

# ONKYO® SERVICE MANUAL

## AUDIO VIDEO CONTROL RECEIVER MODEL TX-8511



Black model

BMD	120V AC, 60Hz
BMP	230V AC, 50Hz
BMP/BMWT	120V / 220-230V AC, 50/60Hz

### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\Delta$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

### CONTENTS

SPECIFICATIONS .....	2
SERVICE PROCEDURES .....	3
EXPLODED VIEW .....	4
PARTS LIST .....	5
BLOCK DIAGRAMS .....	6
MICROPROCESSOR CONNECTION DIAGRAM .....	8
MICROPROCESSOR TERMINAL DESCRIPTION.....	9
IC BLOCK DIAGRAMS AND DESCRIPTION .....	10
PACKING VIEW /PARTS LIST.....	13
ADJUSTMENT PROCEDURES .....	14
PRINTED CIRCUIT BOARD VIEWFROM BOTTOM SIDE ....	17
PRINTED CIRCUIT BOARD-PARTS LIST .....	22
SCHEMATIC DIAGRAMS .....	25

**ONKYO®**  
**AUDIO COMPONENTS**

# SPECIFICATIONS

## AMPLIFIER SECTION

### Power Output:

USA & Canadian models: 100 Watts per channel, min RMS, at 8 ohms, both channels driven from 20 Hz to 20 kHz, with no more than 0.08% THD.

European models: 2 × 100 Watts at 4 ohms, 1 kHz (DIN)

Asian models: 2 × 130 Watts at 4 ohms, 1 kHz (EIAJ)

### Dynamic power output:

USA & Canadian models: 2 × 170 Watts at 2 ohms

2 × 135 Watts at 4 ohms

2 × 140 Watts at 8 ohms

Other area models: 2 × 145 Watts at 2ohms

2 × 120 Watts at 4 ohms

2 × 75 Watts at 8 ohms

Total Harmonic Distortion: 0.08% at rated power

0.08% at 1 watt output

IM Distortion: 0.08% at rated power

0.08% at 1 watt output

Damping Factor: 60 at 8 ohms

### Input Sensitivity and Impedance:

PHONO: 2.5 mV, 50 kohms

Line (CD, TAPE-1, 2, VIDEO-1, 2):

150 mV, 50 kohms

Video (VIDEO-1, 2): 1 Vp-p, 75 ohms

### Output Level and Impedance:

Rec out (TAPE-1, 2): 150 mV, 2.2 kohms

out (VIDEO-2): 150 mV, 2.2 kohms

Video (VIDEO-2, MONITOR):

1 Vp-p, 75 ohms

Phono Overload: 120 mV RMS, at 1,000 Hz, 0.5% THD.

Frequency Response: 20 to 30,000 Hz, ±1 dB

RIAA Deviation: 20 to 20,000 Hz, ±0.8 dB

### Tone Control:

BASS: ±10 dB at 100 Hz

TREBLE: ±10 dB at 10,000 Hz

### Signal to Noise Ratio:

PHONO: 80 dB (IHF A, 5 mV input)

CD/TAPE: 100 dB (IHF A)

Muting: - 50 dB

## TUNER SECTION

### FM:

#### Tuning Range:

U.S. and Canadian models: 87.50 to 108.00 MHz (100 kHz steps)

European and worldwide models:

87.50 to 108.00 MHz (50 kHz steps)

Usable Sensitivity: Mono: 11.2 dBf, 1.0 μV (75 ohms IHF)  
0.9 μV (75 ohms DIN)

Stereo: 17.2 dBf, 2.0 μV (75 ohms IHF)

23 μV (75 ohm DIN)

50dB Quieting Sensitivity: Mono: 17.2 dBf, 2.0 μV (75 ohms)

Stereo: 37.2 dBf, 20.0 μV (75 ohms)

Capture Ratio: 1.5 dB

#### Image Rejection Ratio:

U.S. and Canadian models: 40 dB

Other models: 85 dB

IF Rejection Ratio: 90 dB

Signal-to-Noise Ratio: Mono: 76 dB, IHF

Stereo: 70 dB, IHF

#### Alternate Channel Att. (± 400 kHz):

Mono: 55 dB, IHF

Selectivity: 55 dB DIN (±300 kHz 40 kHz Devi.)

AM Suppression Ratio: 45 dB

Total Harmonic Distortion: Mono: 0.15%

Stereo: 0.25%

Frequency Response: 30 to 15,000 Hz ±1.5 dB

Stereo Separation: 45 dB at 1,000 Hz

30 dB at 100 to 10,000 Hz

Stereo Threshold: 17.2 dBf, 2.0 μV (75 ohms)

### AM:

#### Tuning Range:

U.S. and Canadian models: 530 to 1,710 kHz (10 kHz steps)

European models: 522 to 1,611 kHz (9 kHz steps)

Worldwide models: 530 to 1,710 kHz (10 kHz steps)

531 to 1,602 kHz (9 kHz steps)

Usable Sensitivity: 30 μV

Image Rejection Ratio: 40 dB

IF Rejection Ratio: 40 dB

Signal-to-Noise Ratio: 40 dB

Total Harmonic Distortion: 0.7%

## GENERAL

### Power Supply:

U.S. and Canadian models: AC120 V, 60 Hz

European and Australian models:  
AC230 V, 50 Hz

Worldwide models: AC 220-230/120 V switchable, 50/60 Hz

### Power Consumption:

U.S. and Canadian models: 2.8 A

Other models: 220 W

Dimensions (W × H × D): 435 × 150 × 322 mm

17-1/8" × 5-7/8" × 12-11/16"

Weight: 8.9 kg, 19.6 lbs

## REMOTE CONTROL RC-329S

Transmitter: Infrared


Signal range: Approx. 5 meters, 16 ft.


Power supply: Two "AA" batteries (1.5 V × 2)

Specifications and features are subject to change without notice.

## SERVICE PROCEDURES

### 1. Replacing the fuses

 This symbol located near the fuse indicates that the fuse used is fast operating type. For continued protection against fire hazard, replace with same type fuse. For fuse rating refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilise est a rapide. Pour une protection permanents, n'utiliser que des fusibles de meme type. Ce dernier est indique la qu le present symbol est appose.

Circuit No.	Part No.	Description
F901	252164	5A-UL/T-237 <D,WT>
F902	252075	2.5A-SE-EAK <P,PT,WT>
F903	252075	2.5A-SE-EAK <P,PT>

NOTE: <D>: 120V model only  
 <P>: 230V model only  
 <WT>: Taiwanese model only  
 <PT>: Asian model only

### 2. To Initialize the unit

This device employs a microprocessor to perform various functions and operations. If interference generated by an external power supply, radio wave, or other electrical source results in accident which causes the specified operations and functions to operate abnormally.

To perform a reset, please follow the procedure below.

1. Press and hold down the VIDEO-1 button, then press the SPEAKER-A button.
2. After "clear" is displayed, the preset memory and each mode stored in then memory, such as surround, are initialized and will return to the factory settings.

### 3. Safety-check out

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer.


Connect the insulating-resistance tester between the plug of power supply cord and the screw on the back panel.

Specifications : 3.3Mohm  $\pm$  10% at 500V.

### 4. Change of voltage

Worldwide models are equipped with a voltage selector to conform to local power supplies. This switch is located on the back panel.

Be sure to set this switch to match the voltage of the power supply in your area before turning the the power switch on. This switch is set to 220-230V at the factory. Voltage is changed by sliding the groove in the switch with the screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning t power switch on.

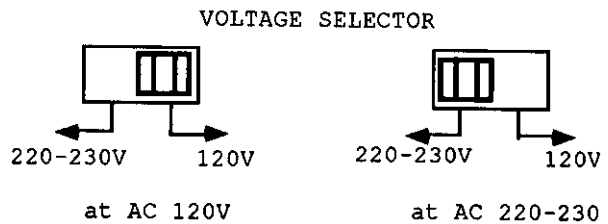

### 5. Memory preservation

This unit does not require memory preservation batteries.

A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged.

The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month the keep the back-up system operative.

The period of the time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorted when the unit is exposed to very high humidity or used in an area with an extremely humid climate.


### 6. Setting the tuning step frequency

Worldwide models are equipped with a step band selector switch. This switch is located on the back pannel. This switch is set to 9 kHz at the factory, but may have to be reset to 10 kHz depending on the area where the unit is used.

AM band step

Other area: 9 kHz  
 U.S.A. & Canada: 10 kHz

TUNER FREQ.

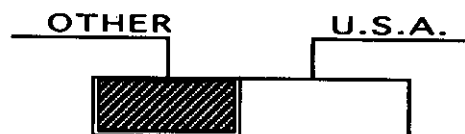


### 7. Changing the band step.

With the exception of the worldwide models, a tuning step selector switch is not provided. When you change the band step, change the parts as shown below.

	To 10 kHz	To 9 kHz
R727	Remove	10 ohm
R724	10K ohm	Remove

EXPLODED VIEW

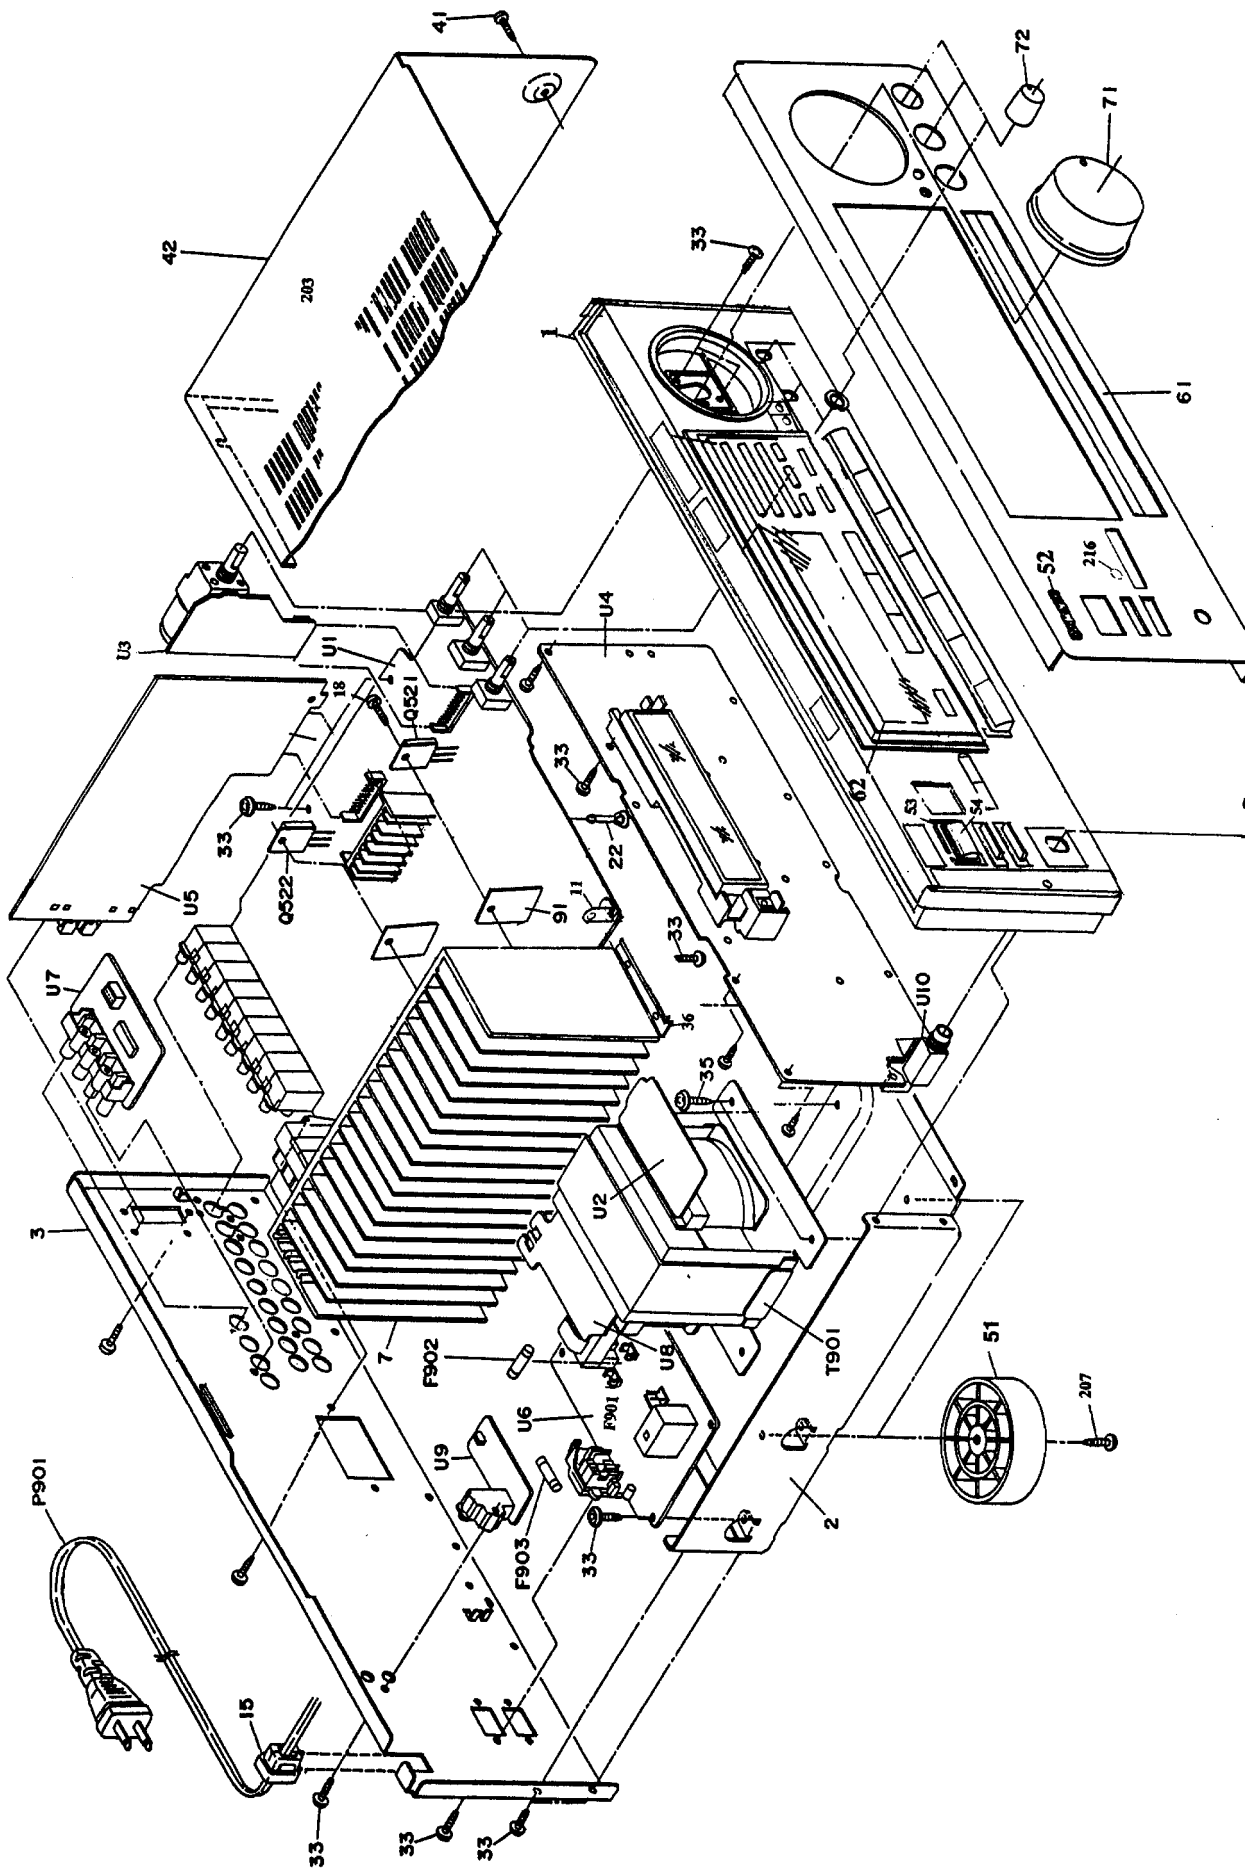


# PARTS LIST


REF. NO.	PART NO.	DESCRIPTION	DESCRIPTION
1	27110952Y	Front Bracket	AS-UC-6#18, (SPT-2), Power supply cord <D>
2	27100321AY	Chassis	AS-CEE, Power supply cord <P,PT>
3	27122285Y	Rear Panel <D>	AS-CEE-2, Power supply cord <WT>
	27122286Y	Rear Panel <P>	2SC5200-O, Power transistors
	27122287Y	Rear Panel <PT>	2SA1943-O, Power transistors
7	27122288Y	Rear Panel <WT>	NPT-1280P, Power transformer <P>
11	27160379Y	Radiator	NPT-1280P, Power transformer <PT>
15	27141530A	Retainer (HS-2)	NPT-1280DG, Power transformer <WT>
18	27300750	Cord Bushing #2271	NPT-1281D, Power transformer <D>
22	801433Y	3SMS8W.SW+14B(BC), Self tapping screw	NAAR-5864-3A, Main circuit pc board ass'y <D>
28	27190991	Holder, KGPS-16RF	NAAR-5864-3B, Main circuit pc board ass'y <P,PT,WT>
33	838130088Y	Holder, KGLS-12RF	NAETC-5866-3A, Power supply pc board ass'y <D>
35	830440089Y	3TTB+8B, Self-tapping screw	NAETC-5866-3B, Power supply pc board <P,PT,WT>
36	27141671Y	4TTC+8C(BC), Self-tapping screw	NAETC-5865-3A, Volume pc board ass'y <D>
41	838430088Y	Retainer	NAETC-5865-3B, Volume pc board ass'y <P,PT,WT>
42	28184663Y	3TTB+8B(BC), Self-tapping screw	NADIS-5918-1A, Display circuit pc board ass'y <D>
51	27175319Y	Top Cover	NADIS-5918-1B, Display circuit pc board ass'y <D>
52	28135244Y	Leg	NADIS-5918-1C, Display circuit pc board ass'y <P,PT>
53	27267955Y	Badge	NARF-5919-1A, Tuner circuit pc board ass'y <WT>
54	28325451Y	Guide (POW) <P,PT,WT>	NARF-5919-1B, Tuner circuit pc board ass'y <D>
54	28325451Y	Knob (POW) <P,PT,WT>	NARF-5919-1C, Tuner circuit pc board ass'y <P,PT>
61	27211863Y	Front Panel <D>	NARF-5919-1C, Tuner circuit pc board ass'y <WT>
	27211864Y	Front Panel <P,PT>	NAPS-5920-1A, Power supply circuit pc board ass'y <D>
	27211865AY	Front Panel <WT>	NAPS-5920-1B, Power supply circuit pc board ass'y <P,PT>
62	28191753Y	Clear Plate	NAPS-5920-1C, Power supply circuit pc board ass'y <WT>
71	28325456Y	Knob (VOL)	NAETC-5921-1A, Video circuit pc board ass'y <D>
72	28325454Y	Knob (TONE)	NAETC-5921-1B, Video circuit pc board ass'y <P,PT>
91	223025	AC262, Isolation Sheet	NAETC-5921-1C, Video circuit pc board ass'y <WT>
203	28141240Y	Cushion 13.5x35	NAETC-5924-1A, Primary pc board ass'y <D>
206	28141332Y	Cushion, t=1.5	NAETC-5924-1B, Primary pc board ass'y <P,PT>
207	831430088Y	3TTW+8B(BC), Self-tapping screw	NAETC-5924-1C, Primary pc board ass'y <WT>
214	27215274Y	Decor Frame	NADIS-5922-1A, RI Terminal circuit pc board ass'y <D>
216	28198778Y	Facel	NADIS-5922-1B, RI Terminal circuit pc board ass'y <P,PT>
D911	22380038 or 22380274	RBV602 or RS603M, diode	NADIS-5922-1C, RI Terminal circuit pc board ass'y <WT>
F901	252164	5A-UL, T-237, Fuse <D,WT>	NAETC-5923-1A, Headphone pc board ass'y <D>
F902	252075	2.5A-SE-EAK, Fuse <P,PT,WT>	NAETC-5923-1B, Headphone pc board ass'y <P,PT>
F903	252075	2.5A-SE-EAK, Fuse <P,PT>	NAETC-5923-1C, Headphone pc board ass'y <WT>
P711	2047311512	NCFC7-311512, Flexible flat cable	NAETC-5867-3A, Speaker Impedance pc board <D>
			NAETC-5867-3B, Speaker Impedance pc board <P,PT>
			NAETC-5867-3C, Speaker Impedance pc board <WT>

NOTE: THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.


NOTE: <D> 120V model only  
<P> 230V model only  
<WT> Taiwan model only  
<PT> Asian model only

BLOCK DIAGRAM

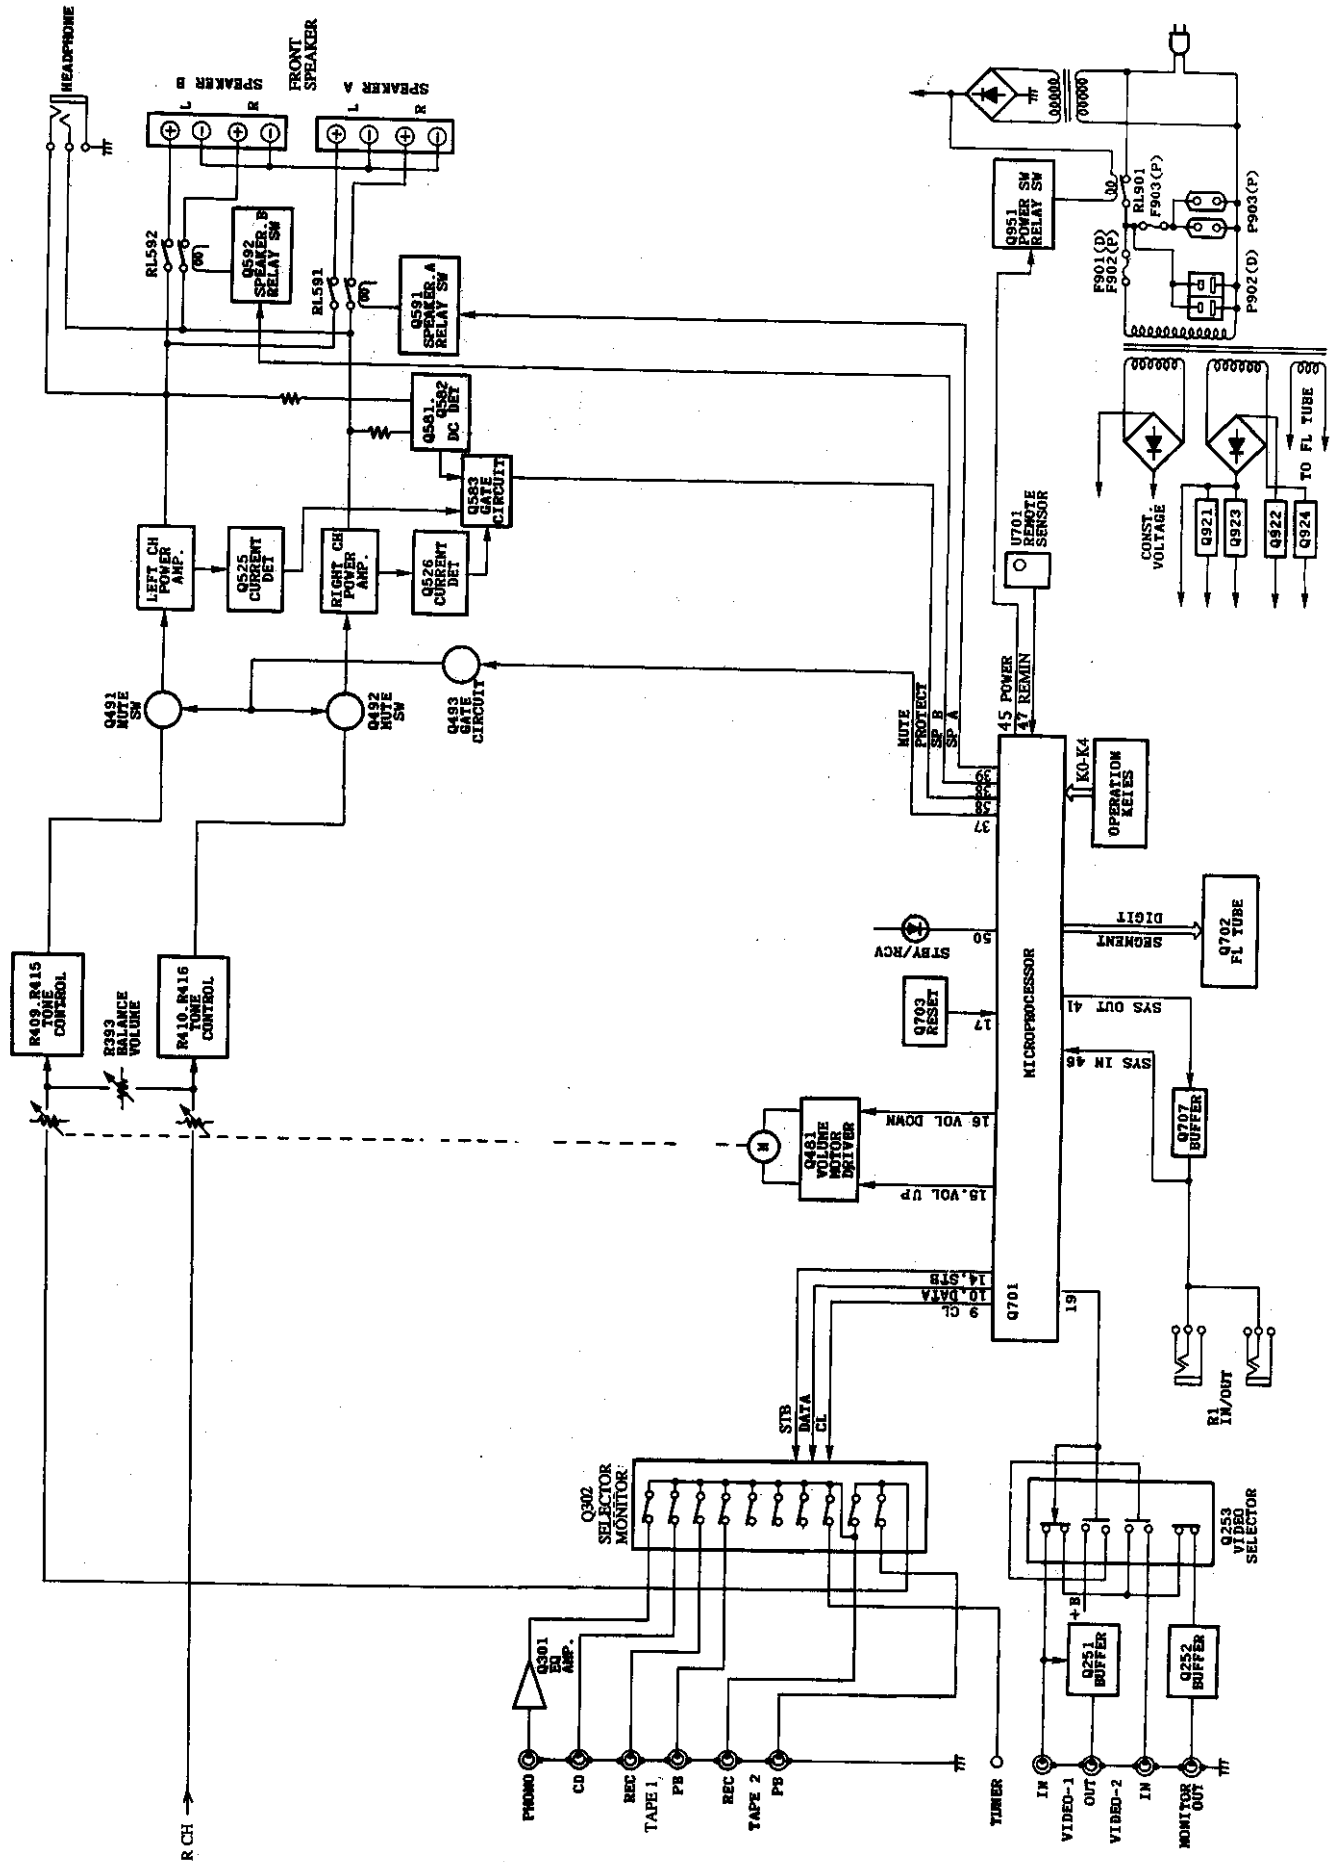

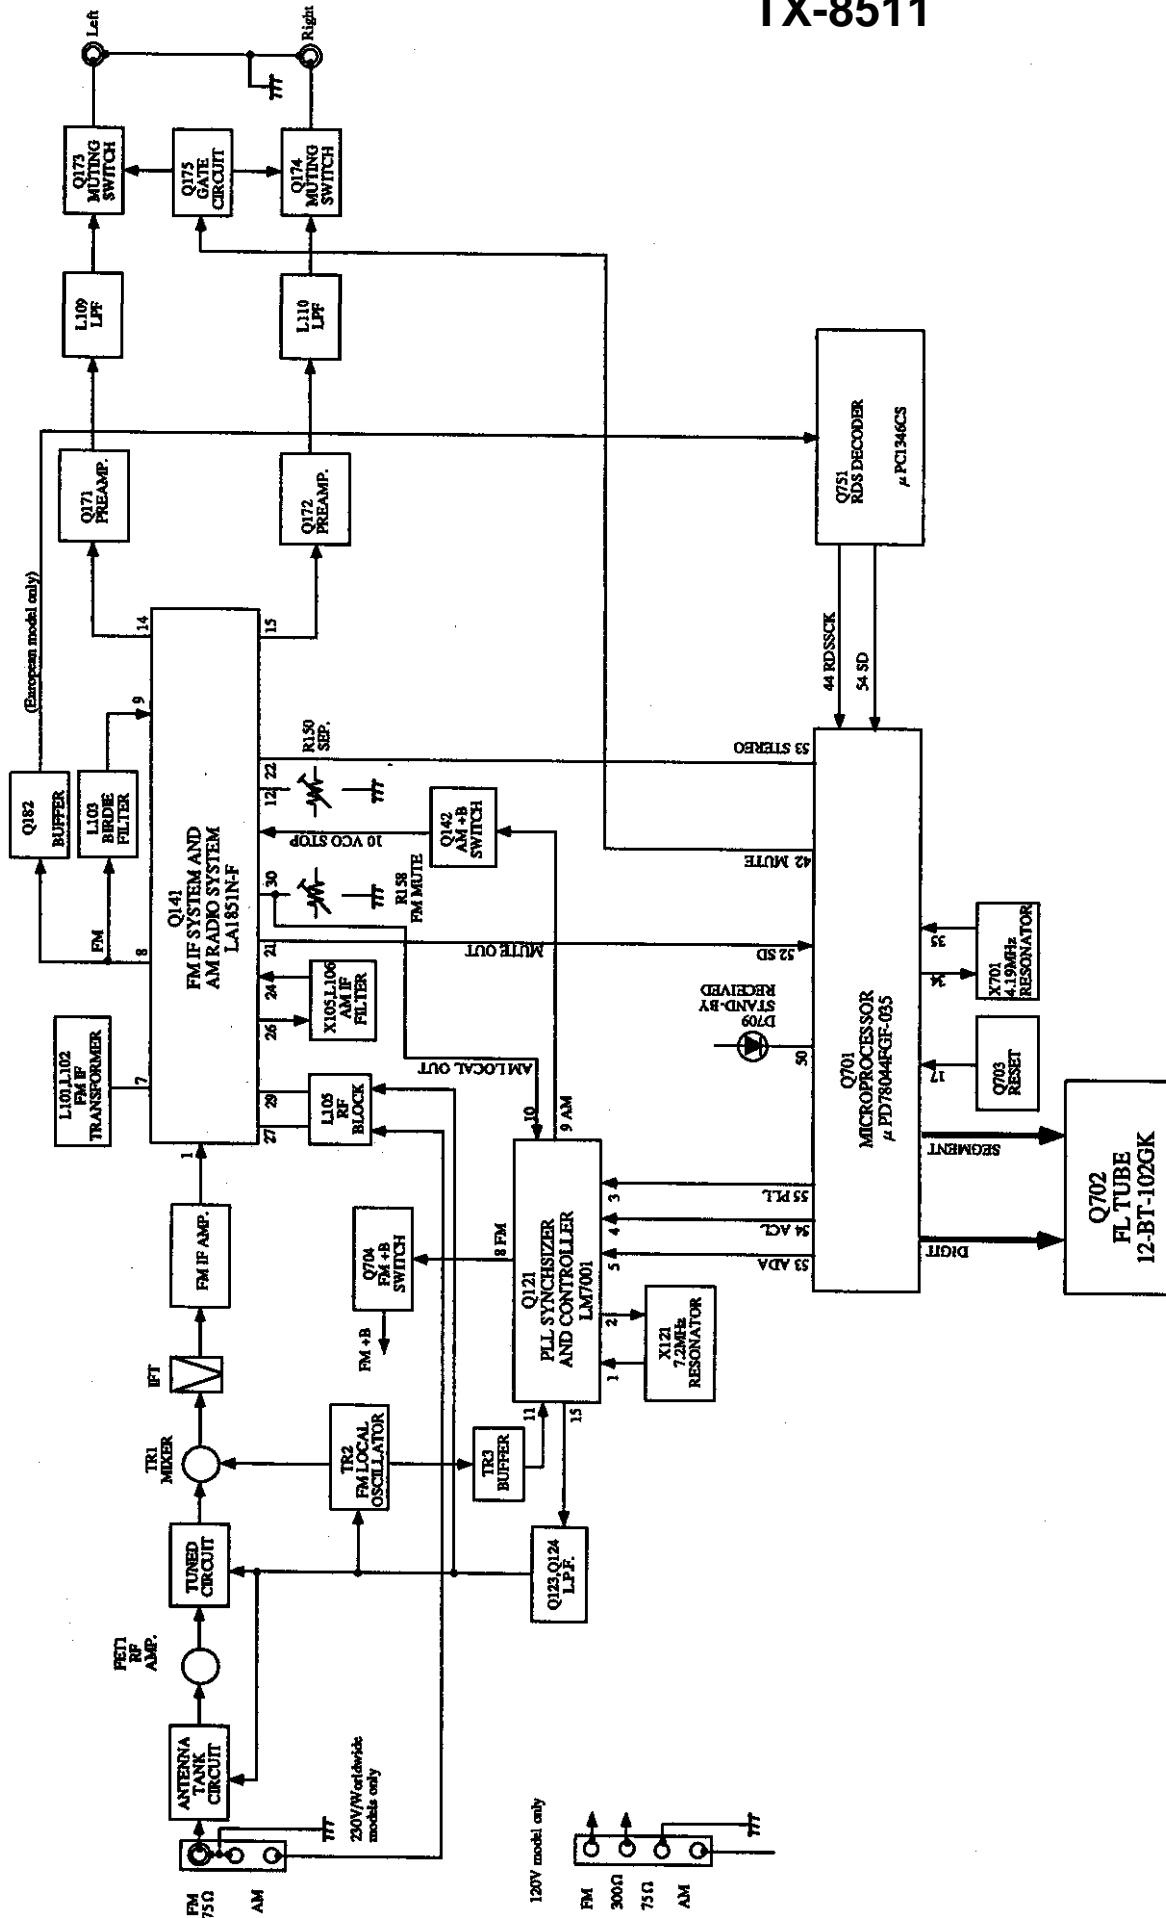

MICROPROCESSOR CONNECTION DIAGRAM

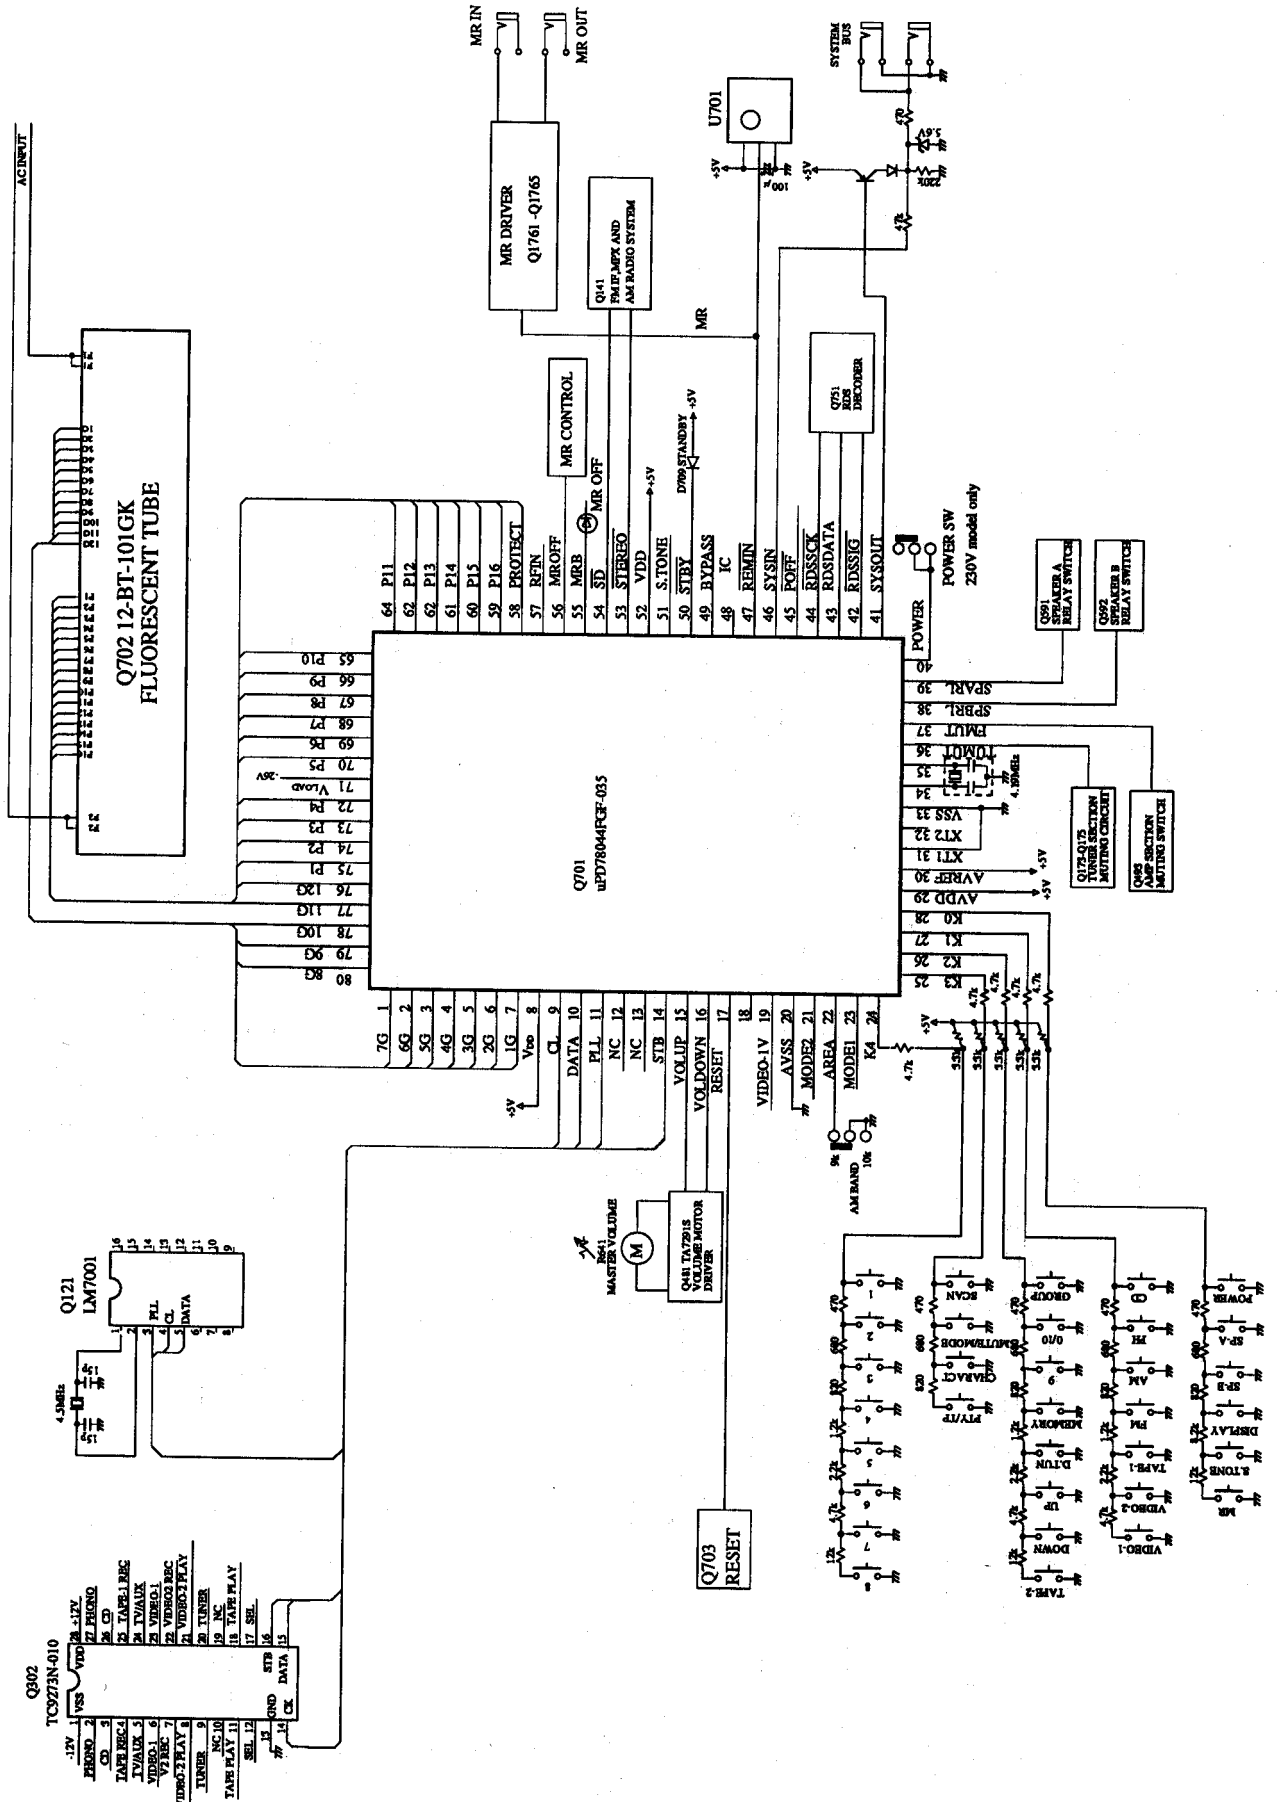



# TERMINAL DESCRIPTION


Q701 :  $\mu$  PD78044FGF-035

Pin No.	Function	I/O	Description
1~7	7G~1G	O	Grid control output pin. On at the high level.
8	VDD		Power supply pin (+5V)
9	CL	O	Clock output pin. Connect to the terminals CK of function switch Q302, and PLL IC Q121.
10	DATA	O	Data output pin. Connect to the terminals DATA of function switch Q302, and PLL IC Q121.
11	PLL	O	Chip enable output pin for PLL IC Q121.
12	NC		Not used.
13	NC		Not used.
14	STB	O	Chip enable output pin. Connect to the terminal STB of function switch Q302.
15	VOLUP	O	Volume control output pin.
16	VOLDOWN	O	Volume control output pin. (Refer table 1.)
17	RESET	I	System reset input pin
18	NC		Not used.
19	VIDEO-1V	O	Video-1 control pin.
20	AVSS		Ground pin of A/D converter
21	MODE2	I	A or B setting input pin.
22	AREA	I	Initializing input of band region
23	MODE1	I	Initializing input of operation mode
24	K4	I	Operation key connection pin
25	K3	I	Operation key connection pin
26	K2	I	Operation key connection pin
27	K1	I	Operation key connection pin
28	K0	I	Operation key connection pin
29	AVDD		Analogue power supply of A/D converter
30	AVREF		Reference voltage input pin of A/D converter
31	XT1		Crystal connection pin for sub system clock resonator
32	XT2		Not used.
33	VSS		Ground pin
34	X1		Resonator connection terminal for main system clock
35	X2		Connect the ceramic resonator 4.19MHz.
36	TUMUT	O	Muting output pin for tuner section.
37	FRONTMUT	O	Muting output pin for front amp.
38	SPBRL	O	Relay control pin for speaker B
39	SPARL	O	Relay control pin for speaker A.
40	POWER	O	Power source control output pin
41	SYSOUT	O	System code output pin
42	RDSSIG	I	Detector input pin of RDS broadcast. L:RDS broadcast
43	RDSDATA	I	Data input pin from RDS decoder uPD1346CS
44	RDSSCK	I	Clock input pin from RDS decoder IC uPC1346CS
45	POFF	I	Power stoppage detector input pin
46	SYSIN	I	System code input pin
47	REMIN	I	Remote control signal input pin
48	NC		Not used.
49	NC		Not used.
50	STBY/RECV	O	Standby and received indicator output pin
51	S. TONE	O	Selective tone control output pin
52	VDD		Power supply pin (+5V)
53	STEREO	I	Detector input pin of FM stereo broadcast
54	SD	I	Detector input pin of broadcast more than muting level
55	MROFF		Multi reem indicator
56	NC		Not used
57	RFIN	I	RF mode input pin
58	PROTECT		Detector input pin of protection circuit.
59~70	P16 - P5	O	Segment output pins. On at the high level.
71	VLOAD	I	Pull-down resistor connection pin of controller and driver of FL.
72~75	P4 - P1	O	Segment output pins. On at the high level.
76~80	12G~8G	O	Grid control output pins. On at the high level.

Operation	#15	#16
VOLUME UP	H	L
VOLUME DOWN	L	H
STOP	H	H

Table 1

# PACKING VIEW

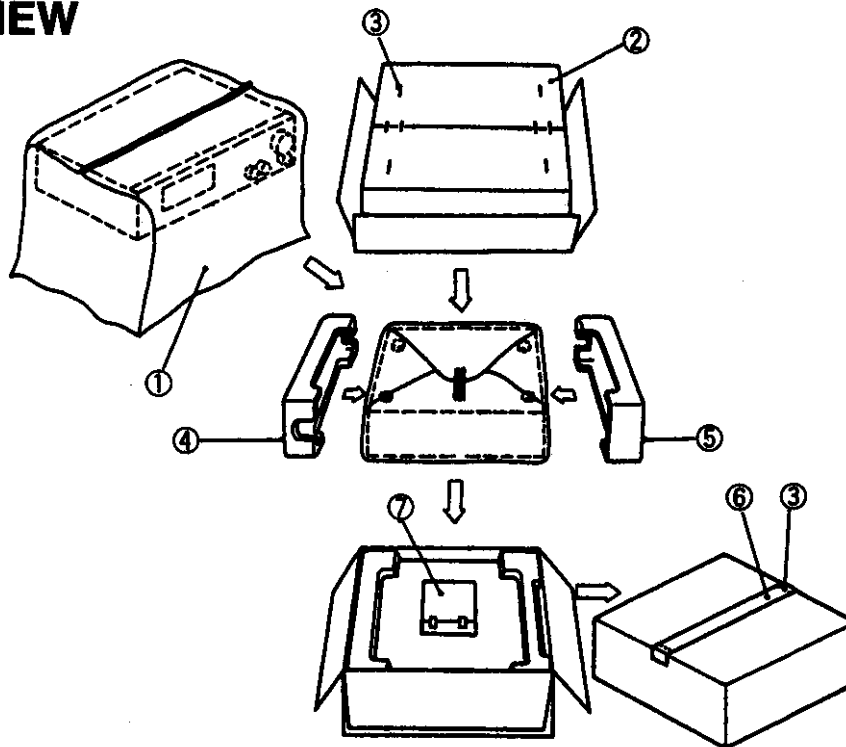

REF. NO.	PART NO.	DESCRIPTION
1	29100034-1AY	Styren Bag 850x650
2	29053096Y	Carton Box <D>
	29053098Y	Carton Box <P>
	29053111Y	Carton Box <PT>
	29053097Y	Carton Box <WT>
3	282321Y	Staple
4,5	29091763Y	Pad AS
7	Accessory	
	29342365Y	Instruction manual, E
	29342366Y	Instruction manual, U3FSI <P>
	29342369Y	Instruction manual, T <PT,WT>
	29342367Y	Instruction manual, U3GSWD <P>
	29355133AY	Instruction Sheet (DBP) <P>
	29365019BY	Warranty Card <D>
	29358002KY	Service Station list <D>
	29362090Y	Label (EAN) AS <P,PT,WT>
	29361786Y	Label (Masaysia) <PT,WT>
	29362005-1Y	Label (UPC)AS <D>
	29100097-1AY	Styren Bag, 350x250
	29361759Y	Label (UL/CUL) <D>
	232140Y	NMA-3057, AM Loop antenna
	292111Y	FM antenna <D>
	292112Y	FM antenna <P,PT,WT>
	25065462	YAE21-0237, FM adaptor <PT,WT>
	25055018	CV-K-1, Conversion plug <WT>
	24140329Y	RC-329S, Remote control transmitter
	3010194	UM-3, Two Batteries

NOTE: <D> 120V model only  
 <P> 230V model only  
 <WT> Taiwan model only  
 <PT> Asian model only

# ADJUSTMENT PROCEDURES

## Preparation

### 1. Input

FM mono: 1 kHz, 75 kHz devi., 60 dB/ $\mu$ V

FM stereo: 1 kHz, 75 kHz devi., 60 dB/ $\mu$ V

Pilot signal :19 kHz,7.5 kHz devi.

AM : 400Hz ,30% mod.

### 2. Outputs

Connect the non-inductive type resistors of 8 ohms to the speaker terminals A unless otherwise noted.

### 3. Standard Knob Positions

Master Volume Control .....	Maximum
Bass Control .....	Center
Treble Control .....	Center
Balance Control .....	Center
Input Selector.....	CD
Tape 2 Monitor.....	CD
Muting .....	Off
Selective tone .....	Off
Speaker .....	A on, B off
Speaker Impedance.....	A or B 8 ohm min./Speaker

## IDLING CURRENT ADJUSTMENT

1. Connect the DC voltmeter to the terminals P521 and P522(VCT and IID) on the main circuit pc board.

2. Adjust the trim resistors R533 and R534 so that the indicator of voltmeter becomes 2.0mV.

3. After 4 - 6 minutes of heat runing, readjust R533 and R534 to get 4.8 - 5.2mV.

NOTE: Set Volume knob to the minimum position.

Set speaker impedance selector switch to "A or B 8 ohms min./SPEAKER" position.

Set the unit to the test mode.

1. Press and hold down the CD button, then press the Power button.
2. "TEST-" is displayed on the display.
3. While "TEST-" is displayed, press the FM key.

**FM ADJUSTMENT**

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM IF/RF	1	Fig.1	99.0MHz 1kHz 75kHz devi. 65dBf(60dB)	—	99.0MHz	DC voltmeter	L101	0±20mV	FM MUTE/MODE switch:ON/STEREO Repeat the steps 1 and 3 until no further adjustment is necessary.
	AC voltmeter					IFT on the front end	Maximum		
	Distortion analyzer					L102	Minimum		
Stereo Distortion		Fig.2	99.0MHz Ext. mod.65dBf(60dB)	Channel L or R 1kHz	99.0MHz	Distortion analyzer	IFT on the front end	Minimum	Don't turn more than ±180°
Stereo Separation	1	Fig.2	99.0MHz Ext. mod. 65dBf(60dB)	Channel L 1kHz	99.0MHz	Channel R AC voltmeter	R150	Minimum	Maximum and same separation
	2			Channel R 1kHz		Channel L AC voltmeter		Minimum	
Muting Level		Fig.2	99.0MHz 21.2dBf(16dB) <P/W Models> 23.2dBf(18dB) <D model>	—	99.0MHz	Oscilloscope or TUNED indicator	R158	Signal output or light on	
RDS		Fig.3	99.0MHz Ext. mod.40dB	RDS data or 57kHz 3% devi.	99.0MHz	Oscilloscope	R786	Maximum	European model only

**AM ADJUSTMENT**

120V model

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		530kHz	Digital DC voltmeter	OSC coil on RF block L105	1.3±0.1V
2	600kHz 400Hz 30% mod. 60dB/m	600kHz	AC voltmeter	RF coil on RF block L105	Maximum
3	990kHz 400Hz 30% mod. 60dB/m	990kHz	AC voltmeter	L106	Maximum

Reference Specification


FM tuned voltage: 87.9MHz~107.9MHz  
More than 1.3V~Less than 10V  
AM tuned voltage: 530kHz~1710kHz  
1.3±0.2V~Less than 9.0V


230V and worldwide models

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		522kHz or 531kHz	Digital DC voltmeter	OSC coil on RF block L151	1.3±0.1V
2	603kHz 400Hz 30% mod. 60dB/m	603kHz	AC voltmeter	RF coil on RF block L105	Maximum
3	999kHz 400Hz 30% mod. 60dB/m	999kHz	AC voltmeter	L106	Maximum


Reference Specification

FM tuned voltage: 87.5MHz~108.0MHz  
more than 1.3V ~Less than 10V  
AM tuned voltage: 522kHz~1611kHz  
1.3±0.2V~Less than 9.0V (230V model)  
AM tuned voltage: 531kHz~1602kHz  
1.3±0.2V~Less than 9.0V (Worldwide model)

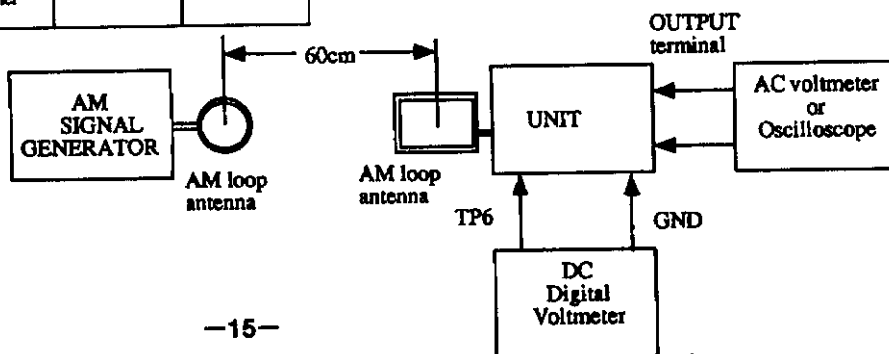


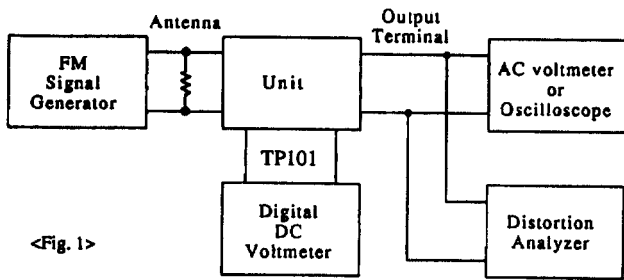


<Fig. 1>

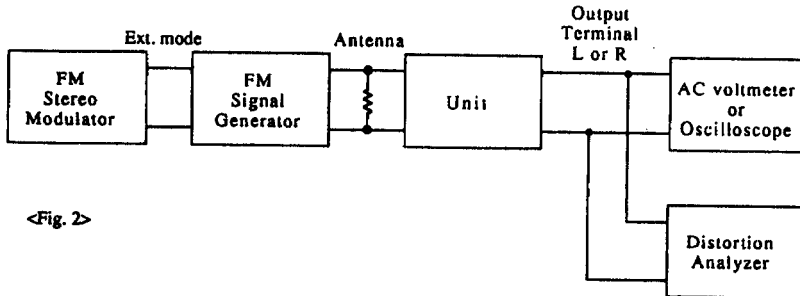

<Fig. 2>

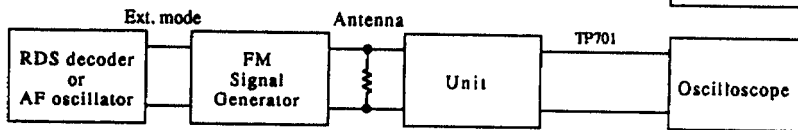

<Fig. 3>

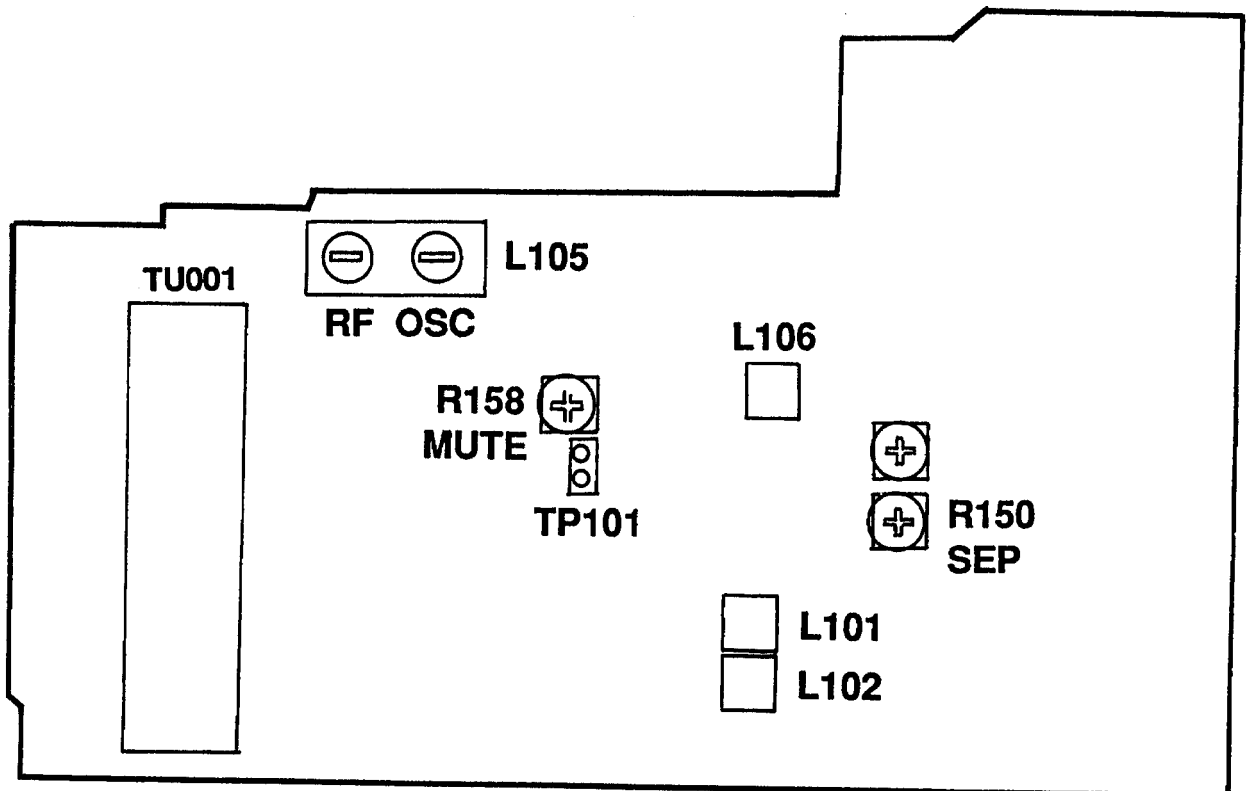

# PRINTED CIRCUIT BOARD-PARTS LIST

## U1 MAIN CIRCUIT PC BOARD (NAAR-5864)

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>ICs</b>		
Q301	222502	NJM4558D-X
Q302	22240881	TC9273N-010
Q401, Q402	22240250	NJM2068L-D
Q481	22240239	TA7291S
Q921	222780125NEC	MPC78M12AHF
Q922	222790125	79M12HF
Q923	222780565JRC	NUM78M56FA
<b>Transistors</b>		
Q403-Q406	2211945	2SK246-GR
Q407	2213510 or 2214350	DTA114ES or RN2202
Q491, Q492	2213631	RN1241-A
Q493	2213510 or 2214350	DTA114ES or RN2202
Q501-Q504	2211733 or 2211732	2SC1845-E or 2SC1845-F
Q505, Q506	2211353	2SA949-O
Q507, Q508	2211733 or 2211732	2SC1845-E or 2SC1845-F
Q509, Q510	2213284	2SC1740S-R
Q511, Q512	2211353	2SA949-O
Q513, Q514	2211633	2SC2229-O
Q515, Q516	2213284	2SC1740S-R
Q517, Q518	2203010	2SC5171
Q519, Q520	2203000	2SA1930
Q525, Q526	2214984 or 2214985	2SC2631-R or 2SC2631-S
Q527, Q528	2211353	2SA949-O
Q529, Q530	2211633	2SC2229-O
Q581, Q582	2211733 or 2211732	2SC1845-E or 2SC1845-F
Q583	2211792	2SA992-F
Q591-Q593	2213640	DTC123JS
Q924	2211455	2SA1015-GR
<b>Diodes</b>		
D401-D404	223163 or 223205	1SS133 or 1SS270A
D501, D502	22380260 or 22380032	RL1N4003 or 1SR139-100, GP104003E
D591, D592	223163 or 223205	1SS133 or 1SS270A
D915-D921	22380260 or 22380032	RL1N4003 or 1SR139-100, GP104003E
D922	224472704	MTZJ27D, Zener
D923-D926	223163 or 223205	1SS133 or 1SS270A
<b>Capacitors</b>		
C303, C304	354741009	10 $\mu$ F, 16V, Elect.
C307, C308	354721019	100 $\mu$ F, 6.3V, Elect.
C309, C310	374726224	6200pF $\pm$ 5%, 50V, Plastic
C311, C312	374721824	1800pF $\pm$ 5%, 50V, Plastic
C313-C316	354741009	10 $\mu$ F, 16V, Elect.
C391, C392	374721015	100pF $\pm$ 10%, 50V, Plastic
C401, C402	354741009	10 $\mu$ F, 16V, Elect.
C407, C408	354741009	10 $\mu$ F, 16V, Elect.
C411, C412	354741009	10 $\mu$ F, 16V, Elect.
C413, C416	374721044	0.1 $\mu$ F $\pm$ 5%, 50V, Plastic
C417-C422	374721024	1000pF $\pm$ 5%, 50V, Plastic
C433, C434	374721534	0.15 $\mu$ F $\pm$ 5%, 50V, Plastic
C435, C436	374721015	100pF $\pm$ 10%, 50V, Plastic
C437	374721044	0.1 $\mu$ F $\pm$ 5%, 50V, Plastic
C441	354721019	100 $\mu$ F, 6.3V, Elect.
C442	354780479	4.7 $\mu$ F, 50V, Elect.
C501, C502	354781009	10 $\mu$ F, 50V, Elect.
C503, C504	374721015	100pF $\pm$ 10%, 50V, Plastic
C507, C508	354724719	470 $\mu$ F, 6.3V, Elect.
C513, C514	354722219	220 $\mu$ F, 6.3V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
C515, C516	354794719	470 $\mu$ F, 100V, Elect.
C521, C522	354784709	47 $\mu$ F, 50V, Elect.
C529, C530	374721044	0.1 $\mu$ F $\pm$ 5%, 50V, Plastic
C581	354721019	100 $\mu$ F, 6.3V, Elect.
C915, C916	3504280	8200 $\mu$ F, 56V, Elect. <D, PT, WT>
C915, C916	3504281	10000 $\mu$ F, 71V, Elect. <D>
C918	354761029	1000 $\mu$ F, 35V, Elect.
C919	354763319	330 $\mu$ F, 35V, Elect.
C922-C925	354781009	10 $\mu$ F, 50V, Elect.
C926	354761019	100 $\mu$ F, 35V, Elect.
C928	354781019	10 $\mu$ F, 50V, Elect.
C932	354781009	10 $\mu$ F, 50V, Elect.
C935	354754719	470 $\mu$ F, 25V, Elect.
C983	374721034	0.01 $\mu$ F $\pm$ 5%, 50V, Plastic
<b>Resistors</b>		
R393	5104288	N11RCL, 250KWT20Z, BALANCE
R409	5104356	N14RLC, 100KWT20Z, BASS
R415	5104356	N14RLC, 100KWT20Z, TREBLE
R511, R512	443526804	68ohm $\pm$ 5%, 1/2W, Metal oxid
R529-R532	443528204	82ohm $\pm$ 5%, 1/2W, Metal oxid
R533, R534	5210259	N06HR, 2KBC, BIAS
R539, R540	443528204	82ohm $\pm$ 5%, 1/2W, Metal oxid
R541, R542	443526804	68ohm $\pm$ 5%, 1/2W, Metal oxid
R545, R546	4000132	0.22ohm $\pm$ 5%, 5W, Metal Plate
R551, R552	453630824	8.2ohm $\pm$ 5%, 1W, Metal
R563, R564	453530224	2.2ohm $\pm$ 5%, 1/2W, Metal
R565, R566	443623914	390ohm $\pm$ 5%, 1W, Metal oxid
R581, R582	443523314	330ohm $\pm$ 5%, 1/2W, Metal oxid
R583-R586	453530224	2.2ohm $\pm$ 5%, 1/2W, Metal
R925	443523314	330ohm $\pm$ 5%, 1/2W, Metal oxid
R926	443522204	22ohm $\pm$ 5%, 1/2W, Metal oxid
R933	443524704	47ohm $\pm$ 5%, 1/2W, Metal oxid
<b>Coils</b>		
L501, L502	231176	S-1.3C
<b>Plugs</b>		
P211a	25055709	NPLG-13P665
P521, P522	25055038	NPLG-2P29
P613a	25055706	NPLG-10P664
<b>Jacks</b>		
P301-P303	25045458 or 25045300	NPJ-6PDBL279 or NPJ-6PDBL159
<b>Terminals</b>		
P501	25060224 or 25060158	NTM-8PDML146 or NTM-8PDML084
<b>Sockets</b>		
P711a	25051838 or 25051297	NSCT-31P1625 or NSCT-31P1086, NSCT-31P758
<b>Relays</b>		
RL591, R592	25065517 or 25065485	U11 NRL-2P5A-DC24-098 or NRL-2P2A-DC24-086
<b>Radiator</b>		
Q921a	27160209	RAD-67
Q921b	838430107	3TTB+10S(BC), Self-tapping screw

## U2 POWER SUPPLY PC BOARD (NAETC-5866)

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Resistors</b>		
R921, R922	453530104	$\Delta$ 1ohm $\pm$ 5%, 1/2W, Metal

## U3 VOLUME PC BOARD (NAETC-5865)

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Resistor</b>		
R641	5104334	N16RGL100KBT, 25F, VOLUME
<b>Socket</b>		
P613b	25051235	NSCT10P1025

## U4 DISPLAY CIRCUIT PC BOARD (NADIS-5918)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q701	22241057	MPD78044FGF-035
Q751	22240679	MPC1346CS <P,PT>
	<b>Transistors</b>	
Q703	221282	DTC144ES
Q705,Q706	2213284	2SC1740S-R
Q707	2213510	DTA114ES
Q791	2211255	2SC1815-GR
Q792	2213640	DTC123JS
	<b>Diodes</b>	
D701,D702	223163 or 223205	1SS133 or 1SS270A
D703	224470913	MTZJ9.1C, Zener
D704,D705	223163 or 223205	1SS133 or 1SS270A
D706,D707	224470562	MTZJ5.6B, Zener
D708	223163 or 223205	1SS133 or 1SS270A
D709	225290T	SEL4110R, LED
D710-D712	223163 or 223205	1SS133 or 1SS270A
D751	223163 or 223205	1SS133 or <P,PT> 1SS270A
D791	223163 or 223205	1SS133 or 1SS270A
D792	225291DT	SEL4910D-D, LED
	<b>Capacitors</b>	
C701	3000076 or 3000078T	0.01F,5.5V Super
C702	375524744	0.47 $\mu$ F $\pm$ 5%, 50V, Plastic
C703	353721019	100 $\mu$ F,6.3V, Elect.
C704	353780109	1 $\mu$ F,50V, Elect.
C706,C707	353780109	1 $\mu$ F,50V, Elect.
C709	354721019	100 $\mu$ F,6.3V, Elect.
C711	353721019	100 $\mu$ F,6.3V, Elect.
C751	354721019	100 $\mu$ F,6.3V, Elect. <P,PT>
C754	374724724	4700pF $\pm$ 5%, 50V, Plastic <P,PT>
C755,C756	374723324	3300pF $\pm$ 5%, 50V, Plastic <P,PT>
C757	354780229	2.2 $\mu$ F,50V, Elect. <P,PT>
C758	374724734	0.047 $\mu$ F $\pm$ 5%, 50V, Plastic <P,PT>
C759	374722234	0.022 $\mu$ F $\pm$ 5%, 50V, Plastic <P,PT>
C760	374724724	4700pF $\pm$ 5%, 50V, Plastic <P,PT>
	<b>Resistor</b>	
R786	5210265	N06HR, 50KBC, BPF FC <P,PT>
	<b>Coils</b>	
L701-L703	233454K220	NCH-1452, 220K
	<b>Sockets</b>	
P211b	25051238	NSCT-13P1028
P711b	25051875 or 25051335	NSCT-31P1662 or NSCT-31P1124, NSCT-31P727
	<b>Plug</b>	
TP701	25055038	NPLG-2P29 <P,PT>
	<b>FL Tube</b>	
Q702	212157	12-BT-102GK
	<b>Holder</b>	
Q702a	27190989	HOLDER(FL)
	<b>Switches</b>	
S701	25035652	NPS-111-S604 <D>
S702-S713	25035652	NPS-111-S604
S715-S725	25035652	NPS-111-S604
S726	25035548	NPS-111-S510 <P,PT>
S731-S738	25035652	NPS-111-S604
S739	25035653	NPS-122-L605 <P,PT,WT>
	<b>Remote sensor</b>	
U701	24130011	PIC-12043TE2
	<b>Ceramic lock</b>	
X701	3010163	CST-4.19MGW

CIRCUIT NO.	PART NO.	DESCRIPTION
X751	Resonator 3010203	AF6146CG <P,PT>

## U5 TUNER CIRCUIT PC BOARD (NARF-5919)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q121	22240090	LM7001
Q141	22240983	LA1851N-F
	<b>Transistors</b>	
Q101	2210746	2SC945A-P <P,PT,WT>
Q102	2211723	2SC1923-O
Q105	2213284	2SC1740S-R
Q122	2213510	DTA114ES
Q123	2212445	2SK365-GR
Q124	2213284	2SC1740S-R
Q142	2213510	DTA114ES
Q143	221282	DTC144ES
Q144	2213640	DTC123JS
Q171,Q172	2213284	2SC1740S-R
Q173,Q174	2212794	2SD1468-R
Q175	2213510	DTA114ES
Q182	2213284	2SC1740S-R <P,PT>
	<b>Diodes</b>	
D101,D102	223191	SD101
D165	224470512	MTZJ5.1B, Zener
	<b>Front end</b>	
TU001	240104	ENV172D2G1 <D>
	240103	ENV172A2G1 <P,PT,WT>
	<b>Capacitors</b>	
C001	354741019	100 $\mu$ F,16V, Elect.
C106	354742209	22 $\mu$ F,16V, Elect.
C107	354784799	0.47 $\mu$ F,50V, Elect.
C127	354721019	100 $\mu$ F,6.3V, Elect.
C130	354780229	2.2 $\mu$ F,50V, Elect.
C131	374722234	0.022 $\mu$ F $\pm$ 5%, 50V, Plastic
C132	354783399	0.33 $\mu$ F,50V, Elect.
C133,C142	354741019	100 $\mu$ F,16V, Elect.
C145	354741009	10 $\mu$ F,16V, Elect.
C146	374723324	3300pF $\pm$ 5%, 50V, Plastic
C147	374721534	0.015 $\mu$ F $\pm$ 5%, 50V, Plastic <D>
C147	374721034	0.01 $\mu$ F $\pm$ 5%, 50V, Plastic <P,PT,WT>
C149	354780479	4.7 $\mu$ F,50V, Elect.
C151,C152	354780109	1 $\mu$ F,50V, Elect.
C153	354783399	0.33 $\mu$ F,50V, Elect.
C154	354741009	10 $\mu$ F,16V, Elect.
C155,C156	374721034	0.01 $\mu$ F $\pm$ 5%, 50V, Plastic <D>
C155,C156	374724724	4700pF $\pm$ 5%, 50V, Plastic <P,PT>
C155,C156	374725624	5600pF $\pm$ 5%, 50V, Plastic <WT>
C159	354780229	2.2 $\mu$ F,50V, Elect.
C160	354784799	0.47 $\mu$ F,50V, Elect.
C162,C166	353741009	10 $\mu$ F,16V, Elect.
C171,C172	354741009	10 $\mu$ F,16V, Elect.
C173,C174	374721024	1000pF $\pm$ 5%, 50V, Plastic <D>
C175,C176	374722724	2700pF $\pm$ 5%, 50V, Plastic <P,PT,WT>
C177	354780229	2.2 $\mu$ F,50V, Elect.
C178	354741009	10 $\mu$ F,16V, Elect.
	<b>Resistors</b>	
R150	5210261	N06HR, 5KBC, Sepration
R158	5210264	N06HR, 30KBC, Mute
	<b>Coils</b>	
L101	233457	NFIF-4081
L102	233458	NFIF-4082
L103	233471	NMC-6084 <P,PT,WT>
L104	233454K220	NCH-1452, 220K
L105	232174	NMRF-5077
L106	232139	NMIF-4062
L107,L108	233484	NMC-4085 <P,PT,WT>
L109,L110	231092	NCH-2140 <D>

# PRINTED CIRCUIT BOARD-PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
P101	<b>Terminals</b>	
	25060239 or	NTM-4PDML161 or
	25060195	NTM-4PDML117 <D>
	25060222 or	NTM-2PDML144 or
	25060117	NTM-2PDML051 <P,PT>
TP101	25060222 or	NTM-2PDML144 or
	25060117	NTM-2PDML051 <WT>
TU001a	<b>Plug</b>	
	25055038	NPLG-2P29
TU001a	<b>Shielded plate</b>	
	27150397	<P,PT,WT>
X101	<b>Ceramic filters</b>	
	3010071	SFE10.7MA5, (RED)
X102	3010130	SFE10.7MZZA <P,PT,WT>
X103	3010071	SFE10.7MA5, (RED)
X105	3010123	SFZ-45OJL
X104	<b>Resonator</b>	
	3010268	CSB456F23
X121	3010141	XTL-7.2M

## U6 POWER SUPPLY CIRCUIT PC BOARD (NAPS-5920)

CIRCUIT NO.	PART NO.	DESCRIPTION
Q951	<b>Transistor</b>	
	2213284	2SC1740S-R
D951-D954	<b>Diodes</b>	
	22380260 or	△ RL1N4003 or
D955	22380032	1SR139-100, GP104003E
	223163 or	1SS133 or
C901	223205	1SS270A
	<b>Capacitors</b>	
C952	3500191	△ 0.01 μ F, 400VAC, IS C
	354742219	220 μ F, 16V, Elect.
R901	<b>Resistors</b>	
	431533355	△ 3.3M ohm ± 10%, 1/2W, Solid <D>
R951	453530824	8.2 ohm ± 5%, 1/2W, Metal
	<b>Transformer</b>	
T902	2300670A	△ NPT-1111D, Power <D>
	2300671A	△ NPT-1111P, Power <P,PT>
	2300672A	△ NPT-1111DG, Power <WT>
F901a	<b>Fuse Holders</b>	
	25050065	YSH403T <D>
F902a, F903a	25050065	YSH403T <P,PT,WT>
P901a	<b>Plug</b>	
	25055675	△ NPLG-2P631
P902	<b>AC Outlets</b>	
	25051126	△ NSCT-4P913 <D>
P903	25051125	△ NSCT-4P912 <P,PT,WT>
RL901	<b>Relays</b>	
	25065515 or	△ NRL-1P5A-DC12-096 or
S901	25065508	△ NRL-1P10A-DC12-093
	<b>Switch</b>	
25065437	△ NSS-22157P, Voltage Selector <WT>	

## U7 VIDEO CIRCUIT PC BOARD (NAETC-5921)

CIRCUIT NO.	PART NO.	DESCRIPTION
Q253	<b>IC</b>	
	222840661	4066B
Q251, Q252	<b>Transistors</b>	
	2213284	2SC1740S-R
D251	<b>Diode</b>	
	223163 or	1SS133 or
C251, C252	223205	1SS270A
	<b>Capacitors</b>	
C255, C256	354721019	100 μ F, 6.3V, Elect.
C257	354724719	470 μ F, 6.3V, Elect.
C259	354721019	100 μ F, 6.3V, Elect.
	354741019	100 μ F, 16V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
P251	<b>Jack</b>	
	25045462 or	NPJ-4PDYE283 or
	25045339	NPJ-4PDYE190

## U9 RI TERMINAL CIRCUIT PC BOARD (NADIS-5922)

CIRCUIT NO.	PART NO.	DESCRIPTION
Q1761-Q1763	<b>Transistors</b>	
	221282 or	DTC144ES or
	2213560	RN1204
Q1764	2213510 or	DTA114ES or
	2214350	RN2202 <D>
D1761, D1763	<b>Diodes</b>	
	223163 or	1SS133 or
D1762	223205	1SS270A
	223163 or	1SS133 or
D1764	223205	1SS270A <D>
	223163 or	1SS133 or
C1761	223205	1SS270A <P,PT,WT>
	<b>Capacitors</b>	
C1762	354721019	100 μ F, 6.3V, Elect.
P1761	374724724	4700pF ± 5%, 50V, Plastic
	<b>Jacks</b>	
P1762	25045481	NPJ-2PDBL299, RI
	25045433	HSJ-1003-01-013, MR <D>
Q1765	25045293	HSJ-1003-01-012, MR <P,PT,WT>
	<b>Photo Coupler</b>	
S1761	24120043	ON3131, PHT CPL <D>
	<b>Switch</b>	
25065286	NSS-22112, AM Band <WT>	

## U10 HEADPHONE PC BOARD (NAETC-5923)

CIRCUIT NO.	PART NO.	DESCRIPTION
P503	<b>Jack</b>	
	25045255	YKB21-5009, Headphone

## U11 SPEAKER IMPEDANCE (NAETC-5867)


CIRCUIT NO.	PART NO.	DESCRIPTION
S911	<b>Switch</b>	
	25065437	NSS-22157P, Speaker Impedance <D>

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

NOTE: <D> 120V model only  
<P> 230V model only  
<WT> Taiwanese model only  
<PT> Asian model only



# SCHEMATIC DIAGRAM PART-1

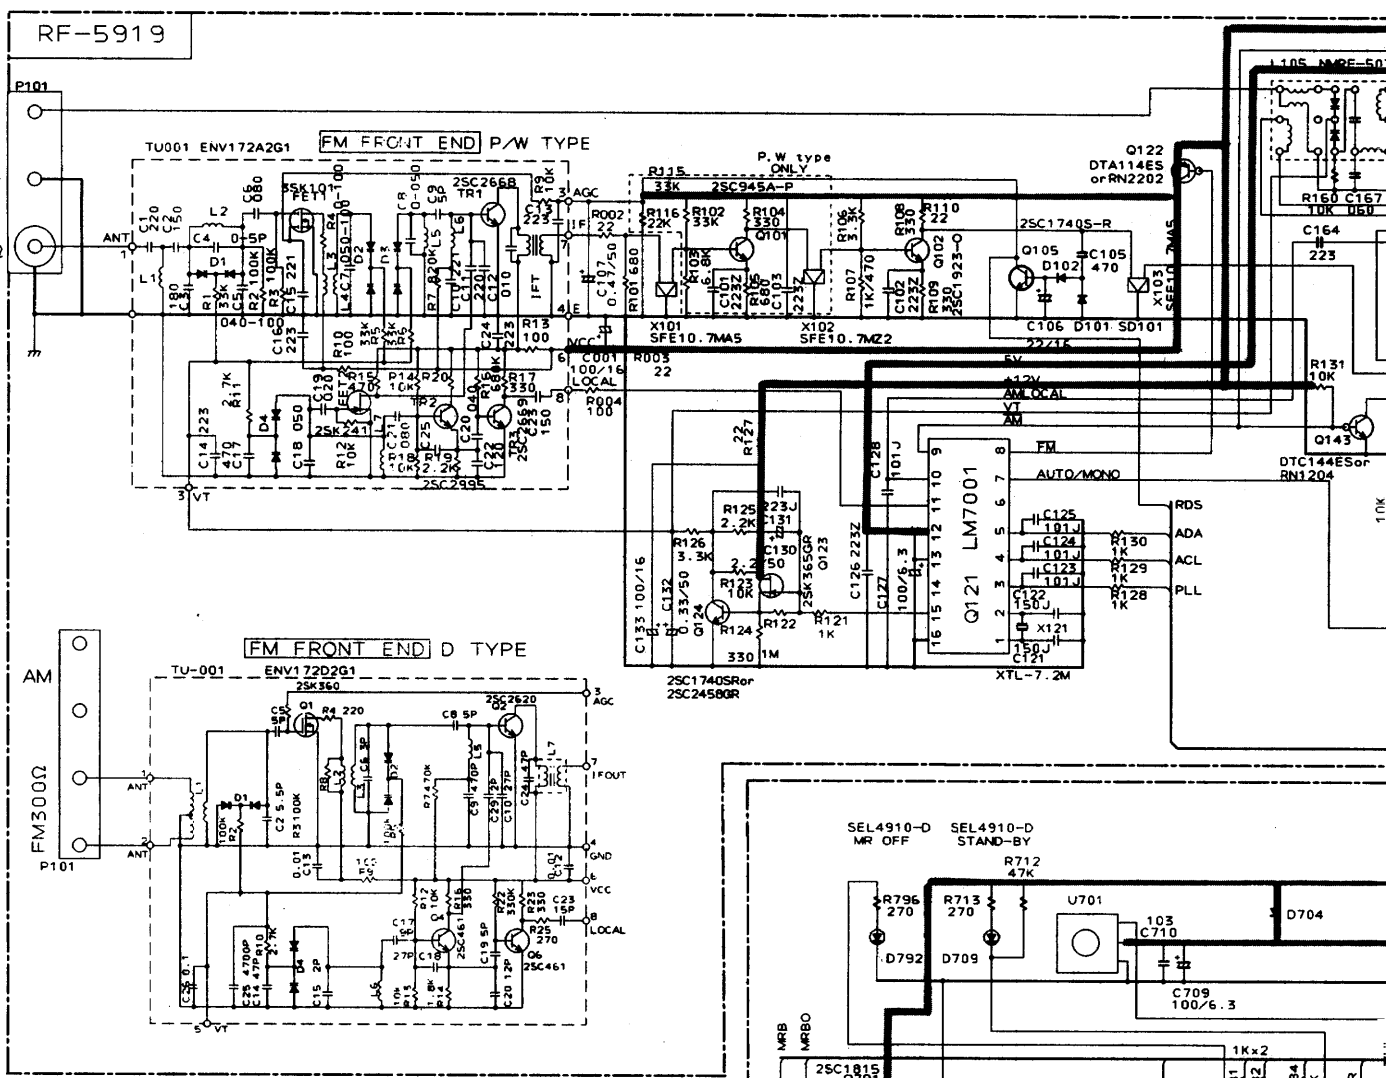


#Parts

	C147	C150	C155	C173	C175	R107	R142	R145	R147	R153
Dtype	153J	NONE	103J	102J	NONE	1K	33K	NONE	Shorted	8.2K
P/PT	103J	471K	472J	NONE	272J	470	68K	Shorted	NONE	15K
Wtype	103J	471K	562J	NONE	272J	470	68K	Shorted	NONE	15K



	R723	R724	R725	R726	R727	R755	R783	C575	C576
Dtype	8.2K	10K	NONE	33K	NONE	10	NONE	NONE	NONE
P/PT	10K	NONE	NONE	NONE	10	10	NONE	102	
Wtype	10K	3.3K	NONE	5.6K	5.6K	10	560	102	

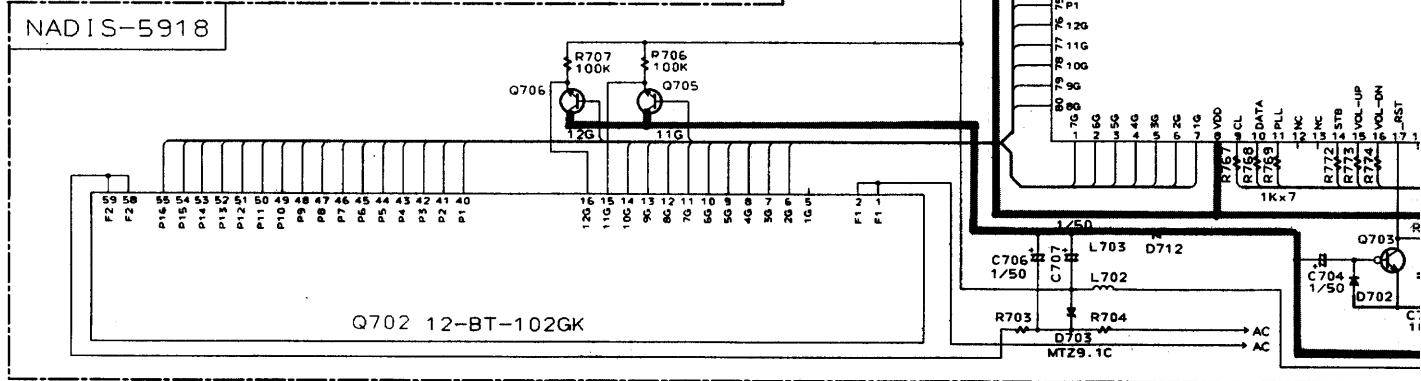

E


F

G

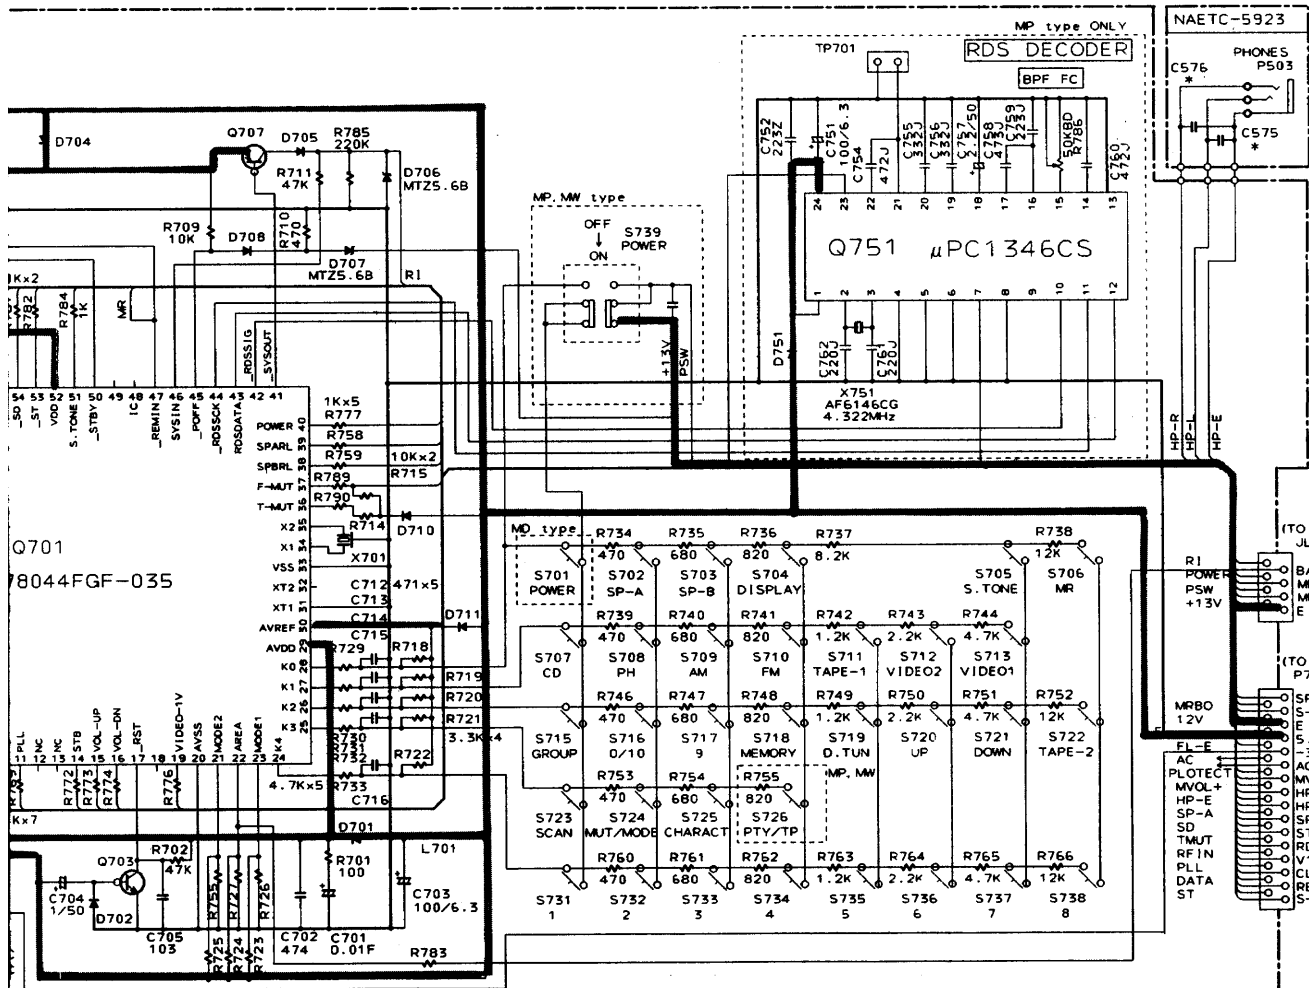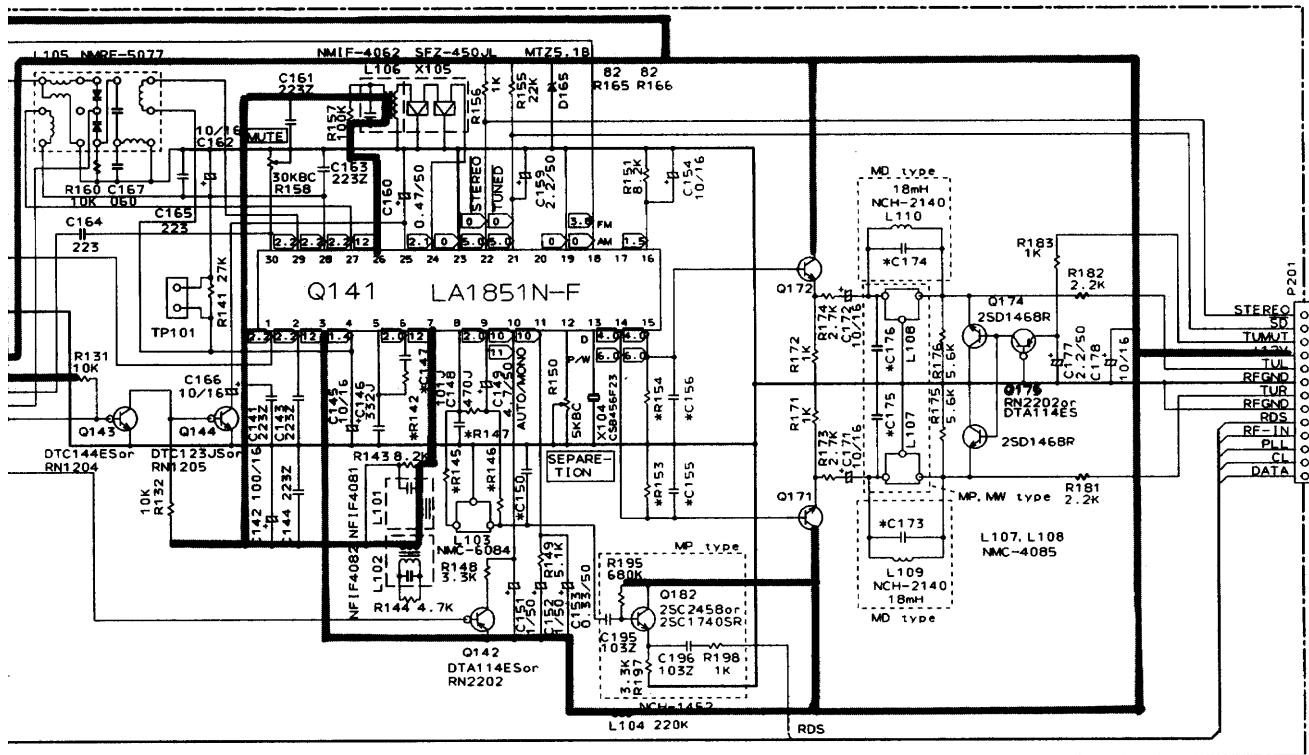


A B C D

# SCHEMATIC DIAGRAM PART-2

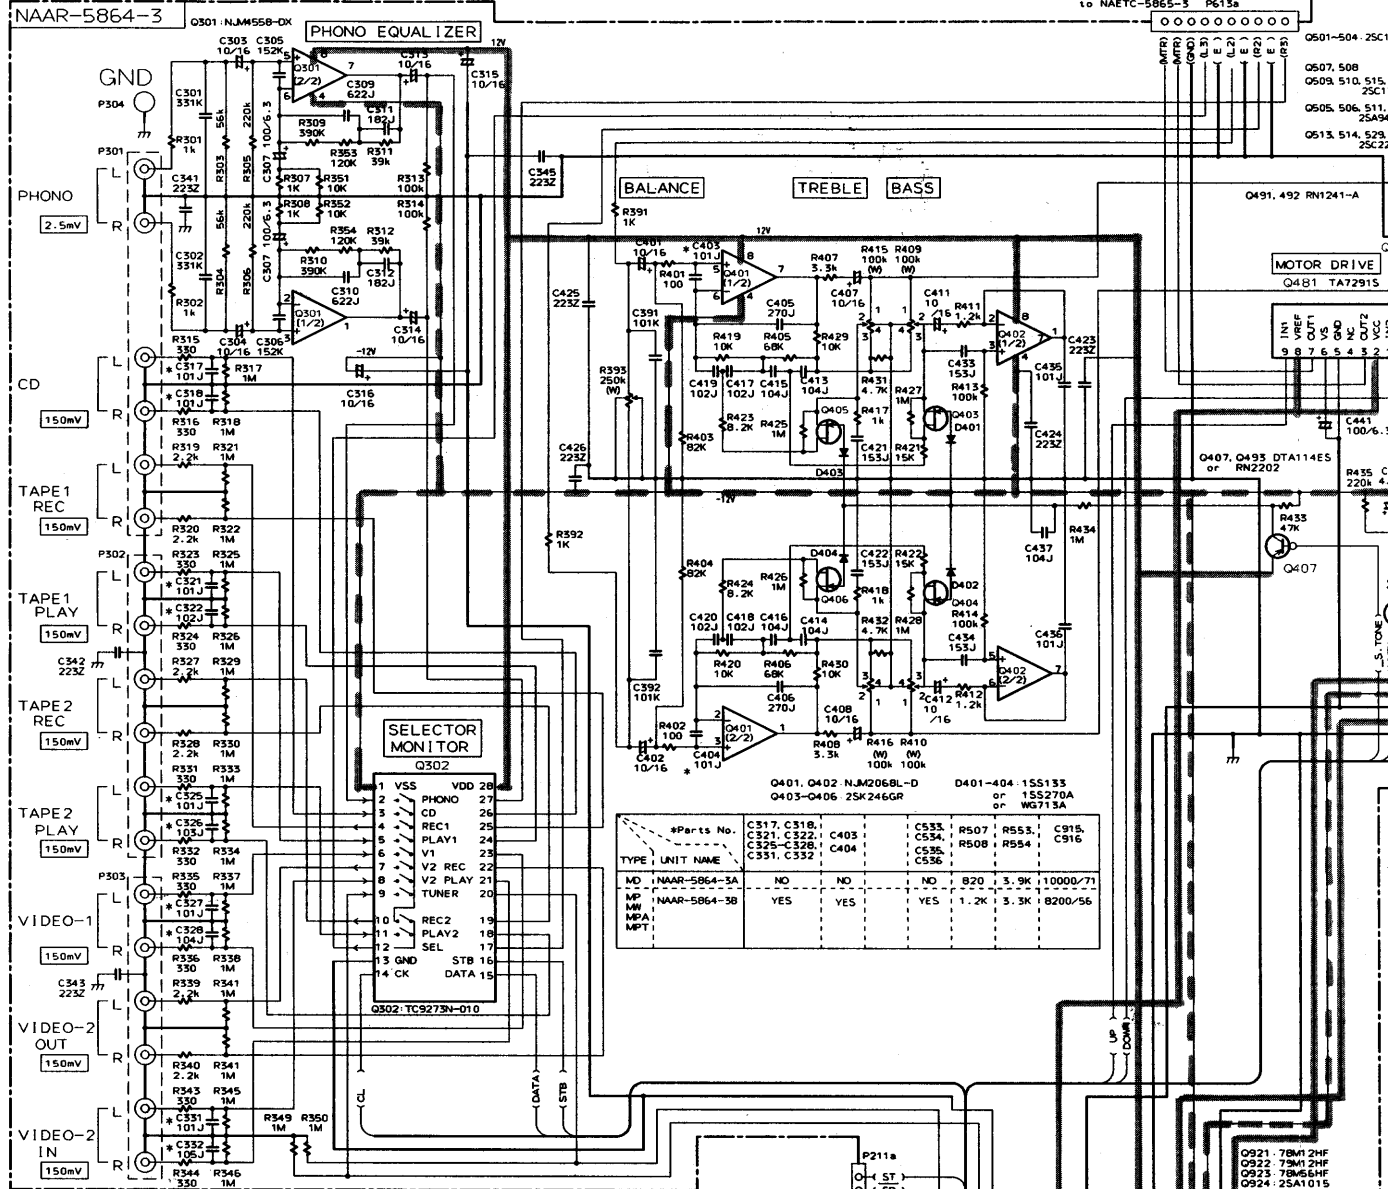









TYPE	UNIT NAME	C317, C318, C321, C322, C325, C328, C331, C332	C403, C404	C533, C534, C535, C536	R507, R508, R544	R553, R554	C915, C916
MD	NAAR-5864-5A	NO	NO	NO	B20	3.9K	10000/71
MP	NAAR-5864-3B	YES	YES	YES	1.2K	3.3K	B2000/56
MFA							
MPT							

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
  - VOLTAGE (MEASURED WITH VOLTMETER)  $\times$ V OR  $\square$  IS DC VOLTAGE. (NO INPUT SIGNAL)
  - ( $\times$ V) IS FOR USA MODEL. (SPEAKER IMP. SW B OHMS)
  - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
  - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
  - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
  - ELECTROLYTIC CAPACITORS (E) ARE IN  $\mu$ F/W.
  - ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX030-3pF, 330-33pF, 331-330pF, 333-0.033 $\mu$ F
  - ALL RESISTORS ARE IN OHMS  $\frac{1}{4}$  WATTS UNLESS OTHERWISE NOTED.
  - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EXCEPT PRINTING SIDE
  - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.



$\text{---} \text{---} \text{---}$  : +B  
 $\text{---} \text{---} \text{---}$  : -B

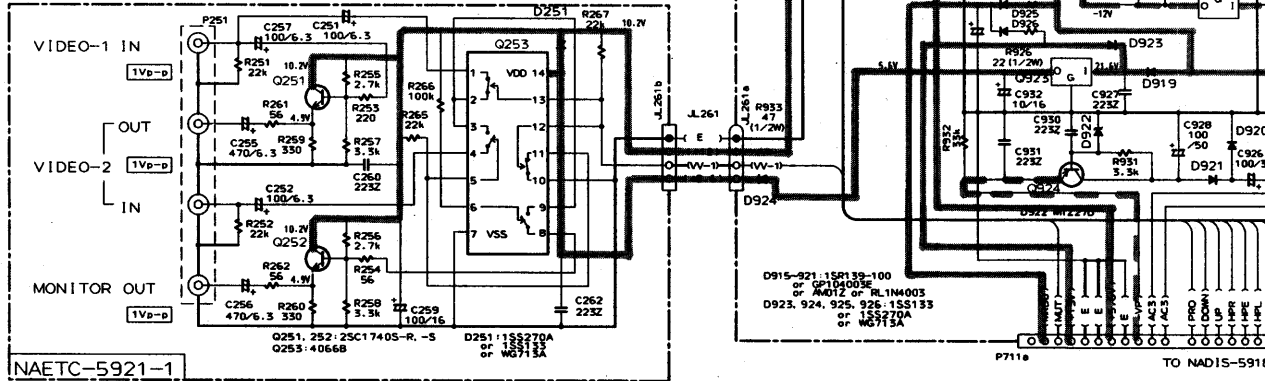


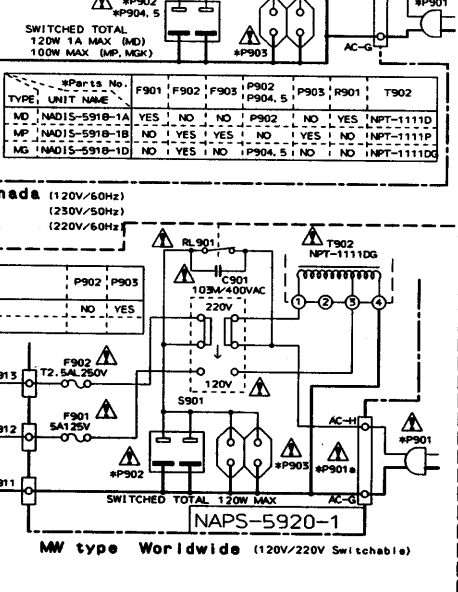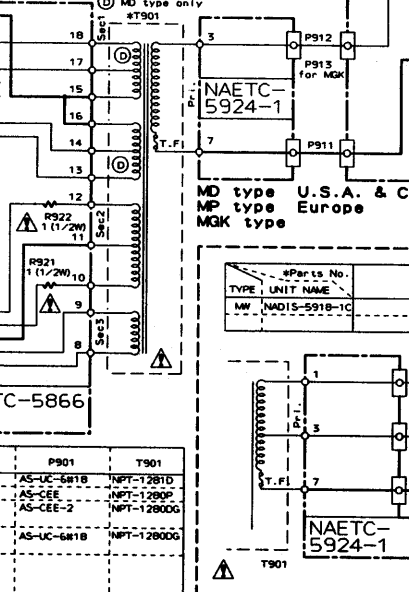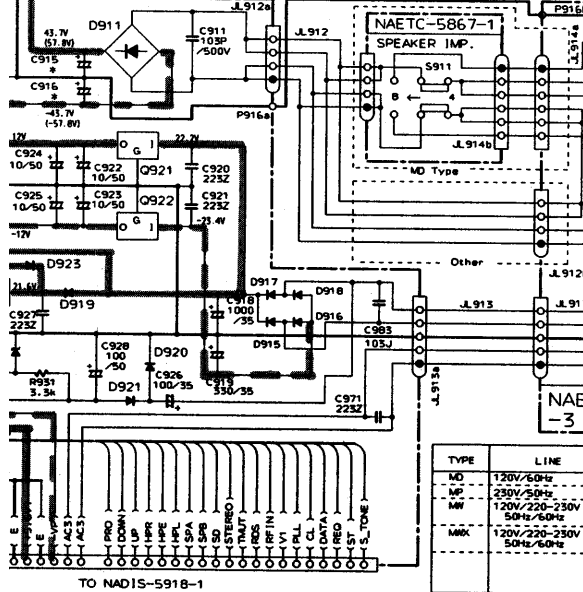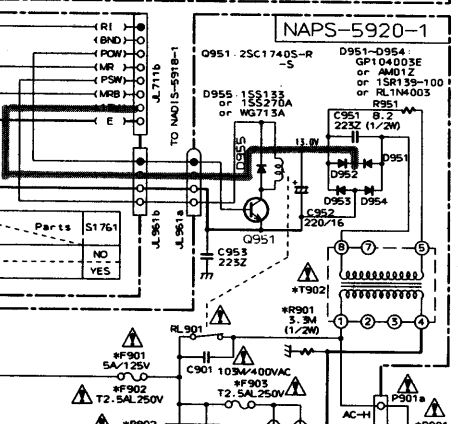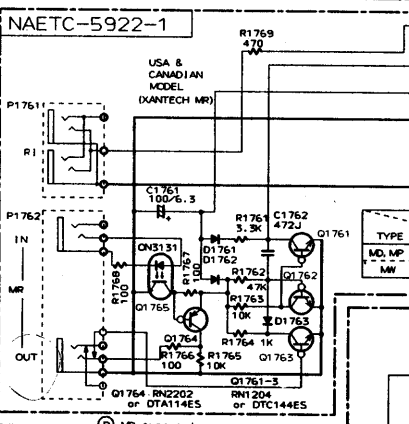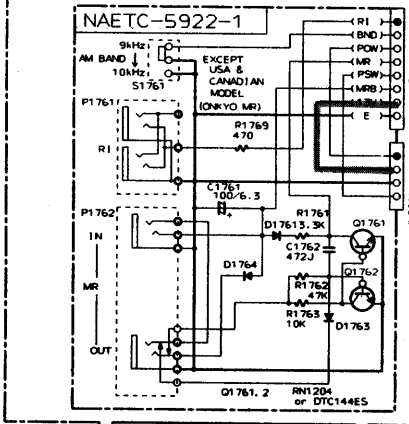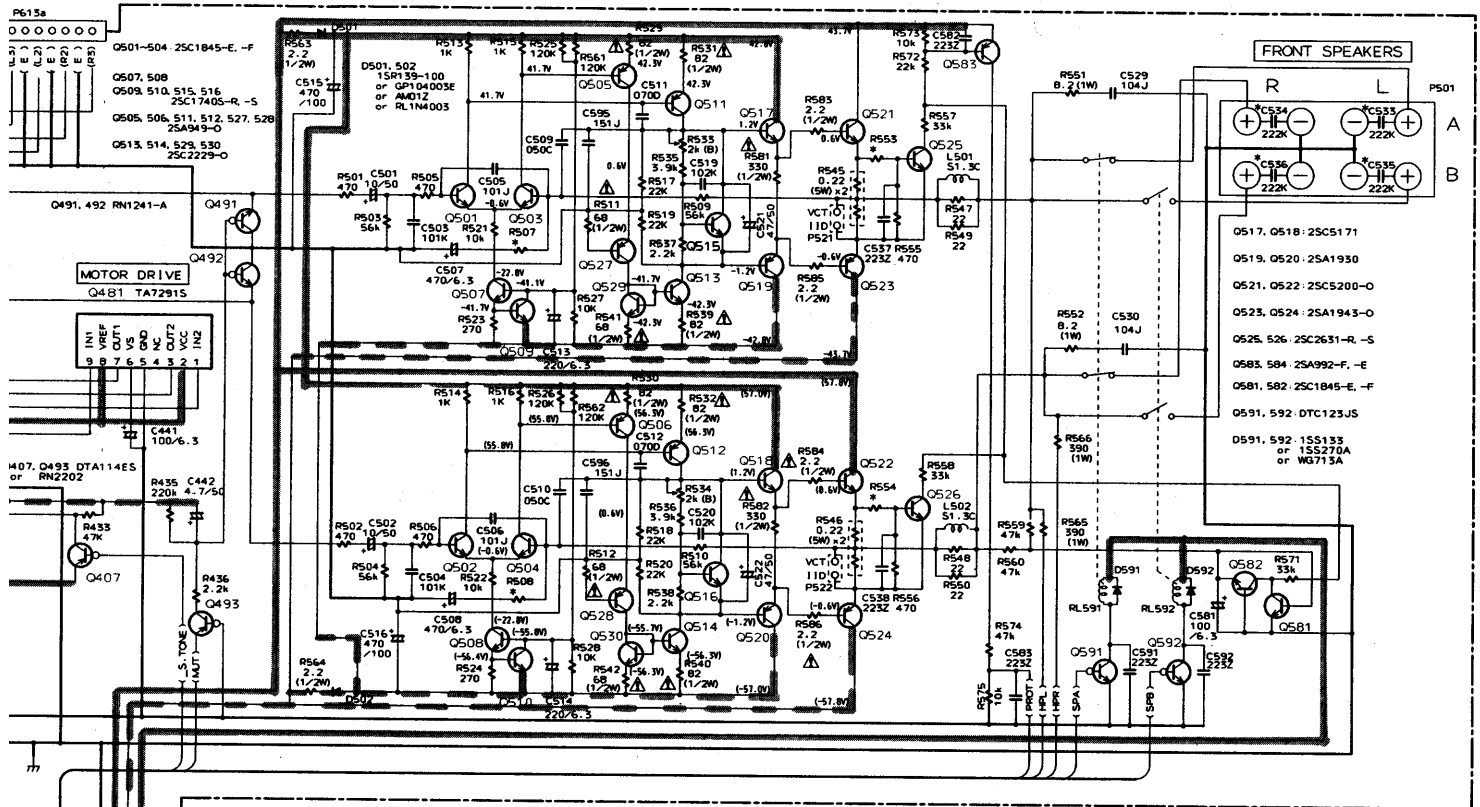

TYPE	LINE	P901	T901
MD	120V/60Hz	AS-UC-681B	NPT-1261D
MP	230V/50Hz	AS-CE-2	NPT-1269D
MW	120V/220-230V 50Hz/60Hz	AS-CE-2	NPT-1260D
MW	120V/220-230V 50Hz/60Hz	AS-UC-681B	NPT-1260D

TYPE	UNIT NAME	F901	F902	F903	P902	P904, 5	P903, P901	T902
MD	NAD15-5918-1A	YES	NO	NO	NO	NO	NO	YES (NPT-1111D)
MP	NAD15-5918-1B	NO	YES	YES	NO	NO	NO	YES (NPT-1111P)
MG	NAD15-5918-1D	NO	YES	NO	NO	NO	NO	NO (NPT-1111D)


MD type U.S.A. & Canada (120V/60Hz)  
MP type Europe (230V/50Hz)  
MW type WorldWide (120V/220V Switchable)

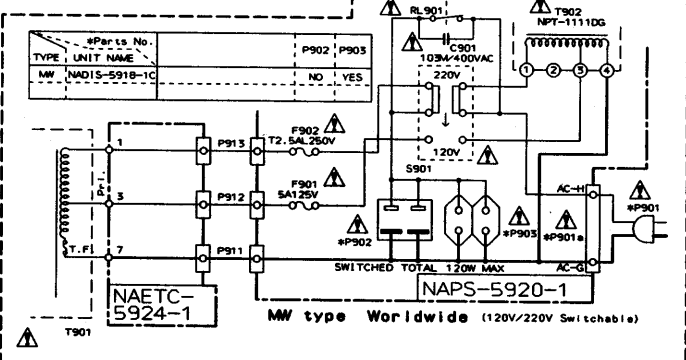

\*Parts

	C147	C150	C155 C156	C173 C174	C175 C176	R107	R142	R145 R146	R147	R153 R154
Dtype	153J	NONE	103J	102J	NONE	1K	33K	NONE	Shorted	8.2K
P/PT	103J	471K	472J	NONE	272J	470	68K	Shorted	NONE	15K
Wtype	103J	471K	562J	NONE	272J	470	68K	Shorted	NONE	15K

	R723	R724	R725	R726	R727	R755	R783	C575 C576
Dtype	8.2K	10K	NONE	33K	NONE	10	NONE	NONE
P/PT	10K	NONE	NONE	NONE	10	10	NONE	102
Wtype	10K	3.3K	NONE	5.6K	5.6K	10	560	102

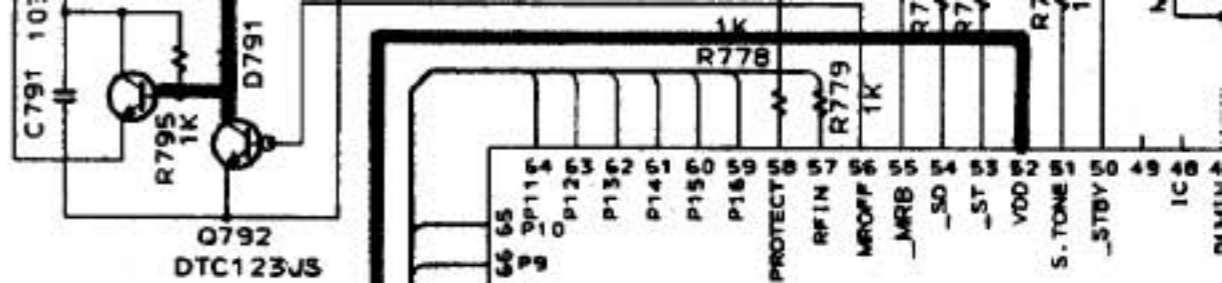

NADIS-5918

