


# ONKYO® SERVICE MANUAL

## AUDIO VIDEO CONTROL TUNER AMPLIFIER MODEL TX-SV50PRO

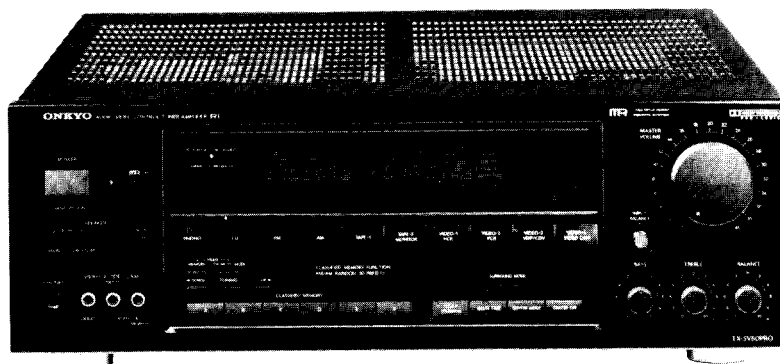

**Black model**

BHUD, BHUDN	120V AC, 60Hz
BHUQ	240V AC, 50Hz
BHUW	120/220V AC, 50/60Hz

### TABLE OF CONTENTS

- Specifications ..... 2
- Service procedures ..... 3
- Exploded view ..... 4
- Parts list ..... 5
- Microprocessor descriptions ..... 6
- IC block diagrams and descriptions ..... 8
- Adjustment procedures ..... 18
- Pc board view and parts list ..... 21
  - Display circuit pc board ..... 21
  - Tuner circuit/Power supply pc boards ..... 27
  - Front, center, & rear amplifier pc boards ..... 31
  - Surround/control pc boards ..... 39
- Schematic diagram ..... 23
  - Microprocessor connection diagram ..... 23
  - Tuner & power supply section ..... 25
  - Amplifier section ..... 35
    - Control section ..... 37
- Block diagram ..... 41
  - Tuner section ..... 41
  - Amplifier section ..... 43
- Packing view ..... 45

#### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\Delta$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTSWHOSSE PARTS NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.



# SPECIFICATIONS

## AMPLIFIER SECTION

Power Output:	Stereo mode 75 watts per channel min. RMS. at 8 ohms, both channels driven, from 20Hz to 20,000Hz, with no more than 0.06% total harmonic distortion. Surround mode 70 watts per channel min. RMS. at 8 ohms both channels driven, from 20Hz to 20,000Hz, with no more than 0.06% total harmonic distortion. (FRONT/CENTER Matrix surround mode) 30 watts per channel min. RMS. at 8 ohms 1,000Hz with no more than 0.08% total harmonic distortion. (REAR Matrix surround mode)
Total Harmonic Distortion:	0.06% at rated power (FRONT)
IM distortion:	0.06% at rated power (FRONT)
Damping Factor:	70 at 8 ohms (FRONT)
Sensitivity and Impedance:	Phono: 2.5mV/50 kohms CD/Tape Play: 150mV/50 kohms Tape Rec: 150mV/2.2 kohms (Phono) Pre out (FRONT): 1V, 2.2 kohms
Phono Overload:	120mV RMS. at 1,000 Hz, 0.06% THD.
Frequency Response:	20 to 30,000 Hz, +/-1 dB
RIAA Deviation:	20 to 20,000 Hz, +/-0.8 dB
Tone Control:	BASS: +/-10 dB at 100 Hz TREBLE: +/-10 dB at 10,000 Hz
Signal to Noise Ratio:	PHONO: 100 dB (IHF A, 5mV input) CD/TAPE: 100 dB (IHF A)
Muting:	- ∞

## TUNER SECTION

<b>FM:</b>	
Tuning Range:	87.50 – 108.00 MHz (50 kHz steps)
Usable Sensitivity:	Mono: 11.2 dBf, 2.0μV Stereo: 17.2 dBf, 4.0μV
50dB Quieting Sensitivity:	Mono: 17.2 dBf, 4.0μV Stereo: 37.2 dBf, 40 μV
Capture Ratio:	1.5 dB
Image Rejection Ratio:	40 dB
IF Rejection Ratio:	90 dB
Signal-to-Noise Ratio:	Mono: 76 dB Stereo: 70 dB
Alternate Channel Attenuation:	55 dB
AM suppression Ratio:	50 dB
Harmonic Distortion:	Mono: 0.1% Stereo: 0.2%
Frequency Response:	30 – 15,000 Hz±1.0 dB
Stereo Separation:	45 dB at 1kHz 30 dB at 100 – 10,000Hz
Muting Level:	17.2 dBf
<b>AM:</b>	
Tuning Range:	530 – 1710 kHz (10 kHz steps) and/or 531 to 1,602 kHz (9kHz steps) (Worldwide model) 522 to 1611 kHz (9 kHz steps) (Australian model)
Usable Sensitivity:	30μV
Image Rejection Ratio:	40 dB
IF Rejection Ratio:	40 dB
Signal-to-Noise Ratio:	40 dB
Harmonic Distortion:	0.7%
<b>GENERAL</b>	
Power Supply:	
USA Model:	AC120V, 60Hz
Australian model:	AC240V, 50Hz
Worldwide model:	120 and 220V Switchable, 50/60Hz
Dimensions (W×H×D):	403×157×432 mm 17-1/8"×6-3/16"×17"
Weight:	12.1kg., 26.7 lbs.

## REMOTE CONTROL TRANSMITTER RC-AV50M

Transmitter:	Infrared
Signal Range:	Approx. 5 meters (16ft. 4")
Power Supply:	Two "AA" batteries (1.5V×2)

Specifications and features are subject to change without notice.

## SERVICE PROCEDURES

### 1. Replacing the fuses

For continued protection against fire hazard, replace only with same type and same rating fuse.

D (120V) model

Circuit No.	Part No.	Description
F901	252051	6A (ST-6), Primary
F903, F904	252051	6A (ST-6), Secondary

Q (240V) model

Circuit No.	Part No.	Description
F902	252076	3.15A-SE-EAK, Primary
F903, F904	252078	5A-SE-EAK, Secondary

W (Worldwide) model

Circuit No.	Part No.	Description
F901	252051	6A (ST-6), Primary
F902	252076	3.15A-SE-EAK, Primary
F903, F904	252078	5A-SE-EAK, Secondary

### 2. Change of AM band selector

With the exception of the worldwide model, a AM BAND step selector switch is not provided.

Band step	D716 (1SS133)
10kHz → 9kHz	Additional
9kHz → 10kHz	Eliminated

The diode D716 is on the display pc board. (Refer to the page 21)


– Worldwide model –

Worldwide models are equipped with a band step selector switch. This switch is located on the back panel. This switch is set to 9kHz at the factory, but may have to be reset to 10kHz depending on the area where the unit is used.


	Band step
U.S.A.	10kHz
Other region	9kHz

### 3. Memory preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory the power switch must be turned on and off a few times each month to keep the back-up system operative. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorter when the unit is exposed to very high humidity or used in an area with an extremely humid climate.

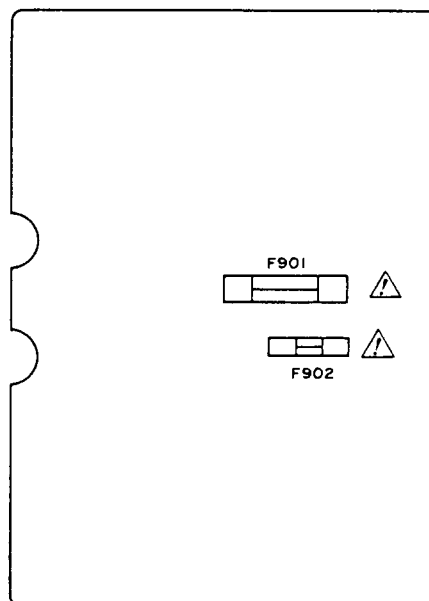

Power supply circuit pc board

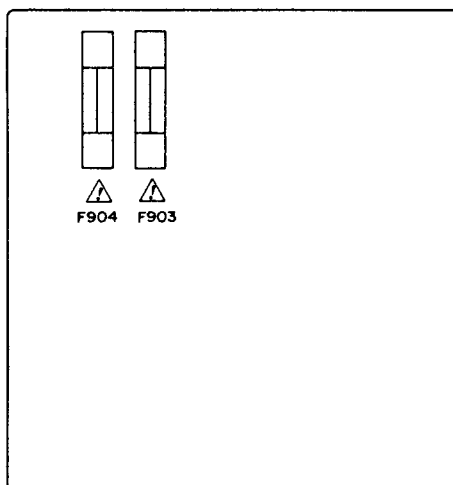

Tuner circuit pc board

### 4. Safety-check out

(Only U.S.A. model)

After correcting the original service problem perform the following safety check before releasing the set to the customer.


Connect the insulating-resistance tester between the plug of power supply cord and terminal GND on the back panel. Specifications: 3.3 Mohm  $\pm$ 10% at 500V.

### 5. Change of voltage

Worldwide models are equipped with a voltage selector to conform with local power supplies. This switch is located on the back panel. Be sure to set this switch to match the voltage of the power supply in your area before turning the power switch on.

This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with the screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on.

CHASSIS-EXPLODED VIEW

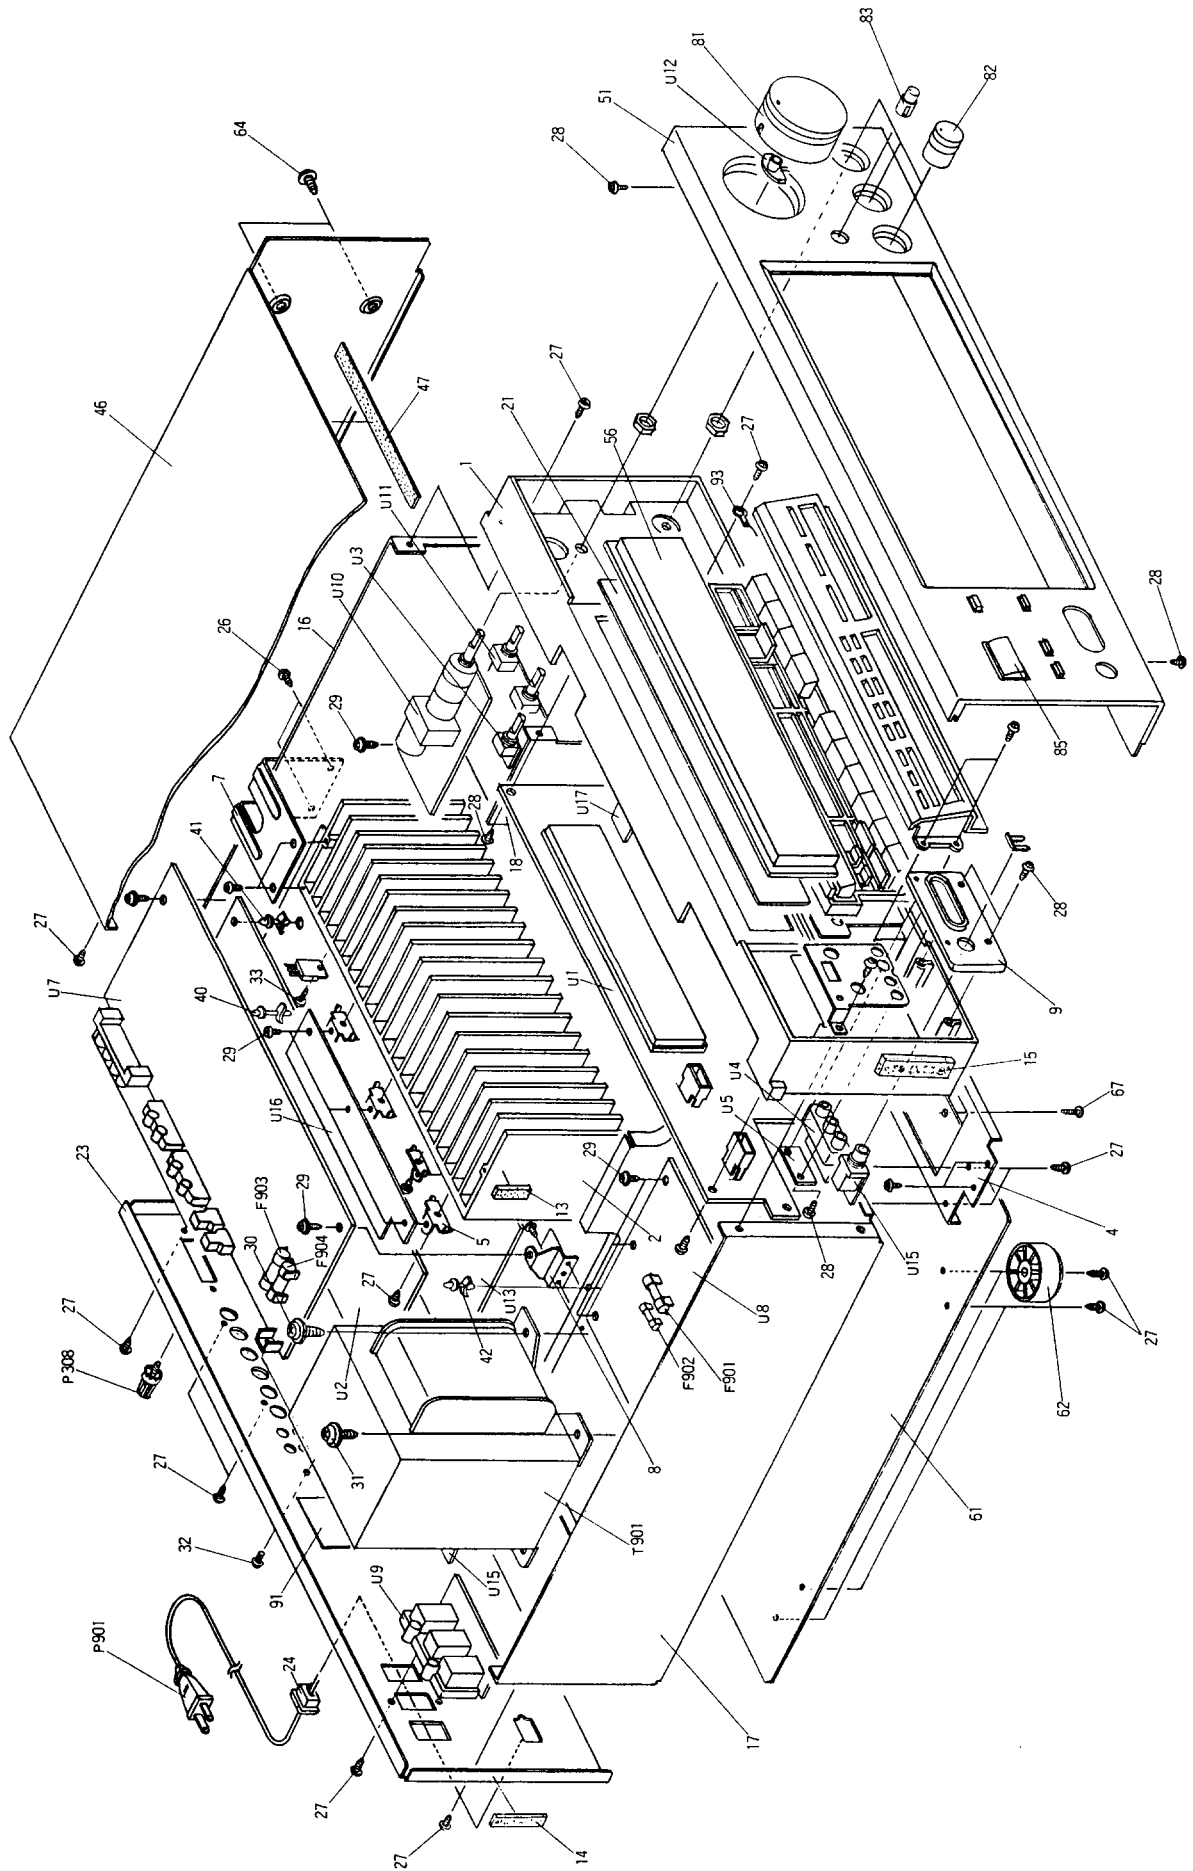


# CHASSIS-EXPLODED VIEW – PARTS LIST

REF.NO.	PART NO.	DESCRIPTION	F903, F904	252051	6A (ST-6), Secondary fuse [D]	U8	1A232571-2	NAPS-3971-2, Power supply circuit pc board ass'y [D]
1	27110587A	Front bracket	F903, F904	252051	6A (ST-6), Secondary fuse [D]	U8	1A232571-2	NAPS-3971-2, Power supply circuit pc board ass'y [D]
2	27160263	Radiator						
4	27130628	Bracket H		252078	5A-SE-EAK, Secondary fuse [W/Q]		1A232571-2C	NAPS-3971-2C, Power supply circuit pc board ass'y [Q]
5	27141359	Bracket H						
7	27141322-1	Bracket R	P308	25060044	Terminal GND		1A232571-2B	NAPS-3971-2B, Power supply circuit pc board ass'y [W]
8	27141360	Bracket B	P901	253123,		U9	1A232572-2	NAETC-3972-2, AC outlet terminal pc board ass'y [D]
9	27190782	Holder PIN		253136,		U10	1A232573-2	NAAF-3973-2, Master volume pc board ass'y
13	28140927	t2×30×10, Cushion		253140,		U11	1A232574-2	NAAF-3974-2, Tone control pc board ass'y
14	28140933	t3× 7×55, Cushion		253161	AS-UC6#18, Power supply cord [D]	U12	1A232575-2	NADIS-3975-2, Volume indicator pc board ass'y
15	28141086	Cushion				U13	1A232576-2	NAAF-3976-2, Pre., and main amplifier pc board ass'y
16	27115240-1	Side bracket				U14	1A232577-2	NAETC-3977-2, Speaker terminal pc board ass'y
17	27130564D	Bracket PT		253149	AS-CEE, Power supply cord [W]	U15	1A232578-2	NAETC-3978-2, Headphone terminal pc board ass'y
18	27130621	Bracket F		253118	AS-SAA, Power supply cord [Q]	U16	1A232579-2	NAAF-3979-2, Rear amplifier pc board ass'y
21	28133249	Back plate	P902, P903	25050337	NSCT-2P164, AC outlet [W]			
23	27121378A	Back panel [D]	S902	25050346	NSCT-2P173, AC outlet [Q]			
	27121379A	Back panel [W]		25065287	NSS-2213P, Voltage selector switch [W]			
	27121380A	Back panel [Q]						
24	27300750	Bushing	T901	2300590	NPT-1081D, Power transformer [D]			
27	834430088	3TTS+8B (BC), Self-tapping screw		2300592	NPT-1081Q, Power transformer [Q]			
28	833430080	3TTP+8P (BC), Self-tapping screw		2300591	NPT-1081DG, Power transformer [W]			
29	831130088	3TTW+8B, Self-tapping screw	U1	1A232565-2	NADIS-3965-2, Display circuitry pc board ass'y [D]			
30	830440089	4TTC+8C (BC), Self-tapping screw		1A232565-2A	NADIS-3965-2A, Display circuit pc board ass'y [Q]			
32	82143006	3P+6FN (BC), Pan head screw		1A232565-2B	NADIS-3965-2B, Display circuit pc board ass'y [W]			
33	801433	3SMS8W-SW+14B (BC), Sems self-tapping screw	U2	1A232566-2	NAAF-3966-2, Surround circuit pc board ass'y			
40	27190369	KGLS-22S, Holder	U3	1A232567-2	NAETC-3967-2, Input balance volume pc board ass'y			
41	27190783	KGLS-11S, Holder	U4	1A232568-2	NAETC-3968-2, Video terminal pc board ass'y			
42	27190693	KGLS-6R, Holder	U5	1A232569-2	NAETC-3969-2, Pc board for video pc board hold			
46	28184463A	Top cover	U6	1A232580-2	NASW-3980-2, Band selector switch pc board [W]			
47	28140835	t0.5×10×135, Cushion	U7	1A232570-2	NARF-3970-2, Tuner circuit pc board ass'y [D]			
51	1A232121	Front panel ass'y						
56	28191576	Clear plate						
61	27170254C	Bottom board						
62	27175153-1	Leg						
64	838440089	4TTB+8C (BC), Self-tapping screw						
67	834430108	3TTS+10B (BC), Self-tapping screw						
81	28323558	Knob VOLUME						
82	28323310A	Knob TONE						
83	28323671A	Knob VOLUME						
85	28324077	Knob POWER						
91	29360626-1	Label FUSE [D]						
92	260215	Binder						
93	2061112060	Terminal ass'y						
F901	252051	6A (ST-6), Primary fuse [D/W]						
F902	252076	3.15A-SE-EAK, Primary fuse [W/Q]						

NOTE:<D><Only 120V model  
<Q><Only 240V model  
<W><Only Worldwide model

NOTE:  
THE COMPONENTS IDENTIFIED BY MARK **▲** ARE  
CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK.  
REPLACE ONLY WITH PARTS NUMBER SPECIFIED.

# MICROPROCESSOR DESCRIPTIONS

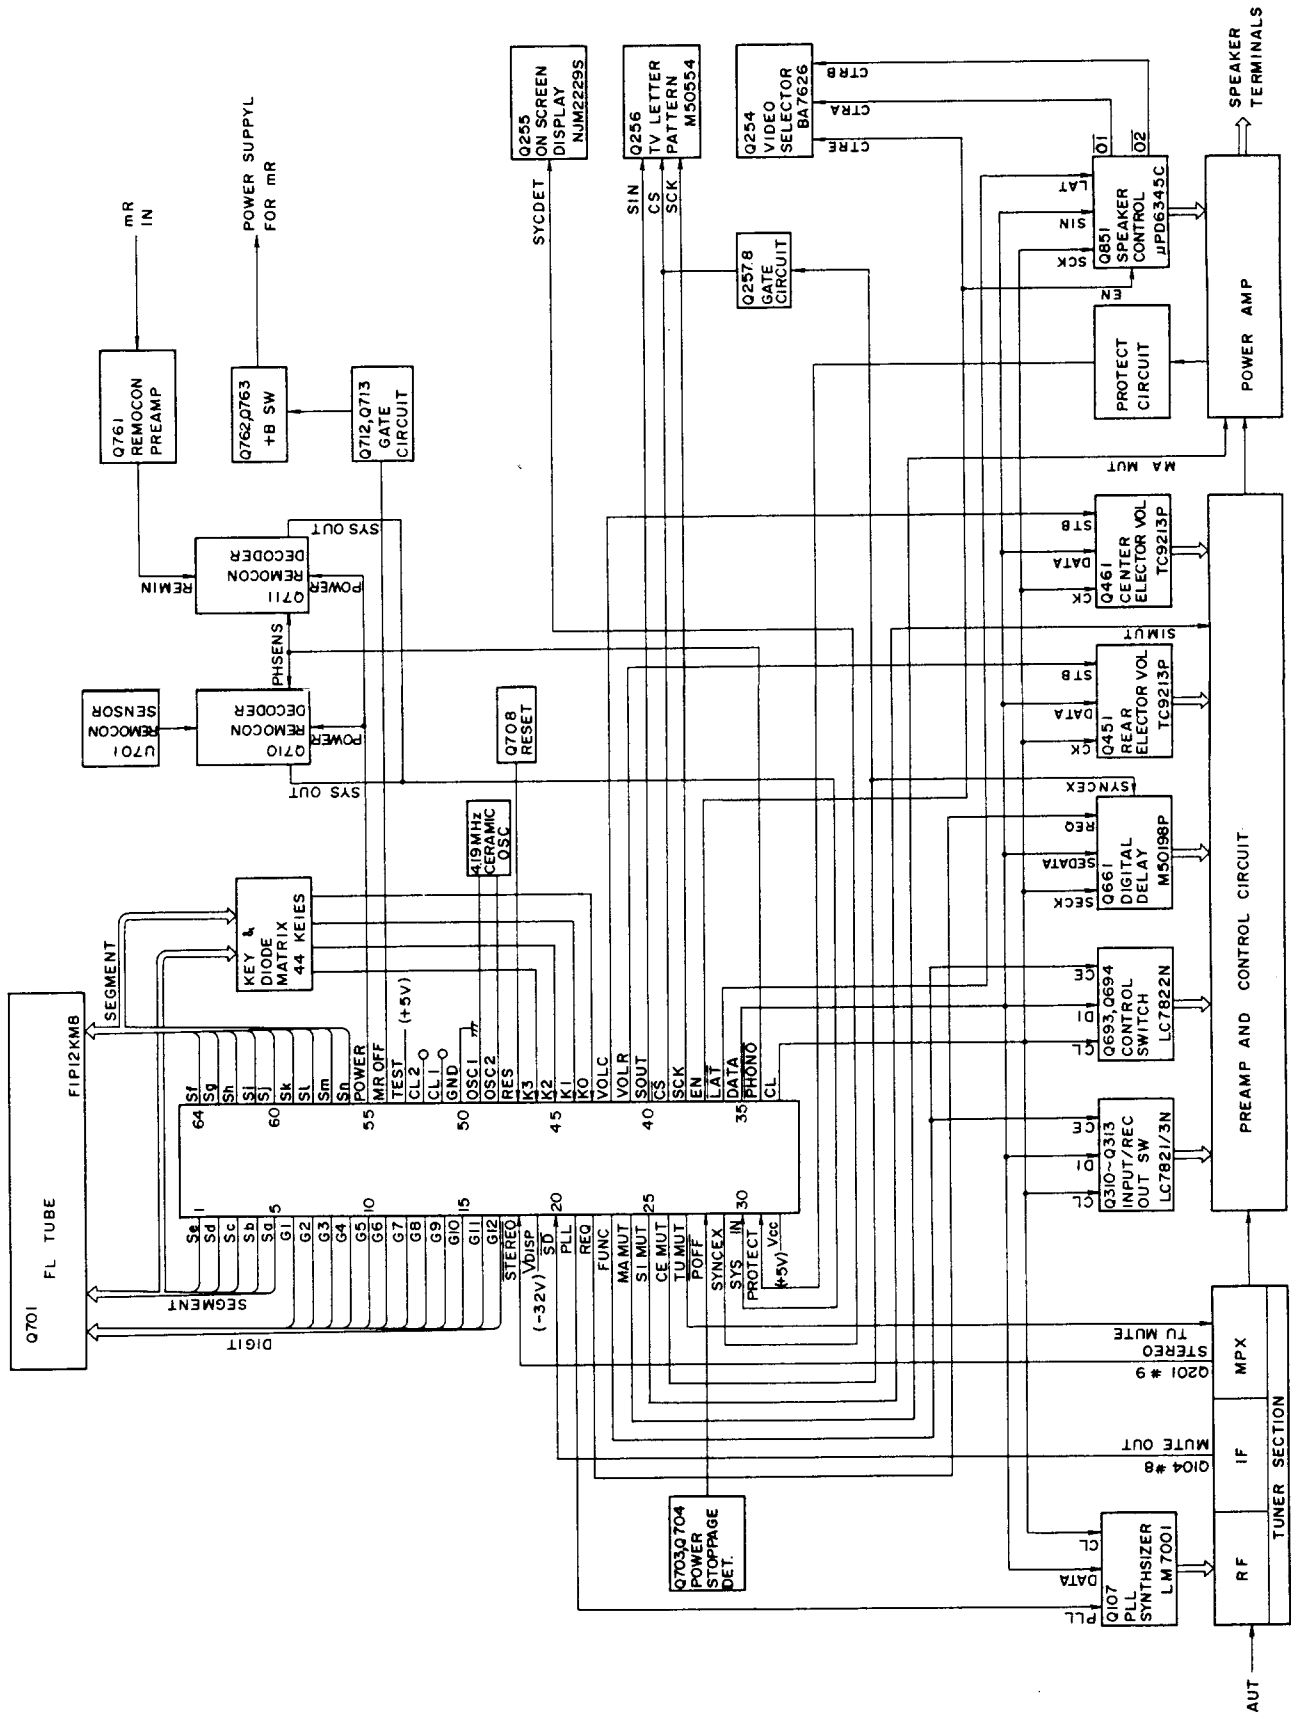

**Q702**  
**HD404729A86 (Microprocessor)**  
**Terminal Description**

Pin no.	Symbol	Description
1	Se	Segment output terminals.Active H.
2	Sd	
3	Sc	
4	Sb	
5	Sa	
6	G1	Digit and Key scan output terminals.Active H.
7	G2	
8	G3	
9	G4	
10	G5	
11	G6	
12	G7	
13	G8	
14	G9	
15	G10	
16	G11	Stereo broadcast discrimination input terminal.Active L.
17	G12	
18	STEREO	Control to the indicator STEREO.
19	Vdisp	Power supply terminal for pull-down resistor.
20	SD	Broadcast discrimination input terminal.Active L.
21	PLL	Connect to the terminal CE of PLL IC (LM7001). Active H.
22	REQ	Connect to the terminal REQ of delay IC(M50198P).Active H.
23	FUNC	Connect to the terminal CE of analog switches(LC7821N, LC7822N and LC7823N). Active H.
24	MAMUT	Audio main muting output terminal.Active H.
25	SIMUT	Audio simulative muting output terminal.Active H.
26	CEMUT	Muting output terminal for the chip select terminal of the control ICs(Data extended IC,PLL IC,and Delay IC).Active H.
27	TUMUT	Tuner muting output terminal.Active H.
28	POFF	Stoppage detection input terminal.Active L.
29	SYNCEX	External/Internal changeover input terminal of synchronizing signal of on screen display.
30	SYS IN	System code input terminal.Active H.
31	PROTECT	Protection circuit discrimination input terminal.H when the protection circuit operates.
32	Vcc	Power supply terminal.

Pin No.	Symbol	Description
33	CL	Clock pulse output terminal.Connect to the terminal CL of PLL IC, the terminal CE of analog switches,the terminal SECK of delay IC, the terminal CK of the electro volume,and the terminal SCK of data extended IC.
34	PHONO	Phono control output terminal.L when the selector switch is PHONO.
35	DATA	Data output terminal.Connect to the terminal DATA of PLL IC,the terminal DI of analog switches,the terminal SEDATA of delay IC ,the terminal DATA of electro volume,and the terminal SIN of data extended IC.
36	LAT	Connect to the terminal LAT of the data extended IC.
37	EN	Connect to the terminal EN of the data extended IC.
38	SCK	Connect to the terminal SCK of the on screen display IC.
39	CS	Connect to the terminal CS of the on screen display IC.
40	SOUT	Connect to the terminal SIN of the on screen display IC.
41	VOLR	Connect to the terminal STB of the electro volume IC for rear and simul.
42	VOLC	Connect to the terminal STB of the electro volume IC for center.
43	K0	Key matrix input terminals.Active H.
44	K1	
45	K2	
46	K3	
47	RES	Reset input terminal.Active H.
48	OSC2	Main system clock input terminal.
49	OSC1	Connect to the ceramic oscillator of 4.19MHz.
50	GND	Ground terminal.
51	CL1	Sub clock input terminal.Not used.
52	CL2	
53	TEST	Test terminal.
54	MR OFF	Multi-room remote control ON/OFF control output terminal.Active L.
55	POWER	Power control output terminal.H when the power turns on.
56	Sn	Segment output terminals.Active H.
57	Sm	
58	Sl	
59	Sk	
60	Sj	
61	Si	
62	Sh	
63	Sg	
64	Sf	

		#11	#10	#9	#8
		KEY0	KEY1	KEY2	KEY3
#5	Sa	POWER	MR MODE	PHONO	CD
#4	Sb	FM	AM	TAPE1	TAPE 2
#3	Sc	VIDEO 1	VIDEO 2	VIDEO 3	VIDEO 4
#2	Sd	MAIN	SUB	CENTER	REAR
#1	Se	MEMORY	FM MUTE	DIRECT	1
#64	Sf	2	3	4	5
#63	Sg	6	7	8	9
#62	Sh	0	REC OUT	SURROUND MODE	SIMUL SOURCE
#61	Si	DOWN	UP	CLASS A	CLASS B
#60	Sj	CLASS C	CLASS D	CLASS B	CLASS F
#59	Sk	SELECTIVE TONE	DELAY TIME	CENTER MODE	CENTER OFF
#58	Sl	BAND 0	BAND1	MODEL	


DIODE MATRIX

BAND1	BAND0	REGION	BAND	FREQUENCY RANGE	CH. SPACE
0	0	U.S.A.	FM	87.50-108.00MHz	50kHz
			AM	530-1710kHz	10kHz
0	1	EUROPE 1	FM	87.50-108.00MHz	50kHz
			AM	522-1611kHz	9kHz
1	0	EUROPE 2	FM	87.50-108.00MHz	50kHz
			AM	531-1602kHz	9kHz
1	1	JAPAN	FM	76.0-90.0MHz	100kHz
			AM	522-1611kHz	9kHz

## IC BLOCK DIAGRAMS AND DESCRIPTIONS

**Q254**

**BA7625 (Video Selector Switch)**

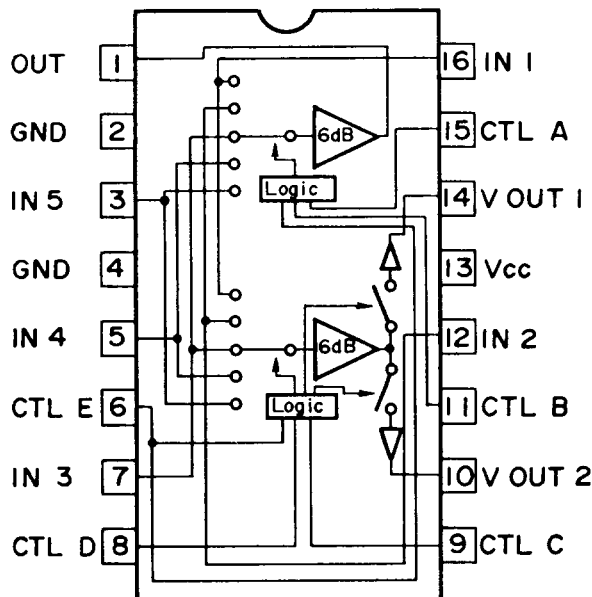

#15	#11	#6	#1
A	B	E	MONITOR OUT
L	L	X	IN1
H	L	X	IN2
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5


#9	#8	#6	#14
C	D	E	VOUT 1
L	L	X	
H	L	X	IN2
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5

X: Don't care

#15	#11	#6	#10
A	B	E	VOUT 2
L	L	X	IN1
H	L	X	
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5




## LM7001 (PLL Synthesizer and Controller)

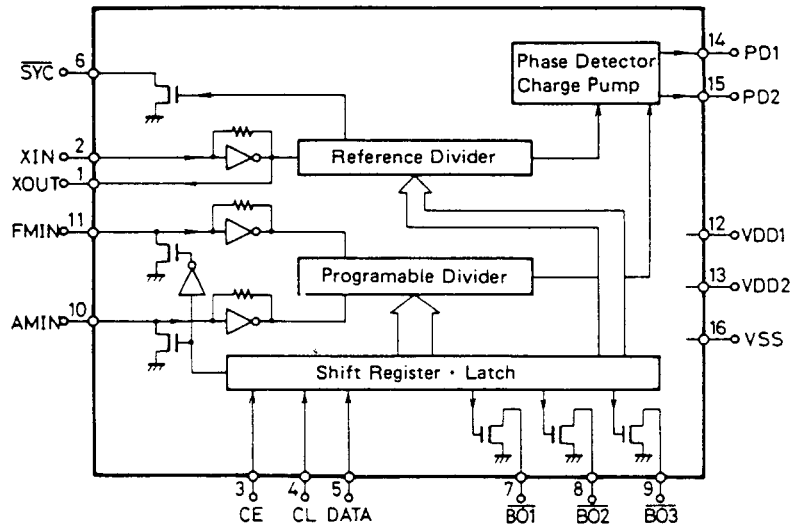

Pin No.	Terminal	Description
1	XOUT	Connect to the 7.2 MHz crystal oscillator.
2	XIN	
3	CE	Chip enable terminal. Connect to the PLL terminal of microprocessor.
4	CL	Serial clock input terminal. Connect to the CLOCK terminal of microprocessor.
5	DATA	Serial data input terminal. Connect to the DATA terminal of microprocessor.
6	$\overline{\text{SYN}}$	Not used.
7	$\overline{\text{AUTO/MONO}}$	AUTO/MONO selection output terminal. "L" when AUTO.
8	$\overline{\text{FM}}$	FM band control output terminal. "L" when FM.
9	$\overline{\text{AM}}$	AM band control output terminal. "L" when AM.
10	AMIN	AM local oscillator input terminal.
11	FMIN	FM local oscillator terminal.
12	VDD 1	Power supply terminal for back-up.
13	VDD 2	Power supply terminal.
14	PD1	Charge pump output of the phase detector which constitutes the PLL. High level is output when the divided local oscillator frequency is high than the reference frequency. In the opposite case, low level is output. Floating occurs when the frequencies matched. The output is applied to the variable capacitor diode in the local oscillator through the low pass filters.
15	PD2	
16	Vss	Ground terminal.

**Q310, Q313**  
**LC7823N (Analog Switch)**

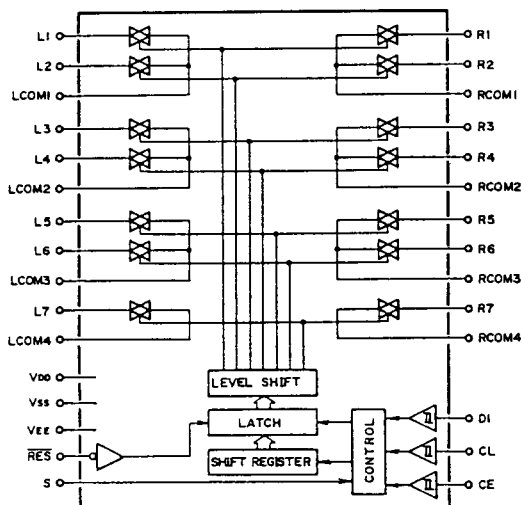

Serial Data Composition

CIRCUIT NO	PART NAME	A0	A1	A2	A3	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Q310	LC7823-N	0	1	1	1								
Q312	LC7821-N	1	1	0	1								
Q313	LC7823-N	1	1	1	1								
Q693	LC7822-N	0	0	1	1								
Q694	LC7822-N	1	0	1	1								

SWITCH CHANGEOVER

ADDRESS

**Q310**

Pin No.	Terminal	Description
1,30	CD	On when the input selector is CD.
2,29	PHONO	On when the input selector is PHONO.
3,28	LCOM1,RCOM1	Common terminal.
4,27	TAPE-1 PB	On when the input selector is TAPE-1.
5,26	VIDEO-1 IN	On when the input selector is VIDEO-1.
6,25	LCOM2,RCOM2	Common terminal.
7,24	VIDEO-2 IN	On when the input selector is VIDEO-2.
8,23	VIDEO-3 IN	On when the input selector is VIDEO-3.
9,22	LCOM3,RCOM3	Common terminal.
10,21	VIDEO-4 IN	On when the input selector is VIDEO-4.
11,20	LCOM4,RCOM4	Common terminal.
12	VEE	Negative power supply terminal. (-15V)
13	CE	Chip enable terminal. Connect to the terminal FUNC of the microprocessor.
14	DI	Serial data input terminal. Connect to the terminal DATA of the microprocessor.
15	CL	Serial clock terminal. Connect to the terminal CL of the microprocessor.
16	Vss	Ground terminal.
17	S	Select terminal.
18	RES	Reset terminal.
19	VDD	Power supply terminal. (+5V)

**Q313**

Pin No.	Terminal	Description
1,30	SOURCE	Off when TAPE-2 MONITOR switch turns on.
2,29	TAPE-2 PB	On when TAPE-2 MONITOR switch turns on.
3,28	LCOM1,RCOM1	Common terminal.
4,27	DOLBY	Off when SURROUND mode switch is DOLBY PRO LOGIC or DOLBY 3 STEREO. On when SIMUL mode.
5,26	DOLBY	On when SURROUND MODE switch is DOLBY PRO LOGIC or DOLBY 3 STEREO. Off when SIMUL mode.
6,25	LCOM2,RCOM2	Common terminal.
7,24	CTRC	
8,23	CTRD	
9,22	LCOM3,RCOM3	Common terminal.
10,21	S.T.C.	On when SELECTIVE TONE turns on.
11,20	LCOM4,RCOM4	Common terminal.
12	VEE	Negative power supply terminal. (-15V)
13	CE	Chip enable terminal. Connect to the terminal FUNC of the microprocessor.
14	DI	Serial data input terminal. Connect to the terminal DATA of the microprocessor.
15	CL	Serial clock terminal. Connect to the terminal CL of the microprocessor.
16	Vss	Ground terminal.
17	S	Select terminal.
18	RES	Reset terminal.
19	VDD	Power supply terminal. (+5V)

# ADJUSTMENT PROCEDURES

## • Preparation

### 1. Input

FM mono: 1kHz, 75kHz devi., 60dB/ $\mu$ V

FM stereo: 1kHz, 75kHz devi., 60dB/ $\mu$ V

Pilot signal 19kHz 7.5kHz devi.

AM: 400Hz 30% mod.

### 2. Outputs

Connect the non-inductive type resistors of 8ohms to the main speaker, subroom speaker, and rear speaker terminals unless otherwise noted.

### 3. Standard Knob Position

TAPE MONITOR 1/2 ..... OFF

VOLUME ..... Maximum


BASS/TREBLE/BALANCE/INPUT

BALANCE ..... Center

MUTING/LOUDNESS ..... Off

INPUT SELECTOR ..... CD

SPEAKERS ..... ON

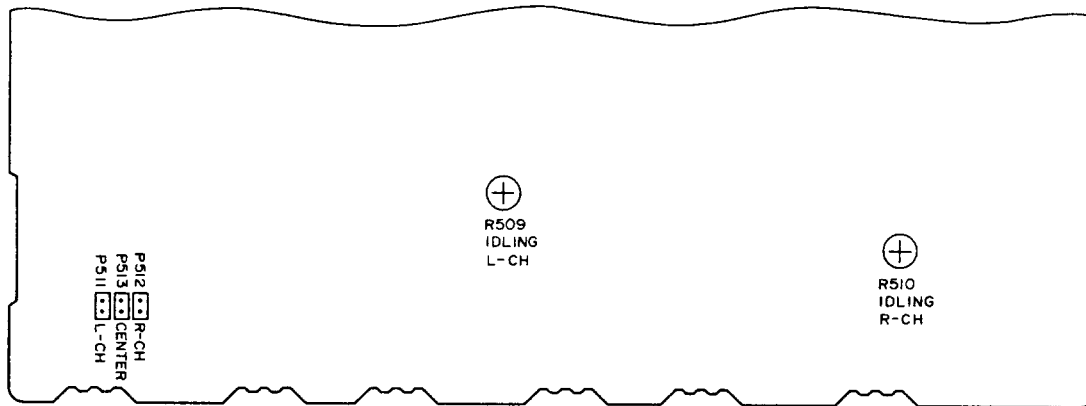

PRE., AND MAIN PC BOARD

## Amplifier section

### Idling Current Adjustment

Connect the DC voltmeter to the terminals IID and VCT on the pre.,and main amplifier pc board. Adjust the semi-fixed resistors R509,and R510 so that the indication of voltmeter is  $5 \pm 0.5$ mV.


ction

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
ion	1					DC voltmeter	L101	0±20mV	
	2	Fig. 1	99.1MHz 1kHz, 75kHz devi. 65dBf (60dB)		99.1MHz	AC voltmeter	IFT on the front end	Maximum	FM MUTE/MODE switch: ON/STEREO Repeat the steps 1 and 3 until no further adjustment is necessary.
	3					Distortion analyzer	L102	Minimum	
ion		Fig. 2	99.1MHz 1kHz, 75kHz devi. 65dBf (60dB)		99.1MHz	Frequency counter	R201	19kHz±10Hz	
		Fig. 3	99.1MHz, Ext mod., 65dBf (60dB)	Channel L or R 1kHz	99.1MHz	Distortion analyzer	IFT on the front end	Minimum	Don't turn more than ±180°
	1	Fig. 3	99.1MHz Ext. modulation 65dBf (60dB)	Channel L 1kHz	99.1MHz	Channel R AC voltmeter	R202	Minimum	Maximum and same separation.
ion	2			Channel R 1kHz	99.1MHz	Channel L AC voltmeter		Minimum	
		Fig. 3	99.1MHz 17.2dBf (12dB)		99.1MHz	TUNING indicator	R101	Light on	



ction

AM SG output	Tuning frequency	Output indicator	Adjustment point	Adjust for
AM SG output	530kHz	Digital DC voltmeter	OSC coil on RF block	1.5±0.1V
600kHz 400Hz, 30% mod. 60dB/m	600kHz	AC voltmeter	ANT coil on RF block	Maximum
990kHz 400Hz, 30% mod. 60dB/m	990kHz	AC voltmeter	L152	Maximum


Reference Specifications  
 FM tuned voltage: 87.5MHz - 108.00MHz  
 1.6±0.4V - 7.9±0.4V  
 AM tuned voltage: 530kHz 1.3±0.5V  
 1710kHz 7.2±0.5V  
 Auto stop level: AM: Less than 62dB/m  
 FM: Less than 17dB/μ

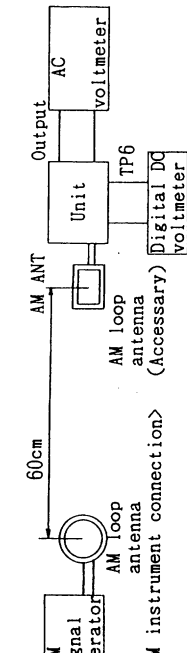

Confirmation of tuned voltage

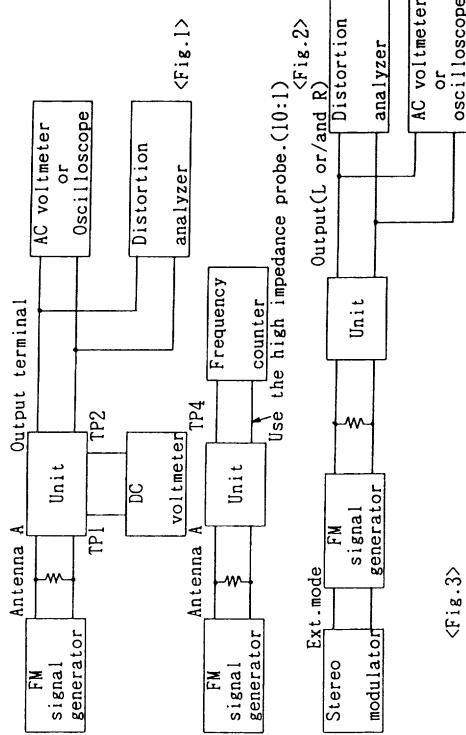


<Fig. 1>

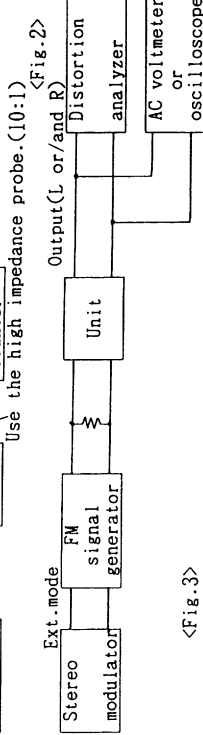

<Fig. 2>

<Fig. 3>

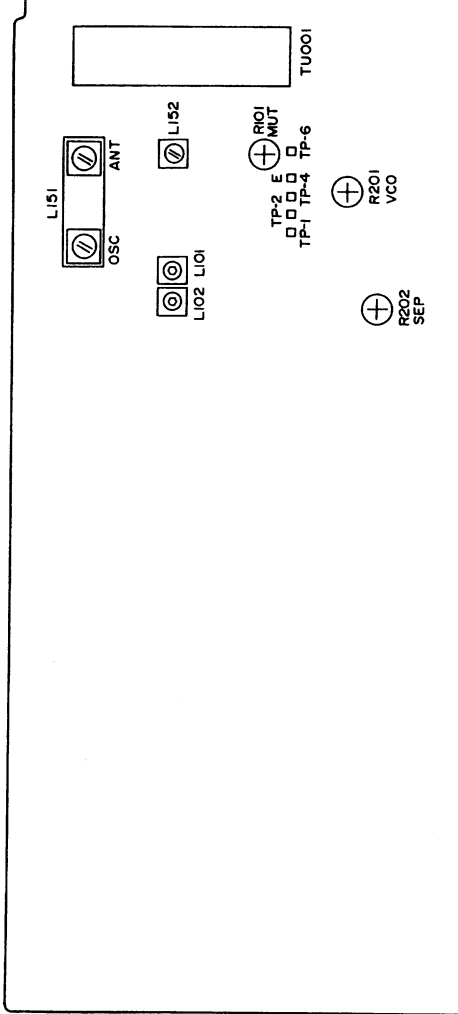

Tuner circuit pc board

# PRINTED CIRCUIT BOARD PARTS LIST

## DISPLAY CIRCUIT PC BOARD (NADIS-3965-2/2A/2B)

### CIRCUIT NO. PART NO. DESCRIPTION

#### Remocon sensor

U701 24130003 GP1U50XS

#### ICs

Q702 22240378 HD404729A86 *beta Arc29*  
 Q710, Q711 22240376  $\mu$ PD17103CX-528

#### FL tube

Q701 21208 FIP12KM8

#### Transistors

Q705-Q707 2213284 2SC1740S-R  
 Q708, Q709 2213510 DTA114ES  
 Q712 2213640 DTC123JS  
 Q713 2213290 TC114ES

#### Diodes

D701-D705 223163 1SS133  
 D708-D715 223163 1SS133  
 D716 223163 1SS133 [Q]  
 D718 223163 1SS133 [W]  
 D748 223163 1SS133  
 D724-D726 223163 1SS133  
 D727 224450562 MTZ5.6B, Zener  
 D728-D732 223163 1SS133  
 D734-D743 223163 1SS133  
 D745, D746 223163 1SS133  
 D747 224450472 MTZ4.7B, Zener

### CIRCUIT NO. PART NO. DESCRIPTION

#### L.E.Ds

D733, D744 225141 SEL2213C

#### Ceramic oscs

X701 3010163 CST4.19MGW  
 X702, X703 3010154 CST8.00MT

#### Coil

L701 233409K220 NCH-1284

#### Capacitors

C703 375524744 0.47 $\mu$ F, 5%, 50V, Plastic (MMT)  
 C704 3000057 0.1F, 5.5V, Super  
 C706 353741009 10 $\mu$ F, 16V, Elect.  
 C709 353721019 100 $\mu$ F, 6.3V, Elect.  
 C711, C715 353780109 1 $\mu$ F, 50V, Elect.

#### Resistors

R733 49163104415 100k $\times$ 15, 1/10W, Network  
 R734 49163104409 100k $\times$ 9, 1/10W, Network

#### Switches


S701-S714 25035548 NPS-111-S510  
 S716-S718 25035548 NPS-111-S510  
 S731 25035548 NPS-111-S510  
 S733-S744 25035548 NPS-111-S510

**CIRCUIT NO. PART NO. DESCRIPTION**

	<b> Holders</b>	
Q701a	27190784	FL tube
D733a	27190549	Stand-by
D744a	27190517A	MR Off

NOTE:  
[W]: Only Worldwide model  
[Q]: Only 240V model

**SCHEMATIC DIAGRAM  
MICROPROCESSOR CONNECTION DIAGRAM**

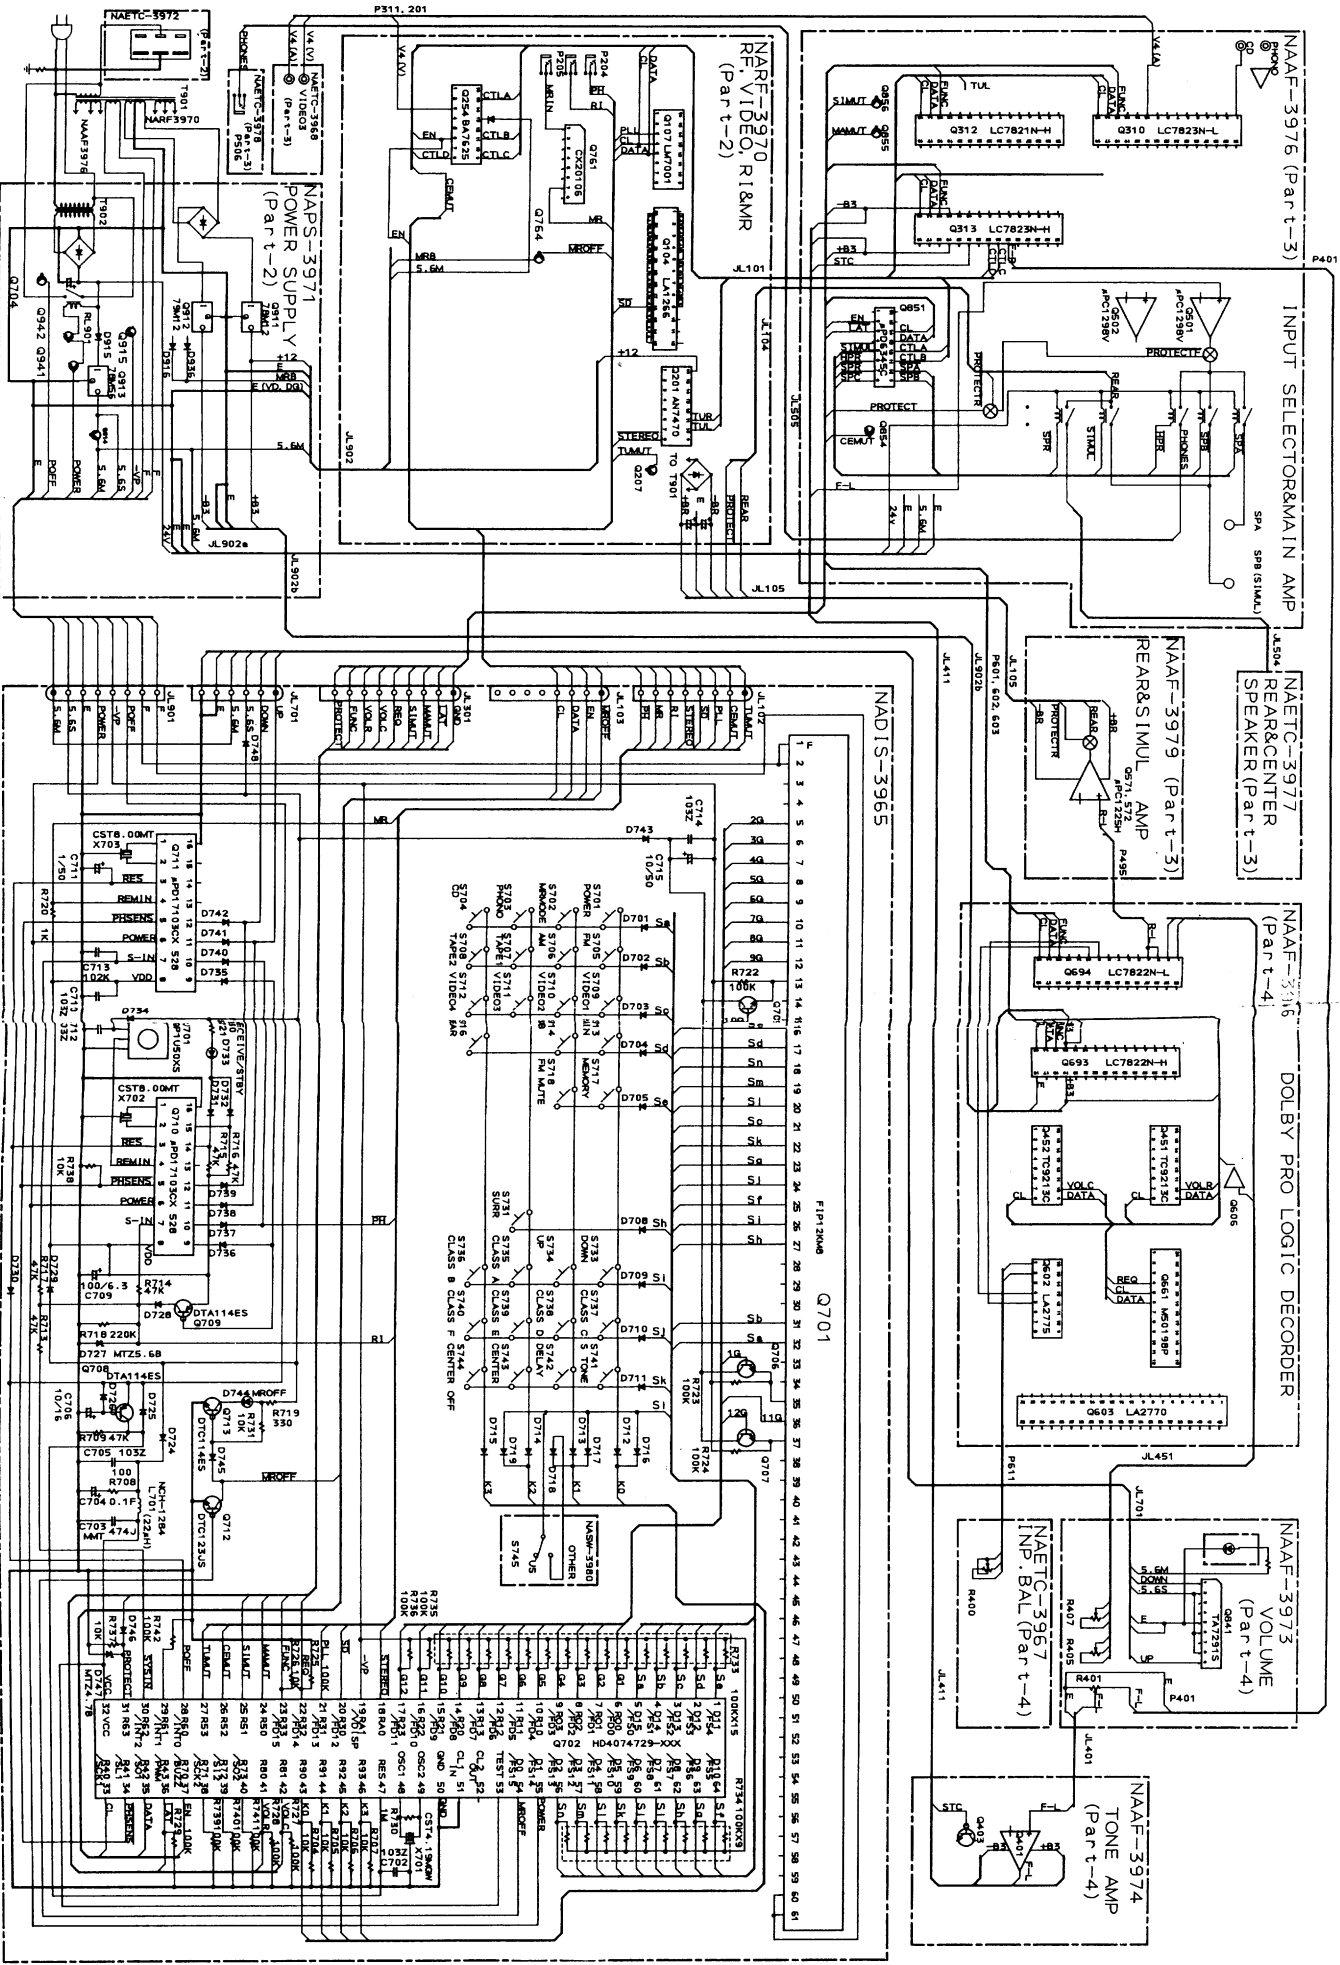

# CHEMATIC DIAGRAM

## INNER CIRCUIT AND POWER SUPPLY SECTION

A

B

C



D

E

F

G

TX-SV50PRO

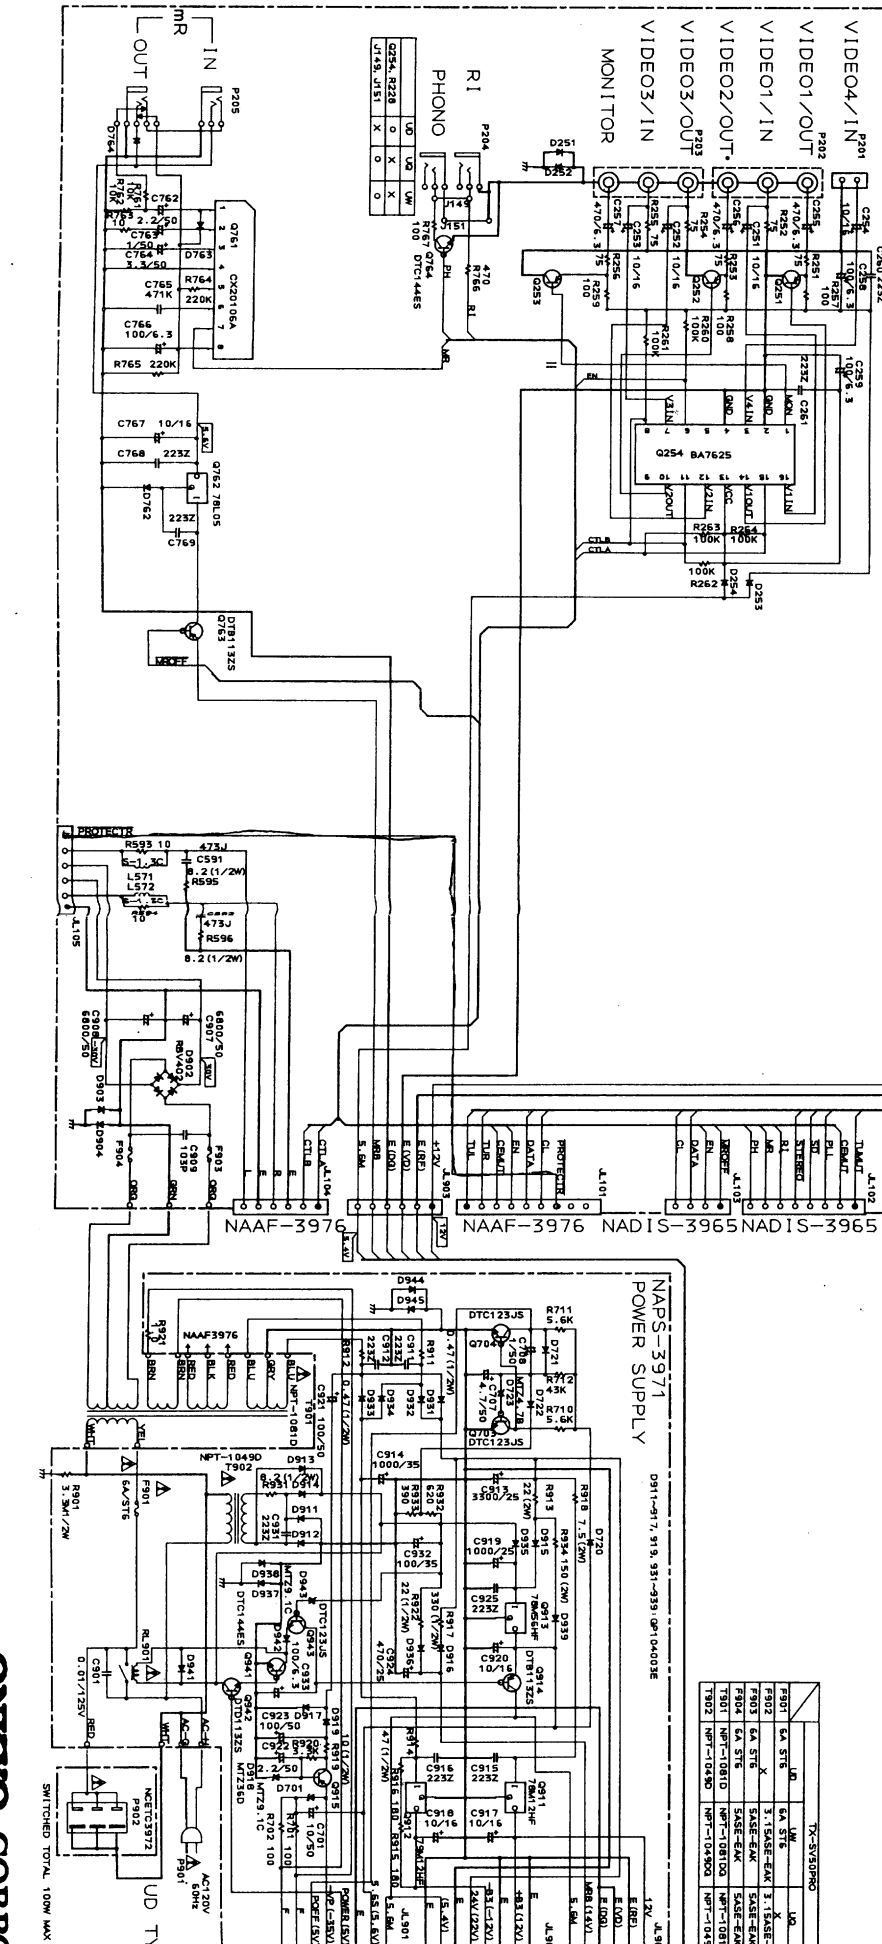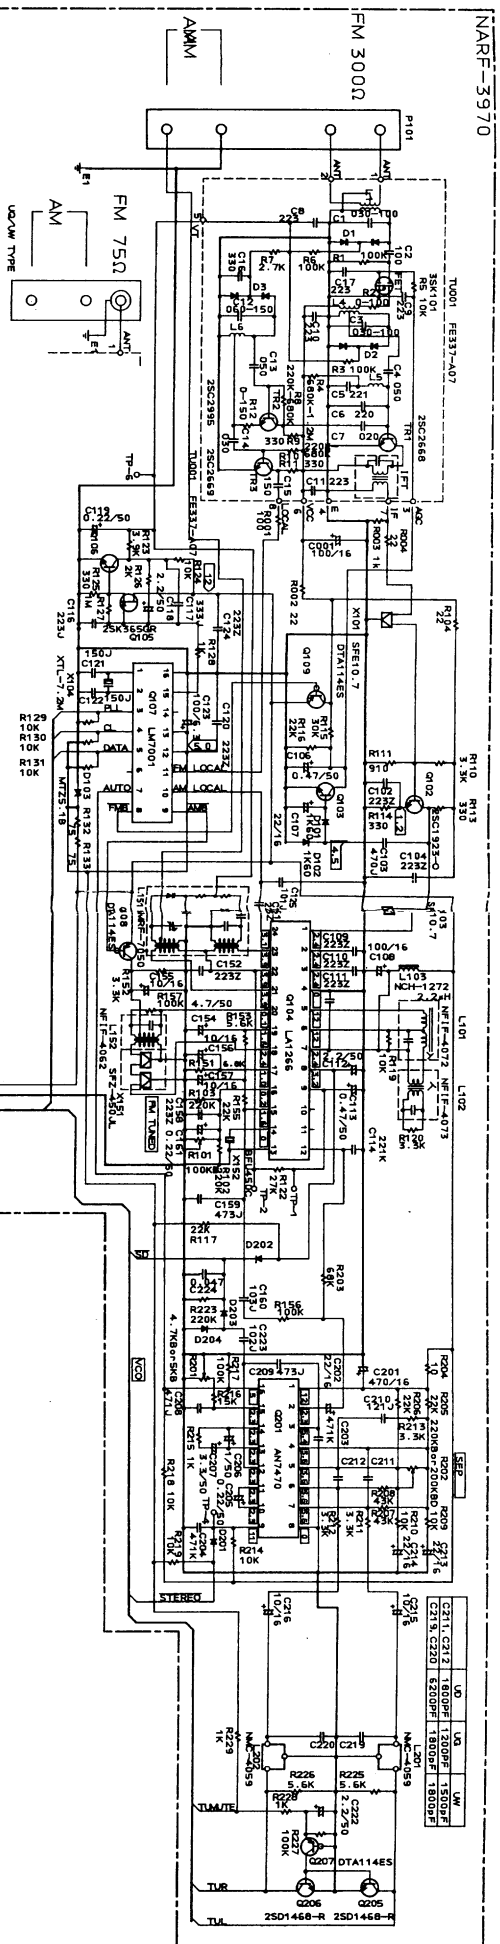

Part No.	QTY	DESCRIPTION	Part No.	QTY	DESCRIPTION
P901	1	6A 5T5	Q911	1	1N4001
P902	1	3.15A5E-EAK	Q912	1	1N4001
P903	1	5A5E-EAK	Q913	1	1N4001
P904	1	5A5E-EAK	Q914	1	1N4001
P905	1	5A5E-EAK	Q915	1	1N4001
P906	1	5A5E-EAK	Q916	1	1N4001
P907	1	5A5E-EAK	Q917	1	1N4001
P908	1	5A5E-EAK	Q918	1	1N4001
P909	1	5A5E-EAK	Q919	1	1N4001
P910	1	5A5E-EAK	Q920	1	1N4001

ONKYO CORPORATION



## TUNER CIRCUIT PC BOARD (NARF-3970-2/2A/2B)

CIRCUIT NO. PART NO. DESCRIPTION

**Front End**

TU001 240088 FE337-A07

**ICs**

Q104 22240039 LA1266  
 Q107 22240090 LM7001  
 Q201 22240242 AN7470  
 Q254 22240373 BA7625  
 Q761 22240345 CX20106A  
 Q762 222780053 78L05

**Transistors**

Q102 2211723 2SC1923-O  
 Q103, Q106 2211183 or 2SC1740-R or  
 2211255 2SC1815-GR  
 Q105 2212445 2SK365-GR, FET  
 Q108, Q109 2213510 DTA114ES  
 Q205, Q206 2212794 2SD1468-R  
 Q207 2213510 DTA114ES  
 Q251-Q253 2213074 or 2SA933-R or  
 2211455 2SA1015-GR  
 Q763 2213830 DTB113ZS  
 Q764 221282 DTC144ES

**Diodes**

D101, D102 223132 1K60, Germanium  
 D103 224450512 MTZ5.1B, Zener  
 D201-D204 223163 1SS133  
 D251-D254 223163 1SS133  
 D762-D764 223163 1SS133  
 D902 22380022 RBV402  
 D903, D904 223163 1SS133

**Transformers**

L101 233401 NFIF-4072  
 L102 233402 NFIF-4073  
 L152 232139 NMIF-4062

**Coils**

L103 233409M022 NCH-1272  
 L151 232148 NMRF-7050  
 L201, L202 233355A NMC-4059  
 L571, L572 231176 S-1.3C

**Ceramic Filters**

X101, X103 3010071 SFE10.7MA5  
 X151 3010123 SFZ450JL  
 X152 3010076 BFU450C

**Oscillator element**

X104 3010141 XTL-7.2M, X'tal

**Capacitors**

C001, C108 354741019 100 $\mu$ F, 16V, Elect.  
 C106 354784799 0.47 $\mu$ F, 50V, Elect.  
 C107 354742209 22 $\mu$ F, 16V, Elect.  
 C112 354780229 2.2 $\mu$ F, 50V, Elect.  
 C113 354784799 0.47 $\mu$ F, 50V, Elect.  
 C116 374722234 0.022 $\mu$ F, 5%, 50V, TF  
 C117 374723334 0.033 $\mu$ F, 5%, 50V, TF  
 C118 354780229 2.2 $\mu$ F, 50V, Elect.  
 C119, C161 354782299 0.22 $\mu$ F, 50V, Elect.  
 C123 354721019 100 $\mu$ F, 6.3V, Elect.  
 C154 354780479 4.7 $\mu$ F, 50V, Elect.  
 C155-C157 354741009 10 $\mu$ F, 16V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
C159	374724734	0.047 $\mu$ F, 5%, 50V, TF
C160	374721034	0.01 $\mu$ F, 5%, 50V, TF
C201	354744719	470 $\mu$ F, 16V, Elect.
C202	354742209	22 $\mu$ F, 16V, Elect.
C205	354782299	0.22 $\mu$ F, 50V, Elect.
C206	354780109	1 $\mu$ F, 50V, Elect.
C207	354780339	3.3 $\mu$ F, 50V, Elect.
C208	370134714	470pF, 5%, 100V, APS
C209	374724734	0.047 $\mu$ F, 5%, 50V, TF
C211, C212	374721824	1800pF, 5%, 50V, TF [D]
	374721224	1200pF, 5%, 50V, TF [W/Q]
C213, C214	354742209	22 $\mu$ F, 16V, Elect.
C215, C216	354741009	10 $\mu$ F, 16V, Elect.
C219, C220	374726224	6200pF, 5%, 50V, TF [D]
	374721824	1800pF, 5%, 50V, TF [W/Q]
C222	354780229	2.2 $\mu$ F, 50V, Elect.
C223	374721024	1000pF, 5%, 50V, TF
C224	374724734	0.047 $\mu$ F, 5%, 50V, TF
C251-C254	354741009	10 $\mu$ F, 16V, Elect.
C255-C257	354724719	470 $\mu$ F, 6.3V, Elect.
C258, C259	354721019	100 $\mu$ F, 6.3V, Elect.
C591, C592	374724734	0.047 $\mu$ F, 5%, 50V, TF
C762	354780229	2.2 $\mu$ F, 50V, Elect.
C763	354780109	1 $\mu$ F, 50V, Elect.
C764	354780339	3.3 $\mu$ F, 50V, Elect.
C766	354721019	100 $\mu$ F, 6.3V, Elect.
C767	354741009	10 $\mu$ F, 16V, Elect.
C907, C908	3504207	6800 $\mu$ F, 50V, Elect.
<b>Resistors</b>		
R101	5210221 or 5210070	N06HR100KBD, Semi-fixed
R201	5210216 or 5210062	N06HR5KBD or N06HR4.7KBD, Semi-fixed
R202	5210072 or 5210222	N06HR220KBC or N06HR200KBD, Semi-fixed
R595, R596	442520824	8.2ohm, 1/2W, Metal oxide film
<b>Terminal</b>		
P101	25060085	NTM-4PDMN29, Antenna [D]
	25060087	NTM-2PDMN31, Antenna [W/Q]
<b>Sockets</b>		
P201	2009990021A	NSAS-4P0045
JL101, JL102	25050272	NSCT-8P100
JL103	25050268	NSCT-4P96
JL104, JL105	25050270	NSCT-6P98
JL903	25050270	NSCT-6P98
<b>Jacks</b>		
P202, P203	25045299	NPJ-3PDYE158
P204	25045172	HSJ-1003-01-020, RI
P205	25045293	HSJ-1003-01-012, MR
<b>Fuses</b>		
F903, F904	252051	$\Delta$ 6A (ST-6), Secondary [D]
	252078	$\Delta$ 5A-SE-EAK, Secondary [W/Q]
<b>Holders</b>		
F903a, F904a	250113	$\Delta$ SN5051, Fuse [D]
	25050065	$\Delta$ YSH403T, Fuse [W/Q]
<b>Labels</b>		
F903b, F904b	29360419	T5A/250V, Rating [W/Q]

## POWER SUPPLY CIRCUIT PC BOARD (NAPS-3971-2/2B/2C)

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>ICs</b>		
Q911	222780125	NEC 78M12HF
Q912	222790125	79M12
Q913	222780565	JRC 78M56
<b>Transistors</b>		
Q703, Q704	2213640	DTC123JS
Q914	2213830	DTB113ZS
Q915	2213074 or 2211455	2SA933-R or 2SA1015-GR
Q941	221282	DTC144ES
Q942	2213650	DTD113ZS
Q943	2213640	DTC123JS
<b>Diodes</b>		
D701	224450913	MTZ9.1C, Zener
D720-D722	223163	ISS133
D723	224450472	MTZ4.7B, Zener
D911-D917	22380035 or 22380032	GP104003E or 1SR139-100
D918	224453604	MTZ36D, Zener
D919, D939	22380035 or 22380032	GP104003E or 1SR139-100
D931-D936	22380032	1SR139-100
D937, D938	223163	ISS133
D941, D942	223163	ISS133
D943	224450913	MTZ9.1C
D944, D945	223163	ISS133
<b>Power transformer</b>		
T902	2300493	$\Delta$ NPT-1049D [D]
	2300495	$\Delta$ NPT-1049DG [W]
	2300496	$\Delta$ NPT-1049D [Q]
<b>Capacitors</b>		
C701	354781009	10 $\mu$ F, 50V, Elect.
C707	354780479	4.7 $\mu$ F, 50V, Elect.
C708	354780109	1 $\mu$ F, 50V, Elect.
C901	3500065A	$\Delta$ DE7150FZ103PAC400V/125V, IS
C913	354753329	3300 $\mu$ F, 25V, Elect.
C914	354761029	1000 $\mu$ F, 35V, Elect.
C917, C918	354741009	10 $\mu$ F, 16V, Elect.
C919	354751029	1000 $\mu$ F, 25V, Elect.
C920	354741009	10 $\mu$ F, 16V, Elect.
C921, C923	354781019	100 $\mu$ F, 50V, Elect.
C922	354780229	2.2 $\mu$ F, 50V, Elect.
C924	354754719	470 $\mu$ F, 25V, Elect.
C932	354761019	100 $\mu$ F, 35V, Elect.
C933	354721019	00 $\mu$ F, 6.3V, Elect.
<b>Resistors</b>		
R901	431523355	$\Delta$ 3.3Mohm, 1/2W, Solid [D]
R911, R912	442524794	0.47ohm, 1/2W, Metal oxide film
R913	441722204	22ohm, 2W, Metal oxide film
R914	442524704	47ohm, 1/2W, Metal oxide film
R917	442523314	330 ohm, 1/2W, Metal oxide film
R918	441620754	7.5 ohm, 1W, Metal oxide film
R919	442521004	10ohm, 1/2W, Metal oxide film
R922	442522204	22ohm, 1/2W, Metal oxide film
R931	442520824	8.2 ohm, 1/2W, Metal oxide film
R934	441721514	150ohm, 2W, Metal oxide film
<b>Relay</b>		
RL901	25065248	$\Delta$ NRL-1P15A-DC12-29 [D]
<b>Sockets</b>		
JL901, JL902	25050272	NSCT-8P100
P903	2009990078	NSAS-4P0115 [D]

**CIRCUIT NO. PART NO. DESCRIPTION**

<b>Fuse</b>		
F901	252051	⚠ 8A (ST-6), Primary [D]
	252078	⚠ 5A-SE-EAK, Primary [W/Q]

<b>Fuseholders</b>		
F901a	250113	⚠ SN5051, Fuse [D]
F902a	25050065	⚠ YSH-403T, Fuse [W/Q]

<b>Radiator</b>	
27160209	RAD-67

<b>Label</b>	
F901c	29360626-1 Fuse [D]

**BAND SELECTOR SWITCH PC BOARD (NASW-3980-2)**

(Only Worldwide model)

**CIRCUIT NO. PART NO. DESCRIPTION**

S741	25065267	NSS-22109, Slide switch
------	----------	-------------------------

NOTE:  
THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.


**AC OUTLET TERMINAL PC BOARD (NAETC-3972-2)**

**CIRCUIT NO. PART NO. DESCRIPTION**


P902	25050388	⚠ NSCT-6P215, AC outlet
------	----------	-------------------------

NOTE:  
[D]: Only 120V model  
[W]: Only Worldwide model  
[Q]: Only 240V model

**LA1266 (FM IF and AM Radio System)**

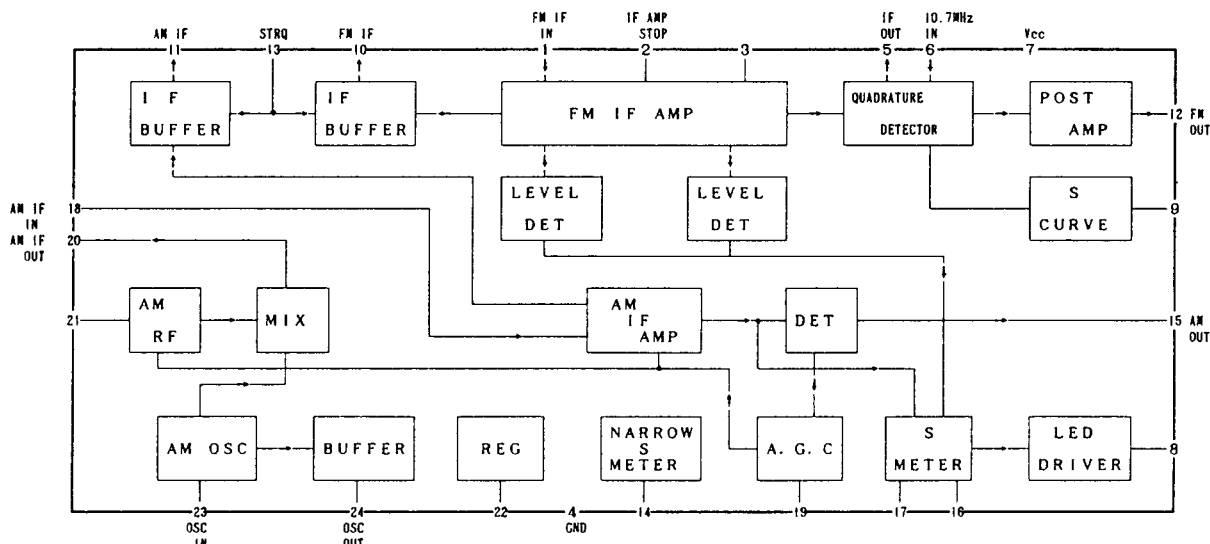

**AN7470 (FM Stereo Decoder)**

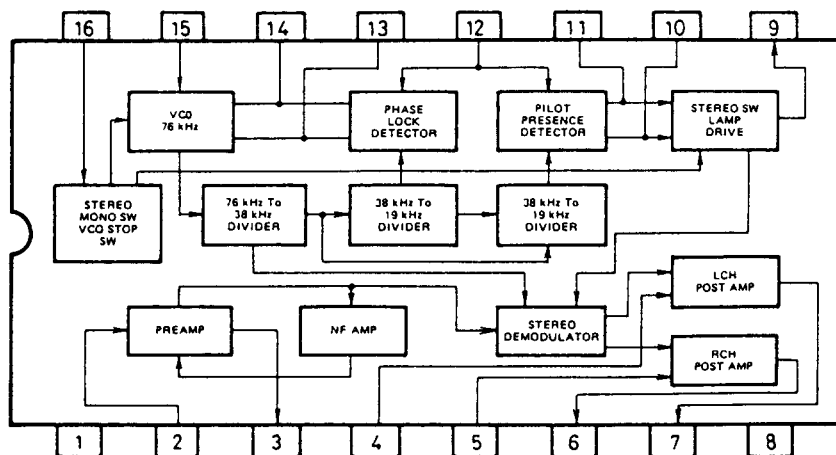

# PRINTED CIRCUIT BOARD PARTS LIST

## PRE./MAIN AMPLIFIER PC BOARD (NAAF-3976-2)

### CIRCUIT NO. PART NO. DESCRIPTION

ICs		
Q301	22240191	NJM4565D-D
Q310, Q313	22240339	LC7823N
Q312	22240280	LC7821N
Q501, Q502	22240311	$\mu$ PC1298V
Q851	22240211	$\mu$ PD6345C

Transistors		
Q491-Q492	2213631 or 2213632	RN1241-A or RN1241-B
Q503, Q504	2211183 or 2211255	2SC1740-R or 2SC1815-GR
Q505, Q506	2201703, 2201704 or 2201705	$\star$ 2SC3855-O, $\star$ 2SC3855-Y or $\star$ 2SC3855-P
Q507, Q508	2201693, 2201694 or 2201695	$\star$ 2SA1491-O, $\star$ 2SA1491-Y or $\star$ 2SA1491-P

CAUTION: Replacement for transistor of mark  $\star$ , if necessary, must be made from the same beta group (HFE) as the original type.

2SC3855-O      2SA1491-O  


Same beta group		
Q531-Q534	2211732 or 2211733	2SC1845-F or 2SC1845-E
Q561	2211792 or 2211793	2SA992-F or 2SA992-E
Q803	2213631 or 2213632	RN1241-A or RN1241-B
Q854, Q855	2213510	DTA114ES

Diodes		
D501, D502	223163	1SS133
D504, D506	223163	1SS133
D851, D852	223163	1SS133
D901	22380022	RBV402

Coils		
L501, L502	231176	S-1.3C

Capacitors		
C303, C304	391980227	2.2 $\mu$ F, 50V, Elect.
C307, C308	391921017	100 $\mu$ F, 6.3V, Elect.
C309, C310	374726224	6200pF, 5%, 50V, TF
C311, C312	374721824	1800pF, 5%, 50V, TF
C313, C314	391941007	10 $\mu$ F, 16V, Elect.
C371, C372	354744709	47 $\mu$ F, 16V, Elect.
C501, C502	391941007	10 $\mu$ F, 16V, Elect.
C503, C504	373303314	330pF, 5%, 125V, PP
C505, C506	354742219	220 $\mu$ F, 16V, Elect.
C511, C512	374726834	0.068 $\mu$ F, 5%, 50V, TF
C513, C514	374724734	0.047 $\mu$ F, 5%, 50V, TF
C517-C520	354700109	1 $\mu$ F, 160V, Elect.
C533	391921017	100 $\mu$ F, 6.3V, Elect.
C562	354700109	1 $\mu$ F, 160V, Elect.
C851	391921017	100 $\mu$ F, 6.3V, Elect.
C855	391941007	10 $\mu$ F, 16V, Elect.
C905, C906	3504238	10000 $\mu$ F, 56V, Elect.

## CIRCUIT NO. PART NO. DESCRIPTION

Resistors		
R509, R510	5210118 or 5210062	N06HR 5KBC or N06HR 4.7KBD, Semi-fixed
R515-R518	441620824	8.2ohm, 1W, Metal oxide film
R519, R520	4500031	0.22ohm, 5W, Metal plate
R521, R522	442520824	8.2ohm, 1/2W, Metal oxide film
R523, R524	441620474	4.7ohm, 1W, Metal oxide film
R525-R528	442524794	0.47ohm, 1/2W, Metal oxide film
R529, R530	441623914	390ohm, 1W, Metal oxide film

Relaies		
RL501, RL502	<u>25065339</u>	NRL-2P5A-DC24-046
RL504	25065339	NRL-2P5A-DC24-046
RL506	25065396	NRL-2P1.25A-DC24-067

Terminals		
P301-P303	25045300	NPJ-6PDBL-159
P304	25045303	NPJ-4PDBL-162
P305	25045302	NPJ-1PDBL-161
P501	<u>25060125</u>	NTM-8PDMN058

Plugs		
P511-P513	25055493	NPLG-2P468
P601-P602	25055492	NPLG-9P467
P603	25055491	NPLG-6P466

Sockets		
P311	2000783	NSAS-6P739
P401	2000931	NSAS-6P884
JL301	25050273	NSCT-9P101
JL411	25050270	NSCT-6P98

Shield plate		
	27150309	

Radiators		
	27160262	

Clamps		
	27301186	

Cord ass'y		
P491	2065525300	

## HEADPHONE TERMINAL PC BOARD (NAETC-3978-2)

CIRCUIT NO.	PART NO.	DESCRIPTION
P505	25045256	YKB21-5010, Headphone terminal

## VIDEO TERMINAL PC BOARD (NAETC-3968-2)

CIRCUIT NO.	PART NO.	DESCRIPTION
D381-D384	223163	1SS133, Diodes
P307	25045266	NPJ-3PDBL133, Terminal
P201a	25055132	NPLG-2P116, Plug
P311a	25055133	NPLG-3P117, Plug
P999	2061712100	Cord ass'y

REAR AMPLIFIER PC BOARD (NAAF-3979-2)

CIRCUIT NO. PART NO. DESCRIPTION

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>ICs</b>		
Q571, Q572	22240108	$\mu$ PC1225H
<b>Transistors</b>		
Q573, Q574	2211183 or 2211255	2SC1740-R or 2SC1815-GR
Q575, Q576	2202063, 2202064 or 2202066	$\star$ 2SC4511-O, $\star$ 2SC4511-Y or $\star$ 2SC4511-P
Q577, Q578	2202053, 2202054 or 2202056	$\star$ 2SA1725-O, $\star$ 2SA1725-Y or $\star$ 2SA1725-P

CAUTION: Replacement for transistor of mark  $\star$ , if necessary must be made from the same beta group (HFE) as the original type.

Ex. 2SC4511-O 2SA1725-O

Same beta group

Q579, Q580	2211732 or 2211733	2SC1845-F or 2SC1845-E
------------	--------------------	------------------------

CIRCUIT NO. PART NO. DESCRIPTION


CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Capacitors</b>		
C571, C572	391980227	2.2 $\mu$ F, 50V, Elect.
C575, C576	354741019	100 $\mu$ F, 16V, Elect.
C583, C584	374723334	0.033 $\mu$ F, 5%, 50V, TF
C585, C586	391980227	2.2 $\mu$ F, 50V, Elect.
<b>Resistors</b>		
R589, R590	4500027	0.22ohm, 2W, Metal plate
R592	442520824	8.2ohm, 1/2W, Metal oxide film
<b>Socket</b>		
P495	2000562	NSAS-6P518

SPEAKER TERMINAL PC BOARD (NAETC-3977-2)


CIRCUIT NO. PART NO. DESCRIPTION

P503	25060144	NTM-4PDML072, Terminal
------	----------	------------------------

Q501, Q502  
 $\mu$ PC1298V (Power Amplifier Driver)

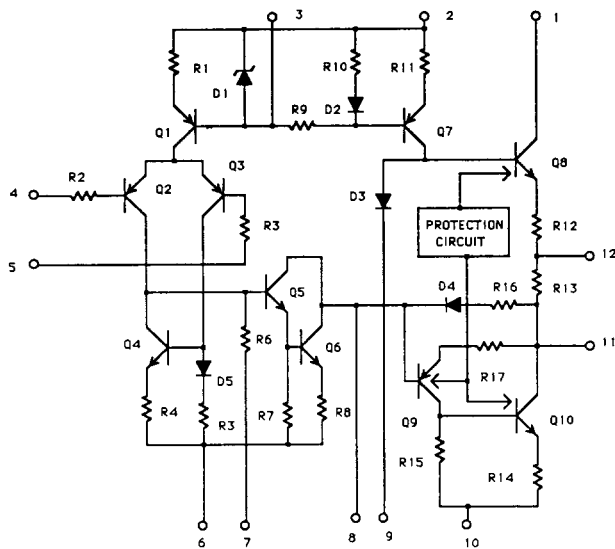


Q571, Q572  
 $\mu$ PC1225H (Power Amplifier Driver)

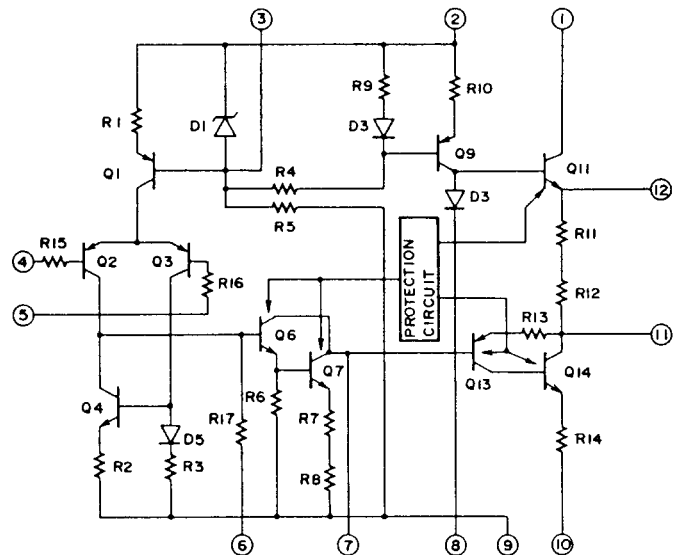



EMATIC DIAGRAM  
ROL SECTION

TX-SV50PRO

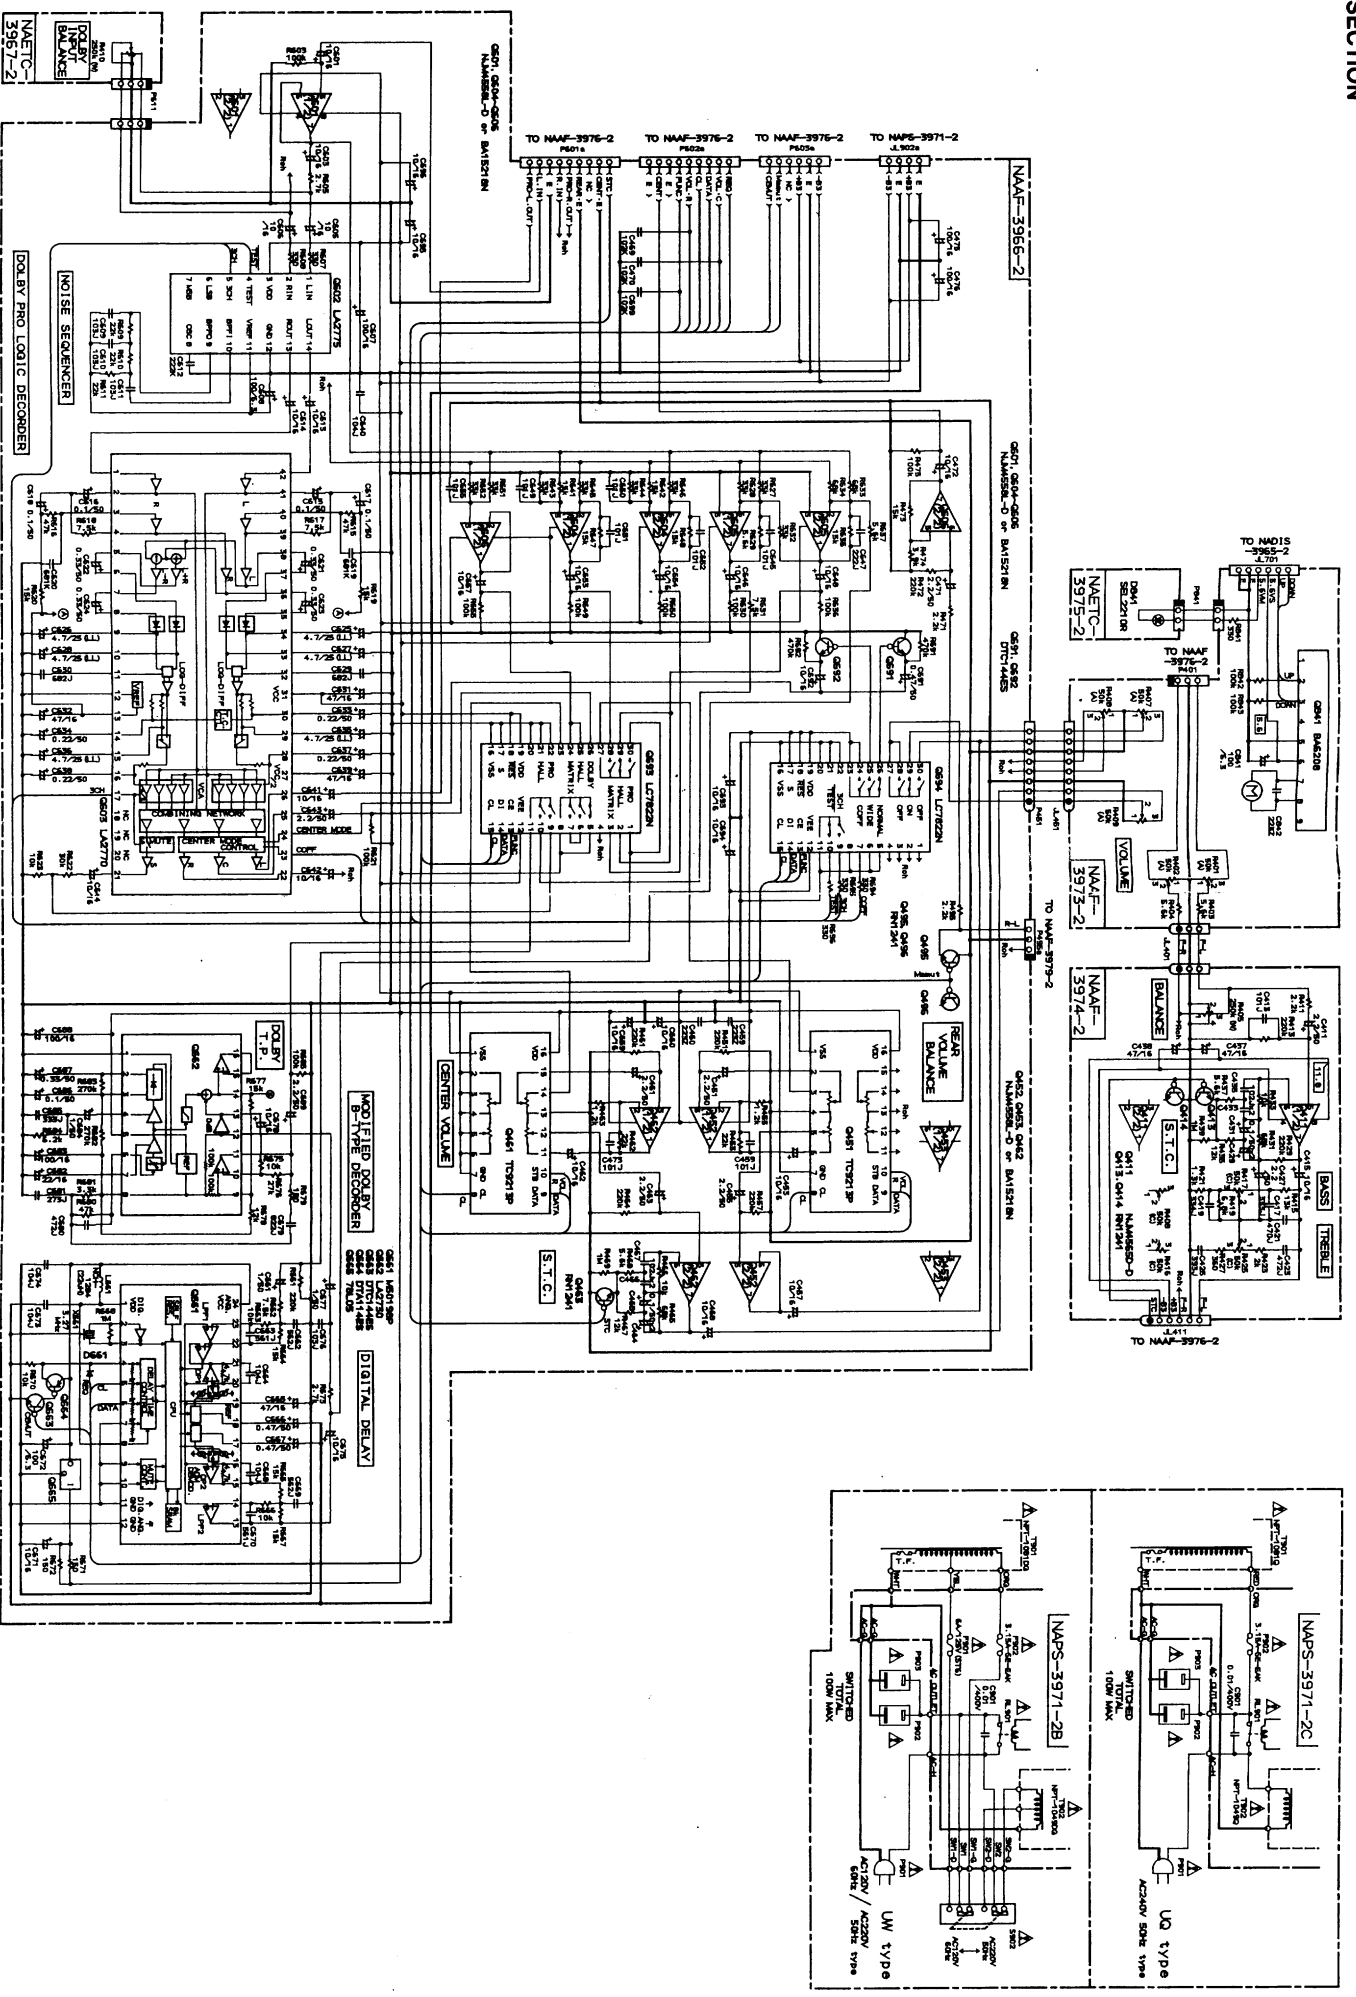

# PRINTED CIRCUIT BOARD PARTS LIST

## SURROUND CIRCUIT PC BOARD (NAAF-3966-2)


CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
					<b>Ceramic osc</b>
			X661	3010169	CST3.27MGW002
					<b>Capacitors</b>
Q451, Q461	22240266	TC9213P	C451, C452	391980227	2.2 $\mu$ F, 50V, Elect.
Q452, Q453	22240247 or	BA15218N or	C453, C454	391941007	10 $\mu$ F, 16V, Elect.
Q462, Q601	22240293	NJM4558L-D	C455, C456	391980227	2.2 $\mu$ F, 50V, Elect.
Q602	22240371	LA2775	C457, C458	391941007	10 $\mu$ F, 16V, Elect.
Q603	22240279	LA2770	C461, C463	391980227	2.2 $\mu$ F, 50V, Elect.
Q604-Q606	22240247 or	BA15218N or	C462	391941007	10 $\mu$ F, 16V, Elect.
	22240293	NJM4558L-D	C464, C465	354781099	0.1 $\mu$ F, 50V, Elect.
Q661	22240370	M50198P	C466, C467	374721024	1000pF, 5%, 50V, TF
Q662	22240139	LA2730	C468, C472	391941007	10 $\mu$ F, 16V, Elect.
Q665	222780053	78L05	C471	391980227	2.2 $\mu$ F, 50V, Elect.
Q693, Q694	22240270	LC7822N	C475, C476	354741019	100 $\mu$ F, 16V, Elect.
			C601-C606	391941007	10 $\mu$ F, 16V, Elect.
			C607	354741019	100 $\mu$ F, 16V, Elect.
			C608	354721019	100 $\mu$ F, 6.3V, Elect.
			C609-C611	374721034	0.01 $\mu$ F, 5%, 50V, TF
			C613, C614	391941007	10 $\mu$ F, 16V, Elect.
			C615-C618	354781099	0.1 $\mu$ F, 50V, Elect.
			C621-C624	354783399	0.33 $\mu$ F, 50V, Elect.
			C625-C628	392850477	4.7 $\mu$ F, 25V, LL
D661	223163	ISS133	C629, C630	374726824	6800pF, 5%, 50V, TF
			C631, C632	354744709	47 $\mu$ F, 16V, Elect.
			C633, C634	354782299	0.22 $\mu$ F, 50V, Elect.
L661	233409K220	NCH-1284	C635, C636	392850477	4.7 $\mu$ F, 25V, LL
			C637, C638	354782299	0.22 $\mu$ F, 50V, Elect.




CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
C639	354744709	47 $\mu$ F, 16V, Elect.	C685	374723334	0.033 $\mu$ F, 5%, 50V, TF
C640	374721044	0.1 $\mu$ F, 5%, 50V, TF	C686	354781099	0.1 $\mu$ F, 50V, Elect.
C641, C642	391941007	10 $\mu$ F, 16V, Elect.	C687	354783399	0.33 $\mu$ F, 50V, Elect.
C643	391980227	2.2 $\mu$ F, 50V, Elect.	C688	354741019	100 $\mu$ F, 16V, Elect.
C644, C646	391941007	10 $\mu$ F, 16V, Elect.	C689	391980227	2.2 $\mu$ F, 50V, Elect.
C647	374722224	2200pF, 5%, 50V, TF	C691	354784799	0.47 $\mu$ F, 50V, Elect.
C648	391941007	10 $\mu$ F, 16V, Elect.	C692-C696	391941007	10 $\mu$ F, 16V, Elect.
C653, C654	391941007	10 $\mu$ F, 16V, Elect.			
C657	391941007	10 $\mu$ F, 16V, Elect.		<b>Plug</b>	
C659, C660	391941007	10 $\mu$ F, 16V, Elect.	P495a	25055133	NPLG-3P117
C661	354780109	1 $\mu$ F, 50V, Elect.			
C662	374725624	5600pF, 5%, 50V, TF		<b>Sockets</b>	
C664, C668	374721044	0.1 $\mu$ F, 5%, 50V, TF	P601a-P602a	25050442	NSCT-9P266
C665	354744709	47 $\mu$ F, 16V, Elect.	P603a	25050441	NSCT-6P265
C666, C667	354784799	0.47 $\mu$ F, 50V, Elect.	P611	2000799	NSAS-6P755
C669	374725624	5600pF, 5%, 50V, TF			
C671	391941007	10 $\mu$ F, 16V, Elect.		<b>Shield wire</b>	
C672	391921017	100 $\mu$ F, 6.3V, Elect.	P451	2050031	NCS-8P3E40
C673, C674	374721044	0.1 $\mu$ F, 5%, 50V, TF			
C675	391941007	10 $\mu$ F, 16V, Elect.			
C676	374721034	0.01 $\mu$ F, 5%, 50V, TF			
C677	354780109	1 $\mu$ F, 50V, Elect.			
C678	391941007	10 $\mu$ F, 16V, Elect.			
C679	374728224	8200pF, 5%, 50V, TF			
C680	374724724	4700pF, 5%, 50V, TF			
C681	374722734	0.027 $\mu$ F, 5%, 50V, TF			
C682	354742209	22 $\mu$ F, 16V, Elect.			
C683	354741019	100 $\mu$ F, 16V, Elect.			
C684	354780109	1 $\mu$ F, 50V, Elect.			

BLOCK DIAGRAM


RENER SECTION

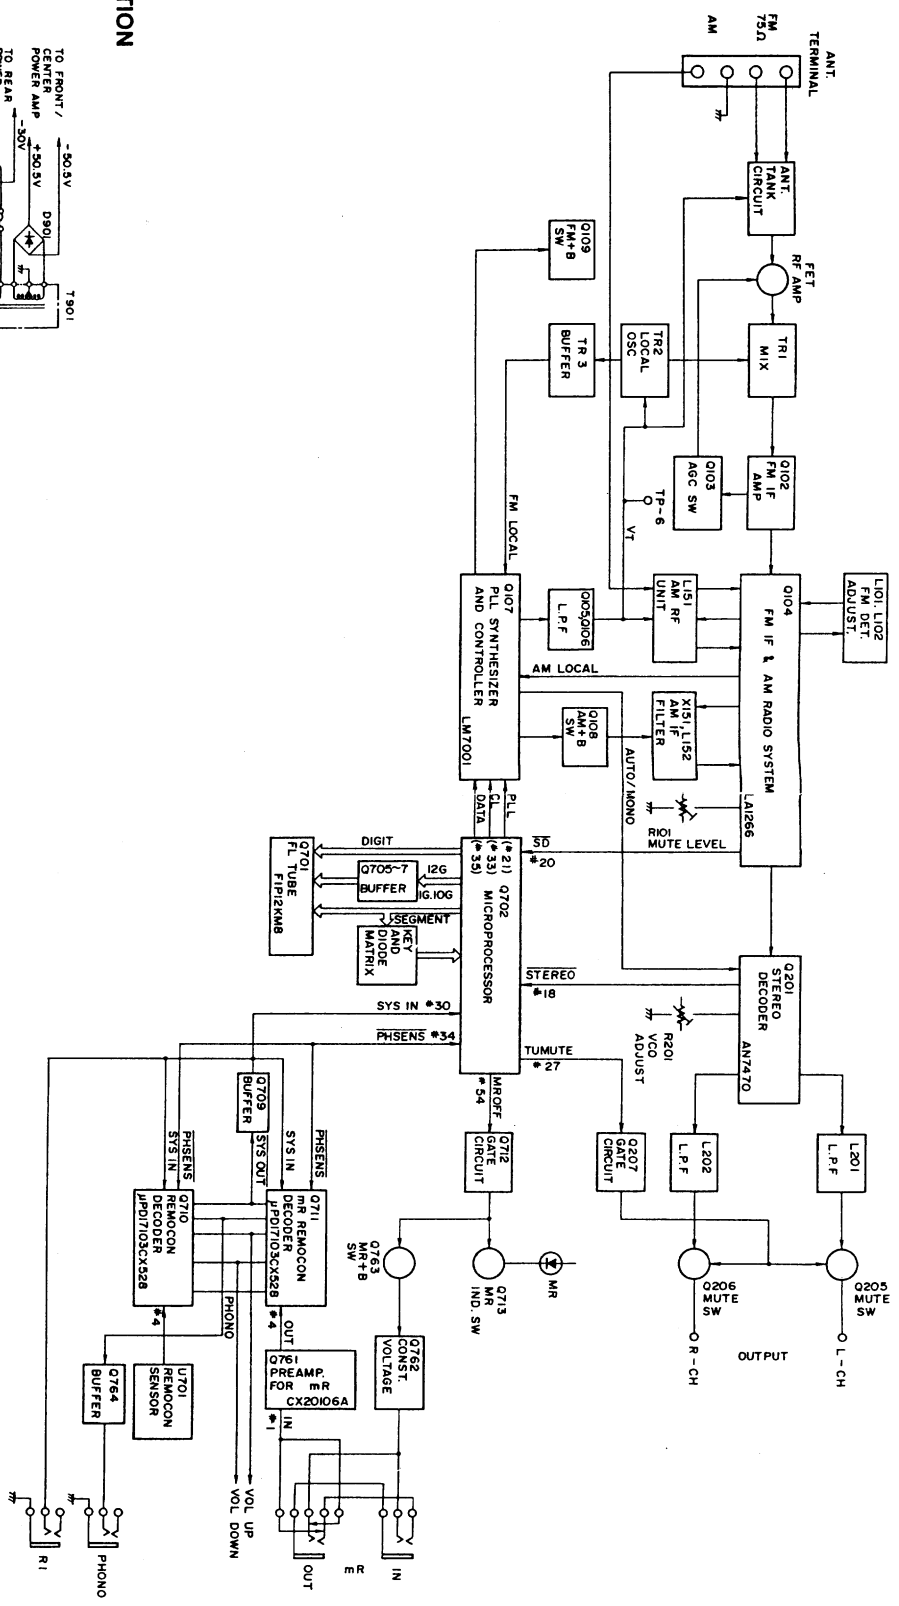


POWER SUPPLY SECTION

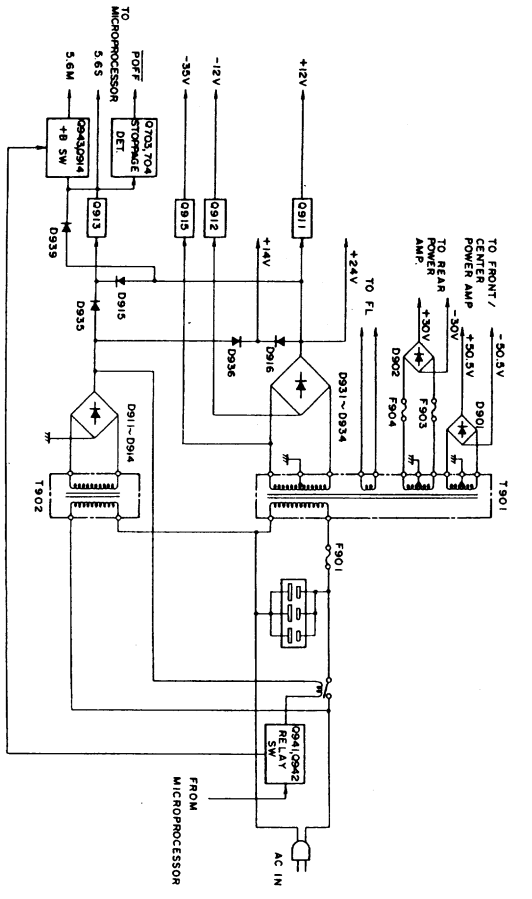

VIDEO SECTION

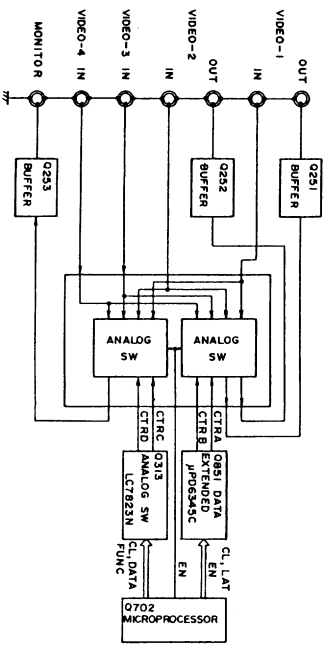

**BLOCK DIAGRAM**  
**LIFIER SECTION**

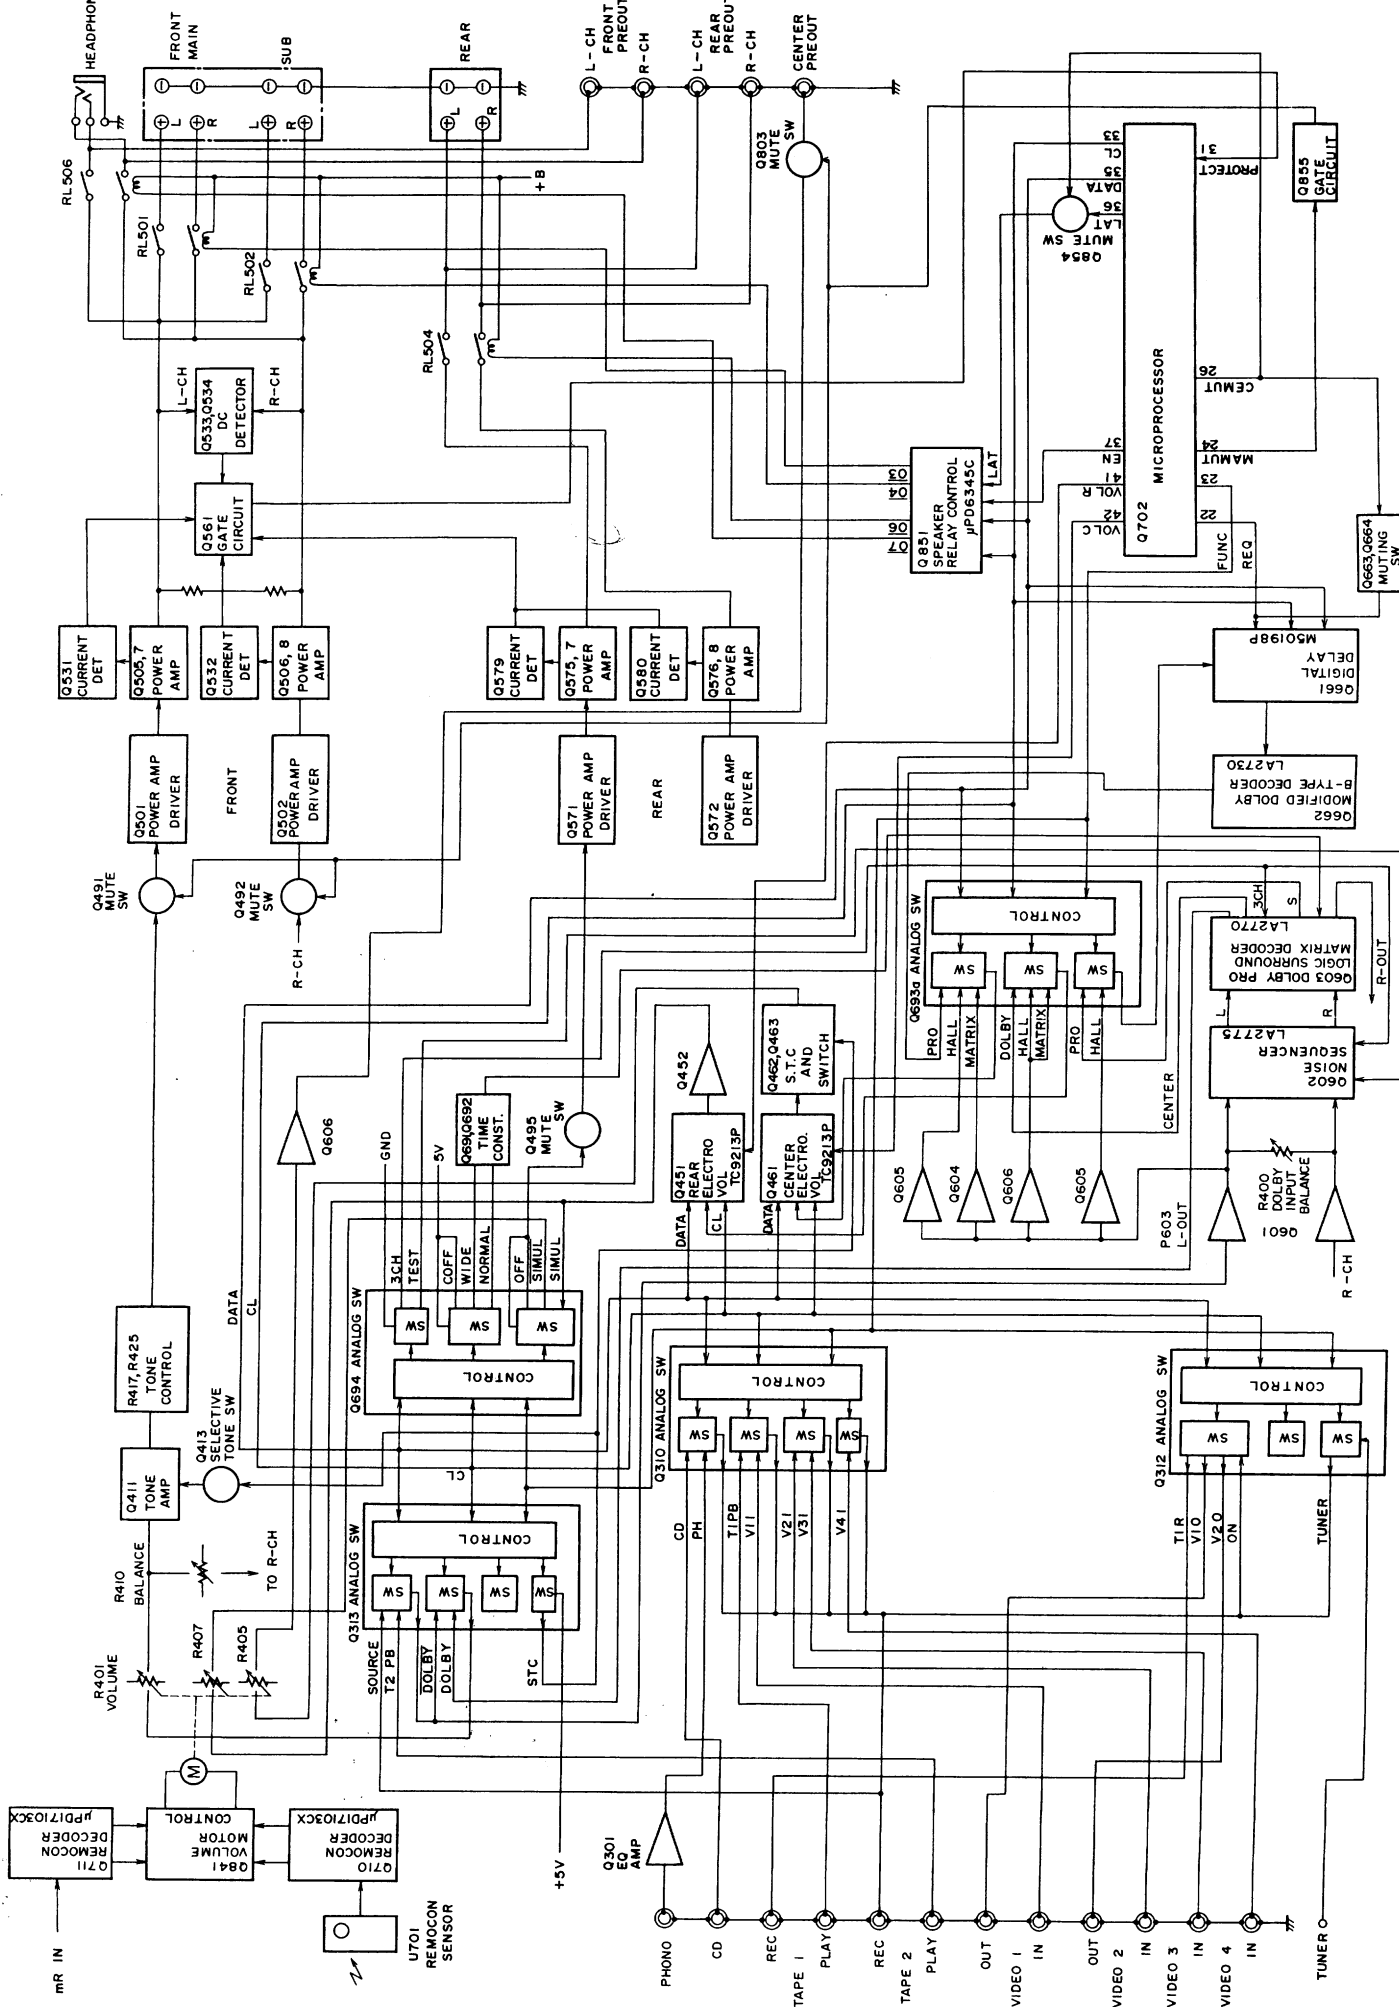

**INPUT BALANCE VOLUME PC BOARD (NAETC-3967-2)**

CIRCUIT NO.	PART NO.	DESCRIPTION
R410	5104258	N11RGLC250KWT15Z, Variable resistor

**MASTER VOLUME PC BOARD (NAAF-3973-2)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>IC</b>		
Q841	22240372	BA6208
<b>Capacitor</b>		
C841	354721019	100 $\mu$ F, 6.3V, Elect.
<b>Resistor</b>		
R401, R402	5140002	N16RGL50KA30F, Variable,
R407-R409		Master Volume
<b>Plug</b>		
P401a	25055133	NPLG-3P117
<b>Sockets</b>		
JL451	25050272	NSCT-8P100
JL701	25050269	NSCT-5P97
P841	2000635A	NSAS-4P591


**VOLUME INDICATOR PC BOARD (NADIS-3975-2)**

CIRCUIT NO.	PART NO.	DESCRIPTION
D841	225241 or 225242 27190545	SEL2210R-C or SEL2210R-D, L.E.D Holder, LED

**TONE CONTROL CIRCUIT PC BOARD (NAAF-3974-2)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>IC</b>		
Q411	22240191	NJM4565D-D
<b>Transistors</b>		
Q413, Q414	2213631 or 2213632	RN1241-A or RN1241-B
<b>Capacitors</b>		
C411, C412	391980227	2.2 $\mu$ F, 50V, Elect.
C415, C416	391941007	10 $\mu$ F, 16V, Elect.
C417, C418	374723334	0.033 $\mu$ F, 5%, 50V, TF
C419, C420	374723344	0.33 $\mu$ F, 5%, 50V, TF
C423, C424	374724724	4700pF, 5%, 50V, TF
C425, C426	374723934	0.039 $\mu$ F, 5%, 50V, TF
C427, C428	391980227	2.2 $\mu$ F, 50V, Elect.
C429-C432	354781099	0.1 $\mu$ F, 50V, Elect.
C433-C436	374721024	1000pF, 5%, 50V, TF
C437, C438	354744709	47 $\mu$ F, 16V, Elect.
<b>Resistors</b>		
R405	5104225	N11RGLC250KWT22Z, Variable, BALANCE
R417, R418	5104216	N14RLC50KC22Z, Variable, BASS
R425, R426	5104216	N14RLC50KC22Z, Variable, TREBLE

# PACKING VIEW

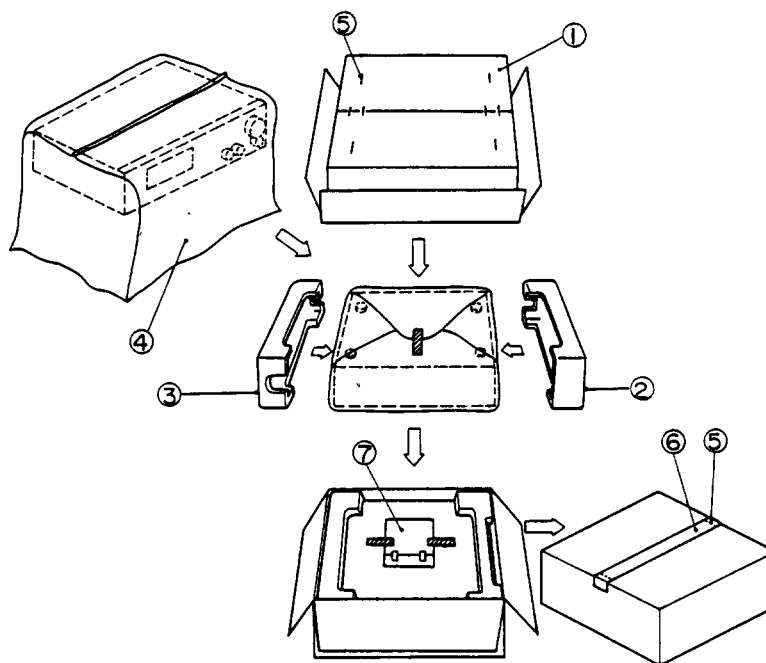

REF.NO.	PART NO.	DESCRIPTION
1	29052104	Master carton box
2	29091422A	Pad L
3	29091423A	Pad R
4	29100035A	1020×720, Poly-styrene bag
5	282301	Sealing hook
6	29110071-1	Damplon tape
7	Accessory bag ass'y	
	29341556A	Instruction manual
	29100097	250×350, Poly-styrene bag
	262064B	FM antenna
	232140	NMA-3057, AM loop antenna
	3010054	UM-3, Two batteries
	24140186	RC-AV50M, Remote control
transmitter	2010200	Remote control cord
	29365019	Warranty card [D]
	29358002J	Service station list [D]
	25060123	YAE21-0120A, FM adaptor [W/Q]
	25055018	CV-K-1, Conversion plug [W]

[D]: Only U.S.A. models

[W]: Only Worldwide models

[Q]: Only 240V models

## ONKYO CORPORATION

International Division: Onarimon Yusen Bldg., 23-5, Nishi-Shimbashi 3-chome, Minato-ku,  
 TOKYO 105. JAPAN Telex: 242-3551 ONKYO J. Tel. 03-432-6981  
**ONKYO U.S.A CORPORATION**  
 200 Williams Drive, Ramsey, N.J. 07446 Telex: 25-710-988-1033 Tel. 201-825-7950