

ONKYO® SERVICE MANUAL

AUDIO VIDEO CONTROL TUNER AMPLIFIER MODEL TX-SV727 MODEL TX-SV727R



Black model

BMD, BMDN	120V AC, 60Hz
BMP	230V AC, 50Hz
BMW	120V or 220V AC, 50/60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

TABLE OF CONTENTS

Specifications	2
Service procedures	3
Exploded view (TX-SV727)	4
Parts list (TX-SV727)	5
Exploded view (TX-SV727R)	6
Parts list (TX-SV727R)	7
Block diagram (Tuner section)	8
120V model	8
Other models	9
Microprocessor connection diagram	10
Microprocessor descriptions	11
IC block diagrams and descriptions	12
Adjustment procedures	23
Pc board-parts list (Amplifier section)	25
Schematic diagram	27
Printed circuit board view	31
Schematic diagram	35
Printed circuit board view	39
Printed circuit board-parts list	41
Schematic diagram	43
Pc board-parts list (Amplifier section)	47
Pc board view (Tuner section)	48
Block diagram (Amplifier section)	49
Packing view	51
Notes	52

ONKYO
AUDIO COMPONENTS

SPECIFICATIONS

AMPLIFIER SECTION

Power Output:

Stereo mode

Front Main L/R channels
100 watts per channel min. RMS. at 8 ohms, both channels driven, from 20 Hz to 20,000 Hz, with no more than 0.08% total harmonic distortion.

Continuous power output:
 2×120 W at 8ohms (DIN)

Surround mode and Multi source mode

Front Main L/R and center channels
 80 W + 80 W + 80 W (1 kHz 0.08 % 8 ohms)

Rear channels (Rear only driven)
 25 W + 25 W (1 kHz 0.8 % 8 ohms)

Remote channels
 80 W + 80 W (1 kHz 0.1 % 8 ohms)

Total Harmonic Distortion: 0.08% at rated power (FRONT)

IM Distortion: 0.08% at rated power (FRONT)

Damping Factor: 60 at 8 ohms (FRONT)

Input Sensitivity and Impedance:

Phono. 2.5 mV/50 kohms

CD/Tape Play: 150 mV/50 kohms

Tape Rec: 150 mV/2.2 kohms

Pre out (FRONT): 1V/ 2.2 kohms

(REAR/CENTER/MULTI SOURCE) :

1V/2.2 kohms

(SUBWOOFER): 1V/2.2 kohms

Phono Overload: 120 mV RMS. at 1,000 Hz, 0.5% THD.

Frequency Response: 20 to 30,000 Hz, +/-1 dB

RIAA Deviation: 20 to 20,000 Hz, +/-0.8 dB

Tone Control: BASS: +/-10 dB at 100 Hz

TREBLE: +/-10 dB at 10,000 Hz

Signal to Noise Ratio: PHONO: 80 dB (IHF A, 5 mV input)

CD/TAPE: 100 dB (IHF A)

Muting: -∞ dB

VIDEO SECTION

Signal sensitivity and impedance:

VDP/VCR input, output: 1 Vp-p, 75 ohms

TUNER SECTION

FM:

Tuning Range:

87.5 — 108.0 MHz (50 kHz steps)

Mono: 11.2 dBf, 1.0 μV (75 ohms) IHF

0.9μV (26 dB S/N, 40kHz Div.)

75 ohms DIN

Stereo: 17.2 dBf, 2.0 μV (75 ohms) IHF

23μV (46 dB S/N, 40kHz Div.)

75 ohms DIN

50dB Quieting Sensitivity:

Mono: 17.2 dBf, 2.0 μV (75 ohms)

Stereo: 37.2 dBf, 20 μV (75 ohms)

1.5 dB

Image Rejection Ratio: 40 dB (U.S.A. & Canadian models)

85 dB (European models)

90 dB

Signal-to-Noise Ratio: Mono: 73 dB

Stereo: 67 dB

Alternate Channel Attenuation: 55 dB

AM Suppression Ratio: 50 dB

Total Harmonic Distortion:

Mono: 0.15%

Stereo: 0.25%

Frequency Response:

30 — 15,000 Hz +/-1.5 dB

Stereo Separation:

45 dB at 1 kHz

30 dB at 100 — 10,000 Hz

AM:

Tuning Range:

USA & Canadian models

530 — 1710 kHz (10 kHz steps)

European models

522 — 1611 kHz (9 kHz steps)

Worldwide models

531 — 1602 kHz (9 kHz steps)

530 — 1710 kHz (10 kHz steps)

30 μV

Image Rejection Ratio: 40 dB

IF Rejection Ratio: 40 dB

Signal-to-Noise Ratio: 40 dB

Total Harmonic Distortion: 0.7%

REMOTE CONTROL RC-288M

Transmitter:

Infrared

Signal range: Approx. 5 meters (16ft.)

Power supply: Two AA

batteries (1.5V × 2)

GENERAL

Power Supply:

USA & Canadian models

AC120 V, 60 Hz

European and Australian models

AC230 V, 50 Hz

Worldwide models

120 and 220 V switchable, 50/60 Hz

Dimensions (W × H × D): 455 × 170 × 389 mm

17-15/16" × 6-11/16" × 15-5/16"

Mass:

13.0 kg (28.7 lbs)

Specifications and features are subject to change without notice.

SERVICE PROCEDURES

1. Replacing the fuses

 This symbol located near the fuse indicates that the fuse used is fast operating type. For continued protection against fire hazard, replace with same type fuse. For fuse rating refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilisé est à rapide. Pour une protection permanente, n'utiliser que des fusibles de même type. Ce dernier est indiqué là où le présent symbole est apposé.

CIRCUIT NO. PART NO. DESCRIPTION

F901	252166Y	6.3A-UL/T-237, Primary <D/W>
F902	252076	3.15A-TSC, Primary <P/W>
F903	252075	2.5A-SE-EAK, Primary <P>
NOTE: <D> :120V model only		
<P> :230V model only		
<W>:Worldwide model only		

2. To Initialize the unit

This device employs a microprocessor to perform various functions and operations. If interference generated by an external power supply, radio wave, or other electrical source results in accident which causes the specified operations and functions to operate abnormally.

To perform a result, please follow the procedure below.

1. Press and hold down the VIDEO-1 button, then press the POWER button.
2. After "clear" is displayed, the preset memory and each mode stored in the memory, such as surround, are initialized and will return to the factory settings.

3. Safety-check out

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer. Connect the insulating-resistance tester between the plug of power supply cord and the screw on the back panel.

Specifications: 3.3 Mohm±10% at 500V.


4. Change of voltage

Worldwide models are equipment with a voltage selector to conform with local power supplies. This switch is located on the back panel.

Be sure to set this switch to match the voltage of the power supply in your area before turning the power switch on.

This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with the screwdriver to the right

or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on.



5. Memory preservation

This unit does not require memory preservation batteries.

A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged.

The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month to keep the back-up system operative.

The period of the time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shortened when the unit is exposed to very high humidity or used in an area with an extremely humid climate.


6. Setting the tuning step frequency

Worldwide models are equipped with a step band selector switch. This switch is located on the back panel. This switch is set to 9 kHz at the factory, but may have to be reset to 10 kHz depending on the area where the unit is used.

AM band step

Europe: 9 kHz

U.S.A.: 10 kHz




7. Changing the band step

With the exception of the worldwide models, a tuning step selector switch is not provided. When you change the band step, change the parts as shown below.

	To 10 kHz	To 9 kHz
R764	1.8 kohm	3 kohm

EXPLODED VIEW
TX-SV727

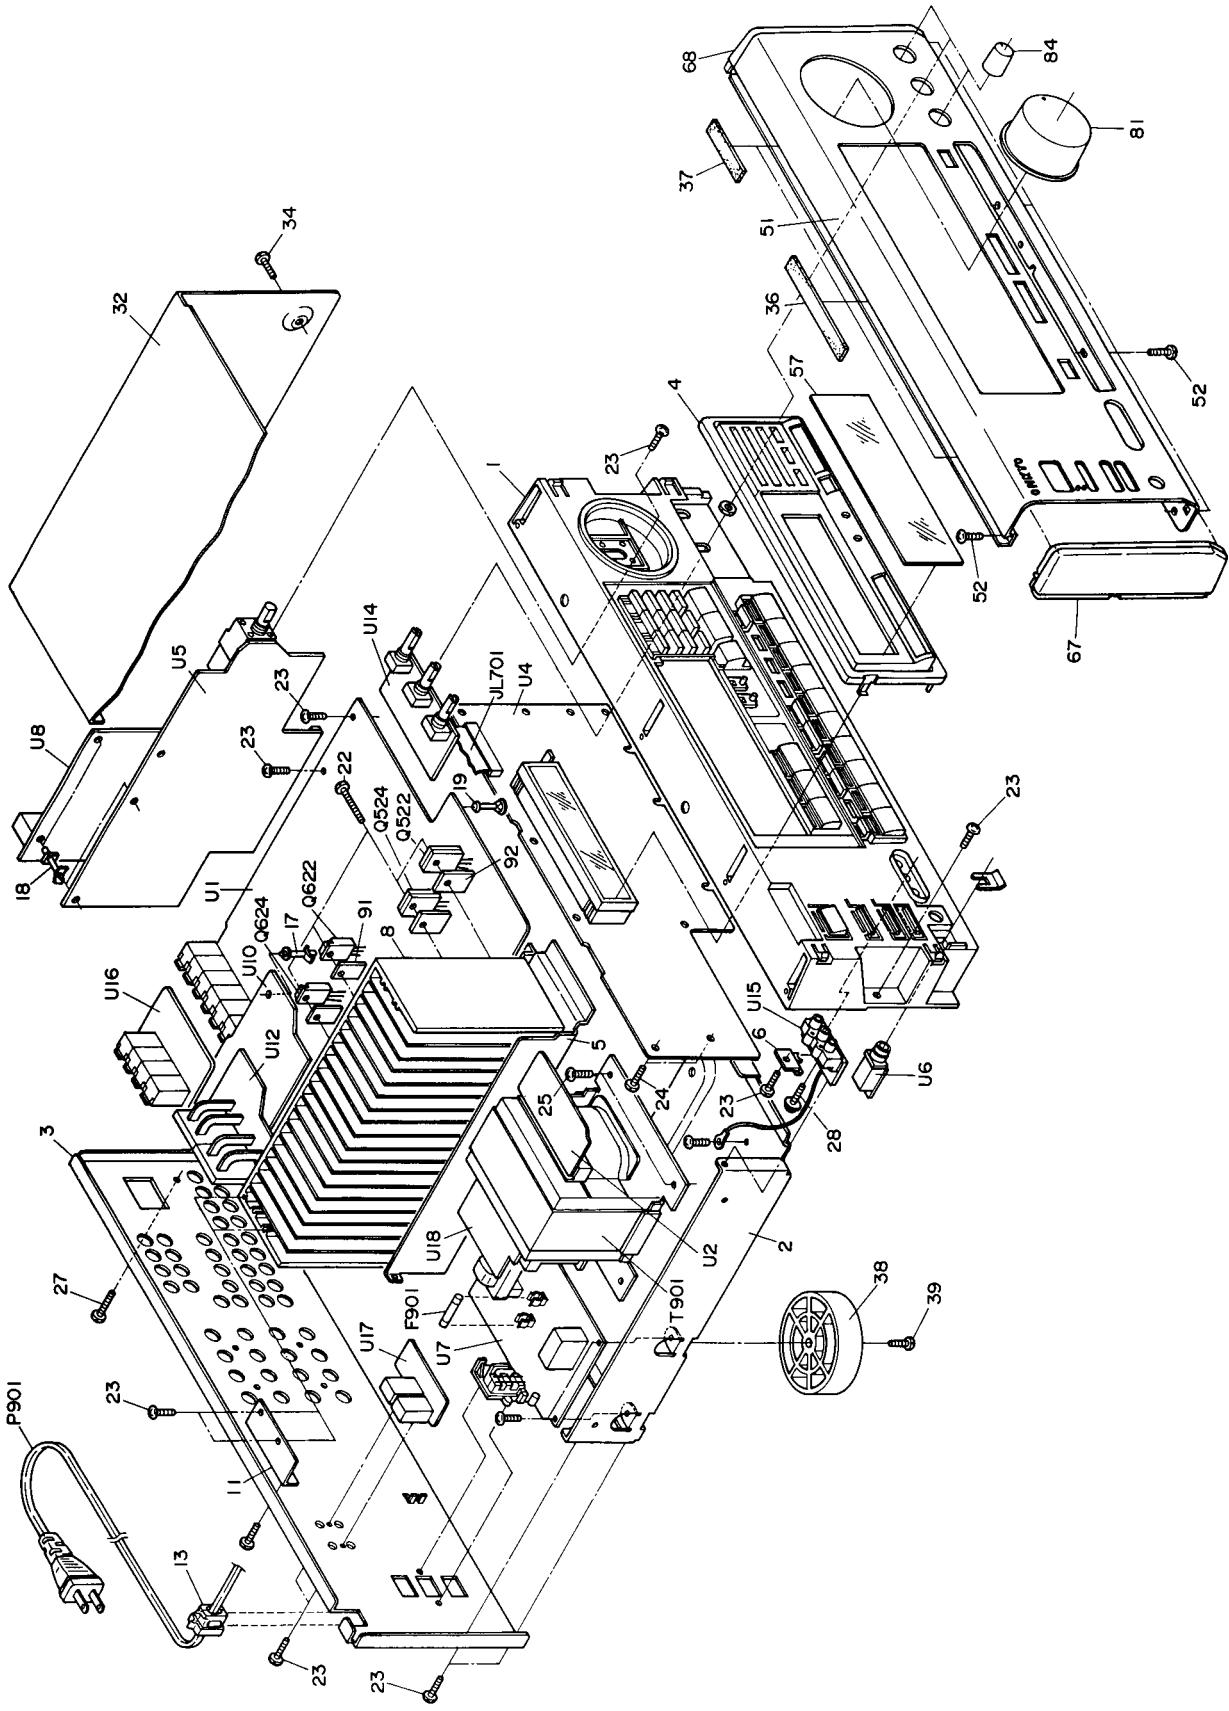


PARTS LIST

REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
1	27110833AY	Front bracket	Q524	2201473	2SA1302-O.
2	27100291Y	Chassis		2202812 or	2SA1943-R or
3	27121995Y	Rear panel <D>		2202813	2SA1943-O. Transistors
4	27121997Y	Rear panel <W>	Q621	2202882	2SD2387-R,
5	27215253AY	Decorative frame	Q622	2202883	2SD2387-O.
6	27130743AY	Bracket H		2202903	2SD2389-O.
7	27262583Y	Plate T		2202904 or	2SD2389-Y or
8	27160347-1Y	Radiator		2202906	2SD2389-P. Transistors
9	27130742Y	Bracket C	Q623	2202872	2SB1558-R.
11	27141607AY	Retainer H	Q624	2202873	2SB1558-O.
13	27300750	A Cord bushing		2202893	2SB1559-O.
17	27190369	KGLS-22S. Holder		2202894 or	2SB1559-P. Transistors
18	27190062	KGLS-12S. Holder		2202896	A NPT-1230D, Power transformer <D>
20	27190926	KGFS-18RF. Holder	T901	2301071Y	A NPT-1255D, Power transformer <C>
22	801433	3SMS8W.SW+14B(BC). Special screw		2301091Y	A NPT-1230DG, Power transformer <W>
23	838130088	3TTB+B8. Self-tapping screw		2301073Y	NAAR-5121-3. Main circuit pc board ass'y <D>
24	833430080	3TTP+8P(BC). Self-tapping screw	U1	1A564521-3Y	NAAR-5121-3B. Main circuit pc board ass'y <W>
25	830440089	4TTC+4B(BC). Self-tapping screw		1A564521-3BY	NAETC-5122-3. Secondary circuit pc board ass'y
26	834430108	3TTS+10B(BC). Self-tapping screw	U2	1A564522-3Y	NADG-5124-3. Display circuit pc board ass'y
27	834230108	3TTS+10B(Ni). Self-tapping screw	U4	1A564524-3Y	NAAF-5125-3. Master volume circuit pc board ass'y <D>
28	831130088	3TTW+8B. Self-tapping screw	U5	1A565525-3AY	NAAF-5125-3A. Master volume circuit pc board ass'y <W>
32	28184540Y	Top cover	U6	1A564526-3Y	NAETC-5126-3. Headphone terminal pc board ass'y
33	838130088	3TTB+8B. Self-tapping screw	U7	1A564527-3Y	NAPS-5127-3. Primary circuit pc board ass'y <D>
34	838440089	4TTB+8C(BC). Self-tapping screw		1A564527-3BY	NAPS-5127-3B. Primary circuit pc board ass'y <W>
36	28140680	0.5x180x8. Cushion	U8	1A564528-3Y	NARF-5128-3. Tuner circuit pc board ass'y <D>
37	28141305Y	0.8x57x8. Cushion		1A564528-3BY	NARF-5128-3B. Tuner circuit pc board ass'y <W>
38	27175300Y	Leg	U10	1A564530-3Y	NAETC-5130-3. Video circuit pc board ass'y <D>
39	838130088	3TTB+8B. Self-tapping screw		1A565530-3AY	NAETC-5130-3A. Video circuit pc board ass'y <W>
51	1A564121Y	Front panel ass'y	U12	1A564532-3Y	NAETC-5132-3. Speaker terminal pc board ass'y <D>
52	838130088	3TTB+8B. Self-tapping screw		1A565532-3AY	NAETC-5132-3A. Speaker terminal pc board ass'y <W>
54	8910301	CS-3, CS ring	U14	1A564534-3Y	NAAF-5134-3. Tone control circuit pc board ass'y
57	28191699Y	Clear plate	U15	1A564535-3Y	NAETC-5135-3. Front terminal pc board ass'y <D>
59	28198813Y	Facet		1A565535-3AY	NAETC-5135-3A. Front terminal pc board ass'y <W>
61	28135199Y	Badge	U16	1A564536-3Y	NAETC-5136-3. Pre, output terminal pc board ass'y
67	28125268Y	End cap L	U17	1A564537-3Y	NAETC-5137-3. MRF/R terminal pc board ass'y <D>
68	28125267Y	End cap R		1A564537-3BY	NAETC-5137-3B. MRF/R terminal pc board ass'y <W>
81	28325057	Knob, Volume	U18	1A564538-3Y	NAETC-5138-3. Transformer terminal pc board ass'y
84	28325055Y	Knob, Tone			
91	223021	A Isolation sheet			NOTE: <D>:120 V model only
92	223023	A Isolation sheet			<W>: Worldwide model only
99	260208	Wire ties			<C>:Canadian model only
F901	252166Y	A 6.3A-UL/T-237. Primary fuse			
F902	252076	A 3.15A-SE-EAK. Primary fuse <W>			
JL701	2047402012Y	NCF7-402012.Flexible flat cable			
P901	253192HT	A AS-UC-6#18. Power supply cord <D>			
	253092-1A or	A AS-CEE-2. Power supply cord <W>			
	253172	A 2SC3281-R,			
Q521	2201482,	2SC3281-O,			
Q522	2201483,	2SC3200-R or			
	2202822 or	2SC3200-O. Transistors			
	2202823	2SA1302-R,			
Q523	2201472,				

NOTE: THE COMPONENTS IDENTIFIED BY MARK ▲ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

EXPLODED VIEW
TX-SV77R

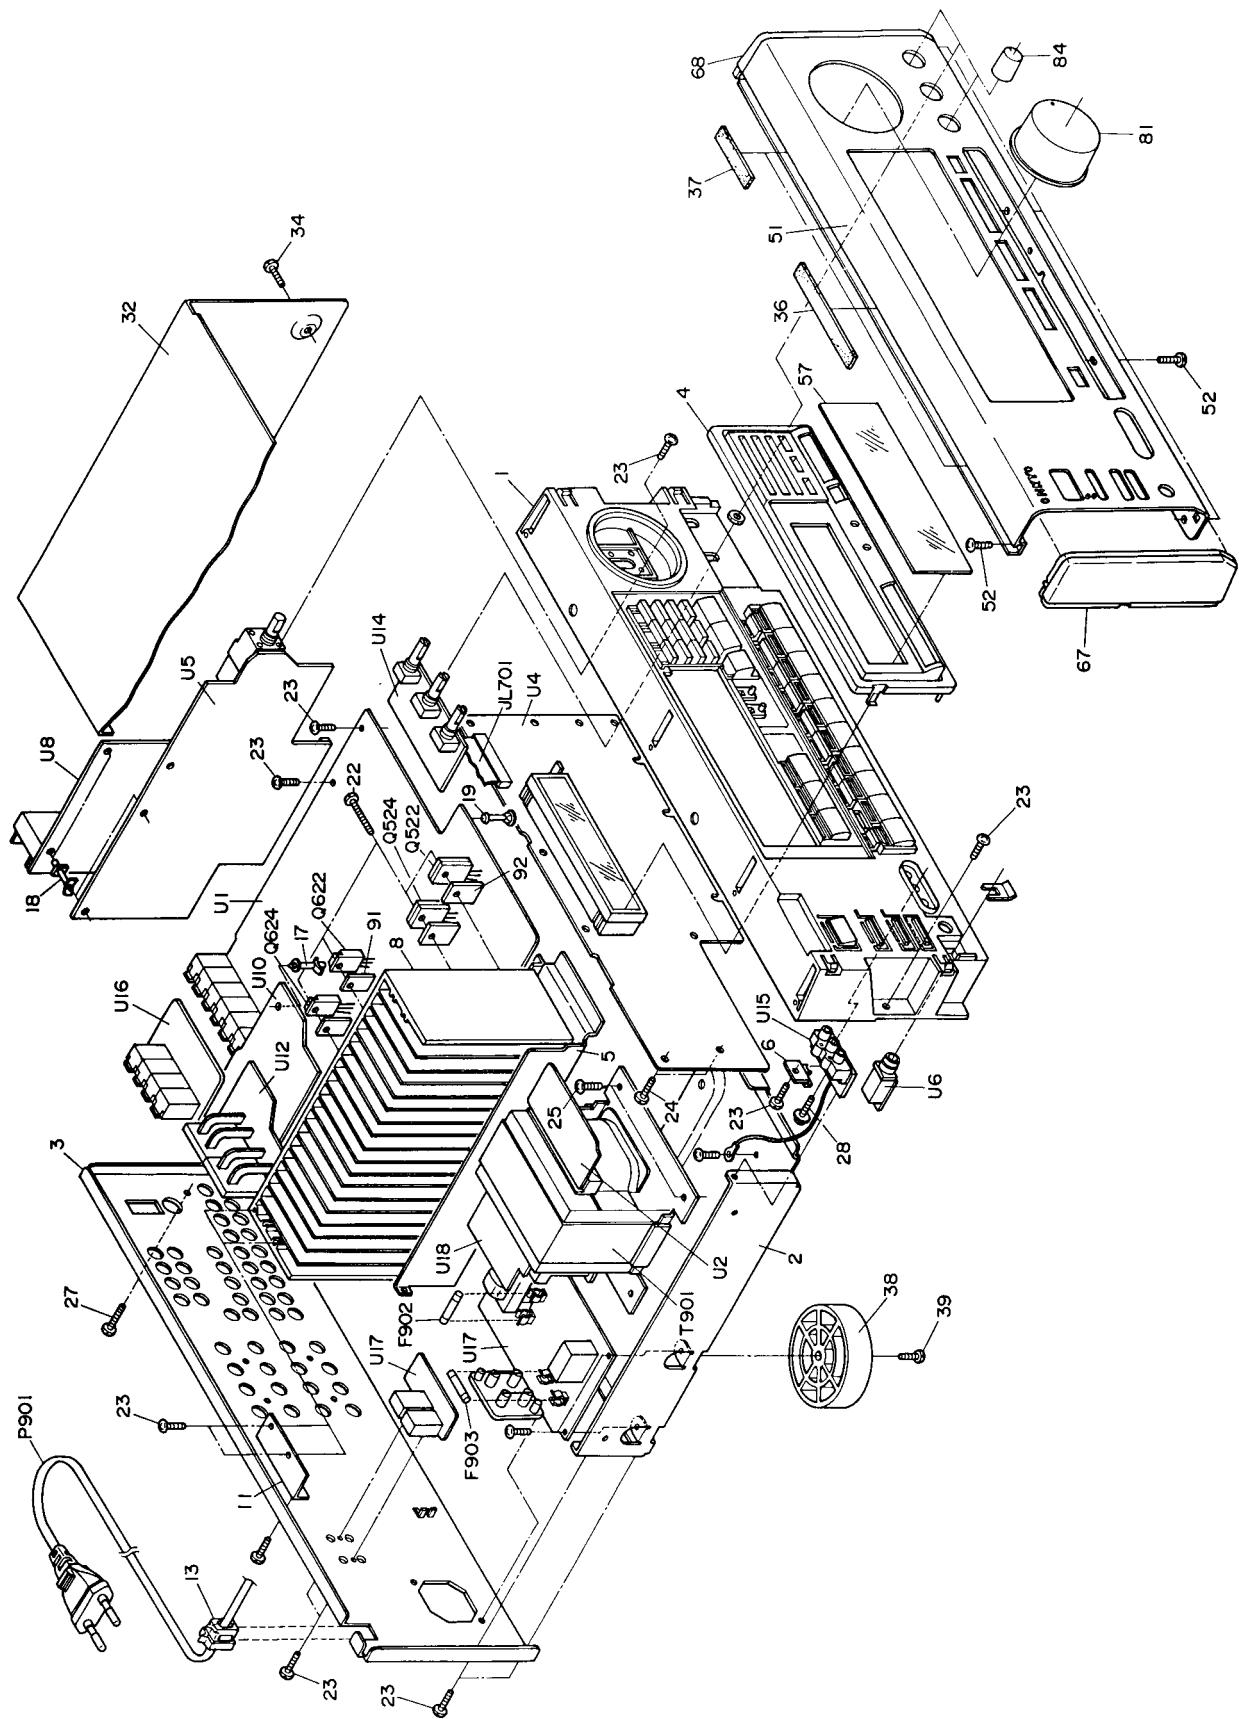


PARTS LIST

REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
1	27110833AY	Front bracket	Q521	2201482,	2SC3281-R,
2	27100291Y	Chassis	Q522	2201483,	2SC3281-O,
3	27121996Y	Rear panel		2202822 or	2SC5200-R or
4	27215256AY	Decorative frame		2202823	2SC5200-O. Transistors
5	27130743AY	Bracket H	Q523	2201472,	2SA1302-R,
6	27262583Y	Plate T	Q524	2201473,	2SA1302-O,
8	271603471Y	Radiator		2202812 or	2SA1943-R or
9	27130742Y	Bracket C		2202813	2SA1943-O. Transistors
11	27141607AY	Retainer H	Q621	2202882,	2SD2387-R,
13	27300750	^ Cord bushing	Q622	2202883,	2SD2387-O,
17	27190369	KGJS-22S Holder		2202903,	2SD2389-O,
18	27190062	KGJS-12S Holder		2202904 or	2SD2389-Y or
20	27190926	KGPS-18RF Holder		2202906	2SD2389-P. Transistors
22	801433	3SMS8W.SW+14B(BC), Special screw	Q623	2202872,	2SB1558-R,
23	838130088	3TTB+8B, Self-tapping screw	Q624	2202873,	2SB1558-O,
24	833430080	3TTP+8P(BC), Self-tapping screw		2202893,	2SB1559-O,
25	830440089	4TTC+8P(BC), Self-tapping screw		2202894 or	2SB1559-Y or
26	834430108	3TTS+10B(BC), Self-tapping screw		2202896	2SB1559-P, Transistors
27	834230108	3TTS+10B(Ni), Self-tapping screw	T901	2301072Y	△ NPT-1230P, Power transformer
28	831130088	3TTW+8B, Self-tapping screw	U1	1A56521-3AY	NAAR-5121-3A, Main circuit pc board ass'y
32	28184540Y	Top cover	U2	1A564522-3Y	NAETC-5122-3, Secondary circuit pc board ass'y
33	838130088	3TTB+8B, Self-tapping screw	U4	1A565524-3AY	NADG-5124-3A, Display circuit pc board ass'y
34	838440089	4TTB+8(CBC), Self-tapping screw	U5	1A564525-3Y	NAAF-5125-3, Master volume circuit pc board ass'y
36	28140680	0.5x180x8, Cushion	U5	1A565525-3AY	NAAF-5125-3A, Master volume circuit pc board ass'y
37	28141305Y	0.8x57x8, Cushion	U6	1A564526-3Y	NAETC-5126-3, Headphone terminal pc board ass'y
38	27175300Y	Leg	U7	1A565527-3AY	NAPS-5127-3A, Primary circuit pc board ass'y
39	838130088	3TTB+8B, Self-tapping screw	U8	1A565528-3AY	NARF-5128-3A, Tuner circuit pc board ass'y
51	1A565121Y	Front panel ass'y	U10	1A565530-3AY	NAETC-5130-3A, Video circuit pc board ass'y
52	838130088	3TTB+8B, Self-tapping screw	U12	1A565532-3AY	NAETC-5132-3A, Speaker terminal pc board ass'y
54	8910301	CS-3, CS ring	U14	1A564534-3Y	NAAF-5134-3, Tone control circuit pc board ass'y
57	28191699Y	Clear plate	U15	1A565535-3AY	NAETC-5135-3A, Front terminal pc board ass'y
59	28198813Y	Facet	U16	1A564536-3Y	NAETC-5136-3, Pre. output terminal pc board ass'y
61	28135199Y	Badge	U17	1A565537-3AY	NAETC-5137-3A, MR/RJ terminal pc board ass'y
67	28125268Y	End cap L	U18	1A564538-3Y	NAETC-5138-3, Transformer terminal pc board ass'y
68	28125267Y	End cap R			
81	28325057	Knob, Volume			
84	28325055Y	Knob, Tone			
91	223021	^ Isolation sheet			
92	223023	^ Isolation sheet			
93	880009	Plastic rivet			
99	260208	Wire ties			
F902	252076	^ 3.15A-SE-EAK, Primary fuse			
F903	252075	^ 2.5A-SE-EAK, AC outlet fuse			
JL701	2047402012Y	NCFC7-402012, Flexible flat cable			
P901	253193HIT	^ AS-CEE, Power supply cord			

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.


BLOCK DIAGRAM
Tuner section
120V model

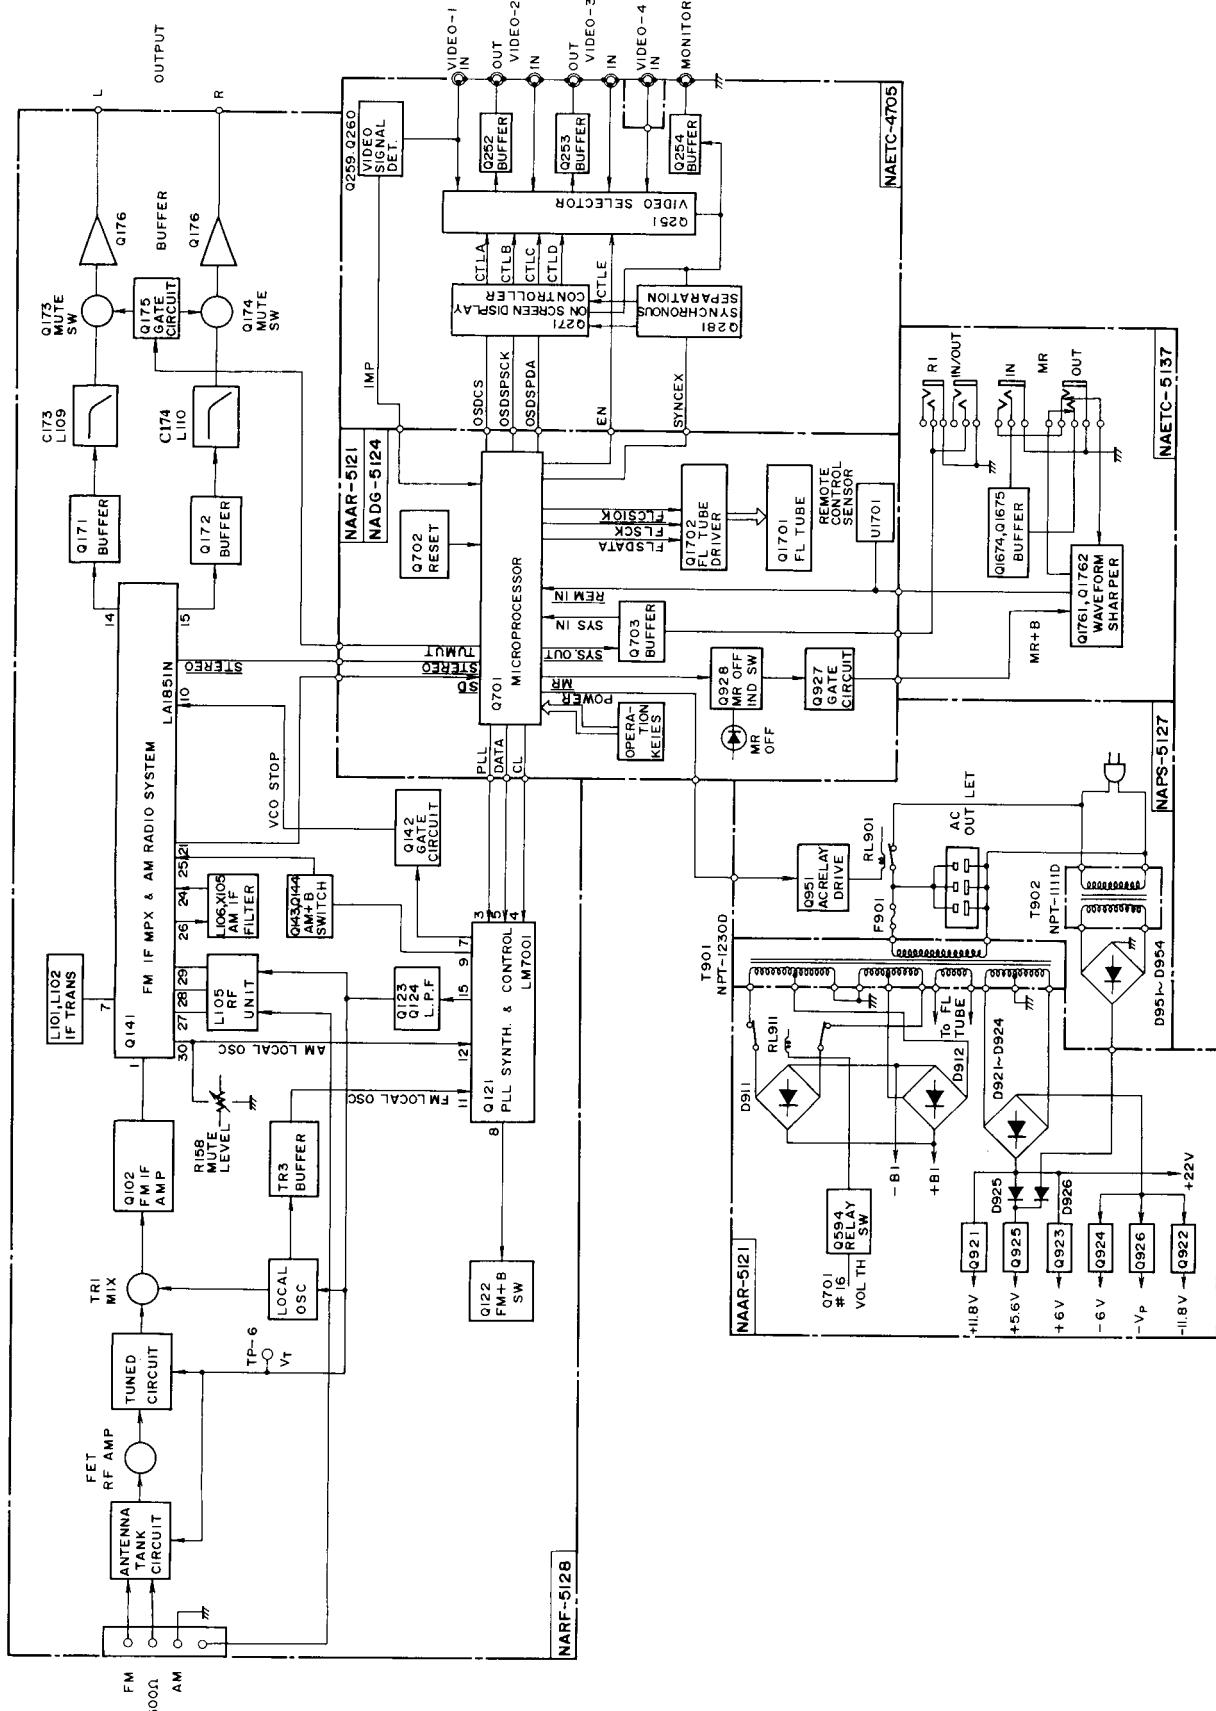

BLOCK DIAGRAM


Tuner section

Other models

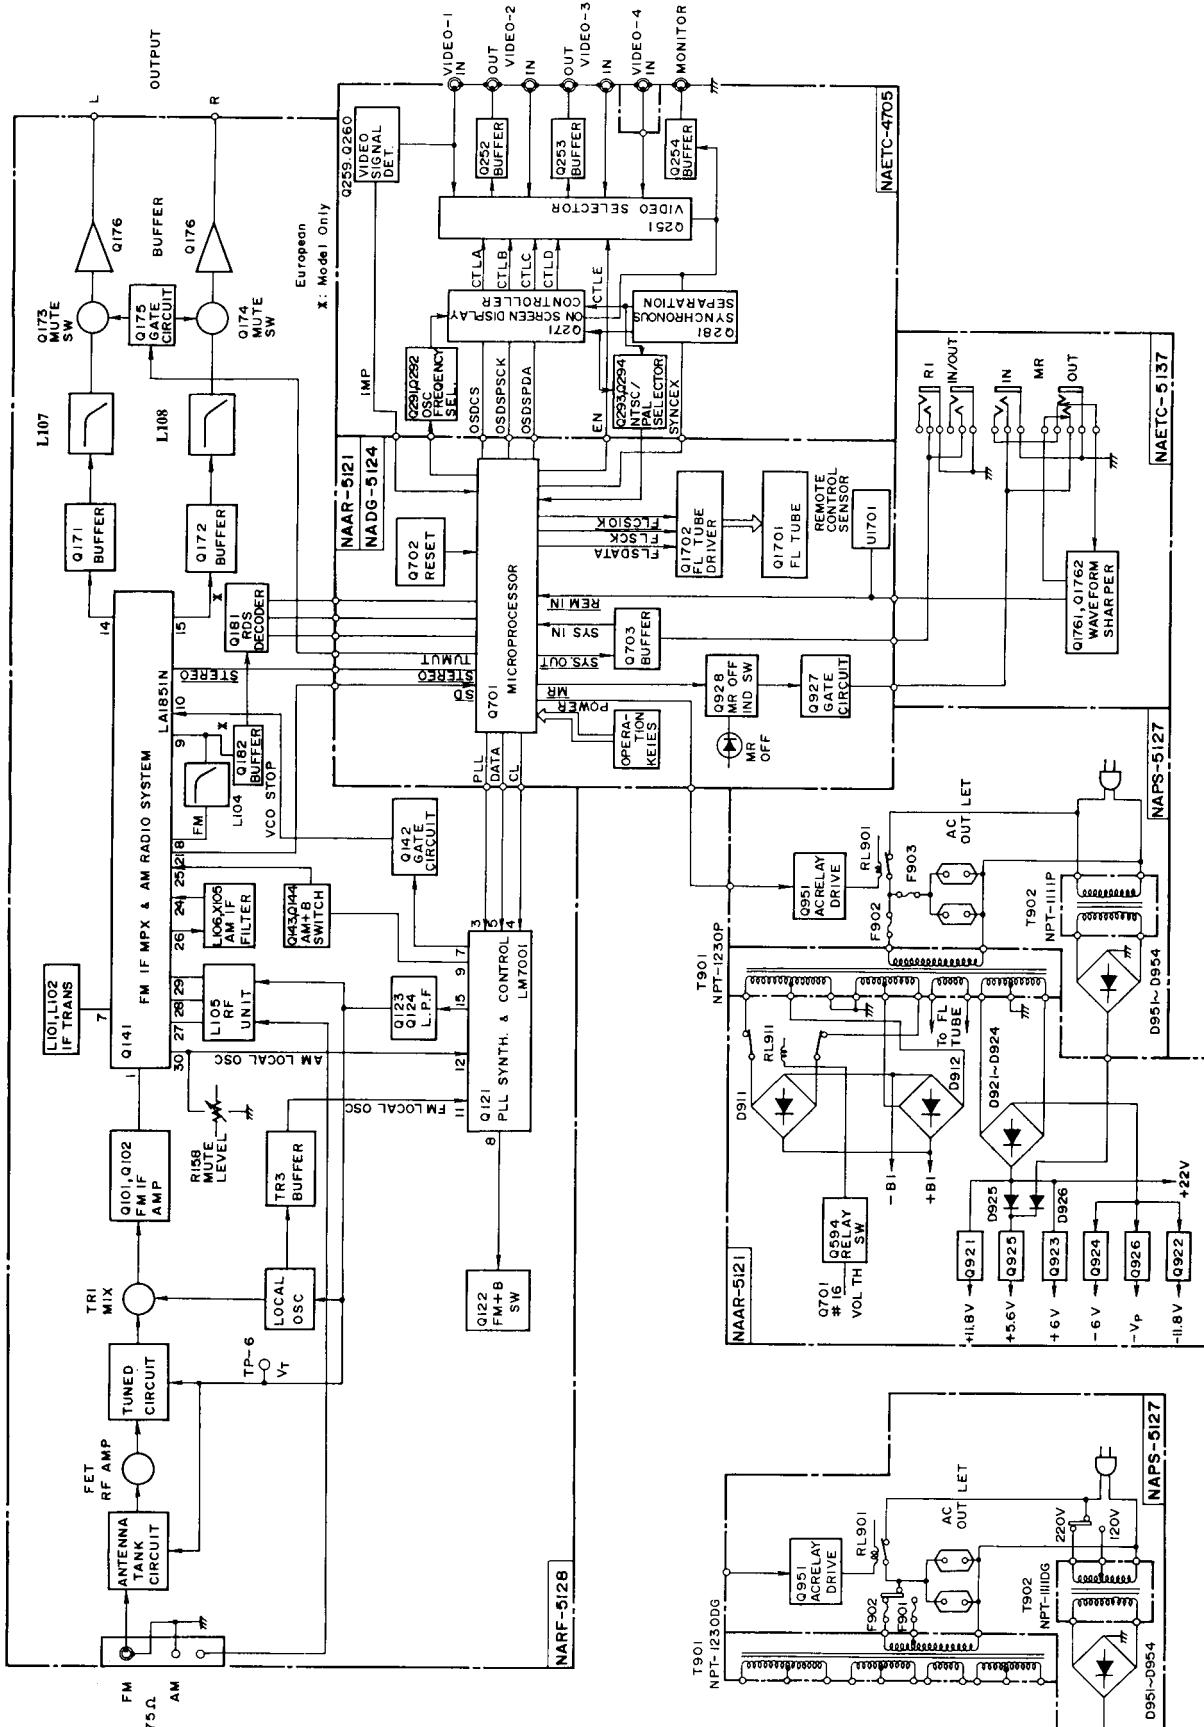

MICROPROCESSOR CONNECTION DIAGRAM

UPD78016CW-021 (MICROPROCESSOR)


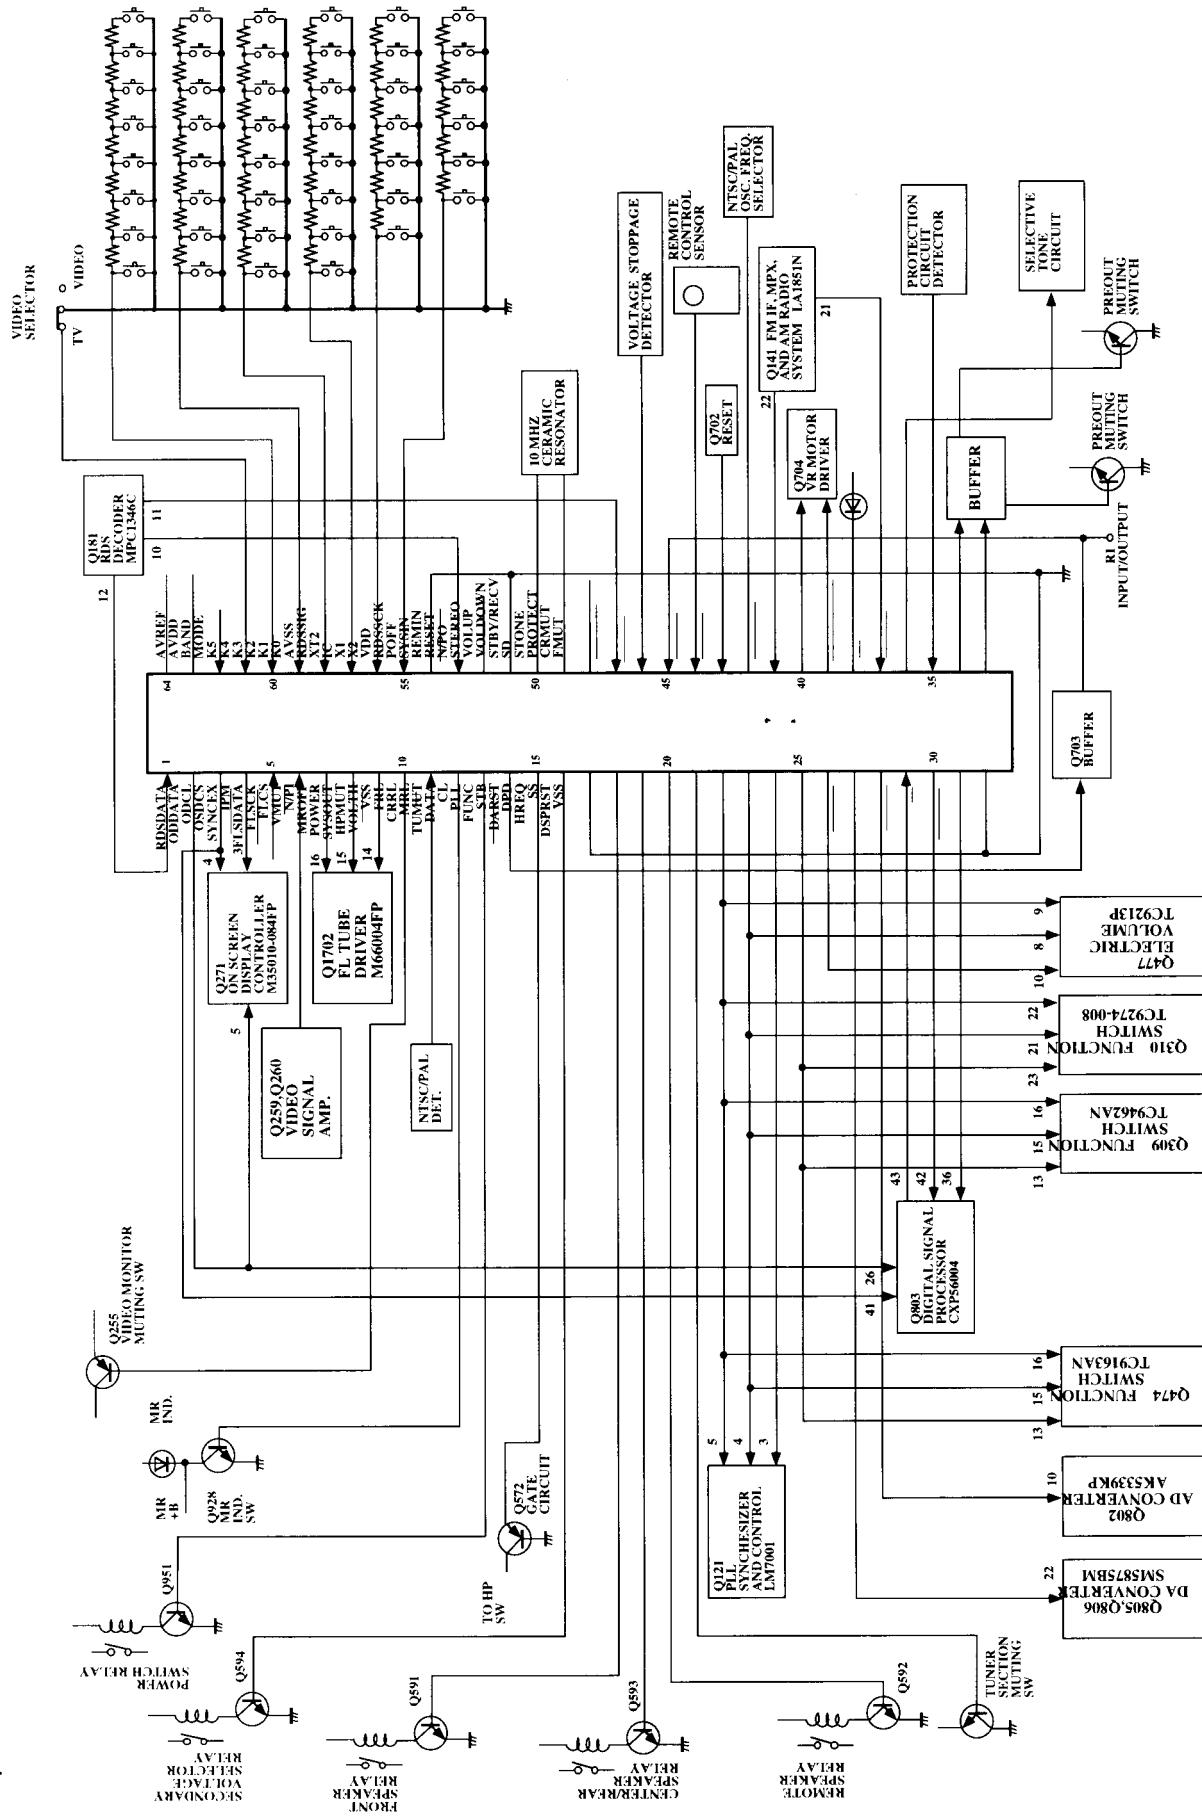


MICROPROCESSOR TERMINAL DESCRIPTIONS

Pin No.	Function	I/O	Description
1	RDS DATA	I	Data input pin from RDS decoder / PDI346CS
2	ODDATA	O	Connect to the terminal STN of OSD controller and terminal MOSI of DSP IC.
3	ODCL	O	Connect to the terminal SCK of OSD controller and terminal SCK of DSP IC.
4	OSDCS	O	Connect to the terminal CS of OSD controller
5	SYNCEX	I	Synchronizing signal control input pin for On-screen display controller. L:External synchronizing H:Internal synchronizing
6	IPM	I	Detector input pin for intelligent power management
7	FLSDATA	O	Data output pin for FL tube driver M66004FP
8	FLSCK	O	Clock output pin for FL tube driver M66004FP
9	FLGS	O	Chip select output pin for FL tube driver M66004FP
10	VMUT	O	Muting control output pin for video signal
11	N/PF	I	Video signal input pin for NTSC/PAL detector.
12	MROFF	O	Multi room indicator and control output pin
13	POWER	O	Power source control output pin
14	SVSOUT	O	System code output pin
15	HFMUT	O	Muting control output pin for headphone signal
16	YOLTH	O	Secondary voltage control output pin
17	VSS		Ground pin
18	FRL	O	Relay control pin for front speaker
19	CRRL	O	Relay control pin for center and rear speakers
20	MRL	O	Relay control pin for multi source
21	TUMUT	O	Muting output pin for tuner section
22	DATA	O	Data output pin. Connect to the terminals DATA of function switch ICs, PLL and electric volume IC.
23	CL	O	Clock output pin. Connect to the terminals CK of function switch ICs, PLL and electric volume IC.
24	PLL	O	Chip enable output pin for PLL IC.
25	FUNC	O	Connect to terminal ST of function switches and terminal STB of TC9274N
26	STB	O	Connect to the terminal STB of electric volume.
27	DARST	O	Reset output pin for DA converter.
28	DPD	O	Control output pin for digital power down.
29	HREQ	I	Connect to the terminal HREQ of DSP IC.
30	SS	O	Connect to the terminal SS of DSP IC.
31	DSPRST	O	Reset output pin for DSP IC.
32	VSS		Ground pin
33	FMUT	O	Muting output pin for front amplifier
34	CRMUT	O	Muting output pin for center and rear amplifiers
35	PROTECT	I	Detector input pin of protection circuit. H:On
36	STONE	O	Selective tone circuit control output pin. L:On

Pin No.	Function	I/O	Description
37	<u>SD</u>	I	Detector input pin of broadcast more than muting level
38	<u>STBY/RECV</u>	O	Stand-by and received indicator output pin
39	<u>VOLDOWN</u>	O	Volume control output pin
40	<u>VOLUME UP</u>	O	Refer table 1.
41	<u>STEREO</u>	I	Detector input pin of FM stereo broadcast
42	N/PO	O	NTSC/PAL selector output pin
43	<u>RESET</u>	I	System reset input pin
44	<u>REM/N</u>	I	Remote control signal input pin
45	<u>SYNSIN</u>	I	System code input pin
46	<u>POFF</u>	I	Power stoppage detector input pin
47	<u>RDSCK</u>	I	Clock input pin from RDS decoder IC / PDI346CS
48	VDD		Power supply pin (+5V)
49	X2	*	Resonator connection terminal for main system clock
50	X1	*	Connect the ceramic resonator 10MHz..
51	IC		Internal connection pin. Connect to the ground terminal.
52	XT2		Crystal connection pin for sub system clock resonator
53	<u>RDSIG</u>	I	Detector input pin of RDS broadcast. L/RDS broadcast
54	AVSS		Ground pin of A/D converter
55	K0	I	Operation key connection pin
56	K1	I	Operation key connection pin
57	K2	I	Operation key connection pin
58	K3	I	Operation key connection pin
59	K4	I	Operation key connection pin
60	K5	I	Operation key connection pin
61	MODE	I	Initializing input of operation mode
62	BAND	I	Initializing input of band region and RDS function.
63	AVDO		Analogue power supply of A/D converter
64	AVREF		Reference voltage input pin of A/D converter

Table 1

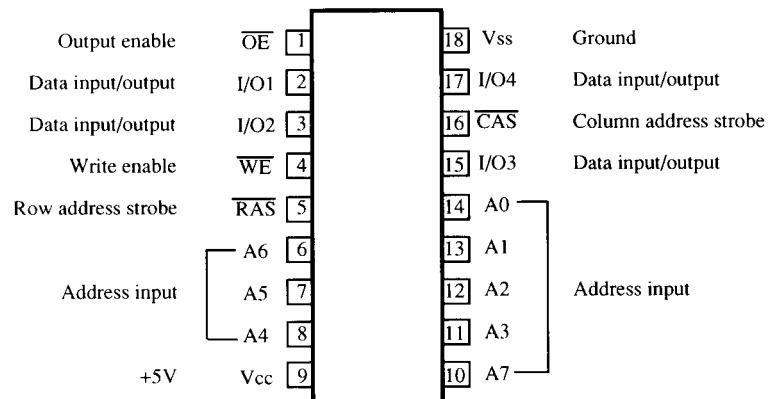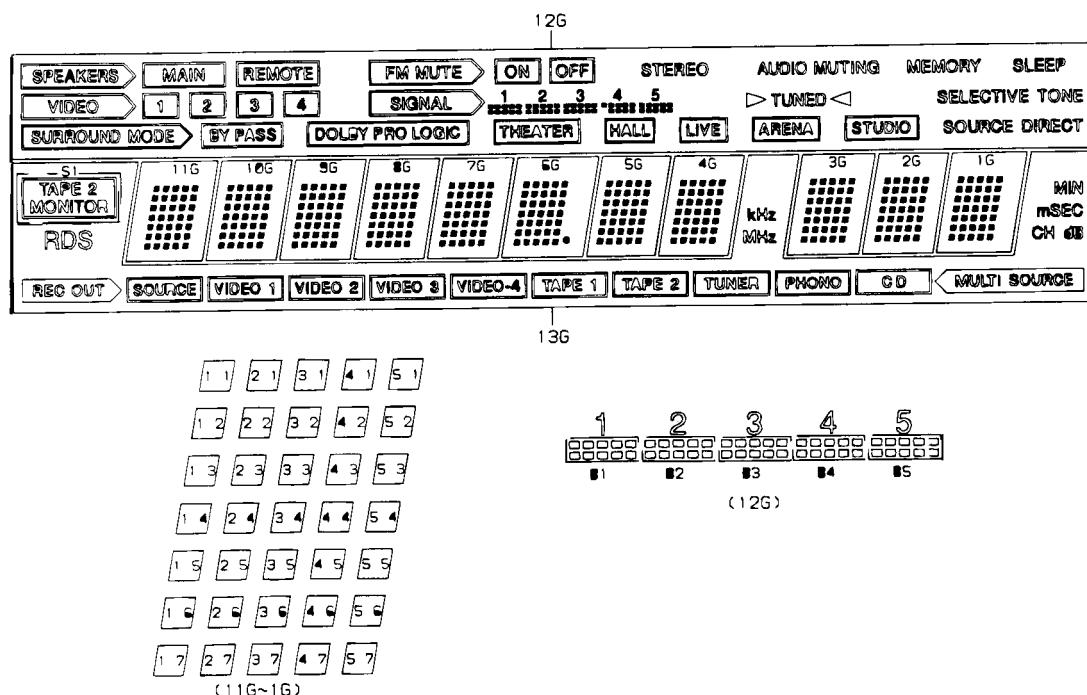LH2464-10 (DRAM)**13-BT-138GK (FL TUBE)**

PIN NO.	6 4	6 3	6 2	6 1	6 0	5 8	5 7	5 6	5 5	5 4	5 3	5 2	5 1	5 0	4 9
CONNECTION	F 2	F 2	N P	N P	P 6	P 5	P 4	P 3	P 3	P 2	P 1	P 0	P 9	P 8	P 7
PIN NO.	4 8	4 7	4 6	4 5	4 4	4 3	4 2	4 1	4 0	4 9	4 8	4 7	4 6	4 5	4 4
CONNECTION	P 2	P 2	P 2	P 2	P 1	P 9									
PIN NO.	3 2	3 1	3 0	3 9	2 8	2 7	2 6	2 5	2 4	2 3	2 2	2 1	2 0	2 9	2 8
CONNECTION	P 8	P 7	P 6	P 5	P 4	P 3	P 2	P 1	N C	N C	N C	N C	N C	N C	N G
PIN NO.	1 6	1 5	1 4	1 3	1 2	1 1	1 0	1 0	9	8	7	6	5	4	3
CONNECTION	G 2	G 1	G 0	G 9	G 8	G 7	G 6	G 5	G 4	G 3	G 2	I G	N P	N P	F 1

NOTE: F1,F2...Filament

NP.....No pin

NC....No connection

1G ~ 13G....Grid

XC56004FJ50 (DSP)

Pin No.	Symbol	Description
1	AGND	GND/EMI control output buffer pin
2	AMC0	This output is Chip selector 0 for SRAM accesses.
3	MA15/MCS3	Address Line 15/Chip Selector 3
4	MA14	Address output for DRAM access
5	MA13	Address output for DRAM access
6	AVCC	Vcc:EMI address/control output buffer pin
7	MA12	Address output for DRAM access
8	AGND	GND/EMI address output buffer pin
9	QVCC	Vcc:Internal Logic supply pin
10	QGND	GND:Internal Logic supply pin
11	MA11	Address output for DRAM access
12	MA10	Address output for DRAM access
13	MA9	Address output for DRAM access
14	MA8	Address output for DRAM access
15	AGND	GND/EMI address output buffer pin
16	MA7	Address output for DRAM access
17	AVCC	Vcc:EMI address/control output buffer pin
18	MA6	Address output for DRAM access
19	MA5	Address output for DRAM access
20	MA4	Address output for DRAM access
21	AGND	GND/EMI address output buffer pin
22	MA3	Address output for DRAM access
23	MA2	Address output for DRAM access
24	MA1	Address output for DRAM access
25	MA0	Address output for DRAM access
26	SCK/SCL	SPI Serial Clock/I.C Serial clock
27	EXTAL	This input should be connected to an external clock source.
28	QVCC	Vcc:Internal Logic supply pin
29	QGND	GND:Internal Logic supply pin
30	PINIT	PLL Initialization pin
31	PGND	GND/PLL supply pin
32	PCAP	Off-chip capacitor connection pin for PLL filter
33	PVCC	Vcc:PLL supply pin
34	SGND	GND:SAI,SHI & ONCE output buffer supply pin
35	MISO/SDA	SPI Master-In-Slave-Out/I.C Data and Acknowledge
36	RESET	This input is a direct hardware reset of the processor.
37	MODA/PROA	Mode Select A/External Interrupt Request A/STOP Recovery
38	MODB/PROB	Mode Select B/External Interrupt Request B
39	MODC/NMI	Mode Select C/Non-Maskable Interrupt Request
40	SVCC	Vcc:SAI,SHI & ONCE output buffer supply pin

Pin No.	Symbol	Description
41	MOSI/HA0	SPI Master-Out-Slave-In/I.C Slave Address 0
42	SS/HA2	SPI Slave Selector/I.C Slave Address 2
43	HREQ	Host Request
44	SGND	GND:SAI,SHI & ONCE output buffer supply pin
45	SDO2	Serial Data Output 2
46	SDO1	Serial Data Output 1
47	SDO0	Serial Data Output 0
48	SVCC	Vcc:SAI,SHI & ONCE output buffer supply pin
49	SCKT	Transmit Serial Clock
50	WST	Transmit Word Select
51	SCKR	Receive Serial Clock
52	QGND	GND:Internal Logic supply pin
53	QVCC	Vcc:Internal Logic supply pin
54	SGND	GND:SAI,SHI & ONCE output buffer supply pin
55	WSR	Receive Word Select
56	SDI1	Serial Data Input 1
57	SDI0	Serial Data Input 0
58	DSO	Debug Serial Output
59	DSI/OS0	Debug Serial Input/Chip Status 0
60	DSCK/OS1	Debug Serial Clock/Chip Status 1
61	DR	Debug Request Input
62	MD7	Data Bus input/output pin
63	MD6	Data Bus input/output pin
64	MD5	Data Bus input/output pin
65	MD4	Data Bus input/output pin
66	DGND	GND:EMI data bus & GPIO output buffer pin
67	MD3	Data Bus input/output pin
68	MD2	Data Bus input/output pin
69	MD1	Data Bus input/output pin
70	DVCC	Vcc:EMI data bus & GPIO output buffer pin
71	MDO	Data Bus input/output pin
72	DGND	GND:EMI data bus & GPIO output buffer pin
73	GPIO3	General Purpose Input/Output 3
74	GPIO2	General Purpose Input/Output 2
75	GPIO1	General Purpose Input/Output 1
76	GPIO0	General Purpose Input/Output 0
77	MRD	Data Read Strobe
78	MWR	Data Write Strobe
79	MA17/MCS1/MRAS	Address Line 17/Chip selector 1/Row Address Strobe
80	MA16/MCS2/MCAS	Address Line 16/Chip selector 2/Column Address Strobe

ADJUSTMENT PROCEDURES

Preparation

1. Input

FM mono: 1kHz, 75kHz devi., 60dB/ μ V
 FM stereo: 1kHz, 67.5kHz devi., 60dB/ μ V
 Pilot signal 19kHz 7.5kHz devi.

AM: 400Hz, 30% mod.

2. Outputs

Connect the non-inductive type resistor of 8 ohms to the all speaker terminals unless otherwise noted.

1.FM ADJUSTMENT

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM IF/RF	1	Fig.1	99.0MHz 1kHz 75kHz devi. 65dBf(60dB)	—	99.0MHz	DC voltmeter	L101	$0 \pm 20mV$	FM MUTE/MODE switch:OFF/MONO Repeat the steps 1 and 3 until no further adjustment is necessary.
	2					AC voltmeter	IFT on the front end	Maximum	
	3					Distortion analyzer	L102	Minimum	
Stereo Distortion		Fig.2	99.0MHz Ext. mod. 65dBf(60dB)	Channel L or R 1kHz	99.0MHz	Distortion analyzer	IFT on the front end	Minimum	Don't turn more than $\pm 180^\circ$
Stereo Separation	1	Fig.2	99.0MHz Ext. mod. 65dBf(60dB)	Channel L 1kHz	99.0MHz	Channel R AC voltmeter	R150	Minimum	Maximum and same separation
	2			Channel R 1kHz		Channel L AC voltmeter		Minimum	
Muting Level		Fig.2	99.0MHz 19.2dBf(14dB)	—	99.0MHz	Oscilloscope	R158	Signal output	
RDS		Fig.3	99.0MHz Ext. mod. 60dB	RDS data or 57kHz 3% devi.	99.0MHz	Oscilloscope	R191	Maximum	TX-SV727R only

2.AM ADJUSTMENT

120V model

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		530kHz	Digital DC voltmeter	OSC coil on RF block L151	$1.4 \pm 0.2V$
2	600kHz 400Hz 30% mod. 60dB/m	600kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	990kHz 400Hz 30% mod. 60dB/m	990kHz	AC voltmeter	L152	Maximum






230V and Worldwide models

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		522kHz or 531kHz	Digital DC voltmeter	OSC coil on RF block L151	$1.3 \pm 0.1V$
2	603kHz 400Hz 30% mod. 60dB/m	603kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	999kHz 400Hz 30% mod. 60dB/m	999kHz	AC voltmeter	L152	Maximum

Reference Specification

FM tuned voltage: 87.5MHz ~ 108.0MHz
 More than 1.3V ~ Less than 10V
 AM tuned voltage: 530kHz ~ 1710kHz
 $1.4 \pm 0.2V$ ~ Less than 9.0V

Reference Specification
 FM tuned voltage: 87.5MHz ~ 108.0MHz
 More than 1.3V ~ Less than 10V
 AM tuned voltage: 522kHz ~ 1611kHz
 $1.3 \pm 0.2V$ ~ Less than 9.0V
 (230V model)
 AM tuned voltage: 531kHz ~ 1602kHz
 $1.3V \pm 0.2$ ~ Less than 9.0V
 (Worldwide model)

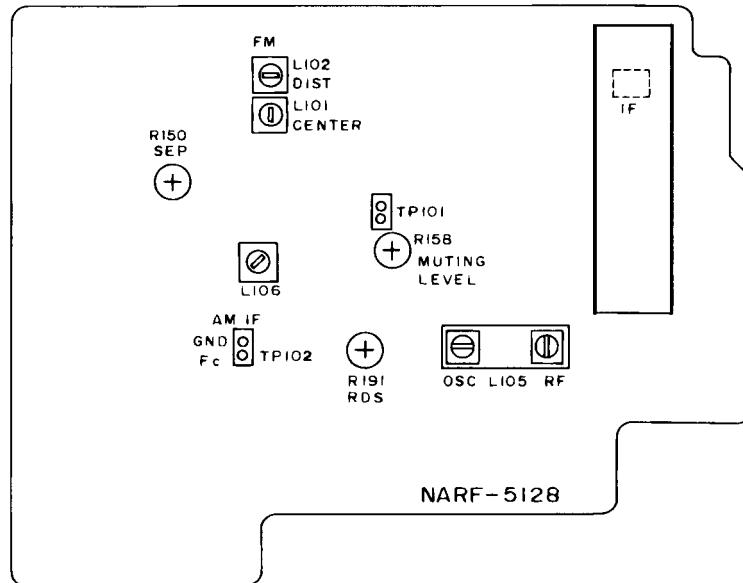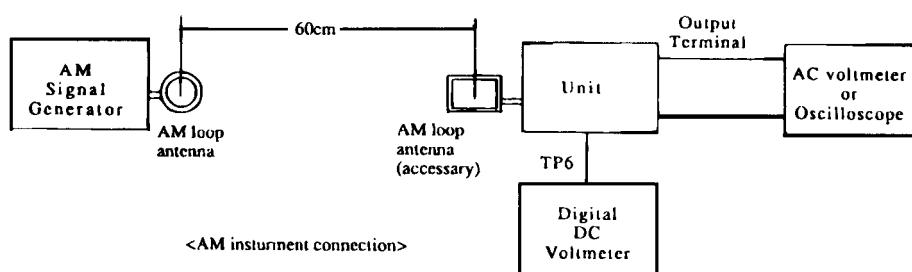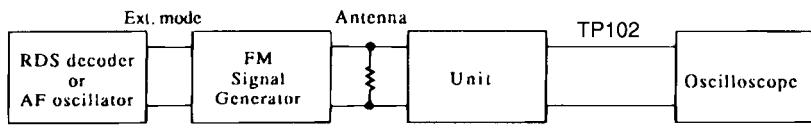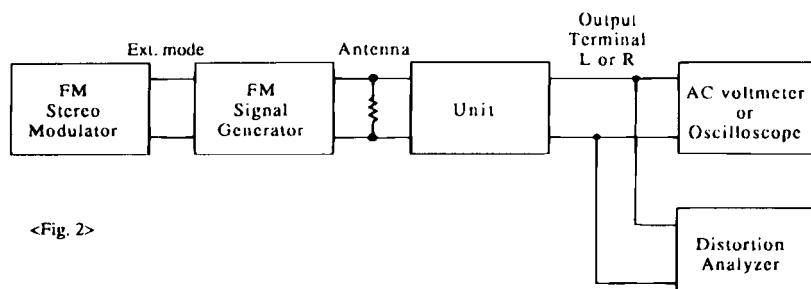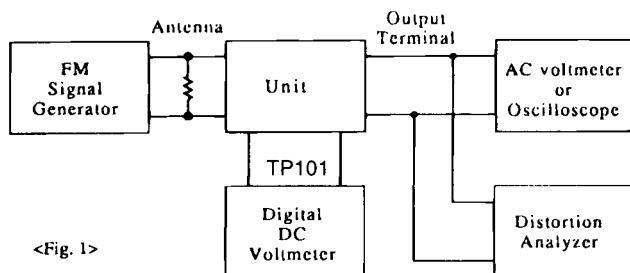

Adjustment point

PRINTED CIRCUIT BOARD-PARTS LIST

CAUTION: Replacement of the transistor of mark *, if necessary, must be made from the same beta group (Hz) as the original type.

MAIN CIRCUIT PC BOARD (NAAR-5121-3/3A/3B/3C/3D)			CIRCUIT NO.	PART NO.	DESCRIPTION
CIRCUIT NO.	PART NO.	DESCRIPTION			
	ICs			D503,D504	Diodes
Q301	22240191	NJM4565D-D		D505,D506	22380012F
Q302-Q308	22240293 or 22240247	NJM4558L-D or BA15218N		D571-D574	1SS270A
Q309	22240798	TC9162AN		D591-D594	223163 or WG713A
Q310	22240829	TC9274N-008		D603,D604	223222
Q571	22240752	NJM4556L		D605,D606	HER303F
Q701	22240907	μ PD78016FCW-034	→	D701-D705	223205
Q704	22240239	TA7291S		D930,D931	ISS133 or WG713A
Q921	222780125NEC	78M12HF		D706	224450562
Q922	222790125	79M12HF		D911,D912	MTZ5.6B
Q923	222780065JRC	78M06HF		D921-D928	RBV602
Q924	222790065JRC	79M06HF		D934	22380046 or AM01Z or
Q925	222780565JRC	78M56		D929	GP104003E
	Transistors			D932	MTZ36D
Q515,Q516	2213284 or	2SC1740S-R or		D933	MTZ6.2C
Q591-Q594	2212115	2SC2458-GR			ISS270A
Q517,Q518	2203010	2SC517I			223163 or WG713A
Q519,Q520	2203000	2SA1930	→	L501,L502	Coils
Q521,Q522	2201482, 2201483, 2202822 or 2202823	* 2SC3281-R, * 2SC3281-O, * 2SC5200-R or * 2SC5200-O		L601,L602	S-1.3C
Q523,Q524	2201472, 2201473, 2202812 or 2202813	* 2SA1302-R, * 2SA1302-O, * 2SA1943-R or * 2SA1943-O		L701	S-1.3C
Q525,Q526	2214984 or	2SC2631-R or		C303,C304	233454K220
Q625,Q626	2214985	2SC2631-S		C307,C308	NCH-1452 220K
Q527,Q528	2214974 or	2SA1123-R or		C309,C310	Resonator
Q627,Q628	2214975	2SA1123-S		X701	3010239Y
Q572,Q703	2213510 or	DTA114ES or			CST10.0MTW
	2214350	RN2202			Capacitors
Q573-Q576	2213631 or 2213632	RN1241-A or RN1241-B		C303,C304	10μ F,16V,Elect.
Q615,Q616	2213284 or 2212115	2SC1740S-R or 2SC2458-GR		C307,C308	100μ F,6.3V,Elect.
Q621,Q622	2202882, 2202883, 2202903, 2202904 or 2202906	* 2SD2387-R, * 2SD2387-O, * 2SD2389-O, * 2SD2389-Y or * 2SD2389-P		C309,C310	6200pF±5%,50V,Plastic
Q623,Q624	2202872, 2202873, 2202893, 2202894 or 2202896	* 2SB1558-R, * 2SB1558-O, * 2SB1559-O, * 2SB1559-Y or * 2SB1559-P		C311,C312	1800pF±5%,50V,Plastic
Q671,Q672	2211732 or 2211733	2SC1845-F or 2SC1845-E		C313,C314	10μ F,16V,Elect.
Q673	2211792 or 2211793	2SA992-F or 2SA992-E		C315,C316	47É F,16V,Elect.
Q702	221282 or	DTC144ES or		C701	100μ F,16V,Elect.
	2213560	RN1204		C702,C704	0.1μ F±5%,50V,Plastic
Q926	2211455	2SA1015-GR		C703	0.047μ F±5%,50V,Plastic
Q927	2211255	2SC1815-GR		C705,C709	100μ F,6.3V,Elect.
Q928	2213640 or	DTC123JS or		C710	0.047μ F±5%,50V,Plastic
2214660	RN1205			C915,C916	220μ F,6.3V,Elect.
				C923	12000μ F,71V,Elect.
				C924	4700μ F,25V,Elect.
				C927,C928	1000μ F,35V,Elect.
				C931,C932	10μ F,16V,Elect.
				C933	10μ F,16V,Elect.
				C935	10μ F,16V,Elect.
				C936	220μ F,35V,Elect.
				C937	220μ F,50V,Elect.
				C940	470μ F,25V,Elect.
				C944	100μ F,35V,Elect.

NOTE: <D>:120 V model only
 <P>:230 V model only
 <W>:Worldwide model only

CIRCUIT NO.	PART NO.	DESCRIPTION
		Resistors
R541,R542	443521014	100 Ohm±5%, 1/2W, Metal oxide
R543,R544	4000132	RGC55 0.22OHMK,Metal plate
R549-R552	453630474	4.7 Ohm±5%, 1W, Metal
R553,R554	443523924	3.9 kohm±5%, 1/2W, Metal oxide
R559,R560	453530824	8.2 Ohm±5%, 1/2W, Metal
R567,R568	453530104	1 Ohm±5%, 1/2W, Metal
R569,R570	443521014	100 Ohm±5%, 1/2W, Metal oxide
R643,R644	4000132	RGC55 0.22OHMK,Metal plate
R649,R650	453630824	8.2 Ohm±5%, 1W, Metal
R653,R654	443523324	3.3 kohm±5%, 1/2W, Metal oxide
R659,R660	453530824	8.2 Ohm±5%, 1/2W, Metal
R923	453530104	1 Ohm±5%, 1/2W, Metal
R924	453530824	8.2 Ohm±5%, 1/2W, Metal
R925,R926	443621204	12 Ohm±5%, 1W, Metal oxide
R927	453530824	8.2 Ohm±5%, 1/2W, Metal
R928	443621804	18 Ohm±5%, 1W, Metal oxide
R929,R930	443621214	120 Ohm±5%, 1W, Metal oxide
R931	443522204	22 Ohm±5%, 1/2W, Metal oxide
R934	443523314	330 Ohm±5%, 1/2W, Metal oxide
R935	443522204	22 Ohm±5%, 1/2W, Metal oxide
R938	453530104	1 Ohm±5%, 1/2W, Metal
		Relais
RL501-RL503	25065339	NRL-2P5A-DC24-046
RL911	25065339	/\\ NRL-2P5A-DC24-046
		Plugs
P201a	25055652	NPLG-14P608 <D/W>
	25055653	NPLG-16P609 <P>
P321a	25055133	NPLG-3P117
P535,P536	25055038	NPLG-2P29
P601a	25055651	NPLG-12P607
P602a	25055654	NPLG-18P610
P603a	25055652	NPLG-14P608
P635,P636	25055038	NPLG-2P29
		Terminals
P301-P303	25045300	NPJ-6PDBL159
P304	25045303	NPJ-4PDBL162
P501	25060125	NTM-8PDPMN058,Speaker
		Wire clammer
P921	260224	CP-1S
		Wire holders
JL251a	25051096	NSCT-12P883
JL501a	25051108	NSCT-4P895
JL502a	25051088	NSCT-4P875
JL503a	25051087	NSCT-3P874
JL702a	25051091	NSCT-7P878
JL911a	25051113	NSCT-9P900
JL921a	25051109	NSCT-5P896
		Wire traps
JL401b	25055630	NPLG-9P592
JL701a	25050980	NSCT-40P767
		Radiators
Q921a	27160209	RAD-67
Q923a	27160211	RAD-68
D911a	27160345AY	


SECONDARY CIRCUIT PC BOARD (NAETC-5122-3)

CIRCUIT NO.	PART NO.	DESCRIPTION
		Resistors
R921,R922	453534794	0.47 Ohm±5%,1/2W, Metal
R941	453534794	0.47 Ohm±5%,1/2W, Metal
		Wire holders
JL911b	25051113	NSCT-9P900
JL921b	25051109	NSCT-5P896
		DISPLAY CIRCUIT PC BOARD (NADIS-5124-3/3A)
CIRCUIT NO.	PART NO.	DESCRIPTION
		Remote sensor
Q1701	24130010	HC-312
		FL tube
Q1701	212138	13-BT-138GK
		ICs
Q1702	22240685R9	M66004FP
Q801	22240293 or	NJM4558L-D or
Q808,Q809	22240247	BA15218N
Q802	22240524	AK5339-VP or CS5339-KP: AK5339-VP and CS5339-KP are same IC.
Q803	22240831R3	XC56004FJ50
Q804	22240720 or	LH2464-10 or
	22240867	LC32464P-80
Q805,Q806	<u>22240832R9</u>	SM5875BM
		Transistors
Q1703	221282 or	DTC144ES or
	2213560	RN1204
Q1704,Q1705	2213284 or	2SC1740S-R or
	2212115	2SC2458-GR
		LEDs
D1701,D1702	225291D	SEL4910D-D
		Diodes
D1703,D1711	223205	ISS270A.
D1713,D1714	223163 or	ISS133 or
D803-D806	223222	WG713A
D1712	224451303	MTZ13C
D802	22380046 or	AM01Z or
	22380035	GP104003E
		Core
L801	230906	BL02RN2-R62
		Coils
L811	233454K220	NCH-1452 220K
L818-L820	233454K220	NCH-1452 220K
		Resonator
X801	3010112	KD6586FFB
		Capacitors
C1702,C1711	353741009	10μ F,16V,Elect.
C1714	375524744	0.47μ F±5%,50V,Plastic
C1716	353781009	10μ F,50V,Elect.
C1717	353721019	100μ F,6.3V,Elect.
C1718,C1719	375524744	0.47μ F±5%,50V,Plastic
C803,C804	353741009	10μ F,16V,Elect.
C805,C806	374721034	0.01μ F±5%,50V,Plastic
C807-C810	353721019	100μ F,6.3V,Elect.
C815,C818	353721019	100μ F,6.3V,Elect.
C816	353741009	10μ F,16V,Elect.
C824,C829	353721019	100μ F,6.3V,Elect.
C825	374724744	0.47μ F±5%,50V,Plastic
C841,C850	353721019	100μ F,6.3V,Elect.

SCHEMATIC DIAGRAM


Part

G
—
F
—
E
—
D
—
C

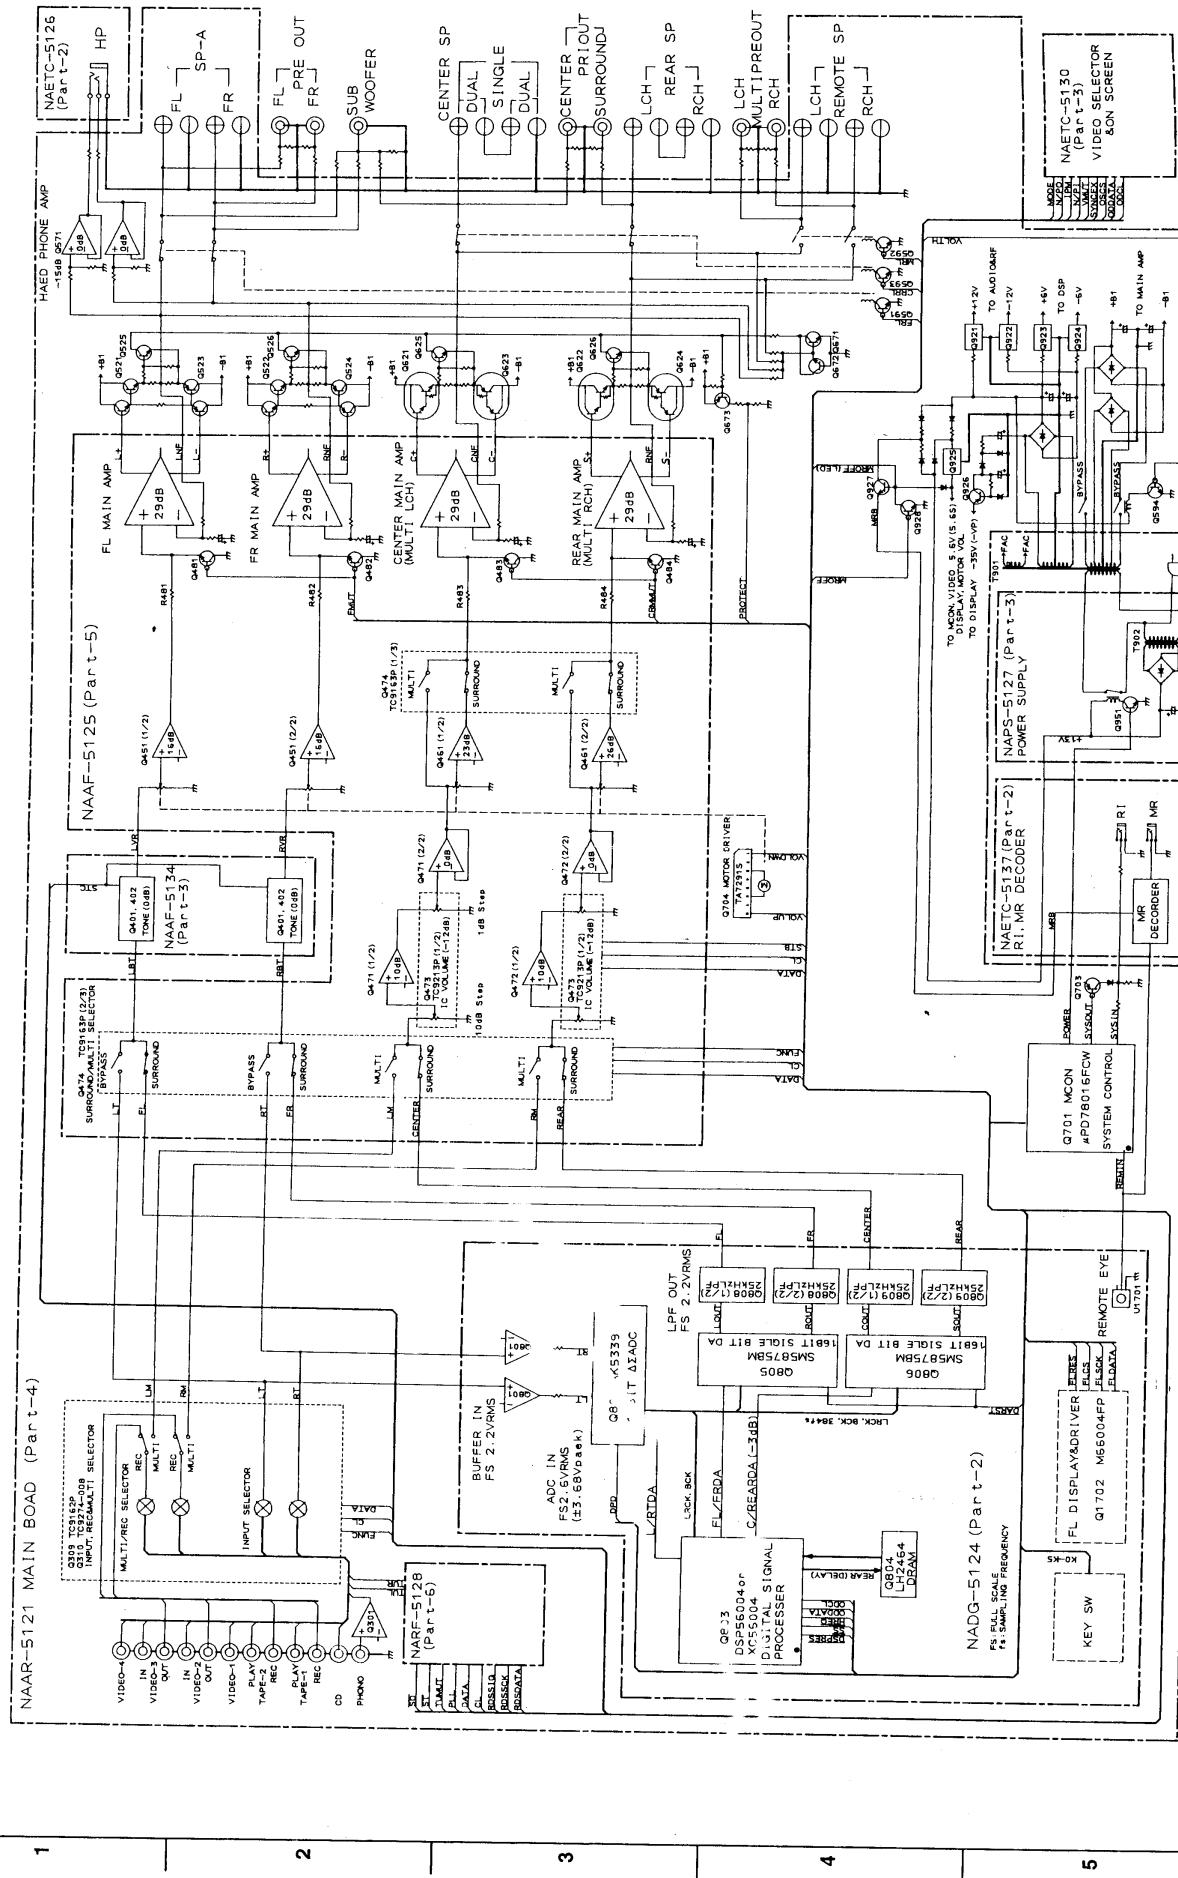


SCHEMATIC DIAGRAM

Part 2

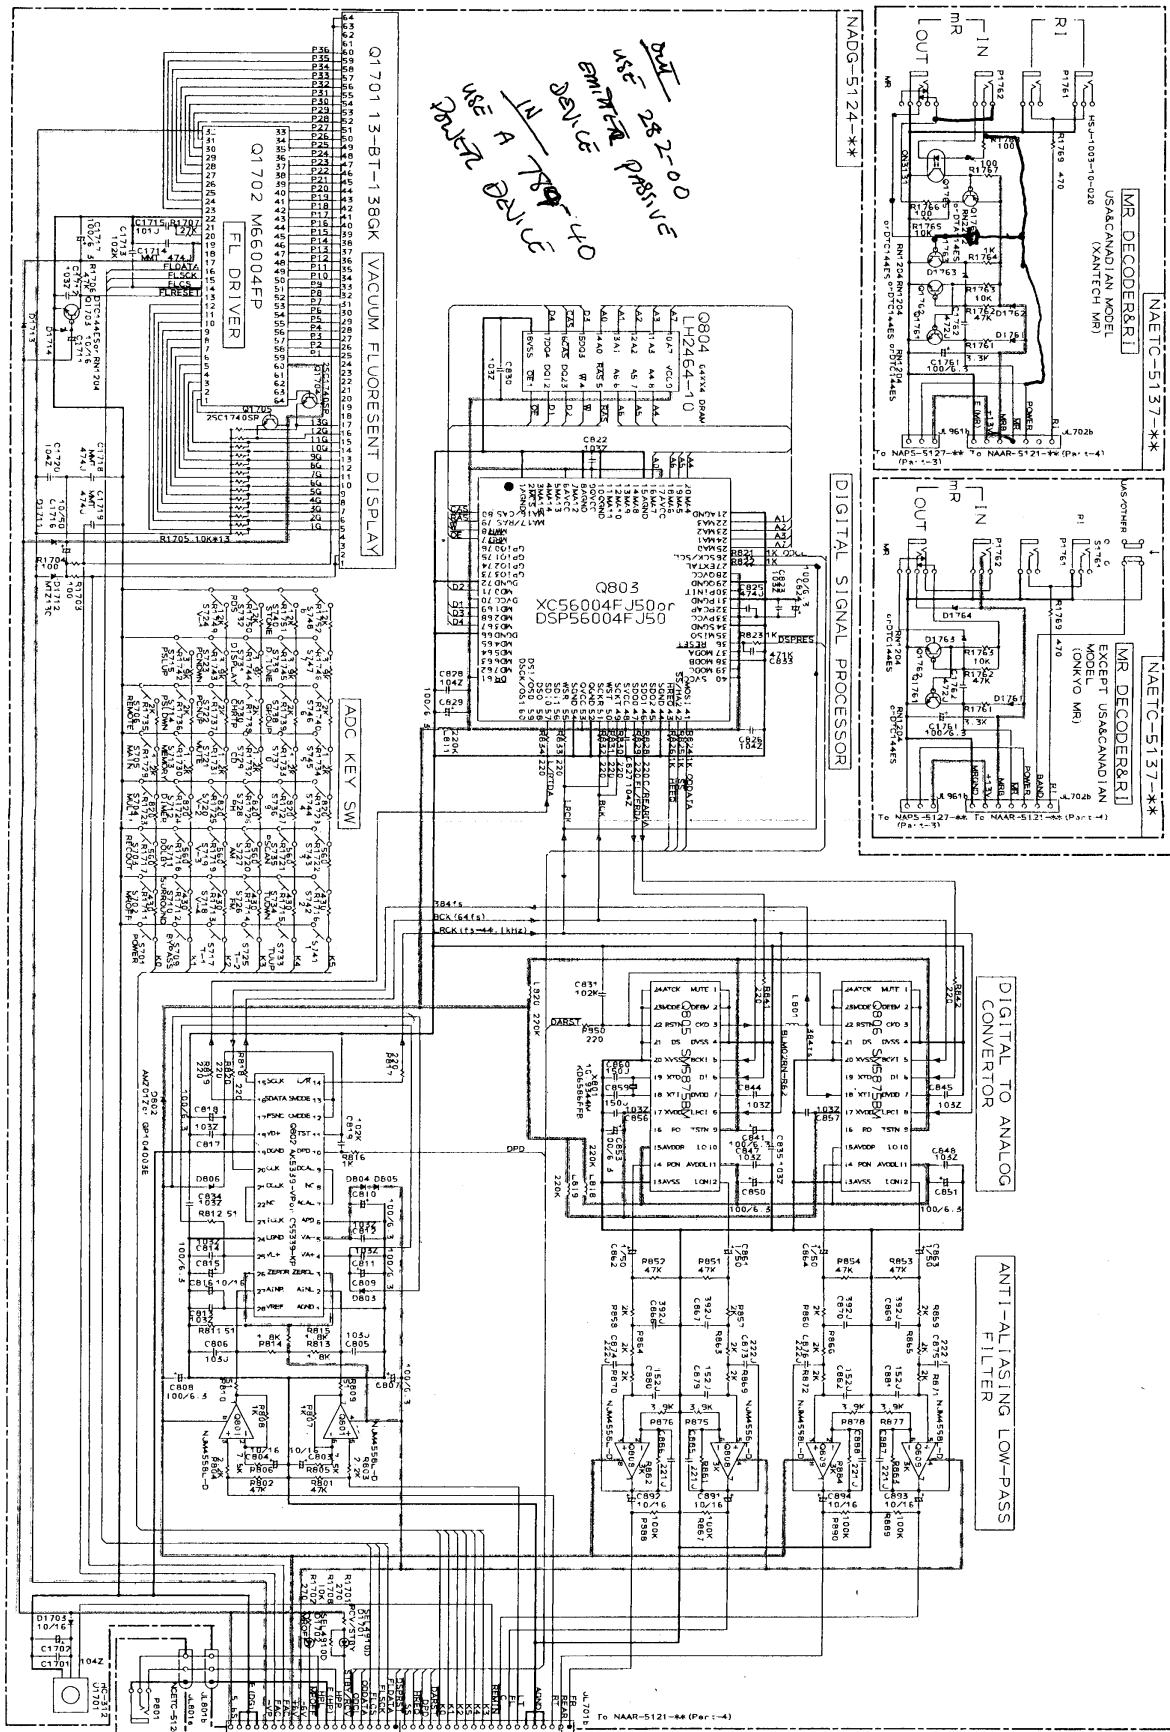


SCHEMATIC DIAGRAM

Part 3

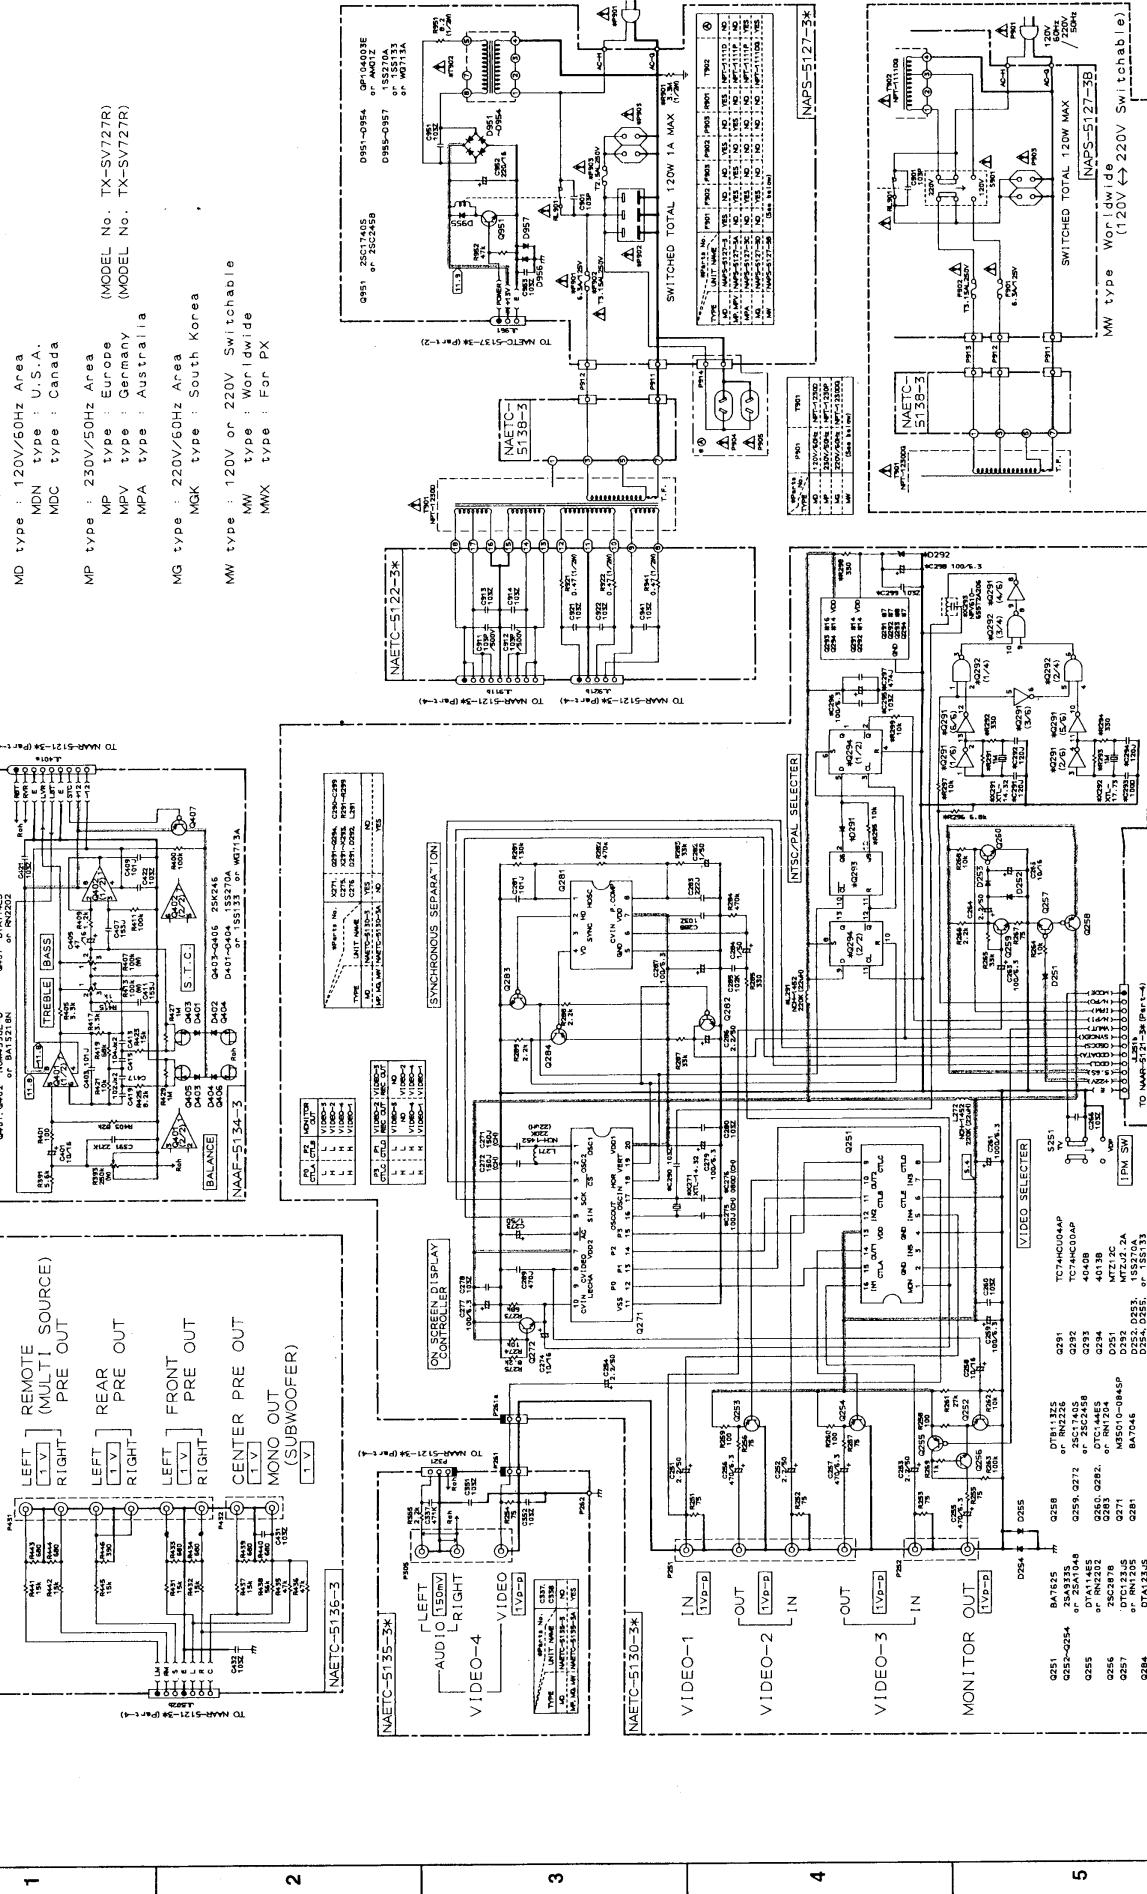

SCHEMATIC DIAGRAM

Hälfte 4

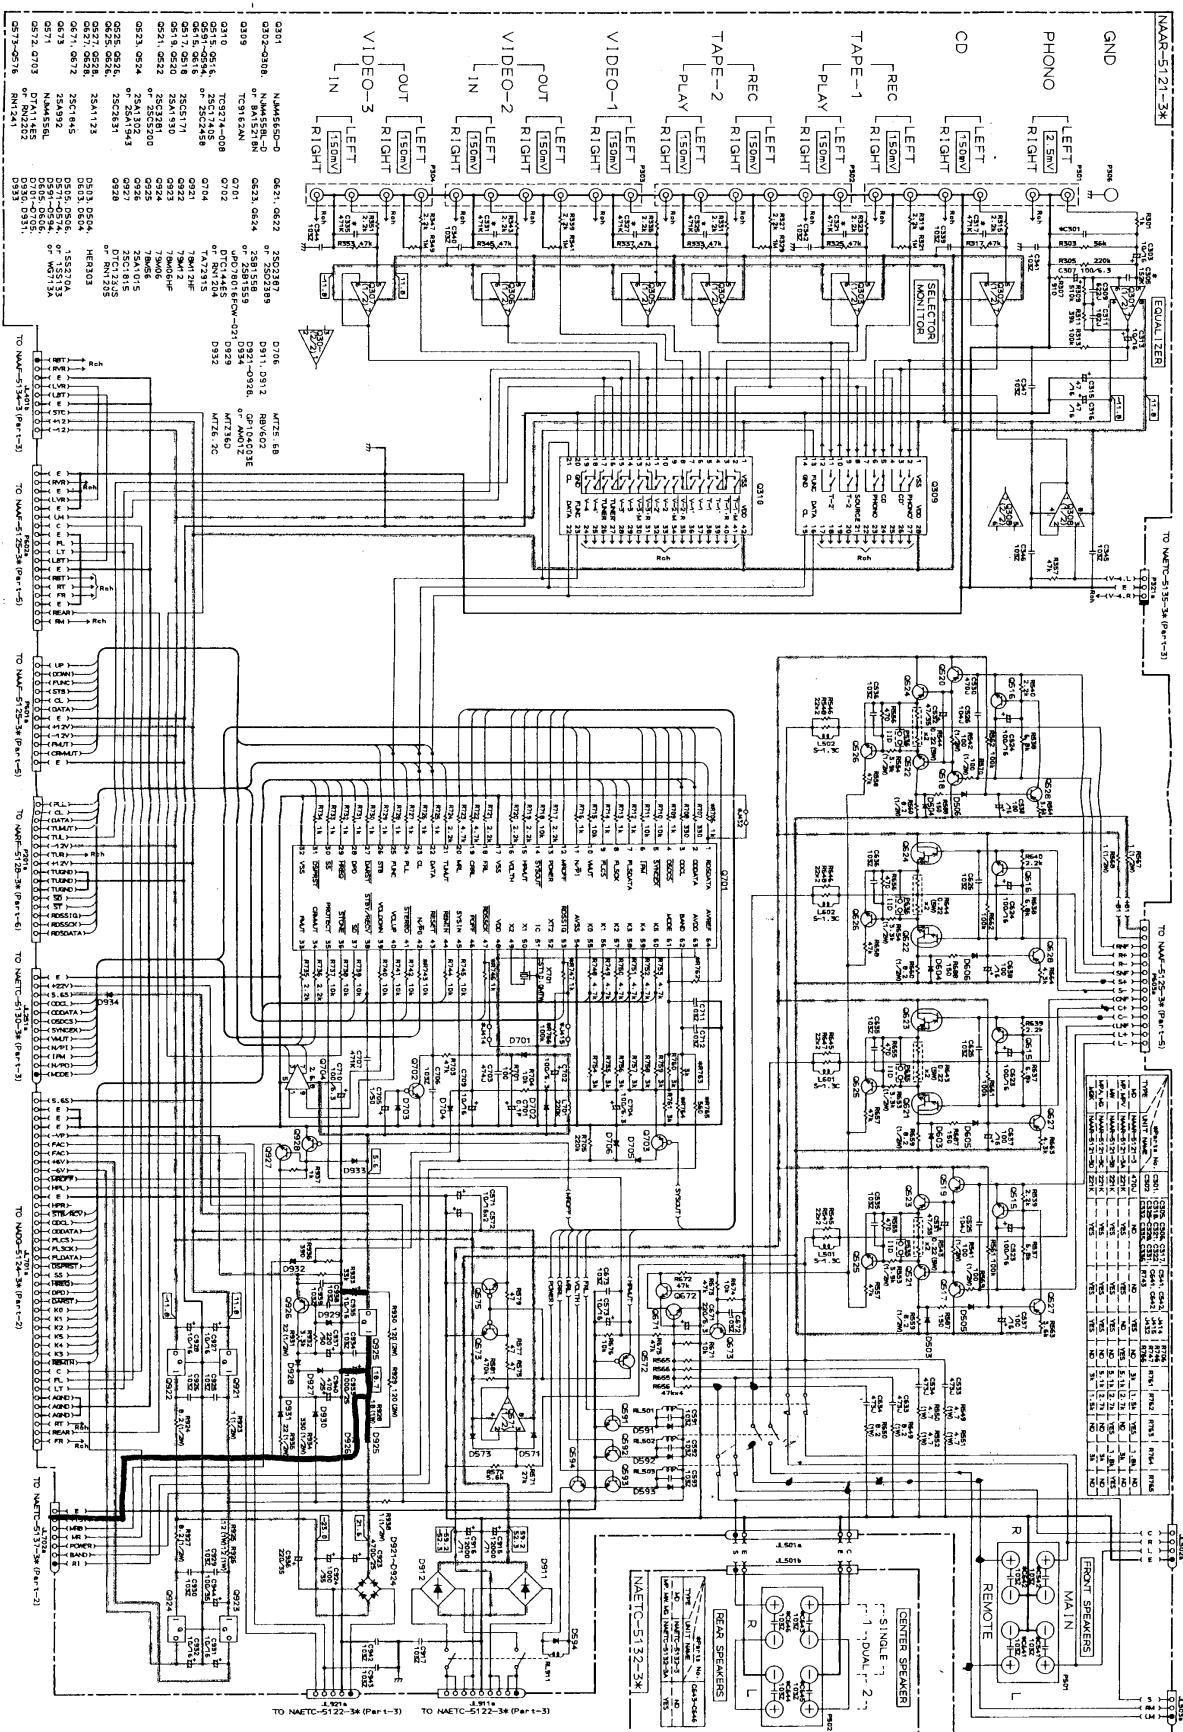

PRINTED CIRCUIT BOARD-PARTS LIST

NOTE: <D>;120 V model only
 <P>;230 V model only
 <W>;Worldwide model only

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	Capacitors			Capacitors	
C853	353721019	100 μ F,6.3V,Elect.	C491,C492	354741009	10 μ F,16V,Elect
C861-C864	353780109	1 μ F,50V,Elect.	C495-C498	354741009	10 μ F,16V,Elect
C867-C870	374723924	3900pF \pm 5%,50V,Plastic	C501,C502	354781009	10 μ F,50V,Elect
C873-C876	374722224	2200pF \pm 5%,50V,Plastic	C503,C504	374724714	470pF \pm 5%,50V,Plastic
C879-C882	374721524	1500pF \pm 5%,50V,Plastic	C507,C508	354742219	220 μ F,16V,Elect
C885-C888	370132214	220pF \pm 5%,100V,APS	C511,C512	374722224	2200pF \pm 5%,50V,Plastic
C891-C894	353741009	10 μ F,16V,Elect.	C513,C514	354721019	100 μ F,6.3V,Elect
	Resistor		C519-C522	354700109	1 μ F,160V,Elect
R1705	49163103413	10k \pm 13 RM1/101J, Array	C601,C602	354781009	10 μ F,50V,Elect
	Push switches		C607,C608	354742219	220 μ F,16V,Elect
S701-S706	25035652	NPS-111-S604	C613,C614	354721019	100 μ F,6.3V,Elect
S709-S715	25035652	NPS-111-S604	C619-C622	354700109	1 μ F,160V,Elect
S717-S729	25035652	NPS-111-S604		Resistors	
S730-S732	25035652	NPS-111-S604 <P>	R450	5104348AY or	N16RQL50KA25F
S733-S748	25035652	NPS-111-S604		5104349AY	Variable
	Holder		R527,R528	443522204	22 Ohm \pm 5%,1/2W,Metal oxide
	27190913Y		R529,R530	443528204	82 Ohm \pm 5%,1/2W,Metal oxide
	Wire holders		R531-R534	453530224	2.2 Ohm \pm 5%,1/2W,Metal
JL701b	25050946	NSCT-40P733	R627,R628	443522204	22 Ohm \pm 5%,1/2W,Metal oxide
JL801b	25051087	NSCT-3P874	R629,R630	443528204	82 Ohm \pm 5%,1/2W,Metal oxide
			R631-R634	453530224	2.2 Ohm \pm 5%,1/2W,Metal
			R929,R930	4400021	120 Ohm \pm 5%,2W,Metal oxide
				Sockets	
	ICs		P601	25050985	NSCT-12P772
Q451,Q461	22240293 or	NJM4558L-D or	P602	25050988	NSCT-18P775
Q471,Q472	22240247	BA15218N	P603	25050986	NSCT-14P773
Q473	22240266	TC9213P			
Q474	22240799	TC9163AN			
	Transistors				
Q481-Q484	2213631 or	RN1241-A or			
	2213632	RN1241-B			
Q491,Q492	2213510 or	DTA114ES or			
	2214350	RN2202			
Q501-Q504	2211732 or	* 2SC1845-F or			
Q601-Q604	2211733	* 2SC1845-E			
Q505,Q506	2213354 or	2SA933S-R or			
Q605,Q606	2212125	2SA1048-GR			
Q507,Q508	2211732 or	2SC1845-F or			
Q607,Q608	2211733	2SC1845-E			
Q509,Q510	2213284 or	2SC1740S-R or			
Q609,Q610	2212115	2SC2458-GR			
Q511,Q512	2211353 or	2SA949-O or			
Q611,Q612	2211354	2SA949-Y			
Q513,Q514	2211633 or	2SC2229-O or			
Q613,Q614	2211634	2SC2229-Y			
	Diodes				
D491,D492	223205	ISS270A			
D501,D502	223163 or	ISS133 or			
D601,D602	223222	WG713A			
	Capacitors				
C451,C452	354780229	2.2 μ F,50V,Elect	C901	3500065A	\wedge DE7150FZ103P AC400/125V,IS
C457-C460	354741009	10 μ F,16V,Elect	C952	354742219	220 μ F,16V,Elect.
C461,C462	354780229	2.2 μ F,50V,Elect		Resistors	
C467-C470	354741009	10 μ F,16V,Elect	R901	431523355	\wedge 3.3 Mohm,1/2W,Solid <D>
C471,C472	354780229	2.2 μ F,50V,Elect	R951	453530824	8.2 Ohm \pm 5%,1/2W,Metal
C475,C476	354741009	10 μ F,16V,Elect	RL901	25065248	\wedge NRL-1P15A-DC12-29 <D/W>
C477,C478	354780229	2.2 μ F,50V,Elect		25065483	\wedge NRL-1P15A-DC12-084 <P>
C479,C480	354741009	10 μ F,16V,Elect		Plug	
			P901a	25055675	NPLG-2P631 <D/P>

MASTER VOLUME CIRCUIT PC BOARD (NAAF-5125-3/3A)

CIRCUIT NO. PART NO. DESCRIPTION

Q451,Q461	22240293 or	NJM4558L-D or
Q471,Q472	22240247	BA15218N
Q473	22240266	TC9213P
Q474	22240799	TC9163AN

Transistors

Q481-Q484	2213631 or	RN1241-A or
	2213632	RN1241-B
Q491,Q492	2213510 or	DTA114ES or
	2214350	RN2202
Q501-Q504	2211732 or	* 2SC1845-F or
Q601-Q604	2211733	* 2SC1845-E
Q505,Q506	2213354 or	2SA933S-R or
Q605,Q606	2212125	2SA1048-GR
Q507,Q508	2211732 or	2SC1845-F or
Q607,Q608	2211733	2SC1845-E
Q509,Q510	2213284 or	2SC1740S-R or
Q609,Q610	2212115	2SC2458-GR
Q511,Q512	2211353 or	2SA949-O or
Q611,Q612	2211354	2SA949-Y
Q513,Q514	2211633 or	2SC2229-O or
Q613,Q614	2211634	2SC2229-Y

Diodes

D491,D492	223205	ISS270A
D501,D502	223163 or	ISS133 or
D601,D602	223222	WG713A
	Capacitors	
C451,C452	354780229	2.2 μ F,50V,Elect
C457-C460	354741009	10 μ F,16V,Elect
C461,C462	354780229	2.2 μ F,50V,Elect
C467-C470	354741009	10 μ F,16V,Elect
C471,C472	354780229	2.2 μ F,50V,Elect
C475,C476	354741009	10 μ F,16V,Elect
C477,C478	354780229	2.2 μ F,50V,Elect
C479,C480	354741009	10 μ F,16V,Elect

HEADPHONE TERMINAL PC BOARD (NAETC-5126-3)

CIRCUIT NO. PART NO. DESCRIPTION

JL801a	25051087	NSCT-3P874,Wire holder
P801	25045257	YKB26-5138,Headphone jack

PRIMARY CIRCUIT PC BOARD (NAPS-5127-3/3A/3B/3D)

CIRCUIT NO. PART NO. DESCRIPTION

	Transistor	
Q951	2213284 or	2SC1740S-R or
	2212115	2SC2458-GR
	Diodes	
D951-D954	22380046 or	AM01Z or
	22380035	GP104003E
D955-D957	223205	ISS270A
	223163 or	ISS133 or
	223222	WG713A
	Power transformer	
T901	2300670AY	\wedge NPT-1111D <D>
	2300671AY	\wedge NPT-1111P <P>
	2300672AY	\wedge NPT-1111DG <W>
	Capacitors	
C901	3500065A	\wedge DE7150FZ103P AC400/125V,IS
C952	354742219	220 μ F,16V,Elect.
	Resistors	
R901	431523355	\wedge 3.3 Mohm,1/2W,Solid <D>
R951	453530824	8.2 Ohm \pm 5%,1/2W,Metal
	Relay	
RL901	25065248	\wedge NRL-1P15A-DC12-29 <D/W>
	25065483	\wedge NRL-1P15A-DC12-084 <P>
	Plug	
P901a	25055675	NPLG-2P631 <D/P>

CAUTION: Replacement of the transistor of mark *, if necessary,
must be made from the same beta group (H_{FE}) as the
original type.

NOTE: THE COMPONENTS IDENTIFIED BY MARK △
ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH
PART NUMBER SPECIFIED.

CIRCUIT NO.	PART NO.	DESCRIPTION
	AC outlet	
P902	25051124	△ NSCT-6P911 <D>
	25051125	△ NSCT-4P912 <P/W>
	Fuseholders	
F901a	25050065	△ YSH403T <D/W>
F902a	25050065	△ YSH403T <P/W>
F903a	25050065	△ YSH403T <P>
	Fuse	
F901	252166Y	△ 6.3A-UL/T-237, Primary <D/W>
F902	252076	△ 3.15A-SE-EAK, Primary <P/W>
F903	252075	△ 2.5A-SE-EAK, AC outlet <P>
	Wire holder	
JL961a	25051087	NSCT-3P874
	Switch	
S901	25065437	△ NSS-22157P, Voltage selector <W>

VIDEO CIRCUIT PC BOARD (NAETC-5130-3/3A)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q251	22240373	BA7625
Q271	22240719	M35010-084SP
Q281	22240830Y	BA7046
Q291	222740046TOS	TC74HCU04AP <P/W>
Q292	222740005TOS	TC74HC00AP <P/W>
Q293	222840401	4040B <P/W>
Q294	222840131	4013B <P/W>
	Transistors	
Q252-Q254	2213354 or 2212125	2SA933S-R or 2SA1048-GR
Q255	2213510 or 2214350	DTA114ES or RN2202
Q256	2212285 or 2212286	2SC2878-A or 2SC2878-B
Q257	2213640 or 2214660	DTC123JS or RN1205
Q258	2213830 or 2214690	DTB113ZS or RN2226
Q259	2213284 or 2212115	2SC1740S-R or 2SC2458-GR
Q260,Q282	221282 or	DTC144ES or
Q283	2213560	RN1204
Q272	2213284 or 2212115	2SC1740S-R or 2SC2458-GR
Q284	2213710 or 2214670	DTA123JS or RN2205
	Diodes	
D251	224451203	MTZ12C
D252-D255	223205 223163 or 223222	ISS270A ISS133 or WG713A
D291	223205 223163 or 223222	ISS270A ISS133 or WG713A <P/W>
D292	224470221	MTZJ2.2A <P/W>
	Coils	
L271,L272	233454K220	NCH-1452 220K
L291	233454K220	NCH-1452 220K <P/W>
	Resonators	
X271	3010167	XTL-14.32M,Crystal <D>

CIRCUIT NO.	PART NO.	DESCRIPTION
X291	3010167	XTL-14.32M,Crystal <P/W>
X292	3010238Y	Filter
X293	3030018	NFV610-655T2A206 <P/W>
	Capacitors	
C251-C254	354780229	2.2μ F,50V,Elect
C255-C257	354724719	470μ F,6.3V,Elect
C258	354741009	10μ F,16V,Elect
C259	354721019	100μ F,6.3V,Elect
C261	354721029	1000μ F,6.3V,Elect
C263	354721019	100μ F,6.3V,Elect
C264	354780229	2.2μ F,50V,Elect
C265	354741009	10μ F,16V,Elect
C273	354780109	1μ F,50V,Elect
C274	354741009	10μ F,16V,Elect
C277	354721019	100μ F,6.3V,Elect
C279	354721019	100μ F,6.3V,Elect
C282	354780109	1μ F,50V,Elect
C283	374722224	2200pF±5%,50V,Plastic
C284	354780109	1μ F,50V,Elect
C286	354780229	2.2μ F,50V,Elect
C287	354721019	100μ F,6.3V,Elect
C296,C298	354721019	100μ F,6.3V,Elect. <P/W>
C297	375524744	0.47μ F±5%,50V,Plastic <P/W>
S251	25065286	NSS-22112
	Terminals	
P251	25045339	NPJ-4PDYE190
P252	25045395	NPJ-2PDYE221
	Plug	
P261a	25055132	NPLG-2P116
	Wire trap	
JL251b	25055633	NPLG-12P595

SPEAKER TERMINAL PC BOARD (NAETC-5132-3/3A)

CIRCUIT NO.	PART NO.	DESCRIPTION
P503	25060125	NTM8PDMN058,Speaker terminal
JL501b	25050268	NSCT-4P96, Wire trap


TONE CONTROL CIRCUIT PC BOARD (NAAF-5134-3)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q401,Q402	22240293 or 22240247	NJM4558L-D or BA15218N
	Transistors	
Q403-Q406	2211945	2SK246-GR
Q407	2213510 or 2214350	DTA114ES or RN2202
	Diodes	
D401-D404	223205	ISS270A
	223163 or 223222	ISS133 or WG713A
	Resistors	
R393	5104225	N11RGLC250KW22Z, Variable
R407,R413	5104230	N14RLC100KWT22Z, Variable
	Wire holder	
JL401a	25051093	NSCT-9P880

SCHEMATIC DIAGRAM

Part 5

A B C D E F G

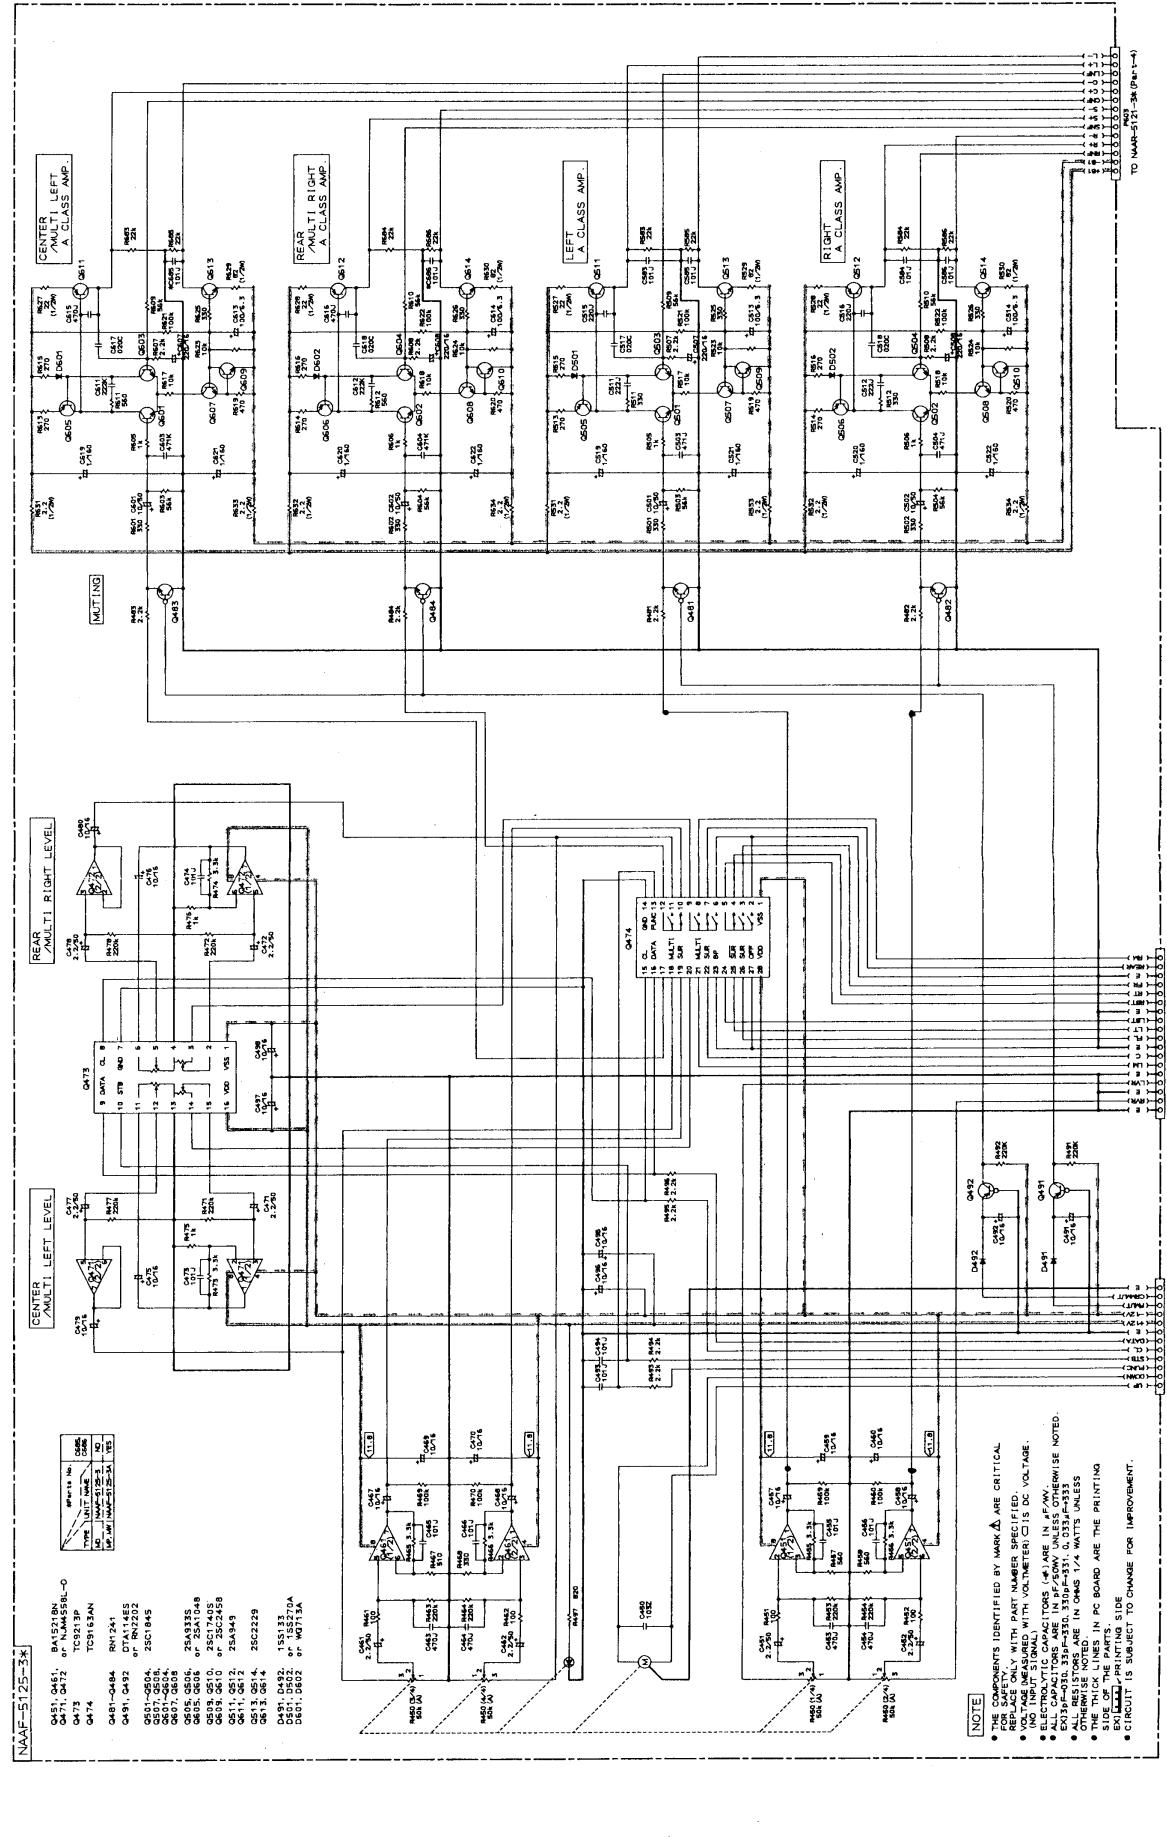

TO NAME 5121-38 (Part 4)


TO NAME 5121-38 (Part 4)

— 44 —

— 43 —

SCHEMATIC DIAGRAM

Part 6

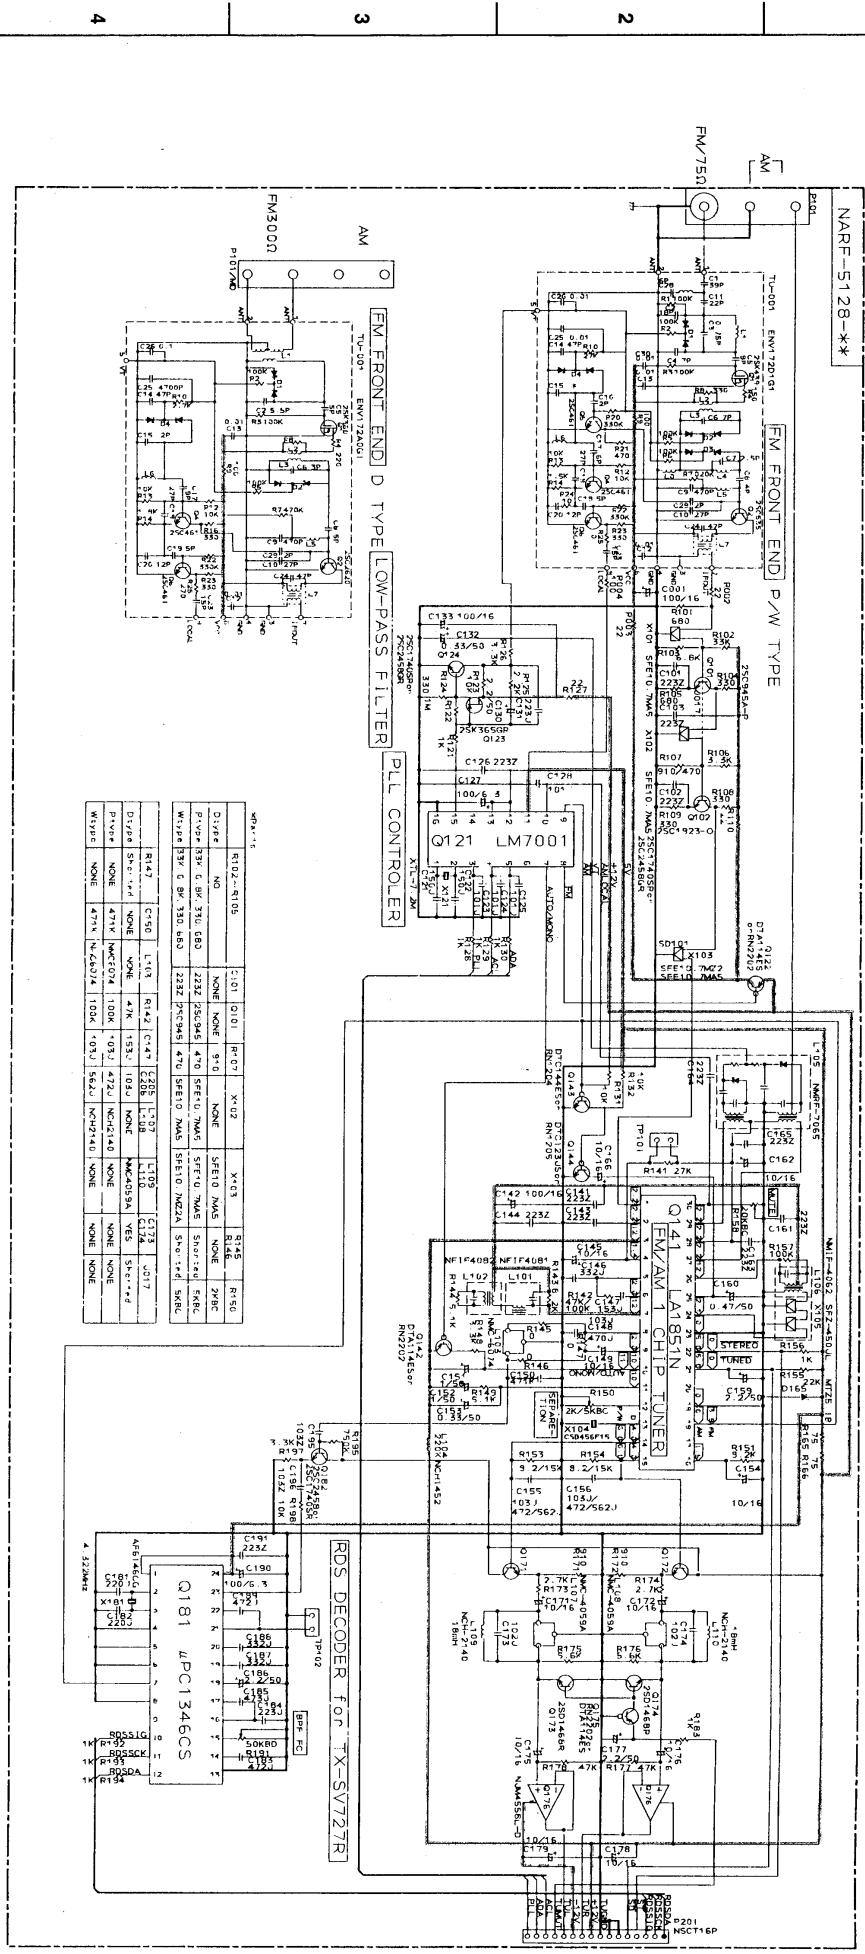


PRINTED CIRCUIT BOARD-PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION	TUNER CIRCUIT PC BOARD (NARF-5128-3/3A/3B/3C)		
			CIRCUIT NO.	PART NO.	DESCRIPTION
	Capacitors				
C401,C402	354741009	10μ F,16V,Elect.	TU001	240098Y	Front end
C405,C406	354744709	47μ F,16V,Elect.		240099Y	ENV172D1G1 <D>
C407,C408	374721534	0.015μ F±5%,50V,Plastic			ENV172A0G1 <P/W>
C411,C412	374721534	0.015μ F±5%,50V,Plastic		ICs	
C413-C416	374721044	0.1μ F±5%,50V,Plastic	Q121	22240090	LM7001
C417-C420	374721024	1000pF±5%,50V,Plastic	Q141	22240749Y	LA1851N
			Q176	22240293 or 22240247	NJM4558L-D or BA15218N
FRONT TERMINAL PC BOARD (NAETC-5135-3/3A)			Q181	22240679	μ PC1346CS <P>
CIRCUIT NO.	PART NO.	DESCRIPTION			
P261	2009990281	NSAS-4P0409,Socket		Transistors	
P305	25045402	NPJ-3PDBL227,Terminal	Q101	2210746	2SC945A-P <P/W>
P321	2009990125	NSAS-6P0190,Socket	Q102	2211723	2SC1923-O
			Q122,Q142	2213510 or 2214350	DTA114ES or RN2202
PRE. OUTPUT TERMINAL PC BOARD (NAETC-5136-3)			Q123	2212445	2SK365-GR
CIRCUIT NO.	PART NO.	DESCRIPTION	Q124	2213284 or Q171,Q172	2SC1740S-R or 2SC2458-GR
P431	25045300	NPJ-6PDBL159,Terminal	Q143	2212115	2SC2458-GR
P432	25045298	NPJ-2PDBL157,Terminal		221282 or 2213560	DTC144ES or RN1204
JL502b	25055628	NPLG-7P590,Plug	Q144	2213640 or 2214660	DTC123JS or RN1205
			Q173,Q174	2212794	2SD1468-R
MR/RI TERMINAL PC BOARD (NAETC-5137-3/3A/3B)			Q182	2213284 or 2212115	2SC1740S-R or 2SC2458-GR <P>
CIRCUIT NO.	PART NO.	DESCRIPTION		Diode	
	Transistors		D165	224450512	MTZ5.1B
Q1761,Q1762	221282 or 2213560	DTC144ES or RN1204		Transformers	
Q1763	221282 or 2213560	DTC144ES or RN1204 <D>	L101	233457Y	NFIF-4081
Q1764	2213510 or 2214350	DTA114ES or RN2202 <D>	L102	233458Y	NFIF-4082
	Photo coupler		L106	232139	NMIF-4062
Q1765	24120043	ON3131 <D>		Coils	
	Diodes		L103	233471Y	NMC-6084 <P/W>
D1761,D1763	223205 223163 or 223222	ISS270A ISS133 or WG713A	L104	233454M022	NCH-1452 022M
D1762	223205 223163 or 223222	ISS270A ISS133 or WG713A <D>	L107,L108 L109,L110	233355A 231092	NMC-4059 <P/W> NCH-2140 <D>
			L105	232163A	RF block
D1764	223205 223163 or 223222	ISS270A, ISS133 or WG713A <P/W>	X104	3010227Y	Resonators
			X121	3010141	CSB456F15,Ceramic
			X181	3010203	XTL-7.2M,Crystal
	Capacitors				AF6146CG <P>
C1761	354721019	100μ F,6.3V,Elect.	X101	3010071	Ceramic filters
C1762	374724724	4700pF±5%,50V,Plastic	X102	3010071	SFE10.7MA5
	Terminals		X103	3010071	<P/W>
P1761	25045172	HSJ-1003-01-020,RI		3010130	SFE10.7MA5 <D>
P1762	25045433	HSJ-1003-01-013,XANTECH <D>	X105	3010123	SFE10.7MZ2A <P/W>
					SFZ450JL
	25045293	HSJ-1003-01-012,MR <P/W>	C001	354741019	Capacitors
	Wire trap		C127	354721019	100μ F,16V,Elect.
JL702b	25055628	NSCT-7P590	C130	354780229	100μ F,6.3V,Elect.
	Wire holder		C131	374722234	2.2μ F,50V,Elect.
JL961b	25051087	NSCT-3P874	C132	354783399	0.022μ F±5%,50V,Plastic
	Switch		C133,C142	354741019	0.33μ F,50V,Elect.
S1761	250650286	NSS-22112, Band step <W>	C145	354741009	100μ F,16V,Elect.
			C146	374723324	3300pF±5%,50V,Plastic
			C147	374721534	0.015μ F±5%,50V,Plastic <D>
				374721034	0.01μ F±5%,50V,Plastic <P/W>

TUNER CIRCUIT PC BOARD

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
		Capacitors			Resistors
C149	354780479	4.7μ F,50V,Elect.	R150	5210259	N06HR2KBC, Trimming <D>
C151,C152	354780109	1μ F,50V,Elect.		5210261	N06HR5KBC, Trimming <P/W>
C153	354783399	0.33μ F,50V,Elect.	R158	5210263	N06HR20KBC, Trimming
C154	354741009	10μ F,16V,Elect.	R191	5210265	N06HR50KBC, Trimming <P>
C155,C156	374721034	0.01μ F±5%,50V,Plastic <D>			Terminal
	374724324	4300pF±5%,50V,Plastic <P>	P101	25060160 or	NTM-4PDML086 or
	374724724	4700pF±5%,50V,Plastic <W>		25060225	NTM-4PDML147, Antenna <D>
C159	354780229	2.2μ F,50V,Elect.		25060117 or	NTM-2PDMN051 or
C160	354784799	0.47μ F,50V,Elect.		25060222	NTM-2PDML144,Antenna <P/W>
C162	354741009	10μ F,16V,Elect.			Socket
C166	354744709	47μ F,16V,Elect.	P201	25050986	NSCT-14P773 <D>
C171,C172	354741009	10μ F,16V,Elect.		25050987	NSCT-16P774 <P>
C173,C174	374721024	1000pF±5%,50V,Plastic <D>			Plugs
C175,C176	354741009	10μ F,16V,Elect.	TP101	25055038	NPLG-2P29
C177	354780229	2.2μ F,50V,Elect.	TP102	25055038	NPLG-2P29 <P>
C178,C179	354741009	10μ F,16V,Elect.			NOTE: <D>:120 V model only
C183,C189	374724724	4700pF±5%,50V,Plastic <P>			<P>:230 V model only
C184	374722234	0.022μ F±5%,50V,Plastic <P>			<W>:Worldwide model only
C185	374724734	0.047μ F±5%,50V,Plastic <P>			
C186	354780229	2.2μ F,50V,Elect. <P>			
C187,C188	374723324	3300pF±5%,50V,Plastic <P>			
C190	354721019	100μ F,6.3V,Elect. <P>			

PACKING VIEW

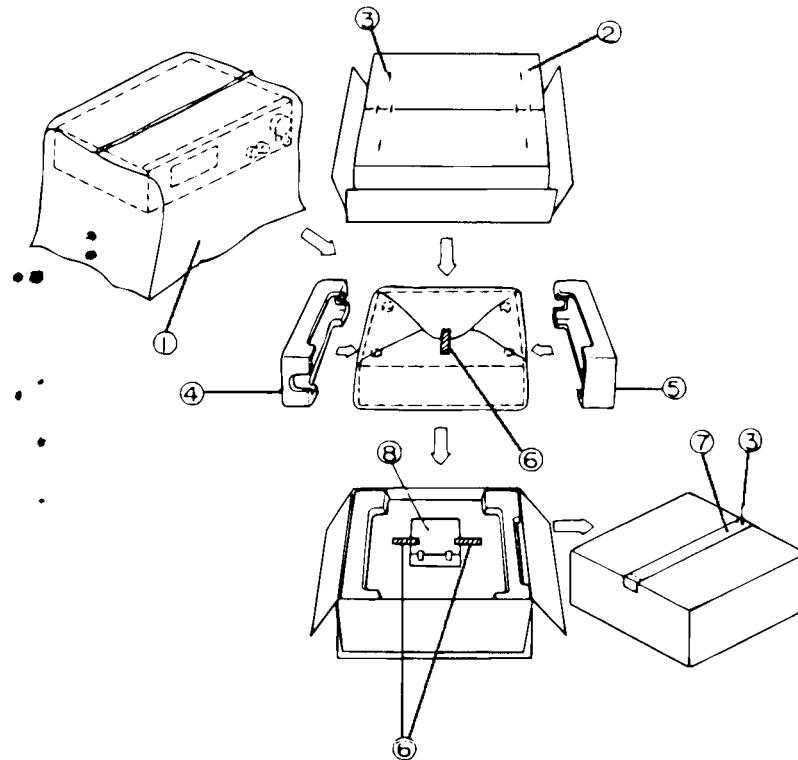

REF.NO. PART NO.

REF.NO.	PART NO.	DESCRIPTION
1	29100034-1Y	Styren bag
2	29052828Y	Carton box <D/W>
	29052829Y	Carton box <P>
3	282301	Staple
4	29091615BY	Pad R
5	29091614CY	Pad L
6	261504	Paper tape
7	29110071	PP tape
8	Accessory bag ass'y 29100097-1Y 24140288Y or 24140288AY	Styren bag RC-288M, Remote control transmitter
	3010054	UM-3, Battery
	232140	NMA-3057, AM loop antenna
	292111	FM antenna <D>
	292112	FM antenna <P/W>
	29342050Y	Instruction manual
	29342051Y	Instruction manual <P>
	29342052Y	Instruction manual <C/W>
	29342053Y	Instruction manual <P>
	2010200	Cord RI
	29365019B	Warranty card <N>
	29358002K	Service station list <N>
	29361778Y	Label UPC <N/C>
	29360117Y	Label CSA <C>
	29360778Y	Label FLASH <C/D>
	29355133AY	Instruction sheet <P>
	25065462	FM antenna adaptor <W>
	25055018	CV-K-1, Conversion plug <W>

NOTE:

<D>: 120 V model only
 <P>: 230 V model only
 <N>: U.S.A. model only
 <W>: Worldwide model only
 <C>: Canadian model only

NOTES

The TX-SV727(B)MPT type (Taiwanese model) is the same as the TX-SV727R(B)MP type (230V model) with the exception of the following sections.

REF.NO.	PART NAME	MPT type		MP type	
		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
3	Rear panel	27122058Y		27121996Y	
4	Decorative frame	27315253AY		27215256AY	
51	Front panel ass'y	1A564121Y		1A565121Y	
U1	Pc board ass'y	1A564521-3CY	NAAR-5121-3C	1A565521-3AY	NAAR-5121-3A
U4	Pc board ass'y	1A564524-3Y	NADG-5124-3	1A565524-3AY	NADG-5124-3A
U8	Pc board ass'y	1A564528-3CY	NARF-5128-3C	1A565528-3AY	NARF-5128-3A
	Instruction manual	29342052Y		29342051Y	
	Instruction manual	Not used		29342053Y	
	FM antenna adaptor	25065462		Not used	
	Carton box	29052828Y		29052829Y	

The TX-SV727(B)MGK type (Korean model) is the same as the TX-SV727R(B)MP type (230V model) with the exception of the following sections.

REF.NO.	PART NAME	MGK type		MP type	
		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
3	Rear panel	27122098Y		27121996Y	
4	Decorative frame	27315253AY		27215256AY	
51	Front panel ass'y	1A564121Y		1A565121Y	
F903	Fuse	Not used		252075	2.5A-SE-EAK
P901	Power supply cord	253213WSE	KS-AS	253193HIT	AS-CEE
P904.5	AC outlet	25051266	NSCT-2P1056	Not used	
T901	Power transformer	2301073Y	NPT-1230DG	2301072Y	NPT-1230P
U1	Pc board ass'y	1A564521-3DY	NAAR-5121-3D	1A565521-3AY	NAAR-5121-3A
U4	Pc board ass'y	1A564524-3Y	NADG-5124-3	1A565524-3AY	NADG-5124-3A
U7	Pc board ass'y	1A564527-3DY	NAPS-5127-3D	1A565527-3AY	NAPS-5127-3A
U8	Pc board ass'y	1A564528-3CY	NARF-5128-3C	1A565528-3AY	NARF-5128-3A
	Instruction manual	29342052Y		29342051Y	
	Instruction manual	29355221		29342053Y	
	FM antenna adaptor	25065462		Not used	
	Carton box	29052828Y		29052829Y	

ONKYO CORPORATION

Sales Planning & Promotion Dept.: 2-1, Nishin-cho, Neyagawa-shi, OSAKA 572, JAPAN

Tel: 0720-31-8111 Fax: 0720-33-5222

ONKYO U.S.A CORPORATION

200 Williams Drive, Ramsey, N.J. 07446, U.S.A.

Tel: 201-825-7950 Fax: 201-825-8150

ONKYO DEUTSCHLAND GMBH ELECTRONICS

Industriestrasse 18-20, 82110 Germering, GERMANY

Tel: 089 84 20 Fax: 089 84 93 226

ONKYO FRANCE

Immeuble Le Diamant, Domaine Technologique de Saclay, 4 Rue Rene Razet,
91892 SACLAY, FRANCE Tel: (1) 69 33 1400 Fax: (1) 69 41 35 84

NS504 PN 0M3498 Printed in Japan