

# ONKYO SERVICE MANUAL

## AUDIO VIDEO CONTROL TUNER AMPLIFIER MODEL TX-SV828THX

### Black model

BUD, BUDN	120V AC, 60Hz
BUP	230V AC, 50Hz
BUG	220V AC, 50Hz

### SATETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\Delta$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

## TABLE OF CONTENTS

Specifications.....	2
Service procedures.....	3
Block diagram.....	4
Tuner section.....	4
Video section.....	5
Microprocessor connection diagram.....	6
Microprocessor terminal description.....	7
IC block diagrams and descriptions.....	8
Pc board-parts list.....	18
Adjustment procedures.....	21
Wiring diagram.....	23
Block diagram-Amplifier section.....	25
Schematic diagram.....	27
Input/output and microprocessor section.....	27
Volume and surround section.....	33
Display and DSP section.....	35
Front/center amp. section.....	41
Tone and surround amp. section.....	43
Tuner section.....	49
Video section.....	51
Printed circuit board view.....	39
Input/output and microprocessor section.....	29
Front/center amp. section.....	39
Printed circuit board view and parts list.....	31
Volume and surround section.....	31
Display and DSP section.....	37
Tone and surround amp. section.....	45
Tuner section.....	47
Video section.....	53
Exploded view.....	55
Parts list.....	57
Packing view.....	59



# SPECIFICATIONS

## AMPLIFIER SECTION

Power output: **Stereo mode** (BY-PASS mode, H.P.F.: OFF)  
LEFT and RIGHT channels  
100 watts per channel min RMS. at 8 ohms, both channels driven, from 20Hz to 20,000Hz, with no more than 0.03 % total harmonic distortion.  
**Continuous power** 2 × 120 Watt at 8 ohms (DIN)  
**Surround mode**  
LEFT, RIGHT and CENTER channels  
90 watts min. RMS. at 8 ohms 1,000Hz, with no more than 0.08% total harmonic distortion.  
LEFT SURROUND and RIGHT SURROUND Channels  
50 watts per channel min. RMS. at 8 ohms 1,000Hz with no more than 0.08% total harmonic distortion.

IM distortion: 0.03% at rated power (LEFT and RIGHT)  
Damping factor: 70 at 8 ohms (LEFT and RIGHT)  
Input sensitivity/impedance: Phono:  
2.5mV/50 kohms  
Line (CD, TAPE 1 ~ 2, VIDEO 1 ~ 4):  
200mV/50 kohms  
Main in (LEFT, RIGHT, CENTER):  
1V/50 kohms (100W output)  
Main in (LEFT SURROUND, RIGHT SURROUND):  
0.7V/50 kohms (50W output)  
EXTERNAL DECODER INPUT (LEFT, RIGHT, CENTER, LEFT SURROUND, RIGHT SURROUND, SUBWOOFER):  
200mV/50 kohms

Output level/impedance:  
Rec out (TAPE 1 ~ 2):  
200mV/2.2 kohms  
Out (VIDEO 2 ~ 3):  
200mV/2.2 kohms  
Pre out (LEFT, CENTER, RIGHT, LEFT SURROUND, RIGHT SURROUND, SUBWOOFER):  
1V/470 ohms  
Pre out (MULTI SOURCE):  
1V/470 ohms  
Phono overload: 120mV RMS. at 1,000 Hz, 0.5 % THD.  
Frequency response: 20 to 30,000 Hz, +/-0.5 dB (Tone defeat: on)  
RIAA deviation: 20 to 20,000 Hz, +/-0.8 dB  
Tone control: BASS: +/-10 dB at 100 Hz  
TREBLE: +/-10 dB at 10,000 Hz  
Signal-to-Noise ratio: PHONO: 80 dB (IHF A, 5mV input) (Surround mode: BY PASS)  
CD/TAPE: 100 dB (IHF A)  
Muting: -∞dB

## VIDEO SECTION

Television format: NTSC (USA and Canadian models)  
NTSC/PAL (Other area model)

Input sensitivity/impedance  
IN (VIDEO 1 ~ 4) VIDEO (Composite):  
1Vp-p/75 ohms  
IN (VIDEO 1 ~ 4) S-VIDEO (Y signal):  
1Vp-p/75 ohms  
IN (VIDEO 1 ~ 4) S-VIDEO (C signal):  
0.28Vp-p/75 ohms

Output level/impedance  
OUT (VIDEO 2 ~ 3, MONITOR OUT) VIDEO (Composite):  
1Vp-p/75 ohms  
OUT (VIDEO 2 ~ 3, MONITOR OUT) S-VIDEO (Y signal):  
1Vp-p/75 ohms  
OUT (VIDEO 2 ~ 3, MONITOR OUT) S-VIDEO (C signal):  
0.28Vp-p/75 ohms

## TUNER SECTION

**FM:**  
Tuning range: 87.50 – 108.00 MHz (50 kHz steps)  
Usable sensitivity: Mono: 11.2 dBf, 1.0 μV (75 ohms)  
Stereo: 17.2 dBf, 2.0 μV (75 ohms)  
50 dB quieting sensitivity: Mono: 17.2 dBf, 2.0 μV (75 ohms)  
Stereo: 37.2 dBf, 20 μV (75 ohms)  
Capture ratio: 1.5 dB  
Image rejection ratio: 40 dB (USA and Canadian models)  
85 dB (European model)  
IF rejection ratio: 90 dB  
Signal-to-Noise ratio: Mono: 76 dB  
Stereo: 70 dB  
Alternate channel  
Attenuation: 55 dB  
AM suppression ratio: 50 dB  
Harmonic distortion: Mono: 0.1%  
Stereo: 0.2%  
Frequency response: 30 – 15,000 Hz ± 1.0 dB  
Stereo separation: 45 dB at 1kHz  
30 dB at 100 – 10,000 Hz  
Muting level: 17.2 dBf

**AM:**  
Tuning: USA and Canadian models  
530 – 1710 kHz (10 kHz steps)  
European models  
522 – 1611 kHz (9 kHz steps)  
Worldwide model  
530 – 1710 kHz (10 kHz steps) or  
531 – 1602 kHz (9 kHz steps)  
Usable sensitivity: 30 μV  
Image rejection ratio: 40 dB  
IF rejection ratio: 40 dB  
Signal-to-Noise ratio: 40 dB  
Harmonic distortion: 0.7%

## GENERAL

Power supply: USA and Canadian models  
AC120V, 60 Hz  
European models  
AC 230V, 50 Hz  
Dimensions (W x H x D): 455 × 170 × 389 mm  
(17-15/16" × 6-15/16" × 15-5/16")  
Mass: 15 kg (33 lbs.)


## REMOTE CONTROL RC-307M


Transmitter: Infrared  
Signal range: Approx. 5 meters (16ft.)  
Power supply: four "AAA" batteries (1.5V × 4)






Specifications and features are subject to change without notice.

# SERVICE PROCEDURES

## 1. Replacing the fuses

 This symbol located near the fuse indicates that the fuse used is fast operating type. For continued protection against fire hazard, replace with same type fuse. For fuse rating refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilise est a rapide. Pour une protection permanente, n'utiliser que des fusibles de meme type. Ce dernier est indique la qu le present symbol est appose.

MARK	REF. NO.	PART NO.	DESCRIPTION
D 	F901	252154	8A-TSC, Primary fuse
P 	F902	252077	4A-SE-EAK, Primary fuse
P 	F903	252075	2.5A-SE-EAK, AC outlet fuse
D 	F915,F916	252153	6.3A-TSC, Secondary fuse
P 	F915,F916	252079	6.3A-SE-EAK, Secondary fuse

NOTE: <D> :120V model only

<P> :230V model only

## 2. To Initialize the unit

This device employs a microprocessor to perform various functions and operations. If interference generated by an external power supply, radio wave, or other electrical source results in accident which causes the specified operations and functions to operate abnormally.

To perform a result, please follow the procedure below.

1. Press and hold down the VIDEO-1 button, then press the POWER button.
2. After "clear" is displayed, the preset memory and each mode stored in the memory, such as surround, are initialized and will return to the factory settings.

## 3. Safety-check out

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer.

Connect the insulating-resistance tester between the plug of power supply cord and the screw on the back panel.

Specifications: 3.3 Mohm±10% at 500V.

## 4. Memory preservation

This unit does not require memory preservation batteries.

A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged.

The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month the keep the back-up system operative.


The period of the time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorted when the unit is exposed to very high humidity or used in an area with an extremely humid climate.

## 5. Changing the band step


With the exception of the worldwide models, a tuning step selector switch is not provided. When you change the band step, change the parts as shown below.

	To 10 kHz	To 9 kHz
R705	open	10 kohm


# BLOCK DIAGRAM TUNER SECTION

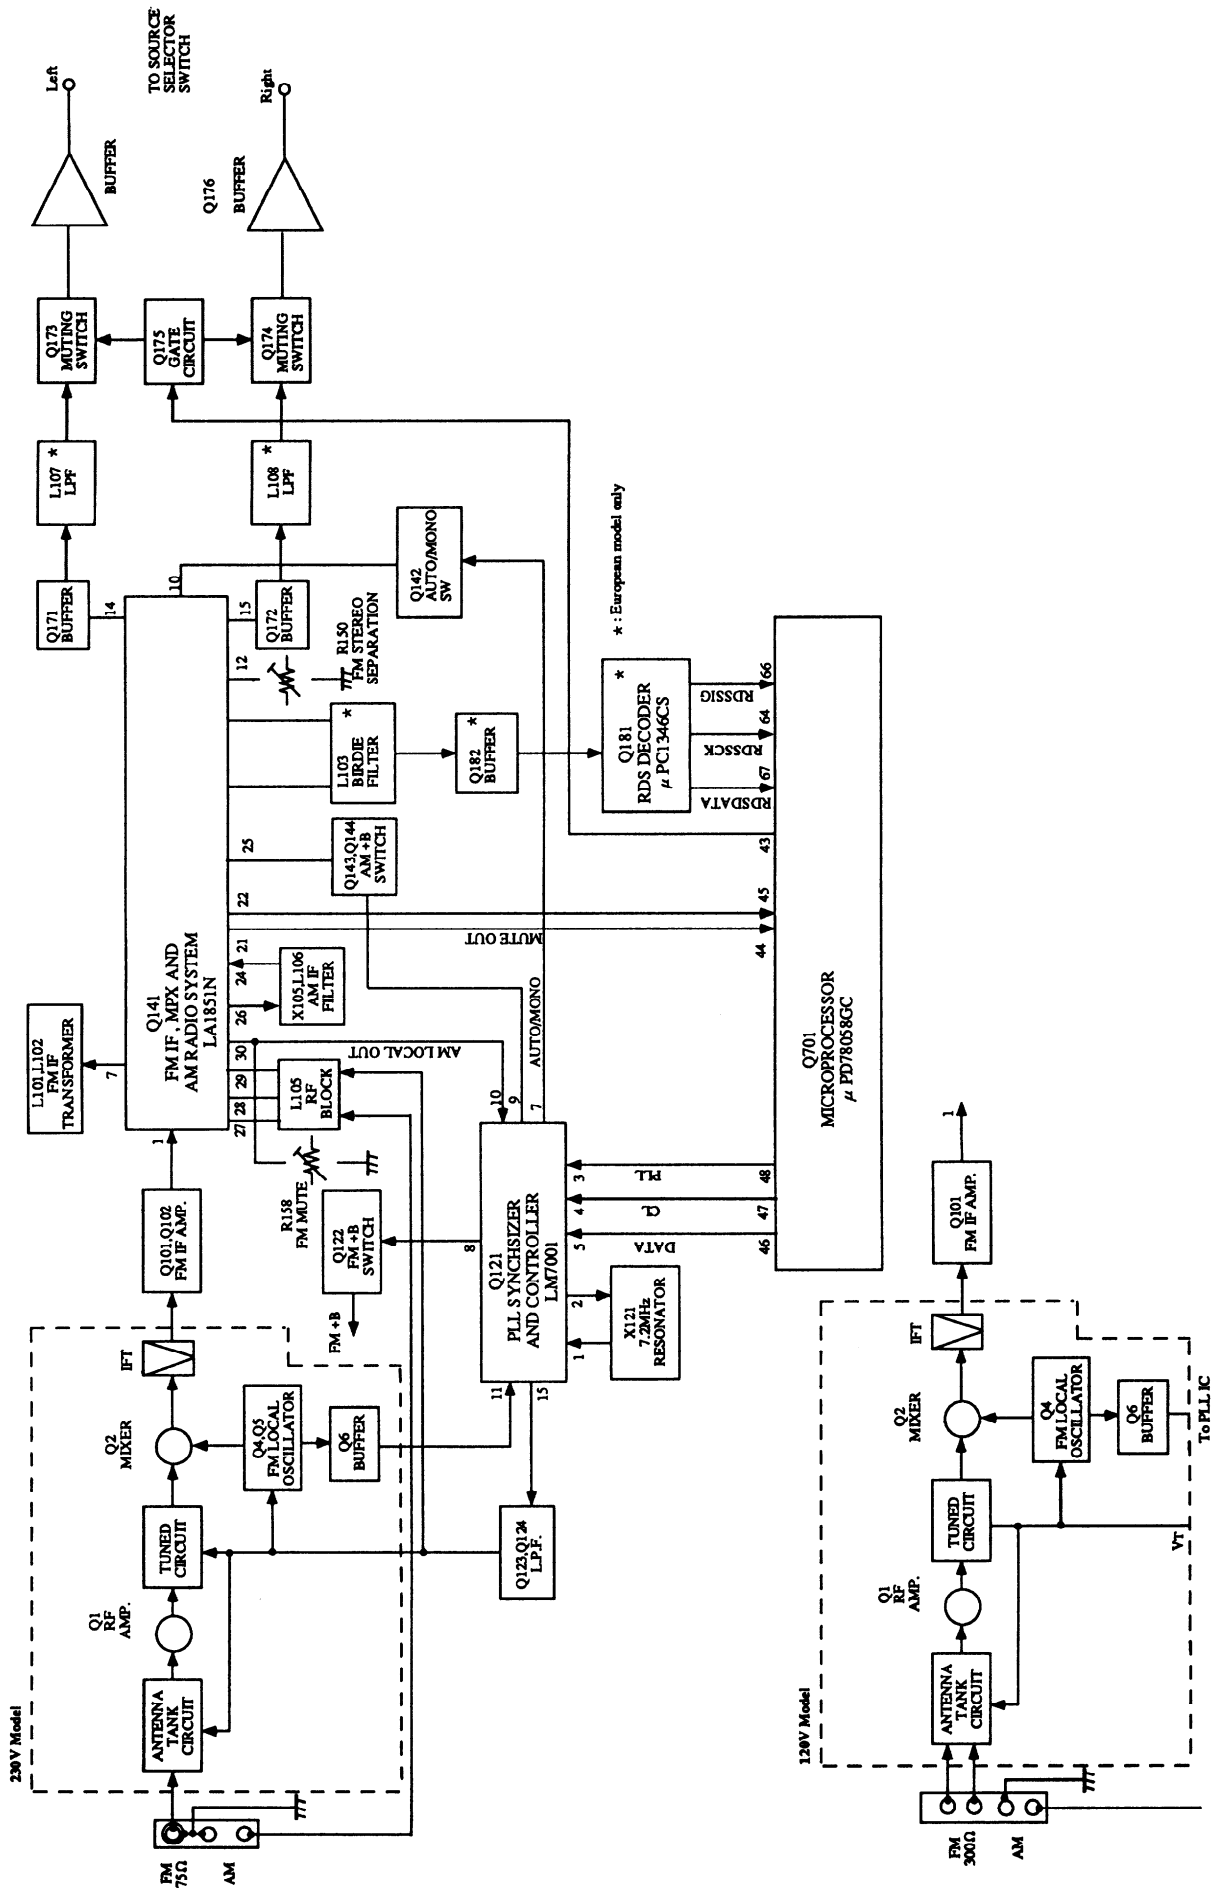

VIDEO SECTION

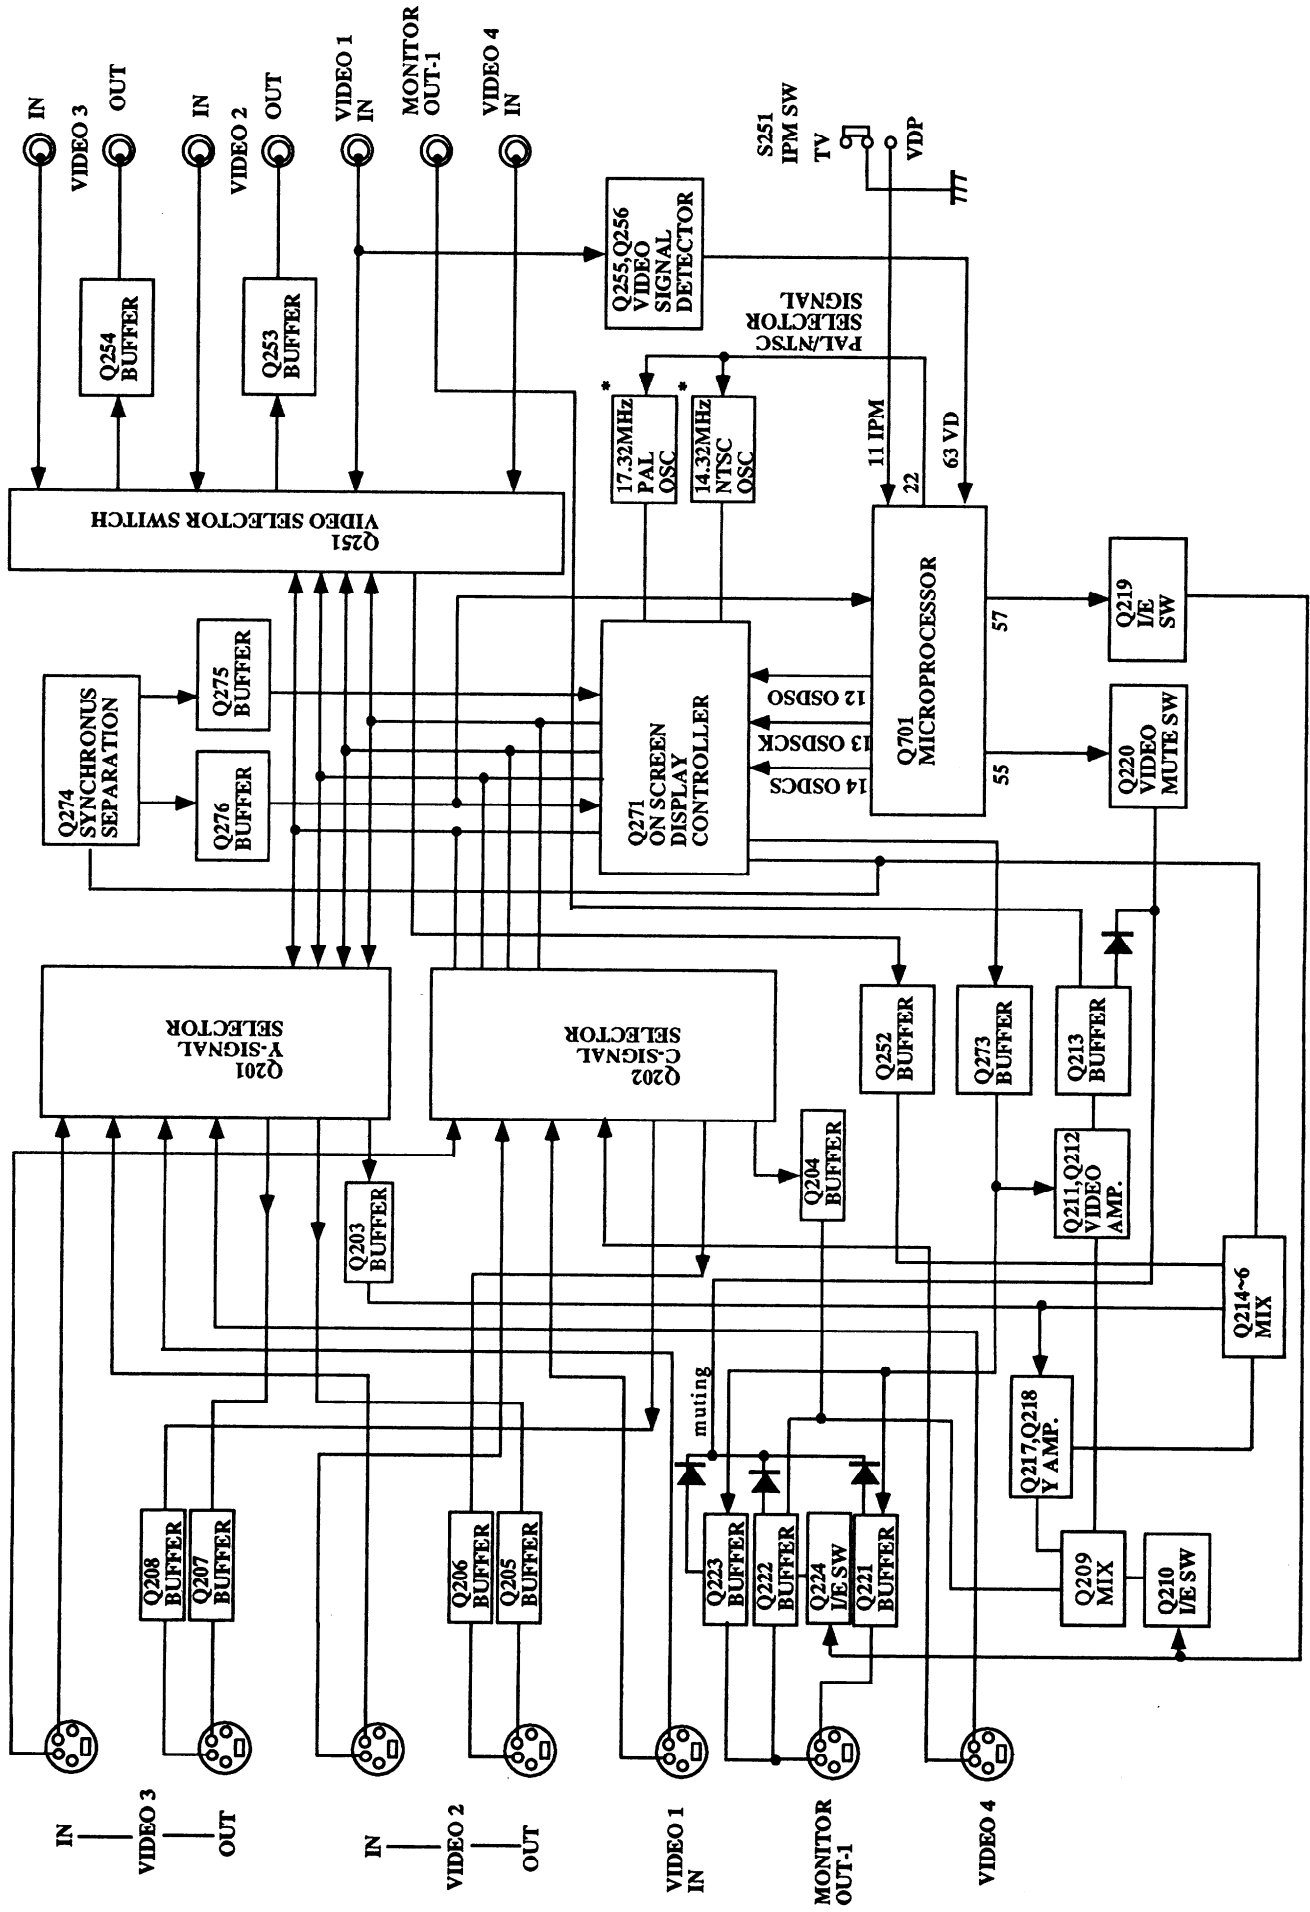

# MICROPROCESSOR-CONNECTION DIAGRAM

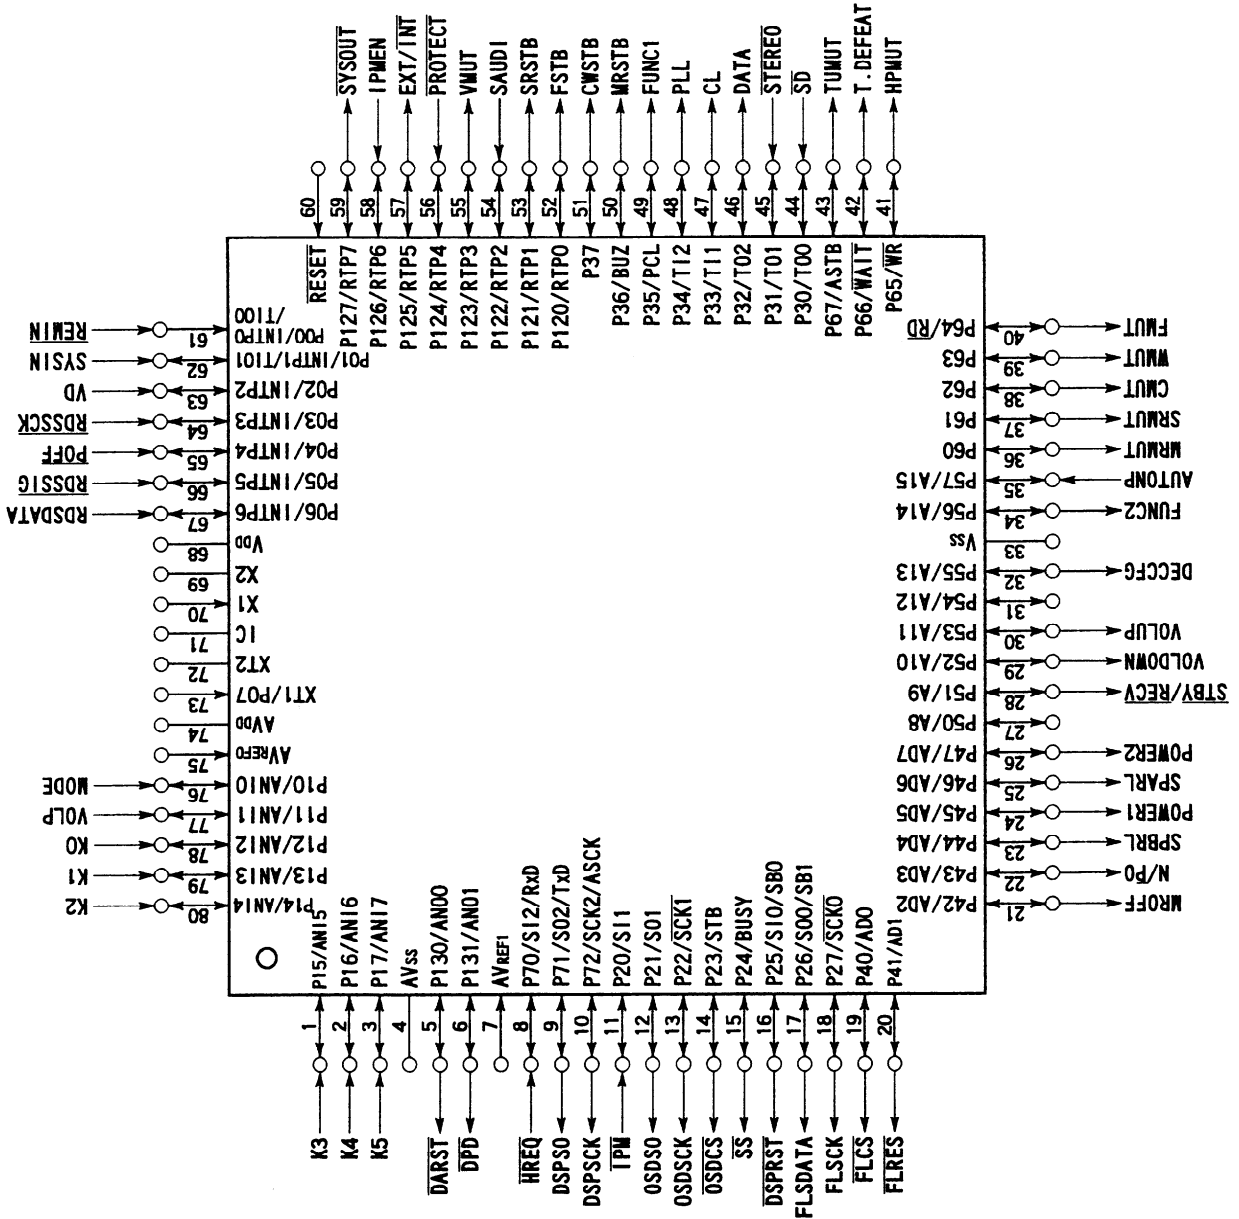


# MICROPROCESSOR TERMINAL DESCRIPTION

Pin No.	Terminal	I/O	Description
1	K3	I	Operation key connection terminal
2	K4	I	Operation key connection terminal
3	K5	I	Operation key connection terminal
4	AVSS	O	Ground terminal for AD converter
5	DARST	O	Reset signal output terminal for DA converter
6	DPD	O	Power source control output terminal for digital section
7	AVREF1	I	Reference voltage terminal for DA converter
8	HREQ	I	Connect to the terminal HREQ of DSP IC Q811.
9	DSPSO	O	Data output terminal for DSP IC.
10	DSPSCK	O	Clock output. Connect to the terminal SCK/SCL of DSP IC.
11	IPM	I	Video I signal input terminal
12	OSDSO	O	Serial data output terminal for on-screen display control IC.
13	OSDSCK	O	Clock output terminal for on-screen display control IC.
14	OSDCS	O	Chip selector output terminal for on-screen display control IC.
15	SS	O	Connect to the terminal SS of DSP IC.
16	DSPRST	O	Connect to the terminal DSP of DSP IC.
17	FLSDATA	O	Data output terminal for FL tube drive IC.
18	FLSCK	O	Clock output terminal for FL tube drive IC.
19	FLCS	O	Chip select output terminal for FL tube drive IC.
20	FLRES	O	Reset output terminal for FL tube drive IC.
21	MROFF	O	MR control output terminal
22	N/P0	O	NTSC/PAL selector output terminal
23	SPBRL	O	Speaker relay B control output terminal
24	POWER1	O	Power switch relay control output terminal
25	SPARL	O	Speaker relay A control output terminal
26	POWER2	O	B+ switch output terminal for power amplifier
27	NC		
28	STBY/RECV	O	Stand-by and Receiving indicator output terminal
29	VOLDOWN	O	Volume control output terminal
30	VOLUP	O	Volume control output terminal
31	NC		
32	DECCFG	O	AC-3 control output terminal
33	Vss		Ground terminal
34	FUNC2	O	Connect to the terminal FUNC of surround selector IC Q1340.
35	AUTONP	I	NTSC/PAL selector terminal for on-screen display.
36	MRMUT	O	Muting control output terminal for multi room signal
37	SIRMUT	O	Muting control output terminal for surround channel amplifier
38	CMUT	O	Muting control output terminal for center channel amplifier
39	WMUT	O	Muting control output terminal for sub woofer
40	FMUT	O	Muting control output terminal for front channel amplifier

Pin No.	Terminal	I/O	Description
41	HPMUT	O	Not used.
42	T.DEFEAT	O	Not used.
43	TUMUT	O	Muting control output terminal for tuner section
44	SD	I	Broadcast detection input terminal more than muting level
45	STEREO	I	FM stereo broadcast detection input terminal
46	DATA	O	Data output terminal for PLL IC, selector IC and electro volume IC.
47	CL	O	Clock output terminal for PLL IC, selector IC and electro volume IC.
48	PLL	O	Connect to the terminal PLL of PLL IC Q121.
49	FUNC1	O	Connect to the terminal FUNC of selector IC and electro volume IC.
50	MRSTB	O	Connect to the terminal STB of electro volume Q1408.
51	CWSTB	O	Connect to the terminal STB of electro volume Q1406.
52	FSTB	O	Connect to the terminal STB of electro volume Q1405.
53	SRSTB	O	Connect to the terminal STB of electro volume Q1407.
54	SAUDI	I	Band region selector input terminal
55	VMUT	O	Muting control output terminal for video section
56	PROTECT	I	Detection input terminal for protection circuit
57	EXT/INT	O	External/Internal selector output terminal
58	IPMEN	I	Input terminal for TV/DDP selector switch.
59	SYSOUT	O	System code output terminal
60	RESET	I	System reset input terminal
61	REMIN	I	Remote control signal input terminal
62	SYSIN	I	System code input terminal
63	VD	I	Video signal detection input pin
64	RDSSCK	I	Clock input terminal from RDS decoder $\mu$ PD1346CS.
65	POFF	I	Power stoppage detection input terminal
66	RDSSIG	I	Signal input terminal from RDS decoder $\mu$ PD1346CS.
67	RDSDATA	I	Data input terminal from RDS decoder $\mu$ PD1346CS.
68	VDD		Power supply terminal (+5V)
69	X2		Ceramic resonator connection terminals for main system
70	X1		Connect the ceramic resonator 5.0MHz.
71	IC		Internal connection terminal.
72	XT2		Crystal connection terminal for sub-system
73	XT1		Crystal connection terminal for sub-system
74	AVDD		Power supply terminal for A/D converter
75	AVREF0	I	Reference voltage input terminal for A/D converter
76	MODE	I	Initializing input terminal of operation mode
77	VOLP	I	Volume position detection input terminal
78	K0	I	Operation key connection terminal
79	K1	I	Operation key connection terminal
80	K2	I	Operation key connection terminal

# IC BLOCK DIAGRAMS AND DESCRIPTIONS


## AK4320-VM (DA Converter)

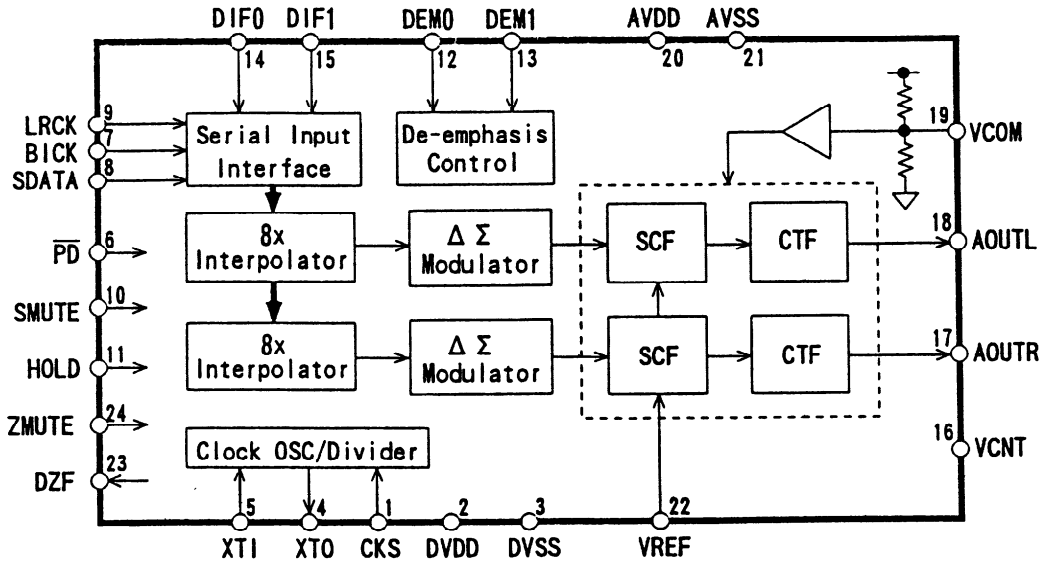

Pin No.	Terminal	I/O	Description	Pin No.	Terminal	I/O	Description
1	CKS	I	Clock select pin	13	DEM1	I	De-emphasis mode pin
2	DVDD		Power supply pin for digital section	14	DIF0	I	Input format pin
3	DVSS		Ground pin for digital section	15	DIF1	I	Input format pin
4	XTO	O	Crystal resonator connection pin	16	VCNT	O	Muting voltage control pin
5	XTI	I	Clock input pin	17	AOUTR	O	Analog signal pin for right channel
6	$\overline{\text{PD}}$	I	Power down pin	18	AOUTL	O	Analog signal pin for left channel
7	BICK	I	Serial bit clock pion	19	ACOM	O	Comman voltage pin
8	SDATA	I	Serial data input pin	20	AVDD		Power supply pin for analog section
9	LRCK	I	L/R clock pin	21	AVSS		Ground pin for analog section
10	SMUTE	I	Soft muting pin	22	VREF	I	Reference voltage input pin
11	HOLD	I	Soft muting hold pin	23	DZF	O	Zero input detector pin
12	DEM0	I	De-emphasis mode pin	24	ZMUTE	I	Zero muting pin




**BA7046 (Synchronous Separation)**

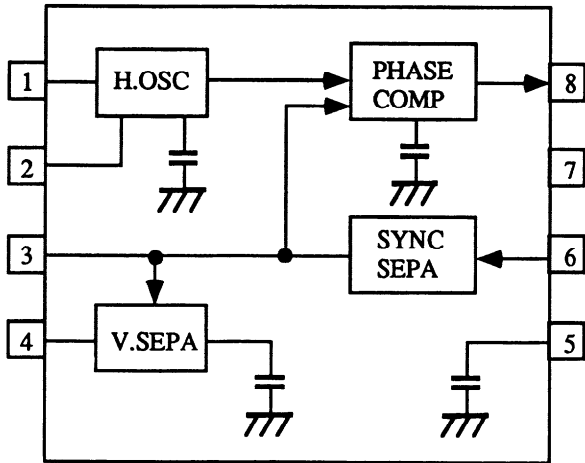

Pin No.	Function
1	Horizontal resonator resistor terminal
2	HD output terminal
3	Synchronizing output terminal
4	VD output terminal
5	Ground terminal
6	Video input terminal
7	Power source terminal
8	Phase comparator output terminal

**BA7625 (Video Selector)**

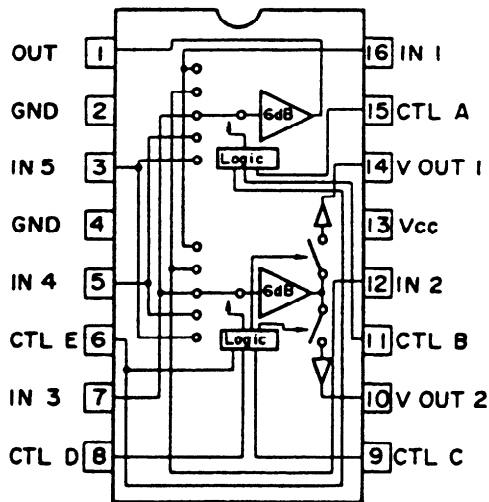



#15	#11	#6	#1
A	B	E	MONITOR OUT
L	L	X	IN1
H	L	X	IN2
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5

#9	#8	#6	#14
C	D	E	VOUT 1
L	L	X	
H	L	X	IN2
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5



X: Don't care

#15	#11	#6	#10
A	B	E	VOUT 2
L	L	X	IN1
H	L	X	
L	H	X	IN3
H	H	L	IN4
H	H	H	IN5


M66004FP (FL Tube Driver)

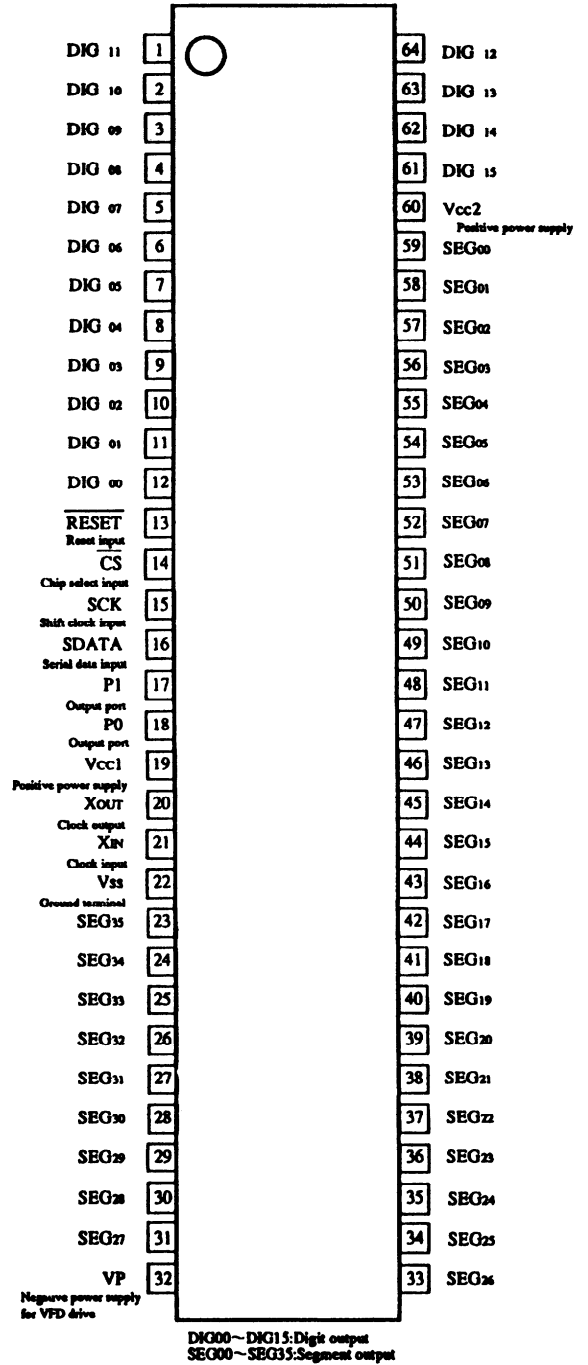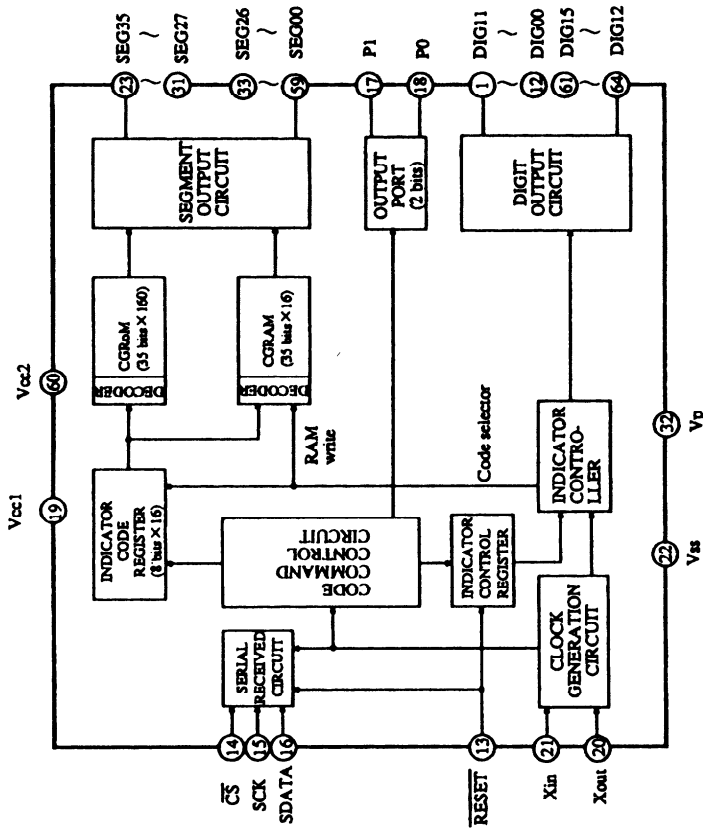


M35010-084SP (ON Screen Display Controller)

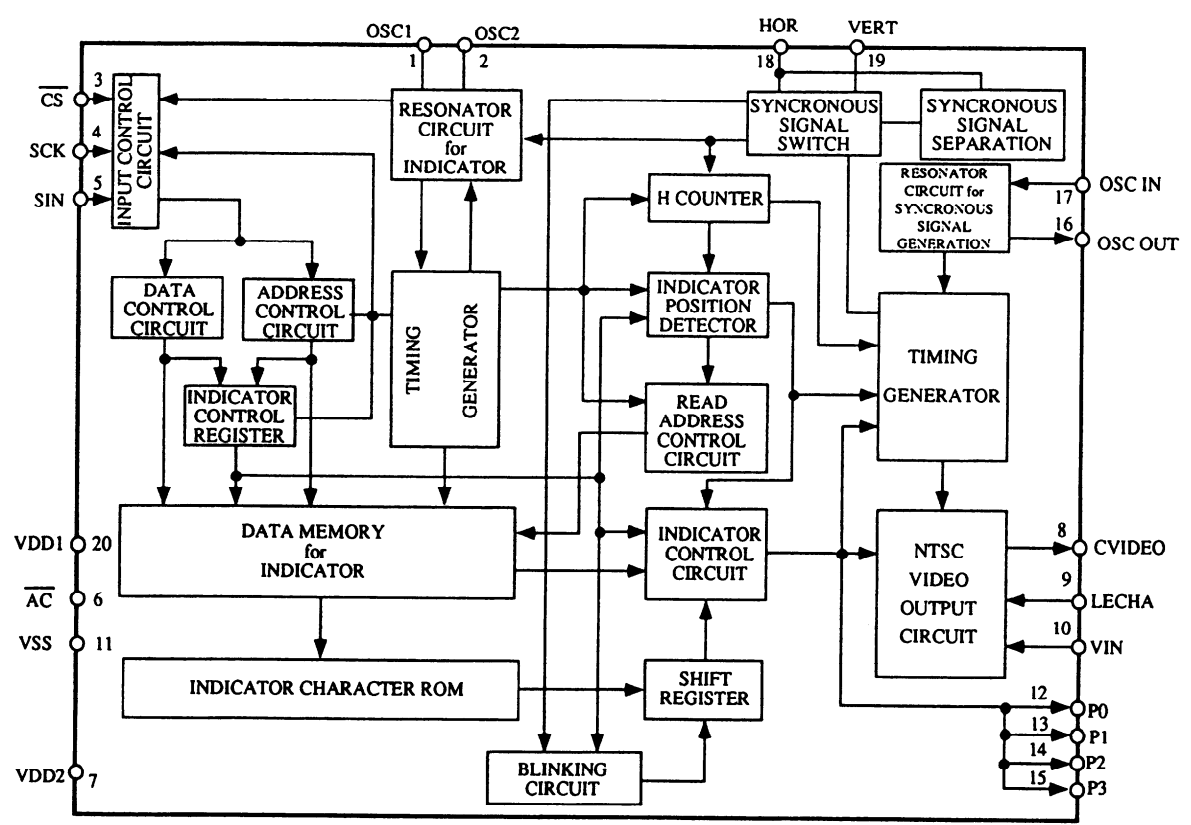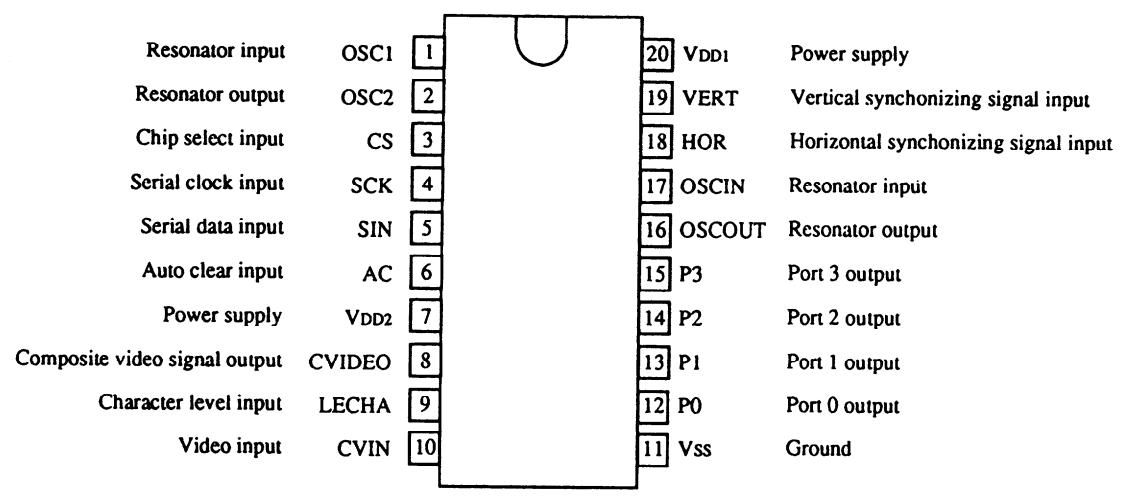

### TC9163AF (Analog Switch)

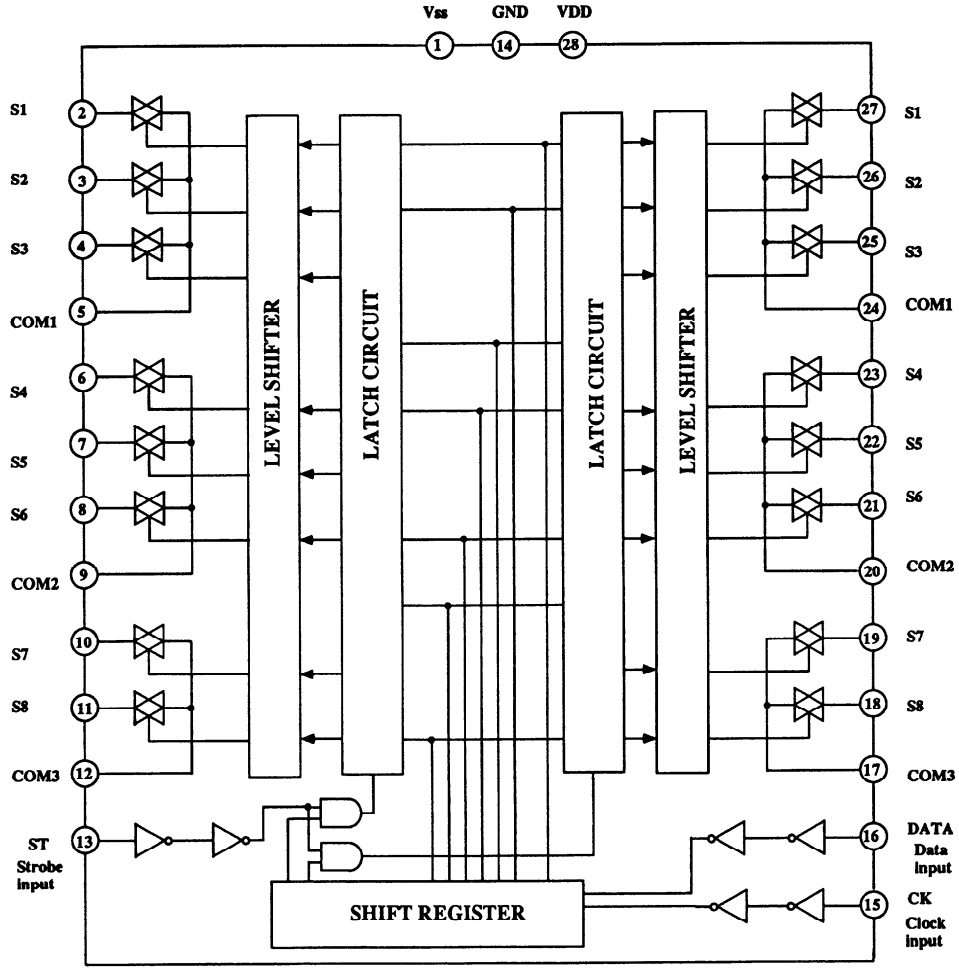


### TA7291 (Volume Motor Control)

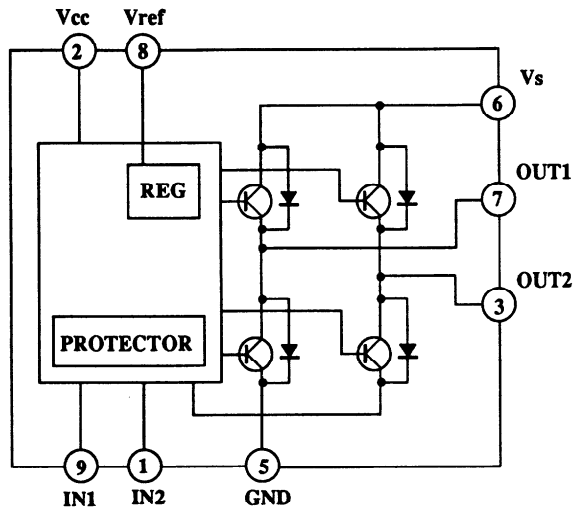


INPUT		OUTPUT		MODE
IN1	IN2	OUT1	OUT2	
0	0	∞	∞	STOP
1	0	H	L	CW/CCW
0	1	L	H	CCW/CW
1	1	L	L	BRAKE

CCW:Counter clockwise direction  
CW:Clockwise direction

TC9212F (Electro Volume)

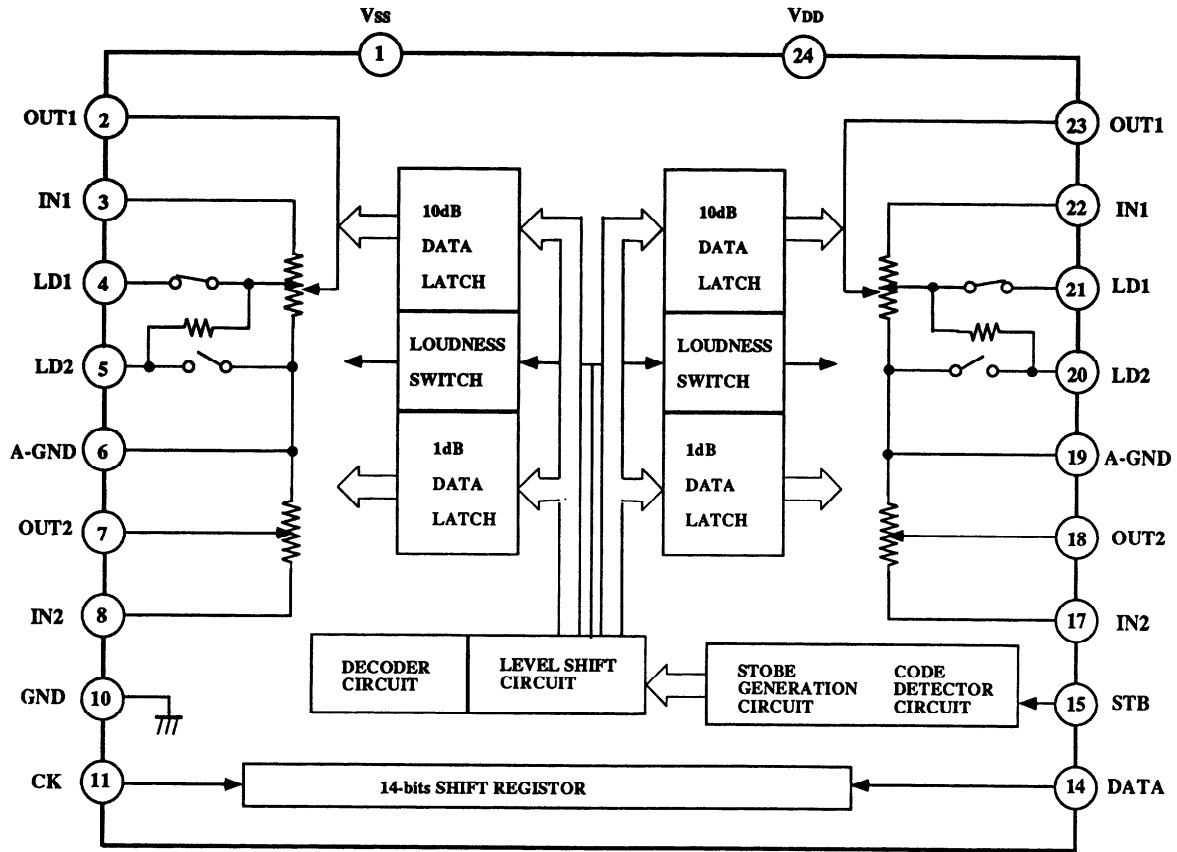

LC32464-80 / LH2464-10 (D RAM)

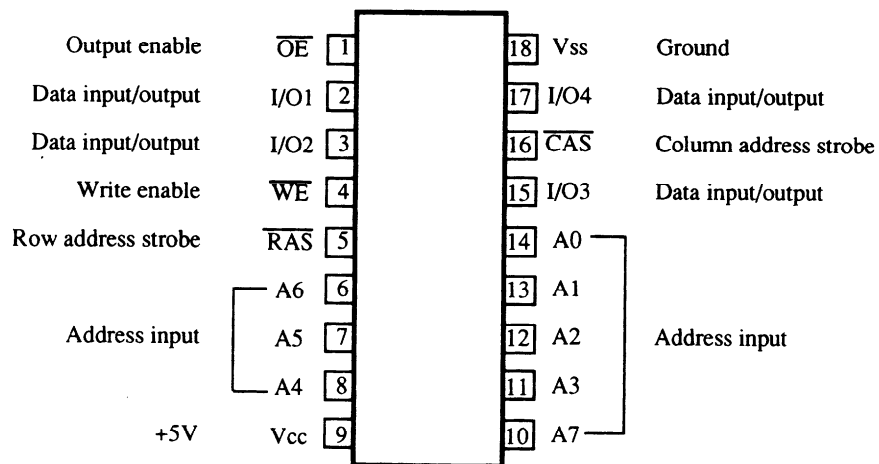


## XC56004FJ66 (DSP)

Pin No.	Terminal	I/O	Description
41	MOSI/HA0	I/O	SPI Master-Out-Slave-In/T2C Slave Address 0
42	SS/HA2	I	SPI Slave Select/T2C Slave Address 2
43	HREQ	I/O	Host Request
44	SGND	O	SAI, SHI & ONCE output buffer ground pin
45	SDO2	O	Serial Output Data 2
46	SDO1	O	Serial Output Data 1
47	SDO0	O	Serial Output Data 0
48	SVCC	O	SAI, SHI & ONCE output buffer power supply pin
49	SCKT	I/O	Transmit Serial Clock
50	WST	I/O	Transmit word Selector
51	SCKR	I/O	Receive Serial Clock
52	QGND	O	Internal Logic ground pin
53	QVCC	O	Internal Logic power supply pin
54	SGND	O	SAI, SHI & ONCE output buffer ground pin
55	WSR	I/O	Receive Word Select
56	SDI1	I	Serial data Input 1
57	SDI0	I	Serial data Input 0
58	DSO	O	Debug Serial Output
59	DSI/OS0	I/O	Debug Serial Input/Chip Status 0
60	DSCK/OS1	I/O	Debug Serial Clock/Chip Status 1
61	DR	I	Debug Request Input
62	MD7	I/O	These pins provide the data bus for EMI accesses. They are inputs during reads
63	MD6	I/O	from external memory, outputs during writes to external memory and are three-stated
64	MD5	I/O	if no external access is taking place.
65	MD4	I/O	
66	DGND	O	EMI data bus & GPIO output ground pin
67	MD3	I/O	These pins provide the data bus for EMI accesses. They are inputs during reads
68	MD2	I/O	from external memory, outputs during writes to external memory and are three-stated
69	MD1	I/O	if no external access is taking place.
70	DVCC	O	EMI data bus & GPIO output power supply pin
71	MD0	I/O	This pin provides the data bus for EMI accesses.
72	DGND	O	EMI data bus & GPIO output ground pin
73	GPIO3	I/O	General Purpose Input/Output
74	GPIO2	I/O	General Purpose Input/Output
75	GPIO1	I/O	General Purpose Input/Output
76	GPIO0	I/O	General Purpose Input/Output
77	MRD	O	Data Read Strobe: This output is asserted when reading external memory.
78	MWR	O	Data Write Strobe: This output is asserted when writing to external memory.
79	MA17/MRAS	O	This output operates as the non-multiplexed address line 17 or as Chip Select 1 for SRAM accesses.
80	MA16/MCAS	O	This output operates as the non-multiplexed address line 16 or as Chip Select 2 for SRAM accesses.


Pin No.	Terminal	I/O	Description
1	AGND	O	EMI control output buffers ground pin
2	MCS0	O	This output is Chip Select 0 for SRAM accesses.
3	MA15/MCS3	O	This output operates as the non-multiplexed address line 15 or as Chip select 3 for SRAM accesses.
4	MA14	O	This pin provides the multiplexed row/column address for DRAM access.
5	MA13	O	This pin provides the multiplexed row/column address for DRAM access.
6	AVCC	O	EMI address/control output buffers power supply pin
7	MA12	O	This pin provides the multiplexed row/column address for DRAM access.
8	AGND	O	EMI address output buffer ground pin
9	QVCC	O	Internal Logic power supply pin
10	QGND	O	Internal Logic ground pin
11	MA11	O	This pin provides the multiplexed row/column address for DRAM access.
12	MA10	O	This pin provides the multiplexed row/column address for DRAM access.
13	MA9	O	This pin provides the multiplexed row/column address for DRAM access.
14	MA8	O	This pin provides the multiplexed row/column address for DRAM access.
15	AGND	O	EMI address output buffer ground pin
16	MA7	O	This pin provides the multiplexed row/column address for DRAM access.
17	AVCC	O	EMI address/control output buffers power supply pin
18	MA6	O	This pin provides the multiplexed row/column address for DRAM access.
19	MA5	O	This pin provides the multiplexed row/column address for DRAM access.
20	MA4	O	This pin provides the multiplexed row/column address for DRAM access.
21	AGND	O	EMI address output buffer ground pin
22	MA3	O	This pin provides the multiplexed row/column address for DRAM access.
23	MA2	O	This pin provides the multiplexed row/column address for DRAM access.
24	MA1	O	This pin provides the multiplexed row/column address for DRAM access.
25	MA0	O	This pin provides the multiplexed row/column address for DRAM access.
26	SCK/SCL	I/O	SPI Serial Clock/T2C Serial Clock
27	EXTAL	I	This input should be connect to an external clock source.
28	QVCC	O	Internal Logic power supply pin
29	QGND	O	Internal Logic ground pin
30	PNIT	I	PLL Initialization pin
31	PGND	O	GND dedicated to the analog PLL circuits
32	PCAP	I	Off-chip capacitor for PLL filter
33	PVCC	O	Vcc dedicated to the analog PLL circuits(PVCC)
34	SGND	O	SAI, SHI & ONCE output buffer ground pin
35	MISO/SDA	I/O	SPI Master-In-Slave-Out/T2C Data and Acknowledge
36	RESET	I	This Schmitt trigger input is a direct hardware reset of the processor.
37	MODA/IRQA	I	Mode Selector A/External Interrupt Request A/Stop Recovery
38	MODB/IRQB	I	Mode Select B/External Interrupt Request B
39	MODC/NMI	I	Mode Select C/Non-Maskable Interrupt Request
40	SVCC	O	SAI, SHI & ONCE output buffer power supply pin

TC9274N-008 (Analog Switch)


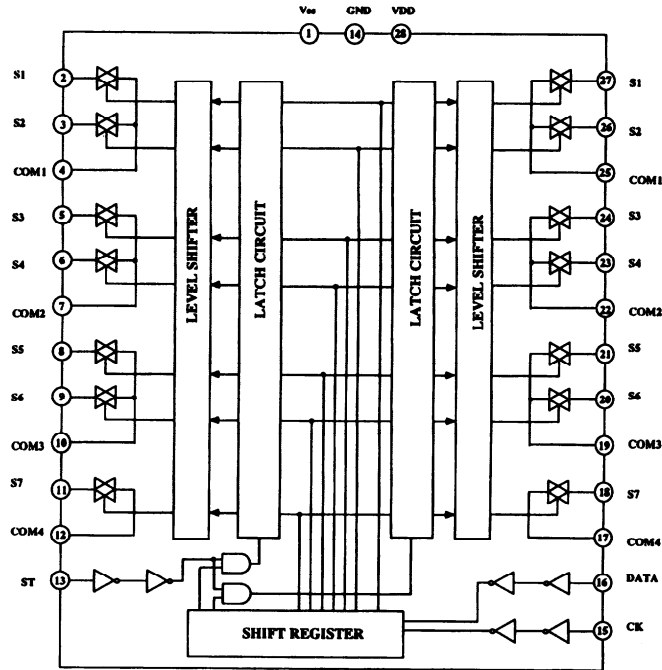


Pin No.	Symbol	Function
1	Vss	Power supply pin (-)
14	GND	Ground pin
28	VDD	Power supply pin (+)
2,3,5,6,8,9,11	S1 ~ S7	Switch input/output pins
27,26,24,23,21,20,18	S1 ~ S7	Switch input/output pins
4,7,10,12	COM1 ~ COM4	Common pins
25,22,19,17	COM1 ~ COM4	Common pins
13	ST	Strobe input pin for data interruption
15	CK	Clock input for data transfer
16	DATA	Serial data input pin for switch setting

TC9162AN (Analog Switch)


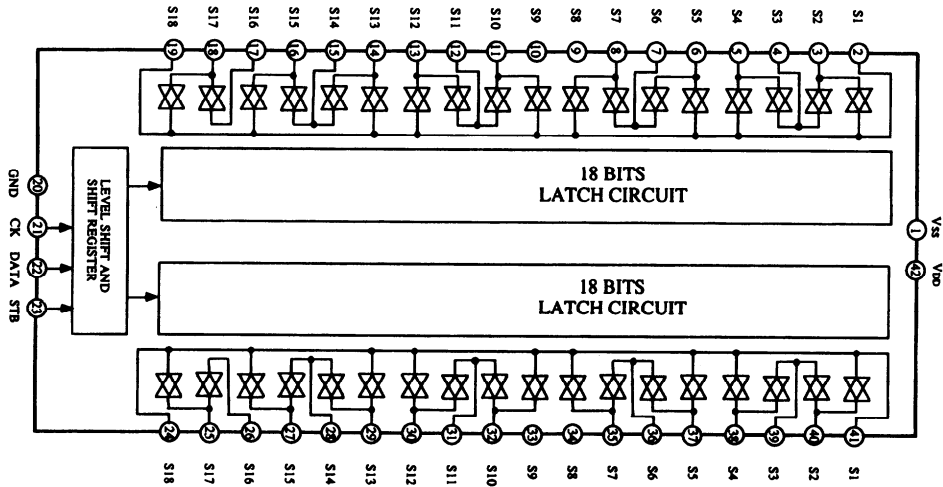


### TLC320AD58C (AD Converter)

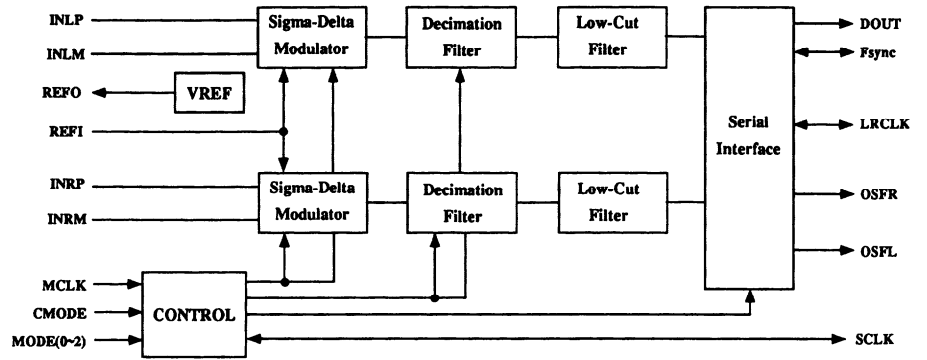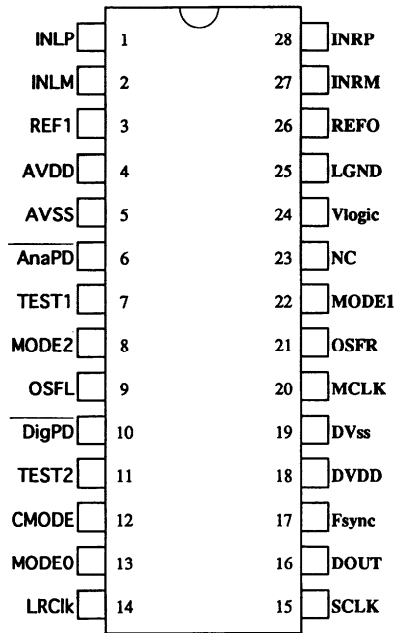



13BT-141GK (FL Tube)

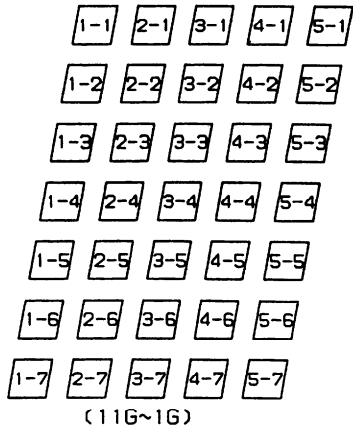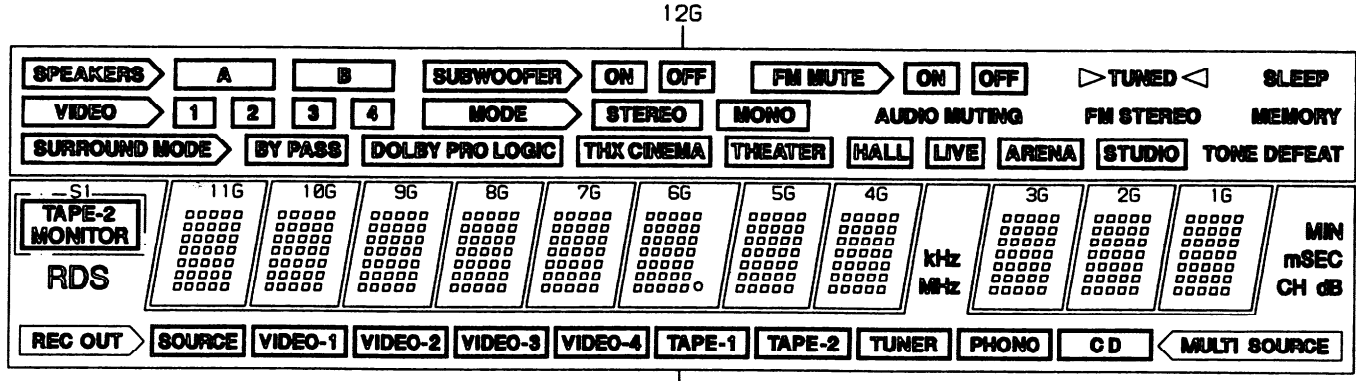

64	63	62	61	60	59	58	57
F2	F2	NP	NP	P36	P35	P34	P33
56	55	54	53	52	51	50	49
P32	P31	P30	P29	P28	P27	P26	P25
48	47	46	45	44	43	42	41
P24	P23	P22	P21	P20	P19	P18	P17
40	39	38	37	36	35	34	33
P16	P15	P14	P13	P12	P11	P10	P9
32	31	30	29	28	27	26	25
P8	P7	P6	P5	P4	P3	P2	P1
24	23	22	21	20	19	18	17
NC	NC	NC	NC	NC	NC	NC	13G
16	15	14	13	12	11	10	9
12G	11G	10G	9G	8G	7G	6G	5G
8	7	6	5	4	3	2	1
4G	3G	2G	1G	NP	NP	F1	F1

F1,F2:Filament  
 NP: No pin  
 NC: No connection  
 1G~13G: Grid

ANODE CONNECTION

	13G	12G	11G~7G	6G	5G~1G
P1	MIN	SLEEP	1-1	1-1	1-1
P2	mSEC	MEMORY	2-1	2-1	2-1
P3	dB	AUDIO MUTING	3-1	3-1	3-1
P4	CH	TONE DEFEAT	4-1	4-1	4-1
P5	MULTI SOURCE	-	5-1	5-1	5-1
P6	REC OUT	TUNED	1-2	1-2	1-2
P7	SOURCE	TUNED	2-2	2-2	2-2
P8	(SOURCE)	FM STEREO	3-2	3-2	3-2
P9	VIDEO-1	OFF (FM MUTE)	4-2	4-2	4-2
P10	(VIDEO-1)	ON (FM MUTE)	5-2	5-2	5-2
P11	VIDEO-2	FM MUTE	1-3	1-3	1-3
P12	(VIDEO-2)	STUDIO	2-3	2-3	2-3
P13	VIDEO-3	ARENA	3-3	3-3	3-3
P14	(VIDEO-3)	LIVE	4-3	4-3	4-3
P15	VIDEO-4	HALL	5-3	5-3	5-3
P16	(VIDEO-4)	THEATER	1-4	1-4	1-4
P17	TAPE-1	THX CINEMA	2-4	2-4	2-4
P18	(TAPE-1)	DOLBY PRO LOGIC	3-4	3-4	3-4
P19	TAPE-2	BY PASS	4-4	4-4	4-4
P20	(TAPE-2)	SURROUND MODE	5-4	5-4	5-4
P21	TUNER	MONO	1-5	1-5	1-5
P22	(TUNER)	STEREO	2-5	2-5	2-5
P23	PHONO	MODE	3-5	3-5	3-5
P24	(PHONO)	OFF (SUBWOOFER)	4-5	4-5	4-5
P25	CD	ON (SUBWOOFER)	5-5	5-5	5-5
P26	(CD)	SUBWOOFER	1-6	1-6	1-6
P27	kHz	B	2-6	2-6	2-6
P28	MHz	A	3-6	3-6	3-6
P29	S1	SPEAKERS	4-6	4-6	4-6
P30	RDS	4	5-6	5-6	5-6
P31	-	3	1-7	1-7	1-7
P32	-	2	2-7	2-7	2-7
P33	-	1	3-7	3-7	3-7
P34	-	VIDEO	4-7	4-7	4-7
P35	-	-	5-7	5-7	5-7
P36	-	-	-	o	-

# PRINTED CIRCUIT BOARD-PARTS LIST

## MAIN CIRCUIT PC BOARD (NAAR-5567-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q301	22240191	NJM4565D-D
Q302~Q308	22240293 or 22240247	NJM4558L-D or BA15218N
Q309	22240798	TC9162AN
Q310	22240829	TC9274N-008
Q701	22240938R3	MPD78058GC-207
Q704	22240239	TA7291S
Q921	222780125NEC	MPC78M12HF
Q922	222790125JRC	NJM79M12FA
Q923	222780055MIT	M5F78M05L
Q924	222790055MIT	M5F79M05L
Q925	222780565JRC	NJM78M56FA
	<b>Transistors</b>	
Q702	221282 or 2213560	DTC144ES or RN1204
Q703	2213510 or 2214350	DTA114ES or RN2202
Q926	2211455	2SA1015-GR
Q927,Q931	2213284 or 2212115	2SC1740S-R or 2SC2458-GR
Q928	2202116 or 2202115	2SD2061-F or 2SD2061-E
Q929	2211255	2SC1815-GR
Q930	2213640 or 2214660	DTC123JS or RN1205
	<b>Diodes</b>	
D701~D705	223205,	1SS270A,
D707,D925	223163 or	1SS133 or
D926,D928	223222	WG713A
D706	224470562	MTZJ5.6B, Zener
D921~D924	22380260,	RL1N4003,
D927,D929	22380035 or	GP104003E or
D930,D939	22380046	AM01Z
D931	224473604	MTZJ36D, Zener
D932~D935	223205,	1SS270A,
D937,D938	223163 or 223222	1SS133 or WG713A
D936	224470623	MTZJ6.2C, Zener
D940	22380260, 22380035 or 22380046	RL1N4003, GP104003E or AM01Z
	<b>Coil</b>	
L701	233454K220	NCH-1452, 220K, Choke
	<b>Resonator</b>	
X701	3010242	CST5.00MGW, Ceramic
	<b>Capacitors</b>	
C302,C307	354741009	10 $\mu$ F, 16V,Elect.
C304,C404	354721019	100 $\mu$ F, 6.3V,Elect.
C305,C405	374726824	6800pF $\pm$ 5%,50V, Plastic
C306,C406	374721824	1800pF $\pm$ 5%,50V, Plastic
C308,C408	374721015	100pF $\pm$ 10%,50V, Plastic <D>
C308,C408	374724714	470pF $\pm$ 5%,50V, Plastic <P>
C309,C312	354741009	10 $\mu$ F, 16V,Elect.
C315,C317	354741009	10 $\mu$ F, 16V,Elect.
C320,C323	354741009	10 $\mu$ F, 16V,Elect.
C325,C331	354741009	10 $\mu$ F, 16V,Elect.
C402,C407	354741009	10 $\mu$ F, 16V,Elect.
C409,C412	354741009	10 $\mu$ F, 16V,Elect.
C415,C417	354741009	10 $\mu$ F, 16V,Elect.
C420,C423	354741009	10 $\mu$ F, 16V,Elect.
C425,C431	354741009	10 $\mu$ F, 16V,Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Capacitors</b>	
C701,C704	354721019	100 $\mu$ F, 6.3V,Elect.
C702	3000076 or	0.1F, 5.5V or
C702	3000078	0.1F, 5.5V, Super
C703	375524744	0.47 $\mu$ F $\pm$ 5%,50V, Plastic
C705	354780109	1 $\mu$ F, 50V,Elect.
C707,C926	354741009	10 $\mu$ F, 16V,Elect.
C711	354721019	100 $\mu$ F, 6.3V,Elect.
C923	354754729	4700 $\mu$ F, 25V,Elect.
C924	354761029	1000 $\mu$ F, 35V,Elect.
C928,C931	354741009	10 $\mu$ F, 16V,Elect.
C929,C941	354761019	100 $\mu$ F, 35V,Elect.
C933,C936	354741009	10 $\mu$ F, 16V,Elect.
C934	354751029	1000 $\mu$ F, 25V,Elect.
C937	354762219	220 $\mu$ F, 35V,Elect.
C938	354782219	220 $\mu$ F, 50V,Elect.
C944	354741009	10 $\mu$ F, 16V,Elect.
C945	354754719	470 $\mu$ F, 25V,Elect.
	<b>Resistors</b>	
R921,R922	453532294	0.22 $\Omega$ $\pm$ 5%,1/2W,Metal
R923	453530104	1 $\Omega$ $\pm$ 5%,1/2W,Metal
R924	453530824	8.2 $\Omega$ $\pm$ 5%,1/2W,Metal
R925	443621204	12 $\Omega$ $\pm$ 5%,1W,Metal oxide
R926,R929	443621804	18 $\Omega$ $\pm$ 5%,1W,Metal oxide
R928,R932	443522204	22 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R930,R931	443621514	150 $\Omega$ $\pm$ 5%,1W,Metal oxide
R938	443522204	22 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R939	443523314	330 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R941,R943	453530104	1 $\Omega$ $\pm$ 5%,1/2W,Metal
R1931~R1938	443621814	180 $\Omega$ $\pm$ 5%,1W,Metal oxide
R1921~R1924	453632294	0.22 $\Omega$ $\pm$ 5%,1W,Metal
	<b>Terminals</b>	
P301~P303	25045300	NPJ-6PDBL159, PIN JACK
P304	25045303	NPJ-4PDBL162, PIN JACK
	<b>Wire Traps</b>	
JL351b	25055633	NPLG-12P595
JL701a	25050980	NSCT-40P767
	<b>Wire holders</b>	
JL251a,JL941a	25051096	NSCT-12P883
	<b>Plugs</b>	
P102a,P1402a	25055653	NPLG-16P609
P102a,P1403a	25055651	NPLG-12P607
P1401a	25055649	NPLG-8P605
P1404a	25055652	NPLG-14P608
P321a	25055133	NPLG-3P117
P921a	25055168	NPLG-5P152
	<b>Radiators</b>	
Q921a,Q923a	27160209	RAD-67

## FRONT/CENTER POWER AMPLIFIER PC BOARD (NAAF-5572-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Transistors</b>	
Q501,Q601	2215428 or 2215427	2SC5169-H or 2SC5169-G
Q502,Q602	2211732 or 2211733	2SC1845-F or 2SC1845-E
Q503,Q508	2213284 or	2SC1740S-R or
Q603,Q608	2212115	2SC2458-GR
Q504,Q505	2214974 or	2SA1123-R or
Q604,Q605	2214975	2SA1123-S
Q506,Q606	2211792 or 2211793	2SA992-F or 2SA992-E

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Transistors</b>			<b>Capacitors</b>	
Q507,Q509	2214984 or	2SC2631-R or	C916	374721044	0.1 $\mu$ F $\pm$ 5%, 50V, Plastic
Q607,Q609	2214985	2SC2631-S	C1502	354781009	10 $\mu$ F, 50V, Elect.
Q510,Q515	2214974 or	2SA1123-R or	C1505	354742219	220 $\mu$ F, 16V, Elect.
Q610,Q615	2214975	2SA1123-S	C1513,C1518	354741019	100 $\mu$ F, 16V, Elect.
Q511,Q611	2203010	2SC5171	C1514,C1515	354764709	47 $\mu$ F, 35V, Elect.
Q512,Q612	2203000	2SA1930	C1516	374724734	0.047 $\mu$ F $\pm$ 5%, 50V, Plastic
Q513,Q613	2202823 or	* 2SC5200-O or	C1520	354721019	100 $\mu$ F, 6.3V, Elect.
	2202822	* 2SC5200-R	C1521,C1522	354700109	1 $\mu$ F, 160V, Elect.
Q514,Q614	2202813 or	* 2SA1943-O or			<b>Resistors</b>
	<del>2202812</del>	* 2SA1943-R	R513,R514	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q516,Q616	2211732 or	2SC1845-F or	R515	443525604	56 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2211733	2SC1845-E	R516	443528204	82 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q541,Q542	2213284 or	2SC1740S-R or	R517,R523	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2212115	2SC2458-GR	R522	443524714	470 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1501	2215428 or	2SC5169-H or	R524,R525	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
	2215427	2SC5169-G	R526,R527	453630334	3.3 $\Omega$ $\pm$ 5%, 1W, Metal
Q1502	2211732 or	2SC1845-F or	R528	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
	2211733	2SC1845-E	R532	4000116	MPC74-5WK, 0.1 $\Omega$ , Metal plate
Q1503,Q1508	2213284 or	2SC1740S-R or	R533	443521524	1.5k $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2212115	2SC2458-GR	R538,R539	453530224	2.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
Q1504,Q1505	2214974 or	2SA1123-R or	R548,R549	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1515	2214975	2SA1123-S	R613,R614	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1506	2211792 or	2SA992-F or	R615	443525604	56 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2211793	2SA992-E	R616	443528204	82 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1507,Q1509	2214984 or	2SC2631-R or	R617,R623	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2214985	2SC2631-S	R622	443524714	470 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1510	2214974 or	2SA1123-R or	R624,R625	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
	2214975	2SA1123-S	R626,R627	453630334	3.3 $\Omega$ $\pm$ 5%, 1W, Metal
Q1511	2203010	2SC5171	R628	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
Q1512	2203000	2SA1930	R632	4000116	MPC74-5WK, 0.1 $\Omega$ , Metal plate
Q1513	2202823 or	* 2SC5200-O or	R633	443521524	1.5k $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2202822	* 2SC5200-R	R638,R639	453530224	2.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
Q1514	2202813 or	* 2SA1943-O or	R648,R649	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2202812	* 2SA1943-R	R911	443524724	4.7k $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
Q1516	2211732 or	2SC1845-F or	R1513,R1514	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	2211733	2SC1845-E	R1515	443525604	56 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	<b>Diodes</b>		R1516	443528204	82 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
D501,D601	223205,	1SS270A,	R1517,R1523	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
D503~D505	223163 or	1SS133 or	R1522	443524714	470 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
D603~D605	223222	WG713A	R1524,R1525	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
D502,D602	22380012	HER303F	R1526,R1527	453630334	3.3 $\Omega$ $\pm$ 5%, 1W, Metal
D911	22380273	RS804M	R1528	453530824	8.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
D1501	223205,	1SS270A,	R1532	4000116	MPC74-5WK, 0.1 $\Omega$ , Metal plate
D1503~D1505	223163 or	1SS133 or	R1533	443521524	1.5k $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	223222	WG713A	R1538,R1539	453530224	2.2 $\Omega$ $\pm$ 5%, 1/2W, Metal
D1502	22380012	HER303F	R1548,R1549	443521014	100 $\Omega$ $\pm$ 5%, 1/2W, Metal oxide
	<b>Capacitors</b>				<b>Plug</b>
C502,C602	354781009	10 $\mu$ F, 50V, Elect.	P511a	25055236	NPLG-5P22
C505,C605	354742219	220 $\mu$ F, 16V, Elect.			<b>Wire holders</b>
C513,C518	354741019	100 $\mu$ F, 16V, Elect.	JL501a	25051113	NSCT-9P900
C514,C515	354764709	47 $\mu$ F, 35V, Elect.	JL911a	25051112	NSCT-8P899
C516,C616	374724734	0.047 $\mu$ F $\pm$ 5%, 50V, Plastic			
C520,C541	354721019	100 $\mu$ F, 6.3V, Elect.			
C521,C522	354700109	1 $\mu$ F, 160V, Elect.			
C542	354780109	1 $\mu$ F, 50V, Elect.			
C613,C618	354741019	100 $\mu$ F, 16V, Elect.			
C614,C615	354764709	47 $\mu$ F, 35V, Elect.			
C620	354721019	100 $\mu$ F, 6.3V, Elect.			
C621,C622	354700109	1 $\mu$ F, 160V, Elect.			
C911,C912	374731044	0.1 $\mu$ F $\pm$ 5%, 100V, Plastic			
C913,C914	3504259	12000 $\mu$ F, 71V, Elect.			
C915	374721044	0.1 $\mu$ F $\pm$ 5%, 50V, Plastic			

CAUTION: Replacement for transistor of mark \*, if necessary must be made from the same beta group (HFE) as the original type.

**POWER SUPPLY CIRCUIT PC BOARD (NAPS-5577-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
Q951	2212115 or	2SC2458-GR
	2213284	2SC1740S-R
Q952	2213640 or	DTC123JS
	2214660	RN1205
Q953	2213830 or	DTB113ZS
	2214690	RN2226
Q961	2211733 or	2SC1845-E
	2211732	2SC1845-F
Q962	2211793 or	2SA992-E
	2211792	2SA992-F
Q971	2212445	2SK365-GR
Q972,Q973	2212115 or	2SC2458-GR
Q991,Q992	2213284	2SC1740S-R
Q974	2202116 or	2SD2061-F
	2202115	2SD2061-E
Q981,Q982	221282 or	DTC144ES
	2213560	RN1204
D951~D954	Diodes	
	22380260, 22380035 or 22380046	RL1N4003, GP104003E or AM01Z
D955,D956	223205,	1SS270A,
D961,D962	223163 or	1SS133 or
D971,D973	223222	WG713A
D974,D983	223205,	1SS270A,
D991~D993	223163 or	1SS133 or
	223222	WG713A
Coils		
L501,L551	231176	S-1.3C, S COIL
L601,L651	231176	S-1.3C, S COIL
L1501	231176	S-1.3C, S COIL
Transformer		
T902	2300670	△ NPT-1111D, Power <D>
T902	2300671	△ NPT-1111P, Power <P>
Capacitors		
C901	3500191	△ DE7150F103M
C952	354742219	220 μ F, 16V,Elect.
C961,C982	354741009	10 μ F, 16V,Elect.
C971	354721019	100 μ F, 6.3V,Elect.
C972	354761019	100 μ F, 35V,Elect.
C981	374724724	4700pF ± 5%,50V, Plastic
Resistors		
R1544,R1545	443625614	560 Ω ± 5%,1W,Metal oxide
R544,R644	443623914	390 Ω ± 5%,1W,Metal oxide
R902~R904	4000146	S3R014, Thermistor <D>
R902~R905	4000147	S5R114, Thermistor <P>
R951	453530824	8.2 Ω ± 5%,1/2W,Metal
R953	443622214	220 Ω ± 5%,1W,Metal oxide <D>
R953	443622714	270 Ω ± 5%,1W,Metal oxide <P>
R953	443622714	270 Ω ± 5%,1W,Metal oxide
R953	443622214	220 Ω ± 5%,1W,Metal oxide
Relaies		
RL501,RL502	25065510	NRL-2P5A-DC24-095
RL551,RL1501	25065510	NRL-2P5A-DC24-095
RL901,RL902	25065248	△ NRL-1P15A-DC12-29 <D>
RL901,RL902	25065508	△ NRL-1P10A-DC12-093 <P>
Fuse holders		
F901a	25050065	△ YSH403T <D>
F902a	25050065	△ YSH403T <P>
F903a	25050065	△ YSH403T <P>
F915a,F916a	25050065	△ YSH403T

CIRCUIT NO.	PART NO.	DESCRIPTION
F901	252154	△ 8A-TSC <D>
	252077	△ 4A-SE-EAK <P>
F903	252075	△ 2.5A-SE-EAK <P>
F915,F916	252153	△ 6.3A-TSC <D>
	252079	△ 6.3A-SE-EAK <P>
Wire traps		
JL501b	25050273	NSCT-9P101
JL503b	25055624	NPLG-3P586
JL551b	25050270	NSCT-6P98
JL911b	25050272	NSCT-8P100
JL915b	25050267	NSCT-3P95
JL941b	25055633	NPLG-12P595
Wire holders		
JL502b	25051112	NSCT-8P899
JL552b	25051108	NSCT-4P895
Plugs		
P901a	25055675	NPLG-2P631, P PLUG
P907a	25055167	NPLG-4P151, P PLUG
P911a	25055166	NPLG-3P150, P PLUG
P915a	25055167	NPLG-4P151, P PLUG
P971a	25055099	NPLG-2P83, P PLUG
P972a	25055708	NPLG-12P664, P PLUG
P981	25045433	HSJ-1003-01-013, JACK <D>
P981	25045293	HSJ-1003-01-012, JACK <P/DT>
P982	25045172	HSJ-1003-01-020, JACK

**AC OUTLET TERMINAL PC BOARD (NAETC-5578-1A/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
P902	25051220	△ NSCT-6P1010, AC outlet <D>

**AC OUTLET TERMINAL PC BOARD (NAETC-5579-1B)**

CIRCUIT NO.	PART NO.	DESCRIPTION
P903	25051125	△ NSCT-4P912, AC outlet <P>

**SPEAKER TERMINAL PC BOARD (NAECT-5580-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
P501	25060147	NTM-4PDMN075, Terminal
P502	25060235	NTM-6PDMN157, Terminal
JL502a	25051112	NSCT-8P899, Wire holder

**SURROUND SPEAKER TERMINAL PC BOARD (NAECT-5581-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
P551	25060147	NTM-4PDMN075, Terminal
JL552a	25051108	NSCT-4P895, Wire holder

**HEADPHONE TERMINAL PC BOARD (NAETC-5582-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
P503	25045257	YKB26-5138,Headphone jack
JL503a	25051087	NSCT-3P874, Wire holder

**NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.**

NOTE: <D> :120V model only  
<P> :230V model only  
<PT> :Taiwanese model only

# ADJUSTMENT PROCEDURES

## Preparation

### 1. Input

FM mono: 1kHz, 75kHz devi., 60dB/ $\mu$ V

FM stereo: 1kHz, 67.5kHz devi., 60dB/ $\mu$ V

Pilot signal 19kHz 7.5kHz devi.

AM: 400Hz, 30% mod.

### 2. Outputs

Connect the non-inductive type resistor of 8 ohms to the all speaker terminals unless otherwise noted.

## 1.FM ADJUSTMENT

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM IF/RF	1	Fig.1	99.0MHz 1kHz 75kHz devi. 65dBf(60dB)	—	99.0MHz	DC voltmeter	L101	0 $\pm$ 20mV	FM MUTE/MODE switch:OFF/MONO Repeat the steps 1 and 3 until no further adjustment is necessary.
	AC voltmeter					IFT on the front end	Maximum		
	Distortion analyzer					L102	Minimum		
Stereo Distortion		Fig.2	99.0MHz Ext. mod.65dBf(60dB)	Channel L or R 1kHz	99.0MHz	Distortion analyzer	IFT on the front end	Minimum	Don't turn more than $\pm 180^\circ$
Stereo Separation	1	Fig.2	99.0MHz Ext. mod. 65dBf(60dB)	Channel L 1kHz	99.0MHz	Channel R AC voltmeter	R150	Minimum	Maximum and same separation
	2			Channel R 1kHz		Channel L AC voltmeter		Minimum	
Muting Level		Fig.2	99.0MHz 19.2dBf(14dB)	—	99.0MHz	Oscilloscope	R158	Signal output	
RDS		Fig.3	99.0MHz Ext. mod.60dB	RDS data or 57kHz 3% devi.	99.0MHz	Oscilloscope	R191	Maximum	TX-SV525R only

## 2.AM ADJUSTMENT

### 120V model

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		530kHz	Digital DC voltmeter	OSC coil on RF block L151	1.4 $\pm$ 0.2V
2	600kHz 400Hz 30% mod. 60dB/m	600kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	990kHz 400Hz 30% mod. 60dB/m	990kHz	AC voltmeter	L152	Maximum

### Reference Specification






FM tuned voltage:87.5MHz~108.0MHz  
More than 1.3V ~Less than 10V  
AM tuned voltage:530kHz~1710kHz  
1.4 $\pm$ 0.2V ~Less than 9.0V

### 230V models

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1		522kHz or 531kHz	Digital DC voltmeter	OSC coil on RF block L151	1.3 $\pm$ 0.1V
2	603kHz 400Hz 30% mod. 60dB/m	603kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	999kHz 400Hz 30% mod. 60dB/m	999kHz	AC voltmeter	L152	Maximum

### Reference Specification

FM tuned voltage:87.5MHz~108.0MHz  
More than 1.3V ~Less than 10V  
AM tuned voltage:522kHz~1611kHz  
1.3 $\pm$ 0.2V ~Less than 9.0V

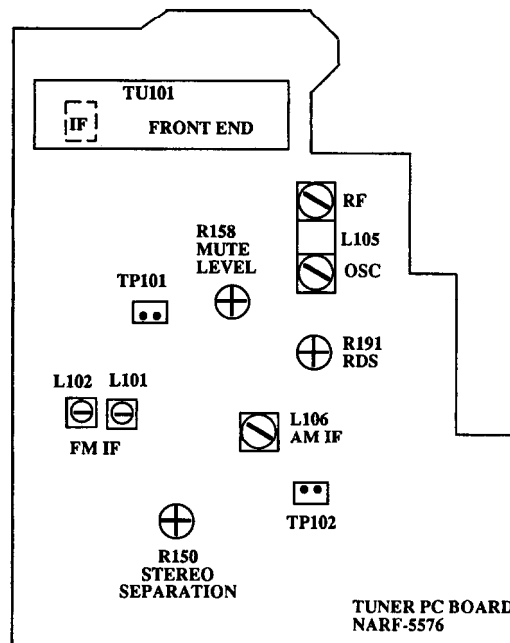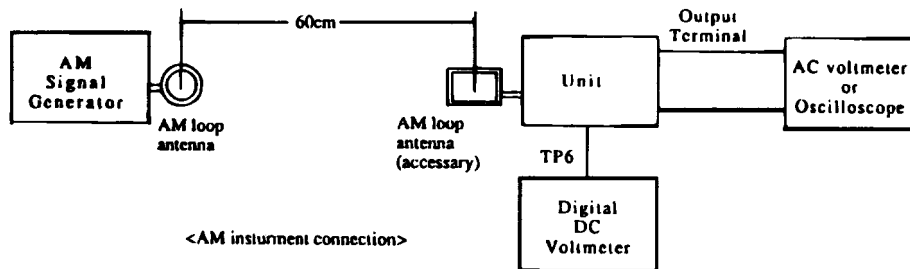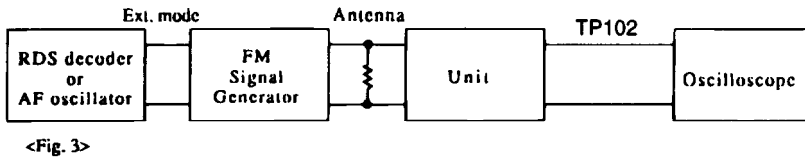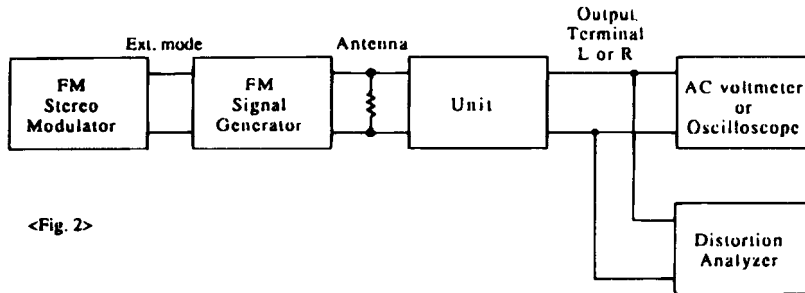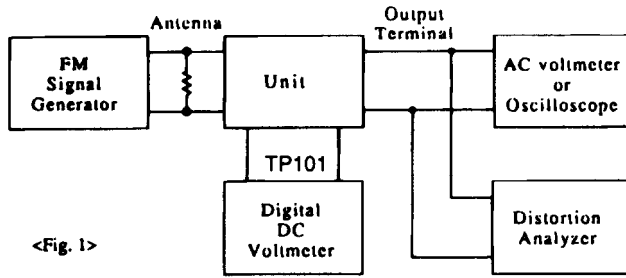

**Adjustment point**



**PREOUT/MAIN IN PC BOARD (NAETC-5571-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Capacitors</b>		
C1301~C1308	374723324	3300pF±5%,50V, Plastic
C1309~C1311	374721015	100pF±10%,50V, Plastic <D>
C1309~C1311	374724714	470pF±5%,50V, Plastic <P>
C1313,C1314	374721015	100pF±10%,50V, Plastic <D>
C1313,C1314	374724714	470pF±5%,50V, Plastic <P>
<b>Terminals</b>		
P1301	25045340	NPJ-4PDBL191
P1302	25045300	NPJ-6PDBL159
P1303	25045303	NPJ-4PDBL162
<b>Socket</b>		
P511a	2009990382	NSAS-10P0519
<b>Wire holders</b>		
JL381a,JL382a	25051093	NSCT-9P880

**AC-3 INPUT TERMINAL PC BOARD (NAETC-5586-1A/1B/1C)**

CIRCUIT NO.	PART NO.	DESCRIPTION
Q1331~Q1333	22240581R1	NJM4565M,ICs
C1331~C1336	374721015	100pF±10%,50V, Plastic capacitor <D>
C1331~C1336	374724714	470pF±5%,50V, Plastic capacitor <P>
C1337~C1342	354741009	10 μ F, 16V,Elect. capacitors
P383a	25051091	NSCT-7P878,Wire holder
P384a	25051093	NSCT-9P880,Wire holder
P1331	25051219	NSCT-25P1009, Socket

NOTE: <D> :120V model only  
<P> :230V model only



## PRINTED CIRCUIT BOARD-PARTS LIST

### DISPLAY CIRCUIT PC BOARD (NADG-5569-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Remote sensor</b>			<b>Diodes</b>	
U1701	24130011	PIC-12043TE2	D803	223234R2	1SS352
	<b>FL tube</b>		D804,D811	224480562R2 or	DTZ5.6B, C-ZENER D
Q1701	212147	13-BT-141GK, FL TUBE	D823,D1712	224490560R2	UDZ5.6B, C-ZENER D
	<b>ICs</b>		D813,D814	223234R2	1SS352
Q801,Q802	22240581R1	NJM4565M	D1701,D1702	225291DT	SEL4910D-D, LED
Q803	22240952R2	TLC320AD58C	D1703,D1711	223234R2	1SS352
Q811	22240940R3	XC56004FJ66	D1713,D1714	223234R2	1SS352
Q812	22240720 or	LH2464-10 or		<b>Coils</b>	
	22240867	LC32464P-80	L801,L802	231237K470R2	NCH-1479, Choke
Q821~Q823	22240942R9	AK4320-VM	L821,L822	231237K470R2	NCH-1479, Choke
Q824	222740045R1TO	TC74HCU04AF	L823	230916R2	BLM31B601SPT, Choke
Q825~Q827	22240581R1	NJM4565M	L824	231237K470R2	NCH-1479, Choke
Q1702	22240685R9	M66004FP		<b>Resonator</b>	
	<b>Transistors</b>		X801	3010230T	CST16.93MXW040, Ceramic
Q804,Q813	2213284 or	2SC1740S-R or			
Q828	2212115	2SC2458-GR			
Q1704,Q1705	2213284 or	2SC1740S-R or			
	2212115	2SC2458-GR			

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Capacitors</b>			<b>Resistor</b>	
C801,C802	353741009	10 $\mu$ F, 16V,Elect.	R1705	49163103413	RM1/10IJ10K $\times$ 13,Array
C807,C808	374721024	1000pF $\pm$ 5%,50V, Plastic		<b>Switches</b>	
C809	353741009	10 $\mu$ F, 16V,Elect.	S701~S707	25035652	NPS-111-S604, Push
C812,C814	353721019	100 $\mu$ F, 6.3V,Elect.	S709~S731	25035652	NPS-111-S604, Push
C816,C824	353721019	100 $\mu$ F, 6.3V,Elect.	S733~S748	25035652	NPS-111-S604, Push
C822	375524744	0.47 $\mu$ F $\pm$ 5%,50V, Plastic		<b>Holder</b>	
C825	374726844	0.68 $\mu$ F $\pm$ 5%,50V, Plastic	Q1701a	27190913Y	FL tube
C829,C836	353721019	100 $\mu$ F, 6.3V,Elect.		<b>Wire holder</b>	
C840,C1717	353721019	100 $\mu$ F, 6.3V,Elect.	JL701b	25050946	NSCT-40P733, WIRE HOL
C845~C849	353721019	100 $\mu$ F, 6.3V,Elect.			
C851~C856	353741009	10 $\mu$ F, 16V,Elect.			
C857~C862	374724724	4700pF $\pm$ 5%,50V, Plastic			
C863~C874	374722224	2200pF $\pm$ 5%,50V, Plastic			
C875~C880	374726824	6800pF $\pm$ 5%,50V, Plastic			
C887~C892	353741009	10 $\mu$ F, 16V,Elect.			
C1702,C1716	353741009	10 $\mu$ F, 16V,Elect.			
C1714,C1718	375524744	0.47 $\mu$ F $\pm$ 5%,50V, Plastic			

# PRINTED CIRCUIT BOARD-PARTS LIST

## SURROUND POWER AMPLIFIER PC BOARD

(NAAF-5574-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Transistors</b>	
Q551,Q651	2215428 or 2215427	2SC5169-H or 2SC5169-G
Q552,Q652	2211733 or	2SC1845-E or
Q566,Q666	2211732	2SC1845-F
Q553,Q653	2213284 or	2SC1740S-R or
Q558,Q658	2212115	2SC2458-GR
Q554~Q556	2214975 or	2SA1123-S or
Q654~Q656	2214974	2SA1123-R
Q557,Q657	2214985 or	2SC2631-S or
Q559,Q659	2214984	2SC2631-R
Q560,Q660	2214975 or	2SA1123-S or
Q565,Q665	2214974	2SA1123-R
Q561,Q661	2203010	2SC5171
Q562,Q662	2203000	2SA1930
Q563,Q663	2203063 or 2203062	* 2SC5198-O or * 2SC5198-R
Q564,Q664	2203053 or 2203052	* 2SA1941-O or * 2SA1941-R
Q591,Q592	2213284 or 2212115	2SC1740S-R or 2SC2458-GR
	<b>Diodes</b>	
D551,D553	223205,	1SS270A,
D651,D653	223163 or 223222	1SS133 or WG713A
D552,D652	22380012	HER303F
D915	22380271, 22380272 or 22380022	D3SBA20, D3SBA60 or RBV402
	<b>Capacitors</b>	
C552,C652	354781009	10 $\mu$ F, 50V,Elect.
C555,C655	354742219	220 $\mu$ F, 16V,Elect.
C563,C568	354741019	100 $\mu$ F, 16V,Elect.
C564,C565	354764709	47 $\mu$ F, 35V,Elect.
C566,C666	374724734	0.047 $\mu$ F $\pm$ 5%,50V, Plastic
C570,C670	354721019	100 $\mu$ F, 6.3V,Elect.
C571,C572	354784709	47 $\mu$ F, 50V,Elect.
C591	354721019	220 $\mu$ F, 6.3V,Elect.
C592	354780109	1 $\mu$ F, 50V,Elect.
C663,C668	354741019	100 $\mu$ F, 16V,Elect.
C664,C665	354764709	47 $\mu$ F, 35V,Elect.
C671,C672	354784709	47 $\mu$ F, 50V,Elect.
C917,C918	3504272	6800 $\mu$ F, 50V,Elect.
	<b>Resistors</b>	
R563,R663	443526804	68 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R564,R664	443526804	68 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R565,R665	443525604	56 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R566,R666	443525604	56 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R567,R667	443526804	68 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R572,R672	443524714	470 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R573,R673	443521014	100 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R574,R575	453530824	8.2 $\Omega$ $\pm$ 5%,1/2W,Metal
R576,R676	453630684	6.8 $\Omega$ $\pm$ 5%,1W,Metal
R578,R678	453530824	8.2 $\Omega$ $\pm$ 5%,1/2W,Metal
R582,R682	4000145	MPC78-2WK, 0.1 $\Omega$ , Metal plate
R583,R683	443528214	820 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R588,R589	453530224	2.2 $\Omega$ $\pm$ 5%,1/2W,Metal
R598,R698	443521014	100 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R599,R699	443521014	100 $\Omega$ $\pm$ 5%,1/2W,Metal oxide
R674,R675	453530824	8.2 $\Omega$ $\pm$ 5%,1/2W,Metal
R688,R689	453530224	2.2 $\Omega$ $\pm$ 5%,1/2W,Metal

CIRCUIT NO.	PART NO.	DESCRIPTION
P561a	25055234	Plug NPLG-3P218
JL551a	25051110	Wire holders NSCT-6P897
JL915a	25051107	NSCT-3P894

## TONE CONTROL CIRCUIT PC BOARD (NAAF-5568-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q351,Q352	22240293 or 22240247	NJM4558L-D or BA15218N
	<b>Capacitors</b>	
C351,C451	354741009	10 $\mu$ F, 16V,Elect.
C353,C453	354744709	47 $\mu$ F, 16V,Elect.
C355,C356	354744709	47 $\mu$ F, 16V,Elect.
C357,C358	374721534	0.015 $\mu$ F $\pm$ 5%,50V, Plastic
C361,C461	374721024	1000pF $\pm$ 5%,50V, Plastic
C362,C462	354783399	0.33 $\mu$ F, 50V,Elect.
C455,C456	354744709	47 $\mu$ F, 16V,Elect.
C457,C458	374721534	0.015 $\mu$ F $\pm$ 5%,50V, Plastic
	<b>Resistors</b>	
R356	5104230	N14RLC100KWT22Z, Variable
R359	5104230	N14RLC100KWT22Z, Variable
R363	5104365	N14RGL30KB22Z, Variable
	<b>Wire holder</b>	
JL351a	25051096	NSCT-12P883, WIRE HOL

## XANTECH PC BOARD(NAETC-5610-1A)

(120V Model only)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Photo coupler</b>	
Q983	24120043	ON3131
	<b>Transistors</b>	
Q984	2213510 or	DTA114ES or
Q984or	2214350	RN2202
Q985	2213284 or	2SC1740S-R or
Q985or	2212115	2SC2458-GR
	<b>Diode</b>	
D984	223205, 223163 or 223222	1SS270A, 1SS133 or WG713A
	<b>Capacitor</b>	
C983	354741009	10 $\mu$ F, 16V
	<b>Socket</b>	
P972	25051237	NSCT-12P1027


## MR TERMINAL PC BOARD (NAETC-5611-1)

(230V Model only)

CIRCUIT NO.	PART NO.	DESCRIPTION
D981,D982	223205, 223163 or 223222	1SS270A, 1SS133 or WG713A,Diodes
P973	25051237	NSCT-12P1027, Socket

CAUTION: Replacement for transistor of mark \* , if necessary must be made from the same beta group (HFE) as the original type.

LM7001 (PLL Synthesizer and controller)

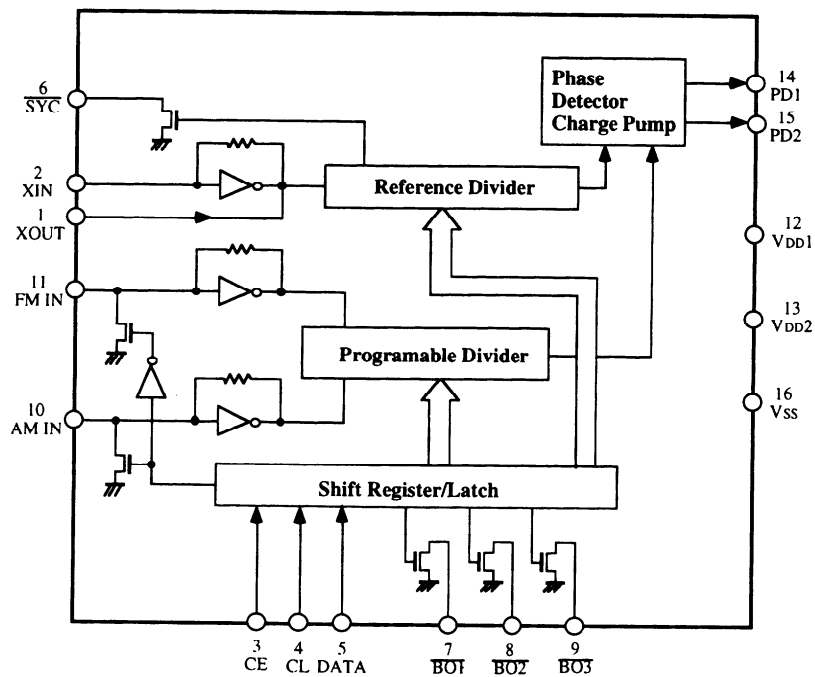


# PRINTED CIRCUIT BOARD-PARTS LIST

## FM/AM TUNER CIRCUIT PC BOARD(NARF-5576-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>Front end</b>			<b>Capacitors</b>	
TU101	240088	FE337-A07 <D>	C155,C156	374721034	0.01 $\mu$ F $\pm$ 5%,50V, Plastic <D>
TU101	240089	FE415-G11 <P>	C155,C156	374724324	4300pF $\pm$ 5%,50V, Plastic <P>
	<b>ICs</b>		C155,C156	374724724	4700pF $\pm$ 5%,50V, Plastic <PT>
Q121	22240090	LM7001	C159	354780229	2.2 $\mu$ F, 50V,Elect.
Q141	22240749	LA1851N	C160	354784799	0.47 $\mu$ F, 50V,Elect.
Q176	22240293 or	NJM4558L-D or	C162,C166	353741009	10 $\mu$ F, 16V,Elect.
	22240247	BA15218N	C171,C172	354741009	10 $\mu$ F, 16V,Elect.
Q181	22240679	$\mu$ PC1346CS <P/PB>	C173,C174	374722724	2700pF $\pm$ 5%,50V, Plastic
	<b>Transistors</b>		C175,C176	354741009	10 $\mu$ F, 16V,Elect.
Q101	2210746T	2SC945A-P <P>	C177	354780229	2.2 $\mu$ F, 50V,Elect.
Q102	2211723	2SC1923-O	C178,C179	354741009	10 $\mu$ F, 16V,Elect.
Q122,Q142	2213510 or	DTA114ES or	C183,C189	374724724	4700pF $\pm$ 5%,50V, Plastic <P/PB>
Q175	2214350	RN2202	C184	374722234	0.022 $\mu$ F $\pm$ 5%,50V, Plastic <P/PB>
Q123	2212445	2SK365-GR	C185	374724734	0.047 $\mu$ F $\pm$ 5%,50V, Plastic <P/PB>
Q124,Q171	2213284 or	2SC1740S-R or	C186	354780229	2.2 $\mu$ F, 50V,Elect. <P/PB>
Q172	2212115	2SC2458-GR	C187,C188	374723324	3300pF $\pm$ 5%,50V, Plastic <P/PB>
Q143	221282 or	DTC144ES or	C190	354721019	100 $\mu$ F, 6.3V,Elect. <P/PB>
	2213560	RN1204		<b>Resistors</b>	
Q144	2213640 or	DTC123JS or	R150	5210261T	N06HR5KBC, Trimming
	2214660	RN1205	R158	5210263T	N06HR20KBC, Trimming
Q173,Q174	2212794	2SD1468-R	R191	5210265T	N06HR50KBC, Trimming <P/PB>
Q181	22240679	MPC1346CS <P/PB>		<b>Terminal</b>	
Q182	2213284 or	2SC1740S-R or	P101	25060160	NTM-4PDML086 <D>
	2212115	2SC2458-GR <P/PB>	P101	25060117	NTM-2PDMMN051 <P>
	<b>Diode</b>			<b>Plugs</b>	
D165	224450512	MTZ5.1B, Zener	TP101	25055038	NPLG-2P29
	<b>Transformers &amp; Coils</b>		TP102	25055038	NPLG-2P29 <P/PB>
L101	233457	NFIF-4081, IF		<b>Socket</b>	
L102	233458	NFIF-4082, IF	P102	25050985	NSCT-12P77 <D/PA/PT>
L103	233471	NMC-6084, MPX <P>	P102	25050987	NSCT-16P774 <P/PB>
L104	233454M022	NCH-1452, 022M, Choke		<b>Plate</b>	
L105	232163A	NMRF-7065, RF	TU101a	27150346	Shield, Front end <P>
L106	232139	NMIF-4062, IF			
L107,L108	233484	NMC-4085, MPX			
	<b>Ceramic filters</b>				
X101	3010071	SFE10.7MA5(RED)			
X102	3010071	SFE10.7MA5(RED) <P>			
X103	3010071	SFE10.7MA5(RED) <D>			
X103	3010130	SFE10.7MZ2A <P>			
X104	3010227	CSB456F15			
X105	3010123	SFZ-450JL			
	<b>Resonators</b>				
X121	3010141	XTL-7.2M, Crystal			
X181	3010203	AF6146CG, Crystal <P/PB>			
	<b>Capacitors</b>				
C001	354741019	100 $\mu$ F, 16V,Elect.			
C127	354721019	100 $\mu$ F, 6.3V,Elect.			
C130	354780229	2.2 $\mu$ F, 50V,Elect.			
C131	374722234	0.022 $\mu$ F $\pm$ 5%,50V, Plastic			
C132	354783399	0.33 $\mu$ F, 50V,Elect.			
C133,C142	354741019	100 $\mu$ F, 16V,Elect.			
C145	354741009	10 $\mu$ F, 16V,Elect.			
C146	374723324	3300pF $\pm$ 5%,50V, Plastic			
C147	374721534	0.015 $\mu$ F $\pm$ 5%,50V, Plastic <D>			
C147	374721034	0.01 $\mu$ F $\pm$ 5%,50V, Plastic <P>			
C149	354780479	4.7 $\mu$ F, 50V,Elect.			
C151,C152	354780109	1 $\mu$ F, 50V,Elect.			
C153	354783399	0.33 $\mu$ F, 50V,Elect.			
C154	354741009	10 $\mu$ F, 16V,Elect.			

NOTE: <D> :120V model only  
 <P> :230V model only  
 <PA> :Australian model only  
 <PB> :U.K. model only  
 <PT> :Taiwanese model only

**EXPLODED VIEW**

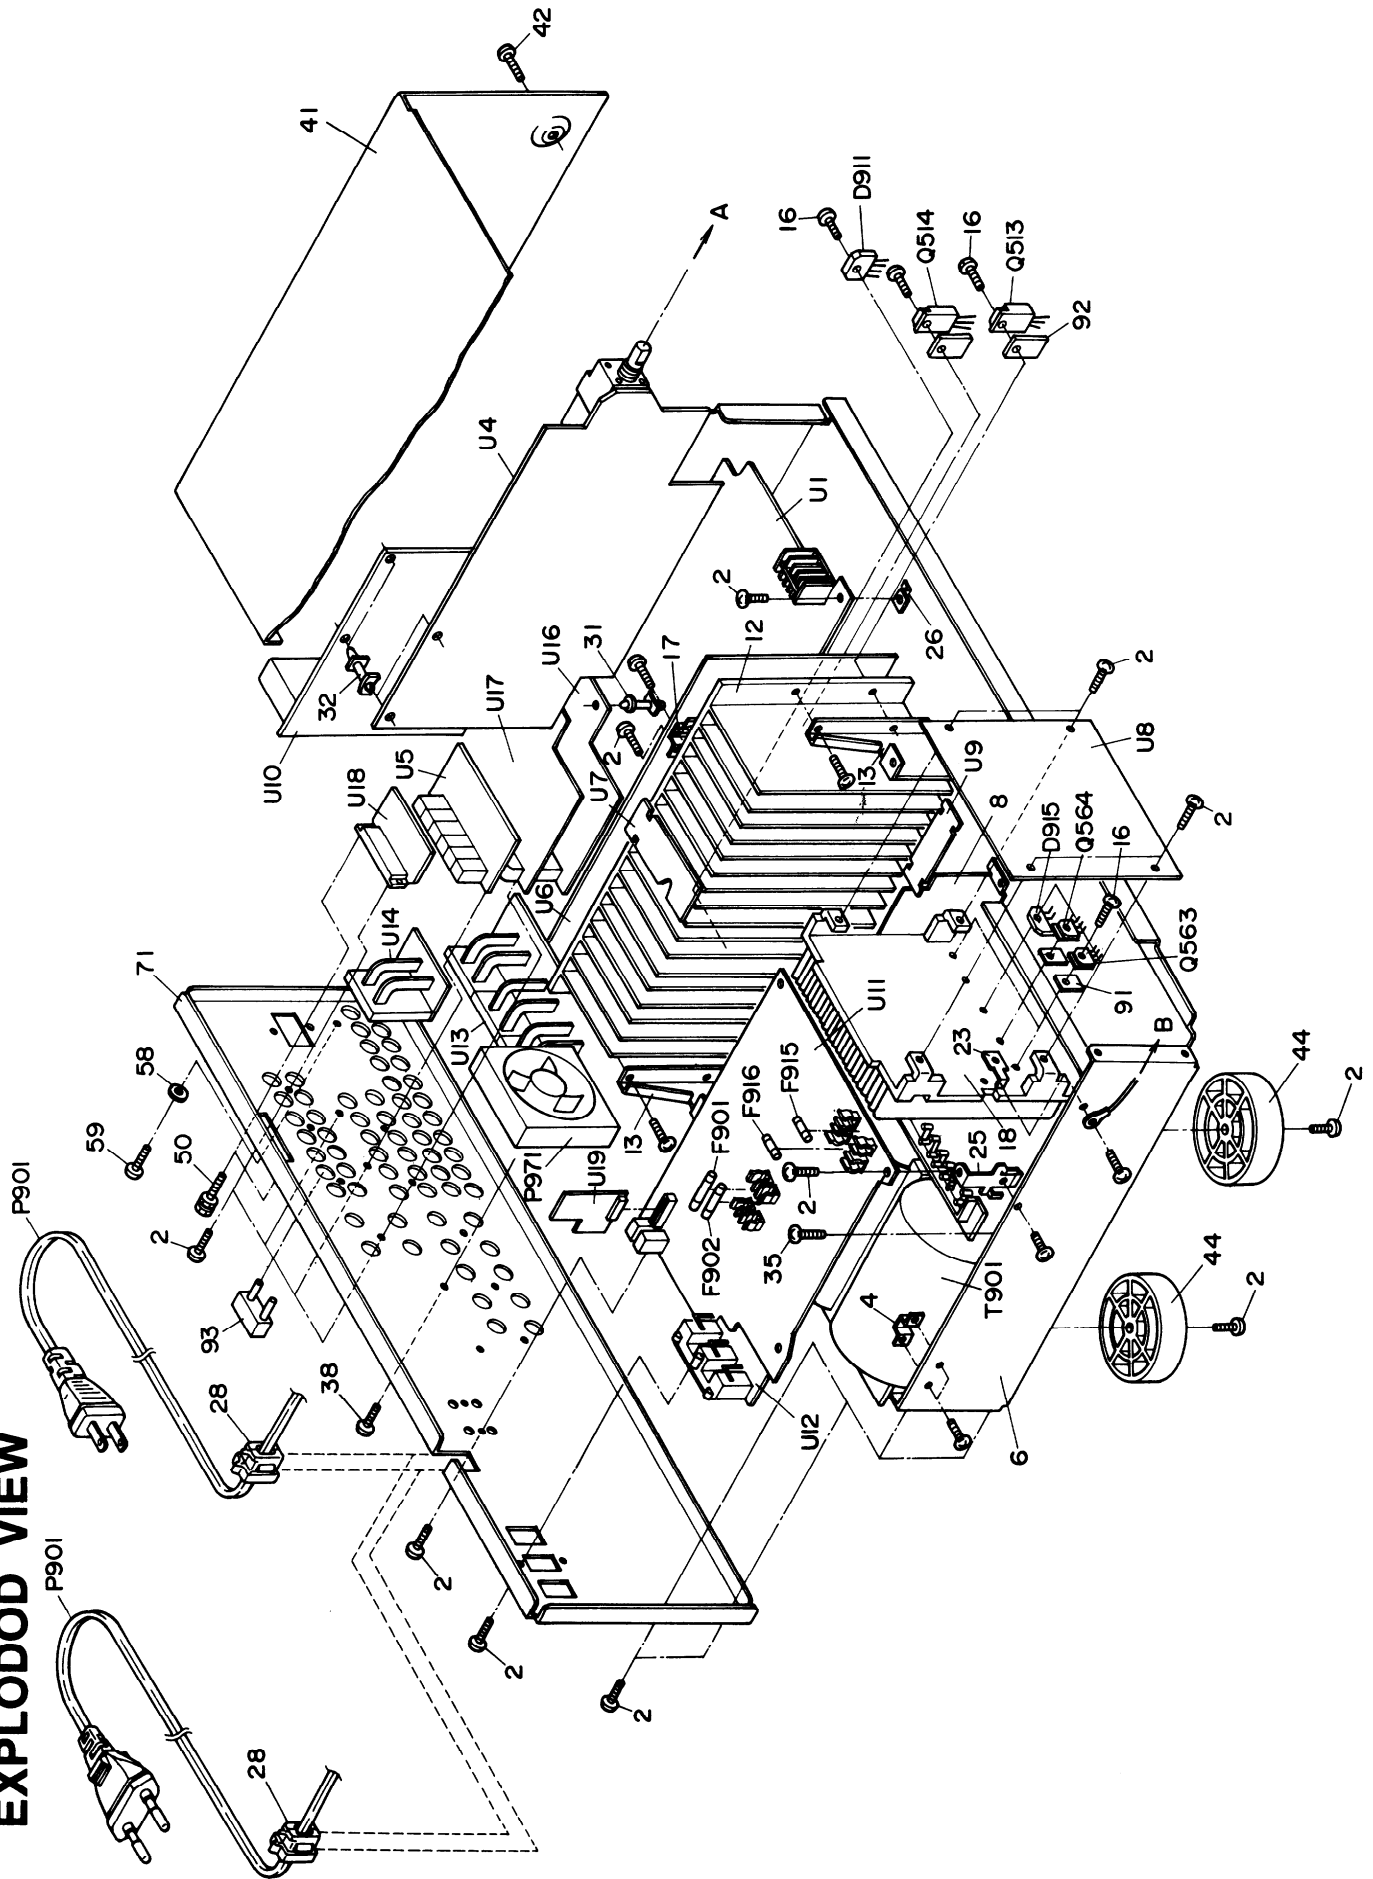

# PRINTED CIRCUIT BOARD-PARTS LIST

## VIDEO TERMINAL PC BOARD (NAETC-5583-1A/1B/1C)


CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q251	22240373	BA7625
Q271	22240719	M35010-084SP
Q274	22240830	BA7046
Q291	222740046TOS	TC74HCU04AP <P>
Q292	222740005TOS	TC74HC00AP <P>
	<b>Transistors</b>	
Q252~Q254	2213354 or	2SA933S-R or
Q273	2212125	2SA1048-GR
Q255,Q272	2213284 or	2SC1740S-R or
Q275	2212115	2SC2458-GR
Q256	221282 or	DTC144ES or
	2213560	RN1204
Q276	2213510 or	DTA114ES
	2214350	RN2202
	<b>Diodes</b>	
D251,D252	223205,	1SS270A,
D255,D256	223163 or	1SS133 or
	223222	WG713A
D291	224470221T	MTZJ2.2A, Zener <P>
	<b>Coils</b>	
L271,L272	233454K220	NCH-1452, 220K, Choke
	<b>Resonators</b>	
X271	3010167	XTL-14.32M, Crystal <D>
X291	3010167	XTL-14.32M, Crystal <P>
X292	3010238	XTL-17.73M, Crystal <P>
	<b>Filter</b>	
X293	3030018	NFV610-655T2A206, EMI <P>
	<b>Capacitors</b>	
C251~C254	354780229	2.2 $\mu$ F, 50V,Elect.
C255~C258	354721019	470 $\mu$ F, 6.3V,Elect.
C260,C261	354721019	100 $\mu$ F, 6.3V,Elect.
C262	354780229	2.2 $\mu$ F, 50V,Elect.
C263	354741009	10 $\mu$ F, 16V,Elect.
C274	354780109	1 $\mu$ F, 50V,Elect.
C276	354744709	47 $\mu$ F, 16V,Elect.
C277	354741009	10 $\mu$ F, 16V,Elect.
C280,C281	354721019	100 $\mu$ F, 6.3V,Elect.
C284,C287	354780109	1 $\mu$ F, 50V,Elect.
C285	374722224	2200pF $\pm$ 5%,50V, Plastic
C288	354721019	100 $\mu$ F, 6.3V,Elect.
C296,C299	354721019	100 $\mu$ F, 6.3V,Elect. <P/DT>
C297	375524744	0.47 $\mu$ F $\pm$ 5%,50V, Plastic <P/DT>
	<b>Switch</b>	
S251	25065286	NSS-22112, Slide
	<b>Terminals</b>	
P251,P252	25045299	NPJ-3PDYE158, PIN JACK
	<b>Wire holders</b>	
JL201b,JL202b	25051091	NSCT-7P878
	<b>Wire trap</b>	
JL251b	25055633	NPLG-12P595

## VIDEO S TERMINAL PC BOARD(NAETC-5584-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
	<b>ICs</b>	
Q201,Q202	22240373	BA7625
	<b>Transistors</b>	
Q203~Q208	2213354 or	2SA933S-R or
Q217	2212125	2SA1048-GR
Q209	2212286 or	2SC2878-B or
Q213~Q215	2212285	2SC2878-A
Q210,Q216	221282 or	DTC144ES or
Q224	2213560	RN1204
Q211,Q212	2213284 or	2SC1740S-R or
Q220	2212115	2SC2458-GR
Q218,Q219	2213510 or	DTA114ES or
	2214350T	RN2202
Q221~Q223	2212286 or	2SC2878-B or
	2212285	2SC2878-A
	<b>Diodes</b>	
D201~D210	223205,	1SS270A,
	223163 or	1SS133 or
	223222	WG713A
	<b>Capacitors</b>	
C201~C208	354780229	2.2 $\mu$ F, 50V,Elect.
C209,C211	354721019	470 $\mu$ F, 6.3V,Elect.
C210,C212	354780229	2.2 $\mu$ F, 50V,Elect.
C213,C215	354721019	470 $\mu$ F, 6.3V,Elect.
C214,C216	354780229	2.2 $\mu$ F, 50V,Elect.
C217	354744709	47 $\mu$ F, 16V,Elect.
C219	354780229	2.2 $\mu$ F, 50V,Elect.
C220	354741009	10 $\mu$ F, 16V,Elect.
C221	354721019	470 $\mu$ F, 6.3V,Elect.
C222,C225	354721019	100 $\mu$ F, 6.3V,Elect.
C226	354721019	100 $\mu$ F, 6.3V,Elect.
	<b>Terminals</b>	
P201,P202	25051568	NSCT-12P1355, S-VIDEO
	<b>Plug</b>	
P211a	25055136	NPLG-6P120, P PLUG
	<b>Wire holders</b>	
JL201a,JL202a	25051091	NSCT-7P878, WIRE HOL

## VIDEO-4 TERMINAL PC BOARD (NAETC-5585-1A/1B/1C)

CIRCUIT NO.	PART NO.	DESCRIPTION
P203	25051569	NSCT-4P1356, Socket
P211	2009990383	NSAS-11P0520, Socket
P253	25045402	NPJ-3PDBL227, Terminal
P321	2000786	NSAS-6P742, Socket

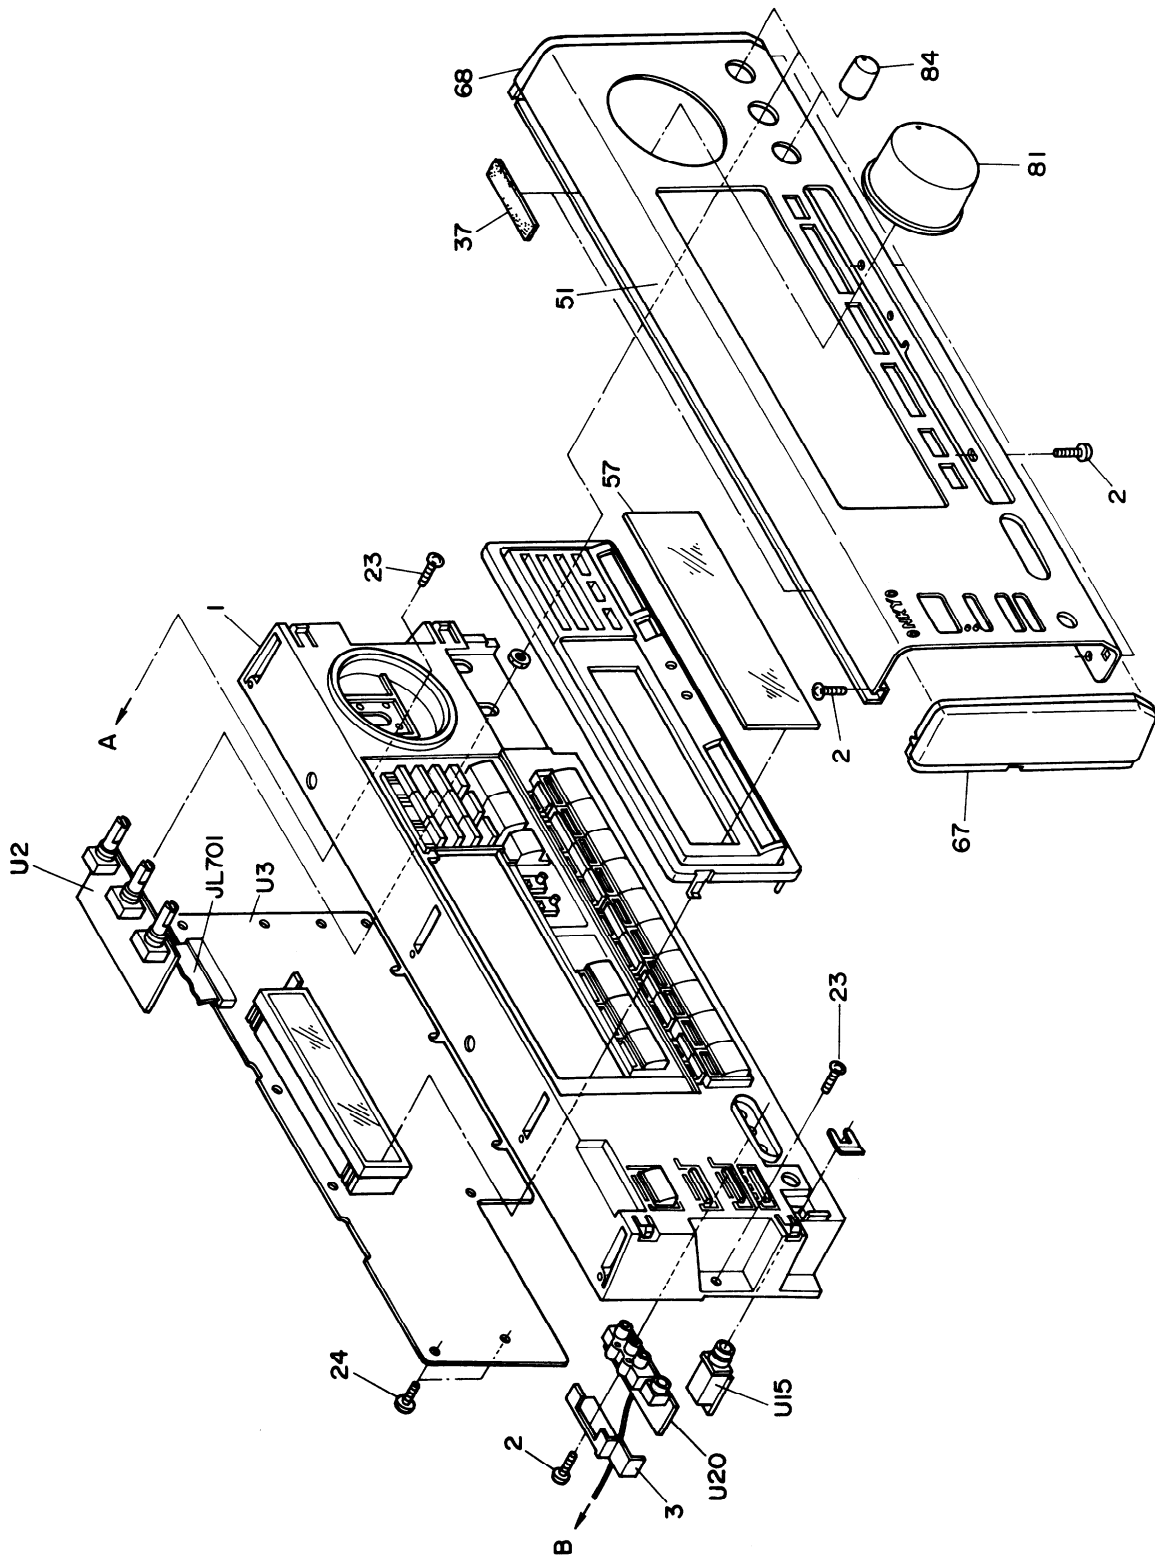



# PARTS LIST


MARK	REF. NO.	PART NO.	DESCRIPTION	MARK	REF. NO.	PART NO.	DESCRIPTION
1		27110896AY	Front bracket	△	D911	22380273	RS804M,Diode
2		838130088	3TTB+8B,Self-tapping screw	△	D915	22380271,	D3SBA20,
3		27190967	Holder	△		22380272 or	D3SBA60 or
4		27141523	Retainer	△		22380022	RBV402, Diode
5		27270147	Spacer	P		880009	NRP-345, Plastic rivet
6		27100305A	Chassis	D	F901	252154	8A-TSC, Primary Fuse
8		27130762	Bracket, power transformer	P	F902	252077	4A-SE-EAK, Primary fuse
12		27160360	Radiator L	P	F903	252075	2.5A-SE-EAK, AC outlet fuse
13		27141650	Retainer HT	D	F915,F916	252153	6.3A-TSC, Secondary fuse
16		801433	3SMS8W,SW+14B(BC), Special screw	P	F915,F916	252079	6.3A-SE-EAK, Secondary fuse
17		27141528	Retainer HL-2	JL701		2047402012	NCFC7-402012, Flexible flat cable
18		27160359	Radiator S	D	F901	253192HIT	AS-UC-6#18, Power supply cord
23		27141330	Retainer PC	P	△	253233KAW	AS-CEE-2, Power supply cord
25		27141651	Retainer TPC	PA	△	253197HIT	AS-SAA, Power supply cord
26		27141333	Retainer S	PB	△	253198HIT	AS-BS, Power supply cord
28		27300750	Cord bushing	PT	△	253233KAW	AS-CEE-2, Power supply cord
29		28140881	Cushion	PA	△	25051570	NSCT-2P1357, AC outlet
31		27190470	KGLS-18S,Holder	P971		24502281	D06T-24TM02(EX), Fan
32		27190062	KGLS-12S,Holder	Q513,Q613		2202823 or	2SC5200-O or
35		830440089	4TTC+8C(BC),Self-tapping screw	Q1513		2202822	2SC5200-R,Transistor
36		28175222	Isolation plate	Q514,Q614		2202813 or	2SA1943-O or
37		28141305	Cushion	Q1514		2202812	2SA1943-R,Transistor
38		833150100	5TTP+10P,Self-tapping screw	Q563,Q663		2203063 or	2SC5198-O or
41		28184540AY	Top cover			2203062	2SC5198-R,Transistor
42		838440089	4TTB+8C(BC),Self-tapping screw	Q564,Q664		2203053 or	2SA1941-O or
44		27175251-2	Leg			2203052	2SA1941-R,Transistor
50		801541	Special screw	D	T901	2301137	NPT-1253D, Power transformer
D/PA/PT 51-53		1A616121	Front panel ass'y	P	△	2301138	NPT-1253P, Power transformer
P/PB		1A617121	Front panel ass'y	D	U1	1A616567-1A	NAAR-5567-1A, Main circuit pc board ass'y
D/PA/PT 51		27211751	Front panel	P/PB		1A616567-1B	NAAR-5567-1B, Main circuit pc board ass'y
P/PB		27211752	Front panel	PA/PT		1A616567-1C	NAAR-5567-1C, Main circuit pc board ass'y
52		28198813Y	Facet	D	U2	1A616568-1A	NAAF-5568-1A, Tone control circuit pc board ass'y
53		28135199Y	Badge	P/PB		1A616568-1B	NAAF-5568-1B, Tone control circuit pc board ass'y
54		27215264	Decorative frame	PA/PT		1A616568-1C	NAAF-5568-1C, Tone control circuit pc board ass'y
57		28191699Y	Clear plate	D	U3	1A616569-1A	NADG-5569-1A, Display circuit pc board ass'y
58		838230088	3TTB+8B(NI), Nickel screw	P/PB		1A616569-1B	NADG-5569-1B, Display circuit pc board ass'y
59		87643010	W3 X 10F(BC),Washer	PA/PT		1A616569-1C	NADG-5569-1C, Display circuit pc board ass'y
67		28125268Y	End cap L	D	U4	1A616570-1A	NAAF-5570-1A, Volume and surround selector pc board ass'y
68		28125267Y	End cap R	P/PB		1A616570-1B	NAAF-5570-1B, Volume and surround selector pc board ass'y
71		27122137A	Rear panel	PA/PT		1A616570-1C	NAAF-5570-1C, Volume and surround selector pc board ass'y
P		27122138A	Rear panel	D	U5	1A616571-1A	NAAF-5571-1A,Pre. out/main in pc board ass'y
PA		27122140A	Rear panel	P/PB		1A616571-1B	NAAF-5571-1B,Pre. out/main in pc board ass'y
81		28325057	Knob, Volume	PA/PT		1A616571-1C	NAAF-5571-1C,Pre. out/main in pc board ass'y
84		28305055Y	Knob, Tone	D	U6	1A616572-1A	NAAF-5572-1A, Front/center power amplifier pc board ass'y
91		223021	TBM-51W9043, Isolation sheet	P/PB		1A616572-1B	NAAF-5572-1B, Front/center power amplifier pc board ass'y
92		223023	TBM-51W9192, Isolation sheet	PA/PT		1A616572-1C	NAAF-5572-1C, Front/center power amplifier pc board ass'y
93		25055436	NPLG-2P418, Plug				
99		260208	Wire tie				

MARK	REF. NO.	PART NO.	DESCRIPTION
D	U7	1A616573-1A	NAETC-5573-1A, Pc board for holder
P/PB		1A616573-1B	NAETC-5573-1B, Pc board for holder
PA/PT		1A616573-1C	NAETC-5573-1C, Pc board for holder
D	U8	1A616574-1A	NAAF-5574-1A, Surround power amplifier pc board ass'y
P/PB		1A616574-1B	NAAF-5574-1B, Surround power amplifier pc board ass'y
PA/PT		1A616574-1C	NAAF-5574-1C, Surround power amplifier pc board ass'y
D	U9	1A616575-1A	NAETC-5575-1A, Pc board for holder
P/PB		1A616575-1B	NAETC-5575-1B, Pc board for holder
PA/PT		1A616575-1C	NAETC-5575-1C, Pc board for holder
D	U10	1A616576-1A	NARF-5576-1A, FM/AM tuner circuit pc board ass'y
P/PB		1A616576-1B	NARF-5576-1B, FM/AM tuner circuit pc board ass'y
PA/PT		1A616576-1C	NARF-5576-1C, FM/AM tuner circuit pc board ass'y
D	U11	1A616577-1A	NAPS-5577-1A, Power supply circuit pc board ass'y
P/PB/PT		1A616577-1B	NAPS-5577-1B, Power supply circuit pc board ass'y
PA		1A616577-1C	NAPS-5577-1C, Power supply circuit pc board ass'y
D	U12	1A616578-1A	NAETC-5578-1A, AC outlet terminal pc board ass'y
P/PB/PT		1A616579-1B	NAETC-5579-1B, AC outlet terminal pc board ass'y
D	U13	1A616580-1A	NAETC-5580-1A, Speaker terminal pc board ass'y
P/PB/PT		1A616580-1B	NAETC-5580-1B, Speaker terminal pc board ass'y
PA		1A616580-1C	NAETC-5580-1C, Speaker terminal pc board ass'y
D	U14	1A616581-1A	NAETC-5581-1A, Surround speaker terminal pc board ass'y
P/PB/PT		1A616581-1B	NAETC-5581-1B, Surround speaker terminal pc board ass'y
PA		1A616581-1C	NAETC-5581-1C, Surround speaker terminal pc board ass'y
D	U15	1A616582-1A	NAETC-5582-1A, Headphone terminal pc board ass'y
P/PB/PT		1A616582-1B	NAETC-5582-1B, Headphone terminal pc board ass'y
PA		1A616582-1C	NAETC-5582-1C, Headphone terminal pc board ass'y
D	U16	1A616583-1A	NAETC-5583-1A, Video terminal pc board ass'y
P/PB/PT		1A616583-1B	NAETC-5583-1B, Video terminal pc board ass'y
PA		1A616583-1C	NAETC-5583-1C, Video terminal pc board ass'y
D	U17	1A616584-1A	NAETC-5584-1A, Video S terminal pc board ass'y
P/PB/PT		1A616584-1B	NAETC-5584-1B, Video S terminal pc board ass'y
PA		1A616584-1C	NAETC-5584-1C, Video S terminal pc board ass'y
D	U18	1A616586-1A	NAAF-5586-1A, AC-3 input terminal pc board ass'y
P/PB		1A616586-1B	NAAF-5586-1B, AC-3 input terminal pc board ass'y
PA/PT		1A616586-1C	NAAF-5586-1C, AC-3 input terminal pc board ass'y
D	U19	1A616510-1A	NAETC-5610-1A, Xantech pc board ass'y
P		1A616511-1B	NAETC-5611-1B, MR terminal pc board ass'y
D	U20	1A616585-1A	NAETC-5585-1A, Video-4 terminal pc board ass'y
P/PB/PT		1A616585-1B	NAETC-5585-1B, Video-4 terminal pc board ass'y
PA		1A616585-1C	NAETC-5585-1C, Video-4 terminal pc board ass'y

NOTE: <D> :120V model only  
 <P> :230V model only  
 <PA> : Australian model only  
 <PB> : U.K. model only  
 <PT> : Taiwanese model only

**NOTE: THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.**

## PACKING VIEW

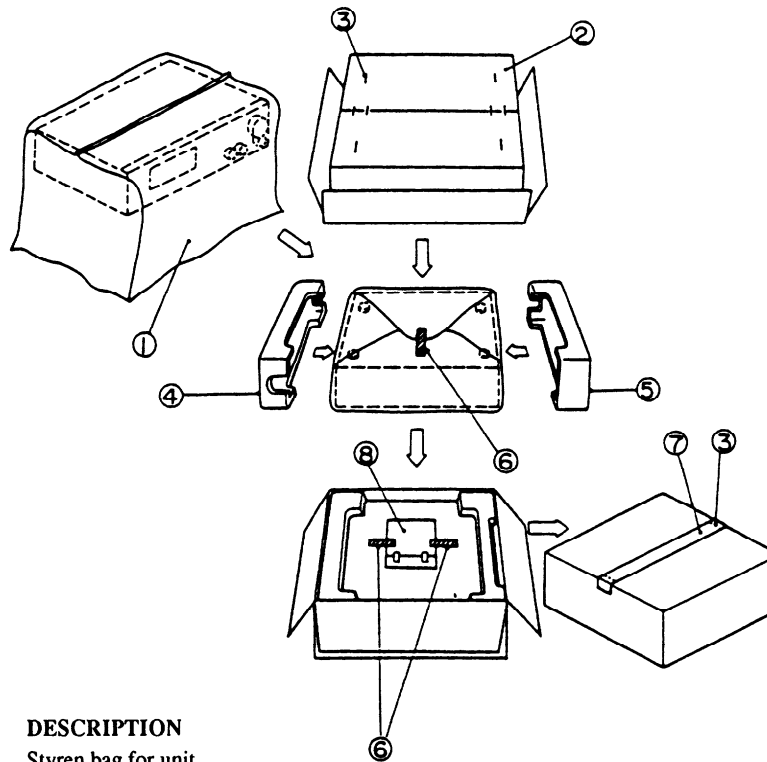


MARK	REF. NO.	PART NO.	DESCRIPTION
	1	29100034A	Styren bag for unit
D/PA/PT	2	29052931	Carton box
P/PB		29052932	Carton box
	3	282302	Staple
	4	29091615B	Pad R
	5	29091614A	Pad L
	6	261504	Adhesive tape
	7	29110071	PP tape
	8		Accessory bag ass'y
		29100097-1Y	350×250, Styren bag
		29342200	Instruction manual, English
P		29342201	Instructio manual U3 (SDSW)
P		29342202	Instructio manual U3 (GFI)
DC/PT		29342203	Instructio manual U3 (FSC)
		24140307	RC-307M, Remote control transmitter
		3010124	UM-4, Four batteries
		232140	NMA-3057, AM loop antenna
D		292111	FM antenna
P		292112	FM antenna
		2010200	Cord RI
DC		29360778	Label Flash
DN		29365019B	Warranty card
DN		29358002K	Service station list
DN		29361913	Label UPC

NOTE: <D> :120V model only  
 <P> :230V model only  
 <DN> :U.S.A. model only  
 <DC> :Canadian model only  
 <PA> :Australian model only  
 <PB> :U.K. model only  
 <PT> :Taiwanese model only


A B C D E F G

**BLOCK DIAGRAM  
AMPLIFIER SECTION**

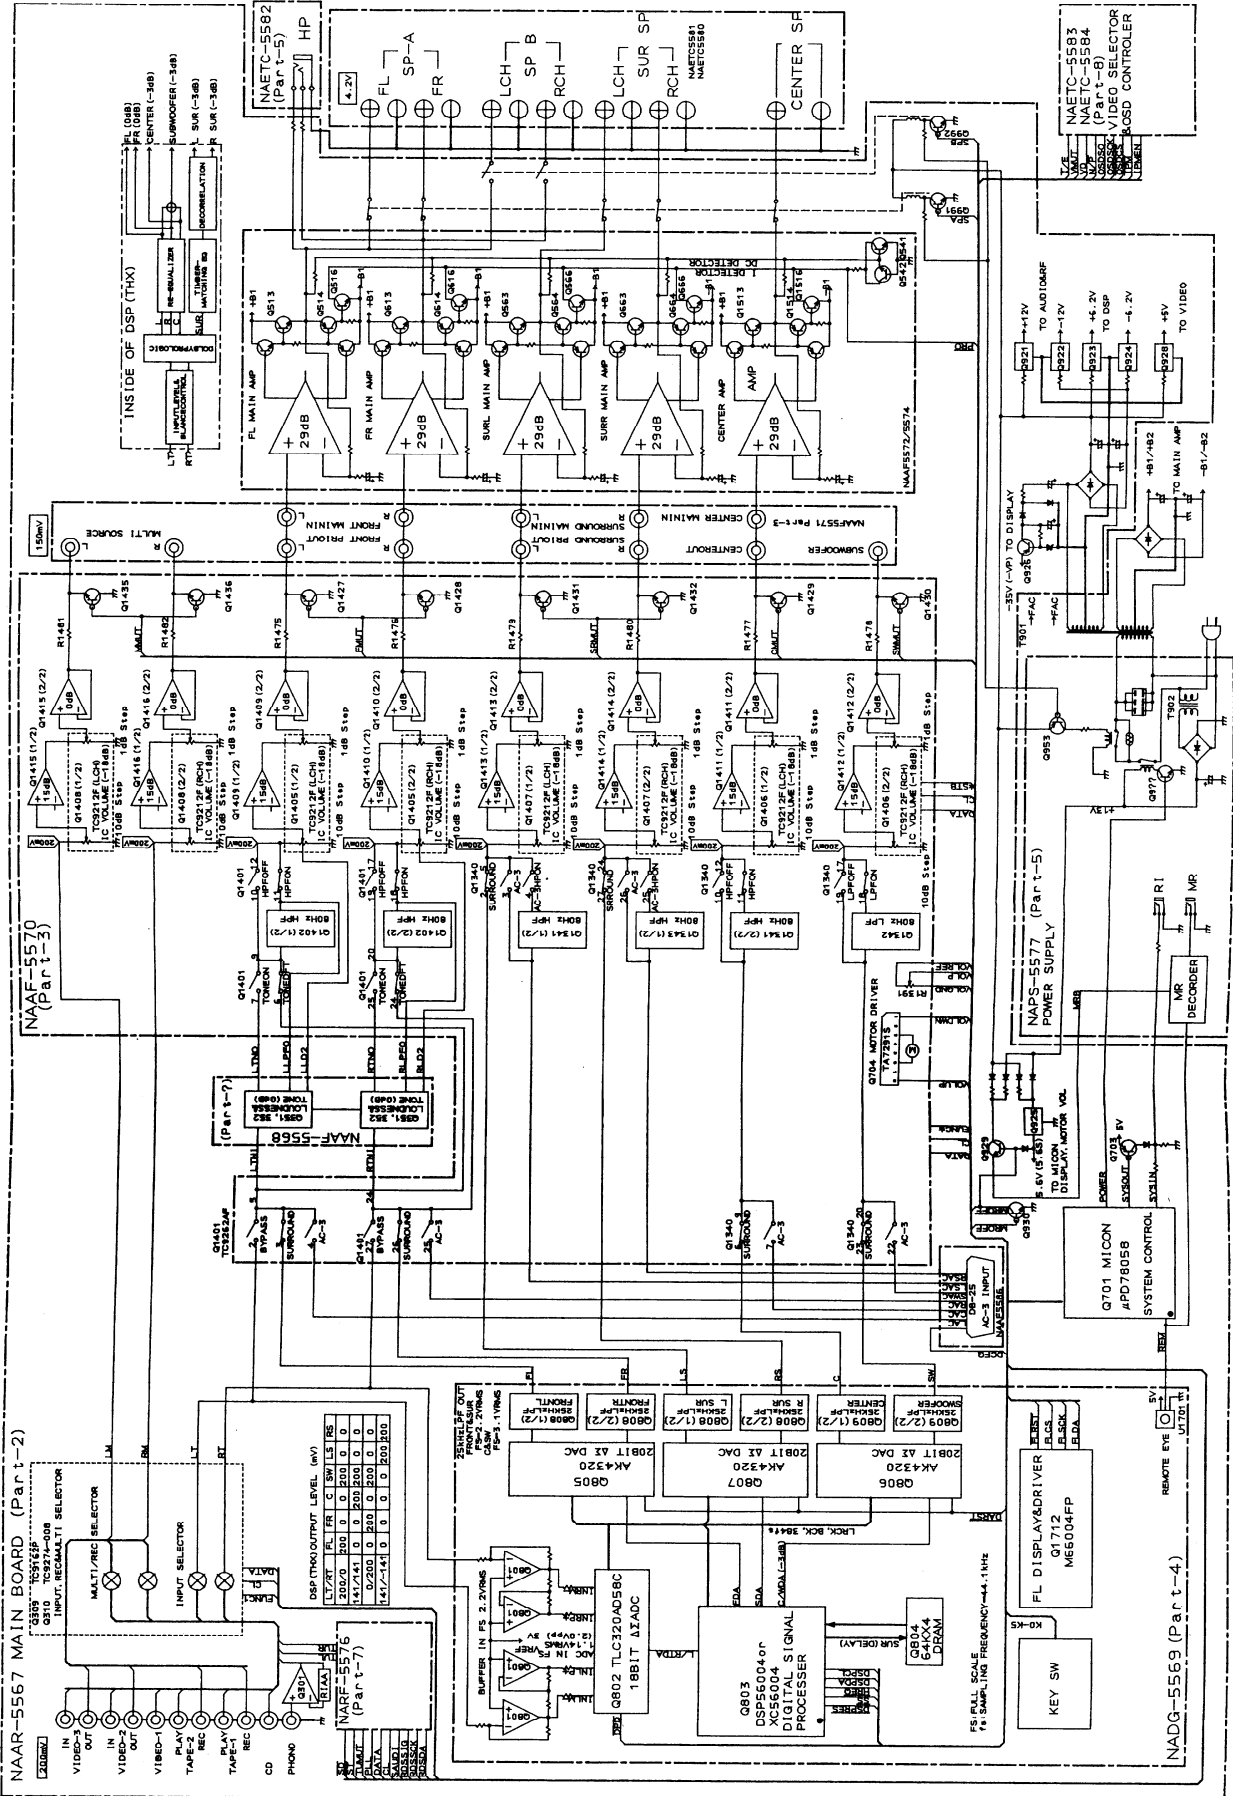

A B C D E F G


**Schematic Diagram**  
**VOLUME AND SURROUND SELECTOR SECTION**

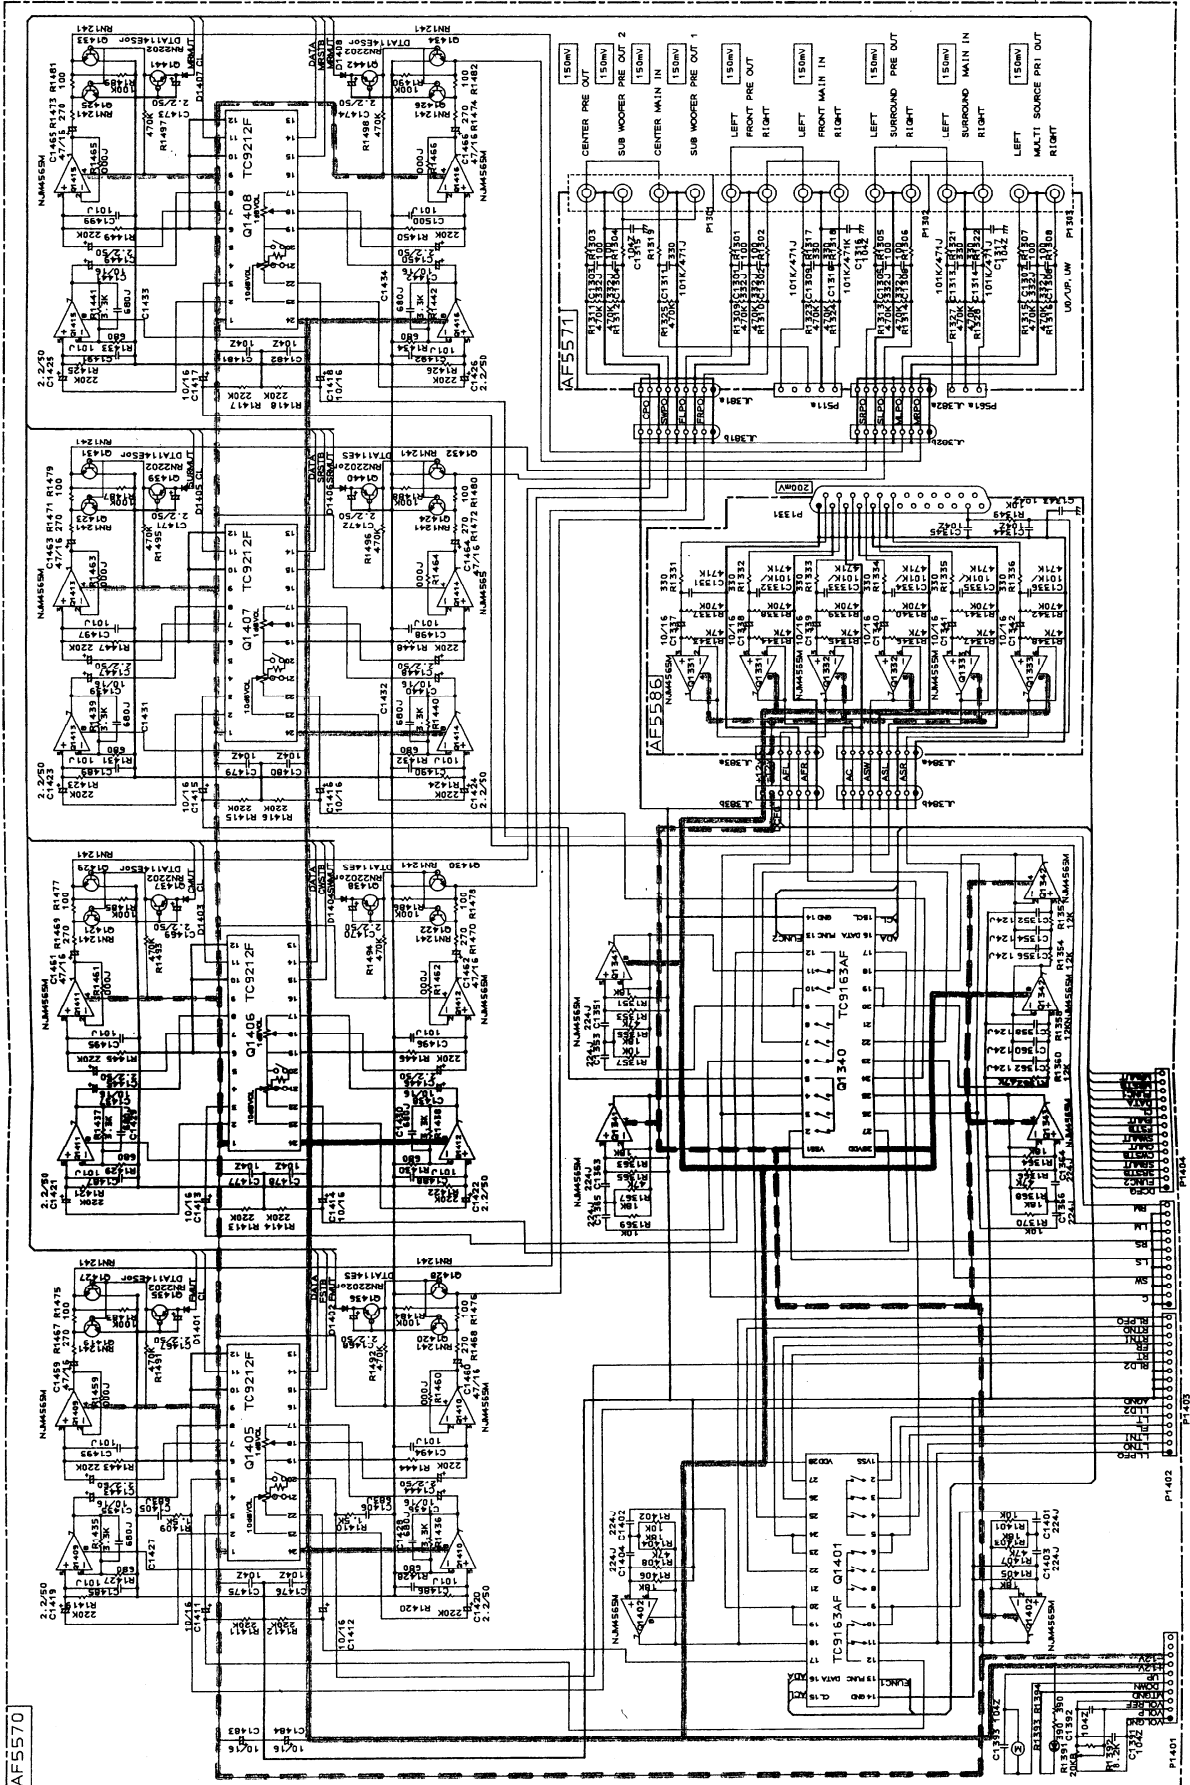

1 2 3 4 5

A B C D E F G

**SCHEMATIC DIAGRAM**  
**FRONT/CENTER AMP. AND POWER SUPPLY SECTION**

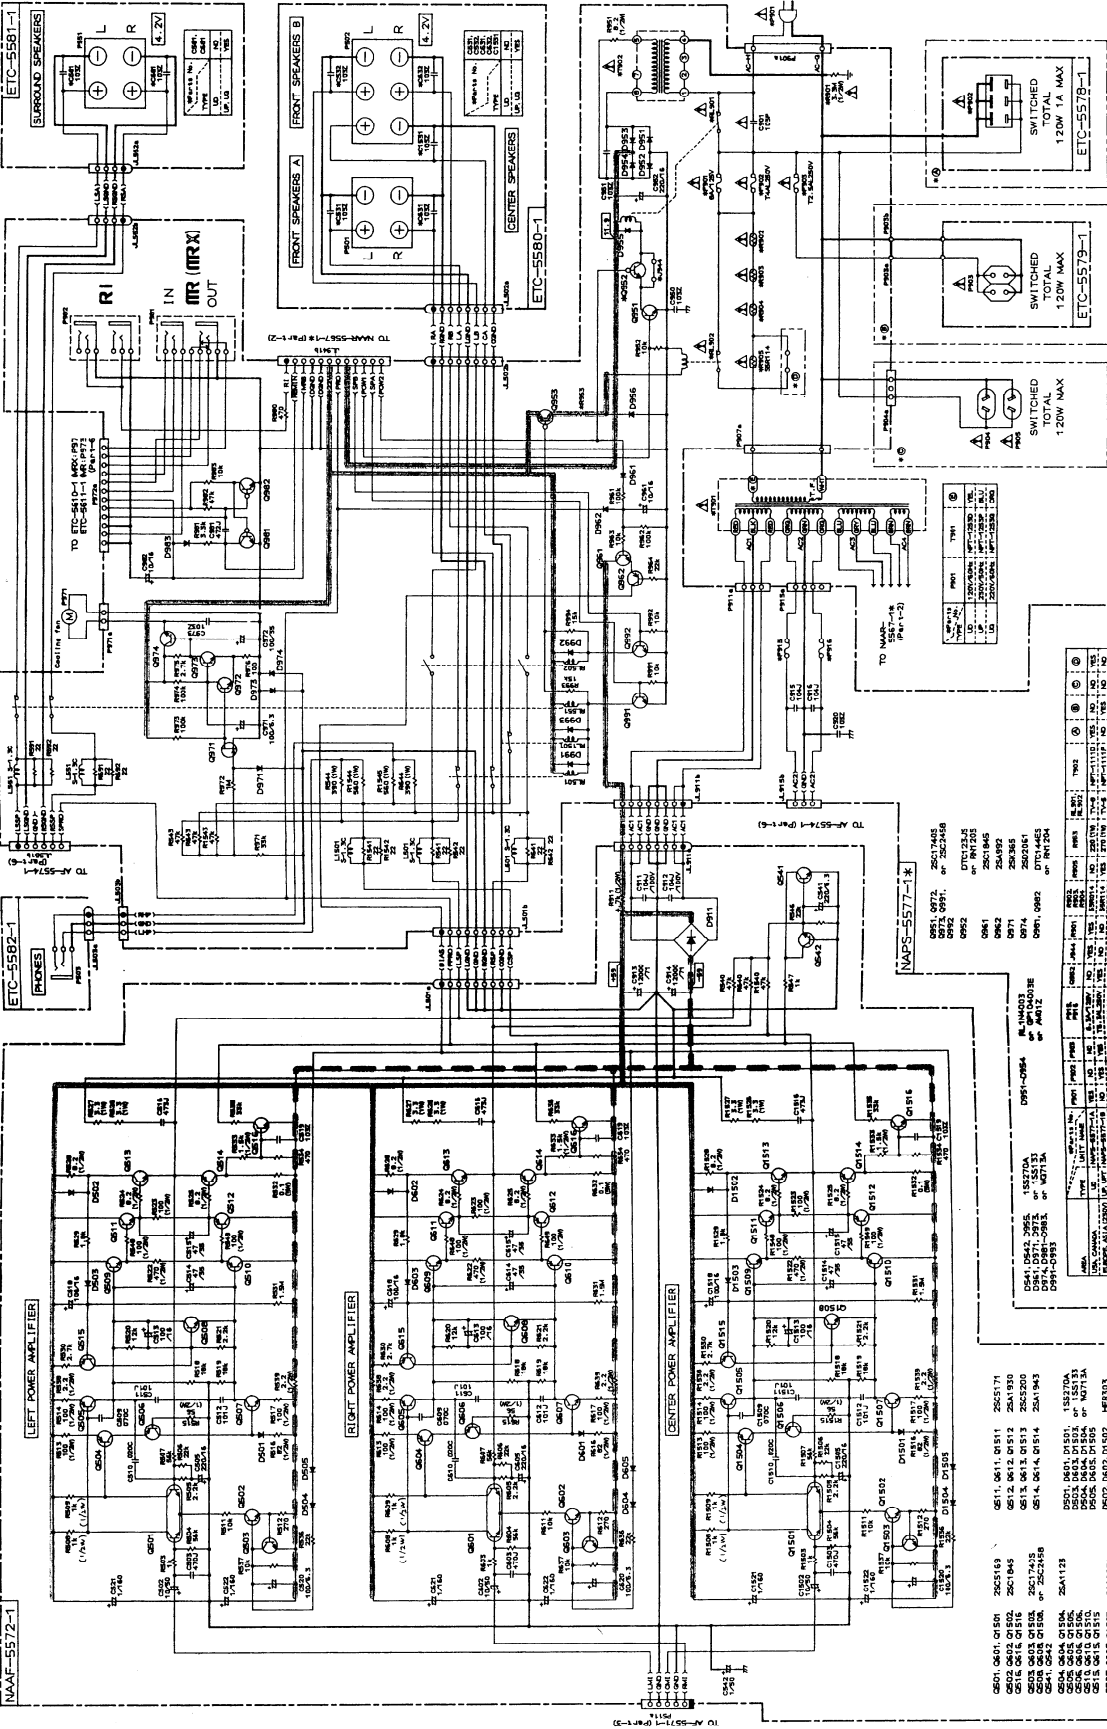

- Q201, Q204, Q150A, Q150B, Q150C, Q150D, Q150E, Q150F, Q150G, Q150H, Q150I, Q150J, Q150K, Q150L, Q150M, Q150N, Q150O, Q150P, Q150Q, Q150R, Q150S, Q150T, Q150U, Q150V, Q150W, Q150X, Q150Y, Q150Z
- Q151, Q152, Q153, Q154, Q155, Q156, Q157, Q158, Q159, Q160, Q161, Q162, Q163, Q164, Q165, Q166, Q167, Q168, Q169, Q170, Q171, Q172, Q173, Q174, Q175, Q176, Q177, Q178, Q179, Q180, Q181, Q182, Q183, Q184, Q185, Q186, Q187, Q188, Q189, Q190, Q191, Q192, Q193, Q194, Q195, Q196, Q197, Q198, Q199, Q200

- R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100

- C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19, C20, C21, C22, C23, C24, C25, C26, C27, C28, C29, C30, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C41, C42, C43, C44, C45, C46, C47, C48, C49, C50, C51, C52, C53, C54, C55, C56, C57, C58, C59, C60, C61, C62, C63, C64, C65, C66, C67, C68, C69, C70, C71, C72, C73, C74, C75, C76, C77, C78, C79, C80, C81, C82, C83, C84, C85, C86, C87, C88, C89, C90, C91, C92, C93, C94, C95, C96, C97, C98, C99, C100

- T1, T2, T3, T4, T5, T6, T7, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17, T18, T19, T20, T21, T22, T23, T24, T25, T26, T27, T28, T29, T30, T31, T32, T33, T34, T35, T36, T37, T38, T39, T40, T41, T42, T43, T44, T45, T46, T47, T48, T49, T50, T51, T52, T53, T54, T55, T56, T57, T58, T59, T60, T61, T62, T63, T64, T65, T66, T67, T68, T69, T70, T71, T72, T73, T74, T75, T76, T77, T78, T79, T80, T81, T82, T83, T84, T85, T86, T87, T88, T89, T90, T91, T92, T93, T94, T95, T96, T97, T98, T99, T100

- U1, U2, U3, U4, U5, U6, U7, U8, U9, U10, U11, U12, U13, U14, U15, U16, U17, U18, U19, U20, U21, U22, U23, U24, U25, U26, U27, U28, U29, U30, U31, U32, U33, U34, U35, U36, U37, U38, U39, U40, U41, U42, U43, U44, U45, U46, U47, U48, U49, U50, U51, U52, U53, U54, U55, U56, U57, U58, U59, U60, U61, U62, U63, U64, U65, U66, U67, U68, U69, U70, U71, U72, U73, U74, U75, U76, U77, U78, U79, U80, U81, U82, U83, U84, U85, U86, U87, U88, U89, U90, U91, U92, U93, U94, U95, U96, U97, U98, U99, U100

- SW1, SW2, SW3, SW4, SW5, SW6, SW7, SW8, SW9, SW10, SW11, SW12, SW13, SW14, SW15, SW16, SW17, SW18, SW19, SW20, SW21, SW22, SW23, SW24, SW25, SW26, SW27, SW28, SW29, SW30, SW31, SW32, SW33, SW34, SW35, SW36, SW37, SW38, SW39, SW40, SW41, SW42, SW43, SW44, SW45, SW46, SW47, SW48, SW49, SW50, SW51, SW52, SW53, SW54, SW55, SW56, SW57, SW58, SW59, SW60, SW61, SW62, SW63, SW64, SW65, SW66, SW67, SW68, SW69, SW70, SW71, SW72, SW73, SW74, SW75, SW76, SW77, SW78, SW79, SW80, SW81, SW82, SW83, SW84, SW85, SW86, SW87, SW88, SW89, SW90, SW91, SW92, SW93, SW94, SW95, SW96, SW97, SW98, SW99, SW100

- DIODES

- TRANSISTORS

- RESISTORS

- CAPACITORS

- TRANSFORMERS

- RELAYS

- MOTORS

- OTHER COMPONENTS

- REVISIONS

- DATE

- BY

- FOR

- APPROVED

- DESIGNED

- DRAWN

- CHECKED

- TESTED

- ASSEMBLED

- INSPECTED



- PACKAGED

- SHIPPED


- RECEIVED

A B C D E F G


SCHEMATIC DIAGRAM TUNER CIRCUIT SECTION

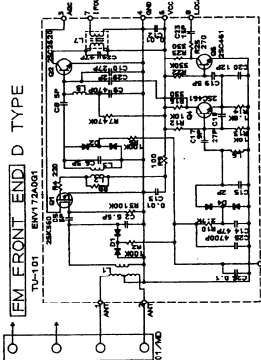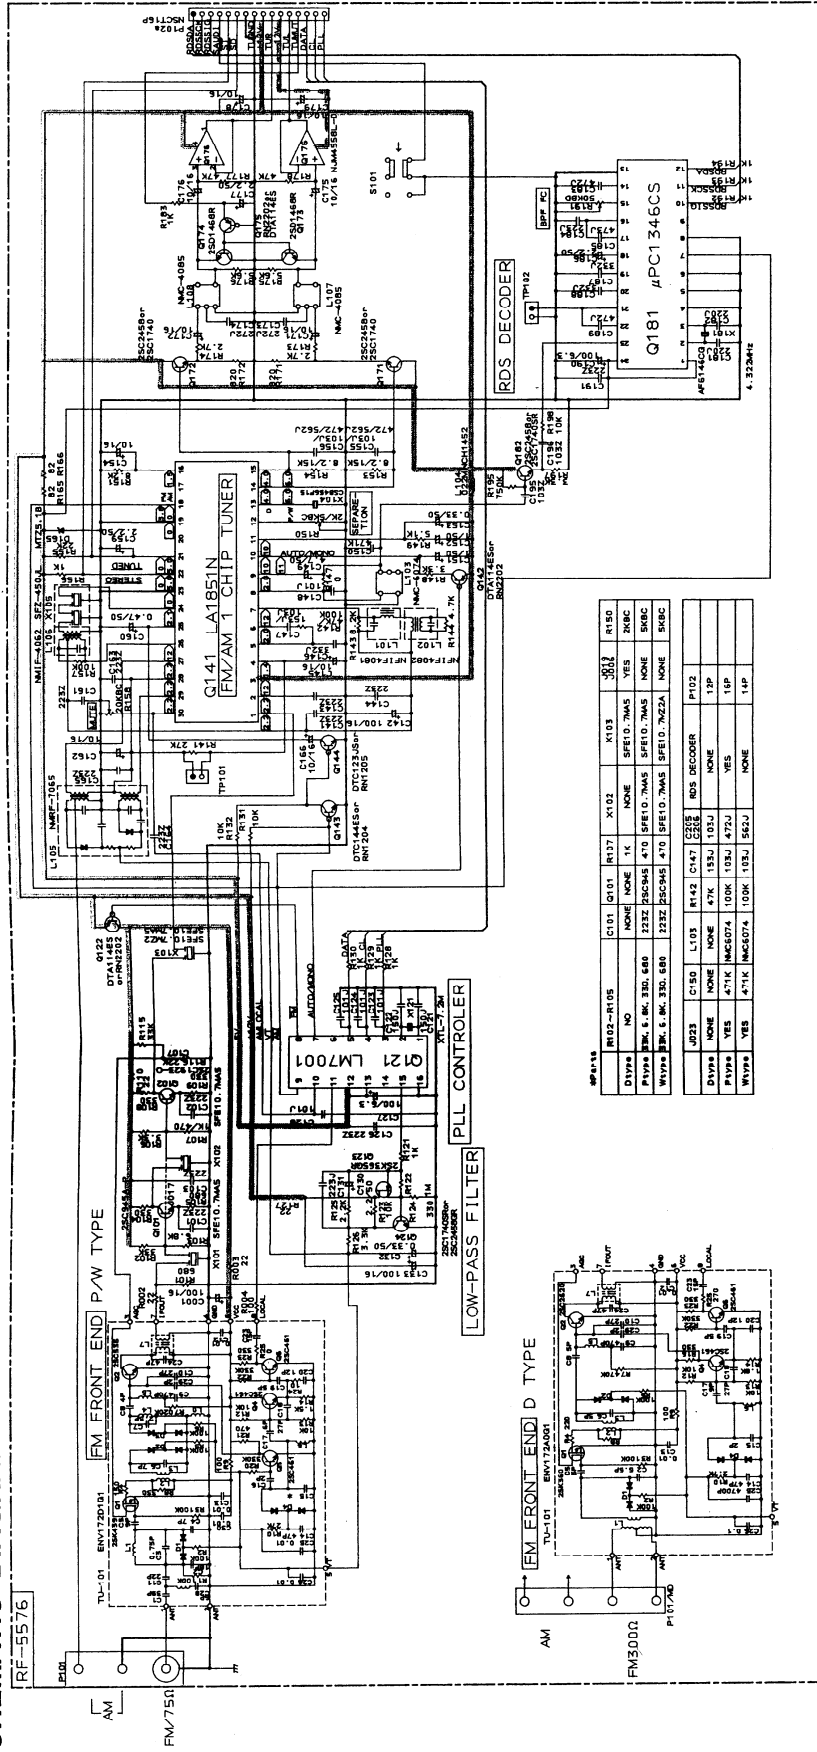

μ PC1346CS (RDS DECODER)

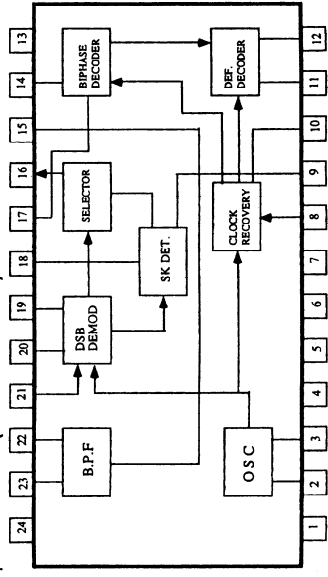

LA1851N (FM IF, MPX AND RADIO SYSTEM)

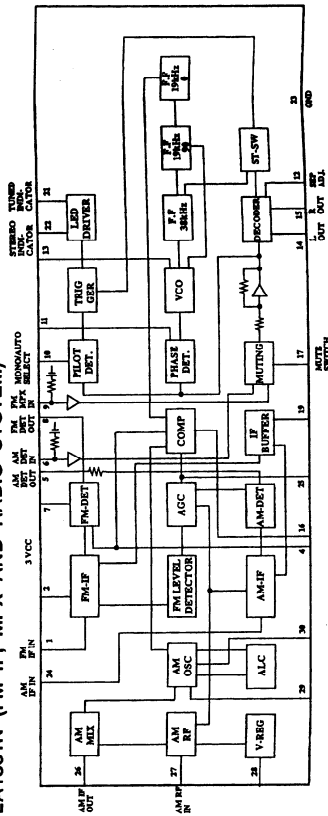

**SCHEMATIC DIAGRAM**  
**VIDEO CIRCUIT SECTION**

A

B

C


D

E

F

G

TX-SV8281HX TX-SV8281HX

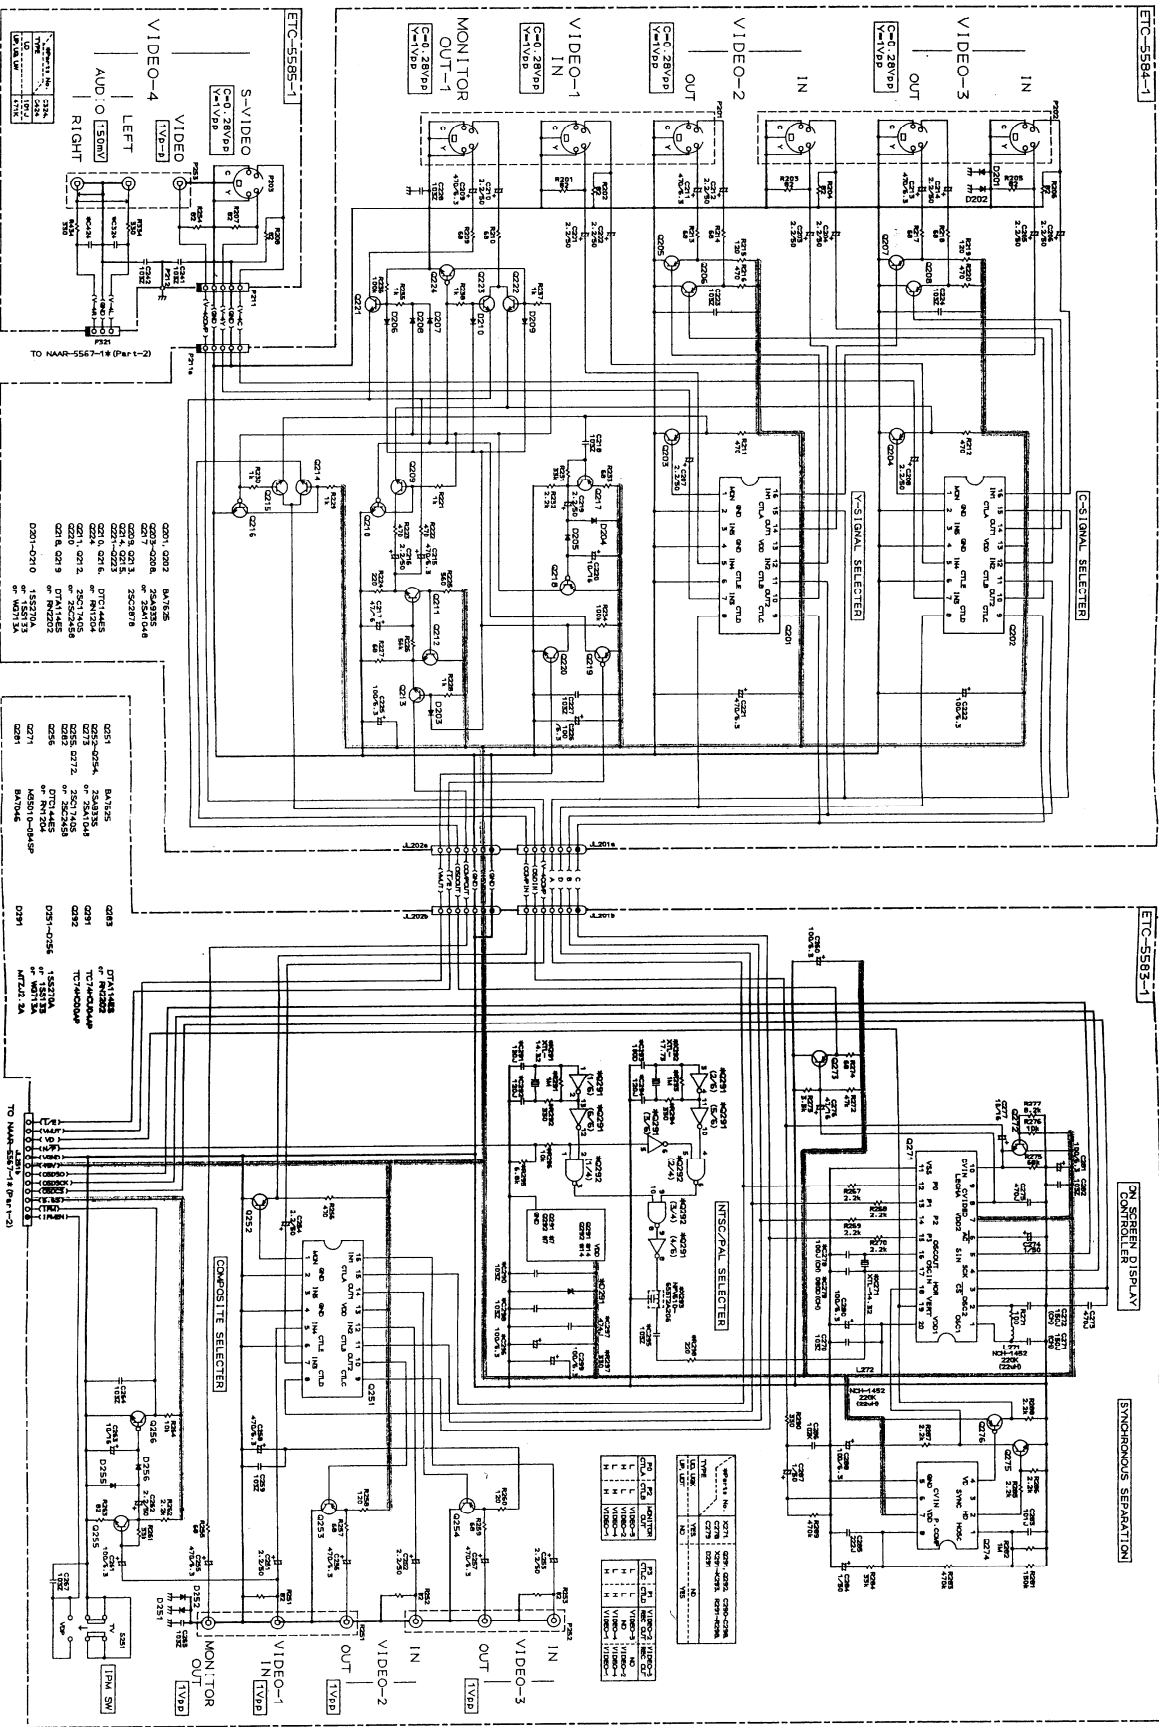







# SCHEMATIC DIAGRAM TONE AND SURROUND AMP. SECTION

A B C D E F G

TX-SV828THX TX-SV828THX

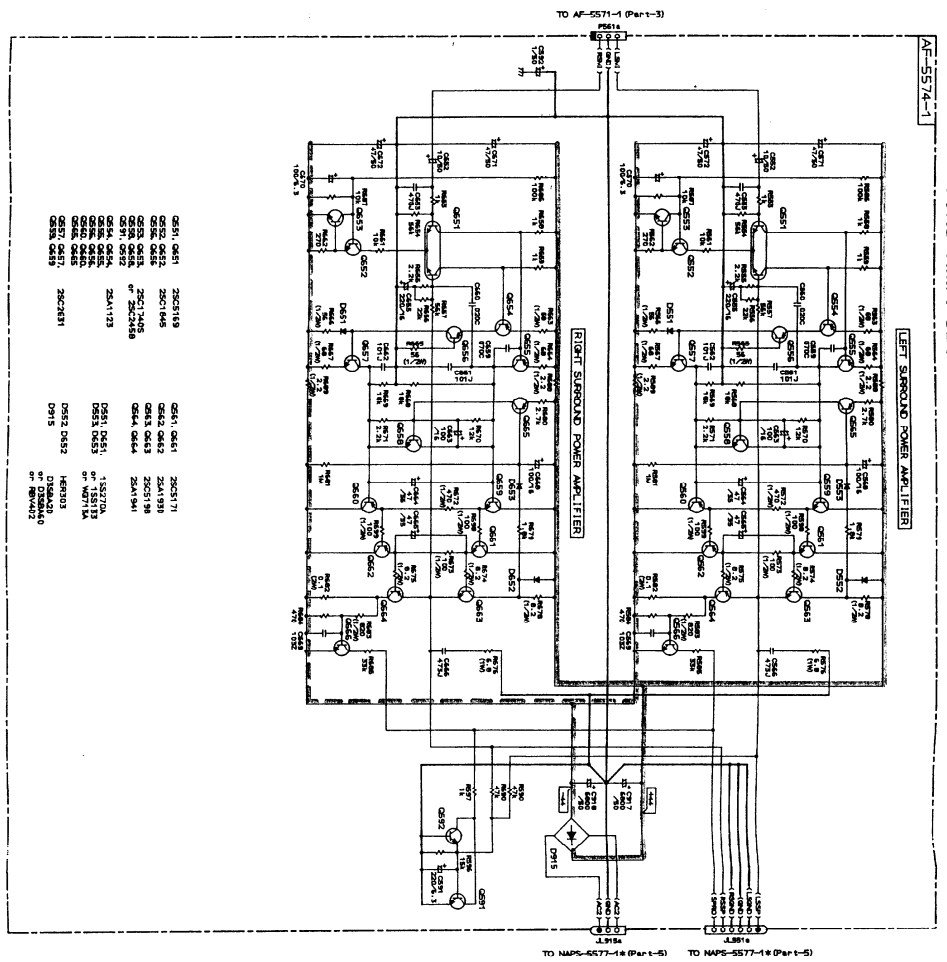


- |            |         |            |         |
|------------|---------|------------|---------|
| Q821, Q821 | 25C2119 | Q841, Q841 | 25C2171 |
| Q822, Q822 | 25C1148 | Q842, Q842 | 25C2171 |
| Q823, Q823 | 25C1148 | Q843, Q843 | 25C2171 |
| Q824, Q824 | 25C1148 | Q844, Q844 | 25C2171 |
| Q825, Q825 | 25C1148 | Q845, Q845 | 25C2171 |
| Q826, Q826 | 25C1148 | Q846, Q846 | 25C2171 |
| Q827, Q827 | 25C1148 | Q847, Q847 | 25C2171 |
| Q828, Q828 | 25C1148 | Q848, Q848 | 25C2171 |
| Q829, Q829 | 25C1148 | Q849, Q849 | 25C2171 |
| Q830, Q830 | 25C1148 | Q850, Q850 | 25C2171 |
| Q831, Q831 | 25C1148 | Q851, Q851 | 25C2171 |
| Q832, Q832 | 25C1148 | Q852, Q852 | 25C2171 |
| Q833, Q833 | 25C1148 | Q853, Q853 | 25C2171 |
| Q834, Q834 | 25C1148 | Q854, Q854 | 25C2171 |
| Q835, Q835 | 25C1148 | Q855, Q855 | 25C2171 |
| Q836, Q836 | 25C1148 | Q856, Q856 | 25C2171 |
| Q837, Q837 | 25C1148 | Q857, Q857 | 25C2171 |
| Q838, Q838 | 25C1148 | Q858, Q858 | 25C2171 |
| Q839, Q839 | 25C1148 | Q859, Q859 | 25C2171 |
| Q840, Q840 | 25C1148 | Q860, Q860 | 25C2171 |
| Q841, Q841 | 25C1148 | Q861, Q861 | 25C2171 |
| Q842, Q842 | 25C1148 | Q862, Q862 | 25C2171 |
| Q843, Q843 | 25C1148 | Q863, Q863 | 25C2171 |
| Q844, Q844 | 25C1148 | Q864, Q864 | 25C2171 |
| Q845, Q845 | 25C1148 | Q865, Q865 | 25C2171 |
| Q846, Q846 | 25C1148 | Q866, Q866 | 25C2171 |
| Q847, Q847 | 25C1148 | Q867, Q867 | 25C2171 |
| Q848, Q848 | 25C1148 | Q868, Q868 | 25C2171 |
| Q849, Q849 | 25C1148 | Q869, Q869 | 25C2171 |
| Q850, Q850 | 25C1148 | Q870, Q870 | 25C2171 |

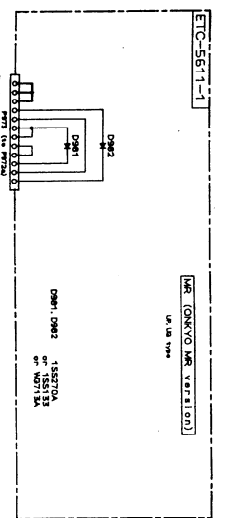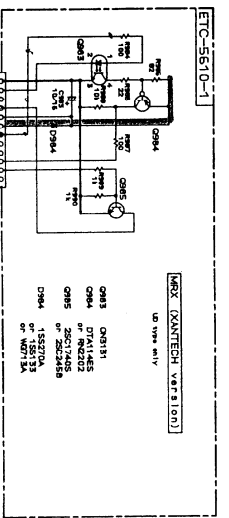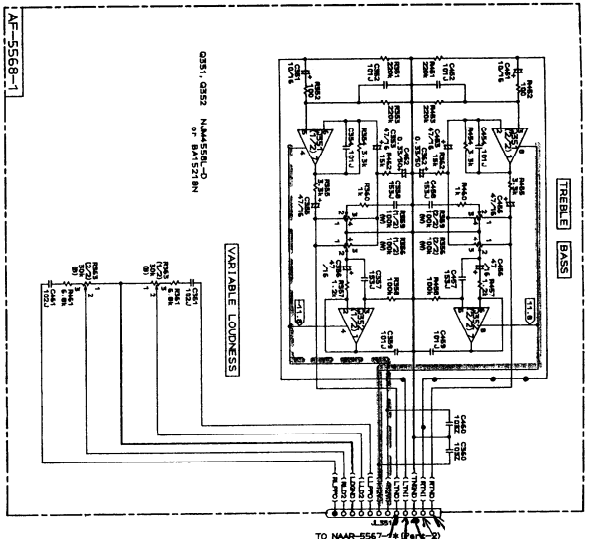

# SCHEMATIC DIAGRAM DISPLAY AND DSP SECTION

A B C D E F G

TX-SV828THX TX-SV828THX

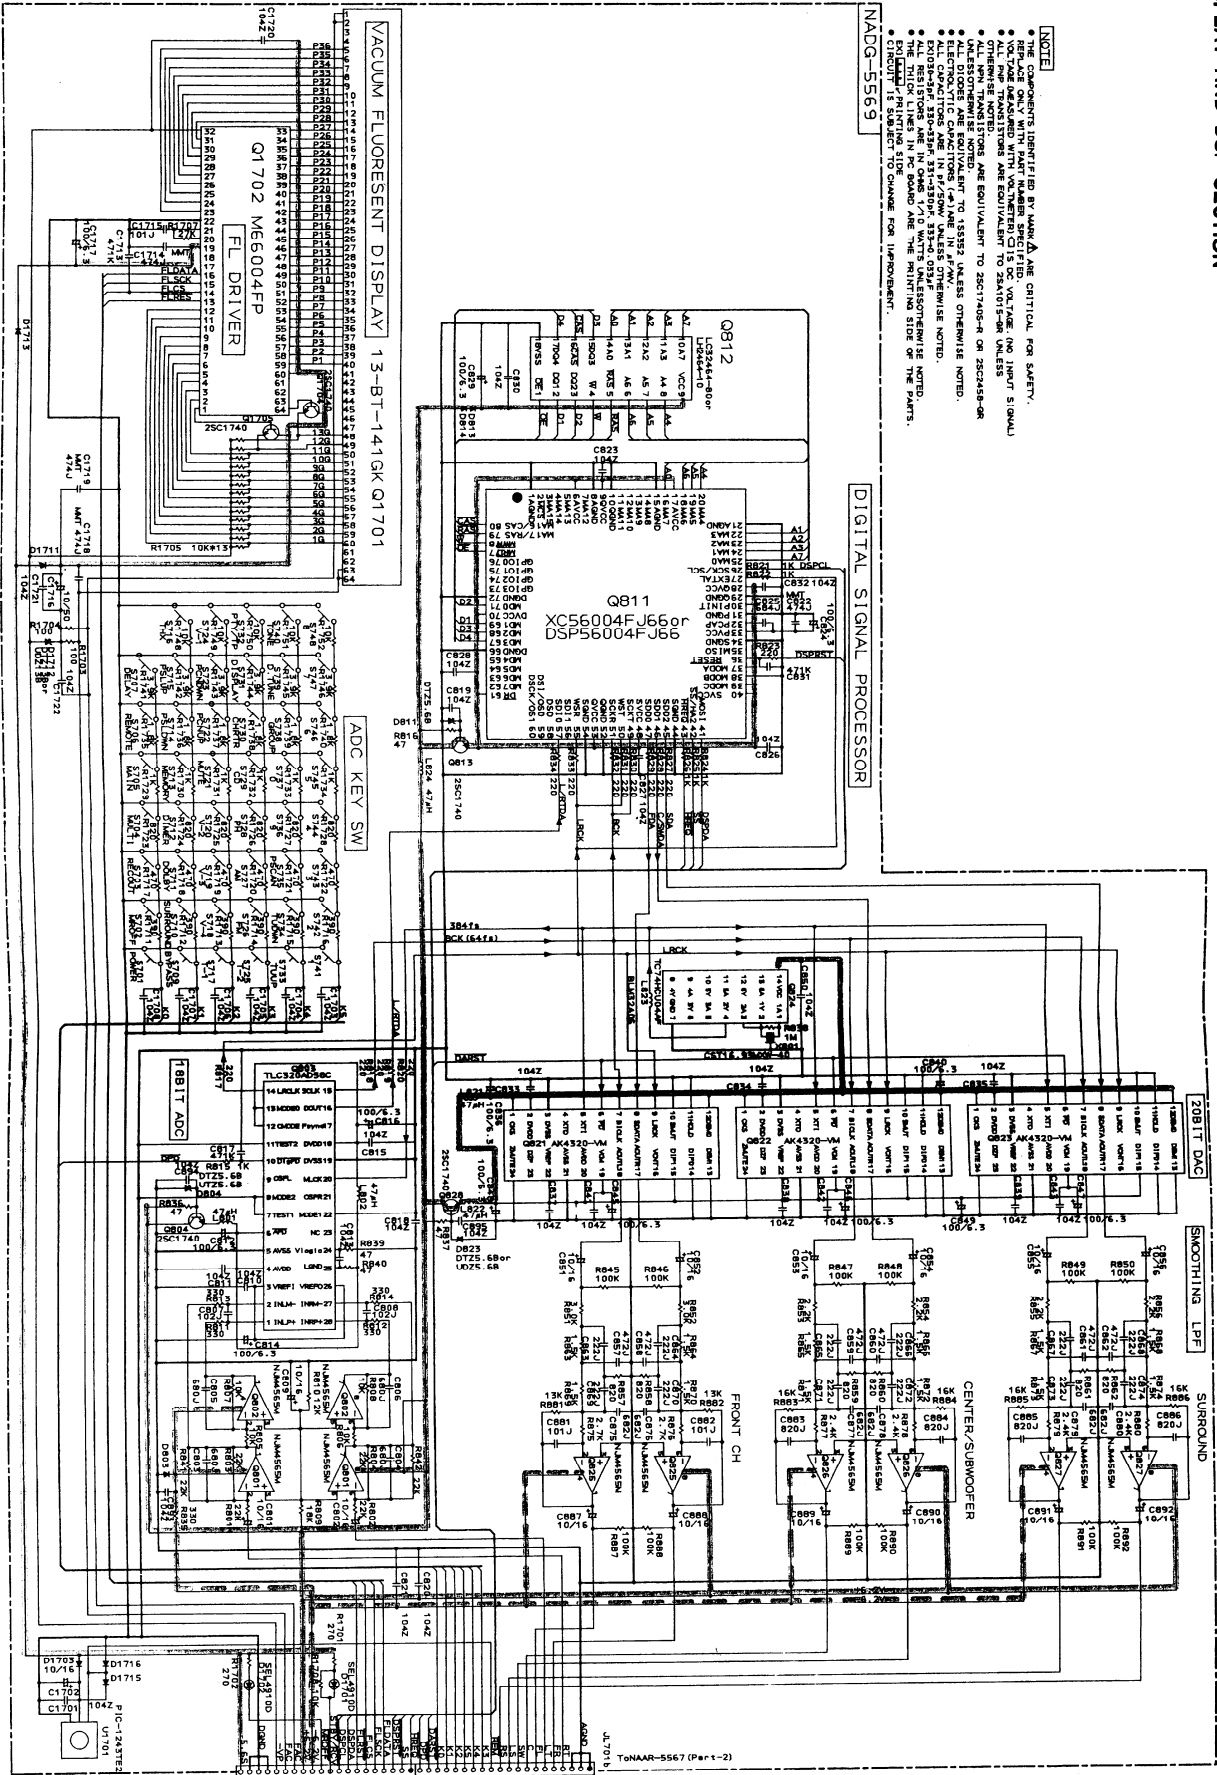

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK A ARE CRITICAL FOR SAFETY.
  - VOLTAGE DERATED WITH UNLIMITED LIFE. DO NOT VOLTAGE IN EXCESS OF 250V UNLESS OTHERWISE NOTED.
  - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2N4105-98 UNLESS OTHERWISE NOTED.
  - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1740S-R OR 2SC2458S-R UNLESS OTHERWISE NOTED.
  - ELECTROLYTIC CAPACITORS (E) ARE IN  $\mu\text{F/W}$ . OTHERWISE NOTED.
  - ELECTROLYTIC CAPACITORS (E) ARE IN  $\mu\text{F/W}$ . OTHERWISE NOTED.
  - ALL RESISTORS ARE IN OHMS UNLESS OTHERWISE NOTED.
  - DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
  - EXCEPT AS SHOWN, ALL DIMENSIONS ARE THE PRINTING SIDE OF THE PARTS.
  - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

NADG-5569

# ADJUSTMENT PROCEDURES

## Preparation

1. Input


FM mono: 1kHz, 75kHz dev., 60dB/μV

FM stereo: 1kHz, 67.5kHz dev., 60dB/μV

Pilot signal: 19kHz 7.5kHz dev.


AM: 400Hz, 30% mod.

## 1. FM ADJUSTMENT

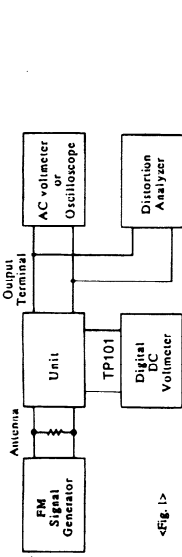


<Fig. 1>


Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuning frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM IF/RF	1	Fig. 1	99.0MHz 1kHz 75kHz dev., 65dB(60dB)	—	99.0MHz	DC voltmeter	L101	0±20mV	FM MUTE/MODE switch: OFF/MONO Repeat the steps 1 and 3 until no further adjustment is necessary.
	IFT on the front end						Maximum		
	L102						Minimum		
Stereo Distortion	1	Fig. 2	99.0MHz Ext. mod. 65dB(60dB)	Channel L or R 1kHz	99.0MHz	Distortion analyzer	IFT on the front end	Minimum	Don't turn more than ±180°
	2	Fig. 2	99.0MHz Ext. mod. 65dB(60dB)	Channel L 1kHz Channel R 1kHz	99.0MHz	Channel R AC voltmeter Channel L AC voltmeter	R150	Minimum	Maximum and same separation
Muting Level	1	Fig. 2	99.0MHz	—	99.0MHz	Oscilloscope	R158	Signal output	
	2	Fig. 3	99.0MHz Ext. mod. 60dB	RDS data 57kHz, 3% dev.	99.0MHz	Oscilloscope	R191	Maximum	



<Fig. 2>



<Fig. 3>

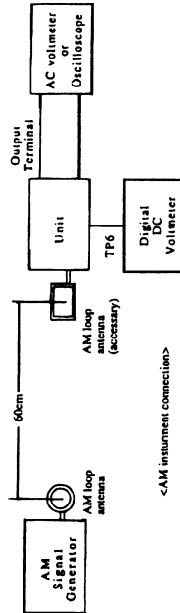

<AM instrument connection>

## 2. AM ADJUSTMENT

120V model


Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1	—	530kHz	Digital DC voltmeter	OSC coil on RF block L151	1.4±0.2V
2	600kHz 400Hz, 30% mod. 60dB/m	600kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	990kHz 400Hz, 30% mod. 60dB/m	990kHz	AC voltmeter	L152	Maximum

Reference Specification  
 FM tuned voltage: 7.5MHz ~ 108.0MHz  
 More than 1.3V ~ Less than 10V  
 AM tuned voltage: 530kHz ~ 1710kHz  
 1.4±0.2V ~ Less than 9.0V

230V models

Step	AM SG output	Tuning Frequency	Output Indicator	Adjustment point	Adjust for
1	—	522kHz or 531kHz	Digital DC voltmeter	OSC coil on RF block L151	1.3±0.1V
2	603kHz 400Hz, 30% mod. 60dB/m	603kHz	AC voltmeter	RF coil on RF block L151	Maximum
3	999kHz 400Hz, 30% mod. 60dB/m	999kHz	AC voltmeter	L152	Maximum


Reference Specification  
 FM tuned voltage: 7.5MHz ~ 108.0MHz  
 More than 1.3V ~ Less than 10V  
 AM tuned voltage: 522kHz ~ 1711kHz  
 1.3±0.2V ~ Less than 9.0V

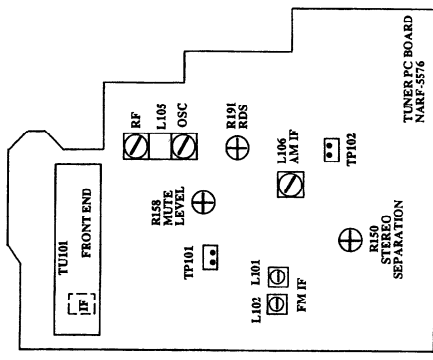

## Adjustment point

# SCHEMATIC DIAGRAM

## INPUT / OUTPUT AND MICROPROCESSOR SECTION

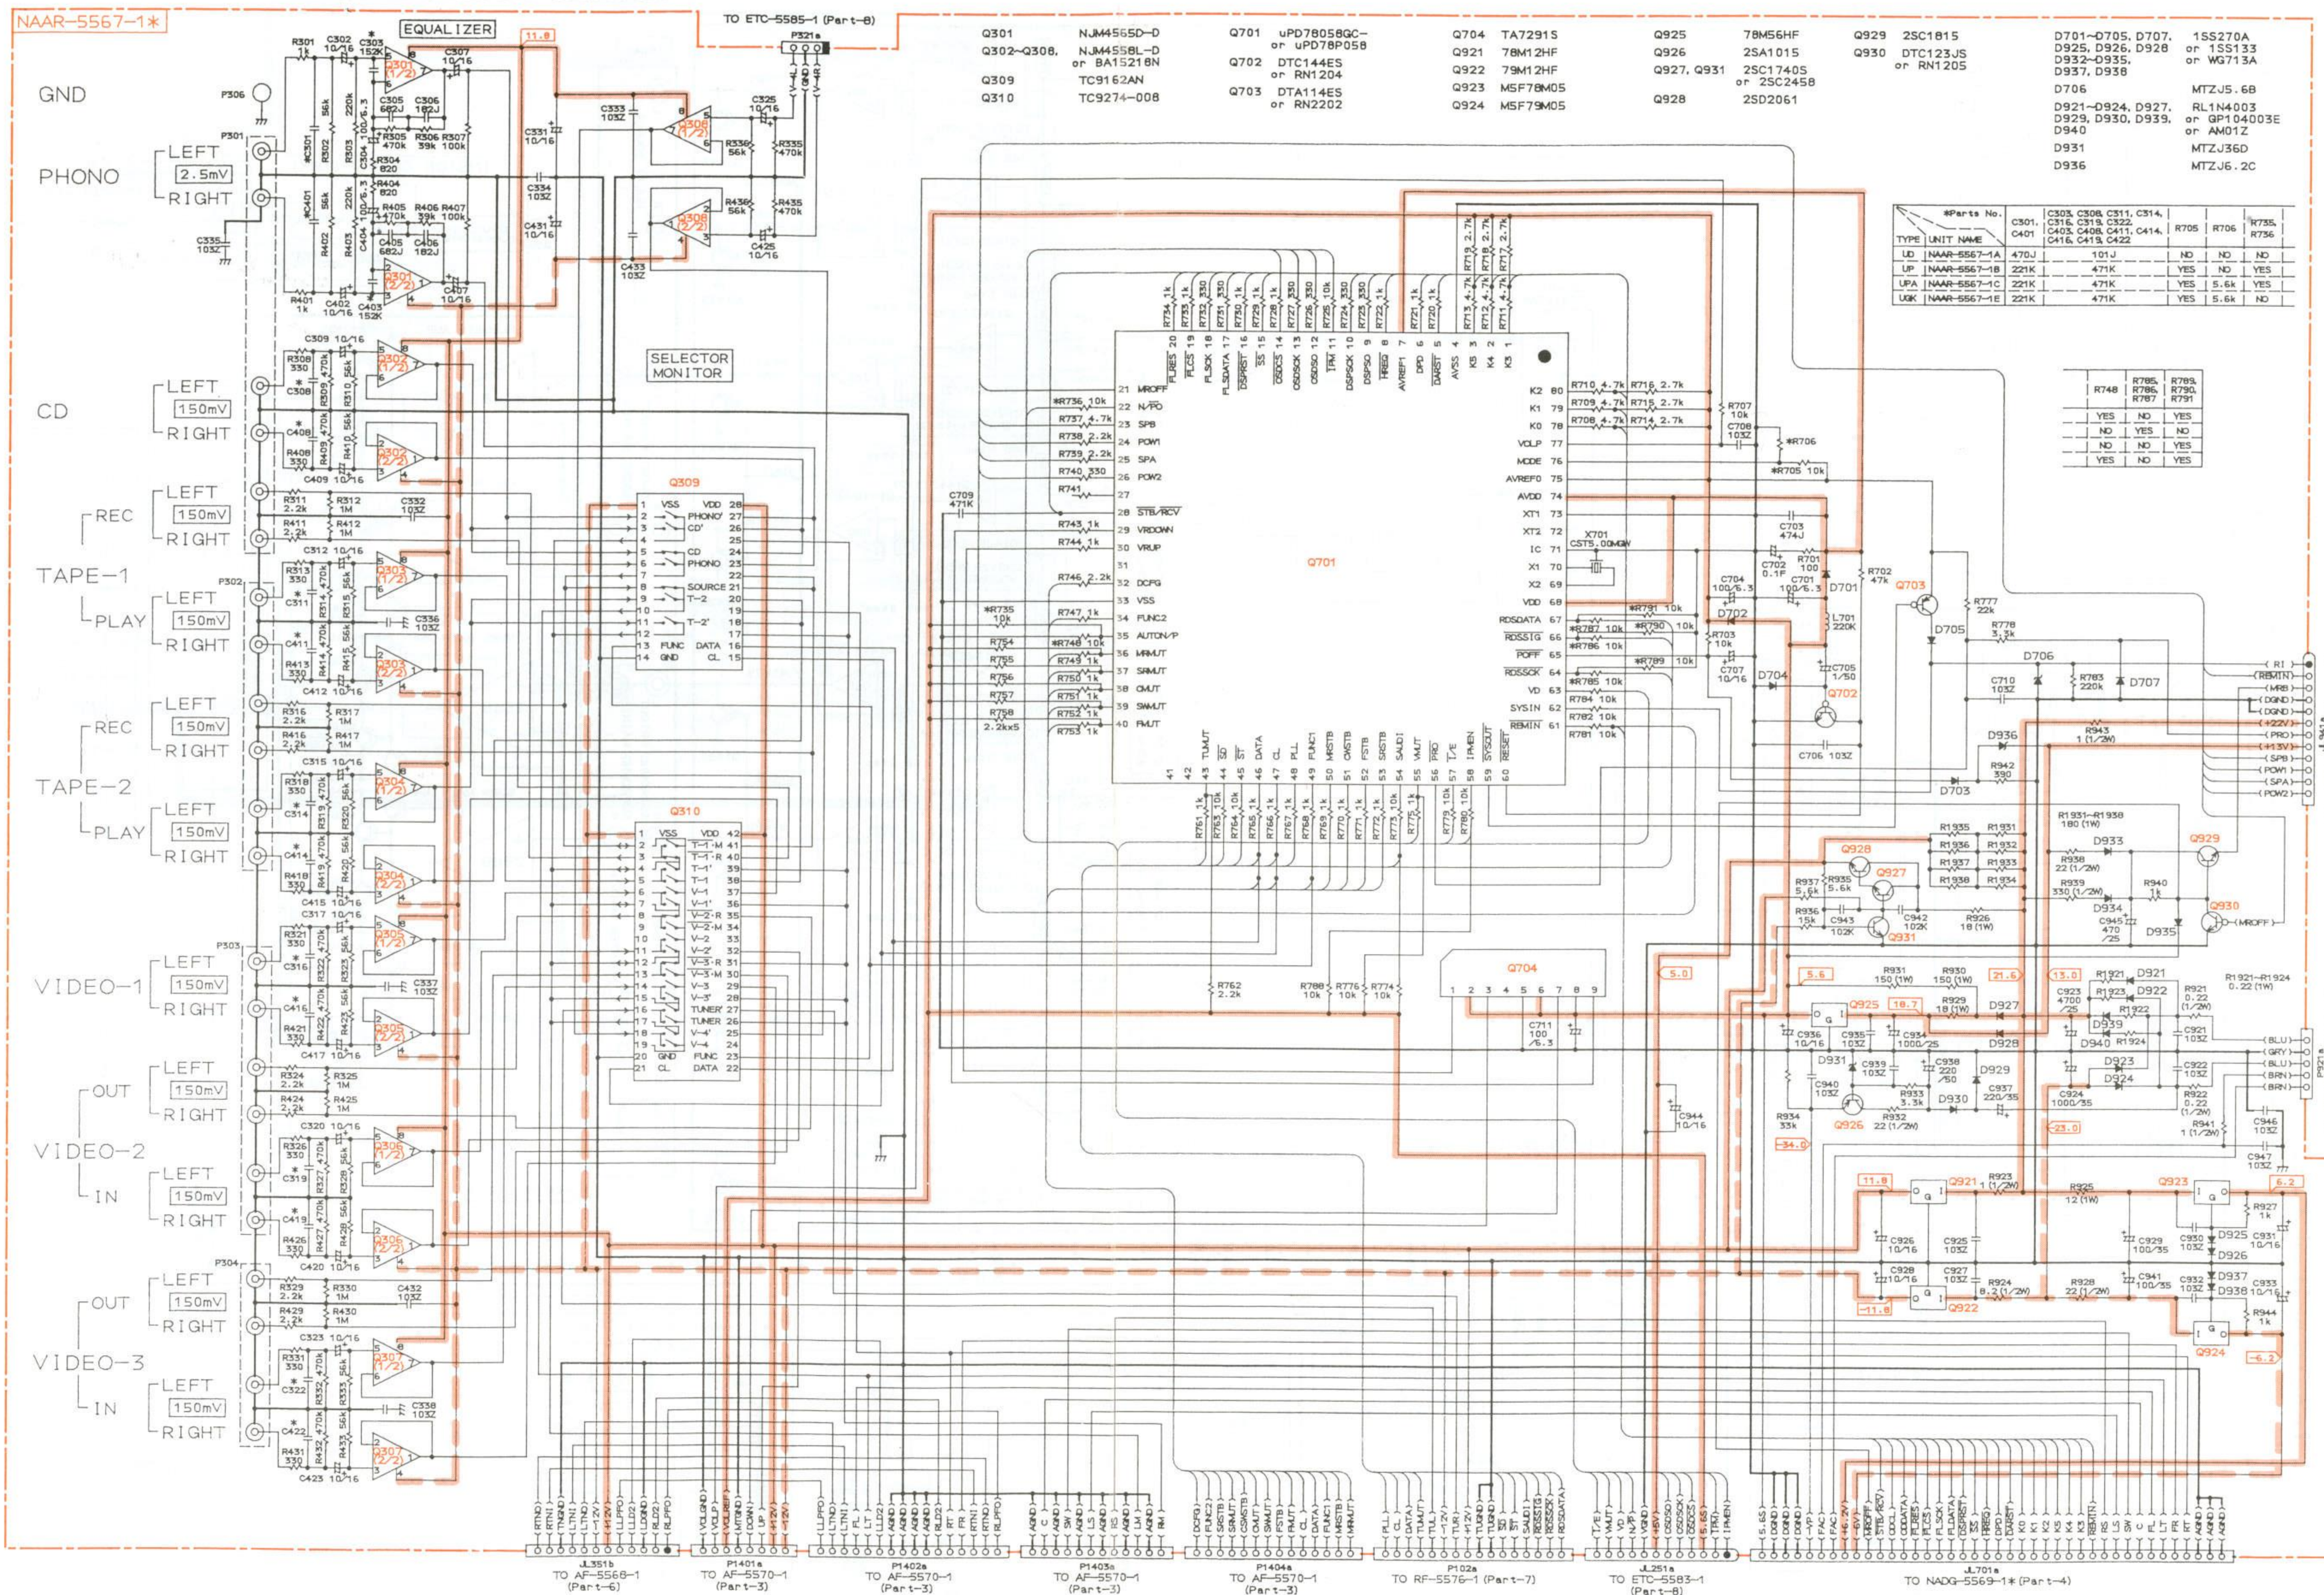

Q301	NUM4555D-D	Q701	uPD78058GC- or uPD78P058	Q704	TA7291S	Q925	78M56HF	Q929	2SC1815	D701-D705, D707, D925, D926, D928, D932-D935, D937, D938	1SS270A or 1SS133 D932-D935, D937, D938
Q302-Q308	NUM4558L-D or BA15218N	Q702	DTC144ES or RN1204	Q921	78M12HF	Q926	2SA1015	Q930	DTC123JS or RN1205	D706	MTZJ5.6B
Q309	TC9162AN	Q703	DTA114ES or RN2202	Q922	79M12HF	Q927, Q931	2SC1740S or 2SC2458			D921-D924, D927, D929, D930, D939, D940	RL1N4003 or GP104003E or AM01Z
Q310	TC9274-008			Q923	MSF78M05	Q928	2SD2061			D931	MTZJ36D
				Q924	MSF79M05					D936	MTZJ6.2C

#Parts No.	C301, C401	C303, C306, C311, C314, C316, C319, C322, C403, C408, C411, C414, C416, C419, C422	R705	R706	R735, R736	
LD	NAAR-5567-1A	470J	101J	NO	NO	NO
LP	NAAR-5567-1B	221K	471K	YES	NO	YES
LPA	NAAR-5567-1C	221K	471K	YES	5.6k	YES
LQK	NAAR-5567-1E	221K	471K	YES	5.6k	NO

R748	R785, R786, R787	R789, R790, R791
YES	NO	YES
NO	YES	NO
NO	NO	NO
YES	NO	YES

1  
2  
3  
4  
5