

Service Manual

Portable Stereo CD System

RX-DS16

Simplified
MASH*
 multi-stage noise shaping

COMPACT
disc
 DIGITAL AUDIO
**Colour**

(K) ... Black Type

Area

Suffix for Model No.	Area	Colour
(E)	Europe and Russia	(K)
(EB)	Great Britain	
(EG)	Germany and Italy	

* MASH is a trademark of NTT.

TAPE SECTION : SG20 Mechanism Series
CD SECTION : RAE0152Z-M Traverse Deck Series

Please file and use this Service Manual together with the Service Manual for Model No. RX-DS 18 (E,EB,EG) Order No. MD9803067C2 .

Note : This Simplified Service Manual is provided to indicate the main difference between the original Model No. RX-DS 18 (E,EB,EG) and the subsequent Model No. RX-DS 16 (E,EB,EG).

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Panasonic®

© 1998 Matsushita Electronics (S) Pte. Ltd.
 All rights reserved. Unauthorized copying
 and distribution is a violation of law.

Schematic Diagram

B MAIN(TUNER) CIRCUIT
 (P.C.Board on page 8)

:+B line


: AM signal line

: FM signal line

: AM OSC signal line

: FM OSC signal line

: AM/FM signal line

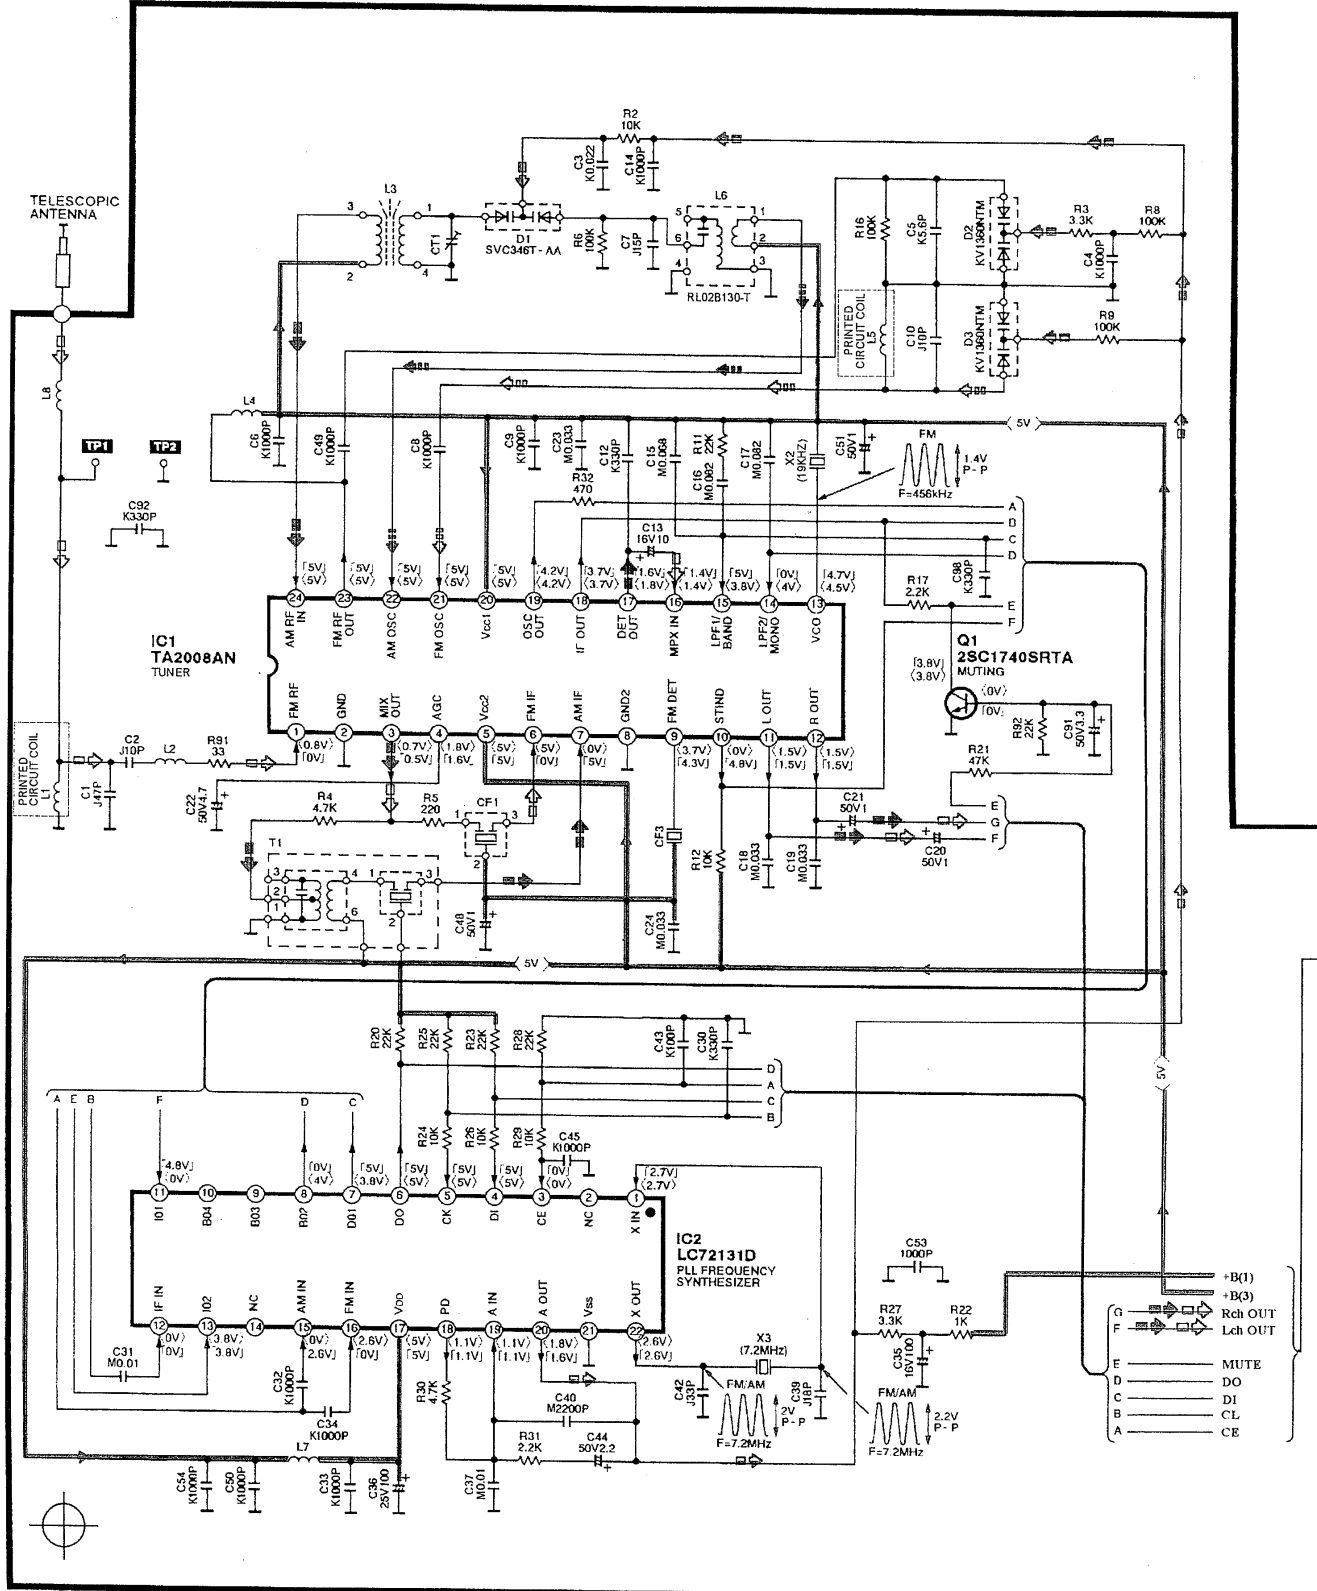


 : +B line
  : Playback signal line
  : FM signal line
  : AM signal line
  : REC signal line

C OPERATION CIRCUIT

(P.C.Board: on page 10)


D SWITCH CIRCUIT


(P.C.Board: on page 7)

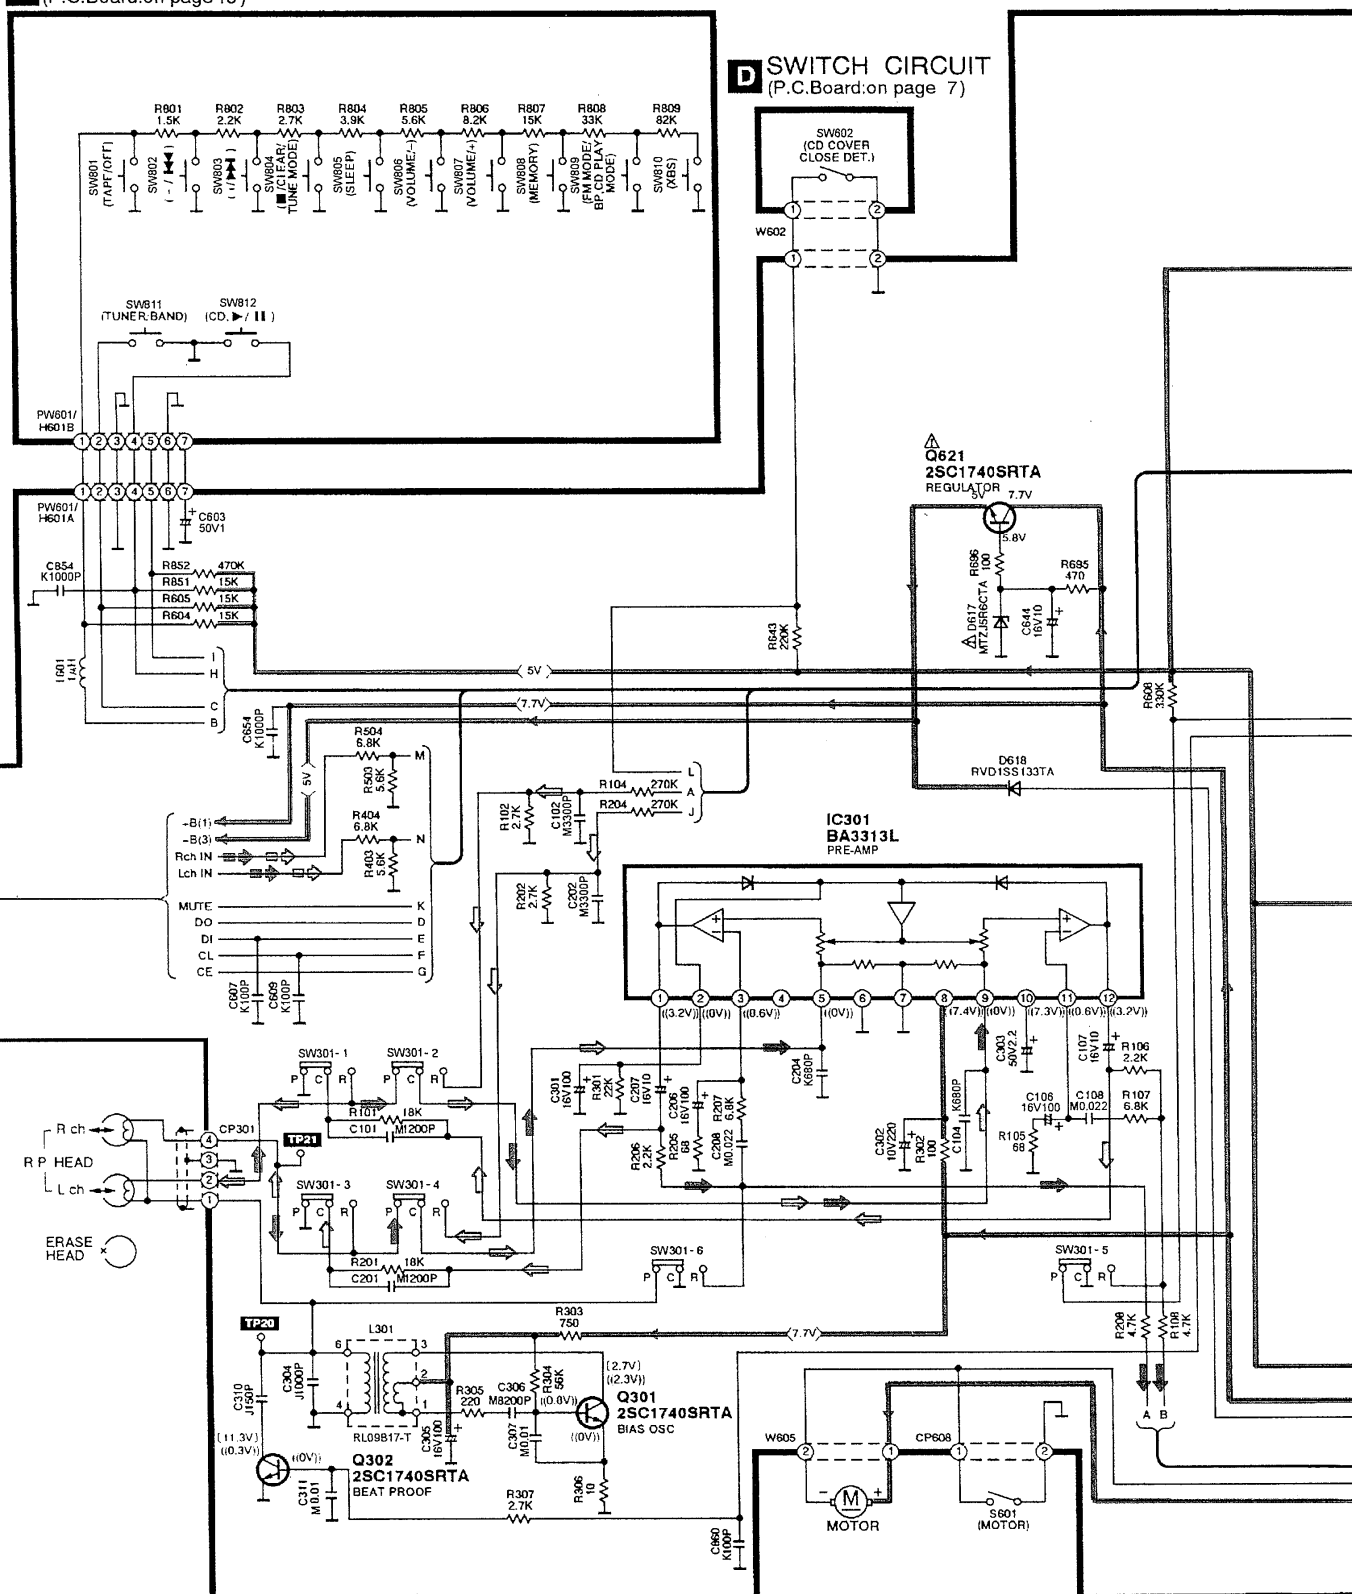

→ : +B line


→ : REC signal line

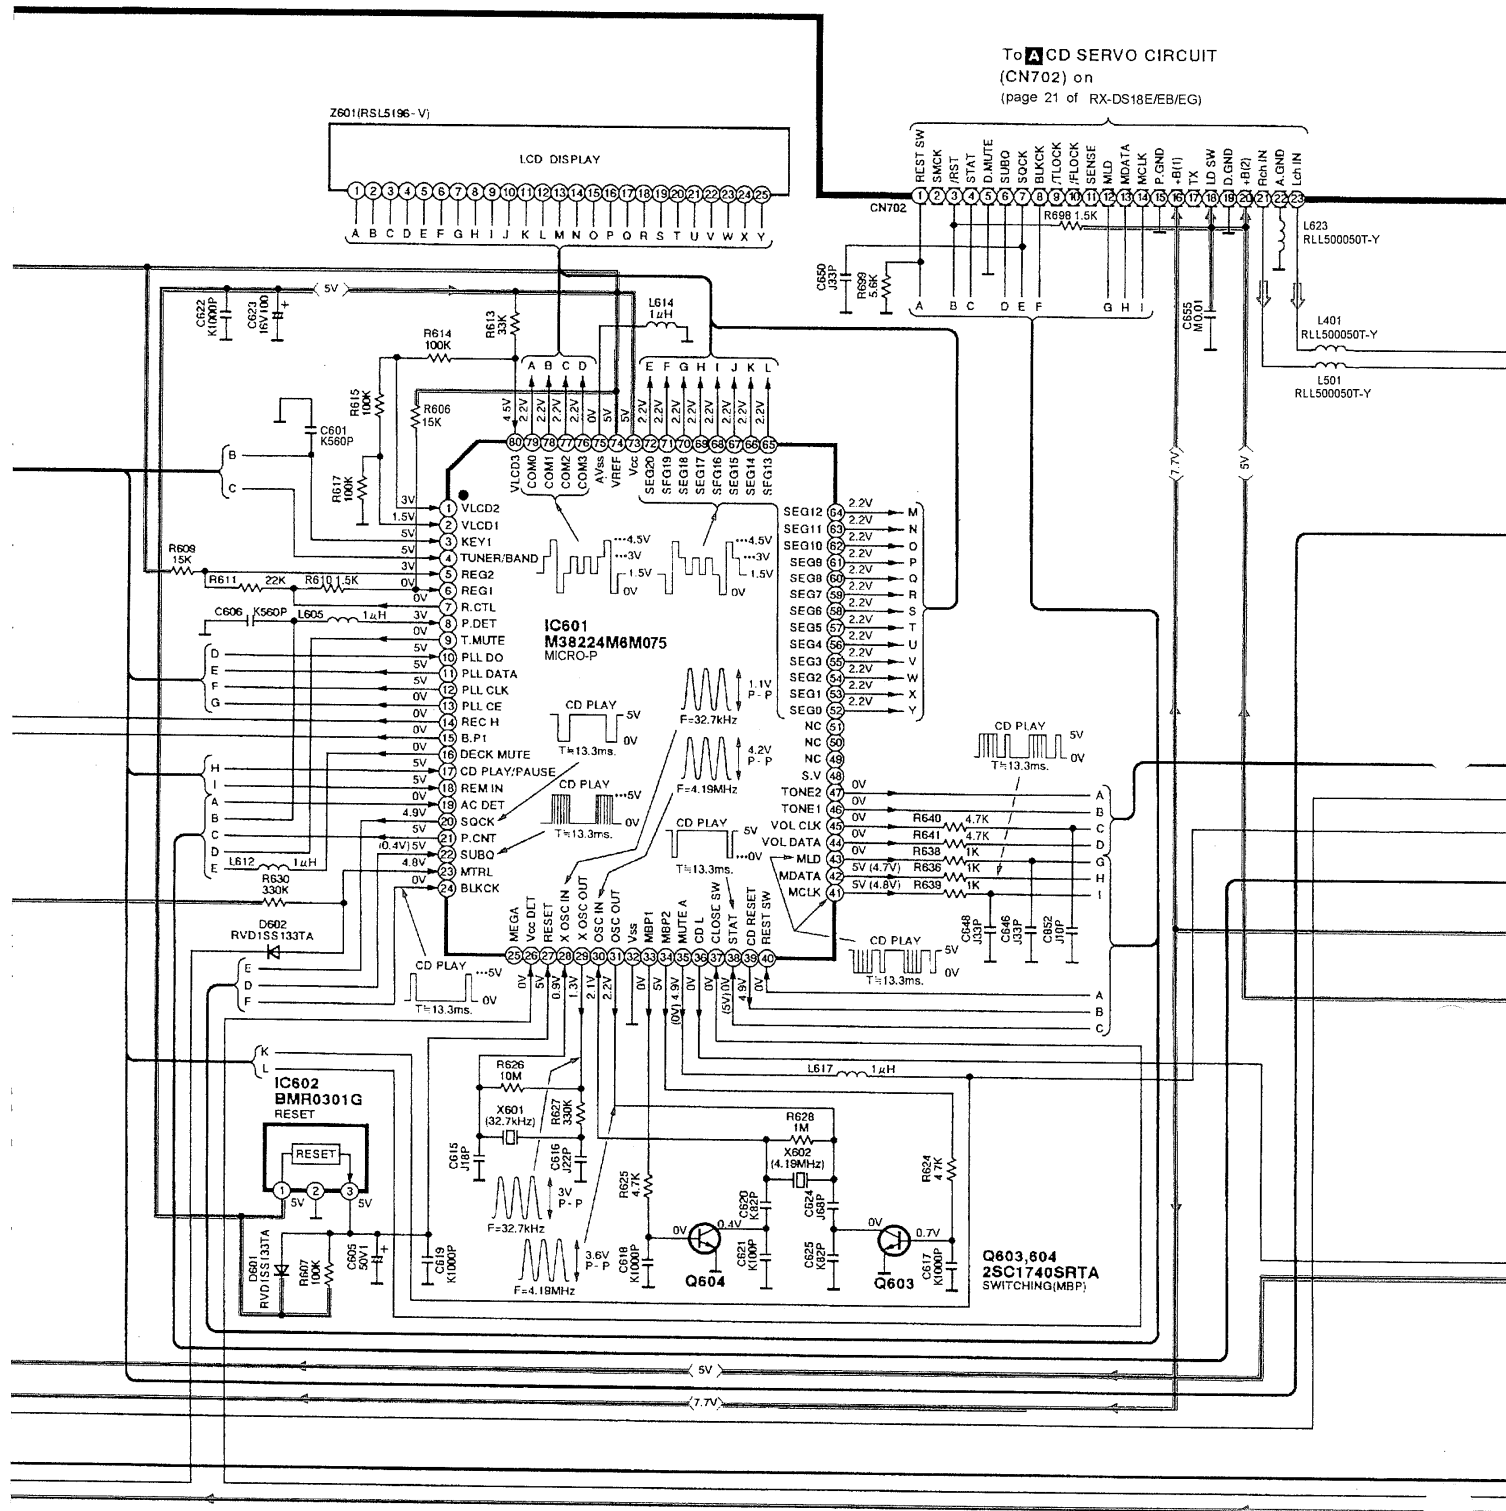

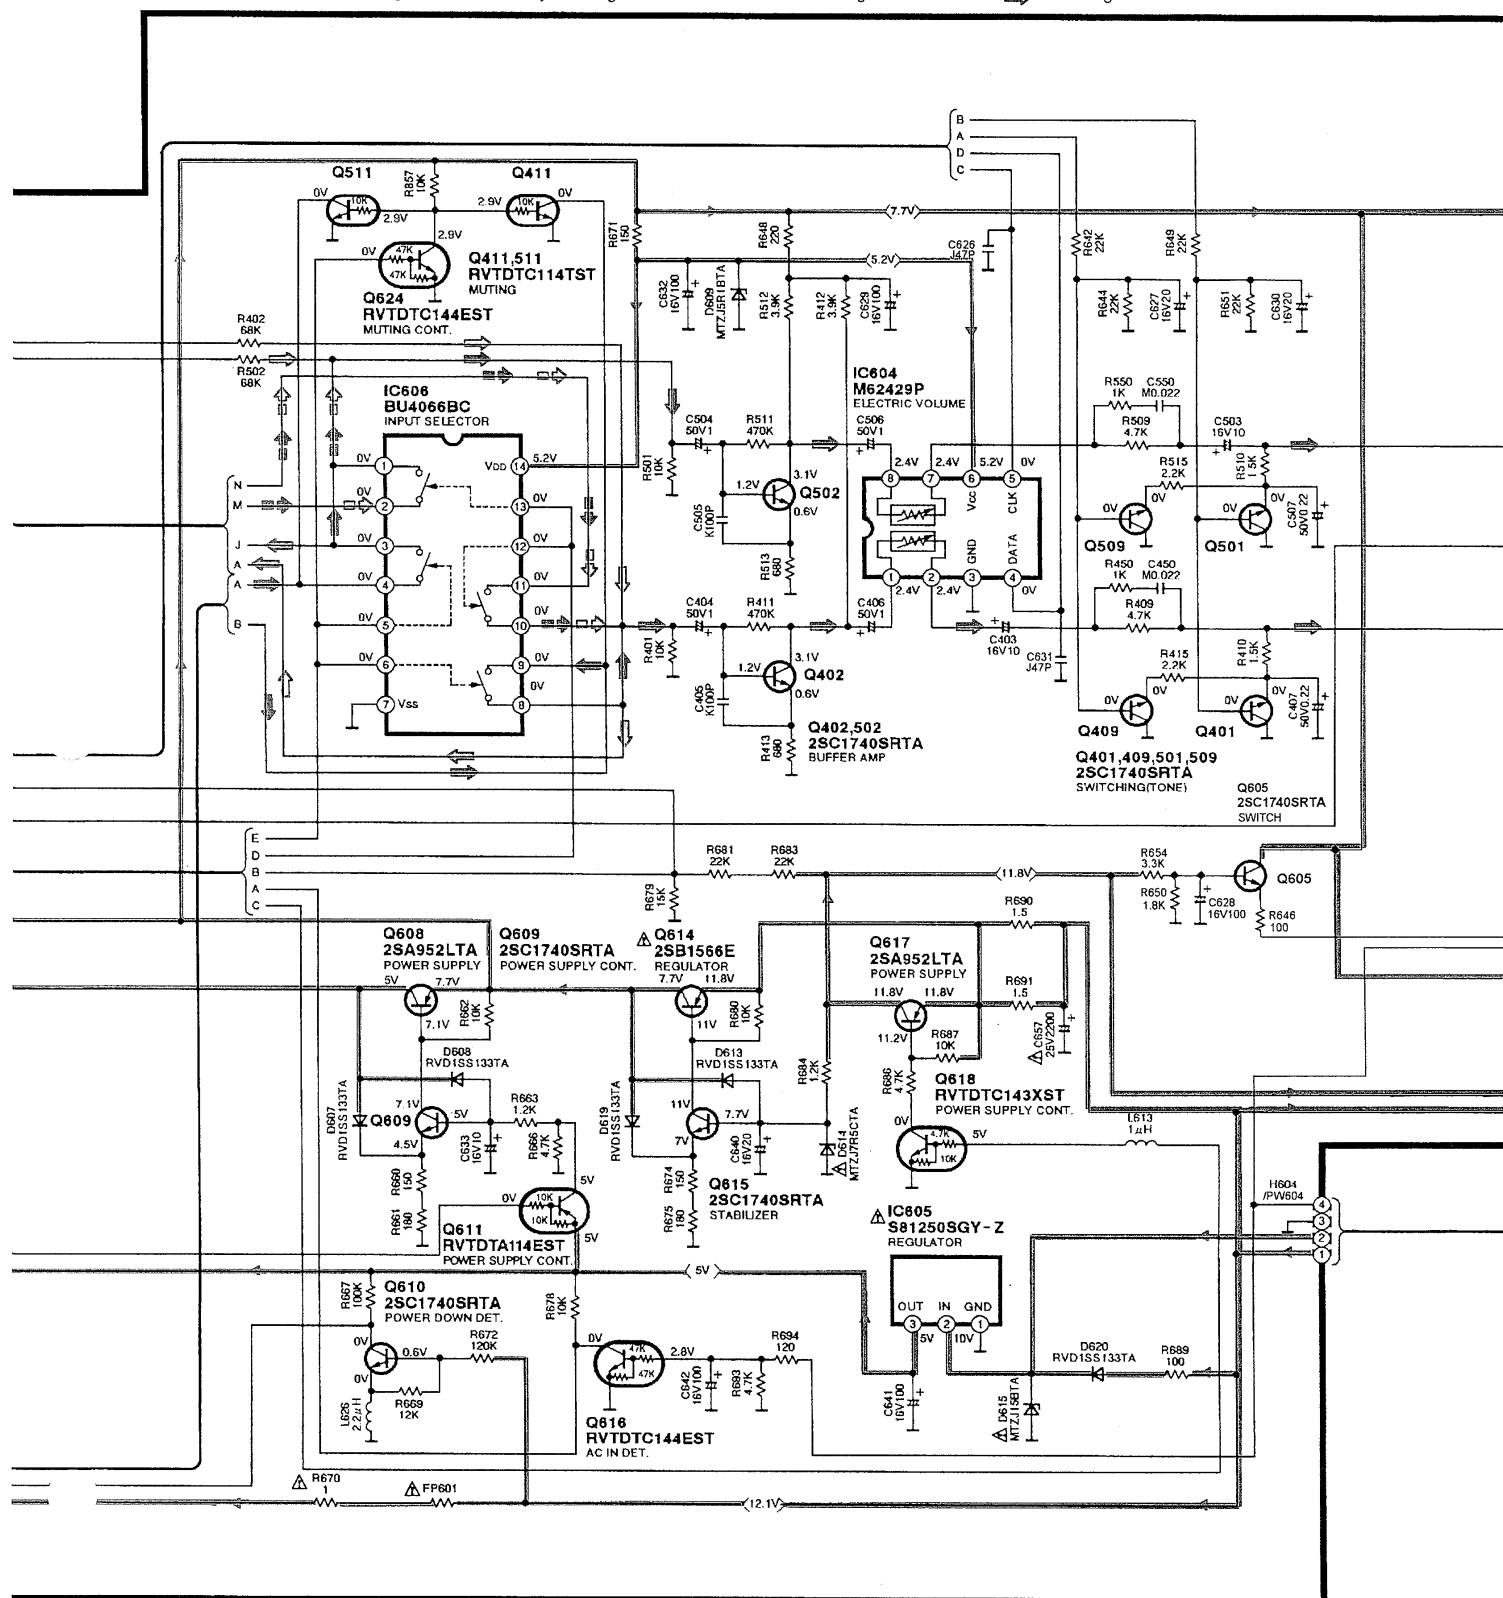


→ +B line


⇒ : Main signal line

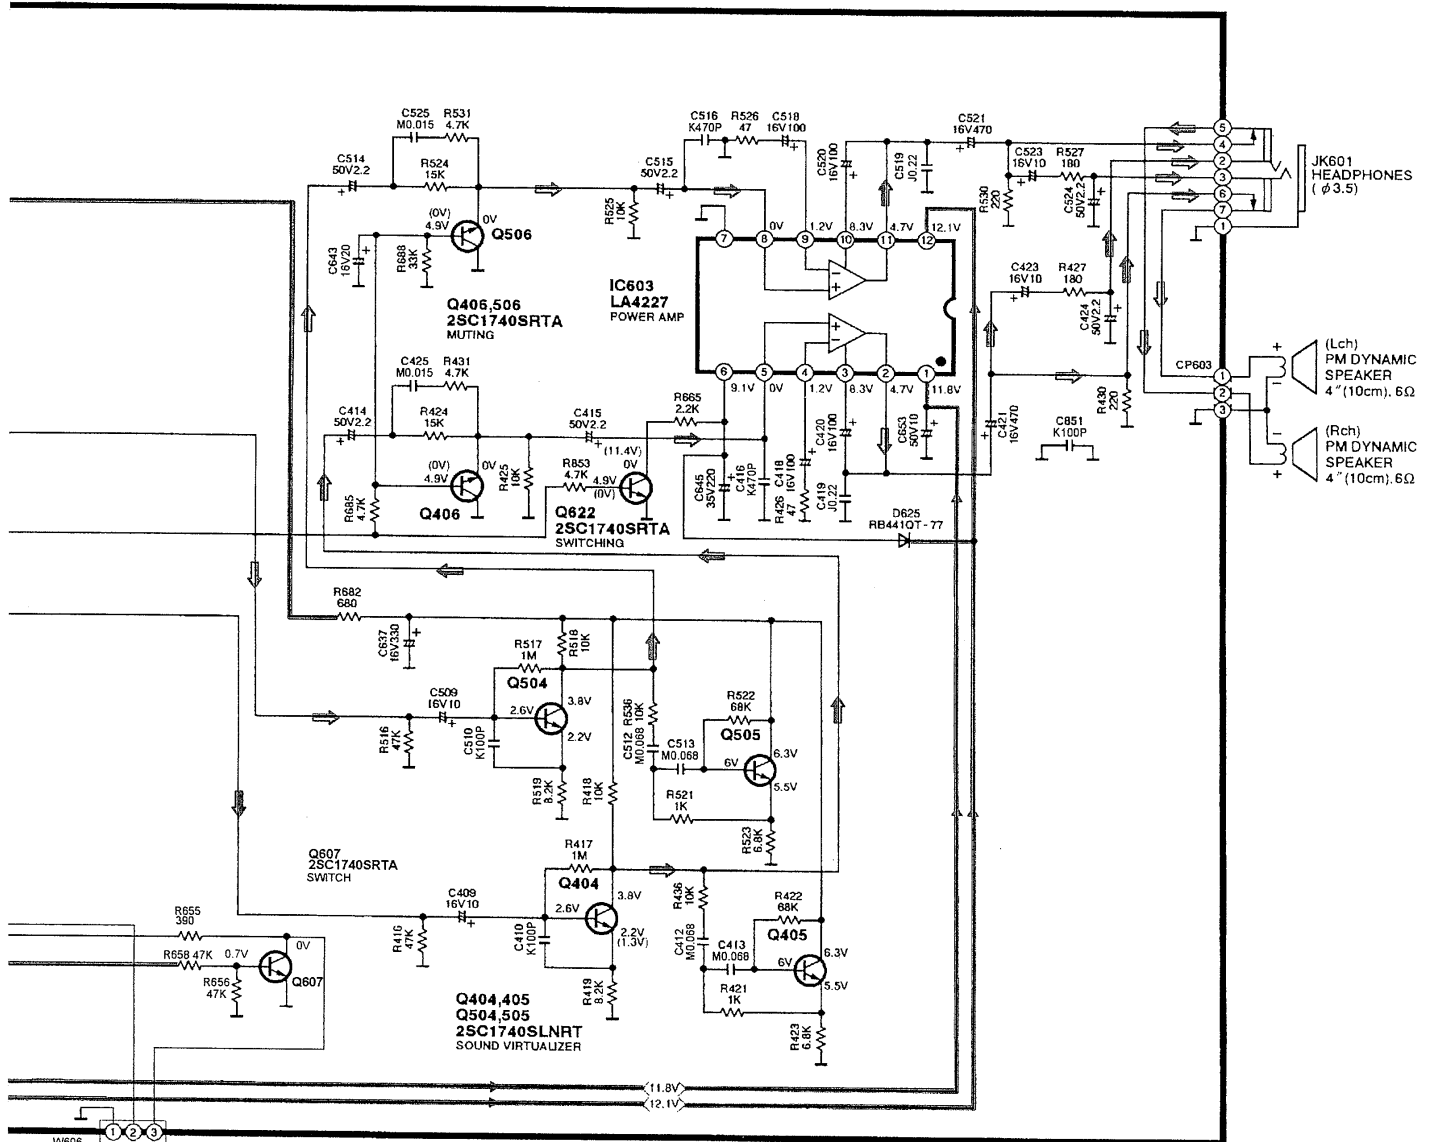


G POWER SUPPLY CIRCUIT (P.C.Board on page 7)

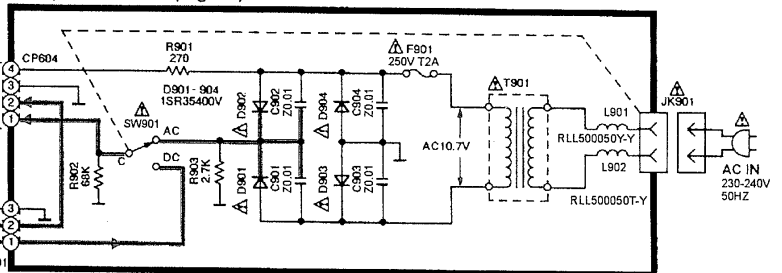

F BATTERY TERMINAL CIRCUIT (P.C.Board on page 10)




E LED CIRCUIT (P.C.Board on page 7)




■ Printed Circuit Board


G POWER SUPPLY P.C.B. (REP2652H)

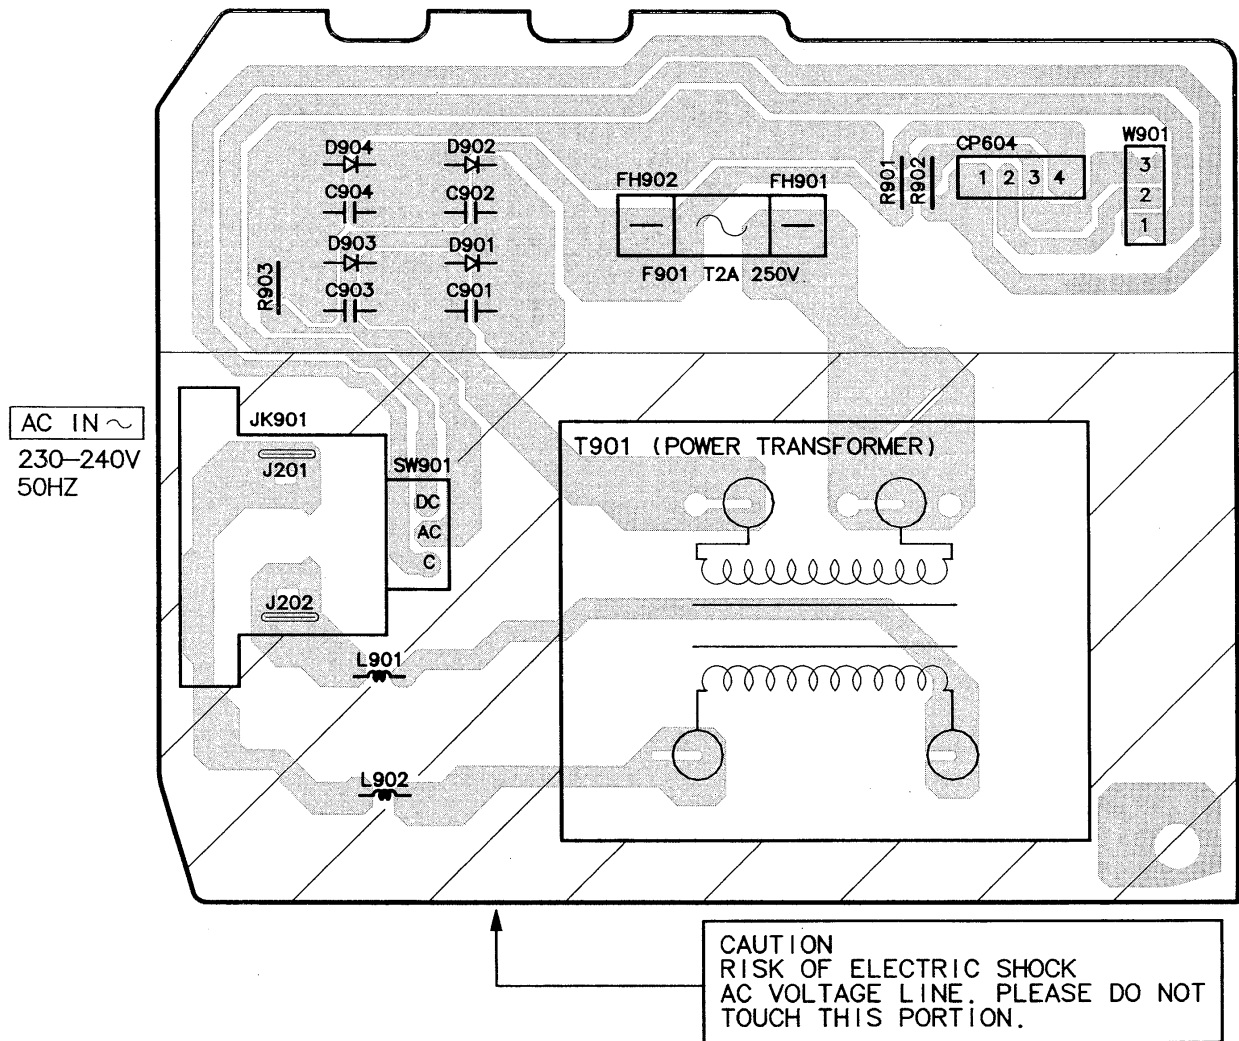


D SWITCH P.C.B.
(REP2652H)

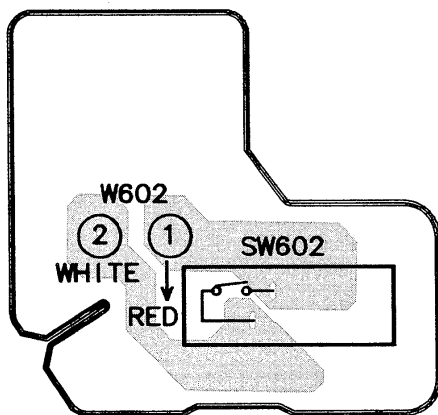


E LED P.C.B.
(REP2652H)

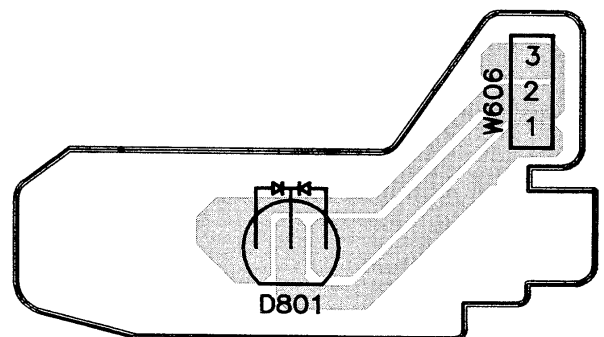

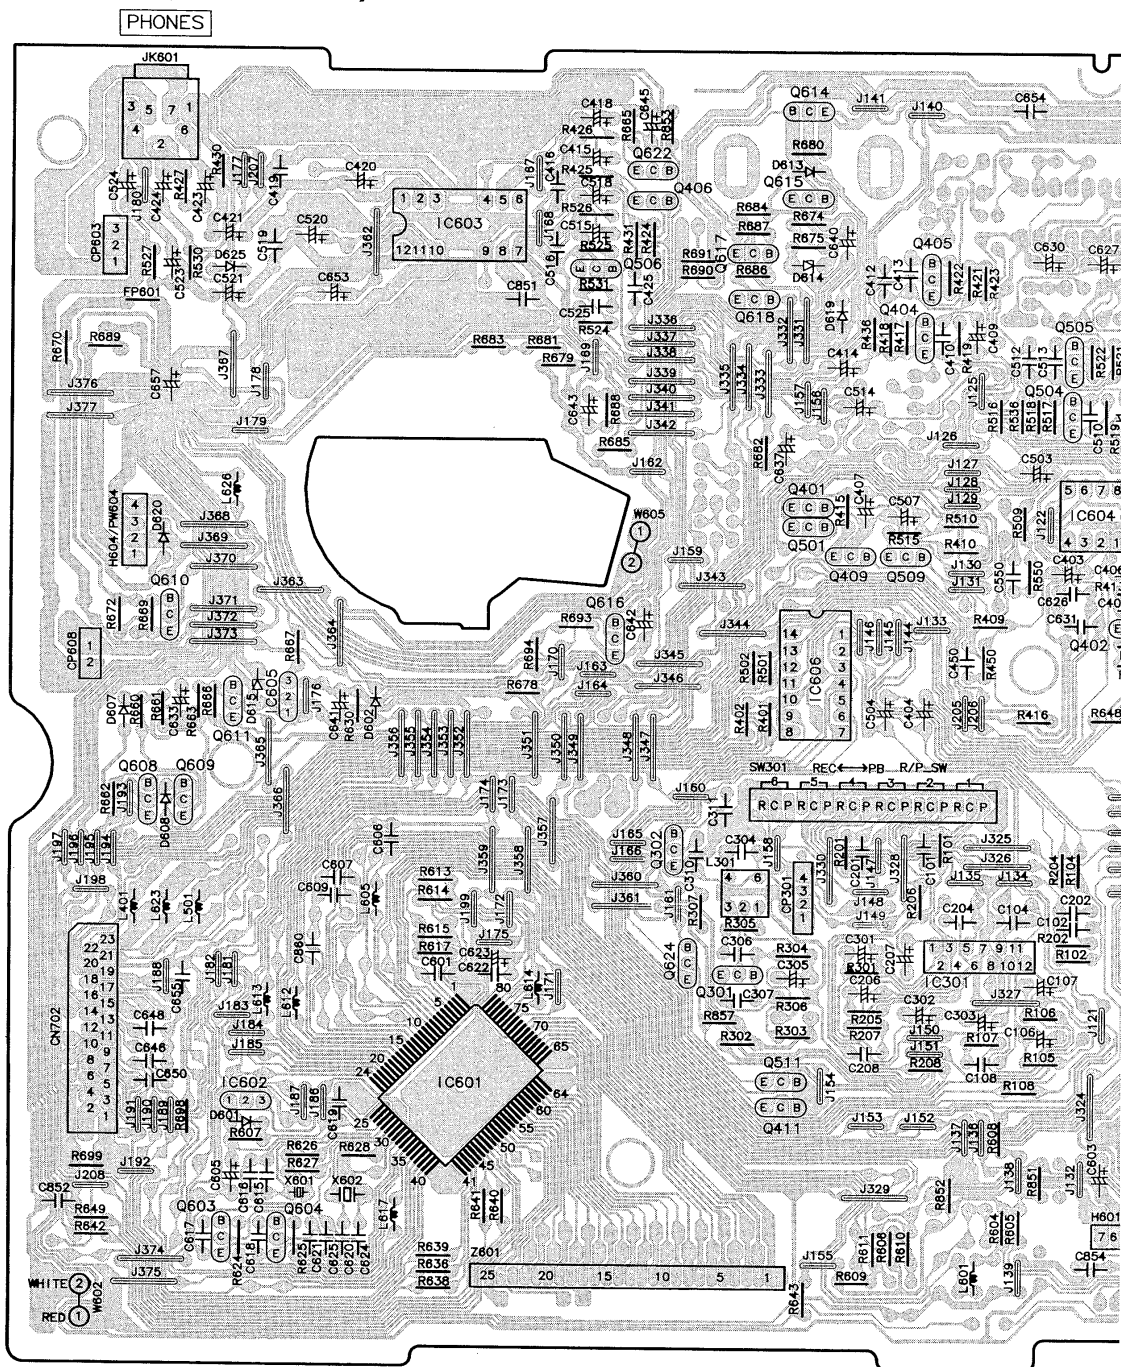B MAIN P.C.B. (REP2652H)


G H I J K L M

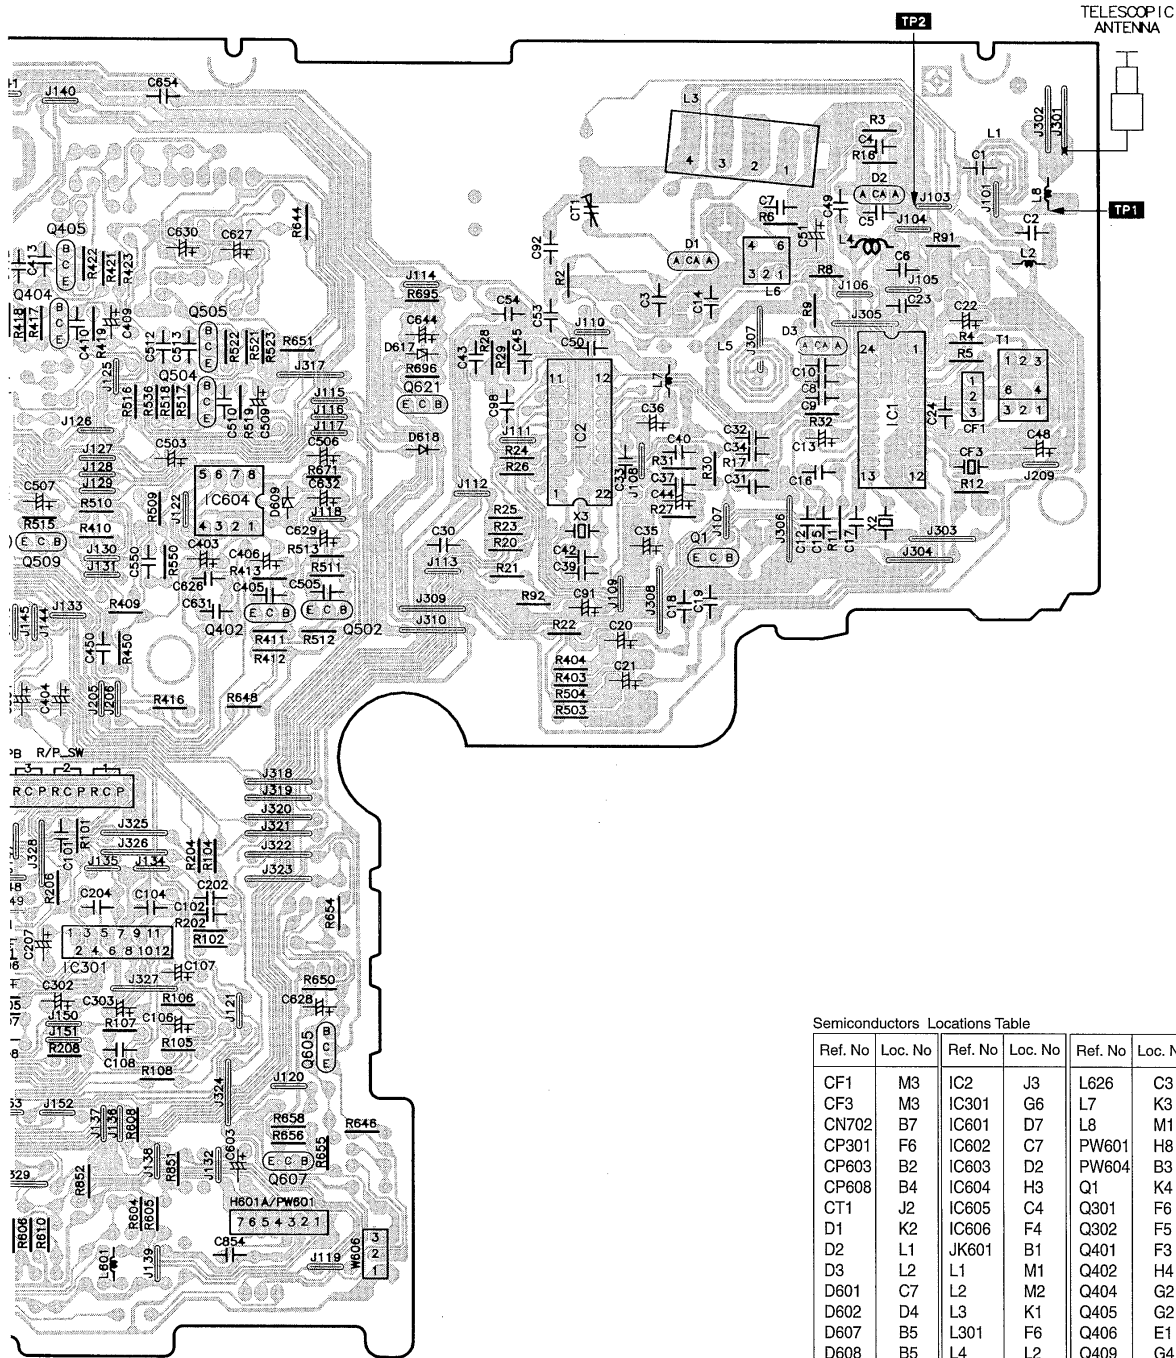


Semiconductors Locations Table

Ref. No	Loc. No	Ref. No	Loc. No	Ref. No	Loc. No	Ref. No	Loc. No
CF1	M3	IC2	J3	L626	C3	Q607	H7
CF3	M3	IC301	G6	L7	K3	Q608	B5
CN702	B7	IC601	D7	L8	M1	Q609	C5
CP301	F6	IC602	C7	PW601	H8	Q610	B4
CP603	B2	IC603	D2	PW604	B3	Q611	C4
CP608	B4	IC604	H3	Q1	K4	Q614	F1
CT1	J2	IC605	C4	Q301	F6	Q615	F1
D1	K2	IC606	F4	Q302	F5	Q616	E4
D2	L1	JK601	B1	Q401	F3	Q617	F2
D3	L2	L1	M1	Q402	H4	Q618	F2
D601	C7	L2	M2	Q404	G2	Q621	I3
D602	D4	L3	K1	Q405	G2	Q622	E1
D607	B5	L301	F6	Q406	E1	Q624	F6
D608	B5	L4	L2	Q409	G4	SW301	G5
D609	H3	L401	B6	Q411	F7	T1	M2
D613	F1	L5	K2	Q501	F3	W602	B8
D614	F2	L501	C6	Q502	I4	W605	E4
D615	C4	L6	K2	Q504	H3	W606	I8
D617	I2	L601	G8	Q505	H2	X2	L3
D618	I3	L605	D6	Q506	E2	X3	J3
D619	G2	L612	C6	Q509	G4	X601	C8
D620	B3	L613	C6	Q511	F7	X602	D8
D625	C2	L614	E6	Q603	C8	Z601	E8
FP601	B2	L617	D8	Q604	C8		
IC1	L3	L623	B6	Q605	I7		

C OPERATION P.C.B. (REP2652H)

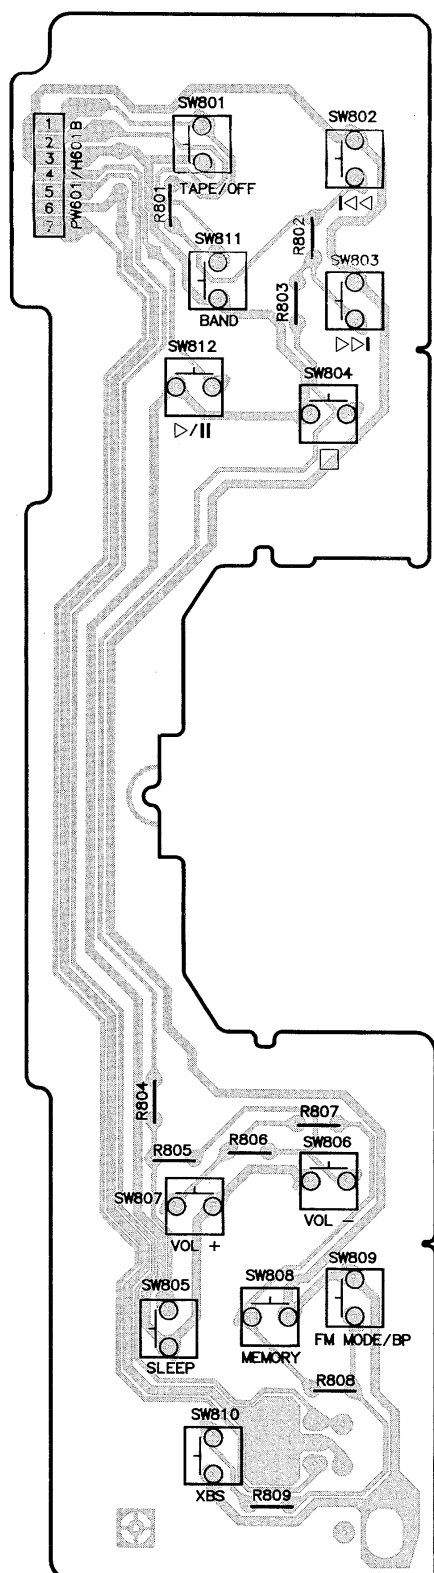

F BATTERY TERMINAL P.C.B. (REP2652H)

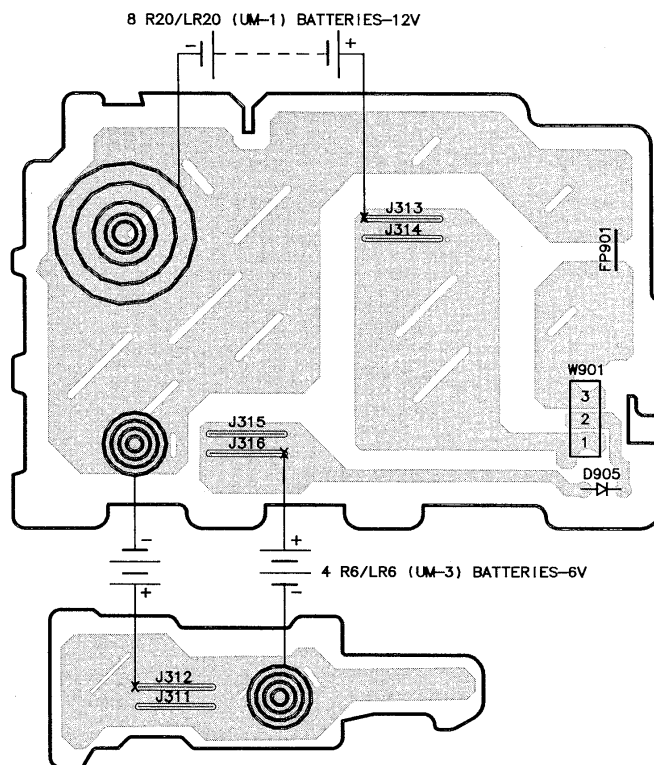

■ Replacement Parts List

Notes: * Important safety notice :
 Components identified by  mark have special characteristics important for safety.
 Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
 When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.
 * The parenthesized in the Remarks columns specify the areas. (Refer to the cover page for area.)
 Parts without these indication can be used for all areas.
 * [M] in Remarks column indicates parts that are supplied by MESA.
 * **Warning :** This product uses a laser diode.
ACHTUNG : • Die Lasereinheit nicht zerlegen.
 • Die Lasereinheit darf nur gegen eine vom hersteller spezifizierte einheit ausgetauscht werden.

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS		36	RMN0475	LCD HOLDER	[M]			CASSETTE DECK	
				38	RGU1630-K	CD EJ BUTTON	[M]				
1	RAS10P20-H	SPEAKER	[M]	39	RML0535	CD LOCK LEVER	[M]	101	RDV0021	MAIN BELT	[M]
2	RDG0183-L	DAMPER GEAR	[M]	40	RGK1008-K	CD TRAY LID	[M]	103	RMB0109-1	BRAKE SPRING	[M]
3	REE0842	CD FFC	[M]	41	SUX102	MECHA ROD	[M]	104	RML0116	BRAKE	[M]
4	REX0905Y	MECHA LEAF SW WIRE.U	[M]	42	XEARR210C-Y	R.ANTENNA	[M]	105	RBR2CY009	ERASE HEAD	[M]
5	REX0906	MECHA HEAD WIRE UNIT	[M]	43	RMB0566	CD OPEN SPRING	[M]	106	RDG0057	IDLER GEAR	[M]
6	REX0907	SP-MAIN WIRE UNIT	[M]	44	RMB0567	CD EJ BTN SPR	[M]	107	RDG0059	FF RELAY GEAR	[M]
7	RFKJXDS16PCK	UPPER CAB. ASS'Y	[M]	45	RME0267	ASSIST SPRING	[M]	108	RDK0005	CAM GEAR	[M]
8	RFKJXDS16EBK	BOTTOM CAB. ASS'Y	[M]EB	46	RME0268	CD EJ LEV SPR	[M]	109	RDV0006-1	RF BELT	[M]
8	RFKJXDS16EGK	BOTTOM CAB. ASS'Y	[M]EG	47	RME0269	DISC HOLD PIECE SPR	[M]	110	RHW16009	CAPSTAN WASHER	[M]
8	RFKJXDS16E-K	BOTTOM CAB. ASS'Y	[M]E	48	RMK0388	CD CHASSIS	[M]	111	RMA0109	BACK PLATE	[M]
8-1	RJC91008	+ BATT. TERMINAL	[M]	49	RMM0207	CHANGE LEVER	[M]	112	RMB0043-1	ROD OPERATION SPRING	[M]
8-2	RKA0059-K	LEG RUBBER	[M]	50	XTBS26+10J	SCREW	[M]	113	RMB0045	AS SPRING	[M]
10	RFKLXDS28EBK	CASS LID. ASS'Y	[M]	51	XTN2+3F	SCREW	[M]	114	RMB0046-1	LOCK PLATE SPRING	[M]
12	RFKNXDS16EBK	DISC HOLDER ASS'Y	[M]	52	XTV26+6G	SCREW	[M]	115	RMB0047	HEAD PANEL SPRING	[M]
13	RGQ0233-K	CD TRAY	[M]	53	XTV3+10G	SP. MOUNTING SCREW	[M]	116	RMB0048	IDLER LEVER SPRING	[M]
14	RGU1631-H	OPR. BUTTON (L)	[M]	54	XTV3+12G	SP. MOUNTING SCREW	[M]	117	RMB0053	PAUSE LEVER SPRING	[M]
15	RGU1632-H	OPR. BUTTON (R)	[M]	55	XTV3+20G	CASING SCREW	[M]	118	RMB0125	BACK TENSION SPRING	[M]
16	RGK1006-K	DIFFUSER (L)	[M]	56	XTV3+8F	SCREW	[M]	119	RMC0061	PACK SPRING(OR RUS60	[M]
17	RGK1007-K	DIFFUSER (R)	[M]	57	XTWS3+10Q	MECHA SHAFT SCREW	[M]	120	RFKRC090P-K	CHASSIS ASS'Y	[M]
18	RGZX0025-K	MECHA BUTTON	[M]	58	XYN3+F12FY	R.ANT SCREW	[M]	121	RML0071	SWING LEVER	[M]
19	RKH0042-K	HANDLE	[M]	59	RMV0189	HEAT SINK	[M]	122	RML0072	AS RELEASE LEVER	[M]
20	RKK0073-2K	BATT. COVER	[M]	60	RMV0220	HEATSINK	[M]	123	RML0073-1	AS PROTECT LEVER	[M]
21	RMAX0028	MECHA BRACKET (L)	[M]	61	RAE0152Z-M	TRAVERSE	[M]	124	RML0074	IDLER LEVER	[M]
22	RMAX0029	MECHA BRACKET (R)	[M]	61-1	SHGD113-1	FLOATING CUSHION	[M]	125	RML0076	EJECT SELECTION LEVE	[M]
23	RMB0490	CASS. OPEN SPRING	[M]	61-2	SNSD38	TRV MOTOR ASS'Y SCRE	[M]	126	RML0077	LOCK PLATE	[M]
24	RKT0040-K	PORT (L)	[M]	62	RME0109	FLOATING SPRING B	[M]	127	RML0078	FUNCTION PLATE	[M]
25	RKT0041-K	PORT (R)	[M]	63	RME0142	FLOATING SPRING A	[M]	128	RML0080	ERASE HEAD ARM	[M]
26	RHD26016	SCREW	[M]	64	RMS0350	FIXED PIN A	[M]	129	RML0081-1	RECORD SAFETY LEVER	[M]
27	RMC0355	R/P PLATE	[M]	65	RMS0123-1	FIXED PIN B	[M]	130	RML0082	PAUSE LEVER	[M]
28	RGQ0234-K	DISC HOLD PIECE	[M]	66	RMR0698-K	TRY CHASSIS	[M]	131	RMM0023	PLAY ROD	[M]
29	RMXX0004	SPACER	[M]	67	XTN2+6G	PCB SCREW	[M]	132	RMM0024	REW ROD	[M]
30	RKQ0224-K	HANDLE FIXTURE	[M]	68	XTWS26+10Q	PANEL PCB SCREW	[M]	133	RMM0025	FF ROD	[M]
31	RMM0205	UP/DOWN LEVER A	[M]	70	RDP0103	ROLLER	[M]	134	RMM0026	STOP ROD	[M]
32	RMM0206	UP/DOWN LEVER B	[M]	71	RMQ0649	MECHA BUTTON SUPPORT	[M]	135	RMM0027	PAUSE ROD	[M]
33	RML0534	R/P LEVER	[M]	72	RMR1155-K	CD FIXTURE	[M]	136	RMM0028	REC ROD	[M]
34	RME0270	R. ANT TERMINAL	[M]					137	RMM0029	EJECT SLIDE LEVER	[M]
35	RMN0417	REMOCON SHIELD	[M]					138	RMR0211	PAUSE BUSH	[M]

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
139	RMR0227	IDLER GEAR BUSH	[M]	Q409	2SC1740SRTA	TRANSISTOR	[M]	D902	1SR35400V	DIODE	[M] ⚠
140	RMS0055	REEL SHAFT	[M]	Q411	RVTDTTC114TST	TRANSISTOR	[M]	D903	1SR35400V	DIODE	[M] ⚠
141	RXF0012	FLYWHEEL ASSY	[M]	Q501	2SC1740SRTA	TRANSISTOR	[M]	D904	1SR35400V	DIODE	[M] ⚠
141-1	RHW21008	FLYWHEEL WASHER	[M]	Q502	2SC1740SRTA	TRANSISTOR	[M]	D905	RVD1SS133TA	DIODE	[M]
142	RMB0044	TRIGGER SPRING	[M]	Q504	2SC1740SLNRT	TRANSISTOR	[M]				
143	RML0075	TRIGGER LEVER	[M]	Q505	2SC1740SLNRT	TRANSISTOR	[M]			SWITCHES	
144	RXP0014	RF CLUTCH ASSY	[M]	Q506	2SC1740SRTA	TRANSISTOR	[M]				
145	RXP0015	PINCH ROLLER ASSY	[M]	Q509	2SC1740SRTA	TRANSISTOR	[M]	S601	RSH1A006-U	SW ,MOTOR	[M]
145-1	RMB0049	PINCH ARM SPRING	[M]	Q511	RVTDTTC114TST	TRANSISTOR	[M]	S701	RSH1A043-U	SW, REST	[M]
146	RBR4CY016-M	STEREO ASTEC HEAD	[M]	Q603	2SC1740SRTA	TRANSISTOR	[M]	SW301	RSP2F002-A	SW, R/P	[M]
147	XTN2+14F	R/P HEAD SCREW	[M]	Q604	2SC1740SRTA	TRANSISTOR	[M]	SW602	RSH1A005-1U	SW, LEAF	[M]
149	RMA0696	HEAD BASE	[M]	Q605	2SC1740SRTA	TRANSISTOR	[M]	SW801	EVQ21405R	SW, TAPE/OFF	[M]
151	RMQ0384	HEAD BASE	[M]	Q607	2SC1740SRTA	TRANSISTOR	[M]	SW802	EVQ21405R	SW, RWD	[M]
154	RXR0004	TAKE UP REEL ASSY	[M]	Q608	2SA952LTA	TRANSISTOR	[M]	SW803	EVQ21405R	SW, FWD	[M]
155	RXR0005	SUPPLY REEL ASSY	[M]	Q609	2SC1740SRTA	TRANSISTOR	[M]	SW804	EVQ21405R	SW, STOP	[M]
156	XTN2+6J	BACK PLATE SCREW	[M]	Q610	2SC1740SRTA	TRANSISTOR	[M]	SW805	EVQ21405R	SW, SLEEP	[M]
158	RHD26002	MOTOR SCREW	[M]	Q611	RVTDTA114EST	TRANSISTOR	[M]	SW806	EVQ21405R	SW, VOL -	[M]
160	RMG0102	MOTOR RUB. CUSH.	[M]	Q614	2SB1566E	TRANSISTOR	[M] ⚠	SW807	EVQ21405R	SW, VOL +	[M]
162	RFKPXDS101PK	DC MOTOR ASS'Y	[M]	Q615	2SC1740SRTA	TRANSISTOR	[M]	SW808	EVQ21405R	SW, MEMORY	[M]
163	RMA0108	MOTOR BK (P.75)	[M]	Q616	RVTDTTC144EST	TRANSISTOR	[M]	SW809	EVQ21405R	SW, FM MODE/BP	[M]
164	XTN26+8J	MOTOR BK SCREW	[M]	Q617	2SA952LTA	TRANSISTOR	[M]	SW810	EVQ21405R	SW, XBS	[M]
165	RME0098-2	EJECT SLIDE LEVER SP	[M]	Q618	RVTDTTC143XST	TRANSISTOR	[M]	SW811	EVQ21405R	SW, BAND	[M]
				Q621	2SC1740SRTA	TRANSISTOR	[M] ⚠	SW812	EVQ21405R	SW, PLAY/PAUSE	[M]
		INTEGRATED CIRCUITS		Q622	2SC1740SRTA	TRANSISTOR	[M]	SW901	RJJ1SE01-1H	SW, AC INLET (JK901)	[M] ⚠
				Q624	RVTDTTC144EST	TRANSISTOR	[M]				
IC1	TA2008AN	IC, TUNER	[M]	Q701	2SA1037AKSTX	TRANSISTOR	[M]			CONNECTORS	
IC2	LC72131D	IC, PLL	[M]	Q702	DTC114YKA146	TRANSISTOR	[M]				
IC301	BA3313L	IC, PRE AMP	[M]					CN701	RJS2A6016	16P FFC CONNECTOR	[M]
IC601	M38224M6M075	IC, MICRO-P	[M]			DIODES		CN702	RJS1A6723-1Q	23P FFC CONN (SERVO)	[M]
IC602	BMR0301G	IC, RESET	[M]					CN702	RJS1A6823-J	23P FFC CONN (MAIN)	[M]
IC603	LA4227	IC, POWER	[M]	D1	SVC346T-AA	DIODE	[M]	CP301	RJP4G18ZA	SOCKET	[M]
IC604	M62429P	IC, E.VOL	[M]	D2	KV1360NTM	DIODE	[M]	CP603	RJP3G9YA	CONNECTOR (3P)	[M]
IC605	S81250SGY-Z	IC, 5V REG.	[M] ⚠	D3	KV1360NTM	DIODE	[M]	CP604	RJP4G4YA	LEAF SW 4P CONNECTOR	[M]
IC606	BU4066BC	IC	[M]	D601	RVD1SS133TA	DIODE	[M]	CP608	RJT029W002-1	SP CONNECTOR	[M]
IC701	AN8837SBE1	IC, HEAD AMP	[M]	D602	RVD1SS133TA	DIODE	[M]				
IC702	MN662746RPK1	IC, LSI	[M]	D607	RVD1SS133TA	DIODE	[M]			TRIMMER	
IC703	AN8780NSBE2	IC	[M]	D608	RVD1SS133TA	DIODE	[M]				
				D609	MTZJ5R1BTA	DIODE	[M]	CT1	ECRLA010A53R	TRIMMER CAPACITOR	[M]
		TRANSISTORS		D613	RVD1SS133TA	DIODE	[M] ⚠				
				D614	MTZJ7R5CTA	DIODE	[M] ⚠			COILS & TRANSFORMERS	
Q1	2SC1740SRTA	TRANSISTOR	[M]	D615	MTZJ15BTA	DIODE	[M] ⚠				
Q301	2SC1740SRTA	TRANSISTOR	[M]	D617	MTZJ5R6CTA	DIODE	[M] ⚠	L2	RLQY30S1W	COIL	[M]
Q302	2SC1740SRTA	TRANSISTOR	[M]	D618	RVD1SS133TA	DIODE	[M]	L3	RLV2C038-0	F.ANT	[M]
Q401	2SC1740SRTA	TRANSISTOR	[M]	D619	RVD1SS133TA	DIODE	[M]	L4	RLD4Y45W	COIL	[M]
Q402	2SC1740SRTA	TRANSISTOR	[M]	D620	RVD1SS133TA	DIODE	[M]	L6	RL02B130-T	AM OSC COIL	[M]
Q404	2SC1740SLNRT	TRANSISTOR	[M]	D625	RB441QT-77	DIODE	[M]	L7	RLQZP101KT-Y	AXIAL COIL	[M]
Q405	2SC1740SLNRT	TRANSISTOR	[M]	D801	SPR325MVWT31	DIODE	[M]	L8	RLQY30S1W	COIL	[M]
Q406	2SC1740SRTA	TRANSISTOR	[M]	D901	1SR35400V	DIODE	[M] ⚠	L301	RL09B17-T	NIL	[M]

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
L401	RLL500050T-Y	RF CHOKE COIL	[M]			HOLDERS					
L501	RLL500050T-Y	RF CHOKE COIL	[M]								
L601	RLQZP1R0KT-Y	AXIAL COIL	[M]	H601A	RMR0316	7P WIRE HOLDER	[M]				
L605	RLQZP1R0KT-Y	AXIAL COIL	[M]	H601B	RMR0316	7P WIRE HOLDER	[M]				
L612	RLQZP1R0KT-Y	AXIAL COIL	[M]	H604	RJS1A5504	CABLE HOLDER	[M]				
L613	RLQZP1R0KT-Y	AXIAL COIL	[M]								
L614	RLQZP1R0KT-Y	AXIAL COIL	[M]			JACKS					
L617	RLQZP1R0KT-Y	AXIAL COIL	[M]								
L623	RLL500050T-Y	RF CHOKE COIL	[M]	JK601	RJJ37TK01-1C	JK	[M]				
L626	RLQZP2R2KT-Y	COIL	[M]	JK901	RJJ1SE01-1H	JK, AC INLET	[M] ⚠				
L901	RLL500050T-Y	RF CHOKE COIL	[M]								
L902	RLL500050T-Y	RF CHOKE COIL	[M]			WIRES					
T1	RLI2B014-T	AM IFT	[M]								
T901	RTP1K1B009-X	TRANSFORMER	[M] ⚠								
		COMPONENT COMBINATION									
Z601	RSL5196-V	LCD	[M]	W602	RWJ4202190KK	CD LEAF SW WIRE	[M]				
				W605	RWJ0102050KR	MAIN-MECHA MOTOR WIRE	[M]				
				W606	RWJ8203120KK	LED-MAIN WIRE	[M]				
				W901	RWJ0103170KK	POWER-BATT WIRE	[M]				
				PW601	RWJ8207110RR	MAIN-PANEL AIRE	[M]				
				PW604	REX0908	POWER-MAIN WIRE UNIT	[M]				
		CERAMIC FILTERS									
						PACKING MATERIALS					
CF1	RLFFETNL02AL	FM CF	[M]								
CF3	RLFDFT20AL	FM DISCRIMINATOR	[M]	P1	RPGX0546	PACKING CASE	[M]EB EG				
				P1	RPGX0584	PACKING CASE	[M]E				
		OSCILLATORS		P2	RPN1111	POLYFOAM	[M]				
				P3	RPH0131	MIRAMAT SHEET	[M]				
						ACCESSORIES					
X2	RSXZ456KM01	19KHZ OSC	[M]	A1	RJA0019-2K	AC CORD (SF) ⚠	[M]EG E				
X3	RSXC7M20S04T	XTAL 7.2MHZ	[M]	A1	VJA0733	AC CORD (SF) ⚠	[M]EB				
X601	RSXD32K7S02	32.768HKZ X'TAL	[M]	A2	RQT4719-E	O/I BOOK (En/Sp/Sw)	[M]E				
X602	RSXZ4M19D01T	CERAMIC OSC	[M]	A2	RQT4720-R	O/I BOOK (Ru/Cz/Po)	[M]E				
X701	RSXZ16M9M01T	CERAMIC OSC	[M]	A2	RQT4721-D	O/I BOOK (Ge/It/Fr)	[M]EG				
				A2	RQT4722-H	O/I BOOK (Du/Da)	[M]EG				
				A2	RQT4723-B	O/I BOOK (En)	[M]EB				
		FUSES									
F901	XBA2C20TB0L	FUSE	[M] ⚠								
		FUSE HOLDERS									
FH901	RJR0169T	FUSE HOLDER	[M]								
FH902	RJR0169T	FUSE HOLDER	[M]								
		FUSE PROTECTORS									
FP601	RSFMB10KT-L	FUSE PROTECTOR	[M] ⚠								
FP901	RSFMB40KT-L	FUSE PROTECTOR	[M] ⚠								

■ Resistors & Capacitors

- Notes :
- Important safety notice:
Components identified by $\triangle$ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.
 - The parenthesized in the Remarks columns specify the areas. (Refer to the cover page for area.)
Parts without these indication can be used for all areas.
 - [M] in Remarks column indicates parts that are supplied by MESA.
 - Capacitor values are in microfarad (μ F) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)
 - Resistors values are in ohms, unless specified otherwise, 1k=1,000(OHM), 1M=1,000k(OHM)

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
	RESISTORS										
R2	ERDS2TJ103T	10K 1/4W [M]	R207	ERDS2TJ682T	6.8K 1/4W [M]	R511	ERDS2TJ474T	470K 1/4W [M]	R640	ERDS2TJ472T	4.7K 1/4W [M]
R3	ERDS2TJ332T	3.3K 1/4W [M]	R208	ERDS2TJ472T	4.7K 1/4W [M]	R512	ERDS2TJ392T	3.9K 1/4W [M]	R641	ERDS2TJ472T	4.7K 1/4W [M]
R4	ERDS2TJ472T	4.7K 1/4W [M]	R301	ERDS2TJ223T	22K 1/4W [M]	R513	ERDS2TJ681T	680 1/4W [M]	R642	ERDS2TJ223T	22K 1/4W [M]
R5	ERDS2TJ221T	220 1/4W [M]	R302	ERDS2TJ101T	100 1/4W [M]	R515	ERDS2TJ222T	2.2K 1/4W [M]	R643	ERDS2TJ224T	220K 1/4W [M]
R6	ERDS2TJ104T	100K 1/4W [M]	R303	ERDS2TJ751T	750 1/4W [M]	R516	ERDS2TJ473T	47K 1/4W [M]	R644	ERDS2TJ223T	22K 1/4W [M]
R8	ERDS2TJ104T	100K 1/4W [M]	R304	ERDS2TJ563T	56K 1/4W [M]	R517	ERDS2TJ105T	1M 1/4W [M]	R646	ERDS2TJ101T	100 1/4W [M]
R9	ERDS2TJ104T	100K 1/4W [M]	R305	ERDS2TJ221T	220 1/4W [M]	R518	ERDS2TJ103T	10K 1/4W [M]	R648	ERDS2TJ221T	220 1/4W [M]
R11	ERDS2TJ223T	22K 1/4W [M]	R306	ERDS2TJ100T	10 1/4W [M]	R519	ERDS2TJ822T	8.2K 1/4W [M]	R649	ERDS2TJ223T	22K 1/4W [M]
R12	ERDS2TJ103T	10K 1/4W [M]	R307	ERDS2TJ272T	2.7K 1/4W [M]	R521	ERDS2TJ102T	1K 1/4W [M]	R650	ERDS2TJ182T	1.8K 1/4W [M]
R16	ERDS2TJ104T	100K 1/4W [M]	R401	ERDS2TJ103T	10K 1/4W [M]	R522	ERDS2TJ683T	68K 1/4W [M]	R651	ERDS2TJ223T	22K 1/4W [M]
R17	ERDS2TJ222T	2.2K 1/4W [M]	R402	ERDS2TJ683T	68K 1/4W [M]	R523	ERDS2TJ682T	6.8K 1/4W [M]	R654	ERDS2TJ332T	3.3K 1/4W [M]
R20	ERDS2TJ223T	22K 1/4W [M]	R403	ERDS2TJ562T	5.6K 1/4W [M]	R524	ERDS2TJ153T	15K 1/4W [M]	R655	ERDS2TJ391T	390 1/4W [M]
R21	ERDS2TJ473T	47K 1/4W [M]	R404	ERDS2TJ682T	6.8K 1/4W [M]	R525	ERDS2TJ103T	10K 1/4W [M]	R656	ERDS2TJ473T	47K 1/4W [M]
R22	ERDS2TJ102T	1K 1/4W [M]	R409	ERDS2TJ472T	4.7K 1/4W [M]	R526	ERDS2TJ470T	47 1/4W [M]	R658	ERDS2TJ473T	47K 1/4W [M]
R23	ERDS2TJ223T	22K 1/4W [M]	R410	ERDS2TJ152T	1.5K 1/4W [M]	R527	ERDS2TJ181T	180 1/4W [M]	R660	ERDS2TJ151T	150 1/4W [M]
R24	ERDS2TJ103T	10K 1/4W [M]	R411	ERDS2TJ474T	470K 1/4W [M]	R530	ERDS2TJ221T	220 1/4W [M]	R661	ERDS2TJ181T	180 1/4W [M]
R25	ERDS2TJ223T	22K 1/4W [M]	R412	ERDS2TJ392T	3.9K 1/4W [M]	R531	ERDS2TJ472T	4.7K 1/4W [M]	R662	ERDS2TJ103T	10K 1/4W [M]
R26	ERDS2TJ103T	10K 1/4W [M]	R413	ERDS2TJ681T	680 1/4W [M]	R536	ERDS2TJ103T	10K 1/4W [M]	R663	ERDS2TJ122T	1.2K 1/4W [M]
R27	ERDS2TJ332T	3.3K 1/4W [M]	R415	ERDS2TJ222T	2.2K 1/4W [M]	R550	ERDS2TJ102T	1K 1/4W [M]	R665	ERDS2TJ222T	2.2K 1/4W [M]
R28	ERDS2TJ223T	22K 1/4W [M]	R416	ERDS2TJ473T	47K 1/4W [M]	R604	ERDS2TJ153T	15K 1/4W [M]	R666	ERDS2TJ472T	4.7K 1/4W [M]
R29	ERDS2TJ103T	10K 1/4W [M]	R417	ERDS2TJ105T	1M 1/4W [M]	R605	ERDS2TJ153T	15K 1/4W [M]	R667	ERDS2TJ104T	100K 1/4W [M]
R30	ERDS2TJ472T	4.7K 1/4W [M]	R418	ERDS2TJ103T	10K 1/4W [M]	R606	ERDS2TJ153T	15K 1/4W [M]	R669	ERDS2TJ123T	12K 1/4W [M]
R31	ERDS2TJ222T	2.2K 1/4W [M]	R419	ERDS2TJ822T	8.2K 1/4W [M]	R607	ERDS2TJ104T	100K 1/4W [M]	R670	ERDS1FVJ1R0T $\triangle$	1 1/2W [M]
R32	ERDS2TJ471T	470 1/4W [M]	R421	ERDS2TJ102T	1K 1/4W [M]	R608	ERDS2TJ334T	330K 1/4W [M]	R671	ERDS2TJ151T	150 1/4W [M]
R91	ERDS2TJ330T	33 1/4W [M]	R422	ERDS2TJ683T	68K 1/4W [M]	R609	ERDS2TJ153T	15K 1/4W [M]	R672	ERDS2TJ124T	120K 1/4W [M]
R92	ERDS2TJ223T	22K 1/4W [M]	R423	ERDS2TJ682T	6.8K 1/4W [M]	R610	ERDS2TJ152T	1.5K 1/4W [M]	R674	ERDS2TJ151T	150 1/4W [M]
R101	ERDS2TJ183T	18K 1/4W [M]	R424	ERDS2TJ153T	15K 1/4W [M]	R611	ERDS2TJ223T	22K 1/4W [M]	R675	ERDS2TJ181T	180 1/4W [M]
R102	ERDS2TJ272T	2.7K 1/4W [M]	R425	ERDS2TJ103T	10K 1/4W [M]	R613	ERDS2TJ333T	33K 1/4W [M]	R678	ERDS2TJ103T	10K 1/4W [M]
R104	ERDS2TJ274T	270K 1/4W [M]	R426	ERDS2TJ470T	47 1/4W [M]	R614	ERDS2TJ104T	100K 1/4W [M]	R679	ERDS2TJ153T	15K 1/4W [M]
R105	ERDS2TJ680T	68 1/4W [M]	R427	ERDS2TJ181T	180 1/4W [M]	R615	ERDS2TJ104T	100K 1/4W [M]	R680	ERDS2TJ103T	10K 1/4W [M]
R106	ERDS2TJ222T	2.2K 1/4W [M]	R430	ERDS2TJ221T	220 1/4W [M]	R617	ERDS2TJ104T	100K 1/4W [M]	R681	ERDS2TJ223T	22K 1/4W [M]
R107	ERDS2TJ682T	6.8K 1/4W [M]	R431	ERDS2TJ472T	4.7K 1/4W [M]	R624	ERDS2TJ472T	4.7K 1/4W [M]	R682	ERDS2TJ681T	680 1/4W [M]
R108	ERDS2TJ472T	4.7K 1/4W [M]	R436	ERDS2TJ103T	10K 1/4W [M]	R625	ERDS2TJ472T	4.7K 1/4W [M]	R683	ERDS2TJ223T	22K 1/4W [M]
R201	ERDS2TJ183T	18K 1/4W [M]	R450	ERDS2TJ102T	1K 1/4W [M]	R626	ERDS2TJ106T	10M 1/4W [M]	R684	ERDS2TJ122T	1.2K 1/4W [M]
R202	ERDS2TJ272T	2.7K 1/4W [M]	R501	ERDS2TJ103T	10K 1/4W [M]	R627	ERDS2TJ334T	330K 1/4W [M]	R685	ERDS2TJ472T	4.7K 1/4W [M]
R204	ERDS2TJ274T	270K 1/4W [M]	R502	ERDS2TJ683T	68K 1/4W [M]	R628	ERDS2TJ105T	1M 1/4W [M]	R686	ERDS2TJ472T	4.7K 1/4W [M]
R205	ERDS2TJ680T	68 1/4W [M]	R503	ERDS2TJ562T	5.6K 1/4W [M]	R630	ERDS2TJ334T	330K 1/4W [M]	R687	ERDS2TJ103T	10K 1/4W [M]
R206	ERDS2TJ222T	2.2K 1/4W [M]	R504	ERDS2TJ682T	6.8K 1/4W [M]	R636	ERDS2TJ102T	1K 1/4W [M]	R688	ERDS2TJ333T	33K 1/4W [M]
			R509	ERDS2TJ472T	4.7K 1/4W [M]	R638	ERDS2TJ102T	1K 1/4W [M]	R689	ERD2FCVG101T	100 1/4W [M]
			R510	ERDS2TJ152T	1.5K 1/4W [M]	R639	ERDS2TJ102T	1K 1/4W [M]	R690	ERDS2TJ1R5T	1.5 1/4W [M]

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
R691	ERDS2TJ1R5T	1.5 1/4W [M]	R805	ERDS2TJ562T	5.6K 1/4W [M]	C42	ECBT1H330J5	33P 50V [M]	C420	ECA1CM101B	100 16V [M]
R693	ERDS2TJ472T	4.7K 1/4W [M]	R806	ERDS2TJ822T	8.2K 1/4W [M]	C43	ECBT1H101KB5	100P 50V [M]	C421	ECA1CM471B	470 16V [M]
R694	ERDS2TJ121T	120 1/4W [M]	R807	ERDS2TJ153T	15K 1/4W [M]	C44	ECA1HM2R2B	2.2 50V [M]	C423	ECA1CM100B	10 16V [M]
R695	ERDS2TJ471T	470 1/4W [M]	R808	ERDS2TJ333T	33K 1/4W [M]	C45	ECBT1H102KB5	1000P 50V [M]	C424	ECA1HM2R2B	2.2 50V [M]
R696	ERDS2TJ101T	100 1/4W [M]	R809	ERDS2TJ823T	82K 1/4W [M]	C48	ECA1HM010B	1 50V [M]	C425	ECBT0J153MS5	0.015 6.3V [M]
R698	ERDS2TJ152T	1.5K 1/4W [M]	R851	ERDS2TJ153T	15K 1/4W [M]	C49	ECBT1H102KB5	1000P 50V [M]	C450	ECBT0J223MS5	0.022 6.3V [M]
R699	ERDS2TJ562T	5.6K 1/4W [M]	R852	ERDS2TJ474T	470K 1/4W [M]	C50	ECBT1H102KB5	1000P 50V [M]	C503	ECEA1CKA100B	10 16V [M]
R701	ERJ6GEYJ4R7A	4.7 1/10W [M]	R853	ERDS2TJ472T	4.7K 1/4W [M]	C51	ECA1HM010B	1 50V [M]	C504	ECA1HM010B	1 50V [M]
R702	ERJ6GEYJ822A	8.2K 1/10W [M]	R857	ERDS2TJ103T	10K 1/4W [M]	C53	ECBT1H102KB5	1000P 50V [M]	C505	ECBT1H101KB5	100P 50V [M]
R704	ERJ6GEYJ102A	1K 1/10W [M]	R901	ERDS2TJ271T	270 1/4W [M]	C54	ECBT1H102KB5	1000P 50V [M]	C506	ECA1HM010B	1 50V [M]
R705	ERJ6GEYJ124A	120K 1/10W [M]	R902	ERDS2TJ683T	68K 1/4W [M]	C91	ECA1HM3R3B	3.3 50V [M]	C507	ECA1HMR22B	0.22 50V [M]
R706	ERJ6GEYJ102A	1K 1/10W [M]	R903	ERDS2TJ272T	2.7K 1/4W [M]	C92	ECBT1H331KB5	330P 50V [M]	C509	ECEA1CKA100B	10 16V [M]
R707	ERJ6GEYJ474A	470K 1/10W [M]				C98	ECBT1H331KB5	330P 50V [M]	C510	ECBT1H101KB5	100P 50V [M]
R708	ERJ6GEYJ154A	150K 1/10W [M]		CAPACITORS		C101	ECBT1C122MR5	1200P 16V [M]	C512	ECFR1C683MR	0.068 16V [M]
R709	ERJ6GEYJ473A	47K 1/10W [M]				C102	ECBT1C332MR5	3300P 16V [M]	C513	ECFR1C683MR	0.068 16V [M]
R710	ERJ6GEYJ103A	10K 1/10W [M]	C1	ECBT1H470J5	47P 50V [M]	C104	ECBT1H681KB5	680P 50V [M]	C514	ECA1HM2R2B	2.2 50V [M]
R711	ERJ6GEYJ154A	150K 1/10W [M]	C2	ECBT1H100JC5	10P 50V [M]	C106	ECA1CM101B	100 16V [M]	C515	ECA1HM2R2B	2.2 50V [M]
R712	ERJ6GEYJ221A	220 1/10W [M]	C3	ECFR1C223KR	0.022 16V [M]	C107	ECA1CM100B	10 16V [M]	C516	ECBT1H471KB5	470P 50V [M]
R715	ERJ6GEYJ122A	1.2K 1/10W [M]	C4	ECBT1H102KB5	1000P 50V [M]	C108	ECBT0J223MS5	0.022 6.3V [M]	C518	ECA1CM101B	100 16V [M]
R717	ERJ6GEYJ102A	1K 1/10W [M]	C5	ECBT1H5R6KC5	5.6P 50V [M]	C201	ECBT1C122MR5	1200P 16V [M]	C519	ECQV1H224JZ3	0.22 50V [M]
R718	ERJ6GEYJ102A	1K 1/10W [M]	C6	ECBT1H102KB5	1000P 50V [M]	C202	ECBT1C332MR5	3300P 16V [M]	C520	ECA1CM101B	100 16V [M]
R719	ERJ6GEYJ102A	1K 1/10W [M]	C7	ECBT1H150JC5	15P 50V [M]	C204	ECBT1H681KB5	680P 50V [M]	C521	ECA1CM471B	470 16V [M]
R720	ERJ6GEYJ102A	1K 1/10W [M]	C8	ECBT1H102KB5	1000P 50V [M]	C206	ECA1CM101B	100 16V [M]	C523	ECA1CM100B	10 16V [M]
R721	ERJ6GEYJ101A	100 1/10W [M]	C9	ECBT1H102KB5	1000P 50V [M]	C207	ECA1CM100B	10 16V [M]	C524	ECA1HM2R2B	2.2 50V [M]
R723	ERJ6GEYJ272A	2.7K 1/10W [M]	C10	ECBT1H100JC5	10P 50V [M]	C208	ECBT0J223MS5	0.022 6.3V [M]	C525	ECBT0J153MS5	0.015 6.3V [M]
R724	ERJ6GEYJ333A	33K 1/10W [M]	C12	ECBT1H331KB5	330P 50V [M]	C301	ECA1CM101B	100 16V [M]	C550	ECBT0J223MS5	0.022 6.3V [M]
R725	ERJ6GEYJ122A	1.2K 1/10W [M]	C13	ECA1CM100B	10 16V [M]	C302	ECA1AM221B	220 10V [M]	C601	ECBT1H561KB5	560P 50V [M]
R727	ERJ6GEYJ682A	6.8K 1/10W [M]	C14	ECBT1H102KB5	1000P 50V [M]	C303	ECA1HM2R2B	2.2 50V [M]	C603	ECA1HM010B	1 50V [M]
R728	ERJ6GEYJ682A	6.8K 1/10W [M]	C15	ECFR1C683MR	0.068 16V [M]	C304	ECQ2A102JZT	1000P 100V [M]	C605	ECA1HM010B	1 50V [M]
R729	ERJ6GEYJ562A	5.6K 1/10W [M]	C16	ECFR1C823MR	0.082 16V [M]	C305	ECA1CM101B	100 16V [M]	C606	ECBT1H561KB5	560P 50V [M]
R731	ERJ6GEYJ123A	12K 1/10W [M]	C17	ECFR1C823MR	0.082 16V [M]	C306	ECBT1C822MS5	8200P 16V [M]	C607	ECBT1H101KB5	100P 50V [M]
R734	ERJ6GEYJ101A	100 1/10W [M]	C18	ECFR1C333MR	0.033 16V [M]	C307	ECBT1C103MS5	0.01 16V [M]	C609	ECBT1H101KB5	100P 50V [M]
R735	ERJ6GEYJ101A	100 1/10W [M]	C19	ECFR1C333MR	0.033 16V [M]	C310	ECQ2A151JZT	150P 100V [M]	C615	ECBT1H180JC5	18P 50V [M]
R736	ERJ6GEYJ101A	100 1/10W [M]	C20	ECA1HM010B	1 50V [M]	C311	ECBT1C103MS5	0.01 16V [M]	C616	ECBT1H220JC5	22P 50V [M]
R738	ERJ6GEYJ223A	22K 1/10W [M]	C21	ECA1HM010B	1 50V [M]	C403	ECEA1CKA100B	10 16V [M]	C617	ECBT1H102KB5	1000P 50V [M]
R741	ERJ6GEYJ562A	5.6K 1/10W [M]	C22	ECA1HM4R7B	4.7 50V [M]	C404	ECA1HM010B	1 50V [M]	C618	ECBT1H102KB5	1000P 50V [M]
R742	ERJ6GEYJ562A	5.6K 1/10W [M]	C23	ECFR1C333MR	0.033 16V [M]	C405	ECBT1H101KB5	100P 50V [M]	C619	ECBT1H102KB5	1000P 50V [M]
R743	ERJ6GEYJ562A	5.6K 1/10W [M]	C24	ECFR1C333MR	0.033 16V [M]	C406	ECEA1HKA010B	1 50V [M]	C620	ECBT1H820KB5	82P 50V [M]
R744	ERJ6GEYJ104A	100K 1/10W [M]	C30	ECBT1H331KB5	330P 50V [M]	C407	ECA1HMR22B	0.22 50V [M]	C621	ECBT1H101KB5	100P 50V [M]
R745	ERJ6GEYJ155A	1.5M 1/10W [M]	C31	ECBT1C103MS5	0.01 16V [M]	C409	ECA1CM100B	10 16V [M]	C622	ECBT1H102KB5	1000P 50V [M]
R748	ERJ6GEYJ272A	2.7K 1/10W [M]	C32	ECBT1H102KB5	1000P 50V [M]	C410	ECBT1H101KB5	100P 50V [M]	C623	ECA1CM101B	100 16V [M]
R749	ERJ6GEYJ682A	6.8K 1/10W [M]	C33	ECBT1H102KB5	1000P 50V [M]	C412	ECFR1C683MR	0.068 16V [M]	C624	ECBT1H680J5	68P 50V [M]
R752	ERJ6GEYJ220A	22 1/8W [M]	C34	ECBT1H102KB5	1000P 50V [M]	C413	ECFR1C683MR	0.068 16V [M]	C625	ECBT1H820KB5	82P 50V [M]
R770	ERJ6GEYJ224A	220K 1/10W [M]	C35	ECA1CM101B	100 16V [M]	C414	ECA1HM2R2B	2.2 50V [M]	C626	ECBT1H470J5	47P 50V [M]
R801	ERDS2TJ152T	1.5K 1/4W [M]	C36	ECA1EM101B	100 25V [M]	C415	ECA1HM2R2B	2.2 50V [M]	C627	ECA1CM220B	20 16V [M]
R802	ERDS2TJ222T	2.2K 1/4W [M]	C37	ECBT1C103MS5	0.01 16V [M]	C416	ECBT1H471KB5	470P 50V [M]	C628	ECA1CM101B	100 16V [M]
R803	ERDS2TJ272T	2.7K 1/4W [M]	C39	ECBT1H180JC5	18P 50V [M]	C418	ECA1CM101B	100 16V [M]	C629	ECA1CM101B	100 16V [M]
R804	ERDS2TJ392T	3.9K 1/4W [M]	C40	ECBT1C222MR5	2200P 16V [M]	C419	ECQV1H224JZ3	0.22 50V [M]	C630	ECA1CM220B	20 16V [M]

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
C631	ECBT1H470J5	47P 50V [M]	C738	ECUZ1E104MBN	0.1 25V [M]		TEST JUMPERS				
C632	ECA1CM101B	100 16V [M]	C739	ECUZ1H103KBN	0.01 50V [M]						
C633	ECA1CM100B	10 16V [M]	C742	ECUZ1E273KBN	0.027 25V [M]	TJ701	EYF8CU	TEST JUMPER [M]			
C637	ECA1CM331B	330 16V [M]	C743	ECUZ1E104ZFN	0.1 25V [M]						
C640	ECA1CM220B	20 16V [M]	C744	ECUZ1E123KBN	0.012 25V [M]						
C641	ECA1CM101B	100 16V [M]	C745	ECUZ1C473KBN	0.047 16V [M]						
C642	ECA1CM101B	100 16V [M]	C747	ECUV1H221KBN	220P 50V [M]						
C643	ECA1CM220B	20 16V [M]	C749	ECUZ1H222KBN	2200P 50V [M]						
C644	ECA1CM100B	10 16V [M]	C750	ECUZ1E104MBN	0.1 25V [M]						
C645	ECA1VM221B	220 35V [M]	C751	ECUZ1E104MBN	0.1 25V [M]						
C646	ECBT1H330J5	33P 50V [M]	C752	ECUZ1H102KBN	1000P 50V [M]						
C648	ECBT1H330J5	33P 50V [M]	C753	ECUZ1H471KBM	470P 50V [M]						
C650	ECBT1H330J5	33P 50V [M]	C754	ECUZ1H471KBN	470P 50V [M]						
C653	ECA1HM100B	10 50V [M]	C761	ECUZ1H471KBN	470P 50V [M]						
C654	ECBT1H102KB5	1000P 50V [M]	C762	ECUZ1H471KBN	470P 50V [M]						
C655	ECBT1C103MS5	0.01 16V [M]	C851	ECBT1H101KB5	100P 50V [M]						
C657	ECA1EM222E 	2200 25V [M]	C852	ECBT1H100JC5	10P 50V [M]						
C701	ECEA0JKA330I	33 6.3V [M]	C854	ECBT1H102KB5	1000P 50V [M]						
C702	ECUZ1E104MBN	0.1 25V [M]	C860	ECBT1H101KB5	100P 50V [M]						
C703	ECEA0JKA101I	100 6.3V [M]	C901	ECKR2H103ZF5	0.01 500V [M]						
C704	ECUZ1E104MBN	0.1 25V [M]	C902	ECKR2H103ZF5	0.01 500V [M]						
C706	ECUZ1H272KBN	2700P 50V [M]	C903	ECKR2H103ZF5	0.01 500V [M]						
C707	ECUZ1E273KBN	0.027 25V [M]	C904	ECKR2H103ZF5	0.01 500V [M]						
C710	ECUV1H151KCN	150P 50V [M]									
C711	ECUZ1E104ZFN	0.1 25V [M]		CHIP JUMPERS							
C712	ECUZ1E104ZFN	0.1 25V [M]									
C713	ECUZ1E104MBN	0.1 25V [M]	RJ701	ERJ8GEY0R00A	0 1/10W [M]						
C714	ECEA0JKA101I	100 6.3V [M]	RJ702	ERJ8GEY0R00A	0 1/8W [M]						
C715	ECUZ1H182KBN	1800P 50V [M]	RJ703	ERJ8GEY0R00A	0 1/8W [M]						
C716	ECUZ1H821KBN	820P 50V [M]	RJ704	ERJ8GEY0R00A	0 1/8W [M]						
C717	ECUZ1E104ZFN	0.1 25V [M]	RJ705	ERJ8GEY0R00A	0 1/8W [M]						
C718	ECUZ1C224KBN	0.22 16V [M]	RJ706	ERJ8GEY0R00A	0 1/8W [M]						
C721	ECUZ1H150JCN	15P 50V [M]	RJ707	ERJ8GEY0R00A	0 1/8W [M]						
C722	ECUZ1H150JCN	15P 50V [M]	RJ708	ERJ8GEY0R00A	0 1/8W [M]						
C723	ECEA1AKA221I	220 10V [M]	RJ709	ERJ8GEY0R00A	0 1/8W [M]						
C724	ECUZ1E104MBN	0.1 25V [M]	RJ710	ERJ8GEY0R00A	0 1/8W [M]						
C725	ECUZ1H102KBN	1000P 50V [M]	RJ721	ERJ6GEY0R00A	0 1/10W [M]						
C726	ECUZ1H102KBN	1000P 50V [M]	RJ722	ERJ6GEY0R00A	0 1/10W [M]						
C727	ECA1HAK010XI	1 50V [M]	RJ723	ERJ6GEY0R00A	0 1/10W [M]						
C728	ECA1HAK010XI	1 50V [M]	RJ724	ERJ6GEY0R00A	0 1/10W [M]						
C730	ECUZ1E104ZFN	0.1 25V [M]	RJ725	ERJ6GEY0R00A	0 1/10W [M]						
C731	ECEA0JKA221I	220 6.3V [M]	RJ726	ERJ6GEY0R00A	0 1/10W [M]						
C732	ECEA0JKA221I	220 6.3V [M]	RJ727	ERJ6GEY0R00A	0 1/10W [M]						
C733	ECUZ1E104MBN	0.1 25V [M]	RJ728	ERJ6GEY0R00A	0 1/10W [M]						
C734	ECEA1AKA221I	220 10V [M]	RJ750	ERJ6GEY0R00A	0 1/10W [M]						
C735	ECUZ1E104ZFN	0.1 25V [M]									
C736	ECUZ1E104ZFN	0.1 25V [M]									
C737	ECUZ1E104ZFN	0.1 25V [M]									