

# Service Manual

Portable Stereo CD System

Radio Cassette

*Simplified*

COMPACT  
disc  
DIGITAL AUDIO

MASH\*  
multi-stage noise shaping

## RX-DT39

Colour

(K) . . . Black Type



Area

Suffix for Model No.	Area	Colour
(E)	Europe	(K)
(EB)	Great Britain	
(EG)	Germany and Italy	

Please file and use this Service Manual together with the Service Manual for Model No. RX-DT 37 ( E,EB,EG ) Order No. MD9612086C2 and MD9802013S8.

**Note :** This Simplified Service Manual is provided to indicate the main difference between the original Model No. RX-DT39 ( E,EB,EG ) and the subsequent Model No. RX-DT 37 ( E,EB,EG ).

### ⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

# Panasonic®


© 1998 Matsushita Electronics (S) Pte. Ltd.  
All rights reserved. Unauthorized copying and distribution is a violation of law.

## ■ Mechanism Parts List

Notes : [M] in Remarks column indicates parts supplied by MESA.

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
		<b>CASSETTE DECK</b>									
101	RDV0021	MAIN BELT	[M]	144	RXP0014	RF CLUTCH ASS'Y	[M]	239	RMR0227	IDLER GEAR BUSH	[M]
103	RMB0109-1	BRAKE SPRING	[M]	145	RXP0015	PINCH ROLLER ASS'Y	[M]	240	RMS0055	REEL SHAFT	[M]
104	RML0116	BRAKE	[M]	145-1	RMB0049	PINCH ARM SPRING	[M]	241	RXF0012	FLYWHEEL ASS'Y	[M]
105	RBR2CY009	E HEAD	[M]	146	RBR4CY016-M	R/P HEAD	[M]	241-1	RHW21008	WASHER	[M]
106	RDG0057	IDLER GEAR	[M]	149	RMA0696	HEAD BASE ASS'Y	[M]	242	RMB0044	TRIGGER SPRING	[M]
107	RDG0059	FF RELAY GEAR	[M]	151	RMQ0384	HEAD BASE	[M]	243	RML0075	TRIGGER LEVER	[M]
108	RDK0005	CAM GEAR	[M]	153	XTN2+14F	SCREW	[M]	244	RXP0014	RF CLUTCH ASSY	[M]
109	RDV0006-1	RF BELT	[M]	154	RXR0004	TAKE UP REEL ASS'Y	[M]	245	RXP0015	PINCH ROLLER ASSY	[M]
110	RHW16009	CAPSTAN WASHER	[M]	155	RXR0005	SUPPLY REEL ASS'Y	[M]	245-1	RMB0049	PINCH ARM SPRING	[M]
111	RMA0109	BACK PLATE	[M]	156	XTN2+6J	SCREW	[M]	246	RBR4CY016-M	R/P HEAD	[M]
112	RMB0043-1	ROD OPERATION SPRING	[M]	157	XTV26+6F	SCREW	[M]	249	RMA0696	HEAD BASE ASS'Y	[M]
113	RMB0045	AS SPRING	[M]	158	RME0098-2	SPRING	[M]	251	RMQ0383	HEAD BASE	[M]
114	RMB0046-1	LOCK PLATE SPRING	[M]	201	RDV0009	MAIN BELT B	[M]	252	XTN26+3F	EARTH LUG SCREW	[M]
115	RMB0047	HEAD PANEL SPRING	[M]	203	RMB0109-1	BRAKE SPRING	[M]	253	XTN2+14F	SCREW	[M]
116	RMB0048	IDLER LEVER SPRING	[M]	204	RML0116	BRAKE	[M]	254	RXR0004	TAKE UP REEL ASS'Y	[M]
117	RMB0053	PAUSE LEVER SPRING	[M]	206	RDG0057	IDLER GEAR	[M]	255	RXR0005	SUPPLY REEL ASS'Y	[M]
118	RMB0125	BACK TENSION SPRING	[M]	207	RDG0059	FF RELAY GEAR	[M]	256	XTN2+6J	SCREW	[M]
119	RMC0061	SPRING	[M]	208	RDK0005	CAM GEAR	[M]	257	XTV26+6F	SCREW	[M]
120	RFKRCT090P-K	CHASSIS ASS'Y	[M]	209	RDV0006-1	RF BELT	[M]	258	RME0098-2	SPRING	[M]
121	RML0071	SWAY LEVER	[M]	210	RHW16009	CAPSTAN WASHER	[M]	260	RFKPXDT610PK	DC MOTOR ASS'Y	[M]
122	RML0072	AS RELEASE LEVER	[M]	211	RMA0109	BACK PLATE	[M]	261	RHD26002	SCREW	[M]
123	RML0073-1	AS PROTECT LEVER	[M]	212	RMB0043-1	ROD OPERATION SPRING	[M]	262	RMA0122	ANGLE	[M]
124	RML0074	IDLER LEVER	[M]	213	RMB0045	AS SPRING	[M]	263	RMG0102	RUBBER SPACE	[M]
125	RML0076	EJECT SELECTION LEVE	[M]	214	RMB0046-1	LOCK PLATE SPRING	[M]	264	RMG0131	RUBBER SPACE	[M]
126	RML0077	LOCK PLATE	[M]	215	RMB0047	HEAD PANEL SPRING	[M]	265	RMA0121	ANGLE	[M]
127	RML0078	FUNCTION PLATE	[M]	216	RMB0048	IDLER LEVER SPRING	[M]	266	RML0085	LEVER	[M]
128	RML0080	E HEAD ARM	[M]	217	RMB0053	PAUSE LEVER SPRING	[M]				
129	RML0081-1	LEVER	[M]	218	RMB0125	BACK TENSION SPRING	[M]				
130	RML0082	PAUSE LEVER	[M]	219	RMC0061	SPRING	[M]				
131	RMM0023	PLAY ROD	[M]	220	RFKRCT090P-K	CHASSIS ASS'Y	[M]				
132	RMM0024	REW ROD	[M]	221	RML0071	SWAY LEVER	[M]				
133	RMM0025	FF ROD	[M]	222	RML0072	AS RELEASE LEVER	[M]				
134	RMM0026	STOP ROD	[M]	223	RML0073-1	AS PROTECT LEVER	[M]				
135	RMM0027	PAUSE ROD	[M]	224	RML0074	IDLER LEVER	[M]				
136	RMM0028	REC ROD	[M]	225	RML0076	EJECT SELECTION LEVE	[M]				
137	RMM0029	EJECT SLIDE LEVER	[M]	226	RML0077	LOCK PLATE	[M]				
138	RMR0211	PAUSE BUSH	[M]	227	RML0078	FUNCTION PLATE	[M]				
139	RMR0227	IDLER GEAR BUSH	[M]	230	RML0082	PAUSE LEVER	[M]				
140	RMS0055	REEL SHAFT	[M]	231	FMM0023	PLAY ROD	[M]				
141	RXF0012	FLYWHEEL ASS'Y	[M]	232	FMM0024	REW ROD	[M]				
141-1	RHW21008	WASHER	[M]	233	FMM0025	FF ROD	[M]				
142	RMB0044	TRIGGER SPRING	[M]	234	FMM0026	STOP ROD	[M]				
143	RML0075	TRIGGER LEVER	[M]	235	FMM0027	PAUSE ROD	[M]				
				237	FMM0029	EJECT SLIDE LEVER	[M]				
				238	RMR0211	PAUSE BUSH	[M]				

## Changes in Cabinet Parts Location

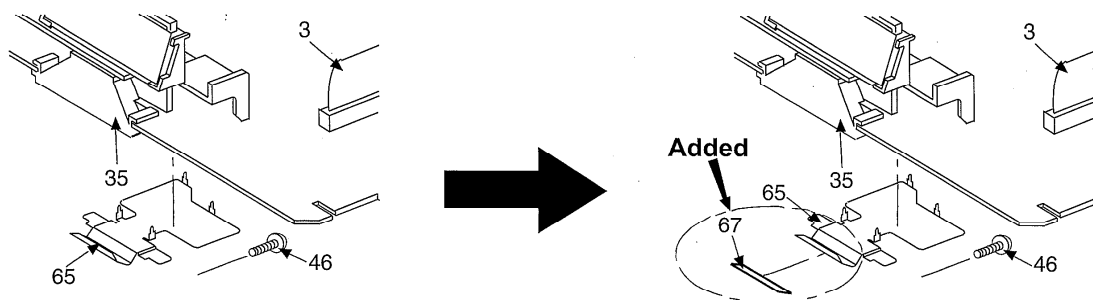

RX-DT 37 E/EB/EG-K

RX-DT 39 E/EB/EG-K

## Replacement Parts List

- Notes:**
- \* Important safety notice :  
Components identified by  $\triangle$  mark have special characteristics important for safety.  
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.  
When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.
  - \* The parenthesized in the Remarks columns specify the areas. (Refer to the cover page for area.)  
Parts without these indication can be used for all areas.
  - \* [M] in Remarks column indicates parts that are supplied by **MESA**.
  - \* The "(SF)" denotes the standard part.
  - \* Remote Control Unit : Supply period for three years from terminal of production.
  - \* **Warning** : This product uses a laser diode. Refer to caution statements on page 2.
  - \* **ACTUNG** : • Die lasereinheit nicht zerlegen.  
• Die lasereinheit darf nur gegen eine vom hersteller spezifizierte einheit ausgetauscht werden.

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
		<b>CABINET AND CHASSIS</b>		11	RFKLXDT37-KC	CASS. LID ASS'Y (R)	[M]	31	RMK0338	PCB CHASSIS	[M]
				12	RFKNXDT39GCK	DISC HOLDER ASS'Y	[M]	32	RML0455	CD CLAMPER HOLDER	[M]
1	EAST10P01A6	SPEAKER	[M]	13	RGQ0195-K	CD TRAY	[M]	33	RML0462	R/P LEVER	[M]
2	RDG0183-L	DAMPER GEAR	[M]	14	RGU1504-S	OPR. BUTTON (L)	[M]	34	RMN0393	LCD HOLDER	[M]
3	REE0763	CD FFC	[M]	15	RGU1505-S	OPR. BUTTON (R)	[M]	35	RMN0394	LED HOLDER	[M]
4	REX0860	SP WIRE	[M]	17	RGV0186-1S	FUNCTION KNOB	[M]	36	RMN0397	SPEAKER SUPPORT PLATE	[M]
5	REX0859	DECK HEAD WIRE	[M]	18	RGZ0035-K	MECHA BUTTON	[M]	37	RMN0398	SPEAKER SUPPORT PLATE	[M]
6	REX0858	WIRE (7P) TO POWER P	[M]	19	RKH0038-K	HANDLE	[M]	38	RMN0400	LEAF SW. COVER	[M]
7	RFKGXDT39GCK	FRONT CAB. ASS'Y	[M]	20	RKK347ZB-K	BATTERY COVER	[M]	39	RMQ0649	MECHA BUTTON SUPPORT	[M]
8	RFKHXTDT39EBK	BACK CAB. ASS'Y	[M]EB	21	RKQ0210A-K1	TOP CAB.	[M]	40	RMV0185	HEAT SINK	[M]
8	RFKHXTDT39EGK	BACK CAB. ASS'Y	[M]EG	22	RMAX0026	MECHA BRACKET	[M]	41	SUX102	MECHA ROD	[M]
8	RFKHXTDT39E-K	BACK CAB. ASS'Y	[M]E	23	RMB0490	CASS. OPEN SPRING	[M]	42	XEARR175EA-Y	ROD ANTENNA	[M]
8-1	RJC91008	+ BATT. TERMINAL	[M]	24	RMB0491	CD OPEN SPRING (R)	[M]	43	XTN2+14GF	SCREW	[M]
8-2	RJR0172	ANT. TERMINAL	[M]	25	RMB0492	CD CLAMPER SPRING	[M]	44	XTN2+3F	SCREW	[M]
9	RFKLXDT39GCK	CD LID ASS'Y	[M]	26	RMB0498	CD OPEN SPRING (L)	[M]	45	XTV3+12GFZ	TOP CAB SCREW	[M]
9-1	RGU1464-K	CD EJECT BUTTON	[M]	27	RMC0312	R/P PLATE	[M]	46	XTV3+12G	SCREW	[M]
9-2	RML0456	CD LOCK LEVER	[M]	28	RMC0325	CD TRAY OPEN SPRING	[M]	47	XTV3+20G	REAR CAB SCREW	[M]
10	RFKLXDT37-KB	CASS. LID ASS'Y (L)	[M]	30	RMK0337	CD SUPPORT	[M]	48	XTV3+8F	POWER AMP IC SCREW	[M]

Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
49	XTWS3+8T	SCREW	[M]	Q304	RVTDTTC143XST	TRANSISTOR	[M]	D609	RVD1SS133TA	DIODE	[M]
50	XYN3+F12FY	R.ANT SCREW	[M]	Q305	2SA1309ARTA	TRANSISTOR	[M]	D610	MTZJ5R6CTA	DIODE	[M] △
51	RMXX0004	MECHA SPACER	[M]	Q601	2SC2785FTA	TRANSISTOR	[M]	D611	RVD1SS133TA	DIODE	[M]
52	RAE0152Z	TRAVERSE	[M]	Q602	2SC2785FTA	TRANSISTOR	[M]	D612	1N5402BM21	DIODE	[M]
52-1	SHGD113-1	FLOATING CUSHION	[M]	Q603	RVTDTA143XST	TRANSISTOR	[M]	D613	RVD1SS133TA	DIODE	[M]
52-2	SNSD38	TRV MOTOR ASS'Y SCREW	[M]	Q604	2SC2785FTA	TRANSISTOR	[M]	D614	RVD1SS133TA	DIODE	[M]
53	RME0109	FLOATING SPRING B	[M]	Q605	2SC2785FTA	TRANSISTOR	[M]	D615	RVD1SS133TA	DIODE	[M]
54	RME0142	FLOATING SPRING A	[M]	Q606	2SA952LTA	TRANSISTOR	[M]	D616	MA700TA	DIODE	[M]
55	RMS0123-1	FIXED PIN B	[M]	Q607	2SC2785FTA	TRANSISTOR	[M]	D618	RVD1SS133TA	DIODE	[M]
56	RMS0350	FIXED PIN A	[M]	Q608	2SB1566E	TRANSISTOR	[M] △	D619	MTZJ6R8BTA	DIODE	[M]
57	RMR0698-K	TRY CHASSIS	[M]	Q609	2SC2785FTA	TRANSISTOR	[M] △	D620	MTZJ7R5CTA	DIODE	[M] △
58	XTN2+6G	PCB SCREW	[M]	Q610	RVTDTA143XST	TRANSISTOR	[M]	D621	RVD1SS133TA	DIODE	[M]
61	REX0861	DECK TO MAIN WIRE	[M]	Q611	RVTDTA114YST	TRANSISTOR	[M]	D622	SLA362MTTJ7	DIODE	[M]
62	RKW0499-Q	MEGA LED WINDOW	[M]	Q612	RVTDTTC114YST	TRANSISTOR	[M]	D623	SLA362MTTJ7	DIODE	[M]
63	RMR1061-X	CONNECTOR HOLDER	[M]	Q613	RVTDTA143XST	TRANSISTOR	[M]	D624	RVD1SS133TA	DIODE	[M]
64	RMV0132	SAFETY COVER	[M]	Q614	RVTDTTC114TST	TRANSISTOR	[M]	D625	RVD1SS133TA	DIODE	[M]
65	RSC0470	MICON SHIELD	[M]	Q615	2SC2785FTA	TRANSISTOR	[M]	D626	RVD1SS133TA	DIODE	[M]
66	XTW3+12Q	SP. MOUNTING SCREW	[M]	Q616	2SC2785FTA	TRANSISTOR	[M]	D627	RVD1SS133TA	DIODE	[M]
67	RMV0135	SHIELD COVER	[M]	Q617	RVTDTTC144EST	TRANSISTOR	[M]	D629	MTZJ15BTA	DIODE	[M] △
				Q618	RVTDTA143XST	TRANSISTOR	[M] △	D631	MA700TA	DIODE	[M]
		<b>INTEGRATED CIRCUITS</b>		Q619	RVTDTA143XST	TRANSISTOR	[M]	D802	SLR342DC	DIODE	[M]
				Q621	2SC2785FTA	TRANSISTOR	[M]	D803	SPR54MVWF	DIODE	[M]
IC1	TA7358FMATEL	IC, FM RF	[M]	Q622	RVTDTTC143XST	TRANSISTOR	[M]	D804	SLR342DC	DIODE	[M]
IC2	BU2616F-E2	IC, PLL	[M]	Q623	2SC2785FTA	TRANSISTOR	[M]	D901	1N5402BM21	DIODE	[M] △
IC3	LA1832MLSTEL	IC, IF/MULTI	[M]	Q624	2SC2001LTA	TRANSISTOR	[M]	D902	1N5402BM21	DIODE	[M] △
IC301	AN7317	IC, PLAYBACK/RECORD	[M]	Q625	RVTDTTC144TST	TRANSISTOR	[M]	D903	1N5402BM21	DIODE	[M] △
IC601	SC440422CFU	IC, MICRO COM.	[M]	Q701	2SA1037AKSTX	TRANSISTOR	[M]	D904	1N5402BM21	DIODE	[M] △
IC602	S-806H-Z	IC, RESET	[M]	Q702	DTC114YKA146	TRANSISTOR	[M]				
IC603	S81250PG-Z	IC, 5V REGULATOR	[M] △							<b>VARIABLE RESISTORS</b>	
IC604	BH3854AFS-E2	IC, SOUND PROCESSOR	[M]			<b>DIODES</b>					
IC605	AN7077Z-LDC	IC, BOOST	[M]					VR301	EVNDCAA03B24	VR, (TAPE SPEED)	[M]
IC606	AN7194K-LD	IC, BTL POWER	[M]	D1	KV1360NTM	DIODE	[M]				
IC701	AN8837SBE1	IC, HEAD AMP	[M]	D3	KV1583BMTL	DIODE	[M]			<b>TRIMMER</b>	
IC702	MN662746RPK1	IC, LSI	[M]	D4	KV1360NTM	DIODE	[M]				
IC703	AN8780NSBE2	IC	[M]	D8	RVD1SS133TA	DIODE	[M]	CT1	RCV10AF1T-S	TRIMMER CAPACITOR	[M]
				D11	RVD1SS135TA	DIODE	[M]				
		<b>TRANSISTORS</b>		D301	RVD1SS133TA	DIODE	[M]			<b>SWITCHES</b>	
				D302	RVD1SS133TA	DIODE	[M]				
Q1	2SC2785FTA	TRANSISTOR	[M]	D303	RVD1SS133TA	DIODE	[M]	S701	RSH1A043-U	SW, REST	[M]
Q2	2SC2785FTA	TRANSISTOR	[M]	D304	RVD1SS133TA	DIODE	[M]	SW301	RSP2F001-A	SW, REC.	[M]
Q3	2SC2786LTA	TRANSISTOR	[M]	D601	RVD1SS133TA	DIODE	[M]	SW302	RSH1A013-2I	SW, FF/CUE (DECK 2)	[M]
Q4	2SC3313BTA	TRANSISTOR	[M]	D602	RVD1SS133TA	DIODE	[M]	SW303	RSH1A004-1	SW, PLAY (DECK 2)	[M]
Q5	RVTDTA143XST	TRANSISTOR	[M]	D603	RVD1SS133TA	DIODE	[M]	SW304	RSH1A004-1	SW, FF/REW (DECK2)	[M]
Q12	2SC2785FTA	TRANSISTOR	[M]	D604	RVD1SS133TA	DIODE	[M]	SW312	RSH1A013-2I	SW, EE/CUE (DECK 1)	[M]
Q101	2SC2785FTA	TRANSISTOR	[M]	D605	RVD1SS133TA	DIODE	[M]	SW313	RSH1A004-1	SW, PLAY (DECK 1)	[M]
Q201	2SC2785FTA	TRANSISTOR	[M]	D606	RVD1SS133TA	DIODE	[M]	SW314	RSH1A004-1	SW, FF/REW (DECK 1)	[M]
Q301	2SC1740SRTA	TRANSISTOR	[M]	D607	RVD1SS133TA	DIODE	[M]	SW601	RSS3D002-B	SW, FUNCTION	[M]
Q303	2SC1684STA	TRANSISTOR	[M]	D608	RVD1SS133TA	DIODE	[M]	SW602	RSH1A037-U	SW, LEAF	[M]



Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks	Ref No.	Part No.	Part Name & Description	Remarks
SW801	EVQ21405R	SW, PRESET EQ	[M]	L902	RLL500050T-Y	RF CHOKE COIL	[M]	H901B	RJS1A5503	CABLE HOLDER	[M]
SW802	EVQ21405R	SW, POWER BLASTER	[M]	L903	RLL500050T-Y	RF CHOKE COIL	[M]				
SW803	EVQ21405R	SW, SKIP/SEARCH (-)	[M]	T1	RLI2Z019-T	IFT (459KHZ)	[M]			<b>JACKS</b>	
SW804	EVQ21405R	SW, SKIP/SEARCH (+)	[M]	T301	RL09B17-T	NIL	[M]				
SW806	EVQ21405R	SW, CD STOP/CLEAR	[M]	T901	RTP1L1B009-X	TRANSFORMER	[M] ⚠	JK601	RJJ39T01	JK, HP	[M]
SW807	EVQ21405R	SW, CD PLAY/PAUSE	[M]					JK901	RJJ1SE01-1H	JK, AC	[M] ⚠
SW808	EVQ21405R	SW, FM/AM (BAND)	[M]			<b>COMPONENT COMBINATION</b>					
SW809	EVQ21405R	SW, SLEEP (TUNER/CD)	[M]							<b>WIRES</b>	
SW810	EVQ21405R	SW, VOL. -	[M]	Z1	RXABPWB6AT	BAND PASS FILT	[M]				
SW811	EVQ21405R	SW, VOL. +	[M]	Z601	RSL5162-L	LCD	[M]	W302	RWJ0104065KX	TO MOTOR	[M]EB E
SW901	RJJ1SE01-1H	SW, AC INLET (JK901)	[M] ⚠	Z801	RCD12042TE	REMOTE CONTROL SENSO	[M]	W602	RWJ0402135KK	WIRE (2P) TO CD PCB	[M]
								W603	RWJ0302135KK	WIRE (2P)	[M]
		<b>CONNECTOR</b>				<b>CERAMIC FILTERS</b>		W606	RWJ0302410KG	SP. WIRE (RCH)	[M]
								W607	RWJ0402170KG	SP. WIRE (LCH)	[M]
CM605	RJS1A5210	10P WIRE HOLDER	[M]	CF1	RLFFETMLA02D	NIL	[M]	PW605	RWJ1110200RR	WIRE (10P) TO TUNER	[M]
CN701	RJS2A6016	16P FFC CONNECTOR	[M]	CF2	RLFFETMLA02D	NIL	[M]	PW901	RWJ0103120QQ	WIRE (3P) TO BATT. P	[M]
CN702	RJS1A6723-1Q	23P FFC CONNECTOR	[M]	CF3	RLFDFT14AD	FM RESONATOR	[M]				
CN702	RJS1A6823-J	23P FPC CONNECTOR	[M]							<b>PACKING MATERIALS</b>	
CP301	RJP12G17ZA	HEAD CONNECTOR	[M]			<b>OSCILLATORS</b>					
CP303	RJP12G18ZA	CONTROL TO MAIN CONN	[M]					P1	RPN1032	POLYFOAM	[M]
CP603A	RJP4G4YA	LEAF SW 4P POST	[M]	X1	RSXZ456KM01	19KHZ OSC	[M]	P2	RPGX0531	PACKING CASE	[M]E
CP603B	RJT060B04	4P CONNECTOR (SP)	[M]	X2	RSXC7M20S04T	XTAL 7.2MHZ	[M]	P2	RPGX0582	PACKING CASE	[M]EB EG
CP604	RJP7G4YA	7P PLUG IN CONNECTOR	[M]	X601	EF0EN4194T4	CERALOCK	[M]	P3	RPH0131	MIRAMAT SHEET	[M]
				X602	RSXD32K7S02	32.768HKZ X'TAL	[M]	P4	RPN1057	POLYFOAM (CENTRE)	[M]
		<b>COILS &amp; TRANSFORMERS</b>		X701	RSXZ16M9M01T	CERAMIC OSC	[M]				
										<b>ACCESSORIES</b>	
L1	RL02B012-T	NIL	[M]			<b>FUSES</b>		A1	RAK-RX928WK	REMOTE CONTROL UNIT	[M]
L3	RLV2C032-0	F. ANT	[M]					A1-1	HTR0212-72PW	R/C BATTERY COVER	[M]
L5	RLQZP8R2JT-Y	NIL	[M]	F901	XBA2C50TB0	FUSE	[M] ⚠	A2	RJA0019-2K	AC CORD (SF) ⚠	[M]EG E
L8	ELEXT101KA9	AXIAL COIL	[M]	F902	XBA2C31TB0	FUSE	[M] ⚠	A2	VJA0733	AC CORD (SF) ⚠	[M]EB
L401	RLL500050T-Y	RF CHOKE COIL	[M]					A3	RQT4711-E	O/I BOOK (En/Sp/Sw)	[M]E
L501	RLL500050T-Y	RF CHOKE COIL	[M]			<b>FUSE HOLDERS</b>		A3	RQT4712-R	O/I BOOK (Ru/Cz/Po)	[M]E
L601	RLQZP2R2KT-Y	AXIAL COIL	[M]					A3	RQT4713-D	O/I BOOK (Ge/It/Fr)	[M]EG
L608	RLQZP2R2KT-Y	AXIAL COIL	[M]	FH901	RJR0169T	FUSE HOLDER	[M]	A3	RQT4714-H	O/I BOOK (Du/Da)	[M]EG
L609	RLQZP2R2KT-Y	AXIAL COIL	[M]	FH902	RJR0169T	FUSE HOLDER	[M]	A3	RQT4715-B	O/I BOOK (En)	[M]EB
L610	RLQZP2R2KT-Y	AXIAL COIL	[M]	FH903	RJR0169T	FUSE HOLDER	[M]				
L611	RLQZP2R2KT-Y	AXIAL COIL	[M]	FH904	RJR0169T	FUSE HOLDER	[M]				
L612	RLQZP2R2KT-Y	AXIAL COIL	[M]								
L613	RLQZP2R2KT-Y	AXIAL COIL	[M]			<b>FUSE PROTECTOR</b>					
L614	RLQZP2R2KT-Y	AXIAL COIL	[M]								
L616	RLQZP2R2KT-Y	AXIAL COIL	[M]	FP901	RSFMB50KT-L	FUSE PROTECTOR	[M]				
L617	RLQZP2R2KT-Y	AXIAL COIL	[M]								
L618	RLL500050T-Y	RF CHOKE COIL	[M]			<b>HOLDERS</b>					
L619	RLQZP2R2KT-Y	AXIAL COIL	[M]								
L620	RLQZP2R2KT-Y	AXIAL COIL	[M]	H601	RMR0320	CABLE HOLDER	[M]				
L621	RLQZP2R2KT-Y	AXIAL COIL	[M]	H604	RJS1A5507	WIRE W101 HOLDER	[M]				
L622	RLQZP2R2KT-Y	AXIAL COIL	[M]	H605	RMR0319	10P CABLE HOLDER	[M]				
L901	RLL500050T-Y	RF CHOKE COIL	[M]	H901A	RJS1A5503	CABLE HOLDER	[M]				

## ■ Resistors & Capacitors

Notes : \* Important safety notice:  
 Components identified by  $\triangle$  mark have special characteristics important for safety.  
 Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.  
 When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.  
 \* Capacitor values are in microfarad ( $\mu$ F) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)  
 \* Resistors values are in ohms, unless specified otherwise, 1k=1,000(OHM), 1M=1,000k(OHM)

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
	<b>RESISTORS</b>										
R1	ERDS2TJ104T	100K 1/4W [M]	R101	ERDS2TJ183T	18K 1/4W [M]	R504	ERDS2TJ152T	1.5K 1/4W [M]	R633	ERDS2TJ101T	100 1/4W [M]
R2	ERDS2TJ332T	3.3K 1/4W [M]	R102	ERDS2TJ330T	33 1/4W [M]	R505	ERDS2TJ472T	4.7K 1/4W [M]	R634	ERDS2TJ1R0T	1 1/4W [M]
R3	ERDS2TJ104T	100K 1/4W [M]	R103	ERDS2TJ472T	4.7K 1/4W [M]	R506	ERDS2TJ822T	8.2K 1/4W [M]	R635	ERDS2TJ182T	1.8K 1/4W [M]
R4	ERDS2TJ103T	10K 1/4W [M]	R105	ERDS2TJ682T	6.8K 1/4W [M]	R507	ERDS2TJ682T	6.8K 1/4W [M]	R636	ERDS2TJ392T	3.9K 1/4W [M]
R5	ERDS2TJ103T	10K 1/4W [M]	R106	ERDS2TJ103T	10K 1/4W [M]	R508	ERDS2TJ822T	8.2K 1/4W [M]	R637	ERDS2TJ224T	220K 1/4W [M]
R6	ERDS2TJ152T	1.5K 1/4W [M]	R107	ERDS2TJ272T	2.7K 1/4W [M]	R511	ERDS2TJ2R2T	2.2 1/4W [M]	R638	ERDS2TJ102T	1K 1/4W [M]
R7	ERDS2TJ330T	33 1/4W [M]	R201	ERDS2TJ183T	18K 1/4W [M]	R514	ERDS2TJ2R2T	2.2 1/4W [M]	R639	ERDS2TJ154T	150K 1/4W [M]
R8	ERDS2TJ104T	100K 1/4W [M]	R202	ERDS2TJ330T	33 1/4W [M]	R516	ERDS2TJ181T	180 1/4W [M]	R640	ERDS2TJ224T	220K 1/4W [M]
R9	ERDS2TJ471T	470 1/4W [M]	R203	ERDS2TJ472T	4.7K 1/4W [M]	R517	ERDS2TJ223T	22K 1/4W [M]	R641	ERDS2TJ153T	15K 1/4W [M]
R10	ERDS2TJ102T	1K 1/4W [M]	R205	ERDS2TJ682T	6.8K 1/4W [M]	R518	ERDS2TJ103T	10K 1/4W [M]	R642	ERDS2TJ153T	15K 1/4W [M]
R11	ERDS2TJ103T	10K 1/4W [M]	R206	ERDS2TJ103T	10K 1/4W [M]	R601	ERDS2TJ224T	220K 1/4W [M]	R643	ERDS2TJ103T	10K 1/4W [M]
R12	ERDS2TJ223T	22K 1/4W [M]	R207	ERDS2TJ272T	2.7K 1/4W [M]	R602	ERDS2TJ224T	220K 1/4W [M]	R644	ERDS2TJ151T	150 1/4W [M]
R13	ERDS2TJ153T	15K 1/4W [M]	R301	ERDS2TJ272T	2.7K 1/4W [M]	R603	ERDS2TJ224T	220K 1/4W [M]	R645	ERDS2TJ122T	1.2K 1/4W [M]
R14	ERDS2TJ103T	10K 1/4W [M]	R303	ERDS2TJ221T	220 1/4W [M]	R604	ERDS2TJ223T	22K 1/4W [M]	R646	ERDS2TJ331T	330 1/4W [M]
R15	ERDS2TJ223T	22K 1/4W [M]	R304	ERDS2TJ100T	10 1/4W [M]	R605	ERDS2TJ823T	82K 1/4W [M]	R647	ERDS2TJ103T	10K 1/4W [M]
R16	ERDS2TJ105T	1M 1/4W [M]	R305	ERDS2TJ563T	56K 1/4W [M]	R606	ERDS2TJ823T	82K 1/4W [M]	R648	ERDS2TJ1R2T	1.2 1/4W [M]
R17	ERDS2TJ103T	10K 1/4W [M]	R306	ERDS2TJ681T	680 1/4W [M]	R607	ERDS2TJ104T	100K 1/4W [M]	R649	ERDS2TJ1R2T	1.2 1/4W [M]
R18	ERDS2TJ223T	22K 1/4W [M]	R307	ERDS2TJ222T	2.2K 1/4W [M]	R608	ERDS2TJ334T	330K 1/4W [M]	R650	ERDS2TJ471T	470 1/4W [M]
R19	ERDS2TJ101T	100 1/4W [M]	R308	ERDS2TJ475T	4.7M 1/4W [M]	R609	ERDS2TJ106T	10M 1/4W [M]	R651	ERDS2TJ122T	1.2K 1/4W [M]
R20	ERDS2TJ151T	150 1/4W [M]	R309	ERDS2TJ101T	100 1/4W [M]	R610	ERDS2TJ104T	100K 1/4W [M]	R652	ERDS2TJ471T	470 1/4W [M]
R21	ERDS2TJ104T	100K 1/4W [M]	R310	ERDS2TJ153T	15K 1/4W [M]	R611	ERDS2TJ472T	4.7K 1/4W [M]	R653	ERDS2TJ271T	270 1/4W [M]
R22	ERDS2TJ331T	330 1/4W [M]	R311	ERDS2TJ473T	47K 1/4W [M]	R612	ERDS2TJ472T	4.7K 1/4W [M]	R654	ERDS2TJ103T	10K 1/4W [M]
R24	ERDS2TJ471T	470 1/4W [M]	R312	ERDS2TJ153T	15K 1/4W [M]	R613	ERDS2TJ224T	220K 1/4W [M]	R655	ERDS2TJ103T	10K 1/4W [M]
R25	ERDS2TJ104T	100K 1/4W [M]	R316	ERDS2TJ123T	12K 1/4W [M]	R614	ERDS2TJ104T	100K 1/4W [M]	R656	ERDS2TJ103T	10K 1/4W [M]
R26	ERDS2TJ102T	1K 1/4W [M]	R317	ERDS2TJ123T	12K 1/4W [M]	R615	ERDS2TJ104T	100K 1/4W [M]	R657	ERDS2TJ223T	22K 1/4W [M]
R27	ERDS2TJ102T	1K 1/4W [M]	R318	ERDS2TJ473T	47K 1/4W [M]	R616	ERDS2TJ104T	100K 1/4W [M]	R658	ERDS2TJ153T	15K 1/4W [M]
R28	ERDS2TJ334T	330K 1/4W [M]	R401	ERDS2TJ152T	1.5K 1/4W [M]	R617	ERDS2TJ224T	220K 1/4W [M]	R659	ERDS2TJ103T	10K 1/4W [M]
R29	ERDS2TJ331T	330 1/4W [M]	R402	ERDS2TJ392T	3.9K 1/4W [M]	R618	ERDS1FVJ2R7T $\triangle$	2.7 1/2W [M]	R660	ERDS2TJ102T	1K 1/4W [M]
R30	ERDS2TJ822T	8.2K 1/4W [M]	R403	ERDS2TJ682T	6.8K 1/4W [M]	R619	ERDS2TJ153T	15K 1/4W [M]	R661	ERDS2TJ124T	120K 1/4W [M]
R31	ERDS2TJ472T	4.7K 1/4W [M]	R404	ERDS2TJ152T	1.5K 1/4W [M]	R620	ERDS2TJ153T	15K 1/4W [M]	R662	ERDS2TJ123T	12K 1/4W [M]
R41	ERDS2TJ301T	300 1/4W [M]	R405	ERDS2TJ472T	4.7K 1/4W [M]	R621	ERDS2TJ153T	15K 1/4W [M]	R663	ERDS2TJ103T	10K 1/4W [M]
R47	ERDS2TJ332T	3.3K 1/4W [M]	R406	ERDS2TJ822T	8.2K 1/4W [M]	R622	ERDS2TJ681T	680 1/4W [M]	R664	ERDS2TJ103T	10K 1/4W [M]
R49	ERDS2TJ103T	10K 1/4W [M]	R407	ERDS2TJ682T	6.8K 1/4W [M]	R623	ERDS2TJ152T	1.5K 1/4W [M]	R665	ERDS2TJ1R2T	1.2 1/4W [M]
R52	ERDS2TJ223T	22K 1/4W [M]	R408	ERDS2TJ822T	8.2K 1/4W [M]	R624	ERDS2TJ392T	3.9K 1/4W [M]	R666	ERDS2TJ473T	47K 1/4W [M]
R59	ERDS2TJ471T	470 1/4W [M]	R411	ERDS2TJ2R2T	2.2 1/4W [M]	R625	ERDS2TJ392T	3.9K 1/4W [M]	R667	ERDS2TJ563T	56K 1/4W [M]
R61	ERDS2TJ103T	10K 1/4W [M]	R414	ERDS2TJ2R2T	2.2 1/4W [M]	R626	ERDS2TJ103T	10K 1/4W [M]	R668	ERDS2TJ472T	4.7K 1/4W [M]
R62	ERDS2TJ471T	470 1/4W [M]	R416	ERDS2TJ181T	180 1/4W [M]	R627	ERDS2TJ563T	56K 1/4W [M]	R669	ERDS2TJ271T	270 1/4W [M]
R64	ERDS2TJ332T	3.3K 1/4W [M]	R417	ERDS2TJ223T	22K 1/4W [M]	R628	ERDS2TJ223T	22K 1/4W [M]	R670	ERDS2TJ472T	4.7K 1/4W [M]
R65	ERDS2TJ470T	47 1/4W [M]	R418	ERDS2TJ103T	10K 1/4W [M]	R629	ERDS2TJ103T	10K 1/4W [M]	R671	ERDS2TJ101T	100 1/4W [M]
R66	ERDS2TJ332T	3.3K 1/4W [M]	R501	ERDS2TJ152T	1.5K 1/4W [M]	R630	ERDS2TJ474T	470K 1/4W [M]	R672	ERDS2TJ105T	1M 1/4W [M]
			R502	ERDS2TJ392T	3.9K 1/4W [M]	R631	ERDS2TJ564T	560K 1/4W [M]	R673	ERDS2TJ224T	220K 1/4W [M]
			R503	ERDS2TJ682T	6.8K 1/4W [M]	R632	ERDS2TJ471T	470 1/4W [M]	R674	ERDS2TJ224T	220K 1/4W [M]

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
R675	ERDS2TJ393T	39K 1/4W [M]	R736	ERJ6GEYJ101A	100 1/10W [M]	C16	RCBS1H102KBY	1000P 50V [M]	C85	ECBT1C103MS5	0.01 16V [M]
R676	ERDS2TJ224T	220K 1/4W [M]	R738	ERJ6GEYJ223A	22K 1/10W [M]	C17	RCBS1H102KBY	1000P 50V [M]	C86	ECBT1H331KB5	330P 50V [M]
R677	ERDS2TJ332T	3.3K 1/4W [M]	R741	ERJ6GEYJ562A	5.6K 1/10W [M]	C18	ECBT1H200JC5	20P 50V [M]	C87	ECBT1C103MS5	0.01 16V [M]
R678	ERDS2TJ563T	56K 1/4W [M]	R742	ERJ6GEYJ562A	5.6K 1/10W [M]	C19	ECBT1H220JC5	22P 50V [M]	C88	ECBT1C103MS5	0.01 16V [M]
R679	ERDS2TJ823T	82K 1/4W [M]	R743	ERJ6GEYJ562A	5.6K 1/10W [M]	C20	RCBS1H102KBY	1000P 50V [M]	C89	ECBT1H101KB5	100P 50V [M]
R681	ERDS2TJ101T	100 1/4W [M]	R744	ERJ6GEYJ104A	100K 1/10W [M]	C21	ECEA1AKA101B	100 10V [M]	C102	ECBT1C122MR5	1200P 16V [M]
R682	ERDS2TJ823T	82K 1/4W [M]	R745	ERJ6GEYJ155A	1.5M 1/10W [M]	C22	RCBS1H102KBY	1000P 50V [M]	C103	ECBT1H102KB5	1000P 50V [M]
R683	ERDS2TJ104T	100K 1/4W [M]	R748	ERJ6GEYJ272A	2.7K 1/10W [M]	C23	RCBS1H102KBY	1000P 50V [M]	C104	ECEA1CKA100B	10 16V [M]
R684	ERDS2TJ151T	150 1/4W [M]	R749	ERJ6GEYJ682A	6.8K 1/10W [M]	C24	RCBS1H102KBY	1000P 50V [M]	C105	ECBT1H102KB5	1000P 50V [M]
R686	ERDS2TJ152T	1.5K 1/4W [M]	R752	ERJ8GEYJ220A	22 1/8W [M]	C25	ECBT1H150JC5	15P 50V [M]	C106	ECEA0JKA101B	100 6.3V [M]
R687	ERDS2TJ272T	2.7K 1/4W [M]	R770	ERJ6GEYJ224A	220K 1/10W [M]	C26	ECBT1H6R8KC5	6.8P 50V [M]	C107	ECFR1C273MR	0.027 16V [M]
R688	ERDS2TJ221T	220 1/4W [M]	R801	ERDS2TJ153T	15K 1/4W [M]	C27	ECBT1H4R7KC5	4.7P 50V [M]	C108	ECBT1H471KB5	470P 50V [M]
R690	ERDS2TJ270T	27 1/4W [M]	R802	ERDS2TJ103T	10K 1/4W [M]	C28	RCBS1H102KBY	1000P 50V [M]	C109	ECEA1HKA010B	1 50V [M]
R691	ERDS2TJ103T	10K 1/4W [M]	R803	ERDS2TJ153T	15K 1/4W [M]	C29	RCBS1H102KBY	1000P 50V [M]	C110	ECBT1C332MR5	3300P 16V [M]
R692	ERDS2TJ103T	10K 1/4W [M]	R804	ERDS2TJ333T	33K 1/4W [M]	C31	RCBS1H102KBY	1000P 50V [M]	C202	ECBT1C122MR5	1200P 16V [M]
R693	ERDS2TJ153T	15K 1/4W [M]	R806	ERDS2TJ152T	1.5K 1/4W [M]	C32	ECBT1H101KB5	100P 50V [M]	C203	ECBT1H102KB5	1000P 50V [M]
R694	ERDS2TJ101T	100 1/4W [M]	R807	ERDS2TJ222T	2.2K 1/4W [M]	C33	ECBT1H101KB5	100P 50V [M]	C204	ECEA1CKA100B	10 16V [M]
R695	ERDS2TJ472T	4.7K 1/4W [M]	R808	ERDS2TJ682T	6.8K 1/4W [M]	C34	ECBT1H680J5	68P 50V [M]	C205	ECBT1H102KB5	1000P 50V [M]
R696	ERDS2TJ124T	120K 1/4W [M]	R809	ERDS2TJ562T	5.6K 1/4W [M]	C35	ECBT1H1R5MC5	1.5P 50V [M]	C206	ECEA0JKA101B	100 6.3V [M]
R697	ERDS2TJ102T	1K 1/4W [M]	R810	ERDS2TJ822T	8.2K 1/4W [M]	C36	RCBS1H102KBY	1000P 50V [M]	C207	ECFR1C273MR	0.027 16V [M]
R698	ERDS2TJ332T	3.3K 1/4W [M]	R811	ERDS2TJ153T	15K 1/4W [M]	C37	RCBS1H102KBY	1000P 50V [M]	C208	ECBT1H471KB5	470P 50V [M]
R699	ERDS2TJ224T	220K 1/4W [M]	R812	ERDS2TJ102T	1K 1/4W [M]	C38	ECBT1H331KB5	330P 50V [M]	C209	ECEA1HKA010B	1 50V [M]
R701	ERJ6GEYJ4R7A	4.7 1/10W [M]	R813	ERDS2TJ181T	180 1/4W [M]	C39	ECBT1C103MS5	0.01 16V [M]	C210	ECBT1C332MR5	3300P 16V [M]
R702	ERJ6GEYJ822A	8.2K 1/10W [M]	R814	ERDS2TJ151T	150 1/4W [M]	C40	ECBT1C103MS5	0.01 16V [M]	C301	ECQP2A151JZT	150P 100V [M]
R704	ERJ6GEYJ102A	1K 1/10W [M]	R815	ERDS2TJ151T	150 1/4W [M]	C44	ECEA1AU101B	100 10V [M]	C302	ECBT1C103MS5	0.01 16V [M]
R705	ERJ6GEYJ124A	120K 1/10W [M]	R816	ERDS2TJ473T	47K 1/4W [M]	C47	ECFR1C223KR	0.022 16V [M]	C305	ECQP1102JZT	1000P 100V [M]
R706	ERJ6GEYJ102A	1K 1/10W [M]	R817	ERDS2TJ473T	47K 1/4W [M]	C48	ECEA0JU101B	100 6.3V [M]	C306	ECEA1AU101B	100 10V [M]
R707	ERJ6GEYJ474A	470K 1/10W [M]	R818	ERDS2TJ270T	27 1/4W [M]	C51	ECEA1HKA010B	1 50V [M]	C307	ECBT1C822MS5	8200P 16V [M]
R708	ERJ6GEYJ154A	150K 1/10W [M]	R819	ERDS2TJ472T	4.7K 1/4W [M]	C52	ECFR1C473MR	0.047 16V [M]	C308	ECBT1C103MS5	0.01 16V [M]
R709	ERJ6GEYJ473A	47K 1/10W [M]	R820	ERDS2TJ152T	1.5K 1/4W [M]	C60	ECEA1AKA220B	22 10V [M]	C309	ECFR1C473MR	0.047 16V [M]
R710	ERJ6GEYJ103A	10K 1/10W [M]	R821	ERDS2TJ473T	47K 1/4W [M]	C61	ECBT1C332MR5	3300P 16V [M]	C310	ECEA1CKA100B	10 16V [M]
R711	ERJ6GEYJ154A	150K 1/10W [M]	R901	ERDS2TJ271T	270 1/4W [M]	C62	RCBS1H102KBY	1000P 50V [M]	C311	ECEA1AKA220B	22 10V [M]
R712	ERJ6GEYJ221A	220 1/10W [M]	R902	ERDS2TJ683T	68K 1/4W [M]	C63	ECBT1H681KB5	680P 50V [M]	C312	ECEA1AKA101B	100 10V [M]
R715	ERJ6GEYJ122A	1.2K 1/10W [M]	R903	ERDS2TJ272T	2.7K 1/4W [M]	C67	ECFR1C223KR	0.022 16V [M]	C317	ECEA1EKA470B	47 25V [M]
R717	ERJ6GEYJ102A	1K 1/10W [M]				C68	ECEA1HKA010B	1 50V [M]	C318	ECEA1AKA330B	33 10V [M]
R718	ERJ6GEYJ102A	1K 1/10W [M]		<b>CAPACITORS</b>		C69	ECFR1C183KR	0.018 16V [M]	C401	ECEA1HKA3R3B	3.3 50V [M]
R719	ERJ6GEYJ102A	1K 1/10W [M]				C70	ECFR1C183KR	0.018 16V [M]	C402	ECEA1CKA100B	10 16V [M]
R720	ERJ6GEYJ102A	1K 1/10W [M]	C3	ECFR1C473MR	0.047 16V [M]	C71	ECEA1HKA2R2B	2.2 50V [M]	C403	ECFR1C683MR	0.068 16V [M]
R721	ERJ6GEYJ101A	100 1/10W [M]	C4	RCBS1H102KBY	1000P 50V [M]	C72	ECEA1HKA010B	1 50V [M]	C404	ECFR1C473MR	0.047 16V [M]
R723	ERJ6GEYJ272A	2.7K 1/10W [M]	C5	ECBT1H2R2KC5	2.2P 50V [M]	C74	ECBT1H471KB5	470P 50V [M]	C405	ECBT0J223MS5	0.022 6.3V [M]
R724	ERJ6GEYJ333A	33K 1/10W [M]	C6	RCBS1H102KBY	1000P 50V [M]	C75	ECEA1HKA010B	1 50V [M]	C406	ECEA1HKAR22B	0.22 50V [M]
R725	ERJ6GEYJ122A	1.2K 1/10W [M]	C9	ECEA1HKN010B	1 50V [M]	C76	ECEA1HKA010B	1 50V [M]	C407	ECEA1CU100B	10 16V [M]
R727	ERJ6GEYJ682A	6.8K 1/10W [M]	C10	ECBT1C332MR5	3300P 16V [M]	C77	ECEA1HKA010B	1 50V [M]	C408	ECBT1H221KB5	220P 50V [M]
R728	ERJ6GEYJ682A	6.8K 1/10W [M]	C11	ECEA1AKA101B	100 10V [M]	C80	ECBT1H331KB5	330P 50V [M]	C411	ECBT1H471KB5	470P 50V [M]
R729	ERJ6GEYJ562A	5.6K 1/10W [M]	C12	ECFR1C223KR	0.022 16V [M]	C81	ECBT1H331KB5	330P 50V [M]	C413	ECBT1H102KB5	1000P 50V [M]
R731	ERJ6GEYJ123A	12K 1/10W [M]	C13	ECFR1C103MR	0.01 16V [M]	C82	ECBT1H150JC5	15P 50V [M]	C414	ECQV1H224JZ3	0.22 50V [M]
R734	ERJ6GEYJ101A	100 1/10W [M]	C14	ECBT1C103MS5	0.01 16V [M]	C83	ECBT1H331KB5	330P 50V [M]	C415	ECQV1H224JZ3	0.22 50V [M]
R735	ERJ6GEYJ101A	100 1/10W [M]	C15	ECBT1H3R9KC5	3.9P 50V [M]	C84	ECBT1C103MS5	0.01 16V [M]	C501	ECEA1HKA3R3B	3.3 50V [M]

Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks	Ref No.	Part No.	Values & Remarks
C502	ECEA1CKA100B	10 16V [M]	C639	ECEA1CU100B	10 16V [M]	C733	ECUZ1E104MBN	0.1 25V [M]		<b>TEST JUMPERS</b>	
C503	ECFR1C683MR	0.068 16V [M]	C640	ECEA1AKA101B	100 10V [M]	C734	ECEA1AKA221I	220 10V [M]			
C504	ECFR1C473MR	0.047 16V [M]	C641	ECBT1H471KB5	470P 50V [M]	C735	ECUZ1E104ZFN	0.1 25V [M]	TJ701	EYF8CU	TEST JUMPER [M]
C505	ECBT0J223MS5	0.022 6.3V [M]	C642	ECEA0JU101B	100 6.3V [M]	C736	ECUZ1E104ZFN	0.1 25V [M]			
C506	ECEA1HKAR22B	0.22 50V [M]	C643	ECEA1CKA100B	10 16V [M]	C737	ECUZ1E104ZFN	0.1 25V [M]			
C507	ECEA1CU100B	10 16V [M]	C644	ECEA1HKA010B	1 50V [M]	C738	ECUZ1E104MBN	0.1 25V [M]			
C508	ECBT1H221KB5	220P 50V [M]	C645	ECBT1H101KB5	100P 50V [M]	C739	ECUZ1H103KBN	0.01 50V [M]			
C511	ECBT1H471KB5	470P 50V [M]	C646	ECEA1EU101B	100 25V [M]	C742	ECUZ1E273KBN	0.027 25V [M]			
C513	ECBT1H102KB5	1000P 50V [M]	C647	ECFR1C104MR	0.1 16V [M]	C743	ECUZ1E104ZFN	0.1 25V [M]			
C514	ECQV1H224JZ3	0.22 50V [M]	C648	ECEA1CKA100B	10 16V [M]	C744	ECUZ1E123KBN	0.012 25V [M]			
C515	ECQV1H224JZ3	0.22 50V [M]	C649	ECBT1H102KB5	1000P 50V [M]	C745	ECUZ1C473KBN	0.047 16V [M]			
C601	ECEA1CKA100B	10 16V [M]	C650	ECBT1C103MS5	0.01 16V [M]	C747	ECUV1H221KBN	220P 50V [M]			
C602	ECBT1C103MS5	0.01 16V [M]	C651	ECBT1H330J5	33P 50V [M]	C749	ECUZ1H222KBN	2200P 50V [M]			
C603	ECBT1H561KB5	560P 50V [M]	C652	ECBT1H330J5	33P 50V [M]	C750	ECUZ1E104MBN	0.1 25V [M]			
C604	ECBT1C103MS5	0.01 16V [M]	C653	ECBT1H330J5	33P 50V [M]	C751	ECUZ1E104MBN	0.1 25V [M]			
C605	ECBT1H180JC5	18P 50V [M]	C654	ECEA1CU101B	100P 16V [M]	C752	ECUZ1H102KBN	1000P 50V [M]			
C606	ECBT1H220JC5	22P 50V [M]	C655	ECEA0JU331B	330 6.3V [M]	C753	ECUZ1H471KBM	470P 50V [M]			
C607	ECBT1C103MS5	0.01 16V [M]	C656	ECQV1H224JZ3	0.22 50V [M]	C754	ECUZ1H471KBN	470P 50V [M]			
C608	ECEA0JKA101B	100 6.3V [M]	C657	ECBT1H101KB5	100P 50V [M]	C761	ECUZ1H471KBN	470P 50V [M]			
C609	ECBT1H471KB5	470P 50V [M]	C658	ECBT1H101KB5	100P 50V [M]	C762	ECUZ1H471KBN	470P 50V [M]			
C610	ECEA1HKA010B	1 50V [M]	C659	ECBT1H101KB5	100P 50V [M]	C901	ECKR2H103ZF5	0.01 500V [M]			
C611	ECBT1H102KB5	1000P 50V [M]	C701	ECEA0JKA330I	33 6.3V [M]	C902	ECKR2H103ZF5	0.01 500V [M]			
C612	ECBT1H102KB5	1000P 50V [M]	C702	ECUZ1E104MBN	0.1 25V [M]	C903	ECKR2H103ZF5	0.01 500V [M]			
C613	ECBT1H820KB5	82P 50V [M]	C703	ECEA0JKA101I	100 6.3V [M]	C904	ECKR2H103ZF5	0.01 500V [M]			
C614	ECBT1H680J5	68P 50V [M]	C704	ECUZ1E104MBN	0.1 25V [M]	C906	ECBT1C103MS5	0.01 16V [M]			
C615	ECBT1H101KB5	100P 50V [M]	C706	ECUZ1H272KBN	2700P 50V [M]						
C616	ECBT1H820KB5	82P 50V [M]	C707	ECUZ1E273KBN	0.027 25V [M]		<b>CHIP JUMPERS</b>				
C618	ECBT1H561KB5	560P 50V [M]	C710	ECUV1H151KCN	150P 50V [M]						
C619	ECBT1H561KB5	560P 50V [M]	C711	ECUZ1E104ZFN	0.1 25V [M]	RJ701	ERJ6GEY0R00A	0 1/10W [M]			
C620	ECBT1H561KB5	560P 50V [M]	C712	ECUZ1E104ZFN	0.1 25V [M]	RJ702	ERJ8GEY0R00A	0 1/8W [M]			
C621	ECBT1H561KB5	560P 50V [M]	C713	ECUZ1E104MBN	0.1 25V [M]	RJ703	ERJ8GEY0R00A	0 1/8W [M]			
C622	ECBT1H221KB5	220P 50V [M]	C714	ECEA0JKA101I	100 6.3V [M]	RJ704	ERJ8GEY0R00A	0 1/8W [M]			
C623	ECBT1H221KB5	220P 50V [M]	C715	ECUZ1H182KBN	1800P 50V [M]	RJ705	ERJ8GEY0R00A	0 1/8W [M]			
C624	ECA1VM332E 	3300 35V [M]	C716	ECUZ1H821KBN	820P 50V [M]	RJ706	ERJ8GEY0R00A	0 1/8W [M]			
C625	ECA1EM332E 	3300 25V [M]	C717	ECUZ1E104ZFN	0.1 25V [M]	RJ707	ERJ8GEY0R00A	0 1/8W [M]			
C626	ECEA1CKA100B	10 16V [M]	C718	ECUZ1C224KBN	0.22 16V [M]	RJ708	ERJ8GEY0R00A	0 1/8W [M]			
C628	ECEA1CKA100B	10 16V [M]	C721	ECUZ1H150JCN	15P 50V [M]	RJ709	ERJ8GEY0R00A	0 1/8W [M]			
C629	ECQV1H105JZ3	10 50V [M]	C722	ECUZ1H150JCN	15P 50V [M]	RJ710	ERJ8GEY0R00A	0 1/8W [M]			
C630	ECEA1CKA100B	10 16V [M]	C723	ECEA1AKA221I	220 10V [M]	RJ721	ERJ6GEY0R00A	0 1/10W [M]			
C631	ECEA1CKA100B	10 16V [M]	C724	ECUZ1E104MBN	0.1 25V [M]	RJ722	ERJ6GEY0R00A	0 1/10W [M]			
C632	ECFR1C104MR	0.1 16V [M]	C725	ECUZ1H102KBN	1000P 50V [M]	RJ723	ERJ6GEY0R00A	0 1/10W [M]			
C633	ECEA1EU100B	10 25V [M]	C726	ECUZ1H102KBN	1000P 50V [M]	RJ724	ERJ6GEY0R00A	0 1/10W [M]			
C634	ECEA1EU101B	100 25V [M]	C727	ECA1HAK010XI	1 50V [M]	RJ725	ERJ6GEY0R00A	0 1/10W [M]			
C635	ECQV1H224JZ3	0.22 50V [M]	C728	ECA1HAK010XI	1 50V [M]	RJ726	ERJ6GEY0R00A	0 1/10W [M]			
C636	ECEA1HKA010B	1 50V [M]	C730	ECUZ1E104ZFN	0.1 25V [M]	RJ727	ERJ6GEY0R00A	0 1/10W [M]			
C637	ECEA1EU330B	33 25V [M]	C731	ECEA0JKA221I	220 6.3V [M]	RJ728	ERJ6GEY0R00A	0 1/10W [M]			
C638	ECEA1CU100B	10 16V [M]	C732	ECEA0JKA221I	220 6.3V [M]	RJ750	ERJ6GEY0R00A	0 1/10W [M]			