

Service Manual

CD Stereo System



Digital Audio Broadcasting

SA-PM33DBEB

Colour

(S)... Silver Type



Remote Control Transmitter



SB-PM33DB

SA-PM33DB

SB-PM33DB

Specification

RMS OUTPUT POWER both channel driven simultaneously
10% total harmonic distortion 20 W per channel (6 Ω)

Input impedance

MUSIC PORT 250 mV 12 k Ω

Output impedance

HEADPHONE 16 Ω to 32 Ω

Phone jack

Terminal Stereo, 3.5 mm

Music Port input jack

Terminal Stereo, 3.5 mm

DAB External antenna

Terminal F-Connector (75 Ω)

n FM Tuner Section

Frequency range 87.50 MHz to 108.00 MHz
(50 kHz step)

Sensitivity 3.2 μ V (IHF)S/N 26 dB 1.2 μ VAntenna terminals 75 Ω (unbalanced)

Preset station FM 15 stations

AM 15 stations

n AM Tuner Section

Frequency range 522 kHz to 1629 kHz
(9 kHz steps)

Sensitivity

S/N 20 dB (at 999 kHz)

1122 μ V/m

n DAB Section

Frequency Band (Wavelength)

Band III (UK only) 11B to 12D (218.640 MHz to
229.072 MHz)

Band III (Europe) 5A to 13F (174.928 MHz to
239.200 MHz)

Intermediate frequency 1st : 38.912 MHz, 2nd : 2.048
MHz

Sensitivity *BER 4x10⁻⁴

MAX. Input Power 0 dBm

Min Requirement -98 dBm

Selectivity

Adjacent Channel (Band III) 33 dB

Far-Off Channel (Band III) 45 dB

DAB memories 20 channels

n Cassette Deck Section

Track system 4-track, 2-channel

Heads

Record/playback Solid permalloy head

Erasure Double gap ferrite head

Motor DC servo motor

Recording system AC bias 100 kHz

Erase system AC erase 100 kHz

Panasonic

© 2006 Matsushita Electric Industrial Co. Ltd.. All rights reserved. Unauthorized copying and distribution is a violation of law.

Tape speed	4.8 cm/s	Audio output (Disc)	
Overall frequency response (+3 dB, -6 dB) at DECK OUT		Number of channels	2 channel
Normal	35 Hz to 14 kHz	Frequency response	20 Hz to 20 kHz (+1, -2dB)
S/N RATIO	47 dB (A weighted)	Wow and flutter	Below measurable limit
Wow and flutter	0.09% (WRMS)	Digital filter	8 fs
Fast-forward and rewind time	Approx. 120 seconds with C-60 cassette tape	D/A converter	MASH (1 bit DAC)

n CD Section

Disc played [8 cm or 12 cm]

(1) CD-Audio (CD-DA)

(2) CD-R/RW (CD-DA, MP3 formatted disc)

(3) MP3

Sampling frequency

CD 44.1 kHz

MP3 32 kHz, 44.1 kHz, 48 kHz

Bit rate

MP3 32 kbps to 384 kbps

Decoding 16/20/24 bit linear

Pickup

Beam source Semiconductor laser

Wavelength 785 nm

Laser power CLASS 1

n General

Power supply AC 230 to 240 V, 50 Hz

Power consumption 64 W

Dimensions (W x H x D) 165 mm x 227 mm x 327 mm

Mass 3.6 kg

Operating temperature range +5°C to +35°C

Operation humidity range 5% to 90% RH (no condensation)

Power consumption in standby mode 0.8 W

Notes :

1. Specifications are subject to change without notices. Mass and dimensions are approximate.

2. Total harmonic distortion is measured by the digital spectrum analyzer.

n System : SC-PM33DBEBS

Music center: SA-PM33DBEBS

Speaker: SB-PM33DBEBM

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 Safety Precautions	4	9.3. Main Parts Location Diagram	22
1.1. General Guidelines	4	9.4. Disassembly of Side Panel L & R	23
1.2. Caution for AC Cord	5	9.5. Disassembly of Top Cabinet Unit	23
1.3. Before Repair and Adjustment	6	9.6. Disassembly of Deck Mechanism and Tape Eject P.C.B.	24
1.4. Protection Circuitry	6	9.7. Disassembly of Headphone P.C.B.	24
2 Prevention of Electro Static Discharge (ESD) to		9.8. Disassembly of Front Panel	24
Electrostatically Sensitive (ES) Devices	7	9.9. Disassembly of DAB P.C.B.	25
3 Precaution of Laser Diode	8	9.10. Disassembly of Panel P.C.B.	26
4 Handling Precautions For Traverse Deck	9	9.11. Disassembly of Rear Panel	26
5 Handling the Lead-free Solder	10	9.12. Disassembly of Tuner Pack	26
5.1. About lead free solder (PbF)	10	9.13. Disassembly of Main P.C.B.	26
6 Accessories	11	9.14. Disassembly of Power P.C.B.	27
7 Operating Instructions Procedures	12	9.15. Disassembly of Speaker Terminal P.C.B.	28
7.1. Main Unit Operation	12	9.16. Disassembly of Transformer P.C.B.	28
7.2. Remote Control Operation	13	9.17. Disassembly of CD Mechanism	29
7.3. Disc Information	13	9.18. Disassembly of Cassette Lid	29
8 Self diagnosis and special mode setting	14	9.19. Disassembly of Traverse Unit, Driving Gear, and Cam	
8.1. Special Mode Table	14	Gear (CD Mechanism Unit)	30
8.2. Error Code Table	18	9.20. Disassembly of Optical Pickup (CD Mechanism Unit)	33
9 Assembling and Disassembling	20	9.21. Disassembly of Traverse Gear A and Traverse Gear B	
9.1. Caution	20	(CD Mechanism Unit)	34
9.2. Disassembly flow chart	21		

9.22. Disassembly of Pinch Roller and Head Block (Deck Mechanism Unit)	35	18 Schematic Diagram	65
9.23. Disassembly of Motor, Capstan Belt A, Capstan Belt B, and Winding Belt (Deck Mechanism Unit)	36	18.1. CD Servo Circuit	65
9.24. Disassembly of Deck Mechanism P.C.B.	37	18.2. Main Circuit and Tuner Extent Circuit	66
9.25. Handling of cassette tape jam	37	18.3. Panel Circuit	68
10 Service Fixture and Tools	39	18.4. Deck Circuit, Deck Mechanism Circuit and Tape Eject Circuit	69
11 Service Positions	39	18.5. Power Circuit	70
11.1. Checking and Repairing of Deck, Deck Mechanism, Headphone P.C.B. and Tape Eject P.C.B.	39	18.6. Transformer Circuit, Headphone Circuit and Speaker Terminal Circuit	71
11.2. Checking and Repairing of DAB P.C.B. and Panel P.C.B.	40	19 Printed Circuit Board	73
11.3. Checking and Repairing of Transformer P.C.B.	41	19.1. CD Servo P.C.B and Panel P.C.B	73
11.4. Checking and Repairing of Main P.C.B.	42	19.2. Main P.C.B and Tuner Extent P.C.B	74
11.5. Checking and Repairing of CD Mechanism P.C.B.	43	19.3. Deck P.C.B, Deck Mechanism P.C.B, Tape Eject P.C.B, Speaker Terminal P.C.B and Headphone P.C.B	75
11.6. Checking and Repairing of Speaker Terminal P.C.B.	44	19.4. Power P.C.B and Transformer P.C.B	76
11.7. Checking and Repairing of Power P.C.B.	45	20 Illustration of IC's, Transistors and Diodes	77
12 Procedure for Checking Operation of Individual Parts of Deck Mechanism Unit	46	21 Terminal Function of IC's	78
12.1. Operation Check with Cassette Tape	46	21.1. IC7001 (MN6627954MA) IC SERVO PROCESSOR/DIGITAL SIGNAL PROCESSOR/DIGITAL FILTER D/A CONVERTER	78
12.2. Operation Check without Cassette Tape	46	21.2. IC7002 (BA5948FPE2) IC 4CH Drive	79
13 Measurement And Adjustments	48	21.3. IC401 (C2CBYY000223) MICROPROCESSOR	79
13.1. Cassette Deck Section	48	22 Troubleshooting Flowchart (CD Section Circuit)	81
14 Voltage Measurement and Waveform Chart	50	23 Exploded Views	83
14.1. Voltage Measurement	50	23.1. Cabinet Parts Location	83
14.2. Waveform	54	23.2. Cassette Deck (RAA4402-1S) & Traverse Deck Part Location	84
15 Wiring Connection Diagram	57	23.3. Packaging	85
16 Block Diagram	59	24 Replacement Parts List	87
17 Notes of Schematic Diagram	63		

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, ensure that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, check for leakage current checks to prevent from being exposed to shock hazards.

1.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Using an ohmmeter measure the resistance value, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1M\Omega$ and $5.2M\Omega$.
When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

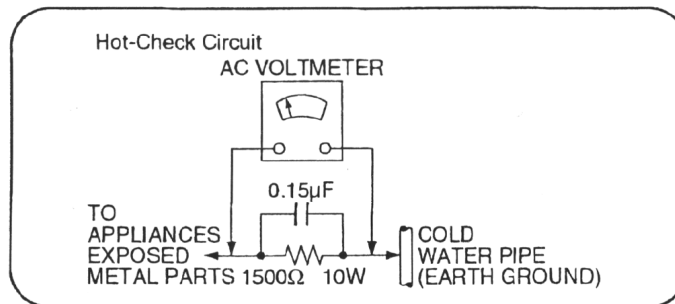


Figure 1

1.1.2. Leakage Current Hot Check (See Figure 1)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5kΩ, 10 watts resistor, in parallel with a 0.15μF capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. should the measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and re-checked before it is returned to the customer.

1.2. Caution for AC Cord

(For “EB” area code model only.)

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.

A 5-ampere fuse is fitted in this plug.

Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362.

Check for the ASTA mark  or the BSI mark  on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.

If you lose the fuse cover, the plug must not be used until a replacement cover is obtained.

A replacement fuse cover can be purchased from your local dealer.

CAUTION!

IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OFF SAFELY.

THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted, please observe the wiring code as shown below.

If in any doubt please consult a qualified electrician.

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral

Brown: Live

As these colours may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The wire which is coloured Blue must be connected to the terminal which is marked with the letter N or coloured Black or Blue.

The wire which is coloured Brown must be connected to the terminal which is marked with the letter L or coloured Brown or Red.

WARNING: DO NOT CONNECT EITHER WIRE TO THE EARTH TERMINAL WHICH IS MARKED WITH THE LETTER E, BY THE EARTH SYMBOL  OR COLOURED GREEN OR GREEN/YELLOW.

THIS PLUG IS NOT WATERPROOF—KEEP DRY.

Before use

Remove the connector cover.

How to replace the fuse

The location of the fuse differ according to the type of AC mains plug (figures A and B). Confirm the AC mains plug fitted and follow the instructions below.

Illustrations may differ from actual AC mains plug.

1. Open the fuse cover with a screwdriver.

Figure A


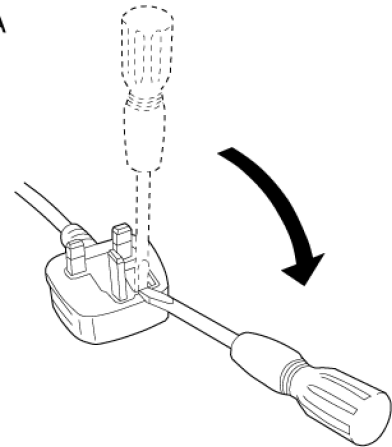


Figure B

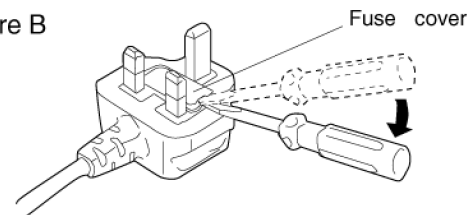

2. Replace the fuse and close or attach the fuse cover.

Figure A


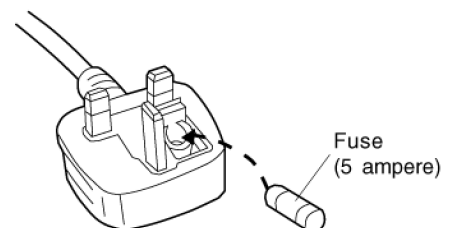


Figure B

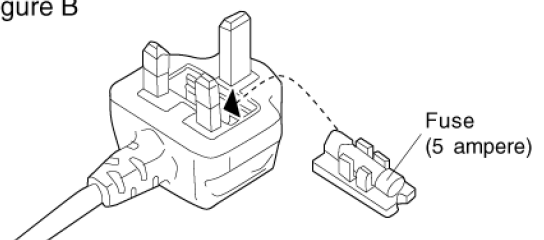

1.3. Before Repair and Adjustment

Disconnect AC power, discharge Power Supply Capacitors C501, C601, C807, C813, C814, C831, C839, C840, C909, C910, C911, C923 & C966 through a 10 Ω , 1W resistor to ground.

DO NOT SHORT-CIRCUIT DIRECTLY (with a screwdriver blade, for instance), as this may destroy solid state devices.

After repairs are completed, restore power gradually using a variac, to avoid overcurrent.

- Current consumption at AC 230-240 V, 50 Hz in NO SIGNAL mode at (volume minimal) should be ~160 mA.

1.4. Protection Circuitry

The protection circuitry may have operated if either of the following conditions are noticed:

- No sound is heard when the power is turned on.
- Sound stops during a performance.

The function of this circuitry is to prevent circuitry damage if, for example, the positive and negative speaker connection wires are "shorted", or if speaker systems with an impedance less than the indicated rated impedance of the amplifier are used.

If this occurs, follow the procedure outlines below:

1. Turn off the power.
2. Determine the cause of the problem and correct it.
3. Turn on the power once again after one minute.

Note:

When the protection circuitry functions, the unit will not operate unless the power is first turned off and then on again.

2 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminium foil, to prevent electrostatic charge build up or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder remover device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminium foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize body motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by $\triangle$ in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

3 Precaution of Laser Diode

CAUTION:

This unit utilizes a class 1 laser.

Invisible laser radiation is emitted from the optical pickup lens.


When the unit is turned on:

1. Do not look directly into the pick up lens.
2. Do not use optical instruments to look at the pick up lens.
3. Do not adjust the preset variable resistor on the pickup lens.
4. Do not disassemble the optical pick up unit.
5. If the optical pick up is replaced, use the manufacturer's specified replacement pick up only.
6. Use of control or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION!

THIS PRODUCT UTILIZES A LASER.

USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

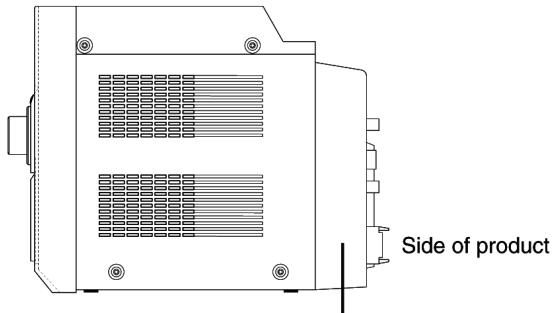

CAUTION	CLASS 1M INVISIBLE LASER RADIATION WHEN OPEN. DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS. IEC60825-1+A2/ Class 1M
VARNING	KLASS 1M OSYNLIG LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD. BETRÄKTA EJ STRÅLEN DIREKT GENOM OPTISKT INSTRUMENT.
FORSIGTIG	USYNLIG LASERSTRÅLING KLASSE 1M, NÄR LÅGET ER ÅBENT. UNDGÅ AT SE LIGE PÅ MED OPTISKE INSTRUMENTER.
VARO	AVATTAESSA OLET ALTTI NA LUOKAN 1M NÄKYMÄTÖNTÄ LASERSÄTELYÄ. ÄLÄ KATSO OPTISELLÄ LAITTEELLA SUORAAN SÄTEESSEEN.
ATTENTION	RAYONNEMENT LASER INVISIBLE, CLASSE 1M. EN CAS D'OUVERTURE, NE PAS REGARDER DIRECTEMENT À L'AIDE D'INSTRUMENTS D'OPTIQUE.
VORSICHT	UNSIICHTBARE LASERSTRAHLUNG KLASSE 1M, WENN ABDECKUNG GEÖFFNET. NICHT DIREKT MIT OPTISCHEN INSTRUMENTEN BETRACHTEN.

Inside of product

4 Handling Precautions For Traverse Deck

The laser diode in the traverse deck (optical pickup) may break down due to potential difference caused by static electricity of clothes or human body.

So, be careful of electrostatic breakdown during repair of the traverse deck (optical pickup).

I Handling of CD traverse deck (optical pickup)

1. Do not subject the traverse deck (optical pickup) to static electricity as it is extremely sensitive to electrical shock.
2. The short land between the No.4 (LD) and No.5 (GND) pins on the flexible board (FFC) is shorted with a solder build-up to prevent damage to the laser diode.
3. Take care not to apply excessive stress to the flexible board (FFC board) (Fig 4.1).
4. Do not turn the variable resistor (laser power adjustment). It has already been adjusted.

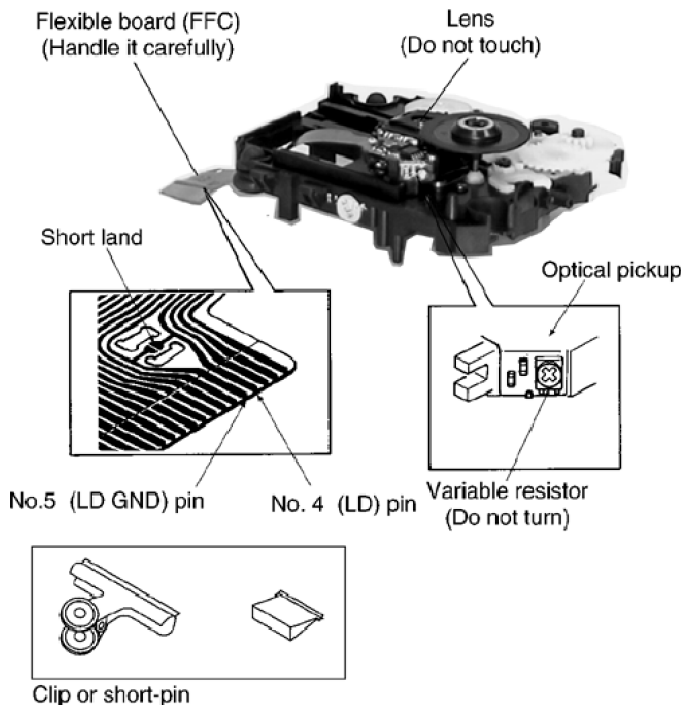


Fig 4.1

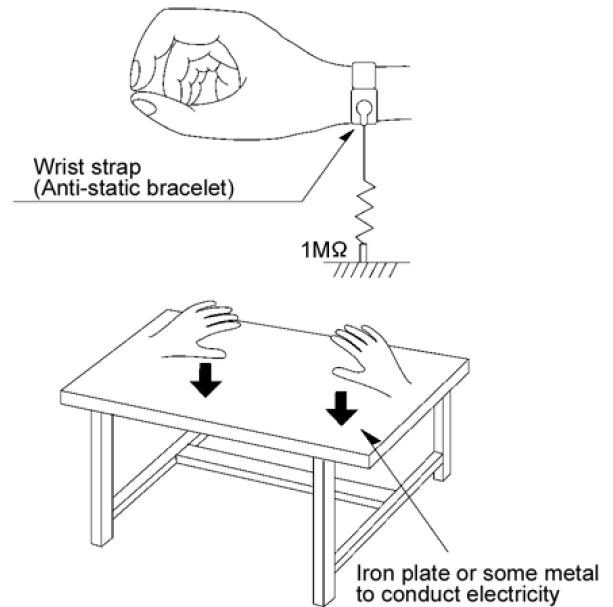


Fig 4.2

Caution when Replacing the Optical Pickup :

The traverse has a short point shorted with solder to protect the laser diode against electrostatics breakdown. Be sure to remove the solder from the short point before making connections.

I Grounding for electrostatic breakdown prevention

1. Human body grounding (Fig 4.2)
Use the anti-static wrist strap to discharge the static electricity from your body.
2. Work table grounding (Fig 4.2)
Put a conductive material (sheet) or steel sheet on the area where the traverse deck (optical pickup) is placed, and ground the sheet.

Caution :

The static electricity of your clothes will not be grounded through the wrist strap. So, take care not to let your clothes touch the traverse deck (optical pickup).

5 Handling the Lead-free Solder

5.1. About lead free solder (PbF)

Distinction of PbF P.C.B.:


P.C.B.s (manufactured) using lead free solder will have a PbF stamp on the P.C.B.

Caution:


- Pb free solder has a higher melting point than standard solder; Typically the melting point is 50 - 70°F (30 - 40°C) higher. Please use a high temperature soldering iron. In case of soldering iron with temperature control, please set it to 700 ± 20°F (370 ± 10°C).
- Pb free solder will tend to splash when heated too high (about 1100°F/600°C).
- When soldering or unsoldering, please completely remove all of the solder on the pins or solder area, and be sure to heat the soldering points with the Pb free solder until it melts enough.

6 Accessories


Note : Refer to Packing Materials & Accessories (Section 24) for part number.




Remote control



AC cord




FM indoor
antenna



AM loop antenna



Antenna
plug
adaptor

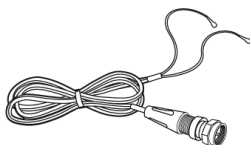


DAB antenna

7 Operating Instructions Procedures

7.1. Main Unit Operation


Main unit

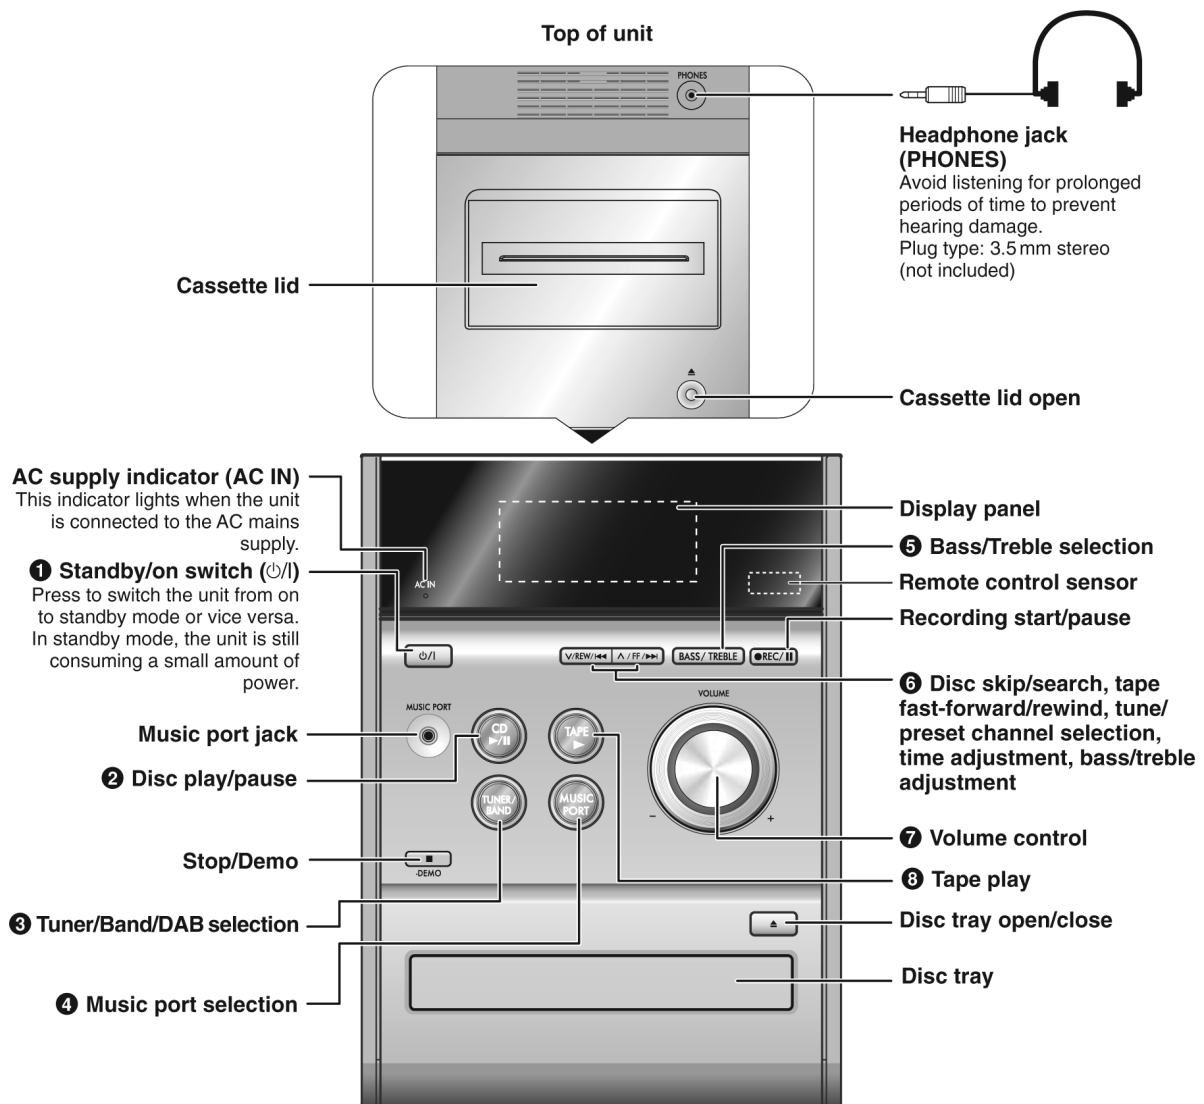

7.2. Remote Control Operation

Remote control

Buttons such as ❶ function the same as the controls on the main unit.

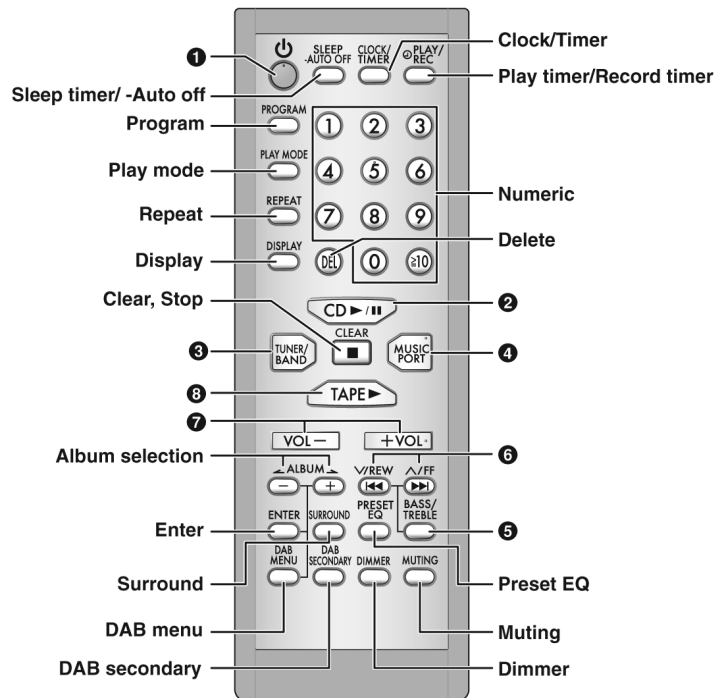

This function allows you to turn off the unit in **disc or tape** mode only after left unused for 10 minutes.

The setting is maintained even if the unit is turned off.

- Press the button to activate.
- Press again to cancel.



Dims the display panel.



Mutes the sound.



Long press of [DISPLAY] key will switch to fast text scrolling.

This function allows you to scroll the display setting faster than current setting.

- Long press again to turn OFF fast text scrolling.

7.3. Disc Information

Note

- This unit can play MP3 files and CD-DA format audio CD-R/RW that have been finalized.
- It may not be able to play some CD-R/RW depending on the condition of the recording.
- Do not use irregularly shaped discs.
- Do not use discs with labels and stickers that are coming off or with adhesive exuding from under labels and stickers.
- Do not attach extra labels or stickers on the disc.
- Do not write anything on the disc.

CD

- This unit can access up to 99 tracks.
- Choose a CD with this mark:



Using DualDiscs

The "CD" sides of DualDiscs do not meet the CD-DA standard so it may not be possible to play them on this unit.

MP3

- Files are treated as tracks and folders are treated as albums.
- This unit can access up to 999 tracks, 255 albums and 20 sessions.
- Disc must conform to ISO9660 level 1 or 2 (except for extended formats).
- To play in a certain order, prefix the folder and file names with the 3-digit numbers in the order you want to play them.

MPEG Layer-3 audio decoding technology licensed from Fraunhofer IIS and Thomson multimedia.


8 Self diagnosis and special mode setting

This unit is equipped with features of self-diagnostic & special mode setting for checking the functions & reliability.

8.1. Special Mode Table

Below is the various special modes for checking:-

Item		FL Display	Key Operation
Mode Name	Description		Front Key
Self -Diagnostic Mode	To enter into self diagnostic checking for main unit.	TEST	1. Select [CD ►/III] for CD mode (Ensure no tape or CD inserted). 2. Press and hold [■, -DEMO] button for 2 seconds follow by [^/FF/►►I]. To exit, press [⏏/I] button on main unit or remote control.
Doctor Mode	To enter into Doctor Mode for checking of various items and displaying EEPROM and firmware version. (For more information, refer to section 8.1.2) Note: The micro-processor version as shown is an example. It will be revise when there is an updates.	1. U14 2. CD NO DISC The Check Sum of EEPROM and firmware version will be display for 1 sec. * ROM correction ** Firmware version No:	In any mode: 1. Press [■, -DEMO] button on main unit follow by [4] and [7] on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
FL Display Test	To check the FL segments display (All segments will light up)		In doctor mode: 1. Press [DIMMER] button on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
CD to Tape Recording Test Mode	To Inspect the recording process from CD to TAPE for the unit. (For more information, refer to section 8.1.3)	TAPE	In doctor mode: 1. Press [4] button on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
Tape Recording and Playing	To Inspect the Tape recording and playing is process for unit. (For more information, refer to section 8.1.4)	NO TAPE	In doctor mode: 1. Press [5] button on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
CD Tray and Tape Door Open	To check CD Tray and Tape Door Open.	NO TAPE	In doctor mode: 1. Press [6] button on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
Volume Setting	To Forced Volume Setting.	1. VOLUME 50 2. VOLUME 29 3. VOLUME 0	In doctor mode: 1. Press [7] button on remote control. 2. Press [8] button on remote control. 3. Press [9] button on remote control. To exit, press [ENTER] button on remote control or [⏏/I] button on main unit or remote control.
Traverse Test	To determine the reliability of CD unit.	 The counter will increment by one. when reach 99999 will change to 00000.	In doctor Mode: 1. Press [≥10], [1], [2] button on remote control. To exit, press [⏏/I] button on main unit or remote control.

Item		FL Display	Key Operation
Mode Name	Description		Front Key
TPS	To check FF TPS for deck. (For more information, refer to section 8.1.5)		In doctor mode: 1. Press [^/FF/▶▶I] button on remote control. To exit, press [ENTER] button on remote control or [⏻/I] button on main unit or remote control.
Cold Start	To activate cold start upon next AC power up.		In doctor mode: 1. Press [SLEEP] button on remote control. To exit, press [ENTER] button on remote control or [⏻/I] button on main unit or remote control.

8.1.1. Cassette Mechanism Self-Diagnostic Mode

Below is information of the checking of cassette deck mechanism

No.	Operation Procedures	Micon operation & processing
1	C-mecha Abnormal Detection shall be executed for DECK.	Check that all DECK mechanism leaf SW is in OFF state.
2	[^/FF/▶▶I] key is pressed, after loading in a NORMAL type cassette with the recording tab on the left side removed.	FF shall be executed for 2 sec, after which STOP. Check the following. { F.REC INH SW } is OFF { HALF SW } is ON Reel pulse toggles between H & L.
3	[^/REW/◀◀I] key is pressed, after loading a NORMAL, CrO2, METAL type cassette with the recording tab on the right side removed.	REW shall be executed for 2 sec, after which STOP. Check the following. { F.REC INH SW } is ON { HALF SW } is ON Reel pulse toggles between H & L.
4	[TAPE ▶] Key is pressed, after loading in a NORMAL, CrO2, METAL type cassette (cassette for TPS checking purposes and with both recording tabs intact).	TPS operation is executed. Check the following. { F.REC INH SW } is ON { HALF SW } is ON TPS signal changes. After checking TPS, it shall STOP. If TPS checking is completed at TAPE END, it is considered as TPS abnormal.
5	[REC] key is pressed, after loading in a NORMAL type cassette (with both recording tabs intact)	REC operation shall not be executed. Check the following. { F.REC INH SW } is ON { HALF SW } is ON
6	Self-diagnostic mode is stopped by pressing the [n] Key.	LCD shall display the abnormality item code, when the STOP key is pressed, it shall display the abnormality item code in the following sequence. [TEST H 0 1] [TEST H 0 2] [TEST H 0 3]
7	To clear all the abnormalities in the memory, press the [n] Key for more than 5 Sec while the self-diagnostic mode is stopped.	At this time, all the abnormalities item in the memory is cleared and is displayed on the LCD.[C L E A R] display for 1 Sec. then,[TEST] is displayed.
8	To cancel the self-diagnostic mode press the [⏻/I] Key.	POWER is OFF. At the next POWER ON, normal operation shall be executed.

- If RAM check error occurs during microcomputer reset, COLDSTART shall be executed and all the error memory shall be cleared during RAM initialization.

8.1.2. EEPROM Checksum (ROM correction)

Purpose : To check for micro-processor firmware version & EEPROM check (ROM correction).

Below is the procedures for this mode.

Step 1: Enter into Doctor mode (For more information refer to section 8.1 on key operation to enter into this mode.


Step 2: Check for firmware version & EEPROM checksum.

- When entering into DOCTOR MODE the firmware version & checksum of EEPROM (if applicable) will appear on FL display.
Below is information on the EEPROM IC (Rom correction) under 3 examples:


1. When EEPROM IC is detected and there is no ROM correction:

		
Micro-processor firmware Version (decimal)		No ROM correction

2. When EEPROM IC is detected and has ROM correction:

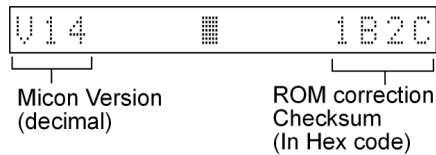

3. When EEPROM IC is detected and has ROM correction but NG:

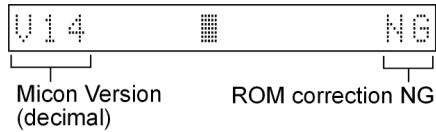

Note: Micro-processor firmware version refers to version No. (Eg.MS079_12) for micro-processor IC.

It is subject to change which would update accordingly.

- Rom correction checksum refers to the hex code that is display upon key buttons pressed if an EEPROM is loaded in the unit. (Main P.C.B)

8.1.3. CD to Tape Recording Inspection

Purpose : To check the recording function from CD to Tape.

Below is the procedures for this mode.

Procedure :

Step 1: Enter into Doctor mode (Refer section 8.1 Special Mode Table)

Step 2: Insert CDT-018 (Ensure TOC is completed) to CD unit before proceeding.

Step 3: Press [4] button on remote control. Enter into CD to Tape Test mode. (During this mode, volume is set to [VOLUME 50], Bass & Treble is set to 0dB & EQ is switch off).

Note : When in CD to Tape Recording Test mode, the following process is perform :

- Deck will rewind to start point (point at the start of recording) & Stop. During rewinding of Tape, CD tray remains open.
- Recording begins (at constant analogue recording speed) for 3 seconds & Stop.
 - However, "Error" would be display if there is no tracks to access to, no tape inserted, no test CD inserted or when the tape erasure prevention tab for FWD side is not suitable for recording.
 - When in this mode, if ■, -DEMO button is pressed the process will stops automatically.

8.1.4. Tape Recording and Playing

Purpose : To check the Tape function.

Assuming the recording to TAPE has been done in test 3, only playing TAPE is made.

Below is the procedures for this mode.

Procedure :


Step 1: Enter into Doctor mode (Refer section 8.1 Special Mode Table)

Step 2: Press [5] button on remote control. Enter into Tape recording Test mode. (During this mode, Tape function is set to automatically, volume is set to [VOLUME 50], Bass & Treble is set to 0dB & EQ is switch off).

Step 3: FWD play is made for 3 seconds after setting the above-mentioned, TAPE is stopped 3 seconds later. Tape should open.

Note : When in CD to Tape Recording Test mode, the following process is perform :

- If the erasure prevention tab for FWD side the tape is broken, it is judged as an error and the recording operation does not start.
- If tape stops by detecting a tape end while recording, it becomes an error.
- If STOP key is pressed while recording or playing, the operation shall be terminated by stopping TAPE. In this case, the doctor mode is not released.
- DMT is output with the same timing as usual.

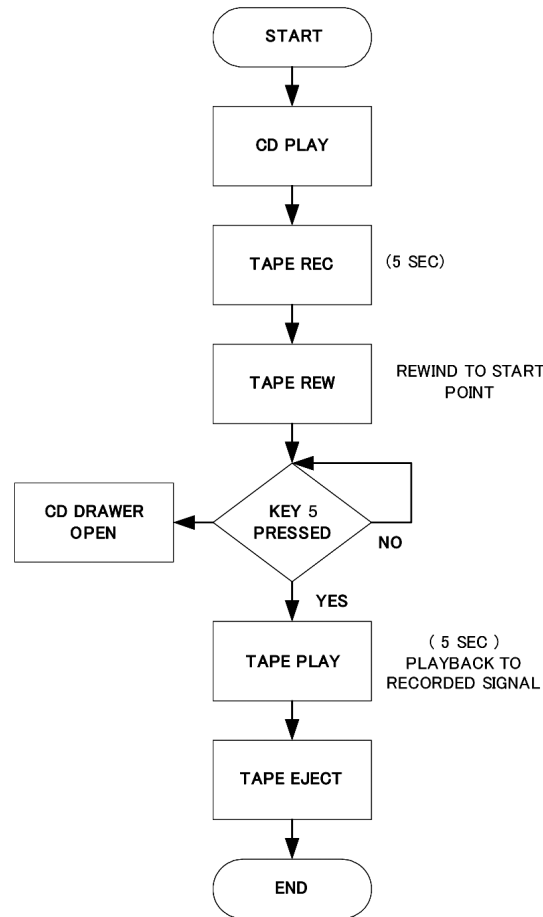

8.1.5. TPS Inspection

Purpose : To check the TPS.

Below is the procedures for this mode.

Procedure :

Step 1: Enter into Doctor mode (Refer section 8.1 Special Mode Table)

Step 2: Press [**^**/**FF**/**▶▶**] button on remote control. Enter into TPS Test mode. (During this mode)

- Software will start checking for existence of cassette in Deck.
- If the Deck does not contain any cassette, it shall end the test and displays the result of the test.
- The test will start by playing the Deck in forward direction for 1 sec and then FF TPS.
- If TPS signal is OK, the Deck shall be ejected. Below is information on the TPS under 3 examples.
 1. If ERROR Flag is set "ERROR" shall be displayed. TPS check result shall not be shown in this case.


ER OR

2. If Deck TPS check = OK

TPS OK

3. If Deck TPS check = NG

TPS NG





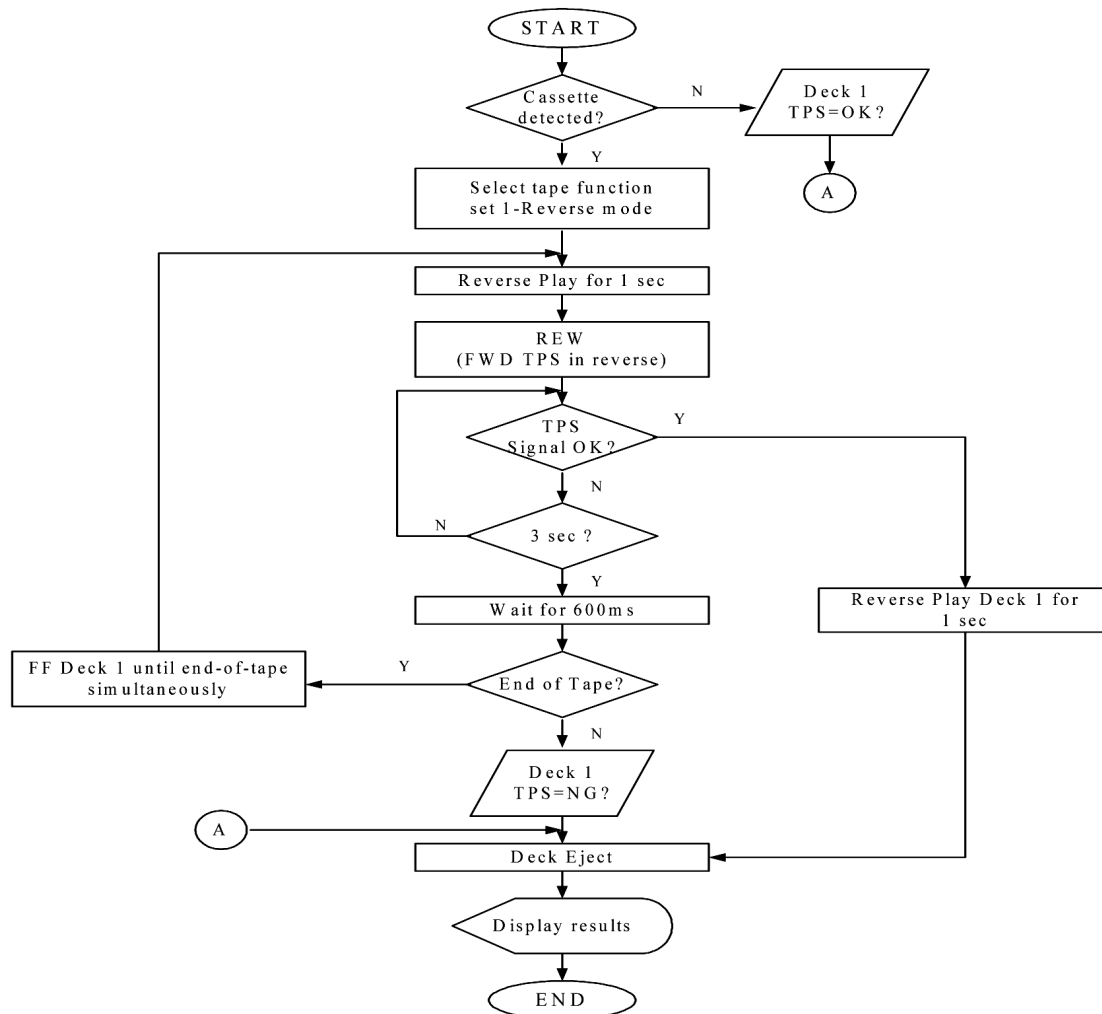


8.2. Error Code Table

Self-Diagnosis Function provides information on any problems occurring for the unit and its respective components by displaying error codes. These error codes such as U**, H** and F** are stored in memory and held unless it is cleared.

The error code is automatically displayed after entering into self-diagnostic mode.

Error Code	Diagnosis Contents	Description of error	Automatic FL Display	Remarks
H01	MODE SW abnormal		H01	For deck mechanism unit. Press [■, -DEMO] on main unit for next error.
H02	REC INH SW abnormal		H02	For deck mechanism unit. Press [■, -DEMO] on main unit for next error.
H03	HALF SW abnormal		H03	For deck mechanism unit. Press [■, -DEMO] on main unit for next error.

Error Code	Diagnosis Contents	Description of error	Automatic FL Display	Remarks
F01	Reel pulse abnormal			For deck mechanism unit. Press [■, -DEMO] on main unit for next error.
F02	TPS abnormal			
F15	CD REST SW Abnormal	CD traverse position initial setting operation failsafe counter (1000 ms) waiting for REST SW to turn on. Error No. shall be clear by force or during cold start.		For CD unit (For Traverse). Press [■, -DEMO] on main unit for next error.
F26	Communication between CD servo LSI and micro-p abnormal.	CD function DTMS command, after system setting, if SENSE = 'L' cannot be detected. Memory shall contain F26 code. After Power on, CD function shall continue, error display shall be "NO DISC". Error No. shall be clear by force or cold start.		For CD unit (For Traverse). Press [■, -DEMO] on main unit for next error.
POWER AMP output abnormal		During normal operation, if DCDET becomes "L", normal POWER OFF process shall not be executed, PCONT shall be switched to "L" immediately. "GOODBYE" shall not be displayed but the error display F61 is displayed instead. 2 seconds after the F61 is displayed, ECONO shall be set to "L" and FL display shall be turned off. The error content shall be memorized when the abnormality occurs and can be displayed in the C-mech self-diagnostic mode described later.		For Power Supply Related Error Detection. Press [■, -DEMO] on main unit for next error.

9 Assembling and Disassembling

9.1. Caution

“ATTENTION SERVICER”

Some chassis components may be have sharp edges. Be careful when disassembling and servicing.

1. This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.
2. For reassembly after operation checks or replacement, reverse the respective procedures.
Special reassembly procedures are described only when required.
3. Select items from the following index when checks or replacement are required.

Warning:

This product uses a laser diode. Refer to “Precaution of Laser Diode”.


Below is the list of disassembly sections

- Disassembly of Side Panel L & R
- Disassembly of Top Cabinet Unit
- Disassembly of Deck Mechanism and Tape Eject P.C.B.
- Disassembly of Headphone P.C.B.
- Disassembly of Front Panel
- Disassembly of DAB P.C.B.
- Disassembly of Panel P.C.B.
- Disassembly of Rear Panel
- Disassembly of Tuner Pack
- Disassembly of Main P.C.B.
- Disassembly of Power P.C.B.
- Disassembly of Speaker Terminal P.C.B.
- Disassembly of Transformer P.C.B.
- Disassembly of CD Mechanism
- Disassembly of Cassette Lid
- Disassembly of Traverse Unit, Driving Gear, and Cam Gear (CD Mechanism Unit)
- Disassembly of Optical Pickup (CD Mechanism Unit)
- Disassembly of Traverse Gear A and Traverse Gear B (CD Mechanism Unit)
- Disassembly of Pinch Roller and Head Block (Deck Mechanism Unit)
- Disassembly of Motor, Capstan Belt A, Capstan Belt B, and Winding Belt (Deck Mechanism Unit)
- Disassembly of Deck Mechanism P.C.B.
- Handling of cassette tape jam


9.2. Disassembly flow chart

The following chart is the procedure for disassembling the casing and inside parts for internal inspection when carrying out the servicing.

To assemble the unit, reverse the steps shown in the chart below.

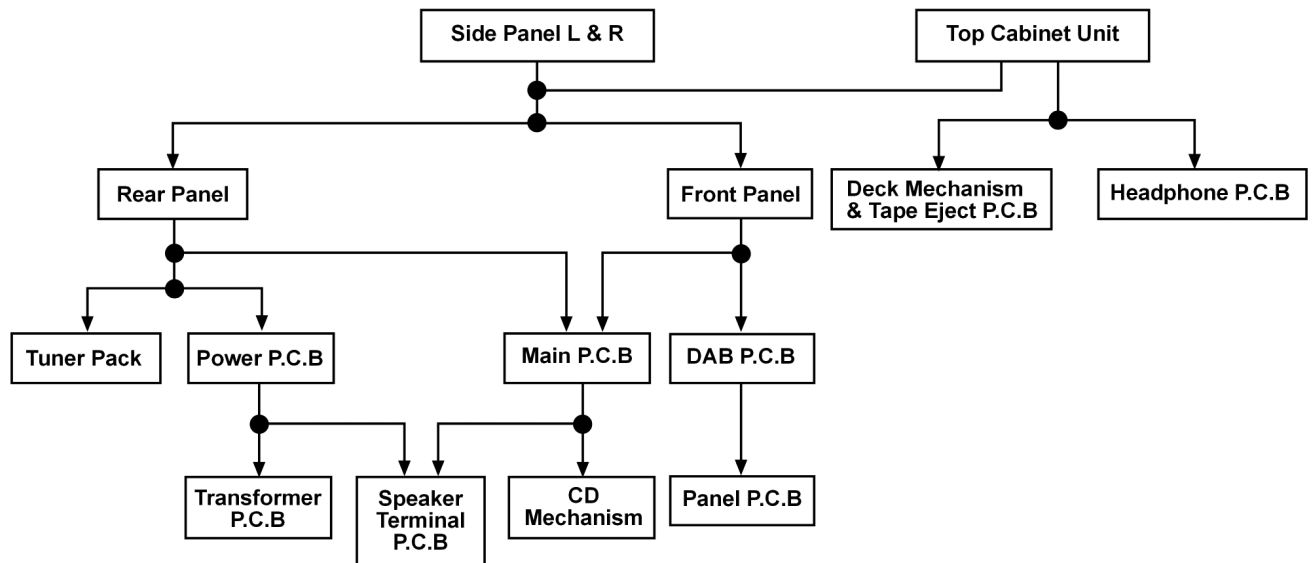


9.3. Main Parts Location Diagram

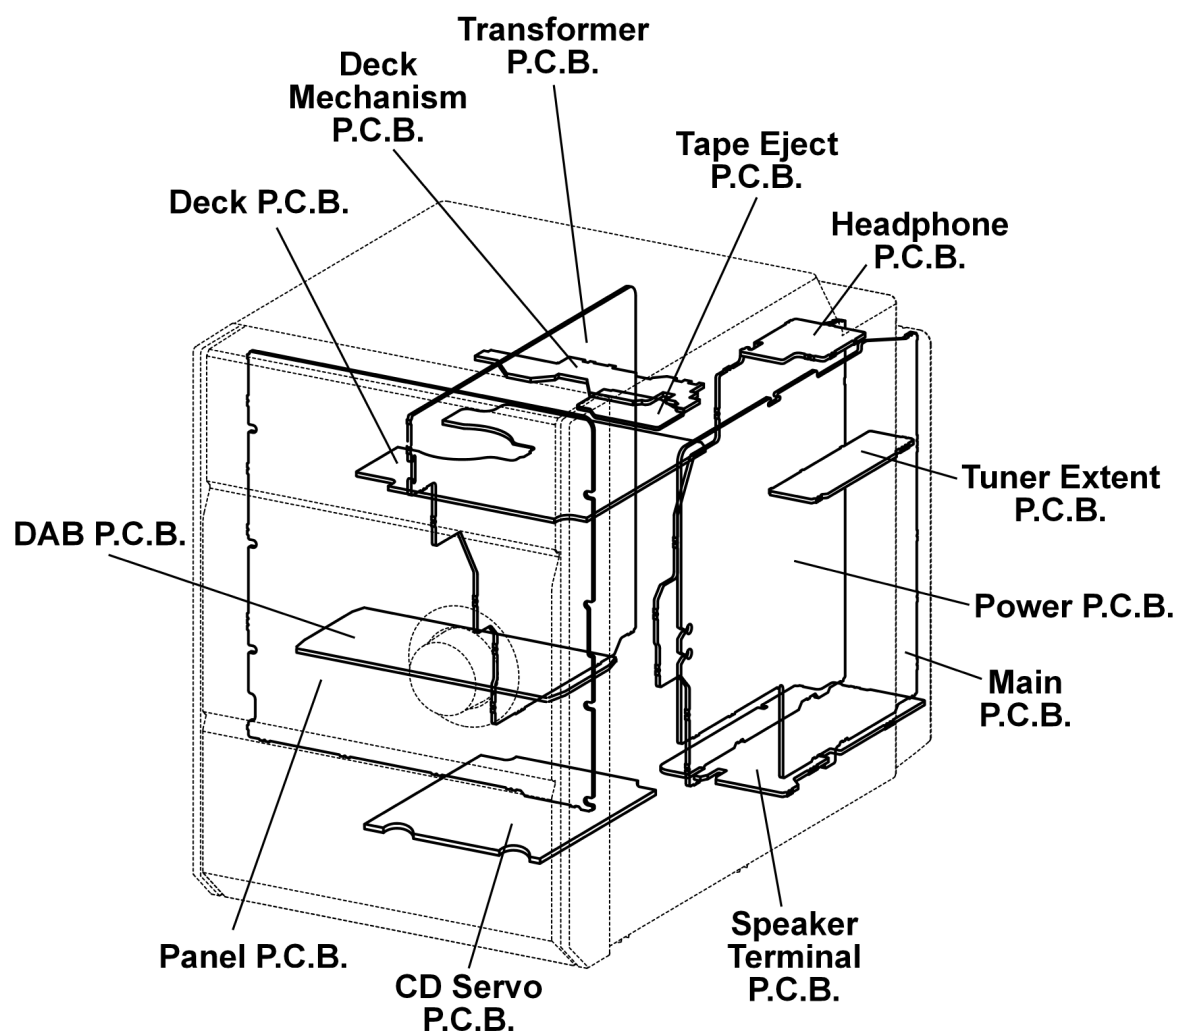

9.4. Disassembly of Side Panel L & R


· Disassembly of Side Panel (R)

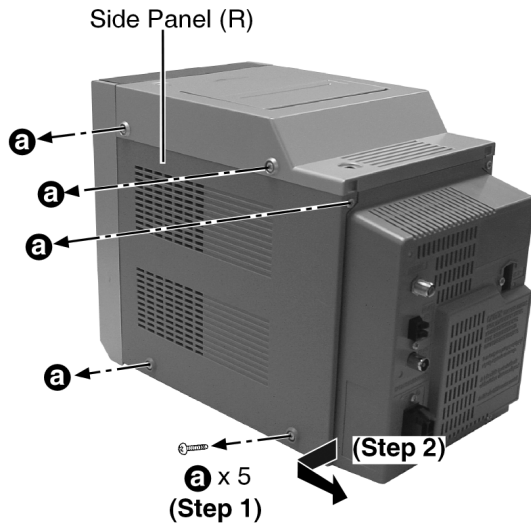

Step 1: Remove 5 screws.

Step 2: Remove the side panel (R) as arrow shown.


· Disassembly of Side Panel (L)

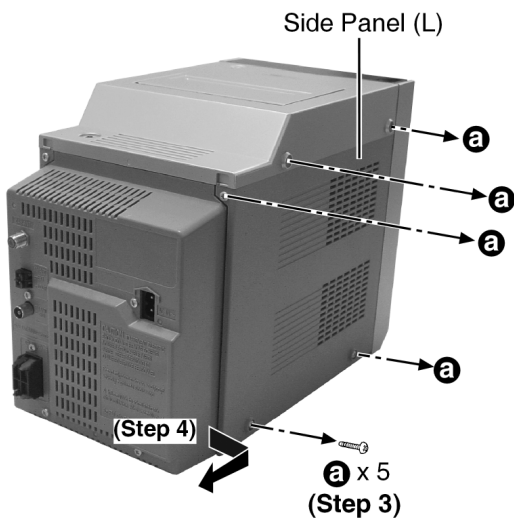


Step 3: Remove 5 screws.

Step 4: Remove the side panel (L) as arrow shown.

9.5. Disassembly of Top Cabinet Unit

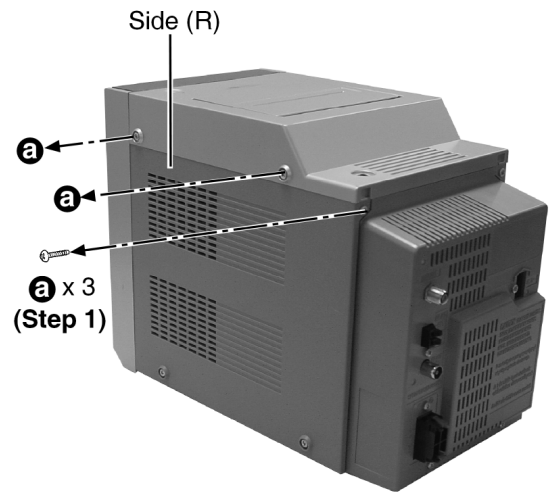


Step 1: Remove 3 screws.

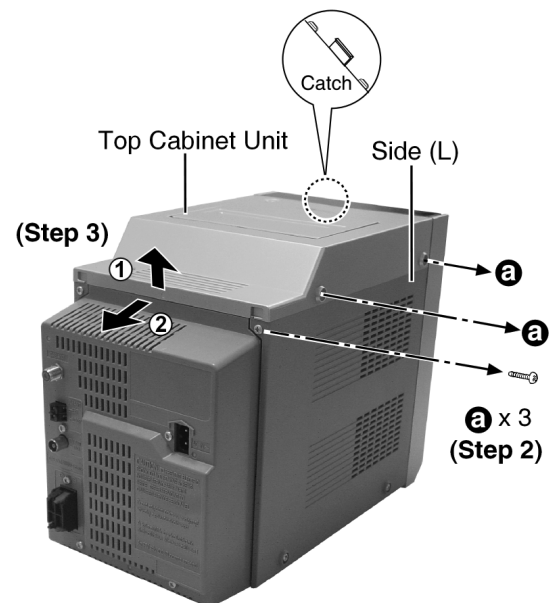

Step 2: Remove 3 screws.

Step 3: Lift up the top cabinet unit, push backward as arrow shown and flip top cabinet unit sideways. (Be careful of the catch)

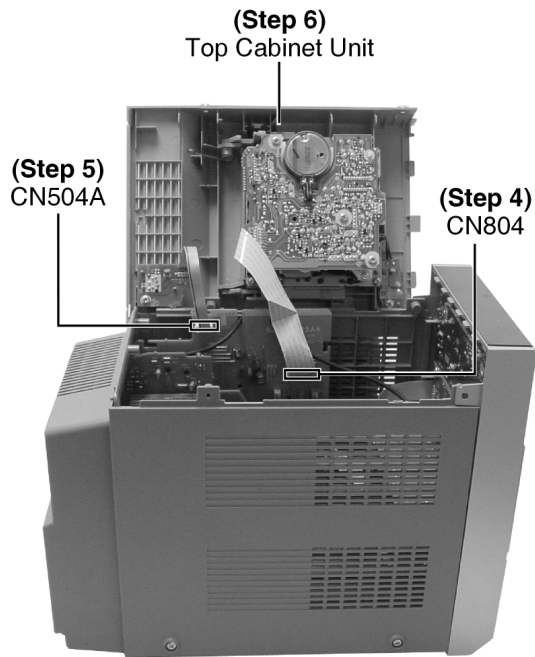

Step 4: Disconnect FFC cable (CN804).


Step 5: Detach connector (CN504A).

Step 6: Remove top cabinet unit.

9.6. Disassembly of Deck Mechanism and Tape Eject P.C.B.

• Follow the (Step 1) - (Step 6) of Item 9.5.

• Disassembly of Tape Eject P.C.B.

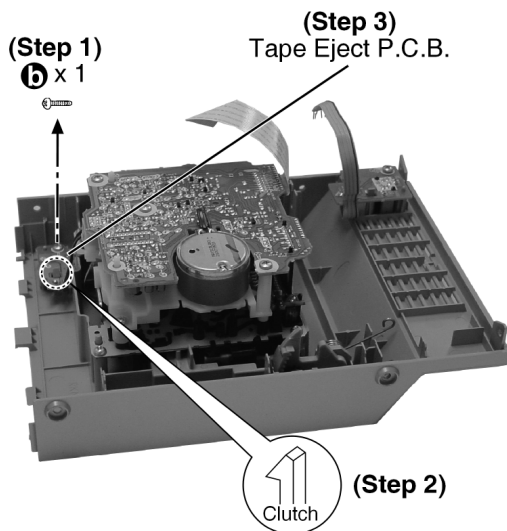


Step 1: Remove 1 screw.

Step 2: Release the clutch.

Step 3: Remove the Tape Eject P.C.B.

• Disassembly of Deck Mechanism.

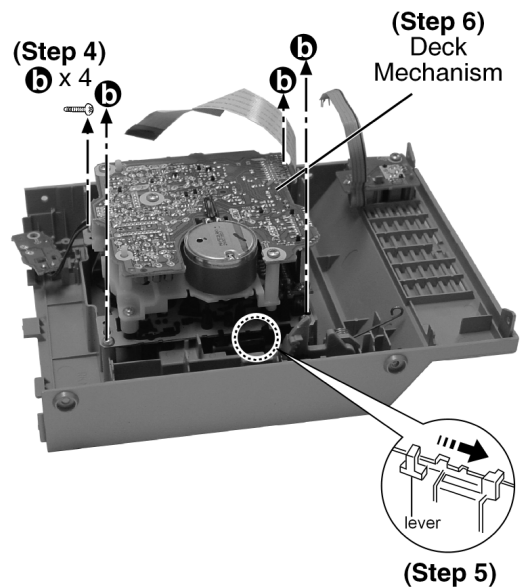


Step 4: Remove 4 screws.

Step 5: Push the lever as arrow shown to open the cassette lid.

Step 6: Remove the Deck Mechanism.

9.7. Disassembly of Headphone P.C.B.

• Follow the (Step 1) - (Step 6) of Item 9.5.

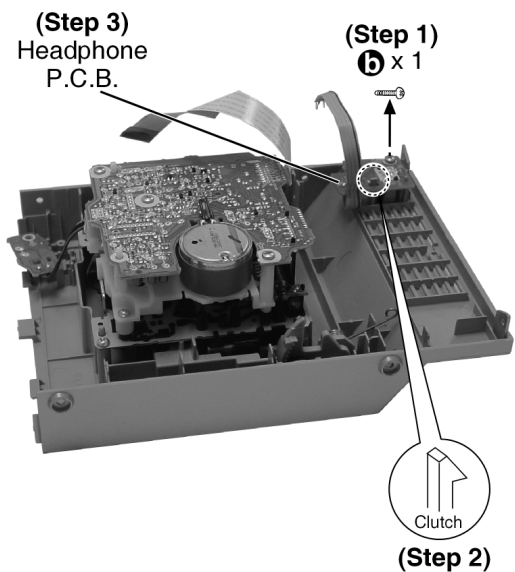

Step 1: Remove 1 screw.


Step 2: Release the clutch.

Step 3: Remove the Headphone P.C.B.


9.8. Disassembly of Front Panel

• Follow the (Step 1) - (Step 4) of Item 9.4.

• Follow the (Step 3) - (Step 6) of Item 9.5.

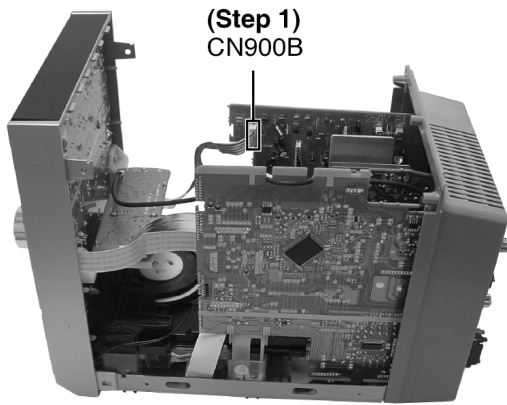


Step 1: Detach connector (CN900B).

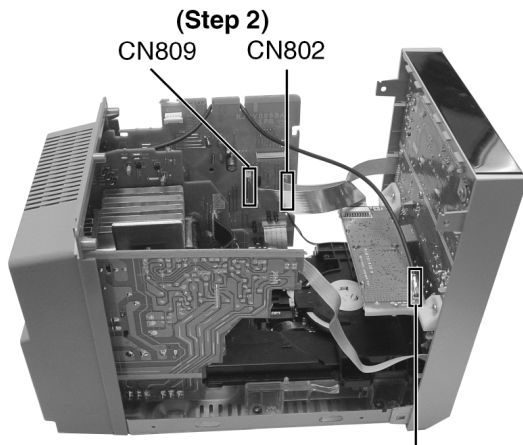

Step 2: Disconnect FFC cable (CN802 and CN809).

Step 3: Disconnect F-Connector.

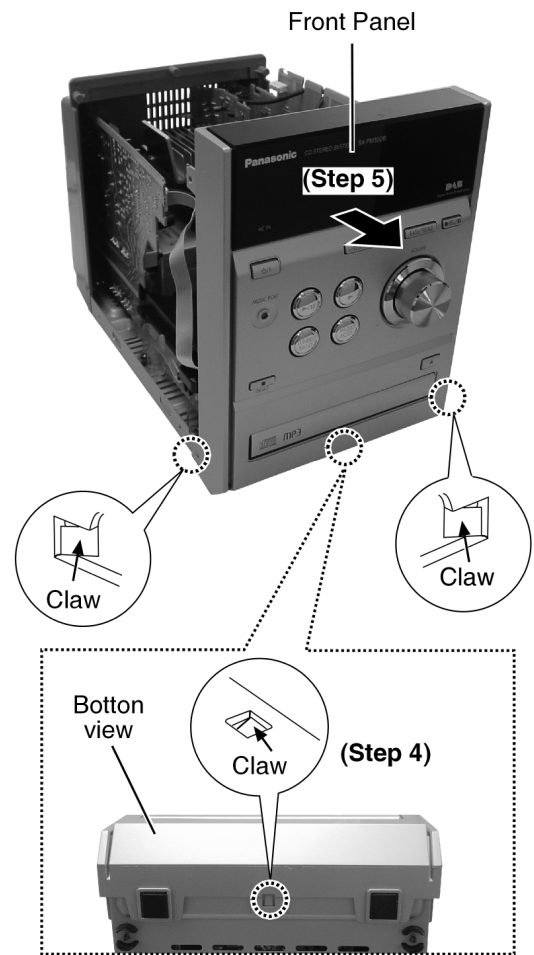


Step 4: Release 3 claws.

Step 5: Remove the Front Panel as arrow shown.

9.9. Disassembly of DAB P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 5) of Item 9.8.

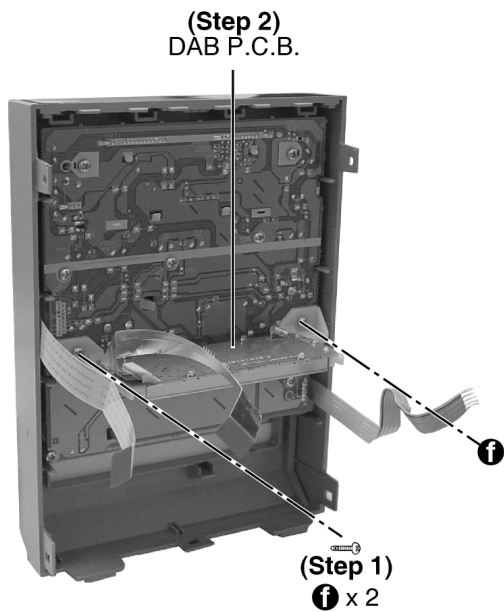


Step 1: Remove 2 screws.

Step 2: Remove the DAB P.C.B.

9.10. Disassembly of Panel P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 5) of Item 9.8.
- Follow the (Step 1) - (Step 2) of Item 9.9.

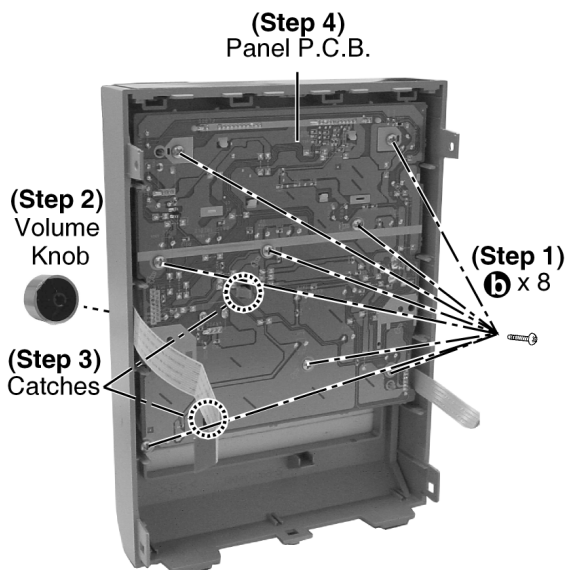

Step 1: Remove 8 screws.


Step 2: Remove the Volume Knob.

Step 3: Release 2 catches.

Step 4: Remove the Panel P.C.B.

9.11. Disassembly of Rear Panel

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.

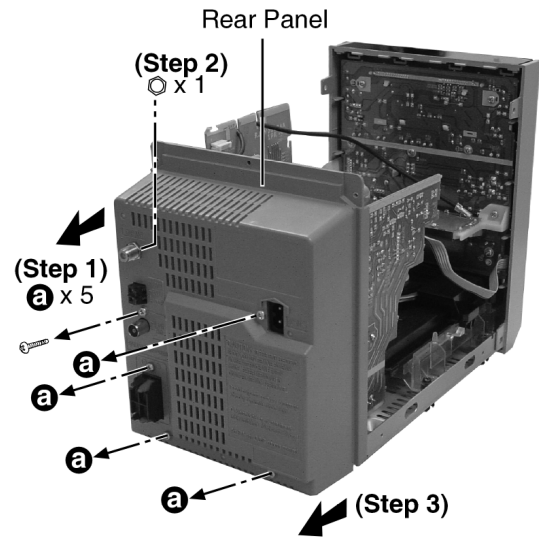


Step 1: Remove 5 screws.

Step 2: Remove 1 nut.

Step 3: Remove the Rear Panel as arrow shown.

9.12. Disassembly of Tuner Pack


- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 3) of Item 9.11.

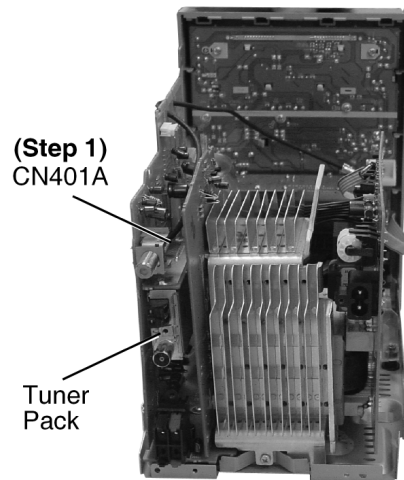


Step 1: Detach the connector CN401A and remove the tuner pack as arrow shown.

9.13. Disassembly of Main P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (step 5) of Item 9.8.
- Follow the (Step 1) - (step 3) of Item 9.11.

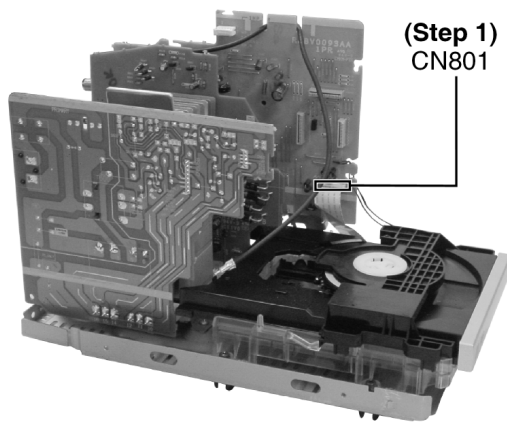

Step 1: Detach the FFC CN801.

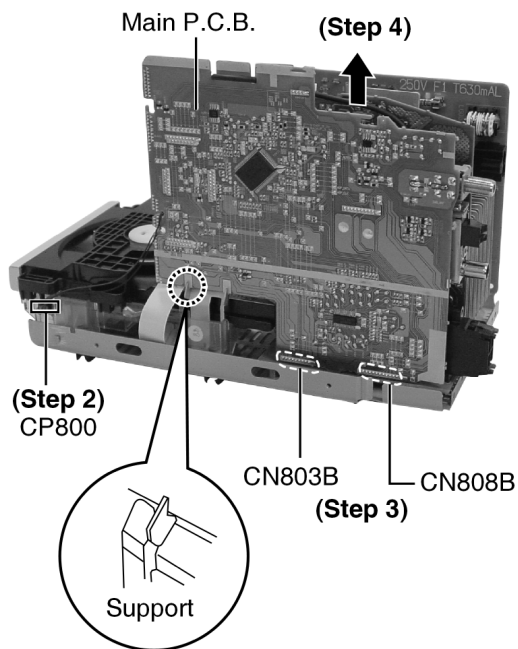


Step 2: Detach connector CP800.

Step 3: Detach connector CN803B and CN808B.



Step 4: Remove the Main P.C.B. as arrow shown.

9.14. Disassembly of Power P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 3) of Item 9.11.

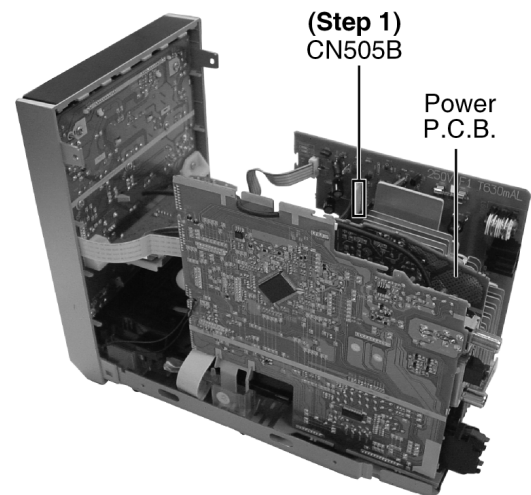

Step 1: Detach the connector CN505B.

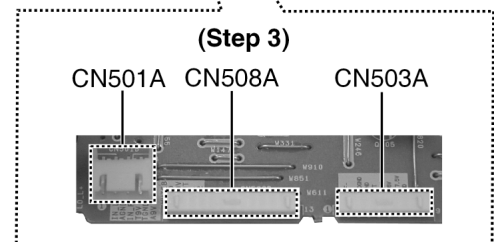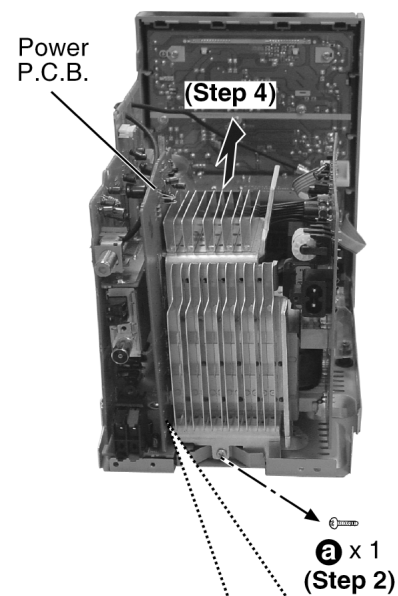


Step 2: Remove 1 screw.


Step 3: Detach the connector CN501A, CN508A and CN503A.

Step 4: Remove the Power P.C.B. as arrow shown.

• Replacement of Power Amplifier IC

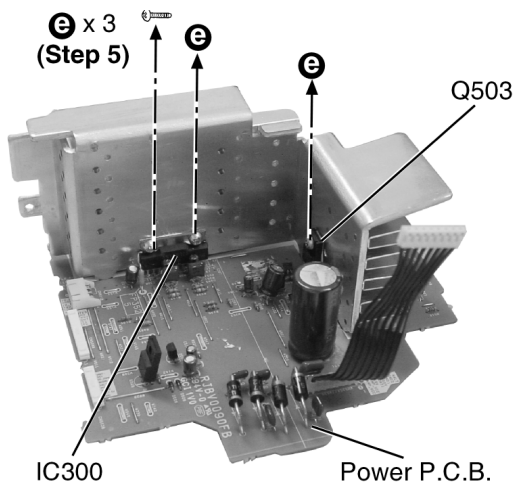

Step 5: Remove 3 screws.

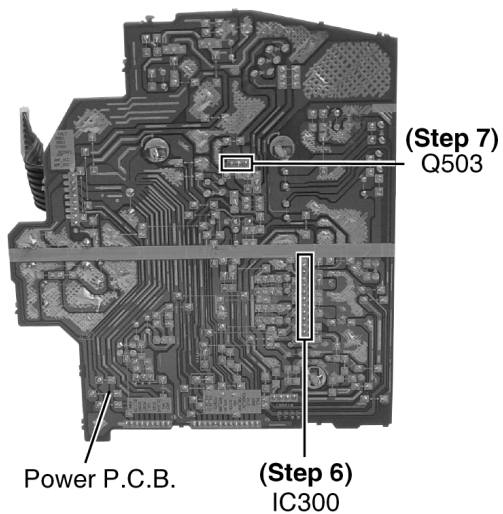


Step 6: Unsolder the terminal of Power Amp IC (IC300) and replace the component.

Step 7: Unsolder the terminal of Transistor (Q503) and replace the component.

9.15. Disassembly of Speaker Terminal P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (step 3) of Item 9.11.
- Follow the (Step 3) of Item 9.13.
- Follow the (Step 1) - (step 4) of Item 9.14.

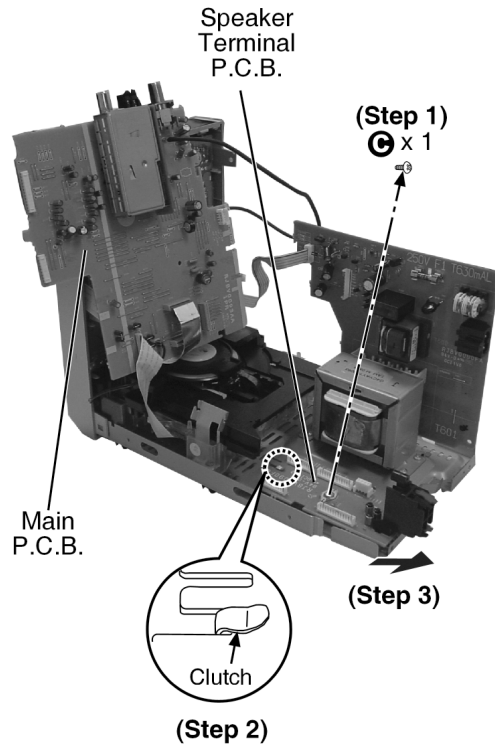


Step 1: Remove 1 screw.

Step 2: Release the clutch.

Step 3: Remove the Speaker Terminal P.C.B. as arrow shown.

9.16. Disassembly of Transformer P.C.B.

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 3) of Item 9.11.
- Follow the (Step 1) - (Step 4) of Item 9.14.

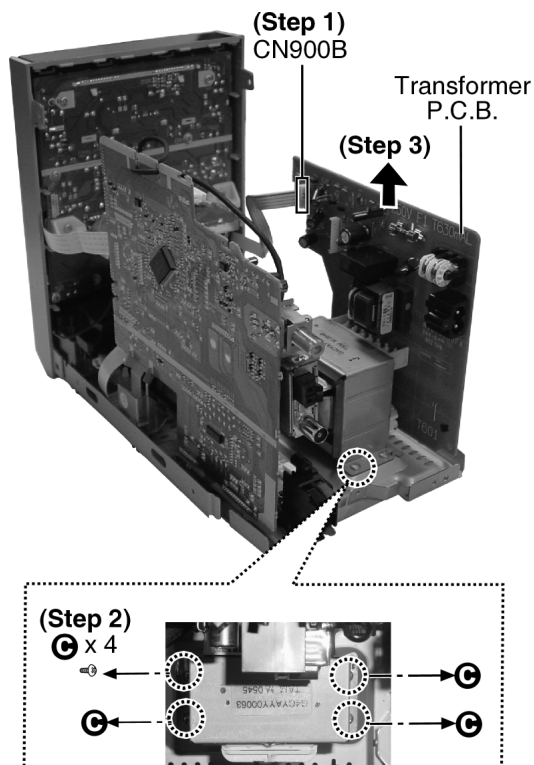


Step 1: Detach the connector CN900B.

Step 2: Remove 4 screws.

Step 3: Remove the Transformer P.C.B. as arrow shown.

9.17. Disassembly of CD Mechanism

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (step 6) of Item 9.5.
- Follow the (Step 1) - (step 5) of Item 9.8.
- Follow the (Step 1) - (step 3) of Item 9.11.
- Follow the (Step 1) - (step 4) of Item 9.13.

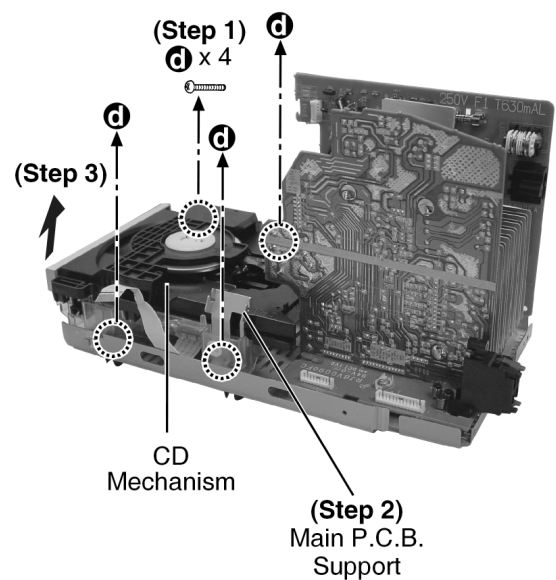

Step 1: Remove 4 screws.


Step 2: Remove the Main P.C.B. support.

Step 3: Remove CD Mechanism as arrow shown.


9.18. Disassembly of Cassette Lid

- Follow the (Step 1) - (Step 2) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (step 4) of Item 9.6.


Screwdriver

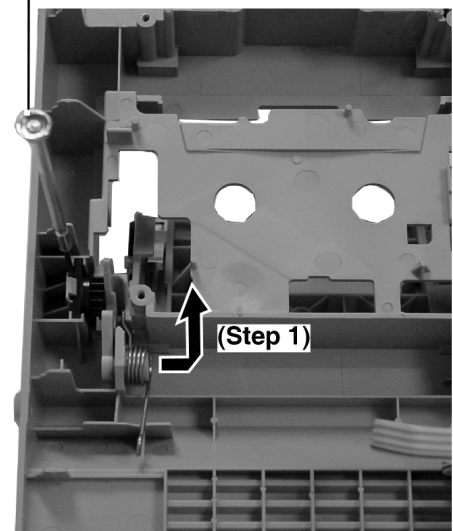


Step 1: Using screwdriver to remove Damper gear as arrow shown.

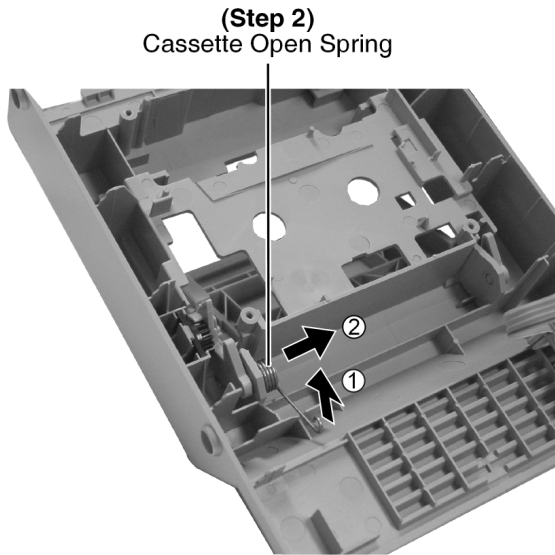

Step 2: Remove the Cassette Open Spring as arrow shown in order.

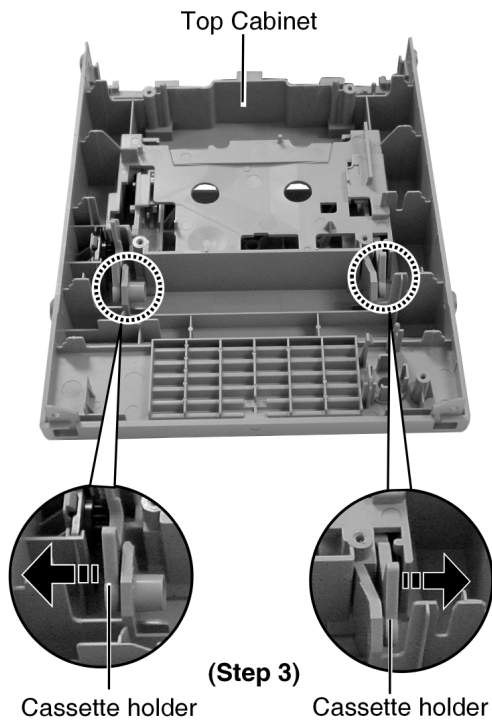

Step 3: Pull the sides Cassette holders to the direction of the arrows shown.

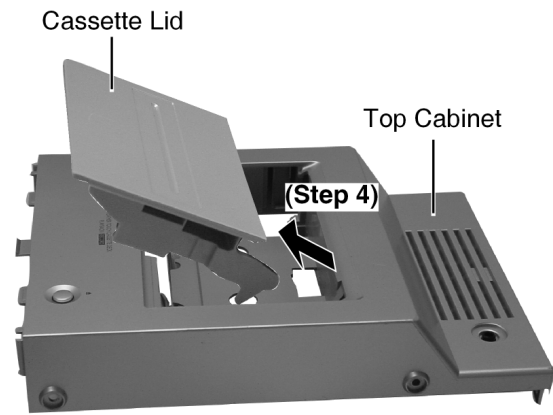


Step 4: Remove the Cassette Lid as arrows shown.


9.19. Disassembly of Traverse Unit, Driving Gear, and Cam Gear (CD Mechanism Unit)

9.19.1. Disassembly of the Traverse Unit

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 5) of Item 9.8.
- Follow the (Step 1) - (Step 3) of Item 9.11 .
- Follow the (Step 1) - (Step 4) of Item 9.13.
- Follow the (Step 1) - (Step 3) of Item 9.17.

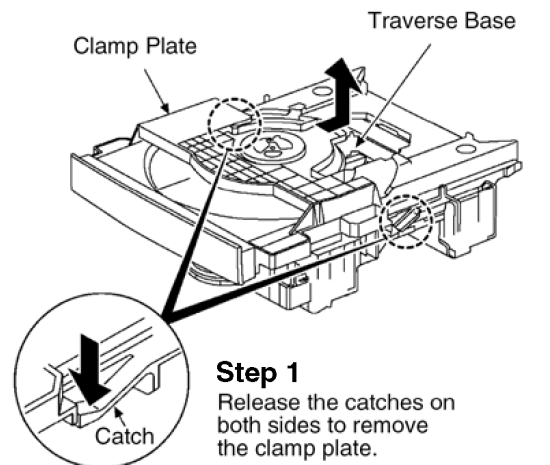


Note:
When the magnet attracts the traverse base that is set to UP, lift the magnet holder backward to remove the clamp plate.

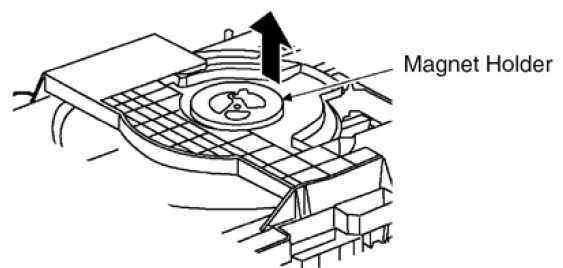


Step 2


Remove the disc tray upward.

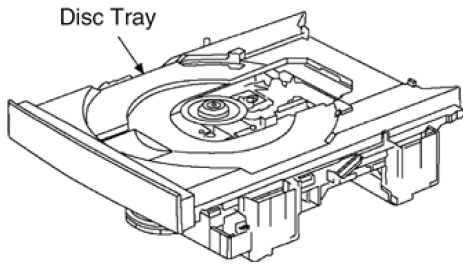**Step 3**


Release 2 catches to pull up the traverse base backward.

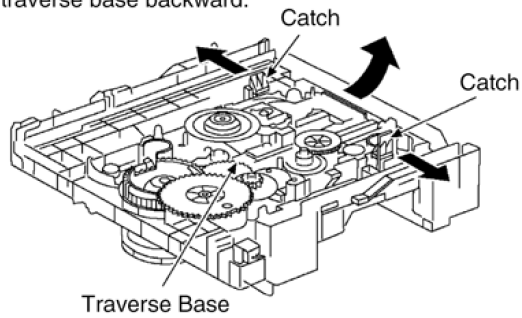**Step 4**


Remove the traverse base.

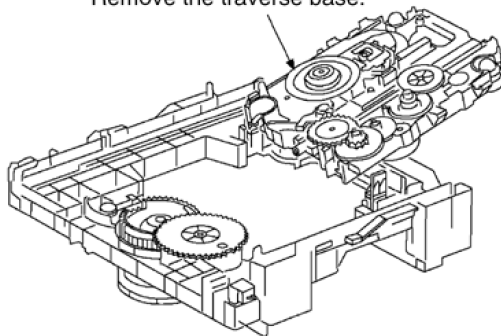**Disassembly of gears drive****Step 5**


Release the catch to push out the driving gear.

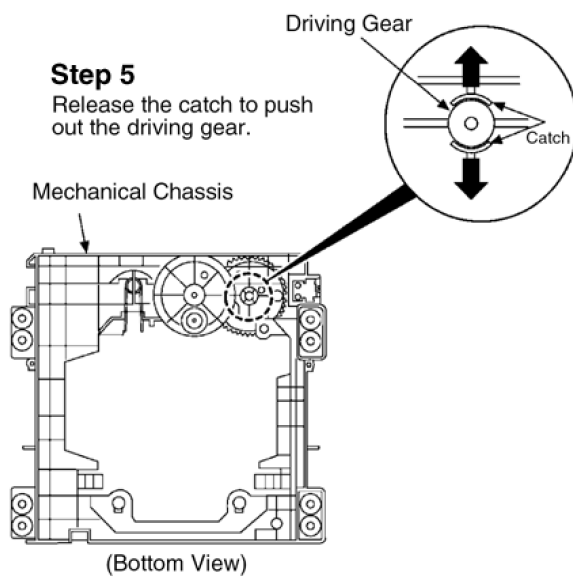**Step 6**


Pull out the driving gear.

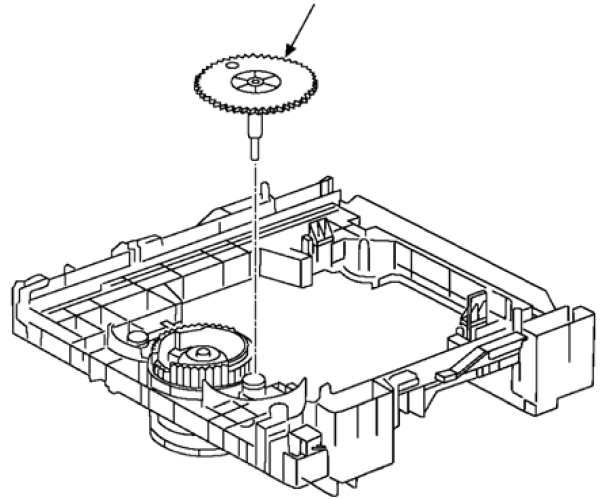**Step 7****b****Step 8**


Remove the floating rubber (B).

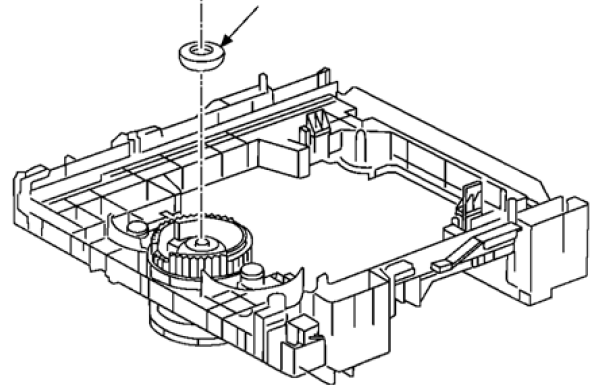**Step 9**

Remove the cam gear.

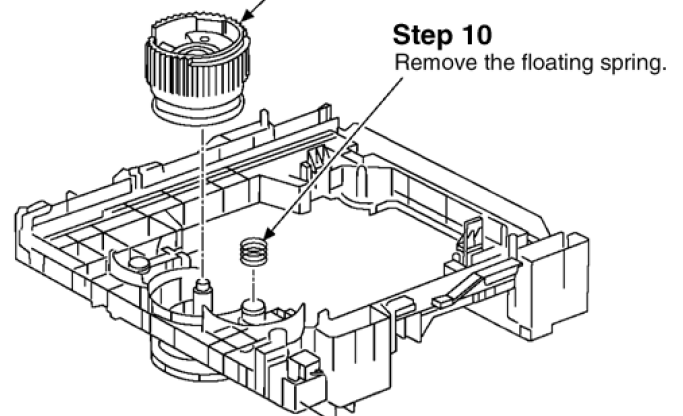**Step 10**


Remove the floating spring.

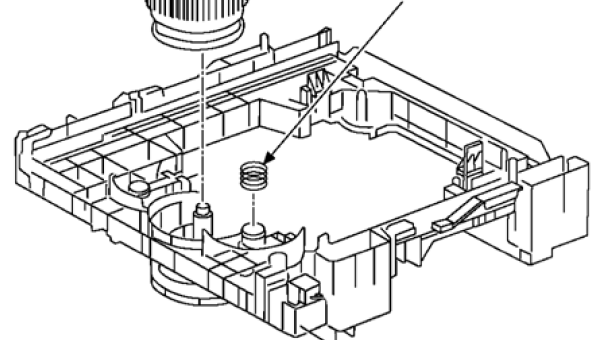

Assembly of Traverse Base, Cam Gear, Driving Gear, Disc Tray, and Clam Plate


Step 1

Turn the traverse gear (B) to the arrow direction, and move the optical pickup to the center.

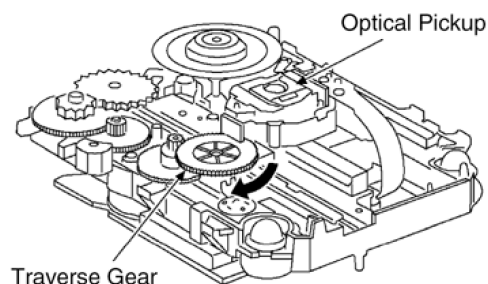


Step 2

Release one side of the lock spring.

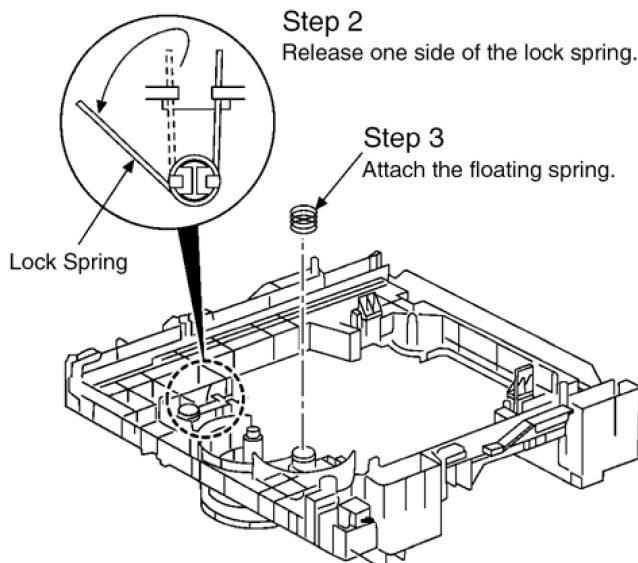


Step 3

Attach the floating spring.

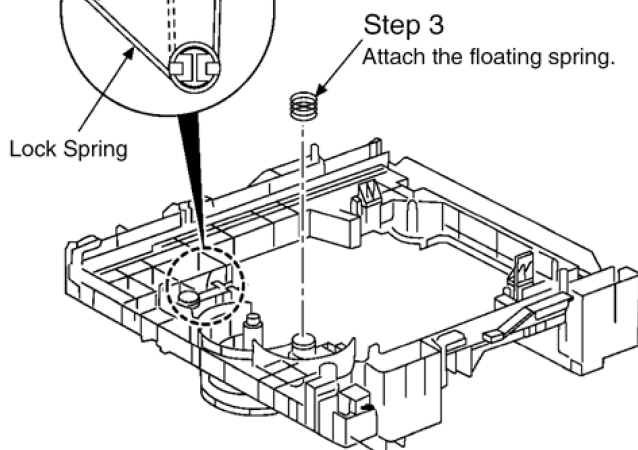


Step 4

Engage the front pin of the traverse gear to the groove of the cam gear and the projection of the cam gear between the TRG lever.

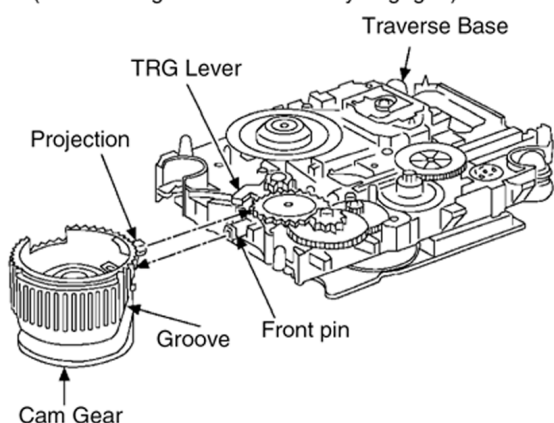


Step 5

Hold the assembled part carefully. Engage the cam gear to the spindle of the mechanical chassis and the floating rubber of the traverse base to the pin of the mechanical chassis.

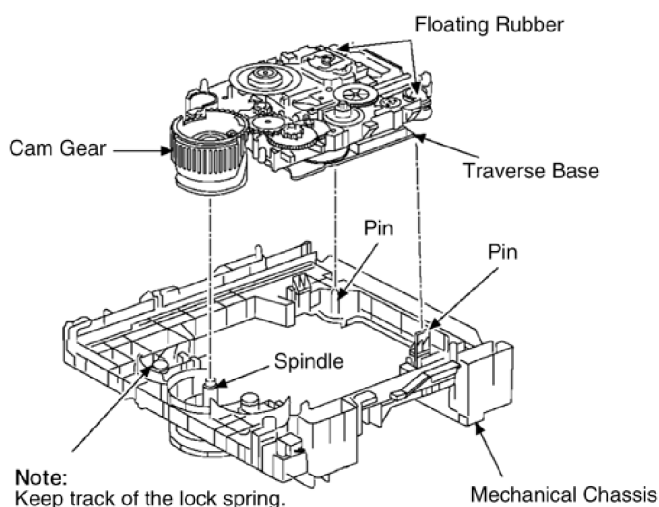


Step 6

Catch the released lock spring back to the traverse base.

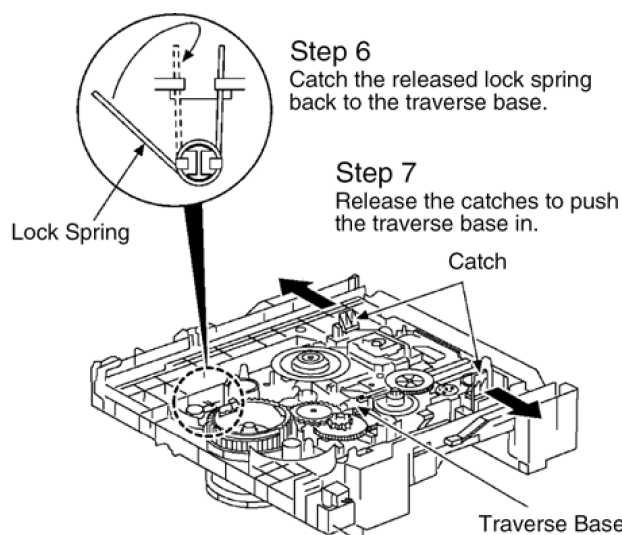


Step 7

Release the catches to push the traverse base in.

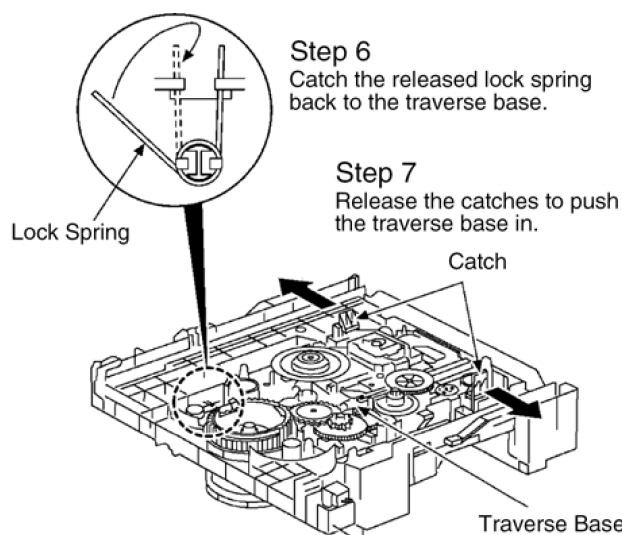


Step 8

Place the floating rubber (B) and fasten the screw.

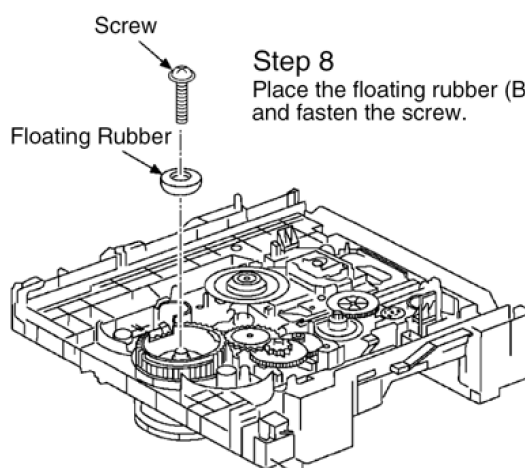


Step 9


Put together the holes located on the driving gear and the mechanical chassis, and push down the driving gear till a click sound is heard.

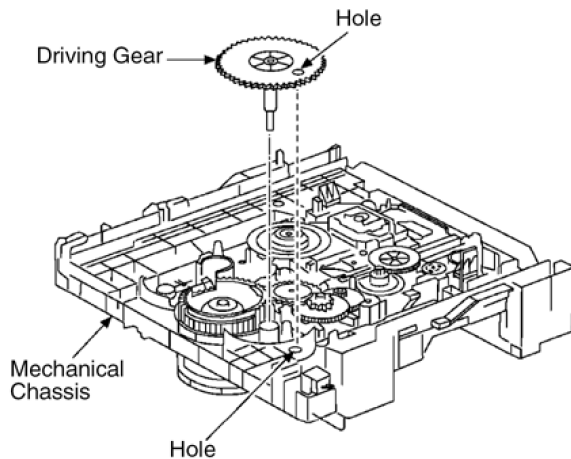**Step 10**

Position the disc tray where the horizontal dent located in the most right exterior of the disc tray is attached to the front surface located in the right most exterior of the mechanical chassis.

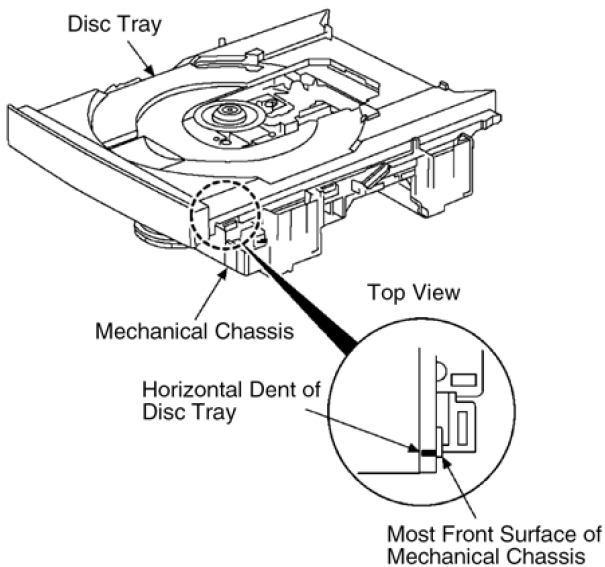**Step 11**

Insert the clamp plate from the top to attach over the catch.

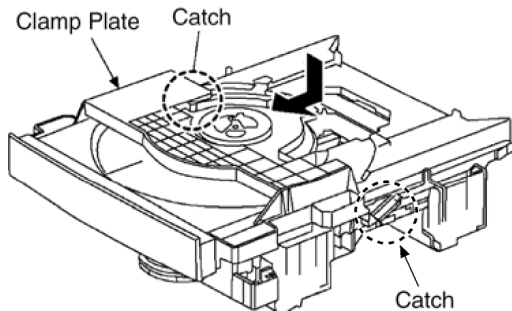


9.20. Disassembly of Optical Pickup (CD Mechanism Unit)

- Follow the (Step 1) - (Step 4) of Item 9.4.

- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 5) of Item 9.8.
- Follow the (Step 1) - (Step 3) of Item 9.11 .
- Follow the (Step 1) - (Step 4) of Item 9.13.
- Follow the (Step 1) - (Step 3) of Item 9.17.
- Follow the (Step 1) - (Step 4) of Item 9.19.1.

Step 3


Remove the CD Servo PCB and turn it over.

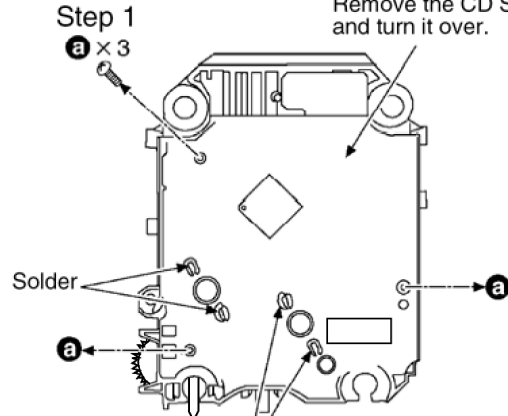**Step 2**


Remove 4 solders of the motor terminal.

Step 4


Remove FFC (CN7001) From the connector, and remove the CD Servo PCB.


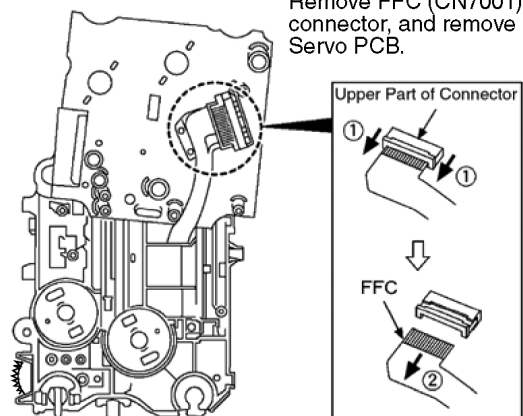


Note:
Insert the short pin to FFC of the optical pickup.
(Refer to "Note on Handling Optical Pickup".)

**Step 5**

Turn the traverse gear (B) to the arrow direction, and move the optical pickup to the most outer side.

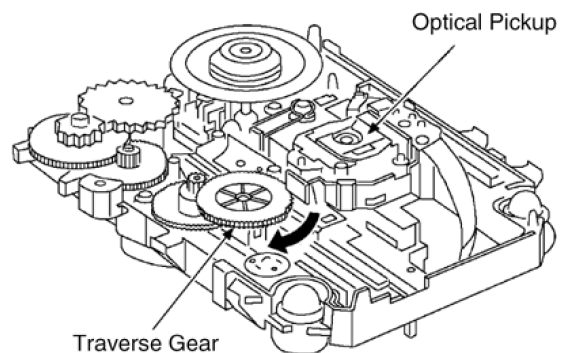


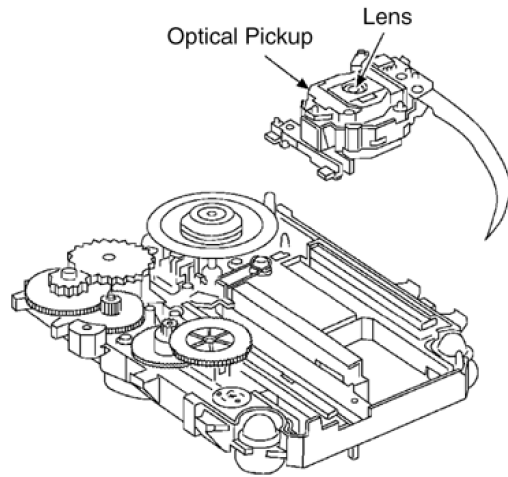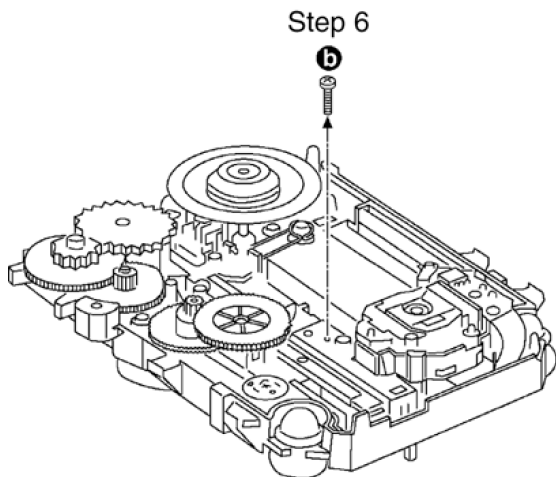

Note:
Do not touch the optical pickup lens.



9.21. Disassembly of Traverse Gear A and Traverse Gear B (CD Mechanism Unit)

- Follow the (Step 1) - (Step 4) of Item 9.4.
- Follow the (Step 3) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 5) of Item 9.8.
- Follow the (Step 1) - (Step 3) of Item 9.11 .
- Follow the (Step 1) - (Step 4) of Item 9.13.
- Follow the (Step 1) - (Step 3) of Item 9.17.
- Follow the (Step 1) - (Step 2) of Item 9.19.1.

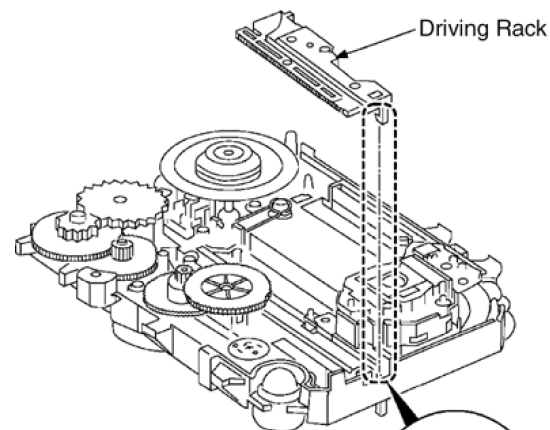



Step 7

Release the catch of the driving rack to remove the rack.

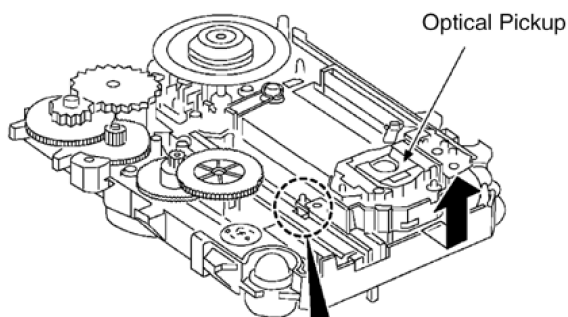


Step 8

Engage the projection of the optical pickup to the dent of the traverse base in order to remove the optical pickup.

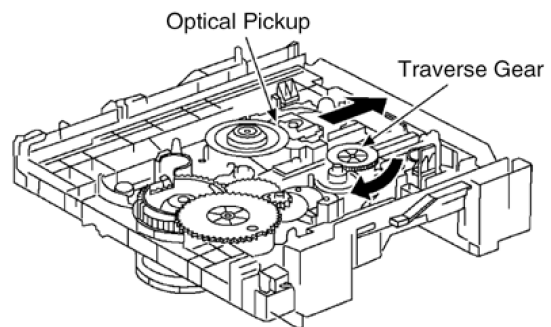


Step 1

Turn the traverse gear to the arrow direction, and move the optical pickup to the most outer side.

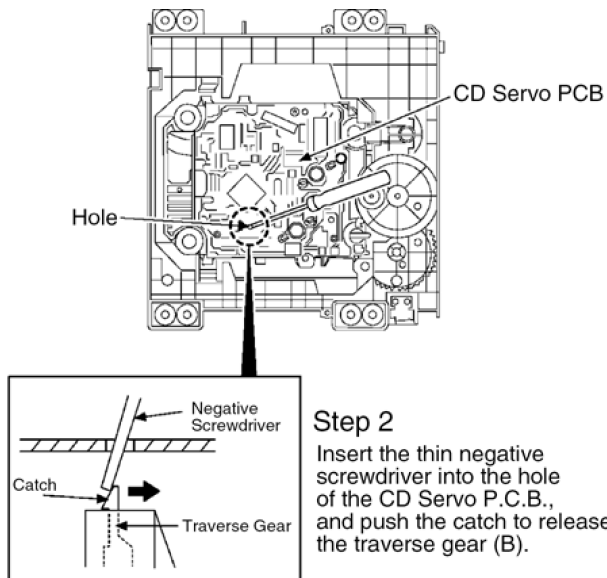**Step 2**

Insert the thin negative screwdriver into the hole of the CD Servo P.C.B., and push the catch to release the traverse gear (B).

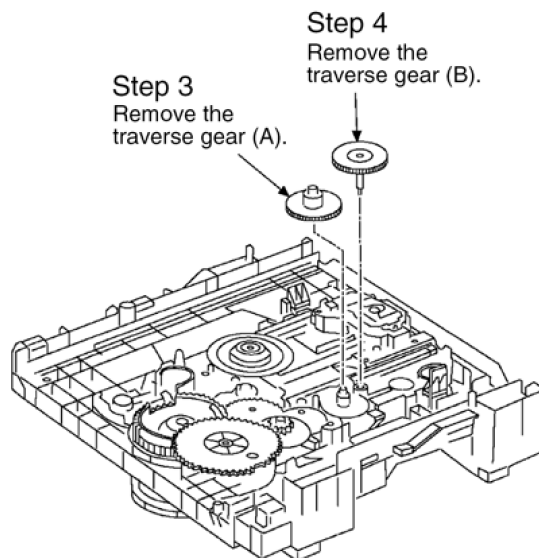



Note:
Do not use the once removed traverse gear (B), and be sure to replace with a new gear.

9.22. Disassembly of Pinch Roller and Head Block (Deck Mechanism Unit)


- Follow the (Step 1) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 6) of Item 9.6.


Step 1

Release catches to remove the pinch rollers (F).

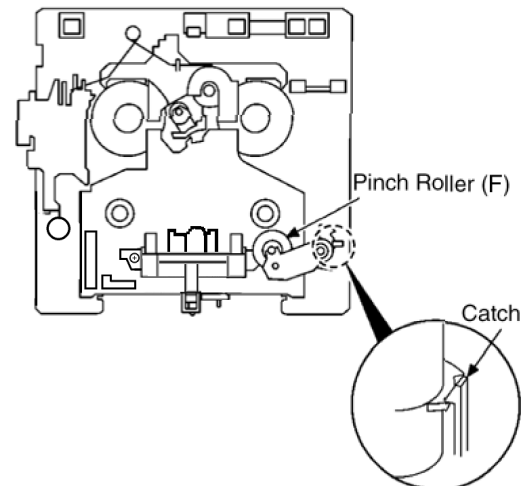




Note:
Support the Deck Mechanism PCB by hand to remove the Deck PCB.


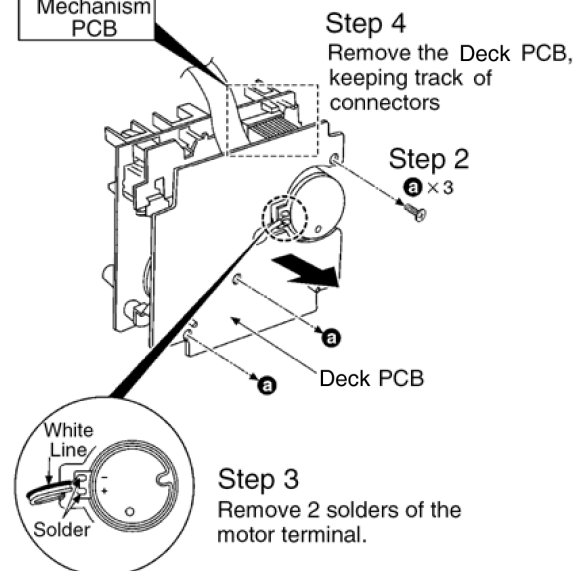


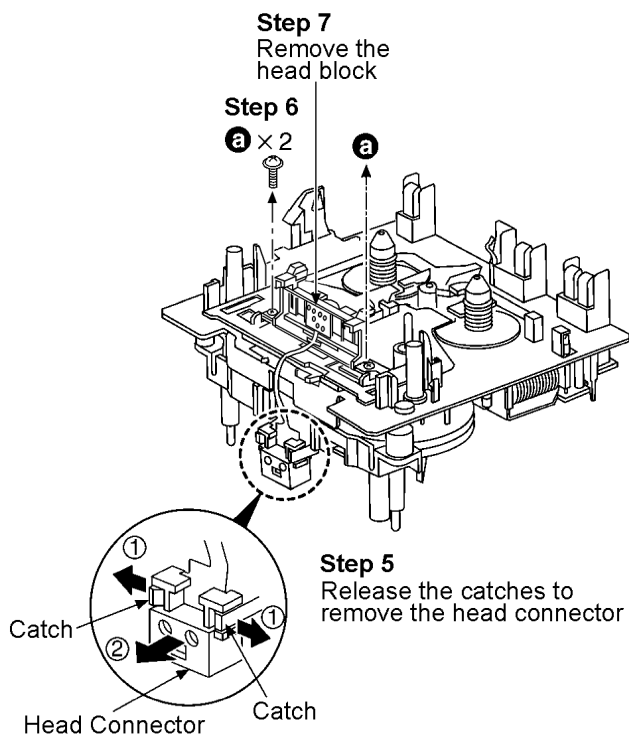


9.23. Disassembly of Motor, Capstan Belt A, Capstan Belt B, and Winding Belt (Deck Mechanism Unit)

- Follow the (Step 1) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 6) of Item 9.6.
- Follow the (Step 1) - (Step 4) of Item 9.22.

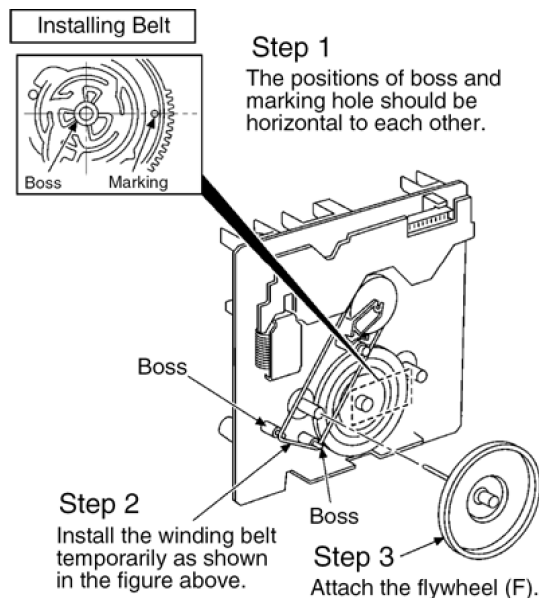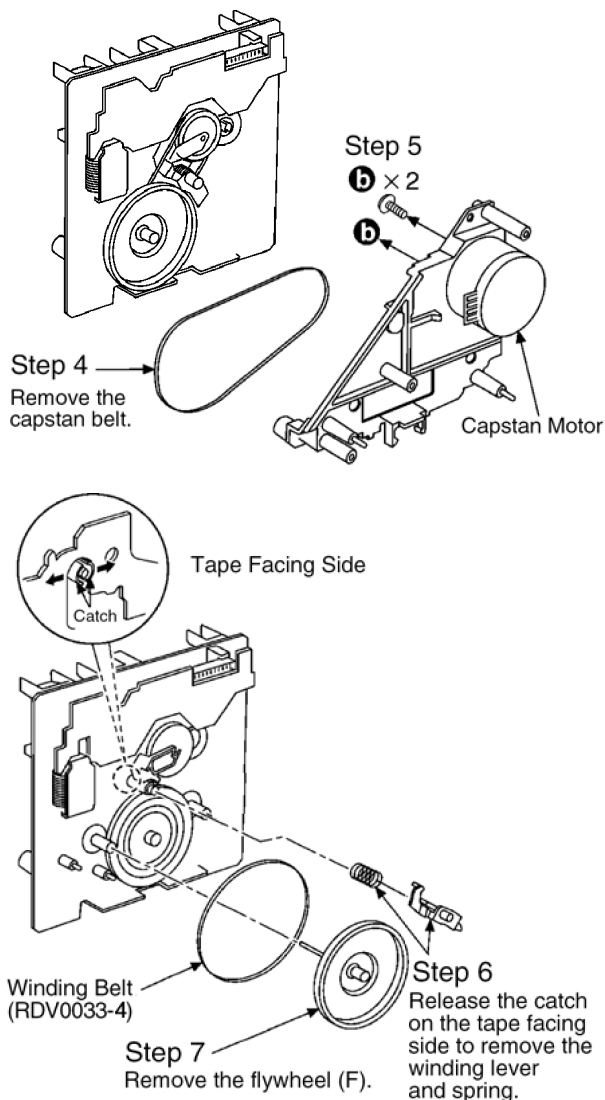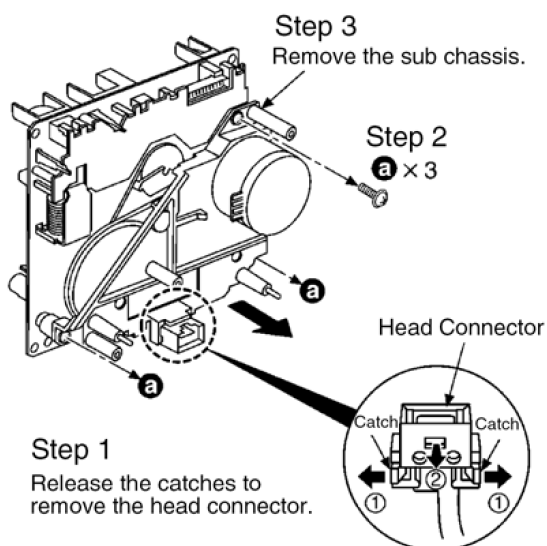


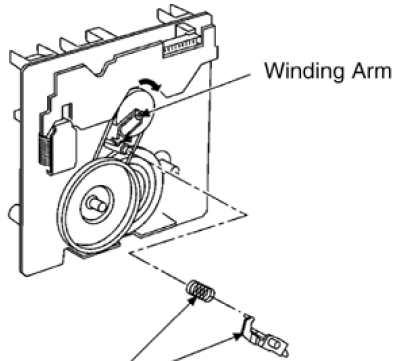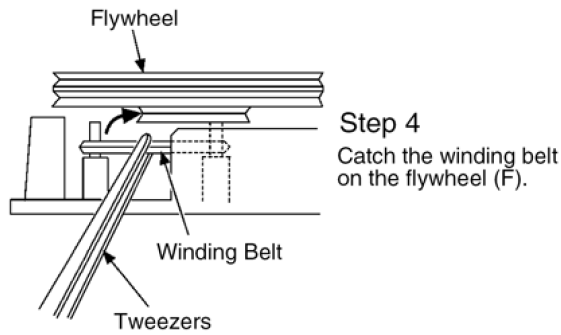




Note:
The winding lever should be positioned as shown in the right figure.



Step 6
Install the capstan belt temporarily as shown in the figure below.

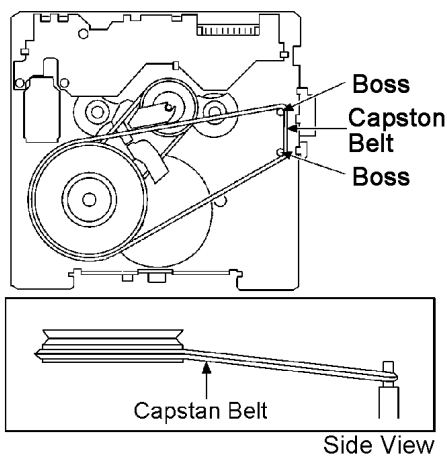


Note:
Keep the belt away from grease.

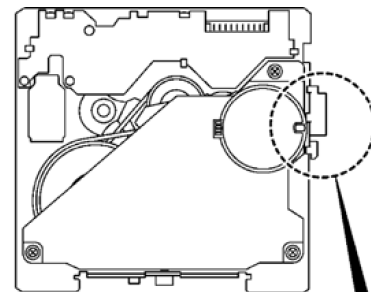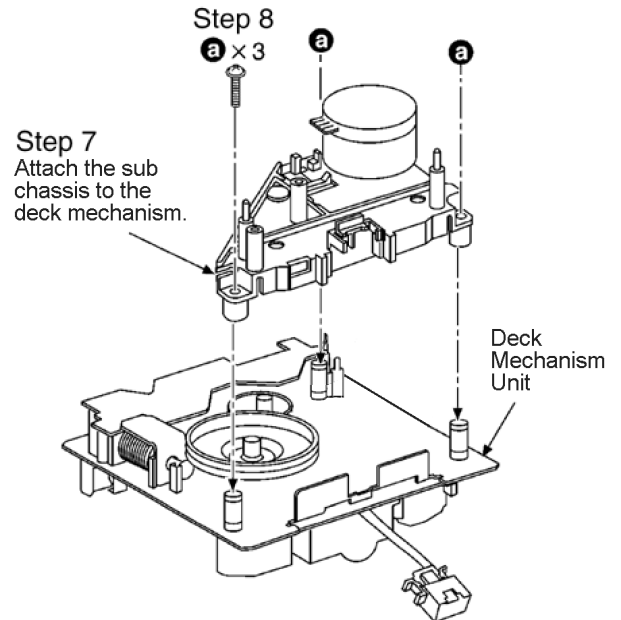

9.24. Disassembly of Deck Mechanism P.C.B.

- Follow the (Step 1) - (Step 6) of Item 9.5.
- Follow the (Step 1) - (Step 6) of Item 9.6.
- Follow the (Step 1) - (Step 4) of Item 9.22.

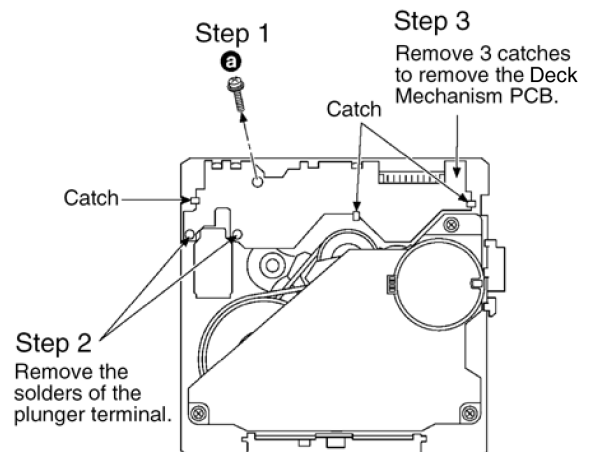


9.25. Handling of cassette tape jam


- Follow the (Step 1) - (Step 4) of Item 9.4.

Step 1

If the cassette tape is not ejected due to twining around capstan or pinch roller during playing or recording, rotate a flywheel **F** to the arrow direction to remove twined tape.

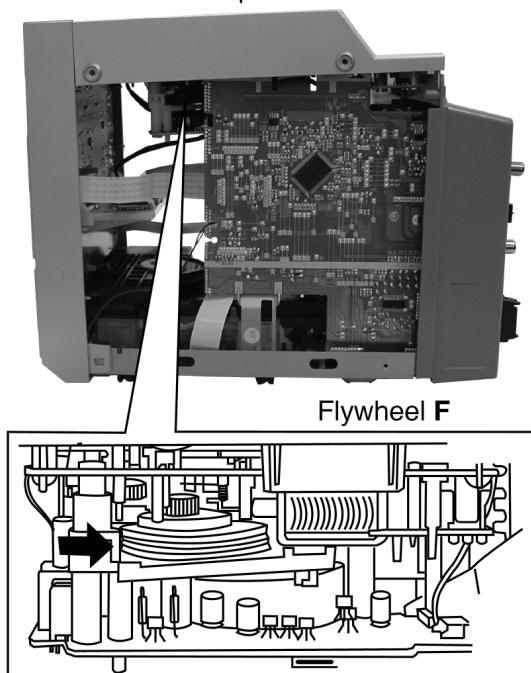

Step 2: Push the lever to the arrow direction, open the cassette cover and take out the cassette tape.

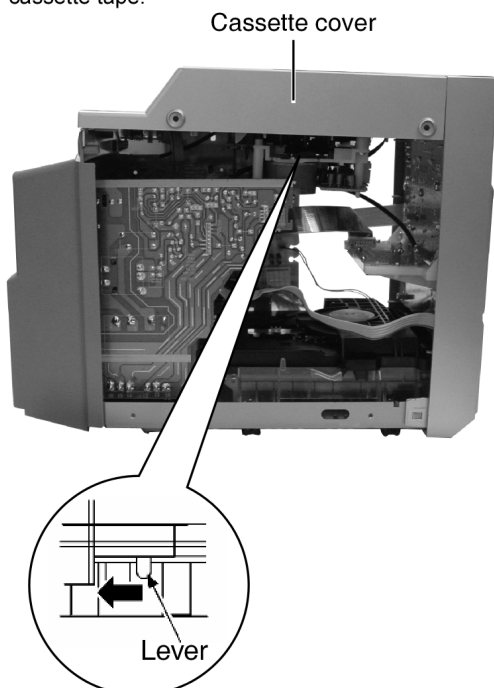

10 Service Fixture and Tools

Service Tools	
Extension P.C.B.	
(A) Main P.C.B. - Speaker Terminal P.C.B.	RFKZPM33E

11 Service Positions


Note: For description of the disassembly procedures, see the Section 9

11.1. Checking and Repairing of Deck, Deck Mechanism, Headphone P.C.B. and Tape Eject P.C.B.

1. Disassemble Top Cabinet

Remove 6 screws on L/R side

Flip top cabinet sideways

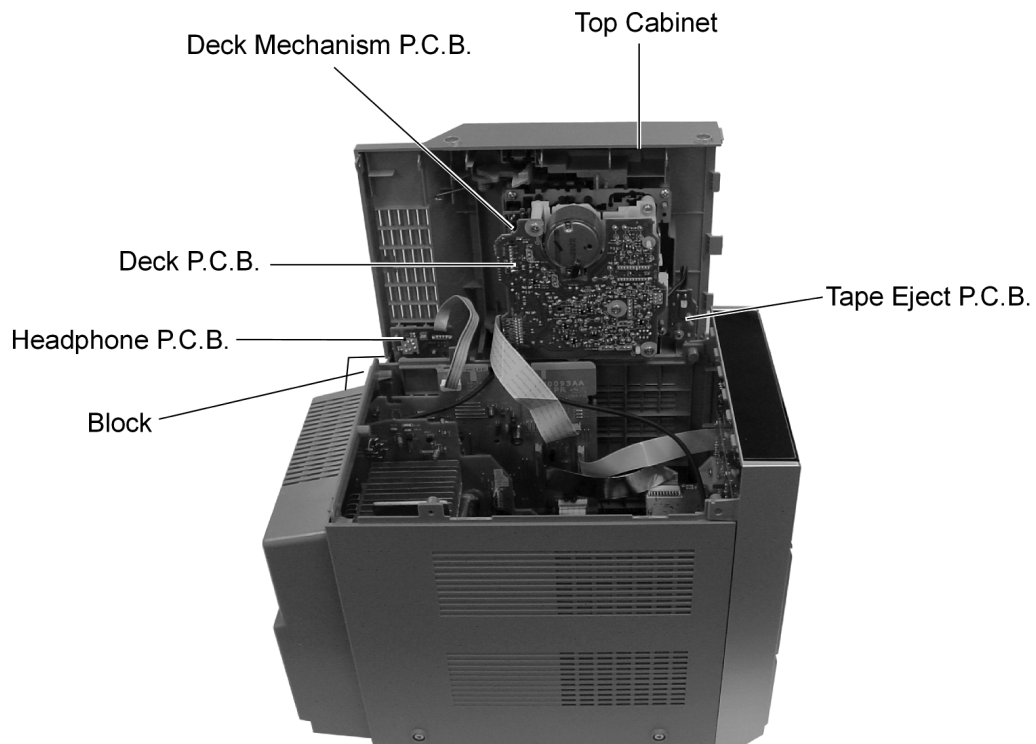

11.2. Checking and Repairing of DAB P.C.B. and Panel P.C.B.

1. Remove Side Panel L/R


Remove 10 screws on L/R side

Remove L/R side panel



2. Disassemble Top Cabinet

Flip top cabinet sideways

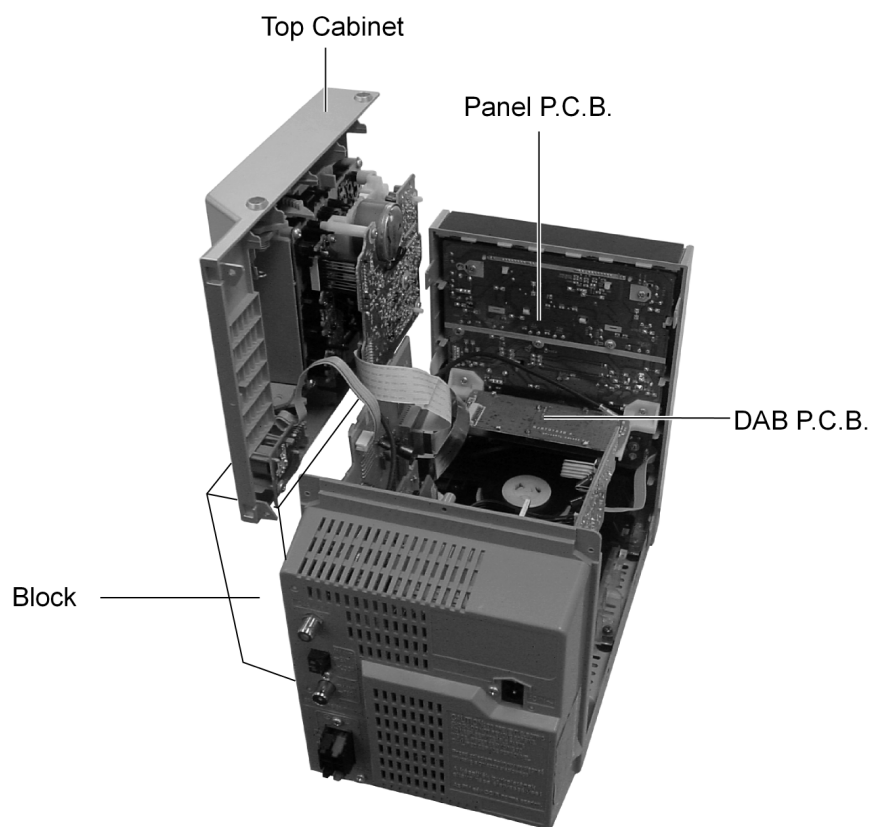

11.3. Checking and Repairing of Transformer P.C.B.

1. Remove Side Panel L/R

Remove 10 screws on L/R side

Remove L/R side panel



2. Disassemble Top Cabinet

Lift up the Top Cabinet




3. Disassemble Rear Panel

Remove 5 screws

Remove 1 nut

Remove Rear Panel

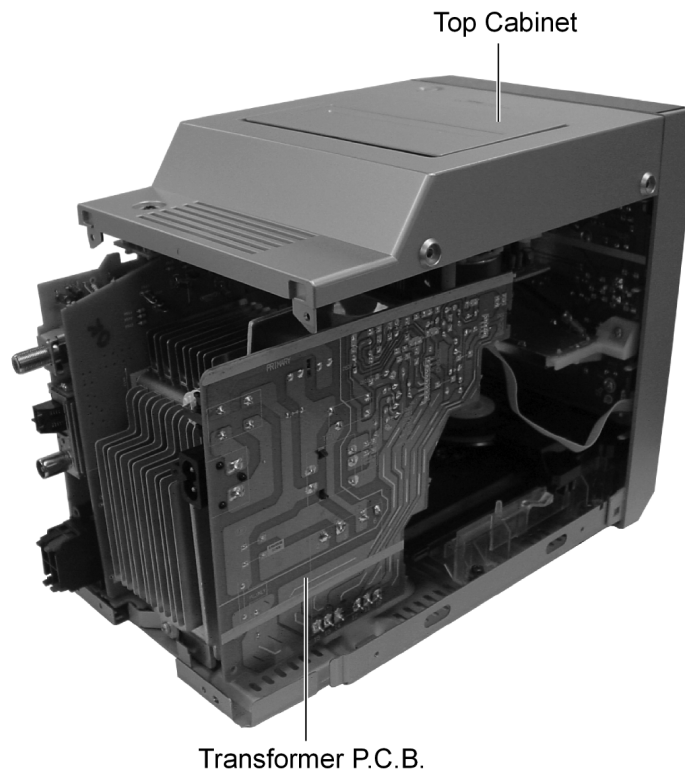

11.4. Checking and Repairing of Main P.C.B.

1. Remove Side Panel L/R

Remove 10 screws on L/R side

Remove L/R side panel



2. Disassemble Top Cabinet

Lift up the Top Cabinet




3. Disassemble Rear Panel

Remove 5 screws

Remove 1 nut

Remove Rear Panel

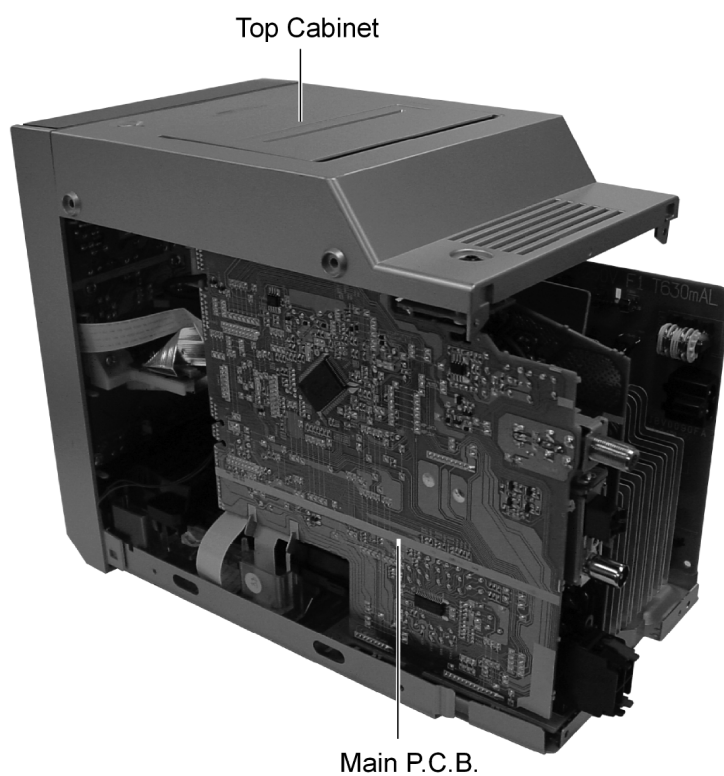

11.5. Checking and Repairing of CD Mechanism P.C.B.

1. Remove Side Panel L/R

Remove 10 screws on L/R side

Remove L/R side panel

2. Disassemble Top Cabinet

Lift up the Top Cabinet

Disconnect CN504A and CN804 (Main P.C.B. connector)

3. Disassemble Front Panel

Disconnect CN900B (Transformer P.C.B. connector)

Disconnect CN802 and CN809 (Main P.C.B. connector)

Disconnect F-Connector (DAB P.C.B. connector)

Bent Front Panel forward

Release 3 catches

4. Disassemble Rear Panel

Remove 5 screws

Remove 1 nut

Remove the Rear Panel

5. Disassemble Main P.C.B.

Disconnect CN801, CN803B and CN808B

Lift up the Main P.C.B.

Remove 4 screws from CD Mechanism unit

Remove Support

Flip the CD Mechanism unit

6. Connect Top Cabinet, Front Panel, Main P.C.B.

Main P.C.B.:

Connect 9P CN803A to CN803B

Connect 13P CN808A to CN808B

Connect 17P FFC cable CN7002 to CN801

Front Panel:

Connect 4P cable WH900 to CN900B

Connect 15P FFC cable CN901A to CN802


Connect 18P FFC cable CN809

Connect F-Connector

Top Cabinet:

Connect 4P cable WH504 to CN504A

Connect 19P FFC cable CN1303 to CN804

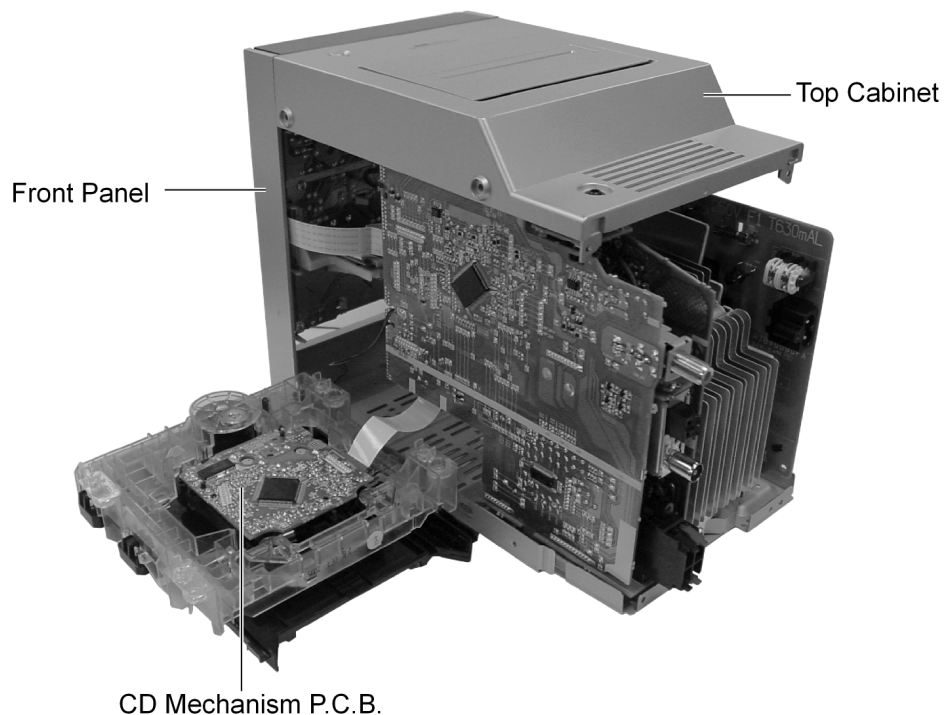

11.6. Checking and Repairing of Speaker Terminal P.C.B.

1. Remove Side Panel L/R

Remove 10 screws on L/R side

Remove L/R side panel

2. Disassemble Top Cabinet

Flip top cabinet sideways

Disconnect CN504A and CN804 (Main P.C.B. connector)

3. Disassemble Rear Panel

Remove 5 screws

Remove 1 nut

Remove the Rear Panel

4. Disassemble Power P.C.B.

Remove 1 screw from Power P.C.B.

5. Disassemble Speaker Terminal P.C.B.

Remove 1 screw from (Speaker Terminal P.C.B.)


Flip the Main P.C.B., Power P.C.B. and
Speaker Terminal P.C.B. together

6. Connect Top Cabinet.

Top Cabinet:

Connect 4P cable WH504 to CN504A

Connect 19P FFC cable CN1303 to CN804

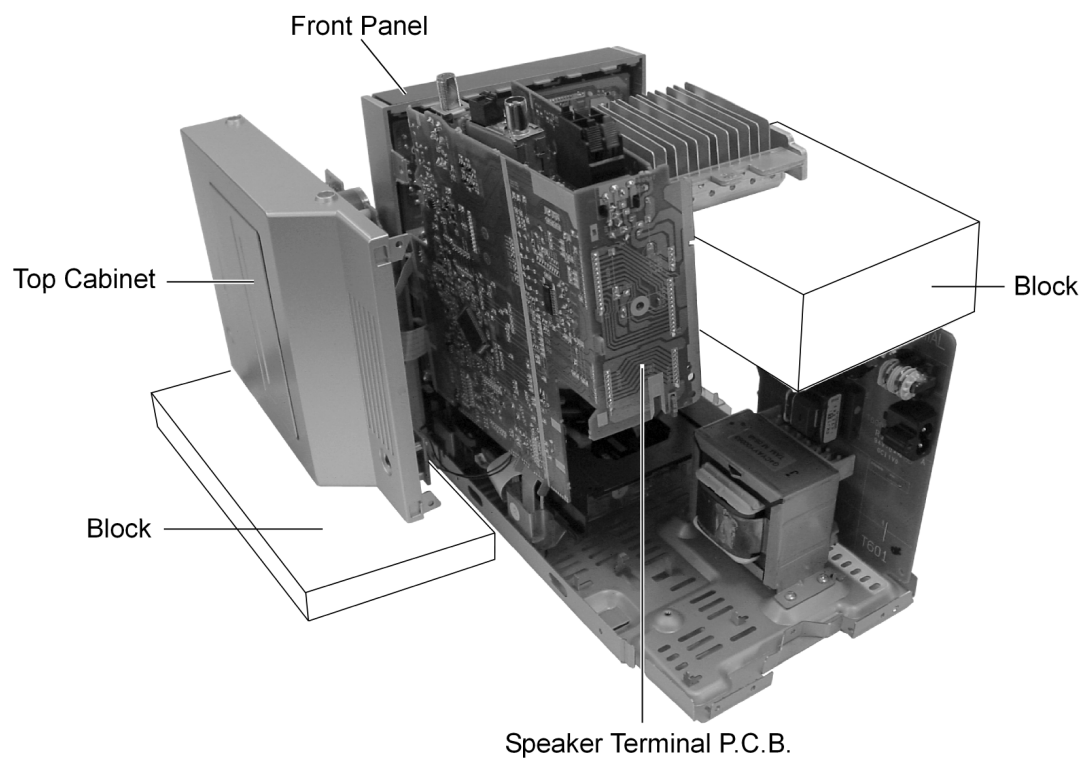

11.7. Checking and Repairing of Power P.C.B.

1. Remove Side Panel L/R

Remove 10 screws on L/R side

Remove L/R side panel



2. Disassemble Top Cabinet

Lift up the Top Cabinet

Disconnect CN504A and CN804 (Main P.C.B. connector)



3. Disassemble Rear Panel

Remove 5 screws

Remove 1 nut

Remove the Rear Panel

4. Disassemble Main P.C.B.

Disconnect CN803B and CN808B




5. Connect Top Cabinet and Main P.C.B.

Main P.C.B.:

Connect Extension P.C.B. (RFKZPM33E) CN803A and CN808A to CN803B and CN808B

Top Cabinet:

Connect 4P cable WH504 to CN504A
Connect 19P FFC cable CN1303 to CN804

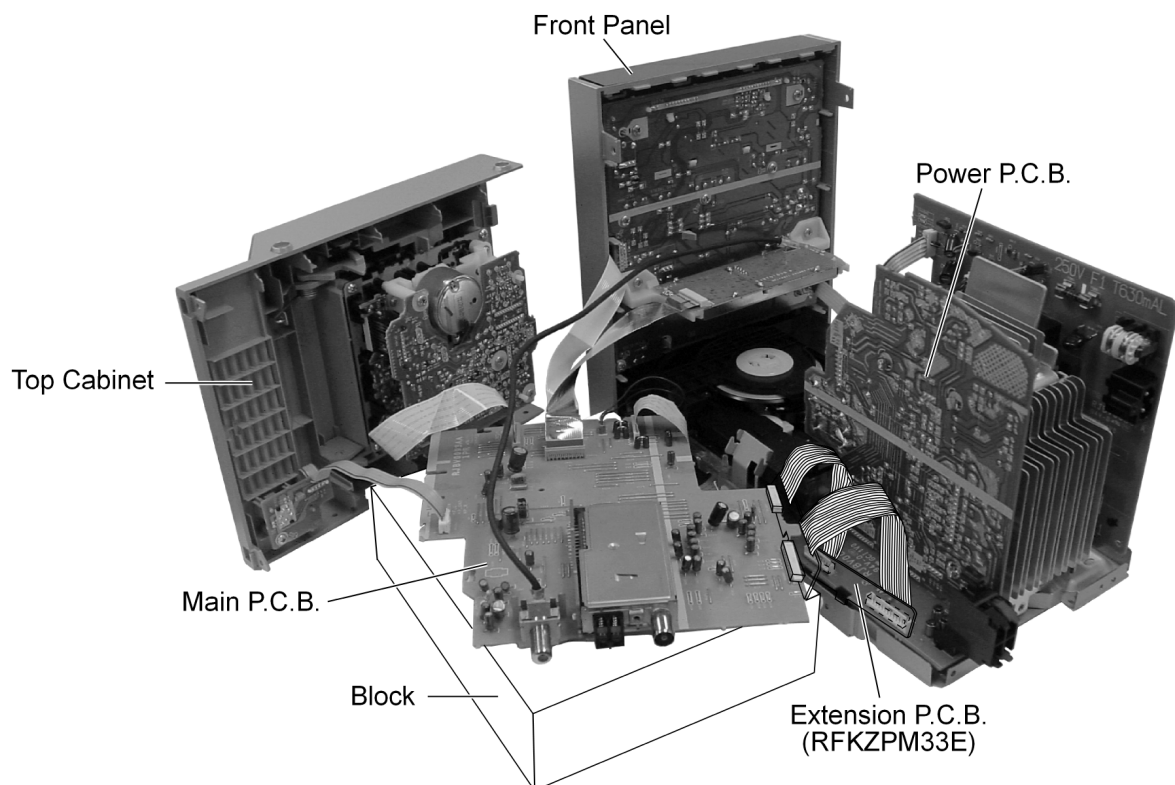

12 Procedure for Checking Operation of Individual Parts of Deck Mechanism Unit

12.1. Operation Check with Cassette Tape

1. Pull up the EJECT lever using a rubber band. (Fig. 6)
2. Supply DC5V to MOTOR. (→ MOTOR rotates.) (Fig. 5)
3. Insert a cassette tape to the unit.
4. Supply DC9V to the plunger, and turn the power ON and OFF. (→ Power +PL, -PL) (Fig. 5)
 - a. FWD PLAY: Supply the plunger power in a flash. (ON: approx. 5msec)
 - b. FWD FF: Supply the plunger power in a flash at PLAY mode. (ON: approx. 5msec)
 - c. STOP: Supply the plunger power in a flash at FWD FF mode. (ON: approx. 5msec)
 - d. REV PLAY: Supply the plunger power in a normal timing at STOP mode. (ON: approx. 200msec)
 - e. REV REW: Supply the plunger power in a flash at REV PLAY mode. (ON: approx. 50msec)
 - f. STOP: Supply the plunger power in a flash at FF mode. (ON: approx. 50msec)

Repeat the operation (→ FWD PLAY)

(Note) Other operation may start if a timing of supplying the plunger power is missed.

12.1.1. Connection Status between Mechanism and Power Supply (Motor, Plunger)

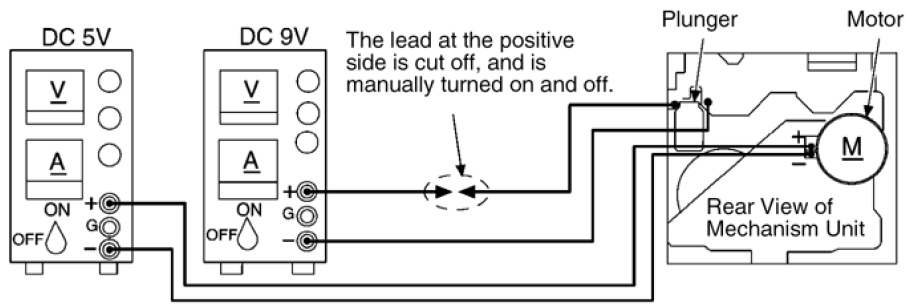


Fig. 5

12.1.2. Operative Parts of Deck Mechanism Unit (EJECT lever fitted with rubber band, Plunger/Rib operation)

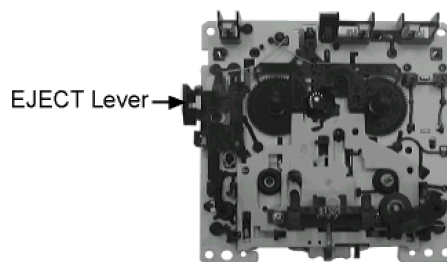


Fig. 6

12.2. Operation Check without Cassette Tape

1. Pull up the EJECT lever using a rubber band. (Fig. 6)
2. Supply DC5V to MOTOR. (→ MOTOR rotates.)
3. Lift up the mechanism unit's plunger/rib with the tip of a negative screwdriver, and operate the unit in the same timing as supplying the power. (Fig. 7)

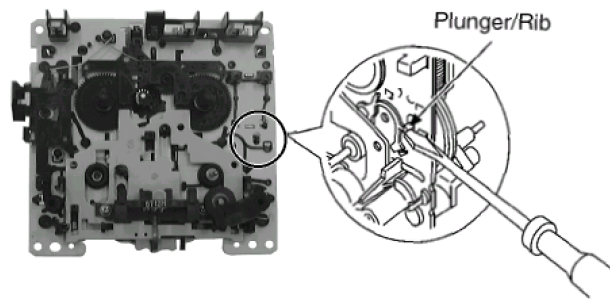


Fig. 7

13 Measurement And Adjustments

13.1. Cassette Deck Section

13.1.1. Requirements

- Test tape (QZZCFM) (QZZCWAT)
- Normal blank cassette tape (QZZCRA)
- Digital frequency counter
- Oscilloscope
- Electrical voltmeter
- Headphone jack output jig (Fig. 8)

13.1.2. Setting of Unit

- VOLUME: MAX

13.1.3. Preparations

1. Apply under [9. Assembling and Disassembling].
2. Remove 4 screws from the mechanism unit to disassemble. under [9. Assembling and Disassembling].
3. Connect the headphone jack output jig (Fig. 8) to headphone jack.

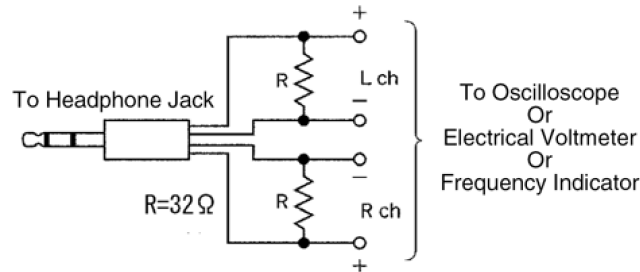


Fig. 8

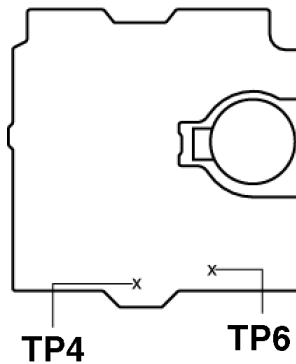


Fig. 9

13.1.4. Tape Speed Adjustment

- Normal speed adjustment (only during forward playback)
- (Product reference value: 3,000±90Hz)

1. Connect a frequency indicator. (Fig. 10)
 2. Playback the middle portion of the test tape (QZZCWAT).
 3. Adjust the motor screw so that the following output level is produced. (Fig. 11)
- Adjustment Range: 3,000 ± 90Hz (a constant speed)




Fig. 10



Fig. 11

13.1.5. Bias Voltage Check

1. Connect an electrical voltmeter. (Fig. 12) (Refer to Fig. 9 for location of test points)
2. Set the function to "TAPE" position.
3. Insert a normal blank cassette tape (QZZCRA).
4. While pressing and holding down [REC (●/■)] button, press [TAPE (▶)] button to pause the recording mode. (Repeat pressing the buttons till the recording pause mode is activated.)
5. Check that the output level is within the standard range.

Standard Range: $16 \pm 3\text{mV}$

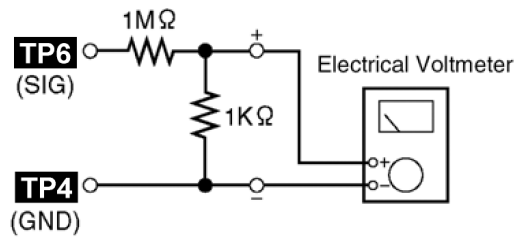


Fig. 12

13.1.6. Bias Frequency Check

1. Connect a digital frequency counter (Fig. 13).
2. Set the function to "TAPE" position.
3. Insert a normal blank cassette tape (QZZCRA) and press "REC" mode on main unit.
4. Check that the output frequency is within the standard range.

Standard Value: $98 \pm 8\text{ kHz}$

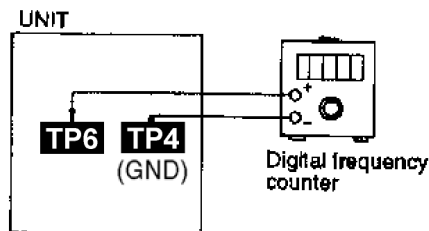


Fig. 13

14 Voltage Measurement and Waveform Chart

Note:

- Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard.
- Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.
- Circuit voltage and waveform described herein shall be regarded as reference information when probing defect point because it may differ from actual measuring value due to difference of Measuring instrument and its measuring condition and product itself.

14.1. Voltage Measurement

14.1.1. CD Servo P.C.B.

CD SERVO P.C.B																				
Ref No.	IC7001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CD PLAY	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1.3	3.3
STANDBY	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.2	0.2	0	0	0.3
Ref No.	IC7001																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
CD PLAY	1.6	0	1.6	0	1.8	0	3.3	1.5	3.3	3.3	0	0	1.6	1.6	1.6	2	2	1.4	1.8	1.8
STANDBY	0	0	0	0	0	0	0.4	0	0.2	0.2	0	0	0.2	0	0	0	0.2	0.2	0.2	0.2
Ref No.	IC7001																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
CD PLAY	0.2	2.4	0	1.8	1.2	1.8	3.3	1.2	1.2	1.2	1.7	1.9	0.8	1.5	1.4	0	0	3	1.5	0
STANDBY	0	0.3	0	0	0.2	0.1	0.3	0.4	0.2	0.2	0.1	0.1	0.3	0	0	0	0	0.4	0	0
Ref No.	IC7001																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
CD PLAY	3.3	0	0	0	0	0	3.1	3.1	3.1	2.5	0	3.1	0	1.6	0	1.5	3.3	0	3.3	1.6
STANDBY	0.2	0.2	0.2	0.2	0.2	0.2	0	0	0	0	0	0	0.2	0.3	0.3	0	0.2	0	0.2	0.1
Ref No.	IC7001																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
CD PLAY	1.6	2.3	0	0	0	0	0	0	0	0	0	0	3.3	0	0	0	0	0	0	0
STANDBY	0.1	0.2	0	0	0	0	0	0	0	0	0	0	0.3	0	0	0	0	0	0	0
Ref No.	IC7002																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CD PLAY	1.6	0	1.6	0	0	0	0	0	0	7.5	4.2	3.5	3.5	3.5	0	3.3	0	3.8	7.5	0
STANDBY	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Ref No.	IC7002																			
MODE	21	22	23	24	25	26	27	28												
CD PLAY	0	7.5	0	0	7.5	0	1.6	0												
STANDBY	0	0	0	0	0	0	0	0												
Ref No.	Q7601																			
MODE	E	C	B																	
CD PLAY	3.3	2.4	2.4																	
STANDBY	0.3	0	0.3																	

14.1.2. Main P.C.B.

MAIN P.C.B																				
Ref No.	IC401																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CD PLAY	0	0	0	0	0	0	3.1	0	0	1.3	0.7	3.1	1.5	0	1.4	3.1	3.1	3.1	0	1.8
STANDBY	0	0	0	0	0	0	3.1	0	0	0.4	0.7	3.1	1.5	0	1.4	0	3.1	3.1	0	1.8
Ref No.	IC401																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
CD PLAY	3.1	0	0	0	0	0.8	3.1	2.2	0	0.5	0	0	0	0	0	0	0	0	2.9	2
STANDBY	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Ref No.	IC401																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
CD PLAY	0	0	3.1	0	0	0	0	1.8	3.1	0	0.1	1.3	0	0	0	1.4	3.1	0	0	0
STANDBY	0	0	0	0	0	0	0	0	0	0	0	2.1	0	0	0	0.1	0	0	0	0
Ref No.	IC401																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
CD PLAY	1.4	3.1	0	0	0	0	0	0	3.1	3.1	0	3.1	0	0	0	0	0	0	0	3.1
STANDBY	0.1	3.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0	0
Ref No.	IC401																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
CD PLAY	0	0	0	0	1.4	0	0	0	3.1	0	0	3.1	3.1	3.1	0	0	3.1	3.1	3.1	1.5
STANDBY	0	0.1	0.1	0	0	0	0	0	0	0	3.1	3.1	3.1	3.1	2.5	0	3.1	3.1	3.1	1.6
Ref No.	IC700																			
MODE	1	2	3	4	5	6	7	8												
CD PLAY	4.8	4.8	4.6	0	4.5	4.8	4.8	9												
STANDBY	0	0	0	0	0	0	0	0												
Ref No.	IC800																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CD PLAY	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	0	0	0	8.8	8.8
STANDBY	0.4	0.4	0.3	0	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0	0	0	0	0.3	0.3
Ref No.	IC800																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32								
CD PLAY	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5								
STANDBY	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3								
Ref No.	IC801																			
MODE	1	2	3																	
CD PLAY	5.7	0	3.9																	
STANDBY	5.8	0	3.9																	
Ref No.	IC802																			
MODE	1	2	3	4	5															
CD PLAY	0	0	4.8	0	3.3															
STANDBY	0	0	0	0	0.2															
Ref No.	IC804																			
MODE	1	2	3	4	5	6	7	8												
CD PLAY	0	3.1	0	0	0	0	0	0												
STANDBY	0	3.1	0	0	0	0	0	0												
Ref No.	Q221				Q222				Q421				Q422				Q750			
MODE	E	C	B		E	C	B		E	C	B		E	C	B		E	C	B	
CD PLAY	0	0	0.3		0	0	0.3		0	0	0.3		0	0	0.3		9.6	0.3	9.7	
STANDBY	0	0	0		0	0	0		0	0	0		0	0	0		0	0	0	
Ref No.	Q751				Q800				Q801				Q802				Q803			
MODE	E	C	B		E	C	B		E	C	B		E	C	B		E	C	B	
CD PLAY	0	9.7	0		0	3.1	0		0	4.8	0		4.8	0	4.8		0	0	3.1	
STANDBY	0	0	0		0	3.1	0		0	0	0		0	0	0		0	0	0	
Ref No.	Q807				Q808															
MODE	E	C	B		E	C	B													
CD PLAY	0	2.1	0		0	2.1	0													
STANDBY	0	0	0		0	0	0													

14.1.3. Panel P.C.B.

PANEL P.C.B																				
Ref No.	IC900																			
MODE	1	2	3	4	5															
CD PLAY	4.8	0	4.8	0	3.3															
STANDBY	0.1	0	0.1	0	0.2															

14.1.4. Power P.C.B.

POWER P.C.B																				
Ref No.	IC300																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12								
CD PLAY	12.4	5.7	0	3.8	3	0	0	0	4.2	5.7	0	5.7								
STANDBY	0	0.2	0	0.2	0	0	0	0	0	0.2	0	0.2								
Ref No.	Q500				Q501				Q503				Q504				Q505			
MODE	E	C	B		E	C	B		E	C	B		E	C	B		E	C	B	
CD PLAY	12.4	11.4	12.4		4.6	11.6	5.6		12.3	9.7	11.6		5	9.1	5.6		4.8	7.5	5.5	
STANDBY	2.8	2.4	2.8		2.4	2.5	3.2		2.9	0.2	2.5		2.4	0	0		0	0	0	
Ref No.	Q507				Q530															
MODE	E	C	B		E	C	B													
CD PLAY	7.5	9.7	8.2		8.8	9.1	9.5													
STANDBY	0	0.1	0.1		0	0	0													

14.1.5. Transformer P.C.B.

TRANSFORMER P.C.B																				
Ref No.	Q600				Q601				Q602				Q603							
MODE	E	C	B		E	C	B		E	C	B		E	C	B					
CD PLAY	0	0.2	0.8		5.7	13.8	6.4		0	1.7	2.8		31.2	32.2	31.8					
STANDBY	0	5.7	0		5.7	13.8	6.4		0	1.7	2.6		0	0.4	0.4					


14.1.6. Deck P.C.B.










DECK P.C.B																				
Ref No.	IC1000																			
MODE	1	2	3	4	5															
CD PLAY	6.2	0	0	0	0															
STANDBY	0.1	0	0	0	0															
Ref No.	IC1001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CD PLAY	0	0.7	5.1	4.3	0	4.8	0	0.2	0	6	0	8.9	0	0	0.2	0	3.6	0.2	4.3	5.1
STANDBY	0	0.6	0.5	0.3	0	0.9	0	0.1	0	0.1	0	0.1	0	0	0.1	0	0.1	0	0.2	0.5
Ref No.	IC1001																			
MODE	21	22																		
CD PLAY	0.1	0																		
STANDBY	0.5	0																		
Ref No.	Q1101			Q1201			Q1302			Q1303			Q1304							
MODE	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B		
CD PLAY	0	0	0.7		0	0	0.7		1.5	1.3	0		0	6.1	0		6.2	0	6.2	
STANDBY	0	0	0.7		0	0	0.7		0	0	0		0	0.1	0		0.1	0	0.1	
Ref No.	Q1309			Q1310			Q1312			Q1314			Q1315							
MODE	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B		
CD PLAY	0	9.1	0.1		0	9.1	0		0	0	0		9.2	-1.3	9.2		9.2	0	9.2	
STANDBY	0	0.1	0		0	0.1	0		0	0	0		0	0	0.1		0.1	0	0.1	
Ref No.	Q1316			Q1317																
MODE	E	C	B	E	C	B														
CD PLAY	0	8.5	-1.1		0	0	0.1													
STANDBY	0	0	0		0	0	0													

14.1.7. Deck Mechanism P.C.B.


DECK MECHNISM P.C.B																				
Ref No.	IC971																			
MODE	1	2	3	4																
CD PLAY	3	3.1	2	3.1																
STANDBY	3	3.1	2	3.1																

14.2. Waveform

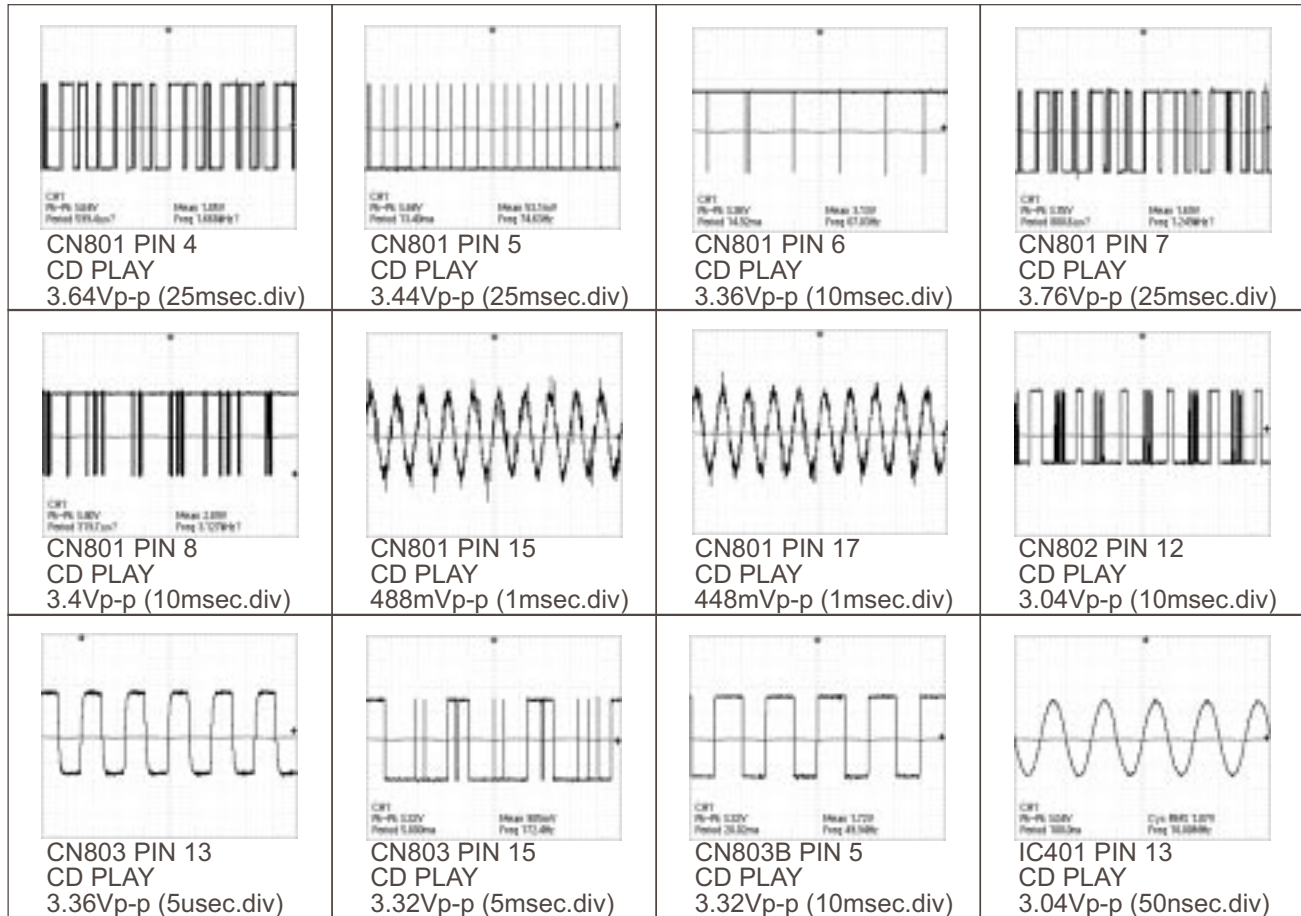



 IC401 PIN 15 CD PLAY 2.16Vp-p (100nsec.div)	 IC401 PIN 19 CD PLAY 3.36Vp-p (10msec.div)	 IC401 PIN 20 CD PLAY 3.12Vp-p (10msec.div)	 IC401 PIN 26 CD PLAY 3.32Vp-p (5msec.div)
 IC401 PIN 28 CD PLAY 3.52Vp-p (5usec.div)	 IC401 PIN 30 CD PLAY 3.32Vp-p (10msec.div)	 IC401 PIN 39 CD PLAY 4.32Vp-p (10msec.div)	 IC401 PIN 42 CD PLAY 3.64Vp-p (10msec.div)
 IC401 PIN 43 CD PLAY 3.4Vp-p (10msec.div)	 IC401 PIN 48 CD PLAY 3.56Vp-p (10msec.div)		

15 Wiring Connection Diagram


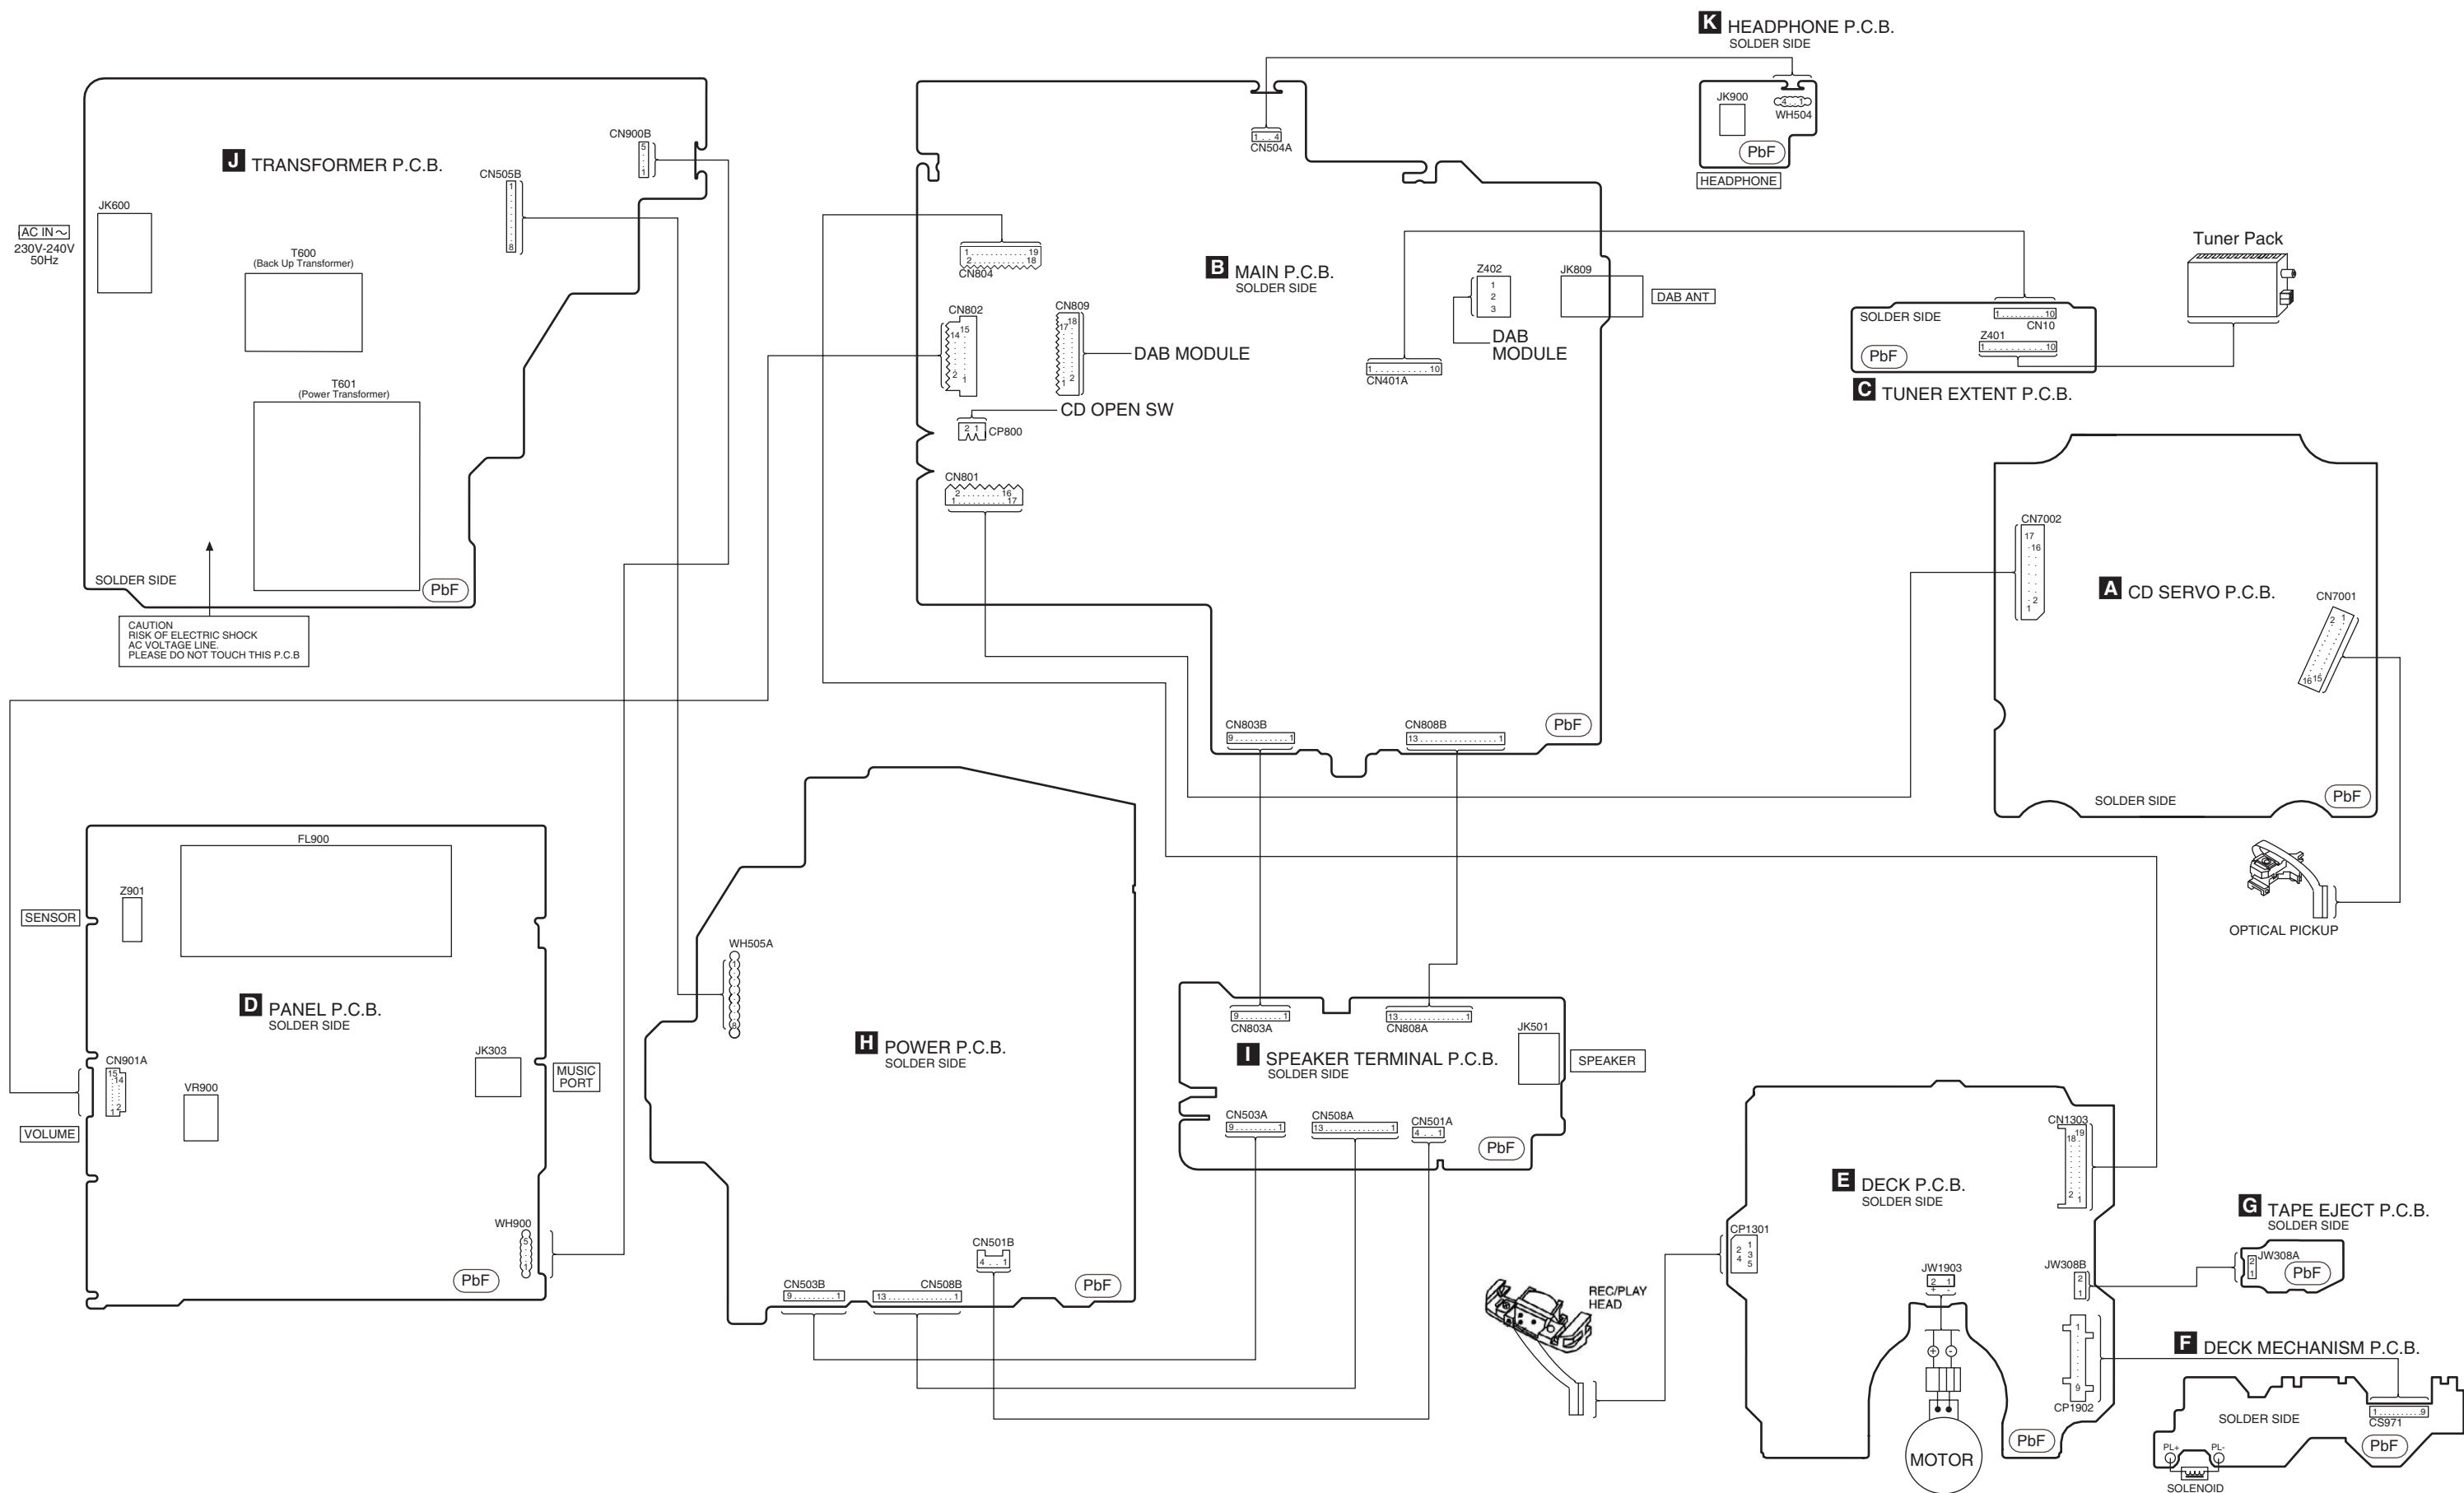


16 Block Diagram

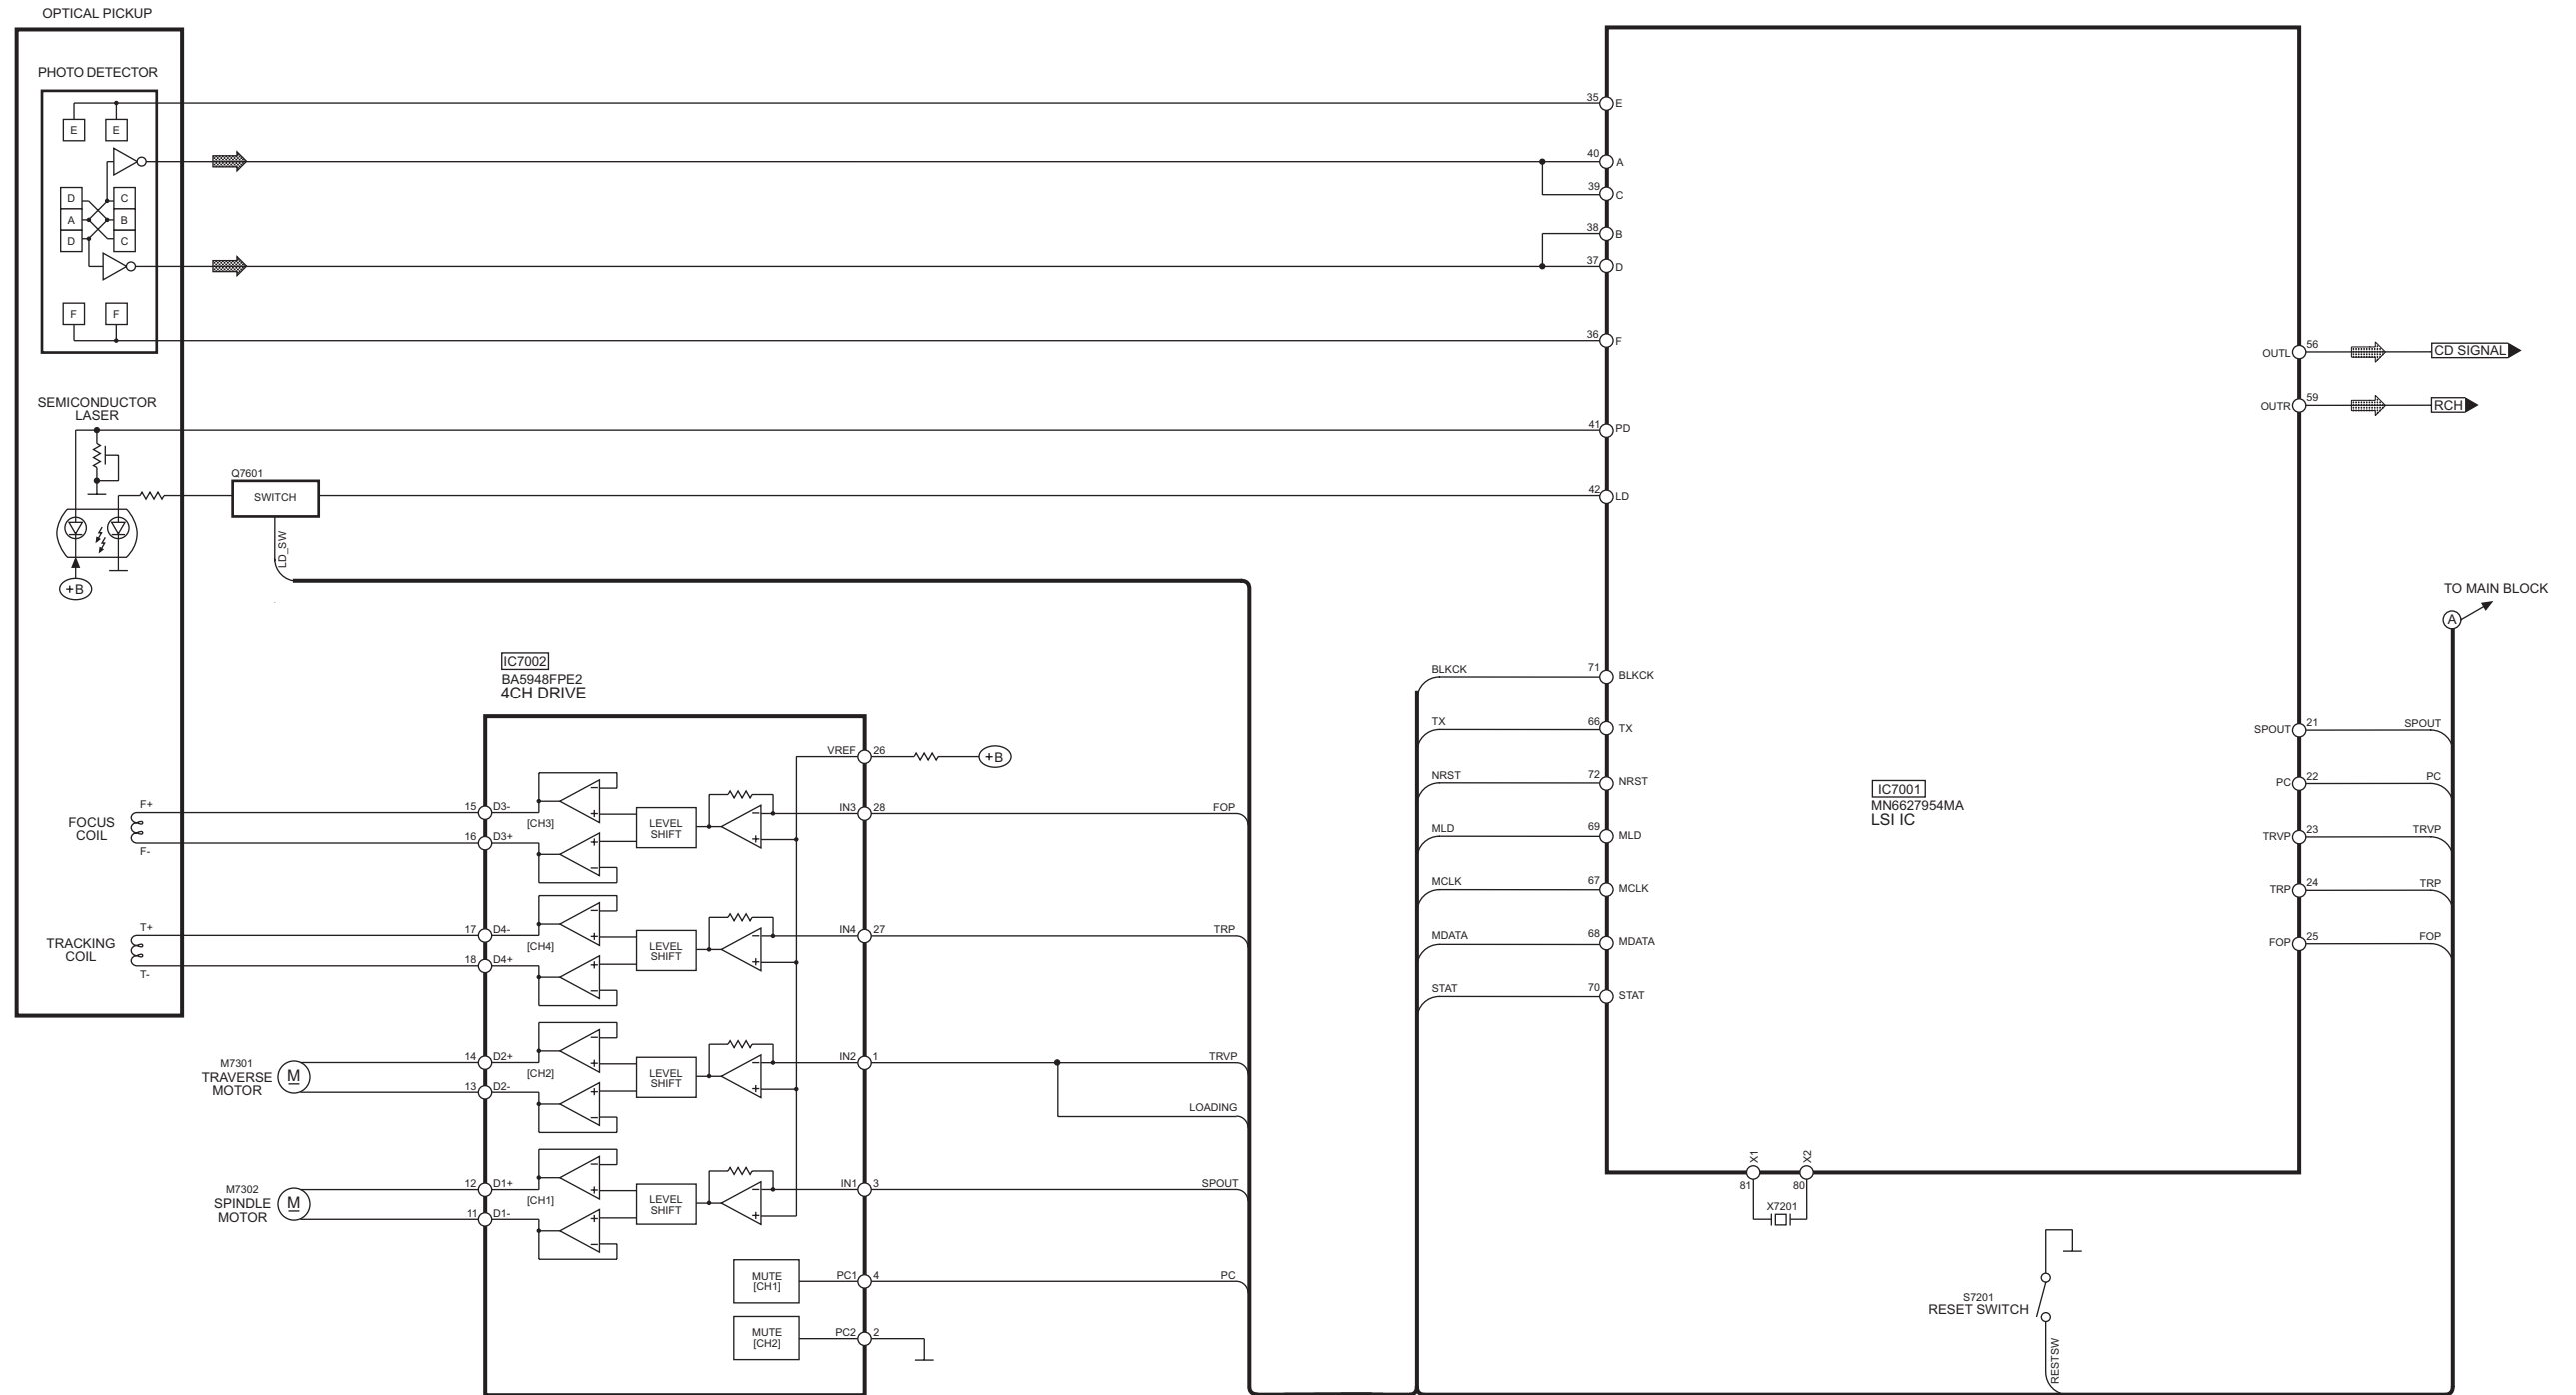

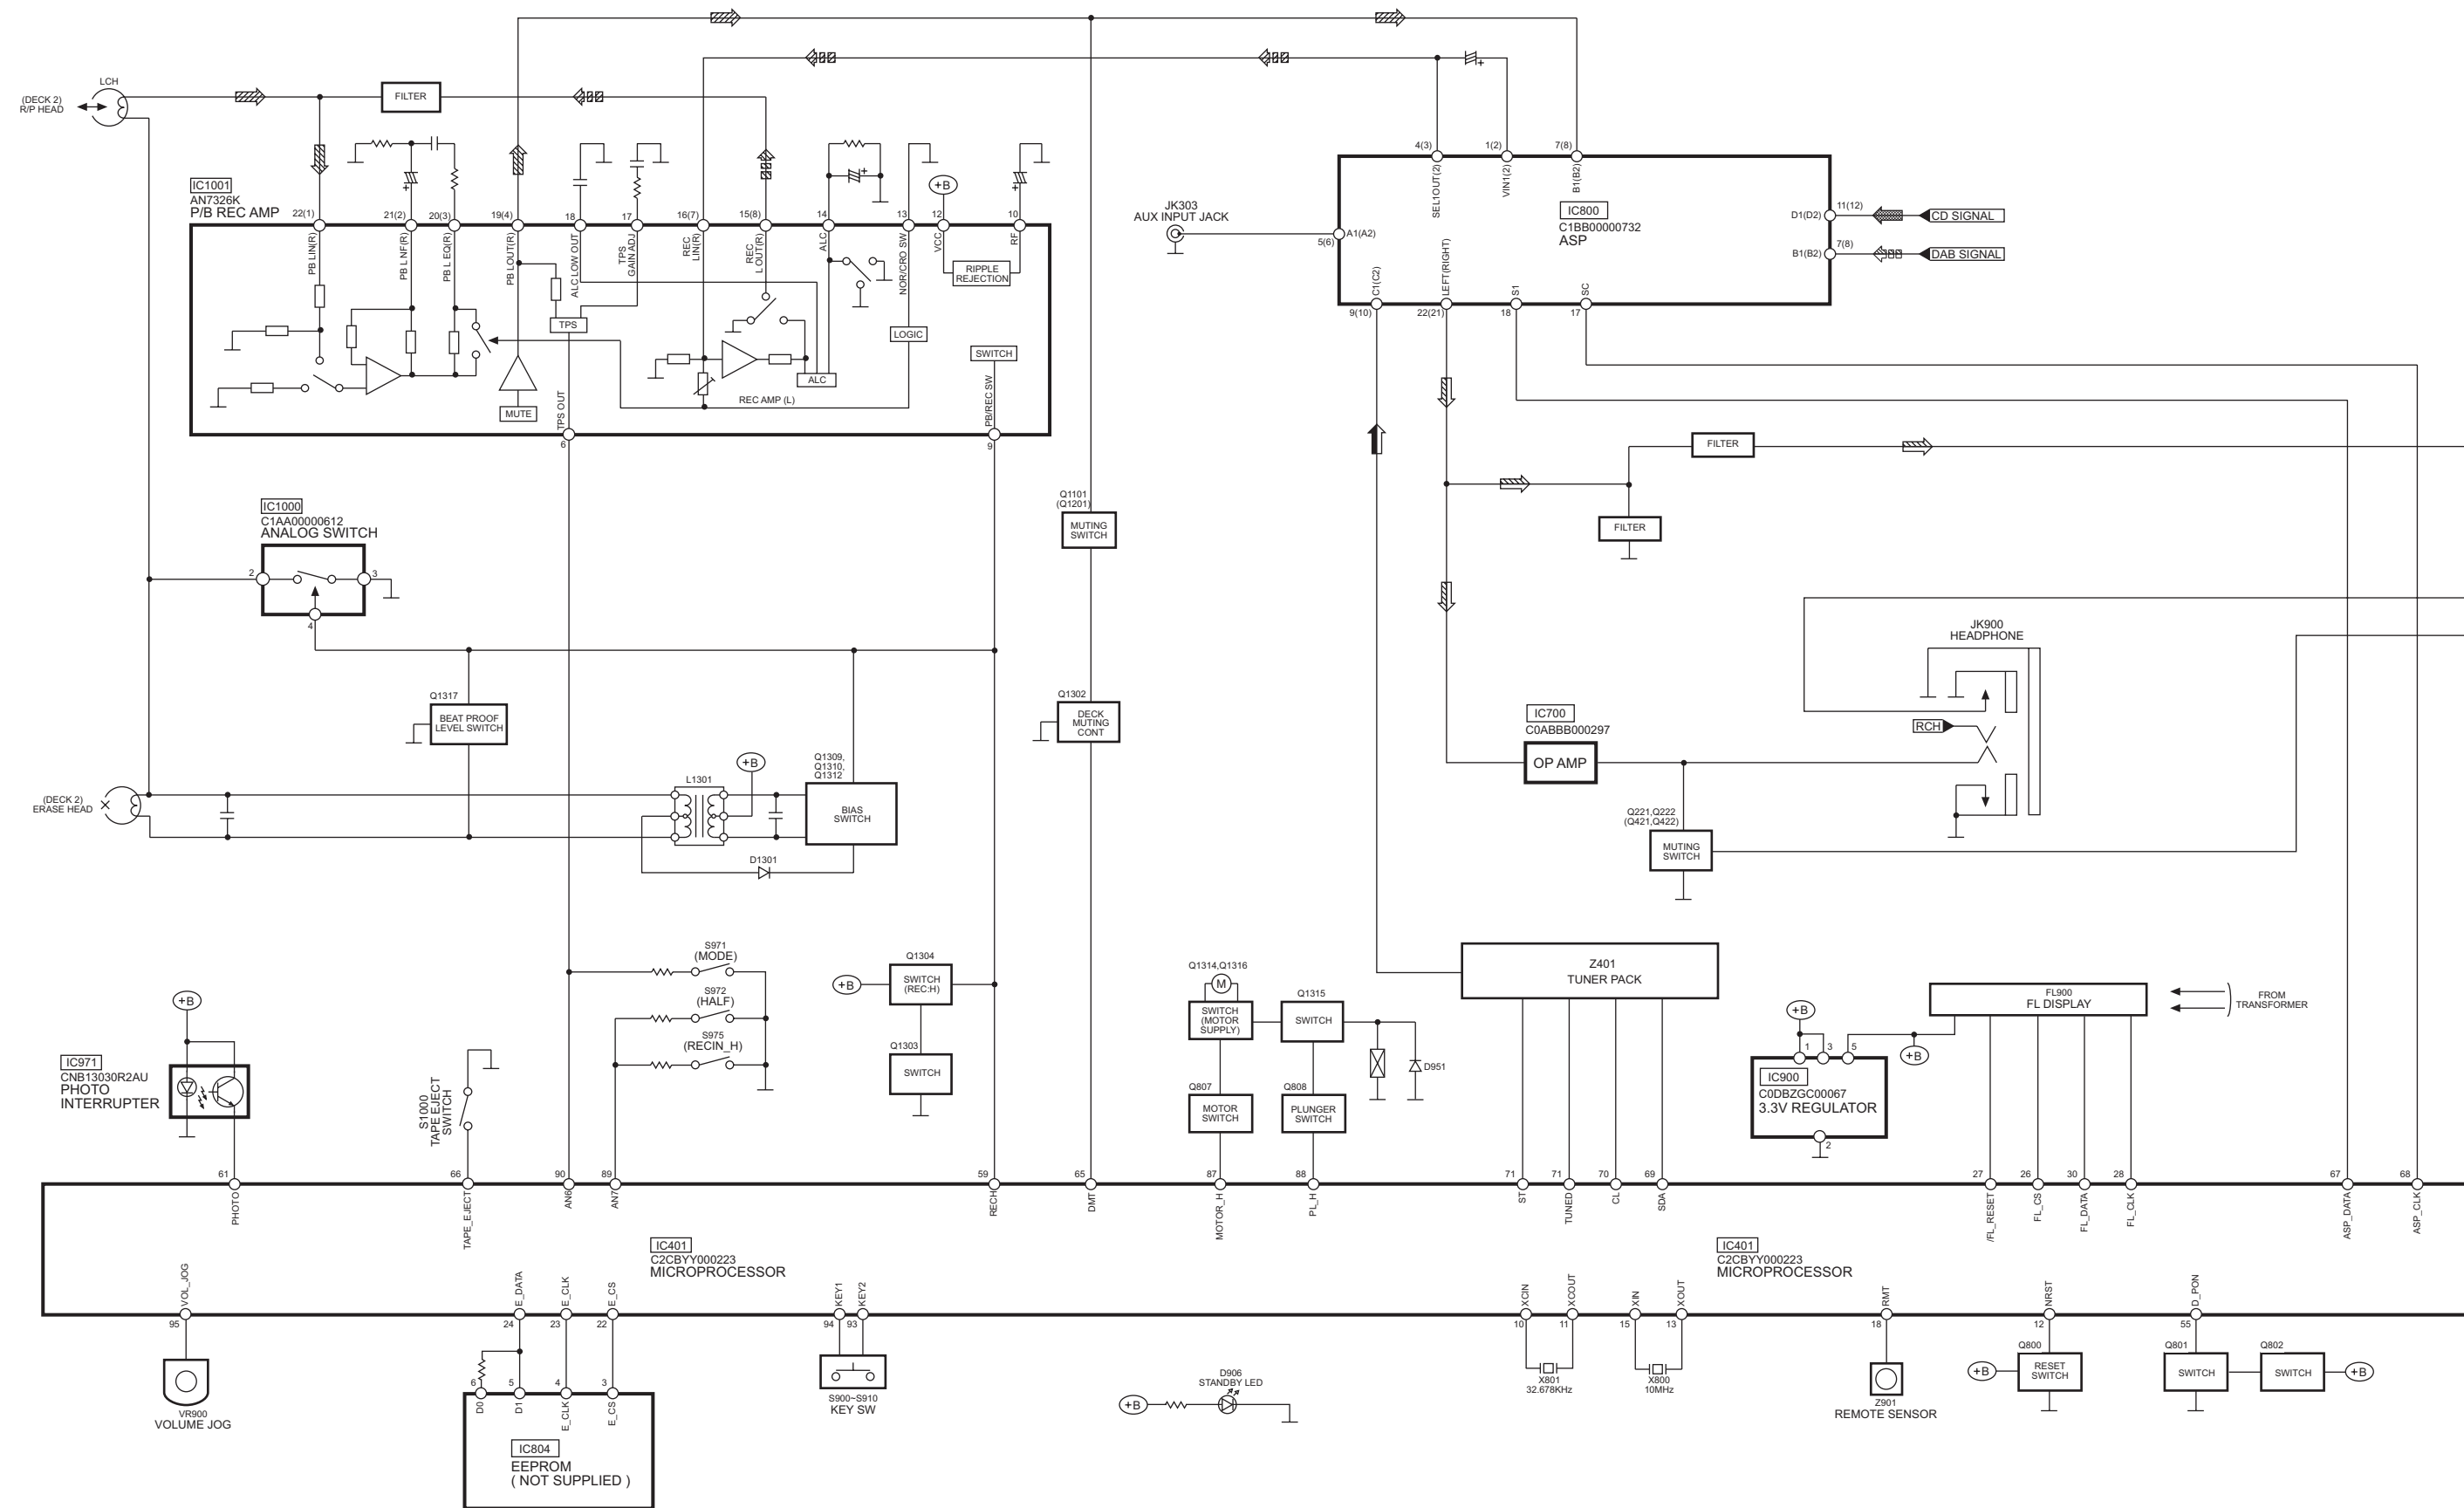

SIGNAL LINES

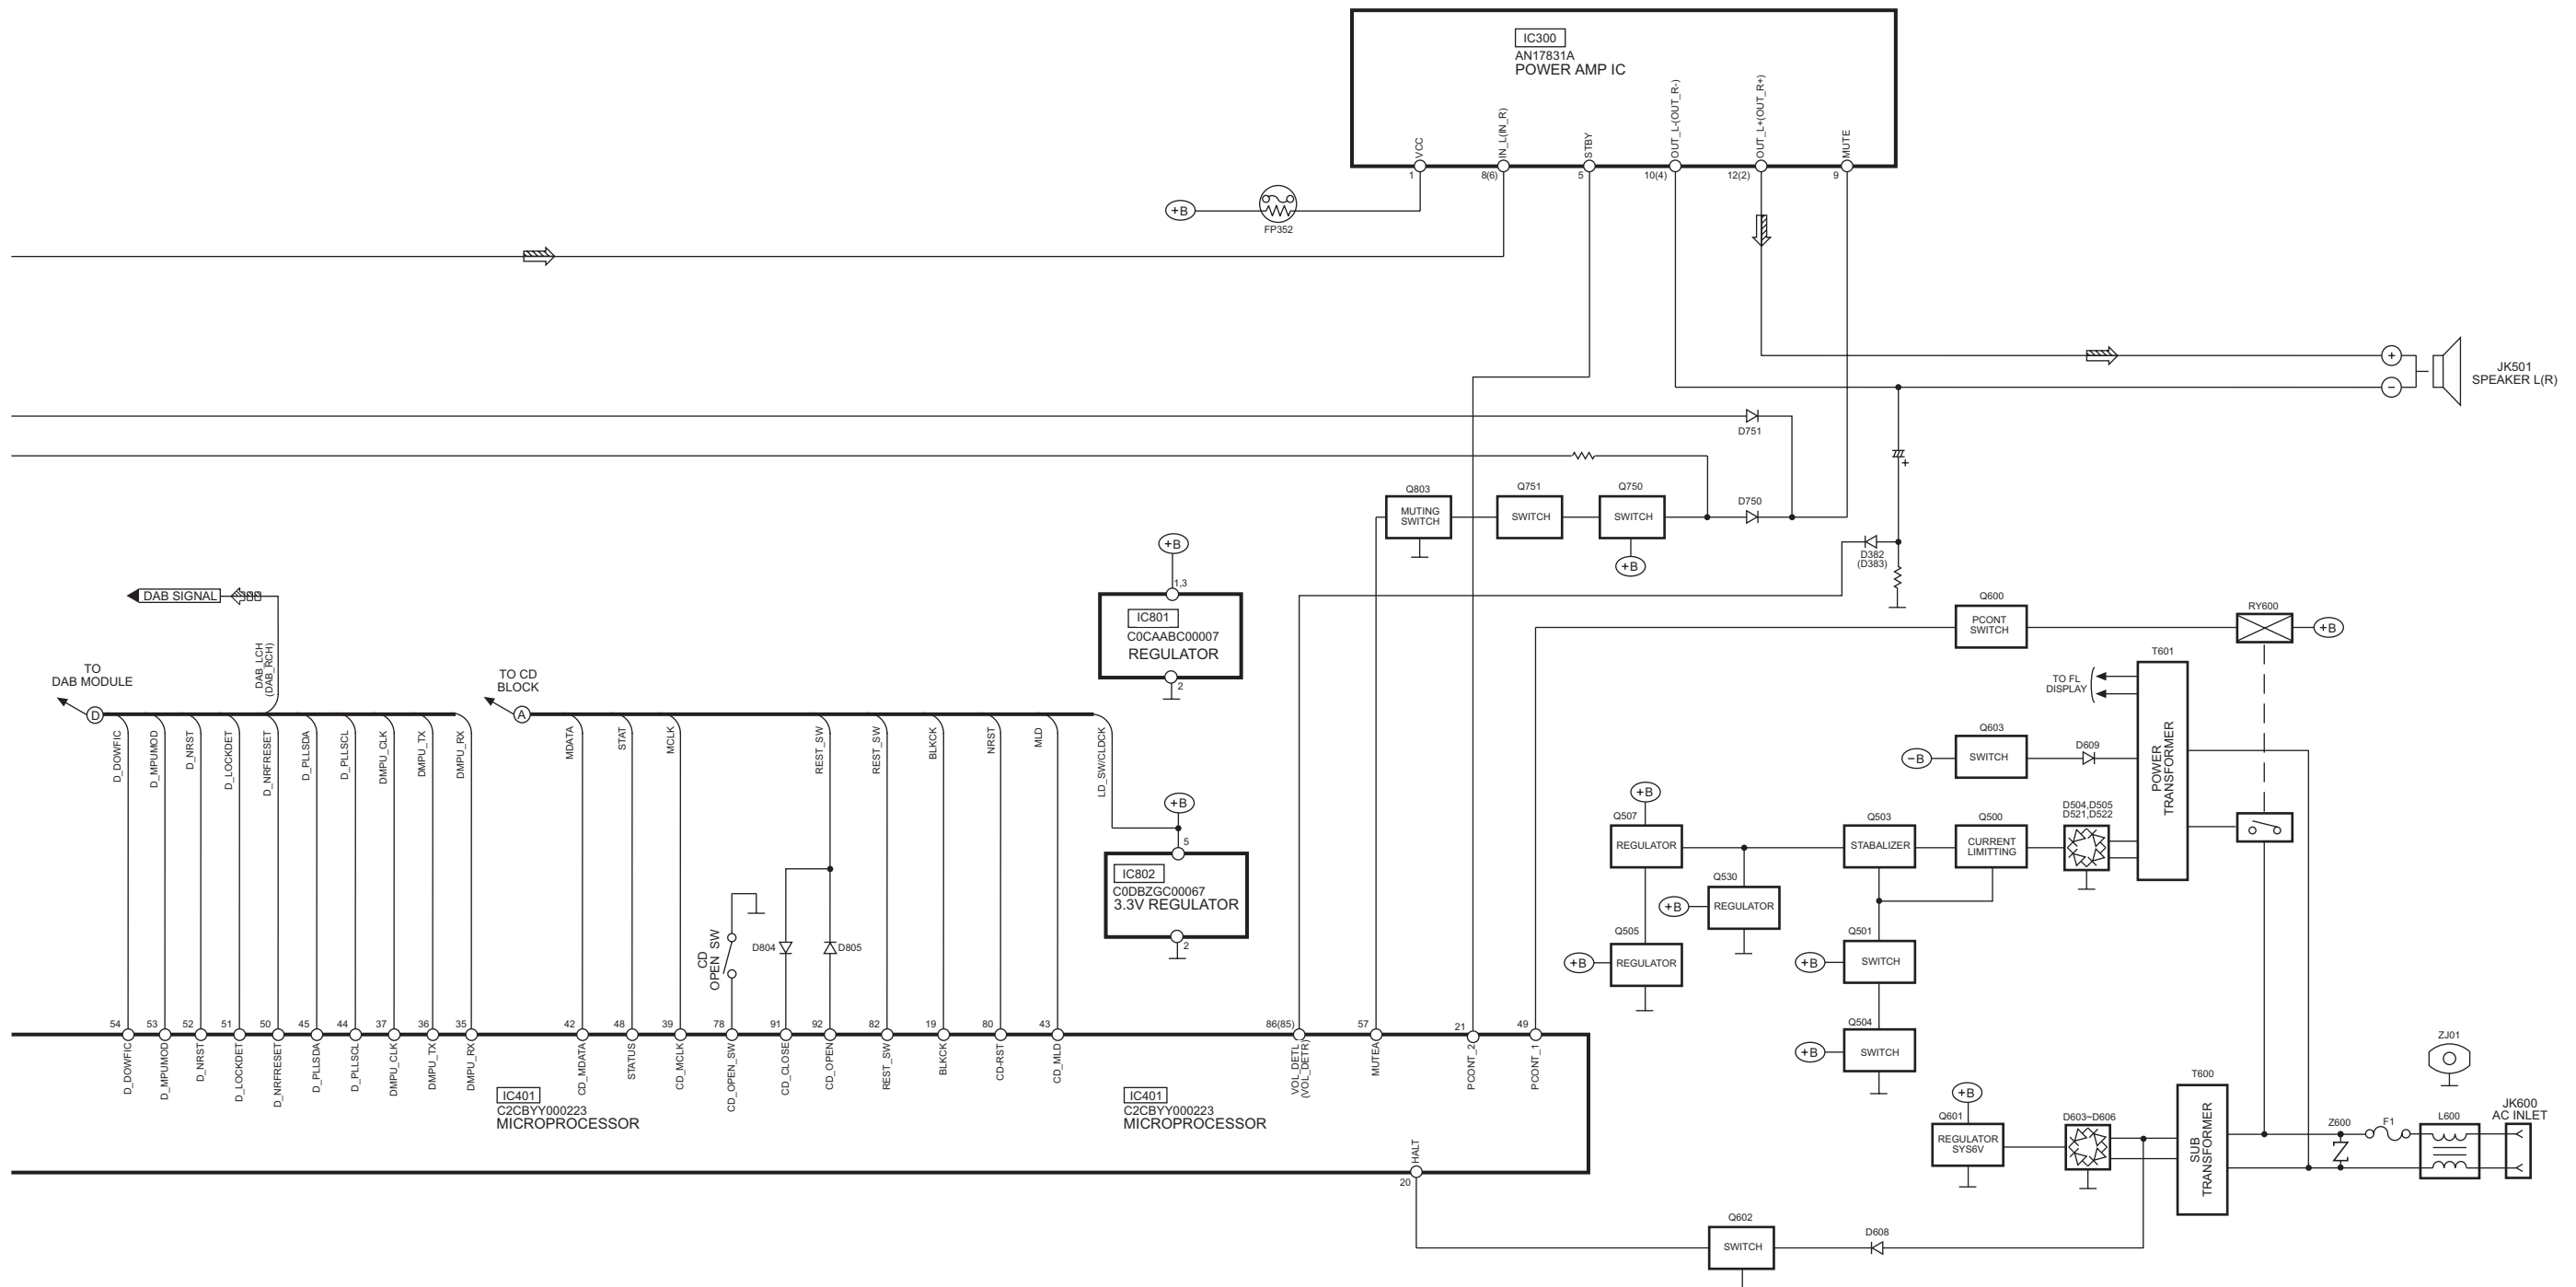

17 Notes of Schematic Diagram

(All schematic diagrams may be modified at any time with the development of new technology)

Note :

S780	CD Open switch
S900	Stop/-Demo switch
S901	CD Play switch
S902	Tape Play switch
S903	Tuner/Band switch
S904	FF switch
S905	REW switch
S906	Power switch
S907	CD Open/Close switch
S908	Bass/Treble switch
S909	Rec switch
S910	Music Port switch
S971	Mode switch
S972	Half switch
S973	CR02 switch
S975	Recinh_F switch
S1000	Tape Eject switch
S7201	Reset switch
VR900	VR Volume Jog

- The voltage value and waveforms are the reference voltage of this unit measured by DC electronic voltmeter (high impedance) and oscilloscope on the basis of chassis. Accordingly, there may arise some error in voltage values and waveforms depending upon the internal impedance of the tester or the measuring unit.

• **Importance safety notice :**

Components identified by  mark have special characteristics important for safety. Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

Caution !

IC, LSI and VLSI are sensitive to static electricity.


Secondary trouble can be prevented by taking care during repair.

- Cover the parts boxes made of plastics with aluminium foil.
- Put a conductive mat on the work table.
- Ground the soldering iron.
- Do not touch the pins of IC, LSI or VLSI with fingers directly.

18 Schematic Diagram

18.1. CD Servo Circuit


OPTICAL PICKUP CIRCUIT

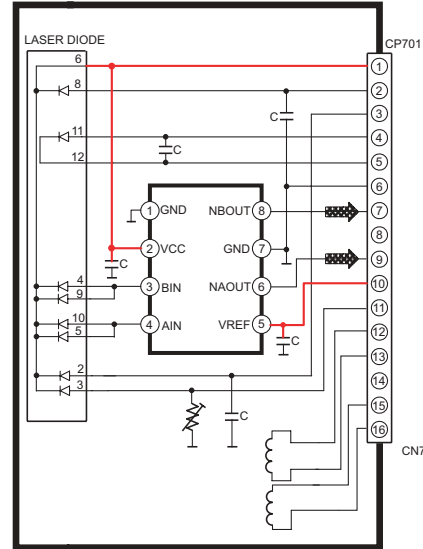

SCHEMATIC DIAGRAM - 1

A CD SERVO CIRCUIT

— : +B SIGNAL LINE : CD-DA SIGNAL LINE : CD SIGNAL LINE

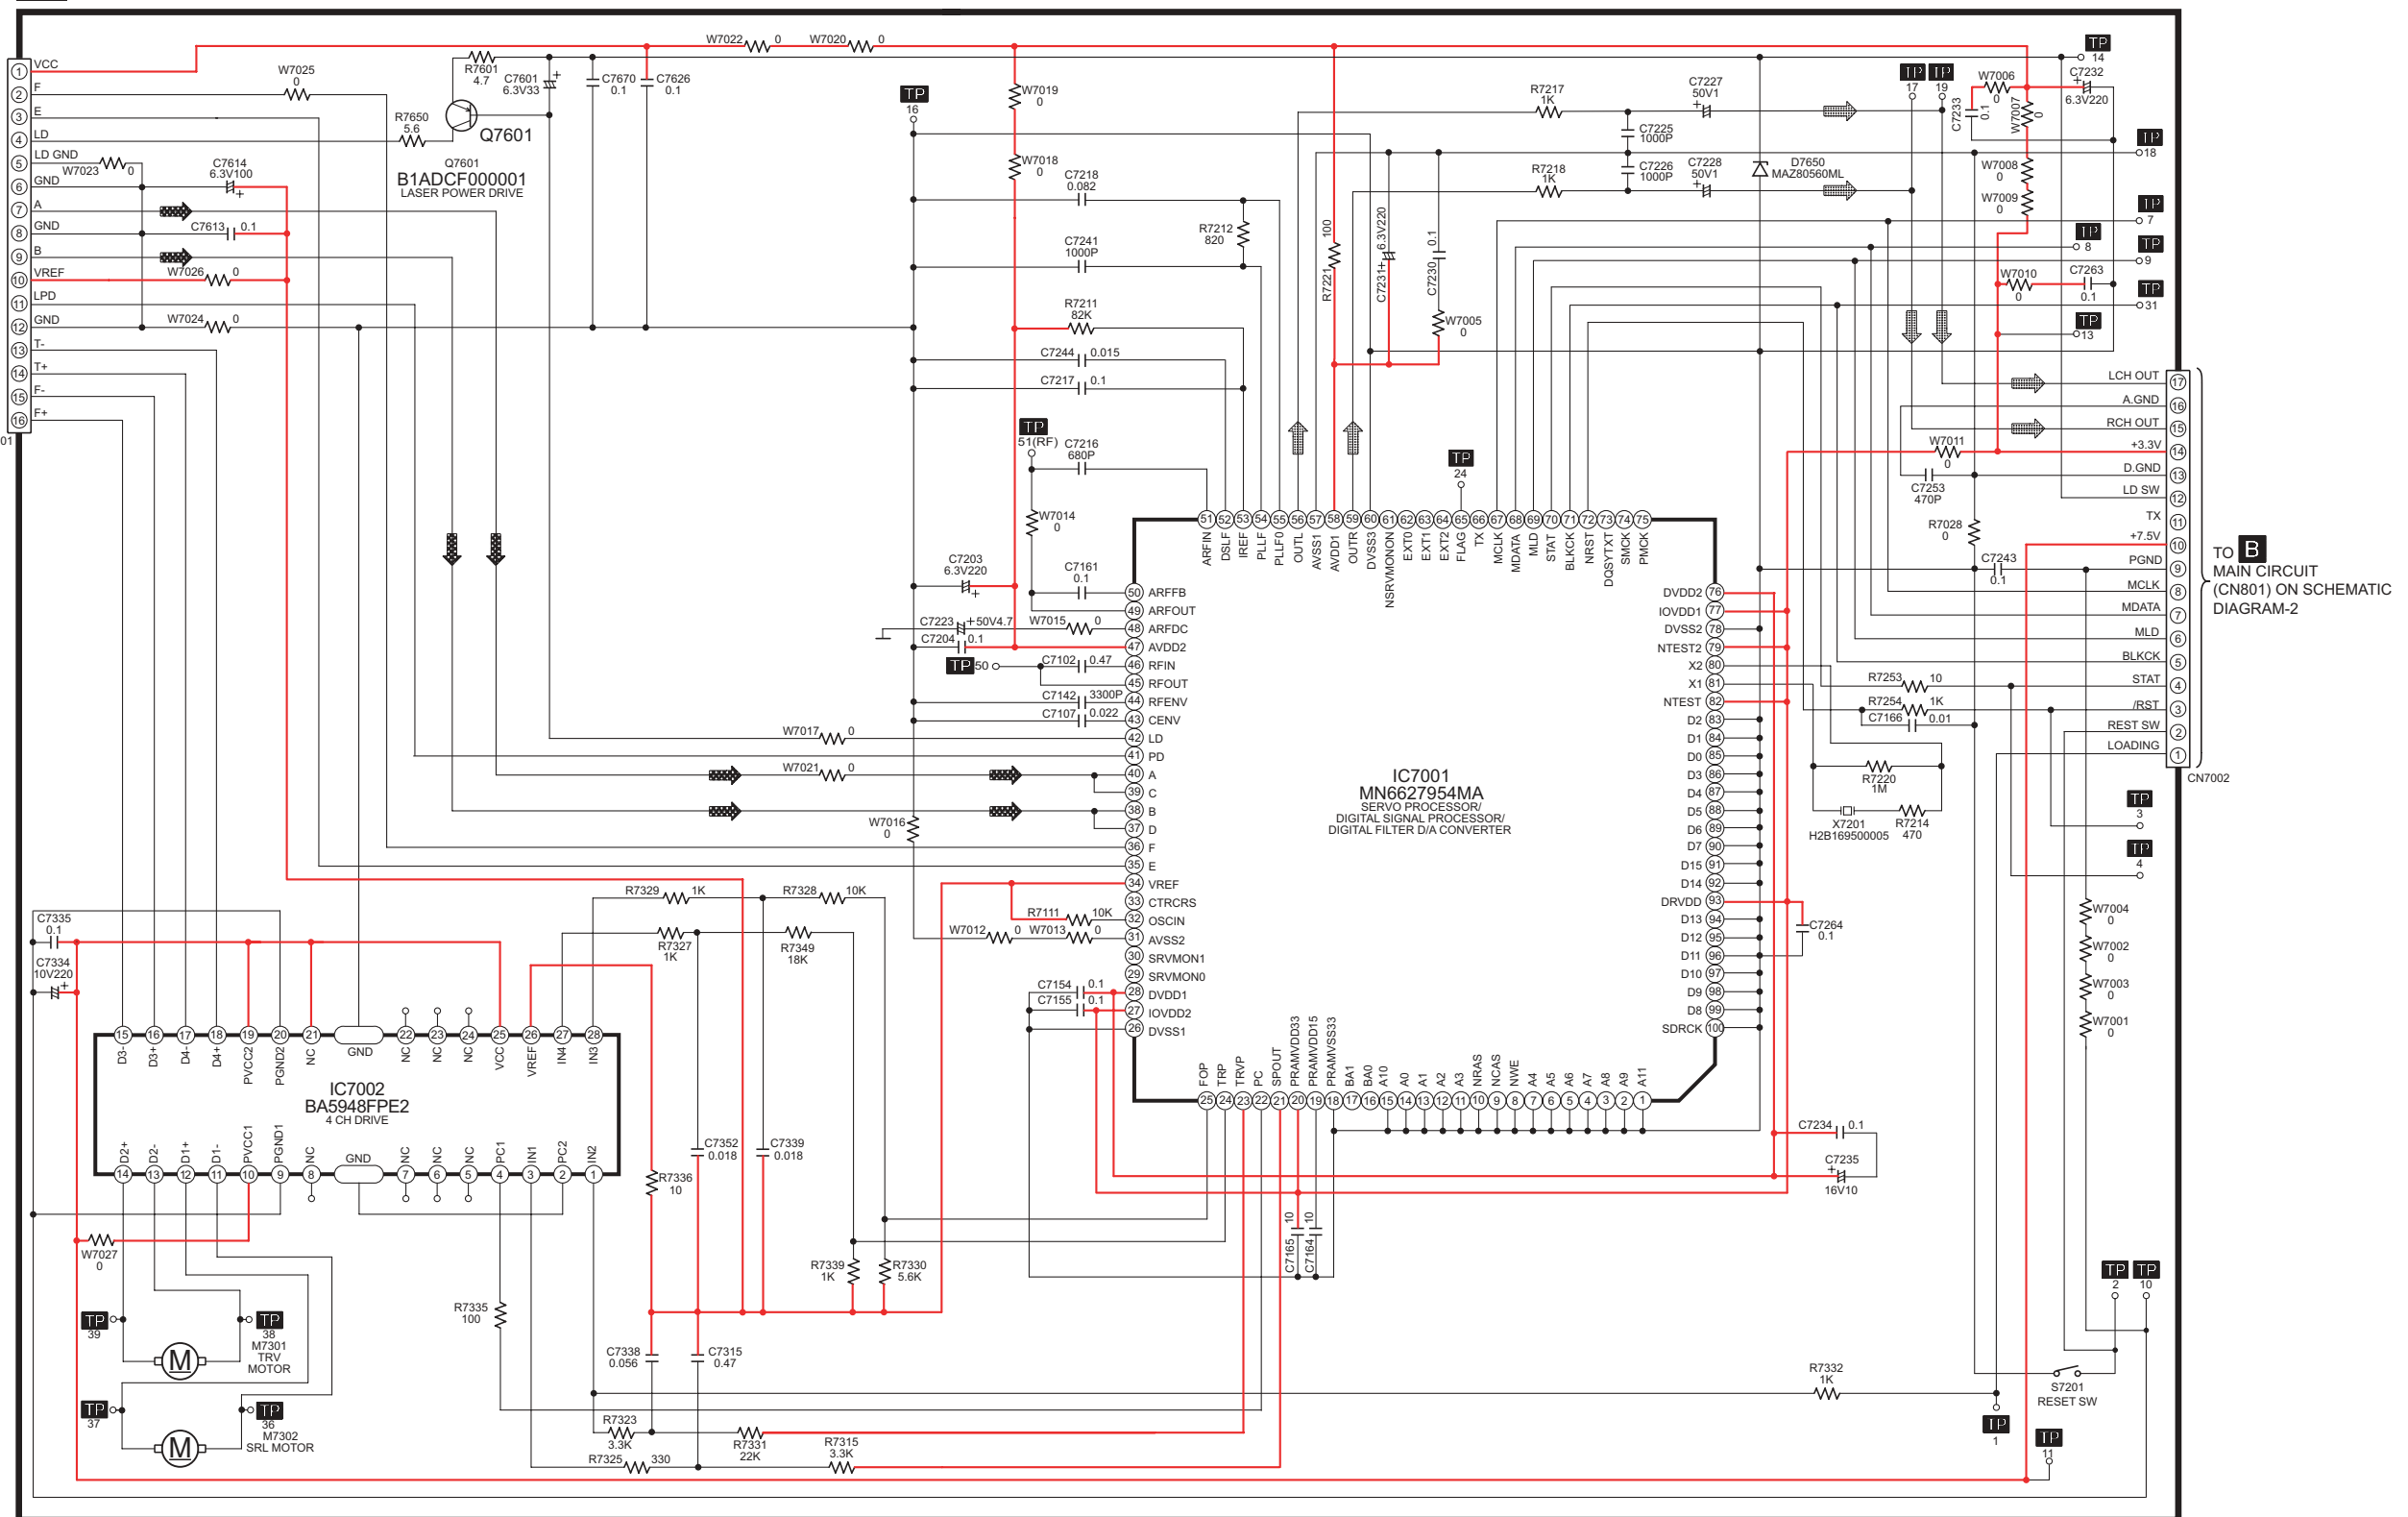


TO **B** MAIN CIRCUIT (CN801) ON SCHEMATIC DIAGRAM-2

SA-PM33DBEB CD SERVO CIRCUIT

18.2. Main Circuit and Tuner Extent Circuit


SCHEMATIC DIAGRAM - 2

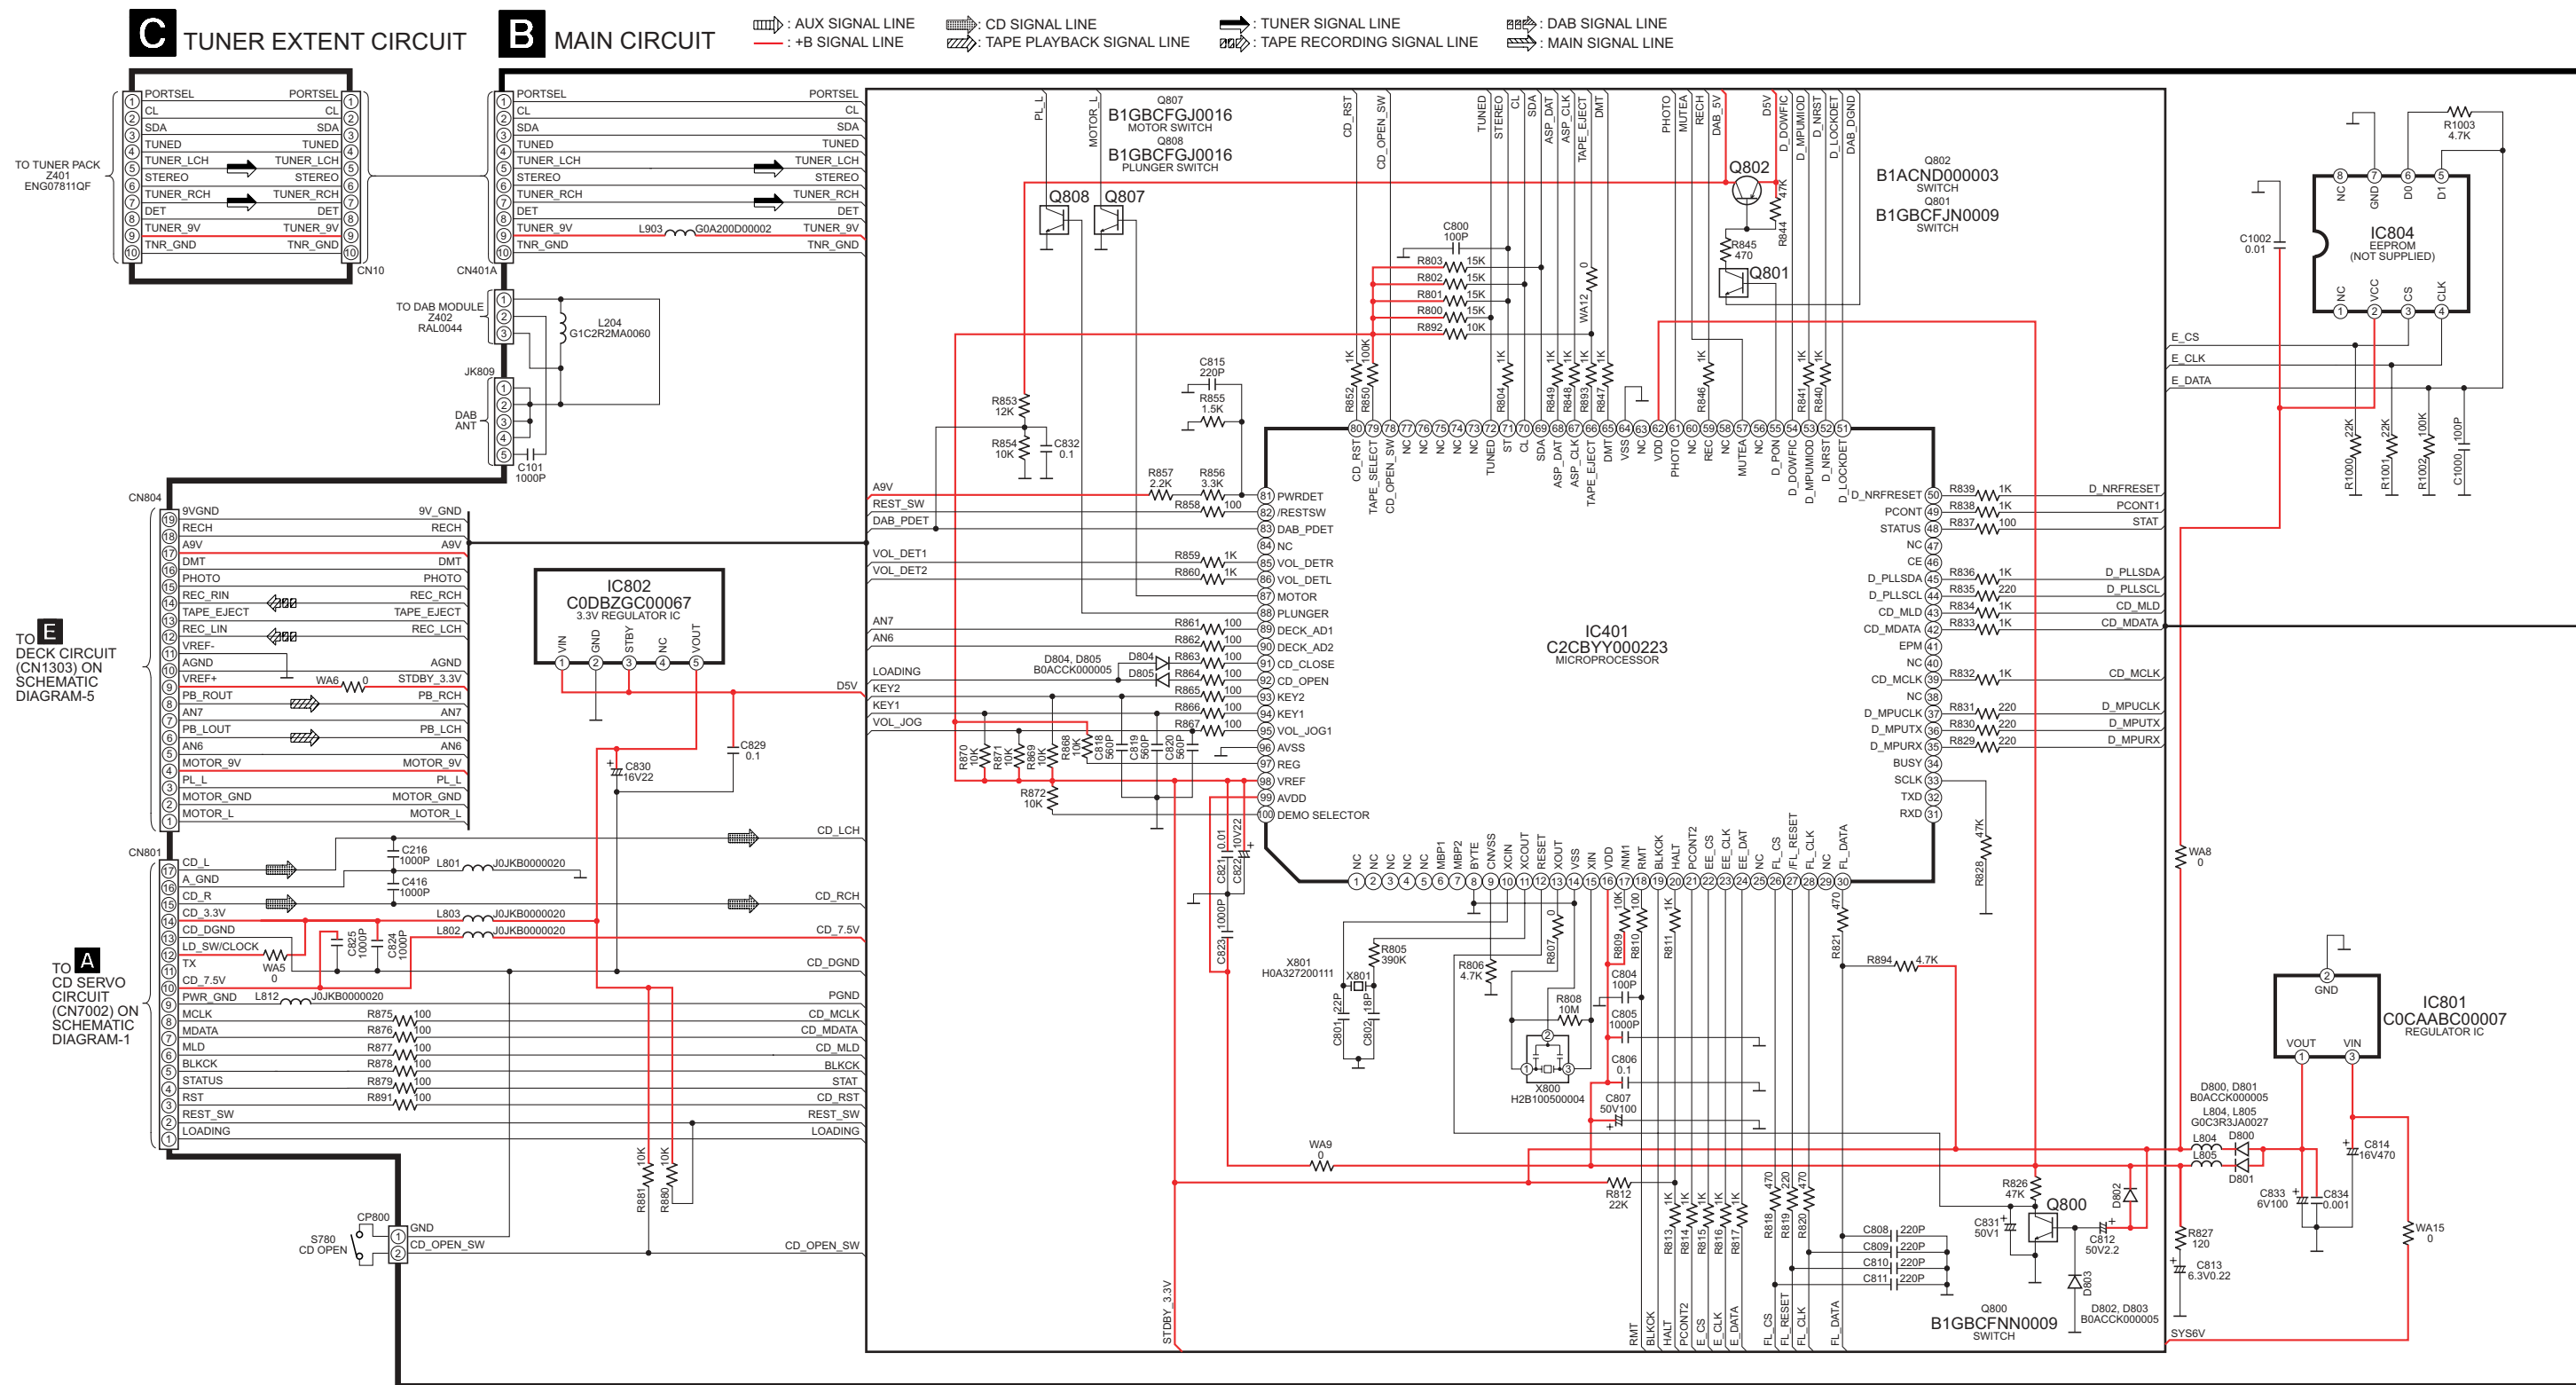

SCHEMATIC DIAGRAM - 3

B MAIN CIRCUIT

 : AUX SIGNAL LINE
 : +B SIGNAL LINE
 : CD SIGNAL LINE
 : TAPE PLAYBACK SIGNAL LINE
 : TUNER SIGNAL LINE
 : TAPE RECORDING SIGNAL LINE
 : DAB SIGNAL LINE
 : MAIN SIGNAL LINE

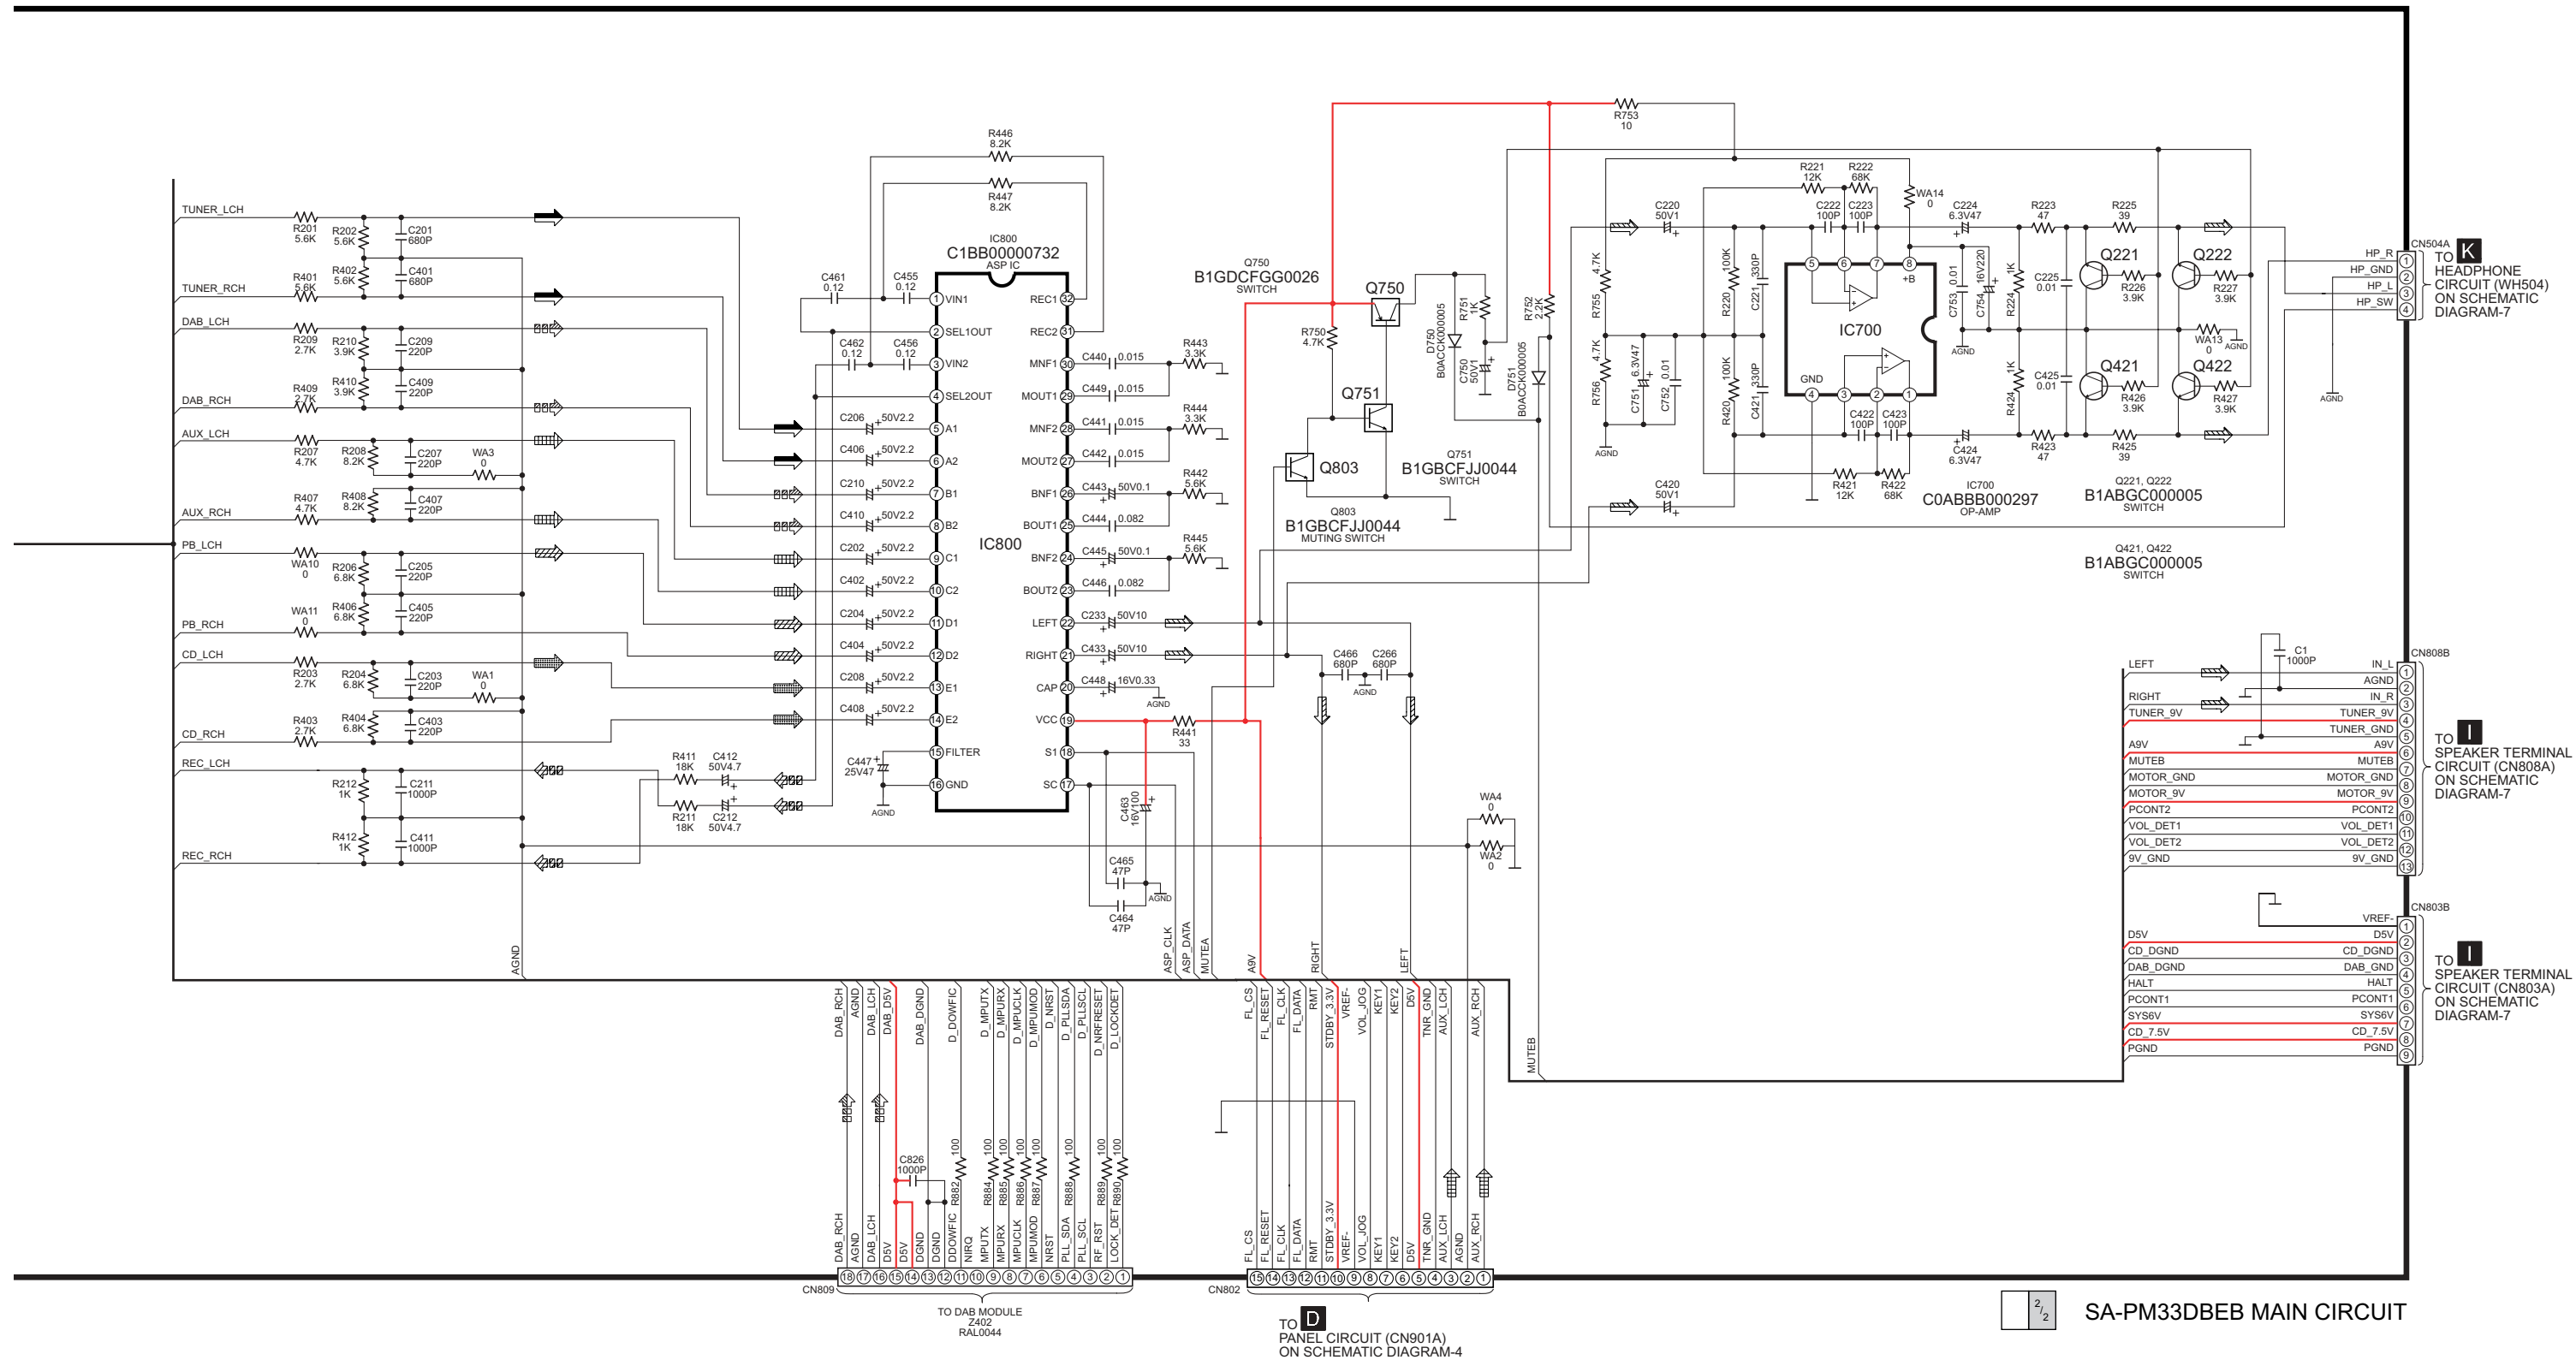


2/2

SA-PM33DBEB MAIN CIRCUIT

18.3. Panel Circuit

SCHEMATIC DIAGRAM - 4

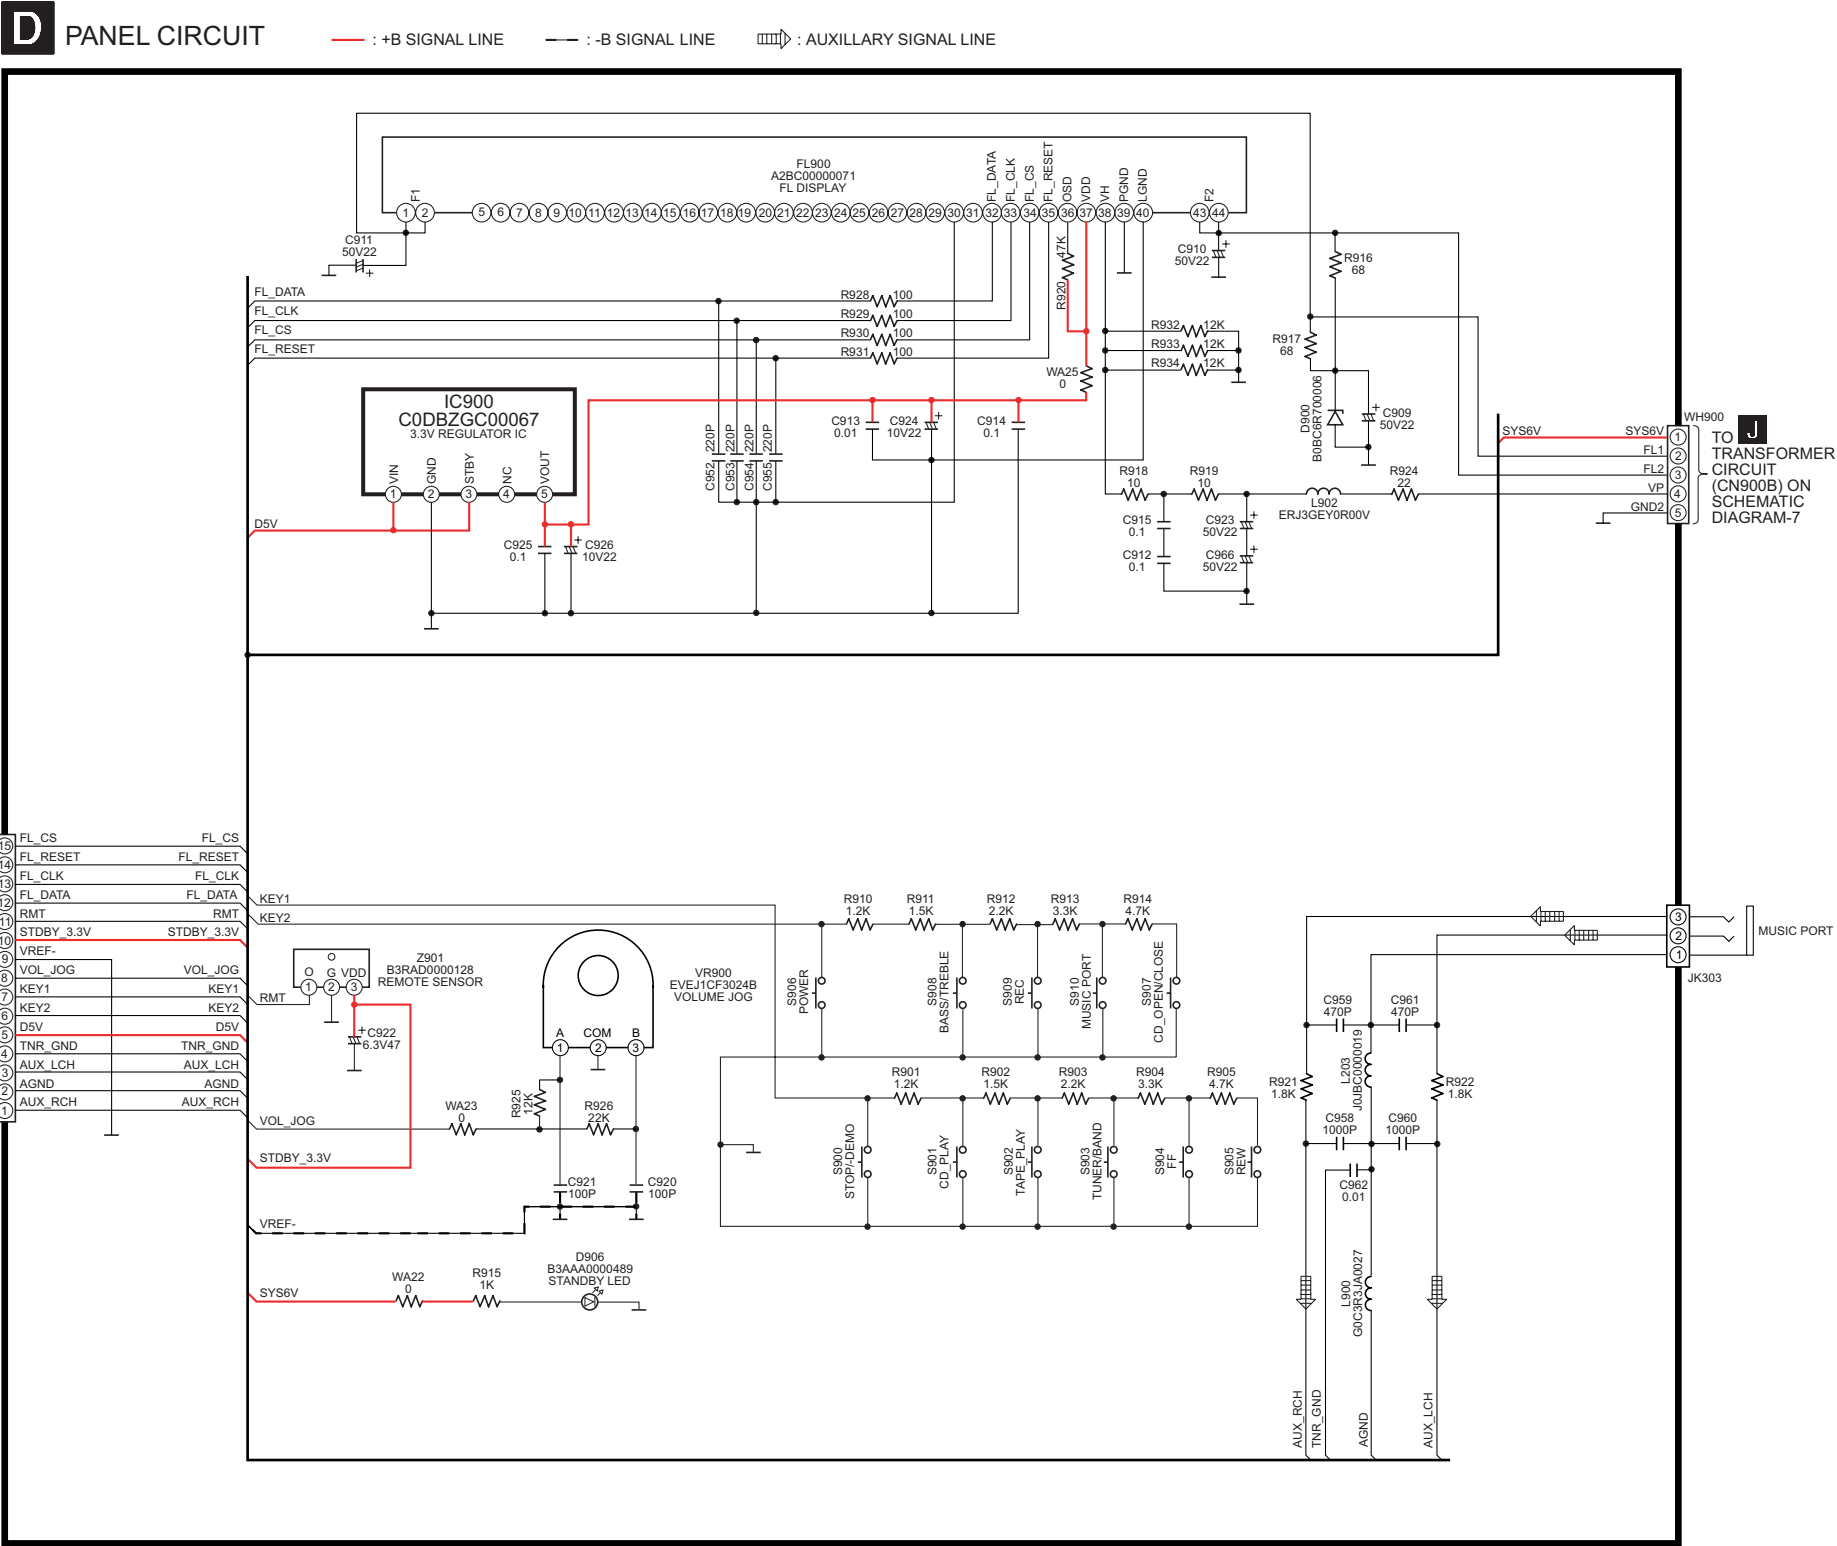


18.4. Deck Circuit, Deck Mechanism Circuit and Tape Eject Circuit

SCHEMATIC DIAGRAM - 5

E DECK CIRCUIT


— : +B SIGNAL LINE — : -B SIGNAL LINE : TAPE RECORD SIGNAL LINE : TAPE PLAYBACK SIGNAL LINE

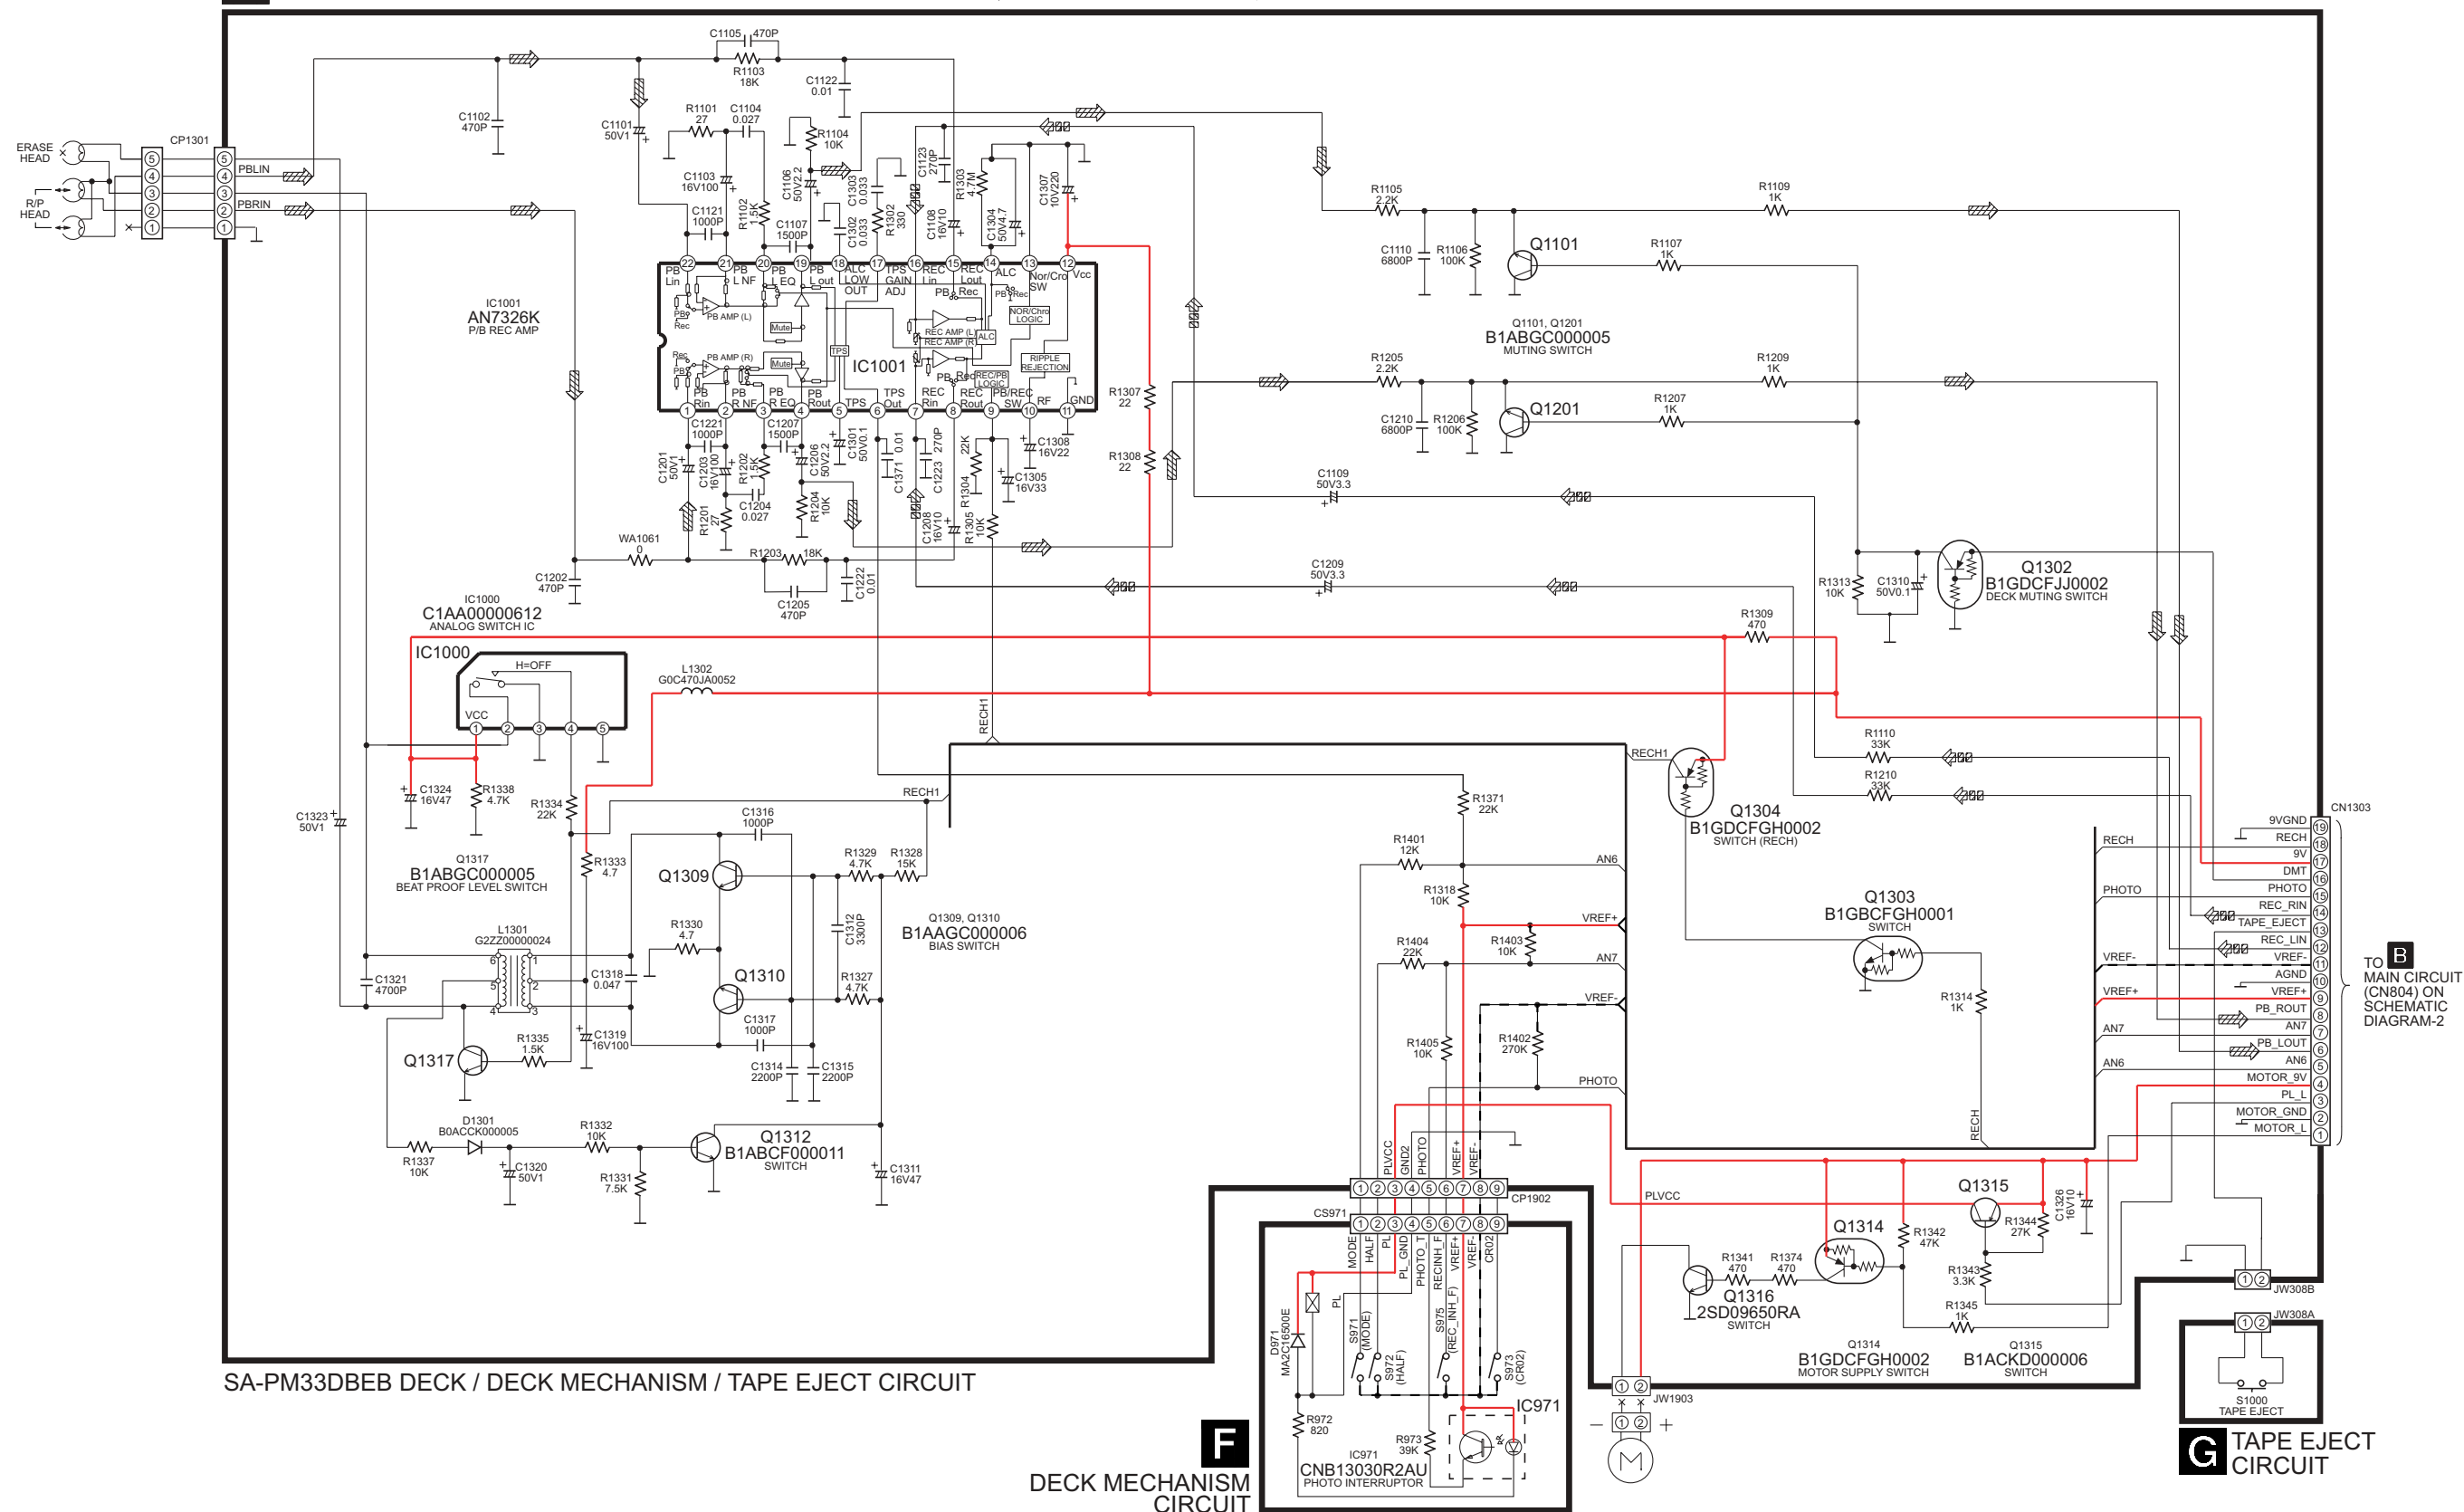

18.5. Power Circuit



SCHEMATIC DIAGRAM - 6

H POWER CIRCUIT — : +B SIGNAL LINE : MAIN SIGNAL LINE

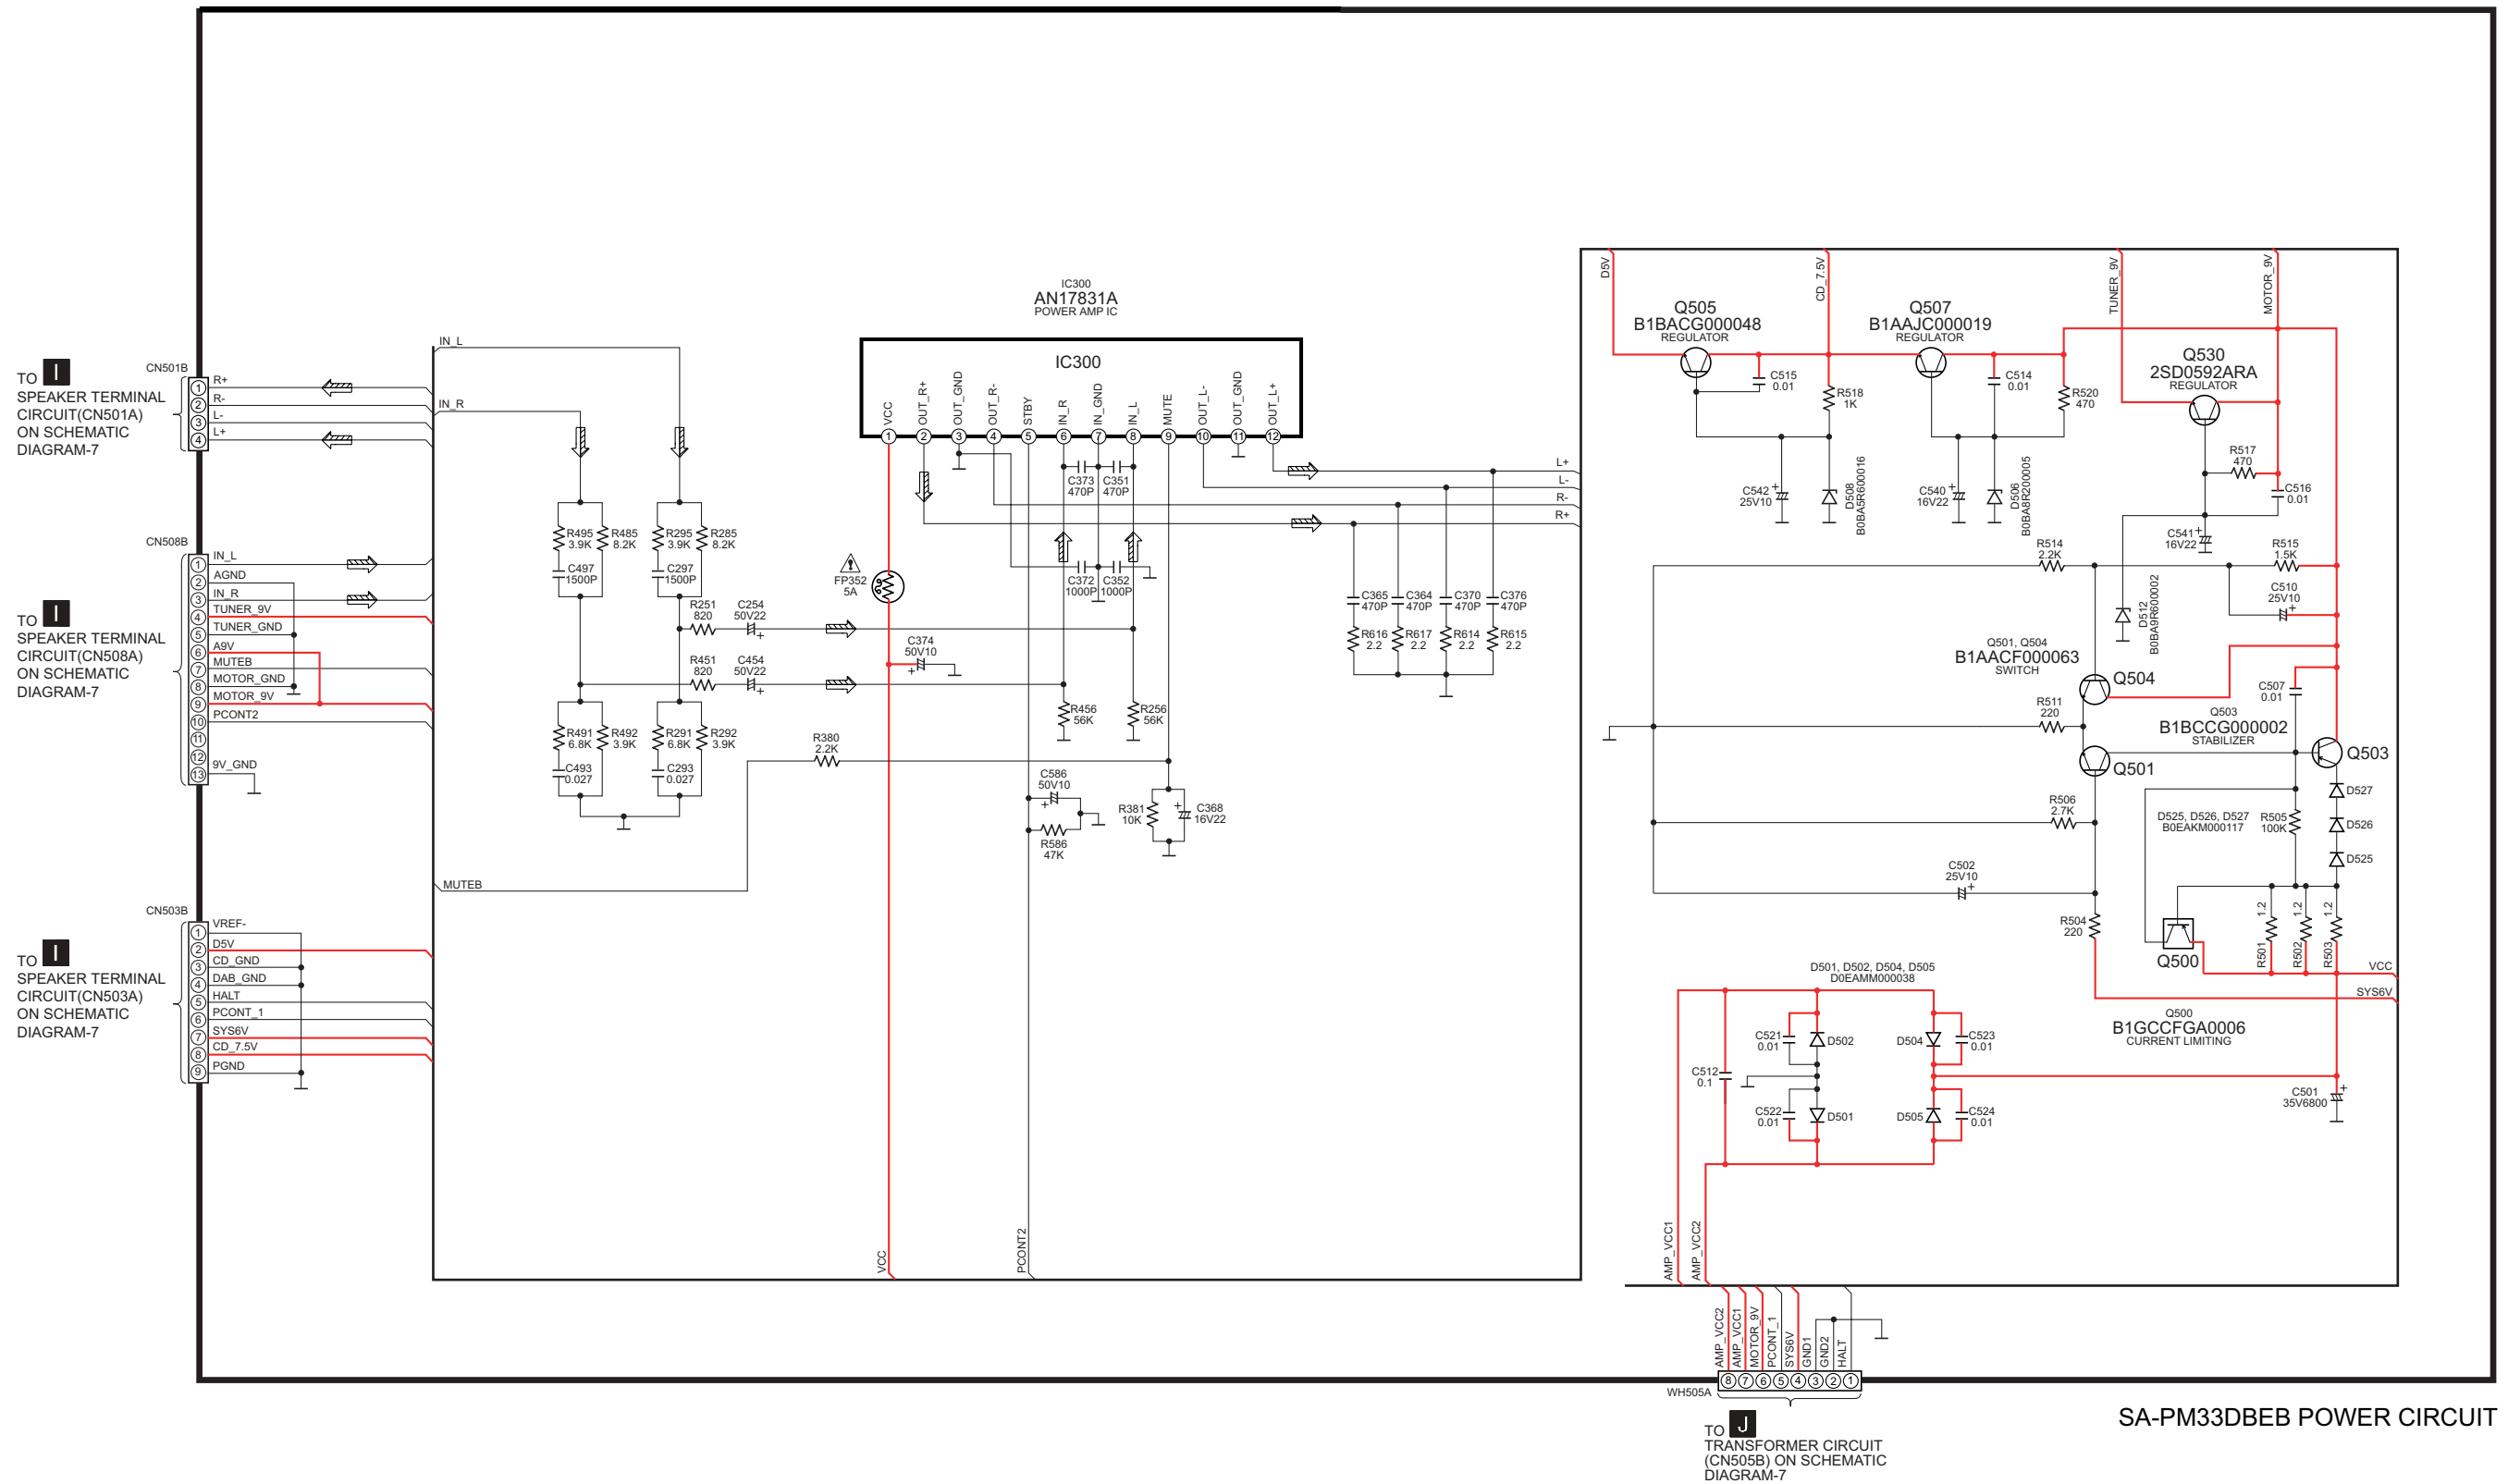

18.6. Transformer Circuit, Headphone Circuit and Speaker Terminal Circuit

SCHEMATIC DIAGRAM - 7

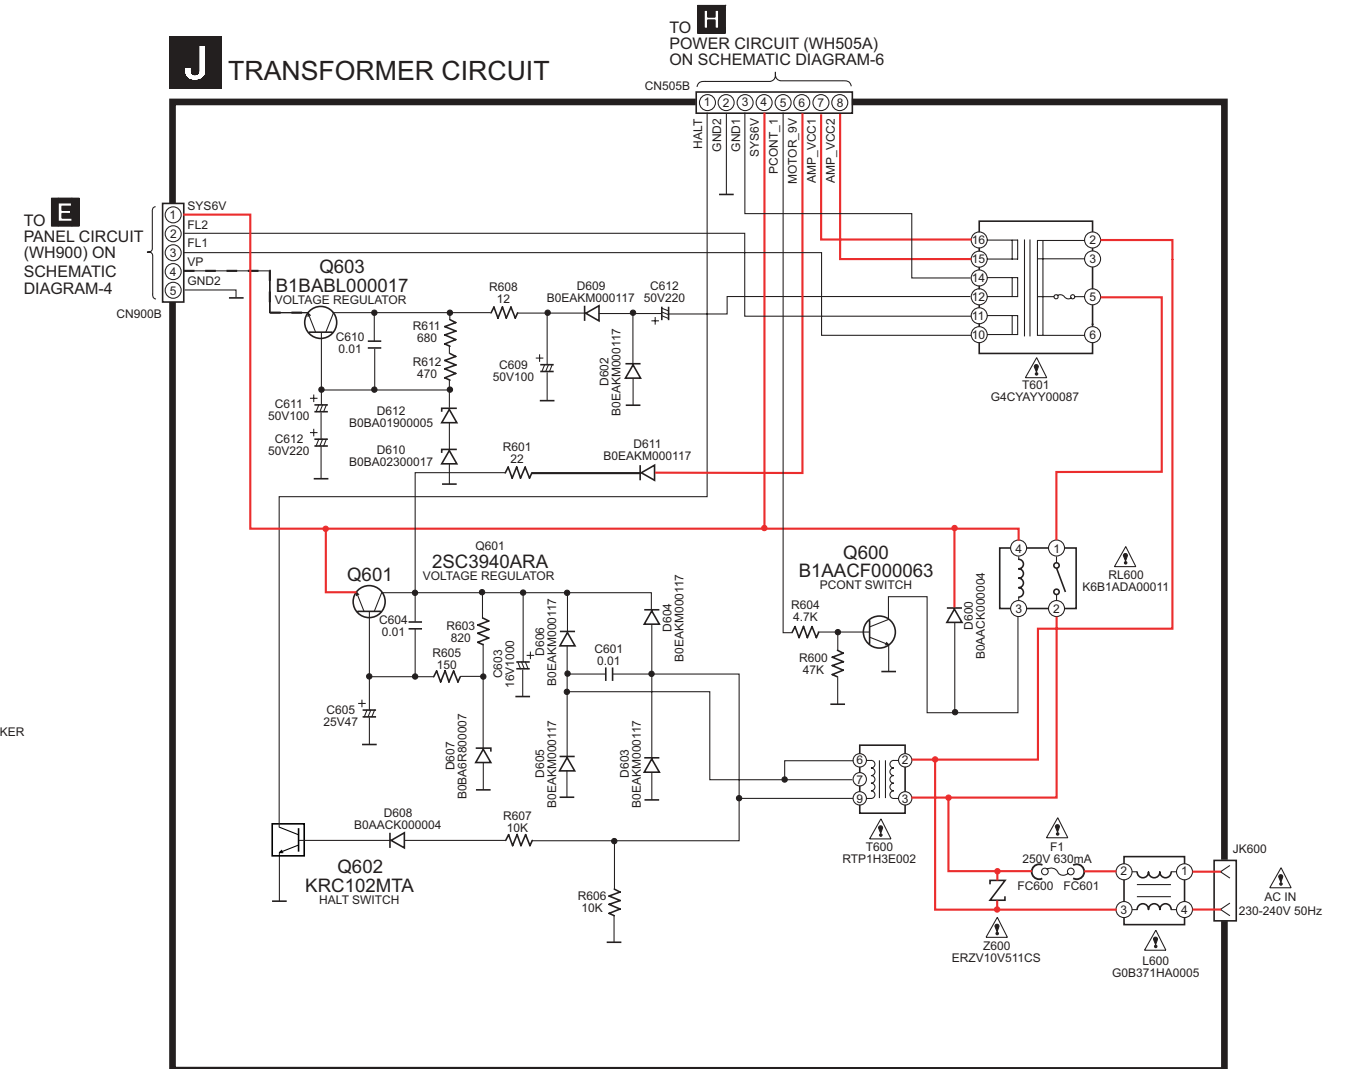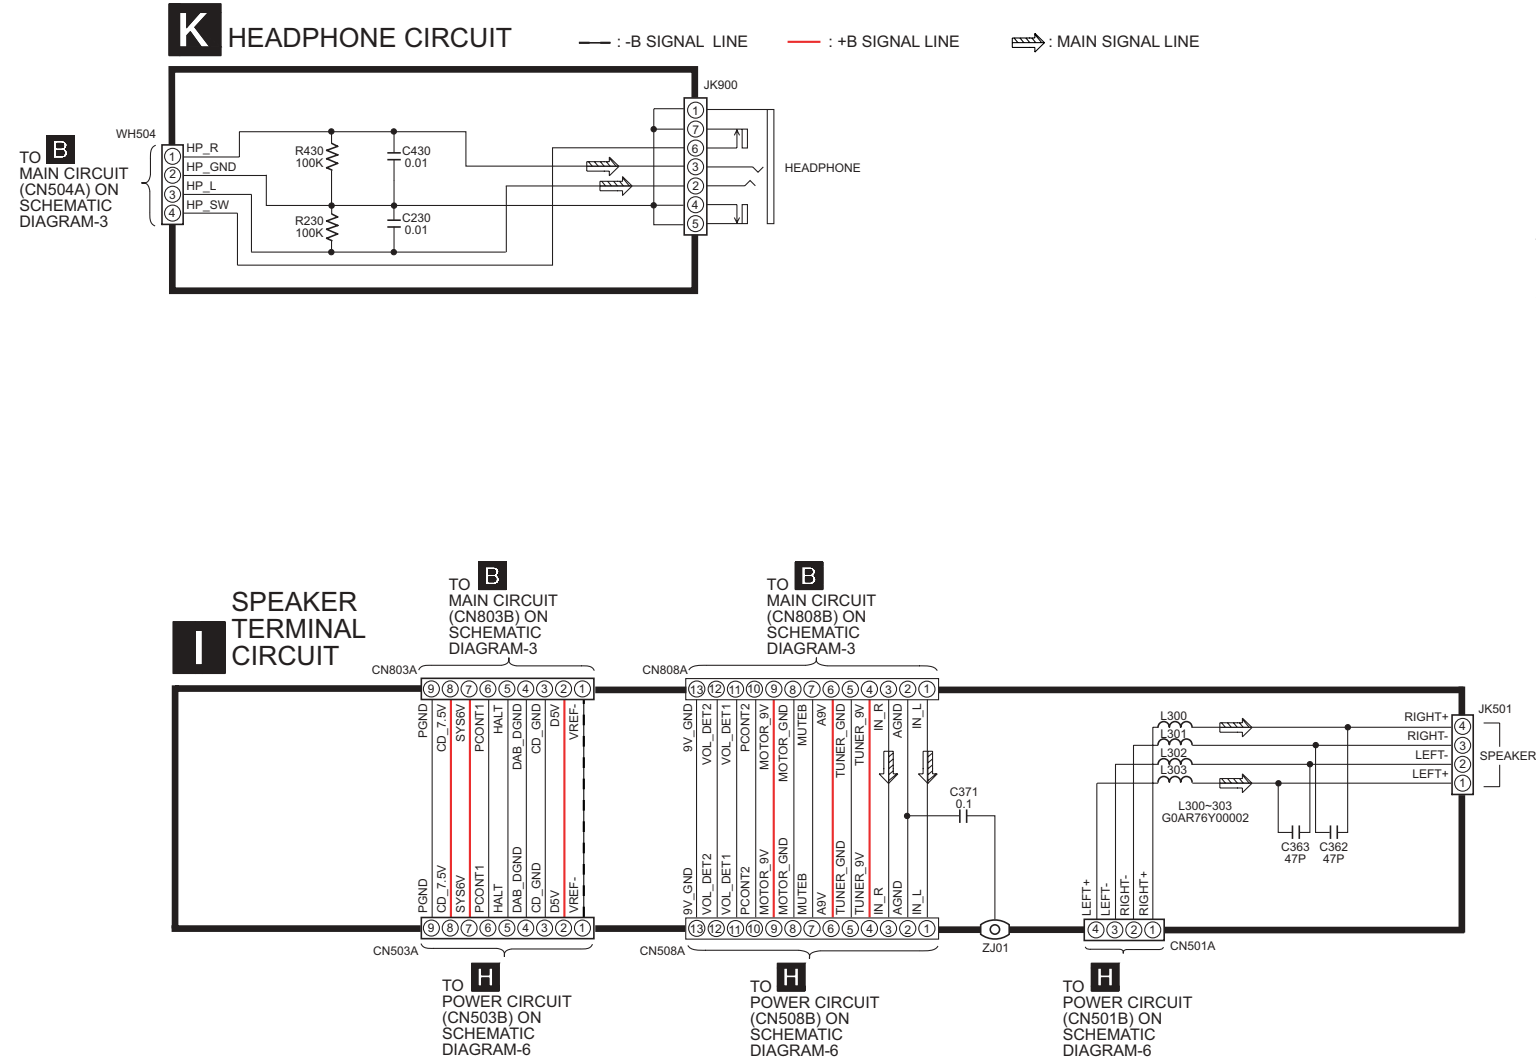


SA-PM33DBEB HEADPHONE/SPEAKER TERMINAL/TRANSFORMER CIRCUIT


19 Printed Circuit Board

19.1. CD Servo P.C.B and Panel P.C.B

A CD SERVO P.C.B (REPV0082A)

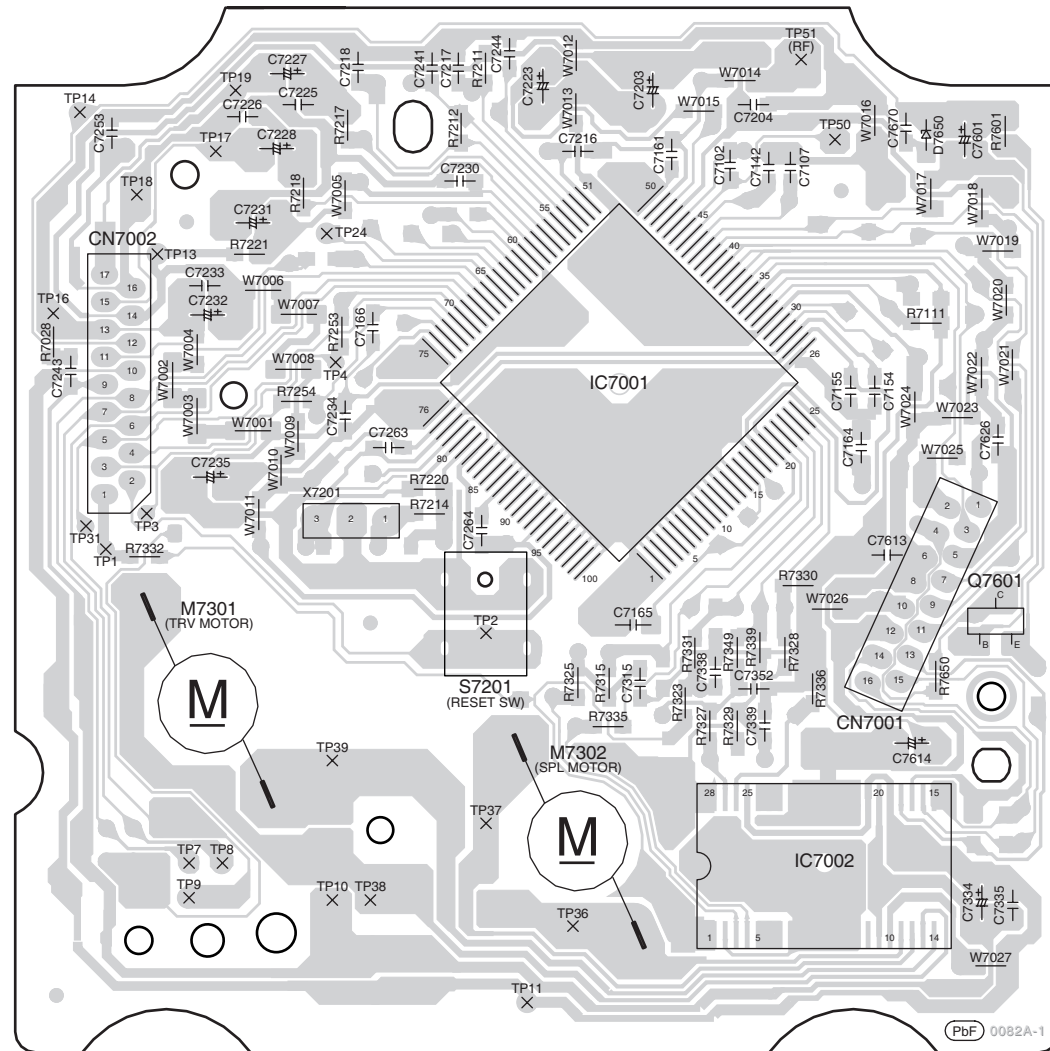


D PANEL P.C.B (REPV0093A)

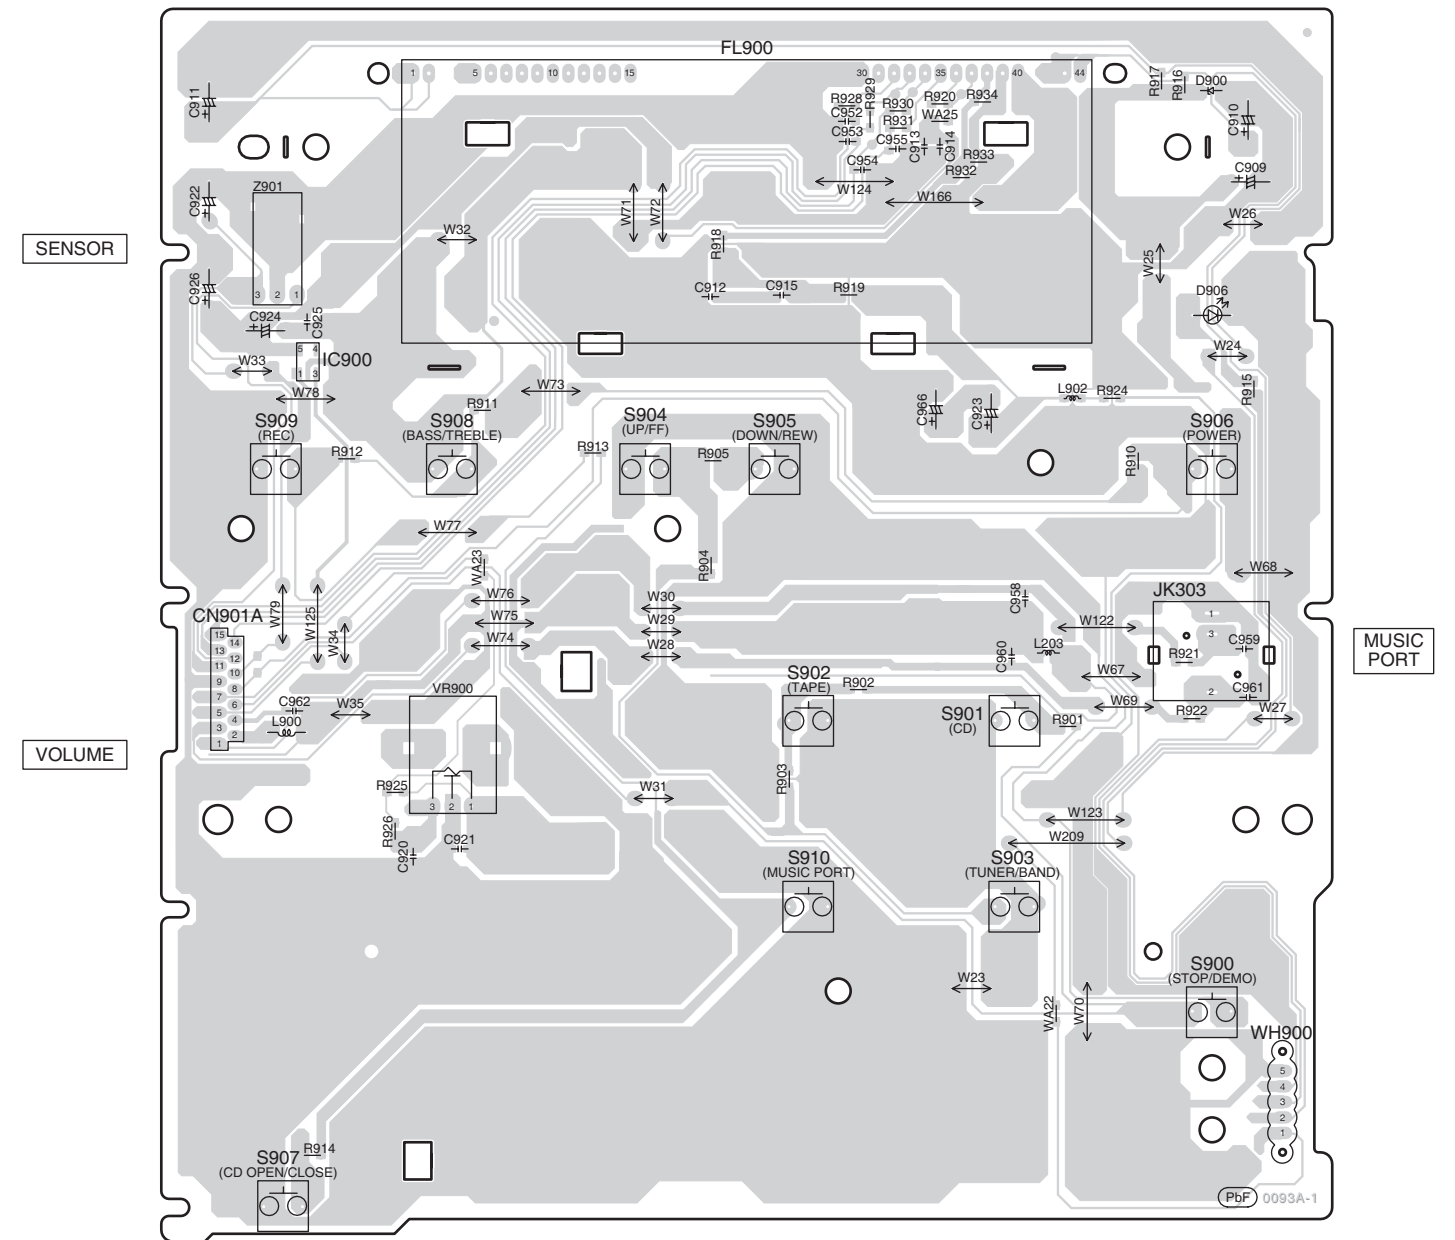





19.3. Deck P.C.B, Deck Mechanism P.C.B, Tape Eject P.C.B, Speaker Terminal P.C.B and Headphone P.C.B

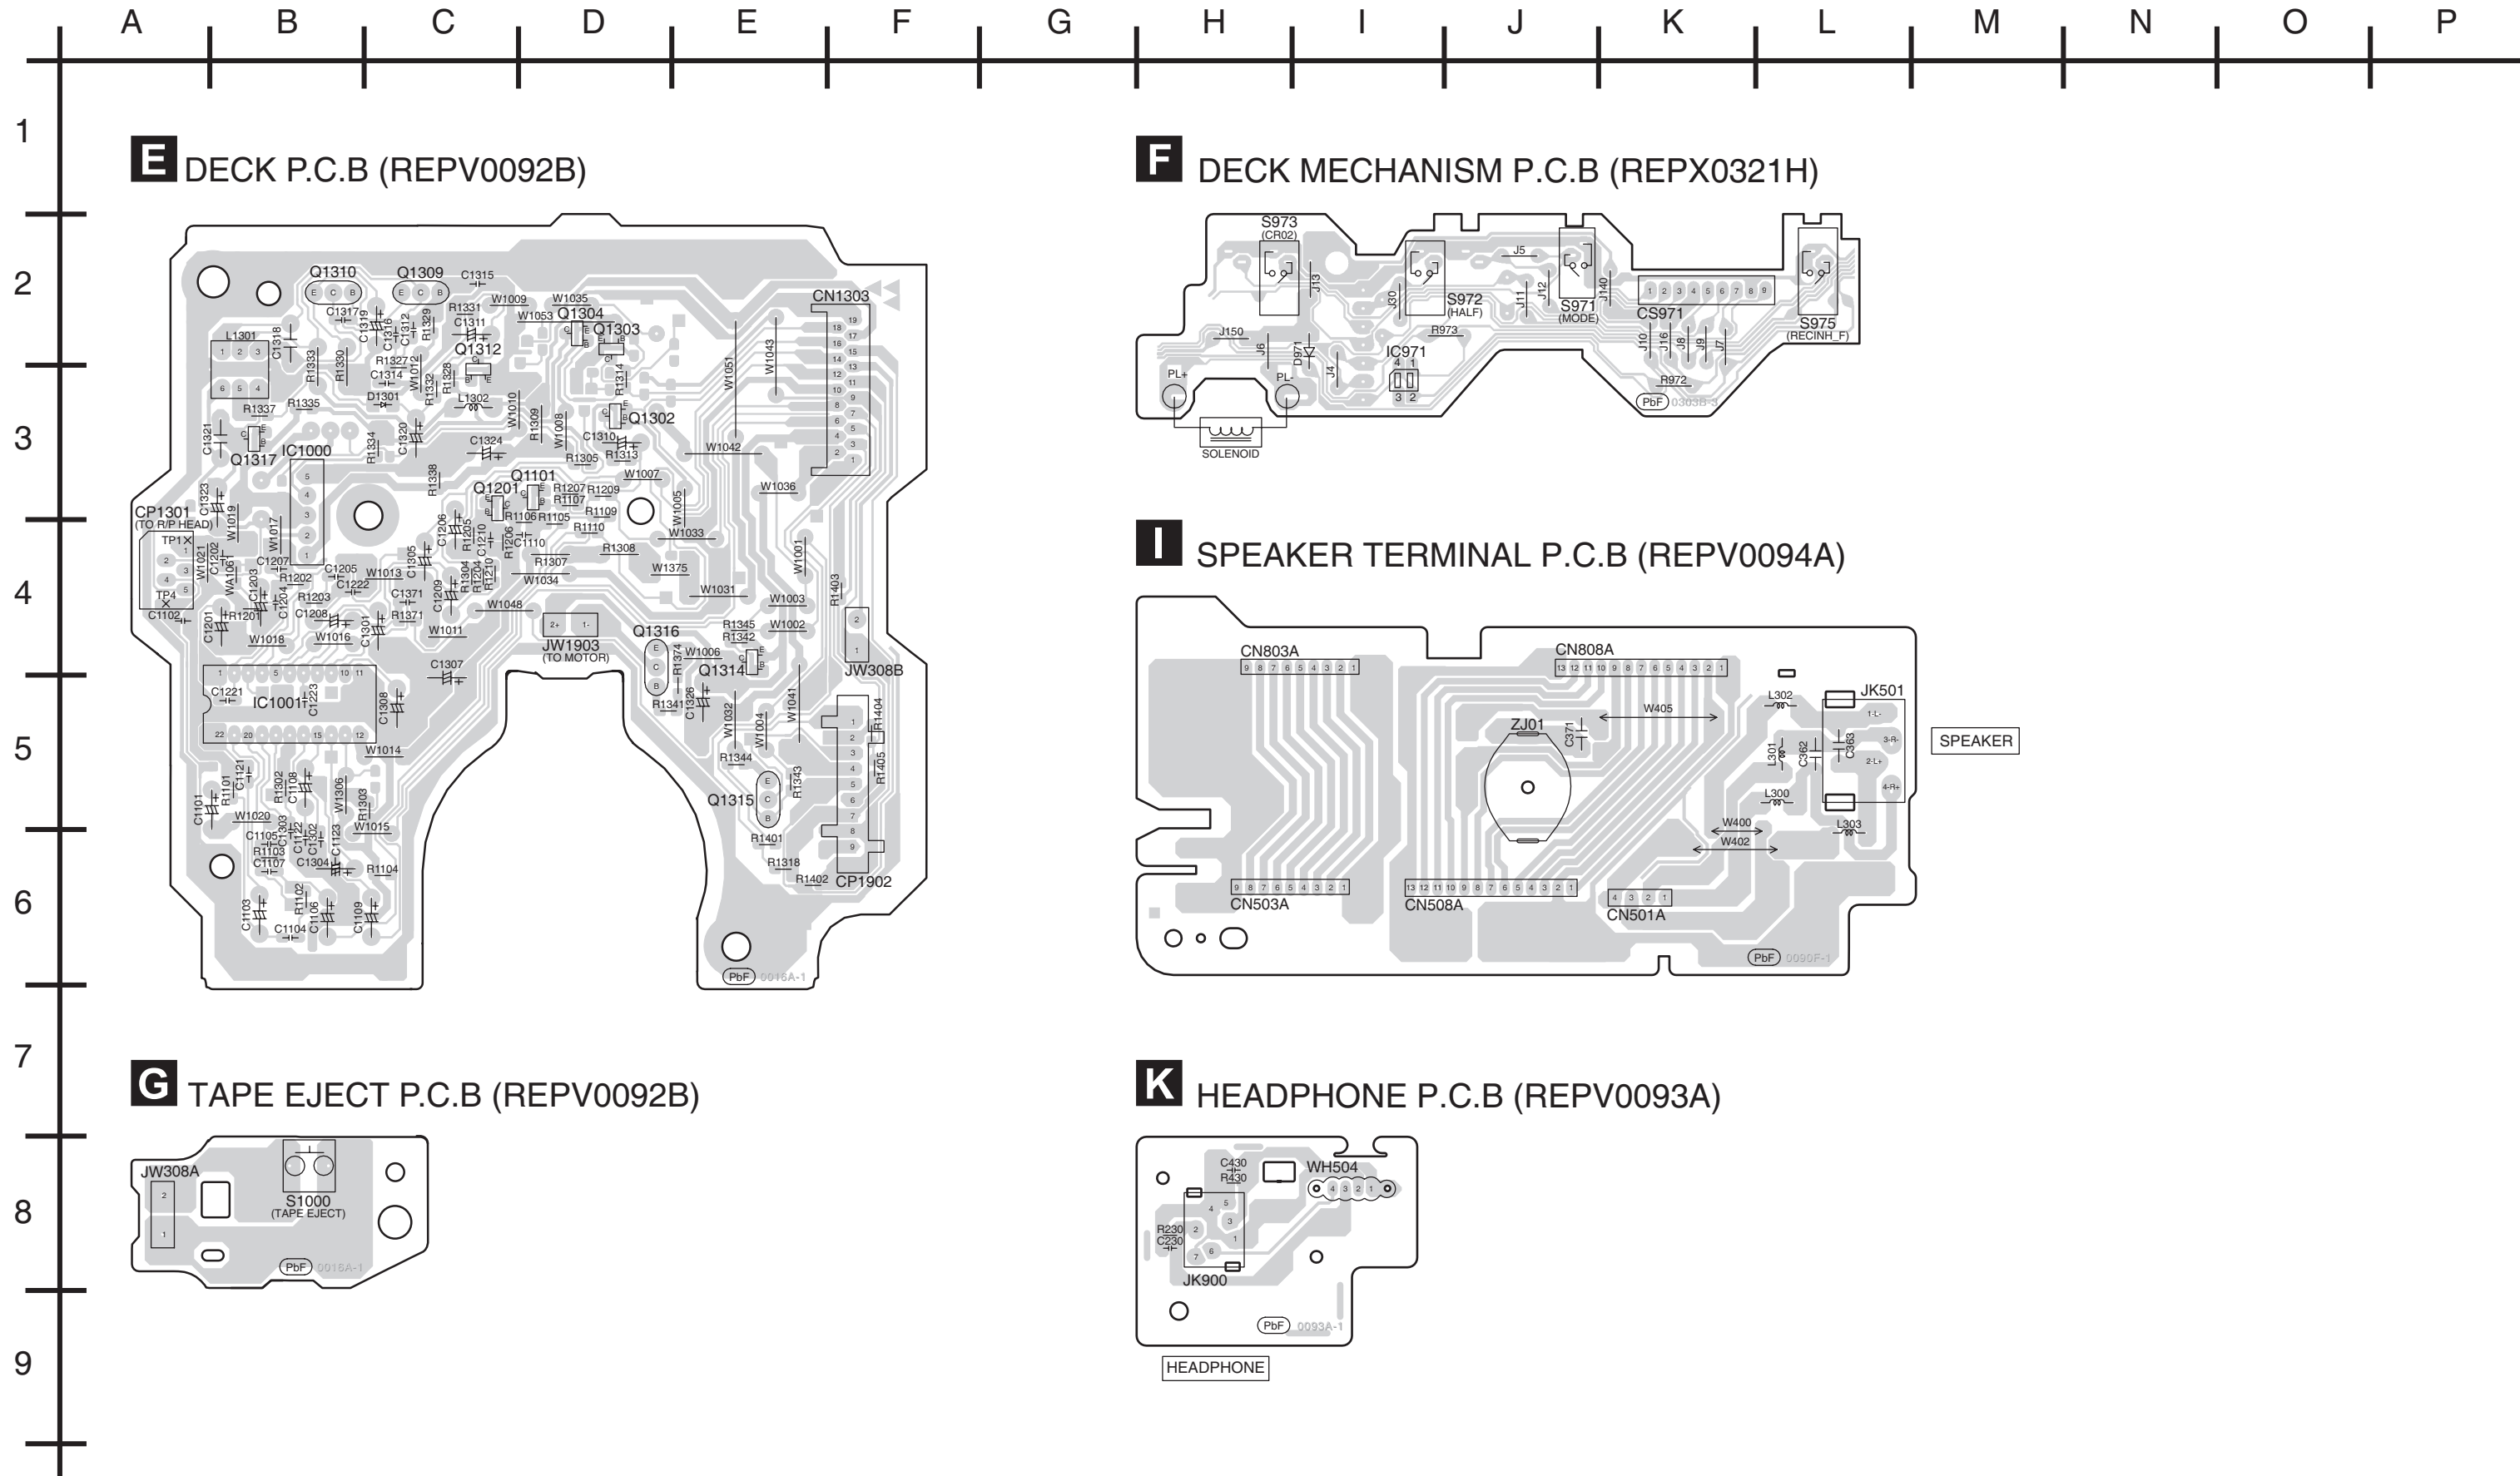


























H POWER P.C.B (REPV0094A)

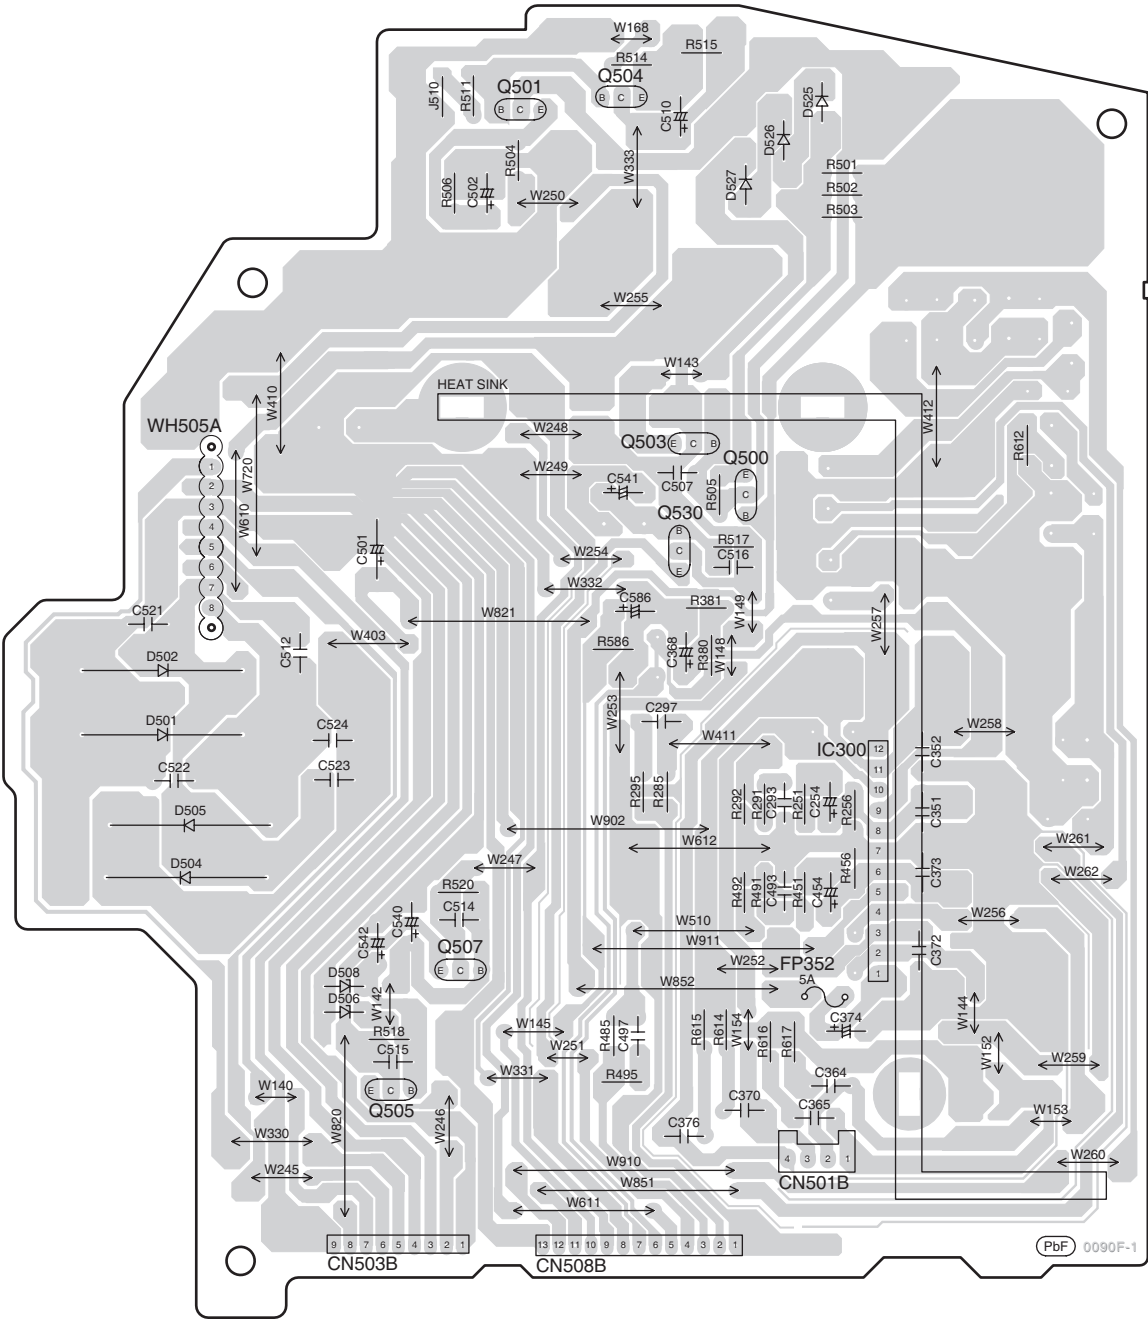

J TRANSFORMER P.C.B (REPV0094A)

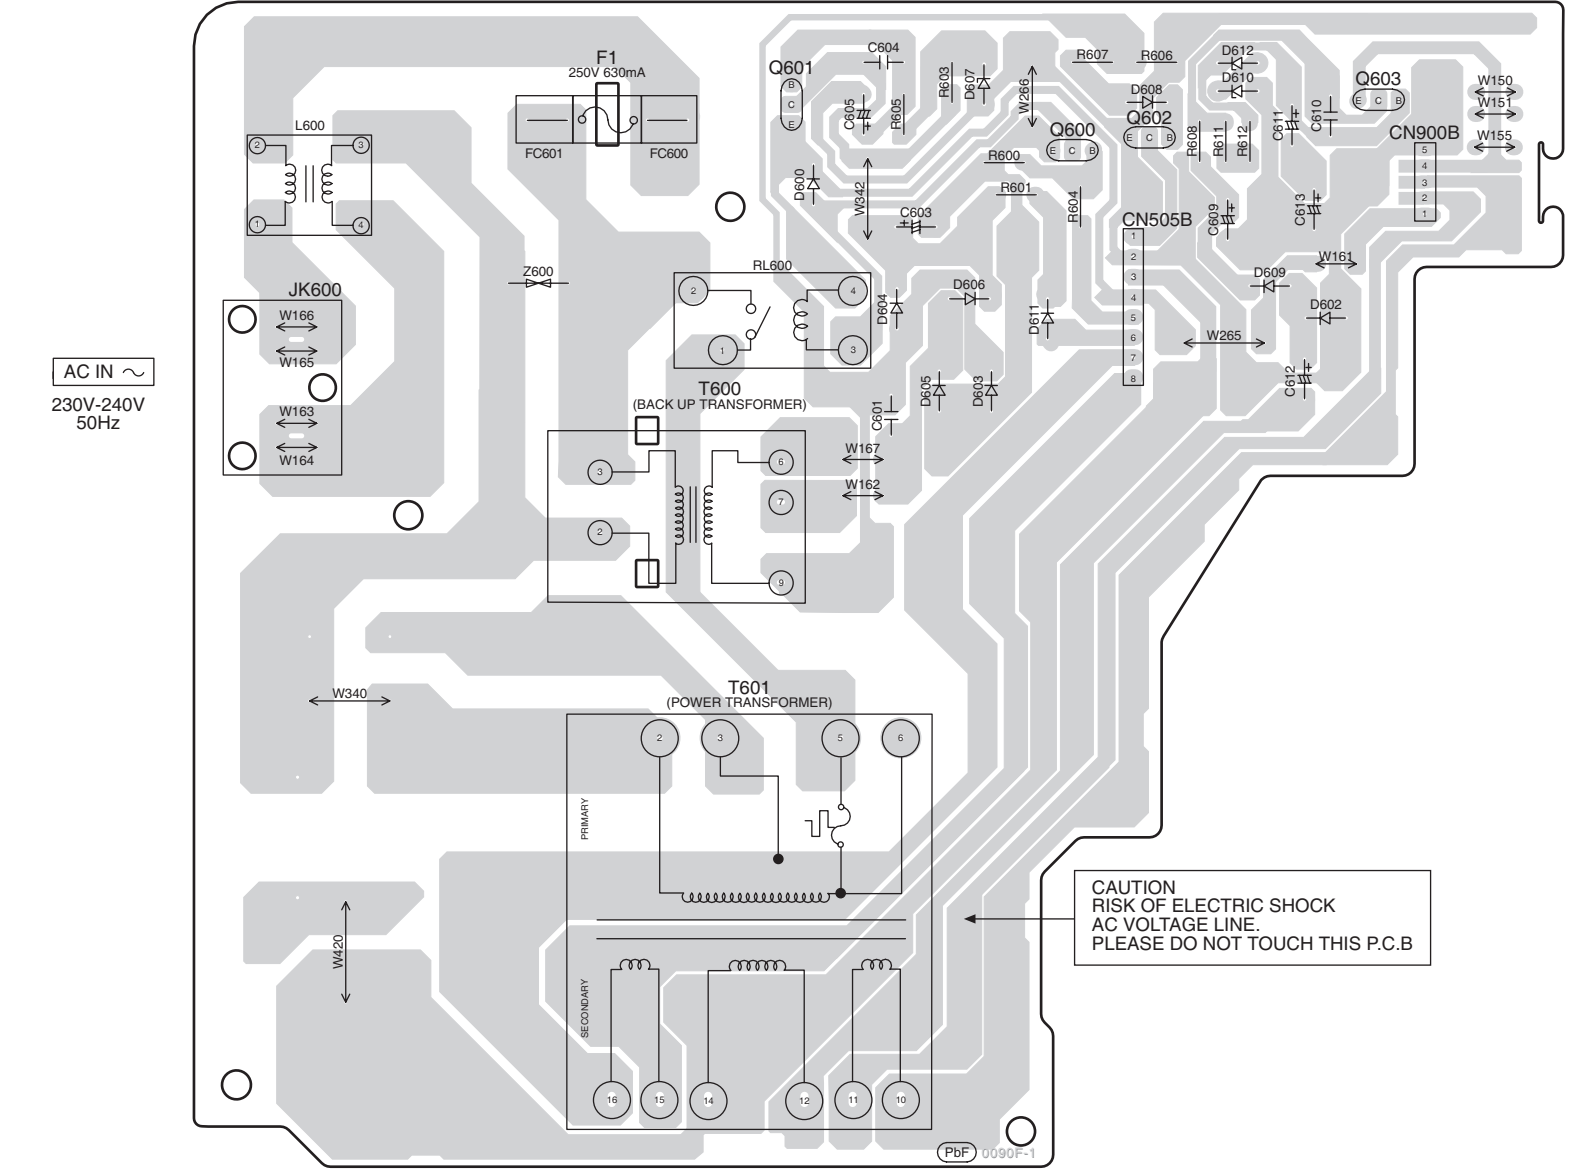

20 Illustration of IC's, Transistors and Diodes

BA5948FPE2 (28P) AN7326K (22P) 	C0ABBB000297 (8P) 	C1BB00000732 (32P) 	MN6627954MA(100P) C2CBYY000223(100P) 	C0DBZGC00067 	CNB13030R2AU 
C1AA00000612 	AN17831A 	C0CAABC00007 	2SC3940ARA 	B1ABGC000005 B1GBCFGH0001 B1GDCFGH0002 B1ABCF000011 B1GDCFJJ0002 B1GBCFNN0009 B1GBCFJN0009 B1GBCFGJ0016 	B1GBCFJJ0044 B1ADCF000001 
B1AACF000063 	B1AAGC000006 	2SD0592ARA 2SD09650RA B1ACKD000006 B1AAJC000019 	B1GDCFGG0026 	B1BABL000017 B1ACND000003 	KRC102MTA B1GCCFGA0006 
B1BCCG000002 B1BACG000048 	B0EAKM000117 B0EAMM000038 	B3AAA0000489 	MA2C16500E B0AACK000004 	MAZ80560ML B0BC6R700006 	B0ACCK000005 B0ACCE000003 
B0BA6R800007 B0BA02300017 B0BA01900005 B0BA5R600016 B0BA9R600002 B0BA8R200005 					

21 Terminal Function of IC's

21.1. IC7001 (MN6627954MA) IC SERVO PROCESSOR/DIGITAL SIGNAL PROCESSOR/DIGITAL FILTER D/A CONVERTER

Pin No.	Mark	I/O	Function
1	A11	O	DRAM address signal O/P 11
2	A9	O	DRAM address signal O/P 9
3	A8	O	DRAM address signal O/P 8
4	A7	O	DRAM address signal O/P 7
5	A6	O	DRAM address signal O/P 6
6	A5	O	DRAM address signal O/P 5
7	A4	O	DRAM address signal O/P 4
8	NWE	O	Write Enable Signal (DRAM)
9	NCAS	O	DRAM CAS Control Signal
10	NRAS	O	DRAM ARS Control Signal
11	A3	O	DRAM address Signal O/P 3
12	A2	O	DRAM address Signal O/P 2
13	A1	O	DRAM address Signal O/P 1
14	A0	O	DRAM address Signal O/P 0
15	A10	O	DRAM address Signal O/P 10
16	BA0	N.C.	Motor O/P (0);/Serial I/P
17	BA1	N.C.	Motor O/P (1);/Serial I/P
18	PRAMVSS33	-	GND (DRAM)
19	PRAMVDD15	-	Power Supply Voltage (DRAM)
20	PRAMVDD33	-	Power Supply Voltage (+1.6V)
21	SPOUT	O	Spindle Drive O/P
22	PC	I/O	Spindle motor drive O/P signal serial data/Monitoring I/P
23	TRVP	O	Traverse Drive O/P (+ve)
24	TRP	O	Tracking Drive O/P (+ve)
25	FOP	O	Focusing Drive O/P (+ve)
26	DVSS1	I	GND
27	IOVDD2	I	Digital Power Supply Voltage 2 (I/O)
28	DVDD1	-	Digital Power Supply Voltage 1 (Built-In)
29	SRVMON0	N.C.	Servo Monitor (0) O/P
30	SRVMON1	N.C.	Servo Monitor (1) O/P
31	AVSS2	-	GND
32	OSCIN	I	Oscillating Input
33	CTRCRS	N.C.	Tracking Cross Comparator
34	VREF	-	+Vref Supply Voltage
35	E	I	Tracking Input Signal 1
36	F	I	Tracking Input Signal 2
37	D	I	Focusing Input Signal 4
38	B	I	Focusing Input Signal 2
39	C	I	Focusing Input Signal 3
40	A	I	Focusing Input Signal 1
41	PD	I	APC Amp I/P
42	LD	O	Laser Drive Current O/P
43	CENV	I	Detection Capacitance Connection terminal
44	RFENV	O	RF Envelope O/P
45	RFOUT	O	RF Summing Amp O/P
46	RFIN	I	SGC I/P
47	AVDD2	I	Analog Power Supply voltage 2 (For DSL/PLL)
48	ARFDC	O	AGC Capacitive Connection Terminal
49	ARFOUT	O	AGC Output
50	ARFFB	I	ARF Feedback Signal I/P
51	ARFIN	I	Audio RF Signal I/P
52	DSLFL	I	Loop Filter Terminal (For DSL)

Pin No.	Mark	I/O	Function
53	IREF	I	Reference I/P
54	PLLFL	I	PLL Loop Filter Terminal (Phase Compare)
55	PLLFO	O	PLL Loop Filter Terminal (Speed Compare)
56	OUTL	O	Audio O/P (LCH)
57	AVSS1	I	GND
58	AVDD1	I	Analog Power Supply Voltage 1
59	OUTR	O	Audio O/P (RCH)
60	DVSS3	I	GND3 (Digital Circuit)
61	NSRVMONON	I	Servo Motor O/P Enabling
62	EXT0	N.C.	Expansion O/P Port 0
63	EXT1	N.C.	Expansion O/P Port 1
64	EXT2	N.C.	Expansion O/P Port 2
65	FLAG	N.C.	Flag Signal O/P
66	TX	N.C.	Digital Audio Interface O/P signal
67	MCLK	I	Micro-Computer Command Clock I/P
68	MDATA	I	Micro-Computer Data I/P
69	MLD	I	Micro-Computer Load I/P
70	STAT	O	Status Signal O/P
71	BLKCK	O	Subcode Blk Clock
72	NRST	O	LSI Reset Signal
73	DQSYTXT	N.C.	Pack Signal O/P for CD-Text data
74	SMCK	N.C.	Micro-Computer Clock O/P
75	PMCK	N.C.	IOCNT Serial data O/P (Synchronous O/P)
76	DVDD2	-	Digital Power Supply Voltage 2 (+1.5V)
77	IOVDD1	-	Digital Power Supply Voltage 1 (For I/O)
78	DVSS2	-	GND2 (For Digital Circuit)
79	NTEST2	I	Test Mode Setting (ON:H)
80	X2	O	Crystal Oscillating Circuit O/P
81	X1	I	Crystal Oscillating Circuit I/P
82	NTEST	I	Test Mode Setting I/P (ON:H)
83	D2	I/O	Data Signal O/P 2
84	D1	I/O	Data Signal O/P 1
85	D0	I/O	Data Signal O/P 0
86	D3	I/O	Data Signal O/P 3
87	D4	I/O	Data Signal O/P 4
88	D5	I/O	Data Signal O/P 5
89	D6	I/O	Data Signal O/P 6
90	D7	I/O	Data Signal O/P 7
91	D15	I/O	Data Signal O/P 15
92	D14	I/O	Data Signal O/P 14
93	DRVDD	I	I/O Power Supply Voltage (DRAM)
94	D13	I/O	Data Signal O/P 13
95	D12	I/O	Data Signal O/P 12
96	D11	I/O	Data Signal O/P 11
97	D10	I/O	Data Signal O/P 10
98	D9	I/O	Data Signal O/P 9
99	D8	I/O	Data Signal O/P 8
100	SDRCK	O	Clock Signal O/P

21.2. IC7002 (BA5948FPE2) IC 4CH Drive

Pin No.	Mark	I/O	Function
1	IN2	I	Motor Driver 92 Input
2	PC2	I	Turntable Motor Drive Signal ("L":ON)
3	IN1	I	Motor Drive (1) Input
4	PC1	-	Traverse Motor Drive Signal ("L":ON)
5-8	N.C.	-	No Connection
9	PGND1	-	Ground Connection (1) for Drive
10	PVCC1	I	Power Supply (1) for Drive
11	D1-	O	Motor Drive (1) reverse - action output
12	D1+	O	Motor Drive (1) forward - action output
13	D2-	O	Motor Drive (2) reverse - action output
14	D2+	O	Motor Drive (2) forward - action output

Pin No.	Mark	I/O	Function
15	D3-	O	Motor Drive (3) reverse - action output
16	D3+	O	Motor Drive (3) forward - action output
17	D4-	O	Motor Drive (4) reverse - action output
18	D4+	O	Motor Drive (4) forward - action output
19	PVCC2	-	Power Supply (2) for Driver
20	PGND2	-	Ground Connection (2) for Driver
21-24	N.C.	O	No Connection
25	VCC	I	Power Supply terminal
26	VREF	I	Reference Voltage Input
27	IN4	I	Motor Driver (4) Input
28	IN3	I	Motor Driver (3) Input


21.3. IC401 (C2CBYY000223) MICROPROCESSOR

Pin No.	Mark	I/O	Function
1	N.C.	-	No Connection
2	N.C.	-	No Connection
3	N.C.	-	No Connection
4	N.C.	-	No Connection
5	N.C.	-	No Connection
6	MBP1	O	Microcomputer Beat Proof Output 1 (CONTROL)
7	MBP2	O	Microcomputer Beat Proof Output 2 (CONTROL)
8	BYTE	-	External Data Bus Width Select Input (connected to Ground)
9	CNVSS	-	Flash Mode Terminal (connect to Ground)
10	XCIN	-	32.768 kHz Sub Clock
11	XCOUT	-	32.768 kHz Sub Clock
12	/RESET	-	Reset Input (ACTIVE L)
13	XOUT	-	10 MHz Main Clock
14	VSS	-	Ground (0V)
15	XIN	-	10 MHz Main Clock
16	VDD	-	Power Supply (+5V)
17	/NMI	-	Connect to Vcc (+5V)
18	RMT	I	Remote Control Input
19	BLKCK	I	CD Block Clock Input (Inverted)
20	HALT	I	AC Failure Detect Input
21	PCONT2	O	Power Supply Control
22	EE_CS	O	EEPROM Chip Select
23	EE_CLK	O	EEPROM CLOCK
24	EE_DAT	I/O	EEPROM DATA
25	N.C.	-	No Connection
26	FL_CS	O	FL Driver Chip Select
27	/FL_RESET	O	Reset Input (ACTIVE L)
28	FL_CLK	O	Serial Clock to FL Driver
29	N.C.	-	No Connection
30	FL_DATA	O	Serial Data To FL Driver
31	RXD	-	No Connection
32	TXD	-	No Connection
33	SCLK	-	Synchronisation Clock (Pull down resistor)
34	BUSY	-	No Connection
35	D_MPURX	O	DAB LSI Serial Data Output
36	D_MPUTX	I	DAB LSI Serial Data Input
37	D_MPUCCLK	O	DAB LSI Serial Clock
38	N.C.	-	No Connection
39	CD_MCLK	O	CD Command CLK Output
40	N.C.	-	No Connection
41	EPM	-	No Connection


Pin No.	Mark	I/O	Function
42	CD_MDATA	O	CD Command Data Output
43	CD_MLD	O	CD Command Load Output
44	D_PLLSCL	O	DAB Serial Clock
45	D_PLSDA	I/O	DAB Serial Data
46	CE	-	No Connection
47	N.C.	-	No Connection
48	STATUS	I	CD Servo LSI Status Input (Inverted)
49	PCONT	O	Main Transformer Control Output
50	D_NRFRESET	O	DAB Tuner LSI Reset
51	D_LOCKDET	I	DAB Tuner LSI Lock Detection
52	D_NRST	O	DAB Decoder LSI Reset
53	D_MPUMOD	O	DAB LSI Serial Communication Mode
54	D_DOWFIC	I	Edge Detector
55	D_PON	O	DAB Module Power Control
56	N.C.	-	No Connection
57	MUTE_A	O	Audio Mute
58	N.C.	-	No Connection
59	REC	O	when record circuit is operating DURING RECORDING = H
60	N.C.	-	No Connection
61	PHOTO	-	PHOTO (SG Mechanism only)
62	VDD	-	Power Supply (+5V)
63	N.C.	-	No Connection
64	VSS	-	Ground (0V)
65	DMT	O	Deck Mute at mecha transition L=mute OFF
66	TAPE_EJECT	-	Tape Eject
67	ASP_CLK	O	ASP CLK
68	ASP_DAT	O	ASP DATA
69	SDA	-	Serial Data Output Pin
70	CL	-	Clock Signal
71	ST	-	Tuner Stereo Signal
72	TUNED	-	Tuner Tuned Signal
73	N.C.	-	No Connection
74	N.C.	-	No Connection
75	N.C.	-	No Connection
76	N.C.	-	No Connection
77	N.C.	-	No Connection
78	CD_OPEN_SW	-	CD Open Switch
79	TAPE_SELECT	I	(H = default setting with TAPE; L = default setting without TAPE)
80	CD_RST	O	CD Reset Output
81	DCDET	O	Power Detection Input

Pin No.	Mark	I/O	Function
82	/RESTSW	I	CD Limit Switch Input for the Most Inner Point (Active Low)-
83	DAB_PDET	O	DAB Module Power Detection
84	N.C.	-	No Connection
85	VOL_DETR	I	Volume Detect Right Input
86	VOL_DETL	I	Volume Detect Left Input
87	MOTOR	O	MOTOR Control Output L=OFF
88	PLUNGER	O	Deck PLUNGER Control Output L=OFF
89	DECK_AD1	I	DECK AD Input 1
90	DECK_AD2	I	DECK AD Input 2
91	CD_CLOSE	I/O	CD Tray Close
92	CD_OPEN	I/O	CD Tray Open
93	KEY2	I	KEY2 INPUT
94	KEY1	I	KEY1 INPUT
95	VOL_JOG1	I	Volume Jog 1
96	AVSS	-	Analog Power Supply Input (Connect to GND)
97	REG	I	Region Setting
98	VREF	-	Reference for A-D (5V)
99	AVCC	-	Analog Power Supply Input
100	DEMO_SELECTOR	I	(H = default demo on, L = default demo off)

22 Troubleshooting Flowchart (CD Section Circuit)

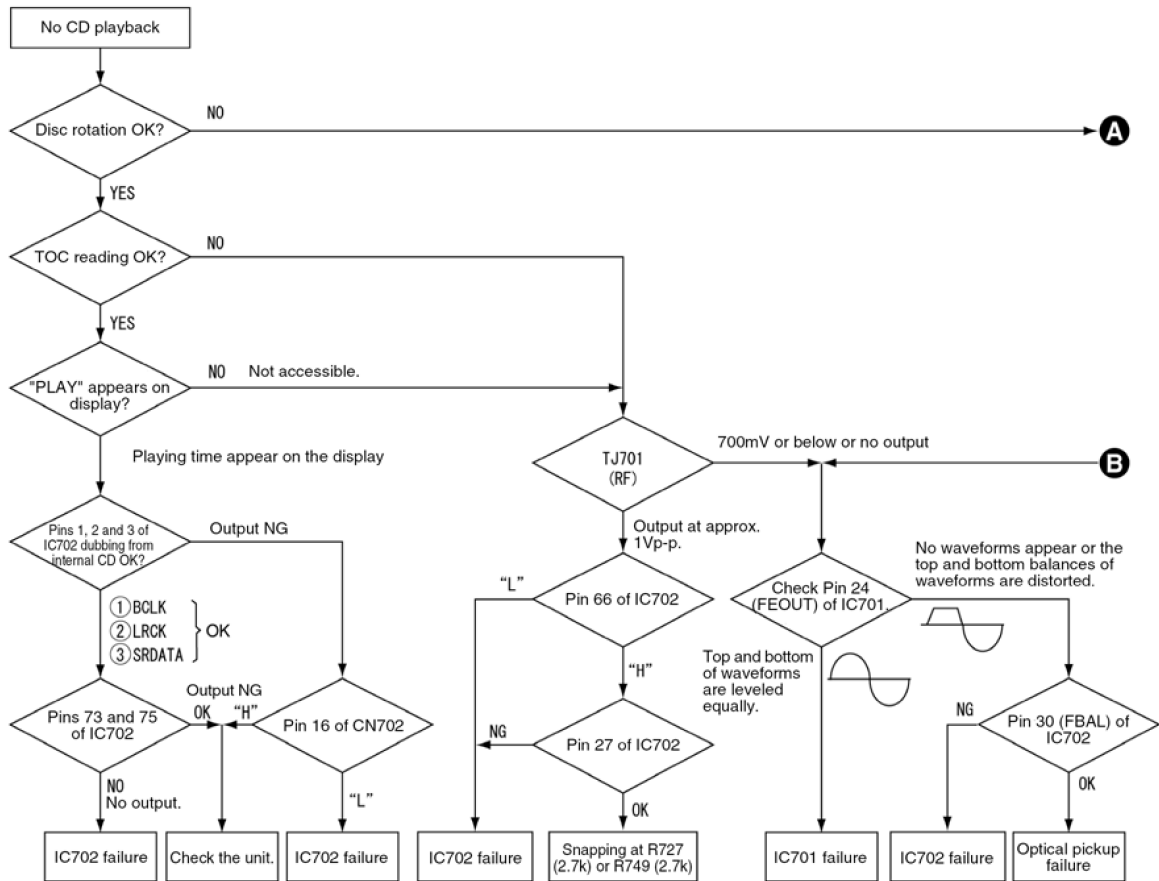


A

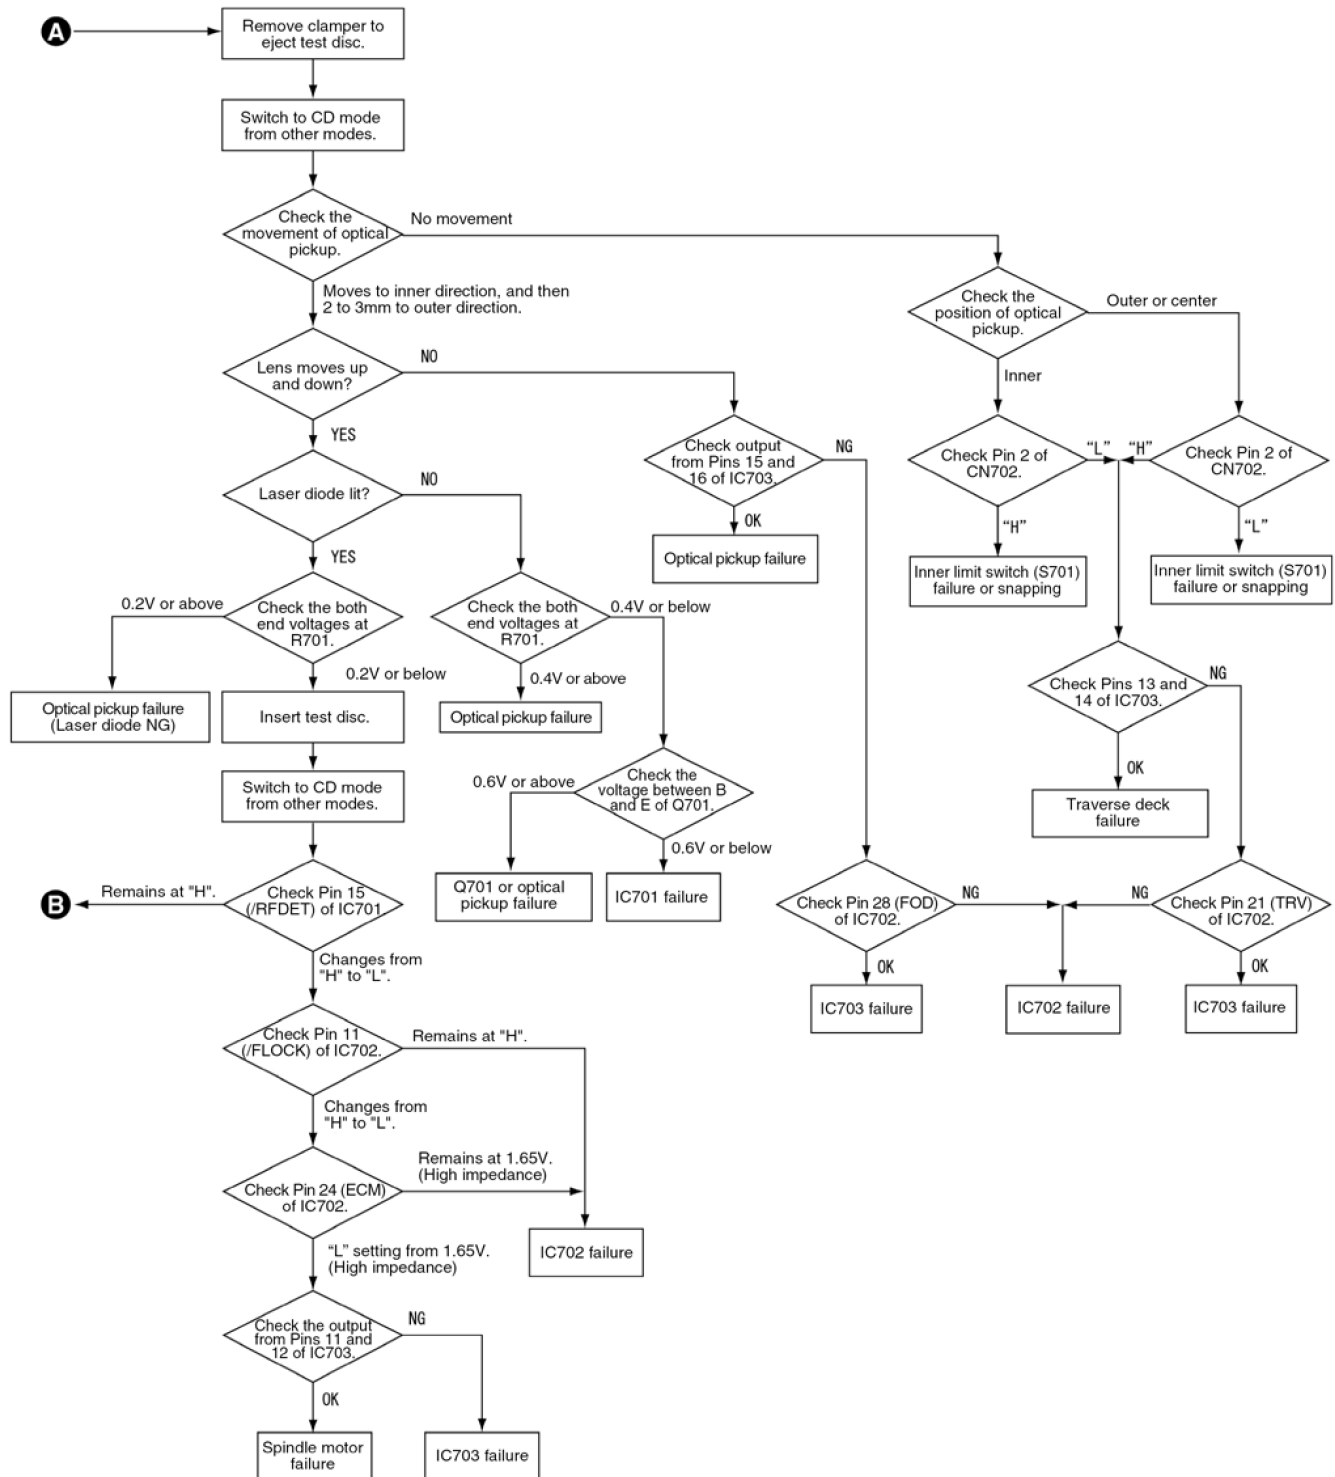


23 Exploded Views


23.1. Cabinet Parts Location

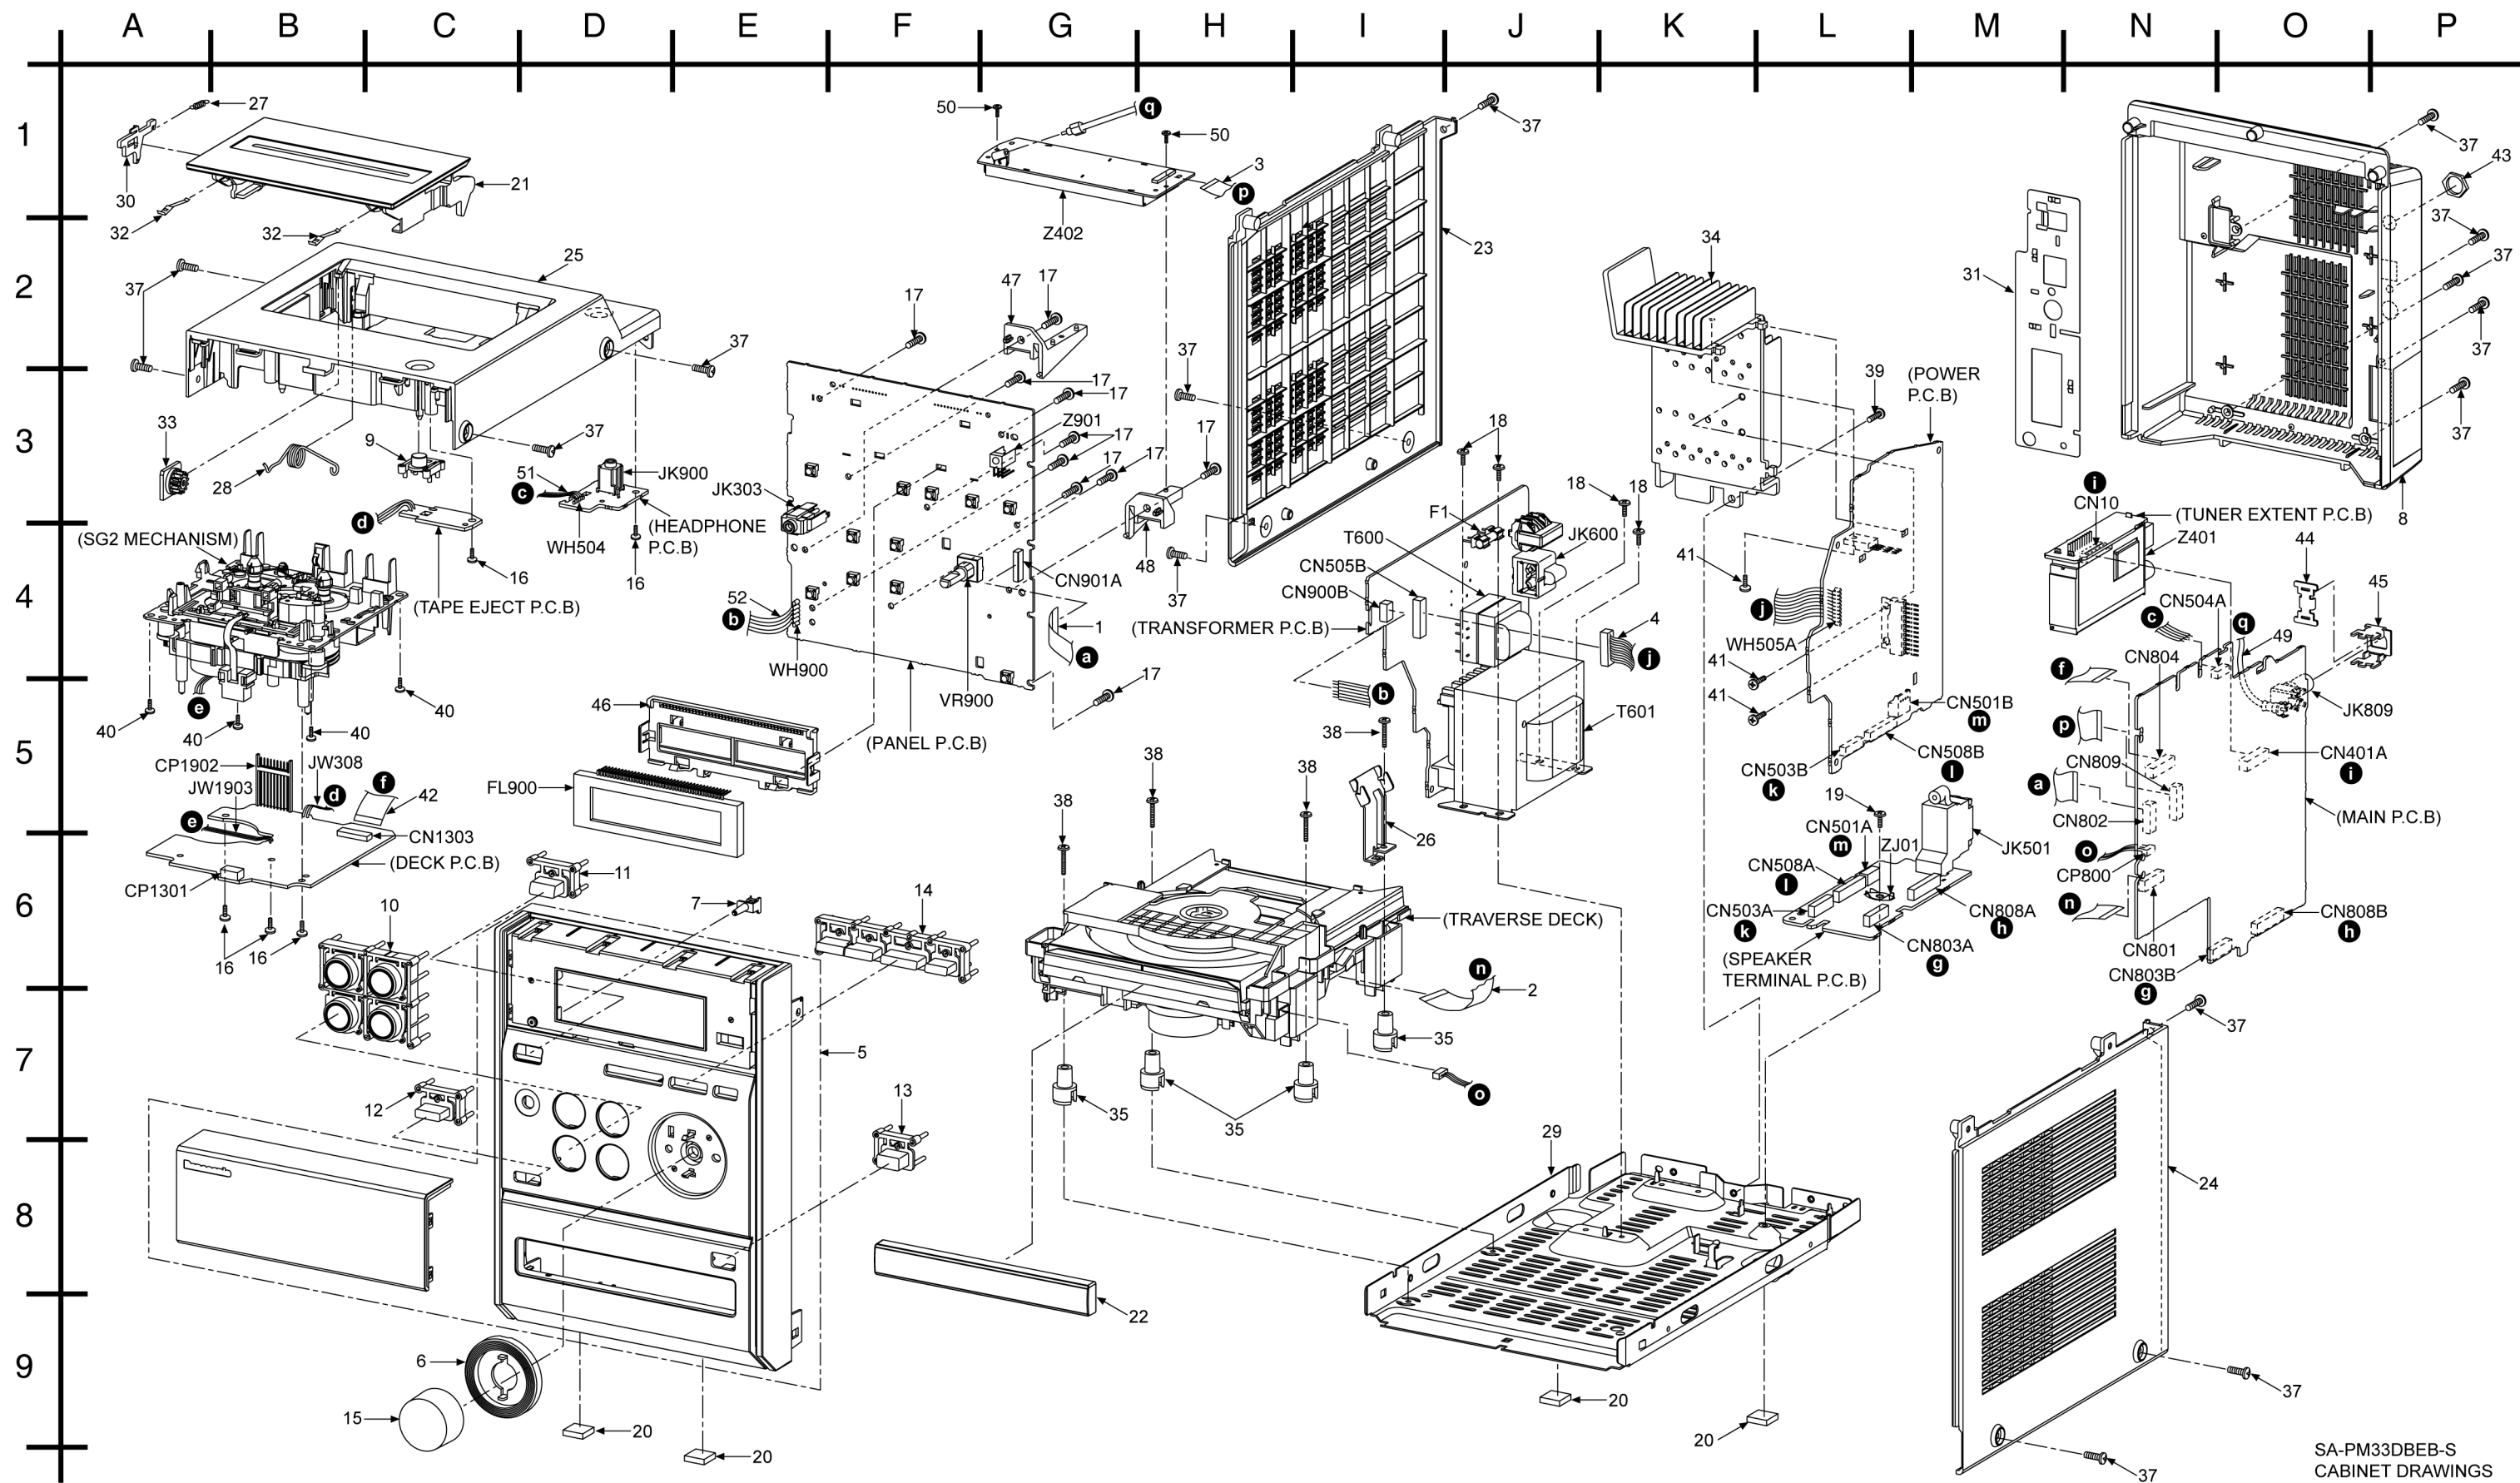

23.2. Cassette Deck (RAA4402-1S) & Traverse Deck Part Location

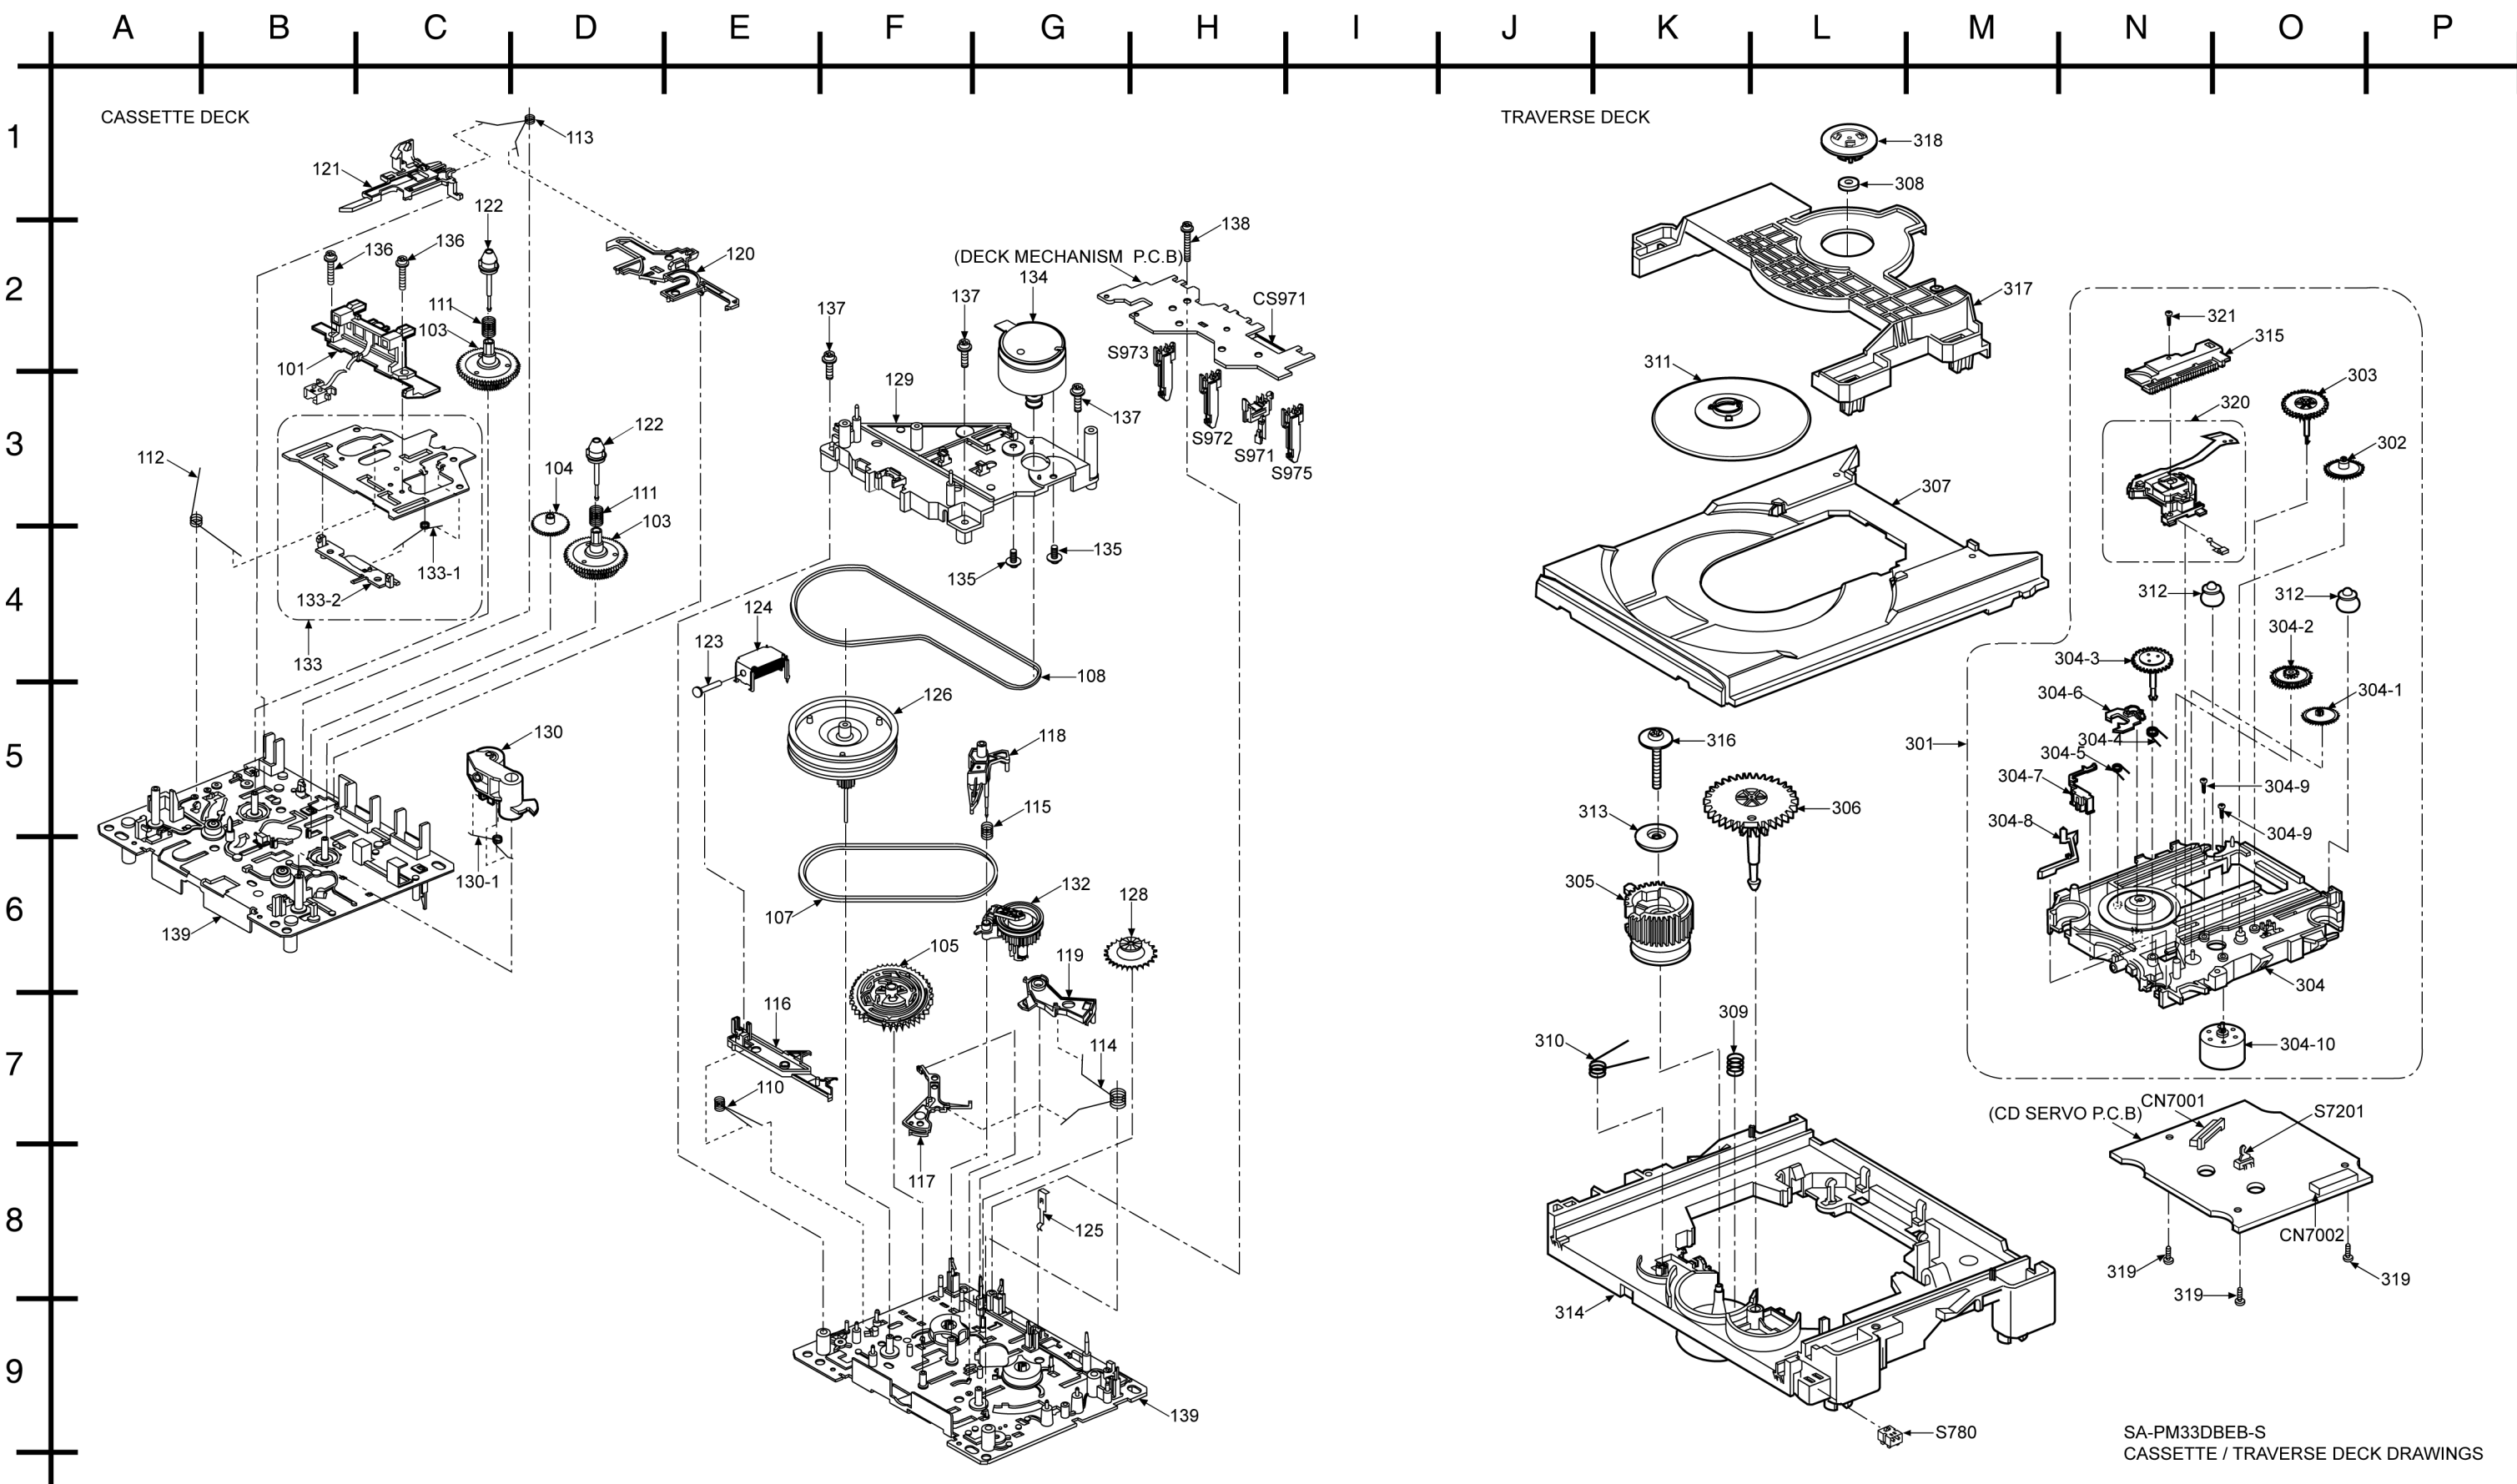

23.3. Packaging

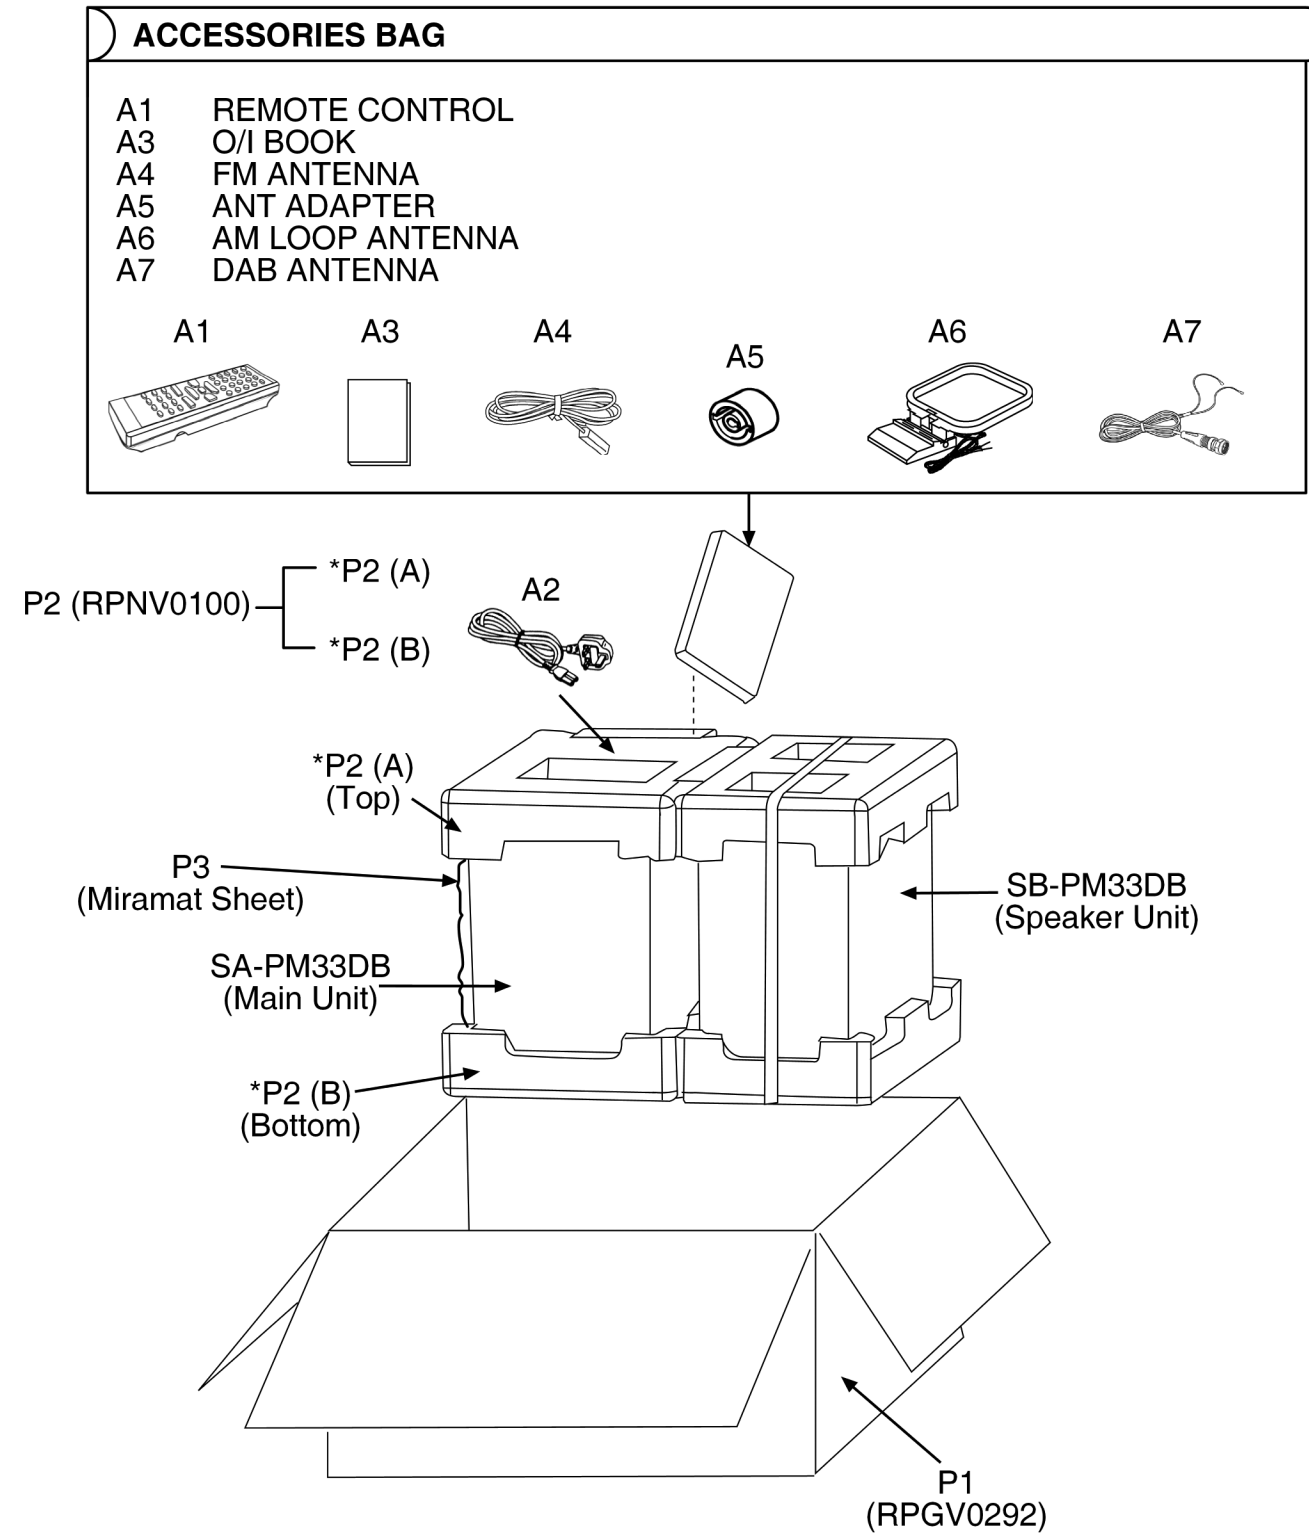

24 Replacement Parts List

Notes:

- Important safety notice:

Components identified by $\triangle$ mark have special characteristics important for safety.

Furthermore, special parts which have purposes of fire-retardent (resistors), high-quality sound (capacitors), low noise (resistors), etc are used.

When replacing any of these components, be sure to use only manufacturer's specified parts shown in the parts list.

- The parenthesized indications in the Remarks columns specify the areas or colour. (Refer to the cover page for area or colour)

Parts without these indications can be used for all areas.

- Warning: This product uses a laser diode. Refer to "Precaution of Laser Diode".

- Capacitor values are in microfarads (μ F) unless specified otherwise, P= Pico-farads (pF), F= Farads.

- Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM).

- The marking (RTL) indicates that the Retention Time is limited for this items. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of a availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

- [M] Indicates in the Remarks columns indicates parts supplied by **PAVCSG**.

- Reference for O/I book languages are as follows:

Ar:	Arabic	Du:	Dutch	It:	Italian	Sp:	Spanish
Cf:	Canadian French	En:	English	Ko:	Korean	Sw:	Swedish
Cz:	Czech	Fr:	French	Po:	Polish	Co:	Traditional Chinese
Da:	Danish	Ge:	German	Ru:	Russian	Cn:	Simplified Chinese
Pe:	Persian	Ur:	Ukraine				

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS	
1	REEV0113	15P FFC	[M]
2	REEV0114	17P FFC (CD-MAIN)	[M]
3	REEV0120	18P FFC (DAB-MAIN)	[M]
4	REXV0062	WIRE 8P (PWR-TRANS)	[M]
5	RFKGAPM33DBE	FRONT PANEL ASS'Y	[M]
6	RGKV0149-S	VOLUME ORNAMENT	[M]
7	RGLV0061-Q	LIGHTING TIP	[M]
8	RFKHAPM33DBE	REAR CABINET ASS'Y	[M]
9	RGU2280-S	CASS EJECT BUTTON	[M]
10	RGUV0134C-S	FUNCTION BUTTON	[M]
11	RGUV0156-S	POWER BUTTON	[M]
12	RGUV0157-S	STOP BUTTON	[M]
13	RGUV0158-S	CD EJECT BUTTON	[M]
14	RGUV0159-S	CONTROL BUTTON	[M]
15	RGWV0039-S	VOLUME KNOB	[M]
16	RHD26046-L	SCREW	[M]
17	RHD26050	SCREW	[M]
18	RHDV30005	SCREW	[M]
19	RHDV30007	SCREW	[M]
20	RHGV0008	LEG CUSHION	[M]
21	RKF0688-S	CASS HOLDER/LID	[M]
22	RKFV0059-S	CD LID	[M]
23	RKMV0064-H	SIDE PANEL (L)	[M]
24	RKMV0065-H	SIDE PANEL (R)	[M]
25	RKMV0066-S	TOP CABINET	[M]
26	RMAV0001	MAIN PCB SUPPORT	[M]
27	RMB0448-J	LOCK ROD SPRING	[M]
28	RMBV0046	CASS LID OPEN SPRING	[M]
29	RMKV0051	BOTTOM CHASSIS	[M]
30	RMM0163-1	CASSETTE LOCK ROD	[M]
31	RSCV0073	REAR SHIELD	[M]
32	RUS757ZAA	CASS HALF SPRING	[M]
33	RXGX0002	DAMPER GEAR	[M]
34	RXXV0040	HEAT SINK UNIT	[M]
35	SHE187-4J	POWER PCB SUPPORT	[M]
37	XTB3+10JFJ	SCREW	[M]
38	XTB3+20JFJK	SCREW	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
39	XTB3+8FFJ	SCREW	[M]
40	XTV3+10GFJ-M	SCREW	[M]
41	XTV3+8FFJ	SCREW	[M]
42	REEV0121	19P FFC (DECK-MAIN)	[M]
43	RHN95002	NUT (DAB)	[M]
44	RMAV0039	F-CONNECTOR SUPPORT	[M]
45	RMAV0040	F-CONNECTOR SUPPORT	[M]
46	RMNV0066	FL HOLDER	[M]
47	RMNV0070	DAB HOLDER L	[M]
48	RMNV0071	DAB HOLDER R	[M]
49	REXV0070	F-CONNECTOR TO DAB P	[M]
50	XTN2+6JFJ	DAB TUNER SCREW	[M]
51	RWJ1104150QX	4P WIRE	[M]
52	RWJ1105205QX	5P WIRE (PANEL-TRAN)	[M]
		CASSETTE DECK	
101	RED0067-2	R/P HEAD BLOCK UNIT	[M]
103	RDG0300	REEL BASE GEAR	[M]
104	RDG0301	WINDING RELAY GEAR	[M]
105	RDK0026-4	MAIN GEAR	[M]
107	RDV0033-4	WINDING BELT	[M]
108	RDV0064-1	CAPSTAN BELT	[M]
110	RMB0312	TRIGGER LEVER SPRING	[M]
111	RMB0400	REEL SPRING	[M]
112	RMB0403	HEAB PANEL SPRING	[M]
113	RMB0404	BRAKE ROD SPRING	[M]
114	RMB0406-5	FR LEVER SPRING	[M]
115	RMB0408	THRUST SPRING	[M]
116	RML0370-4	TRIGGER LEVER	[M]
117	RML0371	FR LEVER	[M]
118	RML0372-2	WINDING LEVER	[M]
119	RML0374-2	EJECT LEVER	[M]
120	RMM0131-1	BRAKE ROD	[M]
121	RMM0133-1	EJECT ROD	[M]
122	RMQ0519	REEL HUB	[M]
123	RMS0398-1	MOVING CORE	[M]
124	RXQ0470-2	PLUNGER	[M]
125	RMC0061	PACK SPRING	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
126	RXF0061-1	FLYWHEEL F ASS'Y	[M]
128	RXG0040	FF RELAY GEAR ASS'Y	[M]
129	RMK0283A-2	SUB-CHASSIS	[M]
130	RXL0124	PINCH ROLLER F ASS'Y	[M]
130-1	RMB0401	PINCH ARM SPRING F	[M]
132	RXL0126	WINDING ARM ASS'Y	[M]
133	RXQ0412-3	HEAD PANEL ASS'Y	[M]
133-1	RMB0405-1	FR ROD SPRING	[M]
133-2	RMM0132-1	FR ROD	[M]
134	REM0120	CAP MOTOR ASS'Y	[M]
135	RHD26022-1	MOTOR SCREW	[M]
136	XTW2+5LFJ	HEAD BLOCK UNIT SCRE	[M]
137	XTW26+10SFJ	SUB-CHASSIS SCREW	[M]
138	XYC2+JF17FJ	PCB EARTH SCREW	[M]
139	RFKJSTR280PP	CHASSIS ASS'Y	[M]
		TRAVERSE DECK	
301	RAE0157Z-V	TRAVERSE W/O PCB	[M]
302	RDG0455	TRAVERSE GEAR (A)	[M]
303	RDG0456-1	TRAVERSE GEAR (B)	[M]
304	RFKNCT100	TRAVERSE BASE ASS'Y	[M]
304-1	RDG0457	LOAD GEAR (A)	[M]
304-10	RXQ0632	TRAVERSE MOTOR UNIT	[M]
304-2	RDG0458	LOAD GEAR (B)	[M]
304-3	RDG0459	LOAD GEAR (C)	[M]
304-4	RME0369	PRESS SPRING	[M]
304-5	RME0291	LOCK SPRING	[M]
304-6	RML0551	TRIGGER LEVER	[M]
304-7	RML0552	LOCK LEVER	[M]
304-8	RMM0219	STOPPER	[M]
304-9	XQN17+C28FJ	SCREW	[M]
305	RDG0460-2	CAM GEAR	[M]
306	RDG0461	DRIVE GEAR	[M]
307	RGQ0254-K2	TRAY	[M]
308	RHM0001	MAGNET	[M]
309	RMB0603	FLOATING SPRING	[M]
310	RME0288	CENTERING SPRING	[M]
311	RFKNXED50-S	CLAMPER HOLDER ASS'Y	[M]
312	RMG0510-K	FLOATING RUBBER (A)	[M]
313	RMG0511-K	FLOATING RUBBER (B)	[M]
314	RMK0422-6	MECHA CHASSIS	[M]
315	RMM0218-1	TRAVERSE DRIVE RACK	[M]
316	RHD30083-1	CAM. GEAR SCREW	[M]
317	RMR1223-K1	CLAMP PLATE	[M]
318	RMR1242-X2	FIXTURE	[M]
319	XTN2+6GFJ	SCREW	[M]
320	RXQ0999	OPU UNIT	[M]
321	SNSD38-1	SCREW	[M]
		PRINTED CIRCUIT BOARD	
	REP0092B	DECK P.C.B. / TAPE EJECT P.C.B.	[M] (RTL)
	REP0093A	MAIN P.C.B. / PANEL P.C.B. / HEADPHONE P.C.B.	[M] (RTL)
	REP0094A	TUNER EXTENT P.C.B. / TRANSFORMER P.C.B. / POWER P.C.B. / SPEAKER TERMINAL P.C.B.	[M] (RTL)
	REP00321H	DECK MECHANISM P.C.B.	[M] (RTL)
	REP00082A	CD SERVO P.C.B.	[M] (RTL)
		INTEGRATED CIRCUITS	
IC300	AN17831A	IC POWER AMP	[M]
IC401	C2C8Y000223	IC MICROPROCESSOR	[M]
IC700	C0ABBB000297	IC OP-AMP	[M]
IC800	C1BB00000732	IC ASP	[M]
IC801	C0CAABC000007	IC REGULATOR	[M]
IC802	C0DBZGC000067	IC 3.3V REGULATOR	[M]
IC900	C0DBZGC000067	IC 3.3V REGULATOR	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
IC971	CNB13030R2AU	IC PHOTO INTERRUPTOR	[M]
IC1000	C1AA000000612	IC ANALOG SWITCH	[M]
IC1001	AN7326K	IC P/B REC AMP	[M]
IC7001	MN6627954MA	IC SERVO PROCESSOR/DIGITAL SIGNAL PROCESSOR/DIGITAL FILTER D/A CONVERTER	[M]
IC7002	BA5948FPE2	IC 4 CH DRIVE	[M]
		TRANSISTORS	
Q221	B1ABGC000005	TRANSISTOR	[M]
Q222	B1ABGC000005	TRANSISTOR	[M]
Q421	B1ABGC000005	TRANSISTOR	[M]
Q422	B1ABGC000005	TRANSISTOR	[M]
Q500	B1GCCFGA0006	TRANSISTOR	[M]
Q501	B1AACF000063	TRANSISTOR	[M]
Q503	B1BCCG000002	TRANSISTOR	[M]
Q504	B1AACF000063	TRANSISTOR	[M]
Q505	B1BACG000048	TRANSISTOR	[M]
Q507	B1AAJC000019	TRANSISTOR	[M]
Q530	2SD0592ARA	TRANSISTOR	[M]
Q600	B1AACF000063	TRANSISTOR	[M]
Q601	2SC3940ARA	TRANSISTOR	[M]
Q602	KRC102MTA	TRANSISTOR	[M]
Q603	B1BABL000017	TRANSISTOR	[M]
Q750	B1GDCFGG0026	TRANSISTOR	[M]
Q751	B1GBCFJJ0044	TRANSISTOR	[M]
Q800	B1GBCFNN0009	TRANSISTOR	[M]
Q801	B1GBCFJN0009	TRANSISTOR	[M]
Q802	B1ACND000003	TRANSISTOR	[M]
Q803	B1GBCFJJ0044	TRANSISTOR	[M]
Q807	B1GBCFGJ0016	TRANSISTOR	[M]
Q808	B1GBCFGJ0016	TRANSISTOR	[M]
Q1101	B1ABGC000005	TRANSISTOR	[M]
Q1201	B1ABGC000005	TRANSISTOR	[M]
Q1302	B1GDCFJJ0002	TRANSISTOR	[M]
Q1303	B1GBCFGH0001	TRANSISTOR	[M]
Q1304	B1GDCFGH0002	TRANSISTOR	[M]
Q1309	B1AAGC000006	TRANSISTOR	[M]
Q1310	B1AAGC000006	TRANSISTOR	[M]
Q1312	B1ABCF000011	TRANSISTOR	[M]
Q1314	B1GDCFGH0002	TRANSISTOR	[M]
Q1315	B1ACKD000006	TRANSISTOR	[M]
Q1316	2SD09650RA	TRANSISTOR	[M]
Q1317	B1ABGC000005	TRANSISTOR	[M]
Q7601	B1ADCF000001	TRANSISTOR	[M]
		DIODES	
D501	B0EAMM000038	DIODE	[M]
D502	B0EAMM000038	DIODE	[M]
D504	B0EAMM000038	DIODE	[M]
D505	B0EAMM000038	DIODE	[M]
D506	B0BA8R200005	DIODE	[M]
D508	B0BA5R600016	DIODE	[M]
D512	B0BA9R600002	DIODE	[M]
D525	B0EAKM000117	DIODE	[M]
D526	B0EAKM000117	DIODE	[M]
D527	B0EAKM000117	DIODE	[M]
D600	B0AACK000004	DIODE	[M]
D602	B0EAKM000117	DIODE	[M]
D603	B0EAKM000117	DIODE	[M]
D604	B0EAKM000117	DIODE	[M]
D605	B0EAKM000117	DIODE	[M]
D606	B0EAKM000117	DIODE	[M]
D607	B0BA6R800007	DIODE	[M]
D608	B0AACK000004	DIODE	[M]
D609	B0EAKM000117	DIODE	[M]
D610	B0BA02300017	DIODE	[M]
D611	B0EAKM000117	DIODE	[M]
D612	B0BA01900005	DIODE	[M]
D750	B0ACCK000005	DIODE	[M]
D751	B0ACCK000005	DIODE	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
D800	B0ACCE000003	DIODE	[M]
D801	B0ACCE000003	DIODE	[M]
D802	B0ACCK000005	DIODE	[M]
D803	B0ACCK000005	DIODE	[M]
D804	B0ACCK000005	DIODE	[M]
D805	B0ACCK000005	DIODE	[M]
D900	B0BC6R700006	DIODE	[M]
D906	B3AAA0000489	DIODE	[M]
D971	MA2C16500E	DIODE	[M]
D1301	B0ACCK000005	DIODE	[M]
D7650	MAZ80560ML	DIODE	[M]
		VARIABLE RESISTOR	
VR900	EVEJ1CF3024B	VR VOLUME ENCODER	[M]
		SWITCHES	
S780	K0F111E00093	SW CD OPEN	[M]
S900	EVQ21405RJ	SW STOP/-DEMO	[M]
S901	EVQ21405RJ	SW CD PLAY	[M]
S902	EVQ21405RJ	SW TAPE PLAY	[M]
S903	EVQ21405RJ	SW TUNER/BAND	[M]
S904	EVQ21405RJ	SW FF	[M]
S905	EVQ21405RJ	SW REW	[M]
S906	EVQ21405RJ	SW POWER	[M]
S907	EVQ21405RJ	SW CD_OPEN/CLOSE	[M]
S908	EVQ21405RJ	SW BASS/TREBLE	[M]
S909	EVQ21405RJ	SW REC	[M]
S910	EVQ21405RJ	SW MUSIC PORT	[M]
S971	K0J1BB000017	SW MODE	[M]
S972	K0J1BB000021	SW HALF	[M]
S973	K0J1BB000021	SW CR02	[M]
S975	K0J1BB000021	SW RECIINH_F	[M]
S1000	EVQ21405RJ	SW TAPE EJECT	[M]
S7201	RSH1A048-A	SW RESET	[M]
		CONNECTORS	
CN10	K1KB10B00042	10P CONNECTOR	[M]
CN401A	K1KA10AA0031	10P CONNECTOR	[M]
CN501A	K1KB04A00035	4P CONNECTOR	[M]
CN501B	K1KA04BA0125	4P CONNECTOR	[M]
CN503A	K1KA09AA0031	9P CONNECTOR	[M]
CN503B	K1KB09B00013	9P CONNECTOR	[M]
CN504A	K1MP04A00003	4P CONNECTOR	[M]
CN505B	K1KA08AA0319	8P CONNECTOR	[M]
CN508A	K1KA13AA0031	13P CONNECTOR	[M]
CN508B	K1KB13B00017	13P CONNECTOR	[M]
CN801	K1MN17AA0004	17P CONNECTOR	[M]
CN802	K1MN15A00049	15P FFC CONNECTOR	[M]
CN803A	K1KA09AA0031	9P CONNECTOR	[M]
CN803B	K1KB09B00013	9P CONNECTOR	[M]
CN804	K1MN19A00027	19P CONNECTOR	[M]
CN808A	K1KA13AA0031	13P CONNECTOR	[M]
CN808B	K1KB13B00017	13P CONNECTOR	[M]
CN809	K1MN18A00046	18P CONNECTOR	[M]
CN900B	K1MP05A00004	5P CONNECTOR	[M]
CN901A	K1MN15A00049	15P FFC CONNECTOR	[M]
CN1303	K1MN19BA0005	19P CONNECTOR	[M]
CN7001	K1MN16B00154	16P CONNECTOR	[M]
CN7002	K1MN17B00032	17P CONNECTOR	[M]
CP800	REXX0230-2	2P CONNECTOR (MAIN TO CR120)	[M]
CP1301	K1MY05AA0043	5P CONNECTOR	[M]
CP1902	K1KA09BA0153	9P CONNECTOR	[M]
CS971	RJU071H09M1	9P CONNECTOR	[M]
		COILS & TRANSFORMERS	
L203	J0JBC0000019	CHIP INDUCTOR	[M]
L204	G1C2R2MA0060	CHIP INDUCTOR	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
L300	G0AR76Y00002	CHOKE COIL	[M]
L301	G0AR76Y00002	CHOKE COIL	[M]
L302	G0AR76Y00002	CHOKE COIL	[M]
L303	G0AR76Y00002	CHOKE COIL	[M]
L600	G0B371HA0005	LINE FILTER	[M] △
L801	J0JKB0000020	EMI BEAD CORE	[M]
L802	J0JKB0000020	EMI BEAD CORE	[M]
L803	J0JKB0000020	EMI BEAD CORE	[M]
L804	G0C3R3JA0027	COIL	[M]
L805	G0C3R3JA0027	COIL	[M]
L812	J0JKB0000020	EMI BEAD CORE	[M]
L900	G0C3R3JA0027	COIL	[M]
L902	ERJ3GEY0R00V	CHIP JUMPER	[M]
L903	G0A200D00002	RF CHOKE COIL	[M]
L1301	G2ZZ00000024	BIAS OCS COIL	[M]
L1302	G0C470JA0052	RF CHOKE COIL	[M]
T600	RTP1H3E002	BACK UP TRANSFORMER	[M] △
T601	G4CYAYY00087	POWER TRANSFORMER	[M] △
		COMPONENT COMBINATION	
Z401	ENG07811QF	TUNER PACK	[M]
Z402	RAL0044	DAB MODULE	[M]
Z600	ERZV10V511CS	ZENER	[M] △
Z901	B3RAD0000128	REMOCON SENSOR	[M]
		RELAY	
RL600	K6B1ADA00011	RELAY	[M] △
		OSCILLATORS	
X800	H2B100500004	CERAMIC RESONATOR	[M]
X801	H0A327200111	CRYSTAL	[M]
X7201	H2B169500005	CRYSTAL	[M]
		DISPLAY TUBE	
FL900	A2BC00000071	FL DISPLAY	[M]
		FUSE	
F1	K5D631BLA012	FUSE	[M] △
		FUSE HOLDERS	
FC600	EYF52BCY	FUSE CLIP	[M]
FC601	EYF52BCY	FUSE CLIP	[M]
		FUSE PROTECTOR	
FP352	K5G502A00039	FUSE PROTECTOR	[M] △
		JACKS	
JK303	K2HC1YYA0003	JK AUX	[M]
JK501	K4BC04B00086	JK RED/BLACK SPEAKER	[M]
JK600	K2AA2B000015	JK AC INLET	[M] △
JK809	K1QKB1BB0002	JK F-CONNECTOR	[M]
JK900	K2HC103A0024	JK HP JACK	[M]
		EARTH TERMINAL	
ZJ01	SNE1004-3	EARTH TERMINAL	[M]
		CHIP JUMPERS	
W7001	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7002	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7003	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7004	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7005	ERJ3GEY0R00V	CHIP JUMPER	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
W7006	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7007	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7008	ERJ6GEY0R00V	CHIP JUMPER	[M]
W7009	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7010	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7011	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7012	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7013	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7014	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7015	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7016	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7017	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7018	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7019	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7020	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7021	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7022	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7023	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7024	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7025	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7026	ERJ3GEY0R00V	CHIP JUMPER	[M]
W7027	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA1	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA2	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA3	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA4	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA5	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA6	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA7	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA8	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA9	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA10	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA11	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA12	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA13	ERJ6GEY0R00V	CHIP JUMPER	[M]
WA14	ERJ6GEY0R00V	CHIP JUMPER	[M]
WA15	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA22	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA23	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA25	ERJ3GEY0R00V	CHIP JUMPER	[M]
WA1061	ERJ3GEY0R00V	CHIP JUMPER	[M]
WH504	RMR0313	CABLE HOLDER	[M]
WH505A	K1YF08000003	8P WIRE HOLDER	[M]
WH900	RMR0314	CABLE HOLDER	[M]
JW308	RWJ0102190SS	2P (CASS OPEN-DECK) (JW308A/B)	[M]
JW1903	RWJ0102050KR	2P (MOTOR WIRE)	[M]
		PACKING MATERIALS	
P1	RPVG0292	PACKING CASE	[M]
P2	RPNV0100	POLYFOAM	[M]
P3	RPHV0001-1	MIRAMAT SHEET	[M]
		ACCESSORIES	
A1	N2QAYB000003	REMOTE CONTROL	[M]
A1-1	RKK-HTR0283	R/C BATTERY COVER	[M]
A2	K2CT3CA00004	AC CORD	[M] △
A3	RQTV0123-B	O/I BOOK (En)	[M]
A4	RSA0007-L	FM ANTENNA WIRE	[M]
A5	K1Y202000013	ANT ADAPTER	[M]
A6	N1DAAA000001	AM LOOP ANTENNA	[M]
A7	N1EADY000001	DAB ANTENNA	[M]
		RESISTORS	
R201	ERJ3GEYJ682V	6.8K 1/16W	[M]
R202	D0GB472JA041	4.7K 1/16W	[M]
R203	D0GB272JA007	2.7K 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R204	ERJ3GEYJ682V	6.8K 1/16W	[M]
R206	D0GB153JA007	15K 1/16W	[M]
R207	D0GB472JA041	4.7K 1/16W	[M]
R208	ERJ3GEYJ822V	8.2K 1/16W	[M]
R209	D0GB272JA007	2.7K 1/16W	[M]
R210	D0GB392JA007	3.9K 1/16W	[M]
R211	D0GB183JA007	18K 1/16W	[M]
R212	ERJ3GEYJ102V	1K 1/16W	[M]
R220	D0GB104JA007	100K 1/16W	[M]
R221	D0GB153JA007	15K 1/16W	[M]
R222	D0GB683JA007	68K 1/16W	[M]
R223	ERJ6GEYJ470V	47 1/10W	[M]
R224	ERJ3GEYJ102V	1K 1/16W	[M]
R225	D0GB390JA041	39 1/16W	[M]
R226	D0GB392JA007	3.9K 1/16W	[M]
R227	D0GB392JA007	3.9K 1/16W	[M]
R230	D0GB104JA007	100K 1/16W	[M]
R251	ERDS2TJ821T	820 1/4W	[M]
R256	D0AE563JA048	56K 1/4W	[M]
R285	ERDS2TJ822T	8.2K 1/4W	[M]
R291	ERDS2TJ682T	6.8K 1/4W	[M]
R292	ERDS2TJ392T	3.9K 1/4W	[M]
R295	D0AE562JA048	5.6K 1/4W	[M]
R380	D0AE222JA048	2.2K 1/4W	[M]
R381	D0AE103JA048	10K 1/4W	[M]
R401	ERJ3GEYJ682V	6.8K 1/16W	[M]
R402	D0GB472JA041	4.7K 1/16W	[M]
R403	D0GB272JA007	2.7K 1/16W	[M]
R404	ERJ3GEYJ682V	6.8K 1/16W	[M]
R406	D0GB153JA007	15K 1/16W	[M]
R407	D0GB472JA041	4.7K 1/16W	[M]
R408	ERJ3GEYJ822V	8.2K 1/16W	[M]
R409	D0GB272JA007	2.7K 1/16W	[M]
R410	D0GB392JA007	3.9K 1/16W	[M]
R411	D0GB183JA007	18K 1/16W	[M]
R412	ERJ3GEYJ102V	1K 1/16W	[M]
R420	D0GB104JA007	100K 1/16W	[M]
R421	D0GB153JA007	15K 1/16W	[M]
R422	D0GB683JA007	68K 1/16W	[M]
R423	ERJ6GEYJ470V	47 1/10W	[M]
R424	ERJ3GEYJ102V	1K 1/16W	[M]
R425	D0GB390JA041	39 1/16W	[M]
R426	D0GB392JA007	3.9K 1/16W	[M]
R427	D0GB392JA007	3.9K 1/16W	[M]
R430	D0GB104JA007	100K 1/16W	[M]
R441	ERD2FCVG330T	33 1/4W	[M]
R442	D0GB562JA007	5.6K 1/16W	[M]
R443	D0GB332JA007	3.3K 1/16W	[M]
R444	D0GB332JA007	3.3K 1/16W	[M]
R445	D0GB562JA007	5.6K 1/16W	[M]
R446	ERJ3GEYJ822V	8.2K 1/16W	[M]
R447	ERJ3GEYJ822V	8.2K 1/16W	[M]
R451	ERDS2TJ821T	820 1/4W	[M]
R456	D0AE563JA048	56K 1/4W	[M]
R485	ERDS2TJ822T	8.2K 1/4W	[M]
R491	ERDS2TJ682T	6.8K 1/4W	[M]
R492	ERDS2TJ392T	3.9K 1/4W	[M]
R495	D0AE562JA048	5.6K 1/4W	[M]
R501	ERDS2TJ1R2T	1.2 1/4W	[M]
R502	ERDS2TJ1R2T	1.2 1/4W	[M]
R503	ERDS2TJ1R2T	1.2 1/4W	[M]
R504	D0AE221JA048	220 1/4W	[M]
R505	D0AE104JA048	100K 1/4W	[M]
R506	D0AE272JA048	2.7K 1/4W	[M]
R511	D0AE221JA048	220 1/4W	[M]
R514	D0AE222JA048	2.2K 1/4W	[M]
R515	D0AE152JA048	1.5K 1/4W	[M]
R517	D0AE471JA048	470 1/4W	[M]
R518	D0AE102JA048	1K 1/4W	[M]
R520	D0AE471JA048	470 1/4W	[M]
R586	D0AE473JA048	47K 1/4W	[M]
R600	D0AE473JA048	47K 1/4W	[M]
R601	D0AE220JA048	22 1/4W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R603	ERDS2TJ821T	820 1/4W	[M]
R604	D0AE472JA048	4.7K 1/4W	[M]
R605	D0AE151JA048	150 1/4W	[M]
R606	D0AE103JA048	10K 1/4W	[M]
R607	D0AE103JA048	10K 1/4W	[M]
R608	ERD2FCVG220T	22 1/4W	[M]
R611	ERDS2TJ681T	680 1/4W	[M]
R612	D0AE471JA048	470 1/4W	[M]
R614	D0AE2R2JA048	2.2 1/4W	[M]
R615	D0AE2R2JA048	2.2 1/4W	[M]
R616	D0AE2R2JA048	2.2 1/4W	[M]
R617	D0AE2R2JA048	2.2 1/4W	[M]
R750	D0GB472JA041	4.7K 1/16W	[M]
R751	ERJ3GEYJ102V	1K 1/16W	[M]
R752	D0GB222JA041	2.2K 1/16W	[M]
R753	D0AF100JA039	10 1/4W	[M]
R755	D0GB472JA041	4.7K 1/16W	[M]
R756	D0GB472JA041	4.7K 1/16W	[M]
R800	D0GB153JA007	15K 1/16W	[M]
R801	D0GB153JA007	15K 1/16W	[M]
R802	D0GB153JA007	15K 1/16W	[M]
R803	D0GB153JA007	15K 1/16W	[M]
R804	D0GB102JA007	1K 1/16W	[M]
R805	D0GB334JA007	330K 1/16W	[M]
R806	D0GB472JA041	4.7K 1/16W	[M]
R807	ERJ3GEYJ0R00V	0 1/16W	[M]
R808	D0GB106JA007	10M 1/16W	[M]
R809	ERJ3GEYJ103V	10K 1/16W	[M]
R810	D0GB101JA007	100 1/16W	[M]
R811	ERJ3GEYJ102V	1K 1/16W	[M]
R812	D0GB223JA041	22K 1/16W	[M]
R813	ERJ3GEYJ102V	1K 1/16W	[M]
R814	ERJ3GEYJ102V	1K 1/16W	[M]
R815	ERJ3GEYJ102V	1K 1/16W	[M]
R816	ERJ3GEYJ102V	1K 1/16W	[M]
R817	ERJ3GEYJ102V	1K 1/16W	[M]
R818	D0GB471JA041	470 1/16W	[M]
R819	D0GB221JA041	220 1/16W	[M]
R820	D0GB471JA041	470 1/16W	[M]
R821	D0GB471JA041	470 1/16W	[M]
R826	D0GB473JA041	47K 1/16W	[M]
R827	D0GB121JA007	120 1/16W	[M]
R828	D0GB473JA041	47K 1/16W	[M]
R829	D0GB221JA041	220 1/16W	[M]
R830	D0GB221JA041	220 1/16W	[M]
R831	D0GB221JA041	220 1/16W	[M]
R832	ERJ3GEYJ102V	1K 1/16W	[M]
R833	ERJ3GEYJ102V	1K 1/16W	[M]
R834	ERJ3GEYJ102V	1K 1/16W	[M]
R835	D0GB221JA041	220 1/16W	[M]
R836	ERJ3GEYJ102V	1K 1/16W	[M]
R837	D0GB101JA007	100 1/16W	[M]
R838	ERJ3GEYJ102V	1K 1/16W	[M]
R839	ERJ3GEYJ102V	1K 1/16W	[M]
R840	D0GB102JA007	1K 1/16W	[M]
R841	D0GB102JA007	1K 1/16W	[M]
R844	D0GB473JA041	47K 1/16W	[M]
R845	D0GB471JA041	470 1/16W	[M]
R846	ERJ3GEYJ102V	1K 1/16W	[M]
R847	ERJ3GEYJ102V	1K 1/16W	[M]
R848	ERJ3GEYJ102V	1K 1/16W	[M]
R849	ERJ3GEYJ102V	1K 1/16W	[M]
R850	D0GB104JA007	100K 1/16W	[M]
R852	ERJ3GEYJ102V	1K 1/16W	[M]
R853	D0GB123JA007	12K 1/16W	[M]
R854	ERJ3GEYJ103V	10K 1/16W	[M]
R855	D0GB182JA007	1.8K 1/16W	[M]
R856	D0GB332JA007	3.3K 1/16W	[M]
R857	D0GB222JA041	2.2K 1/16W	[M]
R858	D0GB101JA007	100 1/16W	[M]
R859	ERJ3GEYJ102V	1K 1/16W	[M]
R860	ERJ3GEYJ102V	1K 1/16W	[M]
R861	D0GB101JA007	100 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R862	D0GB101JA007	100 1/16W	[M]
R863	D0GB101JA007	100 1/16W	[M]
R864	D0GB101JA007	100 1/16W	[M]
R865	D0GB101JA007	100 1/16W	[M]
R866	D0GB101JA007	100 1/16W	[M]
R867	D0GB101JA007	100 1/16W	[M]
R868	D0GB104JA007	100K 1/16W	[M]
R869	ERJ3GEYJ103V	10K 1/16W	[M]
R870	ERJ3GEYJ103V	10K 1/16W	[M]
R871	ERJ3GEYJ103V	10K 1/16W	[M]
R872	ERJ3GEYJ103V	10K 1/16W	[M]
R875	D0GB101JA007	100 1/16W	[M]
R876	D0GB101JA007	100 1/16W	[M]
R877	D0GB101JA007	100 1/16W	[M]
R878	D0GB101JA007	100 1/16W	[M]
R879	D0GB101JA007	100 1/16W	[M]
R880	ERJ3GEYJ103V	10K 1/16W	[M]
R881	ERJ3GEYJ103V	10K 1/16W	[M]
R882	D0GB101JA007	100 1/16W	[M]
R884	D0GB101JA007	100 1/16W	[M]
R885	D0GB101JA007	100 1/16W	[M]
R886	D0GB101JA007	100 1/16W	[M]
R887	D0GB101JA007	100 1/16W	[M]
R888	D0GB101JA007	100 1/16W	[M]
R889	D0GB101JA007	100 1/16W	[M]
R890	D0GB101JA007	100 1/16W	[M]
R891	D0GB101JA007	100 1/16W	[M]
R892	ERJ3GEYJ103V	10K 1/16W	[M]
R893	ERJ3GEYJ102V	1K 1/16W	[M]
R894	D0GB472JA041	4.7K 1/16W	[M]
R901	ERJ3GEYJ122V	1.2K 1/16W	[M]
R902	D0GB152JA007	1.5K 1/16W	[M]
R903	D0GB222JA041	2.2K 1/16W	[M]
R904	D0GB332JA007	3.3K 1/16W	[M]
R905	D0GB472JA041	4.7K 1/16W	[M]
R910	ERJ3GEYJ122V	1.2K 1/16W	[M]
R911	D0GB152JA007	1.5K 1/16W	[M]
R912	D0GB222JA041	2.2K 1/16W	[M]
R913	D0GB332JA007	3.3K 1/16W	[M]
R914	D0GB472JA041	4.7K 1/16W	[M]
R915	ERJ3GEYJ102V	1K 1/16W	[M]
R916	D0GB680JA007	68 1/16W	[M]
R917	D0GB680JA007	68 1/16W	[M]
R918	D0GB100JA007	10 1/16W	[M]
R919	D0GB100JA007	10 1/16W	[M]
R920	D0GB473JA041	47K 1/16W	[M]
R921	D0GB182JA007	1.8K 1/16W	[M]
R922	D0GB182JA007	1.8K 1/16W	[M]
R924	D0GB220JA007	22 1/16W	[M]
R925	D0GB123JA007	12K 1/16W	[M]
R926	D0GB223JA041	22K 1/16W	[M]
R928	D0GB101JA007	100 1/16W	[M]
R929	D0GB101JA007	100 1/16W	[M]
R930	D0GB101JA007	100 1/16W	[M]
R931	D0GB101JA007	100 1/16W	[M]
R932	D0GB123JA007	12K 1/16W	[M]
R933	D0GB123JA007	12K 1/16W	[M]
R934	D0GB123JA007	12K 1/16W	[M]
R972	ERDS2TJ821T	820 1/4W	[M]
R973	ERDS2TJ393T	39K 1/4W	[M]
R1000	D0GB223JA041	22K 1/16W	[M]
R1001	D0GB223JA041	22K 1/16W	[M]
R1002	D0GB104JA007	100K 1/16W	[M]
R1003	D0GB472JA041	4.7K 1/16W	[M]
R1101	D0GB270JA007	27 1/16W	[M]
R1102	D0GB152JA007	1.5K 1/16W	[M]
R1103	D0GB183JA007	18K 1/16W	[M]
R1104	ERJ3GEYJ103V	10K 1/16W	[M]
R1105	D0GB222JA041	2.2K 1/16W	[M]
R1106	D0GB104JA007	100K 1/16W	[M]
R1107	ERJ3GEYJ102V	1K 1/16W	[M]
R1109	ERJ3GEYJ102V	1K 1/16W	[M]
R1110	D0GB333JA007	33K 1/16W	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
R1201	D0GB270JA007	27 1/16W	[M]
R1202	D0GB152JA007	1.5K 1/16W	[M]
R1203	D0GB183JA007	18K 1/16W	[M]
R1204	ERJ3GEYJ103V	10K 1/16W	[M]
R1205	D0GB222JA041	2.2K 1/16W	[M]
R1206	D0GB104JA007	100K 1/16W	[M]
R1207	ERJ3GEYJ102V	1K 1/16W	[M]
R1209	ERJ3GEYJ102V	1K 1/16W	[M]
R1210	D0GB333JA007	33K 1/16W	[M]
R1302	D0GB331JA007	330 1/16W	[M]
R1303	D0GB475JA007	4.7M 1/16W	[M]
R1304	D0GB223JA041	22K 1/16W	[M]
R1305	ERJ3GEYJ103V	10K 1/16W	[M]
R1307	ERD25FVJ220T	22 1/4W	[M]
R1308	ERD25FVJ220T	22 1/4W	[M]
R1309	D0AF471JA039	470 1/4W	[M]
R1313	ERJ3GEYJ103V	10K 1/16W	[M]
R1314	ERJ3GEYJ102V	1K 1/16W	[M]
R1318	ERJ3GEYJ103V	10K 1/16W	[M]
R1327	D0GB472JA041	4.7K 1/16W	[M]
R1328	D0GB153JA007	15K 1/16W	[M]
R1329	D0GB472JA041	4.7K 1/16W	[M]
R1330	ERD2FCVJ4R7T	4.7 1/4W	[M]
R1331	D0GB752JA007	7.5K 1/16W	[M]
R1332	ERJ3GEYJ103V	10K 1/16W	[M]
R1333	ERD2FCVJ4R7T	4.7 1/4W	[M]
R1334	D0GB223JA041	22K 1/16W	[M]
R1335	D0GB152JA007	1.5K 1/16W	[M]
R1337	ERJ3GEYJ103V	10K 1/16W	[M]
R1338	D0GB472JA041	4.7K 1/16W	[M]
R1341	D0GB471JA041	470 1/16W	[M]
R1342	D0GB473JA041	47K 1/16W	[M]
R1343	D0GB332JA007	3.3K 1/16W	[M]
R1344	D0GB273JA007	27K 1/16W	[M]
R1345	ERJ3GEYJ102V	1K 1/16W	[M]
R1371	D0GB223JA041	22K 1/16W	[M]
R1374	D0GB471JA041	470 1/16W	[M]
R1401	D0GB123JA007	12K 1/16W	[M]
R1402	D0GB274JA007	270K 1/16W	[M]
R1403	ERJ3GEYJ103V	10K 1/16W	[M]
R1404	D0GB223JA041	22K 1/16W	[M]
R1405	ERJ3GEYJ103V	10K 1/16W	[M]
R7028	ERJ3GEY0R00V	0 1/16W	[M]
R7111	ERJ3GEYJ103V	10K 1/16W	[M]
R7211	D0GB823JA007	82K 1/16W	[M]
R7212	D0GB821JA007	820 1/16W	[M]
R7214	D0GB471JA041	470 1/16W	[M]
R7217	ERJ3GEYJ102V	1K 1/16W	[M]
R7218	ERJ3GEYJ102V	1K 1/16W	[M]
R7220	D0GB105JA007	1M 1/16W	[M]
R7221	D0GB101JA007	100 1/16W	[M]
R7253	D0GB100JA007	10 1/16W	[M]
R7254	ERJ3GEYJ102V	1K 1/16W	[M]
R7315	D0GB332JA007	3.3K 1/16W	[M]
R7323	D0GB332JA007	3.3K 1/16W	[M]
R7325	D0GB331JA007	330 1/16W	[M]
R7327	ERJ3GEYJ102V	1K 1/16W	[M]
R7328	ERJ3GEYJ103V	10K 1/16W	[M]
R7329	ERJ3GEYJ102V	1K 1/16W	[M]
R7330	D0GB562JA007	5.6K 1/16W	[M]
R7331	D0GB223JA041	22K 1/16W	[M]
R7332	ERJ3GEYJ102V	1K 1/16W	[M]
R7335	D0GB101JA007	100 1/16W	[M]
R7336	D0GB100JA007	10 1/16W	[M]
R7339	ERJ3GEYJ102V	1K 1/16W	[M]
R7349	D0GB183JA007	18K 1/16W	[M]
R7601	D0GB4R7JA007	4.7 1/16W	[M]
R7650	D0GB5R6JA007	5.6 1/16W	[M]
		CAPACITORS	
C1	F1H1H102A219	1000P 50V	[M]
C101	F1H1H102A219	1000P 50V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C201	ECJ1VB1H681K	680P 50V	[M]
C202	ECA1HAK2R2XB	2.2 50V	[M]
C203	F1H1H221A748	220P 50V	[M]
C204	ECA1HAK2R2XB	2.2 50V	[M]
C205	ECJ1VC1H121J	120P 50V	[M]
C206	ECA1HAK2R2XB	2.2 50V	[M]
C207	F1H1H221A748	220P 50V	[M]
C208	ECA1HAK2R2XB	2.2 50V	[M]
C209	F1H1H221A748	220P 50V	[M]
C210	ECA1HAK2R2XB	2.2 50V	[M]
C211	F1H1H102A219	1000P 50V	[M]
C212	ECA1HAK4R7XB	4.7 50V	[M]
C216	F1H1H102A219	1000P 50V	[M]
C220	ECA1HAK010XB	1 50V	[M]
C221	F1H1H331A013	330P 50V	[M]
C222	F1H1H101A230	100P 50V	[M]
C223	F1H1H101A230	100P 50V	[M]
C224	ECA0JAK470XB	47 6.3V	[M]
C225	F1H1E103A029	0.01 25V	[M]
C230	F1H1H103A219	0.01 50V	[M]
C233	ECA1HAK0R1XB	0.1 50V	[M]
C254	ECA1HAKR22XB	0.22 50V	[M]
C266	ECJ1VB1H681K	680P 50V	[M]
C293	ECQV1H273JF3	0.027 50V	[M]
C297	F1D1H152A046	1500P 50V	[M]
C351	F1D1H471A012	470P 50V	[M]
C352	F1D1H102A012	1000P 50V	[M]
C362	F1D1H470A006	47P 50V	[M]
C363	F1D1H470A006	47P 50V	[M]
C364	ECQV1H224JL3	0.22 50V	[M]
C365	ECQV1H224JL3	0.22 50V	[M]
C368	ECA1CAK220XB	22 16V	[M]
C370	ECQV1H224JL3	0.22 50V	[M]
C371	F1D1H1040002	0.1 50V	[M]
C372	F1D1H102A012	1000P 50V	[M]
C373	F1D1H471A012	470P 50V	[M]
C374	ECA1HAK100XB	10 50V	[M]
C376	ECQV1H224JL3	0.22 50V	[M]
C401	ECJ1VB1H681K	680P 50V	[M]
C402	ECA1HAK2R2XB	2.2 50V	[M]
C403	F1H1H221A748	220P 50V	[M]
C404	ECA1HAK2R2XB	2.2 50V	[M]
C405	ECJ1VC1H121J	120P 50V	[M]
C406	ECA1HAK2R2XB	2.2 50V	[M]
C407	F1H1H221A748	220P 50V	[M]
C408	ECA1HAK2R2XB	2.2 50V	[M]
C409	F1H1H221A748	220P 50V	[M]
C410	ECA1HAK2R2XB	2.2 50V	[M]
C411	F1H1H102A219	1000P 50V	[M]
C412	ECA1HAK4R7XB	4.7 50V	[M]
C416	F1H1H102A219	1000P 50V	[M]
C420	ECA1HAK010XB	1 50V	[M]
C421	F1H1H331A013	330P 50V	[M]
C422	F1H1H101A230	100P 50V	[M]
C423	F1H1H101A230	100P 50V	[M]
C424	ECA0JAK470XB	47 6.3V	[M]
C425	F1H1E103A029	0.01 25V	[M]
C430	F1H1H103A219	0.01 50V	[M]
C433	ECA1HAK0R1XB	0.1 50V	[M]
C440	F1H1E1530002	0.015 25V	[M]
C441	F1H1E1530002	0.015 25V	[M]
C442	F1H1E1530002	0.015 25V	[M]
C443	ECA1HAK0R1XB	0.1 50V	[M]
C444	ECJ1VB1C823K	0.082 16V	[M]
C445	ECA1HAK0R1XB	0.1 50V	[M]
C446	ECJ1VB1C823K	0.082 16V	[M]
C447	ECA1EPX470B	47 25V	[M]
C448	ECA1HAKR33XB	0.33 50V	[M]
C449	F1H1E1530002	0.015 25V	[M]
C454	ECA1HAKR22XB	0.22 50V	[M]
C455	ECJ1VB1A124K	0.12 10V	[M]
C456	ECJ1VB1A124K	0.12 10V	[M]
C461	ECJ1VB1A124K	0.12 10V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C462	ECJ1VB1A124K	0.12 10V	[M]
C463	ECA1CAK101XB	100 16V	[M]
C464	F1H1H470A230	47P 50V	[M]
C465	F1H1H470A230	47P 50V	[M]
C466	ECJ1VB1H681K	680P 50V	[M]
C493	ECQB1H273JF3	0.027 50V	[M]
C497	F1D1H152A046	1500P 50V	[M]
C501	ECA1VAM682XE	6800 35V	[M]
C502	ECA1EAK100XB	10 25V	[M]
C507	F1E1H1030001	0.01 50V	[M]
C510	ECA1EAK100XB	10 25V	[M]
C512	ECQE2104KF3	0.1 250V	[M]
C514	F1E1H1030001	0.01 50V	[M]
C515	F1E1H1030001	0.01 50V	[M]
C516	F1E1H1030001	0.01 50V	[M]
C521	ECQB1H103JF3	0.01 50V	[M]
C522	ECQB1H103JF3	0.01 50V	[M]
C523	ECQB1H103JF3	0.01 50V	[M]
C524	ECQB1H103JF3	0.01 50V	[M]
C540	ECA1CAK220XB	22 16V	[M]
C541	ECA1CAK220XB	22 16V	[M]
C542	ECA1EAK220XB	22 25V	[M]
C586	ECA1CAM471XB	470 16V	[M]
C601	F1B1H103A007	0.01 50V	[M]
C603	ECA1CAM102XB	1000 16V	[M]
C604	F1E1H1030001	0.01 50V	[M]
C605	ECA1EM470B	47 25V	[M]
C609	ECA1HM101B	100 50V	[M]
C610	F1E1H1030001	0.01 50V	[M]
C611	ECA1HM101B	100 50V	[M]
C612	ECA1HM221B	220 50V	[M]
C613	ECA1HM101B	100 50V	[M]
C750	ECA1HAK010XB	1 50V	[M]
C751	ECA0JAK470XB	47 6.3V	[M]
C752	F1H1E103A029	0.01 25V	[M]
C753	F1H1E103A029	0.01 25V	[M]
C754	ECA1CAM221XB	220 16V	[M]
C800	ECJ1VC1H101K	100P 50V	[M]
C801	ECJ1VC1H220J	22P 50V	[M]
C802	ECJ1VC1H180J	18P 50V	[M]
C804	ECJ1VC1H101K	100P 50V	[M]
C805	ECJ1VC1H102K	1000P 50V	[M]
C806	ECJ1VB1H104K	0.1 50V	[M]
C807	ECA1HAM101XB	100 50V	[M]
C808	ECJ1VC1H221J	220P 50V	[M]
C809	ECJ1VC1H221J	220P 50V	[M]
C810	ECJ1VC1H221J	220P 50V	[M]
C811	ECJ1VC1H221J	220P 50V	[M]
C812	ECA1HAK2R2XB	2.2 50V	[M]
C813	F4D55334A008	CAPACITOR	[M]
C814	ECA1CAM471XB	470 16V	[M]
C815	F1H1H221A748	220P 50V	[M]
C818	ECJ1VB1H561K	560P 50V	[M]
C819	ECJ1VB1H561K	560P 50V	[M]
C820	ECJ1VB1H561K	560P 50V	[M]
C821	F1H1H103A219	0.01 50V	[M]
C822	ECA0JAK101XB	100 6.3V	[M]
C823	F1H1H102A219	1000P 50V	[M]
C824	F1H1H102A219	1000P 50V	[M]
C825	F1H1H102A219	1000P 50V	[M]
C826	ECJ1VC1H102J	1000P 50V	[M]
C829	F1H1H104A783	0.1 50V	[M]
C830	ECA1CAK220XB	22 16V	[M]
C831	ECA1HAK010XB	1 50V	[M]
C832	ECJ1VB1H104K	0.1 50V	[M]
C833	ECA0JAK101XB	100 6.3V	[M]
C834	F1H1E102A049	1000P 25V	[M]
C909	ECA1HAK220XB	22 50V	[M]
C910	ECA1HAK220XB	22 50V	[M]
C911	ECA1HAK220XB	22 50V	[M]
C912	ECJ1VB1H104K	0.1 50V	[M]
C913	F1H1H103A219	0.01 50V	[M]
C914	ECJ1VB1H104K	0.1 50V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C915	ECJ1VB1H104K	0.1 50V	[M]
C920	F1H1H101A230	100P 50V	[M]
C921	F1H1H101A230	100P 50V	[M]
C922	F2A0J470A013	47P 6.3V	[M]
C923	ECA1HAK220XB	22 50V	[M]
C924	ECA1AAK220XB	22 10V	[M]
C925	ECJ1VB1H104K	0.1 50V	[M]
C926	ECA1CAK220XB	22 16V	[M]
C952	F1H1H221A748	220P 50V	[M]
C953	F1H1H221A748	220P 50V	[M]
C954	F1H1H221A748	220P 50V	[M]
C955	F1H1H221A748	220P 50V	[M]
C958	F1H1H102A219	1000P 50V	[M]
C959	F1H1H471A219	470P 50V	[M]
C960	F1H1H102A219	1000P 50V	[M]
C961	F1H1H471A219	470P 50V	[M]
C962	F1H1H103A219	0.01 50V	[M]
C966	ECA1HAK220XB	22 50V	[M]
C1000	F1H1H101A230	100P 50V	[M]
C1002	F1H1E103A029	0.01 25V	[M]
C1101	ECA1HAK010XB	1 50V	[M]
C1102	F1H1H471A219	470P 50V	[M]
C1103	ECA1CAK101XB	100 16V	[M]
C1104	F1H1C2730001	0.027 16V	[M]
C1105	F1H1H471A219	470P 50V	[M]
C1106	ECA1HAK2R2XB	2.2 50V	[M]
C1107	F1H1H152A219	1500P 50V	[M]
C1108	F2A1C1000018	10P 16V	[M]
C1109	ECA1HAK3R3XB	3.3 50V	[M]
C1110	F1H1H682A219	6800P 50V	[M]
C1121	F1H1H102A219	1000P 50V	[M]
C1122	F1H1H103A219	0.01 50V	[M]
C1123	ECJ1VB1H271K	270P 50V	[M]
C1201	ECA1HAK010XB	1 50V	[M]
C1202	F1H1H471A219	470P 50V	[M]
C1203	ECA1CAK101XB	100 16V	[M]
C1204	F1H1C2730001	0.027 16V	[M]
C1205	F1H1H471A219	470P 50V	[M]
C1206	ECA1HAK2R2XB	2.2 50V	[M]
C1207	F1H1H152A219	1500P 50V	[M]
C1208	F2A1C1000018	10P 16V	[M]
C1209	ECA1HAK3R3XB	3.3 50V	[M]
C1210	F1H1H682A219	6800P 50V	[M]
C1221	F1H1H102A219	1000P 50V	[M]
C1222	F1H1H103A219	0.01 50V	[M]
C1223	ECJ1VB1H271K	270P 50V	[M]
C1301	ECA1HAK0R1XB	0.1 50V	[M]
C1302	F1H1C333A071	0.033 16V	[M]
C1303	F1H1C333A071	0.033 16V	[M]
C1304	ECA1HAK4R7XB	4.7 50V	[M]
C1305	ECA1CAK330XB	33 16V	[M]
C1307	ECA1AAK221XQ	220 10V	[M]
C1308	ECA1CAK220XB	22 16V	[M]
C1310	ECA1HAK0R1XB	0.1 50V	[M]
C1311	ECA1CAK470XB	47 16V	[M]
C1312	F1H1H332A013	3300P 50V	[M]
C1314	F1H1H222A013	2200P 50V	[M]
C1315	F1H1H222A013	2200P 50V	[M]
C1316	F1H1H102A219	1000P 50V	[M]
C1317	F1H1H102A219	1000P 50V	[M]
C1318	ECQV1H473JL3	0.047 50V	[M]
C1319	ECA1CAK101XB	100 16V	[M]
C1320	ECA1HAK010XB	1 50V	[M]
C1321	F0A2A472A019	4700P 100V	[M]
C1323	ECEA1HKN010B	1 50V	[M]
C1324	ECA1CAK470XB	47 16V	[M]
C1326	F2A1C1000018	10P 16V	[M]
C1371	F1H1H103A219	0.01 50V	[M]
C7102	ECJ1VB1A474K	0.47 10V	[M]
C7107	ECJ1VB1H223K	0.022 50V	[M]
C7142	F1H1H332A013	3300P 50V	[M]
C7154	F1H1C104A041	0.1 16V	[M]
C7155	F1H1C104A041	0.1 16V	[M]

Ref. No.	Part No.	Part Name & Description	Remarks
C7161	F1H1C104A041	0.1 16V	[M]
C7164	ECJ2FF1A106Z	10 10V	[M]
C7165	ECJ2FF1A106Z	10 10V	[M]
C7166	F1H1H103A219	0.01 50V	[M]
C7203	F2A0J221A200	220P 6.3V	[M]
C7204	F1H1C104A041	0.1 16V	[M]
C7216	ECJ1VB1H681K	680P 50V	[M]
C7217	F1H1C104A041	0.1 16V	[M]
C7218	ECJ1VB1C823K	0.082 16V	[M]
C7223	ECEA1HKA4R7I	4.7 50V	[M]
C7225	F1H1H102A219	1000P 50V	[M]
C7226	F1H1H102A219	1000P 50V	[M]
C7227	ECA1HAK010XI	1 50V	[M]
C7228	ECA1HAK010XI	1 50V	[M]
C7230	F1H1C104A041	0.1 16V	[M]
C7231	F2A0J221A200	220P 6.3V	[M]
C7232	F2A0J221A200	220P 6.3V	[M]
C7233	F1H1C104A008	0.1 16V	[M]
C7234	F1H1C104A041	0.1 16V	[M]
C7235	ECEA1CKA100I	10 16V	[M]
C7241	F1H1H102A219	1000P 50V	[M]
C7243	F1H1C104A008	0.1 16V	[M]
C7244	ECJ1VB1C153K	0.015 16V	[M]
C7253	F1H1H471A219	470P 50V	[M]
C7263	F1H1C104A041	0.1 16V	[M]
C7264	F1H1C104A041	0.1 16V	[M]
C7315	ECJ1VB1A474K	0.47 10V	[M]
C7334	ECEA1AKA221I	220 10V	[M]
C7335	F1H1C104A008	0.1 16V	[M]
C7338	ECJ1VB1C563K	0.056 16V	[M]
C7339	ECJ1VB1C183K	0.018 16V	[M]
C7352	ECJ1VB1C183K	0.018 16V	[M]
C7601	ECEA0JKA330I	33 6.3V	[M]
C7613	F1H1C104A041	0.1 16V	[M]
C7614	F2A0J101A198	100P 6.3V	[M]
C7626	F1H1C104A041	0.1 16V	[M]
C7670	F1H1C104A041	0.1 16V	[M]