


Service Manual

MODELO	UNIDAD	
SC-TM82AV	SA-TM82AV	Estéreo
	SB-TM82	Baffles
	SB-PS82	Surround
	SB-W82	Subwoofer

Modelo: SC-TM82AV

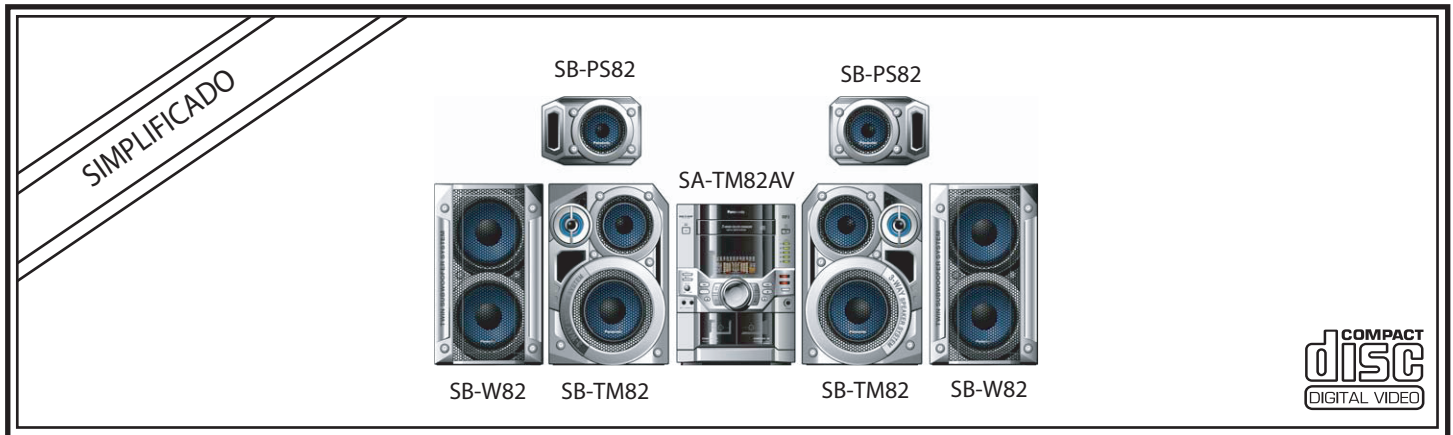

ARCHIVE Y USE ESTE SIMPLIFICADO JUNTO CON LOS MODELOS SC-VK800GC-S Y SC-TM81AV

AMPLIFICADOR	SA-TM82AV
Potencia de salida:	7500 W (P.M.P.O.)
Consumo de potencia:	414 W
Alimentación:	127 V ca $\pm 10\%$ 60 Hz
Sensibilidad AUX:	250 mV
Rango de sintonía AM:	522 - 1629 kHz (paso de 9 kHz) 520 - 1630 kHz (paso de 10 kHz)
Rango de sintonía FM:	87,5 - 108,0 MHz (paso de 0,05 MHz)
Dimensiones (b x h x l):	250 mm x 335 mm x 360 mm
Peso:	9,8 kg aprox.

LECTOR DE DISCOS COMPACTOS	
Frecuencia de muestreo Decodificación Fuente del haz Número de canales Respuesta en frecuencia Wow y Flutter Filtro digital Convertidor D/A	44,1 kHz 16 bits lineares Láser semiconductor/780 nm Estéreo 20 Hz-20 kHz (+1,-2dB) Por debajo de los límites de medición. 8 fs MASH (1 bit DAC)
Video CD Datos de video Datos de audio	Basado en MPEG 1 Basado en MPEG 1 capa 2
Salida de video Formato de video Voltaje de salida Formato físico	NTSC/PAL 1 Vp-p, 75 Basado en el formato de CD-ROM
MP3 Decodificador de MP3 Velocidad de bit Frecuencia de muestreo	Basado en MPEG 1 capa 3 32 kbps-320 kbps 32 kHz 44,1 kHz 48 kHz


BAFLES	IMPEDANCIA DE ENTRADA	DIMENSIONES (b x h x l)	PESO
SB-TM82 FRONTAL Bocina Tweeter 6 cm Bocina Full range 12 cm Bocina Woofer 16 cm (alto) (bajo)	--- --- --- 6 6	252 mm x 370 mm x 292 mm --- --- --- --- ---	5,3 kg aprox. --- --- --- ---
SB-PS82 SURROUND Bocina Full Range 8 cm	8	205 mm x 145 mm x 160 mm	1,3 kg aprox.
SB-W82 SUBWOOFER 16 cm	6	299 mm x 371 mm x 358 mm	6,0 kg aprox.


POTENCIA DE SALIDA (AMPLIFICADOR)			
Frontal	(Bajo) 90 W	RCM por canal (6)	80 Hz , 10% DAT
	(Alto) 95 W	RCM por canal (6)	1 kHz , 10% DAT
Surround	40 W	RCM por canal (8)	1 kHz , 10% DAT
Subwoofer	90 W	RCM por canal (6)	80 Hz , 10 % DAT

Notas:

- Las especificaciones están sujetas a cambios sin previo aviso.
- Los pesos y las dimensiones son aproximados.

Panasonic

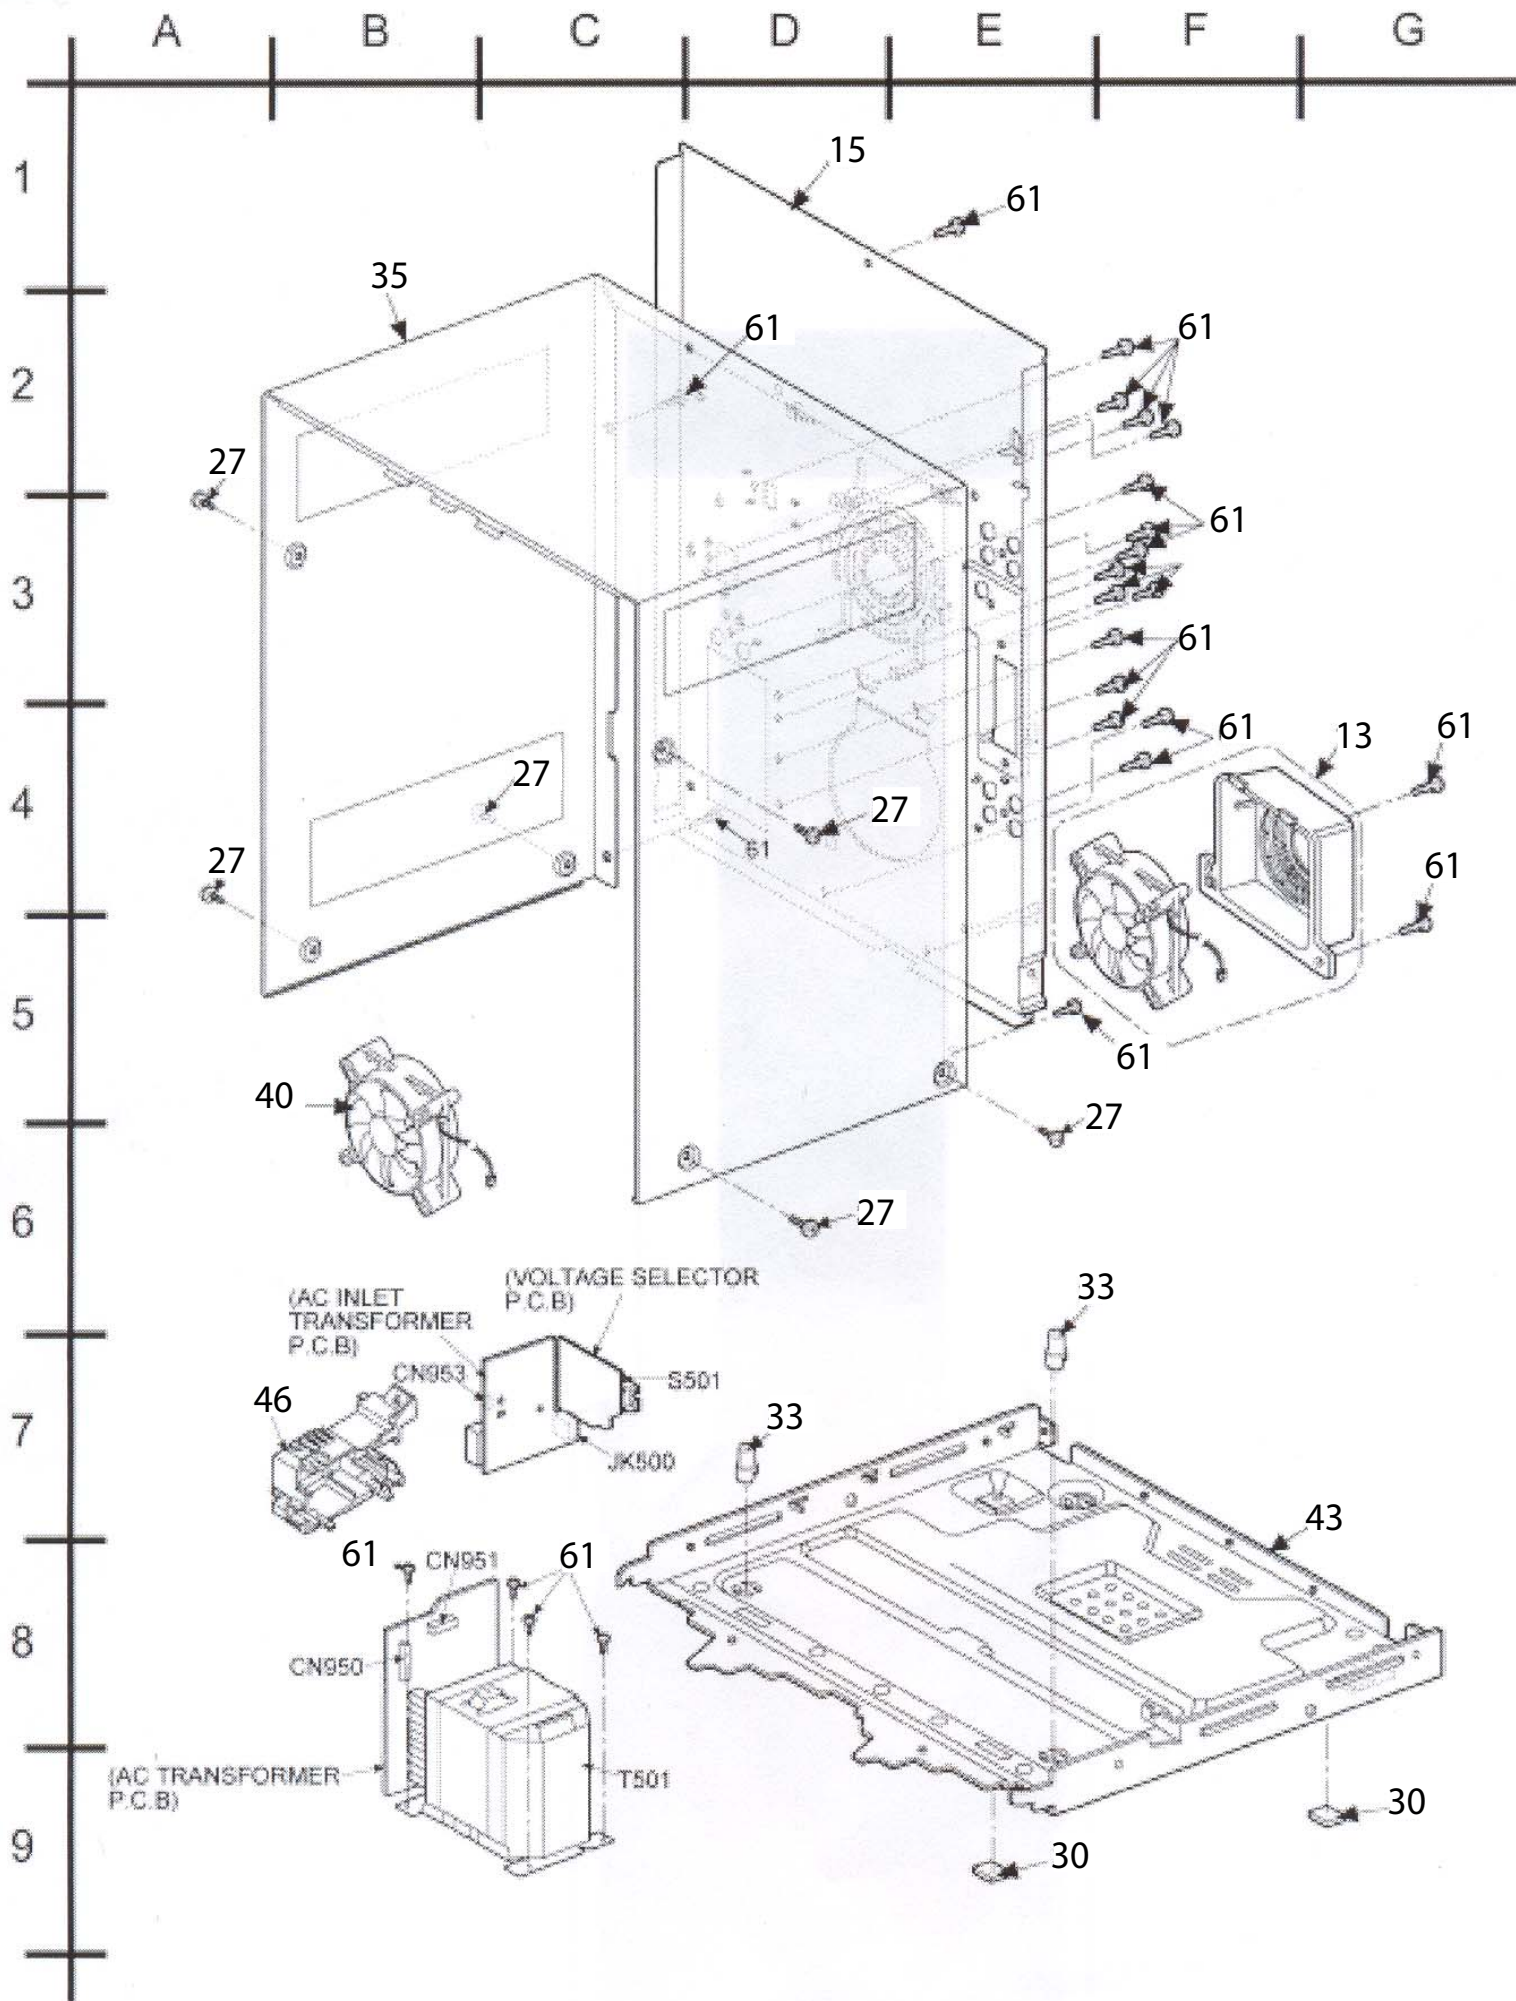

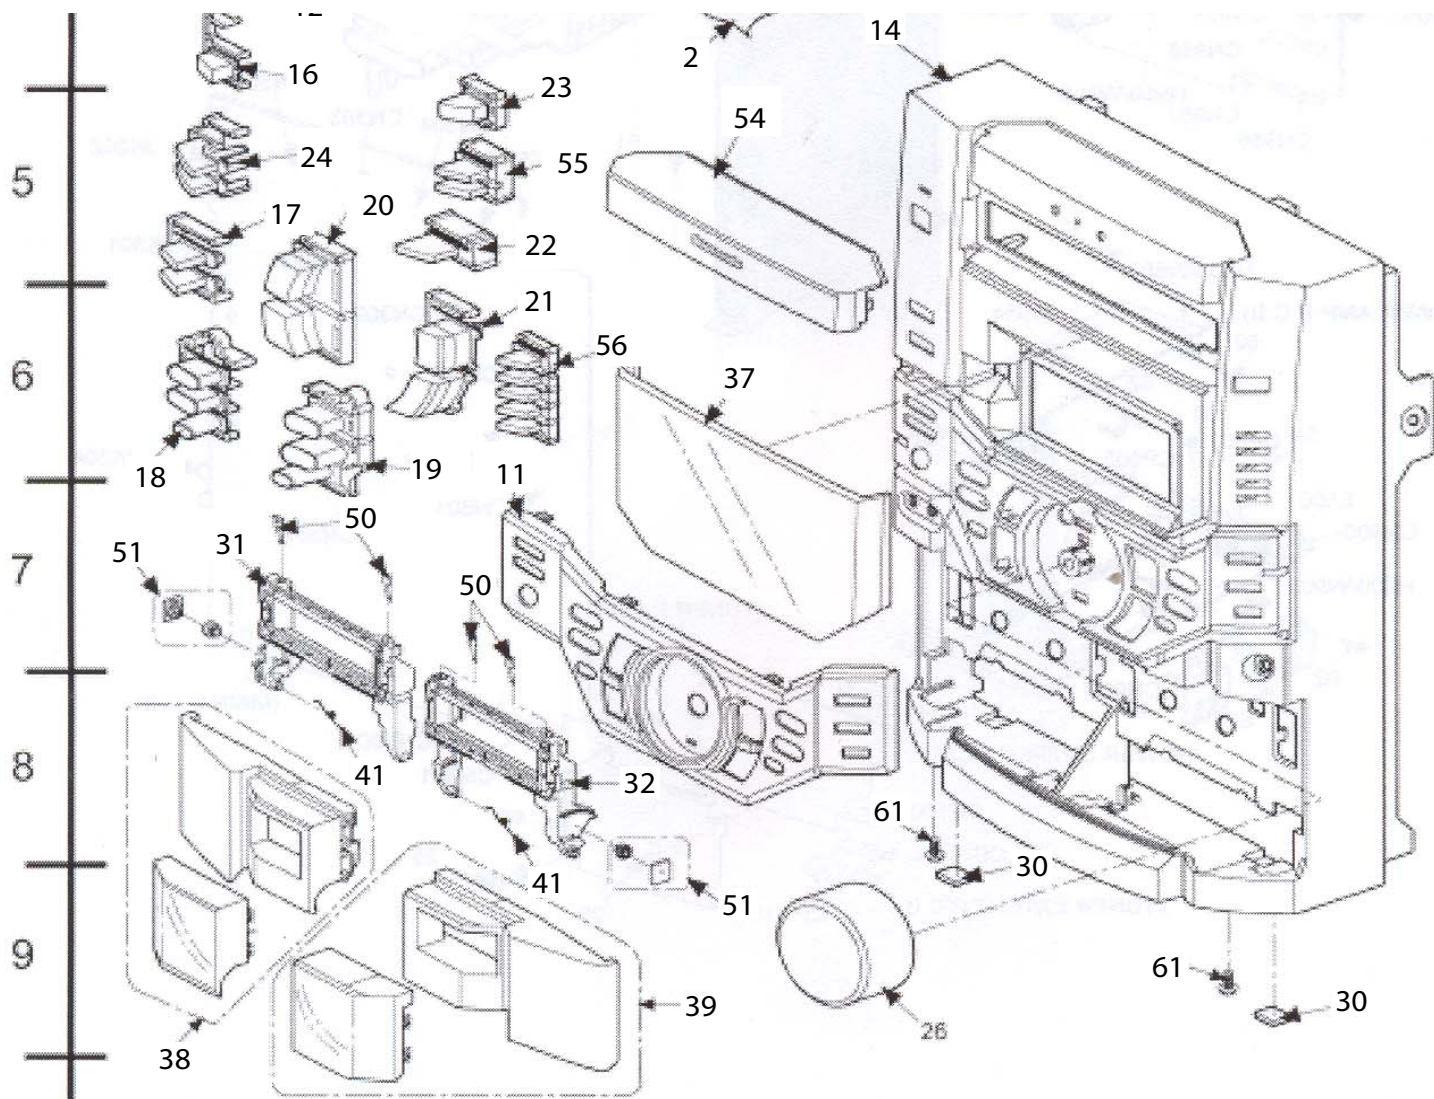

No	Part No.	Description	No	Part No.	Description
11	RGKM0015	CONTROL PANEL	31	RKFX0093-K	CASS HOLDER (L)
12	RGLX0069-Q	POWER LIGHT CHIP	32	RKFX0094-K	CASS HOLDER (R)
13	L6FALEFH0018	FAN UNIT	35	RYKM0033-2	TOP CABINET
14	RYPM0174	FRONT PANEL UNIT	37	RKWX0210A-V	FL WINDOW
15	RGRM0015A-1	REAR PANEL	38	RYFX0128-S	CASS LID (R)
16	RGUX0527-S	POWER BTN	39	RYFX0127-S	CASS LID (L)
17	RGUX0528-1S	DECK 1 / 2	41	RMBX0021	CASS OPEN SPRING
18	RGUM0013	CONTROL BTN (R)	44	RMKX0075A-1	CD CHASSIS
19	RGUM0014	CONTROL BTN (L)	50	RUS757ZAA	CASS HALF SPRING
20	RGUX0532-S	FUNCTION BTN (R)	51	RXGX0002	DAMPER GEAR
21	RGUX0531-S	FUNCTION BTN (L)	54	RGKM0013	TOP ORNAMENT
22	RGUX0533-1S	PRESET EQ. BTN	55	RYQX0109	SS EQ BTN (L)
23	RGUX0535-S	CD EJECT BTN	56	RGUX0536-S	5 CD CONTROL BTN
25	RGWX0056-S	MIC VOL KNOB			
27	RHD30004-2S	SCREW			
30	RMQX0081	F.PANEL			


SB-PS82

1 Connection of the Speaker Cables

- Be sure to connect speaker cables before connecting the AC power supply cord.
- The load impedance of any speaker used with this unit must be 8 Ω .
- Be sure to connect the cable from the right speaker to the right terminal and the cable from the left speaker to the left terminal.

Strip off the outer covering, and twist the center conductor. Make sure the bare ends of the wires are not unravelled. (If they are, twist them tight again.)


Insert the wire to the rear panel of the unit and close the lever.

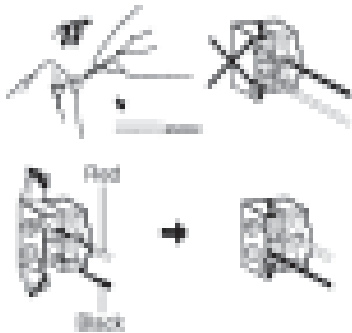

Notes :


- To prevent damage to circuitry, never short-circuit positive (+) and negative (-) speaker wires.
- Be sure to connect only positive (red) wires to positive (+) terminals and negative (black) wires to negative (-) terminals.

2 Connection of Wiring Diagram

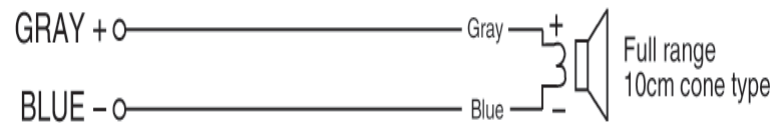

3 Cabinet Parts Location

SB-PS82

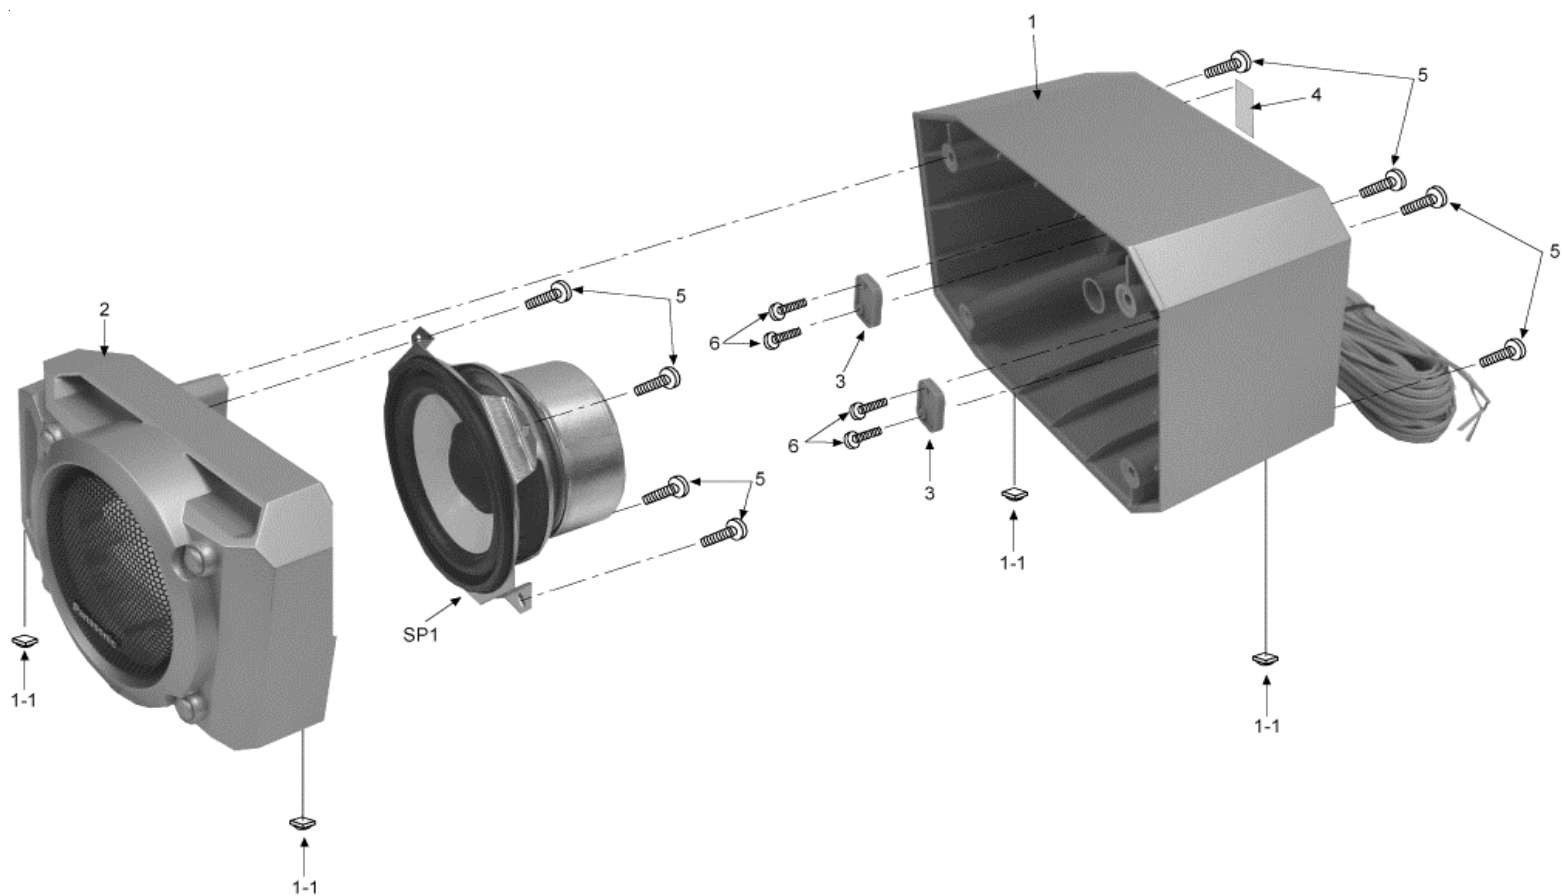

Ref. No.	Part No.	Part Name & Description
1	RKPX0056-LM	REAR CABINET ASS'Y
1-1	RKA0072-KJ	LEG RUBBER
2	RYPM0169	FRONT PANEL ASS'Y R
3	RMR1265-LM	COVER
5	XTBS3+8JFZ1-A	SCREW
6	XTB4+10G-A	SCREW
SP1	EAST10P25D6	SPEAKER


SB-TM82

1 Connection of the Speaker Cables

- Be sure to connect speaker cables before connecting the AC power supply cord.
- The load impedance of any speaker used with this unit must be 6~/12~.
- Be sure to connect the cable from the right speaker to the right terminal and the cable from the left speaker to the left terminal.

Strip off the outer covering, and twist the center conductor. Make sure the bare ends of the wires are not unravelled. (If they are, twist them tight again.)


Insert the wire to the rear panel of the unit and close the lever.

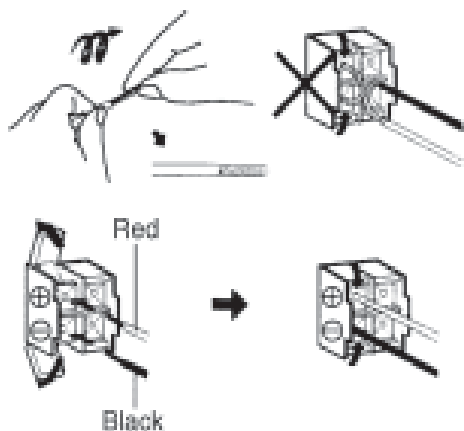

Notes :


- To prevent damage to circuitry, never short-circuit positive (+) and negative (-) speaker wires.
- Be sure to connect only positive (red) wires to positive (+) terminals and negative (black) wires to negative (-) terminals.

2 Connection of the Wiring Diagram

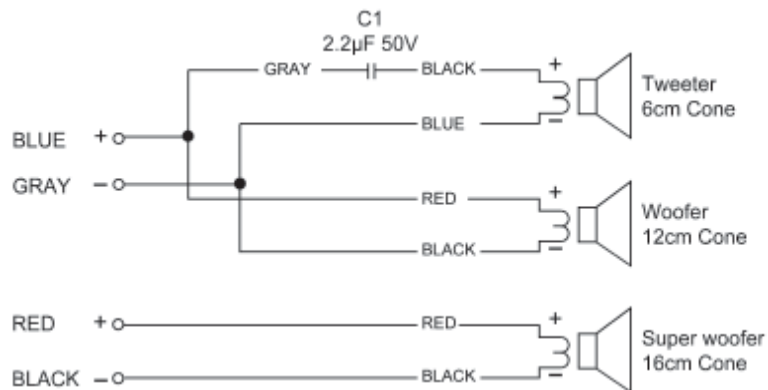

3 Cabinet Parts Location

SB-TM82

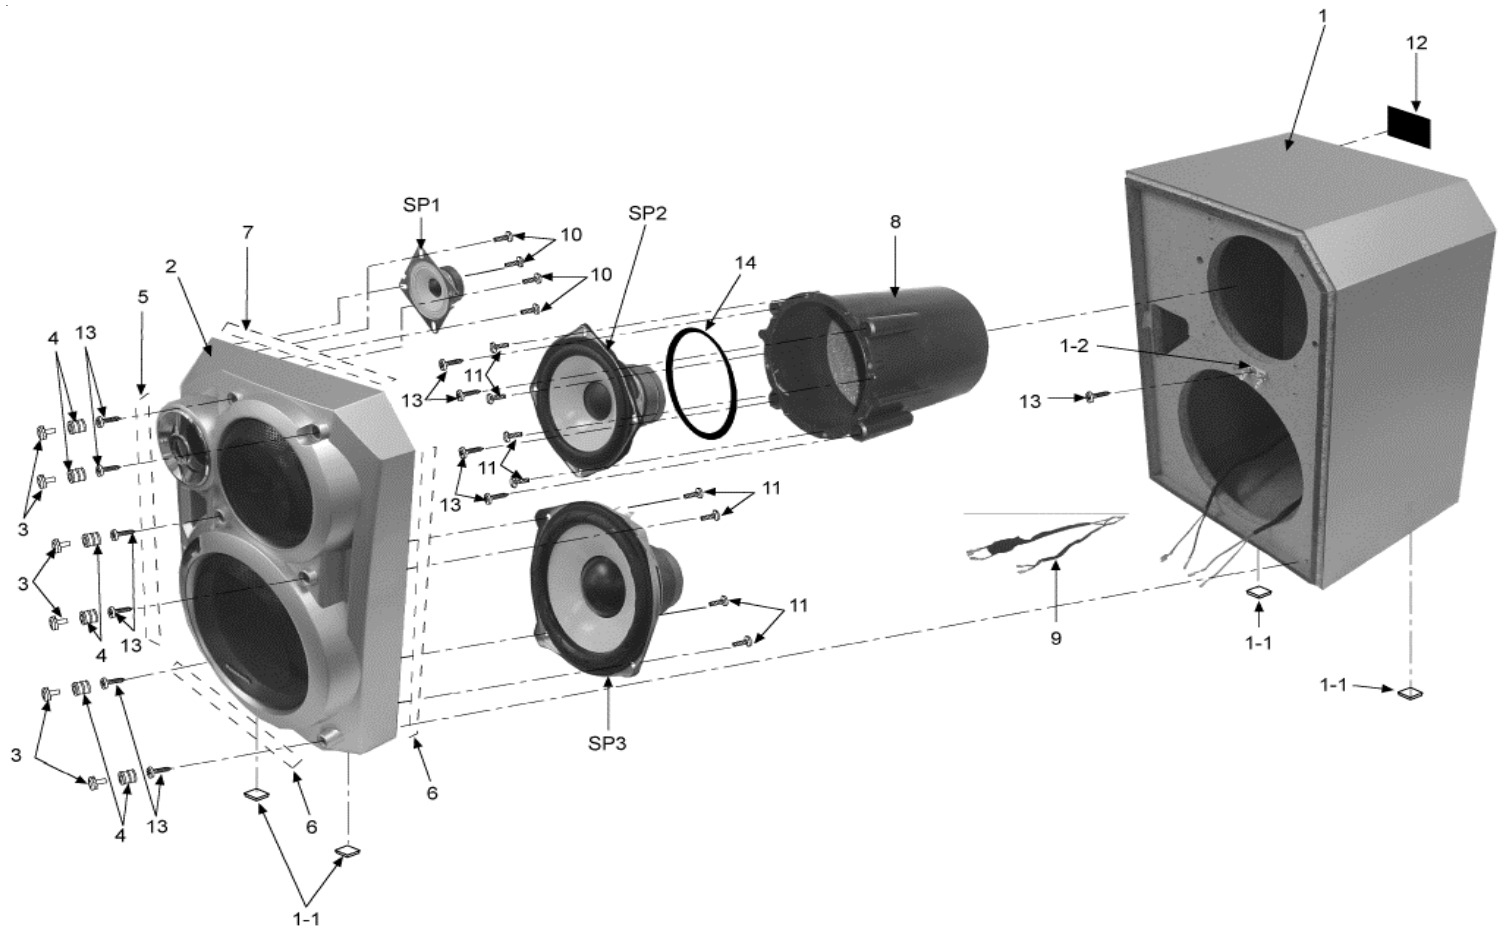

Ref. No.

Part No.

Part Name & Description

1	RKPM0084	SPK CABINET ASS'Y L
1	RKPM0085	SPK CABINET ASS'Y R
1-1	RKA0072-KJ	LEG
1-2	RJH9210	TERMINAL PLATE
2	RYPM0166	FRONT PANEL ASS'Y L
2	RYPM0167	FRONT PANEL ASS'Y R
3	RGKX0115-SJ	ORNAMENT CAP
4	RMG0520-H	CATCHING HOLDER
5	RMQX0076	HIMELON (355 x 8 x 0.5)
6	RMQX0077	HIMELON (320 x 8 x 0.5)
7	RMQX0078	HIMELON (240 x 8 x 0.5)
8	RMRX0038-LM	BACK CAVITY L
8	RMRX0037-LM	BACK CAVITY R
9	REEX0304-1	CORD ASS'Y
10	XTB4+8G-A	SCREW (TWEETER)
11	XTB4+10G-A	SCREW (S. WOOFER)
13	XTB4+16AFZ-A	SCREW
14	RMQ0922	EVA PACKING
SP1	EAS6PH121A	TWEETER
SP2	EAST16PL44E6	WOOFER
SP3	EAST12P39E6	S. WOOFER


SB-W82A

1 Connection of the Speaker Cables

- Be sure to connect speaker cables before connecting the AC power supply cord.
- The load impedance of any speaker used with this unit must be 6 Ω .
- Be sure to connect the cable from the right speaker to the right terminal and the cable from the left speaker to the left terminal.

Strip off the outer covering, and twist the center conductor. Make sure the bare ends of the wires are not unravelled. (If they are, twist them tight again.)


Insert the wire to the rear panel of the unit and close the lever.

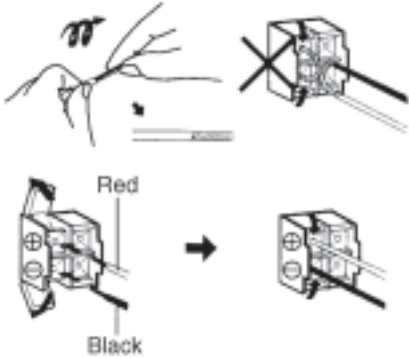

Notes :

- To prevent damage to circuitry, never short-circuit positive (+) and negative (-) speaker wires.
- Be sure to connect only positive (red) wires to positive (+) terminals and negative (black) wires to negative (-) terminals.


2 Connection of the Wiring Diagram

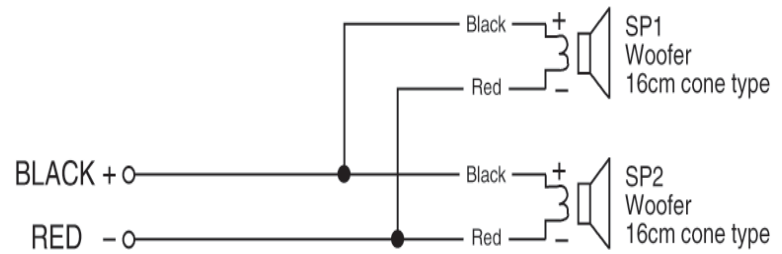

3 Cabinet Parts Location


3 Cabinet Parts Location

SB-PS82A

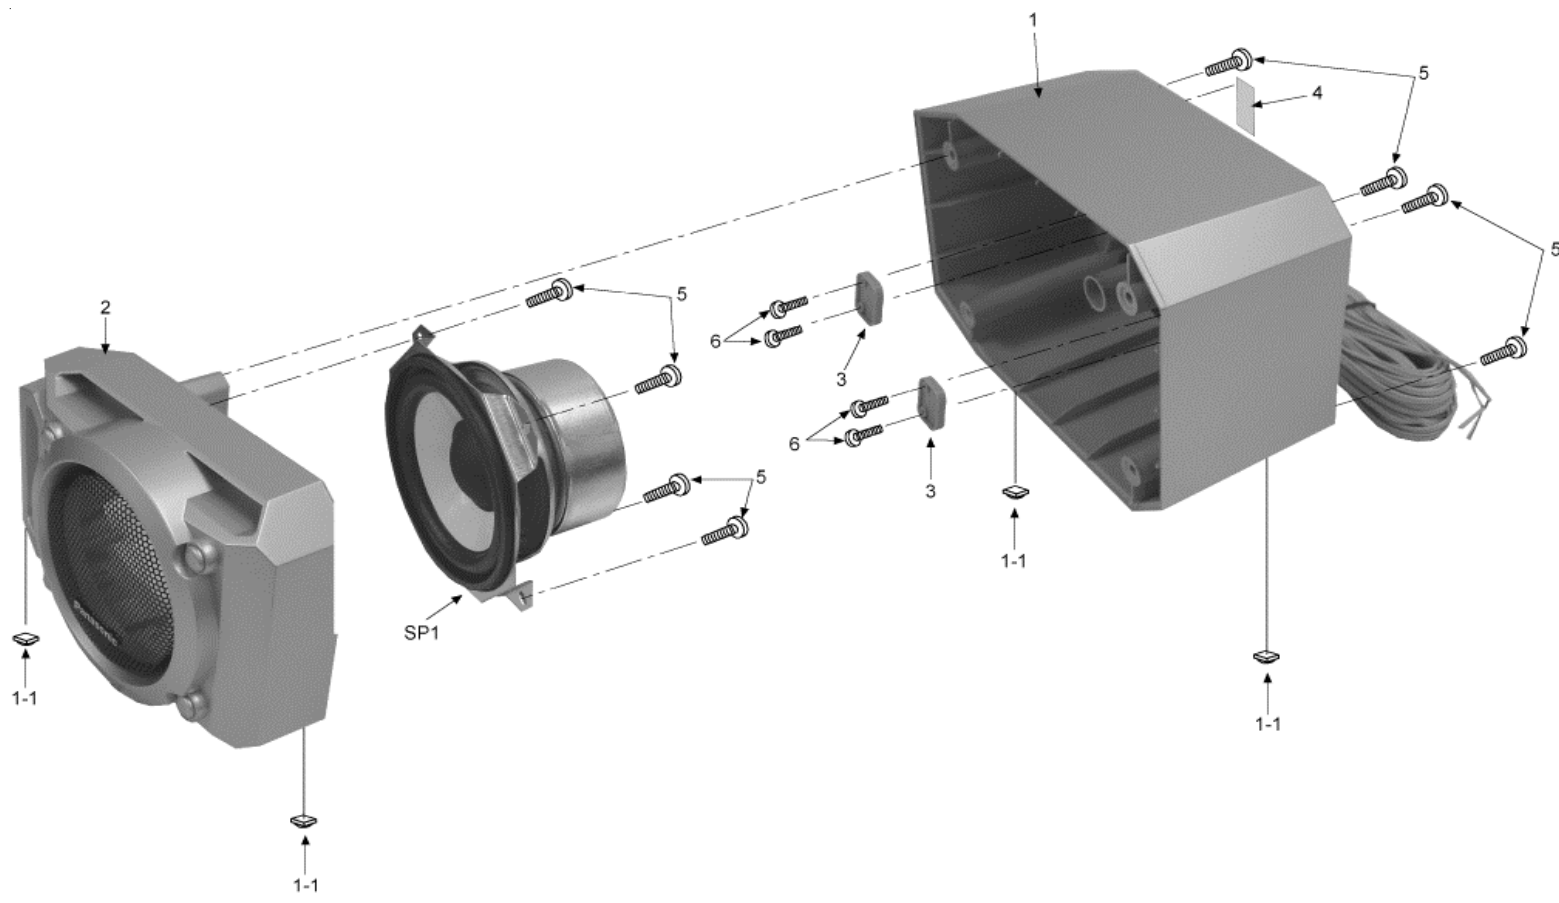

Ref. No.	Part No.	Part Name & Description
1	RKPX0056-LM	REAR CABINET ASS'Y
1-1	RKA0072-KJ	LEG RUBBER
2	RYPM0169	FRONT PANEL ASS'Y R
3	RMR1265-LM	COVER
5	XTBS3+8JFZ1-A	SCREW
6	XTB4+10G-A	SCREW
SP1	EAST10P25D6	SPEAKER

SB-W82A

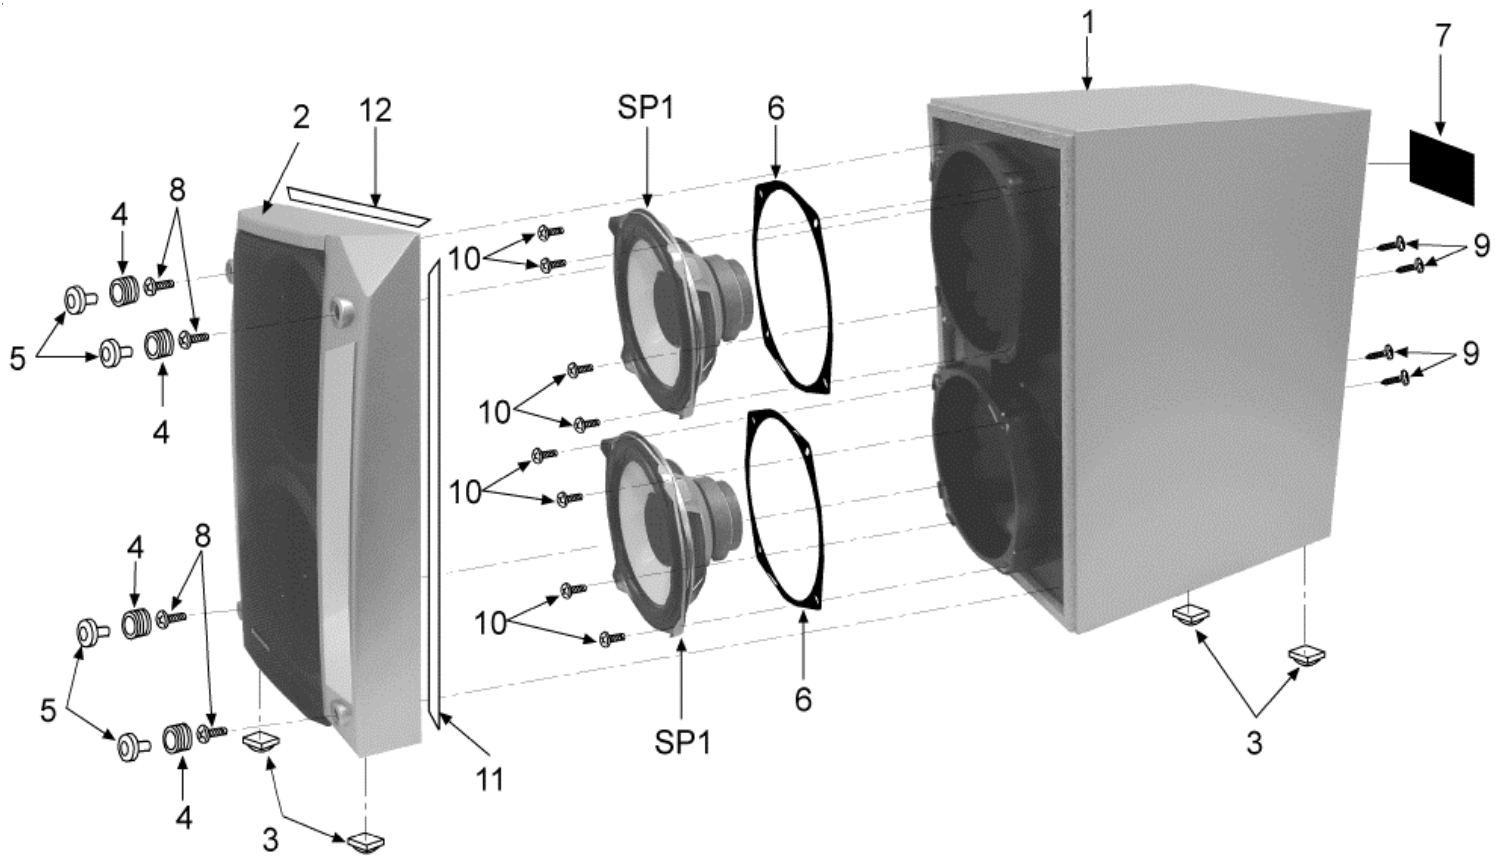

Ref. No.	Part No.	Part Name & Description
1	RKPM0088	SPK CABINET ASS'Y
2	RYPM0168	FRONT PANEL ASS'Y
3	RKA0072-KJ	LEG RUBBER
4	RMG0520-H	RUBBER CATCH
5	RGKX0115-SJ	ORNAMENT CAP
6	436-1704301A	WOOFER EVA PACKING
8	XTB4+12G	SCREW (FRONT PANEL)
9	XTB4+16AFZ'A	SCREW (BLACK)
10	XTB4+10G	SCREW (WOOFER)
11	RMGQX0073	HIMELON
12	RMGQX0074	HIMELON
SP1	EAST16PL44D6	SPEAKER (WOOFER)

ELECTRICAL PART LIST

			Ref. No	Part No	Part Name Description
			CAPACITOR		
Ref. No	Part No	Part Name Description			
PRINTED CIRCUIT BOARD					
			C1	ECBT1H5R6KC5	CAPACITOR CERAMICO
			C10	ECBT1H180JC5	CAPACITOR
			C1001	F1H1H103A753	CHIP CAPACITOR
			C1002	ECEA1HKN2R2B	CAPACITOR
			C1003	ECQP1152JZT	CAPACITOR
			C1006	ECEA1HKA010B	CAPACITOR
			C1007	F0A2A472A015	CAPACITOR
			C1008	ECEA1HKA010B	CAPACITOR
			C1009	ECEA1CKA470B	CAPACITOR
			C101	ECJ1VB1E103K	CHIP CAPACITOR
			C1010	ECA1EM101B	CAPACITOR
			C1011	ECQV1H473JL3	CAPACITOR PP
			C1012	F1H1H102A761	CHIP CAPACITOR
			C1013	F1H1H102A761	CHIP CAPACITOR
			C1014	F1H1H102A761	CHIP CAPACITOR
			C1015	F1H1H102A761	CHIP CAPACITOR
			C1016	ECJ1VB1H222K	CHIP CAPACITOR
			C1017	ECJ1VB1H222K	CHIP CAPACITOR
			C1018	ECJ1VB1H103K	CHIP CAPACITOR
			C1019	F1H1H102A761	CHIP CAPACITOR
			C102	ECEA1CKA100B	CAPACITOR
			C1020	ECJ1VB1H471K	CHIP CAPACITOR
			C1021	ECJ1VB1H471K	CHIP CAPACITOR
			C1022	F1H1H102A761	CHIP CAPACITOR
			C1023	F1H1H102A761	CHIP CAPACITOR
			C1026	ECEA0JKA470B	CAPACITOR
			C1027	F1H1H102A761	CHIP CAPACITOR
			C103	ECJ1VB1E103K	CHIP CAPACITOR
			C1030	ECEA1AKA101B	CAPACITOR
			C1031	ECEA1AKA101B	CAPACITOR
			C1032	F1C1C183A001	CAPACITOR
			C1033	F1C1C183A001	CAPACITOR
			C1034	ECEA1HKA3R3B	CAPACITOR
			C1035	ECEA1HKA3R3B	CAPACITOR
			C1036	ECUV1C333KBV	CAPACITOR CHIP
			C1037	ECEA1HKA3R3B	CAPACITOR
			C1038	ECJ1VB1H221K	CHIP CAPACITOR
			C1039	ECJ1VB1H221K	CHIP CAPACITOR
			C104	F1H1H102A761	CHIP CAPACITOR
			C1040	ECEA1CKA100B	CAPACITOR
			C1041	ECEA1CKA100B	CAPACITOR
			C1042	ECEA1CKA220B	CAPACITOR
			C1043	ECEA1HKA4R7B	CAPACITOR
			C1044	ECEA1AKA330B	CAPACITOR
			C1045	ECEA1AKA220B	CAPACITOR
			C1046	ECEA1CKA221B	CAPACITOR ELECTROLITICO
			C1047	ECEA1HKA010B	CAPACITOR
			C1048	ECEA1HKA010B	CAPACITOR
			C1049	F1H1H102A761	CHIP CAPACITOR
			C1050	F1H1H102A761	CHIP CAPACITOR
			C1051	ECEA1HKA010B	CAPACITOR
			C1052	ECEA1HKA010B	CAPACITOR
			C1053	ECEA1CKA221B	CAPACITOR ELECTROLITICO
			C1055	ECEA1HKA0R1B	CAPACITOR
			C1059	ECJ1VC1H101K	CHIP RESISTOR
			C106	ECJ1VB1E103K	CHIP CAPACITOR
			C1061	ECJ1VC1H101K	CHIP RESISTOR
1	RAIM02704A	CONJ. DECK TM70AV			
2	RAIM02700A	CONJUNTO TRANSF TM70AV			
3	RAIM02701A	CONJ. PODER TM70AV			
4	RAIM04823A	CONJ. PANEL TM82AV			
5	RAIM04822A	CONJUNTO PCB MAIN SA- TM82AV			
6	RAIM03815A	CONJUNTO TUNER PACK			

C1062	ECUV1C104ZFV	CAPACITOR CHIP	C219	ECUV1C104KBV	CAPACITOR CHIP
C1067	ECEA1HKAR22B	CAPACITOR	C220	F1H1H182A219	CAPACITOR
C1069	ECEA1HKAR22B	CAPACITOR	C221	ECEA1HKA2R2B	CAPACITOR
C107	F1H1E473A062	CHIP CAPACITOR	C222	ECEA1CKA100B	CAPACITOR
C108	F1H1H8R0A787	CHIP CAPACITOR	C223	ECEA1HKA010B	CAPACITOR
C109	F1H1H102A761	CHIP CAPACITOR	C224	ECJ1VB1C683K	CAPACITOR CHIP
C11	RCBS1H102KBY	CAPACITOR	C225	ECJ1VC1H101K	CHIP RESISTOR
C110	ECJ1VB1E103K	CHIP CAPACITOR	C226	ECEA1HKAR68B	CAPACITOR
C111	ECEA1HKA4R7B	CAPACITOR	C227	ECJ1VC1H101K	CHIP RESISTOR
C112	ECJ1VB1E103K	CHIP CAPACITOR	C228	ECJ1VB1H471K	CHIP CAPACITOR
C113	F1H1H102A761	CHIP CAPACITOR	C229	ECEA1CKA100B	CAPACITOR
C114	ECEA1HKA3R3B	CAPACITOR	C230	ECEA1CKA100B	CAPACITOR
C115	ECEA1HKA4R7B	CAPACITOR	C232	ECEA1HKAR22B	CAPACITOR
C116	ECJ1VB1C333K	CAPACITOR CHIP	C233	F1H1H102A761	CHIP CAPACITOR
C117	ECJ1VB1E103K	CHIP CAPACITOR	C235	ECJ1VC1H101K	CHIP RESISTOR
C118	ECJ1VB1E103K	CHIP CAPACITOR	C237	ECEA1CKA100B	CAPACITOR
C119	F0A2A681A010	POLYPROPLYENE	C238	ECJ1VC1H101K	CHIP RESISTOR
	CAPACITOR		C239	ECJ1VC1H470J	CAPACITOR
C120	ECEA1CKA100B	CAPACITOR	C240	F1H1A2240004	CHIP CAPACITOR
C121	ECEA1HKAR47B	CAPACITOR	C241	ECJ1VB1C393K	CAPACITOR CHIP
C122	ECEA1HKA010B	CAPACITOR	C242	F1H1H682A219	CAPACITOR
C123	ECEA1HKA010B	CAPACITOR	C243	ECJ1VC1H101K	CHIP RESISTOR
C124	ECJ1VC1H101K	CHIP RESISTOR	C244	ECJ1VC1H470J	CAPACITOR
C125	ECEA1CKA220B	CAPACITOR	C245	ECJ1VC1H101K	CHIP RESISTOR
C126	ECUV1C105ZFN	CAPACITOR	C246	ECEA1HKA3R3B	CAPACITOR
C127	ECEA1CKA220B	CAPACITOR	C247	ECEA1HKA3R3B	CAPACITOR
C129	ECEA0JKA101B	CAPACITOR	C248	ECJ1VC1H470J	CAPACITOR
C130	ECEA0JKA101B	CAPACITOR	C249	ECJ1VC1H101K	CHIP RESISTOR
C131	ECJ1VC1H151J	CHIP CAPACITOR	C250	ECEA1CKA100B	CAPACITOR
C132	F1H1H102A761	CHIP CAPACITOR	C251	ECJ1VB1H681K	CHIP CAPACITOR
C133	ECJ1VC1H270J	CHIP CAPACITOR	C252	ECEA1CKA100B	CAPACITOR
C134	ECJ1VC1H270J	CHIP CAPACITOR	C253	ECJ1VB1H103K	CHIP CAPACITOR
C136	F1H1H102A761	CHIP CAPACITOR	C254	ECEA1CKA100B	CAPACITOR
C137	ECJ1VB1H332K	CHIP CAPACITOR	C256	ECEA1CKA100B	CAPACITOR
C138	ECJ1VB1E103K	CHIP CAPACITOR	C258	ECEA1CKA100B	CAPACITOR
C139	ECEA1HKA4R7B	CAPACITOR	C259	F1H1A2240004	CHIP CAPACITOR
C141	ECEA1HKA010B	CAPACITOR	C260	F1H1A2240004	CHIP CAPACITOR
C142	ECEA1HKA010B	CAPACITOR	C261	RCE1HKN100BG	CAPACITOR (NON POLAR)
C143	F1H1H682A219	CAPACITOR	C265	ECEA1CKA100B	CAPACITOR
C144	F1H1H682A219	CAPACITOR	C3	ECBT1H2R2KC5	CAPACITOR
C147	F1H1H102A761	CHIP CAPACITOR	C301	ECEA1HKA010B	CAPACITOR
C148	ECJ1VB1E103K	CHIP CAPACITOR	C303	F1H1H102A761	CHIP CAPACITOR
C149	ECUV1C104ZFV	CAPACITOR CHIP	C304	ECJ1VB1E103K	CHIP CAPACITOR
C2	RCBS1H102KBY	CAPACITOR	C305	ECEA1CKA100B	CAPACITOR
C201	ECJ1VB1H681K	CHIP CAPACITOR	C306	ECEA1CKA100B	CAPACITOR
C202	ECJ1VC1H101K	CHIP RESISTOR	C307	ECJ1VC1H101K	CHIP RESISTOR
C203	ECJ1VB1H222K	CHIP CAPACITOR	C308	ECJ1VC1H101K	CHIP RESISTOR
C204	ECEA1CKA100B	CAPACITOR	C309	ECA1AM221B	CAPACITOR
C205	ECEA1HKA010B	CAPACITOR	C310	ECEA1HKN010B	CAPACITOR ELECTROLITICO
C206	ECEA1HKA010B	CAPACITOR	C311	ECEA1CKA330B	CAPACITOR
C207	ECEA1HKAR22B	CAPACITOR	C312	ECJ1VB1E103K	CHIP CAPACITOR
C209	ECEA1HKA2R2B	CAPACITOR	C313	ECJ1VB1E103K	CHIP CAPACITOR
C210	ECEA1HKA2R2B	CAPACITOR	C314	ECEA1HKN4R7B	RESISTENCIA
C211	ECEA1HKA2R2B	CAPACITOR	C315	ECJ1VB1E103K	CHIP CAPACITOR
C212	ECEA1HKA4R7B	CAPACITOR	C316	ECJ1VC1H101K	CHIP RESISTOR
C213	ECEA1HKA010B	CAPACITOR	C317	ECJ1VC1H470J	CAPACITOR
C214	ECEA1CKA100B	CAPACITOR	C318	ECJ1VB1E103K	CHIP CAPACITOR
C215	ECUV1C104KBV	CAPACITOR CHIP	C319	ECJ1VB1E103K	CHIP CAPACITOR
C216	ECEA1HKAR33B	CAPACITOR	C320	ECJ1VF1C474Z	CAPACITOR
C217	ECEA1HKAR33B	CAPACITOR	C321	ECUV1C104KBV	CAPACITOR CHIP
C218	ECUV1C104KBV	CAPACITOR CHIP			

C322	ECEA1HKA0R1B	CAPACITOR	C413	ECEA1HKA010B	CAPACITOR
C323	ECJ1VC1H101K	CHIP RESISTOR	C414	ECEA1CKA100B	CAPACITOR
C324	ECJ1VC1H470J	CAPACITOR	C415	ECUV1C104KBV	CAPACITOR CHIP
C325	ECJ1VB1E103K	CHIP CAPACITOR	C416	ECEA1HKAR33B	CAPACITOR
C326	ECEA1HKA010B	CAPACITOR	C417	ECEA1HKAR33B	CAPACITOR
C327	ECEA1AKN100B	CAPACITOR	C418	ECUV1C104KBV	CAPACITOR CHIP
C328	ECJ1VB1E103K	CHIP CAPACITOR	C419	ECUV1C104KBV	CAPACITOR CHIP
C329	ECEA1CKA101B	CAPACITOR	C420	F1H1H182A219	CAPACITOR
C330	ECEA1HKA010B	CAPACITOR	C421	ECEA1HKA2R2B	CAPACITOR
C331	ECEA1HKA010B	CAPACITOR	C422	ECEA1CKA100B	CAPACITOR
C332	ECEA1CKA220B	CAPACITOR	C423	ECEA1HKA010B	CAPACITOR
C333	ECKR1H102ZF5	CAPACITOR CERAMICO	C424	ECJ1VB1C683K	CAPACITOR CHIP
C334	ECJ1VB1C683K	CAPACITOR CHIP	C425	ECJ1VC1H101K	CHIP RESISTOR
C335	F1H1H392A022	CHIP CAPACITOR	C426	ECEA1HKAR68B	CAPACITOR
C336	ECJ1VB1E103K	CHIP CAPACITOR	C427	ECJ1VC1H101K	CHIP RESISTOR
C337	ECEA1CKA100B	CAPACITOR	C428	ECJ1VB1H471K	CHIP CAPACITOR
C338	ECEA1CKA100B	CAPACITOR	C429	ECEA1CKA100B	CAPACITOR
C339	ECEA1HKA010B	CAPACITOR	C430	ECEA1CKA100B	CAPACITOR
C340	ECEA1HKA010B	CAPACITOR	C432	ECEA1HKAR22B	CAPACITOR
C341	ECJ1VB1E103K	CHIP CAPACITOR	C433	F1H1H102A761	CHIP CAPACITOR
C342	ECJ1VB1E103K	CHIP CAPACITOR	C435	ECJ1VC1H101K	CHIP RESISTOR
C343	ECJ1VB1E103K	CHIP CAPACITOR	C438	ECJ1VC1H101K	CHIP RESISTOR
C344	ECJ1VB1E103K	CHIP CAPACITOR	C439	ECJ1VC1H470J	CAPACITOR
C345	ECJ1VC1H101K	CHIP RESISTOR	C440	F1H1A2240004	CHIP CAPACITOR
C346	ECJ1VC1H470J	CAPACITOR	C441	ECJ1VB1C393K	CAPACITOR CHIP
C347	ECEA1CKA100B	CAPACITOR	C442	F1H1H682A219	CAPACITOR
C348	F1H1A2240004	CHIP CAPACITOR	C443	ECJ1VC1H101K	CHIP RESISTOR
C349	ECEA1CKA100B	CAPACITOR	C444	ECJ1VC1H470J	CAPACITOR
C350	ECJ1VB1H103K	CHIP CAPACITOR	C445	ECJ1VC1H101K	CHIP RESISTOR
C352	ECJ1VC1H470J	CAPACITOR	C446	ECEA1HKA3R3B	CAPACITOR
C353	ECJ1VC1H101K	CHIP RESISTOR	C447	ECEA1HKA3R3B	CAPACITOR
C370	ECJ1VB1E103K	CHIP CAPACITOR	C448	ECJ1VC1H470J	CAPACITOR
C371	ECUV1C104KBV	CAPACITOR CHIP	C449	ECJ1VC1H101K	CHIP RESISTOR
C372	ECA1CM221B	CAPACITOR	C450	ECEA1CKA100B	CAPACITOR
C373	RCE1HKN100BG	CAPACITOR (NON POLAR)	C451	ECJ1VB1H681K	CHIP CAPACITOR
C374	ECJ1VB1E103K	CHIP CAPACITOR	C452	ECEA1CKA100B	CAPACITOR
C375	ECA1HM101B	ELECTRONIC CAPACITOR	C453	ECJ1VB1H103K	CHIP CAPACITOR
C376	ECJ1VB1E103K	CHIP CAPACITOR	C455	ECEA1CKA100B	CAPACITOR
C377	ECJ1VB1E103K	CHIP CAPACITOR	C456	ECEA1CKA100B	CAPACITOR
C378	ECEA1CKA100B	CAPACITOR	C459	F1H1A2240004	CHIP CAPACITOR
C379	ECUV1C104KBV	CAPACITOR CHIP	C460	F1H1A2240004	CHIP CAPACITOR
C380	ECA1CM221B	CAPACITOR	C461	RCE1HKN100BG	CAPACITOR (NON POLAR)
C381	ECJ1VB1E103K	CHIP CAPACITOR	C465	ECEA1CKA100B	CAPACITOR
C382	ECJ1VB1E103K	CHIP CAPACITOR	C5	ECBT1H5R6KC5	CAPACITOR CERAMICO
C383	RCE1HKN100BG	CAPACITOR (NON POLAR)	C500	ECBT1H821KB5	CAPACITOR CERAMICO
C384	ECEA1CKA100B	CAPACITOR	C501	ECBT1H821KB5	CAPACITOR CERAMICO
C385	ECA1HM101B	ELECTRONIC CAPACITOR	C502	ECBT1H821KB5	CAPACITOR CERAMICO
C386	ECA1HM470B	ELECTROLYTIC CAPACITOR	C503	ECBT1H821KB5	CAPACITOR CERAMICO
C4	ECBT1H181KB5	CAPACITOR	C504	ECKR1H103ZF5	CONDENSADOR
C401	ECJ1VB1H681K	CHIP CAPACITOR	C505	ECKR1H103ZF5	CONDENSADOR
C402	ECJ1VC1H101K	CHIP RESISTOR	C506	ECBT1E103ZF5	CAPACITOR
C403	ECJ1VB1H222K	CHIP CAPACITOR	C507	ECBT1H220JC5	CAPACITOR
C404	ECEA1CKA100B	CAPACITOR	C508	ECBT1H220JC5	CAPACITOR
C405	ECEA1HKA010B	CAPACITOR	C509	ECBT1H150JC5	CAPACITOR
C406	ECEA1HKA010B	CAPACITOR	C510	ECBT1H150JC5	CAPACITOR
C407	ECEA1HKAR22B	CAPACITOR	C511	ECBT1H473ZF5	CAPACITOR CERAMICO
C409	ECEA1HKA2R2B	CAPACITOR	C512	ECBT1H102KB5	CAPACITOR
C410	ECEA1HKA2R2B	CAPACITOR	C517	ECA1CM221B	CAPACITOR
C411	ECEA1HKA2R2B	CAPACITOR	C519	ECEA1HKA2R2B	CAPACITOR
C412	ECEA1HKA4R7B	CAPACITOR	C520	ECA1EM331B	ELECTROLYTIC CAPACITOR

C521	ECA1HM470B	ELECTROLYTIC CAPACITOR	C624	ECBT1H560J5	CAPACITOR CERAMICO
C522	ECA1HM470B	ELECTROLYTIC CAPACITOR	C625	ECBT1H102KB5	CAPACITOR
C523	ECA1HM470B	ELECTROLYTIC CAPACITOR	C626	ECBT1H560J5	CAPACITOR CERAMICO
C524	ECA1HM470B	ELECTROLYTIC CAPACITOR	C627	ECBT1H102KB5	CAPACITOR
C525	ECA1HM470B	ELECTROLYTIC CAPACITOR	C628	ECBT1E223ZF5	CAPACITOR
C526	ECEA0JKA221B	CAPACITOR	C629	ECBT1H331KB5	CAPACITOR CERAMICO
C527	ECBT1H102KB5	CAPACITOR	C630	ECBT1H101KB5	CAPACITOR
C531	F2A1V472A082	CAPACITOR ELECTROLITICO	C631	ECEA1HKA010B	CAPACITOR
C532	ECEA50V472E	CAPACITOR ELECTROLITICO	C632	ECEA1HKA2R2B	CAPACITOR
C533	ECEA50V472E	CAPACITOR ELECTROLITICO	C633	ECBT1H101KB5	CAPACITOR
C534	F2A1V472A082	CAPACITOR ELECTROLITICO	C634	ECBT1H101KB5	CAPACITOR
C536	ECQV1H184JL3	CAPACITOR	C635	ECBT1H104ZF5	CAPACITOR
C540	ECKR1H103ZF5	CONDENSADOR	C636	ECBT1H101KB5	CAPACITOR
C541	ECKR1H103ZF5	CONDENSADOR	C639	ECEA1HKA3R3B	CAPACITOR
C542	ECBT1H103KB5	AXIAL CAPACITOR	C640	ECEA1VKA220B	CAPACITOR
C543	ECEA1HKA2R2B	CAPACITOR	C641	ECEA1VKA220B	CAPACITOR
C544	ECA0JM471B	CAPACITOR	C646	ECBT1H330J5	CAPACITOR CERAMICO
C580	ECBT1H821KB5	CAPACITOR CERAMICO	C647	ECBT1H330J5	CAPACITOR CERAMICO
C581	ECBT1H821KB5	CAPACITOR CERAMICO	C649	ECBT1H331KB5	CAPACITOR CERAMICO
C582	ECKR1H103ZF5	CONDENSADOR	C653	ECBT1H101KB5	CAPACITOR
C583	ECKR1H103ZF5	CONDENSADOR	C654	ECBT1H101KB5	CAPACITOR
C584	ECBT1H150JC5	CAPACITOR	C655	ECBT1H102KB5	CAPACITOR
C585	ECBT1H150JC5	CAPACITOR	C656	ECBT1E103ZF5	CAPACITOR
C586	ECBT1H473ZF5	CAPACITOR CERAMICO	C657	ECKR1H103ZF5	CONDENSADOR
C587	ECBT1E103ZF5	CAPACITOR	C658	ECEA1VKA4R7B	CAPACITOR ELECTROLITICO
C588	F2A1V472A082	CAPACITOR ELECTROLITICO	C659	ECBT1E223ZF5	CAPACITOR
C589	ECEA50V472E	CAPACITOR ELECTROLITICO	C660	ECBT1E103ZF5	CAPACITOR
C590	ECBT1H821KB5	CAPACITOR CERAMICO	C661	ECEA1HKAR33B	CAPACITOR
C591	ECBT1H821KB5	CAPACITOR CERAMICO	C662	ECBT1H473ZF5	CAPACITOR CERAMICO
C592	ECKR1H103ZF5	CONDENSADOR	C663	ECEA1HKA010B	CAPACITOR
C593	ECKR1H103ZF5	CONDENSADOR	C664	ECBT1H102KB5	CAPACITOR
C594	ECBT1H150JC5	CAPACITOR	C665	ECBT1H101KB5	CAPACITOR
C595	ECBT1H150JC5	CAPACITOR	C666	ECBT1H102KB5	CAPACITOR
C596	ECBT1H473ZF5	CAPACITOR CERAMICO	C667	ECEA1AKA101B	CAPACITOR
C597	ECBT1E103ZF5	CAPACITOR	C669	ECEA0JKA470B	CAPACITOR
C598	ECEA50V472E	CAPACITOR ELECTROLITICO	C670	F1D1H473A012	CAPACITOR
C599	F2A1V472A082	CAPACITOR ELECTROLITICO	C671	ECBT1E223ZF5	CAPACITOR
C6	ECBT1H3R3KC5	CAPACITOR CERAMICO	C672	ECBT1E223ZF5	CAPACITOR
C600	ECEA0JKA101B	CAPACITOR	C673	ECA1CM221B	CAPACITOR
C601	ECBT1H104ZF5	CAPACITOR	C7	ECBT1H4R7KC5	CAPACITOR CERAMICO
C603	ECBT1H331KB5	CAPACITOR CERAMICO	C8	ECBT1H3R3KC5	CAPACITOR CERAMICO
C604	RCE1AM102B	CAPACITOR	C800	ECJ1VC1H100J	CHIP CAPACITOR
C605	ECBT1H102KB5	CAPACITOR	C801	ECJ1VB1H223K	CAPACITOR CHIP
C606	ECBT1H561KB5	CAPACITOR CERAMICO	C802	F1H1H331A789	CHIP CAPACITOR
C607	ECBT1H561KB5	CAPACITOR CERAMICO	C803	ECJ1VB1E103K	CHIP CAPACITOR
C608	ECBT1H561KB5	CAPACITOR CERAMICO	C804	ECJ1VC1H100J	CHIP CAPACITOR
C609	ECBT1H561KB5	CAPACITOR CERAMICO	C805	ECJ1VC1H100J	CHIP CAPACITOR
C610	ECBT1H561KB5	CAPACITOR CERAMICO	C806	ECJ1VC1H100J	CHIP CAPACITOR
C611	ECBT1H561KB5	CAPACITOR CERAMICO	C807	ECJ1VC1H330J	CHIP CAPACITOR
C612	ECBT1H561KB5	CAPACITOR CERAMICO	C808	ECJ1VC1H330J	CHIP CAPACITOR
C613	ECBT1H561KB5	CAPACITOR CERAMICO	C809	ECUV1C104KBV	CAPACITOR CHIP
C615	ECBT1E103ZF5	CAPACITOR	C810	ECEA0JKA101B	CAPACITOR
C616	ECEA1AKA220B	CAPACITOR	C811	ECUV1C104KBV	CAPACITOR CHIP
C617	ECBT1H103KB5	AXIAL CAPACITOR	C812	ECJ1VB1E103K	CHIP CAPACITOR
C618	ECBT1H103KB5	AXIAL CAPACITOR	C813	ECEA0JKA101B	CAPACITOR
C619	ECBT1E103ZF5	CAPACITOR	C814	F1H1H102A761	CHIP CAPACITOR
C620	ECBT1H680J5	CAPACITOR CERAMICO	C815	ECEA0JKA101B	CAPACITOR
C621	ECBT1H680J5	CAPACITOR CERAMICO	C816	F1H1H102A761	CHIP CAPACITOR
C622	ECBT1H150JC5	CAPACITOR	C817	ECEA0JKA101B	CAPACITOR
C623	ECBT1H180JC5	CAPACITOR	C818	F1H1H102A761	CHIP CAPACITOR

C819	ECEA0JKA101B	CAPACITOR
C820	F1H1H102A761	CHIP CAPACITOR
C821	ECEA1AKA101B	CAPACITOR
C822	ECEA0JKA101B	CAPACITOR
C823	ECUV1C104KBV	CAPACITOR CHIP
C826	ECJ1VB1H471K	CHIP CAPACITOR
C830	ECEA0JKA221B	CAPACITOR
C831	ECEA1AKA101B	CAPACITOR
C832	ECEA1AKA101B	CAPACITOR
C833	EEUFC1A681LB	CAPACITOR
C834	ECEA1HKA101B	CAPACITOR
C835	F1H1A2240004	CHIP CAPACITOR
C9	ECBT1H2R2KC5	CAPACITOR
C902	ECEA1HKA010B	CAPACITOR
C903	ECEA1HKA010B	CAPACITOR
C904	ECBT1C332KR5	CAPACITOR
C905	ECEA1HKAR47B	CAPACITOR
C906	ECBT0J153MS5	CAPACITOR
C907	F1C1C3330001	CAPACITOR
C908	ECEA1CKA220B	CAPACITOR
C910	ECBT0J153MS5	CAPACITOR
C911	ECBT1C472KR5	CAPACITOR
C912	F1C1C3330001	CAPACITOR
C913	ECBT1E103ZF5	CAPACITOR
C914	ECBT1H151KB5	CAPACITOR
C916	ECEA1HKA4R7B	CAPACITOR
C917	ECBT1H102KB5	CAPACITOR
C918	ECEA1HKA3R3B	CAPACITOR
C919	ECBT1H471KB5	CAPACITOR CERAMICO
C920	ECBT1H683KB5	CAPACITOR AXIAL
C921	ECBT1H683KB5	CAPACITOR AXIAL
C922	ECBT1H683KB5	CAPACITOR AXIAL
C923	ECEA1AKA101B	CAPACITOR
C950	ECA1HM101B	ELECTRONIC CAPACITOR
C951	ECQE1104KF3	CAPACITOR
C952	ECQE1104KF3	CAPACITOR
C953	ECKR2H103ZF5	CAPACITOR
C954	ECA1EM222B	CAPACITOR
C955	ECA1JM101B	CAP.ELECTROLITICO
C956	ECKR1H103KB5	CONDENSADOR
C957	ECA2AM100B	CAPACITOR ELECLITICO
C958	ECKR1H103ZF5	CONDENSADOR
C959	RCA1CM102BT	CAPACITOR ELECTRO
C960	RCA1CM102BT	CAPACITOR ELECTRO
C961	W6NL-0	ALAMBRE DESNUDO
ESTA#ADO		
C962	ECKR1H103KB5	CONDENSADOR
C963	ECEA1AKA470B	CAPACITOR
C964	F1D1H473A012	CAPACITOR
C965	F1D1H473A012	CAPACITOR
C970	F1D1H473A012	CAPACITOR
C971	F1D1H473A012	CAPACITOR
C980	F1D1H473A012	CAPACITOR
C981	F1D1H473A012	CAPACITOR
C990	F1D1H473A012	CAPACITOR
C991	F1D1H473A012	CAPACITOR

CERAMIC FILTERS

CF201	RLFFETWND01M	CRISTAL
CF202	RLFFETWND01M	CRISTAL

CONNECTORS

CN1001	K1MP08B00001	CONECTOR RIGIDO 8 PINES
CN300	K1KB12B00036	P2 MO CONNECTOR (12
LOC)		
CN301	K1KB12B00036	P2 MO CONNECTOR (12
LOC)		
CN302	RJS1A9417-1	CONECTOR FFC 17P
CN303	RJS1A9417-1	CONECTOR FFC 17P
CN304	RJS1A5210	SOPORTE CABLE
CN305	K1KA02A00008	CONNECTOR
CN306	K1KA02A00010	CONECTOR 2P
CN309	K1MN14A00049	FF CONECTOR
CN310	K1MN24A00040	24P FFC CONECTOR
CN311	K1KB30A00079	CONECTOR 30P
CN900	K1KA02A00010	CONECTOR 2P
CN900	RJT066H10B	10P BTB CONNECTOR
CN950	RJT119W10V	10 PIN CONNECTOR
CN951	RJT119W07V	7 PIN WIRE CONNECTOR
CN953	K1KA03A00083	CONECTOR
CN954	K1KA07A00058	7P CONNECTOR
CN955	RJT119W08V	CONECTOR
CN956	K1KB12B00036	P2 MO CONNECTOR
CN957	K1KB12B00036	P2 MO CONNECTOR
CN958	RJT119W15V	15 PIN WIRE HOLDER
CN959	RJT119W15V	15 PIN WIRE HOLDER
CP1001	K1KA09B00058	CONECTOR
CP1002	K1KA09B00058	CONECTOR
CP500	K1KA12A00184	P2 MQ CONNECTOR (12P)
CP501	K1KA12A00184	P2 MQ CONNECTOR (12P)
CP502	K1KA12A00184	P2 MQ CONNECTOR (12P)
CP503	K1KA12A00184	P2 MQ CONNECTOR (12P)
CP600	RJS1A9417-1	CONECTOR FFC 17P
CP601	RJS1A9417-1	CONECTOR FFC 17P
CP900	RJU066H10M	CONECTOR 10P B-B
CS1001	RJS1A6805-J	CONECTOR 5P
CS1002	RJS1A6805-J	CONECTOR 5P
CS951	RJU071H09M1	CONECTOR
CS971	RJU071H09M1	CONECTOR

DIODES

D1	SVC211SPA-AL	DIODO
D1003	B0ACCK000005	CHIP DIODE
D1004	B0BC3R700004	DIODO
D101	B0BC5R000009	CHIP ZENER DIODE
D2	SVC211SPA-AL	DIODO
D202	MA2J72800L	DIODE
D204	B0ADCC000002	DUAL CHIP DIODE
D205	MA2J72800L	DIODE
D3	SVC211SPA-AL	DIODO
D301	B0ACCK000005	CHIP DIODE
D302	B0ADCJ000020	DUAL CHIP DIODE
D303	B0ADCJ000020	DUAL CHIP DIODE
D304	B0ADCJ000020	DUAL CHIP DIODE
D308	RL1N4003S-P	DIODO
D311	B0BC5R000009	CHIP ZENER DIODE
D312	RL1N4003S-P	DIODO
D317	B0BC7R500001	CHIP DIODE

D370	B0ACCK000005	CHIP DIODE	D906	B0BA5R000004	ZENER DIODE
D371	B0BC01000014	DIODO	D923	ERDS2TJ271T	RESISTENCIA
D372	B0ACCK000005	CHIP DIODE	D950	RL1N4003S-P	DIODO
D373	B0BC01000014	DIODO	D951	MA165TA	DIODO
D374	RL1N4003S-P	DIODO	D951	B0HARM000017	DIODO
D375	B0ACCK000005	CHIP DIODE	D952	B0HARM000017	DIODO
D376	B0ACCK000005	CHIP DIODE	D953	B0HARM000017	DIODO
D377	B0ACCK000005	CHIP DIODE	D954	B0HARM000017	DIODO
D378	RL1N4003S-P	DIODO	D957	B0FBAM000009	RECTIFICADOR DE
D379	B0ACCK000005	CHIP DIODE	D958	B0FBAM000009	RECTIFICADOR DE
D380	B0ACCK000005	CHIP DIODE	D959	RL1N4003S-P	DIODO
D381	B0ACCK000005	CHIP DIODE	D960	RL1N4003S-P	DIODO
D382	B0ACCK000005	CHIP DIODE	D961	MTZJ30ATA	DIODO
D384	B0ACCK000005	CHIP DIODE	D962	1T3T	DIODO
D385	B0ACCK000005	CHIP DIODE	D963	1T3T	DIODO
D402	MA2J72800L	DIODE	D964	1T3T	DIODO
D404	B0ADCC000002	DUAL CHIP DIODE	D965	B0BA6R600008	ZENER DIODE
D405	MA2J72800L	DIODE	D967	ERDS2TJ151T	RESISTENCIA
D500	B0JAPG000019	DIODE	D968	1T3T	DIODO
D501	B0JAPG000019	DIODE	D969	B0HARM000017	DIODO
D520	B0BA01900005	ZENER DIODE	D970	KBP152G4R5	DIODO RECTIFICADOR
D521	B0BA01900005	ZENER DIODE	D971	MA165TA	DIODO
D522	B0BA01900005	ZENER DIODE	D971	B0HARM000017	DIODO
D523	B0BA01900005	ZENER DIODE	D972	REQM0021	DIODO RECUBRIMIENT
D524	RL1N4003S-P	DIODO	D973	REQM0020	CONJUNTO RECUBRIM
D525	RL1N4003S-P	DIODO	D976	B0AACK000004	DIODE
D526	B0AACK000004	DIODE	D977	B0AACK000004	DIODE
D527	B0AACK000004	DIODE	D978	B0AACK000004	DIODE
D540	MTZJ24DTA	DIODO	D979	B0AACK000004	DIODE
D541	B0BA01100004	DIODO ZENER	D980	B0AACK000004	DIODE
D542	B0BA01100004	DIODO ZENER	D981	B0AACK000004	DIODE
D543	B0AACK000004	DIODE	D982	B0AACK000004	DIODE
D544	B0AACK000004	DIODE	D983	B0AACK000004	DIODE
D545	B0AACK000004	DIODE	D984	B0AACK000004	DIODE
D580	B0JAPG000019	DIODE	D985	B0AACK000004	DIODE
D581	B0JAPG000019	DIODE	D986	B0AACK000004	DIODE
D590	B0JAPG000019	DIODE	D987	B0AACK000004	DIODE
D591	B0JAPG000019	DIODE			
D602	B0AACK000004	DIODE	EARTH TERMINAL		
D604	B0AACK000004	DIODE			
D605	B0AACK000004	DIODE	E500	SNE1004-2	TERMINAL DE TIERRA
D606	B0AACK000004	DIODE			
D608	B0AACK000004	DIODE	FUSES		
D610	B0AACK000004	DIODE			
D611	1SS380TE-17	DIODO CHIP	F1	K5D402BK0007	FUSIBLE
D612	1SS380TE-17	DIODO CHIP	F3	K5D632BK0007	FUSIBLE DE 6.3A
D613	MA2C72300F	DIODE	F4	K5D632BK0007	FUSIBLE DE 6.3A
D614	MA2C700A0F	DIODO			
D615	MA2C700A0F	DIODO	FUSE HOLDER		
D616	B0BA5R600016	ZENER DIODE			
D617	B0AACK000004	DIODE	FC1	EYF52BC	FUSIBLE TERMINAL
D620	B3AAA0000583	LED	FC2	EYF52BC	FUSIBLE TERMINAL
D625	B0AACK000004	DIODE	FC5	EYF52BC	FUSIBLE TERMINAL
D626	B0AACK000004	DIODE	FC6	EYF52BC	FUSIBLE TERMINAL
D800	RL1N4003S-P	DIODO	FC7	EYF52BC	FUSIBLE TERMINAL
D801	EK14LFH2K	SCHOTKY DIODE	FC8	EYF52BC	FUSIBLE TERMINAL
D802	B0ACCK000005	CHIP DIODE			
D803	B0ACCK000005	CHIP DIODE			
D901	B3ACA0000234	LED (AMBER)			
D902	B3ACA0000234	LED (AMBER)			

FUSE PROTECTOR

FP951 K5G102AA0002 FUSE PROTECTOR

HOLDERS

H500 K1YF15000004 15 PIN WIRE HOLDER
H502 K1YF15000004 15 PIN WIRE HOLDER
H503 RJS1A5508 SOPORTE CABLE 8P
H600 RMR0316 7P CABLE HOLDER
H601 RMR0317 CONECTOR 8P
H900 RMR0311 NIL
H950 K1YF10000006 10 PIN WIRE HOLDER
H951 K1YF07000003 SOPORTE CABLE 7P

INTEGRATED CIRCUIT

IC1001 AN7348S-E1 TAPE PB IC
IC1002 C1BB00000574 MICRO PROCESADOR IC
IC1004 C1AA00000612 SWIC
IC101 LA1833NMNTLM IC IF
IC102 LC72131MDTRM IC
IC300 C1BB00000731 ASP IC
IC301 BA3838FE2 IC V. MUTE
IC302 C0AABB000117 CIRCUITO INTEGRADO
IC303 KIA4558FEL CIRCUITO INTEGRADO
IC306 C0ABCB000052 Q4AD OP-AMP
IC307 KIA4558FEL CIRCUITO INTEGRADO
IC308 KIA4558FEL CIRCUITO INTEGRADO
IC500 RSN309W44B-P AMPLIFICADOR DE PODER
IC501 C5BA00000113 IC REGULADOR
IC502 RSN312H24-P SCF02
IC503 RSN312H24-P SCF02
IC600 C2BBGF000384 MICRO-PIC (OPE-CON)
IC601 C1BB00000574 MICRO PROCESADOR IC
IC603 C3EBCG000008 MEMORIA EEPROM
IC800 C2BBGF000383 MECHA CON TM70AV
IC803 UPC29M33HF 3.3V REGULATOR IC
IC804 C0DAAHG00007 ICREGULATOR
IC806 C0JBAZ000524 AMP 1C
IC900 C1BB00000716 ECHO IC
IC951 CNB13030R2AU FOTOACOPLADOR
IC971 CNB13030R2AU FOTOACOPLADOR

JUMPER

FJ1 W6NL-0 ALAMBRE DESNUDO
FJ2 W6NL-0 ALAMBRE DESNUDO
FJ3 W6NL-0 ALAMBRE DESNUDO
FJ4 W6NL-0 ALAMBRE DESNUDO
FJ5 W6NL-0 ALAMBRE DESNUDO
FJ6 W6NL-0 ALAMBRE DESNUDO
FJ7 W6NL-0 ALAMBRE DESNUDO
FJ8 W6NL-0 ALAMBRE DESNUDO

J1 W6NL-0 ALAMBRE DESNUDO
J1 W6NL-0 ALAMBRE DESNUDO
J10 W6NL-0 ALAMBRE DESNUDO
J100 W6NL-0 ALAMBRE DESNUDO
J100 W6NL-0 ALAMBRE DESNUDO

J1000 W6NL-0 ALAMBRE DESNUDO
J1004 W6NL-0 ALAMBRE DESNUDO
J1009 W6NL-0 ALAMBRE DESNUDO
J101 W6NL-0 ALAMBRE DESNUDO
J1012 W6NL-0 ALAMBRE DESNUDO
J1013 W6NL-0 ALAMBRE DESNUDO
J1014 W6NL-0 ALAMBRE DESNUDO
J1015 W6NL-0 ALAMBRE DESNUDO
J1016 W6NL-0 ALAMBRE DESNUDO
J1017 W6NL-0 ALAMBRE DESNUDO
J1018 W6NL-0 ALAMBRE DESNUDO
J1020 W6NL-0 ALAMBRE DESNUDO
J1021 W6NL-0 ALAMBRE DESNUDO
J1022 W6NL-0 ALAMBRE DESNUDO
J1023 W6NL-0 ALAMBRE DESNUDO
J1024 W6NL-0 ALAMBRE DESNUDO
J1026 W6NL-0 ALAMBRE DESNUDO
J1028 W6NL-0 ALAMBRE DESNUDO
J1029 W6NL-0 ALAMBRE DESNUDO
J1030 W6NL-0 ALAMBRE DESNUDO
J1031 W6NL-0 ALAMBRE DESNUDO
J1032 W6NL-0 ALAMBRE DESNUDO
J1033 W6NL-0 ALAMBRE DESNUDO
J1034 W6NL-0 ALAMBRE DESNUDO
J1036 W6NL-0 ALAMBRE DESNUDO
J1038 W6NL-0 ALAMBRE DESNUDO
J1039 W6NL-0 ALAMBRE DESNUDO
J104 W6NL-0 ALAMBRE DESNUDO
J1040 W6NL-0 ALAMBRE DESNUDO
J1041 W6NL-0 ALAMBRE DESNUDO
J1042 W6NL-0 ALAMBRE DESNUDO
J1043 W6NL-0 ALAMBRE DESNUDO
J1044 W6NL-0 ALAMBRE DESNUDO
J1045 W6NL-0 ALAMBRE DESNUDO
J1046 W6NL-0 ALAMBRE DESNUDO
J1047 W6NL-0 ALAMBRE DESNUDO
J1048 W6NL-0 ALAMBRE DESNUDO
J1049 W6NL-0 ALAMBRE DESNUDO
J105 W6NL-0 ALAMBRE DESNUDO
J1050 W6NL-0 ALAMBRE DESNUDO
J1051 W6NL-0 ALAMBRE DESNUDO
J1052 W6NL-0 ALAMBRE DESNUDO
J1053 W6NL-0 ALAMBRE DESNUDO
J1054 W6NL-0 ALAMBRE DESNUDO
J1055 W6NL-0 ALAMBRE DESNUDO
J1056 W6NL-0 ALAMBRE DESNUDO
J1057 W6NL-0 ALAMBRE DESNUDO
J1058 W6NL-0 ALAMBRE DESNUDO
J1059 W6NL-0 ALAMBRE DESNUDO
J106 W6NL-0 ALAMBRE DESNUDO
J1060 W6NL-0 ALAMBRE DESNUDO
J1061 W6NL-0 ALAMBRE DESNUDO
J1062 W6NL-0 ALAMBRE DESNUDO
J1063 W6NL-0 ALAMBRE DESNUDO
J1064 W6NL-0 ALAMBRE DESNUDO
J1065 W6NL-0 ALAMBRE DESNUDO
J1066 W6NL-0 ALAMBRE DESNUDO
J1067 W6NL-0 ALAMBRE DESNUDO
J1068 W6NL-0 ALAMBRE DESNUDO
J1069 W6NL-0 ALAMBRE DESNUDO

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

J941	W6NL-0	ALAMBRE DESNUDO
J942	W6NL-0	ALAMBRE DESNUDO
J943	W6NL-0	ALAMBRE DESNUDO
J944	W6NL-0	ALAMBRE DESNUDO
J945	W6NL-0	ALAMBRE DESNUDO
J946	W6NL-0	ALAMBRE DESNUDO
J947	W6NL-0	ALAMBRE DESNUDO
J948	W6NL-0	ALAMBRE DESNUDO
J949	W6NL-0	ALAMBRE DESNUDO
J950	W6NL-0	ALAMBRE DESNUDO
J951	W6NL-0	ALAMBRE DESNUDO
J952	W6NL-0	ALAMBRE DESNUDO
J953	W6NL-0	ALAMBRE DESNUDO
J954	W6NL-0	ALAMBRE DESNUDO
J955	W6NL-0	ALAMBRE DESNUDO
J956	W6NL-0	ALAMBRE DESNUDO
J957	W6NL-0	ALAMBRE DESNUDO
J958	W6NL-0	ALAMBRE DESNUDO
J959	W6NL-0	ALAMBRE DESNUDO
J960	W6NL-0	ALAMBRE DESNUDO
J961	W6NL-0	ALAMBRE DESNUDO
J962	W6NL-0	ALAMBRE DESNUDO
J963	W6NL-0	ALAMBRE DESNUDO
J964	W6NL-0	ALAMBRE DESNUDO
J965	W6NL-0	ALAMBRE DESNUDO
J966	W6NL-0	ALAMBRE DESNUDO
J967	W6NL-0	ALAMBRE DESNUDO
J968	W6NL-0	ALAMBRE DESNUDO
J969	W6NL-0	ALAMBRE DESNUDO
J970	W6NL-0	ALAMBRE DESNUDO
J971	W6NL-0	ALAMBRE DESNUDO
J972	W6NL-0	ALAMBRE DESNUDO
J973	W6NL-0	ALAMBRE DESNUDO
J974	W6NL-0	ALAMBRE DESNUDO
J975	W6NL-0	ALAMBRE DESNUDO
J976	W6NL-0	ALAMBRE DESNUDO
J977	W6NL-0	ALAMBRE DESNUDO
J978	W6NL-0	ALAMBRE DESNUDO
J979	W6NL-0	ALAMBRE DESNUDO
J980	W6NL-0	ALAMBRE DESNUDO
J980	W6NL-0	ALAMBRE DESNUDO
J981	W6NL-0	ALAMBRE DESNUDO
J981	W6NL-0	ALAMBRE DESNUDO
J982	W6NL-0	ALAMBRE DESNUDO
J982	W6NL-0	ALAMBRE DESNUDO
J983	W6NL-0	ALAMBRE DESNUDO
J983	W6NL-0	ALAMBRE DESNUDO
J984	W6NL-0	ALAMBRE DESNUDO
J985	W6NL-0	ALAMBRE DESNUDO
J986	W6NL-0	ALAMBRE DESNUDO
J987	W6NL-0	ALAMBRE DESNUDO
J988	W6NL-0	ALAMBRE DESNUDO
J989	W6NL-0	ALAMBRE DESNUDO
J990	W6NL-0	ALAMBRE DESNUDO
J991	W6NL-0	ALAMBRE DESNUDO
J992	W6NL-0	ALAMBRE DESNUDO
J993	W6NL-0	ALAMBRE DESNUDO
J994	W6NL-0	ALAMBRE DESNUDO
J995	W6NL-0	ALAMBRE DESNUDO
J996	W6NL-0	ALAMBRE DESNUDO

J997	W6NL-0	ALAMBRE DESNUDO
J998	W6NL-0	ALAMBRE DESNUDO
J999	W6NL-0	ALAMBRE DESNUDO

JACKS		
JK101	RJH5414-1	CONECTOR DE ANTENA
JK305	RJH2405L	4 PIN RCA JACK
JK500	K2AA2B000004	AC IN
JK600	K2HC103A0023	CONECTOR DE BAFLES
JK601	K2HC103A0023	CONECTOR DE BAFLES
JK800	RJH2110	VIDEO OUT
JK900	K2HC103A0023	CONECTOR DE BAFLES
JK951	K2HA204B0119	ALLX JACK
JK952	K4BC04B00047	SPEAKER JACK (HIGH)
JK953	K4BC04B00046	4 TERMINAL SPEAKER JACK
JK954	K4BC04B00046	4 TERMINAL SPEAKER JACK

L1	RLQZP1R2KT-Y	BOBINA AXIAL
L1001	G0C470JA0030	RF CHOKE COIL
L1002	7L1A62N	BOBINA DE OSCILACION
L2	RLQZPR47KT-Y	BOBINA AXIAL
L500	RLQZ371	BOBINA
L600	RLQB3R3KT-1Y	BOBINA
L602	RLQB101KT-1Y	BOBINA
L604	G0C100JA0030	INDUCTOR
L605	G0C3R3JA0030	COIL
L606	RLQZP101KT-Y	BOBINA
L607	RLQZP101KT-Y	BOBINA
L608	RLQZP100KT-Y	BOBINA AXIAL
L801	G0ZZ00001930	COIL
L802	G0A200D00002	BOBINA
L803	G0A200D00002	BOBINA
L804	G0A200D00002	BOBINA
L805	G0A200D00002	BOBINA
L806	G0A200D00002	BOBINA

Q1	2SK544F-AC	TRANSISTOR
Q1001	KTC3199GRTA	TRANSISTOR
Q1003	B1AAGC000007	TRANSISTOR
Q1004	B1AAGC000007	TRANSISTOR
Q1005	B1AAGC000007	TRANSISTOR
Q1006	B1GBCFNA0019	TRANSISTORCHIP
Q1007	KTC3875GRTA	TRANSISTOR
Q1008	KTC3875GRTA	TRANSISTOR
Q1009	KTC3875GRTA	TRANSISTOR
Q101	2SC2058SPTA	TRANSISTOR
Q1010	KTC3875GRTA	TRANSISTOR
Q1011	KTC3875GRTA	TRANSISTOR
Q1012	KTD1304TA	TRANSISTOR CHIP
Q1013	KTD1304TA	TRANSISTOR CHIP
Q1014	B1ABCF000011	CHIP TRANSISTOR
Q1015	B1ABCF000011	CHIP TRANSISTOR
Q1016	KRA102STA	TRANSISTOR DIGITAL CHIP
Q1017	KTD1146YTA	TRANSISTOR

Q1018	KTA12710YTA	TRANSISTOR
Q1019	KTA12710YTA	TRANSISTOR
Q1020	KTD1304TA	TRANSISTOR CHIP
Q1021	KTD1304TA	TRANSISTOR CHIP
Q1022	KRA102STA	TRANSISTOR DIGITAL CHIP
Q1023	KRA102STA	TRANSISTOR DIGITAL CHIP
Q106	B1GCCFJJ0015	TRANSISTORRADIAL
Q2	2SC2786MTA	TRANSISTOR
Q201	KTC3875GRTA	TRANSISTOR
Q202	KTC3875GRTA	TRANSISTOR
Q203	KTD1304TA	TRANSISTOR CHIP
Q204	KTC3875GRTA	TRANSISTOR
Q205	KTA1504GRTA	TRANSISTOR
Q206	KTD1304TA	TRANSISTOR CHIP
Q207	KTD1304TA	TRANSISTOR CHIP
Q208	KTD1304TA	TRANSISTOR CHIP
Q209	KTD1304TA	TRANSISTOR CHIP
Q210	KTC3875GRTA	TRANSISTOR
Q211	KTD1304TA	TRANSISTOR CHIP
Q3	2SC2787FL1TA	TRANSISTOR
Q301	B1GBCFJJ0039	TRANSISTORCHIP
Q302	KTA12710YTA	TRANSISTOR
Q307	B1GDCFJJ0023	TRANSISTOR
Q308	KTC3875GRTA	TRANSISTOR
Q309	B1GDCFJJ0023	TRANSISTOR
Q310	B1GDCFJJ0023	TRANSISTOR
Q311	KTD1304TA	TRANSISTOR CHIP
Q313	B1GDCFJJ0023	TRANSISTOR
Q314	B1GDCFJJ0023	TRANSISTOR
Q316	KTD1304TA	TRANSISTOR CHIP
Q320	B1AAKD000009	TRANSISTOR
Q370	B1ADCF000001	TRANSISTOR
Q371	2SD0592ARA	TRANSISTOR
Q372	B1ADCF000001	TRANSISTOR
Q373	2SD0592ARA	TRANSISTOR
Q374	B1ADCF000001	TRANSISTOR
Q375	B1ABCF000011	CHIP TRANSISTOR
Q376	B1ADCF000001	TRANSISTOR
Q377	2SD0592ARA	TRANSISTOR
Q378	B1ADCF000001	TRANSISTOR
Q379	2SD0592ARA	TRANSISTOR
Q380	B1ADCF000001	TRANSISTOR
Q381	B1ABCF000011	CHIP TRANSISTOR
Q382	B1ADCF000001	TRANSISTOR
Q4	2SC2787FL1TA	TRANSISTOR
Q401	KTC3875GRTA	TRANSISTOR
Q402	KTC3875GRTA	TRANSISTOR
Q403	KTD1304TA	TRANSISTOR CHIP
Q404	KTC3875GRTA	TRANSISTOR
Q405	KTA1504GRTA	TRANSISTOR
Q406	KTD1304TA	TRANSISTOR CHIP
Q407	KTD1304TA	TRANSISTOR CHIP
Q408	KTD1304TA	TRANSISTOR CHIP
Q409	KTD1304TA	TRANSISTOR CHIP
Q410	KTC3875GRTA	TRANSISTOR
Q411	KTD1304TA	TRANSISTOR CHIP
Q520	KTC3199GRTA	TRANSISTOR
Q521	KTC3199GRTA	TRANSISTOR
Q522	B1AAGC000007	TRANSISTOR
Q540	KTA1046	TRANSISTOR

Q541	2SD1859QRTV2	TRANSISTOR
Q542	KTC2026	TRANSISTOR
Q543	KTA1267GRTA	TRANSISTOR
Q544	KTA1267GRTA	TRANSISTOR
Q545	B1ACCL000012	TRANSISTOR
Q546	B1ACCL000010	TRANSISTOR
Q547	KTC3199GRTA	TRANSISTOR
Q548	KTC3199GRTA	TRANSISTOR
Q549	KTC3199GRTA	TRANSISTOR
Q550	KRA102MTA	TRANSISTOR
Q600	KRC103MTA	TRANSISTOR
Q601	KRC102MTA	TRANSISTOR
Q602	KTA1267GRTA	TRANSISTOR
Q603	KTC3199GRTA	TRANSISTOR
Q604	KTC3199GRTA	TRANSISTOR
Q605	KRC102MTA	TRANSISTOR
Q606	KTC3199GRTA	TRANSISTOR
Q607	2SC1740SSTA	TRANSISTOR
Q610	KTA1267GRTA	TRANSISTOR
Q612	KTC3199GRTA	TRANSISTOR
Q613	KRC102MTA	TRANSISTOR
Q614	KTC3199GRTA	TRANSISTOR
Q800	B1GBCFJJ0039	TRANSISTORCHIP
Q801	2SC2712GRT5T	CHIP TRANSISTOR
Q802	2SC2712GRT5T	CHIP TRANSISTOR
Q803	2SC2712GRT5T	CHIP TRANSISTOR
Q804	B1GDCFJJ0023	TRANSISTOR
Q805	2SC3326BT5M	CHIP TRANSISTOR
Q807	B1GBCFGG0023	TRANSISTORCHIP
Q808	B1GBCFGG0023	TRANSISTORCHIP
Q810	KTA12710YTA	TRANSISTOR
Q811	B1GDCFJJ0023	TRANSISTOR
Q812	B1GBCFJJ0039	TRANSISTORCHIP
Q813	B1GBCFLL0028	TRANSISTORCHIP
Q900	2SC1740SSTA	TRANSISTOR
Q950	2SB621ARSTA	TRANSISTOR
Q951	2SD21370PA	TRANSISTOR
Q953	B1AAGC000007	TRANSISTOR

RESISTORS

R1	ERDS2TJ104T	RESISTENCIA
R10	ERDS2TJ391T	RESISTENCIA CARBON
R1001	D0GB1R0JA002	CHIP RESISTOR
R1003	ERJ3GEYJ103V	RESISTENCIA CHIP
R1004	D0GB152JA002	THICK FILM CHIP RESISTOR
R1005	ERJ3GEYJ472V	RESISTENCIA CHIP
R1006	ERJ3GEYJ102V	RESISTENCIA CHIP
R1007	ERD25FVJ4R7T	RESISTENCIA
R1008	ERJ3GEYJ223V	RESISTENCIA CHIP
R1009	D0GB183JA002	CHIP RESISTOR
R101	ERJ3GEY0R00V	CHIP JUMPER
R1010	D0GB183JA002	CHIP RESISTOR
R1011	ERJ3GEYJ103V	RESISTENCIA CHIP
R1012	ERJ3GEYJ472V	RESISTENCIA CHIP
R1013	ERJ3GEYJ472V	RESISTENCIA CHIP
R1014	ERJ3GEYJ472V	RESISTENCIA CHIP
R1015	ERJ3GEYJ470V	RESISTENCIA CHIP
R1016	ERJ3GEYJ470V	RESISTENCIA CHIP
R1017	ERJ3GEYJ822V	RESISTENCIA CHIP

R1018	D0GB392JA002	CHIP RESISTOR	R1094	ERJ3GEYJ102V	RESISTENCIA CHIP
R1019	D0GB392JA002	CHIP RESISTOR	R1095	ERJ3GEYJ104V	RESISTENCIA CHIP
R102	ERJ3GEYJ472V	RESISTENCIA CHIP	R1096	ERJ3GEYJ104V	RESISTENCIA CHIP
R1020	ERJ3GEYJ470V	RESISTENCIA CHIP	R1097	ERJ3GEYJ103V	RESISTENCIA CHIP
R1022	ERJ3GEYJ103V	RESISTENCIA CHIP	R1098	ERJ3GEYJ103V	RESISTENCIA CHIP
R1024	D0GB563JA002	THICK FILM CHIP RESISTOR	R1099	ERJ6GEY0R00V	R.CHIP
R1026	ERJ3GEYJ102V	RESISTENCIA CHIP	R11	ERDS2TJ684T	RESISTENCIA CARBON
R1027	ERJ3GEYJ104V	RESISTENCIA CHIP	R110	ERJ3GEYJ102V	RESISTENCIA CHIP
R1028	ERJ3GEYJ822V	RESISTENCIA CHIP	R1100	ERJ6GEY0R00V	R.CHIP
R1029	D0GB475JA008	CHIP RESISTOR	R1101	ERJ6GEY0R00V	R.CHIP
R103	D0GB271JA002	THICK FILM CHIP RESISTOR	R1102	ERJ6GEY0R00V	R.CHIP
R1030	D0GB101JA002	THICK FILM CHIP RESISTOR	R1103	ERJ6GEY0R00V	R.CHIP
R1031	D0GB273JA002	THICK FILM CHIP RESISTOR	R1104	ERJ6GEY0R00V	R.CHIP
R1032	ERJ3GEYJ103V	RESISTENCIA CHIP	R1105	ERJ6GEY0R00V	R.CHIP
R1035	ERJ3GEYJ103V	RESISTENCIA CHIP	R1106	D0GB563JA002	THICK FILM CHIP RESISTOR
R1036	ERJ3GEYJ470V	RESISTENCIA CHIP	R1107	ERJ3GEY0R00V	CHIP JUMPER
R1037	ERJ3GEYJ104V	RESISTENCIA CHIP	R111	ERJ3GEYJ391V	RESISTENCIA CHIP
R1038	ERJ3GEYJ472V	RESISTENCIA CHIP	R112	ERJ3GEYJ104V	RESISTENCIA CHIP
R1039	ERJ3GEYJ153V	RESISTENCIA CHIP	R113	ERJ3GEYJ103V	RESISTENCIA CHIP
R104	ERJ3GEYJ102V	RESISTENCIA CHIP	R114	D0GB562JA002	CHIP RESISTOR
R1040	D0GB563JA002	THICK FILM CHIP RESISTOR	R115	ERJ3GEYJ561V	RESISTENCIA CHIP
R1045	ERJ3GEYJ104V	RESISTENCIA CHIP	R116	ERJ3GEYJ102V	RESISTENCIA CHIP
R1046	ERJ3GEYJ104V	RESISTENCIA CHIP	R117	ERJ3GEYJ473V	RESISTENCIA CHIP
R1047	ERJ3GEYJ102V	RESISTENCIA CHIP	R118	D0GB332JA002	THICK FILM CHIP RESISTOR
R1048	ERJ3GEYJ102V	RESISTENCIA CHIP	R119	D0GB332JA002	THICK FILM CHIP RESISTOR
R1049	D0GB105JA002	CHIP DIODO	R120	ERJ3GEYJ473V	RESISTENCIA CHIP
R105	ERJ3GEYJ471V	RESISTENCIA CHIP	R1200	D0GB563JA002	THICK FILM CHIP RESISTOR
R1050	D0GB105JA002	CHIP DIODO	R121	ERJ3GEYJ223V	RESISTENCIA CHIP
R1051	ERJ3GEYJ221V	RESISTENCIA CHIP	R122	D0GB272JA002	THICK FILM CHIP RESISTOR
R1052	ERJ3GEYJ221V	RESISTENCIA CHIP	R123	D0GB683JA002	CHIP RESISTOR
R1053	ERJ3GEYJ681V	RESISTENCIA	R124	ERJ3GEYJ330V	RESISTENCIA CHIP
R1054	ERJ3GEYJ681V	RESISTENCIA	R125	ERJ3GEYJ471V	RESISTENCIA CHIP
R1055	ERJ3GEYJ222V	RESISTENCIA CHIP	R126	ERJ3GEYJ102V	RESISTENCIA CHIP
R1056	ERJ3GEYJ221V	RESISTENCIA CHIP	R127	ERJ3GEYJ471V	RESISTENCIA CHIP
R1057	ERJ3GEYJ222V	RESISTENCIA CHIP	R128	D0GB820JA019	CHIP CAPACITOR
R1058	D0GB272JA002	THICK FILM CHIP RESISTOR	R129	D0GB273JA002	THICK FILM CHIP RESISTOR
R1059	ERJ3GEYJ103V	RESISTENCIA CHIP	R130	ERJ3GEYJ103V	RESISTENCIA CHIP
R106	D0GB474JA002	THICK FILM CHIP RESISTOR	R131	D0GB121JA002	THICK FILM CHIP RESISTOR
R1060	ERJ3GEYJ391V	RESISTENCIA CHIP	R132	ERJ3GEYJ103V	RESISTENCIA CHIP
R1061	D0GB2R7JA019	CHIP RESISTOR	R133	ERJ3GEYJ102V	RESISTENCIA CHIP
R1062	D0GB2R7JA019	CHIP RESISTOR	R134	ERJ3GEYJ471V	RESISTENCIA CHIP
R1063	ERJ3GEYJ102V	RESISTENCIA CHIP	R135	ERJ3GEYJ102V	RESISTENCIA CHIP
R1064	ERJ3GEYJ102V	RESISTENCIA CHIP	R136	ERJ3GEYJ102V	RESISTENCIA CHIP
R1065	ERJ3GEYJ102V	RESISTENCIA CHIP	R137	ERJ3GEYJ102V	RESISTENCIA CHIP
R1066	ERJ3GEYJ102V	RESISTENCIA CHIP	R138	D0GB332JA002	THICK FILM CHIP RESISTOR
R107	D0GB331JA002	CHIP RESISTENCIA	R141	ERJ3GEYJ682V	RESISTENCIA CHIP
R1075	ERJ3GEYJ222V	RESISTENCIA CHIP	R142	ERJ3GEYJ682V	RESISTENCIA CHIP
R1076	ERJ3GEYJ222V	RESISTENCIA CHIP	R143	ERJ3GEYJ223V	RESISTENCIA CHIP
R1079	ERJ3GEYJ472V	RESISTENCIA CHIP	R144	D0GB121JA002	THICK FILM CHIP RESISTOR
R1080	ERJ3GEYJ472V	RESISTENCIA CHIP	R145	ERJ3GEYJ104V	RESISTENCIA CHIP
R1084	ERJ3GEYJ222V	RESISTENCIA CHIP	R146	ERJ3GEYJ104V	RESISTENCIA CHIP
R1085	ERJ3GEYJ473V	RESISTENCIA CHIP	R151	D0GB820JA019	CHIP CAPACITOR
R1086	ERJ3GEYJ222V	RESISTENCIA CHIP	R152	ERJ3GEY0R00V	CHIP JUMPER
R1087	ERJ3GEYJ473V	RESISTENCIA CHIP	R2	ERDS2TJ104T	RESISTENCIA
R1088	ERJ3GEYJ223V	RESISTENCIA CHIP	R201	ERJ3GEYJ103V	RESISTENCIA CHIP
R1089	ERJ3GEYJ223V	RESISTENCIA CHIP	R202	D0GB332JA002	THICK FILM CHIP RESISTOR
R1090	ERJ3GEYJ221V	RESISTENCIA CHIP	R203	ERJ3GEYJ102V	RESISTENCIA CHIP
R1091	ERJ3GEYJ222V	RESISTENCIA CHIP	R204	ERJ3GEYJ473V	RESISTENCIA CHIP
R1092	ERJ3GEYJ222V	RESISTENCIA CHIP	R205	ERJ3GEYJ102V	RESISTENCIA CHIP
R1093	ERJ3GEYJ102V	RESISTENCIA CHIP	R206	ERJ3GEYJ473V	RESISTENCIA CHIP

R207	ERJ3GEYJ182V	RESISTENCIA CHIP	R271	ERJ3GEYJ153V	RESISTENCIA CHIP
R208	D0GB562JA002	CHIP RESISTOR	R272	ERJ3GEYJ824V	RESISTENCIA CHIP
R209	ERJ3GEYJ104V	RESISTENCIA CHIP	R274	ERJ3GEYJ681V	RESISTENCIA
R210	ERJ3GEYJ473V	RESISTENCIA CHIP	R275	ERJ3GEYJ182V	RESISTENCIA CHIP
R211	ERJ3GEYJ223V	RESISTENCIA CHIP	R276	ERJ3GEYJ221V	RESISTENCIA CHIP
R212	D0GB334JA002	THICK FILM CHIP RESISTOR	R277	ERJ3GEYJ102V	RESISTENCIA CHIP
R213	ERJ3GEYJ823V	RESISTENCIA CHIP	R279	ERJ3GEYJ102V	RESISTENCIA CHIP
R214	ERJ3GEYJ222V	RESISTENCIA CHIP	R280	ERJ3GEYJ104V	RESISTENCIA CHIP
R215	D0GB101JA002	THICK FILM CHIP RESISTOR	R281	D0GB152JA002	THICK FILM CHIP RESISTOR
R216	ERJ3GEY0R00V	CHIP JUMPER	R282	ERJ3GEYJ182V	RESISTENCIA CHIP
R217	ERJ3GEYJ104V	RESISTENCIA CHIP	R283	ERJ3GEYJ102V	RESISTENCIA CHIP
R218	ERJ3GEYJ102V	RESISTENCIA CHIP	R284	D0GB332JA002	THICK FILM CHIP RESISTOR
R219	D0GB152JA002	THICK FILM CHIP RESISTOR	R285	ERJ3GEYJ123V	RESISTENCIA CHIP
R220	D0GB392JA002	CHIP RESISTOR	R286	ERJ3GEYJ823V	RESISTENCIA CHIP
R221	ERJ3GEYJ682V	RESISTENCIA CHIP	R289	D0GB1R0JA002	CHIP RESISTOR
R222	ERJ3GEYJ472V	RESISTENCIA CHIP	R3	ERDS2TJ221T	RESISTENCIA
R223	ERJ3GEYJ473V	RESISTENCIA CHIP	R300	ERJ3GEYJ102V	RESISTENCIA CHIP
R224	D0GB122JA019	CHIP RESISTOR	R301	ERJ3GEY0R00V	CHIP JUMPER
R225	D0GB683JA002	CHIP RESISTOR	R302	ERJ3GEYJ472V	RESISTENCIA CHIP
R226	ERJ3GEYJ222V	RESISTENCIA CHIP	R303	ERJ3GEYJ103V	RESISTENCIA CHIP
R227	ERJ3GEYJ472V	RESISTENCIA CHIP	R304	ERJ3GEYJ222V	RESISTENCIA CHIP
R228	ERJ3GEYJ104V	RESISTENCIA CHIP	R305	ERJ3GEYJ222V	RESISTENCIA CHIP
R229	ERJ3GEYJ102V	RESISTENCIA CHIP	R306	ERJ3GEYJ391V	RESISTENCIA CHIP
R230	ERJ3GEYJ123V	RESISTENCIA CHIP	R307	ERJ3GEYJ391V	RESISTENCIA CHIP
R231	ERJ3GEYJ222V	RESISTENCIA CHIP	R308	ERJ3GEY0R00V	CHIP JUMPER
R232	ERJ3GEYJ104V	RESISTENCIA CHIP	R309	ERJ3GEYJ104V	RESISTENCIA CHIP
R233	D0GB152JA002	THICK FILM CHIP RESISTOR	R310	D0GB152JA002	THICK FILM CHIP RESISTOR
R234	D0GB220JA002	RESISTENCIA CHIP	R311	ERJ3GEYJ223V	RESISTENCIA CHIP
R235	D0GB220JA002	RESISTENCIA CHIP	R312	ERJ3GEYJ221V	RESISTENCIA CHIP
R236	D0GB220JA002	RESISTENCIA CHIP	R313	ERJ3GEYJ103V	RESISTENCIA CHIP
R237	D0GB220JA002	RESISTENCIA CHIP	R314	ERJ3GEYJ225V	CHIP RESISTOR
R238	ERJ3GEYJ223V	RESISTENCIA CHIP	R315	ERJ3GEYJ472V	RESISTENCIA CHIP
R239	ERJ3GEYJ823V	RESISTENCIA CHIP	R316	ERJ3GEYJ103V	RESISTENCIA CHIP
R240	D0GB393JA002	THICK FILM CHIP RESISTOR	R317	ERJ3GEYJ102V	RESISTENCIA CHIP
R241	ERJ3GEY0R00V	CHIP JUMPER	R318	ERJ3GEYJ472V	RESISTENCIA CHIP
R242	ERJ3GEYJ222V	RESISTENCIA CHIP	R319	ERJ3GEY0R00V	CHIP JUMPER
R243	ERJ3GEYJ473V	RESISTENCIA CHIP	R320	D0GB392JA002	CHIP RESISTOR
R244	D0GB393JA002	THICK FILM CHIP RESISTOR	R321	D0GB332JA002	THICK FILM CHIP RESISTOR
R245	ERJ3GEY0R00V	CHIP JUMPER	R322	D0GB393JA002	THICK FILM CHIP RESISTOR
R247	ERJ3GEY0R00V	CHIP JUMPER	R323	D0GB393JA002	THICK FILM CHIP RESISTOR
R248	D0GB334JA002	THICK FILM CHIP RESISTOR	R324	ERJ3GEY0R00V	CHIP JUMPER
R249	ERJ3GEYJ102V	RESISTENCIA CHIP	R325	D0GB332JA002	THICK FILM CHIP RESISTOR
R250	D0GB332JA002	THICK FILM CHIP RESISTOR	R326	ERJ3GEYJ104V	RESISTENCIA CHIP
R253	ERJ3GEYJ473V	RESISTENCIA CHIP	R327	ERJ3GEYJ104V	RESISTENCIA CHIP
R254	ERJ3GEYJ102V	RESISTENCIA CHIP	R328	ERJ3GEYJ103V	RESISTENCIA CHIP
R255	ERJ3GEYJ104V	RESISTENCIA CHIP	R329	ERDS1FVJ220T	RESISTENCIA
R256	ERJ3GEYJ102V	RESISTENCIA CHIP	R330	ERJ3GEYJ224V	RESISTENCIA CHIP
R257	ERJ3GEYJ472V	RESISTENCIA CHIP	R331	ERJ3GEYJ223V	RESISTENCIA CHIP
R258	D0GB273JA002	THICK FILM CHIP RESISTOR	R332	D0GB101JA002	THICK FILM CHIP RESISTOR
R259	D0GB332JA002	THICK FILM CHIP RESISTOR	R333	ERJ3GEY0R00V	CHIP JUMPER
R260	ERJ3GEYJ473V	RESISTENCIA CHIP	R334	ERJ3GEY0R00V	CHIP JUMPER
R261	D0GB333JA002	CHIP RESISTOR	R335	ERJ3GEY0R00V	CHIP JUMPER
R262	D0GB332JA002	THICK FILM CHIP RESISTOR	R336	ERJ3GEY0R00V	CHIP JUMPER
R263	ERJ3GEYJ104V	RESISTENCIA CHIP	R337	D0GB273JA002	THICK FILM CHIP RESISTOR
R264	ERJ3GEYJ182V	RESISTENCIA CHIP	R338	ERJ3GEY0R00V	CHIP JUMPER
R265	ERJ3GEYJ681V	RESISTENCIA	R339	D0GB563JA002	THICK FILM CHIP RESISTOR
R266	ERJ3GEYJ472V	RESISTENCIA CHIP	R340	ERJ3GEYJ221V	RESISTENCIA CHIP
R267	ERJ3GEYJ182V	RESISTENCIA CHIP	R341	ERJ3GEY0R00V	CHIP JUMPER
R269	ERJ3GEYJ104V	RESISTENCIA CHIP	R342	ERJ3GEYJ473V	RESISTENCIA CHIP
R270	D0GB393JA002	THICK FILM CHIP RESISTOR	R343	D0GB333JA002	CHIP RESISTOR

R344	D0GB563JA002	THICK FILM CHIP RESISTOR	R405	ERJ3GEYJ102V	RESISTENCIA CHIP
R345	ERJ3GEYJ222V	RESISTENCIA CHIP	R406	ERJ3GEYJ473V	RESISTENCIA CHIP
R346	ERJ3GEYJ182V	RESISTENCIA CHIP	R407	ERJ3GEYJ182V	RESISTENCIA CHIP
R347	D0GB683JA002	CHIP RESISTOR	R408	D0GB562JA002	CHIP RESISTOR
R348	D0GB821JA002	THICK FILM CHIP RESISTOR	R409	ERJ3GEYJ104V	RESISTENCIA CHIP
R349	ERJ3GEYJ472V	RESISTENCIA CHIP	R410	ERJ3GEYJ473V	RESISTENCIA CHIP
R350	D0GB273JA002	THICK FILM CHIP RESISTOR	R411	ERJ3GEYJ223V	RESISTENCIA CHIP
R351	ERJ3GEYJ223V	RESISTENCIA CHIP	R412	D0GB334JA002	THICK FILM CHIP RESISTOR
R352	ERJ3GEYJ223V	RESISTENCIA CHIP	R413	ERJ3GEYJ823V	RESISTENCIA CHIP
R353	ERJ3GEYJ223V	RESISTENCIA CHIP	R414	ERJ3GEYJ222V	RESISTENCIA CHIP
R354	ERJ3GEYJ223V	RESISTENCIA CHIP	R415	D0GB101JA002	THICK FILM CHIP RESISTOR
R355	ERJ3GEYJ222V	RESISTENCIA CHIP	R416	ERJ3GEY0R00V	CHIP JUMPER
R356	ERJ3GEYJ104V	RESISTENCIA CHIP	R417	ERJ3GEYJ104V	RESISTENCIA CHIP
R357	D0GB152JA002	THICK FILM CHIP RESISTOR	R418	ERJ3GEYJ102V	RESISTENCIA CHIP
R358	D0GB273JA002	THICK FILM CHIP RESISTOR	R419	D0GB152JA002	THICK FILM CHIP RESISTOR
R359	D0GB563JA002	THICK FILM CHIP RESISTOR	R420	D0GB392JA002	CHIP RESISTOR
R360	ERJ3GEYJ221V	RESISTENCIA CHIP	R421	ERJ3GEYJ682V	RESISTENCIA CHIP
R361	ERJ3GEYJ221V	RESISTENCIA CHIP	R422	ERJ3GEYJ472V	RESISTENCIA CHIP
R362	D0GB563JA002	THICK FILM CHIP RESISTOR	R423	ERJ3GEYJ473V	RESISTENCIA CHIP
R363	ERJ3GEYJ104V	RESISTENCIA CHIP	R424	D0GB122JA019	CHIP RESISTOR
R364	ERJ3GEYJ103V	RESISTENCIA CHIP	R425	D0GB683JA002	CHIP RESISTOR
R365	ERJ3GEY0R00V	CHIP JUMPER	R426	ERJ3GEYJ222V	RESISTENCIA CHIP
R366	ERJ3GEYJ222V	RESISTENCIA CHIP	R427	ERJ3GEYJ472V	RESISTENCIA CHIP
R367	ERJ3GEYJ104V	RESISTENCIA CHIP	R428	ERJ3GEYJ104V	RESISTENCIA CHIP
R368	D0GB152JA002	THICK FILM CHIP RESISTOR	R429	ERJ3GEYJ102V	RESISTENCIA CHIP
R369	D0GB821JA002	THICK FILM CHIP RESISTOR	R430	ERJ3GEYJ123V	RESISTENCIA CHIP
R370	ERJ3GEYJ104V	RESISTENCIA CHIP	R431	ERJ3GEYJ222V	RESISTENCIA CHIP
R371	ERJ3GEYJ472V	RESISTENCIA CHIP	R432	ERJ3GEYJ104V	RESISTENCIA CHIP
R372	ERJ3GEYJ472V	RESISTENCIA CHIP	R433	D0GB152JA002	THICK FILM CHIP RESISTOR
R373	D0GB332JA002	THICK FILM CHIP RESISTOR	R434	D0GB220JA002	RESISTENCIA CHIP
R374	ERJ3GEYJ104V	RESISTENCIA CHIP	R435	D0GB220JA002	RESISTENCIA CHIP
R375	ERJ3GEYJ103V	RESISTENCIA CHIP	R436	D0GB220JA002	RESISTENCIA CHIP
R376	ERDS1FVJ220T	RESISTENCIA	R437	D0GB220JA002	RESISTENCIA CHIP
R377	ERJ3GEYJ224V	RESISTENCIA CHIP	R438	ERJ3GEYJ223V	RESISTENCIA CHIP
R378	D0GB101JA002	THICK FILM CHIP RESISTOR	R439	ERJ3GEYJ823V	RESISTENCIA CHIP
R379	ERJ3GEYJ104V	RESISTENCIA CHIP	R440	D0GB393JA002	THICK FILM CHIP RESISTOR
R380	D0GB331JA002	CHIP RESISTENCIA	R441	ERJ3GEY0R00V	CHIP JUMPER
R381	ERJ3GEYJ225V	CHIP RESISTOR	R442	ERJ3GEYJ222V	RESISTENCIA CHIP
R382	ERJ3GEY0R00V	CHIP JUMPER	R443	ERJ3GEYJ473V	RESISTENCIA CHIP
R384	D0GB683JA002	CHIP RESISTOR	R444	D0GB393JA002	THICK FILM CHIP RESISTOR
R385	ERDS1FVJ270T	RESISTENCIA	R445	ERJ3GEY0R00V	CHIP JUMPER
R386	ERJ3GEY0R00V	CHIP JUMPER	R447	ERJ3GEY0R00V	CHIP JUMPER
R387	D0GB683JA002	CHIP RESISTOR	R448	D0GB334JA002	THICK FILM CHIP RESISTOR
R388	ERDS1FVJ100T	RESISTENCIA RADIAL	R449	ERJ3GEYJ102V	RESISTENCIA CHIP
R389	ERDS1FVJ100T	RESISTENCIA RADIAL	R450	D0GB332JA002	THICK FILM CHIP RESISTOR
R390	ERJ3GEYJ153V	RESISTENCIA CHIP	R451	ERJ3GEY0R00V	CHIP JUMPER
R391	ERJ3GEYJ153V	RESISTENCIA CHIP	R453	ERJ3GEYJ473V	RESISTENCIA CHIP
R392	D0GB101JA002	THICK FILM CHIP RESISTOR	R454	ERJ3GEYJ102V	RESISTENCIA CHIP
R393	D0GB101JA002	THICK FILM CHIP RESISTOR	R455	ERJ3GEYJ104V	RESISTENCIA CHIP
R394	ERJ3GEYJ102V	RESISTENCIA CHIP	R456	ERJ3GEYJ102V	RESISTENCIA CHIP
R395	ERJ3GEYJ102V	RESISTENCIA CHIP	R457	ERJ3GEYJ472V	RESISTENCIA CHIP
R396	ERJ3GEY0R00V	CHIP JUMPER	R458	D0GB273JA002	THICK FILM CHIP RESISTOR
R397	ERJ3GEY0R00V	CHIP JUMPER	R459	D0GB332JA002	THICK FILM CHIP RESISTOR
R398	ERJ3GEYJ103V	RESISTENCIA CHIP	R460	ERJ3GEYJ473V	RESISTENCIA CHIP
R399	ERJ3GEYJ103V	RESISTENCIA CHIP	R461	D0GB333JA002	CHIP RESISTOR
R4	ERDS2TJ104T	RESISTENCIA	R462	D0GB332JA002	THICK FILM CHIP RESISTOR
R401	ERJ3GEYJ103V	RESISTENCIA CHIP	R463	ERJ3GEYJ104V	RESISTENCIA CHIP
R402	D0GB332JA002	THICK FILM CHIP RESISTOR	R464	ERJ3GEYJ182V	RESISTENCIA CHIP
R403	ERJ3GEYJ102V	RESISTENCIA CHIP	R465	ERJ3GEYJ681V	RESISTENCIA
R404	ERJ3GEYJ473V	RESISTENCIA CHIP	R466	ERJ3GEYJ472V	RESISTENCIA CHIP

R467	ERJ3GEYJ182V	RESISTENCIA CHIP	R552	ERDS2TJ332T	RESISTENCIA CARBON
R469	ERJ3GEYJ104V	RESISTENCIA CHIP	R553	ERDS2TJ103T	RESISTENCIA
R470	D0GB393JA002	THICK FILM CHIP RESISTOR	R554	ERDS2TJ103T	RESISTENCIA
R471	ERJ3GEYJ153V	RESISTENCIA CHIP	R555	ERDS2TJ103T	RESISTENCIA
R472	ERJ3GEYJ824V	RESISTENCIA CHIP	R556	ERDS2TJ333T	RESISTENCIA CARBON
R474	ERJ3GEYJ681V	RESISTENCIA	R557	ERDS2TJ101T	R.CARBON
R475	ERJ3GEYJ182V	RESISTENCIA CHIP	R559	ERDS2TJ103T	RESISTENCIA
R476	ERJ3GEYJ221V	RESISTENCIA CHIP	R560	ERDS2TJ393T	RESISTENCIA CARBON
R477	ERJ3GEYJ102V	RESISTENCIA CHIP	R561	ERDS2TJ472T	RESISTENCIA CARBON
R479	ERJ3GEYJ102V	RESISTENCIA CHIP	R562	ERDS2TJ563T	RESISTENCIA CARBON
R480	ERJ3GEYJ104V	RESISTENCIA CHIP	R563	ERDS2TJ101T	R.CARBON
R481	D0GB152JA002	THICK FILM CHIP RESISTOR	R564	ERDS2TJ104T	RESISTENCIA
R482	ERJ3GEYJ182V	RESISTENCIA CHIP	R565	ERDS2TJ331T	R.CARBON
R483	ERJ3GEYJ102V	RESISTENCIA CHIP	R580	ERDS2TJ153T	RESISTENCIA
R484	D0GB332JA002	THICK FILM CHIP RESISTOR	R581	ERDS2TJ332T	RESISTENCIA CARBON
R485	ERJ3GEYJ123V	RESISTENCIA CHIP	R582	ERDS2TJ153T	RESISTENCIA
R486	ERJ3GEYJ823V	RESISTENCIA CHIP	R583	ERDS2TJ332T	RESISTENCIA CARBON
R489	D0GB1R0JA002	CHIP RESISTOR	R584	ERDS2TJ563T	RESISTENCIA CARBON
R5	ERDS2TJ564T	RESISTENCIA	R585	ERDS2TJ563T	RESISTENCIA CARBON
R500	ERDS2TJ153T	RESISTENCIA	R586	ERDS2TJ474T	RESISTENCIA CARBON
R501	ERDS2TJ153T	RESISTENCIA	R587	ERDS2TJ102T	R.CARBON
R502	ERDS2TJ153T	RESISTENCIA	R590	ERDS2TJ153T	RESISTENCIA
R503	ERDS2TJ332T	RESISTENCIA CARBON	R591	ERDS2TJ332T	RESISTENCIA CARBON
R504	ERDS2TJ332T	RESISTENCIA CARBON	R592	ERDS2TJ332T	RESISTENCIA CARBON
R505	ERDS2TJ332T	RESISTENCIA CARBON	R594	ERDS2TJ563T	RESISTENCIA CARBON
R506	ERDS2TJ332T	RESISTENCIA CARBON	R595	ERDS2TJ563T	RESISTENCIA CARBON
R507	ERDS2TJ563T	RESISTENCIA CARBON	R596	ERDS2TJ474T	RESISTENCIA CARBON
R508	ERDS2TJ563T	RESISTENCIA CARBON	R597	ERDS2TJ102T	R.CARBON
R509	ERDS2TJ683T	R.CARBON	R6	ERDS2TJ391T	RESISTENCIA CARBON
R510	ERDS2TJ683T	R.CARBON	R601	ERDS2TJ681T	RESISTENCIA CARBON
R511	ERDS2TJ474T	RESISTENCIA CARBON	R602	ERDS2TJ106T	RESISTENCIA
R512	ERDS2TJ102T	R.CARBON	R603	ERDS2TJ334T	RESISTENCIA CARBON
R513	ERDS2TJ681T	RESISTENCIA CARBON	R604	ERDS2TJ472T	RESISTENCIA CARBON
R516	ERDS2TJ393T	RESISTENCIA CARBON	R605	ERDS2TJ472T	RESISTENCIA CARBON
R517	ERDS2TJ103T	RESISTENCIA	R606	ERDS2TJ681T	RESISTENCIA CARBON
R518	ERDS2TJ104T	RESISTENCIA	R607	ERDS2TJ392T	RESISTENCIA CARBON
R520	ERDS1FVJ2R2T	RESISTENCIA RADIAL	R608	ERDS2TJ103T	RESISTENCIA
R521	ERDS1FVJ150T	RESISTENCIA	R612	ERDS2TJ474T	RESISTENCIA CARBON
R522	ERDS2TJ152T	R.CARBON	R613	ERDS2TJ472T	RESISTENCIA CARBON
R523	ERDS2TJ152T	R.CARBON	R614	ERDS2TJ680T	RESISTENCIA
R524	ERDS2TJ473T	RESISTENCIA CARBON	R615	ERDS2TJ680T	RESISTENCIA
R525	ERDS2TJ473T	RESISTENCIA CARBON	R616	ERDS2TJ104T	RESISTENCIA
R526	ERDS2TJ473T	RESISTENCIA CARBON	R617	ERDS2TJ104T	RESISTENCIA
R527	ERDS2TJ473T	RESISTENCIA CARBON	R618	ERDS2TJ104T	RESISTENCIA
R528	ERDS2TJ104T	RESISTENCIA	R619	ERDS2TJ104T	RESISTENCIA
R529	ERDS2TJ104T	RESISTENCIA	R620	ERDS2TJ104T	RESISTENCIA
R530	ERDS2TJ223T	RESISTENCIA	R621	ERDS2TJ104T	RESISTENCIA
R531	ERDS2TJ223T	RESISTENCIA	R622	ERDS2TJ104T	RESISTENCIA
R540	ERD2FCVJ4R7T	RESISTENCIA CARBON	R623	ERDS2TJ104T	RESISTENCIA
R541	ERDS2TJ272T	RESISTENCIA CARBON	R624	ERDS2TJ104T	RESISTENCIA
R542	ERDS2TJ473T	RESISTENCIA CARBON	R625	ERDS2TJ104T	RESISTENCIA
R543	ERDS2TJ822T	RESISTENCIA CARBON	R626	ERDS2TJ104T	RESISTENCIA
R544	ERDS2TJ562T	R.CARBON	R627	ERDS2TJ104T	RESISTENCIA
R545	ERDS2TJ473T	RESISTENCIA CARBON	R628	ERDS2TJ272T	RESISTENCIA CARBON
R546	ERDS2TJ272T	RESISTENCIA CARBON	R629	ERDS2TJ222T	R.CARBON
R547	ERDS2TJ272T	RESISTENCIA CARBON	R630	ERDS2TJ472T	RESISTENCIA CARBON
R548	ERD2FCVJ4R7T	RESISTENCIA CARBON	R632	ERDS2TJ101T	R.CARBON
R549	ERDS2TJ223T	RESISTENCIA	R633	ERDS2TJ101T	R.CARBON
R550	ERDS2TJ103T	RESISTENCIA	R634	ERDS2TJ101T	R.CARBON
R551	ERDS2TJ223T	RESISTENCIA	R635	ERDS2TJ102T	R.CARBON

R636	ERDS2TJ102T	R.CARBON	R699	ERDS2TJ470T	RESISTENCIA CARBON
R637	ERDS2TJ101T	R.CARBON	R7	ERDS2TJ272T	RESISTENCIA CARBON
R638	ERDS2TJ473T	RESISTENCIA CARBON	R8	ERDS2TJ684T	RESISTENCIA CARBON
R640	ERDS2TJ102T	R.CARBON	R800	ERJ3GEYJ102V	RESISTENCIA CHIP
R641	ERDS2TJ223T	RESISTENCIA	R801	ERJ3GEYJ223V	RESISTENCIA CHIP
R642	ERDS2TJ101T	R.CARBON	R802	ERJ3GEYJ473V	RESISTENCIA CHIP
R643	ERDS2TJ101T	R.CARBON	R803	ERJ3GEYJ472V	RESISTENCIA CHIP
R644	ERDS2TJ101T	R.CARBON	R804	ERJ3GEYJ472V	RESISTENCIA CHIP
R645	ERDS2TJ103T	RESISTENCIA	R805	ERJ3GEYJ103V	RESISTENCIA CHIP
R646	ERDS2TJ103T	RESISTENCIA	R806	ERJ3GEYJ102V	RESISTENCIA CHIP
R647	ERDS2TJ103T	RESISTENCIA	R807	ERJ3GEYJ473V	RESISTENCIA CHIP
R649	ERDS2TJ102T	R.CARBON	R808	D0GB152JA002	THICK FILM CHIP RESISTOR
R650	ERDS2TJ103T	RESISTENCIA	R809	ERJ3GEYJ102V	RESISTENCIA CHIP
R651	ERDS2TJ103T	RESISTENCIA	R810	ERJ3GEYJ102V	RESISTENCIA CHIP
R652	ERDS2TJ222T	R.CARBON	R811	ERJ3GEYJ223V	RESISTENCIA CHIP
R653	ERDS2TJ103T	RESISTENCIA	R812	ERJ3GEYJ223V	RESISTENCIA CHIP
R654	ERDS2TJ223T	RESISTENCIA	R813	ERJ3GEYJ472V	RESISTENCIA CHIP
R655	ERDS2TJ473T	RESISTENCIA CARBON	R814	ERJ3GEYJ473V	RESISTENCIA CHIP
R656	ERDS2TJ221T	RESISTENCIA	R815	D0GB101JA002	THICK FILM CHIP RESISTOR
R657	ERDS2TJ221T	RESISTENCIA	R816	ERJ3GEYJ472V	RESISTENCIA CHIP
R658	ERDS2TJ103T	RESISTENCIA	R817	ERJ3GEYJ472V	RESISTENCIA CHIP
R659	ERDS2TJ473T	RESISTENCIA CARBON	R818	D0GB101JA002	THICK FILM CHIP RESISTOR
R660	ERDS2TJ473T	RESISTENCIA CARBON	R819	D0GB101JA002	THICK FILM CHIP RESISTOR
R661	ERDS2TJ473T	RESISTENCIA CARBON	R820	ERJ3GEYJ473V	RESISTENCIA CHIP
R662	ERDS2TJ103T	RESISTENCIA	R821	D0GB821JA002	THICK FILM CHIP RESISTOR
R663	ERDS2TJ223T	RESISTENCIA	R822	ERJ3GEYJ472V	RESISTENCIA CHIP
R664	ERDS2TJ223T	RESISTENCIA	R823	D0GB101JA002	THICK FILM CHIP RESISTOR
R665	ERDS2TJ472T	RESISTENCIA CARBON	R824	ERJ3GEYJ472V	RESISTENCIA CHIP
R666	ERDS2TJ562T	R.CARBON	R825	D0GB101JA002	THICK FILM CHIP RESISTOR
R667	ERDS2TJ223T	RESISTENCIA	R826	ERJ3GEYJ472V	RESISTENCIA CHIP
R668	ERDS2TJ471T	R.CARBON	R827	D0GB101JA002	THICK FILM CHIP RESISTOR
R669	ERDS2TJ104T	RESISTENCIA	R828	ERJ3GEYJ472V	RESISTENCIA CHIP
R670	ERDS2TJ104T	RESISTENCIA	R829	D0GB101JA002	THICK FILM CHIP RESISTOR
R671	ERDS2TJ104T	RESISTENCIA	R830	ERJ3GEYJ472V	RESISTENCIA CHIP
R672	ERDS2TJ104T	RESISTENCIA	R831	ERJ3GEYJ223V	RESISTENCIA CHIP
R673	ERDS2TJ104T	RESISTENCIA	R832	ERJ3GEYJ102V	RESISTENCIA CHIP
R674	ERDS2TJ104T	RESISTENCIA	R833	ERJ3GEYJ223V	RESISTENCIA CHIP
R675	ERDS2TJ104T	RESISTENCIA	R834	ERJ3GEYJ473V	RESISTENCIA CHIP
R676	ERDS2TJ102T	R.CARBON	R835	ERJ3GEYJ103V	RESISTENCIA CHIP
R677	ERDS2TJ102T	R.CARBON	R836	ERJ3GEYJ102V	RESISTENCIA CHIP
R678	ERDS2TJ122T	R.CARBON	R837	ERJ3GEYJ103V	RESISTENCIA CHIP
R679	ERDS2TJ182T	RESISTENCIA	R838	ERJ3GEYJ103V	RESISTENCIA CHIP
R680	ERDS2TJ222T	R.CARBON	R839	ERJ3GEYJ182V	RESISTENCIA CHIP
R681	ERDS2TJ272T	RESISTENCIA CARBON	R840	D0GB101JA002	THICK FILM CHIP RESISTOR
R682	ERDS2TJ472T	RESISTENCIA CARBON	R841	D0GB101JA002	THICK FILM CHIP RESISTOR
R683	ERDS2TJ103T	RESISTENCIA	R842	D0GB101JA002	THICK FILM CHIP RESISTOR
R684	ERDS2TJ103T	RESISTENCIA	R843	D0GB101JA002	THICK FILM CHIP RESISTOR
R685	ERDS2TJ104T	RESISTENCIA	R844	ERJ3GEYJ102V	RESISTENCIA CHIP
R686	ERDS2TJ102T	R.CARBON	R845	ERJ3GEYJ102V	RESISTENCIA CHIP
R687	ERDS2TJ473T	RESISTENCIA CARBON	R846	ERJ3GEYJ470V	RESISTENCIA CHIP
R688	ERDS2TJ472T	RESISTENCIA CARBON	R847	D0GB1R0JA002	CHIP RESISTOR
R689	ERDS2TJ561T	RESISTENCIA CARBON	R848	D0GB1R0JA002	CHIP RESISTOR
R690	ERDS2TJ334T	RESISTENCIA CARBON	R849	D0GB151JA008	CHIP RESISTOR
R691	ERDS2TJ151T	RESISTENCIA	R850	ERJ3GEYJ103V	RESISTENCIA CHIP
R692	ERDS2TJ822T	RESISTENCIA CARBON	R851	ERJ3GEYJ102V	RESISTENCIA CHIP
R693	ERDS2TJ334T	RESISTENCIA CARBON	R852	ERJ3GEYJ102V	RESISTENCIA CHIP
R694	ERDS2TJ102T	R.CARBON	R853	ERJ3GEYJ102V	RESISTENCIA CHIP
R696	ERDS2TJ822T	RESISTENCIA CARBON	R854	ERJ3GEYJ102V	RESISTENCIA CHIP
R697	ERDS2TJ472T	RESISTENCIA CARBON	R855	ERJ3GEYJ102V	RESISTENCIA CHIP
R698	ERDS2TJ682T	R.CARBON	R856	ERJ3GEYJ102V	RESISTENCIA CHIP

R857	ERJ3GEYJ102V	RESISTENCIA CHIP	R918	ERDS2TJ222T	R.CARBON
R858	ERJ3GEYJ102V	RESISTENCIA CHIP	R919	ERDS2TJ272T	RESISTENCIA CARBON
R859	ERJ3GEYJ102V	RESISTENCIA CHIP	R920	ERDS2TJ222T	R.CARBON
R860	ERJ3GEYJ102V	RESISTENCIA CHIP	R922	ERDS2TJ221T	RESISTENCIA
R861	ERJ3GEYJ102V	RESISTENCIA CHIP	R923	ERDS2TJ271T	RESISTENCIA
R862	ERJ3GEYJ182V	RESISTENCIA CHIP	R926	ERDS2TJ101T	R.CARBON
R863	ERJ3GEYJ182V	RESISTENCIA CHIP	R927	ERDS2TJ101T	R.CARBON
R864	ERJ3GEYJ182V	RESISTENCIA CHIP	R928	ERDS2TJ223T	RESISTENCIA
R865	D0GB101JA002	THICK FILM CHIP RESISTOR	R929	ERDS2TJ223T	RESISTENCIA
R866	D0GB101JA002	THICK FILM CHIP RESISTOR	R930	ERDS2TJ153T	RESISTENCIA
R867	D0GB101JA002	THICK FILM CHIP RESISTOR	R931	ERDS2TJ472T	RESISTENCIA CARBON
R868	D0GB101JA002	THICK FILM CHIP RESISTOR	R932	ERDS2TJ103T	RESISTENCIA
R869	ERJ3GEYJ102V	RESISTENCIA CHIP	R933	ERDS2TJ102T	R.CARBON
R870	ERJ3GEYJ472V	RESISTENCIA CHIP	R934	ERDS2TJ223T	RESISTENCIA
R871	ERJ3GEYJ102V	RESISTENCIA CHIP	R935	ERDS2TJ823T	R.CARBON
R872	ERJ3GEYJ102V	RESISTENCIA CHIP	R936	ERDS1FVJ390T	RESISTENCIA RADIAL
R873	ERJ3GEYJ102V	RESISTENCIA CHIP	R937	ERDS2TJ222T	R.CARBON
R874	ERJ3GEYJ472V	RESISTENCIA CHIP	R938	ERDS2TJ474T	RESISTENCIA CARBON
R875	ERJ3GEYJ102V	RESISTENCIA CHIP	R939	ERDS2TJ472T	RESISTENCIA CARBON
R876	ERJ3GEYJ472V	RESISTENCIA CHIP	R940	ERDS2TJ822T	RESISTENCIA CARBON
R877	ERJ3GEYJ102V	RESISTENCIA CHIP	R941	ERDS2TJ681T	RESISTENCIA CARBON
R878	ERJ3GEYJ472V	RESISTENCIA CHIP	R942	ERDS2TJ681T	RESISTENCIA CARBON
R879	D0GB101JA002	THICK FILM CHIP RESISTOR	R943	ERDS2TJ103T	RESISTENCIA
R880	D0GB101JA002	THICK FILM CHIP RESISTOR	R944	ERDS2TJ100T	RESISTENCIA
R881	D0GB101JA002	THICK FILM CHIP RESISTOR	R945	ERDS2TJ100T	RESISTENCIA
R882	ERJ3GEYJ103V	RESISTENCIA CHIP	R946	ERDS1FVJ390T	RESISTENCIA RADIAL
R883	ERJ3GEYJ103V	RESISTENCIA CHIP	R947	ERDS2TJ474T	RESISTENCIA CARBON
R884	ERJ3GEYJ103V	RESISTENCIA CHIP	R948	ERDS2TJ103T	RESISTENCIA
R885	ERJ3GEYJ103V	RESISTENCIA CHIP	R949	ERDS2TJ102T	R.CARBON
R886	ERJ3GEYJ103V	RESISTENCIA CHIP	R950	ERDS2TJ102T	R.CARBON
R887	ERJ3GEYJ103V	RESISTENCIA CHIP	R950	ERDS2TJ183T	RESISTENCIA
R888	ERJ3GEYJ103V	RESISTENCIA CHIP	R951	W6NL-0	ALAMBRE DESNUDO
R889	ERJ3GEYJ472V	RESISTENCIA CHIP	R952	ERDS2TJ821T	RESISTENCIA CARBON
R890	ERJ3GEYJ472V	RESISTENCIA CHIP	R952	ERDS1FVJ100T	RESISTENCIA RADIAL
R891	ERJ3GEYJ102V	RESISTENCIA CHIP	R953	ERDS2TJ393T	RESISTENCIA CARBON
R892	ERJ3GEY0R00V	CHIP JUMPER	R953	ERDS1FVJ100T	RESISTENCIA RADIAL
R893	ERJ3GEYJ472V	RESISTENCIA CHIP	R954	ERDS1FVJ100T	RESISTENCIA RADIAL
R894	ERJ3GEY0R00V	CHIP JUMPER	R955	ERDS2TJ223T	RESISTENCIA
R895	ERJ3GEYJ473V	RESISTENCIA CHIP	R956	ERDS2TJ223T	RESISTENCIA
R897	D0GB101JA002	THICK FILM CHIP RESISTOR	R957	ERDS2TJ151T	RESISTENCIA
R898	ERJ3GEY0R00V	CHIP JUMPER	R958	ERD2FCVJ4R7T	RESISTENCIA CARBON
R899	ERJ3GEY0R00V	CHIP JUMPER	R959	ERDS2TJ472T	RESISTENCIA CARBON
R9	ERDS2TJ391T	RESISTENCIA CARBON	R960	ERDS2TJ332T	RESISTENCIA CARBON
R901	ERDS2TJ331T	R.CARBON	R962	B0EAKM000122	RECTIFIER DIODE
R902	ERDS2TJ331T	R.CARBON	R964	ERDS1FVJ100T	RESISTENCIA RADIAL
R903	ERDS2TJ102T	R.CARBON	R965	ERDS1FVJ100T	RESISTENCIA RADIAL
R904	ERDS2TJ102T	R.CARBON	R966	ERDS2TJ104T	RESISTENCIA
R905	ERDS2TJ471T	R.CARBON	R967	ERDS2TJ184T	R.CARBON
R906	ERDS2TJ102T	R.CARBON	R968	ERDS2TJ394T	RESISTENCIA CARBON
R907	ERDS2TJ102T	R.CARBON	R969	ERDS2TJ394T	RESISTENCIA CARBON
R908	ERDS2TJ472T	RESISTENCIA CARBON	R970	ERDS1FVJ100T	RESISTENCIA RADIAL
R909	ERDS2TJ101T	R.CARBON	R971	ERDS1FVJ100T	RESISTENCIA RADIAL
R910	ERDS2TJ102T	R.CARBON	R972	ERDS2TJ821T	RESISTENCIA CARBON
R911	ERDS2TJ102T	R.CARBON	R973	ERDS2TJ393T	RESISTENCIA CARBON
R912	ERDS2TJ122T	R.CARBON	R976	ERDS2TJ184T	R.CARBON
R913	ERDS2TJ182T	RESISTENCIA	R977	ERDS2TJ683T	R.CARBON
R914	ERDS2TJ102T	R.CARBON	R978	ERDS2TJ393T	RESISTENCIA CARBON
R915	ERDS2TJ102T	R.CARBON	R979	ERDS2TJ393T	RESISTENCIA CARBON
R916	ERDS2TJ122T	R.CARBON	R980	ERDS1FVJ100T	RESISTENCIA RADIAL
R917	ERDS2TJ182T	RESISTENCIA	R981	ERDS1FVJ100T	RESISTENCIA RADIAL

R982	ERDS2TJ393T	RESISTENCIA CARBON
R983	ERDS2TJ393T	RESISTENCIA CARBON
R984	ERDS2TJ103T	RESISTENCIA
R985	ERDS2TJ103T	RESISTENCIA
R986	ERDS2TJ394T	RESISTENCIA CARBON
R987	ERDS2TJ104T	RESISTENCIA
R988	ERDS2TJ394T	RESISTENCIA CARBON
R989	ERDS2TJ394T	RESISTENCIA CARBON
R990	ERDS1FVJ100T	RESISTENCIA RADIAL
R991	ERDS1FVJ100T	RESISTENCIA RADIAL
R992	ERDS2TJ393T	RESISTENCIA CARBON
R993	ERDS2TJ393T	RESISTENCIA CARBON
R994	ERDS2TJ103T	RESISTENCIA
R995	ERDS2TJ103T	RESISTENCIA
R996	ERDS2TJ104T	RESISTENCIA
R997	ERDS2TJ184T	R.CARBON
R998	ERDS2TJ394T	RESISTENCIA CARBON
R999	ERDS2TJ394T	RESISTENCIA CARBON

RELAY

RL502	RSY0040M-0	RELEVADOR PRIMARIO
-------	------------	--------------------

SWITCHES

S600	EVQ21405R	TACT SWITCH
S601	EVQ21405R	TACT SWITCH
S602	EVQ21405R	TACT SWITCH
S603	EVQ21405R	TACT SWITCH
S604	EVQ21405R	TACT SWITCH
S605	EVQ21405R	TACT SWITCH
S606	EVQ21405R	TACT SWITCH
S607	EVQ21405R	TACT SWITCH
S610	EVQ21405R	TACT SWITCH
S611	EVQ21405R	TACT SWITCH
S910	EVQ21405R	TACT SWITCH
S911	EVQ21405R	TACT SWITCH
S912	EVQ21405R	TACT SWITCH
S913	EVQ21405R	TACT SWITCH
S914	EVQ21405R	TACT SWITCH
S920	EVQ21405R	TACT SWITCH
S921	EVQ21405R	TACT SWITCH
S922	EVQ21405R	TACT SWITCH
S923	EVQ21405R	TACT SWITCH
S924	EVQ21405R	TACT SWITCH
S925	EVQ21405R	TACT SWITCH
S926	EVQ21405R	TACT SWITCH
S951	RSH1A018-3U	INTERUPTOR DE HOJA
S952	RSH1A019-2U	INTERUPTOR DE HOJA
S953	RSH1A019-2U	INTERUPTOR DE HOJA
S971	RSH1A018-3U	INTERUPTOR DE HOJA
S972	RSH1A019-2U	INTERUPTOR DE HOJA
S973	RSH1A019-2U	INTERUPTOR DE HOJA
S974	RSH1A019-2U	INTERUPTOR DE HOJA
S975	RSH1A019-2U	INTERUPTOR DE HOJA
SW800	K0D112B00126	MONO /ST SVY
T501	RTPM1P3M025-V	TRANSFORMADOR
PRINCIPAL	TM70AV	
T502	G4C2AAJ00001	TRANSFORMADOR BACK UP

VARIABLE RESITOR

VR600	EVEKE2F3524B	CONTROL DE VOLUMEN
VR602	EVUF2AF25B14	CONTROL DE VOLUMEN

WIRES

W1	REE0971	WIRE (AMARILLO)
W1001	RWJ6510110XX	MULTICABLE
W1002	RWJ0102050CK	MULTICABLE
W500	REXX0304-1	15 PIN FLAT WIRE
W502	REXX0304-1	15 PIN FLAT WIRE
W503	REXX0302	8 PIN FLAT WIRE
W600	REXX0295-1	CABLE PLANO 7PINES
W601	RWJ0208150RX	CABLE
W7	REVM0097-A	CABLE PRIMARIO VIOLETA
W950	REXX0297	10 PIN WIRE CONNECTOR
W951	REXX0296	7 PIN FLAT WIRE
W952	REXX0206-1	MULTICABLE 2P

OSCILLATOR

X102	RLFDFT22DD	FILTRO CERAMICO
X103	RSXC7M20S05T	CRISTAL
X600	H0A327200073	32.768 HKZ XTAL
X601	RSXZ4M19D01T	OSCILADOR CERAMICO
X800	H2B600400003	CERAMIC OCCILLATOR

COMPONENT COMBINATION

Z1002	RGSD12A1445T	RESISTENCIA RADA
Z101	RLA2Z007-T	BOBINA
Z102	G2BAE0000003	AM IF BLOCK
Z501	ERZV10V511CS	ZNR
Z600	B3RAB0000012	REMOTE CONTROL SENSOR
Z971	RGSD12A1445T	RESISTENCIA RADA

1

2

A

B

VR600
B3RAB0000012

JOG VOL

B COM 2 A

C853 100P

C854 100P

DECK 12 OPEN

DECK 12

V_JOG_A

V_JOG_B

D_GND

900 RJ009H10M

POWER

S600

DISC 1

S602

DISC 2

S603

DISC 3

S604

DISC 4

S605

DISC 5

S606

CLOSE

CD OPEN

S607

GND2

R676 1K

R677 1K

R678 1K

R679 1K

R680 2K

R681 2K

R682 4.7K

R683 4.7K

R684 4.7K

R685 4.7K

R686 4.7K

R687 4.7K

R688 4.7K

R689 4.7K

R690 4.7K

R691 4.7K

R692 4.7K

R693 4.7K

R694 4.7K

R695 4.7K

R696 4.7K

R697 4.7K

R698 4.7K

R699 4.7K

R700 4.7K

R701 4.7K

R702 4.7K

R703 4.7K

R704 4.7K

R705 4.7K

R706 4.7K

R707 4.7K

R708 4.7K

R709 4.7K

R710 4.7K

R711 4.7K

R712 4.7K

R713 4.7K

R714 4.7K

R715 4.7K

R716 4.7K

R717 4.7K

R718 4.7K

R719 4.7K

R720 4.7K

R721 4.7K

R722 4.7K

R723 4.7K

R724 4.7K

R725 4.7K

R726 4.7K

R727 4.7K

R728 4.7K

R729 4.7K

R730 4.7K

R731 4.7K

R732 4.7K

R733 4.7K

R734 4.7K

R735 4.7K

R736 4.7K

R737 4.7K

R738 4.7K

R739 4.7K

R740 4.7K

R741 4.7K

R742 4.7K

R743 4.7K

R744 4.7K

R745 4.7K

R746 4.7K

R747 4.7K

R748 4.7K

R749 4.7K

R750 4.7K

R751 4.7K

R752 4.7K

R753 4.7K

R754 4.7K

R755 4.7K

R756 4.7K

R757 4.7K

R758 4.7K

R759 4.7K

R760 4.7K

R761 4.7K

R762 4.7K

R763 4.7K

R764 4.7K

R765 4.7K

R766 4.7K

R767 4.7K

R768 4.7K

R769 4.7K

R770 4.7K

R771 4.7K

R772 4.7K

R773 4.7K

R774 4.7K

R775 4.7K

R776 4.7K

R777 4.7K

R778 4.7K

R779 4.7K

R780 4.7K

R781 4.7K

R782 4.7K

R783 4.7K

R784 4.7K

R785 4.7K

R786 4.7K

R787 4.7K

R788 4.7K

R789 4.7K

R790 4.7K

R791 4.7K

R792 4.7K

R793 4.7K

R794 4.7K

R795 4.7K

R796 4.7K

R797 4.7K

R798 4.7K

R799 4.7K

R800 4.7K

R801 4.7K

R802 4.7K

R803 4.7K

R804 4.7K

R805 4.7K

R806 4.7K

R807 4.7K

R808 4.7K

R809 4.7K

R810 4.7K

R811 4.7K

R812 4.7K

R813 4.7K

R814 4.7K

R815 4.7K

R816 4.7K

R817 4.7K

R818 4.7K

R819 4.7K

R820 4.7K

R821 4.7K

R822 4.7K

R823 4.7K

R824 4.7K

R825 4.7K

R826 4.7K

R827 4.7K

R828 4.7K

R829 4.7K

R830 4.7K

R831 4.7K

R832 4.7K

R833 4.7K

R834 4.7K

R835 4.7K

R836 4.7K

R837 4.7K

R838 4.7K

R839 4.7K

R840 4.7K

R841 4.7K

R842 4.7K

R843 4.7K

R844 4.7K

R845 4.7K

R846 4.7K

R847 4.7K

R848 4.7K

R849 4.7K

R850 4.7K

R851 4.7K

R852 4.7K

R853 4.7K

R854 4.7K

R855 4.7K

R856 4.7K

R857 4.7K

R858 4.7K

R859 4.7K

R860 4.7K

R861 4.7K

R862 4.7K

R863 4.7K

R864 4.7K

R865 4.7K

R866 4.7K

R867 4.7K

R868 4.7K

R869 4.7K

R870 4.7K

R871 4.7K

R872 4.7K

R873 4.7K

R874 4.7K

R875 4.7K

R876 4.7K

R877 4.7K

R878 4.7K

R879 4.7K

R880 4.7K

R881 4.7K

R882 4.7K

R883 4.7K

R884 4.7K

R885 4.7K

R886 4.7K

R887 4.7K

R888 4.7K

R889 4.7K

R890 4.7K

R891 4.7K

R892 4.7K

R893 4.7K

R894 4.7K

R895 4.7K

R896 4.7K

R897 4.7K

R898 4.7K

R899 4.7K

R900 4.7K

R901 4.7K

R902 4.7K

R903 4.7K

R904 4.7K

R905 4.7K

R906 4.7K

R907 4.7K

R908 4.7K

R909 4.7K

R910 4.7K

R911 4.7K

R912 4.7K

R913 4.7K

R914 4.7K

R915 4.7K

R916 4.7K

R917 4.7K

R918 4.7K

R919 4.7K

R920 4.7K

R921 4.7K

R922 4.7K

R923 4.7K

R924 4.7K

R925 4.7K

R926 4.7K

R927 4.7K

R928 4.7K

R929 4.7K


R930 4.7K


R931 4.7K

R932 4.7K

R933 4.7K



R934 4

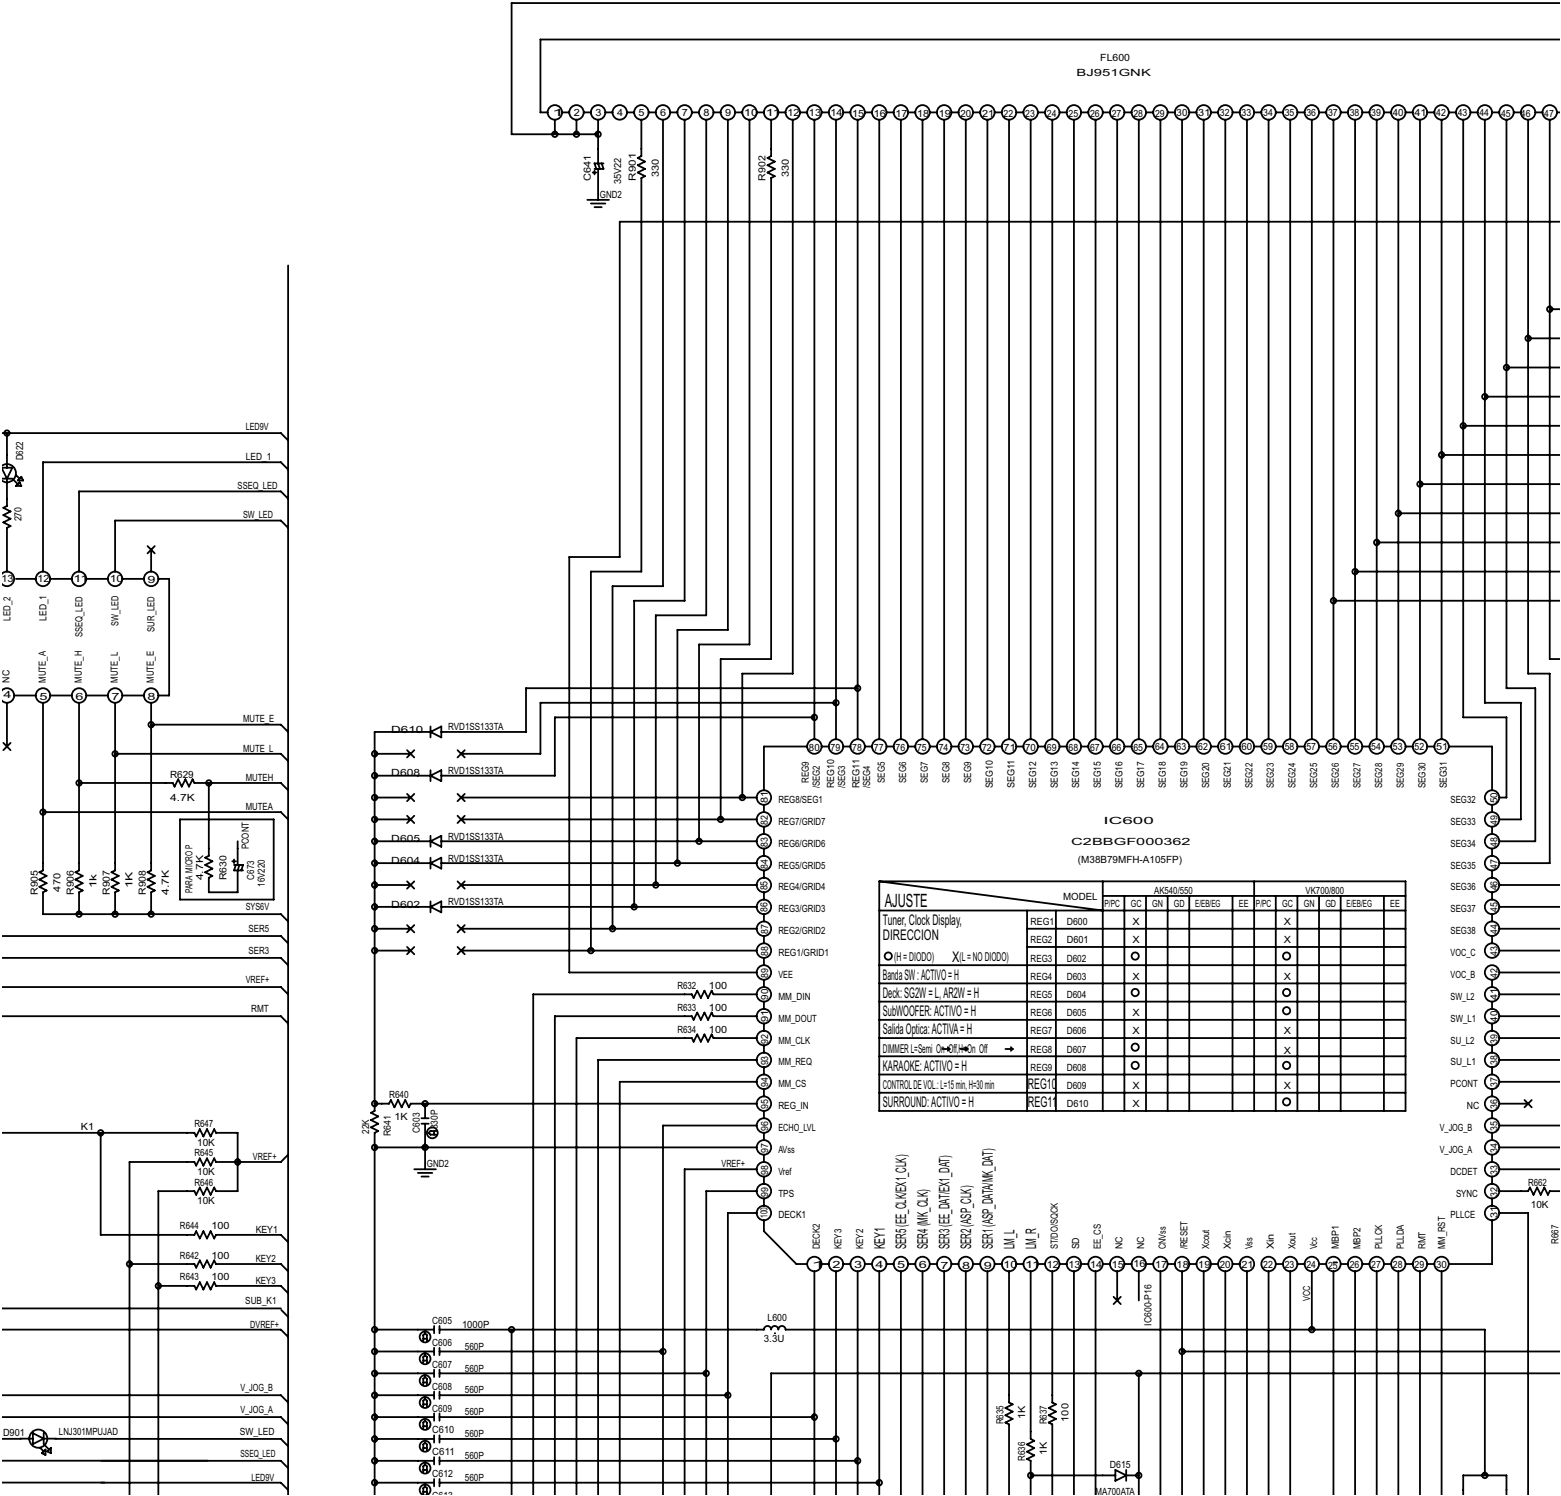

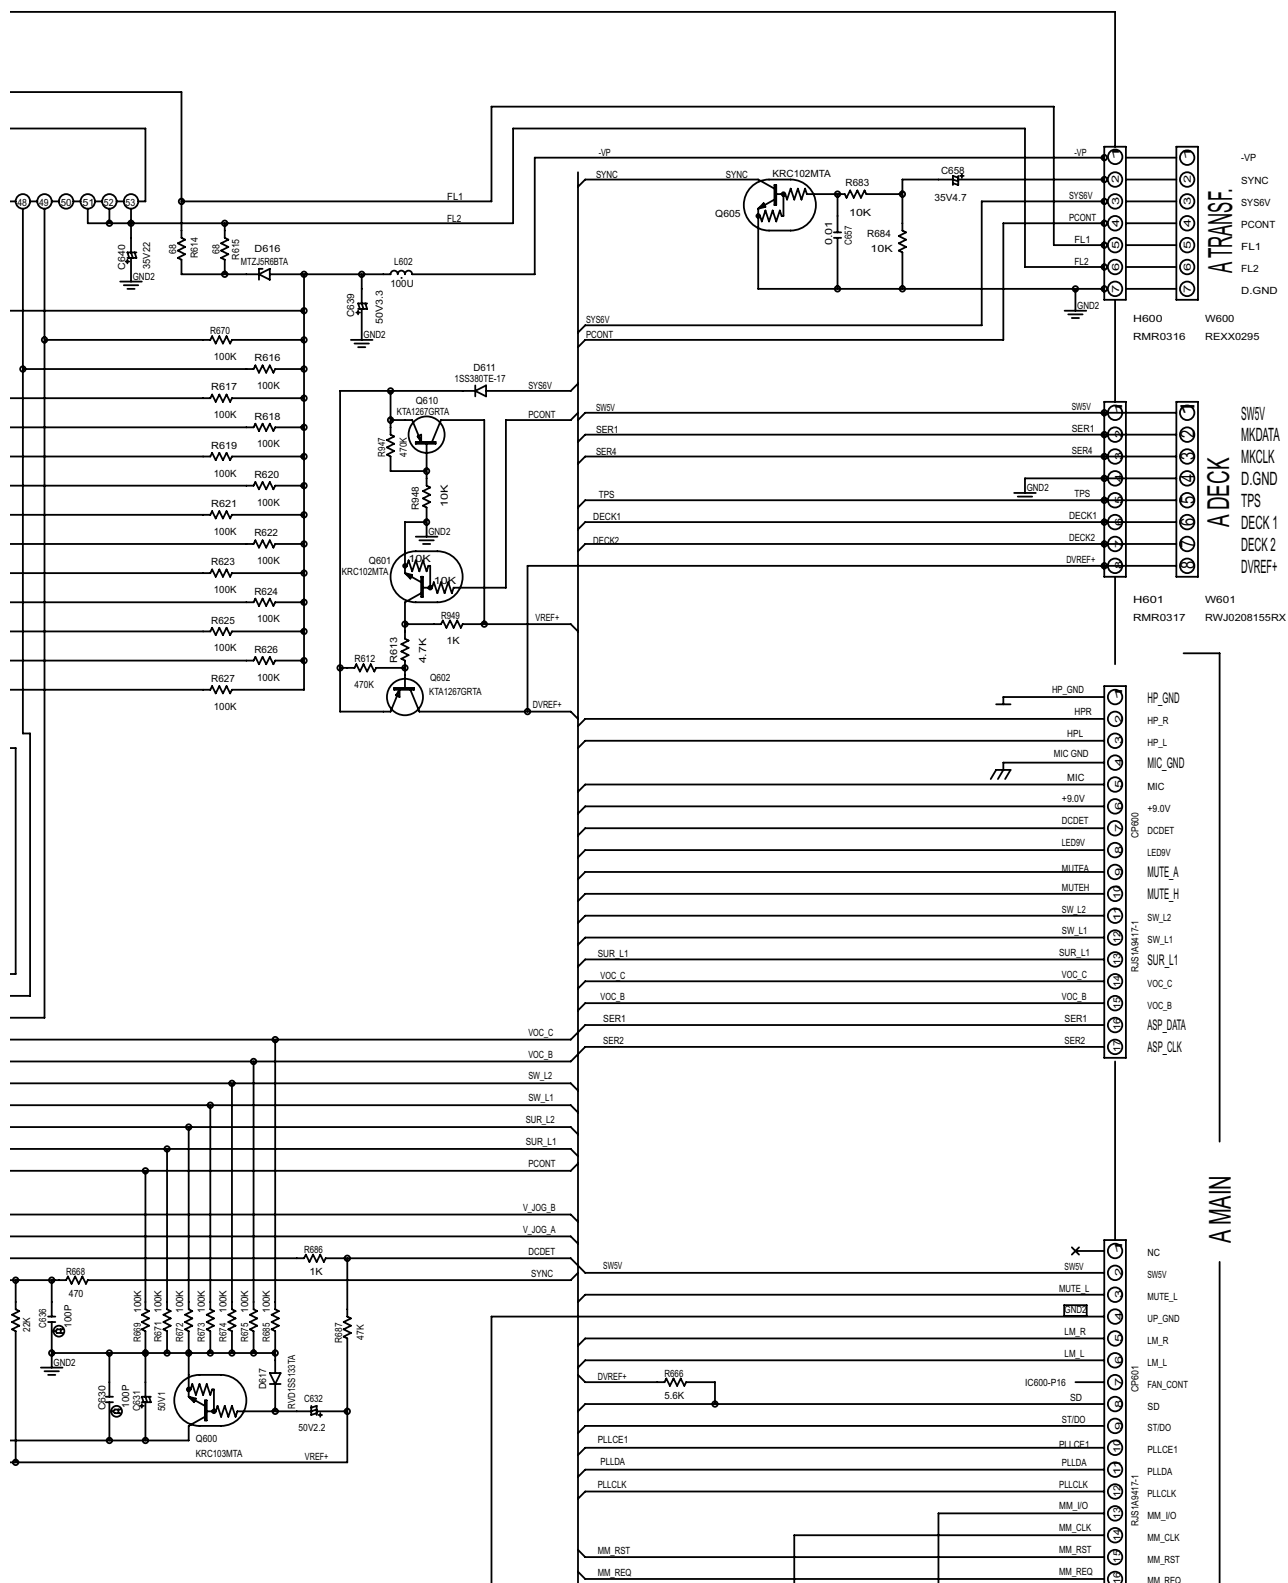

A

B

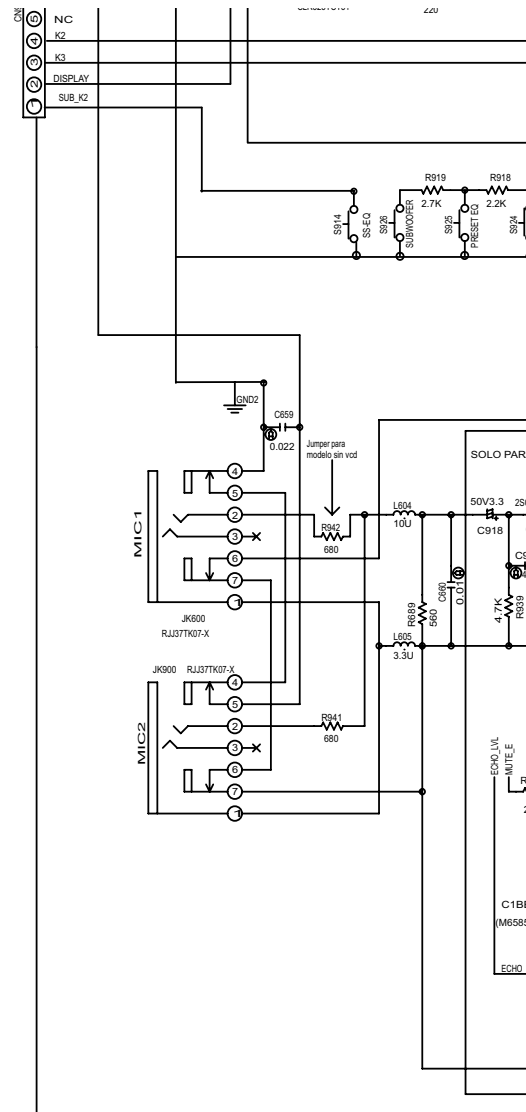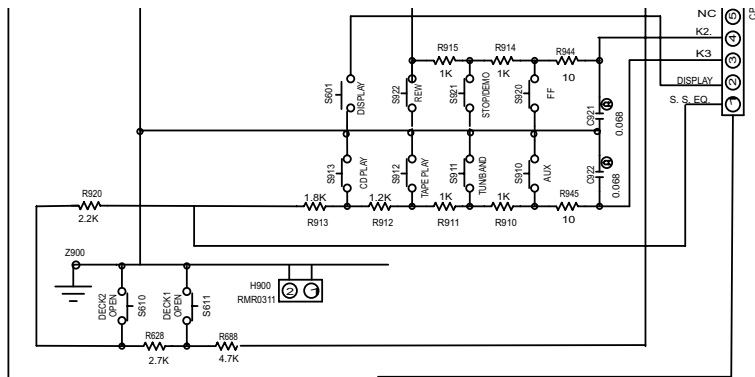

PANASONIC DE MEXICO S.A. DE C.V.

DEPARTAI





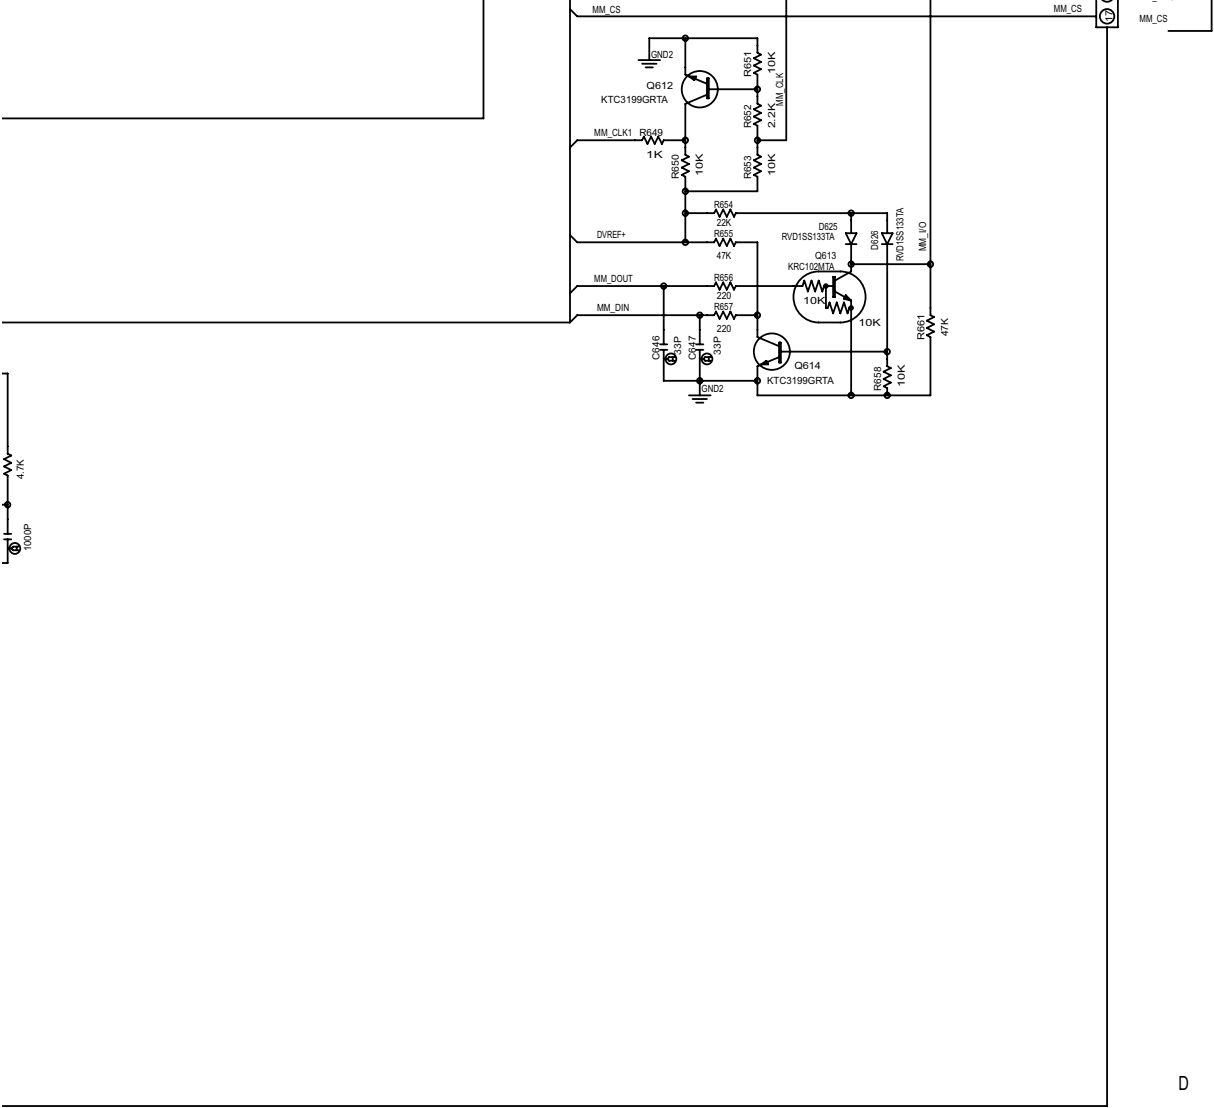


					DIAGRAMA ELECTRONICO	
Símbolo	Código		Símbolo	Símbolo	Proceso	
Emisión	Fecha	Dpto.	Sección	Nota	Modelo	SA-TM82AV
Pre.	30/01/2004	Ing. audio	Eléctrica	Panasonic		
Fin	30/01/2004				No. de Parte	RJBM0040A
Escala	Diseño	Dibujó	Revisó	Aprobó		
S/E	OCTAVIO I.	OCTAVIO I.			Nombre	Circuito panel

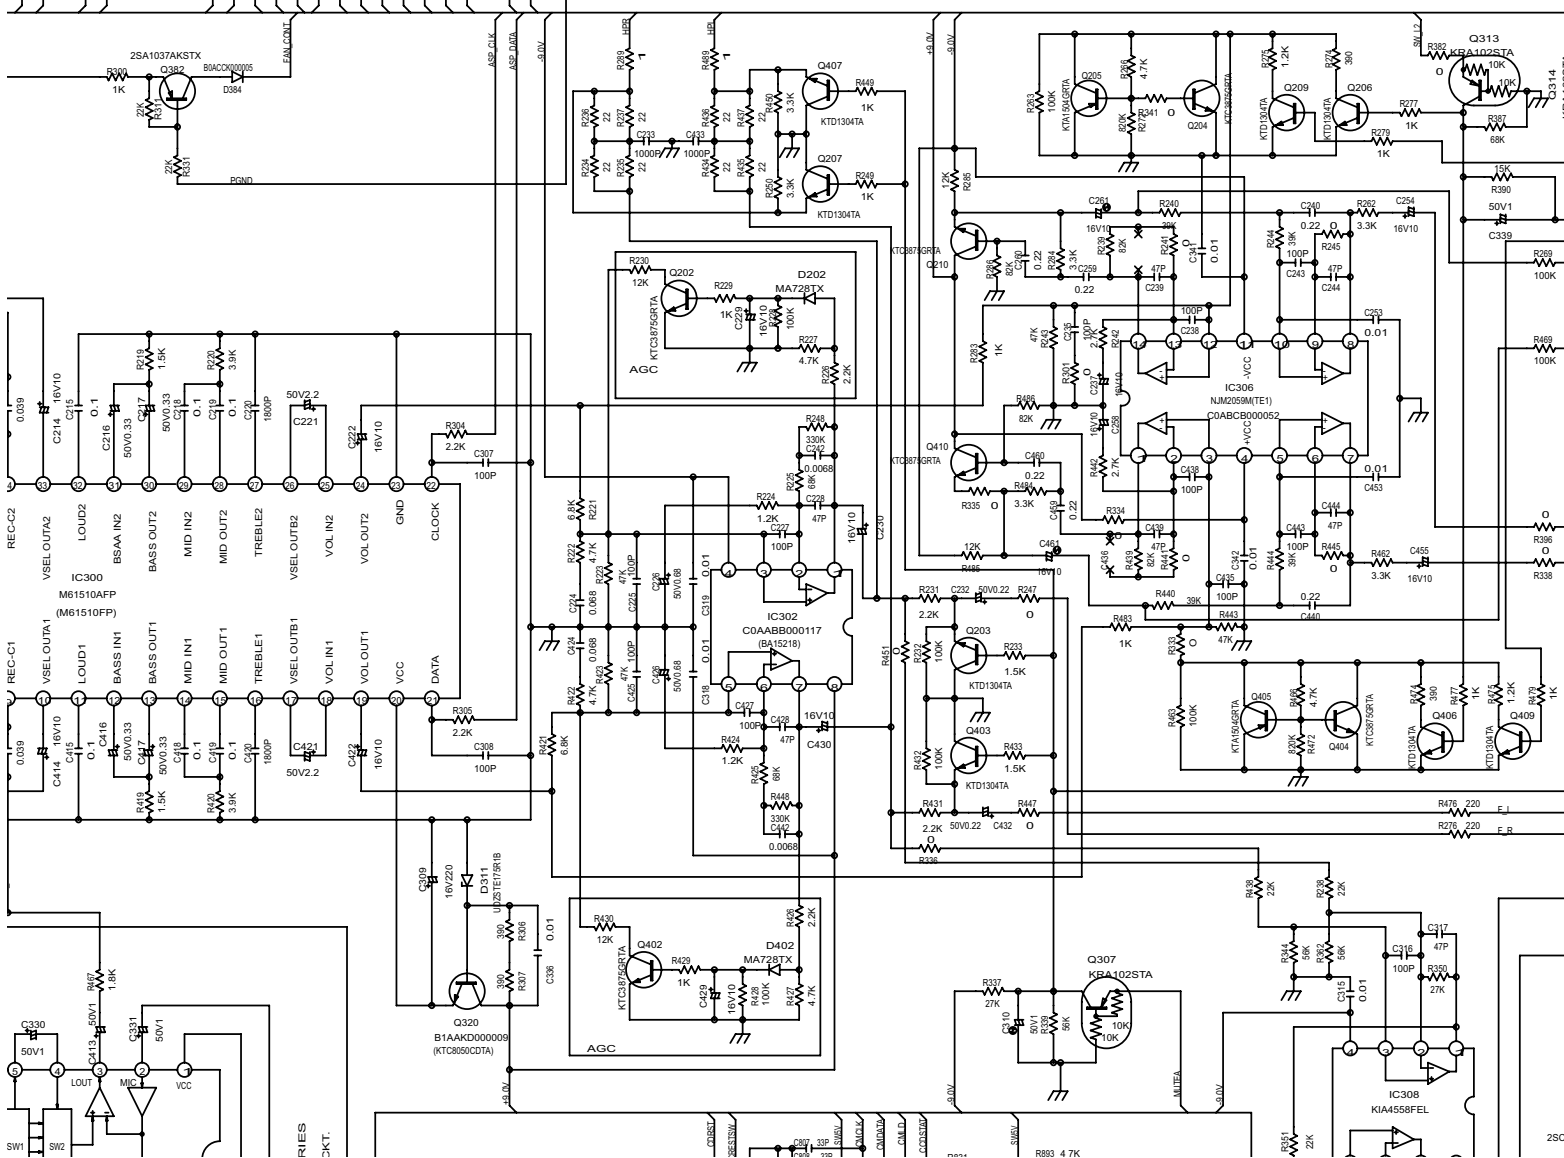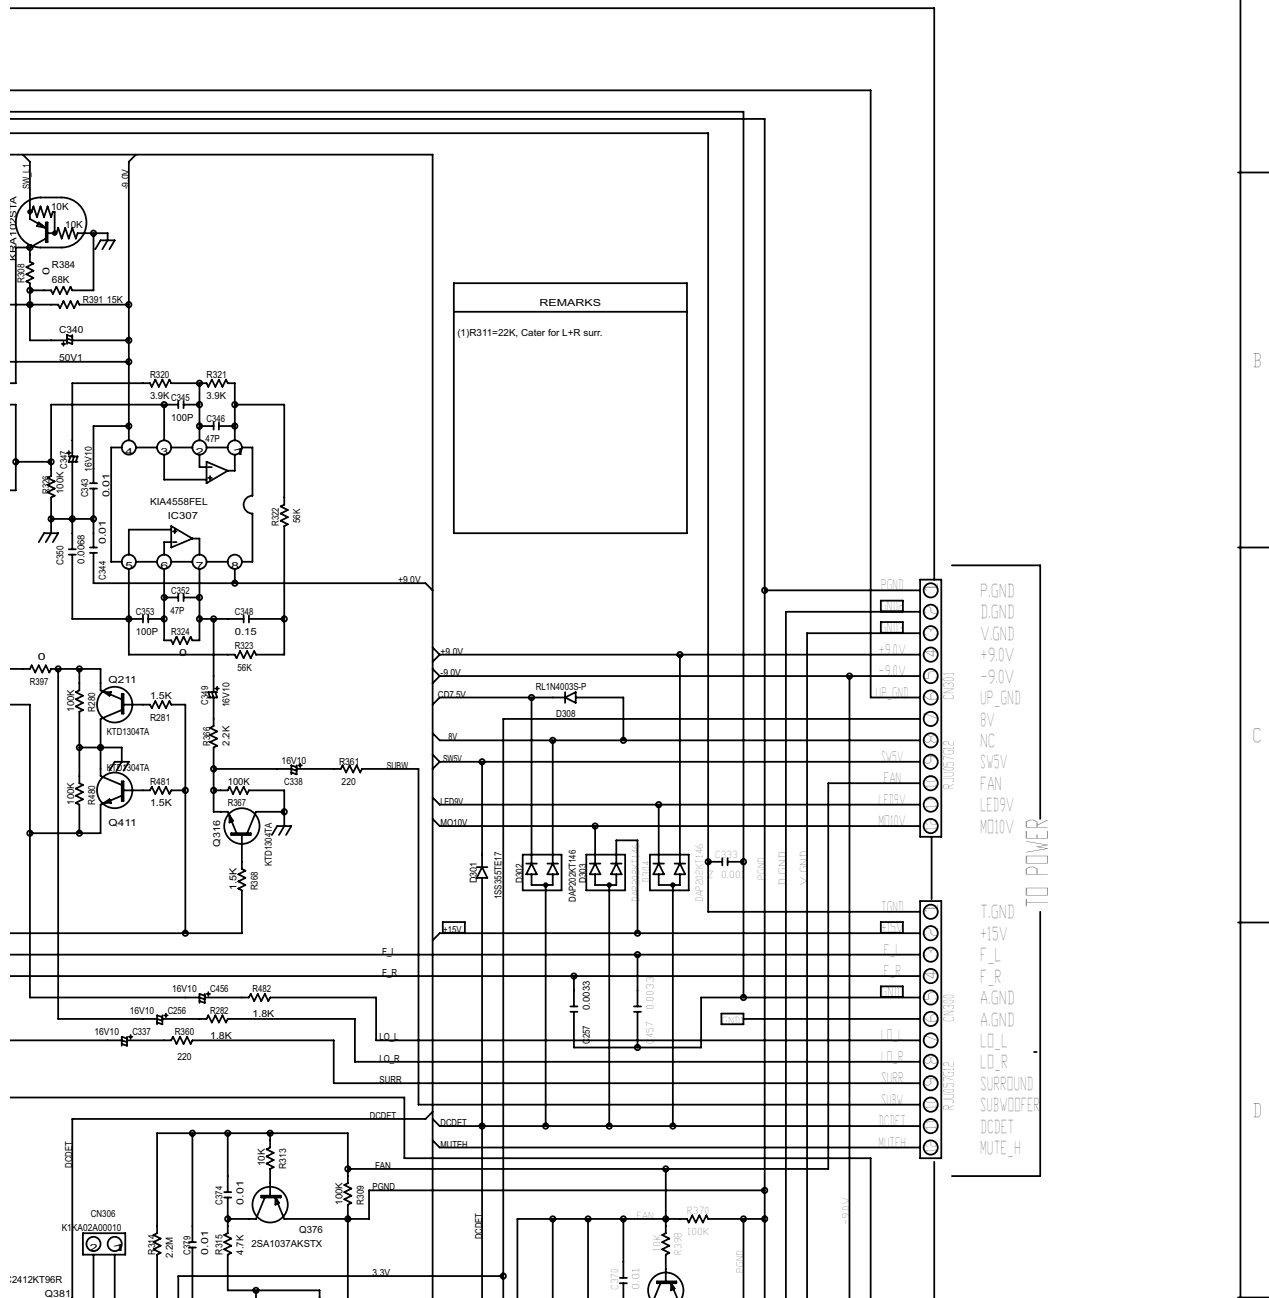

[illegible]

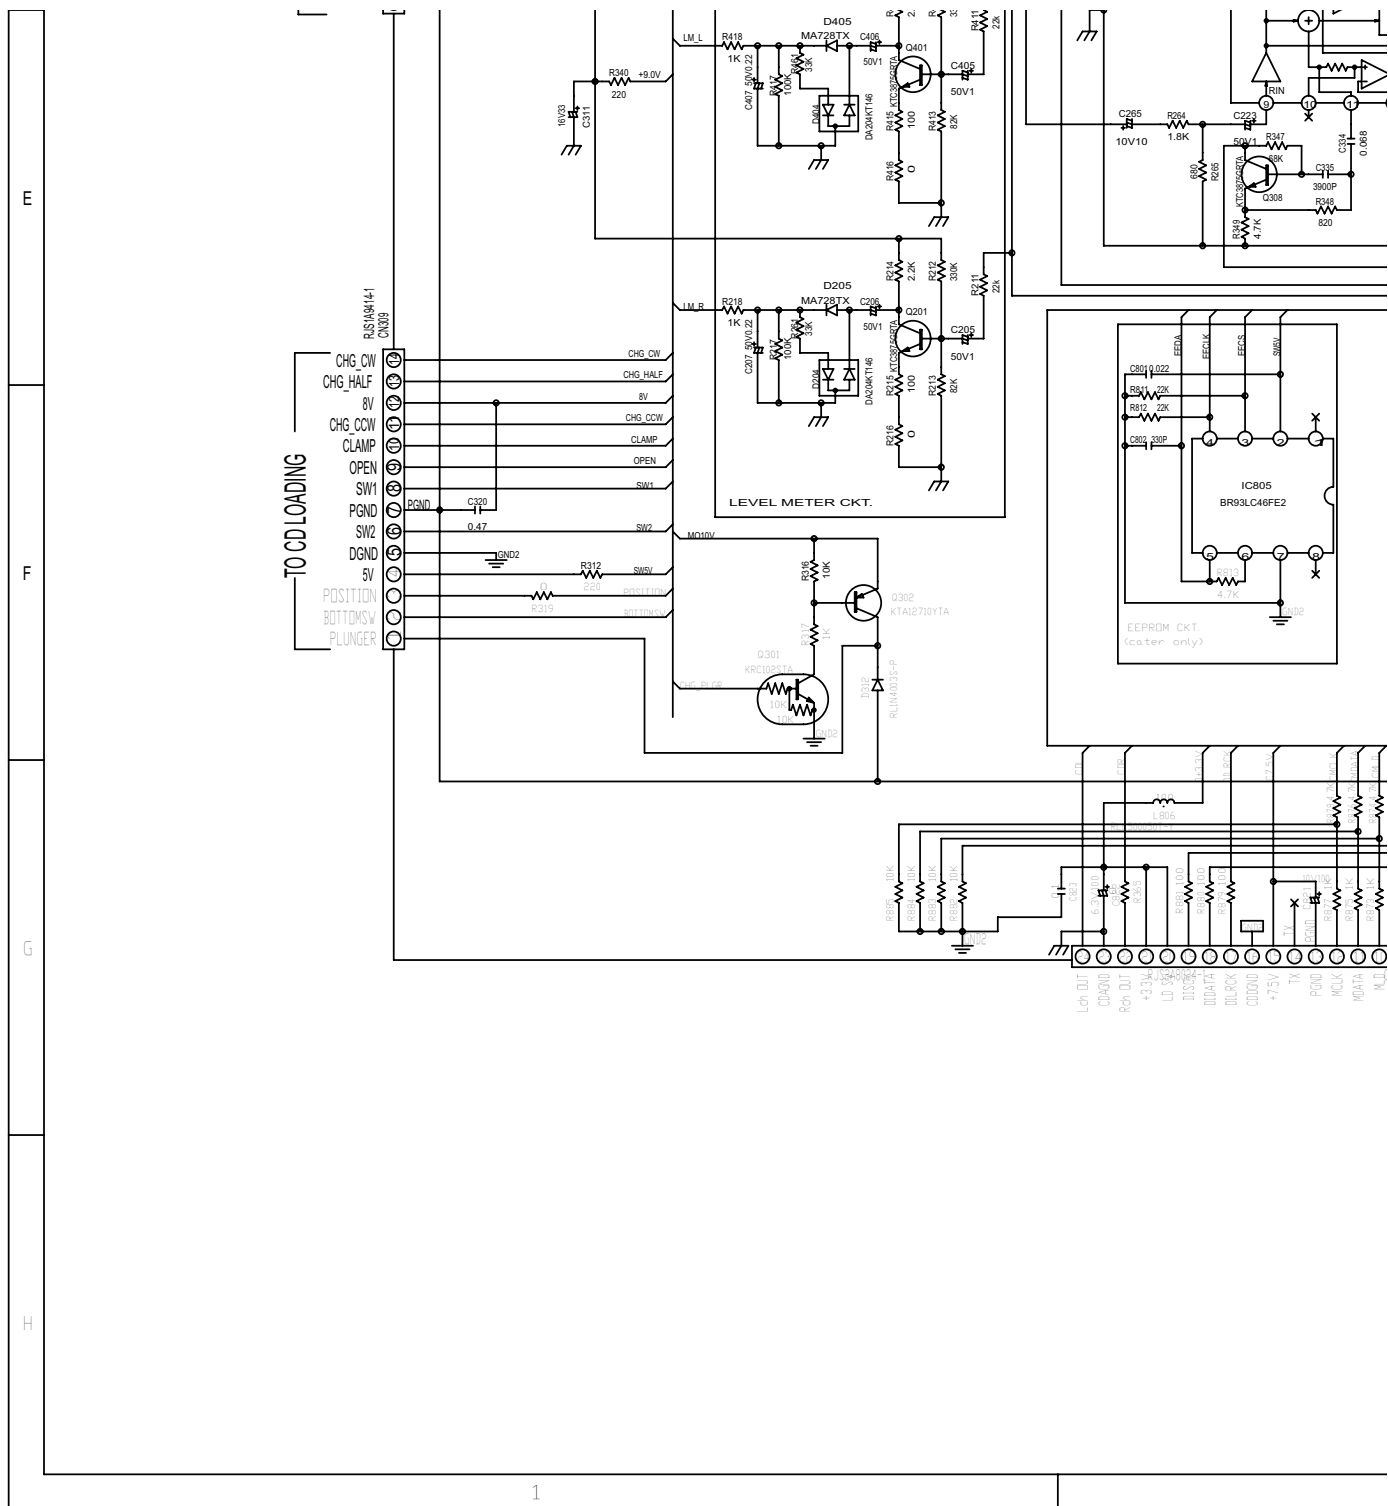


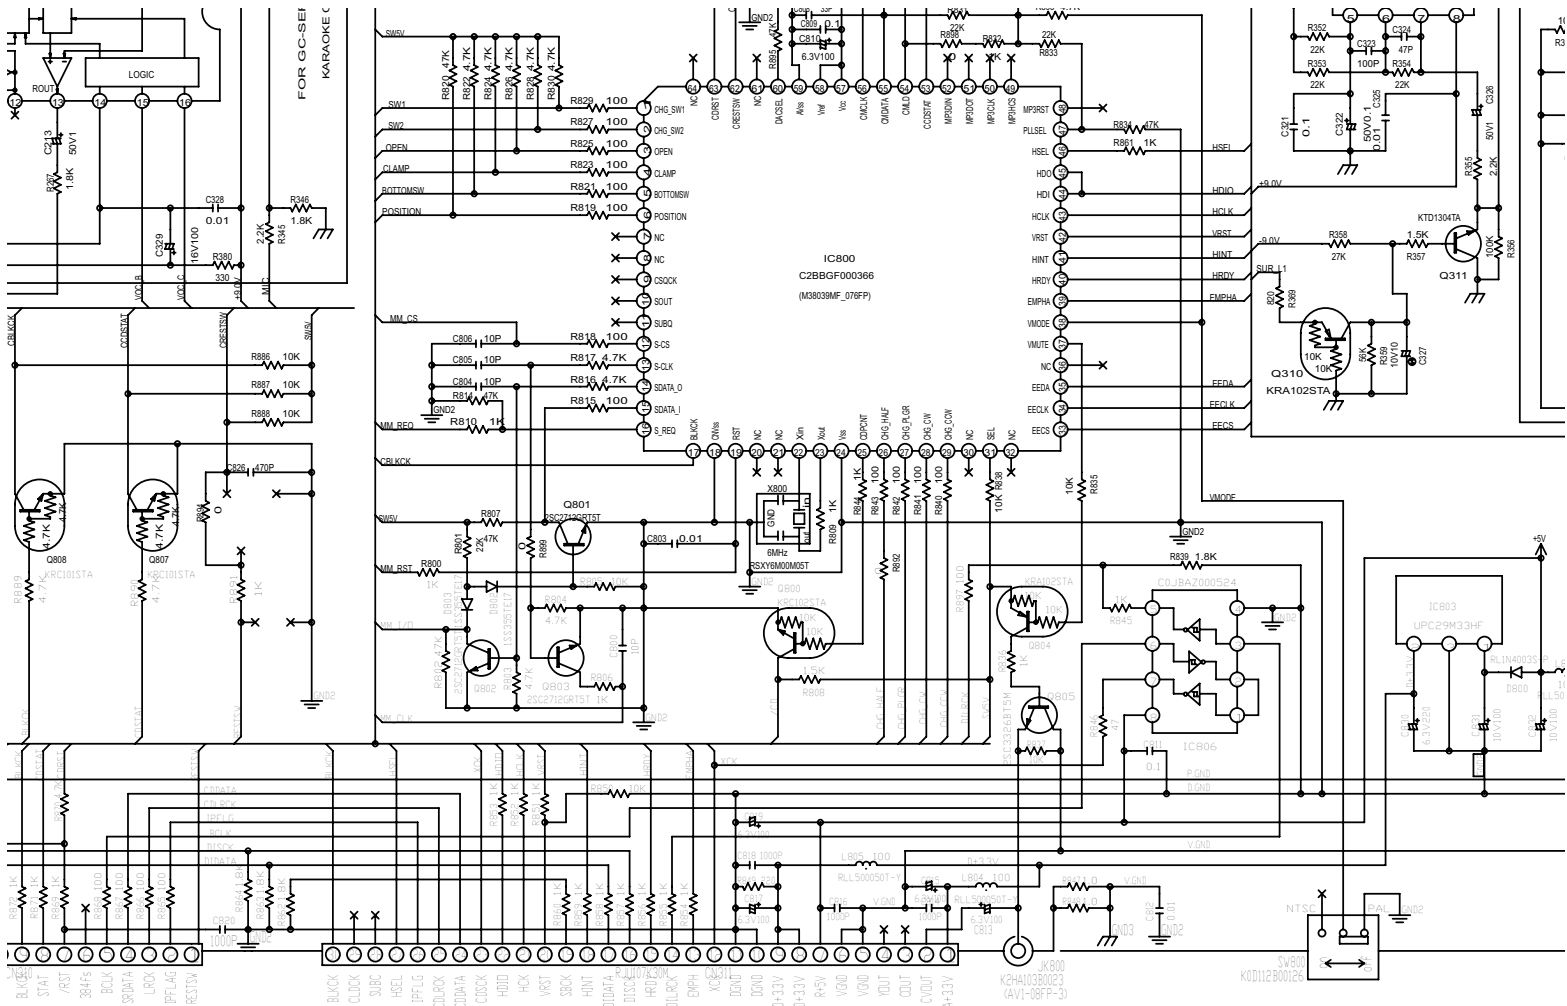



NOTE :
THIS CIRCUITRY IS
CORRECT AT TIME OF
ISSUANCE. ANY CHANGES
SHALL REFER TO THE
TECHNICAL INFORMATION
ISSUED BY R&D.


REMARKS
1. L1 NUMBER ASSIGNMENT
2. LCH : 400 TO 499
3. RCH : 200 TO 299
4. GENAF : 300 TO 399
5. VCD : 600 TO 699
6. 0100F : ECUV1E10
7. 0100F : ECUV1E11
8. 0100F : ECUV1E12
9. 0100F : ECUV1E13
10. 0100F : ECUV1E14
11. 0100F : ECUV1E15
12. 0100F : ECUV1E16
13. 0100F : ECUV1E17
14. 0100F : ECUV1E18
15. 0100F : ECUV1E19
16. 0100F : ECUV1E20
17. 0100F : ECUV1E21
18. 0100F : ECUV1E22
19. 0100F : ECUV1E23
20. 0100F : ECUV1E24
21. 0100F : ECUV1E25
22. 0100F : ECUV1E26
23. 0100F : ECUV1E27
24. 0100F : ECUV1E28
25. 0100F : ECUV1E29
26. 0100F : ECUV1E30
27. 0100F : ECUV1E31
28. 0100F : ECUV1E32
29. 0100F : ECUV1E33
30. 0100F : ECUV1E34
31. 0100F : ECUV1E35
32. 0100F : ECUV1E36
33. 0100F : ECUV1E37
34. 0100F : ECUV1E38
35. 0100F : ECUV1E39
36. 0100F : ECUV1E40
37. 0100F : ECUV1E41
38. 0100F : ECUV1E42
39. 0100F : ECUV1E43
40. 0100F : ECUV1E44
41. 0100F : ECUV1E45
42. 0100F : ECUV1E46
43. 0100F : ECUV1E47
44. 0100F : ECUV1E48
45. 0100F : ECUV1E49
46. 0100F : ECUV1E50
47. 0100F : ECUV1E51
48. 0100F : ECUV1E52
49. 0100F : ECUV1E53
50. 0100F : ECUV1E54
51. 0100F : ECUV1E55
52. 0100F : ECUV1E56
53. 0100F : ECUV1E57
54. 0100F : ECUV1E58
55. 0100F : ECUV1E59
56. 0100F : ECUV1E60
57. 0100F : ECUV1E61
58. 0100F : ECUV1E62
59. 0100F : ECUV1E63
60. 0100F : ECUV1E64
61. 0100F : ECUV1E65
62. 0100F : ECUV1E66
63. 0100F : ECUV1E67
64. 0100F : ECUV1E68
65. 0100F : ECUV1E69
66. 0100F : ECUV1E70
67. 0100F : ECUV1E71
68. 0100F : ECUV1E72
69. 0100F : ECUV1E73
70. 0100F : ECUV1E74
71. 0100F : ECUV1E75
72. 0100F : ECUV1E76
73. 0100F : ECUV1E77
74. 0100F : ECUV1E78
75. 0100F : ECUV1E79
76. 0100F : ECUV1E80
77. 0100F : ECUV1E81
78. 0100F : ECUV1E82
79. 0100F : ECUV1E83
80. 0100F : ECUV1E84
81. 0100F : ECUV1E85
82. 0100F : ECUV1E86
83. 0100F : ECUV1E87
84. 0100F : ECUV1E88
85. 0100F : ECUV1E89
86. 0100F : ECUV1E90
87. 0100F : ECUV1E91
88. 0100F : ECUV1E92
89. 0100F : ECUV1E93
90. 0100F : ECUV1E94
91. 0100F : ECUV1E95
92. 0100F : ECUV1E96
93. 0100F : ECUV1E97
94. 0100F : ECUV1E98
95. 0100F : ECUV1E99
96. 0100F : ECUV1E100
97. 0100F : ECUV1E101
98. 0100F : ECUV1E102
99. 0100F : ECUV1E103
100. 0100F : ECUV1E104


SQUEMATIC DIAGRAM POWER & TRANSFORMER PCB

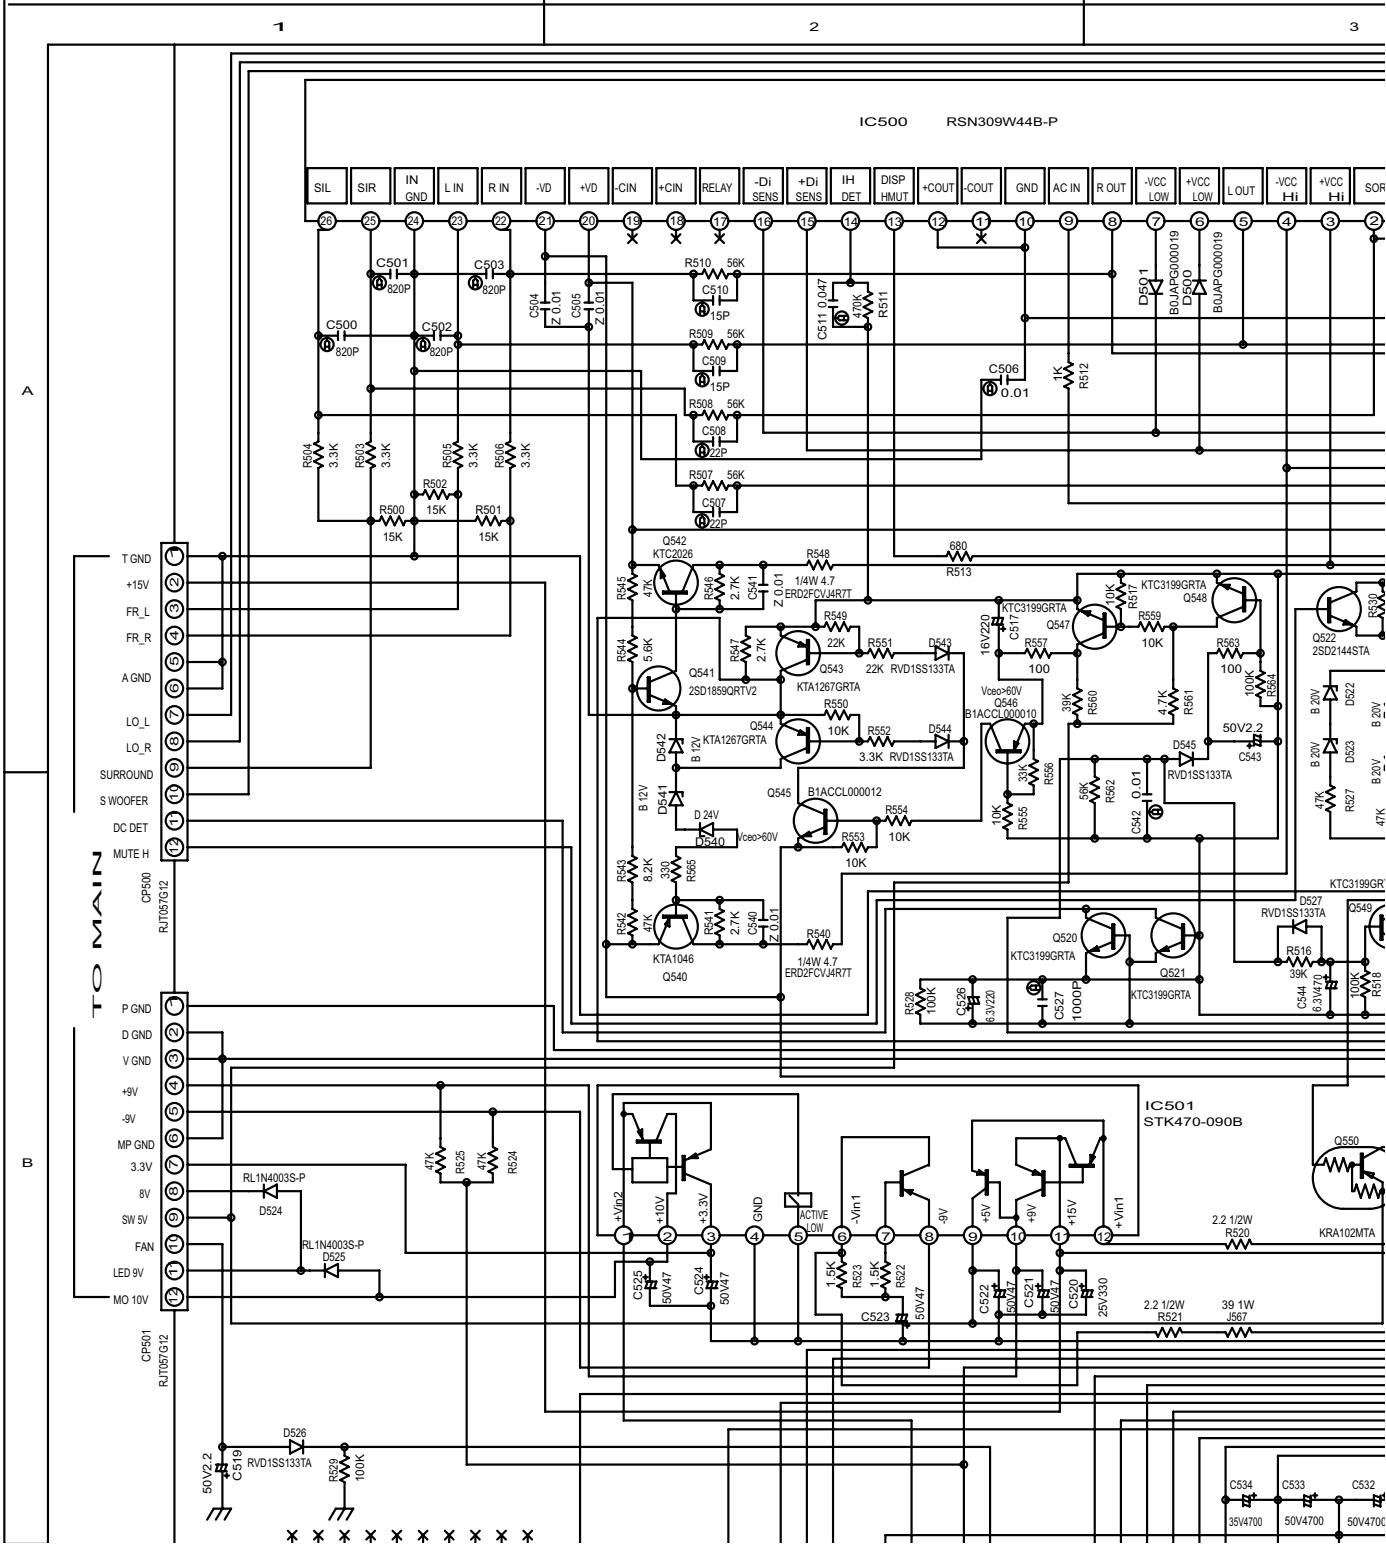


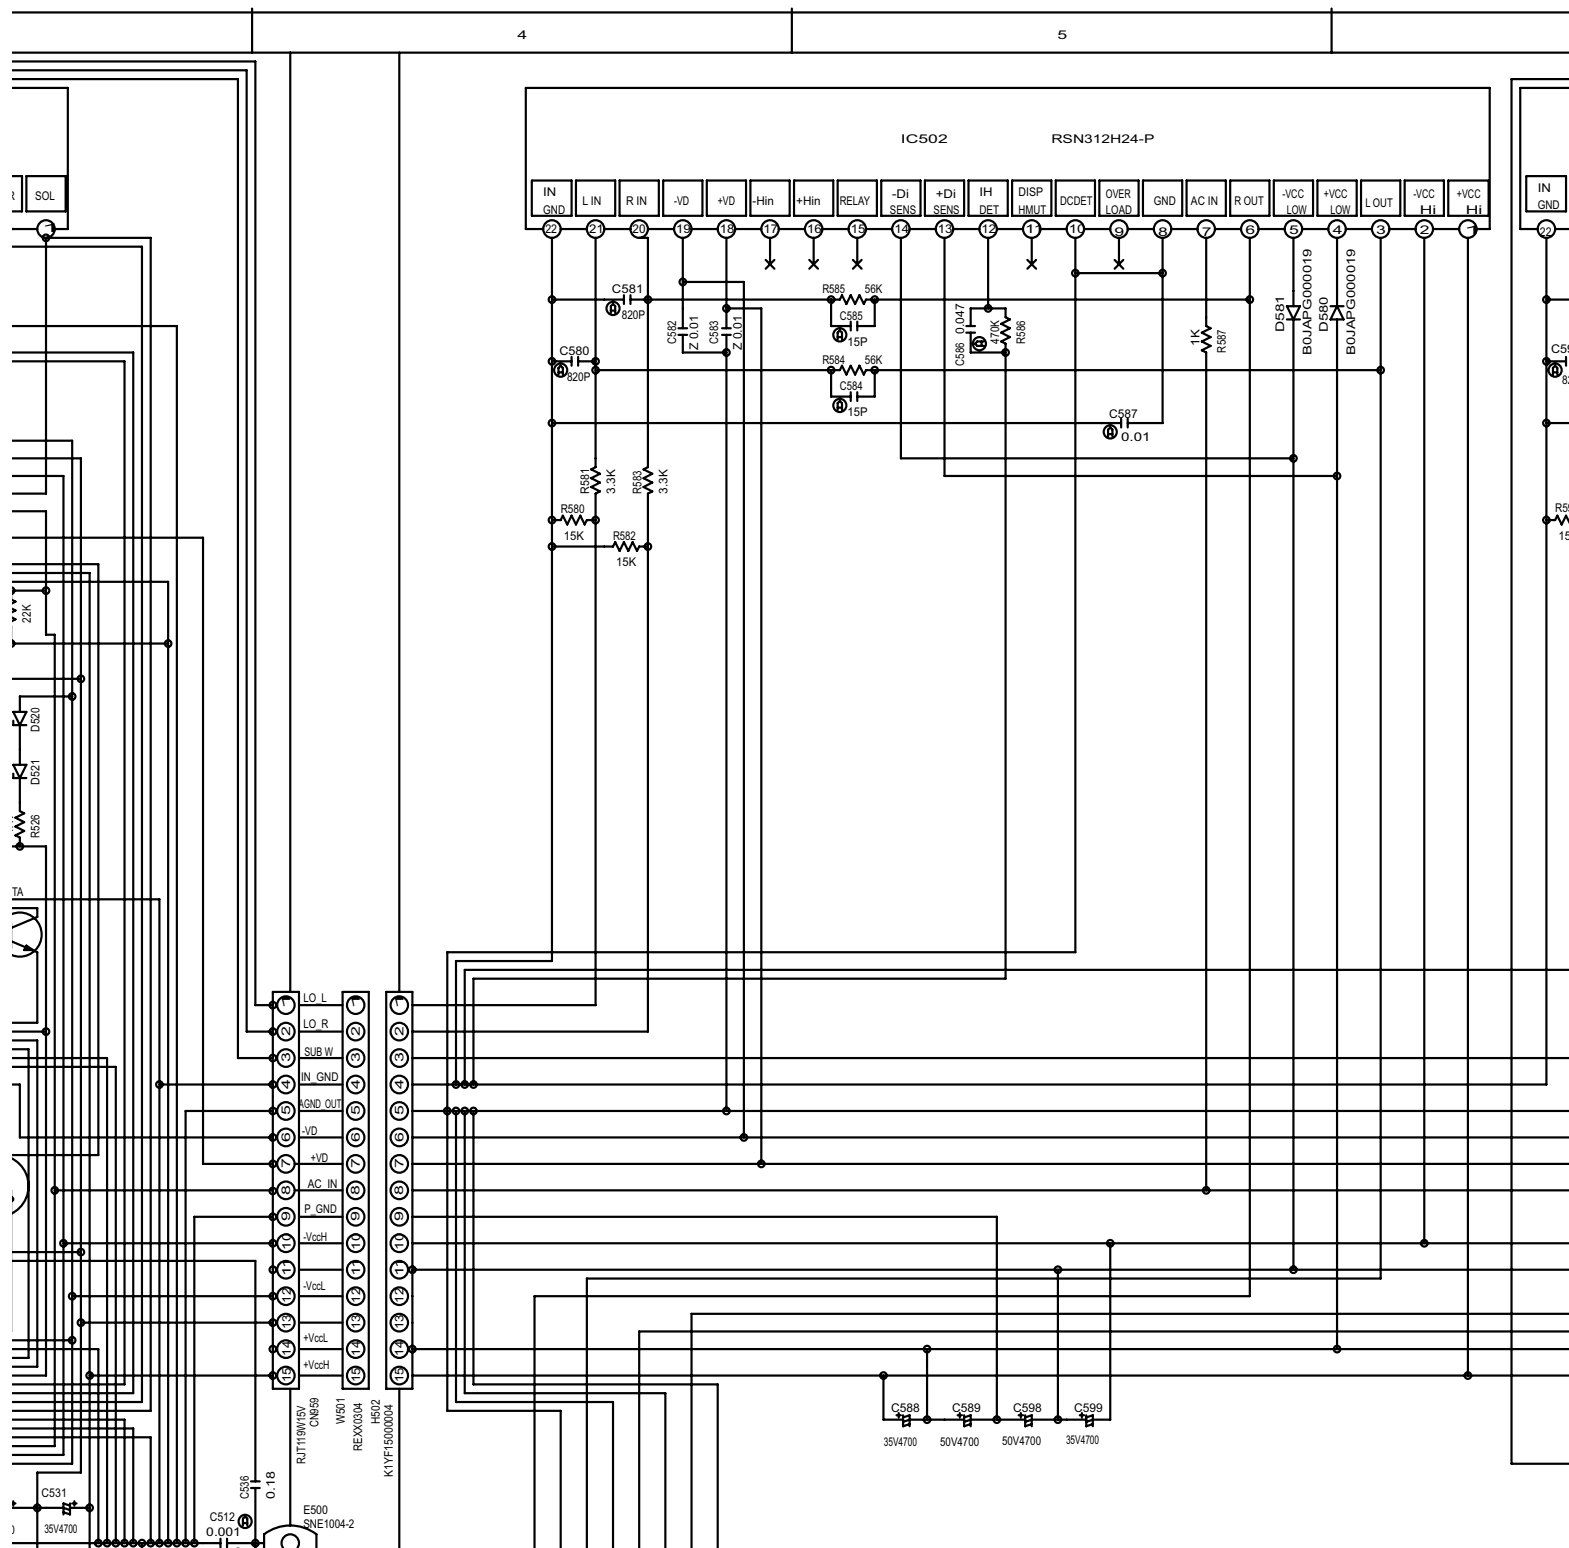

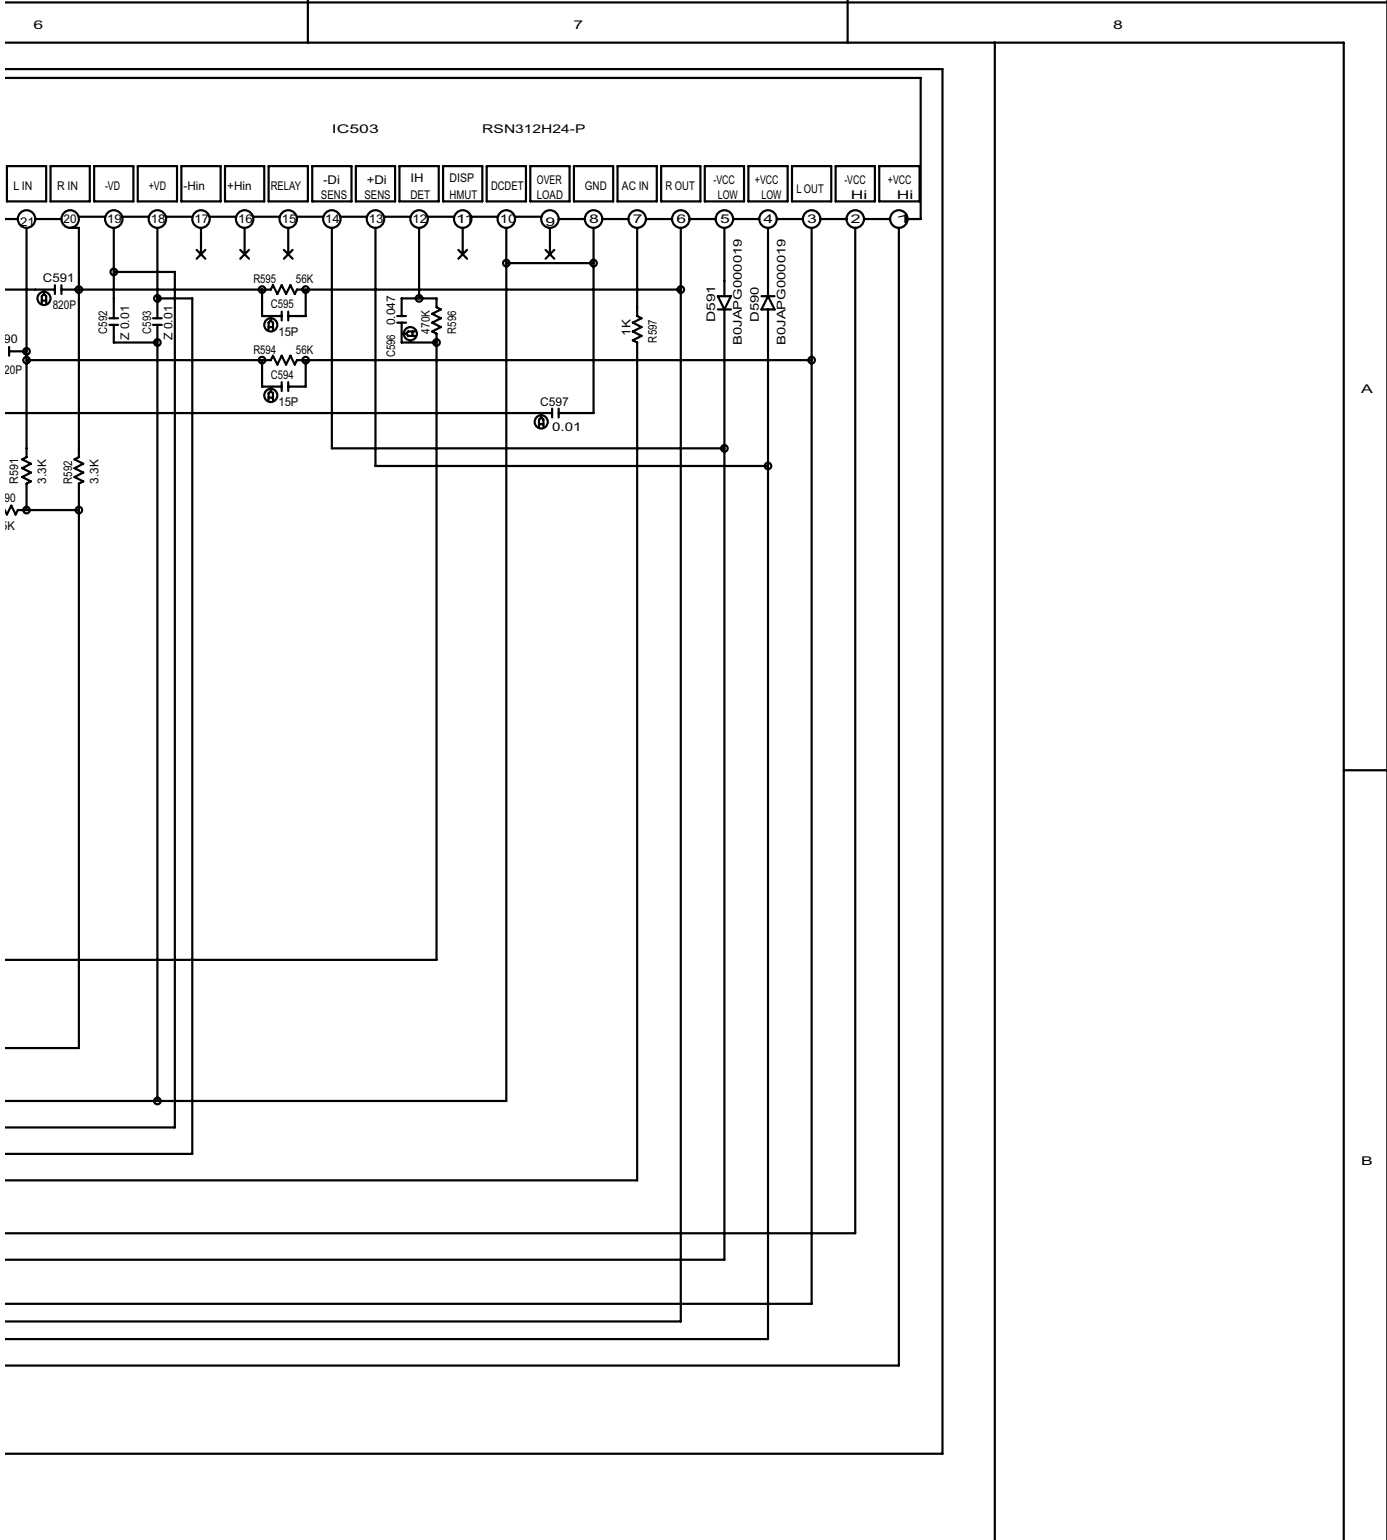

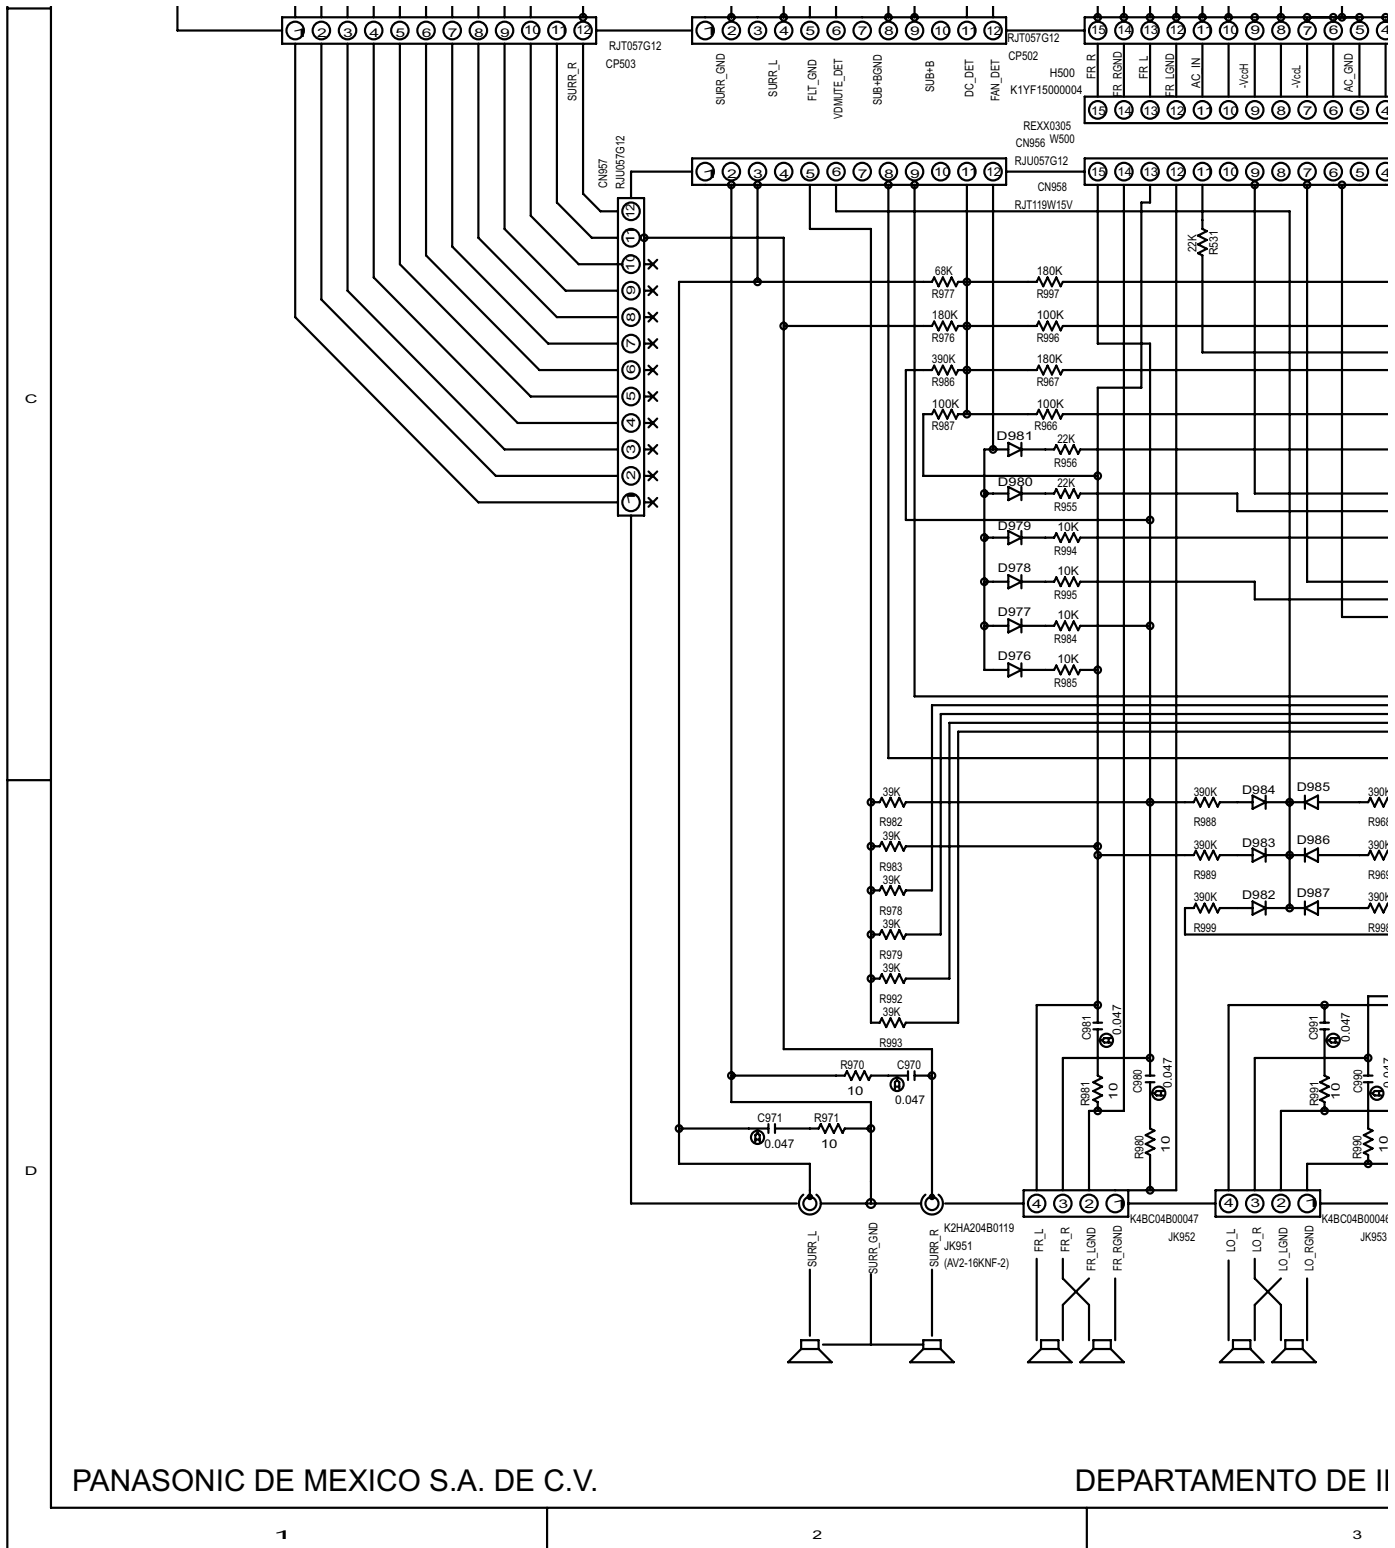

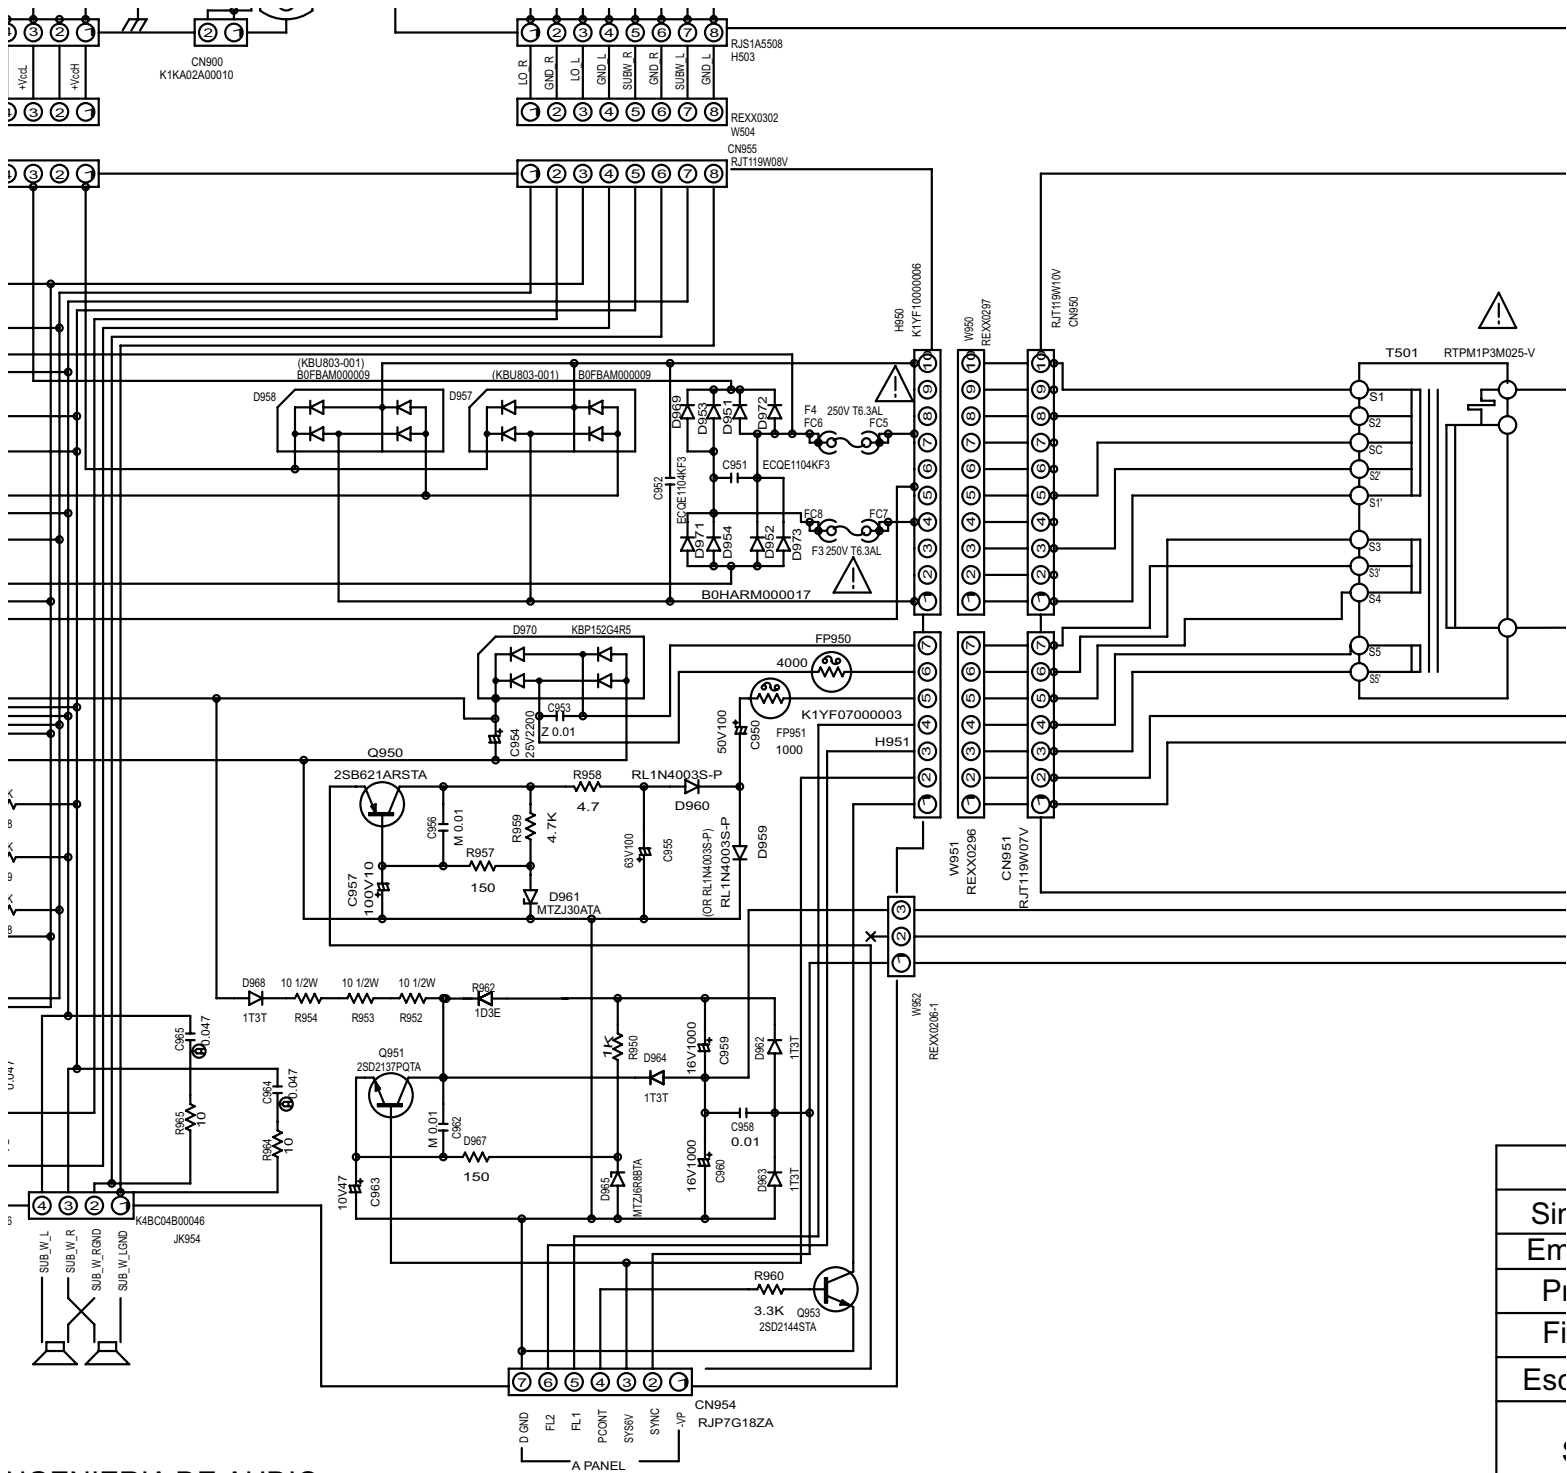

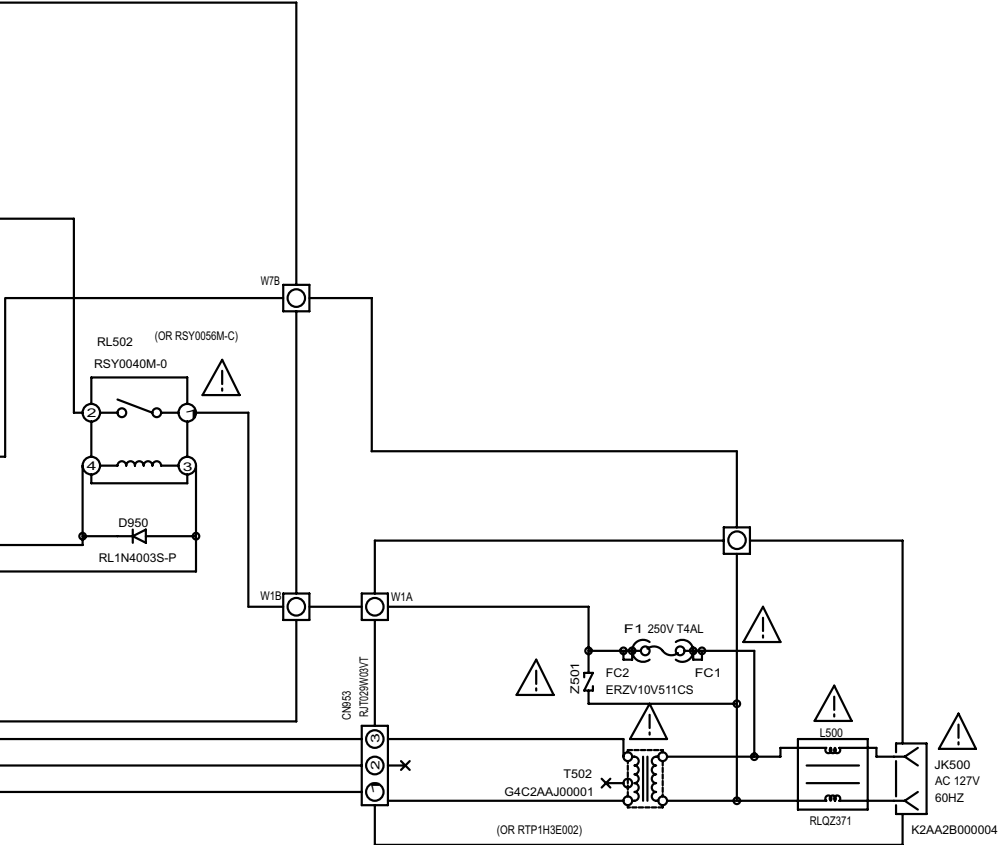

NOTA :
ESTE CIRCUITO ES
CORRECTO HASTA EL MOMENTO DE
SU EMISION. PARA CUALQUIER CAMBIO
DEBERA REFERIRSE A LA
INFORMACION DE INGENIERIA

	Código		Simbolo		DiAGRAMA ELECTRONICO	
Simbolo	Fecha		Sección	Nota	Proceso	
Revisión	02-02-04	Dpto. Ing. audio	Electrica	Panasonic	Modelo	SA-TM82AV
Revisión	02-02-04				No. de parte	RJBX0293A-2, RJBX0294A
Diseño	Diseño	Dibujó	Revisó	Aprobó	Nombre	Circuito poder /transform.
S/E	OCTAVIO I	OCTAVIO I				

PRINTING PCB BOARD

