

PIONEER®

Service Manual

SX-8

SPECIFICATIONS

Miscellaneous

Power Consumption	225W
-------------------------	------

Weight (without package) 15.2kg (33 lb 8 oz)

Furnished Parts

Fuse (8A) x 1
(4A) x 1

CONTRAST OF MISCELLANEOUS PARTS

NOTES:

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- For your Parts Stock Control, the fast moving items are indicated with the marks **★★** and **★**.
★★ GENERALLY MOVES FASTER THAN ★
 This classification shall be adjusted by each distributor because it depends on model number, temperature, humidity, etc.

ELECTRICAL PARTS


Mark	Symbol & Description	Part No.			Remarks
		KU type	S type	S/G type	
 ★	T1 Power transformer (120V) (110/120/220/240V)	ATT-882	 ATT-888	 ATT-888	110/120V 220/240V with fuse holder
 ★	T2 Power transformer (120V) (110/120/220/240V)	ATT-883	 ATT-887	 ATT-887	
 ★★	FU1 Fuse (8A) Fuse (4A)	AEK-304	(AEK-304) AEK-100	AEK-304 (AEK-100)	
 ★★	S36 Push switch (POWER)	ASG-534	ASG-533	ASG-533	
 ★★	S37 Line voltage selector		AKR-031	AKR-031	
 ★★	S38 Line voltage selector		AKX-063	AKX-063	
 ★★	S39 Slide switch (DE-EMPHASIS)		ASH-016	ASH-016	
 ★	C1,C2 Ceramic capacitor	ACG-017	ACG-001	ACG-001	
 ★	R1 Carbon composition resistor (2.2M/½W)	ACN-029			
 ★	AC power cord	ADG-052	ADG-049	ADG-049	

PACKING AND FURNISHED PARTS


Mark	Symbol & Description	Part No.			Remarks
		KU type	S type	S/G type	
	Packing case	AHE-019	AHE-019	AHE-021	
	Inside packing	AHC-063	AHC-063	AHC-064	
	Cardboard spacer			AHB-111	
	Operating instructions	ARB-467	ARB-468	ARB-468	
	Station card set	AAN-028	AAN-029	AAN-029	
 ★★	Fuse (8A)		AEK-304	AEK-304	
 ★★	Fuse (4A)		AEK-100	AEK-100	

- When replacing the tuner assembly (GWE-178) of S and S/G types, cut the resistor R33 (connected in parallel with R34).

D



NOTE:
The indicated semiconductors are representative ones only. Other alternative semiconductors may be used and are listed in the parts list.

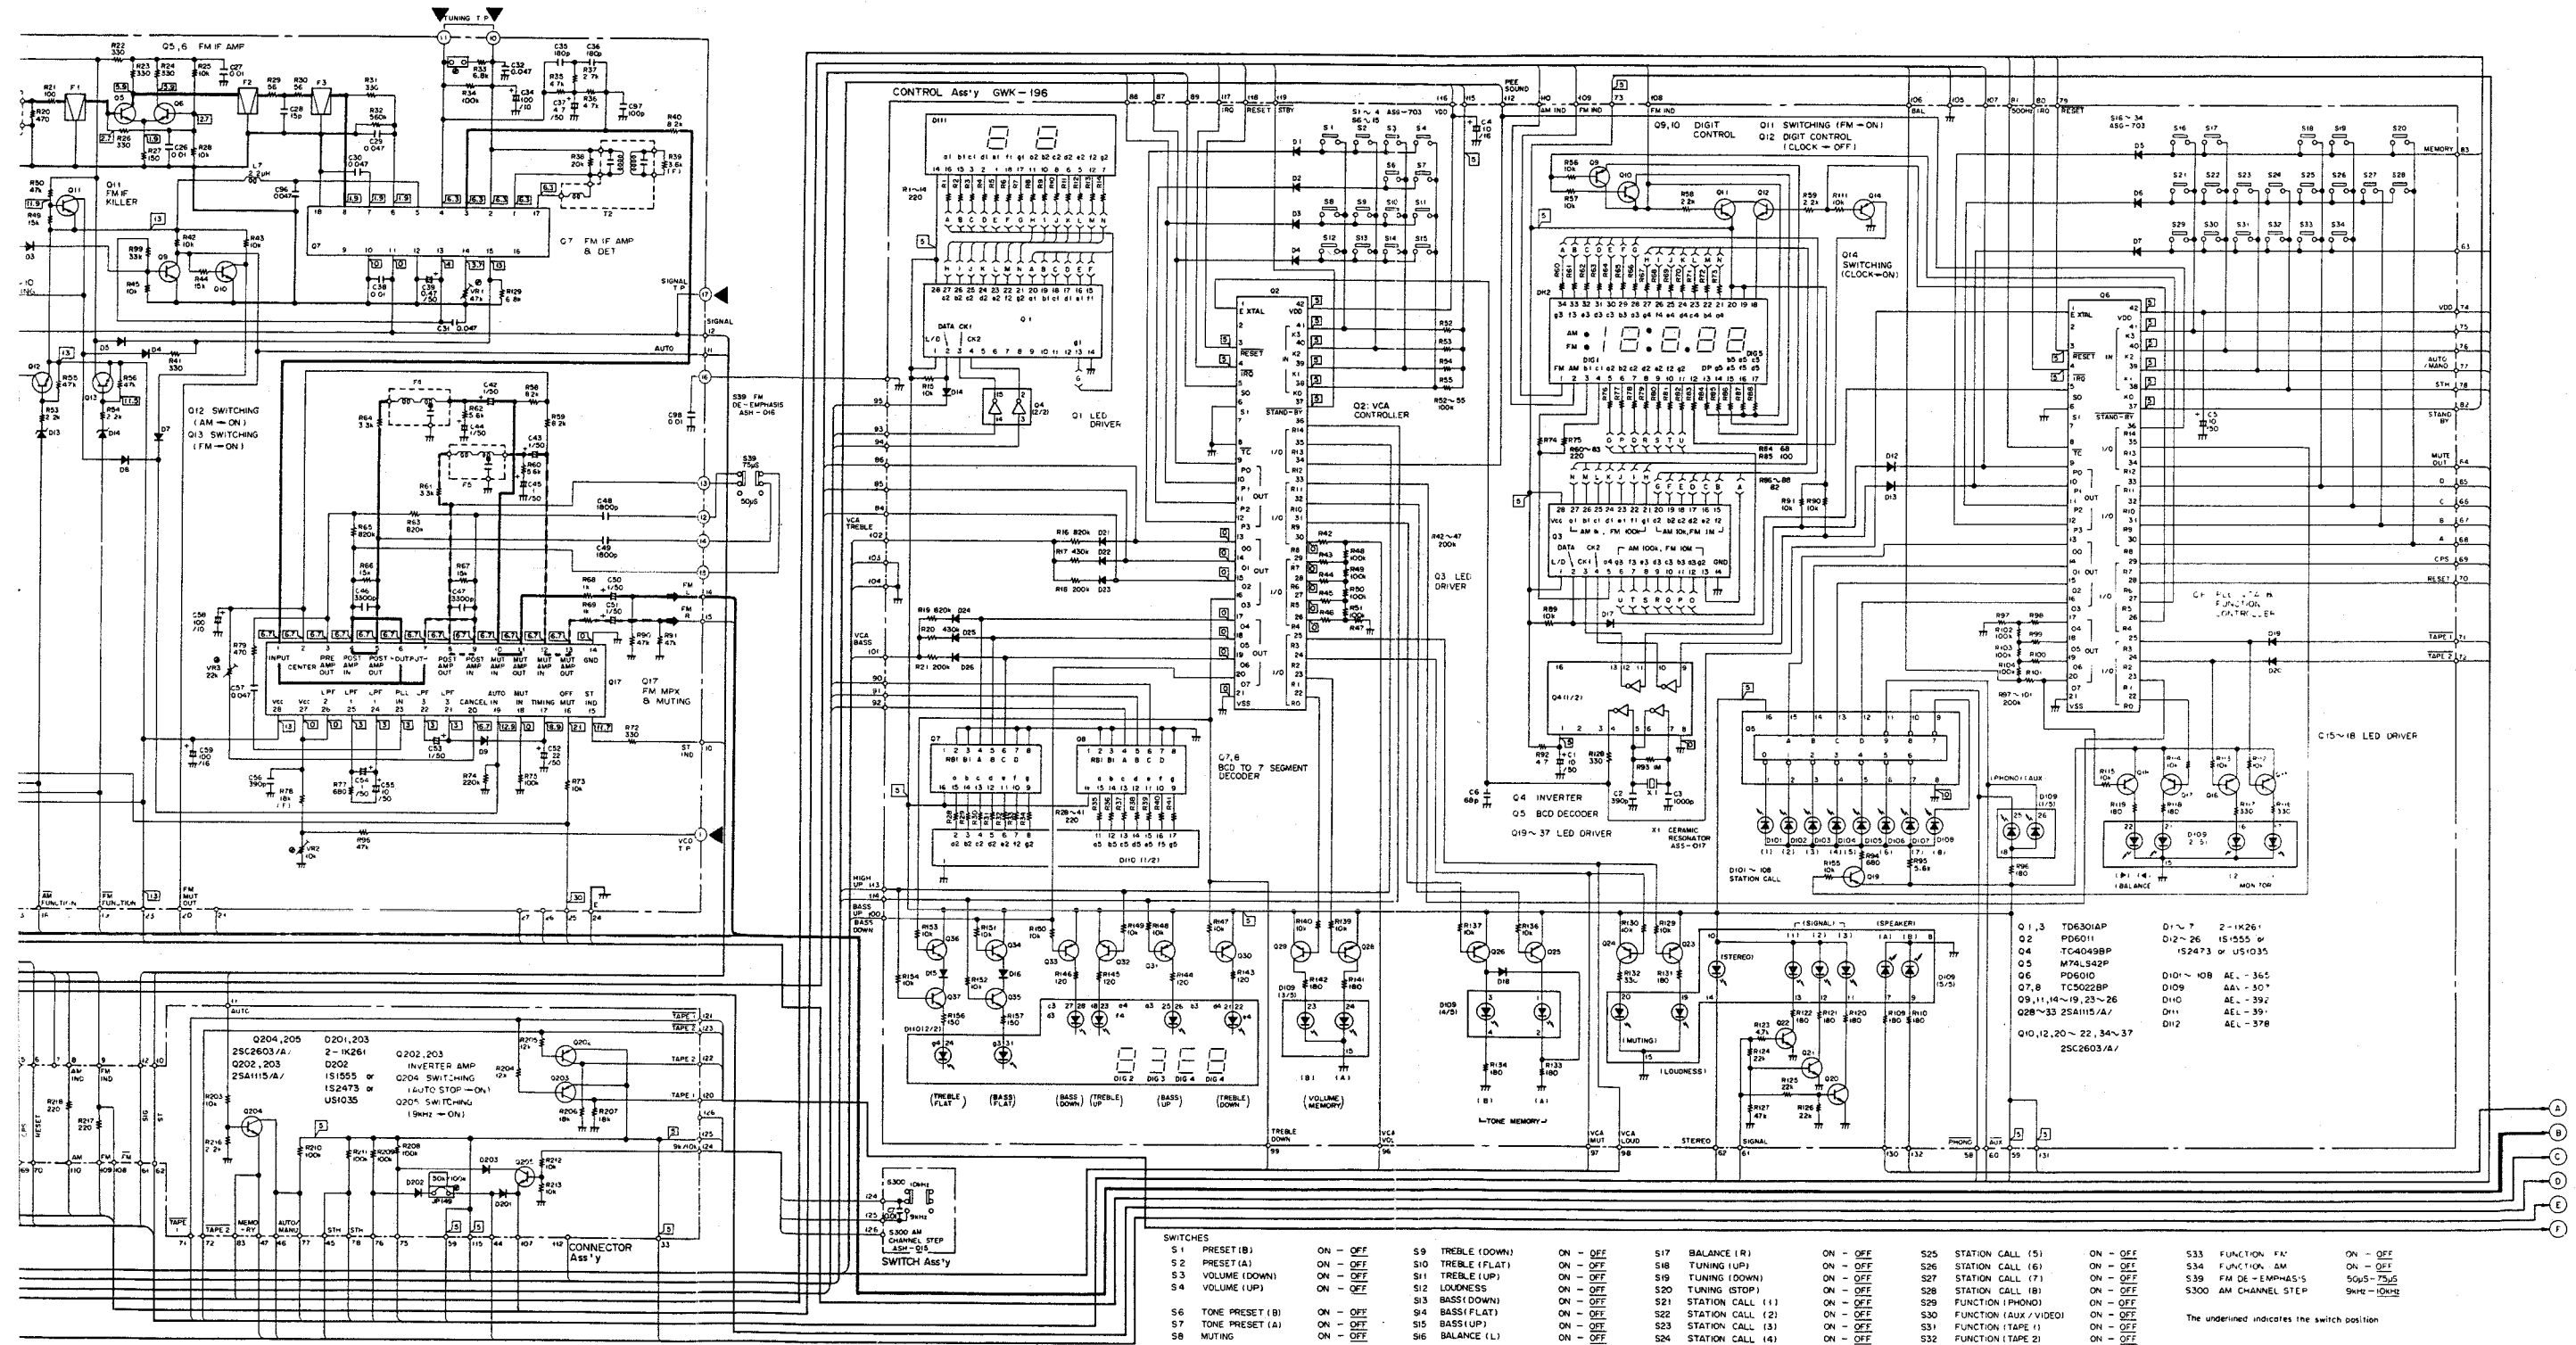


A
B
C
D

D



NOTE:
The indicated semiconductors are representative ones only. Other alternative semiconductors may be used and are listed in the parts list.

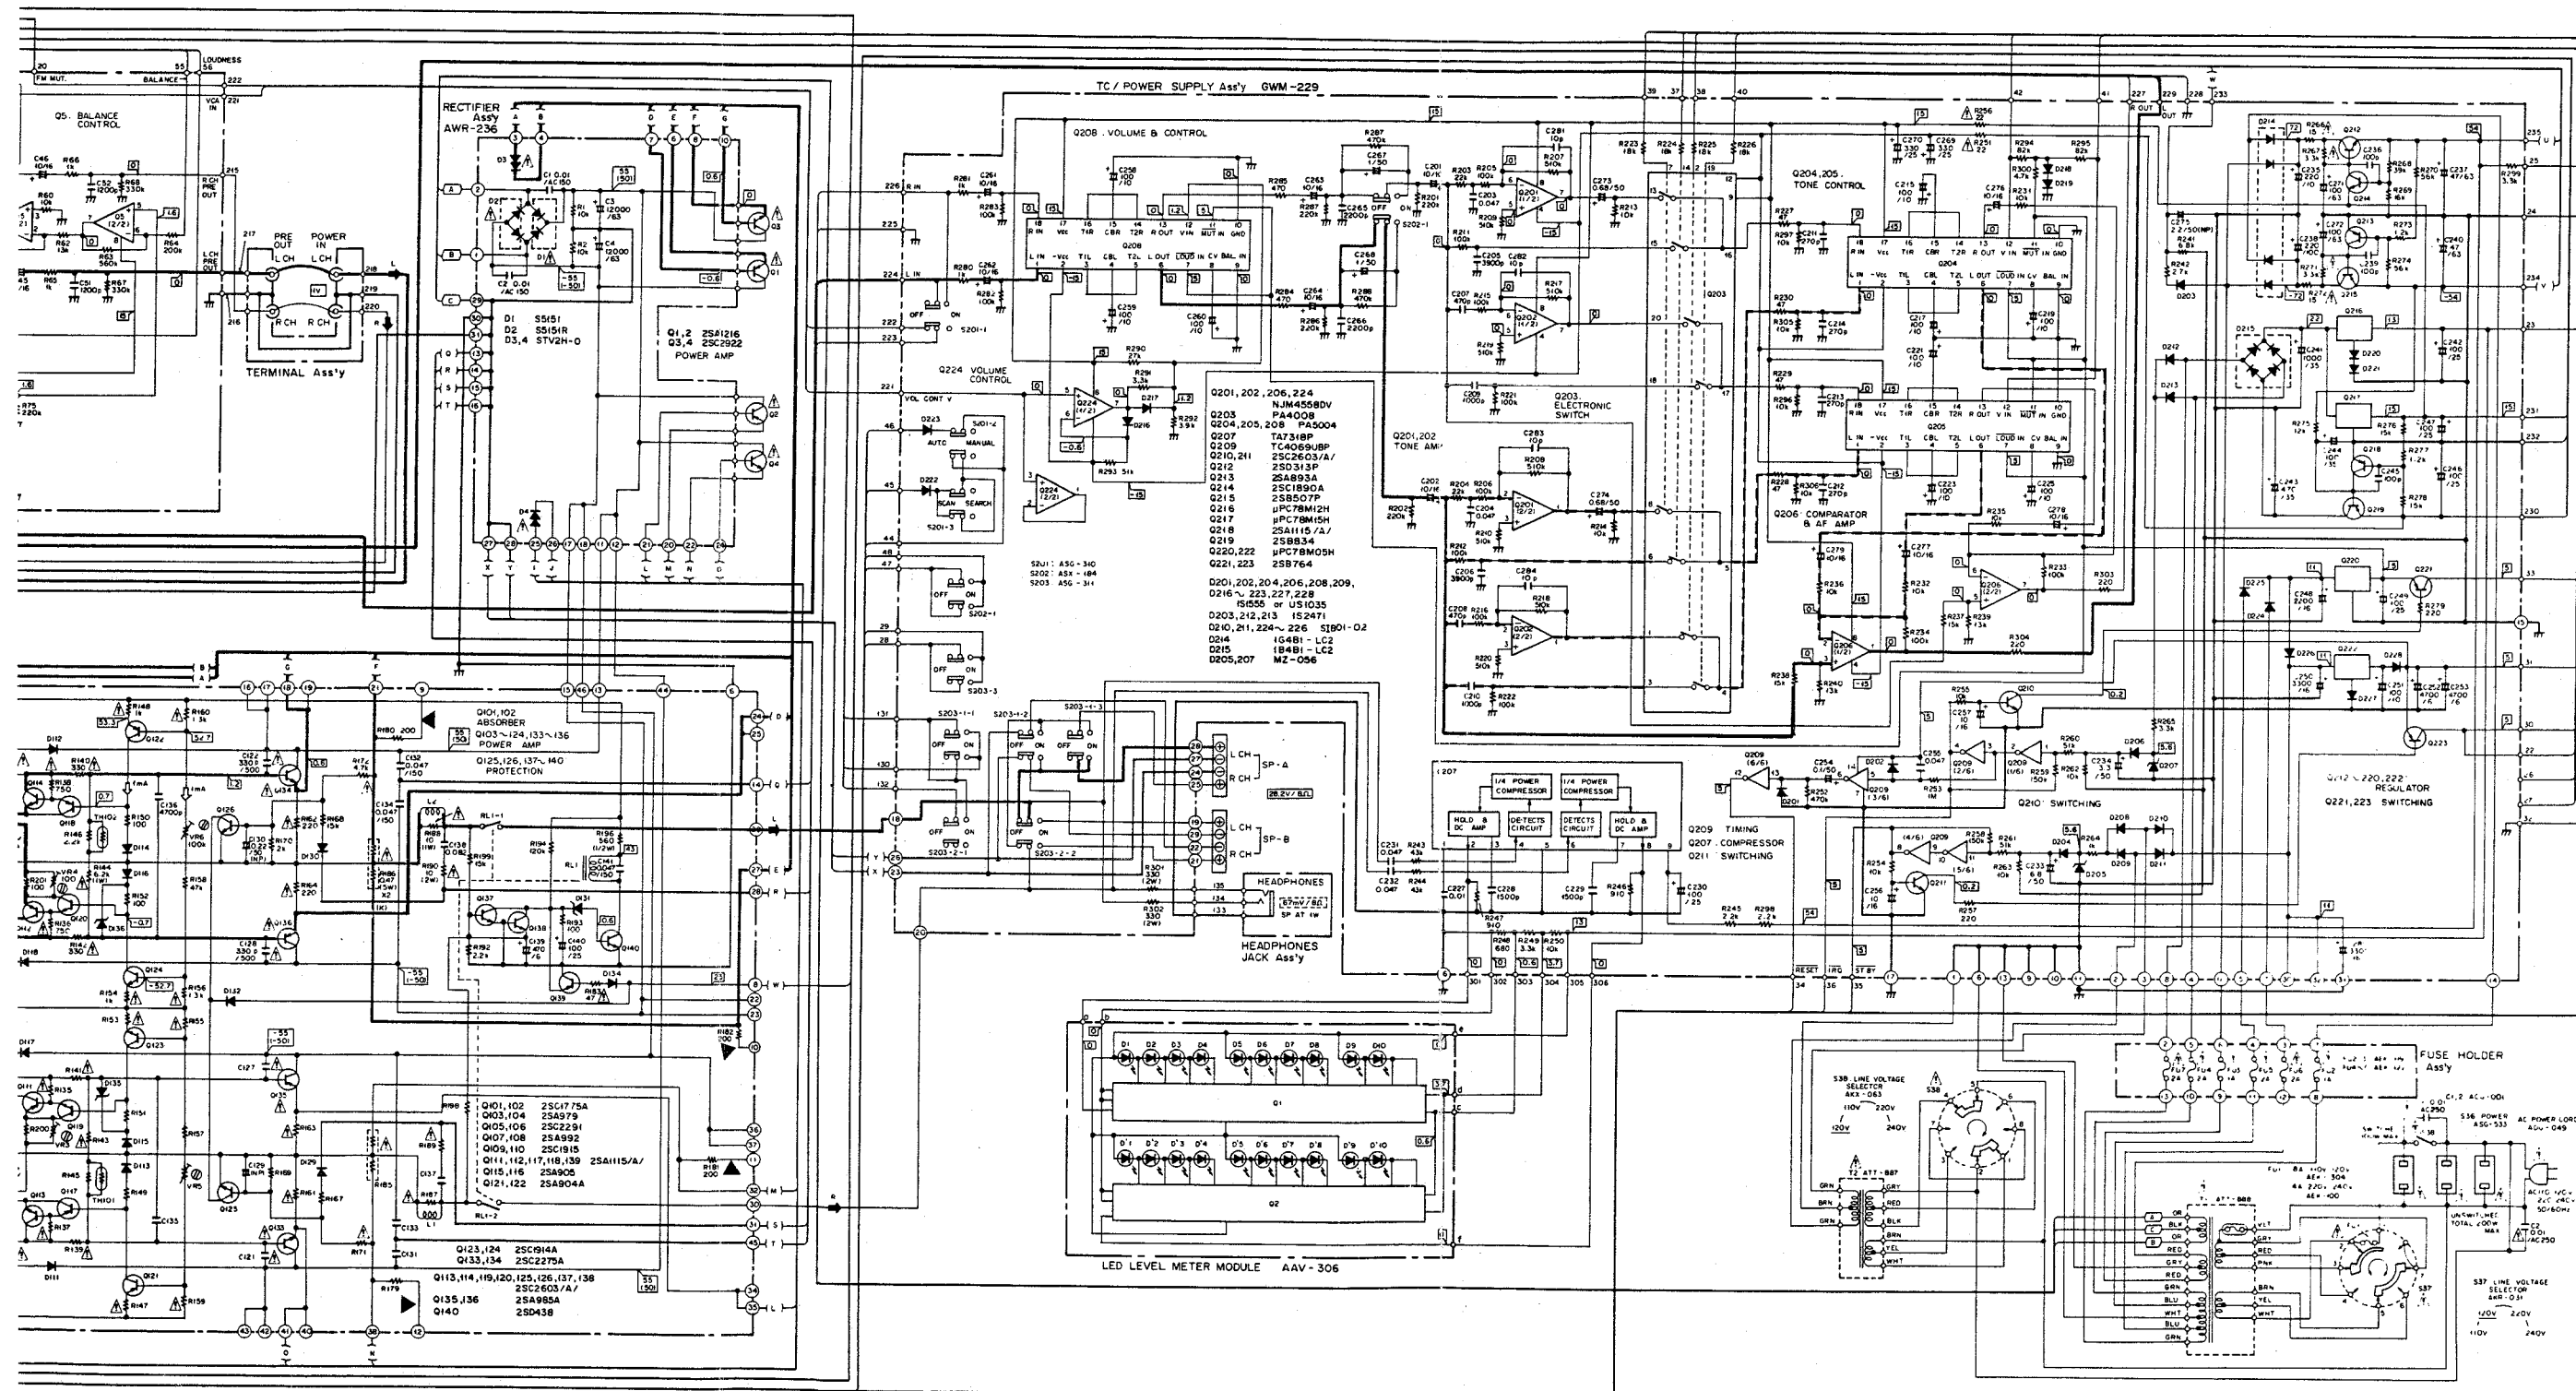

A

B

C

D

CORRECTION TO SERVICE MANUAL

(1 / 1)

PIONEER

No. SI-A38015
Date. Dec. 14, 1983

MODEL: SX-8

[ARP-043]

PAGE: 24, 29 (Q213)

Eingegangen
23. Jan. 1984
Ganglia


Please correct Service Manual as follows:

P. 24


ORIGINAL

CORRECTION

2SA839A



2SA893A



P. 29

ORIGINAL

CORRECTION

SEMICONDUCTORS

Mark	Part No.	Symbol & Description
★★	NJM4558DV	Q201, Q202, Q206, Q224
★★	PA4008	Q203
★★	PA5004	Q204, Q205, Q208
★★	TC4069UBP	Q209
★★	TA7318P-A	Q207
★★	μPC78M05H	Q220, Q222
★★	μPC78M12H	Q216
★★	μPC78M15H	Q217
★★	2SA839A	Q213
★★	2SA1115/A/	Q218
★★	2SB507P	Q215
★★	2SB764	Q221, Q223
★★	2SB834	Q219
★★	2SC1890A	Q214
★★	2SC2603/A/	Q210, Q211



SEMICONDUCTORS

Mark	Part No.	Symbol & Description
★★	NJM4558DV	Q201, Q202, Q206, Q224
★★	PA4008	Q203
★★	PA5004	Q204, Q205, Q208
★★	TC4069UBP	Q209
★★	TA7318P-A	Q207
★★	μPC78M05H	Q220, Q222
★★	μPC78M12H	Q216
★★	μPC78M15H	Q217
★★	2SA893A	Q213
★★	2SA1115/A/	Q218
★★	2SB507P	Q215
★★	2SB764	Q221, Q223
★★	2SB834	Q219
★★	2SC1890A	Q214
★★	2SC2603/A/	Q210, Q211

PIONEER ELECTRONIC CORPORATION

(38-018, SMM-KI-SU 30)

T. Nakagawa, Manager
Service Section, International Division