


MULTIPLEX ALIGNMENT USING FM STEREO GENERATOR AND AUDIO OSCILLATOR

SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
19KC to MPX Input.	Vert. In-put to pin 2 of V <sub>1</sub> , low side to ground.	A1	Adjust for maximum.
"	Vert. In-put to pin 2 of V <sub>2</sub> , low side to ground.	A2	Adjust for maximum. Set scope to lock in 2 cycle waveform.
"	Vert. In-put to point $\diamond$ , low side to ground.	A3	Adjust for maximum 4 cycle waveform.
67KC to MPX Input	"	A4, A5	Adjust for MINIMUM.
20 KC to point $\diamond$ low side to ground.	Vert. In-put to point $\diamond$ , low side to ground.	A6	Adjust for MINIMUM.

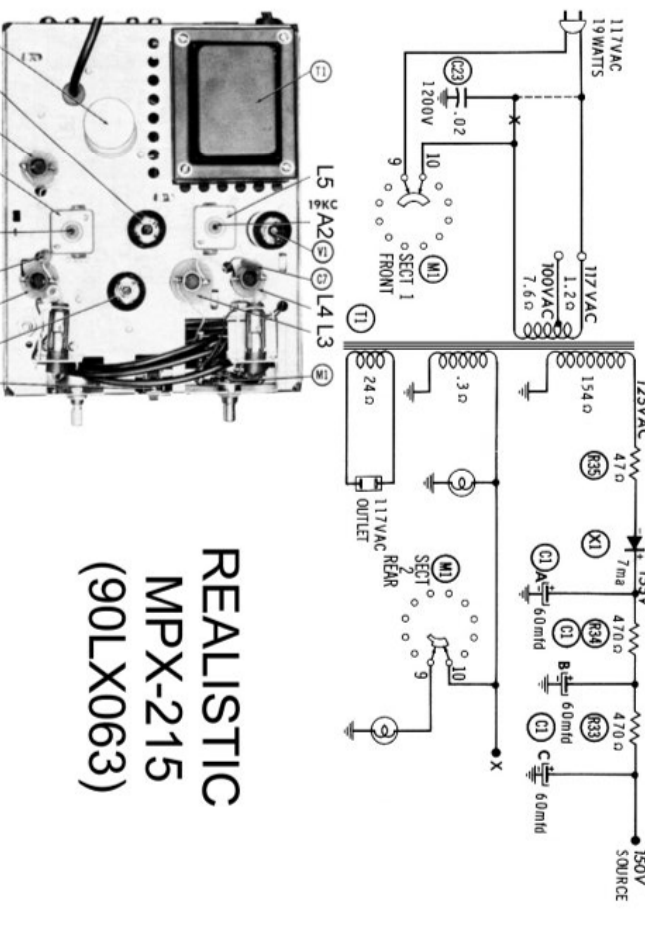

**REALISTIC**  
**MPX-215**  
**(90LX063)**