


STEREO AMPLIFIER

SA-7500II

KC

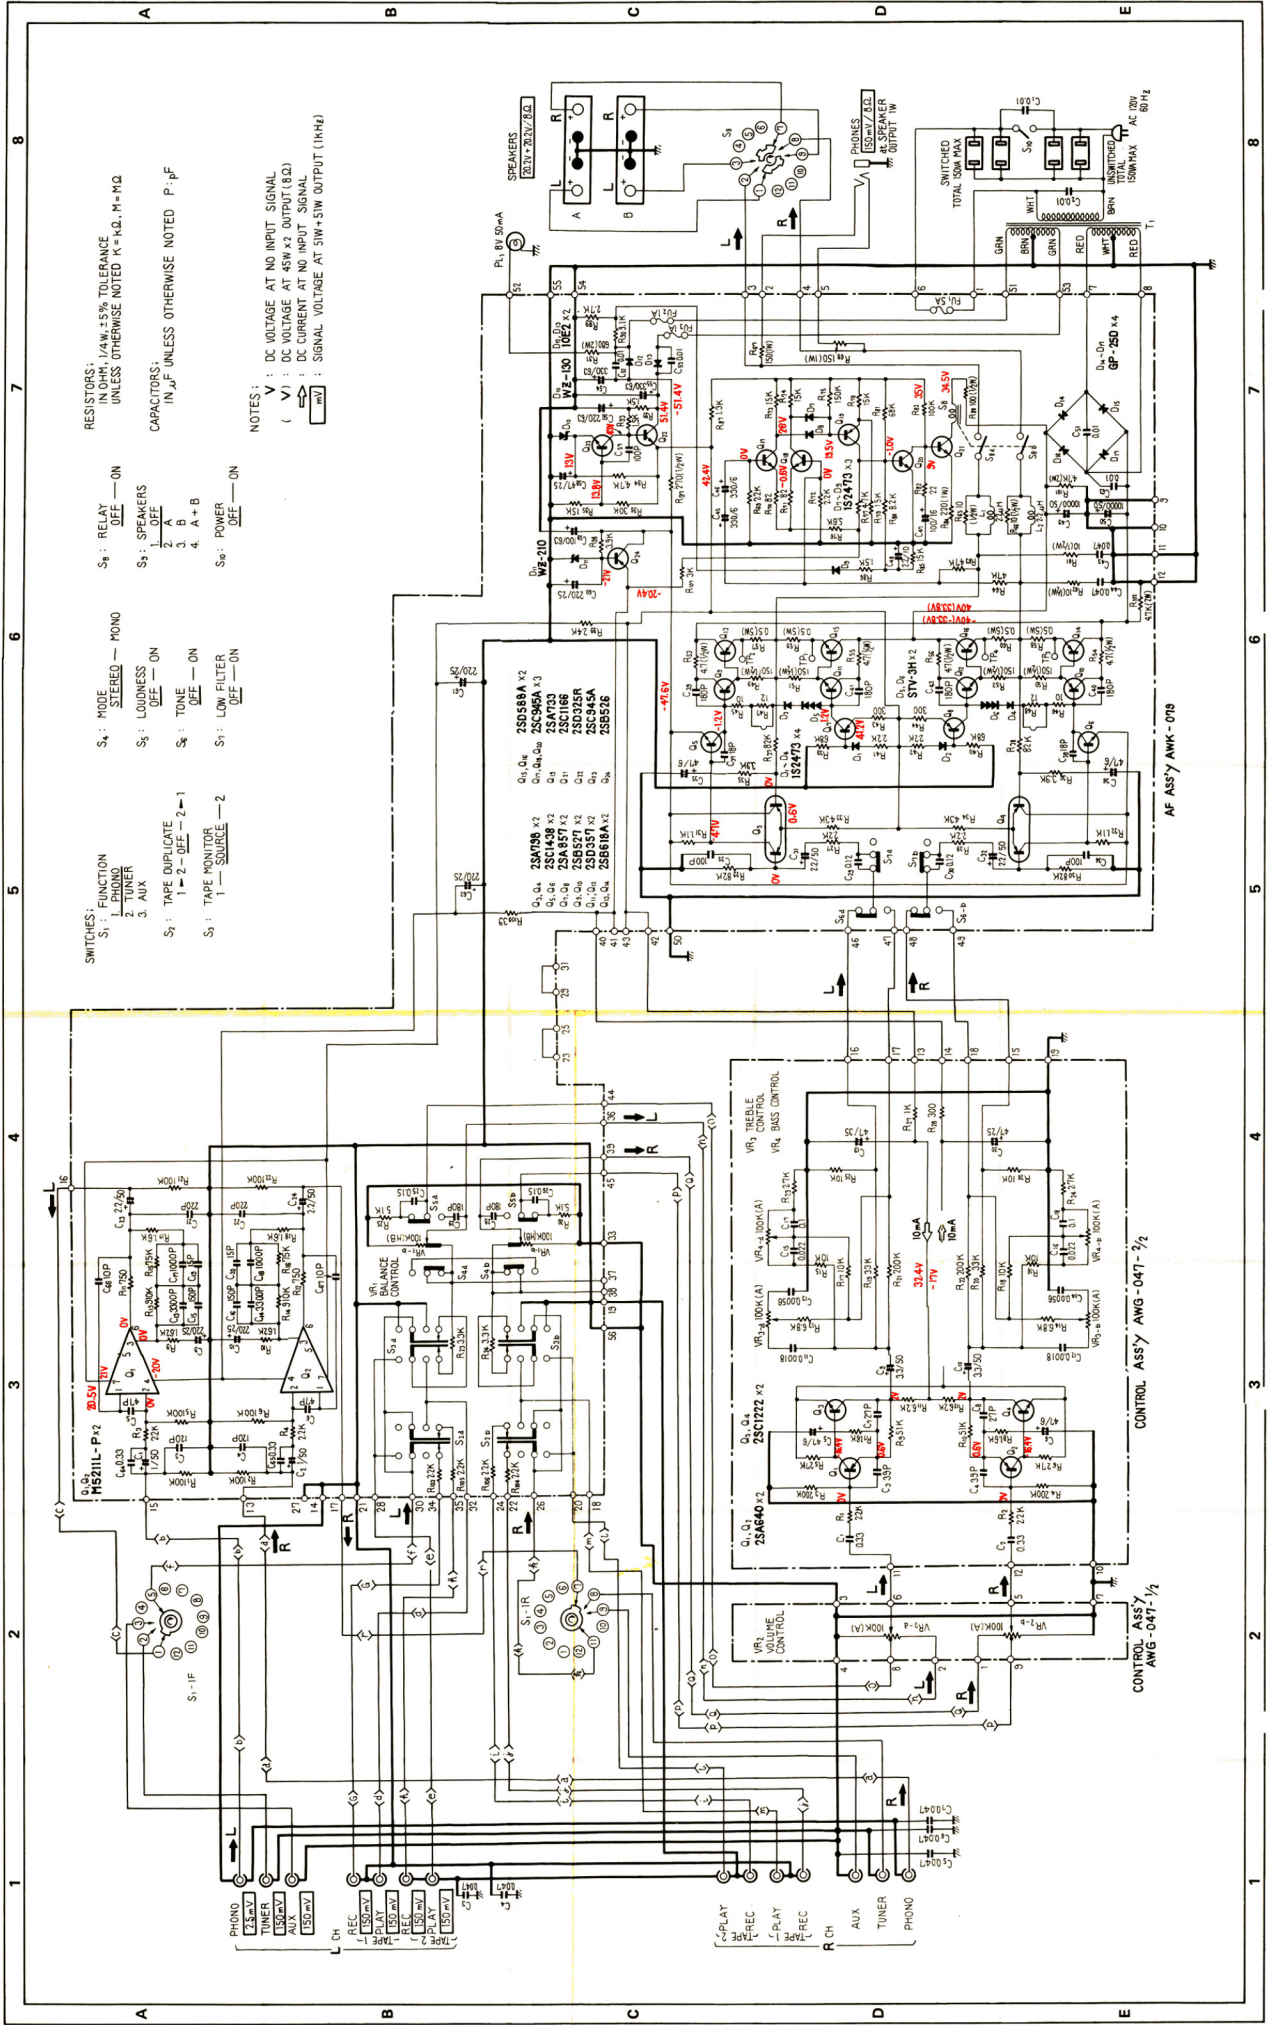

- SWITCHES:**
S₁: FUNCTION
1. PHONO
2. TUNER
3. AUX
S₂: TAPE DUPLICATE
1 → 2 → DEF → 2 → 1
S₃: TAPE MONITOR
1 → SOURCE → 2
- S₄: MODE**
STEREO — MONO
DEF — ON
- S₅: LOUDNESS**
DEF — ON
2. A
3. B
4. A + B
- S₆: TONE**
DEF — ON
A + B
- S₇: LOW FILTER**
DEF — ON
- S₈: RELAY**
DEF — ON
- S₉: SPEAKERS**
2. A
3. B
4. A + B
- S₁₀: POWER**
DEF — ON

RESISTORS:
IN OHM, 1/4W, ±5% TOLERANCE
UNLESS OTHERWISE NOTED K = KΩ, M = MΩ

CAPACITORS:
IN μF UNLESS OTHERWISE NOTED P = pF

NOTES:
V : DC VOLTAGE AT NO INPUT SIGNAL
(V) : DC VOLTAGE AT 45W X2 OUTPUT (Ω2)
I : DC CURRENT AT NO INPUT SIGNAL
[mV] : SIGNAL VOLTAGE AT 31W+31W OUTPUT (1KHz)