


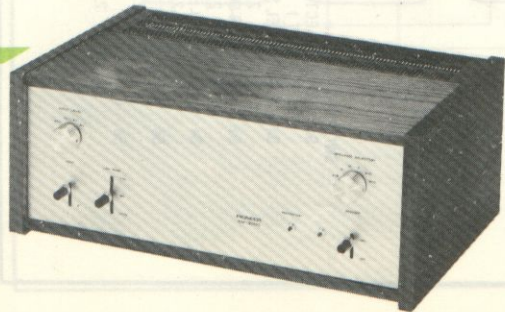



STEREO POWER AMPLIFIER

SM-3000


NVW NW


7

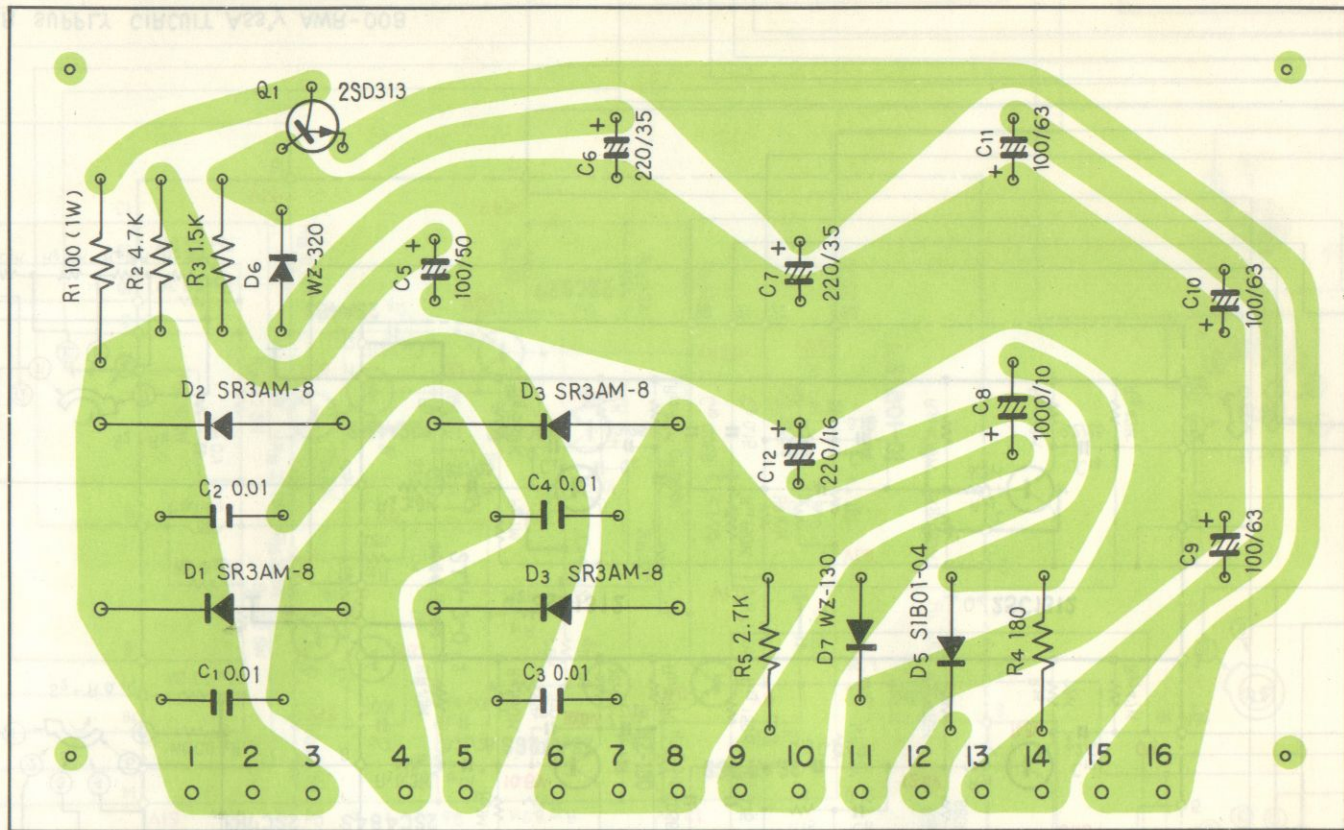


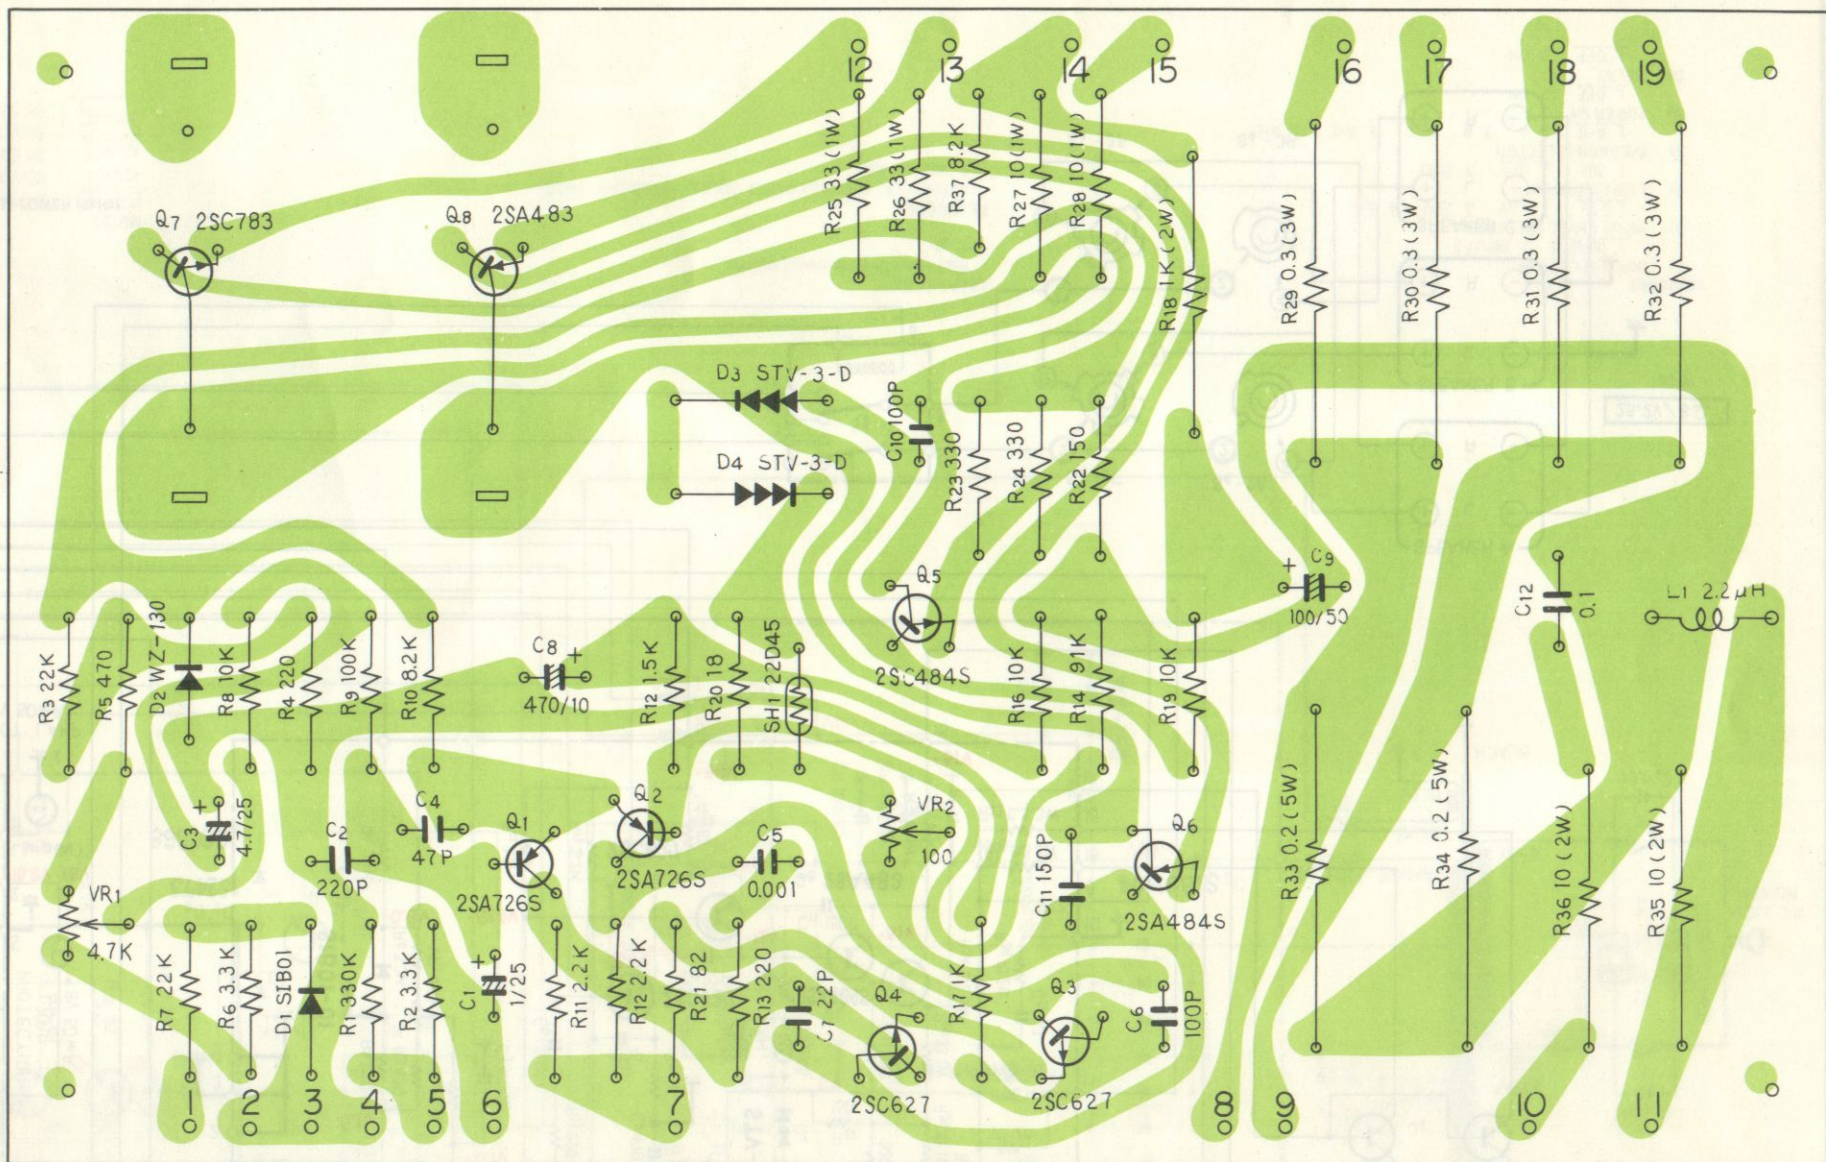


Filter amp ass'y AWM-015

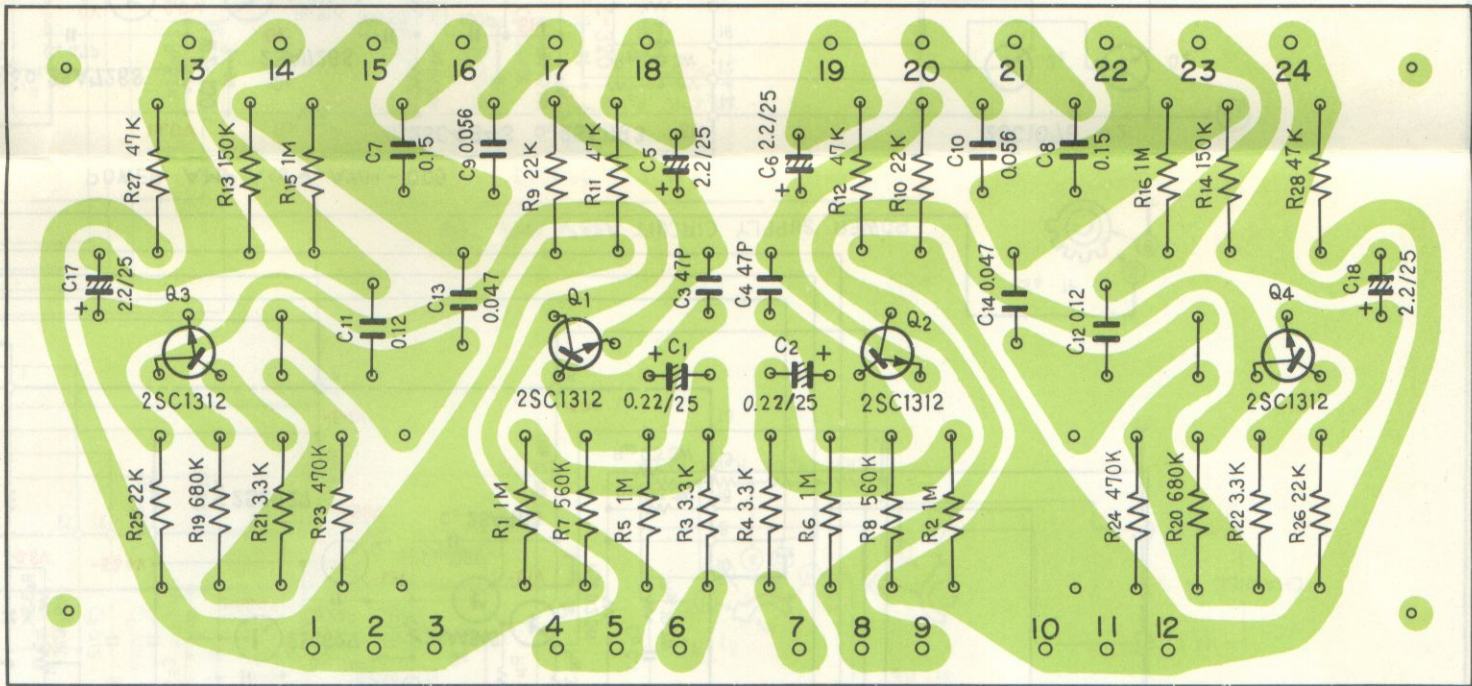

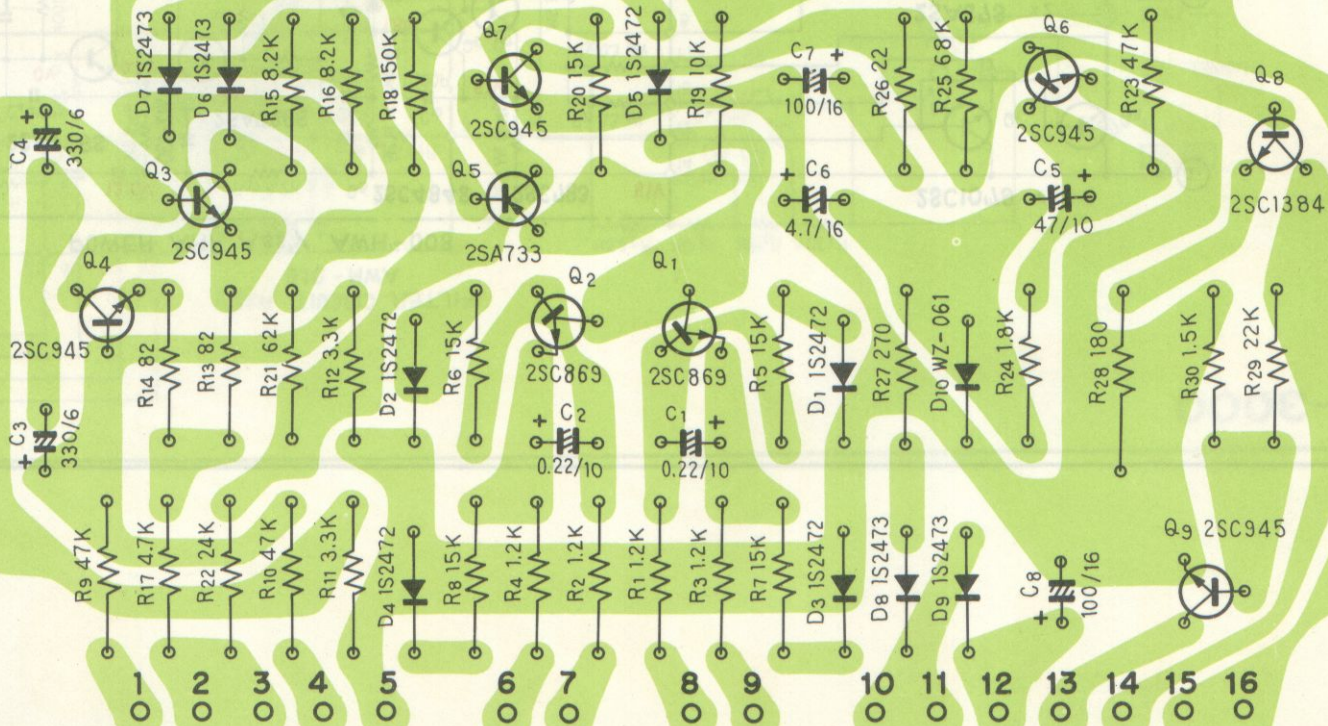

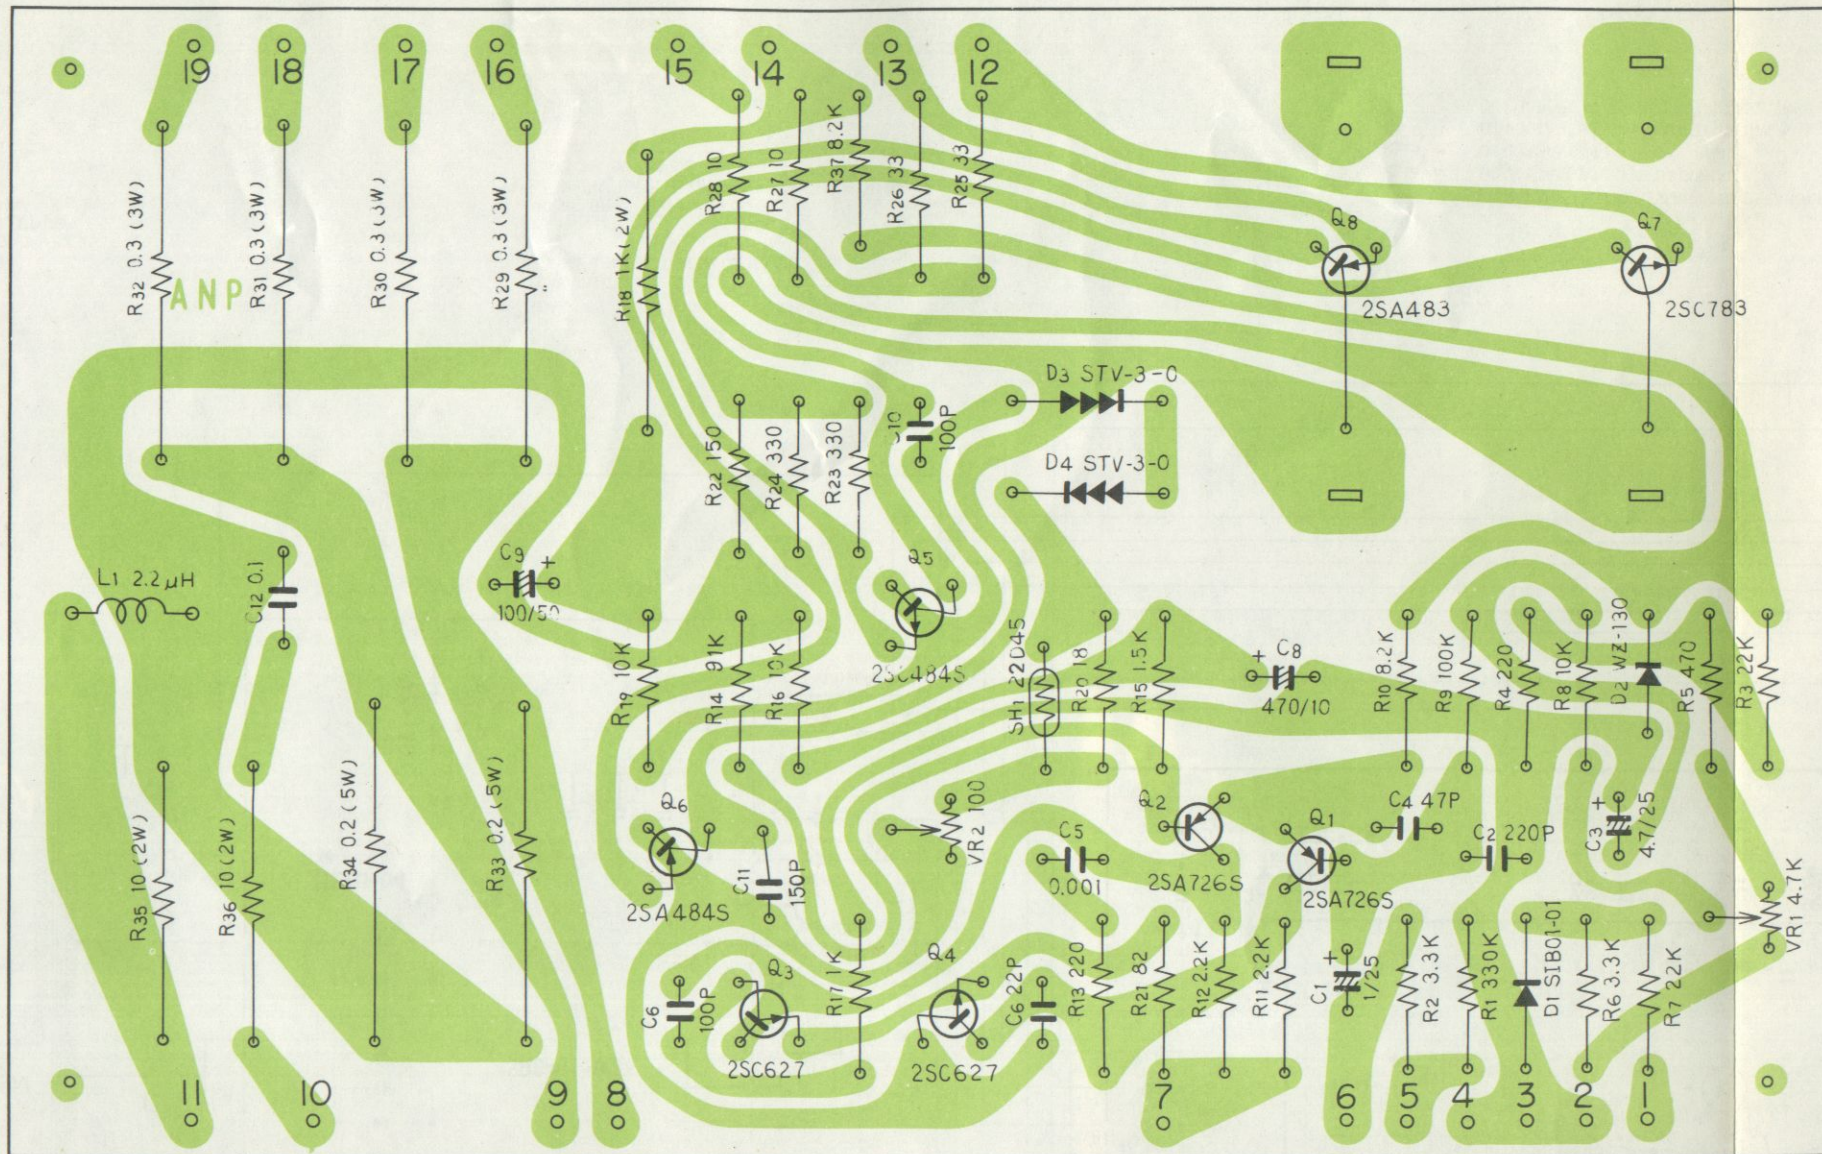

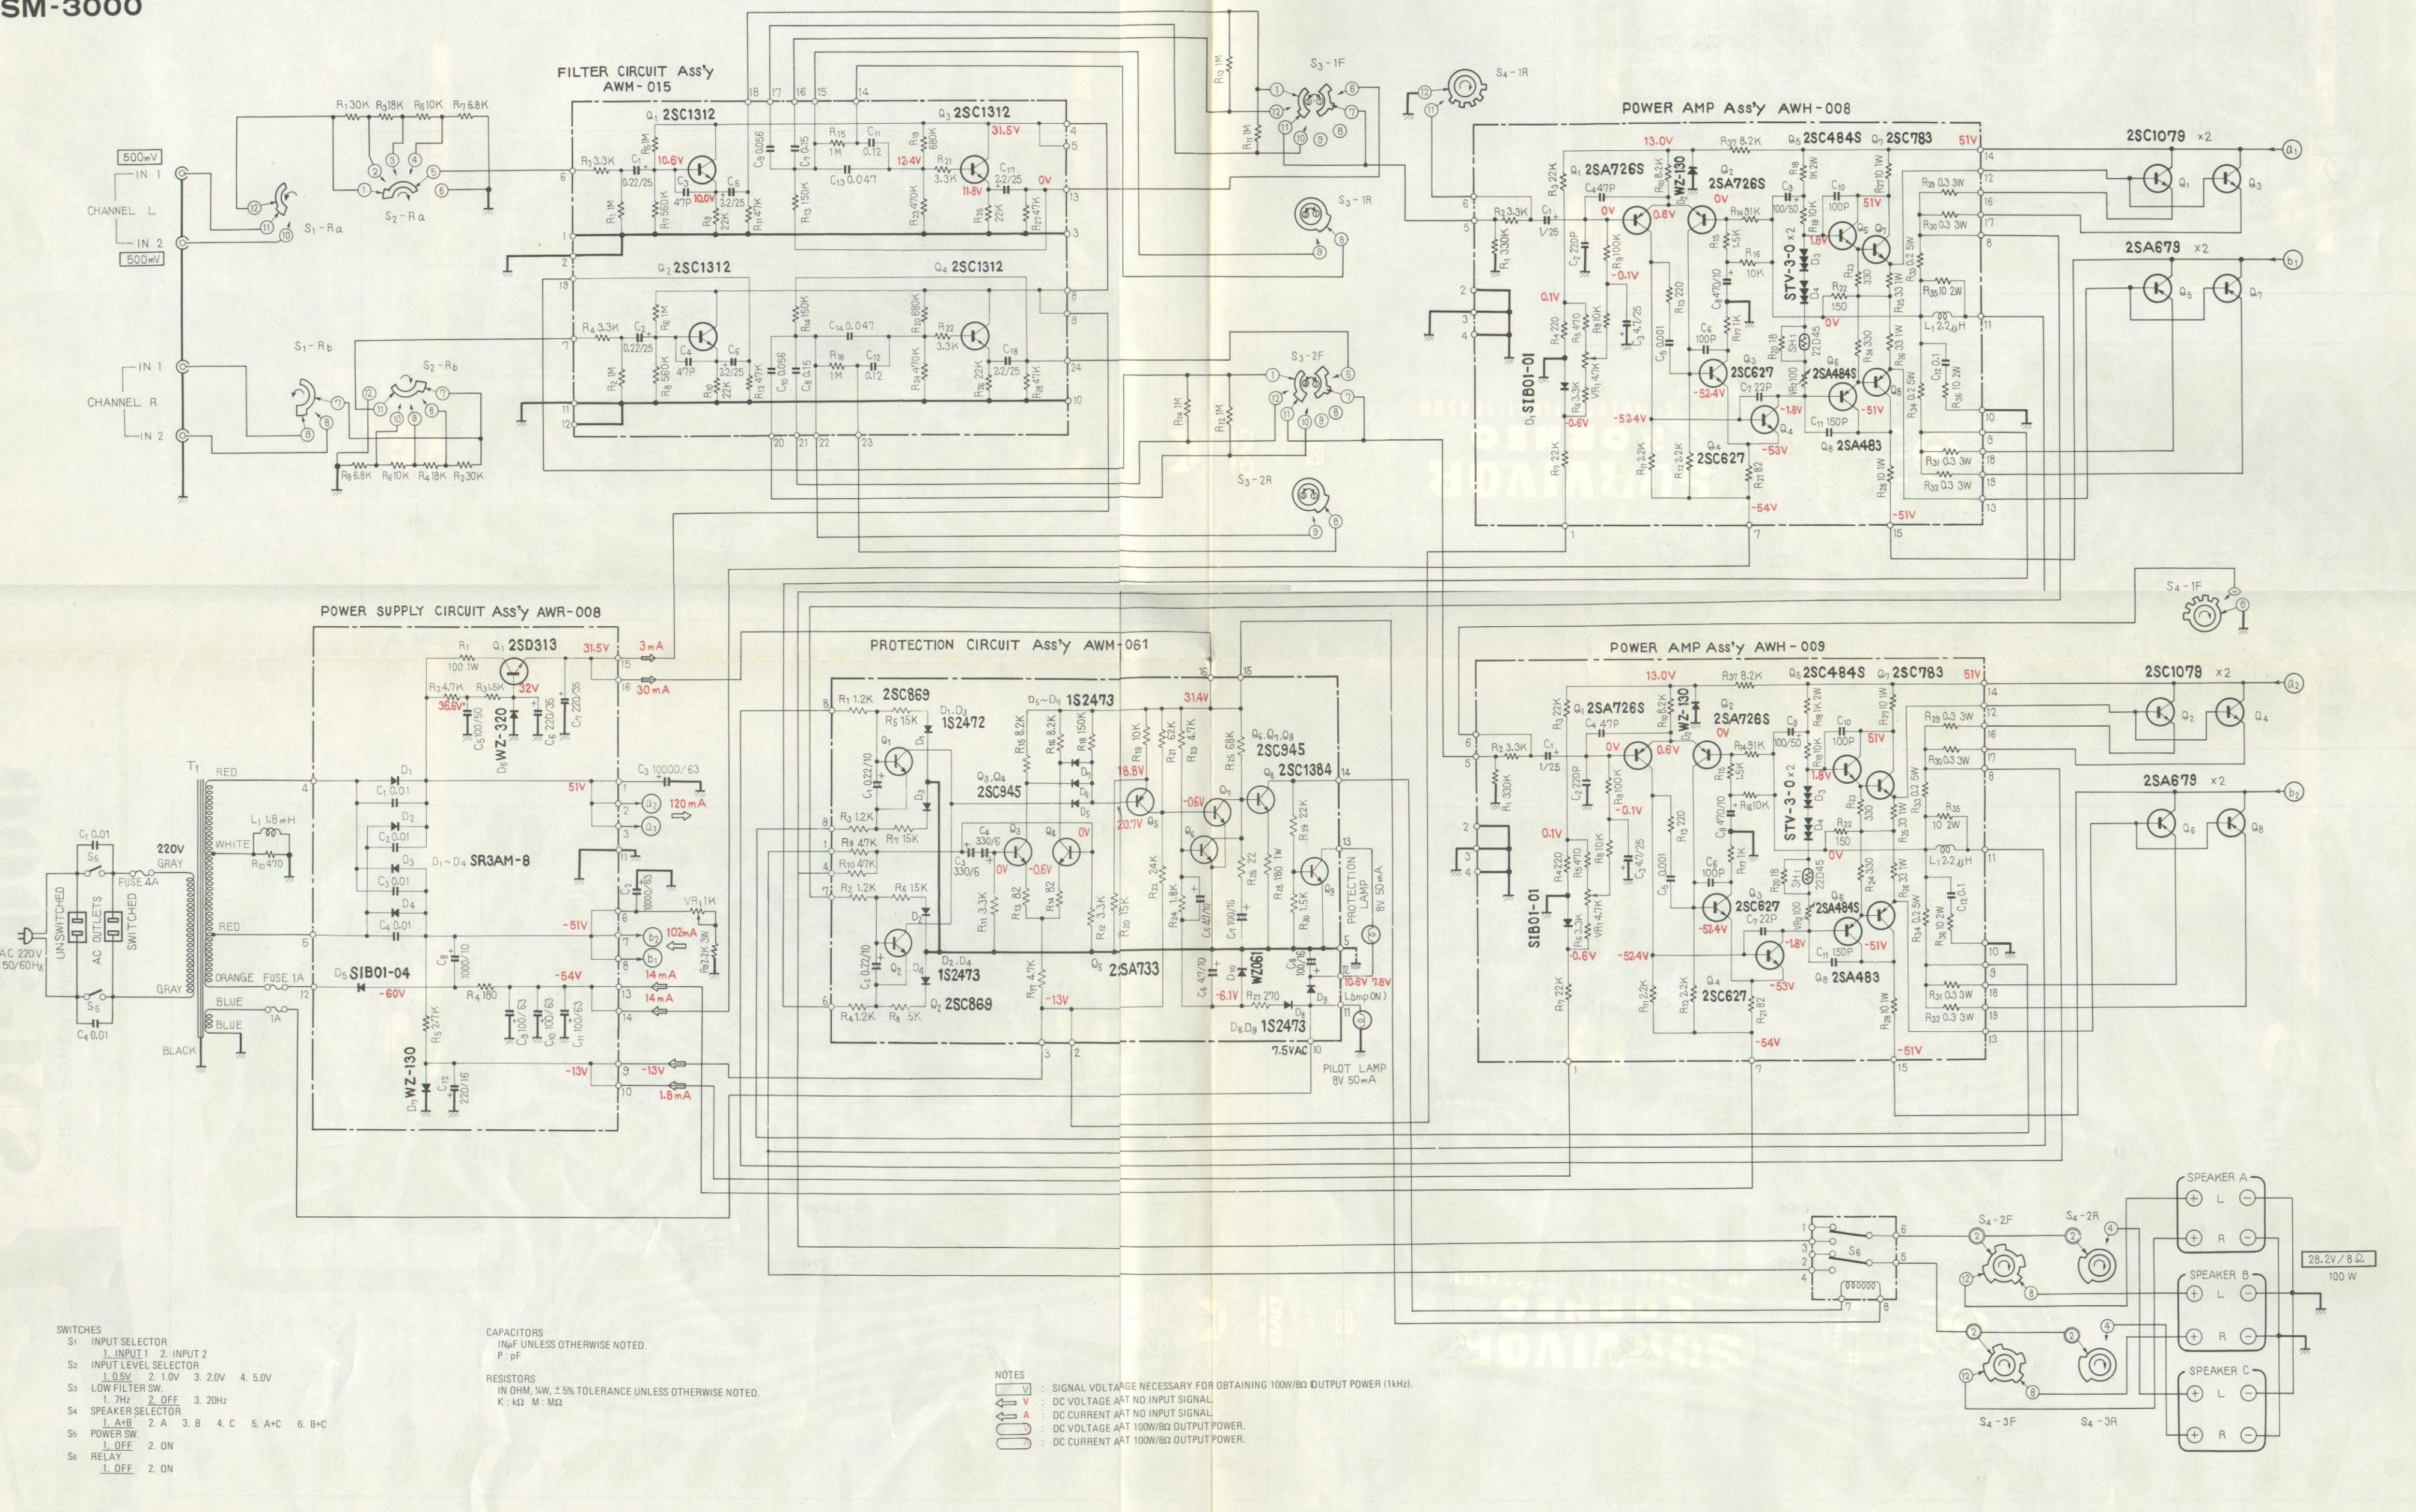

- SWITCHES**
- S1 INPUT SELECTOR
1. INPUT 1 2. INPUT 2
 - S2 INPUT LEVEL SELECTOR
1. 0.5V 2. 1.0V 3. 2.0V 4. 5.0V
 - S3 LOW FILTER SW.
1. 7Hz 2. OFF 3. 20Hz
 - S4 SPEAKER SELECTOR
1. A+B 2. A 3. B 4. C 5. A+C 6. B+C
 - S5 POWER SW.
1. OFF 2. ON
 - S6 RELAY
1. OFF 2. ON

- CAPACITORS**
IN μF UNLESS OTHERWISE NOTED.
P: pF
- RESISTORS**
IN OHM, %W, ±5% TOLERANCE UNLESS OTHERWISE NOTED.
K: K M: M Ω

- NOTES**
- V: SIGNAL VOLTAGE NECESSARY FOR OBTAINING 100W/8Ω OUTPUT POWER (1kHz).
 - V: DC VOLTAGE AAT NO INPUT SIGNAL.
 - A: DC CURRENT AAT NO INPUT SIGNAL.
 - V: DC VOLTAGE AAT 100W/8Ω OUTPUT POWER.
 - A: DC CURRENT AAT 100W/8Ω OUTPUT POWER.