



7. BLOCK DIAGRAM





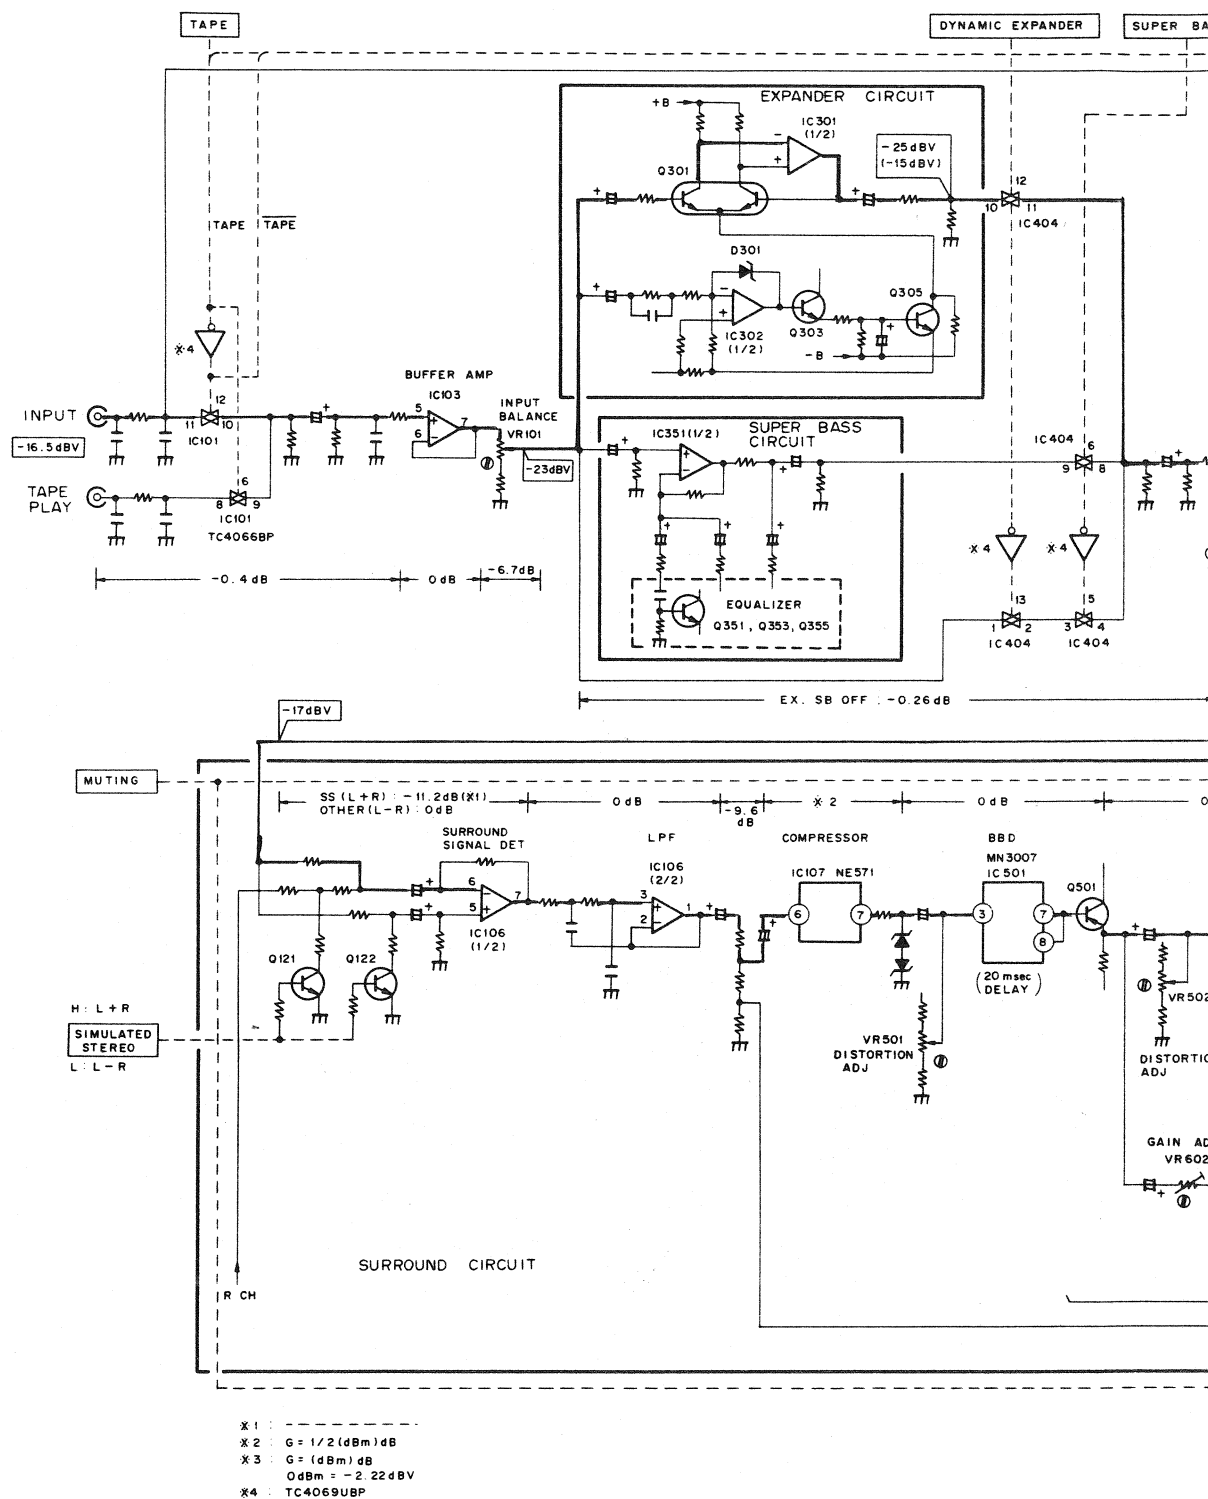


DER SUPER BASS

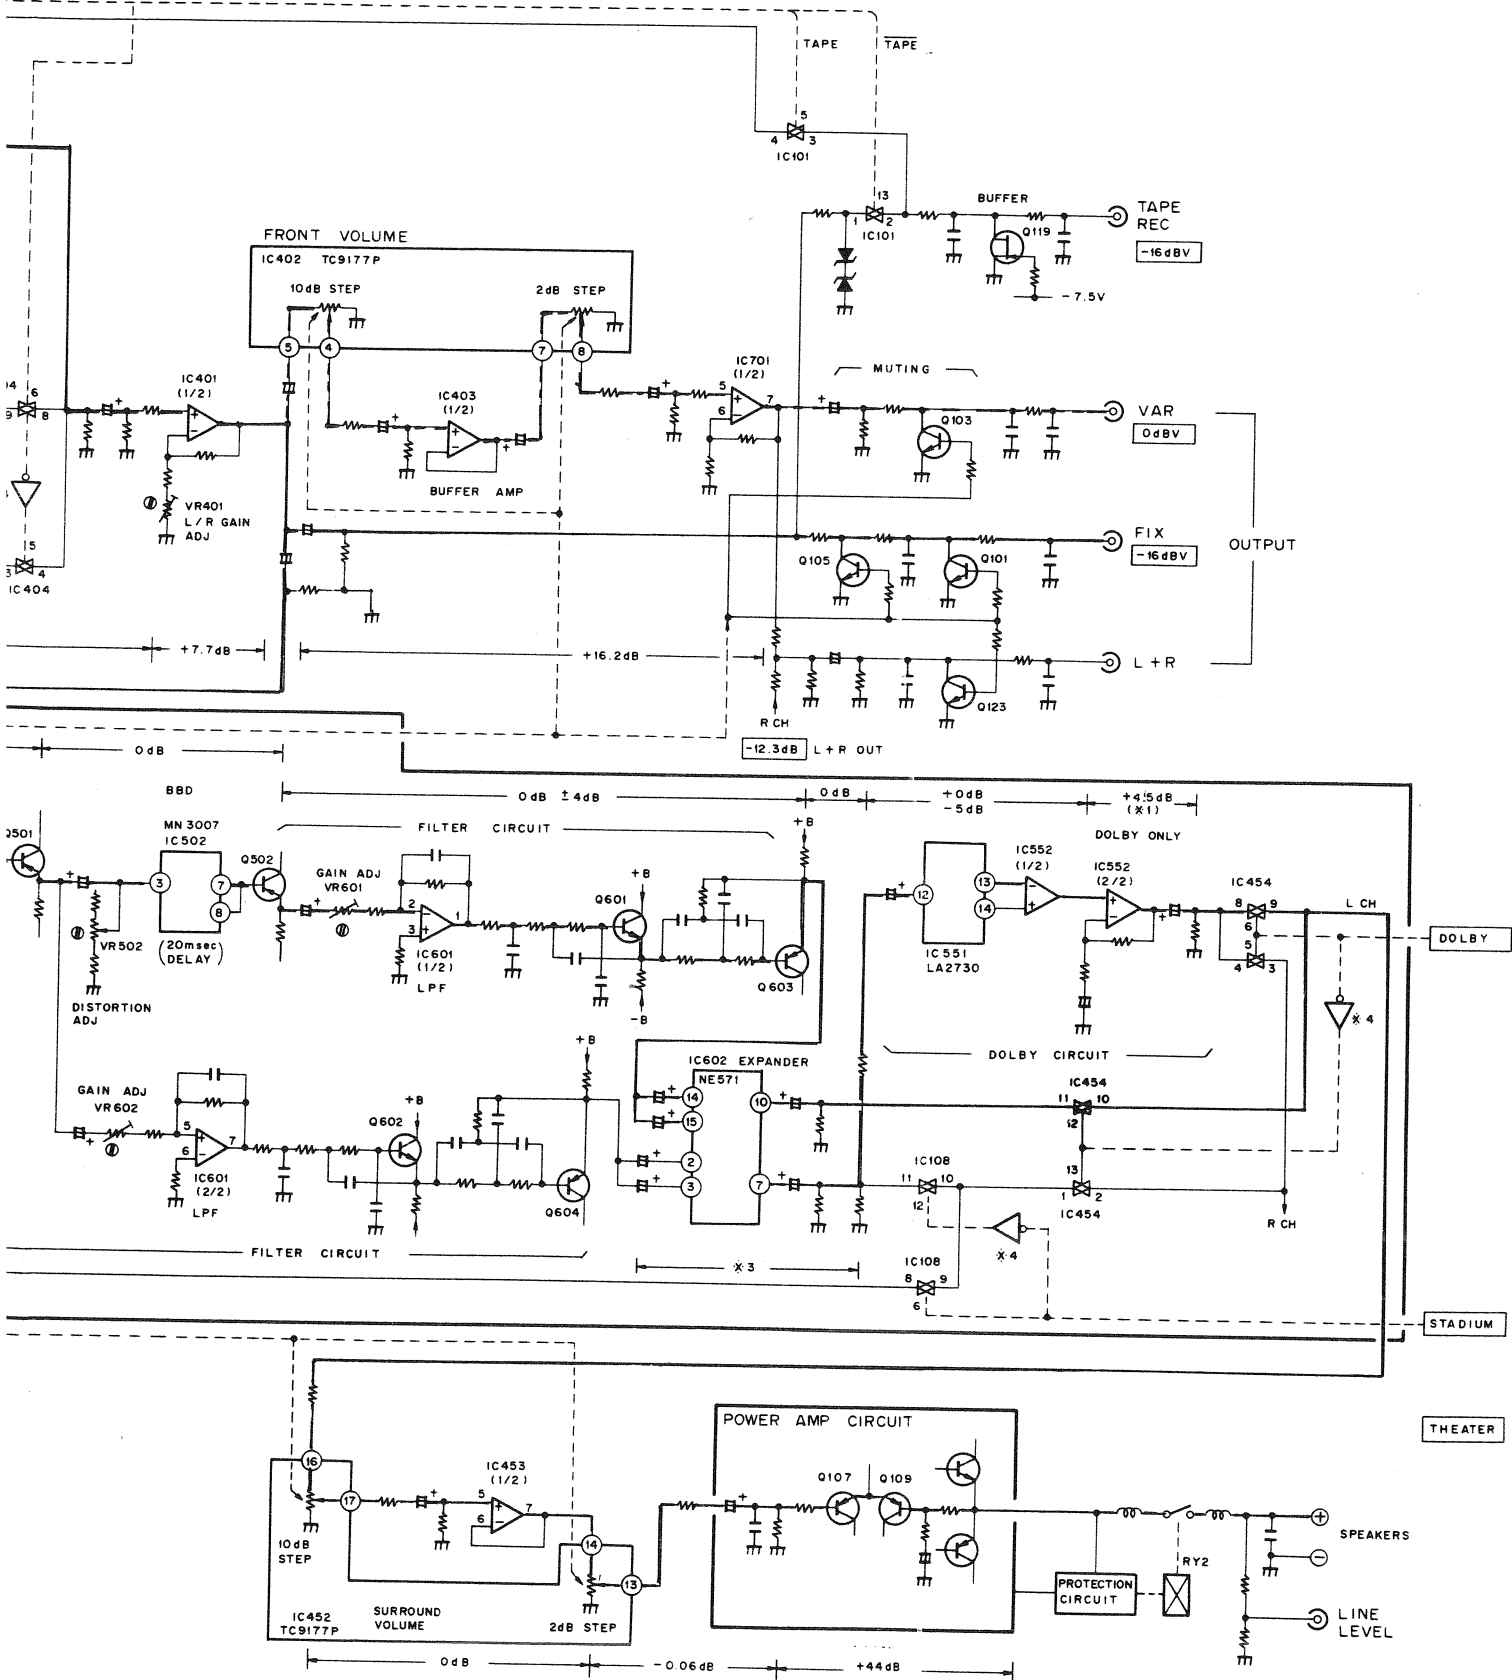



3



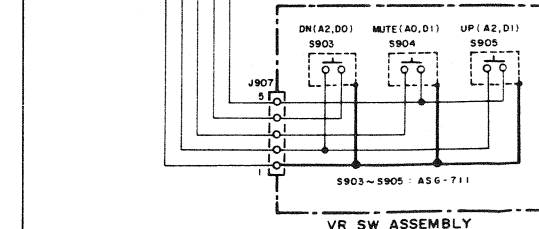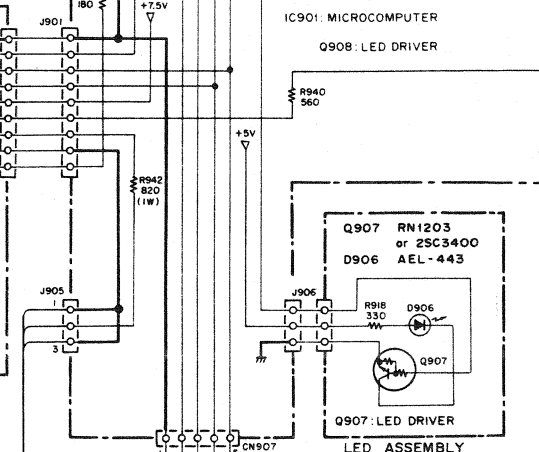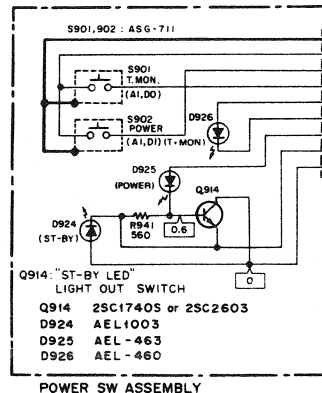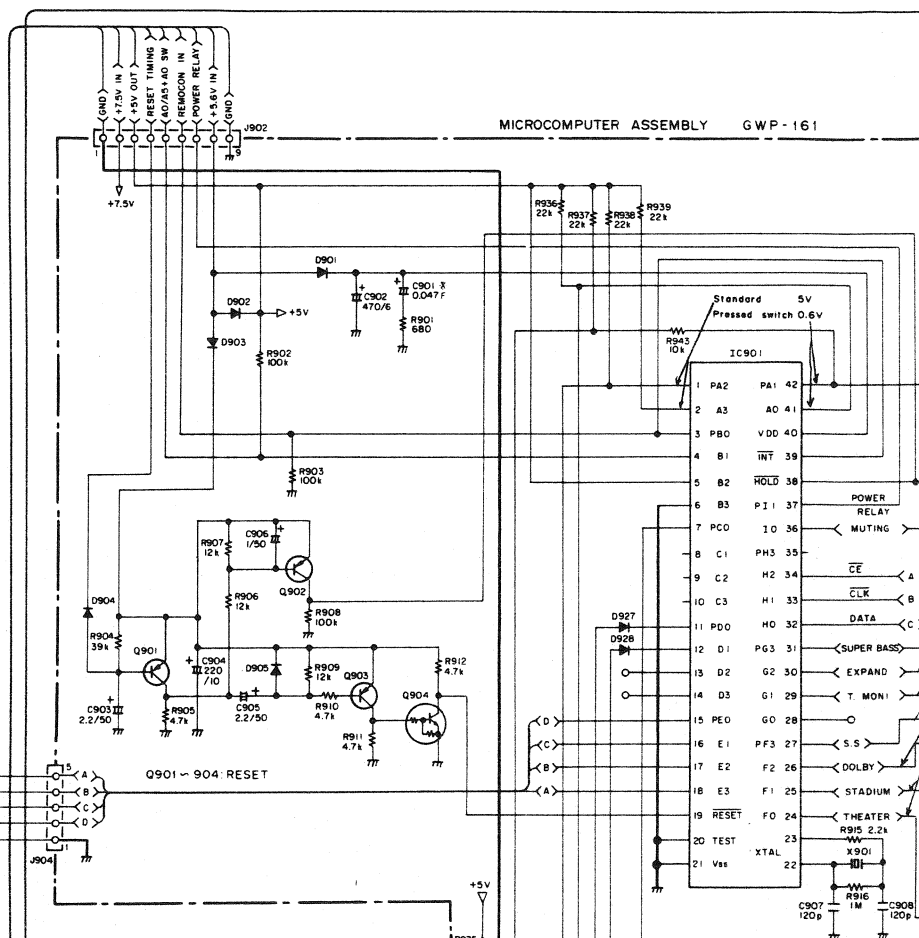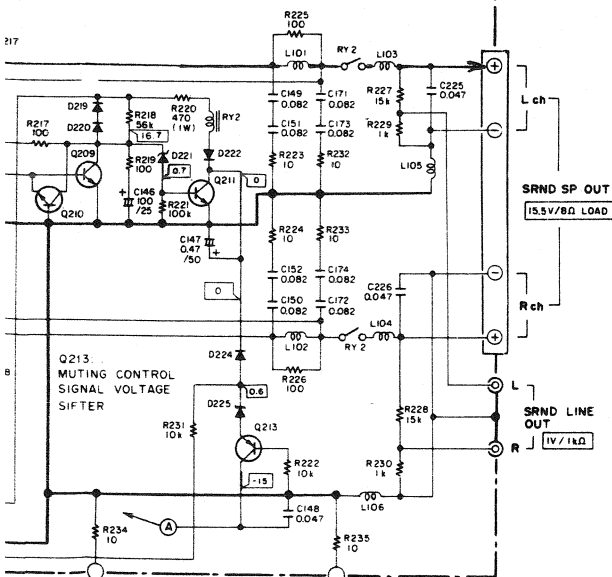

NOTE:

The indicated semiconductors are representative ones only.
Other alternative semiconductors may be used and are
listed in the parts list.

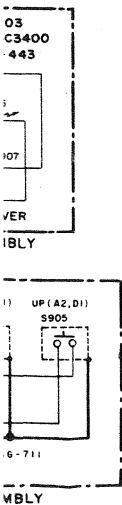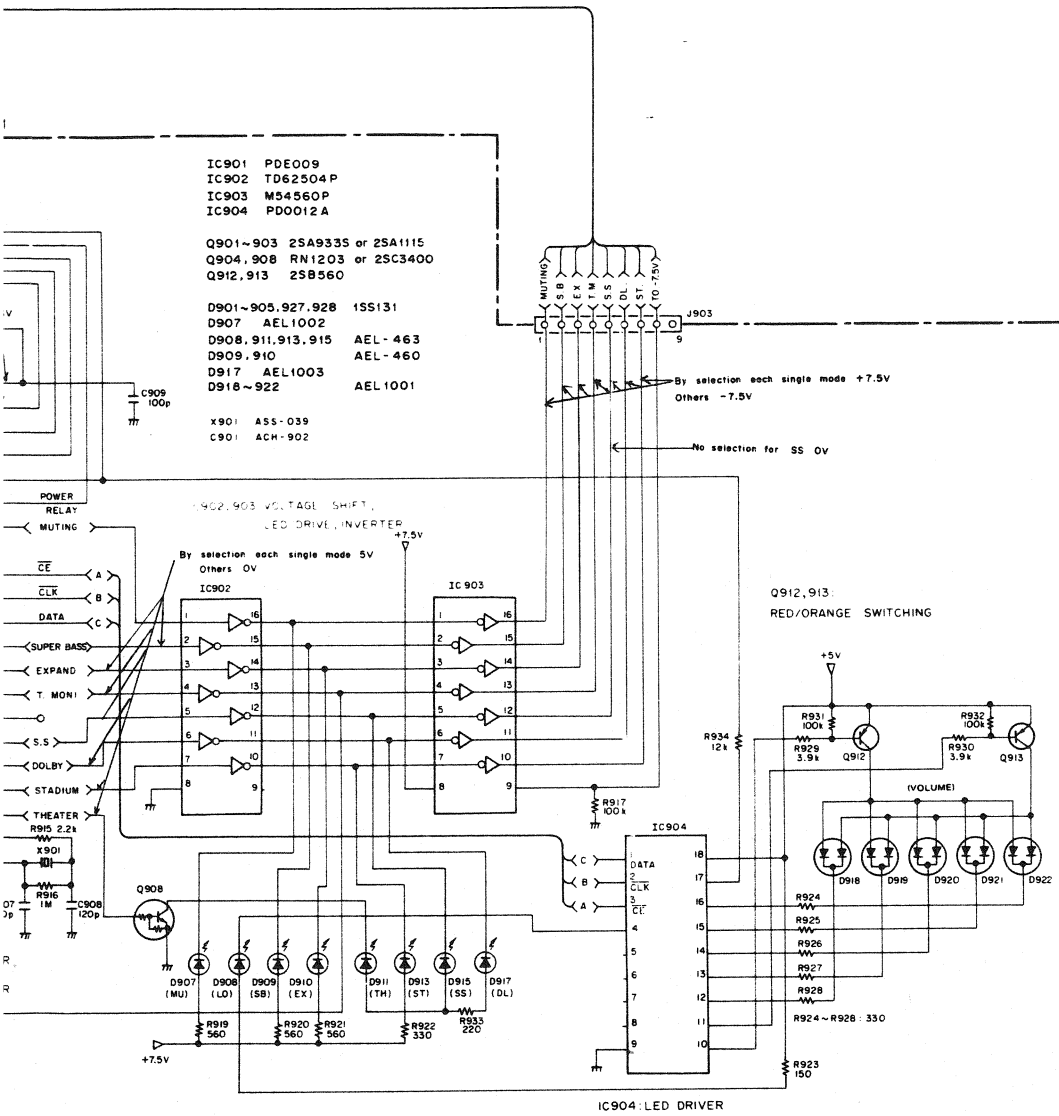

1. RESISTORS

Indicated in Ω , $\frac{1}{2}W$, $\frac{1}{4}W$, $\frac{1}{8}W$: $\pm 5\%$ tolerance unless otherwise noted k: k Ω ,
M: M Ω , (F): $\pm 1\%$, (G): $\pm 2\%$, (K): $\pm 10\%$ (M): $\pm 20\%$ tolerance

2. CAPACITORS

Indicated in capacity (μF)/voltage (V) unless otherwise noted p: pF
Indication without voltage is 50V except electrolytic capacitor.

3. VOLTAGE, CURRENT

Signal voltage at (W + W B1) output (1kHz)
DC voltage (V) at no input signal
Value in () is DC voltage at rated power.
mA DC current at no input signal

4. OTHERS

Signal route
Adjusting point
The 1 mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
marked capacitors and resistors have parts numbers

This is the basic schematic diagram, but the actual circuit may vary due to improvements in design.

SWITCHES

PIN JACK ASSEMBLY

S801: REMOTE

ON - OFF

POWER SW ASSEMBLY

S901: TAPE MONITOR (A1, D0)

ON - OFF

S902: POWER (A1, D1)

ON - OFF

VR SW ASSEMBLY

S903: DN (A2, D0)

ON - OFF

S904: MUTING (A0, D1)

ON - OFF

S905: UP (A2, D1)

ON - OFF

OTHERS

S1: POWER

ON - OFF

The underlined indicates the switch position.



SIGNAL ROUTE: THEATER SWITCH ON-OFF
EXPAND SWITCH ON-OFF


A

B

C


D

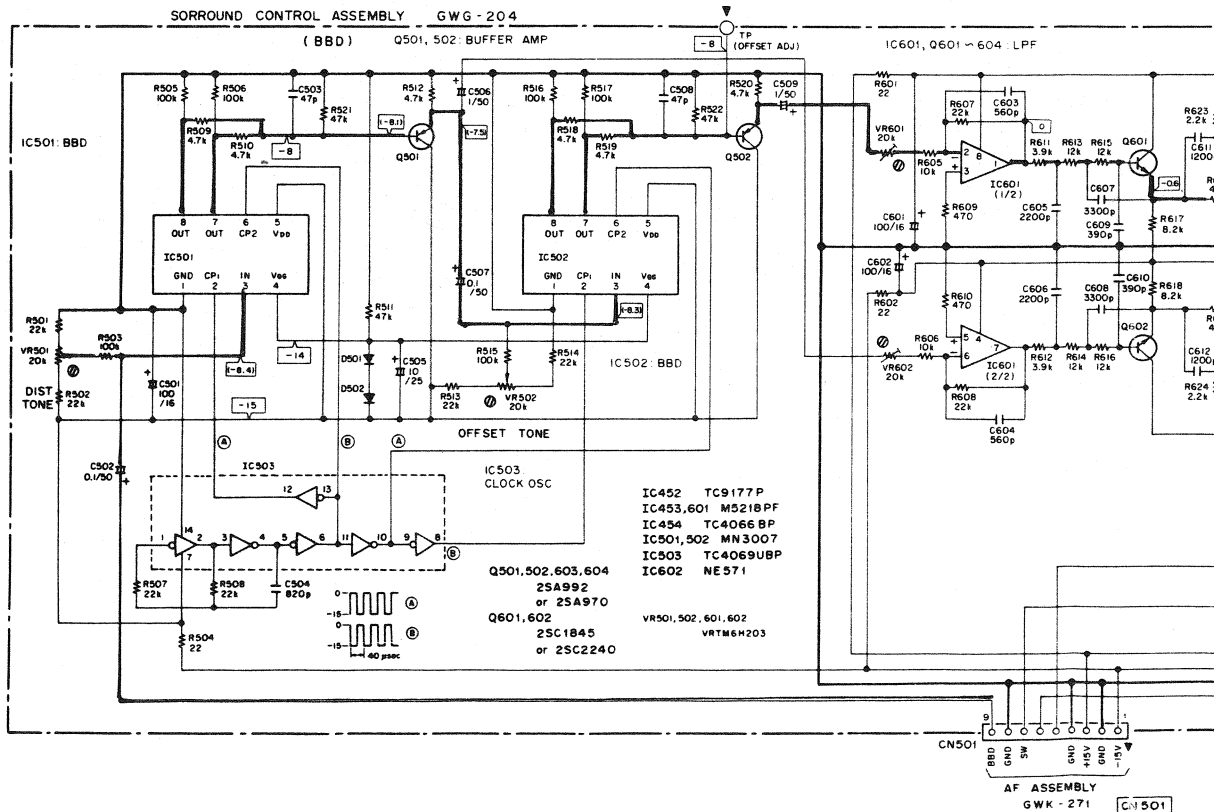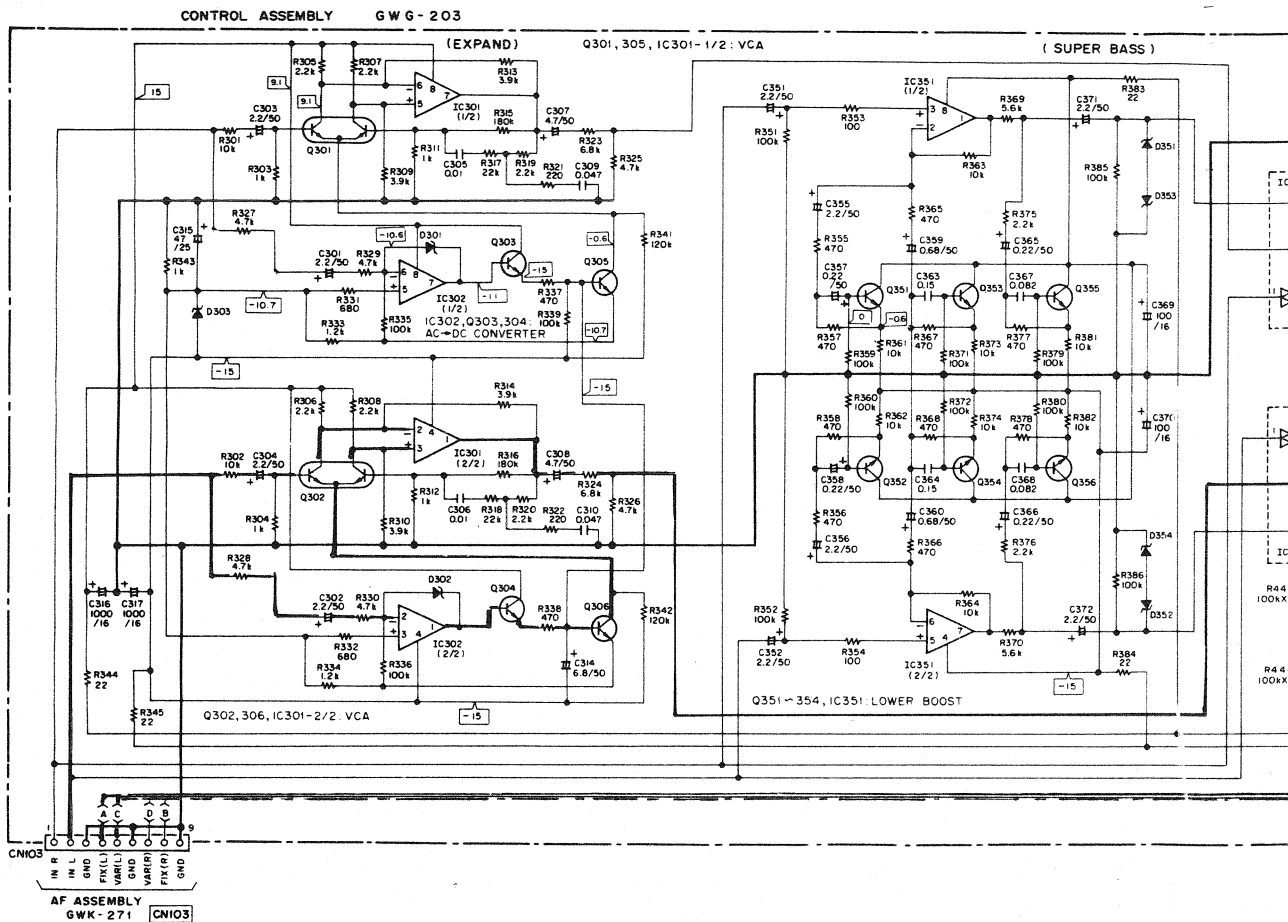

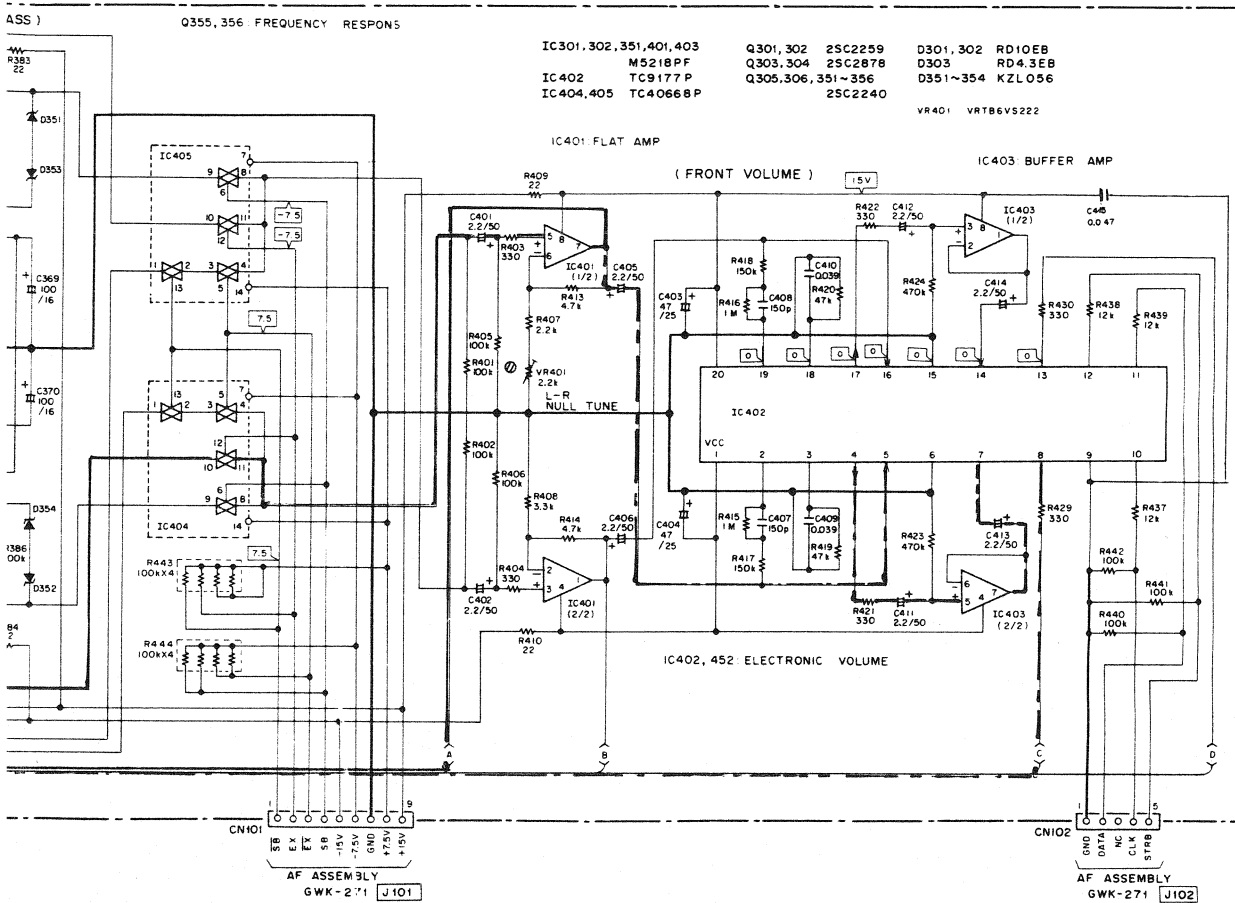

A

B

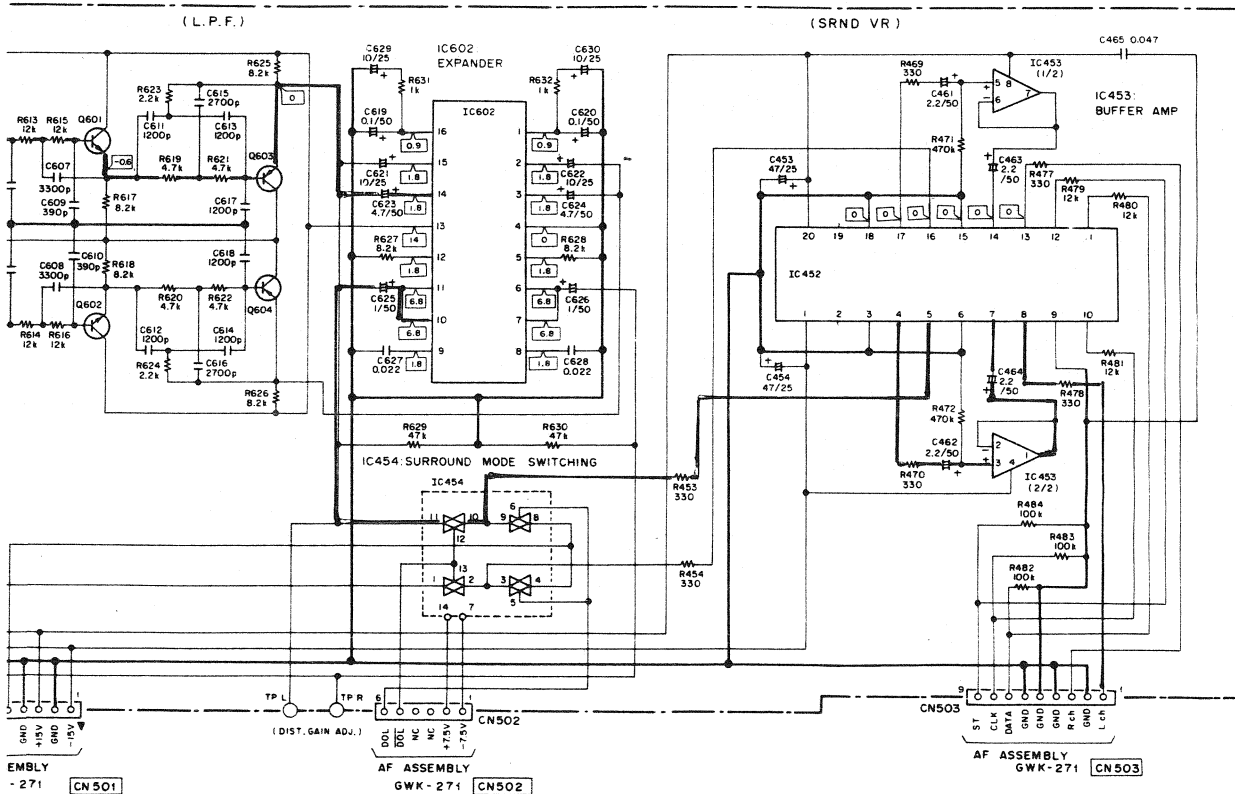

C

D