

ADDITIONAL



Service Manual

STEREO RECEIVER

SX-3700 ^S_{S/G}

MODEL SX-3700 COMES IN FOUR VERSIONS DISTINGUISHED AS FOLLOWS:

Type	Voltage	Remarks
KU	120V only	U.S.A. model
KC	120V only	Canada model
S	110V, 120V, 220V and 240V (Switchable)	General export model
S/G	110V, 120V, 220V and 240V (Switchable)	U.S. Military model

- This additional service manual is applicable to the SX-3700/S, S/G.
- The basic performance of the SX-3700/S, S/G types are the same as the SX-3700/KU type. Please refer to the SX-3700/KU type service manual (ART-535) with exception of this supplements.

1. SPECIFICATIONS

The specifications for SX-3700/S and S/G types are the same as the SX-3700/KU type except for following section;

Miscellaneous

Power Requirements AC 110V/120V/220V/240V
 (Switchable) 50/60Hz

Power consumption 150W

Weight (without package) 12.4kg (27lb 6oz)

Furnished Parts

Fuse 2

2. CONTRAST OF MISCELLANEOUS PARTS

NOTES:

- Parts without part number cannot be supplied.
- The \triangle mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

MISCELLANEOUS PARTS

Symbol	Description	Part No.			Remarks
		KU	S	S/G	
\triangle FU1	Fuse	AEK-100	AEK-103	AEK-100	
\triangle T1	Power transformer	ATT-696	ATT-709	ATT-698	
S9	Slide switch	ASH-016	ASH-016	
\triangle S10	Line voltage selector	AKR-031	AKR-031	
\triangle C1	Capacitor	ACG-017	ACG-001	ACG-001	
\triangle R1	Resistor 2.2M Ω	ACN-029	
\triangle	Power cord	ADG-023	ADG-048	ADG-048	

PACKING AND FURNISHED PARTS

Symbol	Description	Part No.			Remarks
		KU	S	S/G	
	Operating instructions	ARB-360	ARB-374	ARB-374	
\triangle	Fuse	AEK-100	AEK-103	
	Packing case	AHD-765	AHD-765	AHD-787	
	Packing spacer	AHB-105	
\triangle	Fuse	AEK-103	AEK-100	


3. SCHEMATIC DIAGRAM (S,S/G)

A

B

C

D

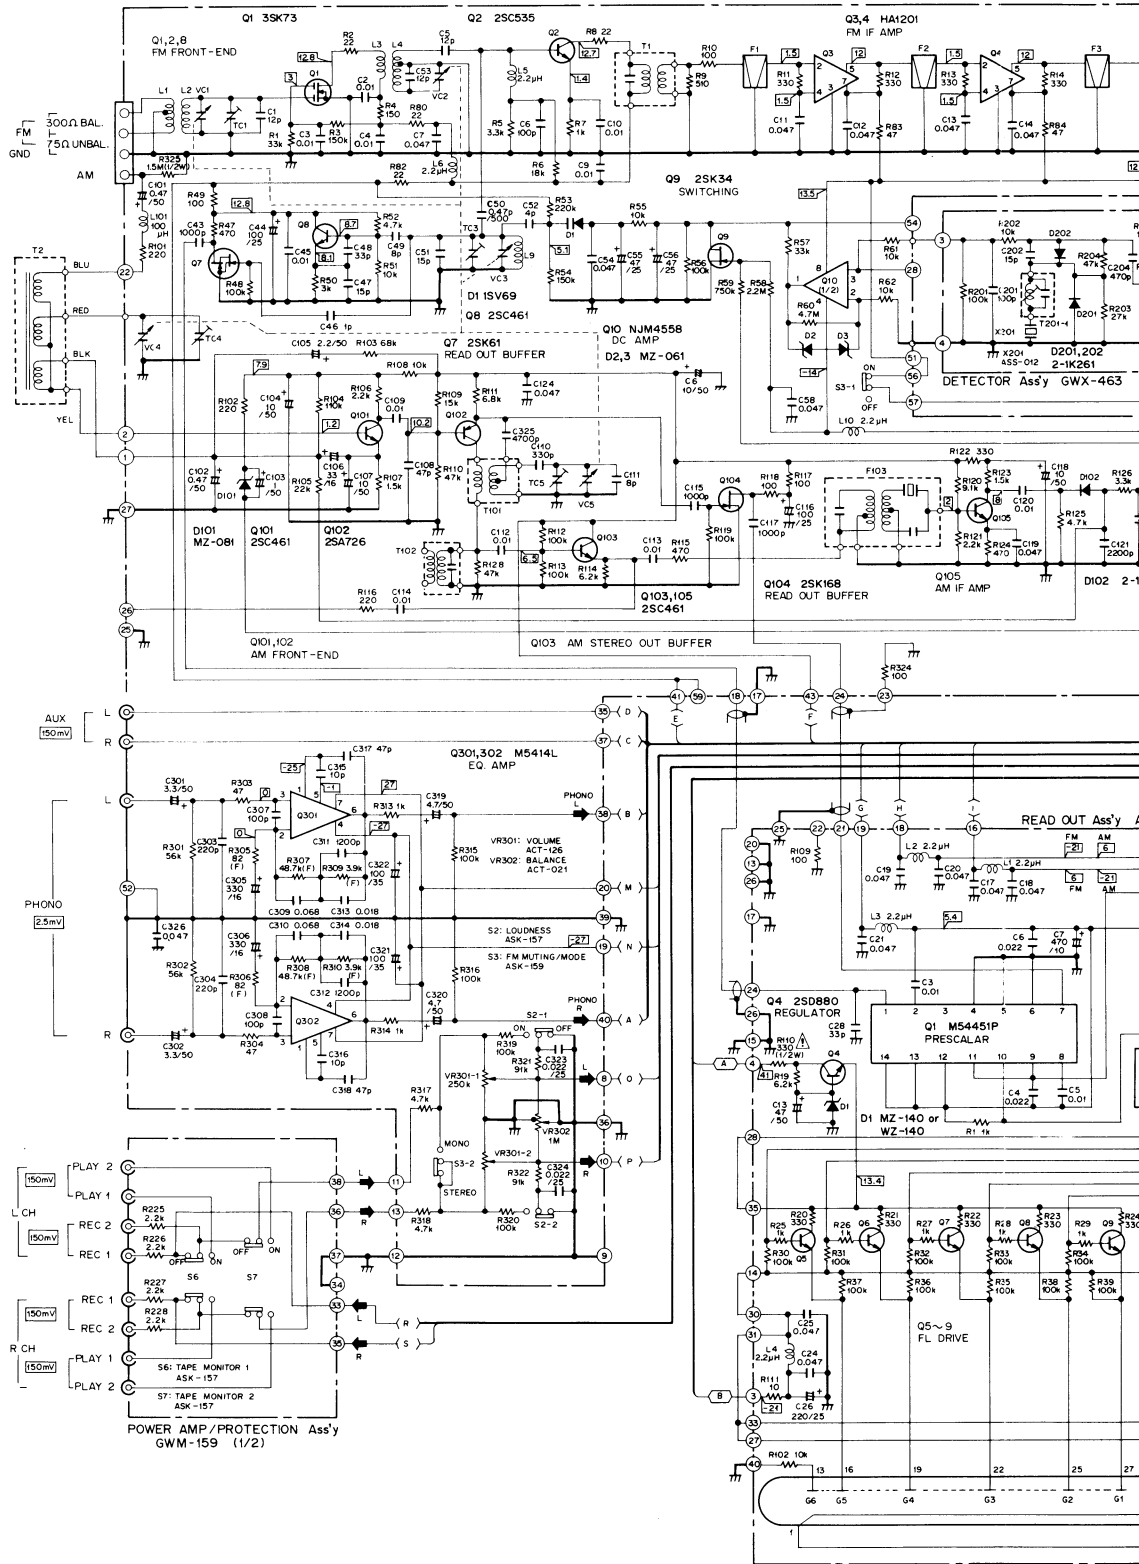

1

2

3

