

listed in the parts list.

RESISTORS:  
IN OHM 1/4W ±5% TOLERANCE UNLESS OTHERWISE NOTED K:kΩ M:MΩ

CAPACITORS:  
IN μF UNLESS OTHERWISE NOTED P:pF

V: SIGNAL VOLTAGE AT 20W + 20W 6Ω OUTPUT (1kHz)  
V: DC VOLTAGE AT NO INPUT SIGNAL  
mA: DC CURRENT AT NO INPUT SIGNAL

SWITCHES:  
S1: FUNCTION  
1. AM  
2. FM  
3. PHONO  
4. AUX


S4: LOUDNESS  
OFF - ON

S5: SPEAKER A  
OFF - ON

S6: SPEAKER B  
OFF - ON

S2: TAPE MONITOR  
OFF - ON

TERMINAL Ass'y

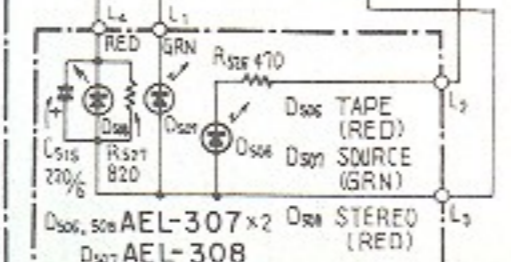

D501-504 2-1K261 x 4  
D505, 506 1S2473