

STR-DE525/V515

SERVICE MANUAL

US Model
Canadian Model
E Model
Australian Model
PX Model
STR-DE525
Chinese Model
STR-V515



Photo : STR-DE525

Dolby Laboratories Licensing Corporation.
“DOLBY” the double-D symbol and “AC-3” and “PRO LOGIC”
are trademarks of Dolby Laboratories Licensing Corporation.

SPECIFICATIONS

AUDIO POWER SPECIFICATIONS

POWER OUTPUT AND TOTAL HARMONIC DISTORTION:
With 8 ohm loads, both channels driven, from 20 - 20,000 Hz; rated 100 watts per channel minimum RMS power, with no more than 0.09% total harmonic distortion from 250 milliwatts to rated output.

Amplifier section

POWER OUTPUT

Stereo mode (8 ohms 20 Hz - 20 kHz, THD 0.09%) 100 W + 100 W

Surround mode

(8 ohms at 1 kHz, THD 0.8%)
Front: 100 W/ch
Center^{a)}: 100 W
Rear^{a)}: 100 W/ch

a) Depending on the sound field settings and the source, there may be no sound output.

5.1/DVD mode (8 ohms at 1 kHz, THD 0.8%)

Front: 100 W/ch
Center: 100 W
Rear: 100 W/ch

Dynamic power output

155 W + 155 W, 8 ohms
220 W + 220 W, 4 ohms

Frequency response

PHONO: RIAA
equalization curve
±0.5 dB
CD, TAPE/MD, VIDEO
1, 2;
10 Hz - 50 kHz +0.5/
-2 dB (with sound
field, tone, and bass
booster bypassed)

Inputs

PHONO:
Sensitivity: 1.5 mV
Impedance: 50
kilohms
S/N^{b)}: 75 dB (A,
2.5 mV^{c)})

CD:

Sensitivity: 150 mV
Impedance:
50 kilohms
S/N^{b)}: 82 dB (A,
150 mV^{c)})

TAPE/MD, VIDEO,
TV/DBS (TV/LD);
Sensitivity: 150 mV
Impedance:
50 kilohms
S/N^{b)}: 82 dB (A,
150 mV^{c)})

5.1/DVD INPUT

Sensitivity: 150 mV
Impedance:
50 kilohms
S/N^{b)}: 82 dB (A,
150 mV^{c)})

b) 78' IHF

c) Weighted network, input level

— Continued on next page —

FM STEREO/FM-AM RECEIVER



MICROFILM

SONY®

| | |
|------------|---|
| Outputs | AUDIO OUT: Voltage: 150 mV Impedance: 10 kilohms WOOFER: Voltage: 2 V Impedance: 1 kilohm PHONES: Accepts low- and high-impedance headphones |
| BASS BOOST | +10 dB at 70 Hz |
| TONE | ±10 dB at 100 Hz and 10 kHz |

FM tuner section

Tuning range 87.5 - 108.0 MHz

Antenna terminals
75 ohms, unbalanced

Sensitivity Mono: 18.3 dBf, 4.5 µV
Stereo: 38.3 dBf, 45 µV

Usable sensitivity
11.2 dBf, 2 µV (IHF)

S/N Mono: 76 dB
Stereo: 70 dB

Harmonic distortion at 1 kHz
Mono: 0.3%
Stereo: 0.5%

Separation 45 dB at 1 kHz

Frequency response
30 Hz - 15 kHz +0.5/
-2 dB

Selectivity 60 dB at 400 kHz

AM tuner section

| | |
|--------------|---|
| Tuning range | With 10-kHz tuning scale: 530 - 1710 kHz (USA and Canada only ^{d)}) 530 - 1610 kHz (all other countries except Singapore, Malaysia, and Australia) With 9-kHz tuning scale: 531 - 1710 kHz (USA and Canada only) 531 - 1602 kHz (all other countries ^{d)}) |
| Antenna | Loop antenna |

Usable sensitivity
50 dB/m (at 1,000 kHz or 999 kHz)

S/N 54 dB (at 50 mV/m)

Harmonic distortion
0.5 % (50 mV/m, 400 kHz)

Selectivity At 10 kHz: 40 dB
At 9 kHz: 35 dB

d) You can change the AM tuning scale to 9 kHz (USA and Canada only) or to 10 kHz (all countries except USA, Canada, Singapore, Malaysia, and Australia). After tuning in any AM station, turn off the receiver. Press down the TUNING + or PRESET TUNING + button and press the V/Ø button. All preset stations will be reset to their factory settings when you change the tuning scale. To reset the scale to 10 kHz (or 9 kHz), repeat the procedure.

Video section

| | |
|---------|----------------|
| Inputs | 1 Vp-p 75 ohms |
| Outputs | 1 Vp-p 75 ohms |

General

| | |
|--------|---|
| System | Tuner section: PLL quartz-locked digital synthesizer system Preamplifier section: Low-noise NF type equalizer Power amplifier section: Pure-complementary SEPP |
|--------|---|

| | |
|--------------------|---|
| Power requirements | USA and Canada: 120 V AC, 60 Hz Australia: 240 V AC, 50 Hz Singapore and Malaysia: 230 V AC, 50/60 Hz All other countries: 120/240/220 V AC selectable, 50/60 Hz |
|--------------------|---|

| | |
|-------------------|---|
| Power consumption | Canada: 400 VA All other countries: 250 W |
|-------------------|---|

| | |
|------------|---|
| AC outlets | Australia, Singapore, and Malaysia: 1 switched, maximum 100 W All other countries: 2 switched, total 100 W |
|------------|---|

| | |
|------------|---|
| Dimensions | 430 × 157.5 × 370 mm (17 × 6 ¹ / ₄ × 14 ⁵ / ₈ inches) including projecting parts and controls |
|------------|---|

Mass (approx.)
9.1 kg (20 lb 1 oz)

Design and specifications are subject to change without notice.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer: Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microampers). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

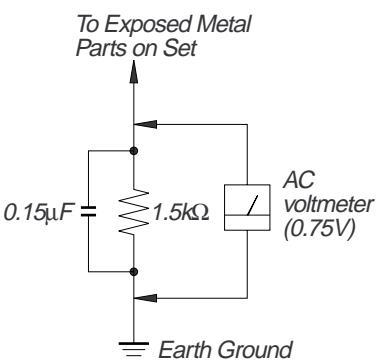


Fig. A. Using an AC voltmeter to check AC leakage.

TABLE OF CONTENTS

| | |
|--|----|
| 1. GENERAL | 4 |
| 2. TEST MODE | 6 |
| 3. DIAGRAMS | |
| 3-1. Circuit Boards Location | 7 |
| 3-2. Block Diagram — Main Section | 9 |
| 3-3. Block Diagram — Power Section | 11 |
| 3-4. Printed Wiring Board — AMP Section | 13 |
| 3-5. Schematic Diagram — AMP Section | 15 |
| 3-6. Printed Wiring Board — Video Section | 17 |
| 3-7. Schematic Diagram — Video Section | 19 |
| 3-8. Printed Wiring Board — Input Section | 21 |
| 3-9. Schematic Diagram — Input Section | 23 |
| 3-10. Printed Wiring Board — Display Section | 25 |
| 3-11. Schematic Diagram — Display Section | 27 |
| 3-12. Printed Wiring Board — Power Section | 29 |
| 3-13. Schematic Diagram — Power Section | 31 |
| 3-14. IC Block Diagrams | 35 |
| 4. EXPLODED VIEWS | |
| 4-1. Front Panel Section | 38 |
| 4-2. Chassis Section | 39 |
| 5. ELECTRICAL PARTS LIST | 40 |

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK \triangle OR DOTTED LINE WITH MARK \triangle ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE \triangle SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPÉMENTS PUBLIÉS PAR SONY.

SECTION 1 GENERAL

LOCATION AND FUNCTION OF CONTROLS [FRONT PANEL]

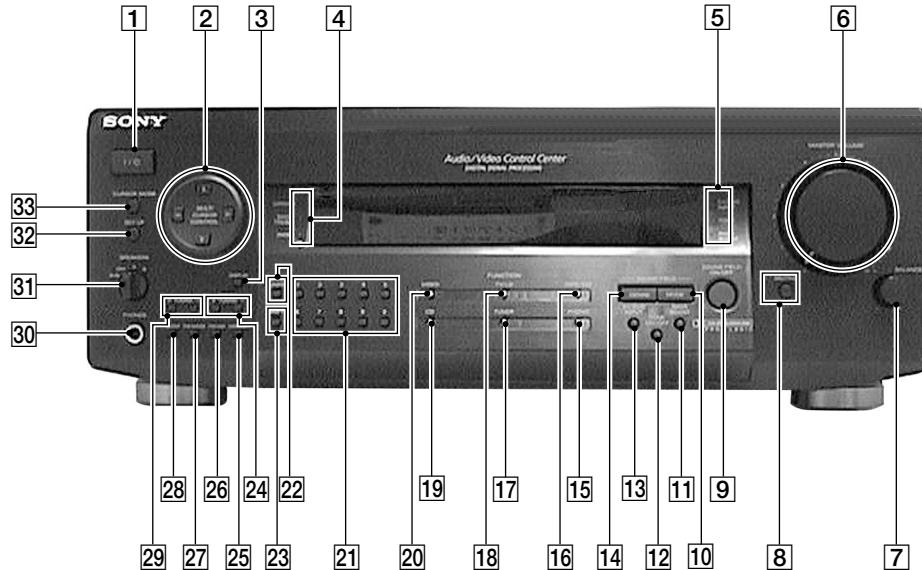


Photo : STR-DE525

- | | |
|---|---------------------------------|
| [1] POWER switch | [18] TUNER FUNCTION button |
| [2] MULTI CURSOR CONTROL | [19] VIDEO FUNCTION button |
| [3] DISPLAY REAR LEVEL +, - buttons | [20] CD FUNCTION buttons |
| [4] SURROUND, BASS/TREBLE, INDEX indicators | [21] Numeric buttons |
| [5] 5.1/DVD, TONE, BASS BOOST indicators | [22] DIRECT TUNING button |
| [6] MASTER VOLUME control | [23] SHIFT buttons |
| [7] BALANCE control | [24] PRESET TUNING +, - buttons |
| [8] MUTING button | [25] MEMORY button |
| [9] SOUND FIELD ON/OFF button | [26] FM/AM button |
| [10] SOUND FIELD MODE button | [27] FM MODE button |
| [11] BASS BOOST button | [28] SLEEP button |
| [12] TONE ON/OFF button | [29] TUNING +, - buttons |
| [13] 5.1/DVD INPUT button | [30] PHONES jack |
| [14] SOUND FIELD GENRE button | [31] SPEAKERS A, B switches |
| [15] PHONO FUNCTION button | [32] SET UP button |
| [16] TAPE/MD FUNCTION button | [33] CURSOR MODE button |
| [17] TV/LD FUNCTION button | |

[REAR PANEL]

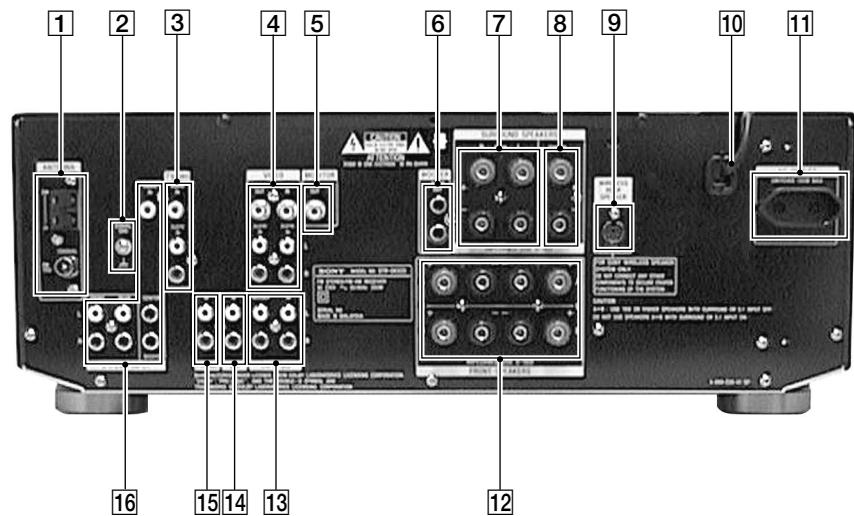


Photo : STR-DE525

| | | | |
|---|----------------------------|----|-----------------------|
| 1 | ANTENNA (FM/AM) | 9 | WIRELESS REAR SPEAKER |
| 2 | SIGNAL GND | 10 | AC power cord |
| 3 | TV/DBS | 11 | AC OUTLET |
| 4 | VIDEO | 12 | FRONT SPEAKERS (A/B) |
| 5 | MONITOR | 13 | TAPE/MD |
| 6 | WOOFER | 14 | CD |
| 7 | SURROUND SPEAKERS (REAR) | 15 | PHONO |
| 8 | SURROUND SPEAKERS (CENTER) | 16 | 5.1/DVD INPUT |

SECTION 2 TEST MODE

SOFTWARE VERSION DISPLAY MODE

- * The software version is displayed.
- * Procedure:
 - While depressing the TUNER and the BASS BOOST buttons simultaneously, press the power [I/] button to turn on the main power. The software version is displayed.

KEY TEST MODE

- * All keys are tested.
- * Procedure:
 - While depressing the CD and the BASS BOOST buttons simultaneously, press the power [I/] button to turn on the main power. The message REST40 appears. When the respective keys are pressed one after another, the number decrements in the order of REST39, REST38, and so on.

FLUORESCENT INDICATOR TUBE TEST MODE

- * All fluorescent segments are tested. When this test is activated, all segments turn on at the same time, then each segment turns on one after another.
- * Procedure:
 - While depressing the TV/LD and the BASS BOOST buttons simultaneously, press the power [I/] button to turn on the main power. All segments turn on at the same time, then each segment turns on one after another.

FACTORY SET MODE

- * All preset contents are reset to the default setting.
- * Procedure:
 - While depressing the VIDEO and the BASS BOOST buttons simultaneously, press the power [I/] button to turn on the main power. The message FACTORY appears and the present contents are reset to the default values.

ALL CLEAR MODE

- * All preset contents are cleared when this mode is activated. Use this mode before returning the product to clients upon completion of repair.
- * Procedure:
 - While depressing the VIDEO and the TAPE/MD buttons simultaneously, press the power [I/] button to turn on the main power. The message INITIAL appears and initialization is performed.

SOUND FIELD CLEAR MODE

- * The preset sound field is cleared when this mode is activated. Use this mode before returning the product to clients upon completion of repair.
- * Procedure:
 - While depressing the SOUND FIELD ON/OFF button, press the power [I/] button to turn on the main power. The message S. F. CLEAR appears and initialization is performed.

AM CHANNEL STEP 9 kHz/10 kHz SELECTION MODE


- * Either the 9 kHz step or 10 kHz step can be selected for the AM channel step.
- * Procedure:
 - Set the FUNCTION to AM. Turn off the main power.
 - While depressing the TUNING+ button or the PRESET+ button, press the power [I/] button to turn on the main power. Either the message 9k STEP or 10k STEP appears. Select the desired step.

DEMO MODE

- * Continuous demonstration starts when the demo mode is activated.
- * Procedure:
 - While depressing the CURSOR MODE button, press the power [I/] button to turn on the main power. The message MUSIC DEMO appears and demonstration is performed automatically.

SECTION 3 DIAGRAMS

3-1. CIRCUIT BOARDS LOCATION

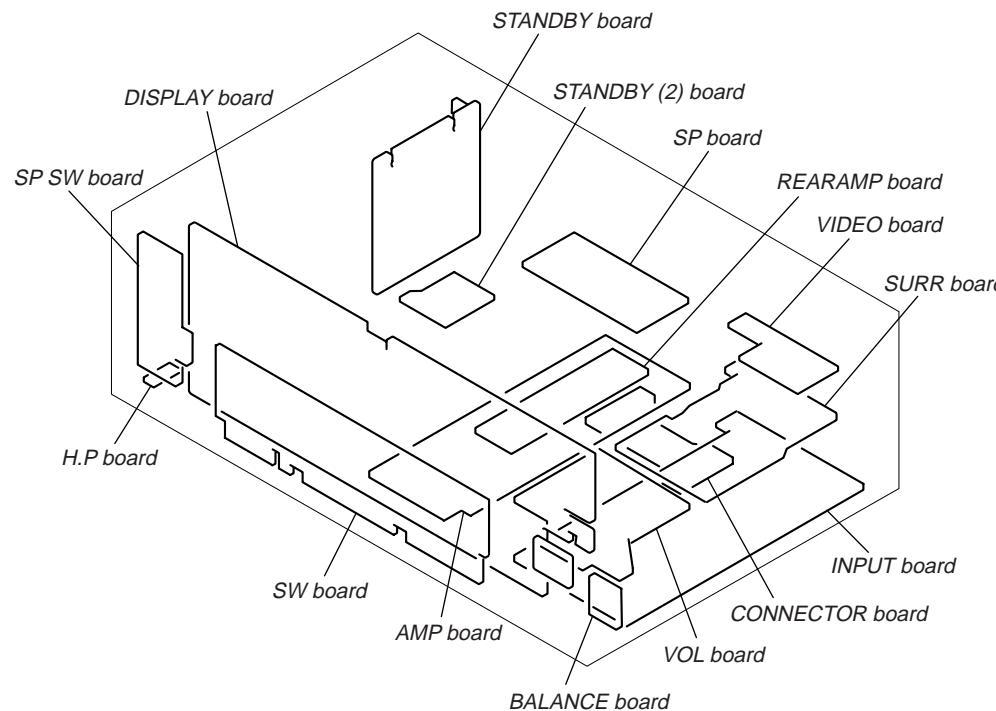

**THIS NOTE IS COMMON FOR PRINTED WIRING
BOARDS AND SCHEMATIC DIAGRAMS.
(In addition to this necessary note is printed in each
block.)**

For schematic diagrams.

Note:

- All capacitors are in μF unless otherwise noted. pF : $\mu\mu\text{F}$ 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $1/4\text{W}$ or less unless otherwise specified.
- % : indicates tolerance.
- \triangle : internal component.
- : nonflammable resistor.
- : fusible resistor.
- : panel designation.

Note:

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- : B+ Line.
- : B- Line.
- : adjustment for repair.
- Voltages and waveforms are dc with respect to ground under no-signal (detuned) conditions.
- No mark : FM
- Voltages are taken with a VOM (Input impedance $10\text{ M}\Omega$). Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with a oscilloscope.
- Circled numbers refer to waveforms.
- Signal path.
 : FM
- Abbreviation
 - CND : Canadian
 - AUS : Australian
 - CH : Chinese
 - MY : Malaysia
 - SP : Singapore
 - EA : Saudi Arabia


For printed wiring boards.

Note:


- : parts extracted from the component side.
- : Through hole.
- : internal component.
- : Pattern from the side which enables seeing.

• Waveform

DISPLAY BOARD

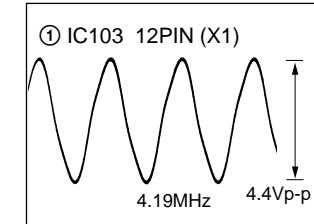

3-2. BLOCK DIAGRAM –MAIN SECTION–

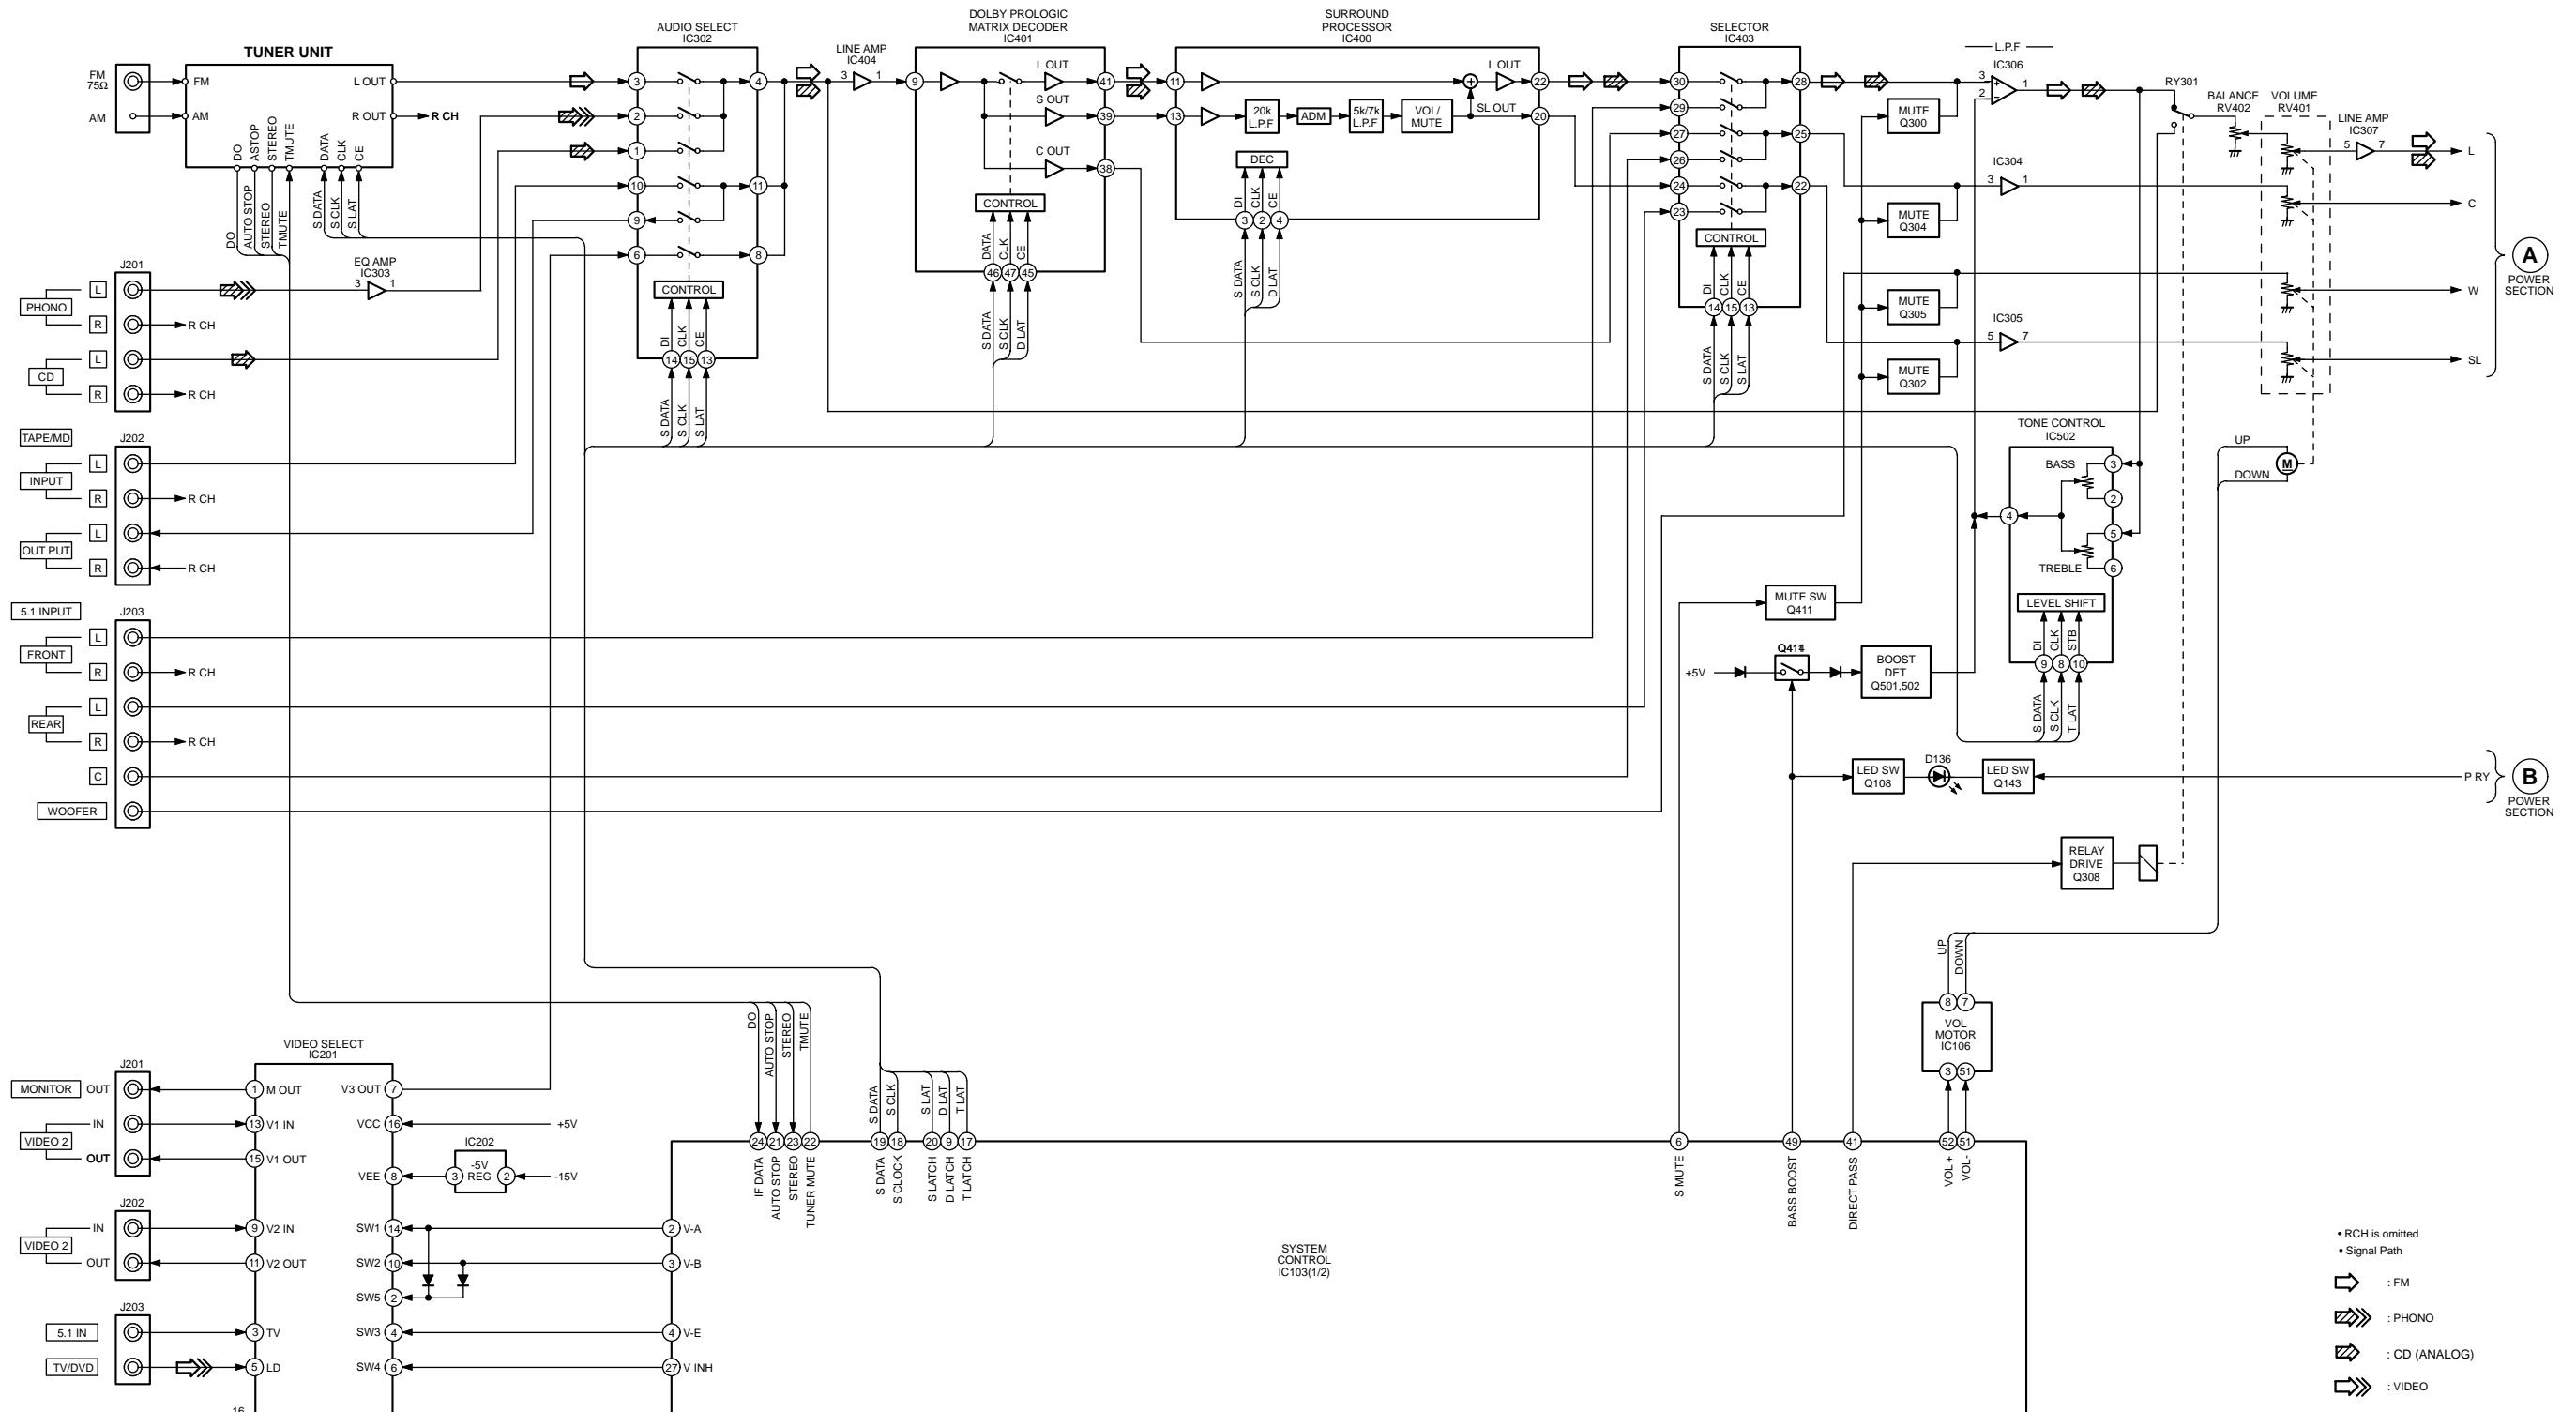

- RCH is omitted
- Signal Path


 : FM

 : PHONO

 : CD (ANALOG)

 : VIDEO


3-3. BLOCK DIAGRAM -POWER SECTION-

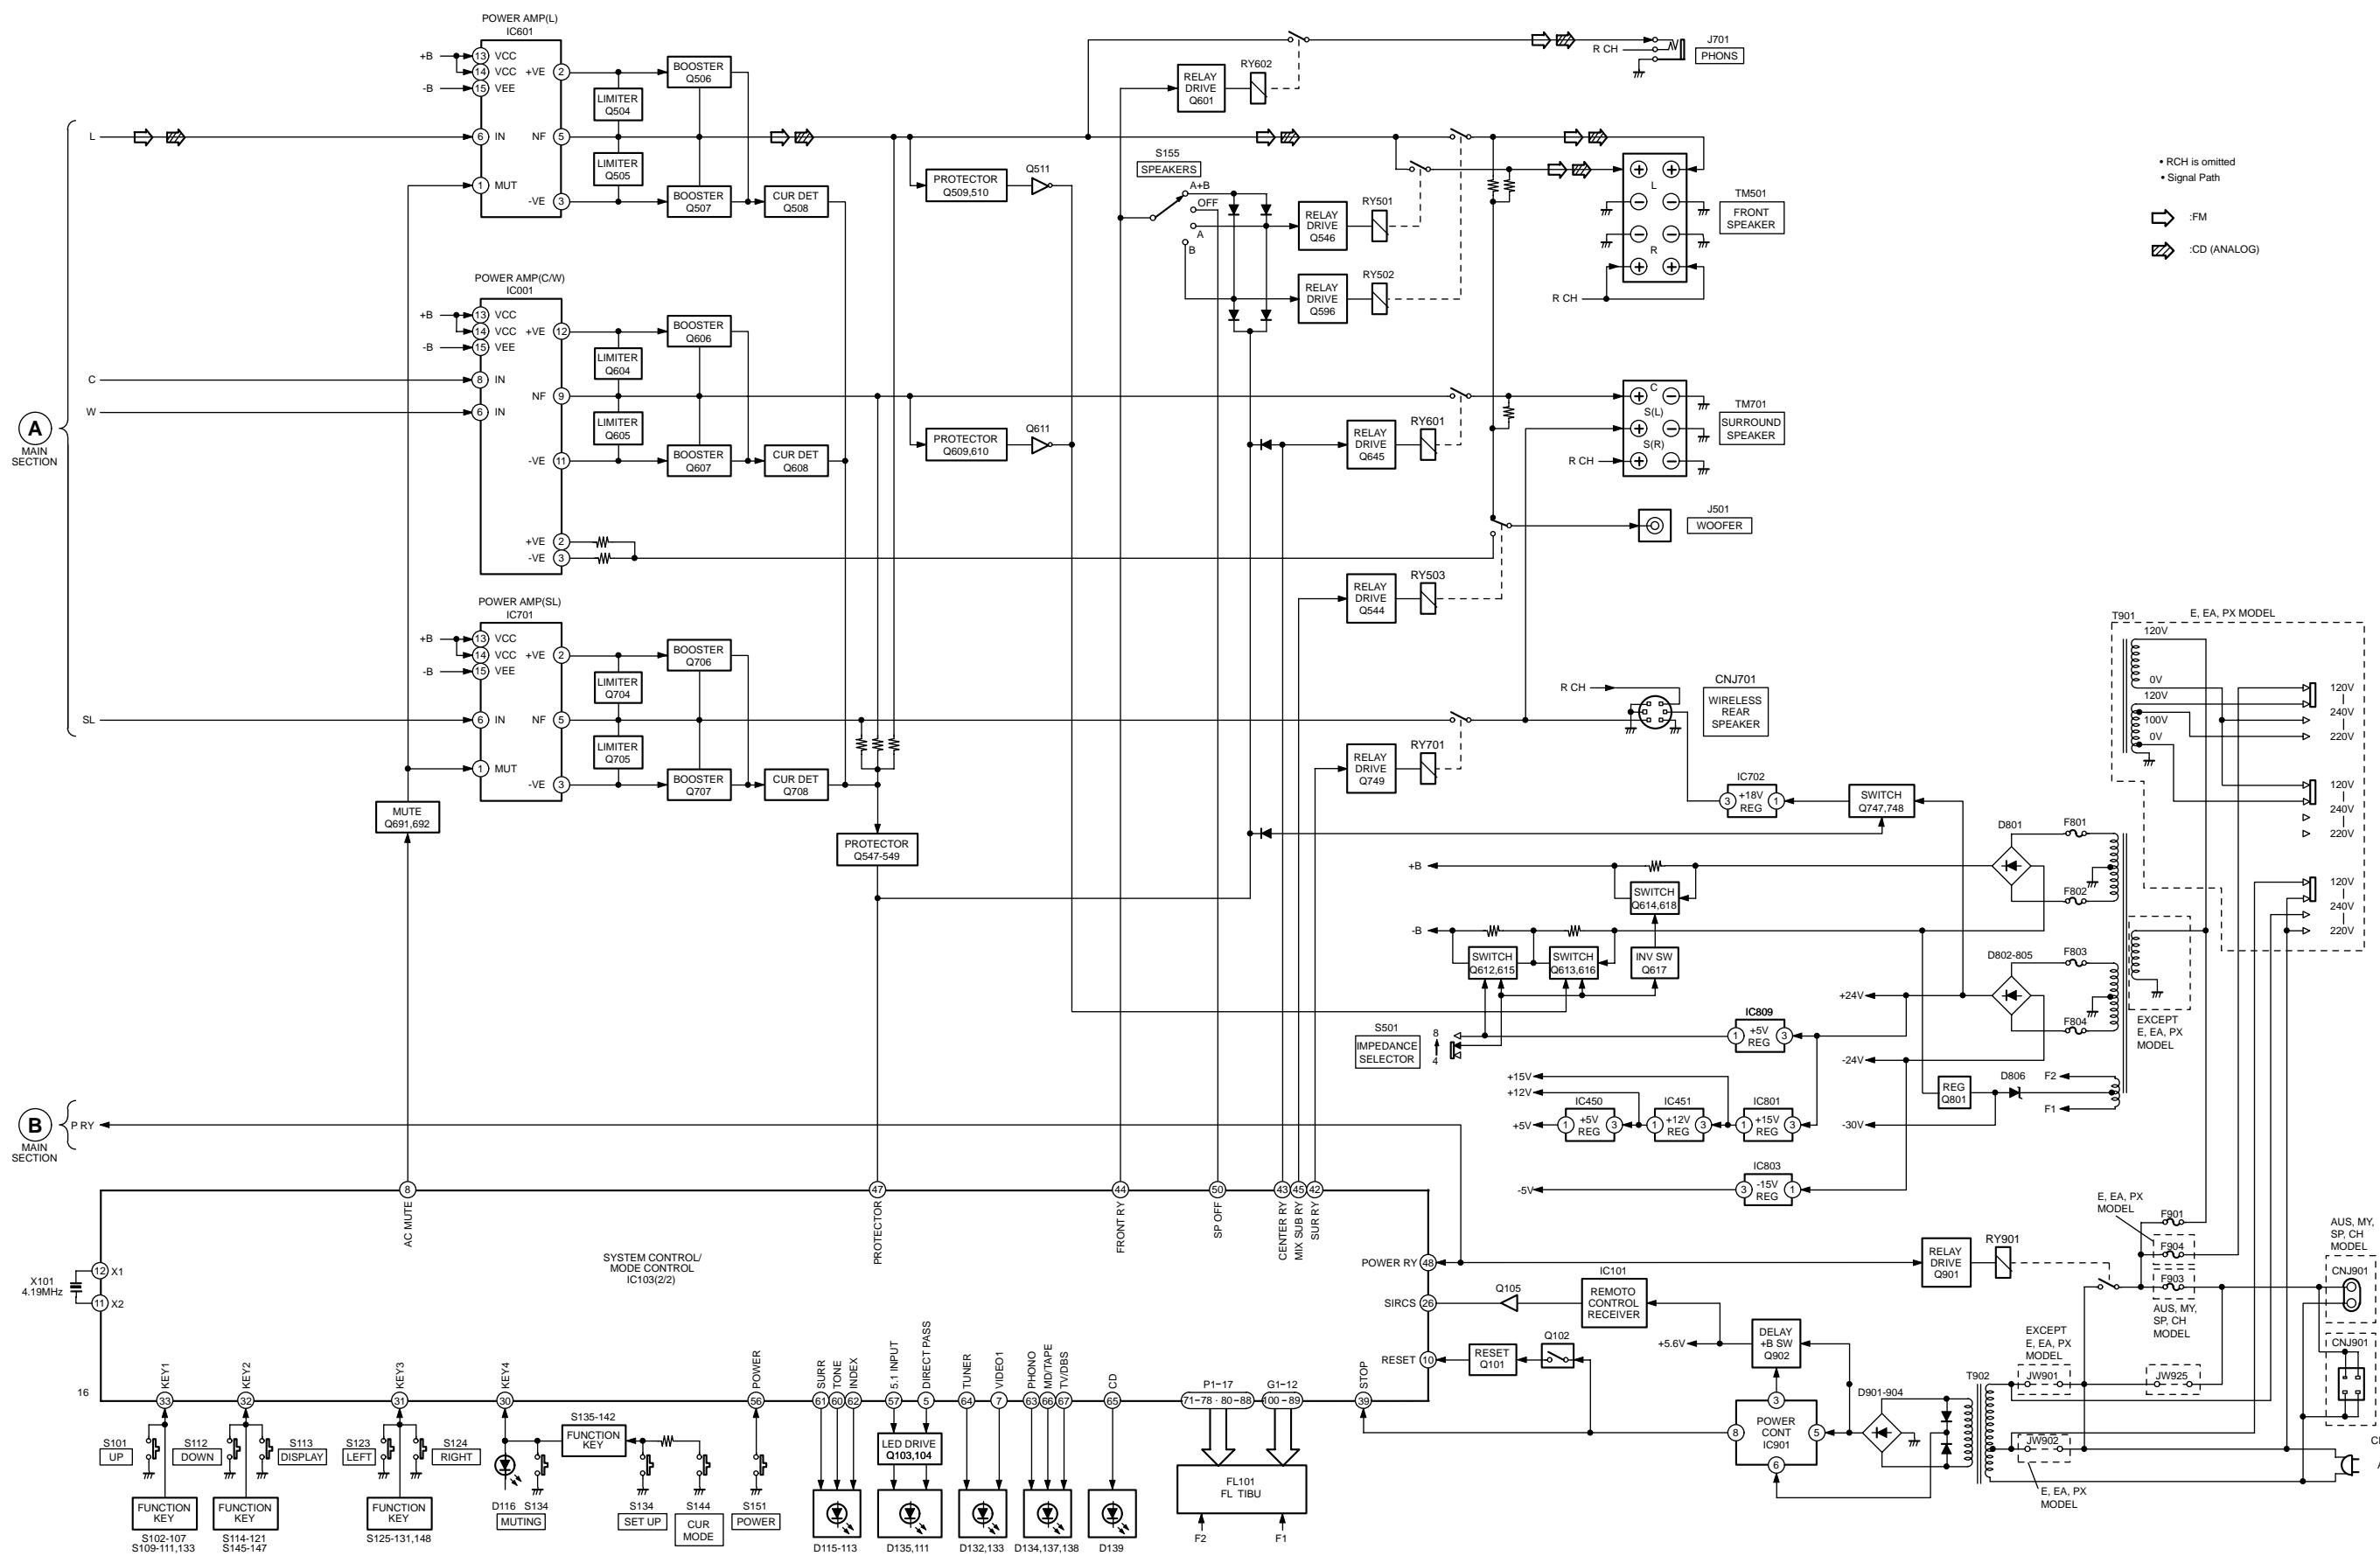


3-4. PRINTED WIRING BOARD — AMP SECTION —

- Semiconductor Location

| Ref. No. | Location | Ref. No. | Location |
|----------|----------|----------|----------|
| D501 | I-6 | Q504 | I-6 |
| D502 | I-6 | Q506 | J-6 |
| D503 | I-6 | Q507 | J-6 |
| D504 | I-7 | Q508 | I-8 |
| D505 | F-4 | Q509 | F-5 |
| D506 | F-4 | Q510 | F-4 |
| D543 | D-4 | Q511 | F-4 |
| D545 | F-4 | Q544 | C-6 |
| D546 | I-3 | Q546 | F-11 |
| D547 | H-11 | Q547 | H-12 |
| D548 | H-11 | Q548 | H-12 |
| D549 | H-11 | Q549 | H-11 |
| D551 | I-11 | Q554 | I-11 |
| D552 | I-11 | Q556 | J-11 |
| D553 | I-11 | Q557 | J-12 |
| D554 | I-12 | Q558 | I-12 |
| D555 | G-4 | Q559 | G-5 |
| D556 | F-4 | Q560 | F-5 |
| D601 | I-9 | Q561 | F-5 |
| D602 | I-9 | Q596 | F-11 |
| D603 | I-9 | Q601 | F-11 |
| D604 | I-9 | Q604 | I-9 |
| D605 | C-5 | Q606 | J-8 |
| D606 | C-6 | Q607 | J-10 |
| D607 | C-5 | Q608 | I-10 |
| D608 | F-12 | Q609 | C-6 |
| D647 | H-4 | Q610 | C-6 |
| D648 | I-4 | Q611 | C-6 |
| D649 | C-3 | Q612 | I-4 |
| D705 | D-3 | Q613 | H-4 |
| D706 | D-3 | Q614 | H-34 |
| D749 | B-2 | Q615 | I-4 |
| D801 | F-8 | Q616 | H-4 |
| D802 | G-10 | Q617 | H-4 |
| D803 | G-10 | Q618 | H-4 |
| D804 | G-10 | Q645 | C-5 |
| D805 | G-10 | Q709 | C-3 |
| D806 | F-11 | Q710 | C-3 |
| D807 | H-8 | Q745 | C-4 |
| | | Q747 | C-6 |
| IC702 | C-7 | Q748 | C-6 |
| IC809 | G-11 | Q801 | H-8 |

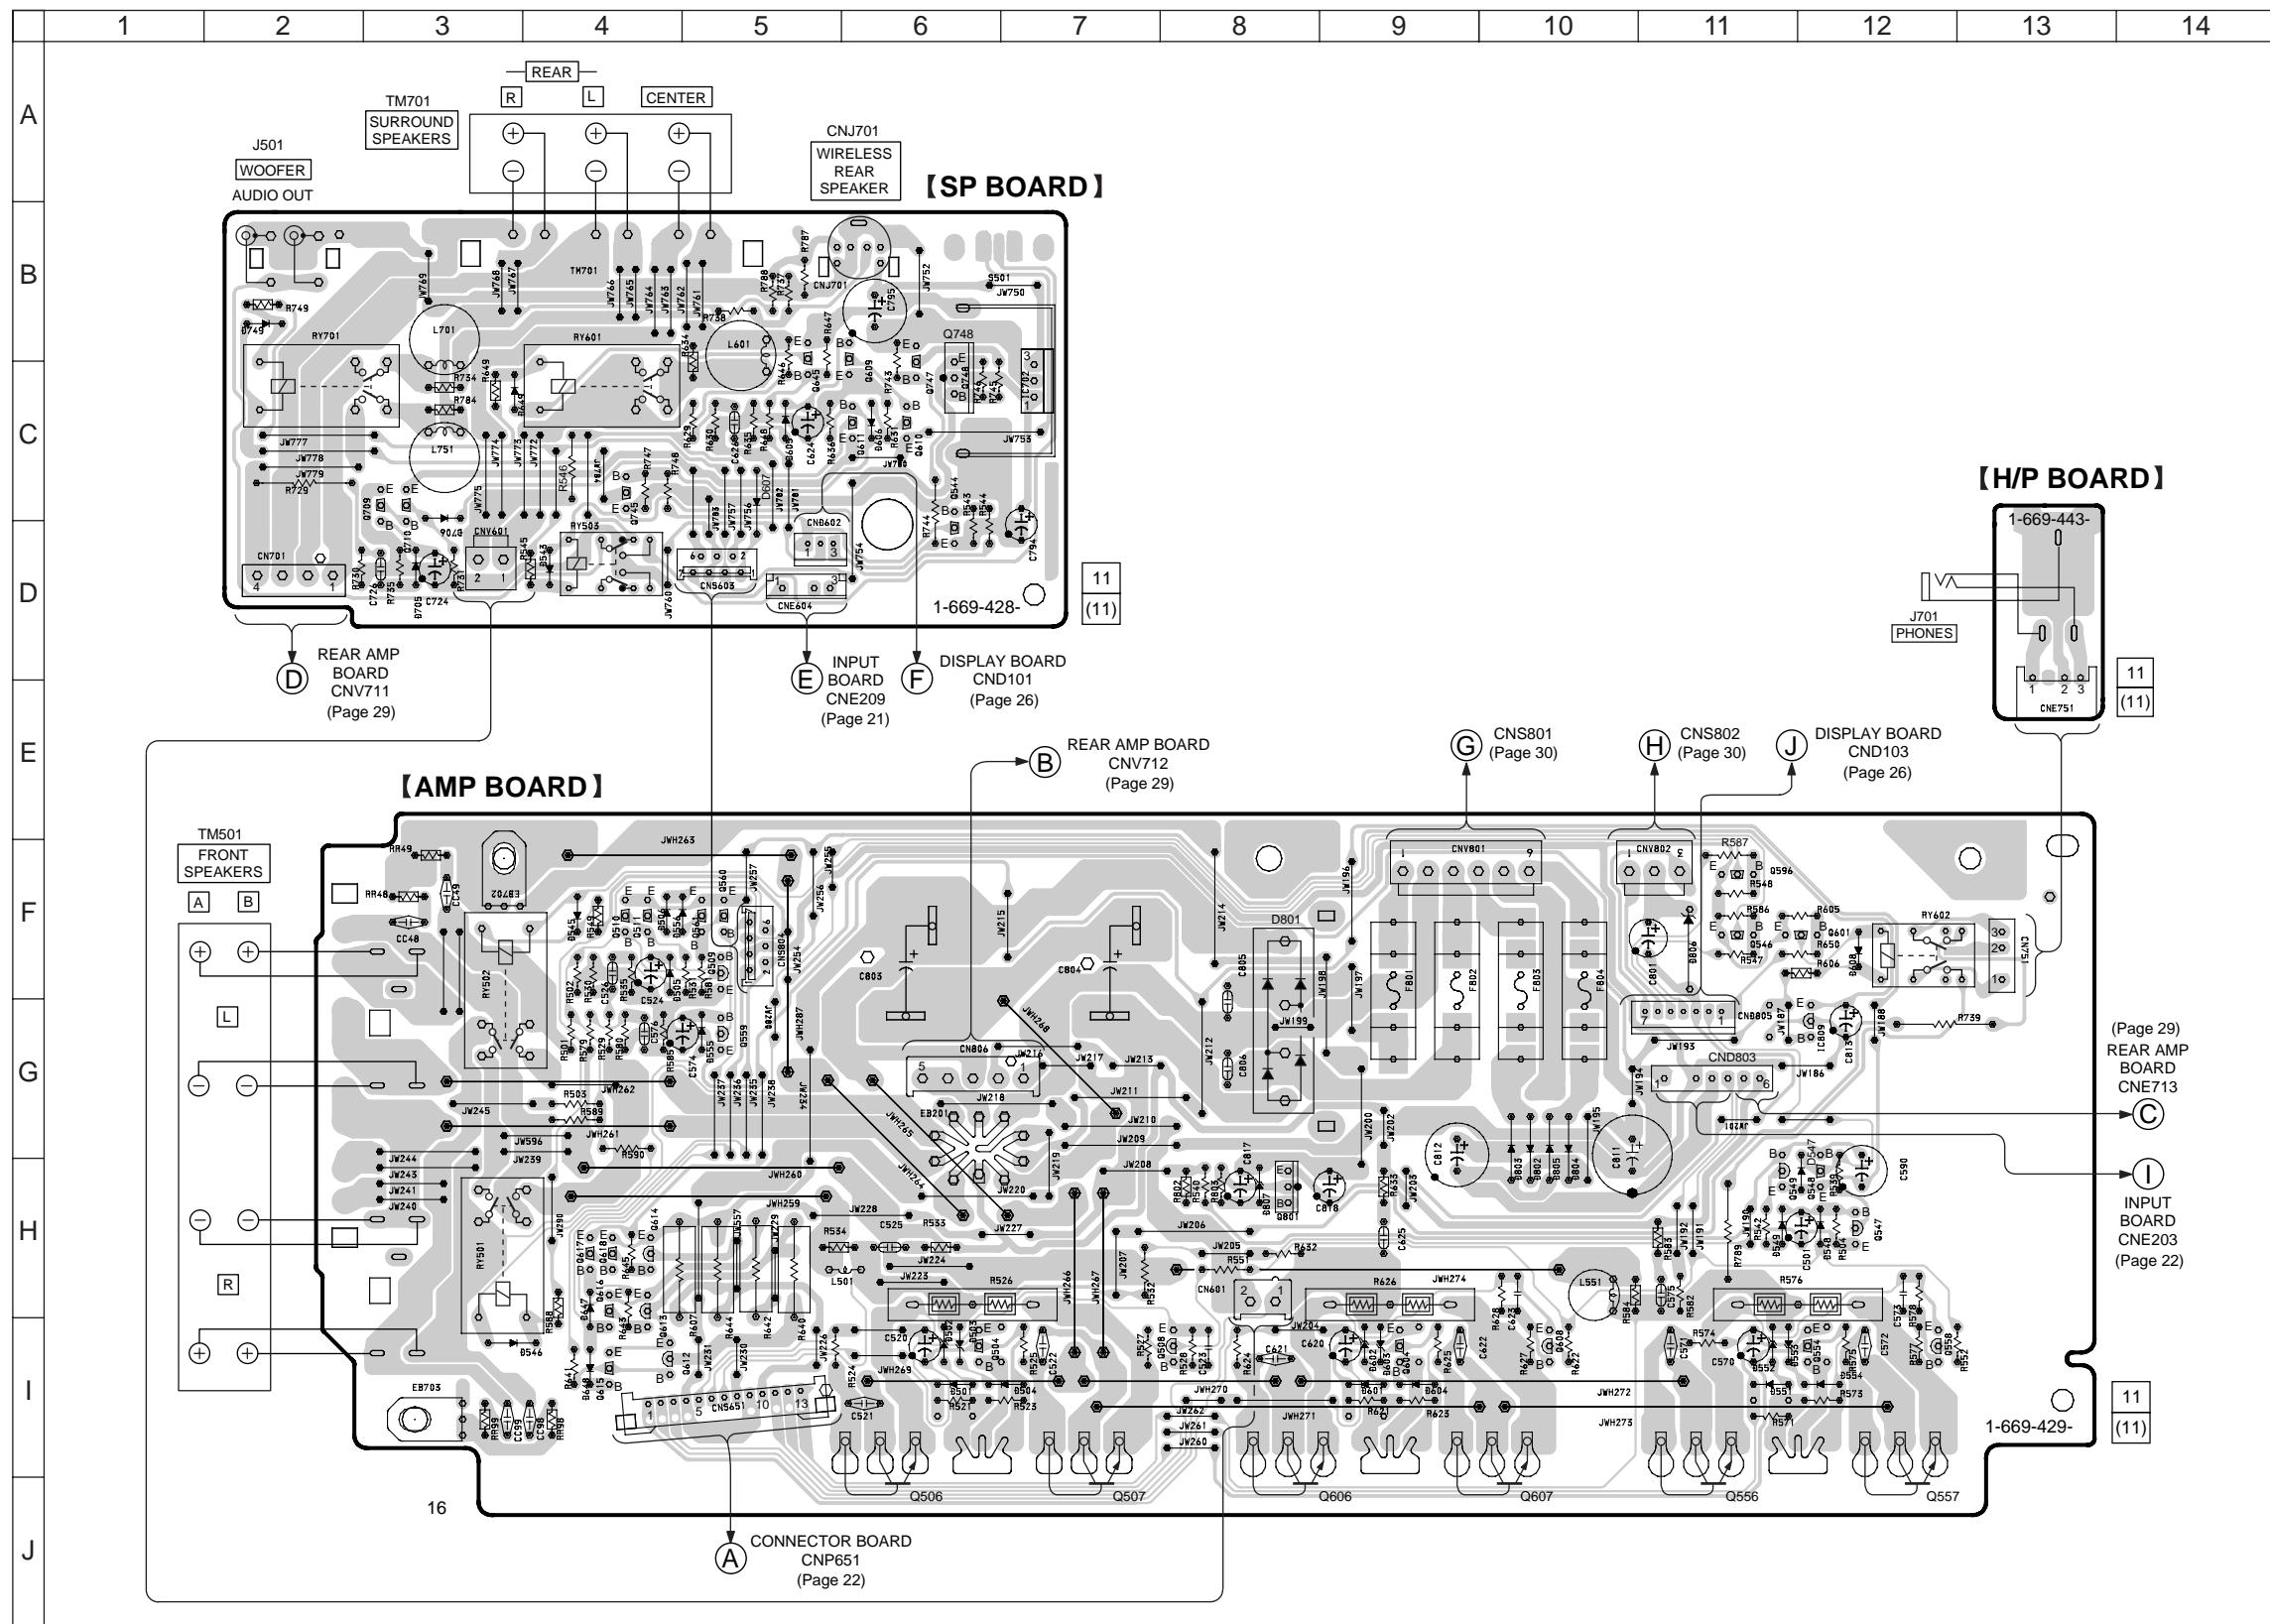

3-5. SCHEMATIC DIAGRAM — AMP SECTION —

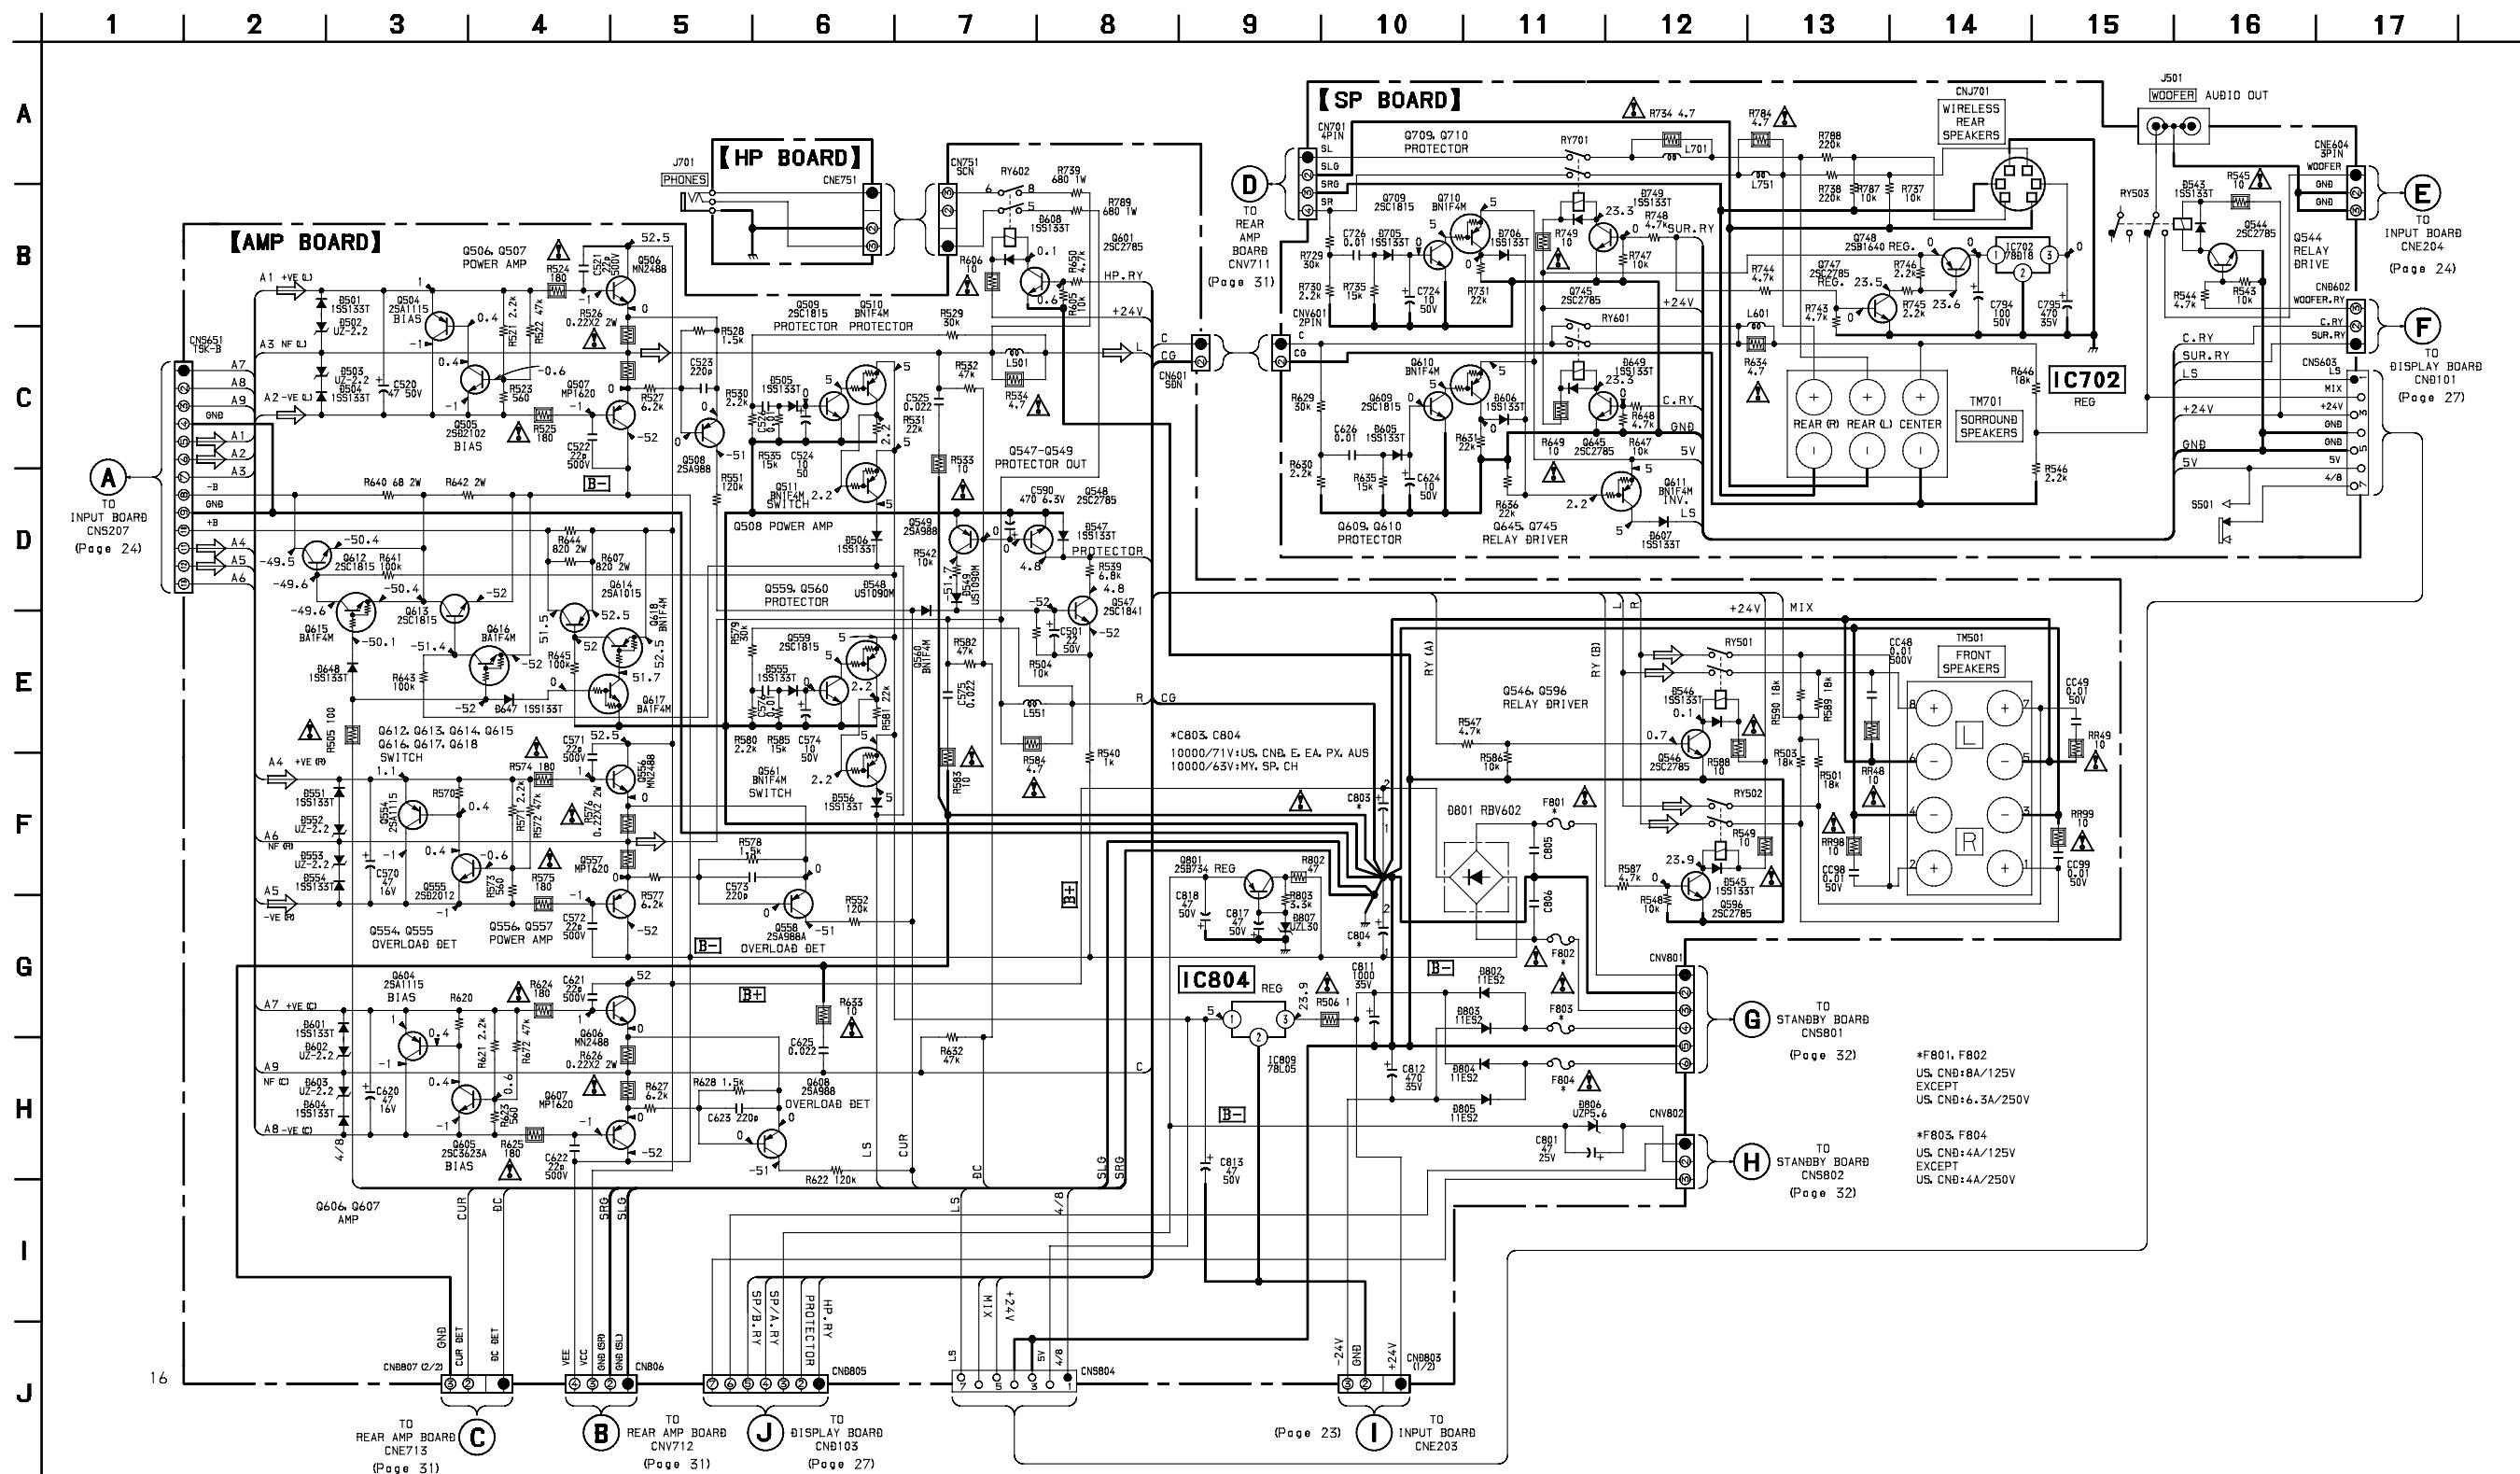

3-6. PRINTED WIRING BOARD — VIDEO SECTION —

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|

A

B

C

D

E


F

G


H

I

J

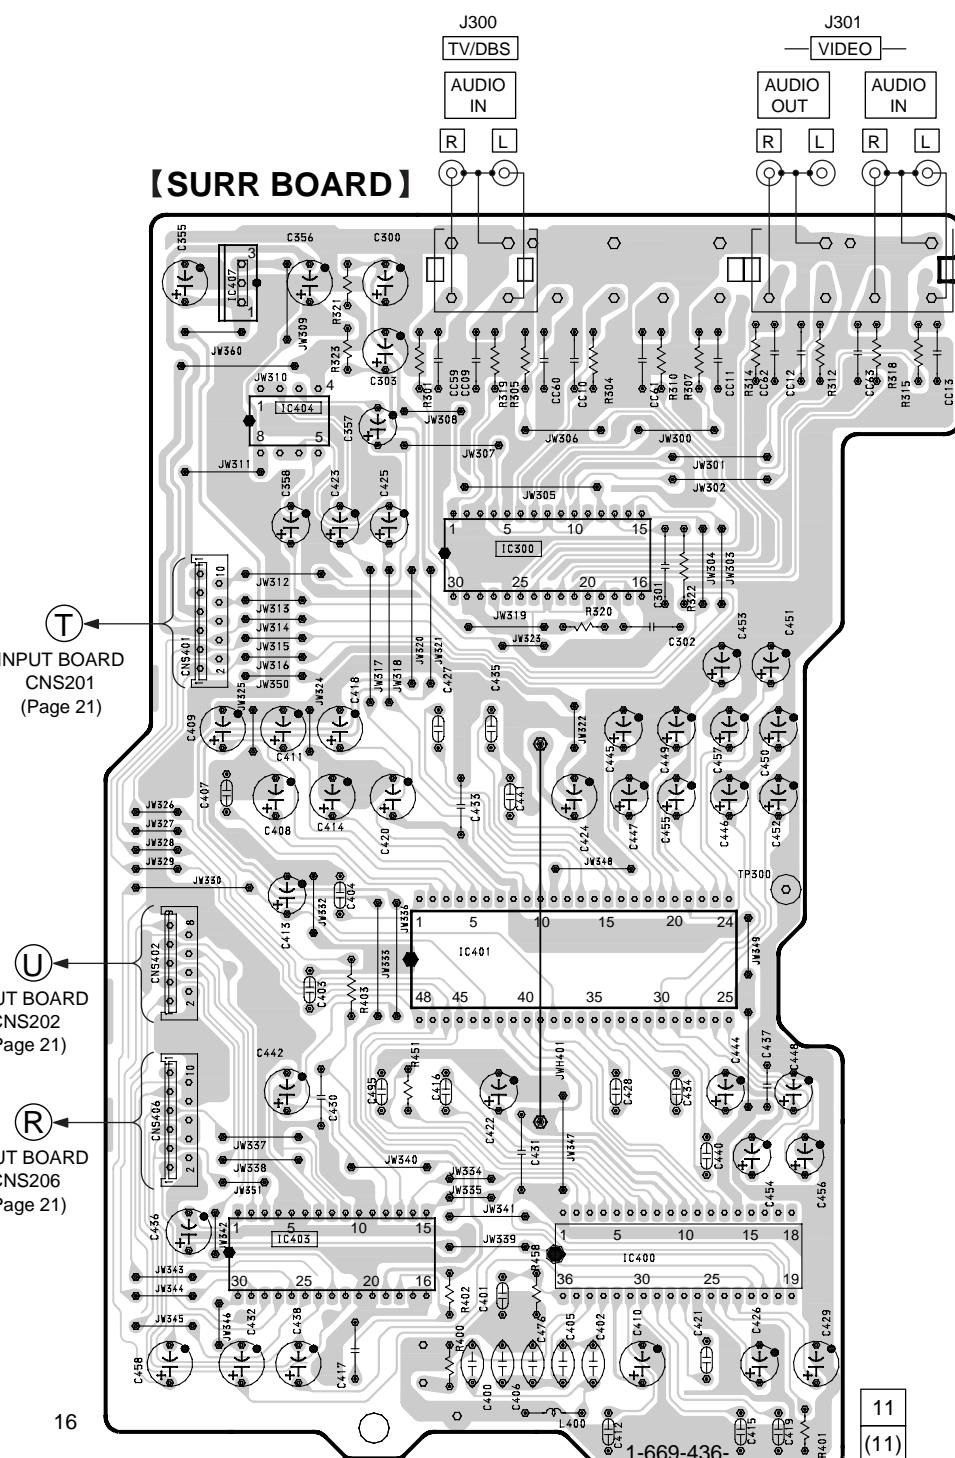


【VIDEO BOARD】

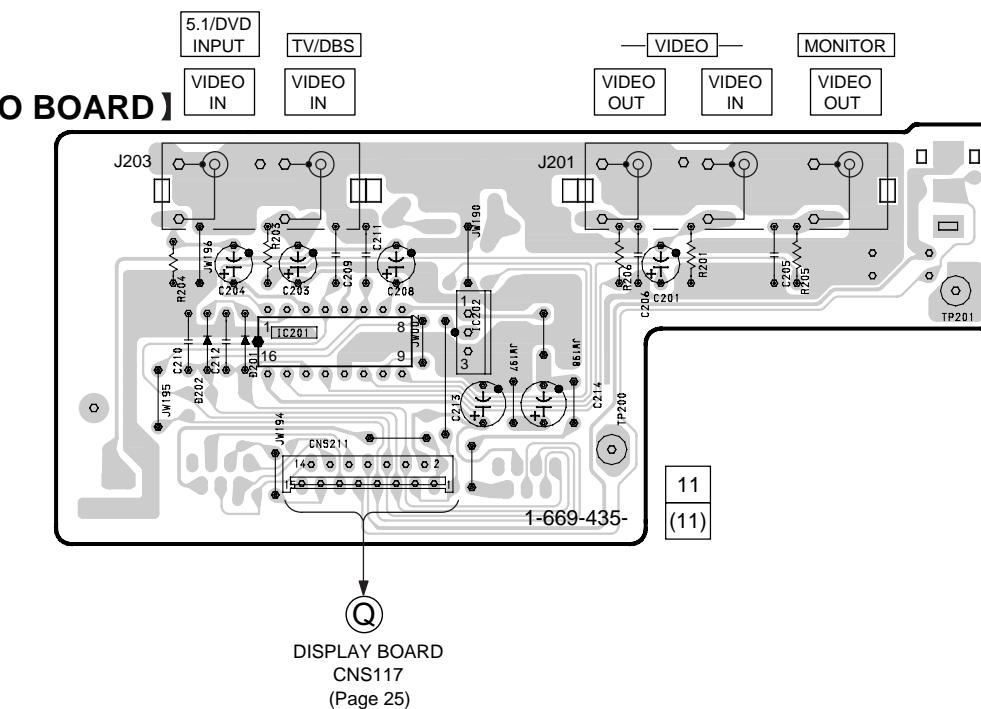

• Semiconductor Location

| Ref. No. | Location |
|----------|----------|
| D201 | C-9 |
| D212 | C-9 |
| IC201 | C-10 |
| IC202 | C-10 |
| IC300 | D-4 |
| IC400 | H-5 |
| IC401 | F-4 |
| IC403 | H-3 |
| IC404 | C-3 |
| IC407 | C-3 |


3-7. SCHEMATIC DIAGRAM — VIDEO SECTION —

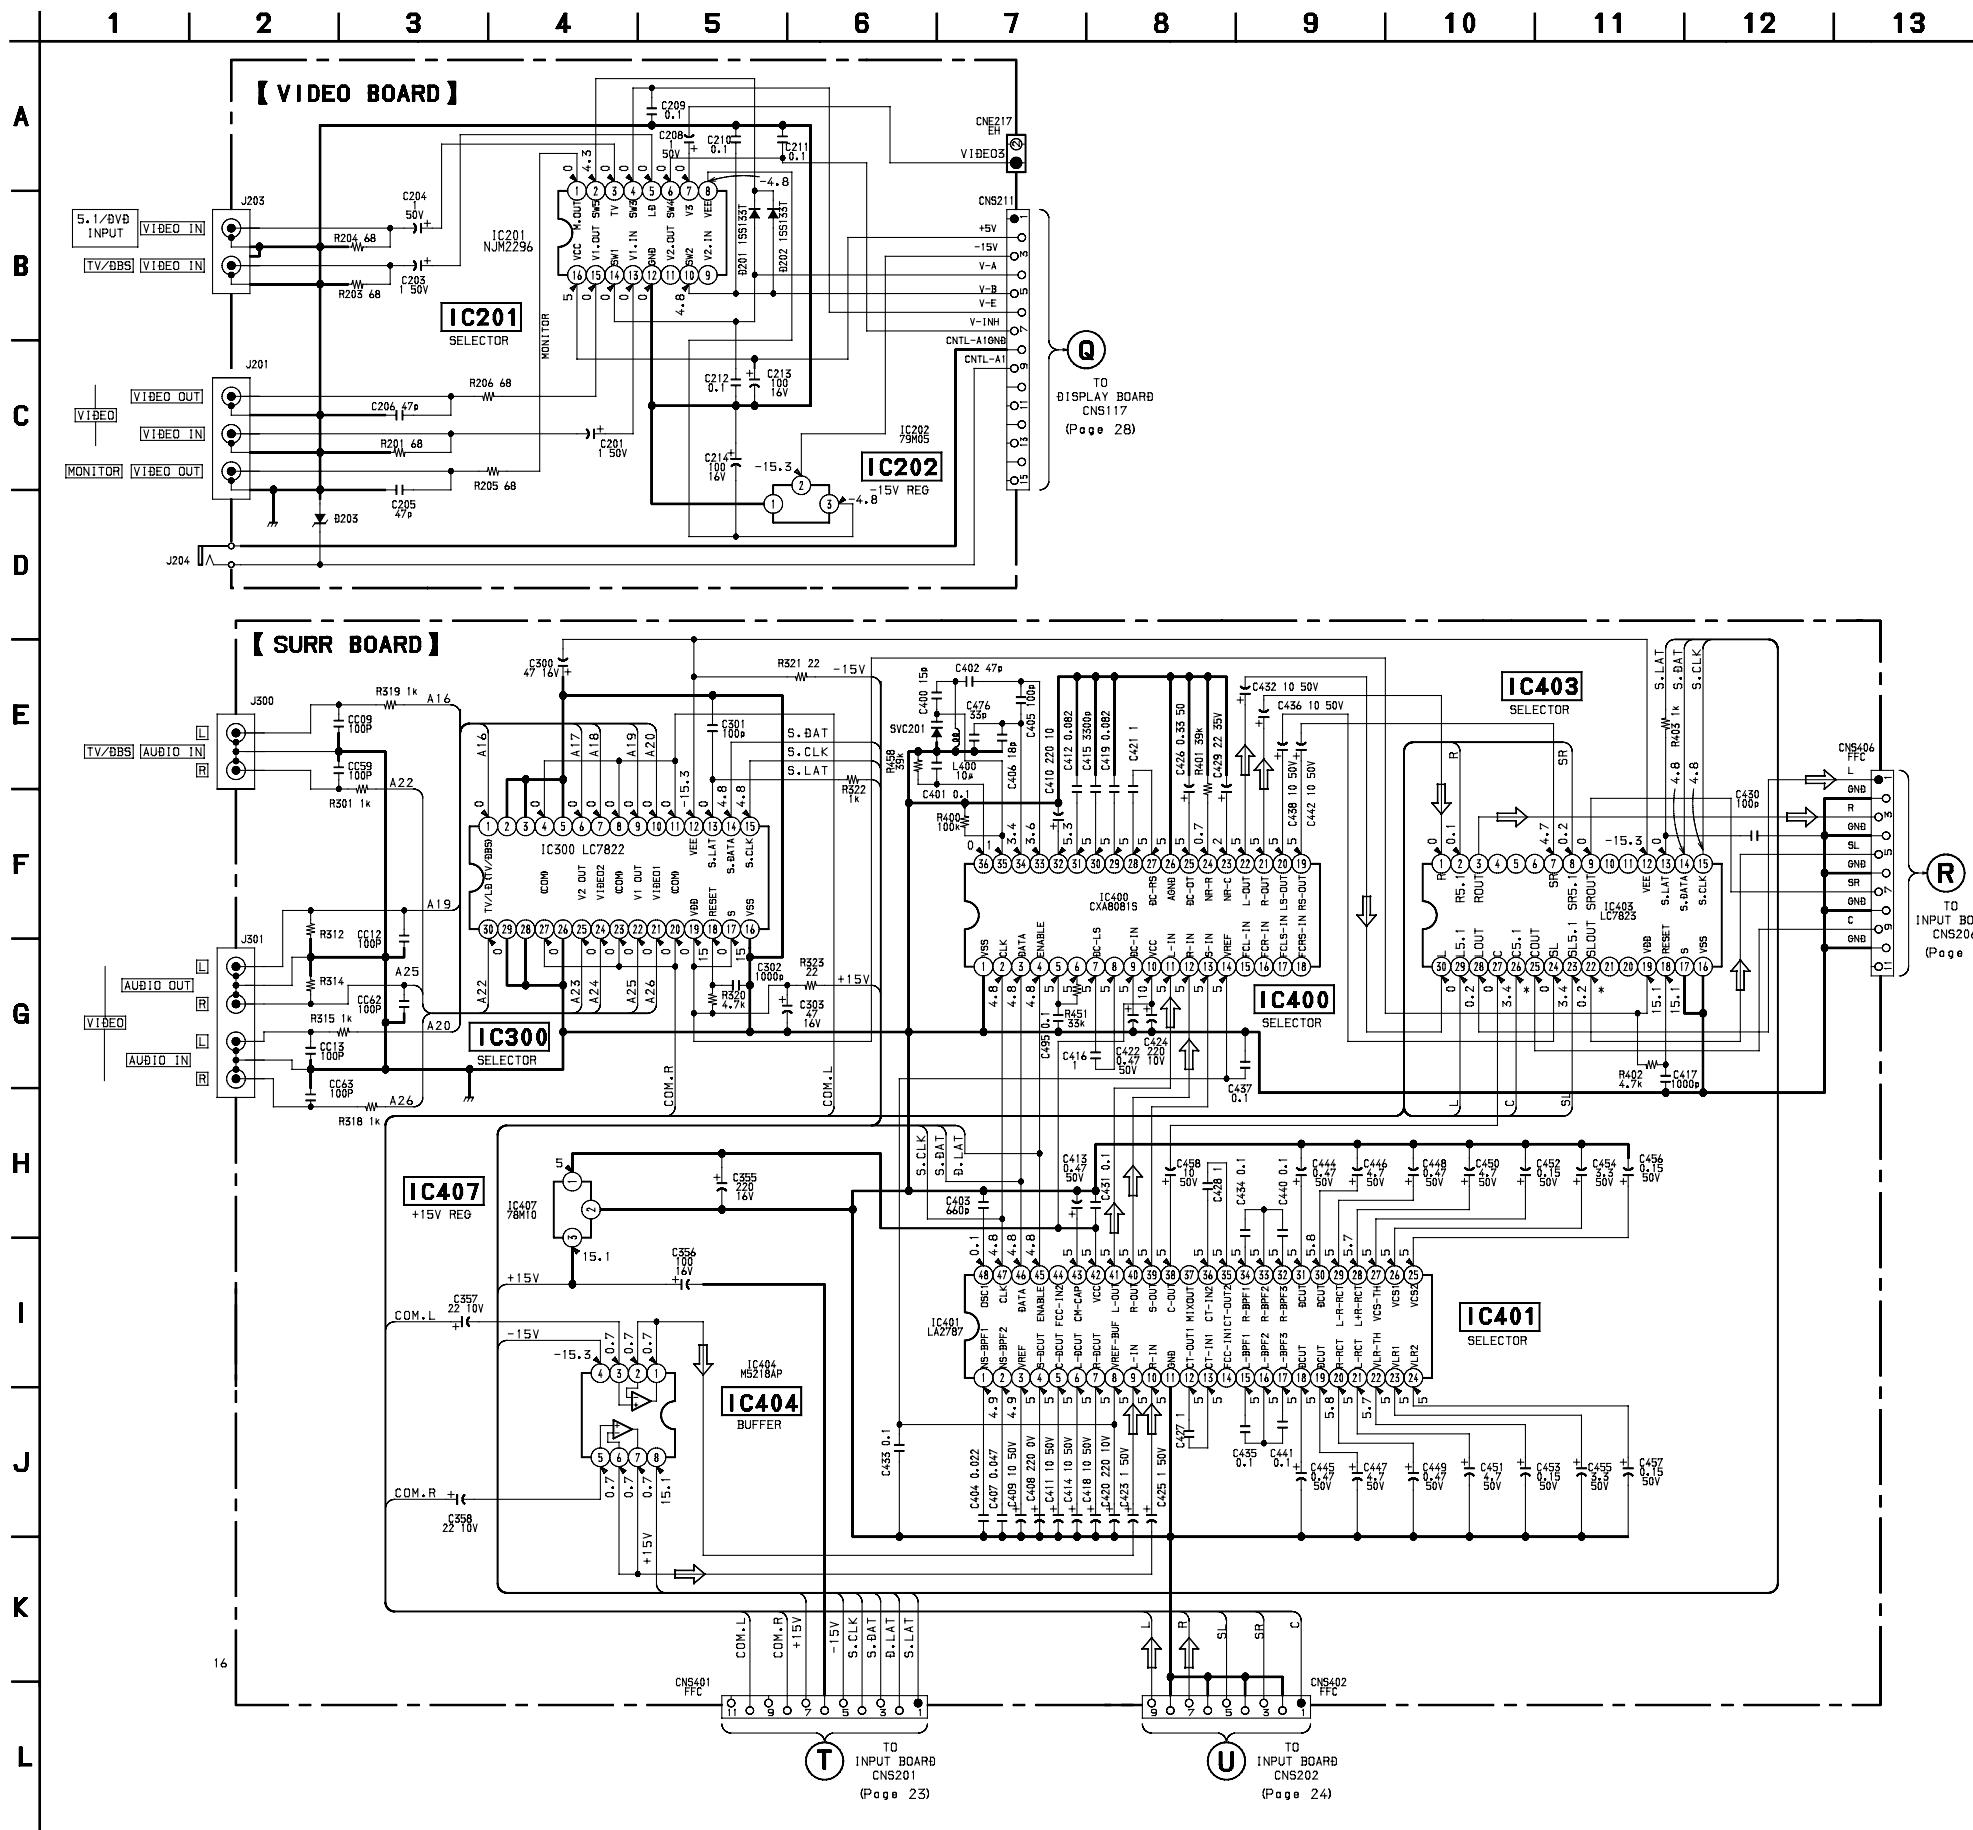


3-8. PRINTED WIRING BOARD — INPUT SECTION —

• Semiconductor Location

| Ref. No. | Location |
|----------|----------|
| D301 | G-9 |
| D401 | I-10 |
| D402 | H-12 |
| IC001 | F-9 |
| IC301 | G-7 |
| IC302 | E-4 |
| IC303 | F-4 |
| IC304 | H-10 |
| IC305 | H-9 |
| IC306 | G-12 |
| IC450 | D-13 |
| IC451 | D-11 |
| IC502 | G-13 |
| IC601 | E-9 |
| IC701 | E-7 |
| IC801 | D-11 |
| IC803 | D-12 |
| Q300 | H-10 |
| Q301 | H-10 |
| Q302 | H-8 |
| Q303 | G-7 |
| Q304 | G-8 |
| Q305 | G-8 |
| Q411 | H-9 |
| Q414 | H-12 |
| Q501 | F-12 |
| Q502 | E-12 |
| Q551 | H-12 |
| Q552 | H-13 |
| Q691 | D-10 |
| Q692 | D-10 |
| Q3008 | G-8 |

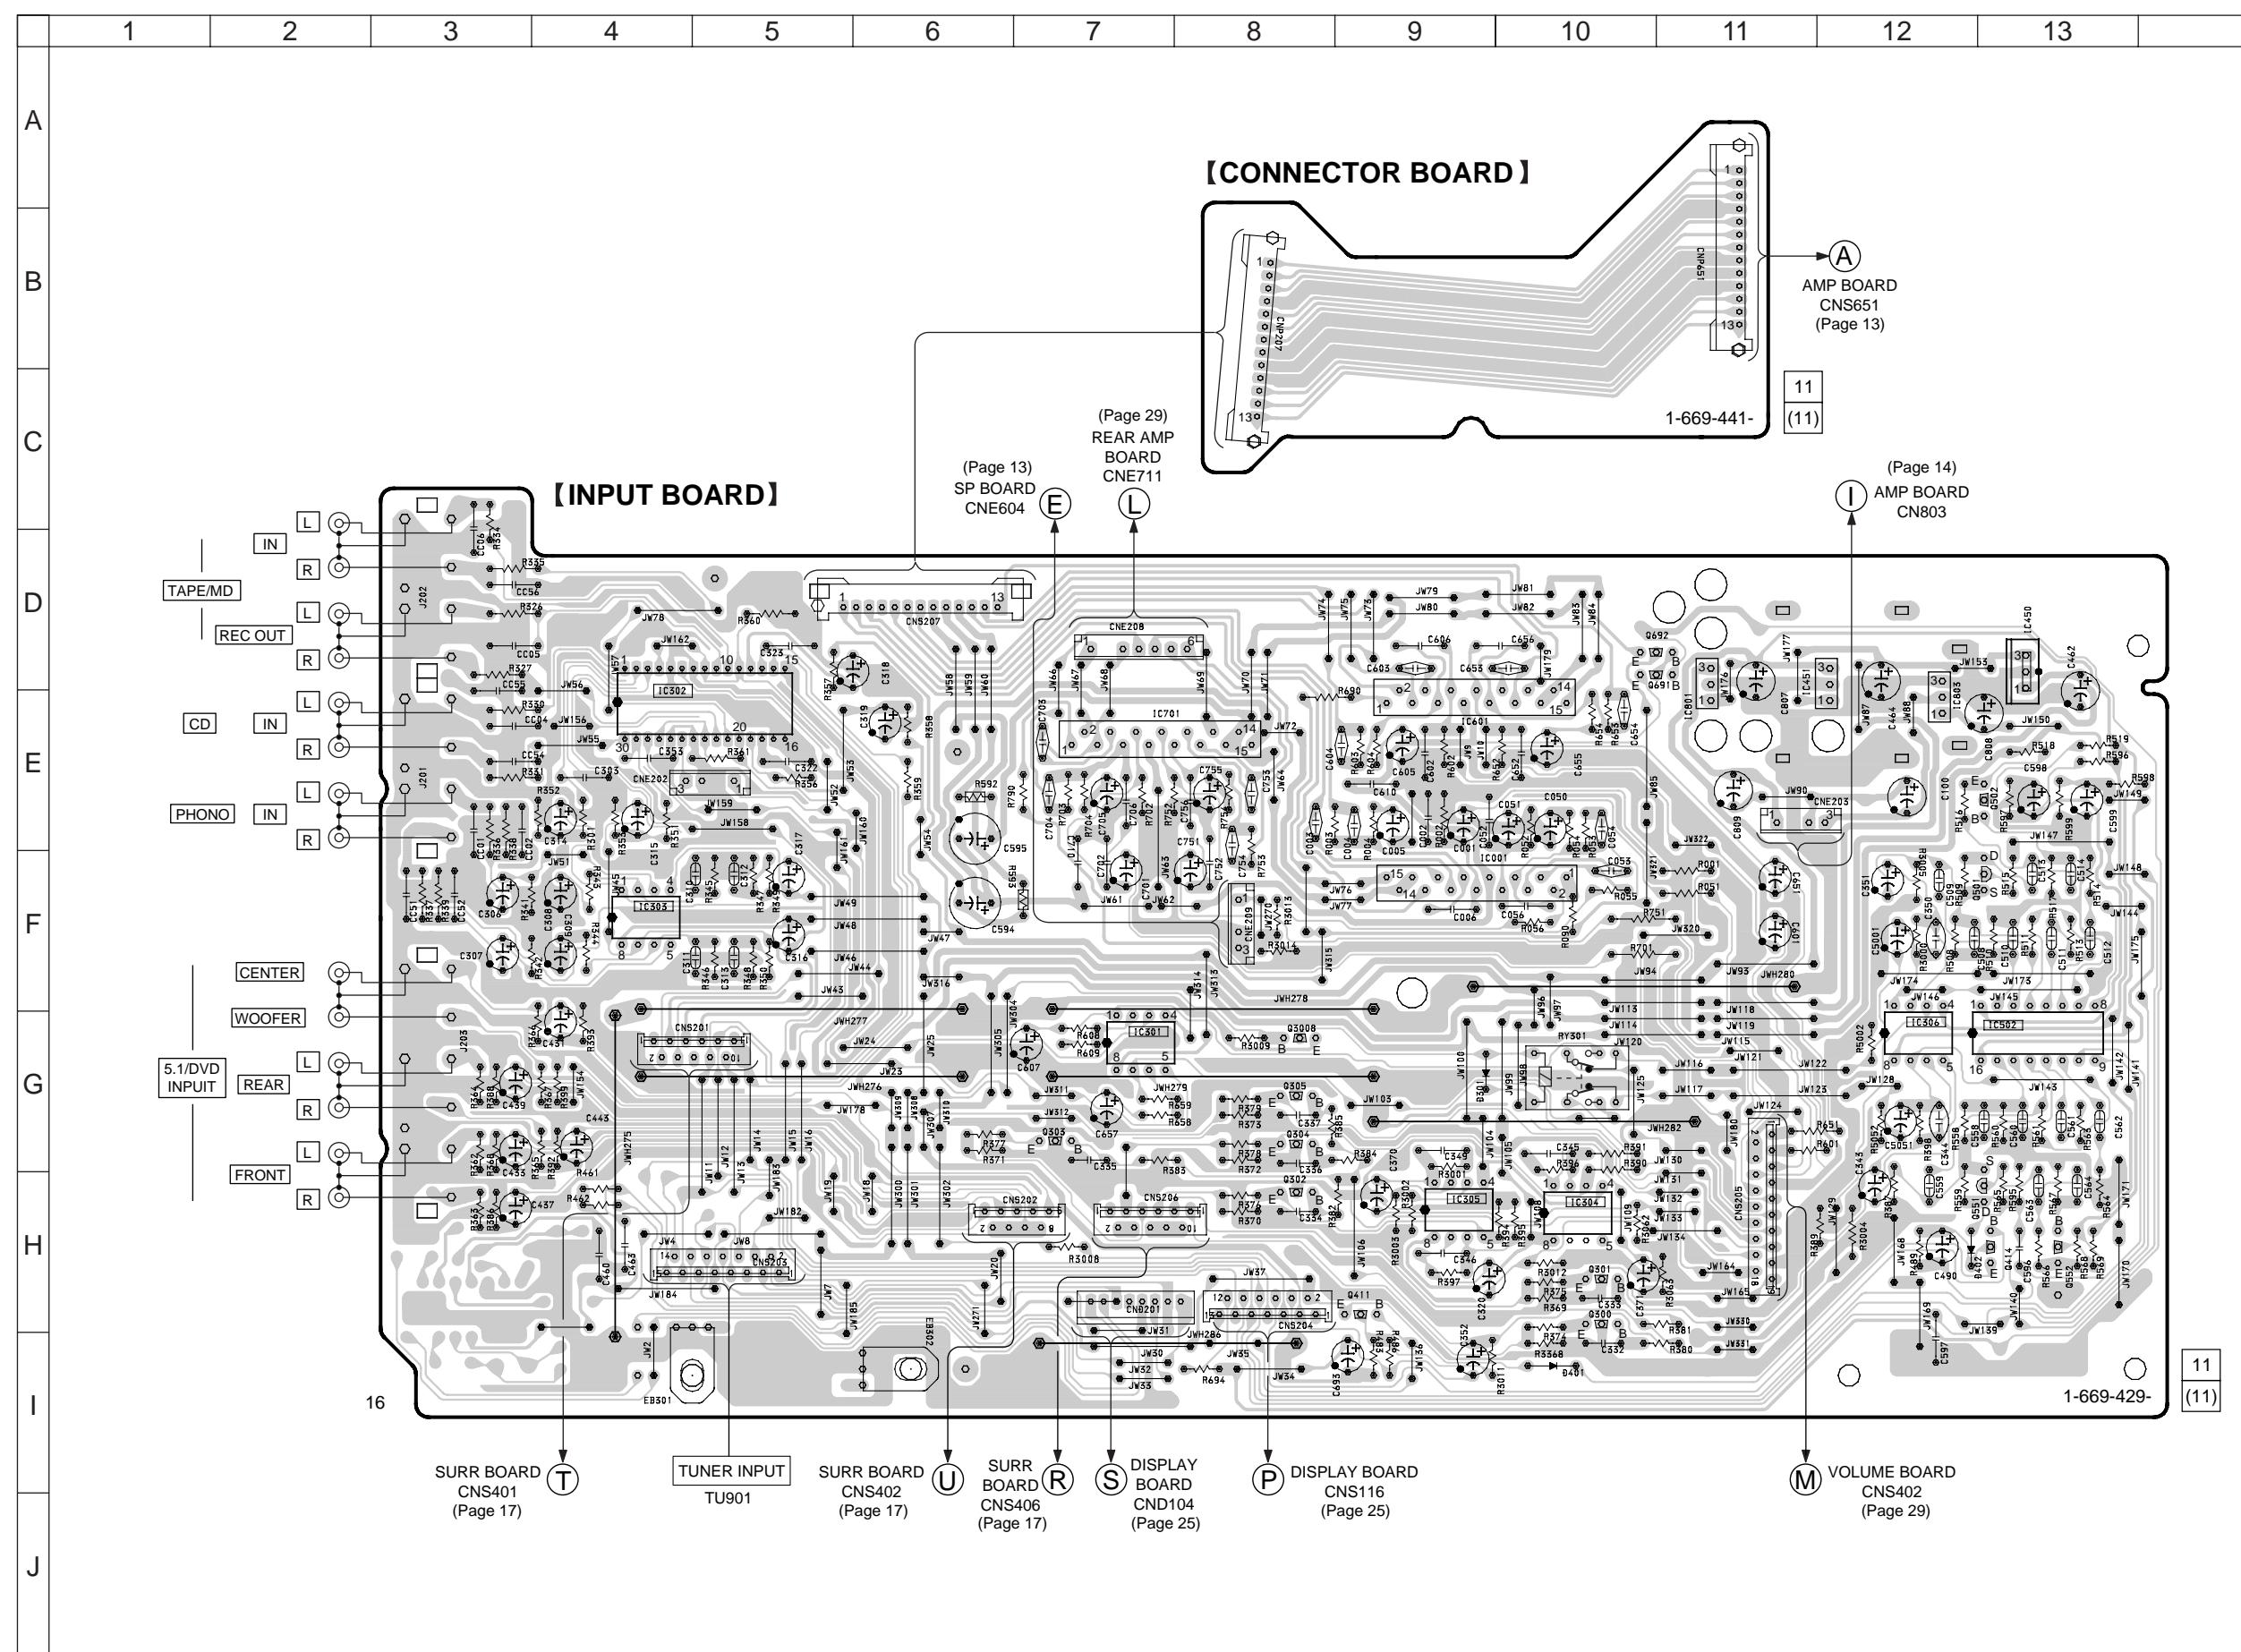


3-9. SCHEMATIC DIAGRAM — INPUT SECTION —

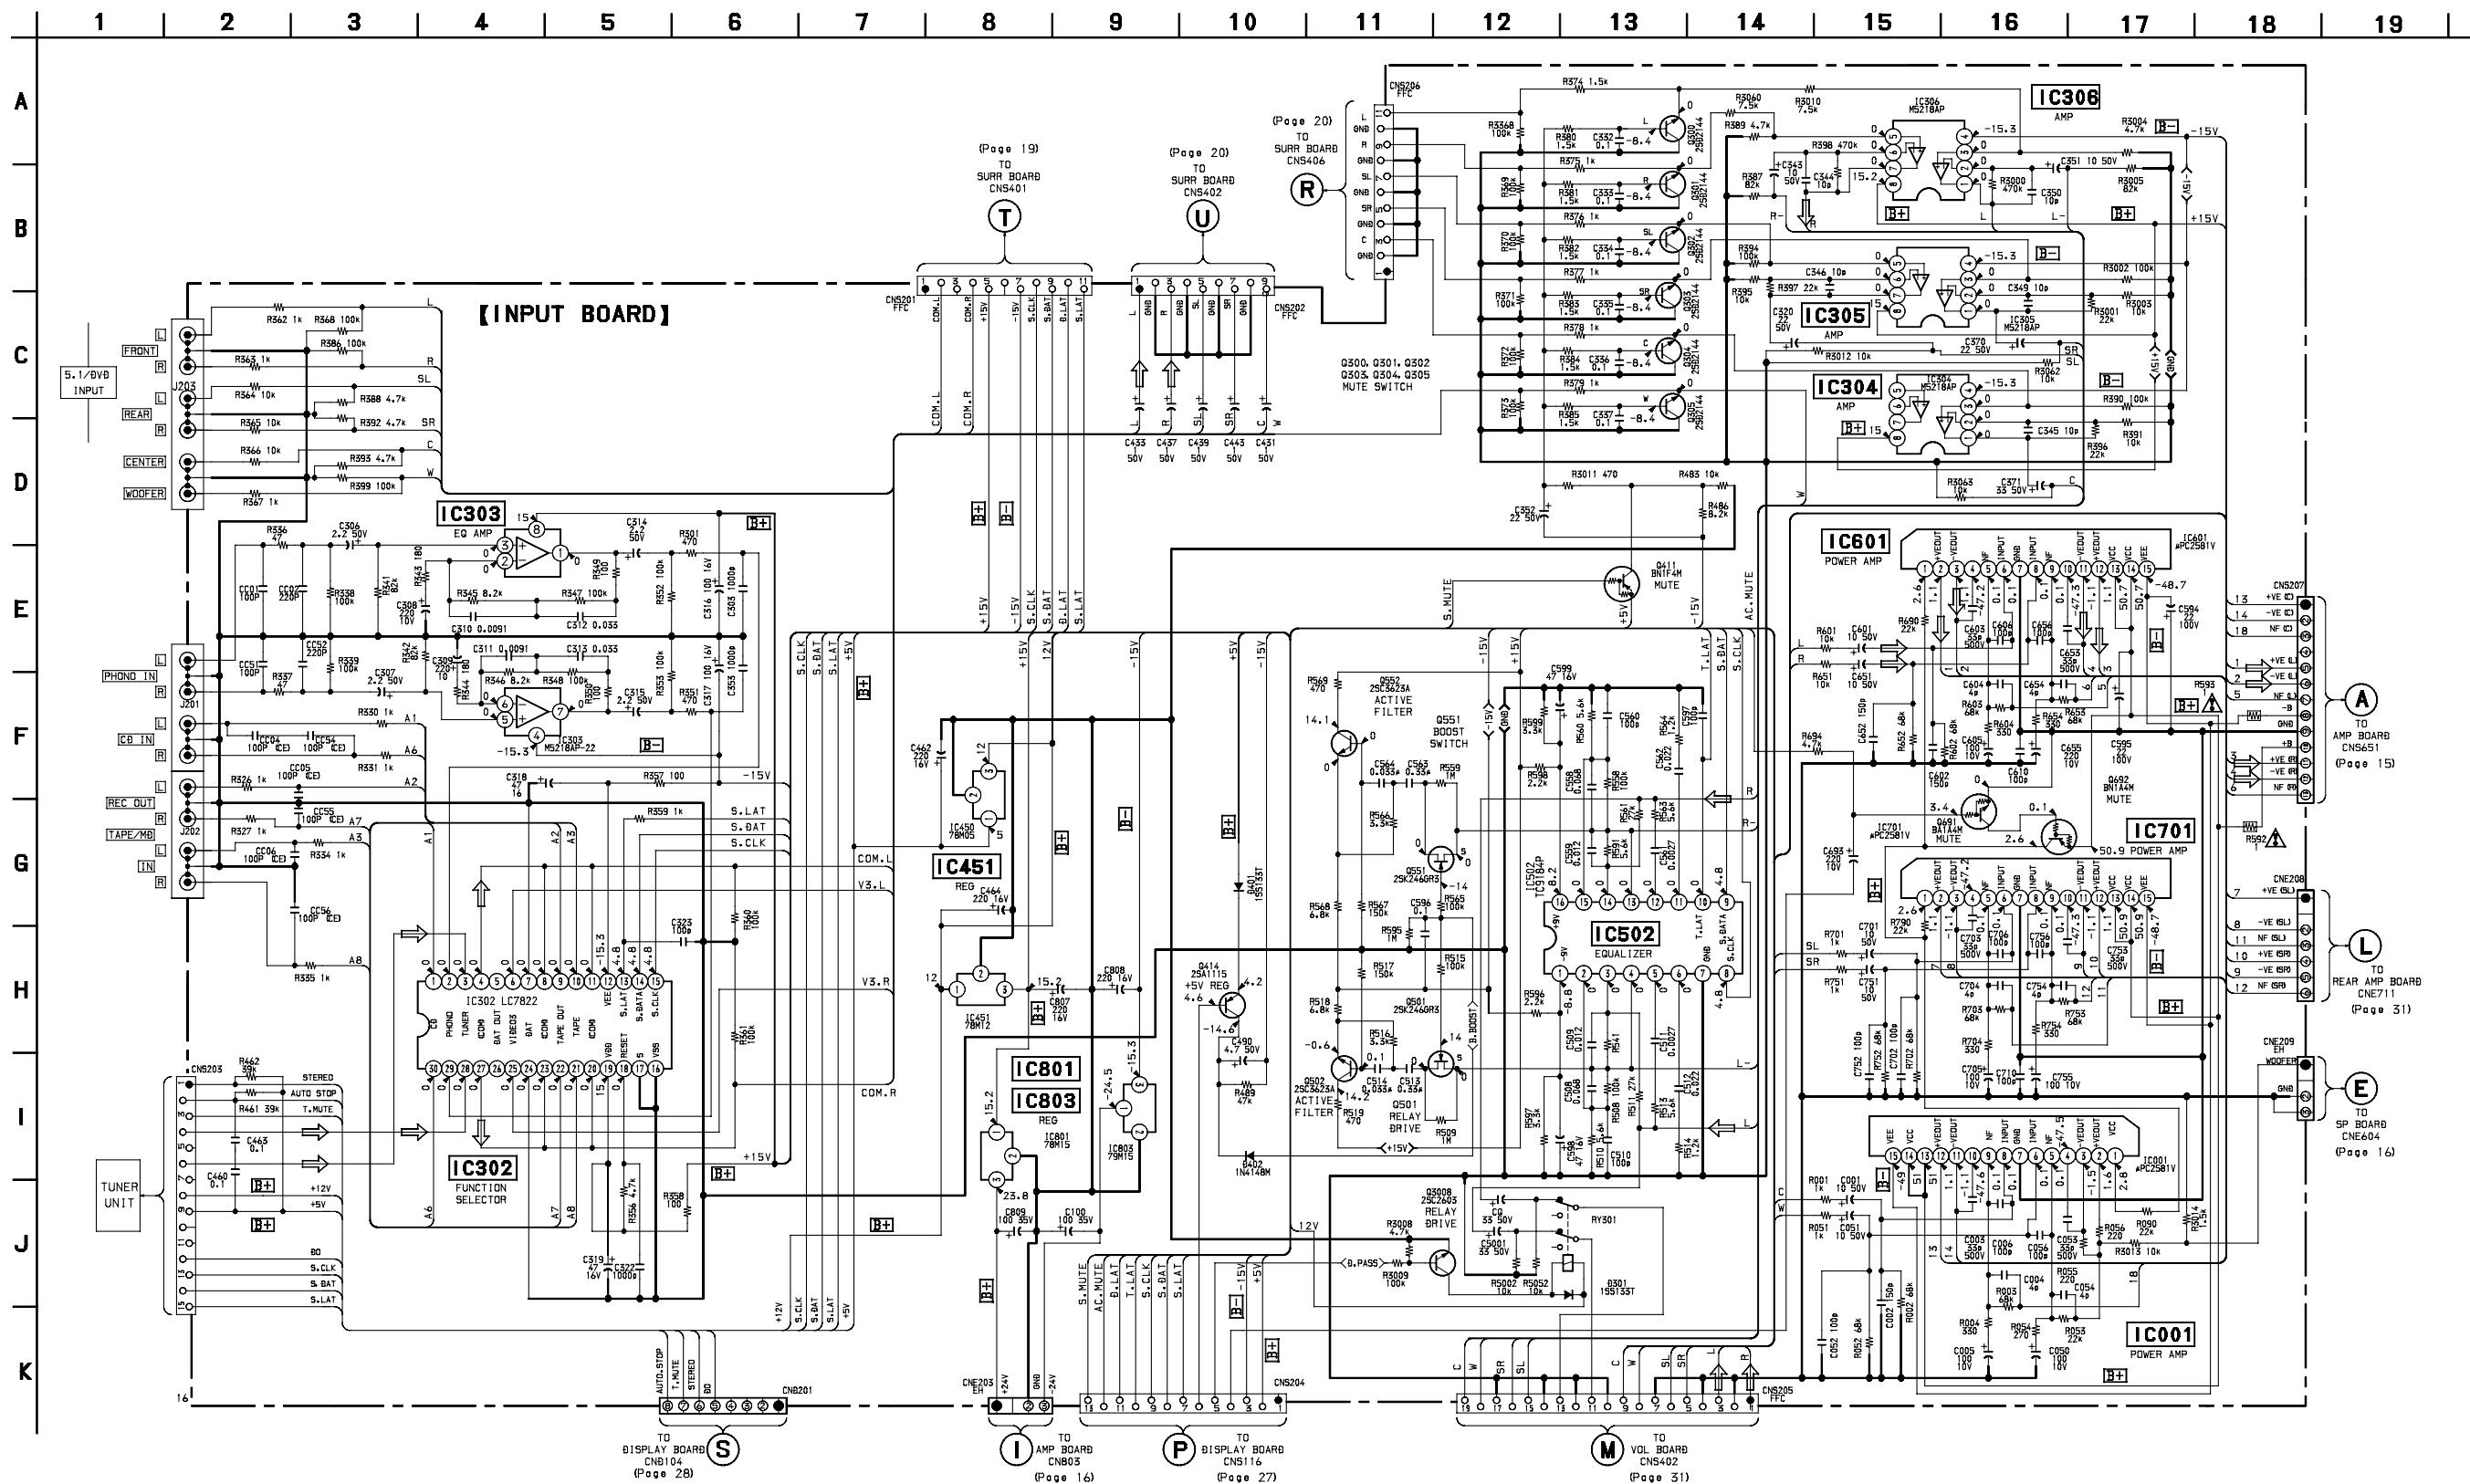


3-10. PRINTED WIRING BOARD—DISPLAY SECTION —

- Semiconductor Location

| Ref. No. | Location |
|----------|----------|
| D107 | E-5 |
| D108 | C-4 |
| D111 | C-3 |
| D113 | C-12 |
| D114 | C-12 |
| D115 | D-12 |
| D116 | E-2 |
| D119 | B-12 |
| D120 | B-11 |
| D121 | B-12 |
| D132 | H-8 |
| D133 | I-6 |
| D134 | H-9 |
| D135 | C-3 |
| D136 | D-3 |
| D137 | H-6 |
| D138 | I-8 |
| D139 | I-9 |
| D151 | B-10 |
| D152 | B-10 |
| D153 | B-10 |
| D154 | B-10 |
| D184 | C-2 |
| IC101 | C-4 |
| IC103 | D-7 |
| IC106 | C-1 |
| Q101 | B-11 |
| Q102 | B-12 |
| Q103 | C-2 |
| Q104 | C-2 |
| Q105 | D-4 |
| Q108 | C-2 |
| Q143 | E-3 |

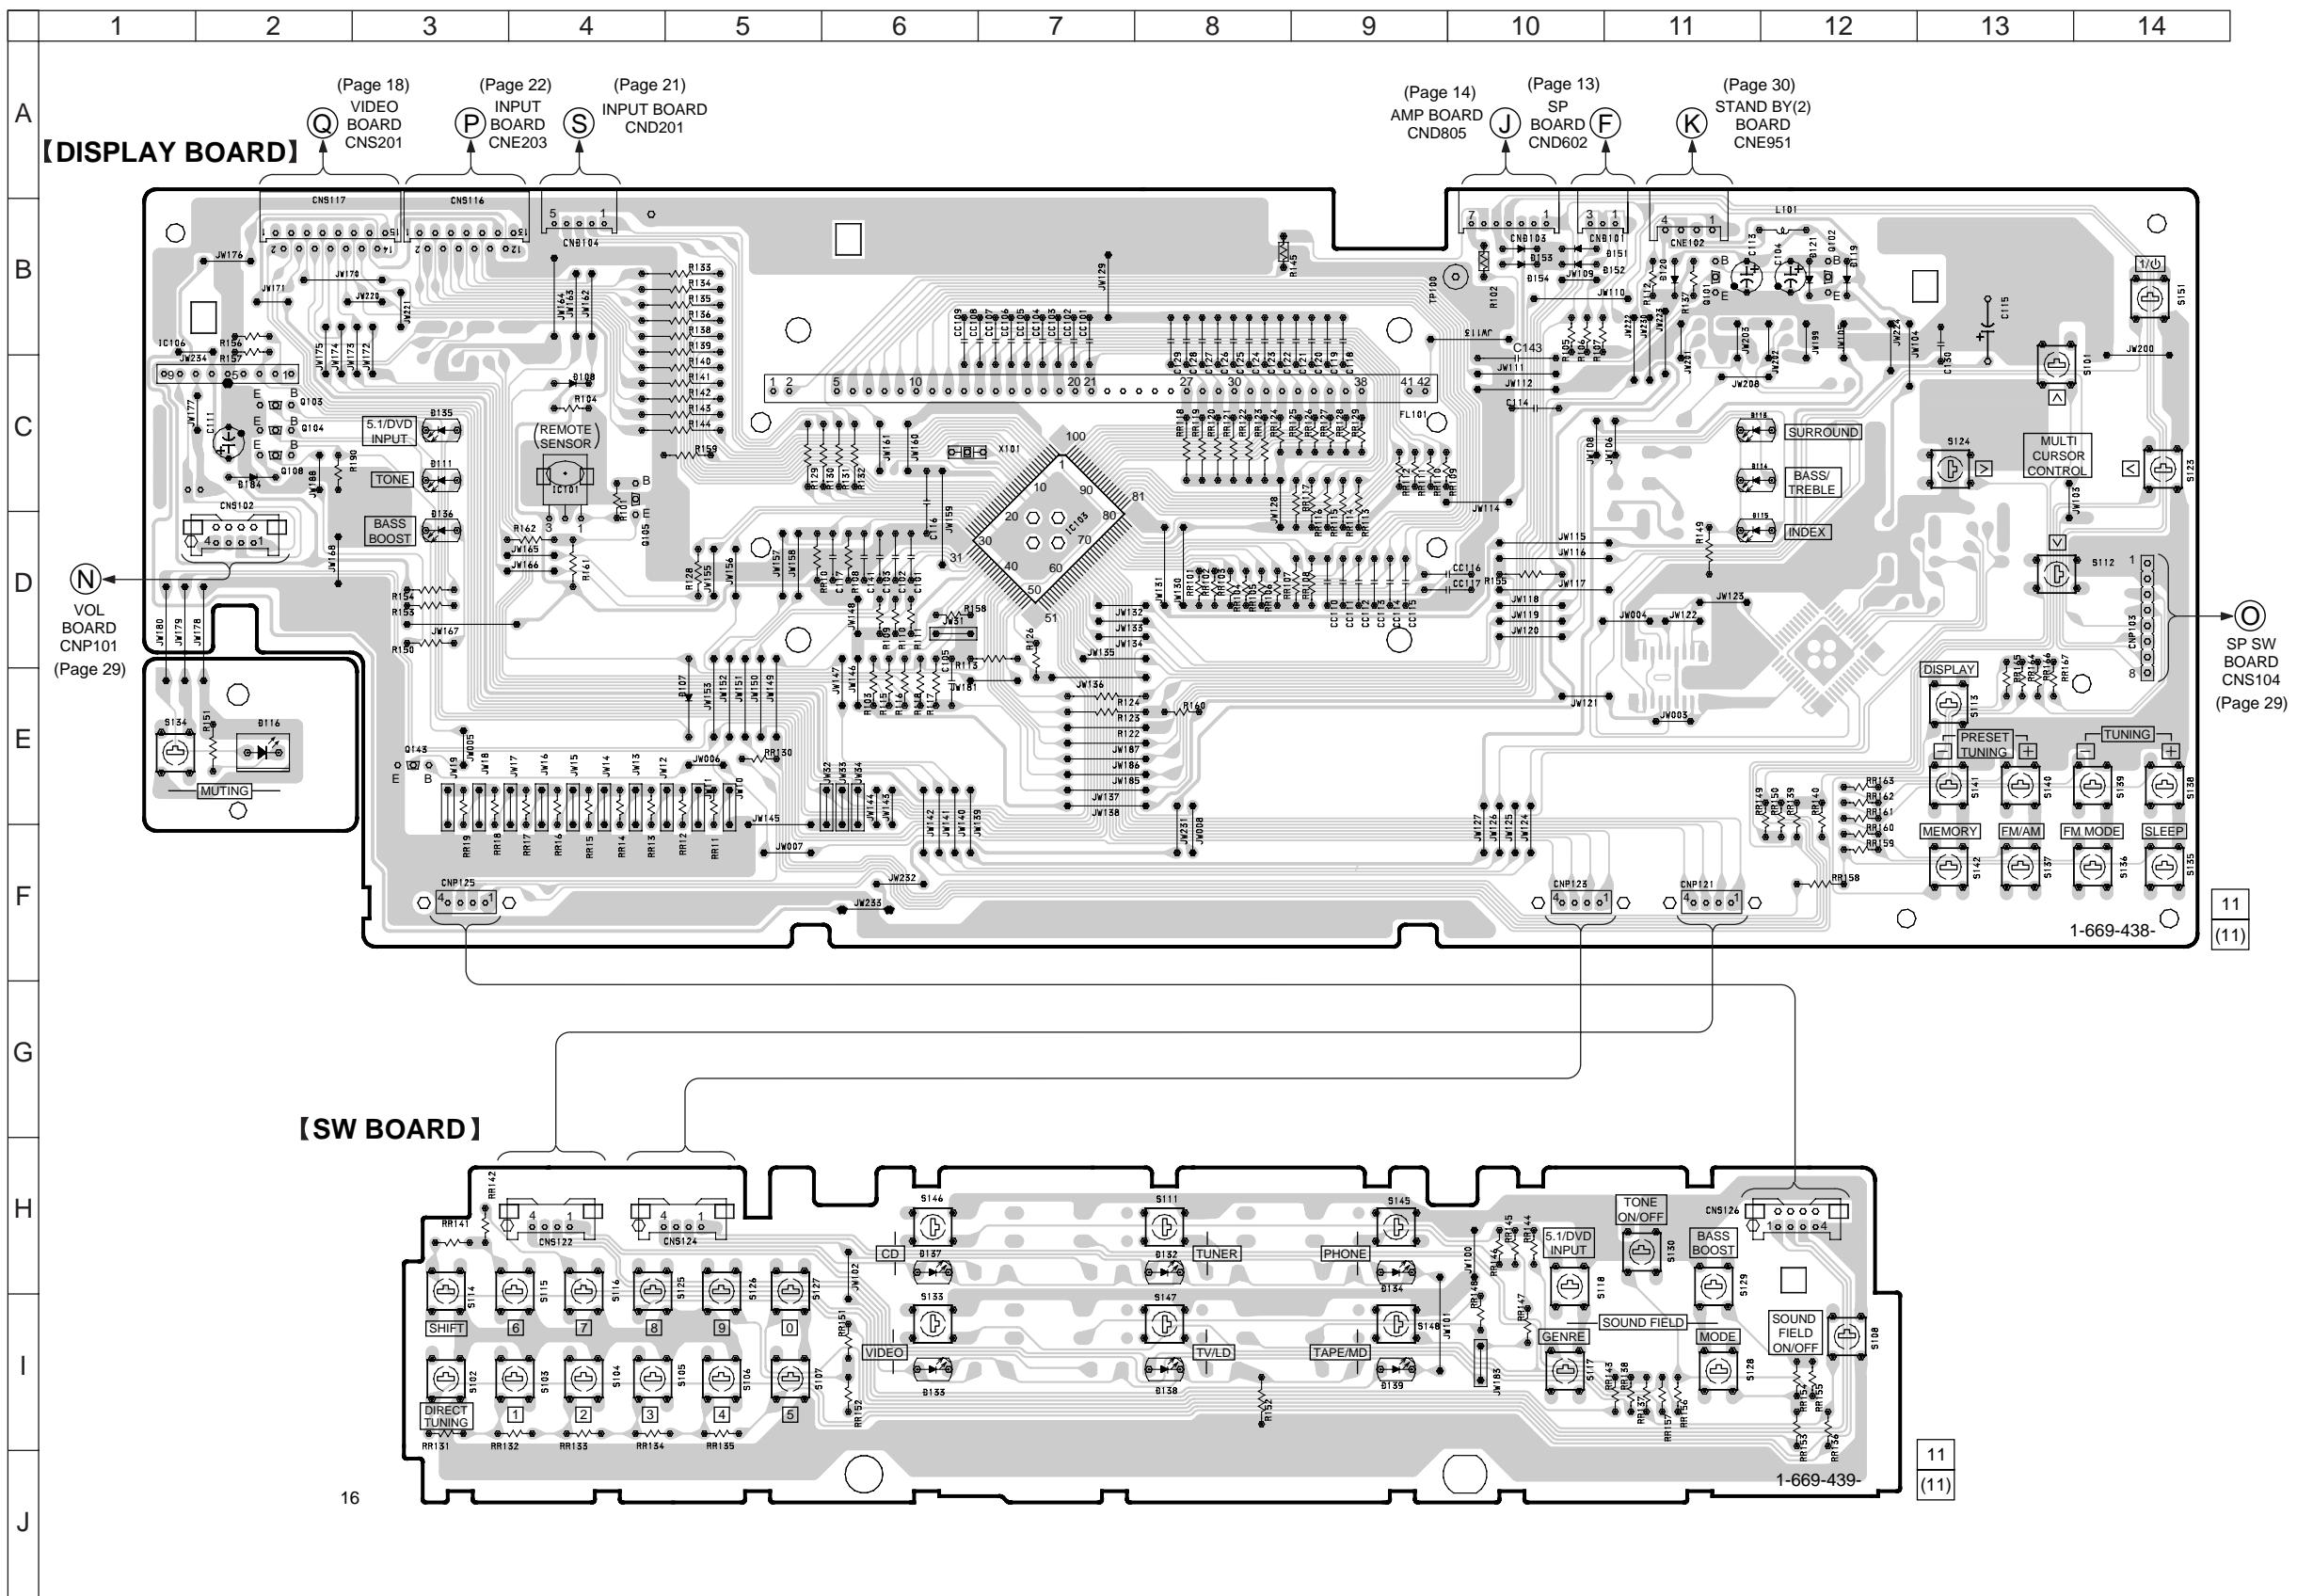


3-11. SCHEMATIC DIAGRAM — DISPLAY SECTION — • See page 8 for Waveform.

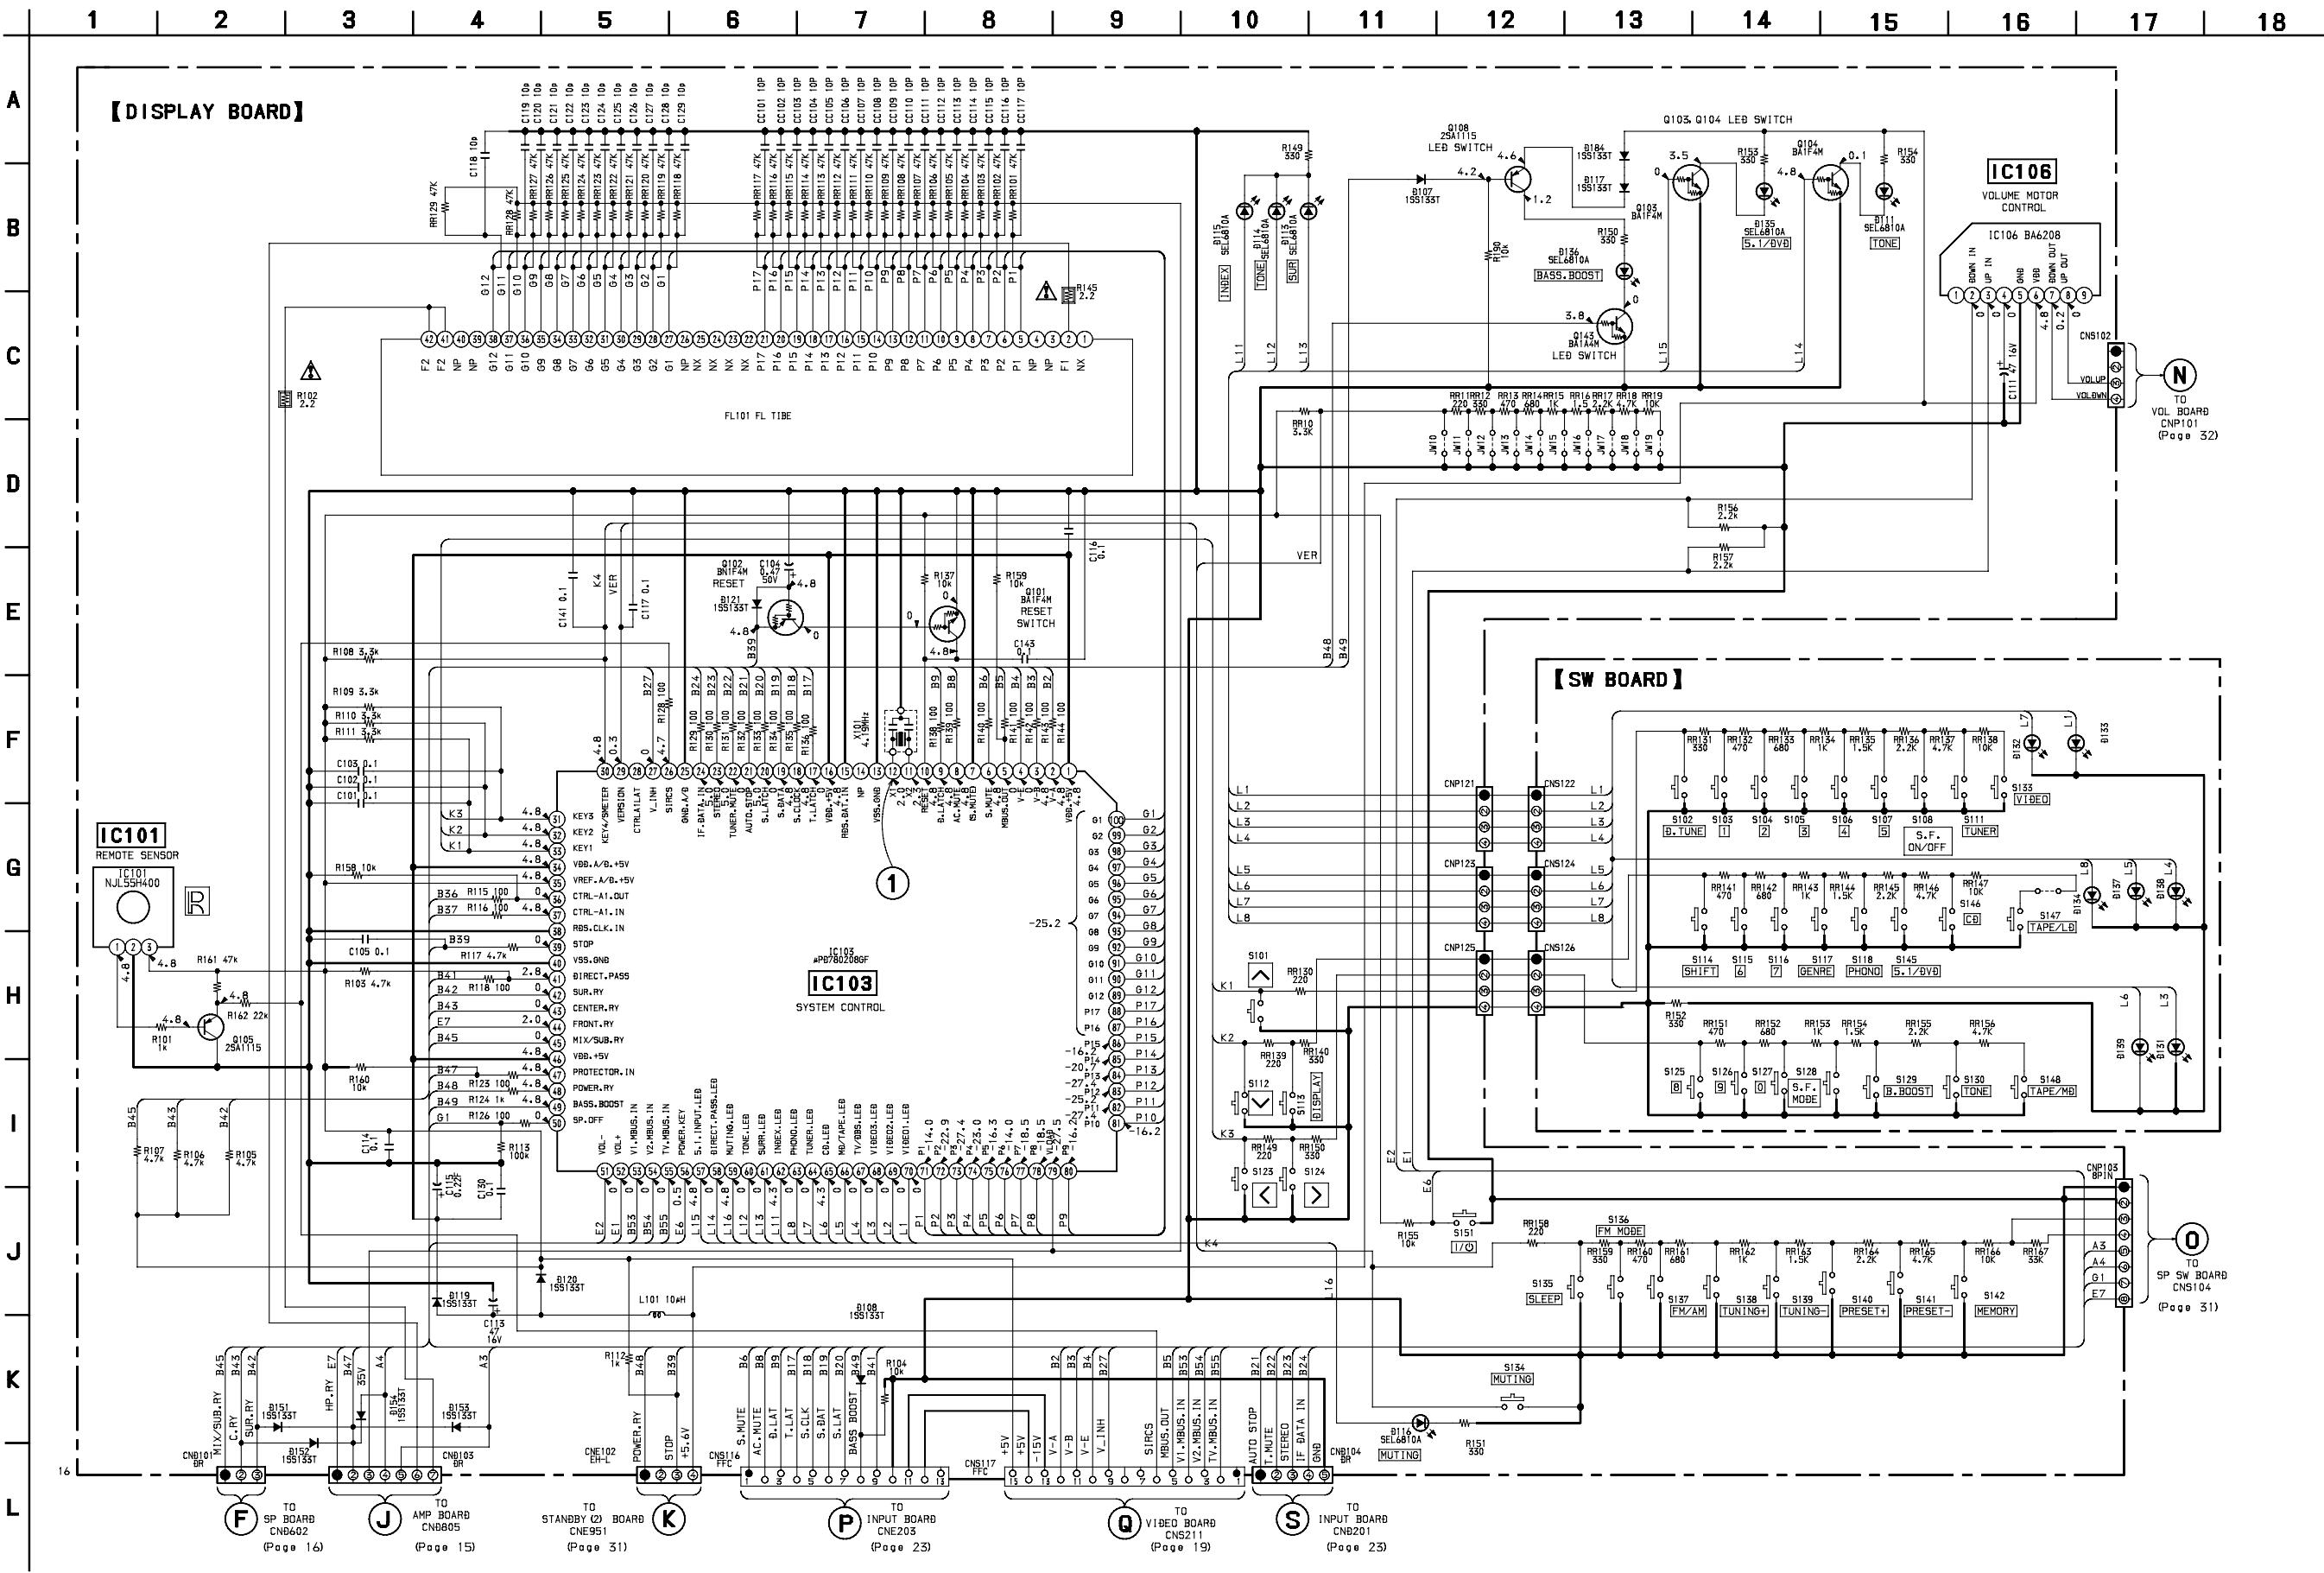


3-12. PRINTED WIRING BOARD—POWER SECTION—

• Semiconductor Location

| Ref. No. | Location |
|----------|----------|
| D122 | B-5 |
| D123 | B-5 |
| D543 | D-4 |
| D605 | C-5 |
| D606 | C-6 |
| D607 | C-5 |
| D649 | C-3 |
| D701 | B-2 |
| D702 | B-2 |
| D703 | C-2 |
| D704 | C-2 |
| D705 | D-3 |
| D706 | D-3 |
| D749 | B-2 |
| D751 | G-2 |
| D752 | F-2 |
| D753 | G-2 |
| D754 | G-2 |
| D901 | B-8 |
| D902 | C-8 |
| D903 | B-8 |
| D904 | C-8 |
| D905 | C-8 |
| D906 | C-8 |
| IC702 | C-7 |
| IC901 | C-7 |
| Q544 | C-6 |
| Q609 | C-6 |
| Q610 | C-6 |
| Q611 | C-6 |
| Q645 | C-5 |
| Q704 | C-2 |
| Q705 | C-1 |
| Q706 | B-1 |
| Q707 | C-1 |
| Q708 | B-2 |
| Q709 | C-3 |
| Q710 | C-3 |
| Q745 | C-4 |
| Q747 | C-6 |
| Q748 | C-6 |
| Q754 | G-2 |
| Q755 | G-1 |
| Q756 | F-1 |
| Q757 | G-1 |
| Q758 | H-2 |
| Q901 | B-8 |
| Q902 | C-8 |

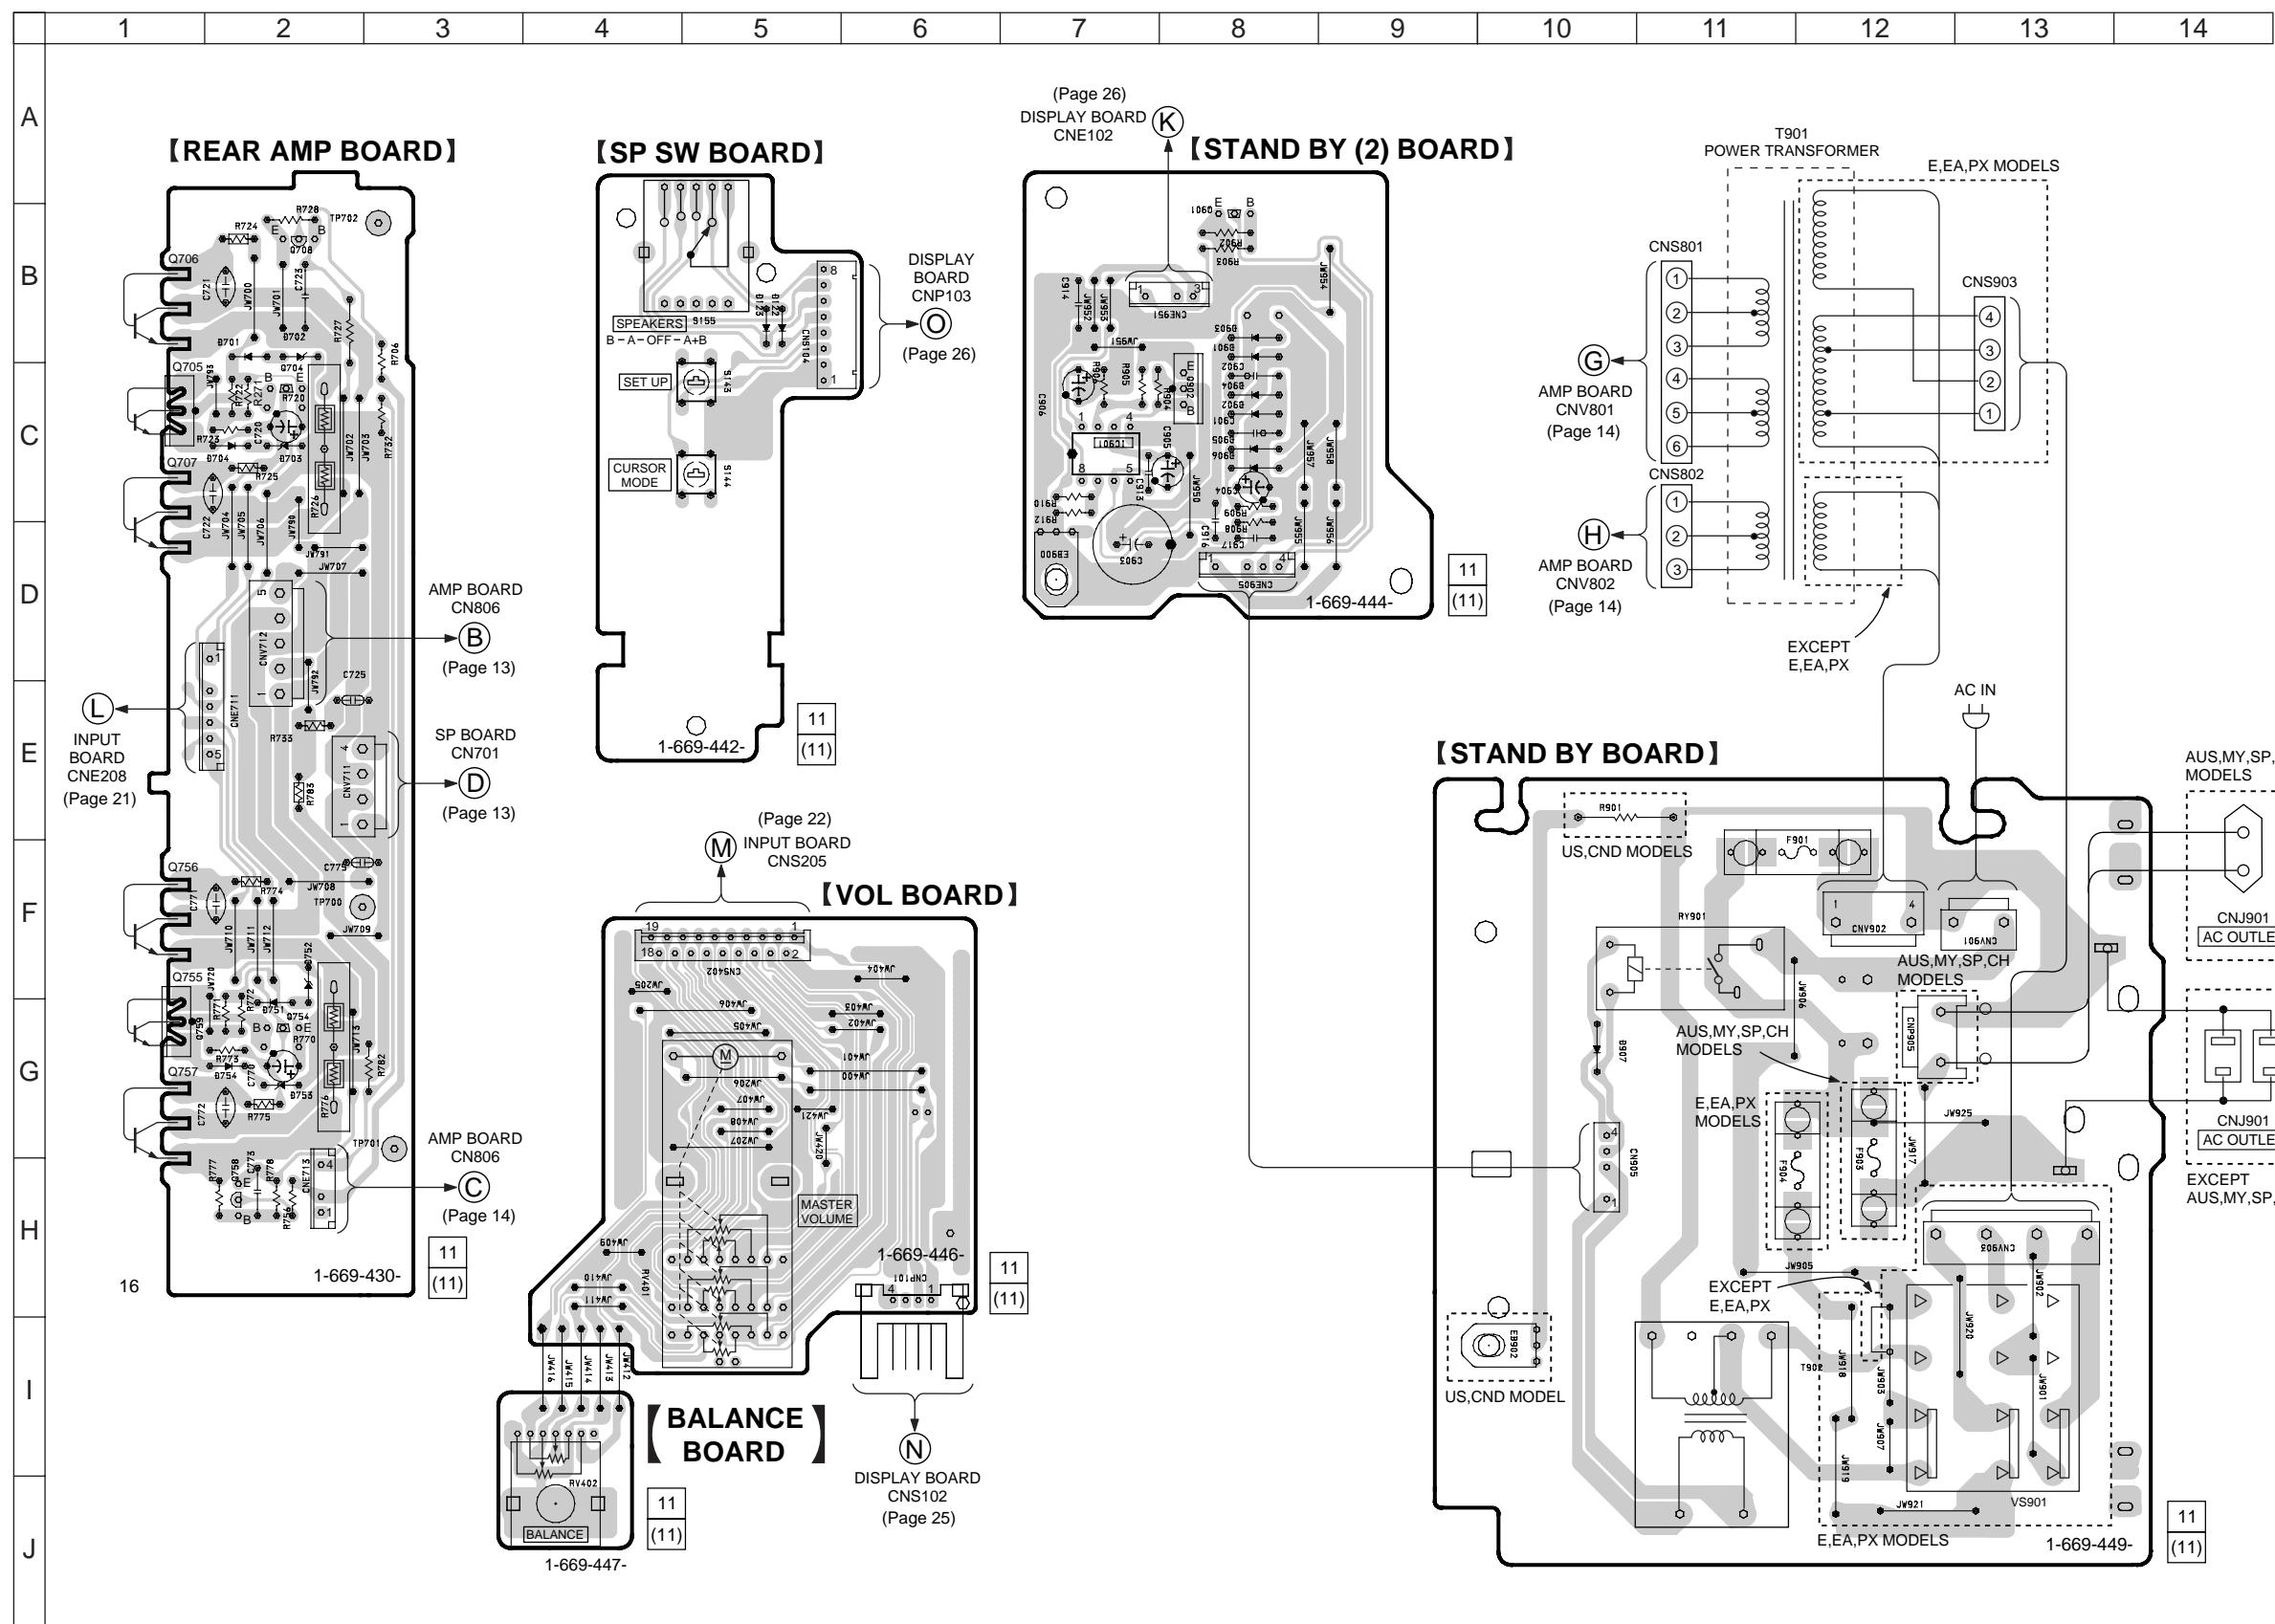

3-13. SCHEMATIC DIAGRAM — POWER SECTION —

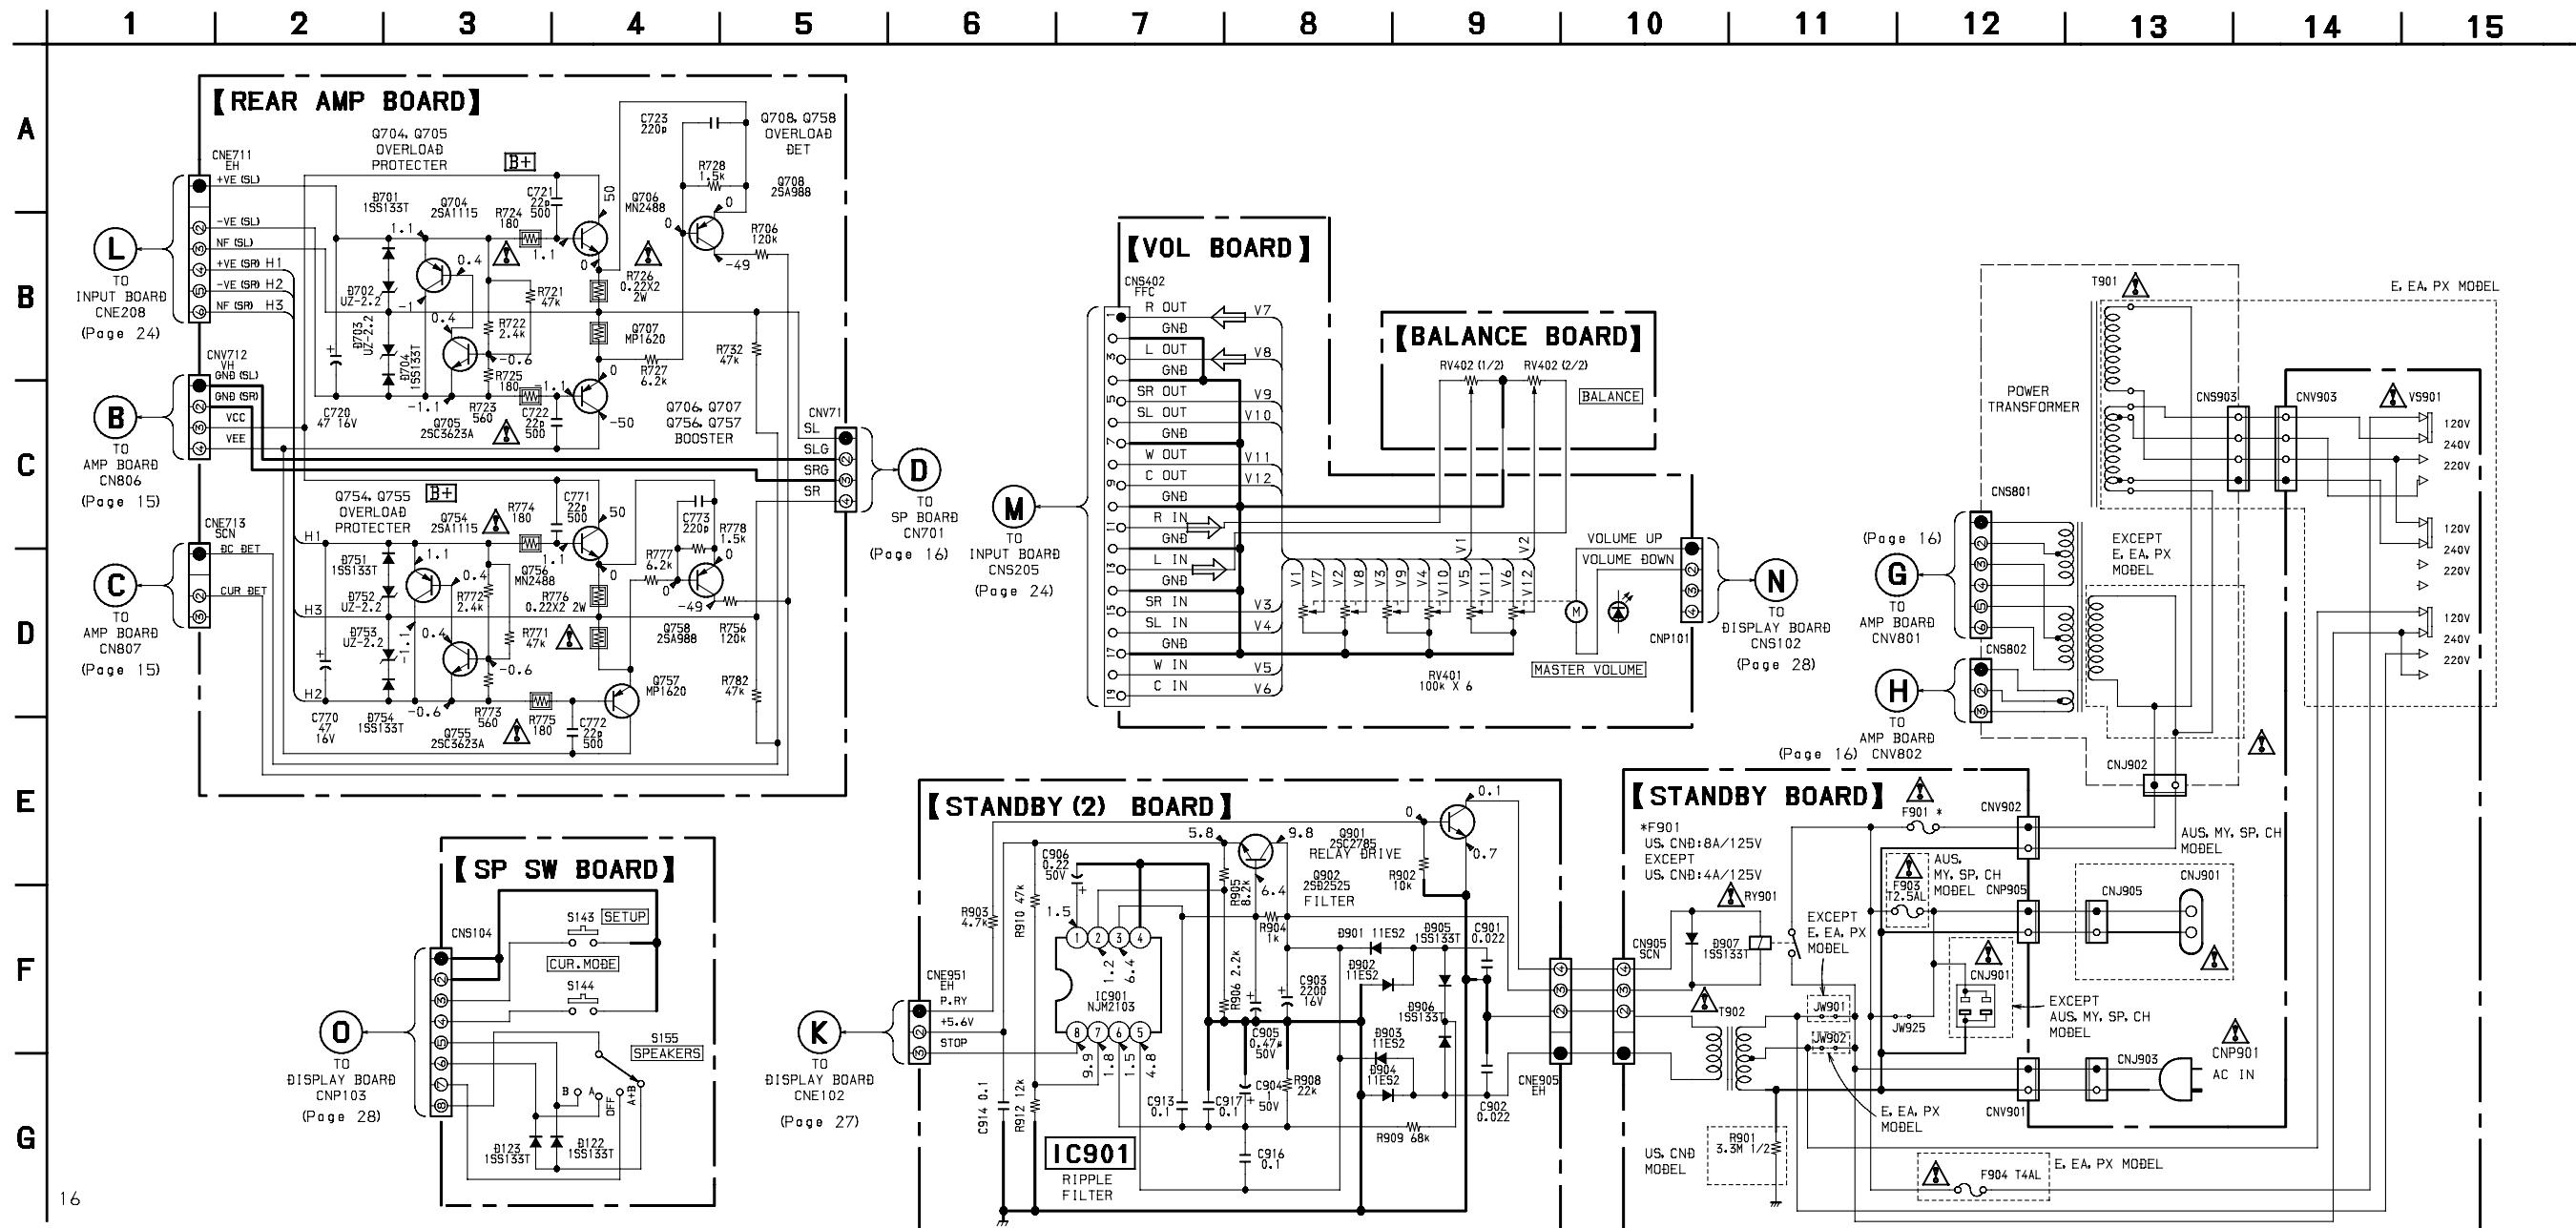


• IC103 uPD780208FGF

| Pin No. | Pin Name | I/O | Description |
|---------|---------------|-----|------------------------------|
| 1 | VDD | — | Power Supply (+5 V) |
| 2 | P37 | O | Video IC SW1 |
| 3 | P36/BUZ | O | Video IC SW2 |
| 4 | P35/PCL | O | Video IC SW3 |
| 5 | P34/TI2 | O | Ground through resister |
| 6 | P33/TI1 | O | S Mute |
| 7 | P32/TO2 | I | Not used (ground) |
| 8 | P31/TO1 | O | A-class mute |
| 9 | P30/TO0 | O | Dolby latch |
| 10 | RESET | I | System reset |
| 11 | X2 | — | System clock (4.19 MHz) |
| 12 | X1 | I | System clock (4.19 MHz) |
| 13 | IC (VPP) | — | = VSS (0 V) |
| 14 | XT2 | — | Open |
| 15 | P04/XT1 | I | Ground |
| 16 | VDD | — | +5 V |
| 17 | P27/SCK0 | O | Tone latch |
| 18 | P26/SO0/SB1 | O | Serial clock |
| 19 | P25/SI0/SB0 | O | Serial data |
| 20 | P24/BUSY | O | Serial latch |
| 21 | P23/STB | I | Auto stop |
| 22 | P22/SCK1 | O | Tuner mute |
| 23 | P21/SO1 | I | Stereo |
| 24 | P20/SI1 | I | Tuner data in |
| 25 | AVSS | — | A/D ground (0 V) |
| 26 | P17/ANI7 | I | SIRCS input |
| 27 | P16/ANI6 | O | Video IC SW4 |
| 28 | P15/ANI5 | O | Ground through resister |
| 29 | P14/ANI4 | I | Version |
| 30 | P13/ANI3 | I | A/D key 4 |
| 31 | P12/ANI2 | I | A/D key 3 |
| 32 | P11/ANI1 | I | A/D key 2 |
| 33 | P10/ANI0 | I | A/D key 1 |
| 34 | AVDD | — | A/D power supply (+5 V) |
| 35 | AVref | I | A/D reference voltage (+5 V) |
| 36 | P03/INTP3 | O | Ground through resister |
| 37 | P02/INTP2 | I | Ground |
| 38 | P01/INTP1 | I | Ground |
| 39 | P00/INTP0/T10 | I | STOP |
| 40 | VSS | — | 0 V |
| 41 | P74 | O | Direct pass relay |
| 42 | P73 | O | Surround relay |
| 43 | P72 | O | Center relay |
| 44 | P71 | O | Front relay |
| 45 | P70 | O | Mix/sub relay |
| 46 | VDD | — | +5 V |
| 47 | P127/FIP52 | I | Protector in |
| 48 | P126/FIP51 | O | Power relay |
| 49 | P125/FIP50 | O | Bass boost |
| 50 | P124/EIP49 | I | Speaker off |


| Pin No. | Pin Name | I/O | Description |
|---------|------------|-----|-------------------------|
| 51 | P123/FIP48 | O | Volume – |
| 52 | P122/EIP47 | O | Volume + |
| 53 | P121/FIP46 | I | Ground |
| 54 | P120/FIP45 | I | Ground |
| 55 | P117/FIP44 | I | Ground |
| 56 | P116/FIP43 | I | Power switch in |
| 57 | P115/EIP42 | O | 5.1/DVD input LED |
| 58 | P114/FIP41 | O | Tone LED |
| 59 | P113/FIP40 | O | Muting LED |
| 60 | P112/FIP39 | O | Bass/Treble LED |
| 61 | P111/FIP38 | O | Surround LED |
| 62 | P110/FIP37 | O | Index LED |
| 63 | P107/FIP36 | O | PHONO LED |
| 64 | P106/FIP35 | O | TUNER LED |
| 65 | P105/FIP34 | O | TAPE/MD LED |
| 66 | P104/FIP33 | O | CD LED |
| 67 | P103/FIP32 | O | TV/LD LED |
| 68 | P102/FIP31 | O | Ground through resister |
| 69 | P101/FIP30 | O | Ground through resister |
| 70 | P100/FIP29 | O | Video LED |
| 71 | P97/FIP28 | O | P1 |
| 72 | P96/FIP27 | O | P2 |
| 73 | P95/FIP26 | O | P3 |
| 74 | P94/FIP25 | O | P4 |
| 75 | P93/FIP24 | O | P5 |
| 76 | P92/FIP23 | O | P6 |
| 77 | P91/FIP22 | O | P7 |
| 78 | P90/FIP21 | O | P8 |
| 79 | Vload | — | FIP pull down (-35 V) |
| 80 | P87/FIP20 | O | P9 |
| 81 | P86/FIP19 | O | P10 |
| 82 | P85/FIP18 | O | P11 |
| 83 | P84/FIP17 | O | P12 |
| 84 | P83/FIP16 | O | P13 |
| 85 | P82/FIP15 | O | P14 |
| 86 | P81/FIP14 | O | P15 |
| 87 | P80/FIP13 | O | P16 |
| 88 | FIP12 | O | P17 |
| 89 | FIP11 | O | 12G |
| 90 | FIP10 | O | 11G |
| 91 | FIP9 | O | 10G |
| 92 | FIP8 | O | 9G |
| 93 | FIP7 | O | 8G |
| 94 | FIP6 | O | 7G |
| 95 | FIP5 | O | 6G |
| 96 | FIP4 | O | 5G |
| 97 | FIP3 | O | 4G |
| 98 | FIP2 | O | 3G |
| 99 | FIP1 | O | 2G |
| 100 | FIP0 | O | 1G |

3-14. IC BLOCK DIAGRAMS


IC001 uPC2581V

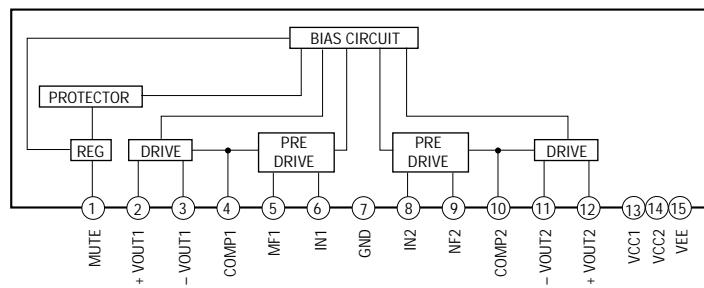


IC106 BA6208

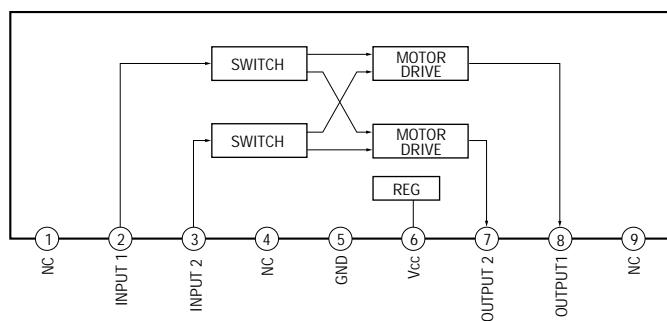


IC201 NJM2296D




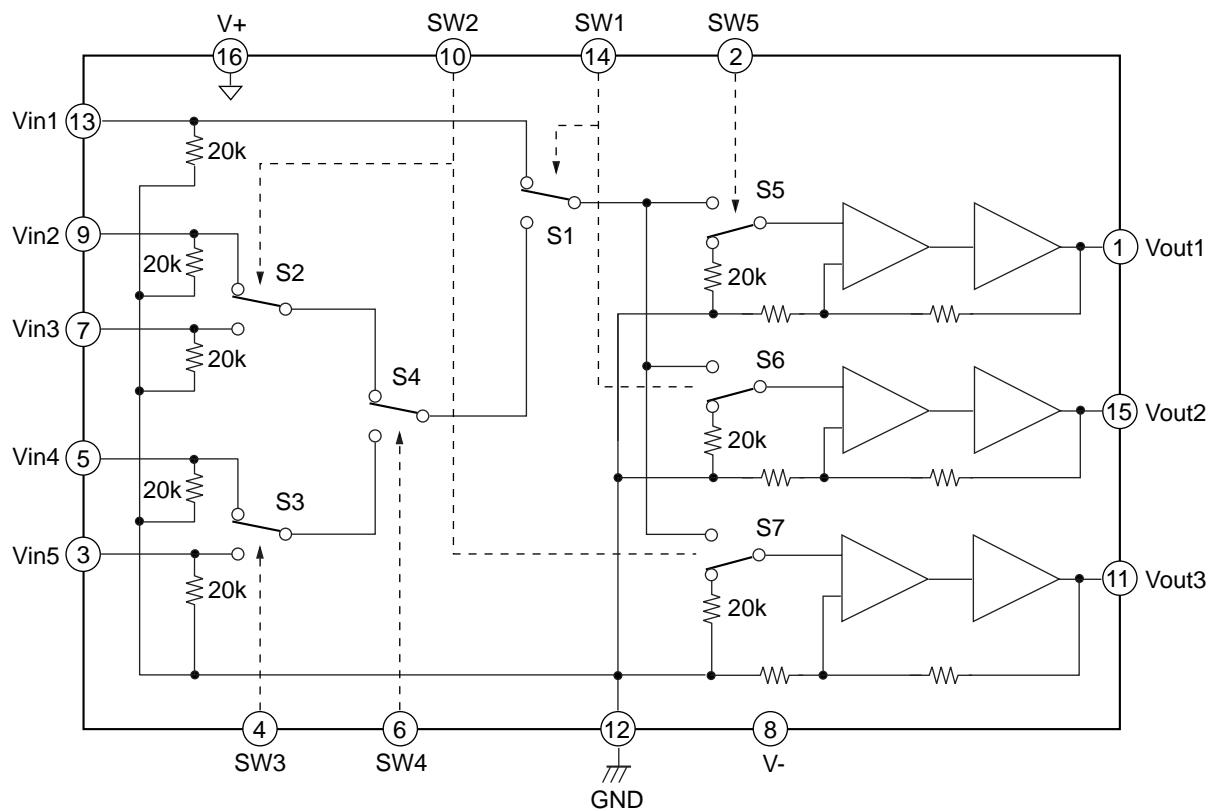


IC400 CXA8081S

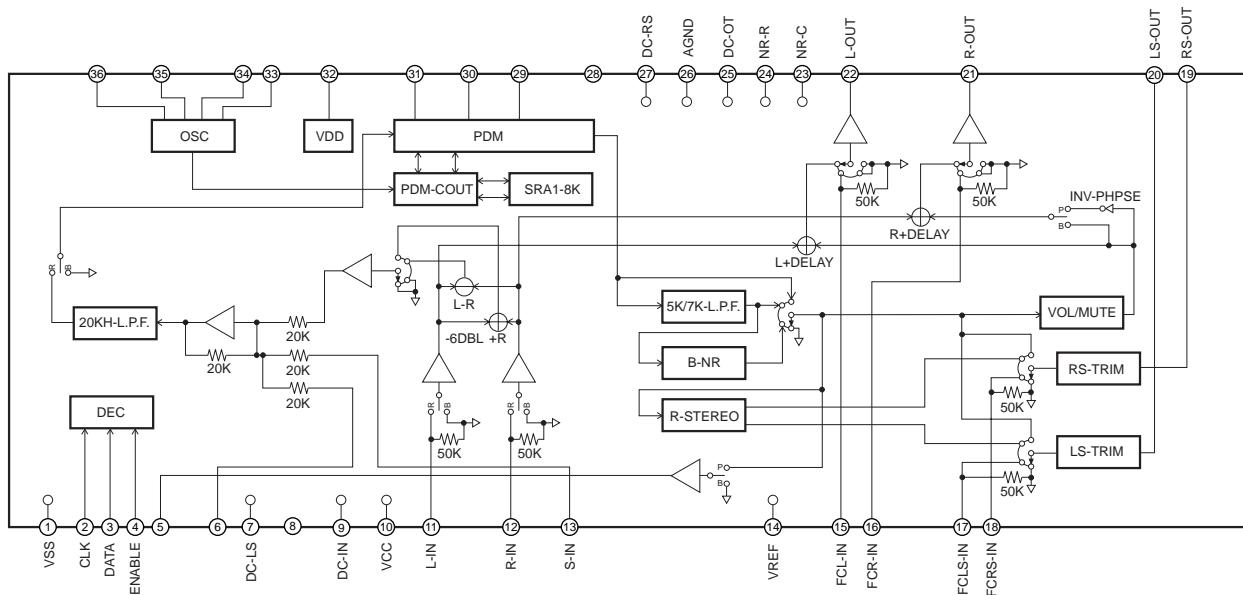

IC401 CXA8079S

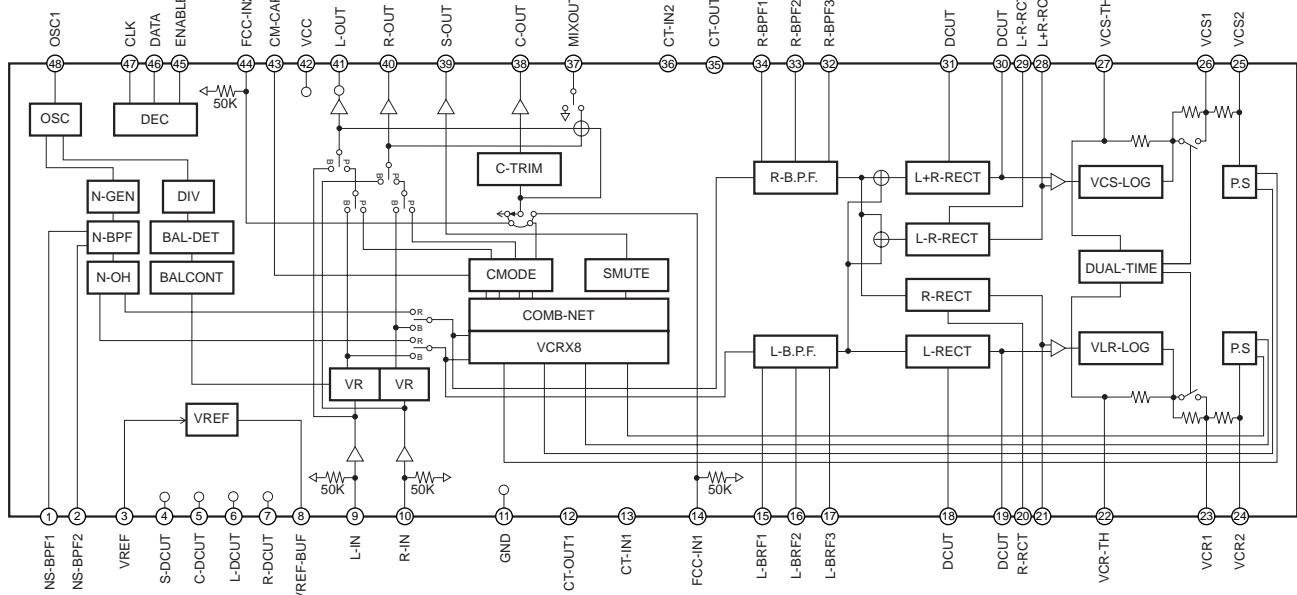

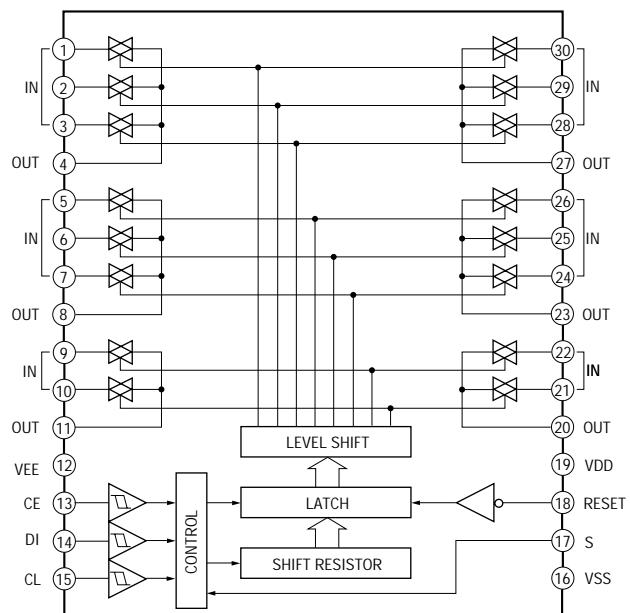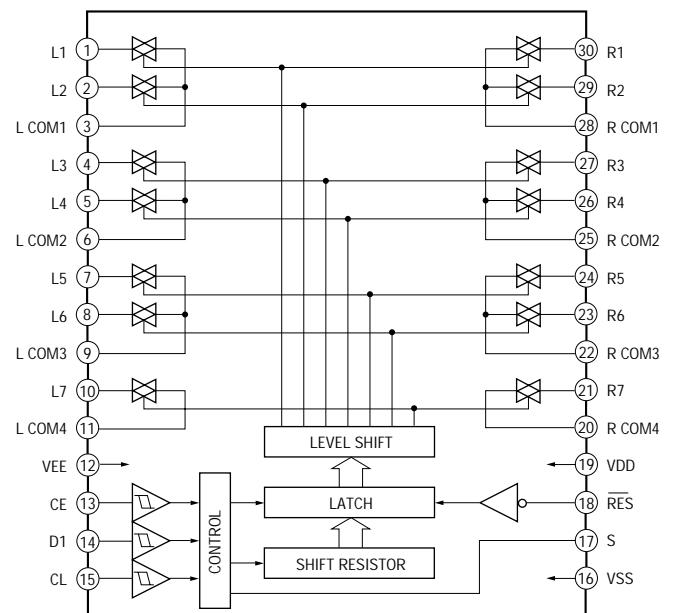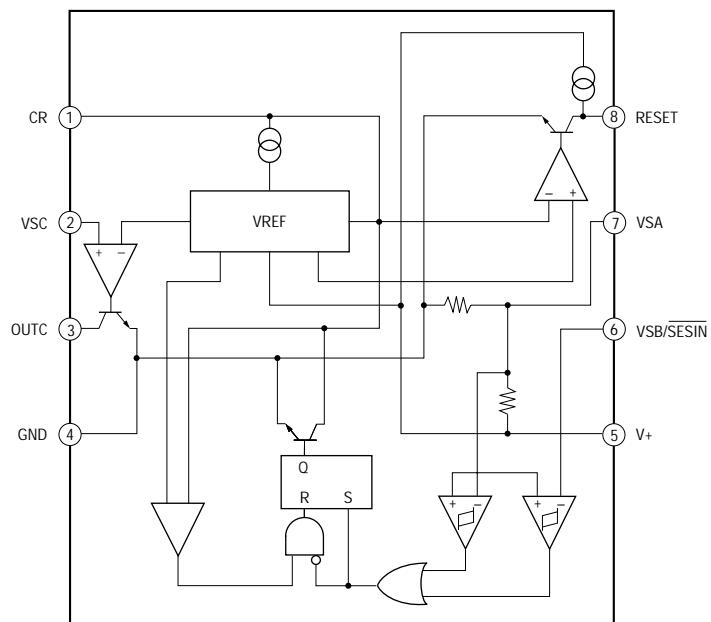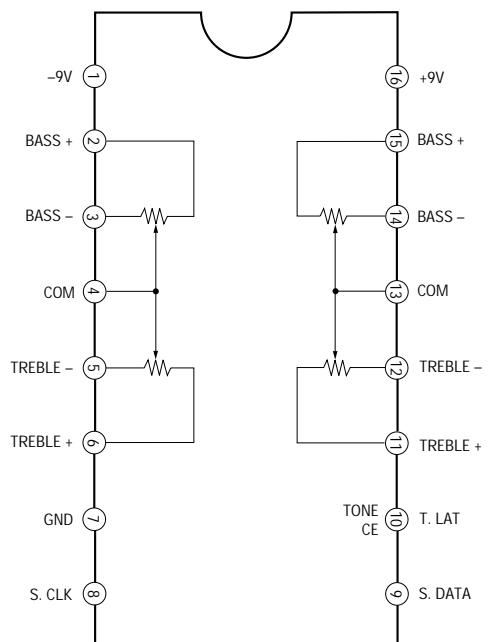IC302 LC7822**IC403 LC7823****IC901 NJM2103D****IC502 TC9184P**

SECTION 4 EXPLODED VIEWS

NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.

• Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.

• Abbreviation

CND : Canadian
AUS : Australian
CH : Chinese


MY : Malaysia
SP : Singapore
EA : Saudi Arabia

When indicating parts by reference number, please include the board name.

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.


Les composants identifiés par une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

4-1. FRONT PANEL SECTION

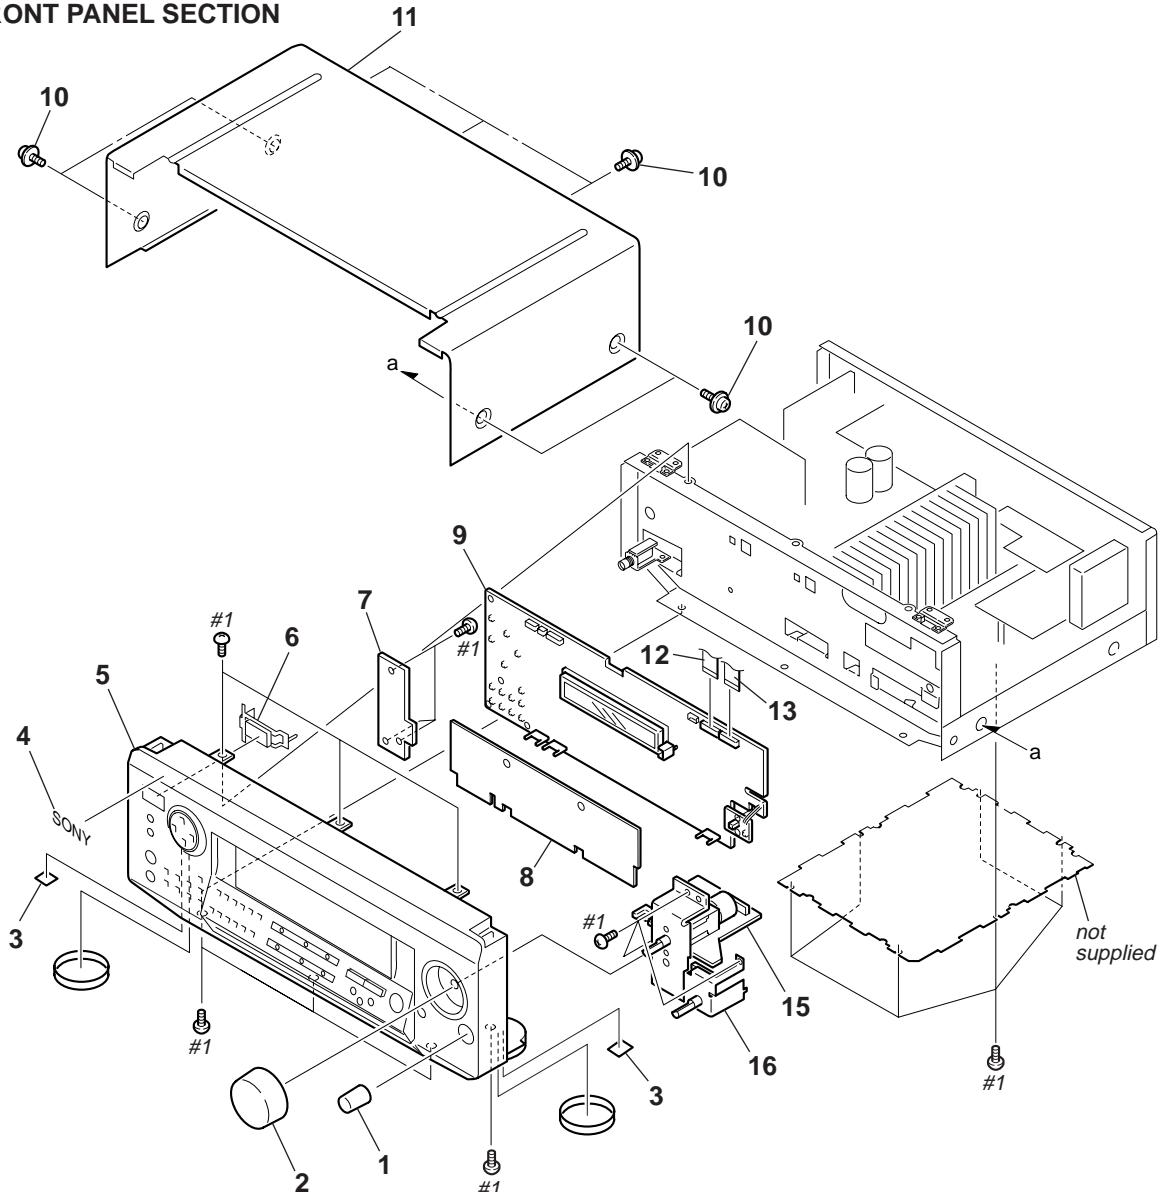

| Ref. No. | Part No. | Description | Remarks | Ref. No. | Part No. | Description | Remarks |
|----------|--------------|--|---------|----------|--------------|--|---------|
| 1 | 4-957-383-01 | KNOB (F14) (BLACK)(EXCEPT CH) | | * 8 | 1-669-439-11 | SW BOARD | |
| 1 | 4-957-383-21 | KNOB (F14) (GOLD) (CH) | | * 9 | A-4407-420-A | DISPLAY BOARD, COMPLETE (MY,SP) | |
| 2 | X-4949-627-1 | KNOB (VOL) ASSY (BLACK)(EXCEPT CH) | | * 9 | A-4407-421-A | DISPLAY BOARD, COMPLETE (E,EA,PX) | |
| 2 | X-4949-750-1 | KNOB ASSY (C5)(GOLD)(CH) | | * 9 | A-4407-584-A | DISPLAY BOARD, COMPLETE (US,CND) | |
| 3 | 4-977-358-02 | CUSHION (US,CND,CH) | | * 9 | A-4407-598-A | DISPLAY BOARD, COMPLETE (AUS) | |
| 4 | 4-996-698-01 | EMBLEM, SONY (SILVER)(EXCEPT CH) | | * 9 | A-4407-600-A | DISPLAY BOARD, COMPLETE (CH) | |
| 4 | 4-996-698-11 | EMBLEM, SONY (GOLD)(CH) | | 10 | 3-710-901-01 | SCREW, TAPPING (GOLD)(CH) | |
| 5 | X-4949-740-1 | PANEL ASSY (U5),FRONT (BLACK) (US,CND,AUS) | | 10 | 3-710-901-11 | SCREW, TAPPING (BLACK)(EXCEPT CH) | |
| 5 | X-4949-909-1 | PANEL ASSY (SP),FRONT (BLACK) (E,EA,PX,MY,SP) | | * 11 | 4-982-682-01 | CASE (414532)(BLACK)(US,CND,E,EA,PX,AUS) | |
| 5 | X-4949-741-1 | PANEL ASSY (C5),FRONT (GOLD)(CH) | | 11 | X-4947-722-1 | CASE ASSY (BLACK) (MY,SP) | |
| 6 | 4-989-850-01 | BUTTON (BB)(BLACK)(EXCEPT CH) | | 12 | 1-783-776-11 | WIRE (FLAT TYPE) (13 CORE) | |
| 6 | 4-989-850-12 | BUTTON (BB)(GOLD)(CH) | | 13 | 1-773-022-11 | WIRE (FLAT TYPE) (15 CORE) | |
| * 7 | 1-669-442-11 | SP SW BOARD | | * 15 | 1-669-446-11 | VOL BOARD | |
| | | | | * 16 | 1-669-447-11 | BALANCE BOARD | |

4-2. CHASSIS SECTION

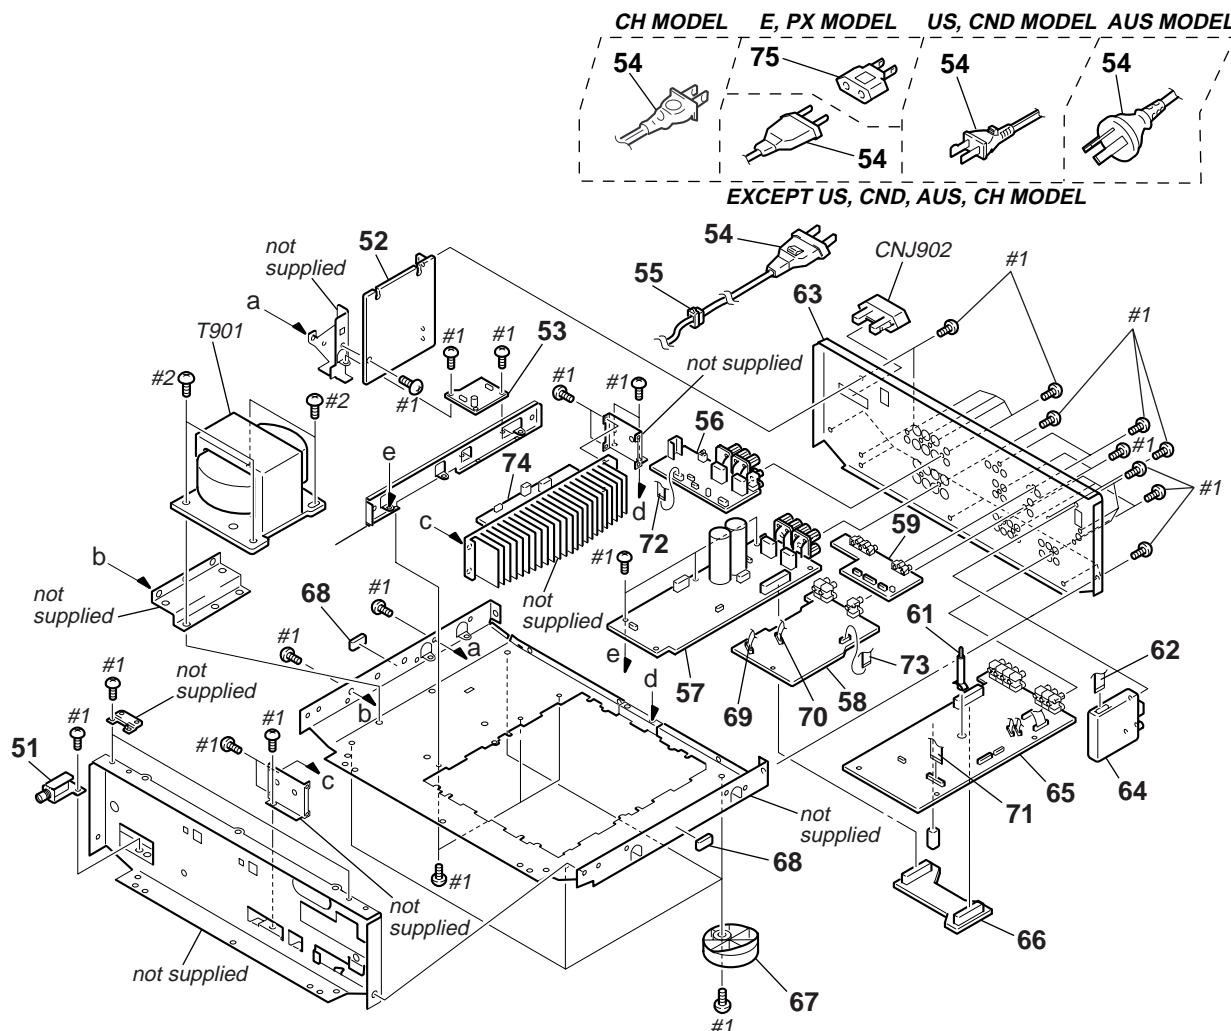

| Ref. No. | Part No. | Description | Remarks | Ref. No. | Part No. | Description | Remarks |
|----------|--------------|---|----------------------|---|--------------|---|---------|
| * 51 | 1-669-443-11 | H.P BOARD | | * 65 | A-4407-596-A | INPUT BOARD, COMPLETE | |
| * 52 | 1-669-449-11 | STANBY BOARD (US,CND,AUS,MY,SP,CH) | (US,CND,E,EA,PX,AUS) | * 65 | A-4407-604-A | INPUT BOARD,COMPLETE(MY,SP,CH) | |
| * 53 | A-4407-589-A | STANBY (2) BOARD, COMPLETE | | * 66 | 1-669-441-11 | CONNECTOR BOARD | |
| △ 54 | 1-696-847-11 | CORD, POWER (AUS) | | 67 | X-4947-207-1 | FOOT ASSY (F50150S) (E,EA,PX,AUS,MY,SP) | |
| △ 54 | 1-769-743-11 | CORD, POWER (US,CND) | | 67 | X-4947-208-1 | FOOT ASSY (F50150S) (US,CND) | |
| △ 54 | 1-769-744-11 | CORD, POWER (E,EA,PX,MY,SP) | | 67 | X-4947-547-1 | FOOT ASSY (F50150S) (CH) | |
| △ 54 | 1-782-464-21 | CORD, POWER (CH) | | 68 | 4-985-642-01 | CUSHION | |
| * 55 | 3-703-244-00 | BUSHING (2104), CORD | | 69 | 1-769-941-11 | WIRE (FLAT TYPE) (11 CORE) | |
| * 56 | A-4407-602-A | SP BOARD, COMPLETE (MY,SP,CH) | | 70 | 1-765-321-11 | WIRE (FLAT TYPE) (9 CORE) | |
| * 56 | A-4407-592-A | SP BOARD, COMPLETE (US,CND,E,EA,PX,AUS) | | 71 | 1-773-110-11 | WIRE (FLAT TYPE) (19 CORE) | |
| * 57 | A-4407-595-A | AMP BOARD, COMPLETE | (US,CND,E,EA,PX,AUS) | 72 | 1-769-877-11 | WIRE (FLAT TYPE) (7 CORE) | |
| * 57 | A-4407-603-A | AMP BOARD, COMPLETE(MY,SP,CH) | | 73 | 1-773-022-11 | WIRE (FLAT TYPE) (15 CORE) | |
| * 58 | A-4407-593-A | SURR BOARD, COMPLETE | | * 74 | A-4407-590-A | REARAMP BOARD, COMPLETE | |
| * 59 | 1-669-435-11 | VIDEO BOARD | | △ 75 | 1-569-008-11 | ADAPTOR, CONVERSION 2P (E,PX) | |
| 61 | 4-924-098-91 | HOLDER, PC BOARD | | △ 75 | 1-770-019-11 | ADAPTOR, CONVERSION 3P (UK) | |
| 62 | 1-773-008-11 | WIRE (FLAT TYPE) (15 CORE) | | △ CNJ902 | 1-251-416-11 | OUTLET, A.C. (AUS) | |
| * 63 | 4-999-235-01 | PANEL, BACK (US) | | △ CNJ902 | 1-526-794-11 | OUTLET, AC (MY,SP) | |
| * 63 | 4-999-235-11 | PANEL, BACK (CND) | | △ T901 | 1-431-809-11 | TRANSFORMER, POWER (US) | |
| * 63 | 4-999-235-21 | PANEL, BACK (AUS) | | △ T901 | 1-431-810-11 | TRANSFORMER, POWER (CND) | |
| * 63 | 4-999-235-31 | PANEL, BACK (E,EA,PX) | | △ T901 | 1-431-811-11 | TRANSFORMER, POWER (MY,SP,CH) | |
| * 63 | 4-999-235-41 | PANEL, BACK (MY,SP) | | △ T901 | 1-431-812-11 | TRANSFORMER, POWER (AUS) | |
| * 63 | 4-999-235-51 | PANEL, BACK (CH) | | △ T901 | 1-431-813-11 | TRANSFORMER, POWER (E,EA,PX) | |
| 64 | 1-693-407-21 | TUNER (US,CND,E,EA,PX) | | The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified. | | | |
| 64 | 1-693-408-21 | TUNER (AUS,MY,SP,CH) | | Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié. | | | |

SECTION 5

ELECTRICAL PARTS LIST

NOTE:

When indicating parts by reference number, please include the board name.

The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.

- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- CAPACITORS:

uF: μ F

- RESISTORS

All resistors are in ohms.

METAL: metal-film resistor

METAL OXIDE: Metal Oxide-film resistor

F: nonflammable

- COILS

uH: μ H

- SEMICONDUCTORS

In each case, u: μ , for example:

uA...: μ A..., uPA..., μ PA...,

uPB...: μ PB..., uPC..., μ PC...,

uPD...: μ PD...

- Abbreviation

CND : Canadian

MY : Malaysia

AUS : Australian

SP : Singapore

CH : Chinese

EA : Saudi Arabia

| Ref. No. | Part No. | Description | Remarks | | | Ref. No. | Part No. | Description | Remarks | | | | | | | | |
|--------------------------|--------------|--|---------|--------------|-----------------------------|-----------|--------------|--------------------------------|--------------|---------|--------|------|--------------|------------------|--|--|--|
| * | A-4407-595-A | AMP BOARD, COMPLETE ***** (US,CND,E,EA,PX,AUS) | CC48 | 1-164-096-11 | CERAMIC | 0.01uF | 50V | CC49 | 1-164-096-11 | CERAMIC | 0.01uF | 50V | | | | | |
| * | A-4407-603-A | AMP BOARD, COMPLETE(MY,SP,CH) ***** | CC98 | 1-164-096-11 | CERAMIC | 0.01uF | 50V | CC99 | 1-164-096-11 | CERAMIC | 0.01uF | 50V | | | | | |
| < CONNECTOR > | | | | | | | | | | | | | | | | | |
| 1-533-293-11 FUSE HOLDER | | | | | | | | | | | | | | | | | |
| < CAPACITOR > | | | | | | | | | | | | | | | | | |
| C501 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | * CND803 | 1-564-340-00 | PIN, CONNECTOR 6P | | | | | | | | | |
| C520 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | * CND805 | 1-564-341-11 | PIN, CONNECTOR 7P | | | | | | | | | |
| C521 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | CNS651 | 1-784-806-11 | HOUSING,CONNECTOR(PC BOARD)13P | | | | | | | | | |
| C522 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | CNS804 | 1-568-439-11 | SOCKET, CONNECTOR 7P | | | | | | | | | |
| C523 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V | * CNV801 | 1-564-243-11 | PIN, CONNECTOR 6P | | | | | | | | | |
| C524 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | * CNV802 | 1-564-104-00 | PIN, CONNECTOR (B3P-VH) 3P | | | | | | | | | |
| C525 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | < DIODE > | | | | | | | | | | | |
| C526 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | D501 | 8-719-911-19 | DIODE 1SS119 | | | | D502 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | |
| C570 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | D503 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | | D504 | 8-719-911-19 | DIODE 1SS119 | | | |
| C571 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | D505 | 8-719-911-19 | DIODE 1SS119 | | | | D506 | 8-719-911-19 | DIODE 1SS119 | | | |
| C572 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | D545 | 8-719-911-19 | DIODE 1SS119 | | | | D546 | 8-719-911-19 | DIODE 1SS119 | | | |
| C573 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V | D547 | 8-719-911-19 | DIODE 1SS119 | | | | D548 | 8-719-911-19 | DIODE 1SS119 | | | |
| C574 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | D549 | 8-719-911-19 | DIODE 1SS119 | | | | D551 | 8-719-911-19 | DIODE 1SS119 | | | |
| C575 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | D552 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | | D553 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | |
| C576 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | D554 | 8-719-911-19 | DIODE 1SS119 | | | | D555 | 8-719-911-19 | DIODE 1SS119 | | | |
| C590 | 1-126-935-11 | ELECT | 470uF | 20% | 6.3V | D556 | 8-719-911-19 | DIODE 1SS119 | | | | D601 | 8-719-911-19 | DIODE 1SS119 | | | |
| C620 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | D557 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | | D602 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | |
| C621 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | D603 | 8-719-109-54 | DIODE RD2.2ES-B2 | | | | D604 | 8-719-911-19 | DIODE 1SS119 | | | |
| C622 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V | D608 | 8-719-911-19 | DIODE 1SS119 | | | | D647 | 8-719-911-19 | DIODE 1SS119 | | | |
| C623 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V | D648 | 8-719-911-19 | DIODE 1SS119 | | | | D801 | 8-719-302-38 | DIODE RBV-602-01 | | | |
| C625 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | D604 | 8-719-911-19 | DIODE 1SS119 | | | | D802 | 8-719-200-82 | DIODE 11ES2 | | | |
| C801 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | D608 | 8-719-911-19 | DIODE 1SS119 | | | | D803 | 8-719-200-82 | DIODE 11ES2 | | | |
| C803 | 1-109-932-11 | ELECT(BLOCK) | 10000uF | 20% | 71V (US,CND,E,EA,PX,AUS) | D647 | 8-719-911-19 | DIODE 1SS119 | | | | D804 | 8-719-200-82 | DIODE 11ES2 | | | |
| C803 | 1-117-950-11 | ELECT | 10000uF | 20% | 63V (MY,SP,CH) | D648 | 8-719-911-19 | DIODE 1SS119 | | | | D805 | 8-719-200-82 | DIODE 11ES2 | | | |
| C804 | 1-109-932-11 | ELECT(BLOCK) | 10000uF | 20% | 71V (US,CND,E,EA,PX,AUS) | D806 | 8-719-068-24 | DIODE HZ5.6BP-TK | | | | D807 | 8-719-934-17 | DIODE HZS27-1L | | | |
| C804 | 1-117-950-11 | ELECT | 10000uF | 20% | 63V (MY,SP,CH) | | | | | | | | | | | | |
| C805 | 1-130-781-00 | FILM | 0.22uF | 10% | 100V | | | | | | | | | | | | |
| C806 | 1-130-781-00 | FILM | 0.22uF | 10% | 100V | | | | | | | | | | | | |
| C811 | 1-126-952-11 | ELECT | 1000uF | 20% | 35V | | | | | | | | | | | | |
| C812 | 1-126-951-11 | ELECT | 470uF | 20% | 35V | | | | | | | | | | | | |
| C813 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | | | | | | | | | | | | |
| C817 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | | | | | | | | | | | | |
| C818 | 1-126-967-11 | ELECT | 47uF | 20% | 50V | | | | | | | | | | | | |

| Ref. No. | Part No. | Description | Remarks | Ref. No. | Part No. | Description | Remarks |
|---|--------------|--|---------|----------|--------------|------------------------|----------------|
| < TERMINAL > | | | | | | | |
| * EB702 | 1-537-738-21 | TERMINAL, EARTH | | R501 | 1-249-432-11 | CARBON | 18K 5% 1/4W |
| * EB703 | 1-537-738-21 | TERMINAL, EARTH | | R503 | 1-249-432-11 | CARBON | 18K 5% 1/4W |
| < FUSE > | | | | | | | |
| △F801 | 1-532-506-51 | FUSE TIME LAG 6.3A/250V(EXCEPT US,CND) | | R504 | 1-249-429-11 | CARBON | 10K 5% 1/4W |
| △F801 | 1-533-311-11 | FUSE, GLASS CYLINDRICAL(DIA.5) 8A/125V (US,CND) | | R521 | 1-247-840-00 | CARBON | 2.4K 5% 1/4W |
| △F802 | 1-532-506-51 | FUSE TIME LAG 6.3A/250V(EXCEPT US,CND) | | R523 | 1-249-414-11 | CARBON | 560 5% 1/4W F |
| △F802 | 1-533-311-11 | FUSE, GLASS CYLINDRICAL(DIA.5) 8A/125V (US,CND) | | R524 | 1-249-408-81 | CARBON | 180 5% 1/4W F |
| △F803 | 1-532-504-51 | FUSE TIME LAG 4A/250V (EXCEPT US,CND) | | R525 | 1-249-408-81 | CARBON | 180 5% 1/4W F |
| △F803 | 1-533-419-11 | FUSE, GLASS CYLINDRICAL(DIA.5) 4A/125V (US,CND) | | R526 | 1-233-352-41 | ENCAPSULATED COMPONENT | |
| △F804 | 1-532-504-51 | FUSE TIME LAG 4A/250V (EXCEPT US,CND) | | R527 | 1-247-850-11 | CARBON | 6.2K 5% 1/4W |
| △F804 | 1-533-419-11 | FUSE, GLASS CYLINDRICAL(DIA.5) 4A/125V (US,CND) | | R528 | 1-249-419-11 | CARBON | 1.5K 5% 1/4W F |
| < IC > | | | | | | | |
| IC809 | 8-759-708-05 | IC NJM78L05A | | R529 | 1-247-866-11 | CARBON | 30K 5% 1/4W |
| < COIL > | | | | | | | |
| L501 | 1-420-872-00 | COIL, AIR-CORE (US,CND,E,EA,PX,AUS) | | R530 | 1-249-421-11 | CARBON | 2.2K 5% 1/4W F |
| L501 | 1-411-906-11 | COIL, AIR-CORE (MY,SP,CH) | | R531 | 1-249-433-11 | CARBON | 22K 5% 1/4W |
| L551 | 1-420-872-00 | COIL, AIR-CORE (US,CND,E,EA,PX,AUS) | | R532 | 1-249-437-11 | CARBON | 47K 5% 1/4W |
| L551 | 1-411-906-11 | COIL, AIR-CORE (MY,SP,CH) | | R533 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| < TRANSISTOR > | | | | | | | |
| Q504 | 8-729-119-76 | TRANSISTOR 2SA1175-HFE | | R534 | 1-249-389-11 | CARBON | 4.7 5% 1/4W F |
| Q506 | 8-749-010-25 | IC MN2488-OPY-M | | R535 | 1-249-431-11 | CARBON | 15K 5% 1/4W |
| Q507 | 8-749-010-26 | IC MP1620-OPY-M | | R539 | 1-249-427-11 | CARBON | 6.8K 5% 1/4W F |
| Q508 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | R540 | 1-249-417-11 | CARBON | 1K 5% 1/4W F |
| Q509 | 8-729-281-53 | TRANSISTOR 2SC1815-GR | | R542 | 1-249-429-11 | CARBON | 10K 5% 1/4W |
| Q510 | 8-729-900-63 | TRANSISTOR DTA124ES | | R547 | 1-249-425-11 | CARBON | 4.7K 5% 1/4W F |
| Q511 | 8-729-900-63 | TRANSISTOR DTA124ES | | R548 | 1-249-429-11 | CARBON | 10K 5% 1/4W |
| Q546 | 8-729-119-79 | TRANSISTOR 2SC2785-FEK | | R549 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| Q547 | 8-729-140-84 | TRANSISTOR 2SC1841-PAFAEA | | R551 | 1-247-881-00 | CARBON | 120K 5% 1/4W |
| Q548 | 8-729-119-79 | TRANSISTOR 2SC2785-FEK | | R552 | 1-247-881-00 | CARBON | 120K 5% 1/4W |
| Q549 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | R571 | 1-247-840-00 | CARBON | 2.4K 5% 1/4W |
| Q554 | 8-729-119-76 | TRANSISTOR 2SA1175-HFE | | R573 | 1-249-414-11 | CARBON | 560 5% 1/4W F |
| Q556 | 8-749-010-25 | IC MN2488-OPY-M | | R574 | 1-249-408-81 | CARBON | 180 5% 1/4W F |
| Q557 | 8-749-010-26 | IC MP1620-OPY-M | | R575 | 1-249-408-81 | CARBON | 180 5% 1/4W F |
| Q558 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | R576 | 1-233-352-41 | ENCAPSULATED COMPONENT | |
| Q559 | 8-729-281-53 | TRANSISTOR 2SC1815-GR | | R577 | 1-247-850-11 | CARBON | 6.2K 5% 1/4W |
| Q560 | 8-729-900-63 | TRANSISTOR DTA124ES | | R578 | 1-249-419-11 | CARBON | 1.5K 5% 1/4W F |
| Q561 | 8-729-900-63 | TRANSISTOR DTA124ES | | R579 | 1-247-866-11 | CARBON | 30K 5% 1/4W |
| Q596 | 8-729-119-79 | TRANSISTOR 2SC2785-FEK | | R580 | 1-249-421-11 | CARBON | 2.2K 5% 1/4W F |
| Q601 | 8-729-119-79 | TRANSISTOR 2SC2785-FEK | | R581 | 1-249-433-11 | CARBON | 22K 5% 1/4W |
| Q604 | 8-729-119-76 | TRANSISTOR 2SA1175-HFE | | R582 | 1-249-437-11 | CARBON | 47K 5% 1/4W |
| Q606 | 8-749-010-25 | IC MN2488-OPY-M | | R583 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| Q607 | 8-749-010-26 | IC MP1620-OPY-M | | R584 | 1-249-389-11 | CARBON | 4.7 5% 1/4W F |
| Q608 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | R585 | 1-249-431-11 | CARBON | 15K 5% 1/4W |
| Q612 | 8-729-281-53 | TRANSISTOR 2SC1815-GR | | R586 | 1-249-429-11 | CARBON | 10K 5% 1/4W |
| Q613 | 8-729-281-53 | TRANSISTOR 2SC1815-GR | | R587 | 1-249-425-11 | CARBON | 4.7K 5% 1/4W F |
| Q614 | 8-729-201-53 | TRANSISTOR 2SA1015-GR | | R588 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| Q615 | 8-729-900-36 | TRANSISTOR DTC124ES | | R589 | 1-249-432-11 | CARBON | 18K 5% 1/4W |
| Q616 | 8-729-900-36 | TRANSISTOR DTC124ES | | R590 | 1-249-432-11 | CARBON | 18K 5% 1/4W |
| Q617 | 8-729-900-36 | TRANSISTOR DTC124ES | | R605 | 1-249-429-11 | CARBON | 10K 5% 1/4W |
| Q618 | 8-729-900-63 | TRANSISTOR DTA124ES | | R606 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| Q801 | 8-729-140-97 | TRANSISTOR 2SB734-34 | | R607 | 1-216-456-00 | METAL OXIDE | 820 5% 2W F |
| The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified. | | | | | | | |
| Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié. | | | | | | | |

| AMP | BALANCE | CONNECTOR | DISPLAY |
|-----------------------|-----------------------------------|--------------------------------------|----------------|
| <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u> | <u>Remarks</u> |
| R632 | 1-249-437-11 | CARBON | 47K 5% 1/4W |
| R633 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| R640 | 1-215-885-00 | METAL OXIDE | 68 5% 2W F |
| R641 | 1-249-441-11 | CARBON | 100K 5% 1/4W |
| R642 | 1-216-453-00 | METAL OXIDE | 270 5% 2W F |
| R643 | 1-249-441-11 | CARBON | 100K 5% 1/4W |
| R644 | 1-216-456-00 | METAL OXIDE | 820 5% 2W F |
| R645 | 1-249-441-11 | CARBON | 100K 5% 1/4W |
| R650 | 1-249-425-11 | CARBON | 4.7K 5% 1/4W F |
| R739 | 1-215-868-00 | METAL OXIDE | 680 5% 1W F |
| R789 | 1-215-868-00 | METAL OXIDE | 680 5% 1W F |
| R802 | 1-249-401-11 | CARBON | 47 5% 1/4W F |
| R803 | 1-247-843-11 | CARBON | 3.3K 5% 1/4W |
| RR48 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| RR49 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| RR98 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| RR99 | 1-249-393-11 | CARBON | 10 5% 1/4W F |
| < CAPACITOR > | | | |
| C101 | 1-164-159-11 | CERAMIC | 0.1uF |
| C102 | 1-164-159-11 | CERAMIC | 0.1uF |
| C103 | 1-164-159-11 | CERAMIC | 0.1uF |
| C104 | 1-126-959-11 | ELECT | 0.47uF 20% |
| C105 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C111 | 1-126-967-11 | ELECT | 47uF 20% |
| C113 | 1-126-967-11 | ELECT | 47uF 20% 16V |
| C114 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C115 | 1-104-905-11 | CAPACITOR | 0.22F 5.5V |
| C116 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C117 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C118 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C119 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C120 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C121 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C122 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C123 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C124 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C125 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C126 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C127 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C128 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C129 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| C130 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C141 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| C143 | 1-164-159-11 | CERAMIC | 0.1uF 50V |
| CC101 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC102 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC103 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC104 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC105 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC106 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC107 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC108 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC109 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC110 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC111 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC112 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC113 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC114 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC115 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC116 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| CC117 | 1-162-199-31 | CERAMIC | 10PF 5% 50V |
| < VARIABLE RESISTOR > | | | |
| RV402 | 1-225-447-11 | RES, VAR, CARBON 100K/100K (BALANCE) | ***** |
| * 1-669-447-11 | BALANCE BOARD | ***** | |
| < CONNECTOR > | | | |
| CNP207 | 1-784-807-11 | CONNECTOR, BOARD TO BOARD 13P | |
| CNP651 | 1-784-807-11 | CONNECTOR, BOARD TO BOARD 13P | ***** |
| * A-4407-420-A | DISPLAY BOARD, COMPLETE (MY,SP) | ***** | |
| * A-4407-421-A | DISPLAY BOARD, COMPLETE (E,EA,PX) | ***** | |
| * A-4407-584-A | DISPLAY BOARD, COMPLETE (US,CND) | ***** | |
| * A-4407-598-A | DISPLAY BOARD, COMPLETE (AUS) | ***** | |
| * A-4407-600-A | DISPLAY BOARD, COMPLETE (CH) | ***** | |
| * 3-386-245-11 | HOLDER (FL) | | |
| * 4-921-941-01 | CUSHION (FL) | | |
| < CONNECTOR > | | | |
| * CND101 | 1-564-496-11 | PIN, CONNECTOR 3P | |
| * CND103 | 1-564-500-11 | PIN, CONNECTOR 7P | |
| * CND104 | 1-564-498-11 | PIN, CONNECTOR 5P | |
| * CNE102 | 1-564-519-11 | PLUG, CONNECTOR 4P | |
| CNP103 | 1-779-365-11 | CONNECTOR, PC BOARD (PLUG) 8P | |
| CNP121 | 1-779-366-11 | CONNECTOR, BOARD TO BOARD 4P | |
| CNP123 | 1-779-366-11 | CONNECTOR, BOARD TO BOARD 4P | |
| CNP125 | 1-779-366-11 | CONNECTOR, BOARD TO BOARD 4P | |
| CNS102 | 1-770-397-11 | HOUSING, CONNECTOR(PC BOARD)4P | |
| * CNS116 | 1-568-856-11 | SOCKET, CONNECTOR 13P | |
| * CNS117 | 1-568-858-11 | SOCKET, CONNECTOR 15P | |

| Ref. No. | Part No. | Description | | | Remarks | | Ref. No. | Part No. | Description | | | Remarks | |
|----------------|--------------|-----------------------------|-------------------------------|----|---------|---|----------|--------------|-------------|------|----|---------|---|
| < DIODE > | | | | | | | | | | | | | |
| D107 | 8-719-911-19 | DIODE | 1SS119 | | | | R110 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | |
| D108 | 8-719-911-19 | DIODE | 1SS119 | | | | R111 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | |
| D111 | 8-719-058-64 | DIODE | SEL5823A-TP15 (TONE) | | | | R112 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W | F |
| D113 | 8-719-058-64 | DIODE | SEL5823A-TP15 (SURROUND) | | | | R113 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | |
| D114 | 8-719-058-64 | DIODE | SEL5823A-TP15 (BASS/TREBLE) | | | | R115 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D115 | 8-719-058-64 | DIODE | SEL5823A-TP15 (INDEX) | | | | R116 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D116 | 8-719-313-45 | DIODE | SEL6810A-TH10 (MUTING) | | | | R117 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F |
| D119 | 8-719-911-19 | DIODE | 1SS119 | | | | R118 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D120 | 8-719-911-19 | DIODE | 1SS119 | | | | R123 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D121 | 8-719-911-19 | DIODE | 1SS119 | | | | R124 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W | F |
| D135 | 8-719-058-64 | DIODE | SEL5823A-TP15 (5.1/DVD INPUT) | | | | R126 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D136 | 8-719-058-64 | DIODE | SEL5823A-TP15 (BASS BOOST) | | | | R128 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D151 | 8-719-911-19 | DIODE | 1SS119 | | | | R129 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D152 | 8-719-911-19 | DIODE | 1SS119 | | | | R130 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| D153 | 8-719-911-19 | DIODE | 1SS119 | | | | R130 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D154 | 8-719-911-19 | DIODE | 1SS119 | | | | R131 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| D184 | 8-719-911-19 | DIODE | 1SS119 | | | | R132 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| < FILTER > | | | | | | | | | | | | | |
| FL101 | 1-517-770-11 | INDICATOR TUBE, FLUORESCENT | | | | | R136 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| < IC > | | | | | | | | | | | | | |
| IC101 | 8-759-459-83 | IC | NJL55H400 | | | | R137 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| IC103 | 8-759-526-69 | IC | uPD780208GF-017-3BA | | | | R138 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| IC106 | 8-759-962-08 | IC | BA6208 | | | | R139 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| < COIL > | | | | | | | | | | | | | |
| L101 | 1-410-509-11 | INDUCTOR | 10uH | | | | R140 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| < TRANSISTOR > | | | | | | | | | | | | | |
| Q101 | 8-729-900-36 | TRANSISTOR | DTC124ES | | | | R141 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| Q102 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | R142 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| Q103 | 8-729-900-36 | TRANSISTOR | DTC124ES | | | | R143 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| Q104 | 8-729-900-36 | TRANSISTOR | DTC124ES | | | | R144 | 1-247-807-31 | CARBON | 100 | 5% | 1/4W | |
| Q105 | 8-729-119-76 | TRANSISTOR | 2SA1175-HFE | | | | ▲R145 | 1-249-385-11 | CARBON | 2.2 | 5% | 1/6W | F |
| Q108 | 8-729-900-36 | TRANSISTOR | DTC124ES | | | | R149 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| Q109 | 8-729-900-36 | TRANSISTOR | DTC124ES | | | | R150 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| Q110 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | R151 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| Q111 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | R153 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| Q112 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | R154 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| Q113 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | R155 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| Q143 | 8-729-900-80 | TRANSISTOR | DTC114ES | | | | R156 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W | F |
| < RESISTOR > | | | | | | | | | | | | | |
| R101 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W | F | R157 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W | F |
| ▲R102 | 1-249-385-11 | CARBON | 2.2 | 5% | 1/6W | F | R158 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| R103 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F | R159 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| R104 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F | R160 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| R104 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | R161 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | |
| R105 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F | R162 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | |
| R106 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F | R190 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | |
| R107 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F | RR10 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | |
| R108 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | | RR11 | 1-249-409-11 | CARBON | 220 | 5% | 1/4W | F |
| R109 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | | RR12 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | |
| < RESISTOR > | | | | | | | | | | | | | |
| RR13 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W | F | RR14 | 1-249-415-11 | CARBON | 680 | 5% | 1/4W | F |
| RR14 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W | F | RR15 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W | F |
| RR16 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W | F | RR17 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W | F |
| RR17 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W | F | RR18 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W | F |
| RR19 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | RR19 | 1-249-429-11 | CARBON | 47K | 5% | 1/4W | |
| RR101 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | RR101 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | |

The components identified by mark ▲ or dotted line with mark ▲ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque ▲ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

DISPLAY

H.P

INPUT

| Ref. No. | Part No. | Description | | | Remarks | Ref. No. | Part No. | Description | | Remarks |
|----------|--------------|----------------------------|------|----|---------|----------|--------------|----------------------------------|--------------------|----------------------------------|
| RR102 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | < VIBRATOR > | | |
| RR103 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR104 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | X101 | 1-577-101-11 | VIBRATOR, CERAMIC | | ***** |
| RR105 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR106 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | * | 1-669-443-11 | H.P BOARD | | ***** |
| RR107 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR108 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | < CONNECTOR > | | |
| RR109 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR110 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | * | CNE751 | 1-564-519-11 | PLUG, CONNECTOR 4P | |
| RR111 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR112 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | < JACK > | | |
| RR113 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | J701 | 1-568-519-41 | JACK, LARGE TYPE (PHONES) | | ***** |
| RR114 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR115 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR116 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | * | A-4407-596-A | INPUT BOARD, COMPLETE | | ***** |
| RR117 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR118 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | (US,CND,E,EA,PX,AUS) |
| RR119 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | * | A-4407-604-A | INPUT BOARD, COMPLETE (MY,SP,CH) | | ***** |
| RR120 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR121 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR122 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | 7-685-872-09 SCREW +BVTT 3X8 (S) |
| RR123 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | < CAPACITOR > | | |
| RR124 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | | | | | |
| RR125 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | C001 | 1-126-964-11 | ELECT | 10uF | 20% 50V |
| RR126 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | C002 | 1-162-282-31 | CERAMIC | 100PF | 10% 50V |
| RR127 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | C003 | 1-102-233-00 | CERAMIC | 33PF | 10% 500V |
| RR128 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | C004 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF 500V |
| RR129 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | C005 | 1-126-933-11 | ELECT | 100uF | 20% 10V |
| RR130 | 1-249-409-11 | CARBON | 220 | 5% | 1/4W F | C006 | 1-162-282-31 | CERAMIC | 100PF | 10% 50V |
| RR139 | 1-249-409-11 | CARBON | 220 | 5% | 1/4W F | C050 | 1-126-933-11 | ELECT | 100uF | 20% 10V |
| RR140 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | C051 | 1-126-964-11 | ELECT | 10uF | 20% 50V |
| RR149 | 1-249-409-11 | CARBON | 220 | 5% | 1/4W F | C052 | 1-162-282-31 | CERAMIC | 100PF | 10% 50V |
| RR150 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | C053 | 1-102-233-00 | CERAMIC | 33PF | 10% 500V |
| RR158 | 1-249-409-11 | CARBON | 220 | 5% | 1/4W F | C054 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF 500V |
| RR159 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | C056 | 1-162-282-31 | CERAMIC | 100PF | 10% 50V |
| RR160 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | C100 | 1-126-948-11 | ELECT | 100uF | 20% 35V |
| RR161 | 1-249-415-11 | CARBON | 680 | 5% | 1/4W F | C306 | 1-126-961-11 | ELECT | 2.2uF | 20% 50V |
| RR162 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | C307 | 1-126-961-11 | ELECT | 2.2uF | 20% 50V |
| RR163 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | C308 | 1-126-934-11 | ELECT | 220uF | 20% 10V |
| RR164 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | C309 | 1-126-934-11 | ELECT | 220uF | 20% 10V |
| RR165 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | C312 | 1-136-159-00 | FILM | 0.033uF | 5% 50V |
| RR166 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | C313 | 1-136-159-00 | FILM | 0.033uF | 5% 50V |
| RR167 | 1-249-435-11 | CARBON | 33K | 5% | 1/4W | C314 | 1-126-961-11 | ELECT | 2.2uF | 20% 50V |
| | | | | | | C315 | 1-126-961-11 | ELECT | 2.2uF | 20% 50V |
| | | | | | | C316 | 1-126-933-11 | ELECT | 100uF | 20% 16V |
| | | | | | | C317 | 1-126-933-11 | ELECT | 100uF | 20% 16V |
| S101 | 1-762-751-11 | SWITCH, TACTILE (A) | | | | C318 | 1-126-967-11 | ELECT | 47uF | 20% 16V |
| S112 | 1-762-751-11 | SWITCH, TACTILE (V) | | | | C319 | 1-126-967-11 | ELECT | 47uF | 20% 16V |
| S113 | 1-762-751-11 | SWITCH, TACTILE (DISPLAY) | | | | C320 | 1-126-965-11 | ELECT | 22uF | 20% 50V |
| S123 | 1-762-751-11 | SWITCH, TACTILE (<) | | | | C322 | 1-162-294-31 | CERAMIC | 0.001uF | 10% 50V |
| S124 | 1-762-751-11 | SWITCH, TACTILE (>) | | | | C323 | 1-162-282-31 | CERAMIC | 100PF | 10% 50V |
| S134 | 1-762-751-11 | SWITCH, TACTILE (MUTING) | | | | C332 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S135 | 1-762-751-11 | SWITCH, TACTILE (SLEEP) | | | | C333 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S136 | 1-762-751-11 | SWITCH, TACTILE (FM MODE) | | | | C334 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S137 | 1-762-751-11 | SWITCH, TACTILE (FM/AM) | | | | C335 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S138 | 1-762-751-11 | SWITCH, TACTILE (TUNING +) | | | | C336 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S139 | 1-762-751-11 | SWITCH, TACTILE (TUNING -) | | | | C337 | 1-164-159-11 | CERAMIC | 0.1uF | 50V |
| S140 | 1-762-751-11 | SWITCH, TACTILE (PRESET +) | | | | C343 | 1-126-964-11 | ELECT | 10uF | 20% 50V |
| S141 | 1-762-751-11 | SWITCH, TACTILE (PRESET -) | | | | | | | | |
| S142 | 1-762-751-11 | SWITCH, TACTILE (MEMORY) | | | | | | | | |
| S151 | 1-762-751-11 | SWITCH, TACTILE (POWER) | | | | | | | | |

| Ref. No. | Part No. | Description | Remarks | | | Ref. No. | Part No. | Description | Remarks | | | | | |
|----------|--------------|-------------|----------|--------|------|---------------|--------------|--------------------------------|---------|--------|------|--|--|--|
| C344 | 1-102-508-91 | CERAMIC | 10PF | 0.5PF | 50V | C710 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C345 | 1-162-199-31 | CERAMIC | 10PF | 5% | 50V | C751 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | | | |
| C346 | 1-162-199-31 | CERAMIC | 10PF | 5% | 50V | C752 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C349 | 1-162-199-31 | CERAMIC | 10PF | 5% | 50V | C753 | 1-102-233-00 | CERAMIC | 33PF | 10% | 500V | | | |
| C350 | 1-102-508-91 | CERAMIC | 10PF | 0.5PF | 50V | C754 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF | 500V | | | |
| C351 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | C755 | 1-126-933-11 | ELECT | 100uF | 20% | 10V | | | |
| C352 | 1-126-961-11 | ELECT | 2.2uF | 20% | 50V | C756 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C370 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | C807 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | | | |
| C371 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | C808 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | | | |
| C431 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | C809 | 1-126-948-11 | ELECT | 100uF | 20% | 35V | | | |
| C433 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | C5001 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | | | |
| C437 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | C5051 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | | | |
| C439 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | CC01 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C443 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | CC02 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V | | | |
| C460 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | CC04 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C462 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | CC05 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C463 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | CC06 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C464 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | CC51 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C490 | 1-126-963-11 | ELECT | 4.7uF | 20% | 50V | CC52 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V | | | |
| C508 | 1-136-495-11 | FILM | 0.068uF | 5% | 50V | CC54 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C509 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | CC55 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C510 | 1-110-335-11 | MYLAR | 100PF | 5% | 50V | CC56 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | | | |
| C511 | 1-130-476-00 | MYLAR | 0.0027uF | 5% | 50V | < CONNECTOR > | | | | | | | | |
| C512 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | < CONNECTOR > | | | | | | | | |
| C513 | 1-136-171-00 | FILM | 0.33uF | 5% | 50V | * CND201 | 1-564-339-00 | PIN, CONNECTOR 5P | | | | | | |
| C514 | 1-136-159-00 | FILM | 0.033uF | 5% | 50V | CNE202 | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P | | | | | | |
| C558 | 1-136-495-11 | FILM | 0.068uF | 5% | 50V | CNE203 | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P | | | | | | |
| C559 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | CNE208 | 1-691-768-11 | PLUG (MICRO CONNECTOR) 6P | | | | | | |
| C560 | 1-110-335-11 | MYLAR | 100PF | 5% | 50V | CNE209 | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P | | | | | | |
| C561 | 1-130-476-00 | MYLAR | 0.0027uF | 5% | 50V | CNS201 | 1-569-060-11 | SOCKET, CONNECTOR 11P | | | | | | |
| C562 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | CNS202 | 1-568-442-11 | SOCKET, CONNECTOR 9P | | | | | | |
| C563 | 1-136-171-00 | FILM | 0.33uF | 5% | 50V | CNS203 | 1-569-321-11 | SOCKET, CONNECTOR 15P | | | | | | |
| C564 | 1-136-159-00 | FILM | 0.033uF | 5% | 50V | CNS204 | 1-568-443-11 | SOCKET, CONNECTOR 13P | | | | | | |
| C594 | 1-128-560-11 | ELECT | 22uF | 20% | 100V | CNS205 | 1-569-323-11 | SOCKET, CONNECTOR 19P | | | | | | |
| C595 | 1-128-560-11 | ELECT | 22uF | 20% | 100V | CNS206 | 1-569-060-11 | SOCKET, CONNECTOR 11P | | | | | | |
| C596 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | CNS207 | 1-784-806-11 | HOUSING,CONNECTOR(PC BOARD)13P | | | | | | |
| C597 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | < DIODE > | | | | | | | | |
| C598 | 1-126-967-11 | ELECT | 47uF | 20% | 16V | D301 | 8-719-911-19 | DIODE 1SS119 | | | | | | |
| C598 | 1-126-965-11 | ELECT | 22uF | 20% | 50V | D302 | 8-719-911-19 | DIODE 1SS119 | | | | | | |
| C599 | 1-126-967-11 | ELECT | 47uF | 20% | 16V | D401 | 8-719-911-19 | DIODE 1SS119 | | | | | | |
| C600 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | D402 | 8-719-911-19 | DIODE 1SS119 | | | | | | |
| C602 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | < TERMINAL > | | | | | | | | |
| C603 | 1-102-233-00 | CERAMIC | 33PF | 10% | 500V | * EB301 | 1-537-738-21 | TERMINAL, EARTH | | | | | | |
| C604 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF | 500V | < IC > | | | | | | | | |
| C605 | 1-126-933-11 | ELECT | 100uF | 20% | 10V | IC001 | 8-759-326-52 | IC uPC2581V | | | | | | |
| C606 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | IC302 | 8-759-805-14 | IC LC7822 | | | | | | |
| C610 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | IC303 | 8-759-636-74 | IC M5218AP-22 | | | | | | |
| C651 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | IC304 | 8-759-634-51 | IC M5218AP | | | | | | |
| C652 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | IC305 | 8-759-634-51 | IC M5218AP | | | | | | |
| C653 | 1-102-233-00 | CERAMIC | 33PF | 10% | 500V | IC306 | 8-759-634-51 | IC M5218AP | | | | | | |
| C654 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF | 500V | IC450 | 8-759-604-35 | IC M5F78M05L | | | | | | |
| C655 | 1-126-933-11 | ELECT | 100uF | 20% | 10V | IC451 | 8-759-391-87 | IC BA78M12P | | | | | | |
| C656 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | IC502 | 8-759-462-99 | IC TC9184P | | | | | | |
| C693 | 1-126-934-11 | ELECT | 220uF | 20% | 10V | < DIODE > | | | | | | | | |
| C701 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | < IC > | | | | | | | | |
| C702 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | < TERMINAL > | | | | | | | | |
| C703 | 1-102-233-00 | CERAMIC | 33PF | 10% | 500V | < IC > | | | | | | | | |
| C704 | 1-107-584-11 | CERAMIC | 4PF | 0.25PF | 500V | < IC > | | | | | | | | |
| C705 | 1-126-933-11 | ELECT | 100uF | 20% | 10V | < IC > | | | | | | | | |
| C706 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | < IC > | | | | | | | | |

INPUT

| Ref. No. | Part No. | Description | | Remarks | Ref. No. | Part No. | Description | | Remarks |
|----------|--------------|----------------|-----------------|-----------|----------|--------------|-------------|------|-----------|
| IC601 | 8-759-326-52 | IC | uPC2581V | | R350 | 1-247-807-31 | CARBON | 100 | 5% 1/4W |
| IC701 | 8-759-326-52 | IC | uPC2581V | | R352 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| IC801 | 8-759-604-40 | IC | M5F78M15 | | R353 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| IC803 | 8-759-604-46 | IC | M5F79M15 | | R356 | 1-249-425-11 | CARBON | 4.7K | 5% 1/4W F |
| | | < JACK > | | | R357 | 1-247-807-31 | CARBON | 100 | 5% 1/4W |
| J201 | 1-695-188-31 | JACK, PIN 4P | (CD/PHONO) | | R358 | 1-247-807-31 | CARBON | 100 | 5% 1/4W |
| J202 | 1-573-028-31 | JACK, PIN 4P | (TAPE/MD) | | R359 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| J203 | 1-785-009-11 | JACK, PIN 6P | (5.1/DVD INPUT) | | R360 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| | | < TRANSISTOR > | | | R361 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q300 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R362 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q301 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R363 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q302 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R364 | 1-249-429-11 | CARBON | 10K | 5% 1/4W |
| Q303 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R365 | 1-249-429-11 | CARBON | 10K | 5% 1/4W |
| Q304 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R366 | 1-249-429-11 | CARBON | 10K | 5% 1/4W |
| | | | | | R367 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q305 | 8-729-922-37 | TRANSISTOR | 2SD2144S | | R368 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q307 | 8-729-620-05 | TRANSISTOR | 2SC2603-EF | | R369 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q411 | 8-729-900-63 | TRANSISTOR | DTA124ES | | R370 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q414 | 8-729-900-63 | TRANSISTOR | DTA124ES | | R371 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q501 | 8-729-202-67 | TRANSISTOR | 2SK246-GR3 | | R372 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q502 | 8-729-141-30 | TRANSISTOR | 2SC3623A-LK | | R373 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| Q551 | 8-729-202-67 | TRANSISTOR | 2SK246-GR3 | | R374 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q552 | 8-729-141-30 | TRANSISTOR | 2SC3623A-LK | | R375 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q691 | 8-729-900-80 | TRANSISTOR | DTC114ES | | R376 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q692 | 8-729-422-57 | TRANSISTOR | UN4111 | | R377 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| Q3008 | 8-729-620-05 | TRANSISTOR | 2SC2603-EF | | R378 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| | | < RESISTOR > | | | R379 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F |
| R001 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R380 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R002 | 1-249-439-11 | CARBON | 68K | 5% 1/4W | R381 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R003 | 1-249-439-11 | CARBON | 68K | 5% 1/4W | R382 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R004 | 1-249-411-11 | CARBON | 330 | 5% 1/4W | | | | | |
| R051 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R383 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R052 | 1-249-439-11 | CARBON | 68K | 5% 1/4W | R384 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R053 | 1-249-433-11 | CARBON | 22K | 5% 1/4W | R385 | 1-249-419-11 | CARBON | 1.5K | 5% 1/4W F |
| R054 | 1-249-410-11 | CARBON | 270 | 5% 1/4W F | R386 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| R055 | 1-249-409-11 | CARBON | 220 | 5% 1/4W F | R387 | 1-249-440-11 | CARBON | 82K | 5% 1/4W |
| R056 | 1-249-409-11 | CARBON | 220 | 5% 1/4W F | R388 | 1-249-425-11 | CARBON | 4.7K | 5% 1/4W F |
| R090 | 1-249-433-11 | CARBON | 22K | 5% 1/4W | R389 | 1-249-425-11 | CARBON | 4.7K | 5% 1/4W F |
| R326 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R390 | 1-249-441-11 | CARBON | 4.7K | 5% 1/4W F |
| R327 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R391 | 1-249-429-11 | CARBON | 100K | 5% 1/4W |
| R330 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R392 | 1-249-425-11 | CARBON | 10K | 5% 1/4W F |
| R331 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R393 | 1-249-425-11 | CARBON | 4.7K | 5% 1/4W F |
| R334 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R394 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| R335 | 1-249-417-11 | CARBON | 1K | 5% 1/4W F | R395 | 1-249-429-11 | CARBON | 10K | 5% 1/4W |
| R336 | 1-249-401-11 | CARBON | 47 | 5% 1/4W F | R396 | 1-249-433-11 | CARBON | 22K | 5% 1/4W |
| R337 | 1-249-401-11 | CARBON | 47 | 5% 1/4W F | R397 | 1-249-433-11 | CARBON | 22K | 5% 1/4W |
| R338 | 1-249-441-11 | CARBON | 100K | 5% 1/4W | R398 | 1-247-895-00 | CARBON | 470K | 5% 1/4W |
| R339 | 1-249-441-11 | CARBON | 100K | 5% 1/4W | R399 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| R341 | 1-249-440-11 | CARBON | 82K | 5% 1/4W | R461 | 1-249-436-11 | CARBON | 39K | 5% 1/4W |
| R342 | 1-249-440-11 | CARBON | 82K | 5% 1/4W | R462 | 1-249-436-11 | CARBON | 39K | 5% 1/4W |
| R343 | 1-249-408-11 | CARBON | 180 | 5% 1/4W F | R483 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| R344 | 1-249-408-11 | CARBON | 180 | 5% 1/4W F | R486 | 1-249-440-11 | CARBON | 82K | 5% 1/4W |
| R345 | 1-249-428-11 | CARBON | 8.2K | 5% 1/4W F | R489 | 1-249-437-11 | CARBON | 47K | 5% 1/4W |
| R346 | 1-249-428-11 | CARBON | 8.2K | 5% 1/4W F | R508 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| R347 | 1-249-441-11 | CARBON | 100K | 5% 1/4W | R509 | 1-247-903-00 | CARBON | 1M | 5% 1/4W |
| R348 | 1-249-441-11 | CARBON | 100K | 5% 1/4W | R510 | 1-249-426-11 | CARBON | 5.6K | 5% 1/4W |
| R349 | 1-247-807-31 | CARBON | 100 | 5% 1/4W | R511 | 1-249-434-11 | CARBON | 27K | 5% 1/4W |
| | | | | | R513 | 1-249-426-11 | CARBON | 5.6K | 5% 1/4W |
| | | | | | R514 | 1-249-418-11 | CARBON | 1.2K | 5% 1/4W F |
| | | | | | R515 | 1-249-441-11 | CARBON | 100K | 5% 1/4W |
| | | | | | R516 | 1-247-843-11 | CARBON | 3.3K | 5% 1/4W |

INPUT
REARAMP

| Ref. No. | Part No. | Description | | | Remarks | Ref. No. | Part No. | Description | | | Remarks |
|----------|--------------|-------------|------|----|---------|----------|--------------|----------------------------|---------|-----|----------------|
| R517 | 1-247-883-00 | CARBON | 150K | 5% | 1/4W | R3063 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W |
| R518 | 1-249-427-11 | CARBON | 6.8K | 5% | 1/4W F | R3368 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| R519 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | R5002 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W |
| R541 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | R5052 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W |
| R558 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | | | | | | < RELAY > |
| R559 | 1-247-903-00 | CARBON | 1M | 5% | 1/4W | RY301 | 1-515-614-11 | RELAY | | | |
| R560 | 1-249-426-11 | CARBON | 5.6K | 5% | 1/4W | | | | | | ***** |
| R561 | 1-249-434-11 | CARBON | 27K | 5% | 1/4W | | | | | | ***** |
| R563 | 1-249-426-11 | CARBON | 5.6K | 5% | 1/4W | | | | | | ***** |
| R564 | 1-249-418-11 | CARBON | 1.2K | 5% | 1/4W F | * | A-4407-590-A | REARAMP BOARD, COMPLETE | | | |
| R565 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | | | | | | ***** |
| R566 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | | | | | | < CAPACITOR > |
| R567 | 1-247-883-00 | CARBON | 150K | 5% | 1/4W | C720 | 1-126-967-11 | ELECT | 47uF | 20% | 16V |
| R568 | 1-249-427-11 | CARBON | 6.8K | 5% | 1/4W F | C721 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V |
| R569 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | C722 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V |
| R591 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | C723 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V |
| R592 | 1-249-381-11 | CARBON | 1 | 5% | 1/4W F | C725 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V |
| R593 | 1-249-381-11 | CARBON | 1 | 5% | 1/4W F | C770 | 1-126-967-11 | ELECT | 47uF | 20% | 16V |
| R595 | 1-247-903-00 | CARBON | 1M | 5% | 1/4W | C771 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V |
| R596 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | C772 | 1-107-597-11 | CERAMIC | 22PF | 10% | 500V |
| R597 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | C773 | 1-162-286-31 | CERAMIC | 220PF | 10% | 50V |
| R598 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | C775 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V |
| R599 | 1-247-843-11 | CARBON | 3.3K | 5% | 1/4W | | | | | | < CONNECTOR > |
| R601 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | | | | | | |
| R602 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | CNE711 | 1-691-768-11 | PLUG (MICRO CONNECTOR) 6P | | | |
| R603 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | CNE713 | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P | | | |
| R604 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | * CNV711 | 1-564-241-11 | PIN, CONNECTOR (B4P-VH) 4P | | | |
| R651 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | * CNV712 | 1-564-242-00 | PIN, CONNECTOR 5P | | | |
| R651 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | | | | | | < DIODE > |
| R652 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | D701 | 8-719-911-19 | DIODE 1SS119 | | | |
| R653 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | D702 | 8-719-109-51 | DIODE RD2.0ES-B2 | | | |
| R654 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | D703 | 8-719-109-51 | DIODE RD2.0ES-B2 | | | |
| R690 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | D704 | 8-719-911-19 | DIODE 1SS119 | | | |
| R694 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | D751 | 8-719-911-19 | DIODE 1SS119 | | | |
| R701 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | D752 | 8-719-109-51 | DIODE RD2.0ES-B2 | | | |
| R702 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | D753 | 8-719-109-51 | DIODE RD2.0ES-B2 | | | |
| R703 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | D754 | 8-719-911-19 | DIODE 1SS119 | | | |
| R704 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | | | | | | < TRANSISTOR > |
| R751 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | | | | | | |
| R752 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | Q704 | 8-729-119-76 | TRANSISTOR 2SA1175-HFE | | | |
| R753 | 1-249-439-11 | CARBON | 68K | 5% | 1/4W | Q705 | 8-729-209-15 | TRANSISTOR 2SD2012 | | | |
| R754 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | Q706 | 8-749-010-25 | IC MN2488-OPY-M | | | |
| R790 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | Q707 | 8-749-010-26 | IC MP1620-OPY-M | | | |
| R3000 | 1-247-895-00 | CARBON | 470K | 5% | 1/4W | Q708 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | | |
| R3001 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | | | | | | |
| R3002 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | Q754 | 8-729-119-76 | TRANSISTOR 2SA1175-HFE | | | |
| R3003 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | Q755 | 8-729-209-15 | TRANSISTOR 2SD2012 | | | |
| R3004 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | Q756 | 8-749-010-25 | IC MN2488-OPY-M | | | |
| R3005 | 1-249-440-11 | CARBON | 82K | 5% | 1/4W | Q757 | 8-749-010-26 | IC MP1620-OPY-M | | | |
| R3006 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | Q758 | 8-729-140-82 | TRANSISTOR 2SA988-PAFAEA | | | |
| R3007 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | | | | | | < RESISTOR > |
| R3008 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | | | | |
| R3009 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W | R706 | 1-247-881-00 | CARBON | 120K | 5% | 1/4W |
| R3010 | 1-249-434-11 | CARBON | 27K | 5% | 1/4W | R722 | 1-247-840-00 | CARBON | 2.4K | 5% | 1/4W |
| R3011 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | R723 | 1-249-414-11 | CARBON | 560 | 5% | 1/4W F |
| R3012 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | R724 | 1-249-408-11 | CARBON | 180 | 5% | 1/4W F |
| R3013 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | R725 | 1-249-408-11 | CARBON | 180 | 5% | 1/4W F |
| R3014 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | | | | | | |
| R3060 | 1-249-434-11 | CARBON | 27K | 5% | 1/4W | | | | | | |
| R3062 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | | | | |

| Ref. No. | Part No. | Description | | | Remarks | Ref. No. | Part No. | Description | | | Remarks | | | |
|---------------|--------------|--|-----------|-----|---------|----------------|--------------|--|-------------|----|---------|--|--|--|
| R726 | 1-233-352-41 | ENCAPSULATED COMPONENT | | | | < TRANSISTOR > | | | | | | | | |
| R727 | 1-247-850-11 | CARBON | 6.2K | 5% | 1/4W | Q544 | 8-729-119-79 | TRANSISTOR | 2SC2785-FEK | | | | | |
| R728 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | Q609 | 8-729-281-53 | TRANSISTOR | 2SC1815-GR | | | | | |
| R732 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | Q610 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | | |
| R733 | 1-249-393-11 | CARBON | 10 | 5% | 1/4W F | Q611 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | | |
| R756 | 1-247-881-00 | CARBON | 120K | 5% | 1/4W | Q645 | 8-729-119-79 | TRANSISTOR | 2SC2785-FEK | | | | | |
| R772 | 1-247-840-00 | CARBON | 2.4K | 5% | 1/4W | Q709 | 8-729-281-53 | TRANSISTOR | 2SC1815-GR | | | | | |
| R773 | 1-249-414-11 | CARBON | 560 | 5% | 1/4W F | Q710 | 8-729-900-63 | TRANSISTOR | DTA124ES | | | | | |
| R774 | 1-249-408-11 | CARBON | 180 | 5% | 1/4W F | Q745 | 8-729-119-79 | TRANSISTOR | 2SC2785-FEK | | | | | |
| R775 | 1-249-408-11 | CARBON | 180 | 5% | 1/4W F | Q747 | 8-729-119-79 | TRANSISTOR | 2SC2785-FEK | | | | | |
| R776 | 1-233-352-41 | ENCAPSULATED COMPONENT | | | | Q748 | 8-729-030-19 | TRANSISTOR | 2SB1640 | | | | | |
| R777 | 1-247-850-11 | CARBON | 6.2K | 5% | 1/4W | < RESISTOR > | | | | | | | | |
| R778 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | R543 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | |
| R782 | 1-249-437-11 | CARBON | 47K | 5% | 1/4W | R544 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | |
| R783 | 1-249-393-11 | CARBON | 10 | 5% | 1/4W F | R545 | 1-249-393-11 | CARBON | 10 | 5% | 1/4W F | | | |
| ***** | | | | | | | | | | | | | | |
| * | A-4407-602-A | SP BOARD, COMPLETE (MY,SP,CH) | | | | R546 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | | | |
| * | A-4407-592-A | SP BOARD, COMPLETE (US,CND,E,EA,PX,AUS) | | | | R629 | 1-247-866-11 | CARBON | 30K | 5% | 1/4W | | | |
| ***** | | | | | | | | | | | | | | |
| < CAPACITOR > | | | | | | | | | | | | | | |
| C624 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | R630 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | | | |
| C626 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | R631 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | | | |
| C724 | 1-126-964-11 | ELECT | 10uF | 20% | 50V | R634 | 1-249-389-11 | CARBON | 4.7 | 5% | 1/4W F | | | |
| C726 | 1-136-153-00 | FILM | 0.01uF | 5% | 50V | R635 | 1-249-431-11 | CARBON | 15K | 5% | 1/4W | | | |
| C794 | 1-126-968-11 | ELECT | 100uF | 20% | 50V | R636 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | | | |
| C795 | 1-126-969-11 | ELECT | 220uF | 20% | 50V | R646 | 1-249-432-11 | CARBON | 18K | 5% | 1/4W | | | |
| < CONNECTOR > | | | | | | | | | | | | | | |
| * CND602 | 1-564-337-00 | PIN, CONNECTOR 3P | | | | R647 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | |
| CNE604 | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P | | | | R648 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | |
| CNJ701 | 1-774-136-11 | CONNECTOR, ROUND TYPE 6P (WIRELESS REAR SPEAKER) | | | | R649 | 1-249-393-11 | CARBON | 10 | 5% | 1/4W F | | | |
| CNS603 | 1-568-439-11 | SOCKET, CONNECTOR 7P | | | | R729 | 1-247-866-11 | CARBON | 30K | 5% | 1/4W | | | |
| CNV601 | 1-564-320-00 | PIN, CONNECTOR (B2P-VH) 2P | | | | R730 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | | | |
| < DIODE > | | | | | | | | | | | | | | |
| D543 | 8-719-911-19 | DIODE | 1SS119 | | | R731 | 1-249-433-11 | CARBON | 22K | 5% | 1/4W | | | |
| D605 | 8-719-911-19 | DIODE | 1SS119 | | | R734 | 1-249-389-11 | CARBON | 4.7 | 5% | 1/4W F | | | |
| D606 | 8-719-911-19 | DIODE | 1SS119 | | | R735 | 1-249-431-11 | CARBON | 15K | 5% | 1/4W | | | |
| D607 | 8-719-911-19 | DIODE | 1SS119 | | | R737 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | |
| D649 | 8-719-911-19 | DIODE | 1SS119 | | | R738 | 1-247-887-00 | CARBON | 220K | 5% | 1/4W | | | |
| D705 | 8-719-911-19 | DIODE | 1SS119 | | | R743 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | |
| D706 | 8-719-911-19 | DIODE | 1SS119 | | | R744 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | |
| D749 | 8-719-911-19 | DIODE | 1SS119 | | | R745 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | | | |
| < RELAY > | | | | | | | | | | | | | | |
| < IC > | | | | | | | | | | | | | | |
| IC702 | 8-759-605-01 | IC | M5F78M18L | | | R747 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | |
| < JACK > | | | | | | | | | | | | | | |
| J501 | 1-770-157-21 | JACK, PIN 2P (WOOFER) | | | | R748 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | | | |
| < COIL > | | | | | | | | | | | | | | |
| L601 | 1-411-906-11 | COIL, AIR-CORE (MY,SP,CH) | | | | R749 | 1-249-393-11 | CARBON | 10 | 5% | 1/4W F | | | |
| L601 | 1-420-872-00 | COIL, AIR-CORE (US,CND,E,EA,PX,AUS) | | | | R784 | 1-249-389-11 | CARBON | 4.7 | 5% | 1/4W F | | | |
| L701 | 1-411-906-11 | COIL, AIR-CORE (MY,SP,CH) | | | | R787 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | |
| L701 | 1-420-872-00 | COIL, AIR-CORE (US,CND,E,EA,PX,AUS) | | | | R788 | 1-247-887-00 | CARBON | 220K | 5% | 1/4W | | | |
| L751 | 1-411-906-11 | COIL, AIR-CORE (MY,SP,CH) | | | | < TERMINAL > | | | | | | | | |
| L751 | 1-420-872-00 | COIL, AIR-CORE (US,CND,E,EA,PX,AUS) | | | | TM701 | 1-694-431-21 | TERMINAL BOARD (SURROUND SPEAKERS) (MY,SP,CH) | | | | | | |
| ***** | | | | | | | | | | | | | | |
| TM701 | 1-537-510-11 | TERMINAL BOARD (SURROUND SPEAKERS) (US,CND,E,EA,PX,AUS) | | | | | | | | | | | | |

| | | |
|--------------|----------------|-------------------|
| SP SW | STANDBY | STANDBY(2) |
|--------------|----------------|-------------------|

| Ref. No. | Part No. | Description | Remarks | Ref. No. | Part No. | Description | Remarks |
|----------|--------------|--|---------|----------|--------------|--------------------------------------|---|
| * | 1-669-442-11 | SP SW BOARD ***** | | | | < SWITCH > | |
| | | < CONNECTOR > | | | VS901 | 1-571-437-11 | SWITCH, POWER VOLTAGE CHANGE (E,EA,PX) ***** |
| * CNS104 | 1-695-808-11 | CONNECTOR, PC BOARD 8P < DIODE > | | * | A-4407-589-A | STANDBY (2) BOARD, COMPLETE ***** | |
| D122 | 8-719-911-19 | DIODE 1SS119 | | | | < CAPACITOR > | |
| D123 | 8-719-911-19 | DIODE 1SS119 < SWITCH > | | C901 | 1-136-157-00 | FILM 0.022uF 5% 50V | |
| S143 | 1-762-751-11 | SWITCH, TACTILE (SET UP) | | C902 | 1-136-157-00 | FILM 0.022uF 5% 50V | |
| S144 | 1-762-751-11 | SWITCH, TACTILE (CURSOR MODE) | | C903 | 1-126-768-11 | ELECT 2200uF 20% 16V | |
| S155 | 1-762-268-11 | SWITCH, ROTARY (SPEAKERS) | ***** | C904 | 1-126-960-11 | ELECT 1uF 20% 50V | |
| * | 1-669-449-11 | STANDBY BOARD ***** | | C905 | 1-126-959-11 | ELECT 0.47uF 20% 50V | |
| | 1-533-217-31 | HOLDER, FUSE < CONNECTOR > | | C906 | 1-124-464-11 | ELECT 0.22uF 20% 50V | |
| CNJ901 | 1-540-041-11 | OUTLET, AC (NONPOLAR) (2P)(CH) | | C913 | 1-164-159-11 | CERAMIC 0.1uF 50V | |
| CNJ901 | 1-540-060-11 | OUTLET, AC (POLAR)(US,CND,E,EA,PX) | | C914 | 1-164-159-11 | CERAMIC 0.1uF 50V | |
| * CNP905 | 1-580-230-21 | PIN, CONNECTOR (PC BOARD) 2P(AUS,MY,SP) | | C916 | 1-164-159-11 | CERAMIC 0.1uF 50V | |
| CNV901 | 1-564-321-00 | PIN, CONNECTOR 2P | | C917 | 1-164-159-11 | CERAMIC 0.1uF 50V | |
| * CNV902 | 1-565-792-11 | PIN, CONNECTOR 2P | | | | | |
| CNV903 | 1-568-106-11 | PIN, CONNECTOR 4P (E,EA,PX) < DIODE > | | | | | |
| D907 | 8-719-911-19 | DIODE 1SS119 < TERMINAL > | | D901 | 8-719-200-82 | DIODE 11ES2 | |
| * EB902 | 1-537-738-21 | TERMINAL, EARTH (US,CND) < FUSE > | | D902 | 8-719-200-82 | DIODE 11ES2 | |
| △F901 | 1-533-311-11 | FUSE, GLASS CYLINDRICAL(DIA.5) 8A/125V (US,CND) | | D903 | 8-719-200-82 | DIODE 11ES2 | |
| △F901 | 1-533-504-51 | FUSE TIME LAG 4A/250V(EXCEPT US,CND) | | D904 | 8-719-200-82 | DIODE 11ES2 | |
| △F903 | 1-532-464-51 | FUSE TIME LAG 2.5A/250V (AUS,MY,SP,CH) | | D905 | 8-719-911-19 | DIODE 1SS119 | |
| △F904 | 1-532-504-51 | FUSE TIME LAG 4A/250V (E,EA,PX) | | D906 | 8-719-911-19 | DIODE 1SS119 < TERMINAL > | |
| | | < RESISTOR > | | * EB900 | 1-537-738-21 | TERMINAL, EARTH < IC > | |
| R901 | 1-202-725-00 | SOLID 3.3M 10% 1/2W (US,CND) | | IC901 | 8-759-333-83 | IC NJM2103D < TRANSISTOR > | |
| | | < RELAY > | | Q901 | 8-729-119-79 | TRANSISTOR 2SC2785-FEK | |
| RY901 | 1-515-999-11 | RELAY, POWER < TRANSFORMER > | | Q902 | 8-729-026-68 | TRANSISTOR 2SD2525(TP) | |
| T902 | 1-450-358-11 | TRANSFORMER,POWER (E,EA,PX,AUS,MY,SP,CH) | | | | < RESISTOR > | |
| T902 | 1-450-361-11 | TRANSFORMER,POWER(US,CND) | | R902 | 1-249-429-11 | CARBON 10K 5% 1/4W | |
| | | | | R903 | 1-249-425-11 | CARBON 4.7K 5% 1/4W F | |
| | | | | R904 | 1-249-417-11 | CARBON 1K 5% 1/4W F | |
| | | | | R905 | 1-249-428-11 | CARBON 8.2K 5% 1/4W F | |
| | | | | R906 | 1-249-421-11 | CARBON 2.2K 5% 1/4W F | |
| | | | | R908 | 1-249-433-11 | CARBON 22K 5% 1/4W | |
| | | | | R909 | 1-249-439-11 | CARBON 68K 5% 1/4W | |
| | | | | R910 | 1-249-437-11 | CARBON 47K 5% 1/4W | |
| | | | | R912 | 1-249-430-11 | CARBON 12K 5% 1/4W | |
| | | | | | | ***** | |

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

SURR

| <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u> | <u>Remarks</u> | | | <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u> | <u>Remarks</u> | | |
|-----------------|-----------------|----------------------|-------------------------------------|-----|-----|-----------------|-----------------|-----------------------------------|----------------|-----|--------|
| * | A-4407-593-A | SURR BOARD, COMPLETE | ***** ***** < CAPACITOR > | | | C448 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V |
| | | | | | | C449 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V |
| | | | | | | C450 | 1-126-163-11 | ELECT | 4.7uF | 20% | 50V |
| | | | | | | C451 | 1-126-163-11 | ELECT | 4.7uF | 20% | 50V |
| | | | | | | C452 | 1-124-250-11 | ELECT | 0.15uF | 20% | 50V |
| C10 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | C453 | 1-124-250-11 | ELECT | 0.15uF | 20% | 50V |
| C11 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | C454 | 1-126-162-11 | ELECT | 3.3uF | 20% | 50V |
| C60 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | C455 | 1-126-162-11 | ELECT | 3.3uF | 20% | 50V |
| C61 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | C456 | 1-124-250-11 | ELECT | 0.15uF | 20% | 50V |
| C300 | 1-124-589-11 | ELECT | 47uF | 20% | 16V | C457 | 1-124-250-11 | ELECT | 0.15uF | 20% | 50V |
| C301 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | C458 | 1-124-261-00 | ELECT | 10uF | 20% | 50V |
| C302 | 1-162-294-31 | CERAMIC | 0.001uF | 10% | 50V | C459 | 1-124-261-00 | ELECT | 10uF | 20% | 50V |
| C303 | 1-124-589-11 | ELECT | 47uF | 20% | 16V | C476 | 1-102-518-11 | CERAMIC | 33PF | 5% | 50V |
| C355 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | C495 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V |
| C356 | 1-126-933-11 | ELECT | 100uF | 20% | 16V | CC09 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C357 | 1-126-514-11 | ELECT | 22uF | 20% | 10V | CC12 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C358 | 1-126-514-11 | ELECT | 22uF | 20% | 10V | CC13 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C400 | 1-102-951-00 | CERAMIC | 15PF | 5% | 50V | CC59 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C401 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V | CC62 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C402 | 1-102-852-91 | CERAMIC | 47PF | 5% | 50V | CC63 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V |
| C403 | 1-130-469-00 | MYLAR | 680PF | 5% | 50V | CNS401 | 1-569-060-11 | SOCKET, CONNECTOR 11P | | | |
| C404 | 1-136-157-00 | FILM | 0.022uF | 5% | 50V | CNS402 | 1-568-442-11 | SOCKET, CONNECTOR 9P | | | |
| C405 | 1-102-973-00 | CERAMIC | 100PF | 5% | 50V | CNS406 | 1-569-060-11 | SOCKET, CONNECTOR 11P | | | |
| C406 | 1-102-953-00 | CERAMIC | 18PF | 5% | 50V | < IC > | | | | | |
| C407 | 1-136-161-00 | FILM | 0.047uF | 5% | 50V | IC300 | 8-759-805-14 | IC LC7822 | | | |
| C408 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | IC400 | 8-759-528-36 | IC CXA8081S | | | |
| C409 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | IC401 | 8-759-528-35 | IC CXA8079S | | | |
| C410 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | IC403 | 8-759-805-15 | IC LC7823 | | | |
| C411 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | IC404 | 8-759-634-51 | IC M5218AP | | | |
| C412 | 1-136-164-00 | FILM | 0.082uF | 5% | 50V | IC407 | 8-759-604-38 | IC M5F78M10 | | | |
| C413 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V | < JACK > | | | | | |
| C414 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | J300 | 1-774-725-11 | JACK, PIN 2P (TV/DBS AUDIO IN) | | | |
| C415 | 1-130-477-00 | MYLAR | 0.0033uF | 5% | 50V | J301 | 1-573-028-31 | JACK, PIN 4P (VIDEO AUDIO IN/OUT) | | | |
| C416 | 1-136-177-00 | FILM | 1uF | 5% | 50V | < COIL > | | | | | |
| C417 | 1-162-294-31 | CERAMIC | 0.001uF | 10% | 50V | L400 | 1-410-509-11 | INDUCTOR | 10uH | | |
| C418 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | L403 | 1-410-509-11 | INDUCTOR | 10uH | | |
| C419 | 1-136-164-00 | FILM | 0.082uF | 5% | 50V | < RESISTOR > | | | | | |
| C420 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | R301 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C421 | 1-136-177-00 | FILM | 1uF | 5% | 50V | R304 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| C422 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V | R305 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| C423 | 1-126-301-11 | ELECT | 1uF | 20% | 50V | R307 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C424 | 1-126-934-11 | ELECT | 220uF | 20% | 16V | R310 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C425 | 1-126-301-11 | ELECT | 1uF | 20% | 50V | R312 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| C426 | 1-124-252-00 | ELECT | 0.33uF | 20% | 50V | R314 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| C427 | 1-136-177-00 | FILM | 1uF | 5% | 50V | R315 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C428 | 1-136-177-00 | FILM | 1uF | 5% | 50V | R318 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C429 | 1-128-551-11 | ELECT | 22uF | 20% | 35V | R319 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C430 | 1-162-282-31 | CERAMIC | 100PF | 10% | 50V | R320 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F |
| C432 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | R321 | 1-249-397-11 | CARBON | 22 | 5% | 1/4W F |
| C434 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V | R322 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F |
| C435 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V | R323 | 1-249-397-11 | CARBON | 22 | 5% | 1/4W F |
| C436 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | R400 | 1-249-441-11 | CARBON | 100K | 5% | 1/4W |
| C438 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | | | | | | |
| C440 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V | | | | | | |
| C441 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V | | | | | | |
| C442 | 1-124-261-00 | ELECT | 10uF | 20% | 50V | | | | | | |
| C444 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V | | | | | | |
| C445 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V | | | | | | |
| C446 | 1-126-163-11 | ELECT | 4.7uF | 20% | 50V | | | | | | |
| C447 | 1-126-163-11 | ELECT | 4.7uF | 20% | 50V | | | | | | |

SURR

SW

VIDEO

| Ref. No. | Part No. | Description | Remarks | | | Ref. No. | Part No. | Description | Remarks | | | | | | | | | | | | | | |
|------------|--------------|-------------------------------------|---------------|----|--------|--|--------------|---------------------------------|---------------|-----|--------|--|--|--|--|--|--|--|--|--|--|--|--|
| R401 | 1-249-436-11 | CARBON | 39K | 5% | 1/4W | S116 | 1-762-751-11 | SWITCH, TACTILE (7) | | | | | | | | | | | | | | | |
| R402 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | S117 | 1-762-751-11 | SWITCH, TACTILE (GENRE) | | | | | | | | | | | | | | | |
| R403 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | S118 | 1-762-751-11 | SWITCH, TACTILE (5.1/DVD INPUT) | | | | | | | | | | | | | | | |
| R451 | 1-249-435-11 | CARBON | 33K | 5% | 1/4W | S125 | 1-762-751-11 | SWITCH, TACTILE (8) | | | | | | | | | | | | | | | |
| R458 | 1-249-436-11 | CARBON | 39K | 5% | 1/4W | S126 | 1-762-751-11 | SWITCH, TACTILE (9) | | | | | | | | | | | | | | | |
| ***** | | | | | | | | | | | | | | | | | | | | | | | |
| * | 1-669-439-11 | SW BOARD | ***** | | | S127 | 1-762-751-11 | SWITCH, TACTILE (0) | | | | | | | | | | | | | | | |
| | | | < CONNECTOR > | | | S128 | 1-762-751-11 | SWITCH, TACTILE (MODE) | | | | | | | | | | | | | | | |
| | | | | | | S129 | 1-762-751-11 | SWITCH, TACTILE (BASS BOOST) | | | | | | | | | | | | | | | |
| | | | | | | S130 | 1-762-751-11 | SWITCH, TACTILE (TONE ON/OFF) | | | | | | | | | | | | | | | |
| | | | | | | S133 | 1-762-750-11 | SWITCH, TACTILE (VIDEO) | | | | | | | | | | | | | | | |
| CNS122 | 1-770-397-11 | HOUSING, CONNECTOR(PC BOARD)4P | | | | S145 | 1-762-750-11 | SWITCH, TACTILE (PHONO) | | | | | | | | | | | | | | | |
| CNS124 | 1-770-397-11 | HOUSING, CONNECTOR(PC BOARD)4P | | | | S146 | 1-762-750-11 | SWITCH, TACTILE (CD) | | | | | | | | | | | | | | | |
| CNS126 | 1-770-397-11 | HOUSING, CONNECTOR(PC BOARD)4P | | | | S147 | 1-762-750-11 | SWITCH, TACTILE (TV/LD) | | | | | | | | | | | | | | | |
| | | | < DIODE > | | | S148 | 1-762-750-11 | SWITCH, TACTILE (TAPE/MD) | | | | | | | | | | | | | | | |
| ***** | | | | | | | | | | | | | | | | | | | | | | | |
| D132 | 8-719-058-64 | DIODE SEL5823A-TP15 (TUNER) | | | | * | 1-669-435-11 | VIDEO BOARD | ***** | | | | | | | | | | | | | | |
| D133 | 8-719-058-64 | DIODE SEL5823A-TP15 (VIDEO) | | | | | | | < CAPACITOR > | | | | | | | | | | | | | | |
| D134 | 8-719-058-64 | DIODE SEL5823A-TP15 (PHONO) | | | | C201 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | | | | | | | | | | | | |
| D137 | 8-719-058-64 | DIODE SEL5823A-TP15 (CD) | | | | C203 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | | | | | | | | | | | | |
| D138 | 8-719-058-64 | DIODE SEL5823A-TP15 (TV/LD) | | | | C204 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | | | | | | | | | | | | |
| D139 | 8-719-058-64 | DIODE SEL5823A-TP15 (TAPE/MD) | | | | C205 | 1-162-215-31 | CERAMIC | 47PF | 5% | 50V | | | | | | | | | | | | |
| | | | < RESISTOR > | | | C206 | 1-162-215-31 | CERAMIC | 47PF | 5% | 50V | | | | | | | | | | | | |
| R152 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | C208 | 1-126-960-11 | ELECT | 1uF | 20% | 50V | | | | | | | | | | | | |
| RR131 | 1-249-411-11 | CARBON | 330 | 5% | 1/4W | C209 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | | | | | | | | | | | | |
| RR132 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | C210 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | | | | | | | | | | | | |
| RR133 | 1-249-415-11 | CARBON | 680 | 5% | 1/4W F | C211 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | | | | | | | | | | | | |
| RR134 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | C212 | 1-164-159-11 | CERAMIC | 0.1uF | | 50V | | | | | | | | | | | | |
| RR135 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | C213 | 1-126-933-11 | ELECT | 100uF | 20% | 16V | | | | | | | | | | | | |
| RR136 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | C214 | 1-126-933-11 | ELECT | 100uF | 20% | 16V | | | | | | | | | | | | |
| RR137 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | < CONNECTOR > | | | | | | | | | | | | | | | | | |
| RR138 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | | | | | | | | | | | | | | | | | | |
| RR141 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | < DIODE > | | | | | | | | | | | | | | | | | |
| RR142 | 1-249-415-11 | CARBON | 680 | 5% | 1/4W F | | | | | | | | | | | | | | | | | | |
| RR143 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | CNS211 1-569-321-11 SOCKET, CONNECTOR 15P | | | | | | | | | | | | | | | | | |
| RR144 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | < DIODE > | | | | | | | | | | | | | | | | | |
| RR145 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | | | | | | | | | | | | | | | | | | |
| RR146 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | D201 8-719-911-19 DIODE 1SS119 | | | | | | | | | | | | | | | | | |
| RR147 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | D202 8-719-911-19 DIODE 1SS119 | | | | | | | | | | | | | | | | | |
| RR148 | 1-249-435-11 | CARBON | 33K | 5% | 1/4W | < IC > | | | | | | | | | | | | | | | | | |
| RR151 | 1-249-413-11 | CARBON | 470 | 5% | 1/4W F | IC201 8-759-529-20 IC NJM2296D | | | | | | | | | | | | | | | | | |
| RR152 | 1-249-415-11 | CARBON | 680 | 5% | 1/4W F | IC202 8-759-700-65 IC NJM79L05A | | | | | | | | | | | | | | | | | |
| RR153 | 1-249-417-11 | CARBON | 1K | 5% | 1/4W F | < JACK > | | | | | | | | | | | | | | | | | |
| RR154 | 1-249-419-11 | CARBON | 1.5K | 5% | 1/4W F | J201 1-770-337-11 JACK, PIN 3P (VIDEO/MONITOR) | | | | | | | | | | | | | | | | | |
| RR155 | 1-249-421-11 | CARBON | 2.2K | 5% | 1/4W F | J203 1-695-317-21 JACK, PIN 2P (5.1/DVD, TV/DBS, VIDEO IN) | | | | | | | | | | | | | | | | | |
| RR156 | 1-249-425-11 | CARBON | 4.7K | 5% | 1/4W F | < RESISTOR > | | | | | | | | | | | | | | | | | |
| RR157 | 1-249-429-11 | CARBON | 10K | 5% | 1/4W | R201 1-249-403-11 CARBON 68 5% 1/4W F | | | | | | | | | | | | | | | | | |
| < SWITCH > | | | | | | | | | | | | | | | | | | | | | | | |
| S102 | 1-762-751-11 | SWITCH, TACTILE (DIRECT TUNING) | | | | R203 | 1-249-403-11 | CARBON | 68 | 5% | 1/4W F | | | | | | | | | | | | |
| S103 | 1-762-751-11 | SWITCH, TACTILE (1) | | | | R204 | 1-249-403-11 | CARBON | 68 | 5% | 1/4W F | | | | | | | | | | | | |
| S104 | 1-762-751-11 | SWITCH, TACTILE (2) | | | | R205 | 1-249-403-11 | CARBON | 68 | 5% | 1/4W F | | | | | | | | | | | | |
| S105 | 1-762-751-11 | SWITCH, TACTILE (3) | | | | R206 | 1-249-403-11 | CARBON | 68 | 5% | 1/4W F | | | | | | | | | | | | |
| S106 | 1-762-751-11 | SWITCH, TACTILE (4) | | | | ***** | | | | | | | | | | | | | | | | | |
| S107 | 1-762-751-11 | SWITCH, TACTILE (5) | | | | | | | | | | | | | | | | | | | | | |
| S108 | 1-762-751-11 | SWITCH, TACTILE (SOUND FILE ON/OFF) | | | | | | | | | | | | | | | | | | | | | |
| S111 | 1-762-750-11 | SWITCH, TACTILE (TUNER) | | | | | | | | | | | | | | | | | | | | | |
| S114 | 1-762-751-11 | SWITCH, TACTILE (SHIFT) | | | | | | | | | | | | | | | | | | | | | |
| S115 | 1-762-751-11 | SWITCH, TACTILE (6) | | | | | | | | | | | | | | | | | | | | | |

VOL

| <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u> | <u>Remarks</u> | <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u> | <u>Remarks</u> |
|-----------------|-----------------|-------------------------------|-----------------|-----------------|-----------------|---------------------------------------|--------------------------|
| * | 1-669-446-11 | VOL BOARD | ***** | | | ACCESSORIES & PACKING MATERIALS | ***** |
| | | < CONNECTOR > | | | 1-475-135-11 | REMOTE COMMANDER RM-U501(CH) | |
| CNP101 | 1-770-388-11 | PIN, CONNECTOR (PC BOARD) 4P | | | 8-917-634-90 | REMOTE COMMANDER RM-PP401(CND) | |
| CNS402 | 1-569-323-11 | SOCKET, CONNECTOR 19P | | | 8-917-635-90 | REMOTE COMMANDER RM-U401 | (EXCEPT CND,CH) |
| | | < VARIABLE RESISTOR > | | | 4-978-977-01 | BATTERY, COVER | |
| RV401 | 1-225-446-11 | RES, VAR, CARBON 100KX6 | (MASTER VOLUME) | | 3-864-029-11 | MANUAL, INSTRUCTION (ENGLISH) | |
| | | ***** | | | 3-864-029-21 | MANUAL, INSTRUCTION (FRENCH) | |
| | | MISCELLANEOUS | ***** | | 3-864-029-31 | MANUAL, INSTRUCTION | (ENGLISH/FRENCH/SPANISH) |
| 12 | 1-769-993-11 | WIRE (FLAT TYPE) (13 CORE) | | | 3-864-029-41 | MANUAL, INSTRUCTION (ENGLISH/CHINESE) | |
| △54 | 1-696-847-11 | CORD, POWER (AUS) | | | 3-864-029-51 | MANUAL, INSTRUCTION (ENGLISH/CHINESE) | |
| △54 | 1-769-743-11 | CORD, POWER (US,CND) | | | 1-501-374-11 | ANTENNA, LOOP | |
| △54 | 1-769-744-11 | CORD, POWER (E,EA,PX,MY,SP) | | | ***** | | |
| △54 | 1-782-464-21 | CORD, POWER (CH) | | #1 | 7-685-646-79 | SCREW +BVTP 3X8 TYPE2 TT(B) | |
| 64 | 1-693-407-21 | TUNER (US,CND,E,EA,PX) | | #2 | 7-685-881-09 | SCREW +BVTT 4X8 (S) | |
| 64 | 1-693-408-21 | TUNER (AUS,MY,SP,CH) | | #3 | 7-685-872-09 | SCREW +BVTT 3X8 (S) | |
| 69 | 1-769-941-11 | WIRE (FLAT TYPE) (11 CORE) | | | | | |
| 69 | 1-769-948-11 | WIRE (FLAT TYPE) (11 CORE) | | | | | |
| 70 | 1-765-321-11 | WIRE (FLAT TYPE) (9 CORE) | | | | | |
| 71 | 1-773-110-11 | WIRE (FLAT TYPE) (19 CORE) | | | | | |
| 72 | 1-769-877-11 | WIRE (FLAT TYPE) (7 CORE) | | | | | |
| 73 | 1-773-008-11 | WIRE (FLAT TYPE) (15 CORE) | | | | | |
| 73 | 1-773-022-11 | WIRE (FLAT TYPE) (15 CORE) | | | | | |
| △CNJ902 | 1-251-416-11 | OUTLET, A.C. (AUS) | | | | | |
| △CNJ902 | 1-526-794-11 | OUTLET, AC (MY,SP) | | | | | |
| △T901 | 1-431-809-11 | TRANSFORMER, POWER (US) | | | | | |
| △T901 | 1-431-810-11 | TRANSFORMER, POWER (CND) | | | | | |
| △T901 | 1-431-811-11 | TRANSFORMER, POWER (MY,SP,CH) | | | | | |
| △T901 | 1-431-812-11 | TRANSFORMER, POWER (AUS) | | | | | |
| △T901 | 1-431-813-11 | TRANSFORMER, POWER (E,EA,PX) | | | | | |
| | | ***** | | | | | |

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.