TANDBERG PORTABLE RADIO

Modell TP 3-3

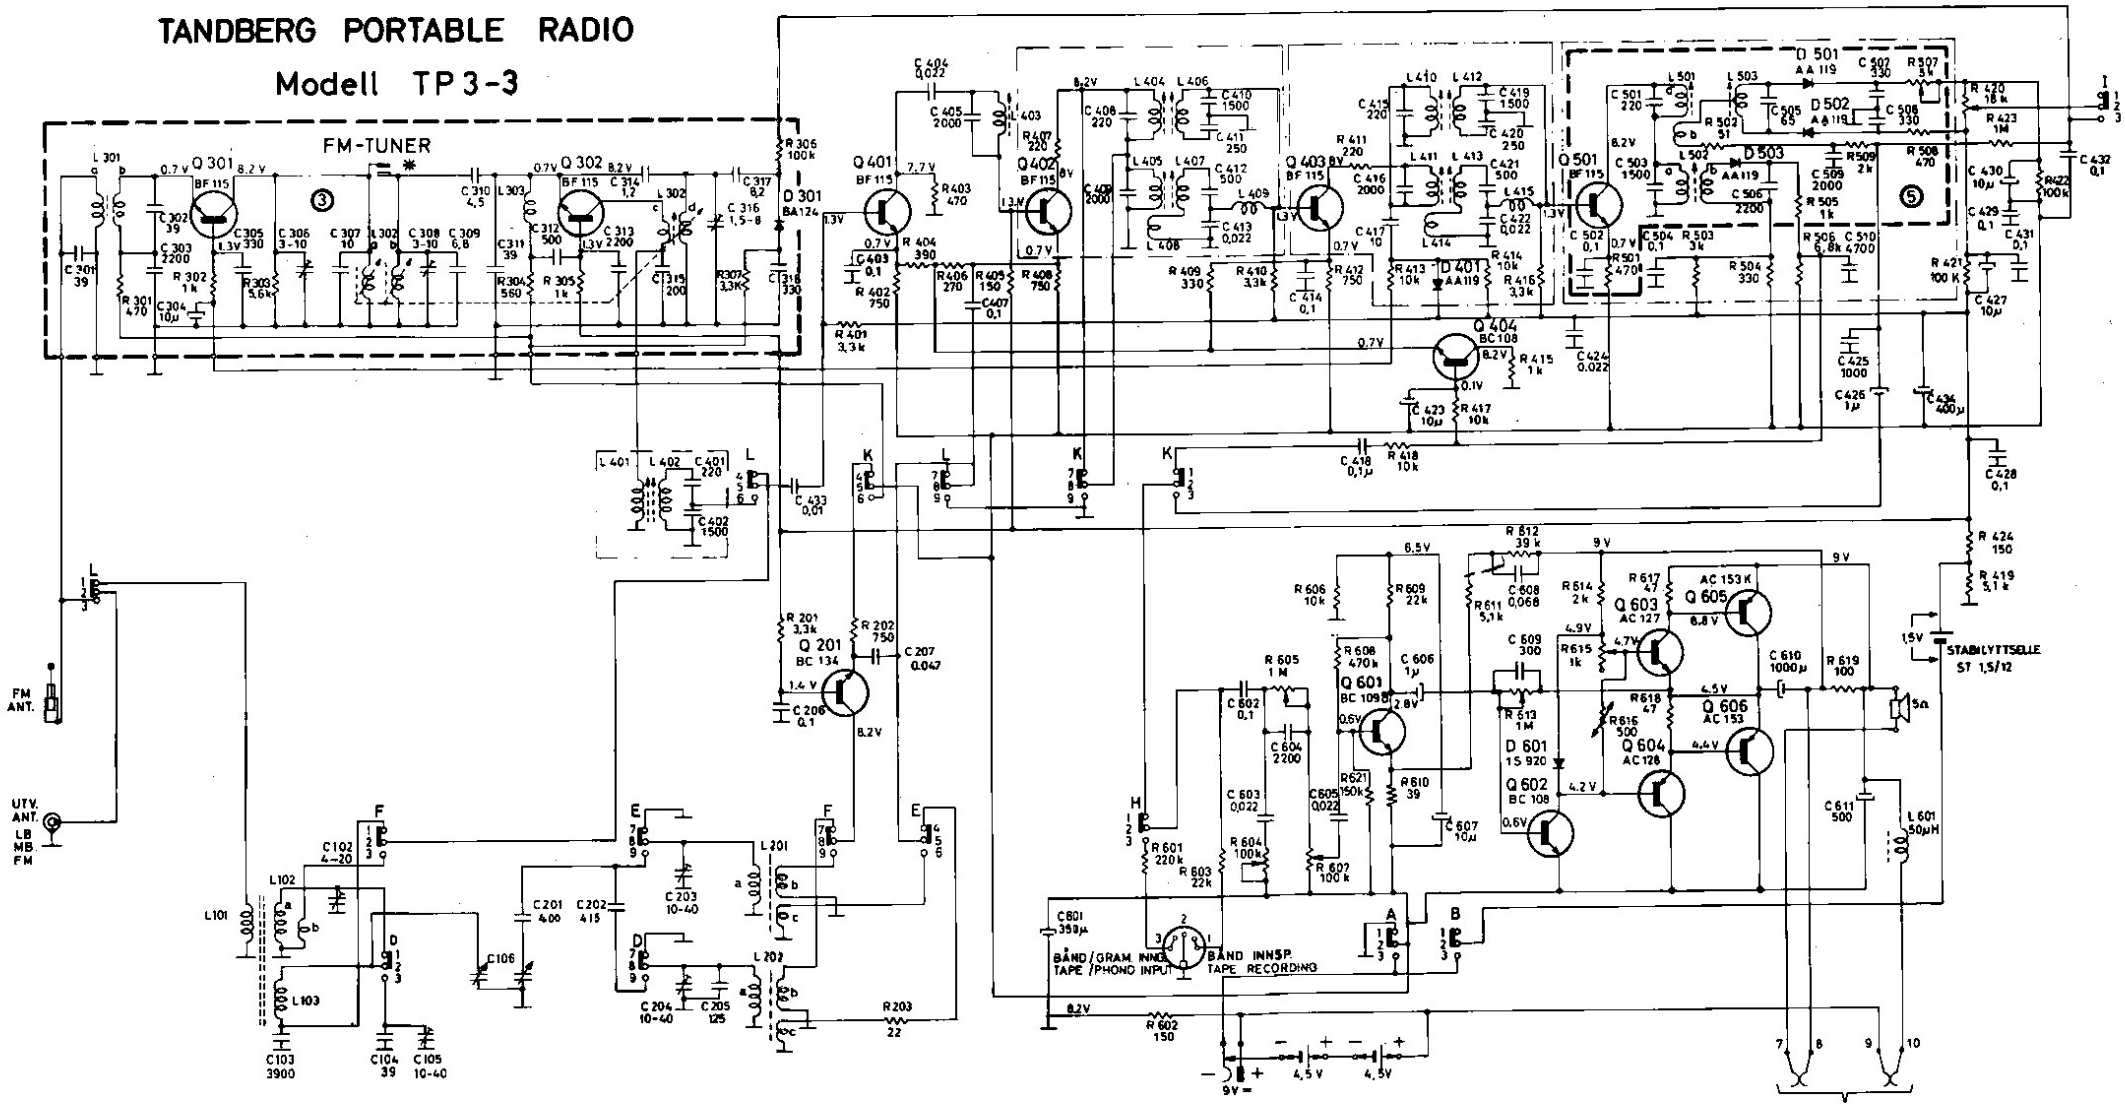

PÅ-AV	LB	MB	BÅND/ GRAM. TAPE/ PHONO	AFK	FM
ON-OFF	LW	MW	PHONO	AFC	FM
A B	C D	E F	G H	I J	K L

TRYKK-KNAPP VENDER SETT OVENFRA
PUSH-BUTTON ASSEMBLY SEEN FROM TOP

* FOLIEKAPASITET
PRINT CAPACITY

SPENNINGMÅLINGER UTEN TILFØRT SIGNAL

SPENNINGENE I SKJEMAET ER MÅLT FRA ⏚ VED 9V BATTERISPENNING MÅLT MED RØRVOLTMETER.

VOLTAGES ARE MEASURED WITH NO SIGNAL APPLIED

THE VOLTAGES SHOWN IN SCHEMATIC, ARE MEASURED FROM ⏚ AT 9V BATTERYVOLTAGE. THE VOLTAGES ARE MEASURED WITH VTVM.

HVILESTRØMMEN I LF-DEL MÅLES VED Å KOPLE ET MILLIAMP. METER MELLOM KONTAKTFJÆRENE 9 OG 10 (NEDSKRUDD VOLUMKONTROLL). DENNE KAN JUSTERES VED HJELP AV R615, OG SKAL VÆRE 8 mA. MIDTPUNKTSPENNINGEN FOR UTGANGSTRINNET SKAL VÆRE CA. 4.5 V, MÅLT FRA ⏚ TIL KOLLEKTOR PÅ Q 605.

THE QUIESCENT CURRENT IN THE LF-CIRCUIT IS MEASURED BY CONNECTING A MA-METER BETWEEN THE CONTACT SPRINGS 9 AND 10 (THE VOLUME CONTROL SHOULD BE TURNED ALL THE WAY DOWN). THE QUIESCENT CURRENT IS ADJUSTED BY R615 AND SHOULD BE 8mA. THE CENTERVOLTAGE FOR THE OUTPUT CIRCUIT SHOULD BE APPROXIMATE 4.5V MEASURED FROM ⏚ TO COLLECTOR Q 605.

TRANSISTORENE SETT FRA UNDERSIDEN
THE TRANSISTORS SEEN FROM UNDERNEATH



Tandbergs Radiofabrikk a/s
WIRING DIAGRAM TP3-3
DRAWING NO. 10389
JAN. 1967