


SERVICE MANUAL

SKANTIC

LUXOR


8101

TYPE 120 9204

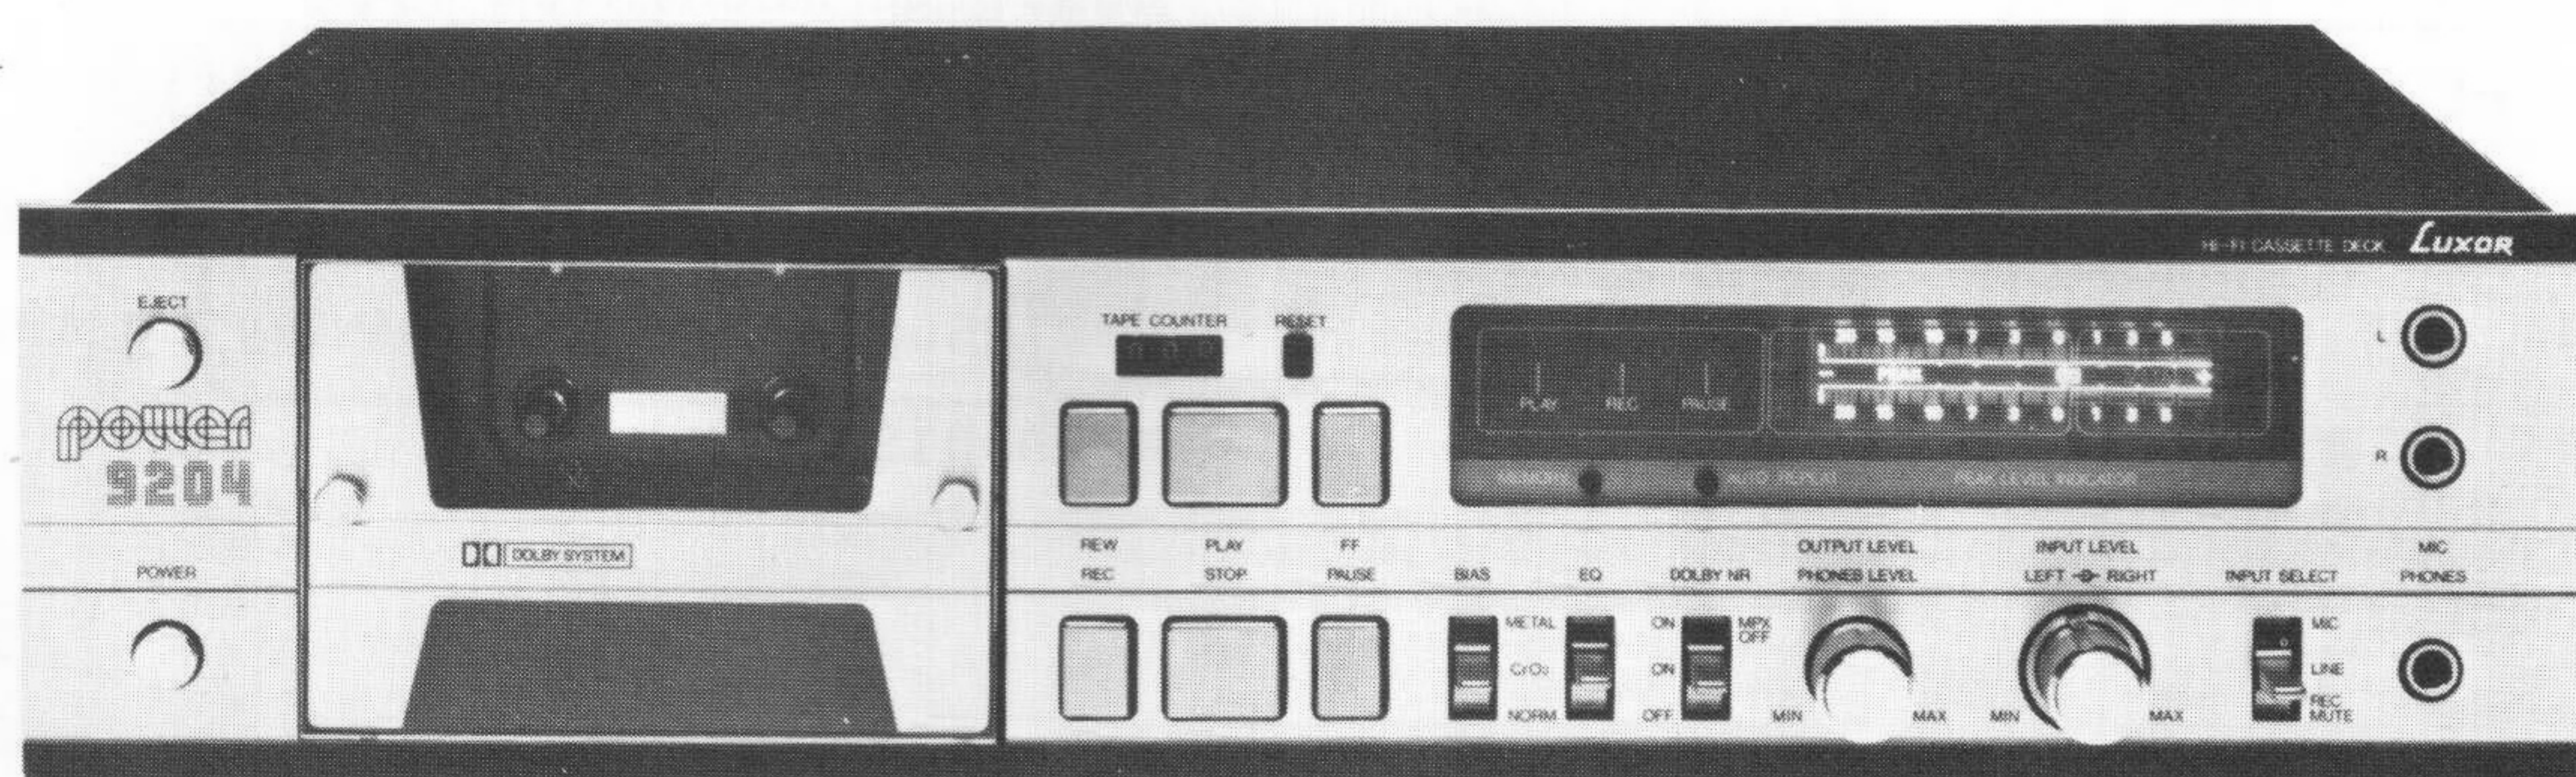

DATA

Frekvensområde Frequency range	Standard	20 - 15 000 Hz
	CrO ₂	20 - 16 000 Hz
	Metal	20 - 18 000 Hz
Dynamik (DIN) Dynamics	Standard	64 dB
	CrO ₂	64 dB
	Metal	65 dB
Svaj Wow and flutter	DIN	± 0,15 %
	VRMS	± 0,06 %
Ingångar Inputs	DIN	0.7 mV/3,3 kΩ
	Line	80 mV/50 kΩ
	Mic	0,7 mV/3,3 kΩ
Utgångar Outputs	Amp	1.600 mV/ 1 kΩ
	Phones jack	6,3 mm

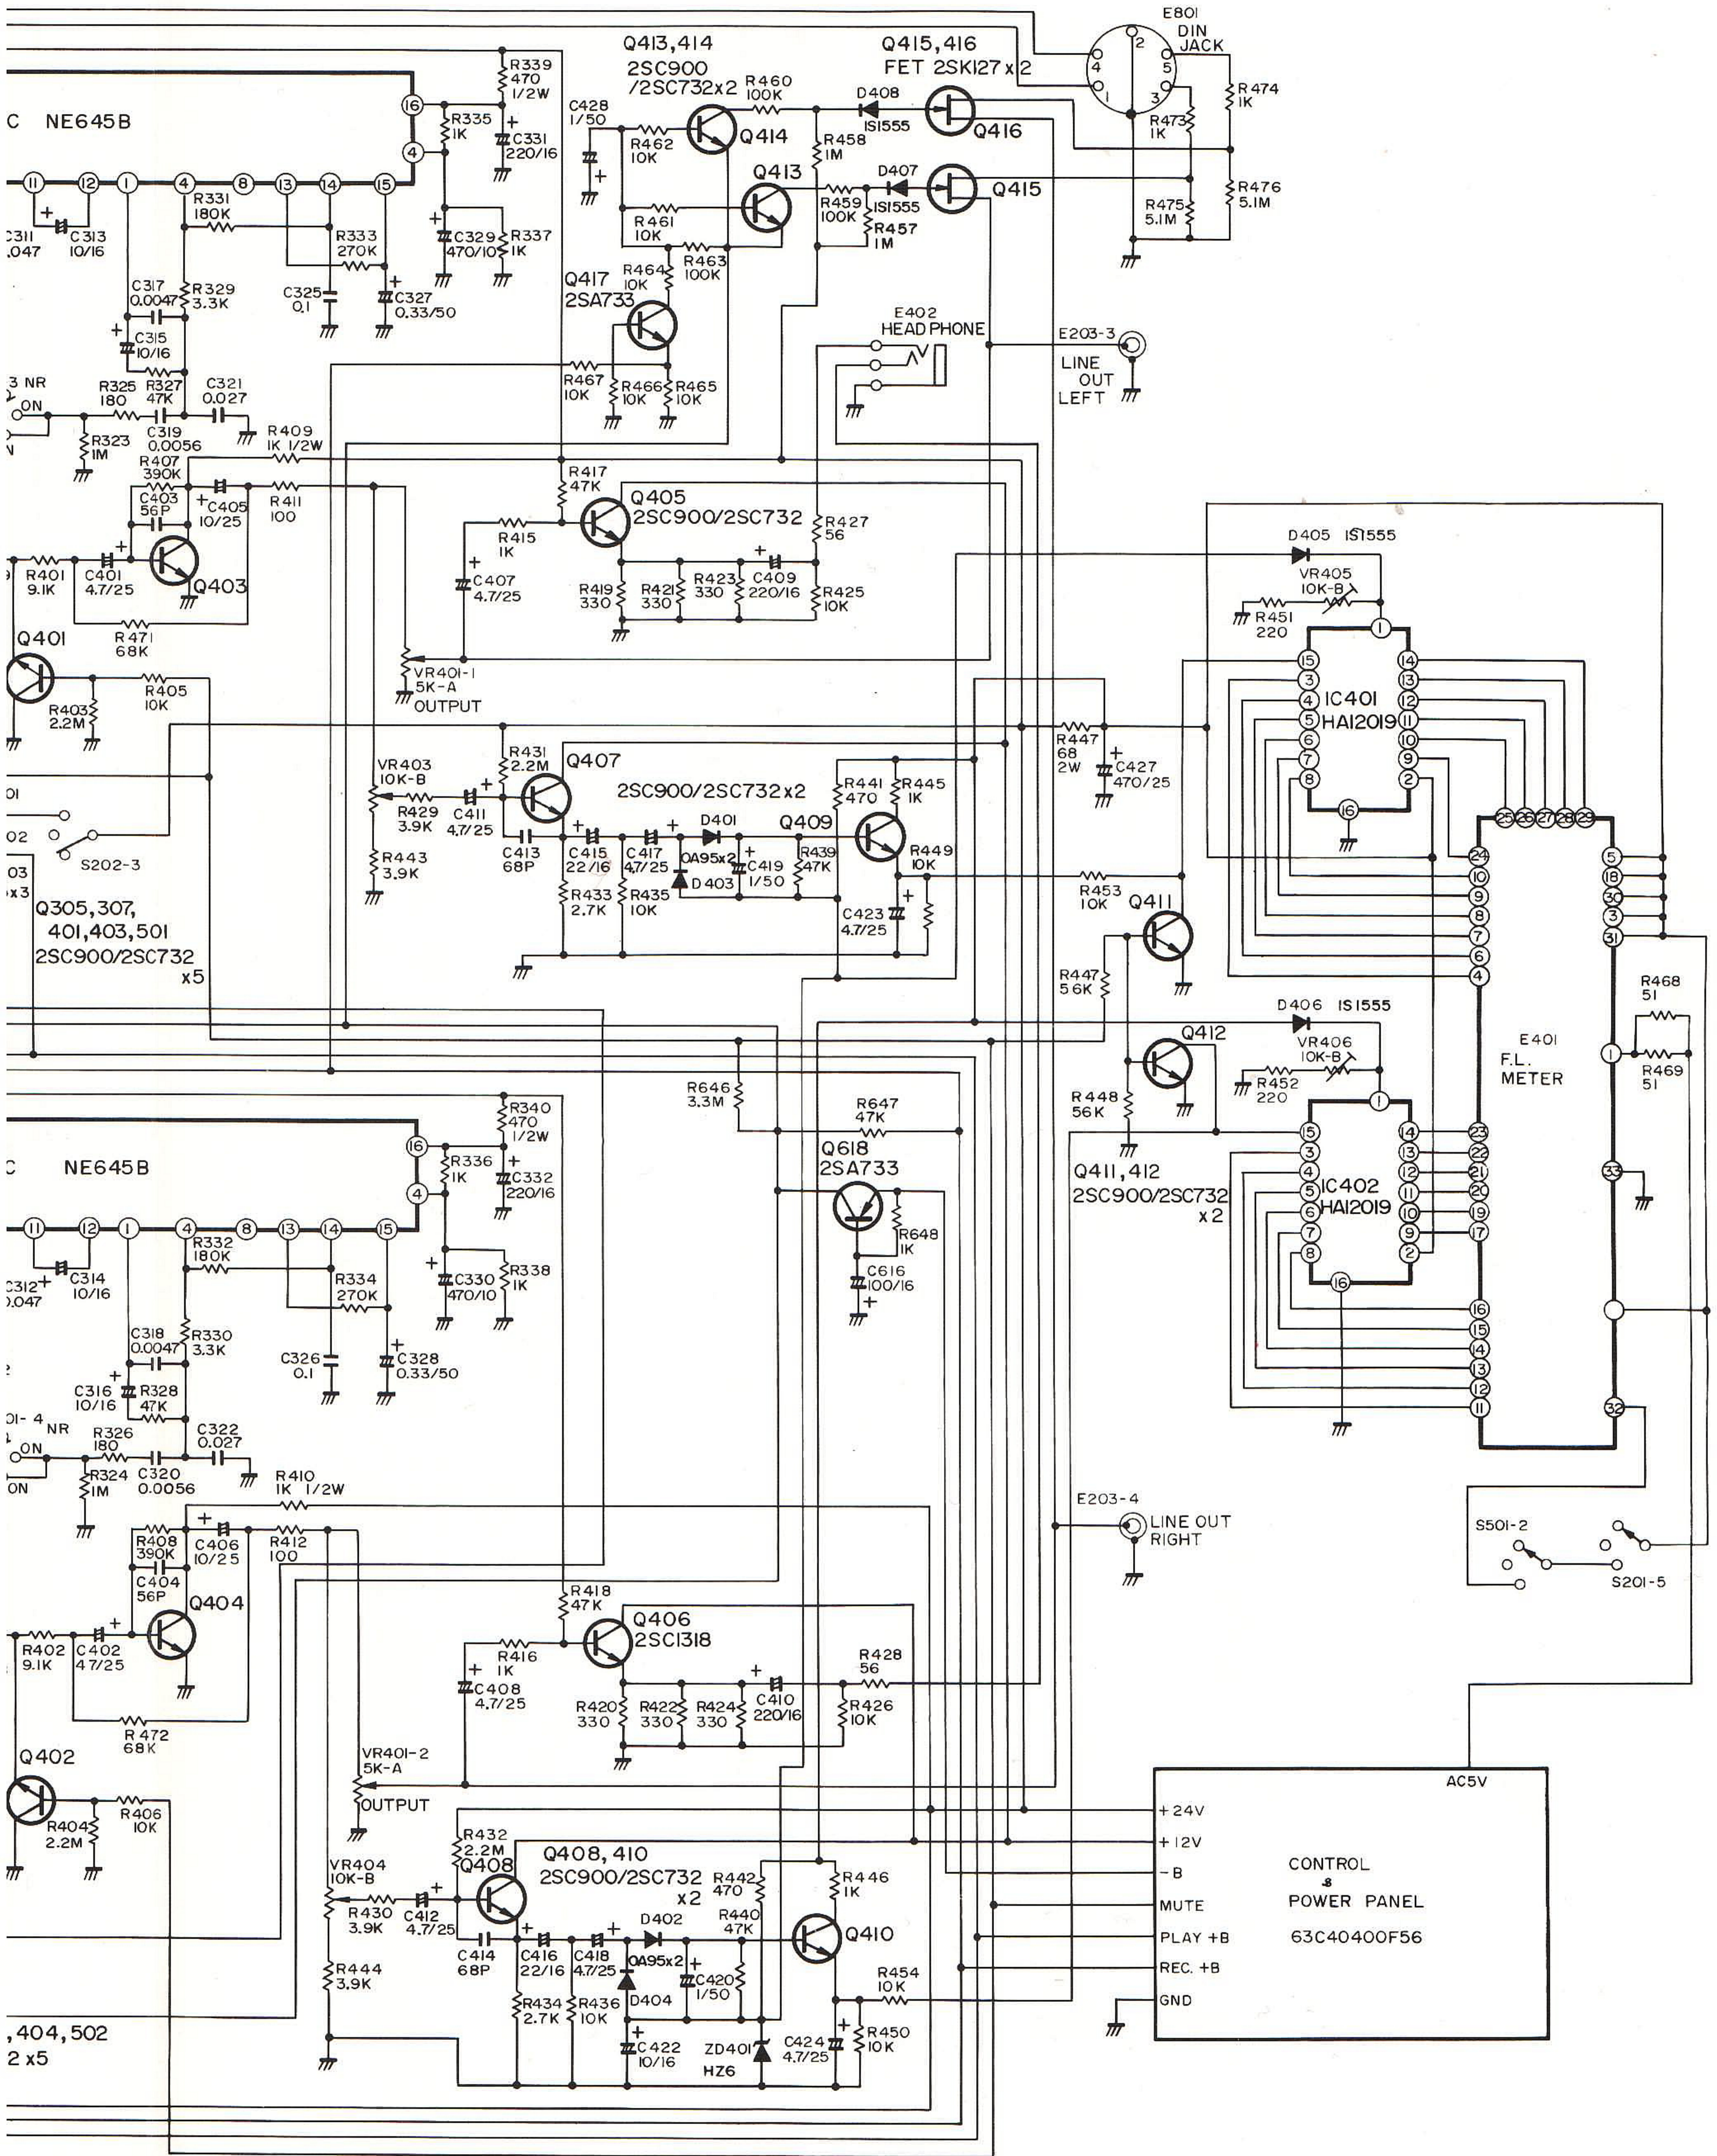

C NE645B

C NE645B

,404,502
2 x5

AC5V

+24V

+12V

-B

MUTE

PLAY +B

REC. +B

GND

CONTROL
POWER PANEL
63C40400F56

E401
F.L.
METER

E402
HEADPHONE

E203-3
LINE
OUT
LEFT

E203-4
LINE
OUT
RIGHT

VR401-2
5K-A
OUTPUT

VR401-1
5K-A
OUTPUT

D405 IS1555
VR405
10K-B

D406 IS1555
VR406
10K-B

S501-2

S201-5

