

# Service Manual


Stereo Graphic Equalizer

## SH-8055

[E],[EK],[EF],[EB],[EH],[EGA],  
[XA],[XL],[PA],[PE],[Ei]

## SH-8055(K)

[E],[EK],[EF],[EB],[EH],  
[EGA],[XA],[XL]

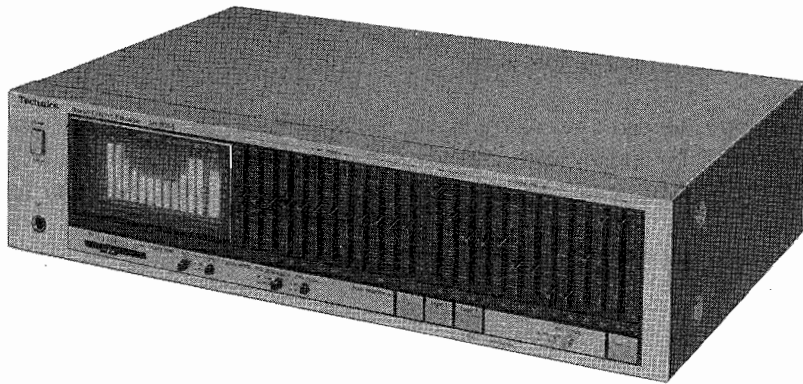

### Areas

- \* [E] is available in Scandinavia and Switzerland.
- \* [EK] is available in United Kingdom.
- \* [EF] is available in France.
- \* [EB] is available in Belgium.
- \* [EH] is available in Holland.
- \* [EGA] is available in F.R. Germany.
- \* [XA] is available in Southeast Asia, Oceania, Africa, Middle Near East and Central South America.
- \* [XL] is available in Australia.
- \* [PA] is available in Far East PX.
- \* [PE] is available in European Military.
- \* [Ei] is available in Italy.

- \* The colors of this model include silver and black.
- \* The black type model is provided with (K) in the Service Manual.

## Specifications

(Specifications are subject to change without notice for further improvement.)

### (DIN 45 500)

|   |                                     |
|---|-------------------------------------|
| Frequency response<br>(center position) | : 5 Hz~100 kHz, -1 dB               |
| Maximum output<br>voltage               | : 8 V (1 kHz, THD 0.01%)            |
| Rated output vc                         | V                                   |
| Rated total harr<br>distortion          | 003% (20 Hz~20 kHz)<br>002% (1 kHz) |
| Input sensitivit                        | V                                   |
| Signal-to-noise                         | ≥2 dB (110 dB, IHF' A)              |
| Maximum input<br>voltage                | V (1 kHz)                           |
| Input impedanc                          | 7 kΩ                                |
| Gain                                    | ±1 dB                               |
| Channel balanc                          | 0.5 dB                              |
| 250 Hz~6300<br>Channel separa           |                                     |
| 1 kHz                                   | : 70 dB                             |

**Band level controls** : +12 dB~-12 dB  
(12 elements continuously variable  
per channel)

**Center frequency** : 25 Hz, 40 Hz, 63 Hz, 100 Hz,  
160 Hz, 250 Hz, 500 Hz, 1 kHz,  
2 kHz, 4 kHz, 8 kHz, 16 kHz

**Pink noise output  
voltage** : 50 mV

**Compatible microphone  
sensitivity** : above -74 dBV/μbar (1 kHz)

**Microphone attenuator** : -20 dB

### GENERAL

**Power supply** : AC 110 V/120 V/220 V/240 V,  
50 Hz/60 Hz.

**Power consumption** : 17 W

### Dimensions

: 108×430×270 mm  
(4-1/4"×16-15/16"×10-5/8")  
: 4.1 kg (9.0 lb)

## CONTENTS

|   |        |
|---|--------|
| SAFETY PRECAUTION                             | Page 2 |
| BLOCK DIAGRAM OF FUNCTION                     | 2      |
| LOCATION OF CONTROLS                          | 3      |
| REAL TIME SPECTRUM ANALYZER                   | 3      |
| PINK NOISE                                    | 4      |
| HOW TO USE THE REAL TIME<br>SPECTRAM ANALYZER | 4      |

|                                    |        |
|------------------------------------|--------|
| INSTRUCTIONS                       | Page 6 |
| REQUENCY RESPONSE                  | 8      |
| CIRCUIT BOARDS                     | 9      |
| EXPLODED PARTS LIST                | 15     |
| EW                                 | 17     |
| WIRING DIAGRAM                     | 20     |
| AM                                 | 28     |
| SPECTRUM ANALYZER AND TIMING CHART | 30     |

# Technics

Panasonic  
Matsushita Electric  
1-2, 1-chome, Shiba-koen

Ltd. Matsushita Electric Trading Co., Ltd.  
105 Japan P.O. Box 288, Central Osaka Japan


## SAFETY PRECAUTIONS

1. Before servicing, unplug the power cord to prevent an electric shock.
2. When replacing parts, use only manufacturer's recommended components for safety.
3. Check the condition of the power cord. Replace if wear or damage is evident.
4. After servicing, be sure to restore the lead dress, insulation barriers, insulation papers, shields, etc.
5. Before returning the serviced equipment to the customer, be sure to make the following insulation resistance test to prevent the customer from being exposed to a shock hazard.

### INSULATION RESISTANCE TEST


1. Unplug the power cord and short the two prongs of the plug with a jumper wire.
2. Turn on the power switch.
3. Measure the resistance value with ohmmeter between the jumpered AC plug and each exposed metal cabinet part, such as screwheads antenna, control shafts, handle brackets, etc. Equipment with antenna terminals should read between  $3M\Omega$  and  $5.2M\Omega$  to all exposed parts. (Fig. A) Equipment without antenna terminals should read approximately infinity to all exposed parts. (Fig. B)

**Note:** Some exposed parts may be isolated from the chassis by design. These will read infinity.

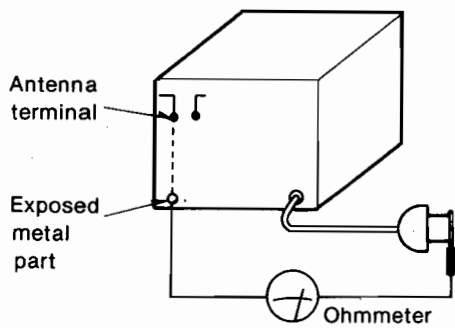

(Fig. A)

Resistance =  $3M\Omega - 5.2M\Omega$

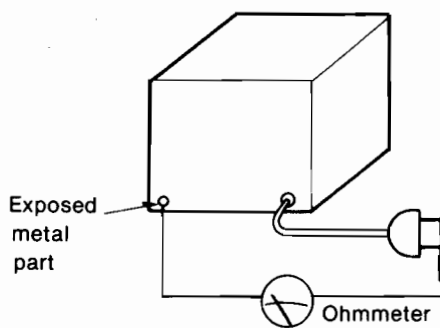


(Fig. B)


Resistance = Approx  $\infty$

4. If the measurement is outside the specified limits, there is a possibility of a shock hazard. The equipment should be repaired and rechecked before it is returned to the customer.

## BLOCK DIAGRAM OF FUNCTION

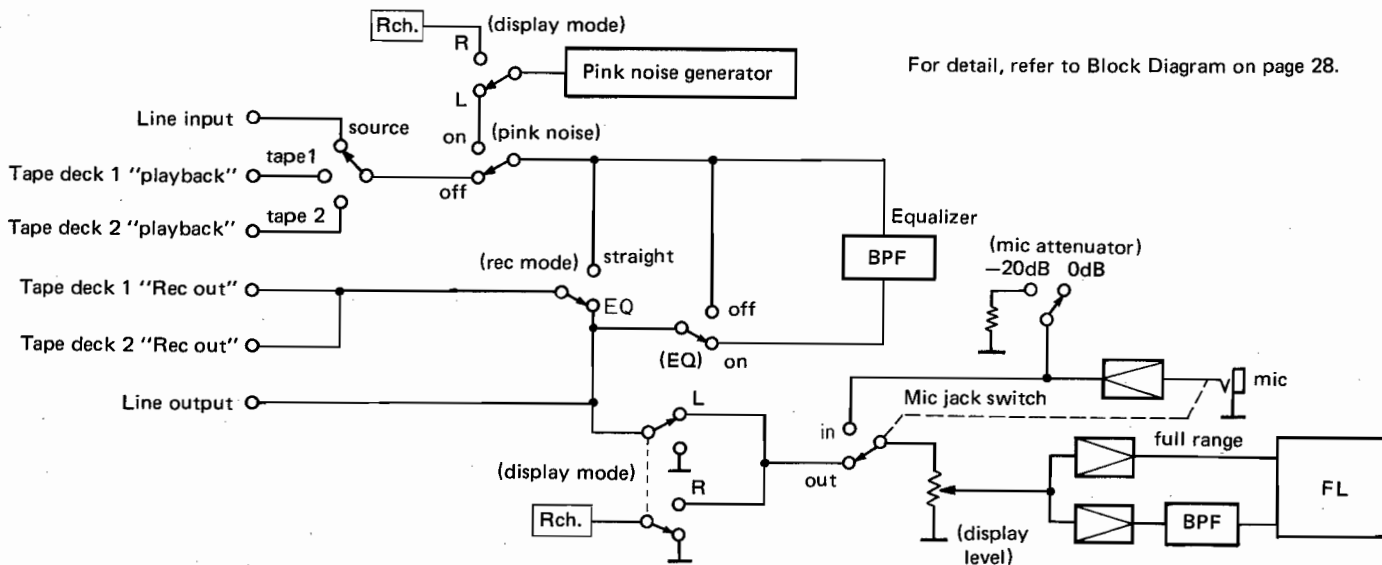


## LOCATION OF CONTROLS

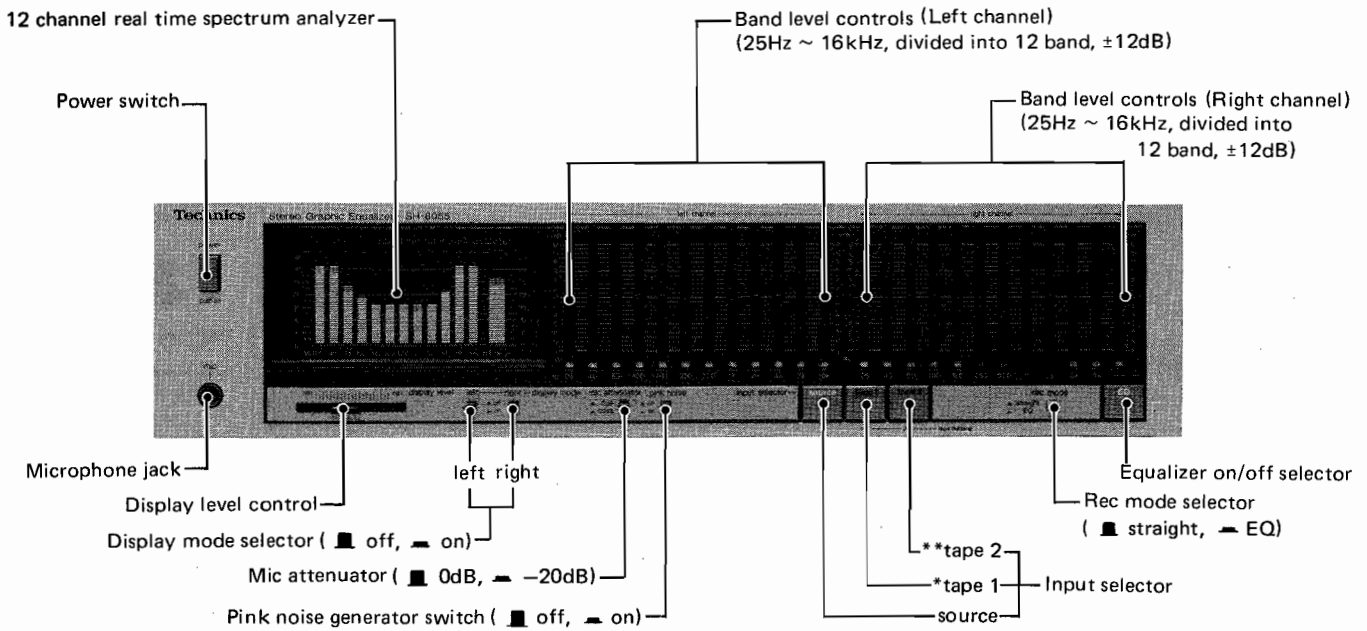

\* Mic Jack of this unit is not for mixing.

\* Dubbing from tape deck 1 to 2 is possible with tape 1 switch.  
\*\* Dubbing from tape deck 2 to 1 is possible with tape 2 switch.

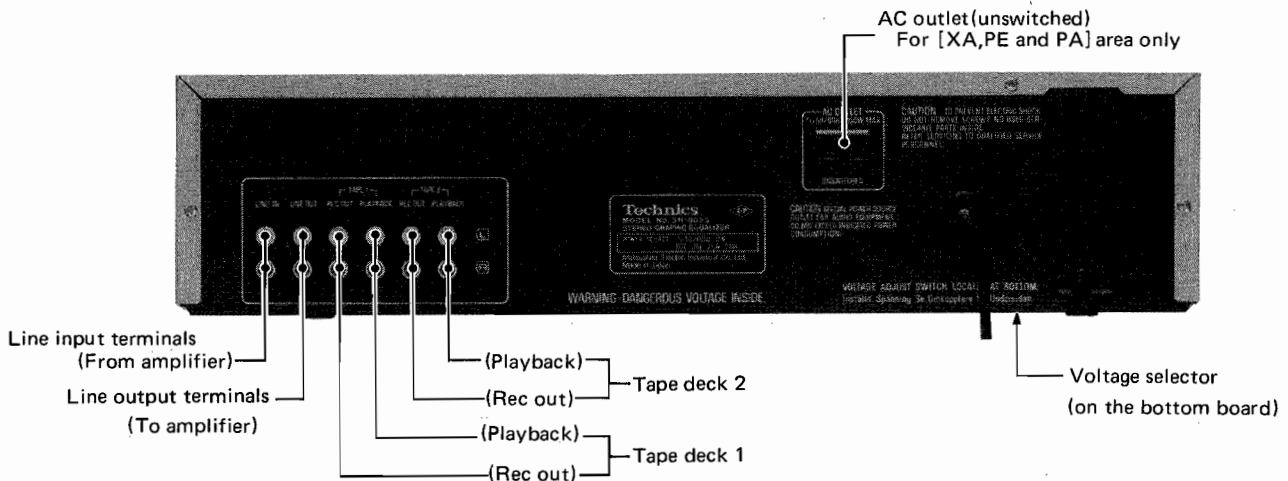

- The power supply for this unit varies depending upon the areas. Also, the parts used for power supply are different. So, refer to the circuit diagram and the replacement parts list.


## REAL TIME SPECTRUM ANALYZER

- This can be used to measure and correct the sound field frequency response of a listening room and to measure the frequency components of a sound source.
- The same 12-band frequency divider as for the band level controls allows the levels of the frequency components of voices, music, etc., to be visually displayed.
- The "full range" area on the right side displays the combined level of all of the frequency bands.
- The display is in 12 points for each frequency band and a level width of 30 dB can be displayed.
- The real time spectrum analyzer is connected to the output terminals of this unit. When the equalizer switch is "on", the level of the corrected source is displayed; when pink noise switch is "on", the level of the corrected pink noise is displayed; when the microphone is connected, the microphone input level is displayed.
- The attack time and recovery time of the display is fast for source and slow for pink noise; thus the responsiveness to the source is good and the display is easy to see during sound field correction.


## PINK NOISE

- Pink noise is used for measurement and correction of the sound field frequency response because it is mostly within the audible range, its energy distribution is uniform, and it has a wide frequency band.
- Because pink noise has large instantaneous level fluctuations, the display may fluctuate.


<Frequency response of pink noise>

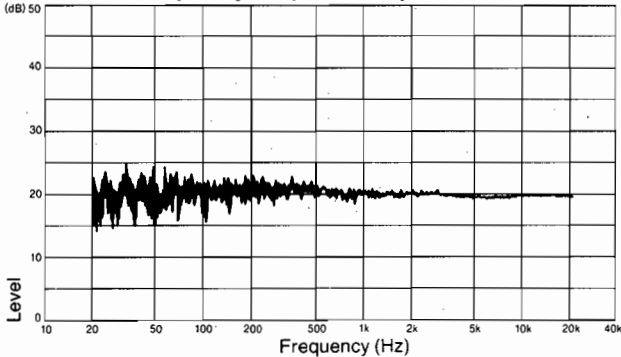


Response of white noise



Response of filter




+




## HOW TO USE THE REAL-TIME SPECTRUM ANALYZER



- With the sound volume of amplifier set at minimum, the frequency characteristics of sound sources such as human voice, live music and noise can be measured (displayed on spectrum analyzer) through operations in numerical order as shown below.
- As the sound volume of amplifier is increased through operations as shown below, the sound volume of pink noise increases, and then the sound field frequency characteristics can be measured (displayed on spectrum analyzer).

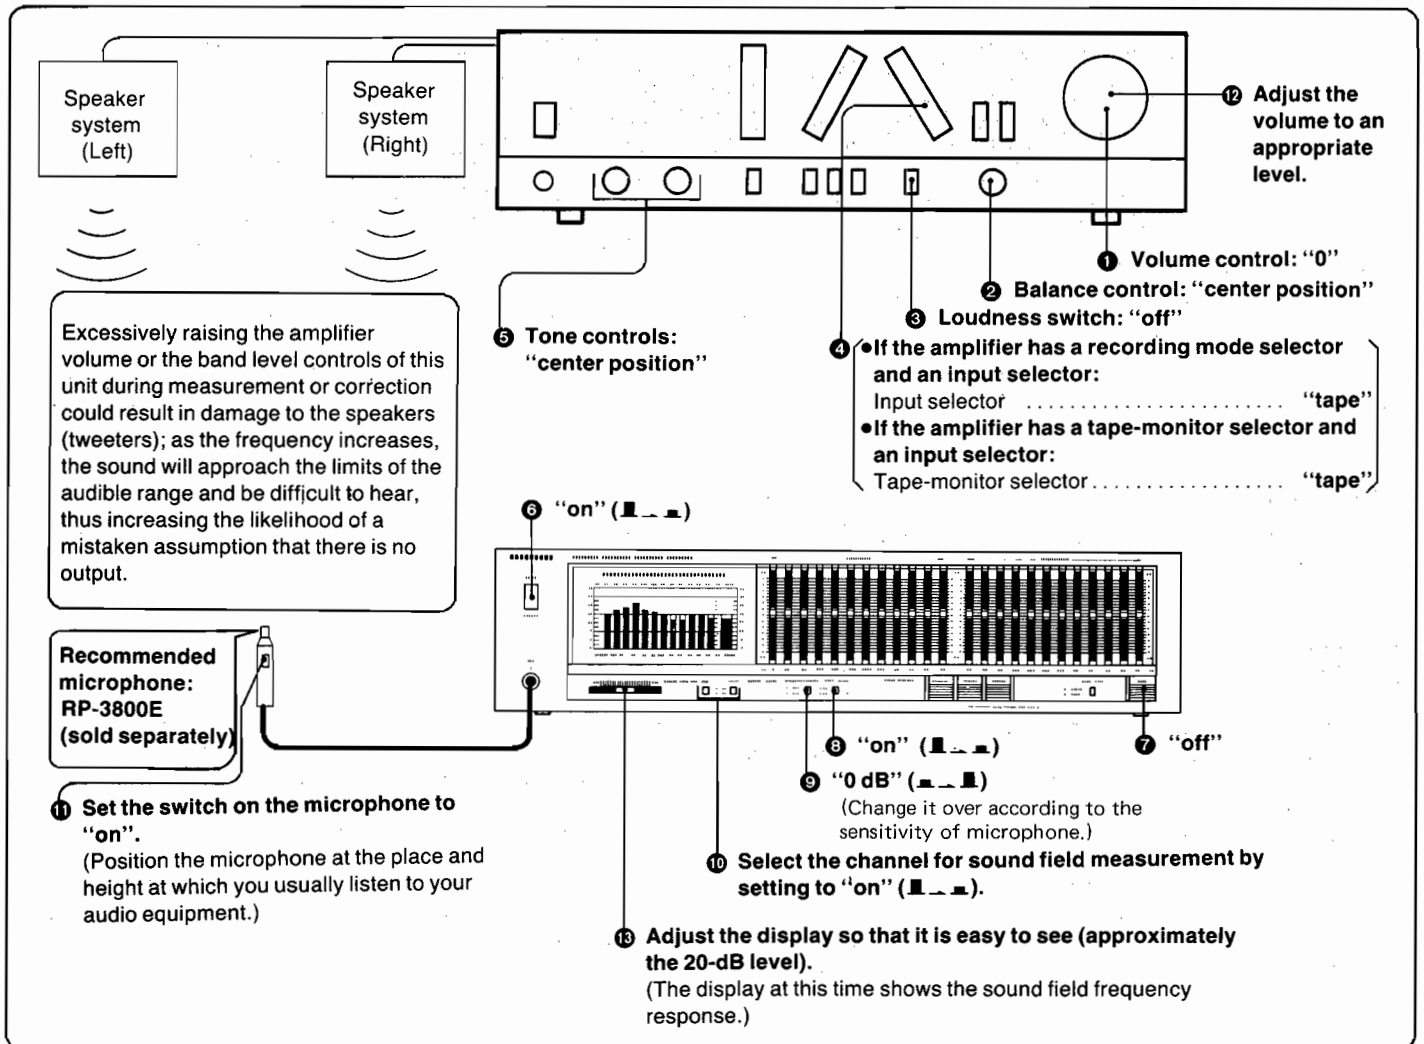


- Correct the sound field in order as shown below according to the data obtained through measurement on page 4.
- Correct is on each of the channels.

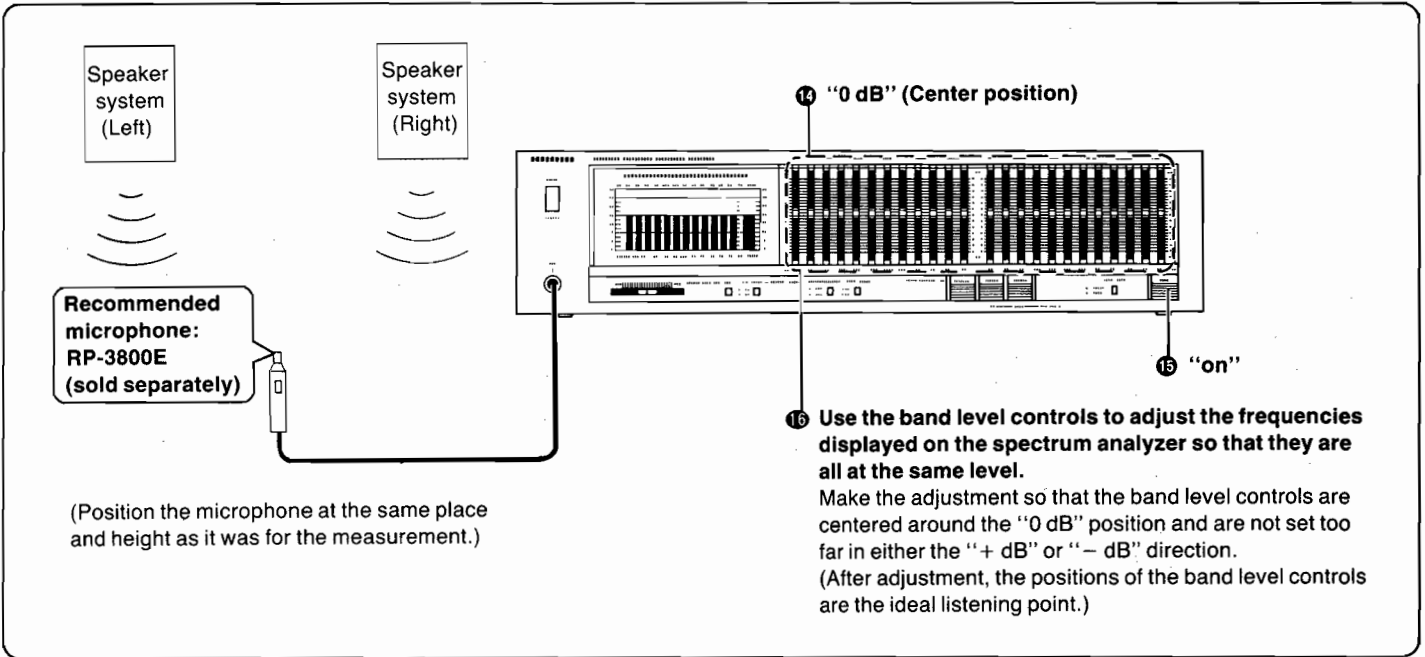



**(Example of sound field frequency response obtained through measurement)**

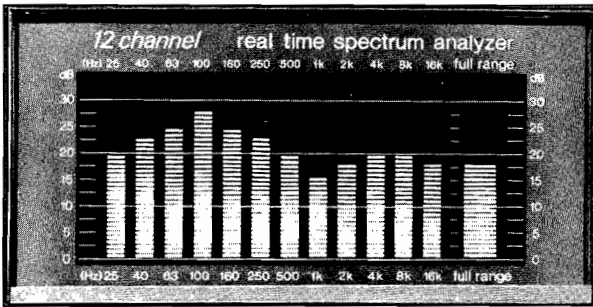


**(Position of the band level controls after correction adjustment)**

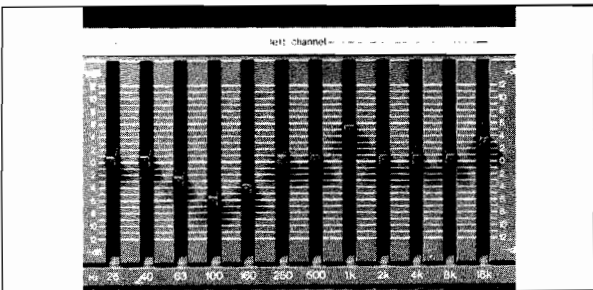

**Frequency response prior to correction adjustment**

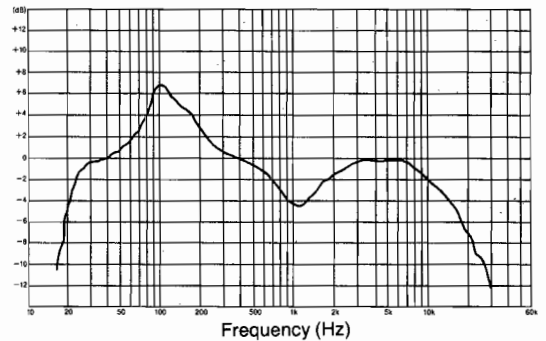

**Frequency response after correction adjustment**

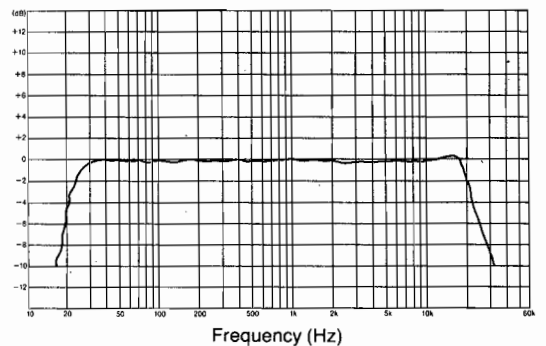

- Depending on the listening room, it is not always possible to obtain a perfectly flat response for equalization correction.
- When making the correction adjustment, the spectrum analyzer display may not always visually agree with the positions of the band level controls.

**<Microphone to be used with this unit>**

The microphone that should be used with this unit is the RP-3800E (sold separately). If any other microphone is used, the frequency response displayed on the spectrum analyzer may differ from the actual sound field frequency response.

## DISASSEMBLY INSTRUCTIONS

### 1. How to remove the cabinet

1. Remove the screws (Fig. 1: ① ~ ⑦) of the cabinet.
2. Remove the cabinet.

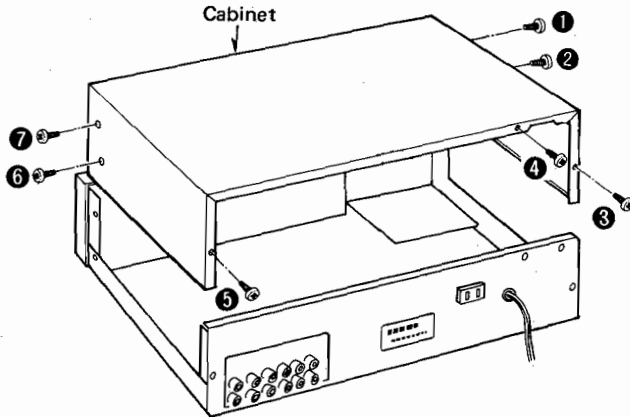


Fig. 1

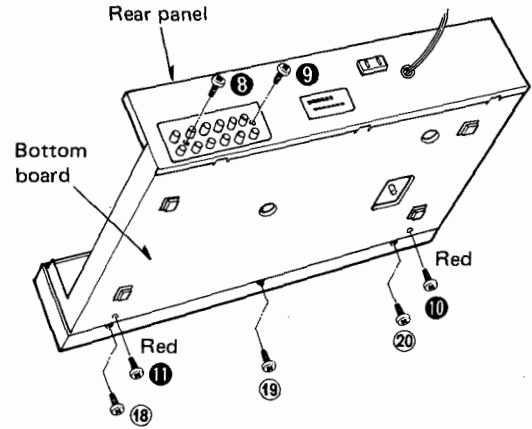


Fig. 2

### 2. How to remove the printed circuit board

1. Remove the cabinet. (Refer to "How to remove the cabinet")
2. Remove the screws (Fig. 2: ⑧ ~ ⑪) of the rear panel and the bottom board.
3. Remove the screws (Fig. 3: ⑫ ~ ⑭) of the main printed circuit board.
4. Remove the stopper A (P.C.B. holder) of the FL printed circuit board. (Refer to Fig. 4)

(Note) Claw screws or ordinary screws (3 x 8 mm) and toothed washers should be used for screws ⑫ and ⑭.

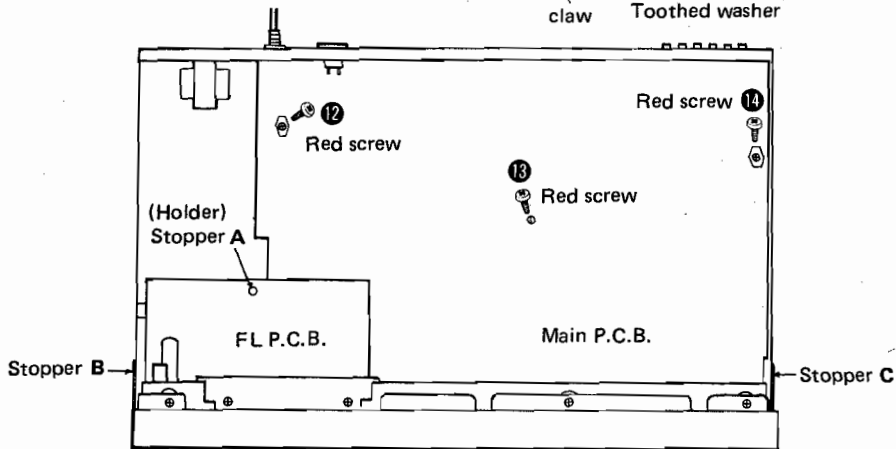



Fig. 3

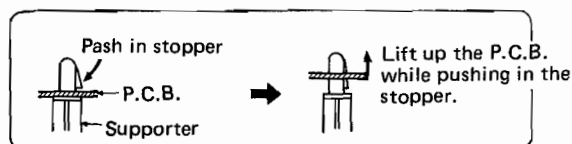


Fig. 4

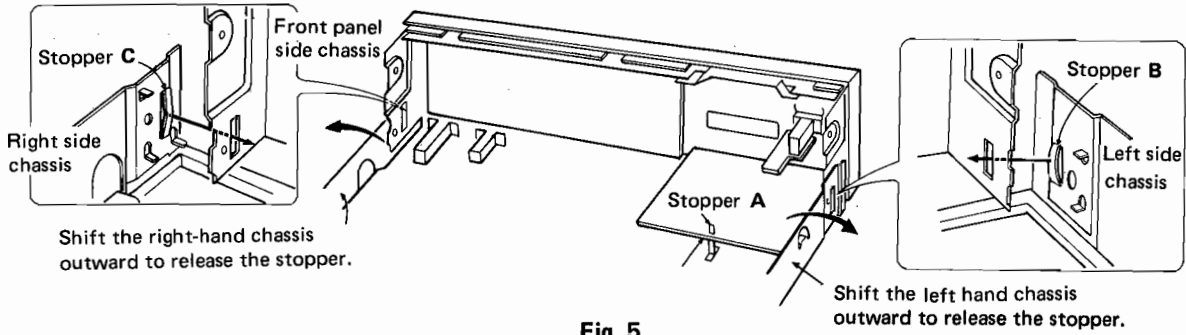


Fig. 5

5. Shift the right and left chassis outward as shown in Fig. 5 to release the stoppers B and C out of the chassis holes on the front panel side.

6. Slightly draw out the front panel toward you along with the P.C.B., then raise the chassis as in Fig. 6 and check.

\* When checking the voltage, removing screws 12 and 14 of Fig. 3, touch the ground side of circuit tester rod to the ground line of P.C.B. (power supply circuit terminal (3), etc.) because the chassis is not grounded.

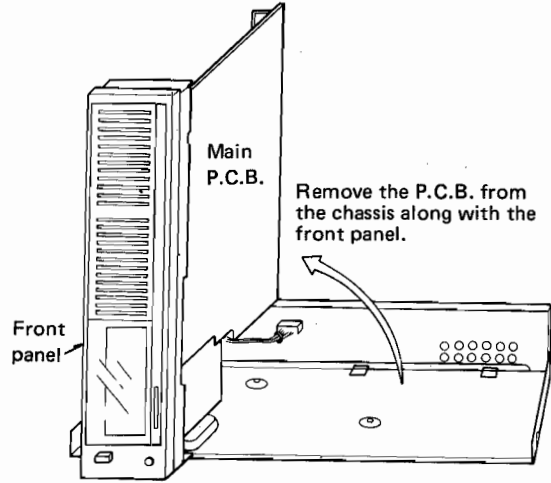


Fig. 6

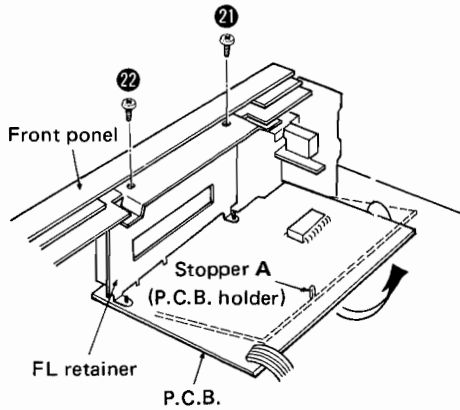


Fig. 7

**3. How to remove the FL P.C.B.**

1. Remove the cabinet. (See Fig. 1.)
2. Remove screws 21 and 22 as in Fig. 7.
3. Remove stopper A. (See Fig. 4.)
4. Remove P.C.B. together with FL from the chassis in the direction of the arrow in Fig. 7.

**4. How to remove front panel**

1. Remove the cabinet. (See Fig. 1.)
2. Remove screws 15 ~ 20 as in Fig. 8. (For screws 18 ~ 20, See Fig. 2.)
3. Remove the front panel from the chassis.
4. Input switch LED P.C.B. and EQ switch LED P.C.B. are fitted to the front panel. Release the claws as in Fig. 9 to remove the P.C.B. from the front panel.

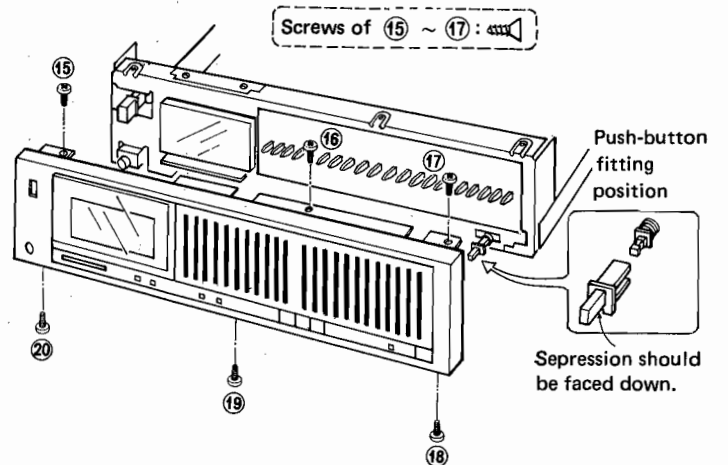


Fig. 8




Fig. 9




Fig. 10

## 5. How to remove input select/EQ switch

1. Remove the front panel. (See Fig. 8.)
2. Push the claw of the button from the back of front panel in the direction of the arrow as in Fig. 10 to shift it out toward the front panel.

## 6. How to remove band level control P.C.B.

1. Remove the front panel. (See Fig. 8.)
  2. Remove the light shielding cloth as in Fig. 11.
  3. Remove the 12 screws shown in Fig. 12 to remove the P.C.B. (It can be removed together with the knobs.)
- \* The light shielding cloth and control P.C.B. can be removed together with the knobs. When removing the knobs, refer to Fig. 11.

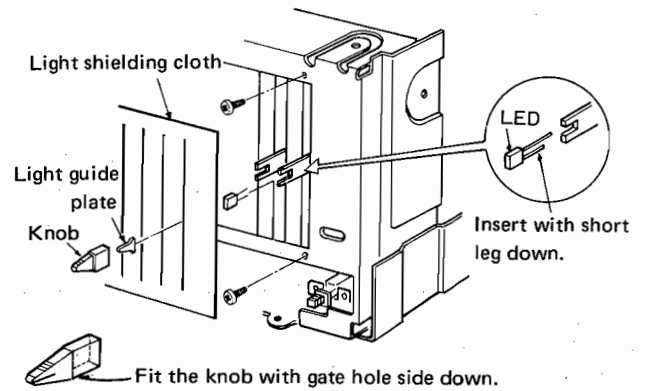


Fig. 11


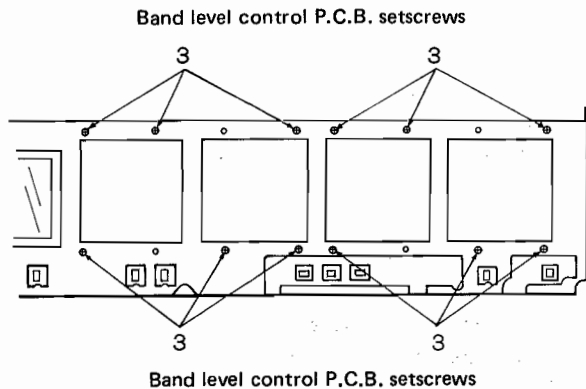


Fig. 12


## ■ TOTAL FREQUENCY RESPONSE



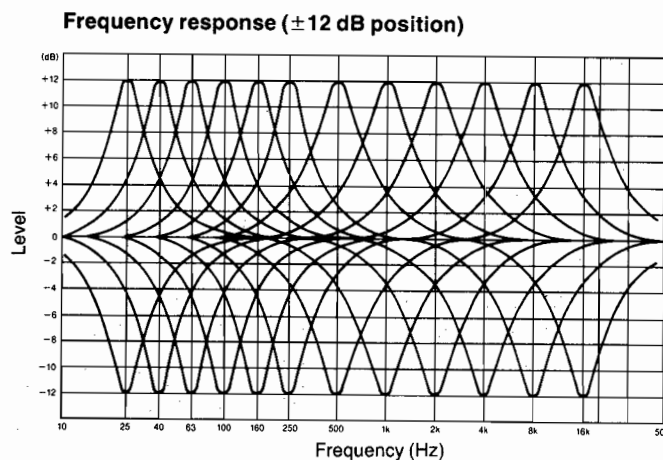

PRINTED CIRCUIT BOARDS

• Band level control P.C.B. of left and right channel

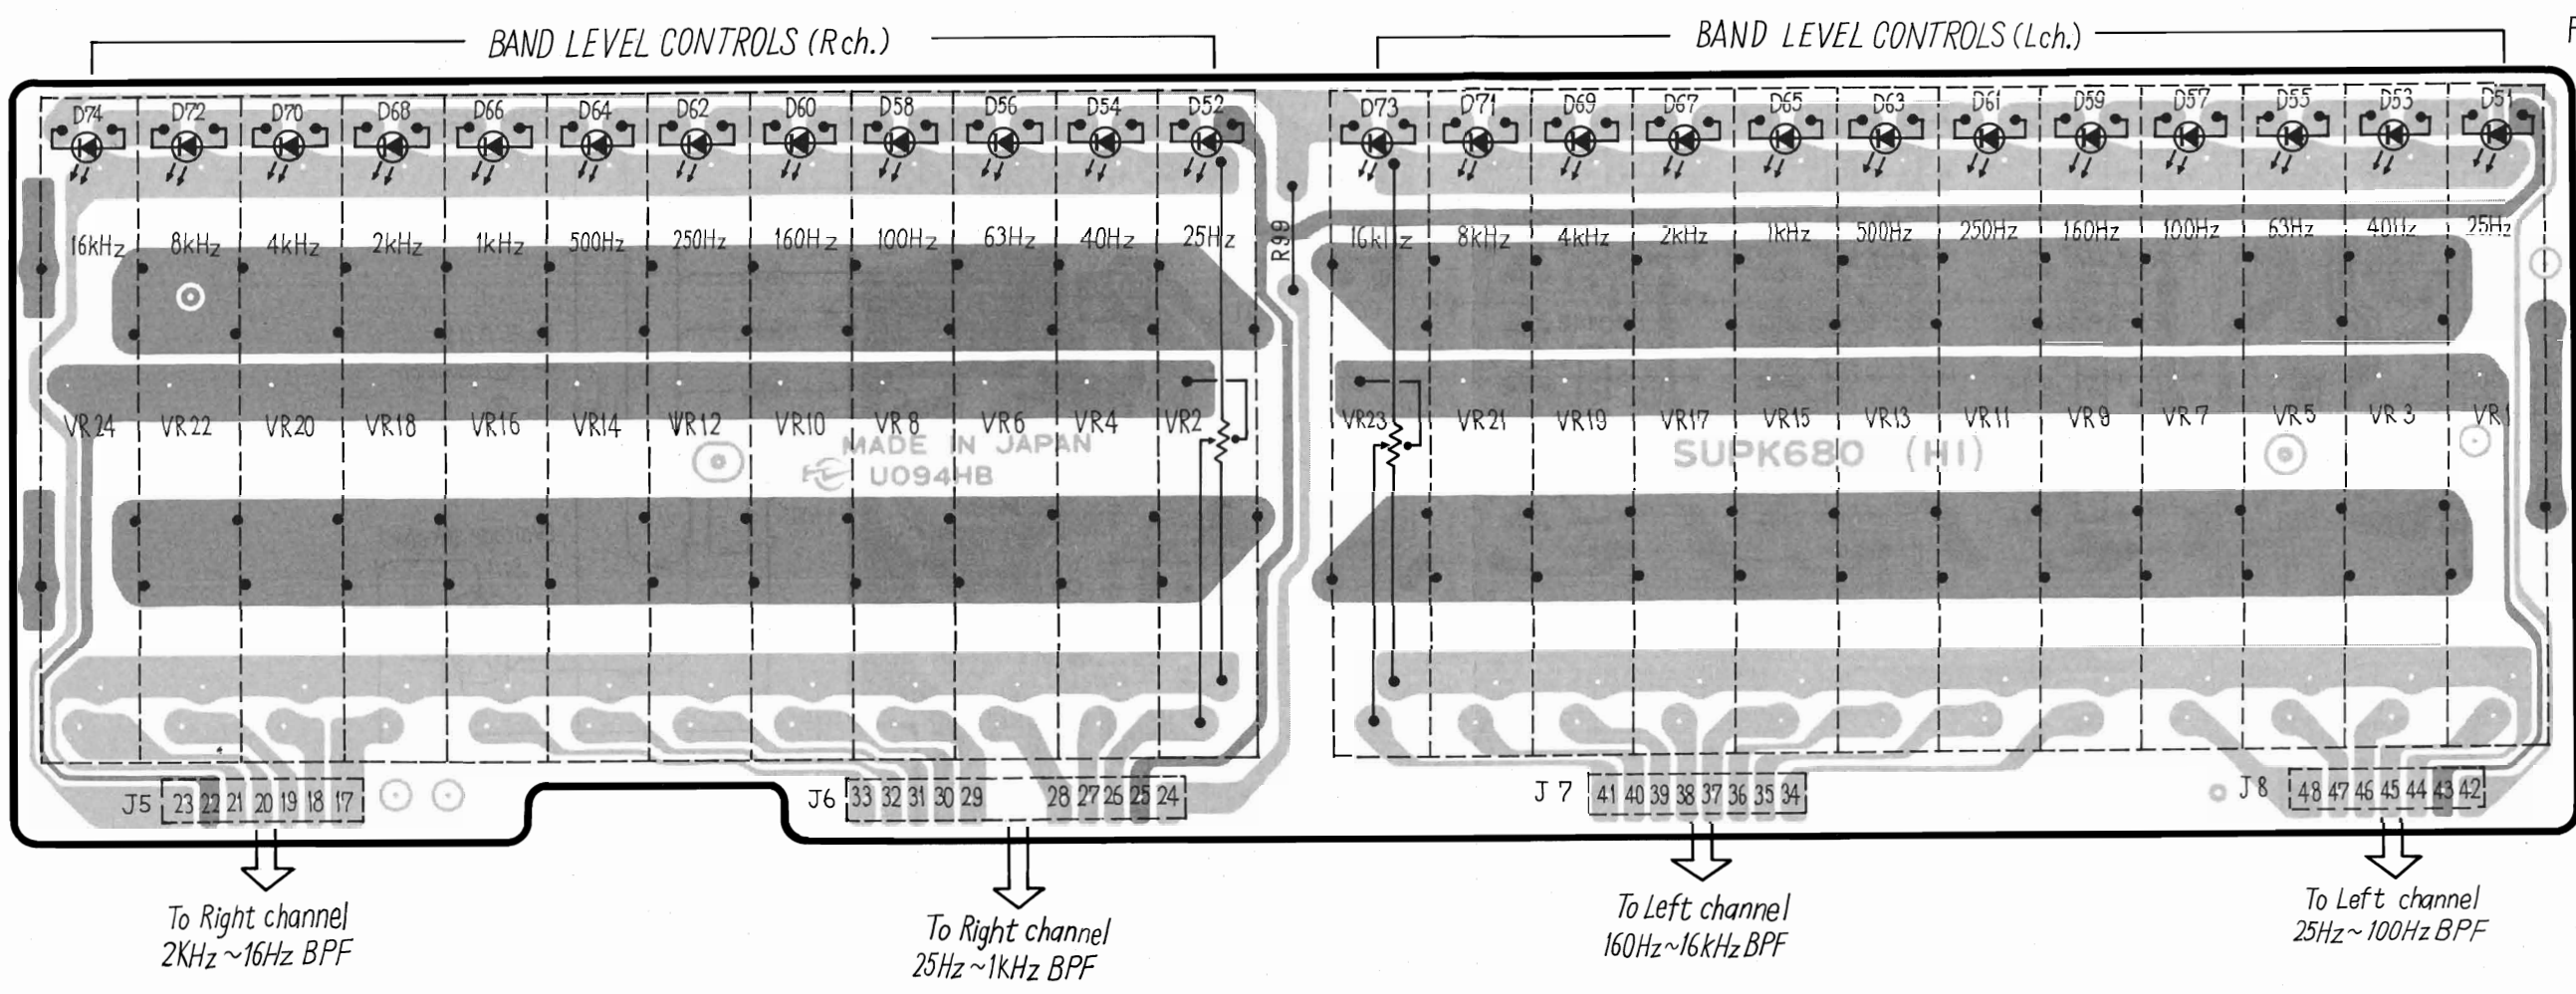


To Right channel  
2KHz ~ 16Hz BPF

To Right channel  
25Hz ~ 1KHz BPF

To Left channel  
160Hz ~ 16kHz BPF

To Left channel  
25Hz ~ 100Hz BPF


• Spectrum analyzer display

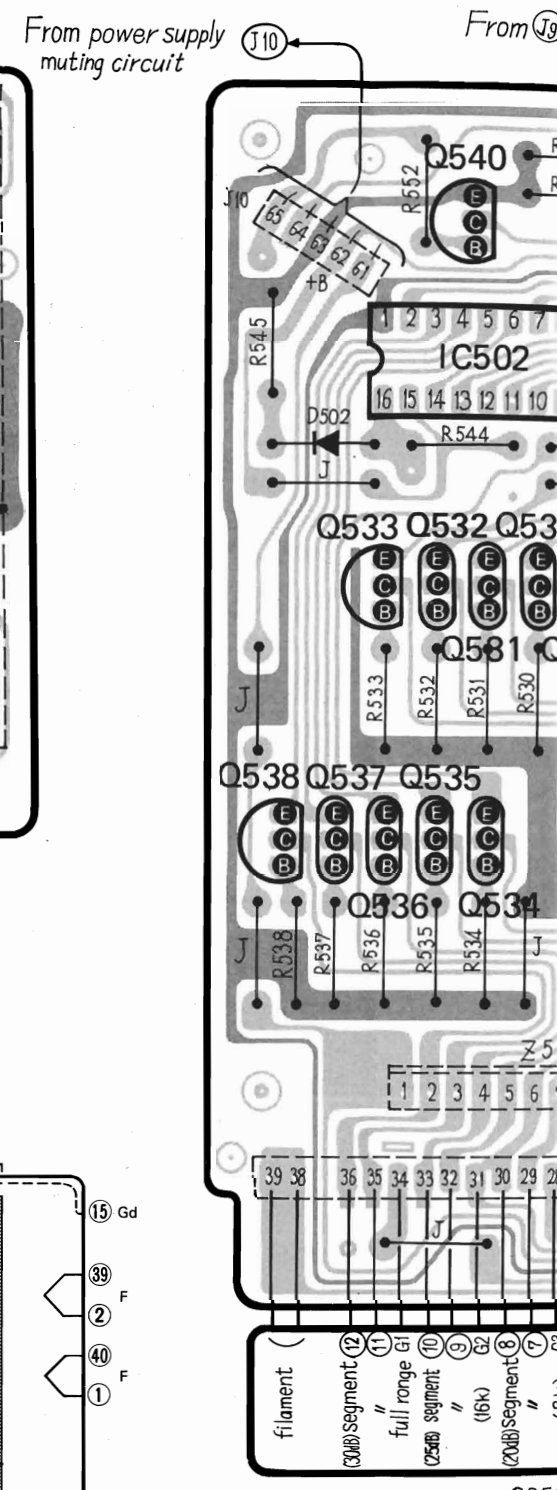


• Terminal guide of transistors, diodes and IC's

|  |  |                            |                                     |
|--|--|----------------------------|-------------------------------------|
| <p>SVIHA12010<br/>16 pins<br/>NO.1</p> <p>SVIM54834P<br/>22 pins</p> | <p>2SA564, 2SA921,<br/>2SA1246, 2SC1815,<br/>2SC2878</p> | <p>2SB941,<br/>2SD1265</p> | <p>SVINJM2043SE<br/>SVITA75559S</p> |
| <p>AN78N12</p>   | <p>SVD1SR35200F</p>                                      | <p>SVD1B4B42</p>           | <p>OA90 SVD1S2076</p>               |
| <p>MA27-W</p>  | <p>LN251RCPP</p>   | <p>MA1160</p>              | <p>LN41YCPH, LN81RCPH</p>           |


• Terminal number of FL (Spectrum analyzer)

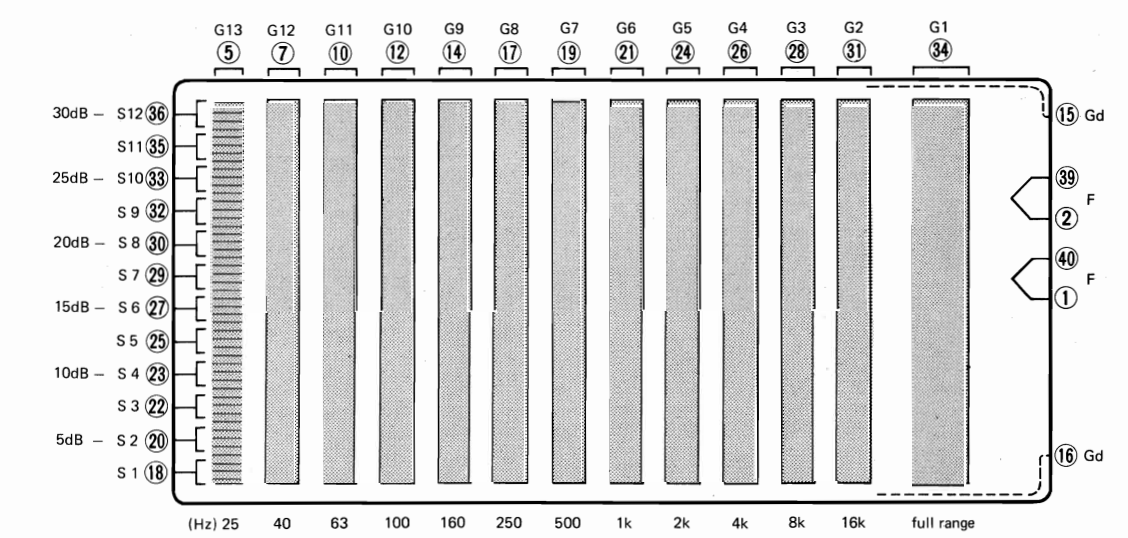

|                |   |   |    |    |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|----------------|---|---|----|----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| PIN No.        | 1 | 2 | 3  | 4  | 5 | 6 | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 |   |
| PIN CONNECTION | F | F | Np | Nc | G | G | Nc | Nc | Nc | Nc | G  | G  | Nc | G  | G  | Gd | Gd | G  | S  | G  | S  | G  | S  | S  | S  | G  | S  | G  | S  | G  | S  | S  | G  | S  | S  | G  | S  | Np | F  | F |

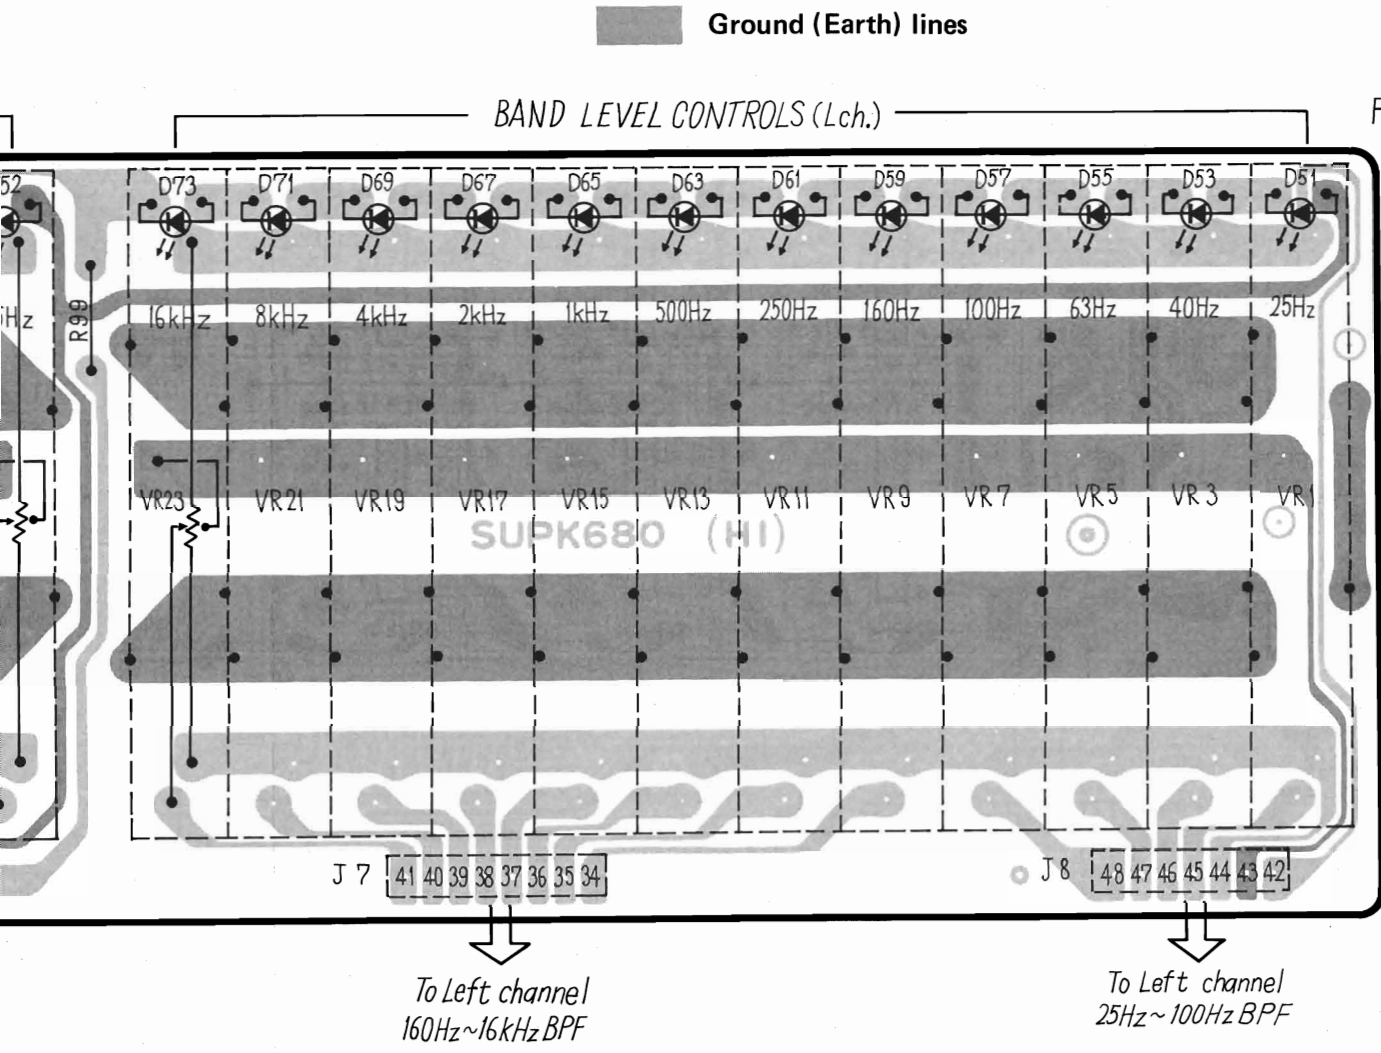


• Terminal number of FL (Spectrum analyzer)

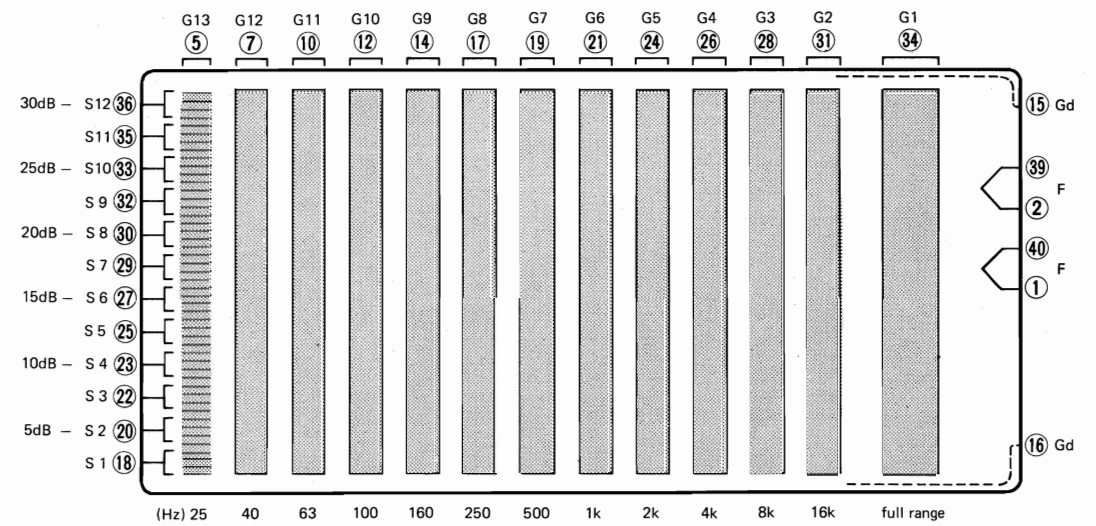

| PIN No.        | 1 | 2 | 3  | 4  | 5 | 6 | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 |
|----------------|---|---|----|----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| PIN CONNECTION | F | F | Np | Nc | G | G | Nc | Nc | Nc | G  | G  | Nc | Nc | G  | Gd | Gd | S  | G  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | S  | F  |

• Spectrum analyzer display P.C.B.

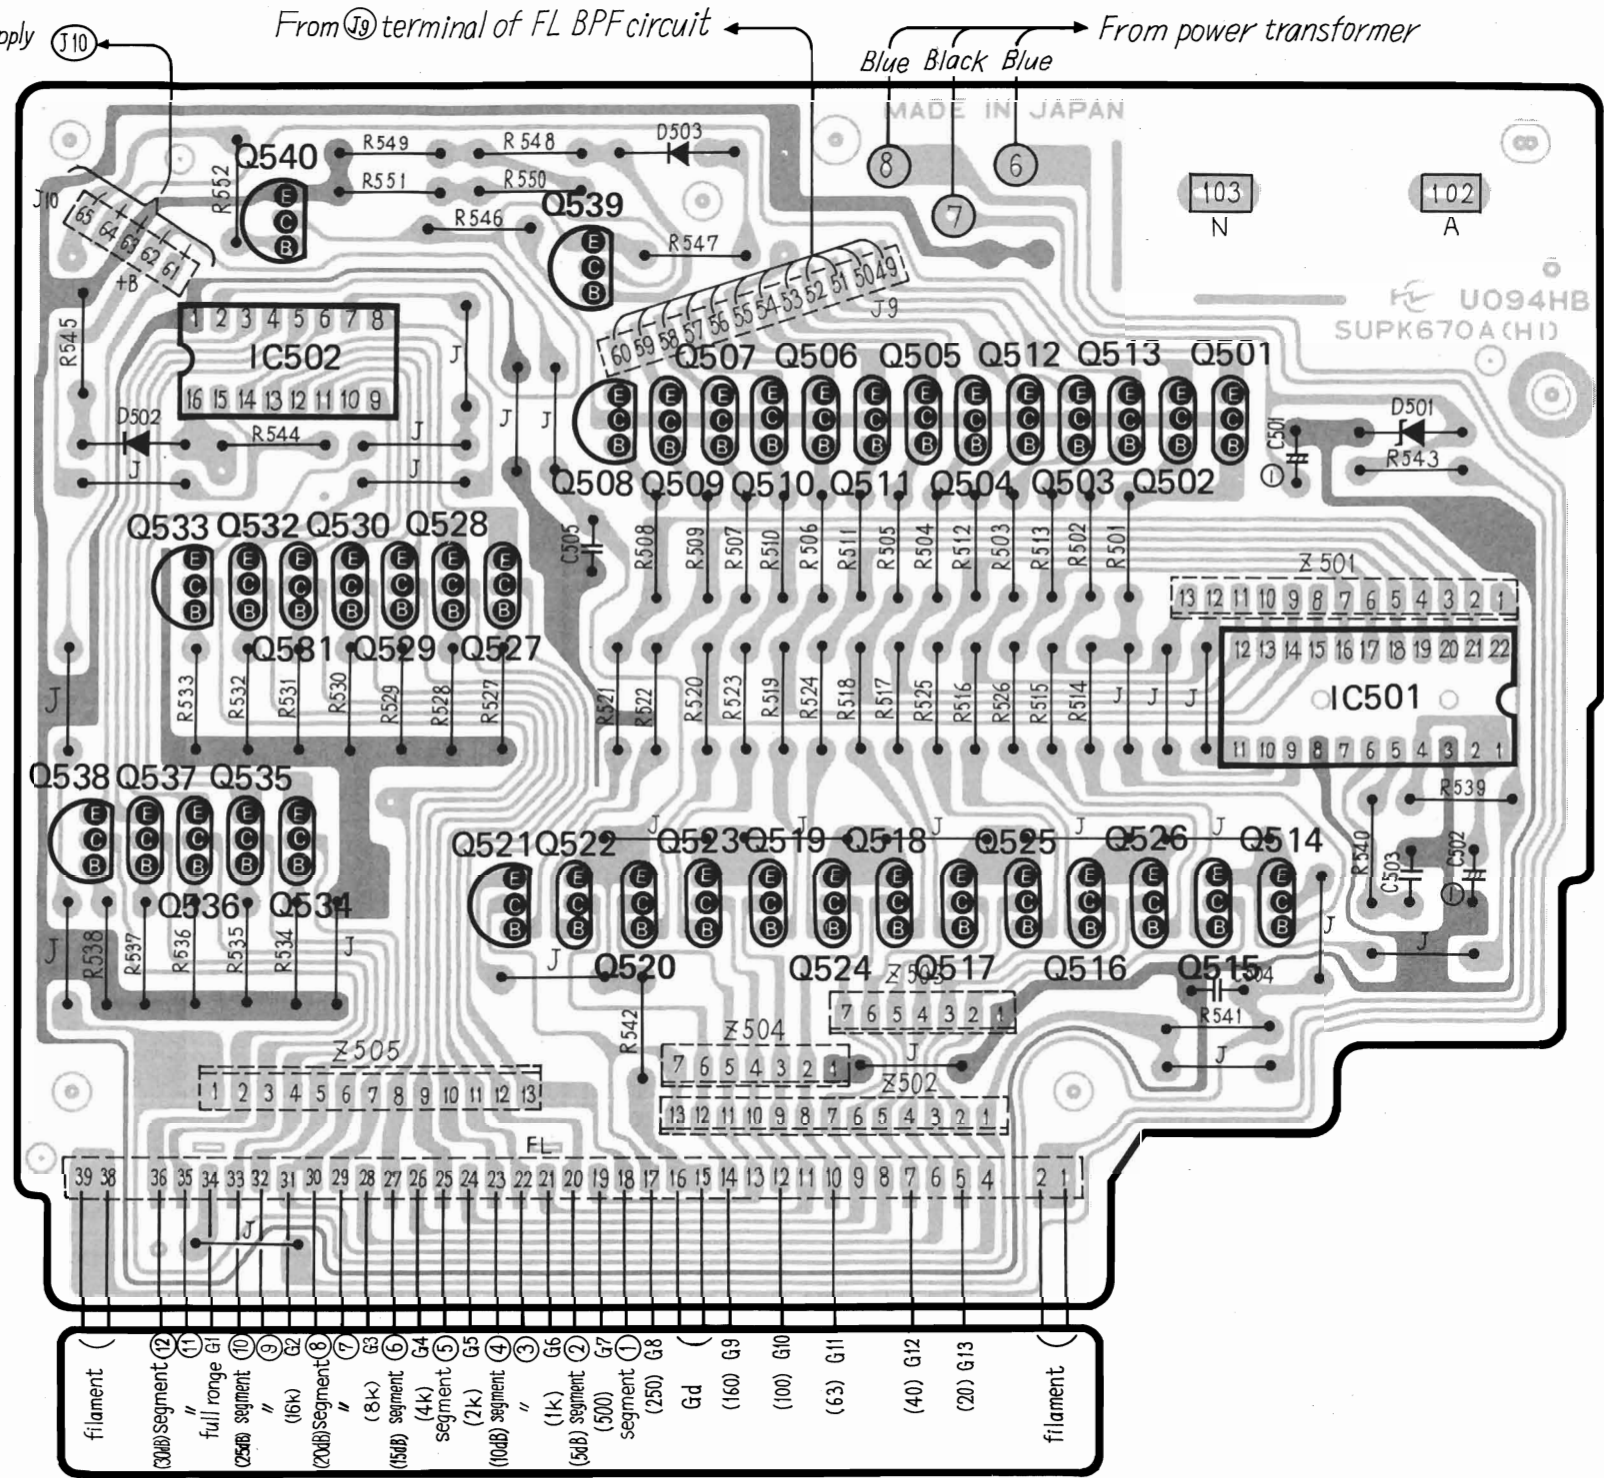

43SE 59S

1S2076


A

A




N81RCPH






- Band pass filter, Pink noise generator, Power source and Input/Output control P.C.B.

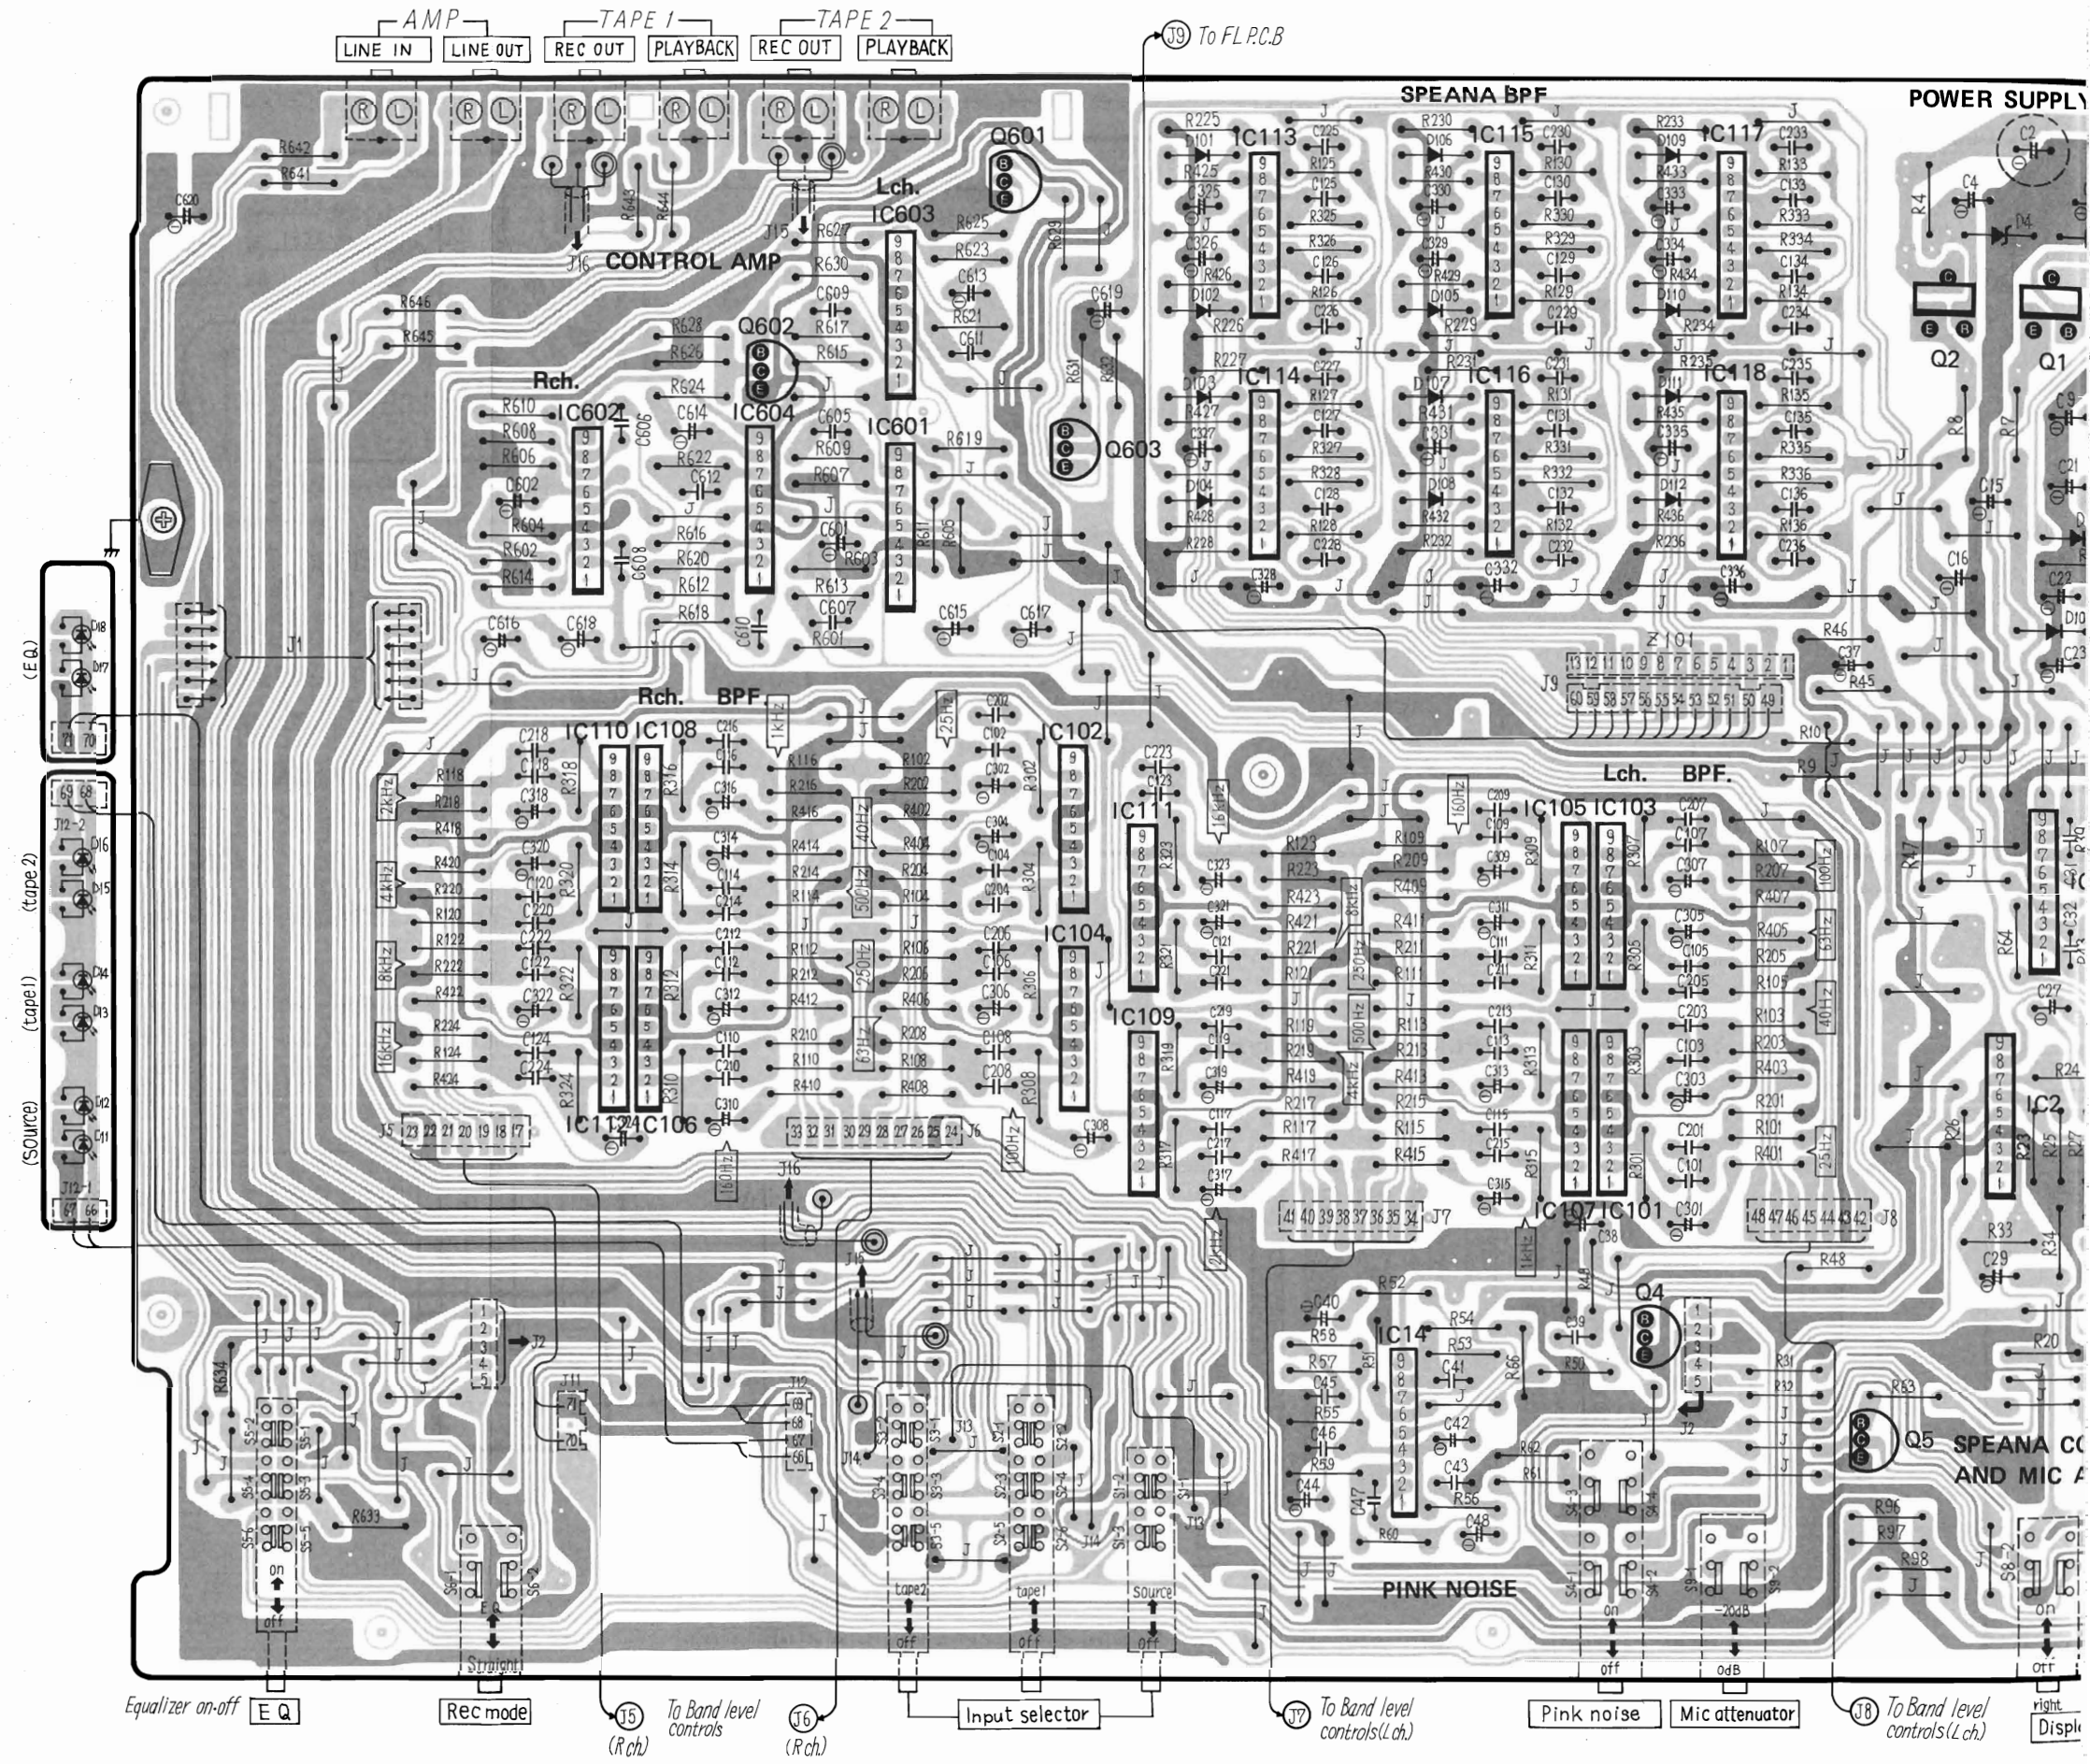



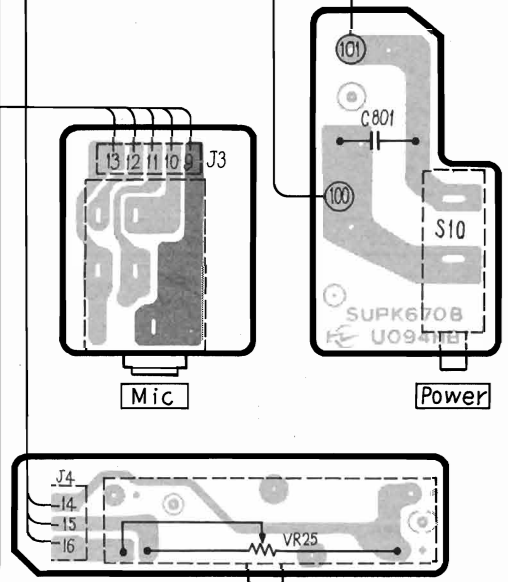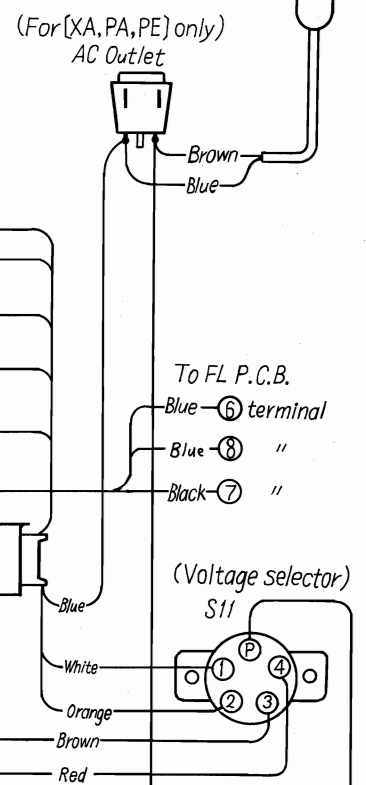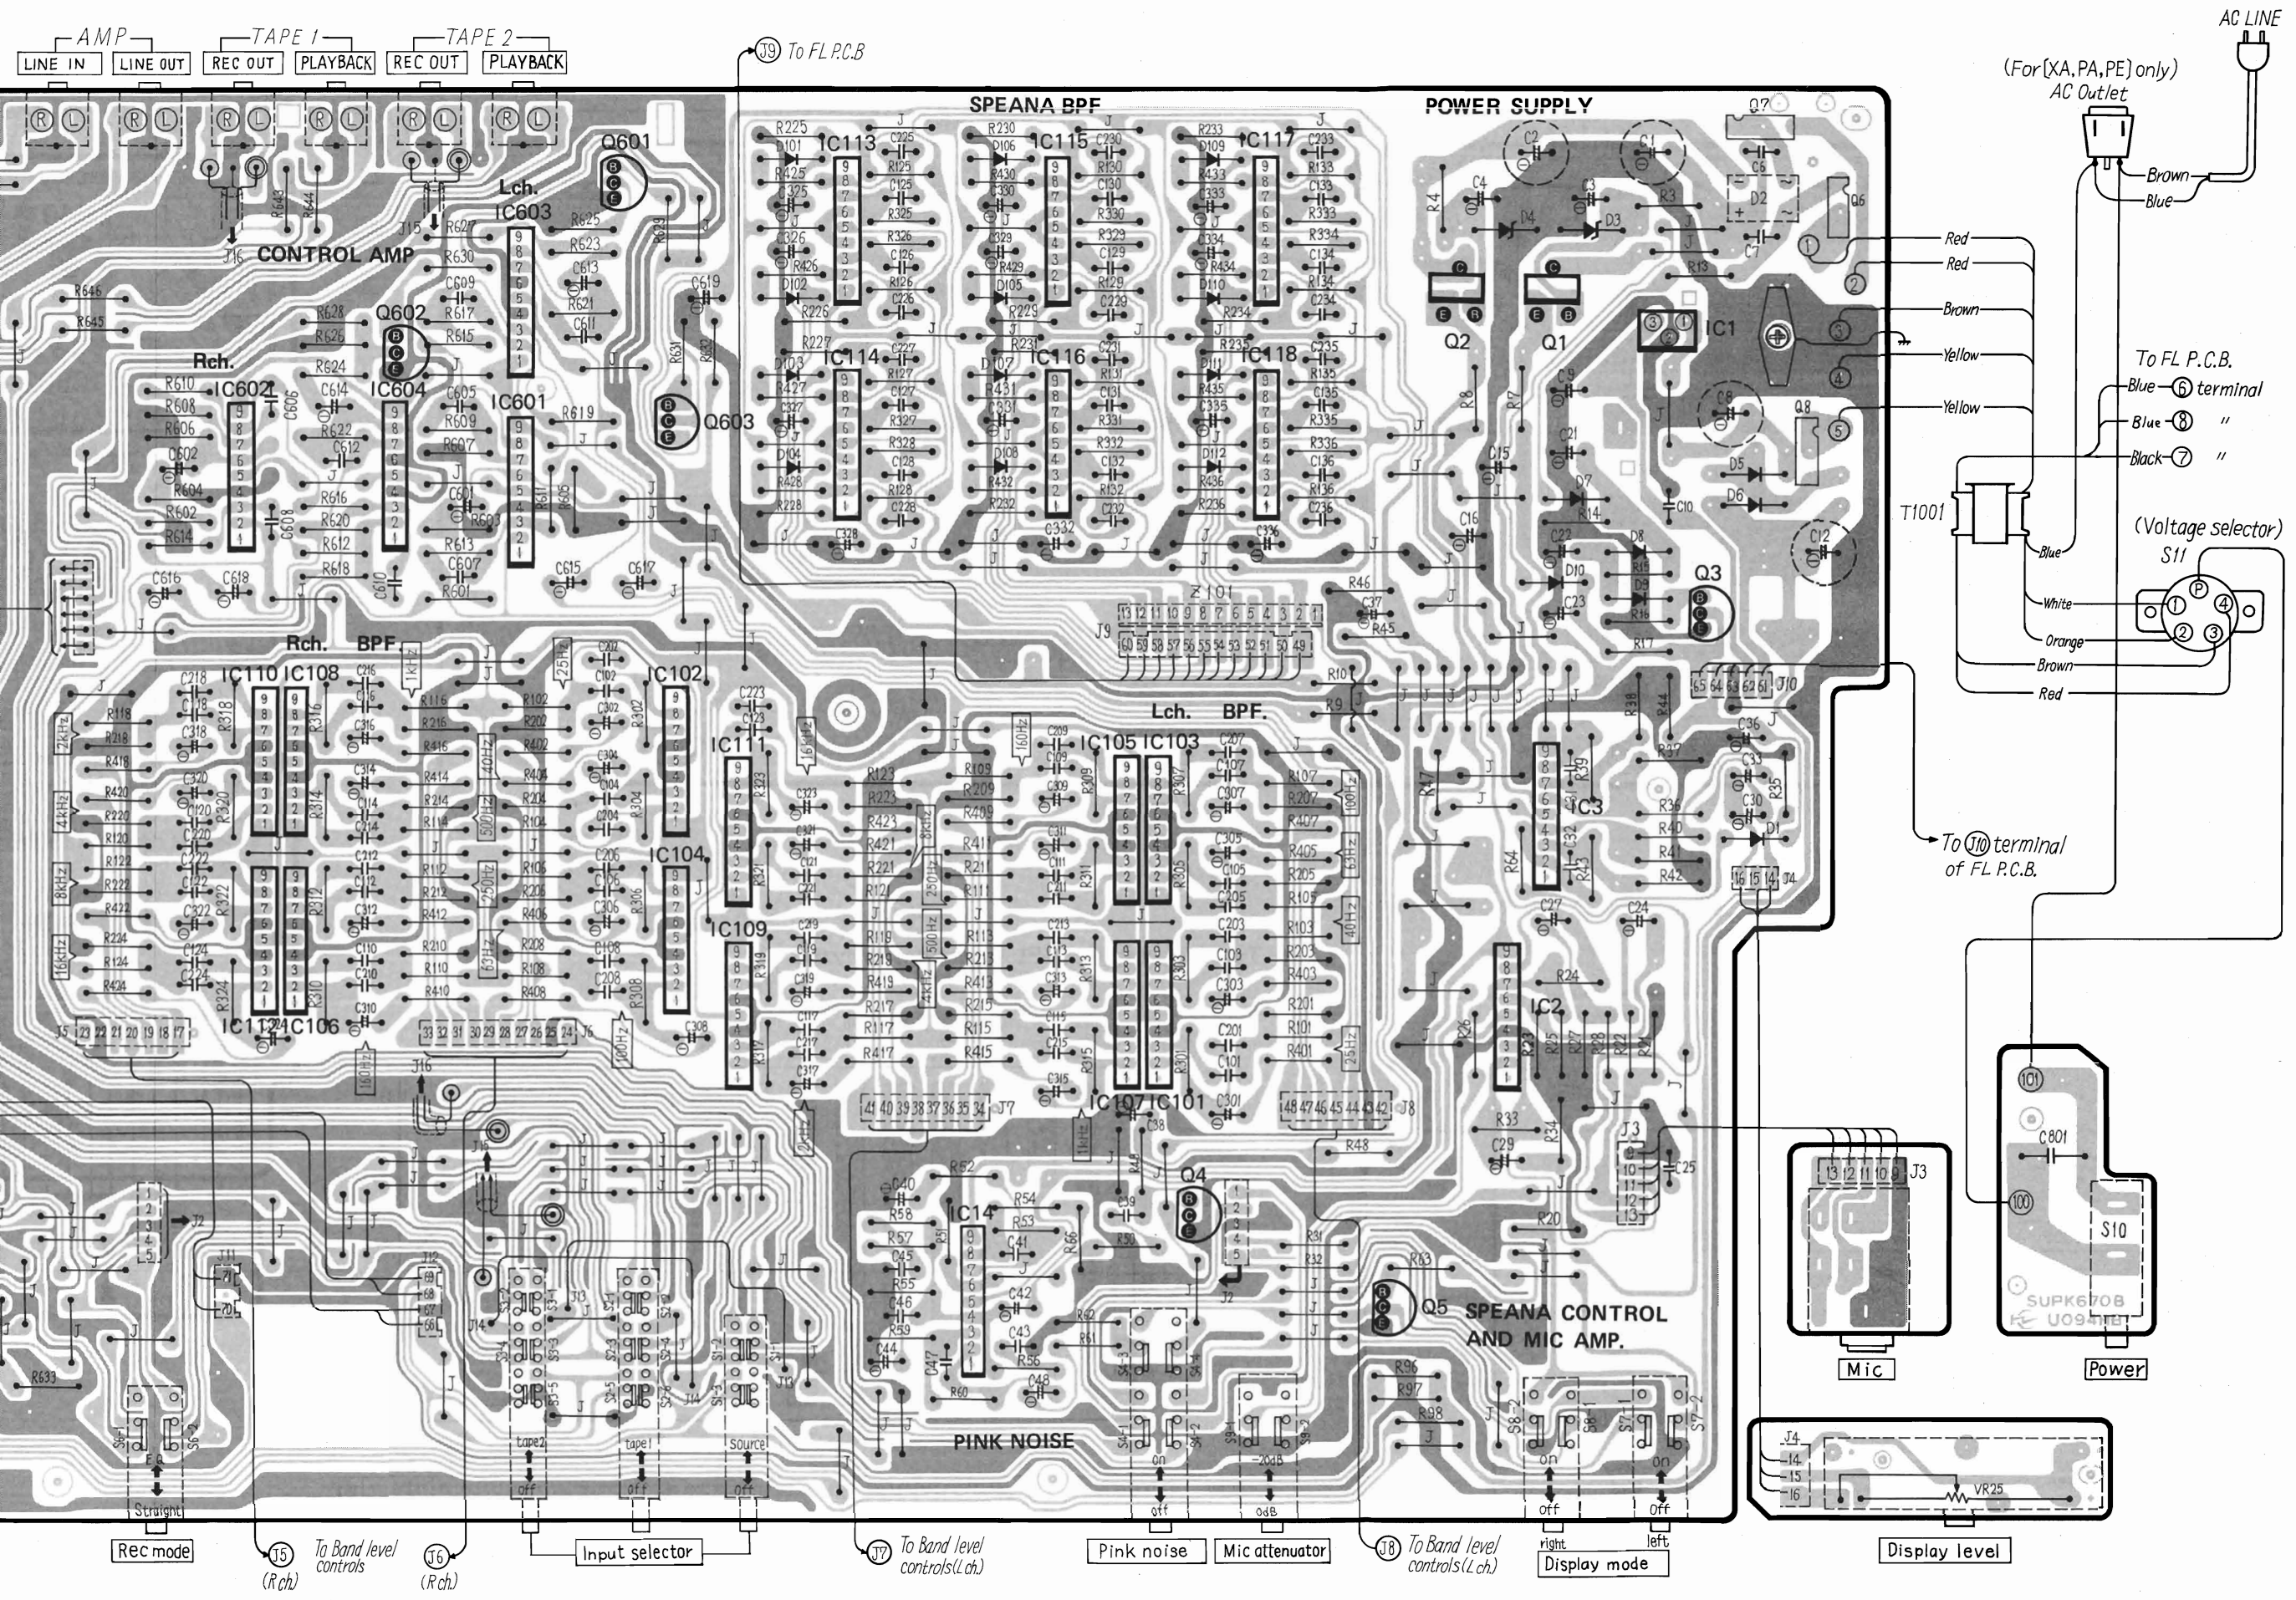



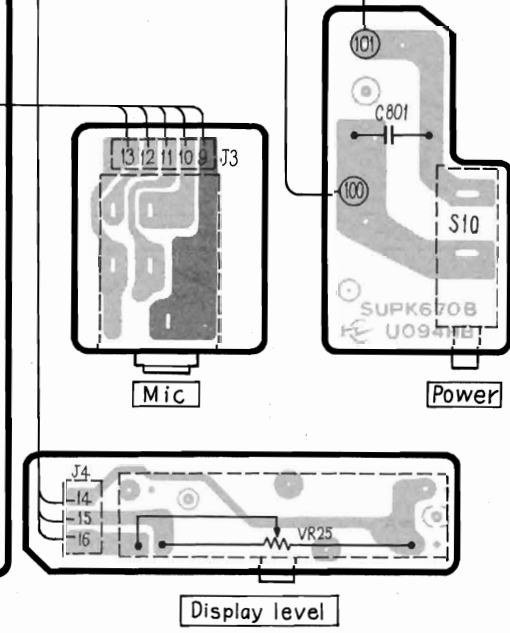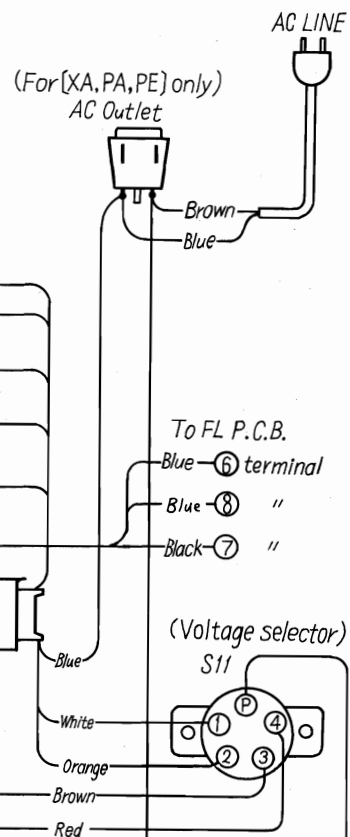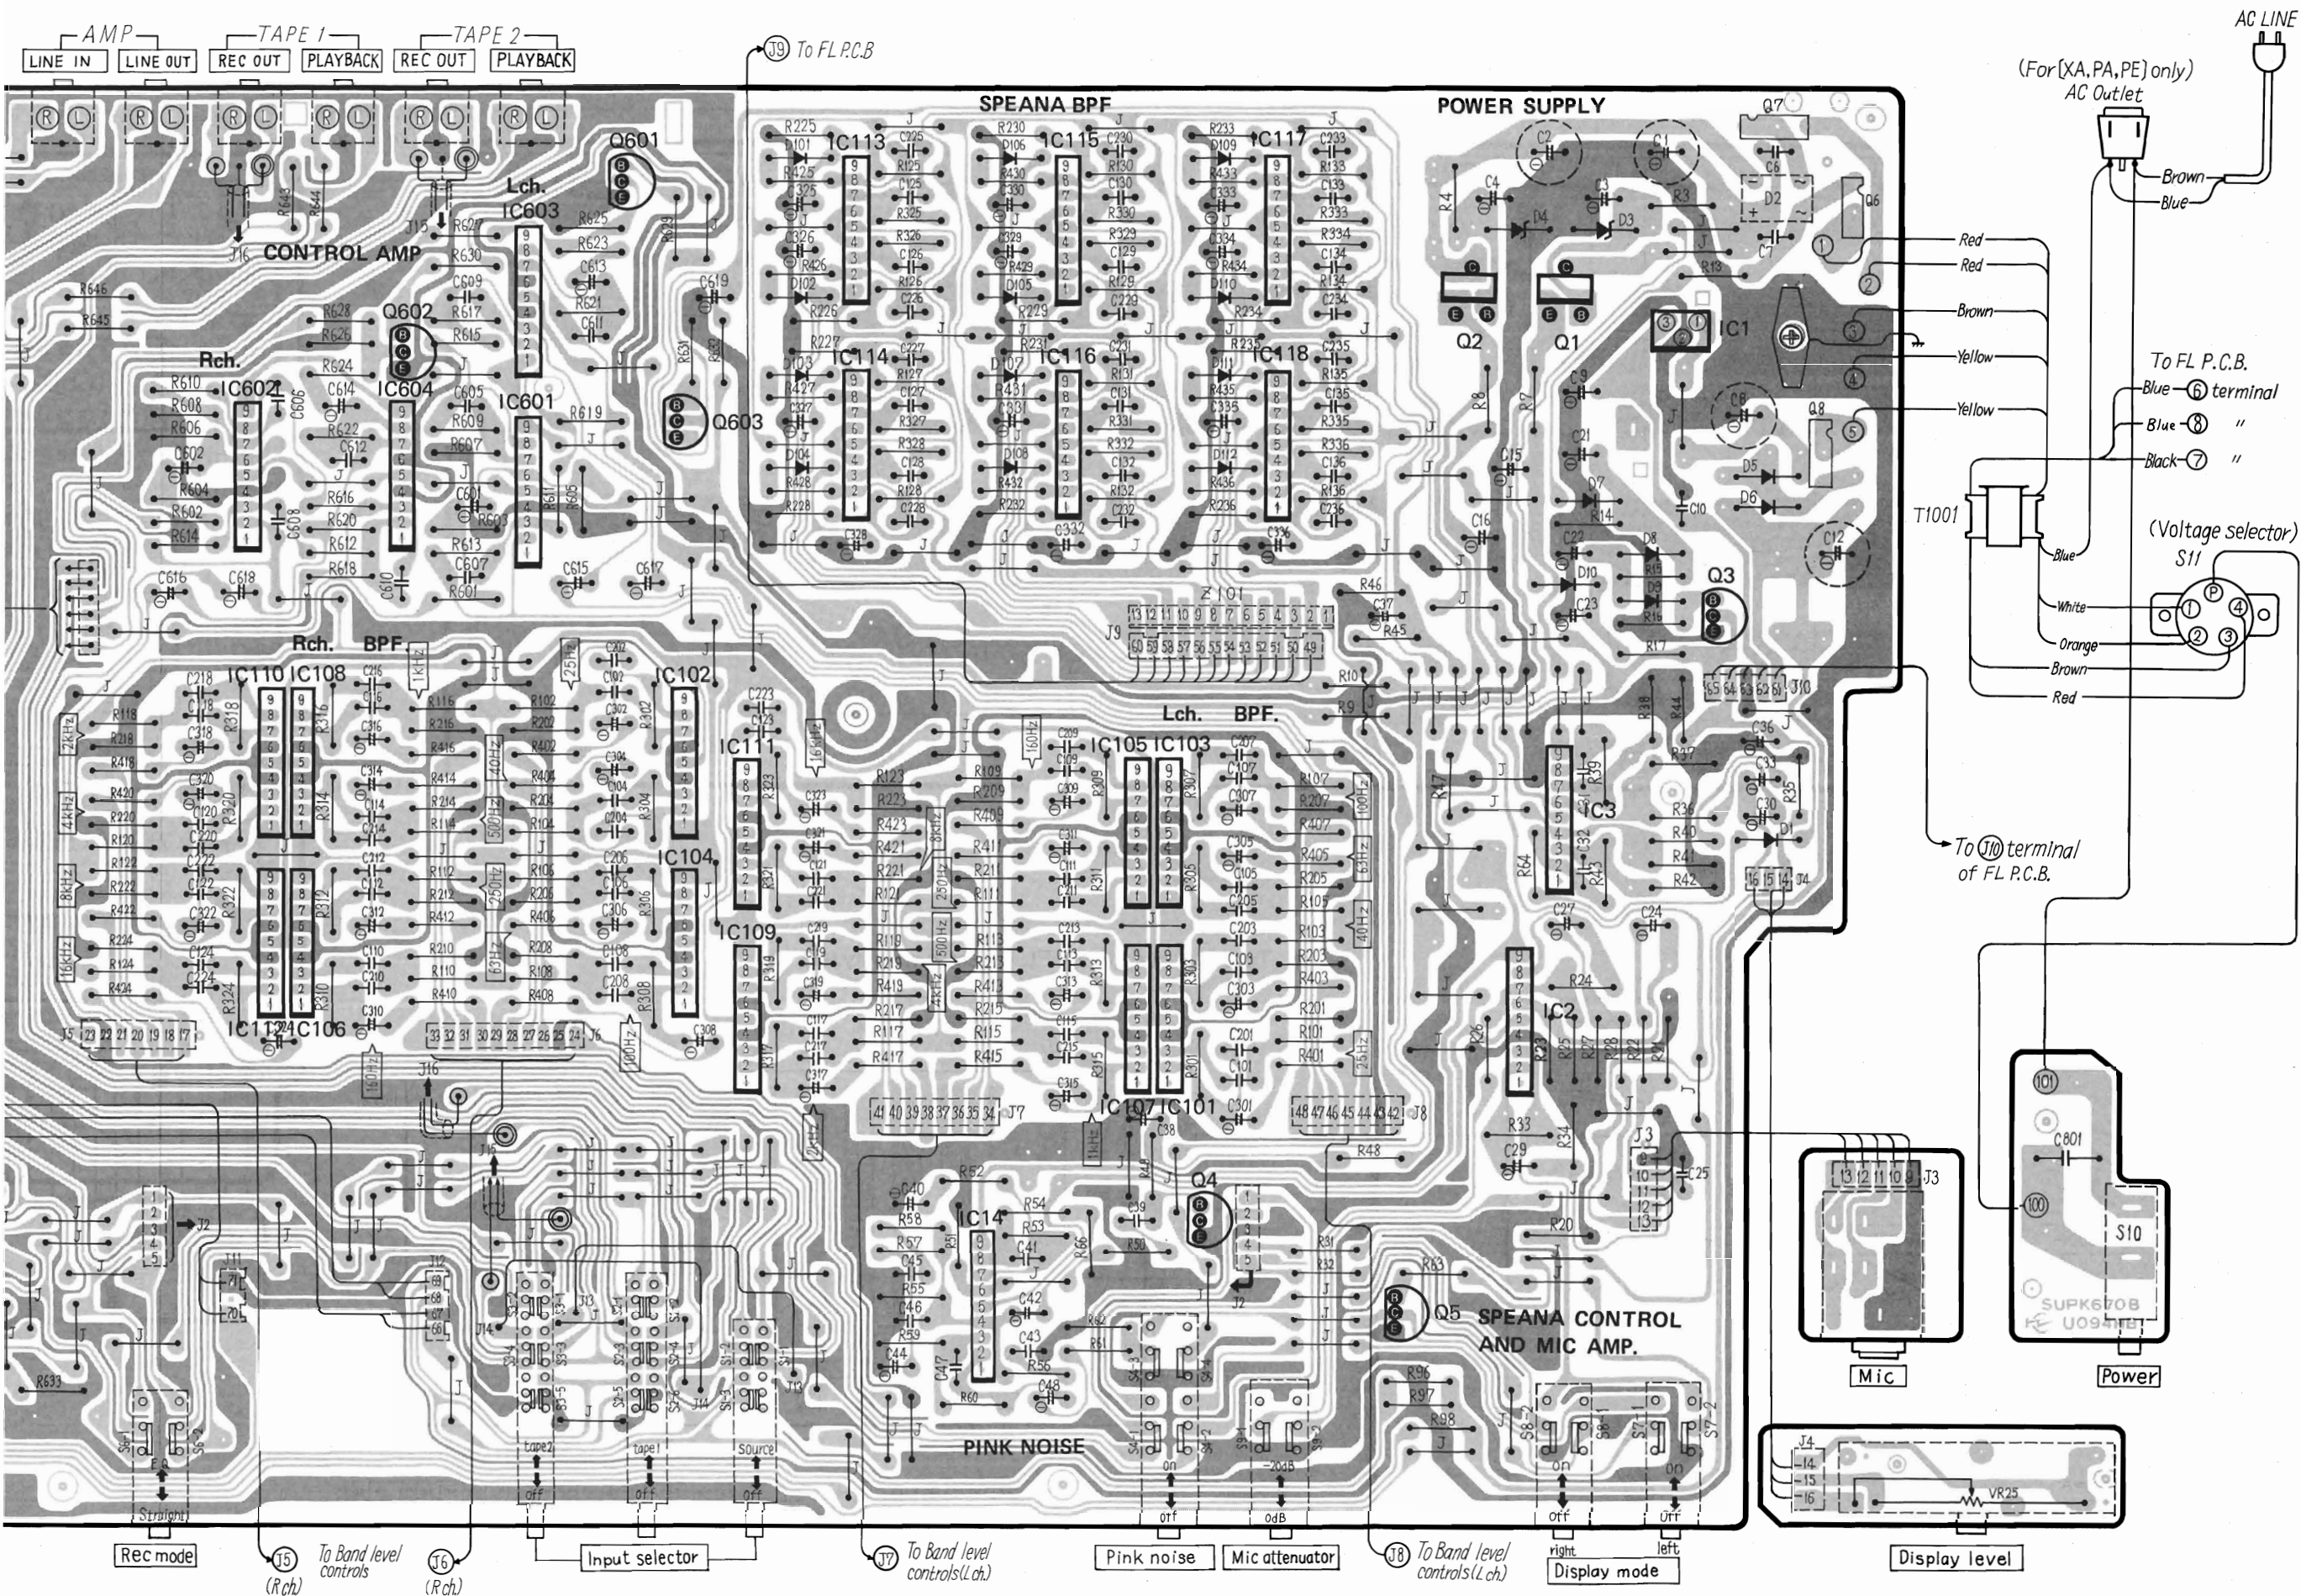




EXPLODED VIEW

Cabinet and Chassis parts

| Ref. No.                         | Part No.    | Description                       |
|----------------------------------|-------------|-----------------------------------|
| <b>CABINET and CHASSIS PARTS</b> |             |                                   |
| 1                                | ○ SGWK210PA | Front Panel (Silver) (1)          |
| 1                                | ⊗ SGWK210BA | Front Panel (Black) (1)           |
| 2                                | ○ SDUK8     | Dial Plate(Silver) (1)            |
| 2                                | ⊗ SDUK8-1   | Dial Plate(Black) (1)             |
| 3                                | ○ SGXK75    | Ornament Cover (Silver) (1)       |
| 3                                | ⊗ SGXK75-1  | Ornament Cover (Black) (1)        |
| 4                                | ○ SGXK76    | Ornament Cover (Silver) (1)       |
| 4                                | ⊗ SGXK76-1  | Ornament Cover (Black) (1)        |
| 5                                | ○ SGUK10    | Transparent Plate (Silver) (1)    |
| 5                                | ⊗ SGUK10-1  | Transparent Plate (Black) (1)     |
| 6                                | ○ SGXK74    | Sub Front Panel (Silver) (1)      |
| 6                                | ⊗ SGXK74-1  | Sub Front Panel (Black) (1)       |
| 7                                | SJJK22      | Jack, Headphone(1)                |
| 8                                | ○ SBD69-3K  | Button, Display Level(Silver) (1) |
| 8                                | ⊗ SBD69-1   | Button, Display Level(Black) (1)  |
| 9                                | SUBK9       | Connection Rod (1)                |
| 10                               | ○ SBC475-1  | Button(Silver) (4)                |
| 10                               | ⊗ SBC475    | Button(Black) (4)                 |
| 11                               | SBDK9       | Button (2)                        |
| 12                               | SBZK29      | Connection Rod (2)                |
| 13                               | SBC475-2    | Button, Rec Mode (1)              |
| 14                               | SGXK77      | Spacer (1)                        |
| 15                               | SHRK918     | Holder (1)                        |
| 16                               | SKUH8055N   | Bottom Board(W/ Feet) (1)         |
| 16-1                             | SHS2481     | Foot (4)                          |
| 17                               | SJF3059-2N  | Terminal Board, In/Output (1)     |
| 18(E)                            | SGPK210-2A  | Rear Panel (1)                    |
| 18(XA, PA, PE)                   | SGPK210-3A  | Rear Panel (1)                    |
| 18(other)                        | SGPH8055-SH | Rear Panel Ass'y (1)              |
| 19(EK)                           | △ QFC1205M  | Cord, Power Source (1)            |
| 19(PA, PE)                       | △ RJA52YA   | Cord, Power Source (1)            |
| 19(XL)                           | △ QFC1208M  | Cord, Power Source (1)            |
| 19(other)                        | △ SJA138-3  | Cord, Power Source (1)            |
| 20(XA, PA, PE) only              | SJS9221-1   | Socket, AC Outlet (1)             |
| 21                               | SUWK390     | Holder (1)                        |
| 22                               | SBCKH8055N  | Button, Source (1)                |
| 23                               | SBCKH8055N1 | Button, Tape 1 (1)                |
| 24                               | SBCKH8055N2 | Button, Tape 2 (1)                |
| 25                               | SBCKH8055N3 | Button, EQ (1)                    |
| 26                               | ○ SKCK110S  | Cabinet(Silver) (1)               |
| 26                               | ⊗ SKCK110B  | Cabinet(Black) (1)                |
| 27                               | SBC337-1    | Button, Power (1)                 |
| 28                               | SUSK30-1    | Spring (4)                        |
| 29                               | SMXK26      | Cover (1)                         |
| 30(EK)                           | SHR129      | Bushing (1)                       |
| 30(other)                        | SHR127      | Bushing (1)                       |
| 31                               | SHR301      | Clamper, Lead Wire (2)            |


| Ref. No.             | Part No.     | Description              |
|----------------------|--------------|--------------------------|
| <b>SCREWS</b>        |              |                          |
| N1                   | S XTB3+8B    | Tapping, ⊕3×8 (3)        |
| N2                   | S XTB3+8B    | Tapping, ⊕3×8 (3)        |
| N3                   | S XSN3+6S    | ⊕3×6 (2)                 |
| N4                   | S XSN2+2AFZ  | ⊕2×2 (2)                 |
| N5                   | S XSN3+6S    | ⊕3×6 (2)                 |
| N6                   | S XSN2+4FZ   | ⊕2×4 (2)                 |
| N7                   | S XTB3+8B    | Tapping, ⊕3×8 (3)        |
| N8                   | S XTB3+8B    | Tapping, ⊕3×8 (2)        |
| N9                   | S XSN4+8FZ   | ⊕4×8 (2)                 |
| N10                  | S XTB3+10BFZ | Tapping, ⊕3×10(2)        |
| N11                  | S XTB3+8BFZ  | Tapping, ⊕3×8 (5)        |
| N12                  | ○ SNE2095-2  | Cabinet (Silver) (4)     |
| N12                  | ⊗ SNE2095-3  | Cabinet (Black) (4)      |
| N13                  | S XTB3+8B    | Tapping, ⊕3×8 (2)        |
| <b>NUTS</b>          |              |                          |
| N15                  | S XNS12      | Headphones, φ12 (1)      |
| <b>WASHERS</b>       |              |                          |
| N20                  | S XWA3B      | Spring, φ3 (2)           |
| N21                  | S XWG4       | Power Transformer, φ4(2) |
| N22                  | S XWA4B      | Power Transformer, φ4(2) |
| N23                  | S XWA3B      | Spring, φ3 (1)           |
| <b>ACCESSORIES</b>   |              |                          |
| A1(EK)               | SQFK10054    | Instruction Book (1)     |
| A1(EGA)              | SQFK10047    | Instruction Book (1)     |
| A1(XA)               | SQFK10045    | Instruction Book (1)     |
| A1(PA, PE)           | SQFK10049    | Instruction Book (1)     |
| A1(Ei)               | SQFK10048    | Instruction Book (1)     |
| A1[other]            | SQFK10046    | Instruction Book (1)     |
| A2(XA)only           | △ SJP5213-1  | Plug Adaptor (1)         |
| A3(PA, PE)only       | SJP9215      | Plug Adaptor (1)         |
| A4                   | △ SJP2129-5  | Cord, Pin-pin (2)        |
| <b>PACKING PARTS</b> |              |                          |
| P1(EF)               | SPGK115      | Carton Box (1)           |
| P1[other]            | SPGK116      | Carton Box (1)           |
| P2                   | SPSK59       | Pad, Left (1)            |
| P3                   | SPSK60       | Pad, Right (1)           |
| P4                   | SPP699       | Polythylene Bag (1)      |

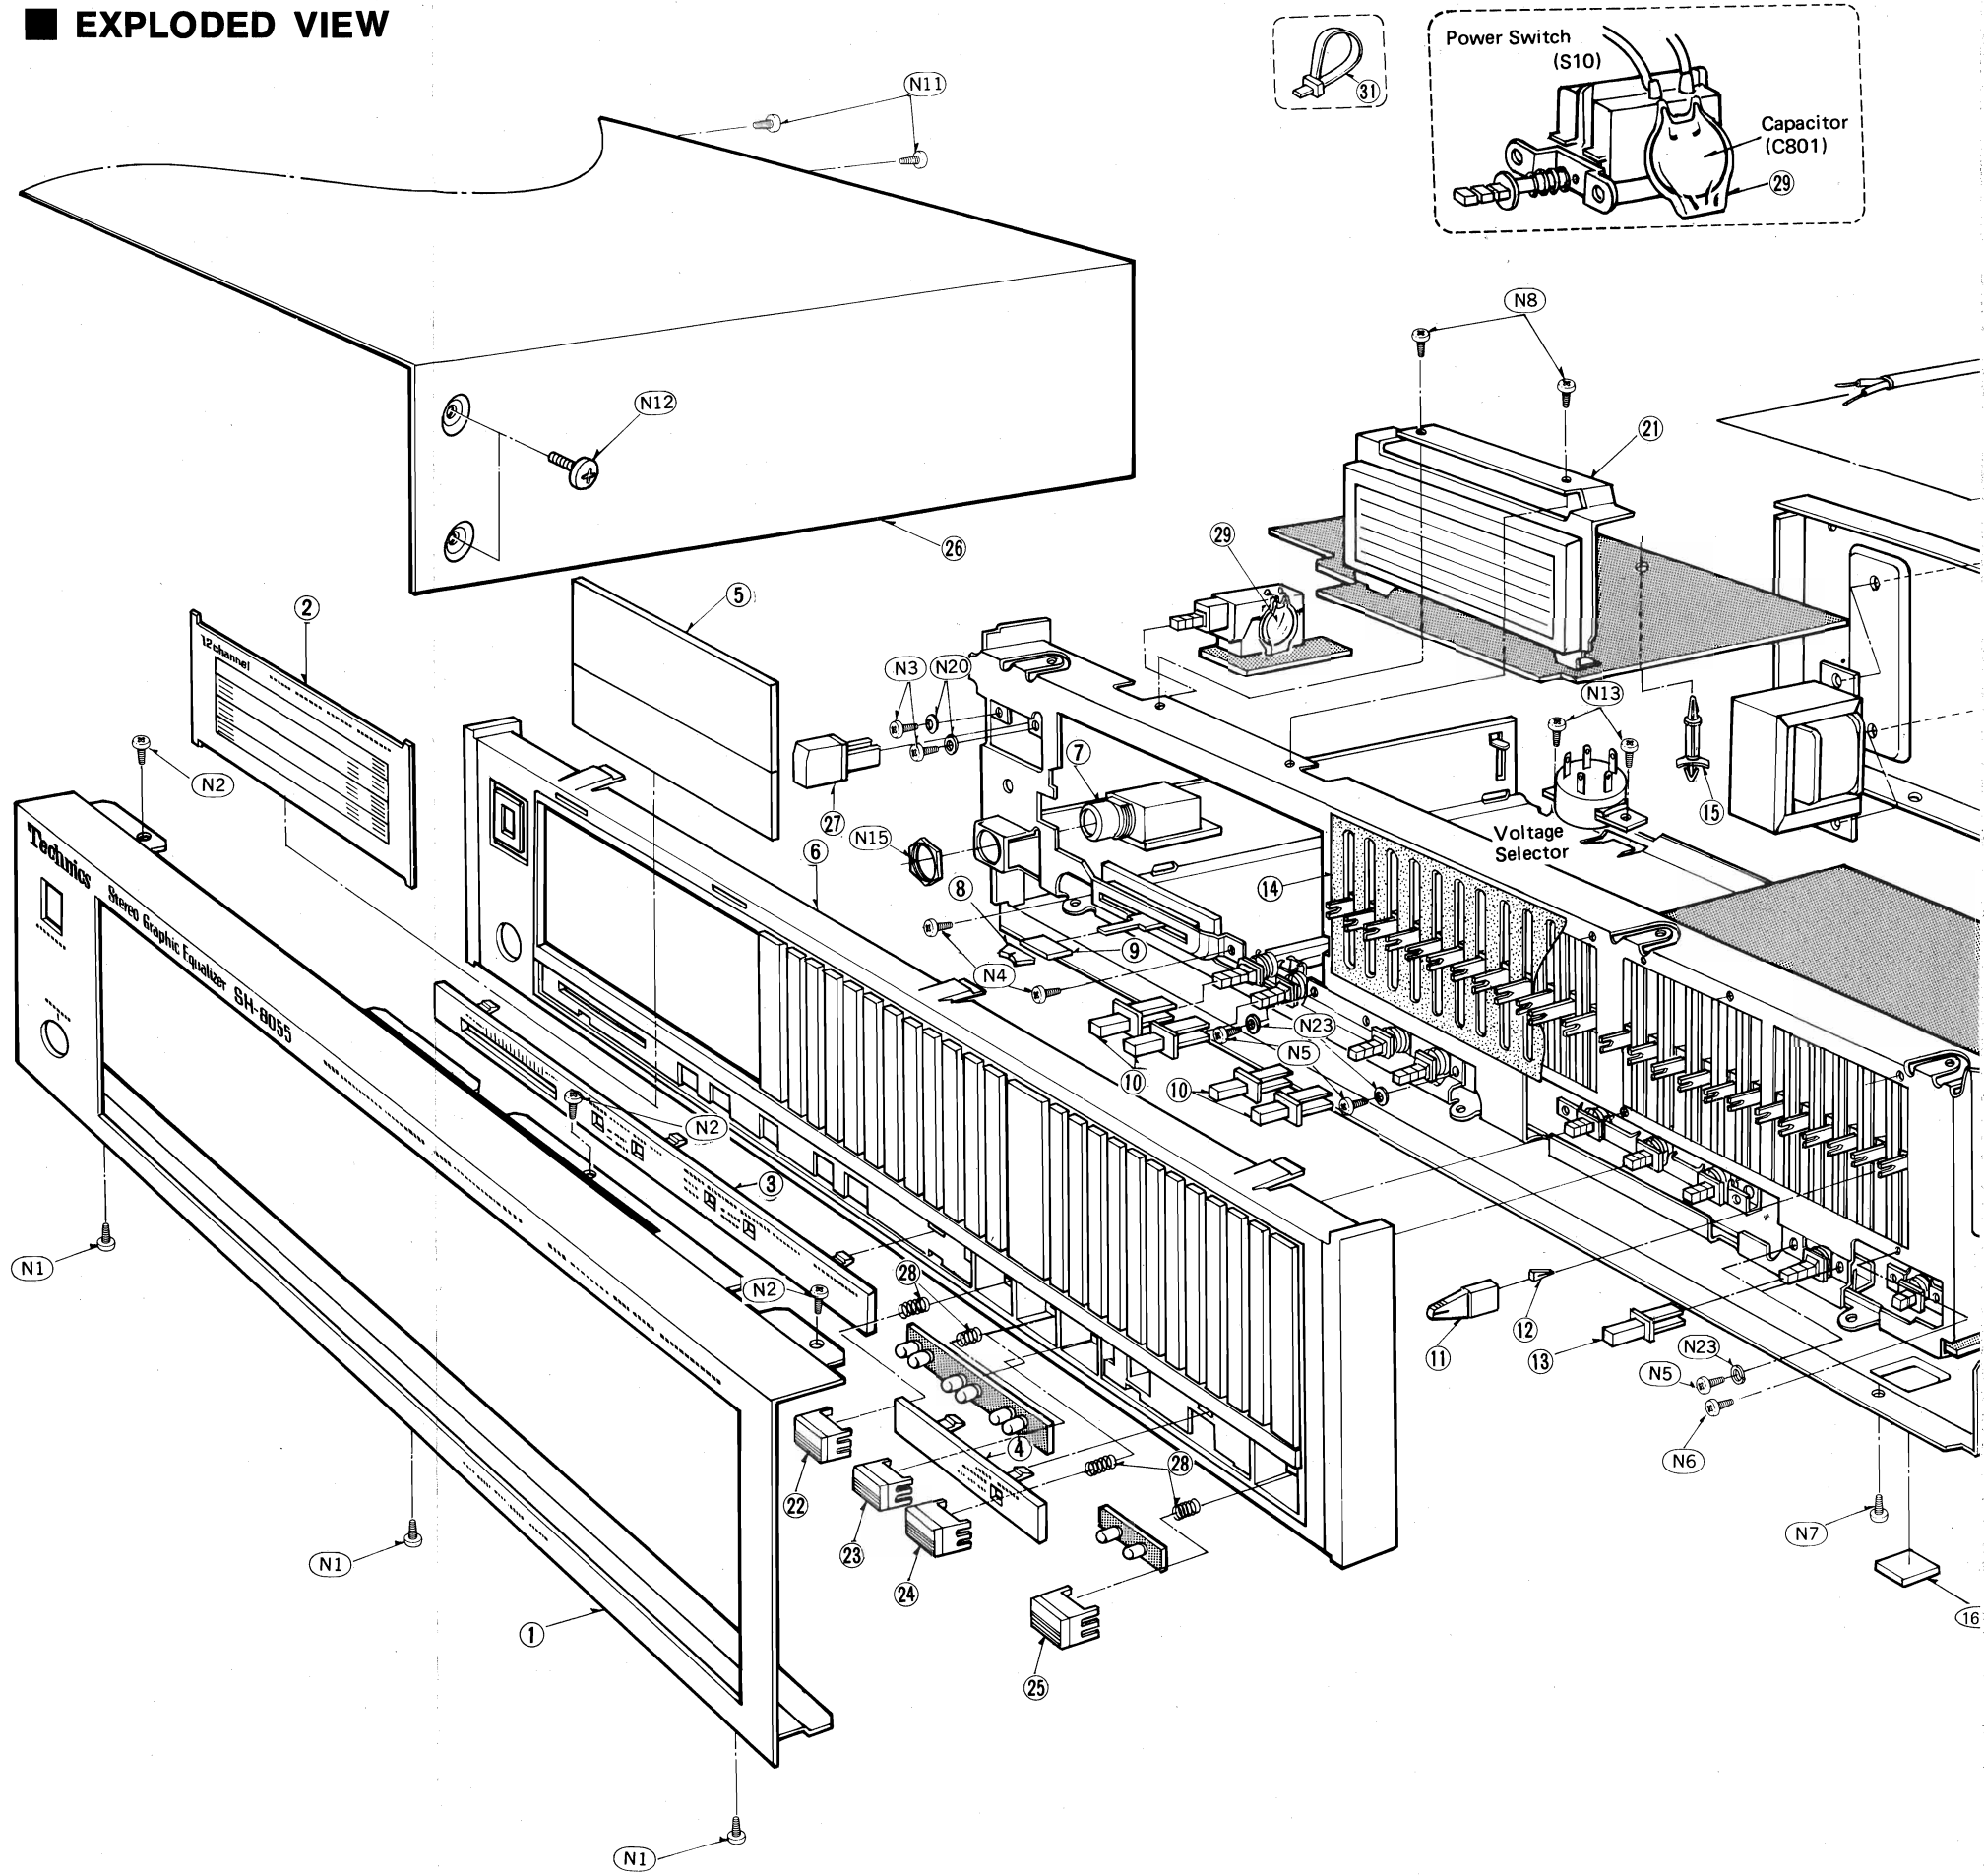



EXPLODED VIEW

| No.                                    | Description                            |
|--|--|
| B                                      | Tapping, $\varnothing 3 \times 8$ (3)  |
| B                                      | Tapping, $\varnothing 3 \times 8$ (3)  |
| S                                      | $\varnothing 3 \times 6$ (2)           |
| AFZ                                    | $\varnothing 2 \times 2$ (2)           |
| S                                      | $\varnothing 3 \times 6$ (2)           |
| FZ                                     | $\varnothing 2 \times 4$ (2)           |
| B                                      | Tapping, $\varnothing 3 \times 8$ (3)  |
| B                                      | Tapping, $\varnothing 3 \times 8$ (2)  |
| FZ                                     | $\varnothing 4 \times 8$ (2)           |
| BFZ                                    | Tapping, $\varnothing 3 \times 10$ (2) |
| BFZ                                    | Tapping, $\varnothing 3 \times 8$ (5)  |
| -2                                     | Cabinet (Silver) (4)                   |
| -3                                     | Cabinet (Black) (4)                    |
| 3                                      | Tapping, $\varnothing 3 \times 8$ (2)  |
| Headphones, $\varnothing 12$ (1)       |  |
| Spring, $\varnothing 3$ (2)            |  |
| Power Transformer, $\varnothing 4$ (2) |  |
| Power Transformer, $\varnothing 4$ (2) |  |
| Spring, $\varnothing 3$ (1)            |  |
| 4                                      | Instruction Book (1)                   |
| 7                                      | Instruction Book (1)                   |
| 5                                      | Instruction Book (1)                   |
| 9                                      | Instruction Book (1)                   |
| 8                                      | Instruction Book (1)                   |
| 6                                      | Instruction Book (1)                   |
| 1                                      | Plug Adaptor (1)                       |
|  | Plug Adaptor (1)                       |
| 5                                      | Cord, Pin-pin (2)                      |
|  | Carton Box (1)                         |
|  | Carton Box (1)                         |
|  | Pad, Left (1)                          |
|  | Pad, Right (1)                         |
|  | Polythylene Bag (1)                    |

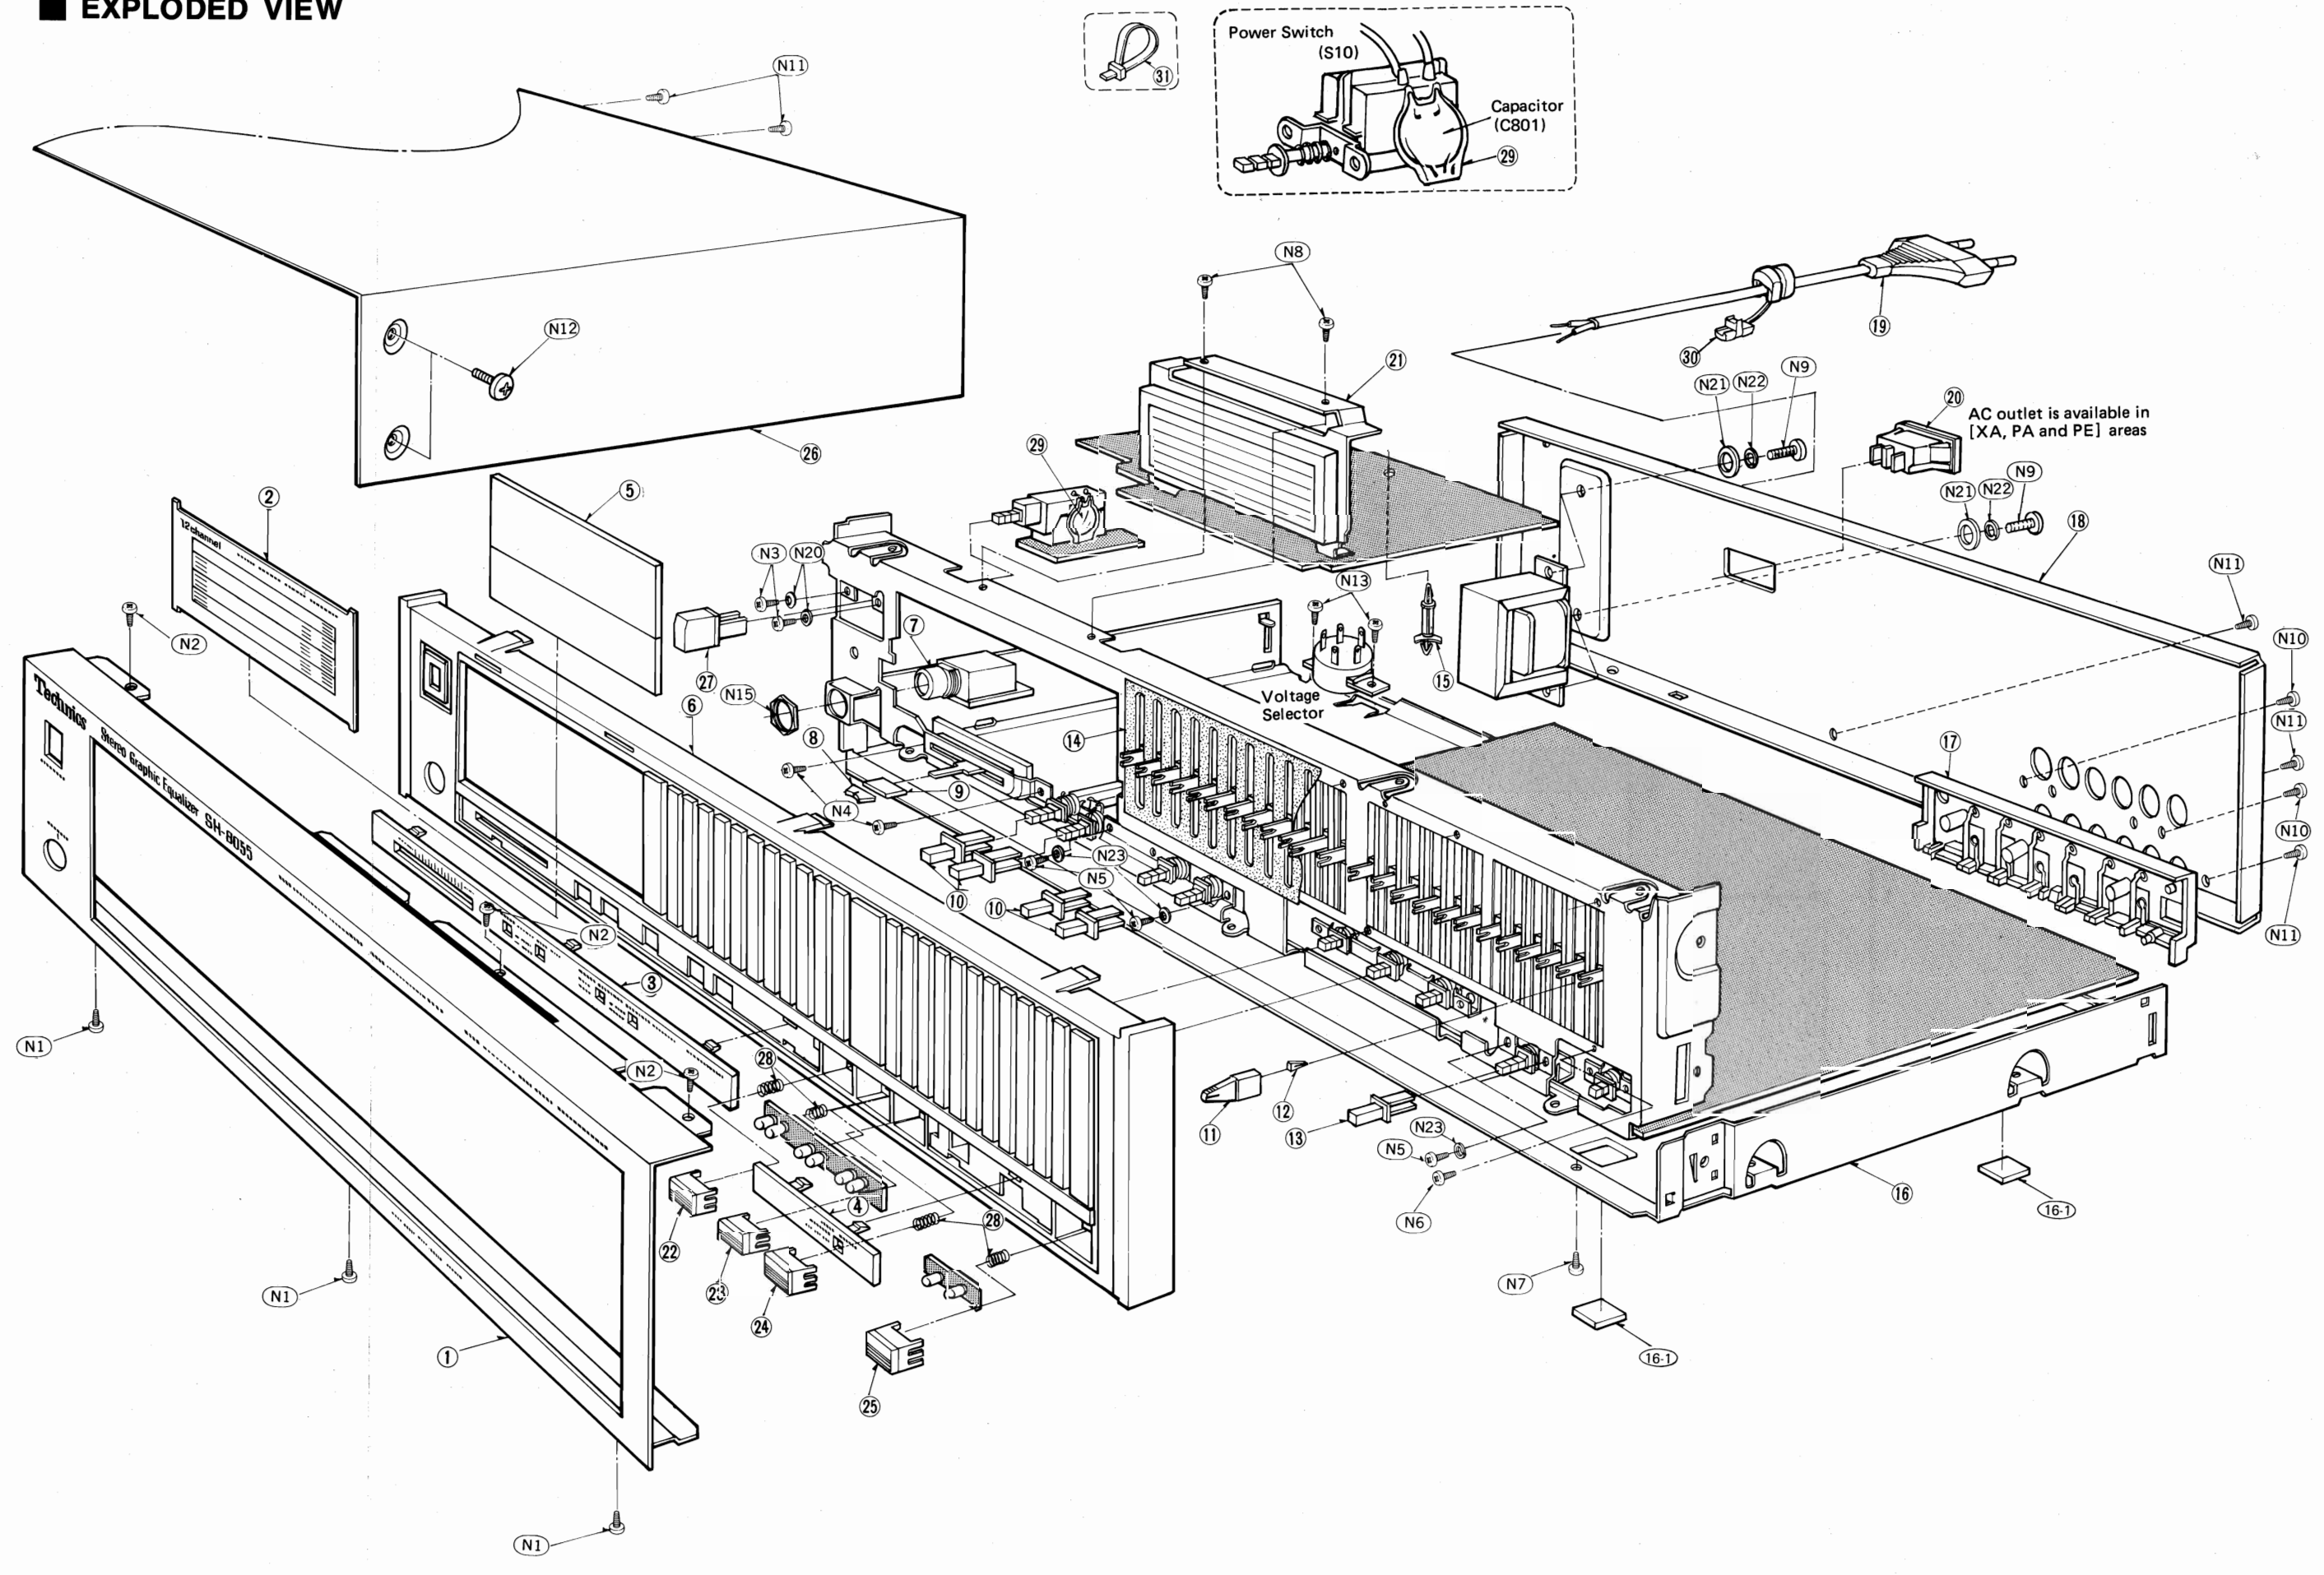




**SCHEMATIC DIAGRAM (A)**

(This schematic diagram may be modified at any time with the development of new technology.)




- Input/Output control
- Microphone amplifier
- Pink noise generator
- Band level control
- Band pass filter
- Power source

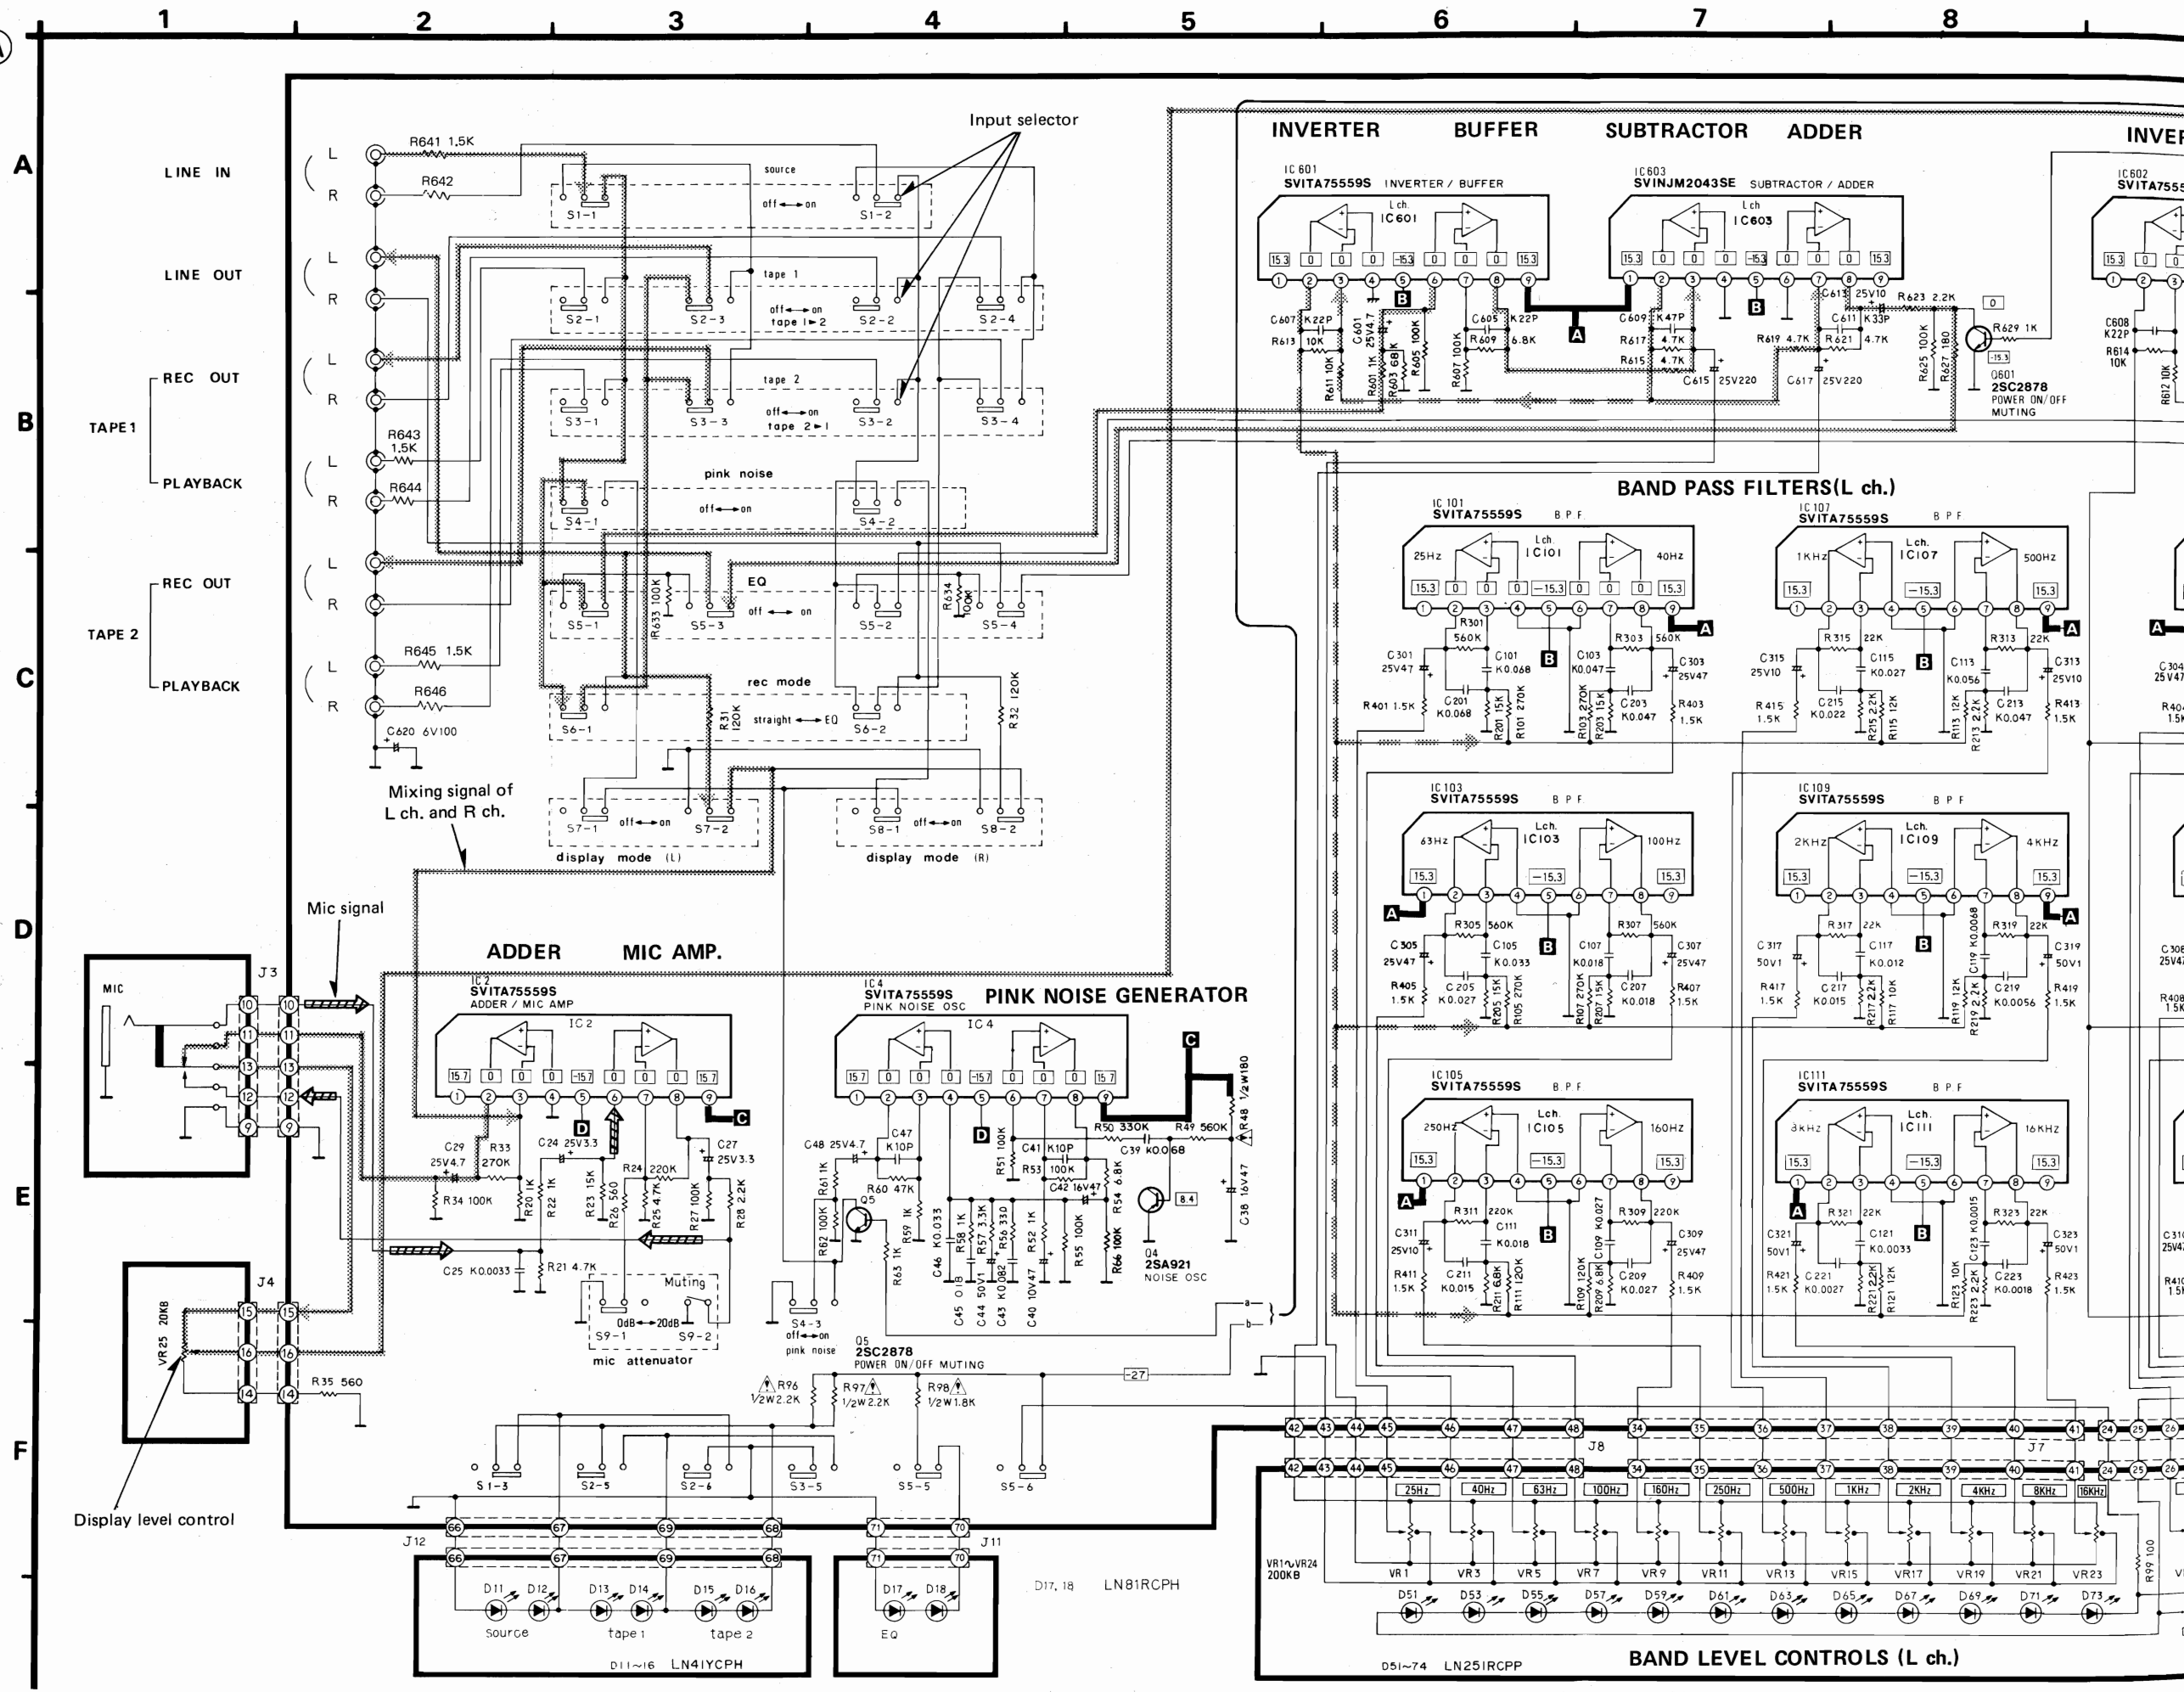


SUBTRACTOR ADDER

INVERTER BUFFER

SUBTRACTOR ADDER













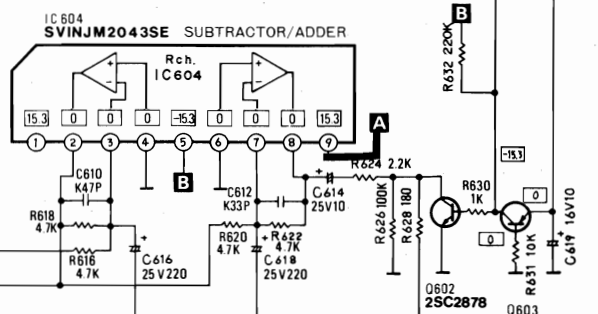
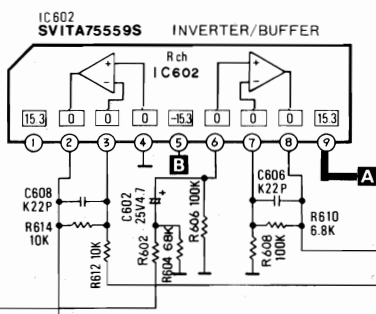
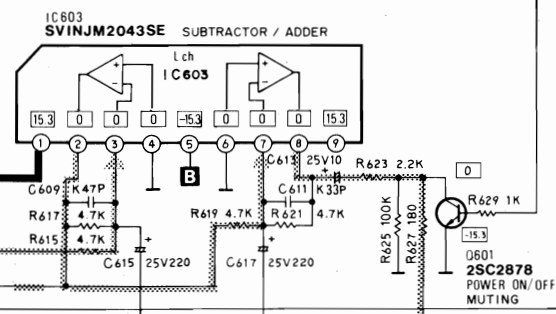


FULL RANGE BAND LEVEL AMP.

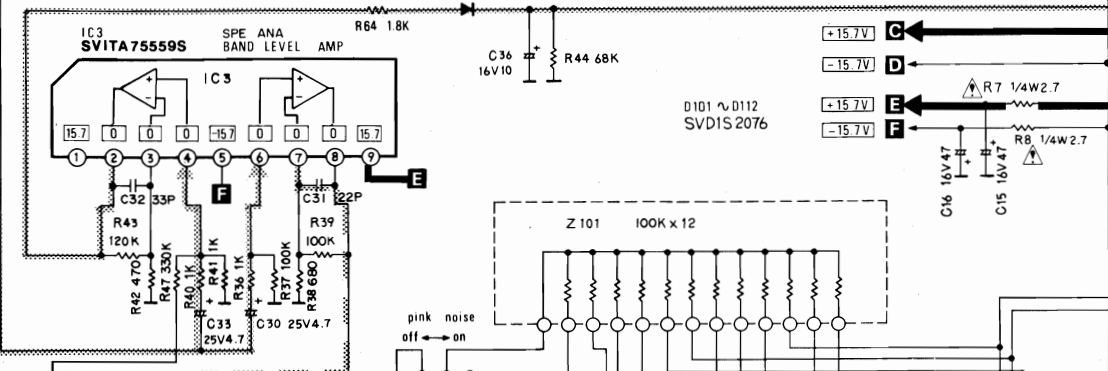



BAND PASS FILTERS (L ch.)

BAND PASS FILTERS (R ch.)

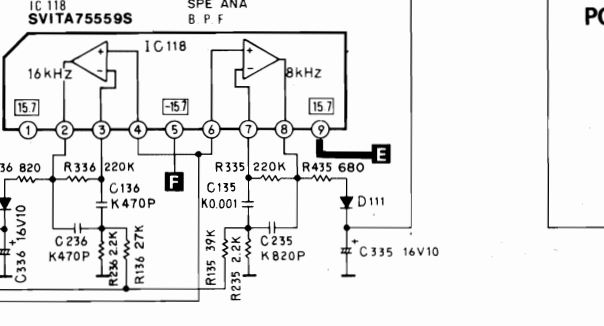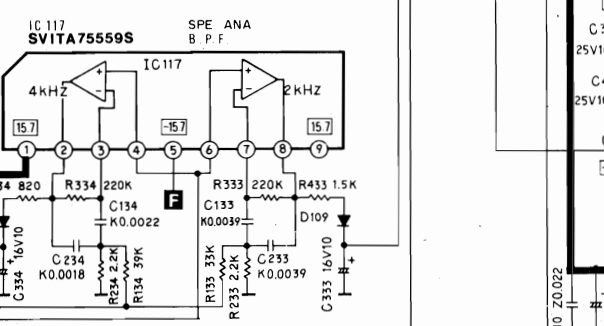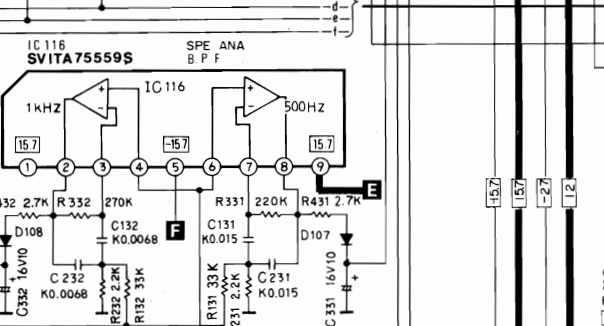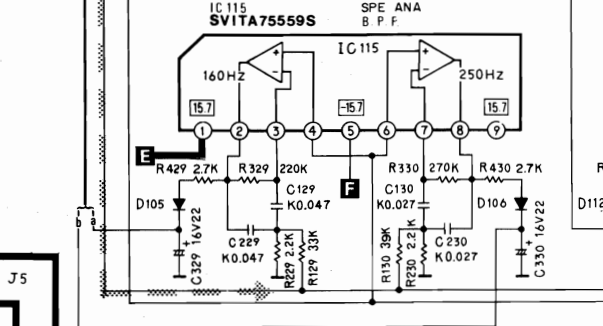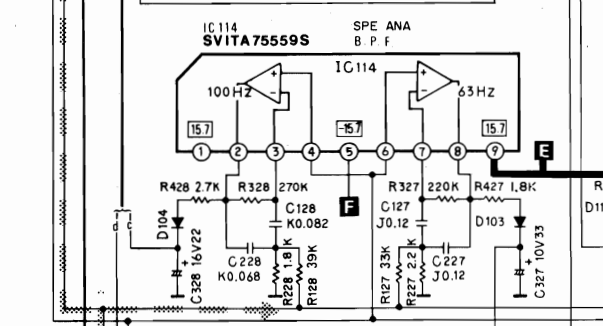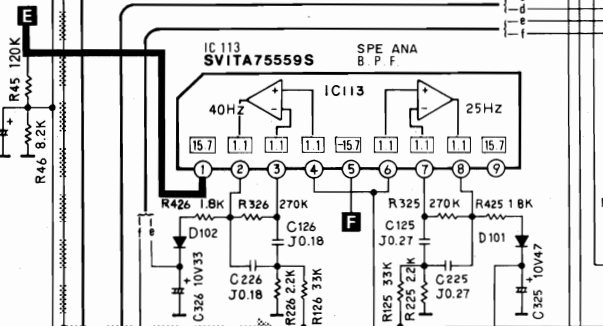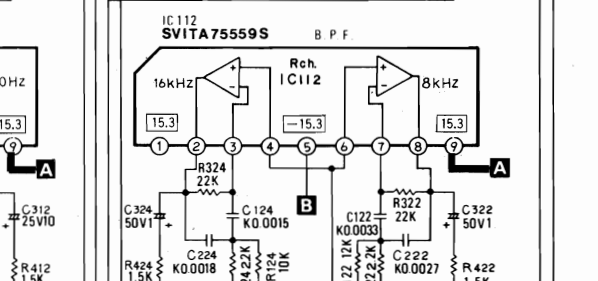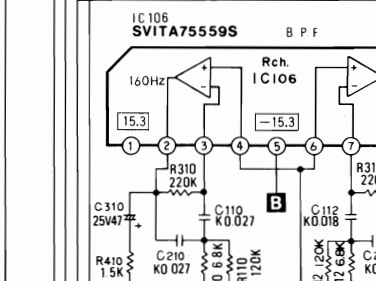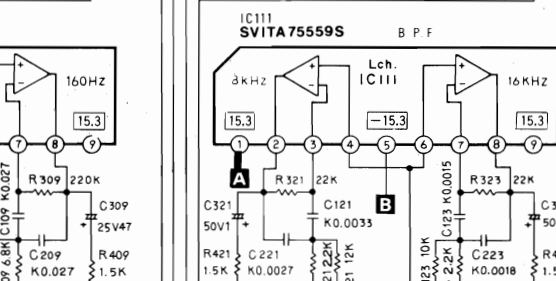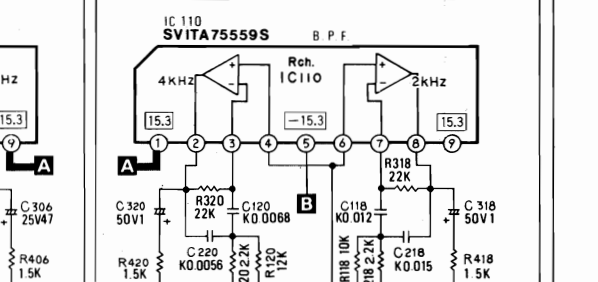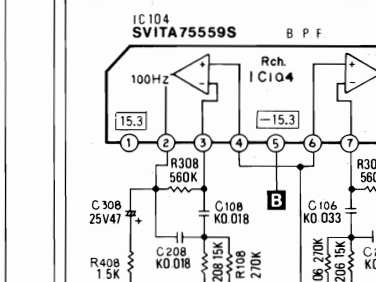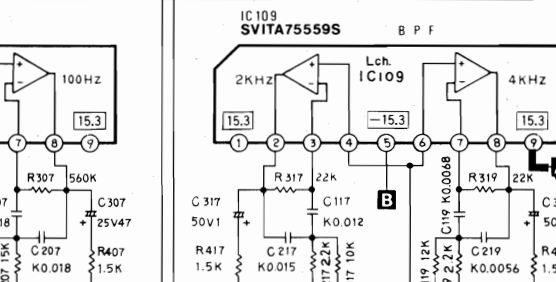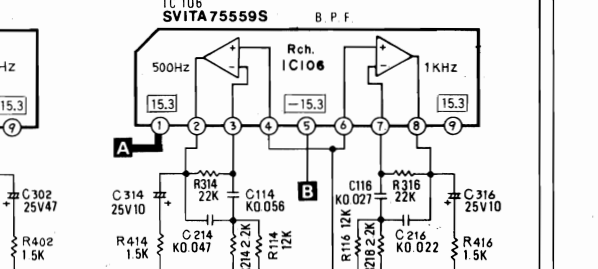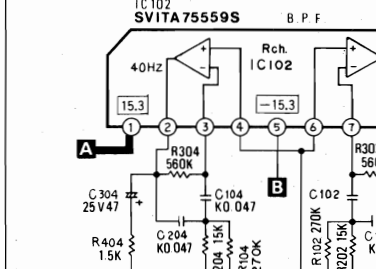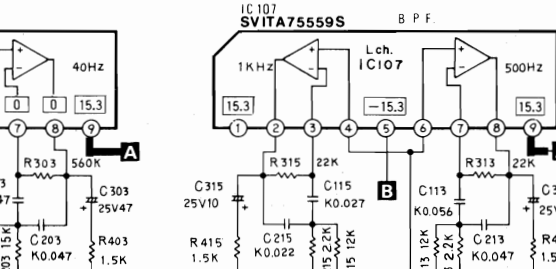


BAND LEVEL CONTROLS (L ch.)


BAND LEVEL CONTROLS (R ch.)

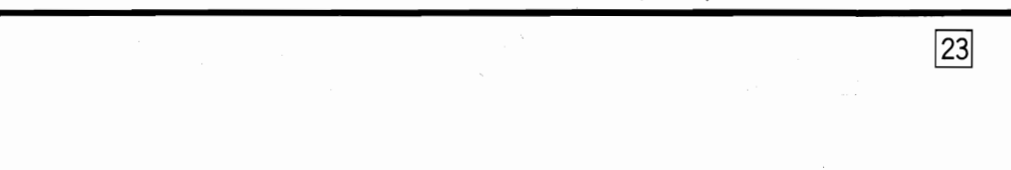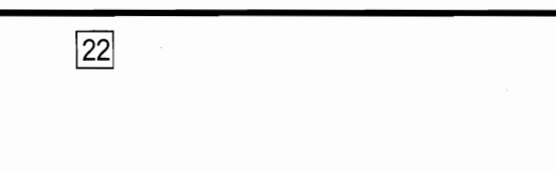

POWER ON/OFF

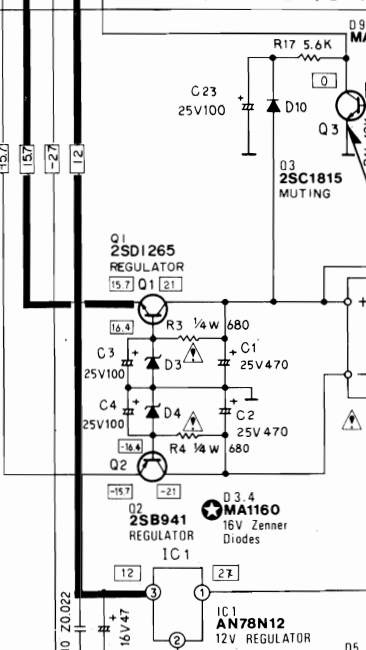


POWER SUPPLY


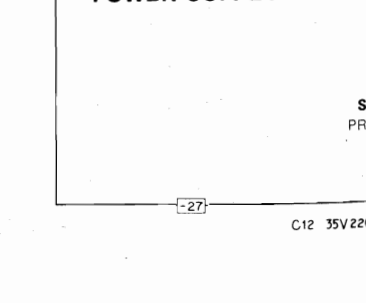


BAND PASS FILTERS OF SPECTRUM ANALYZER


IC1 (AN78N12) -> Output volta Max. power :

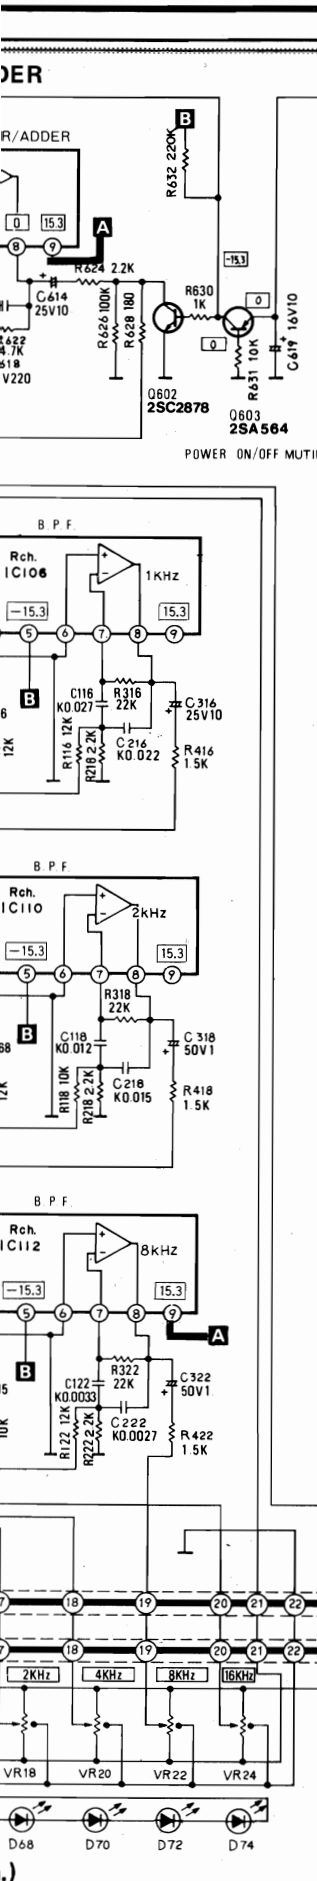


**FULL RANGE BAND LEVEL AMP.** <sup>D1</sup> Signal detector  
SVD1S2076

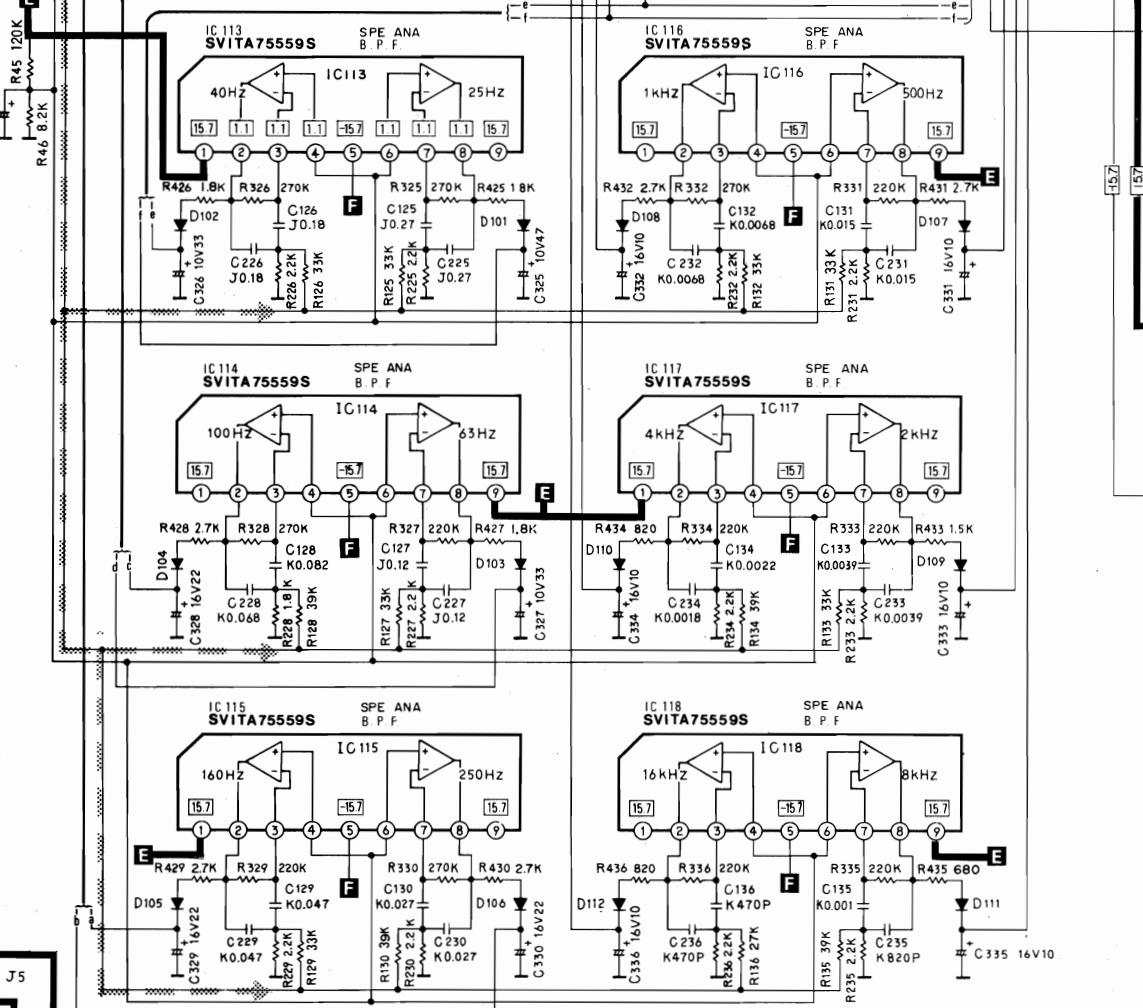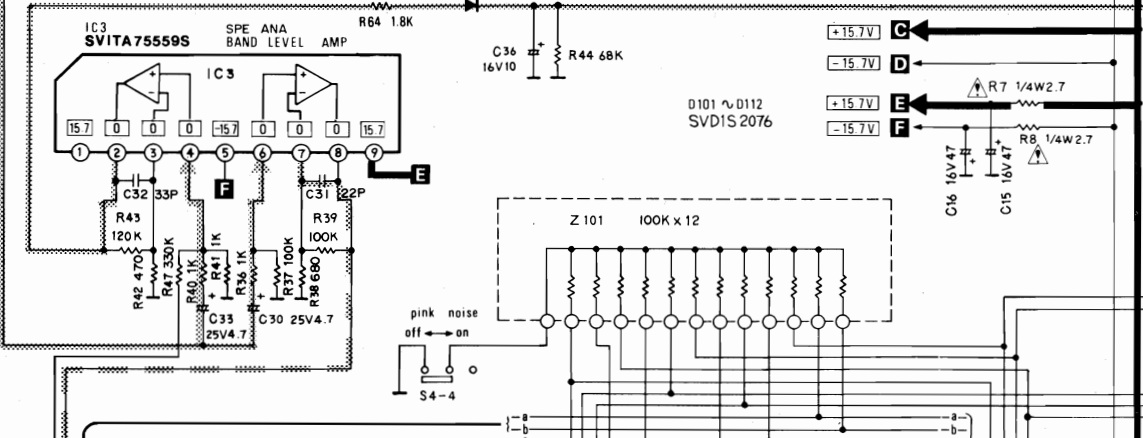


**BAND PASS FILTERS OF SPECTRUM ANALYZER**

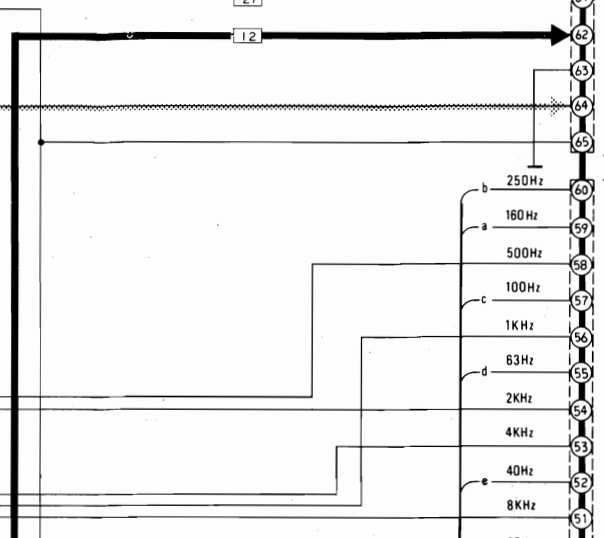

**POWER ON/OFF MUTING**

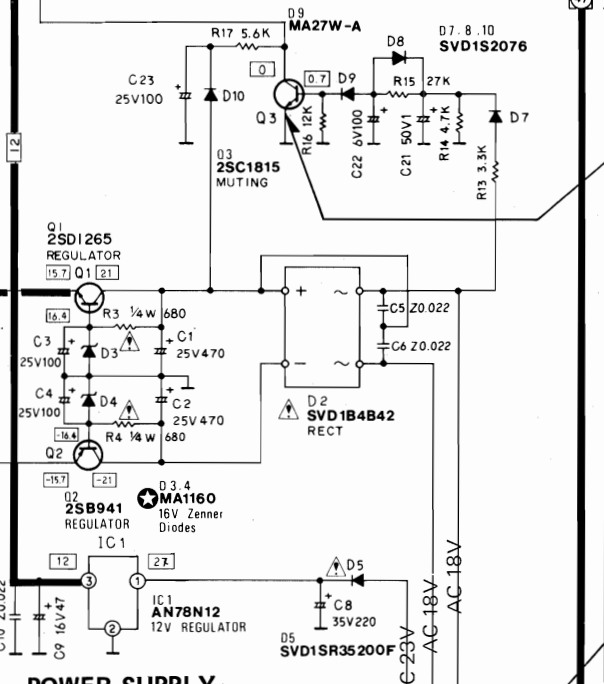



**POWER SUPPLY**

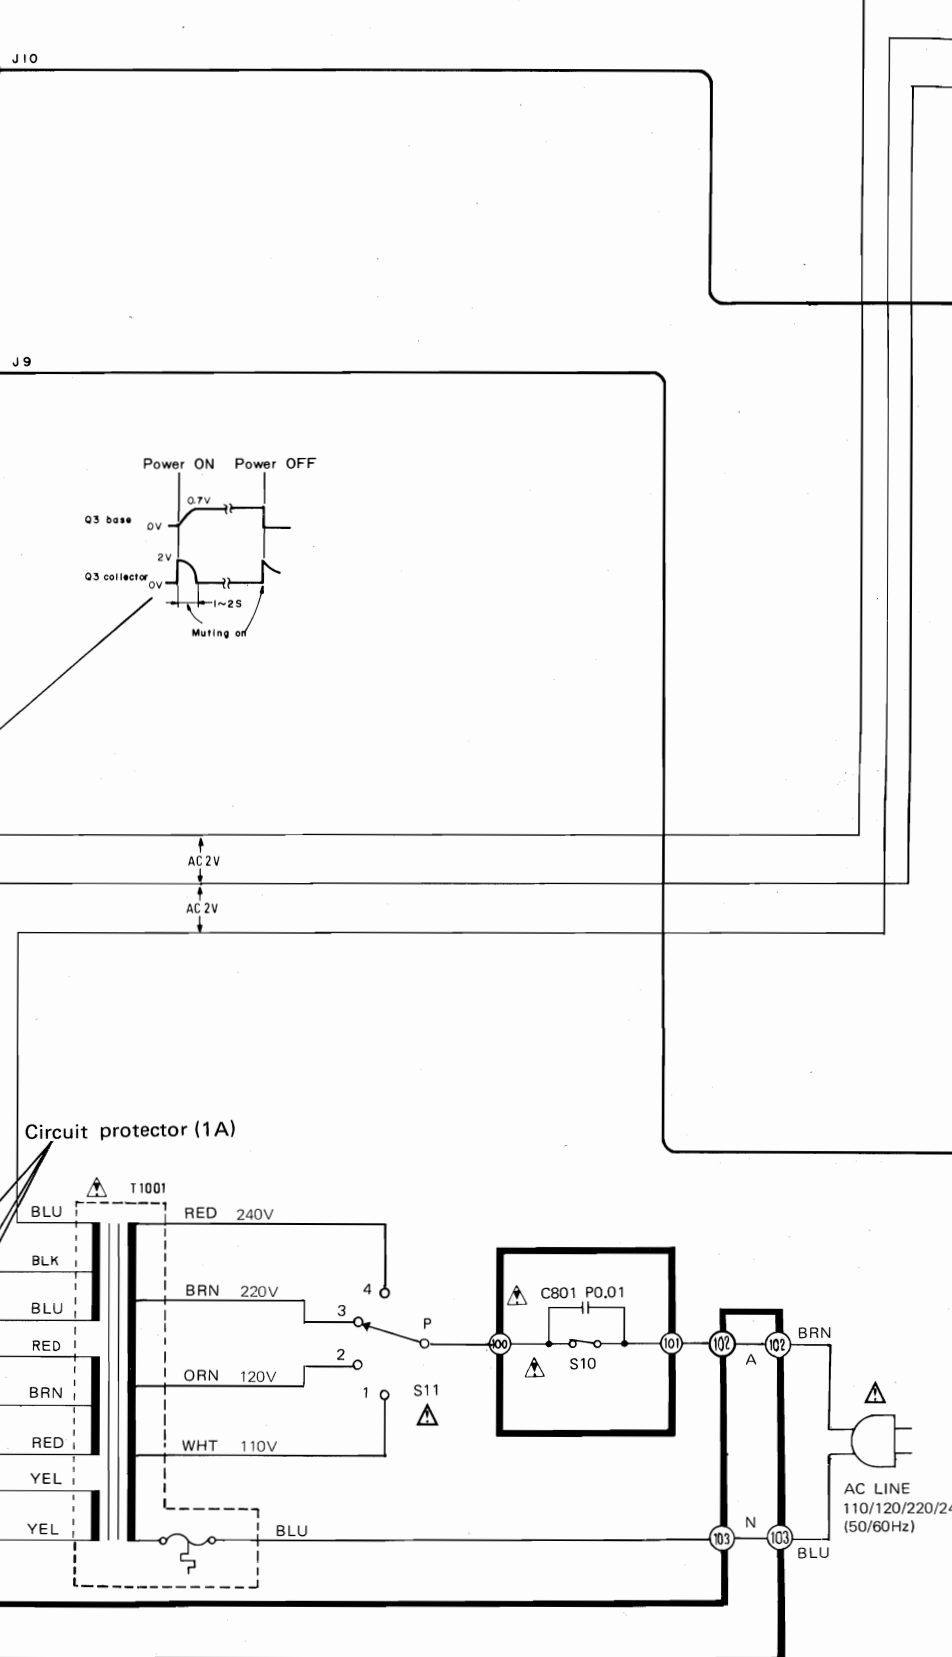

IC1 (AN78N12) → Output voltage: 12V, peak output current: 500mA, Max. power source input voltage: 35V

(Note) Voltage from **A** ~ **F** shown in circuit diagram zone 15-A is supplied to each IC of BPF circuit.

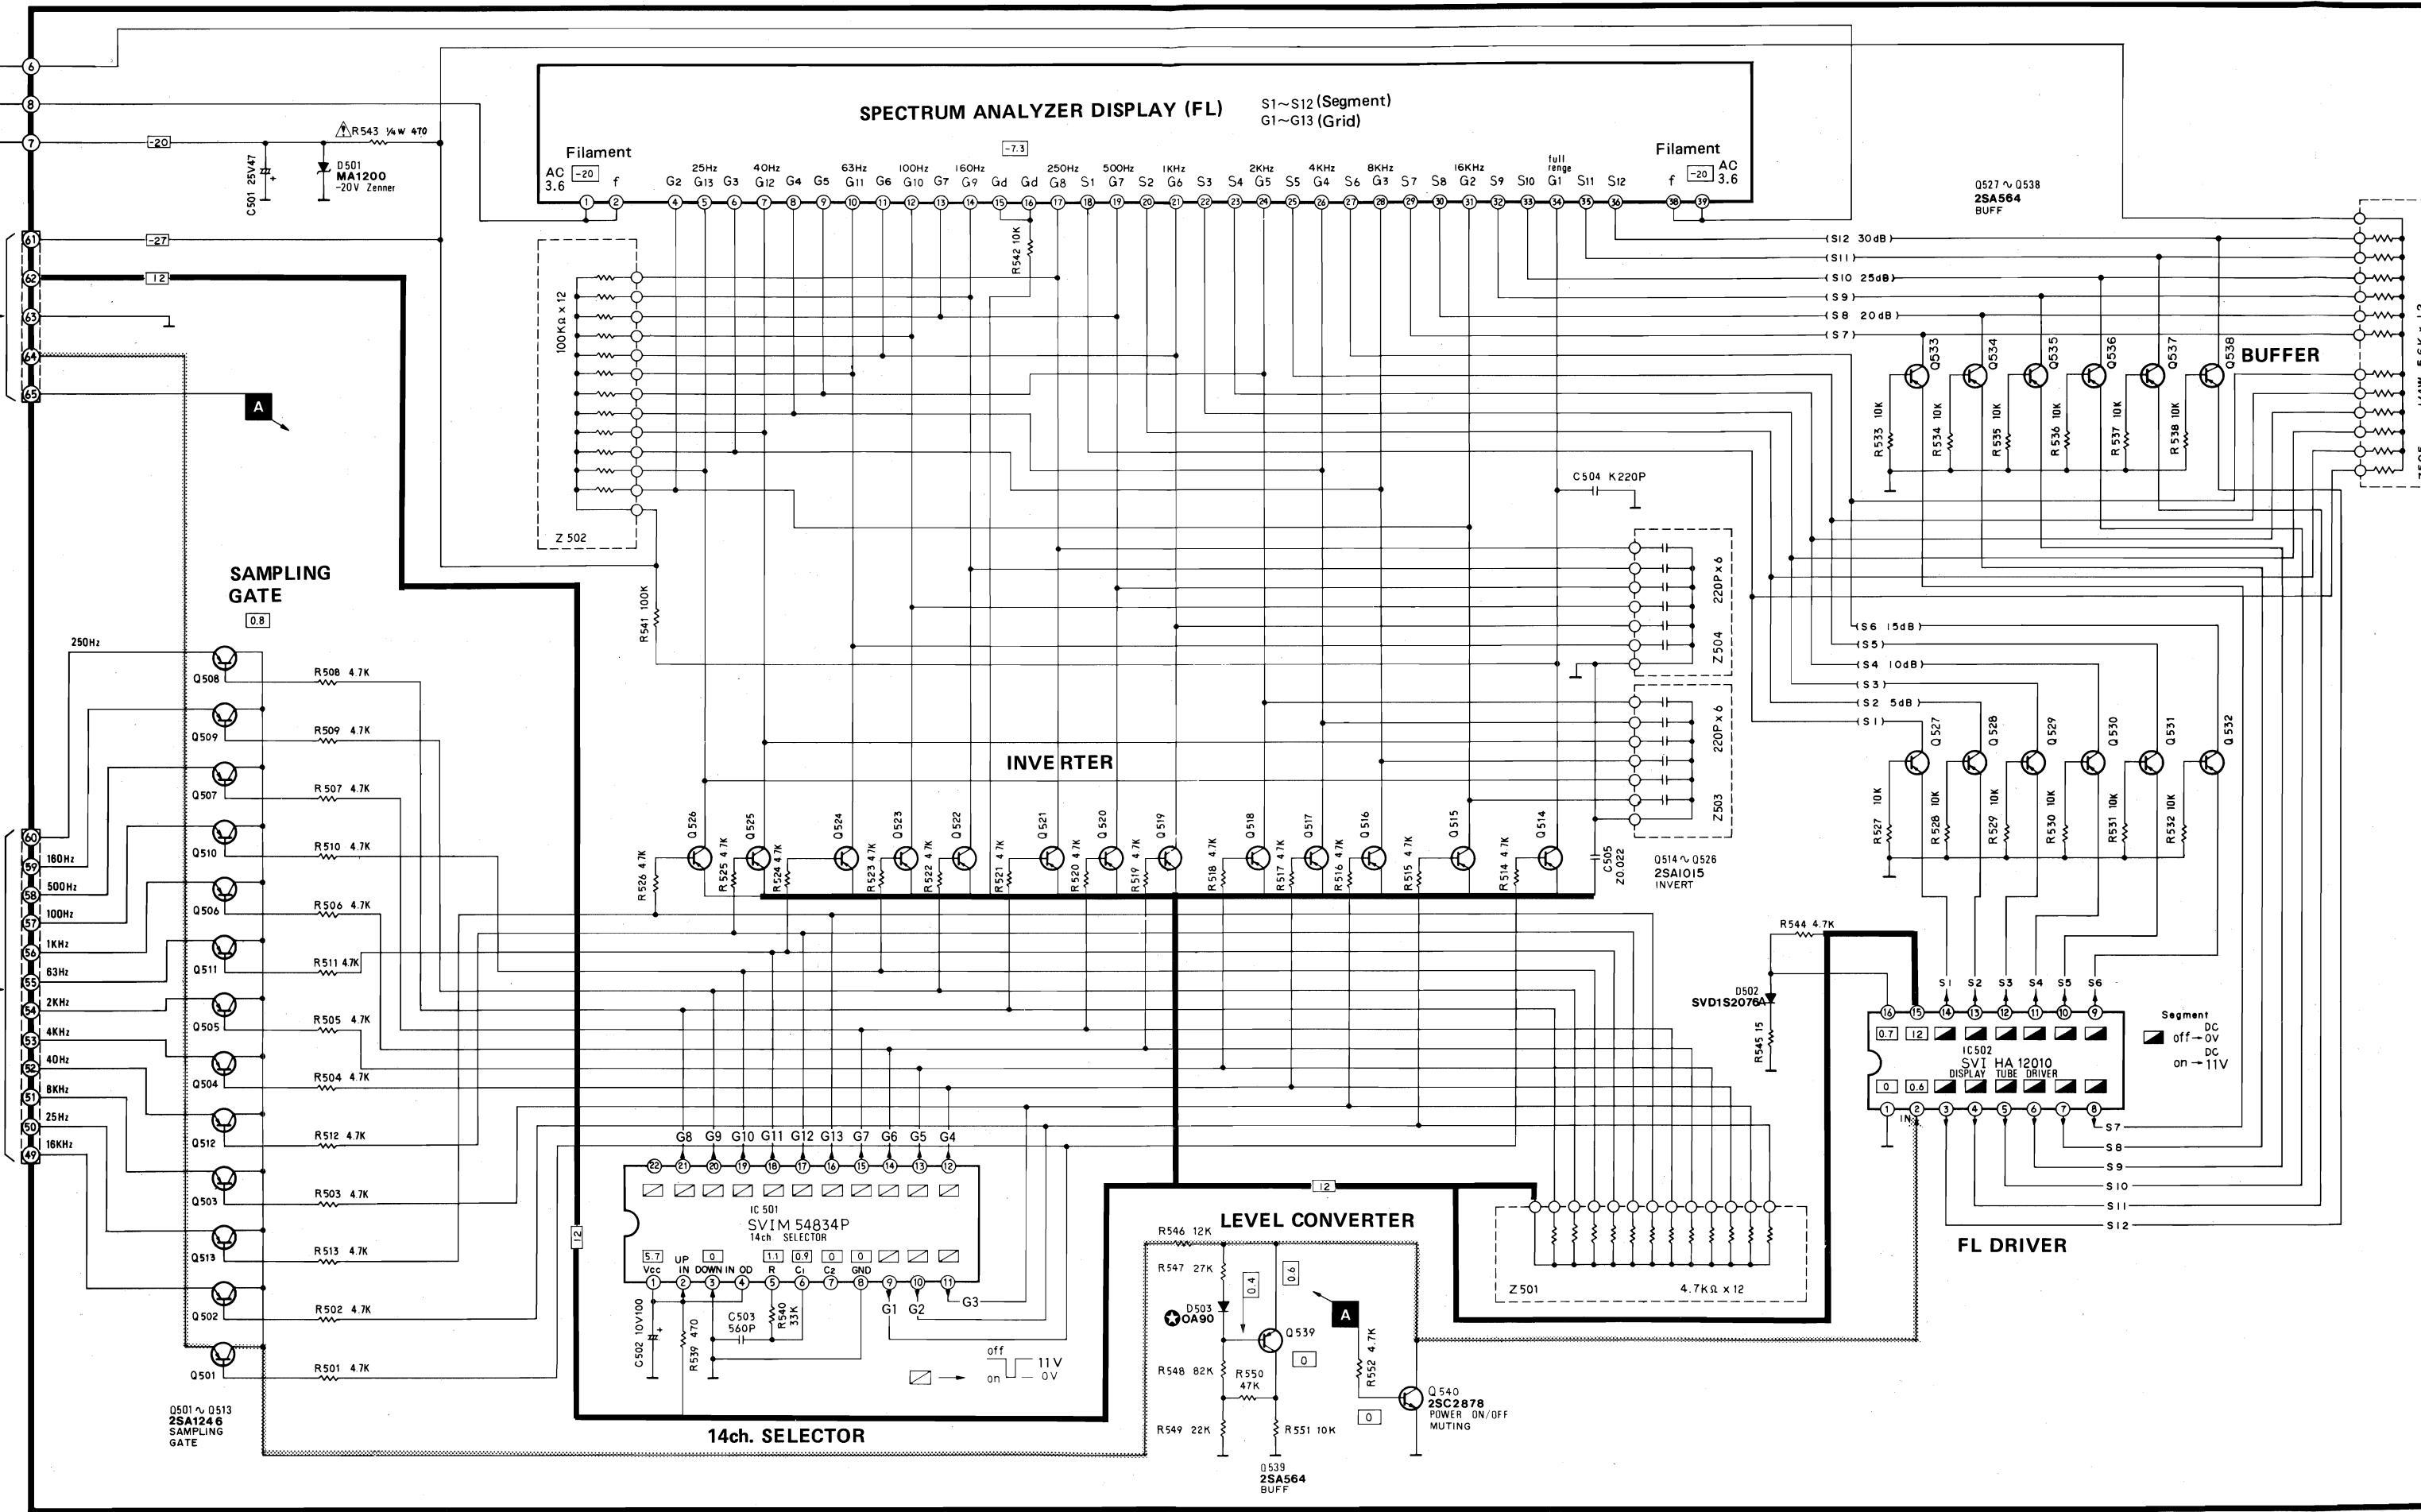

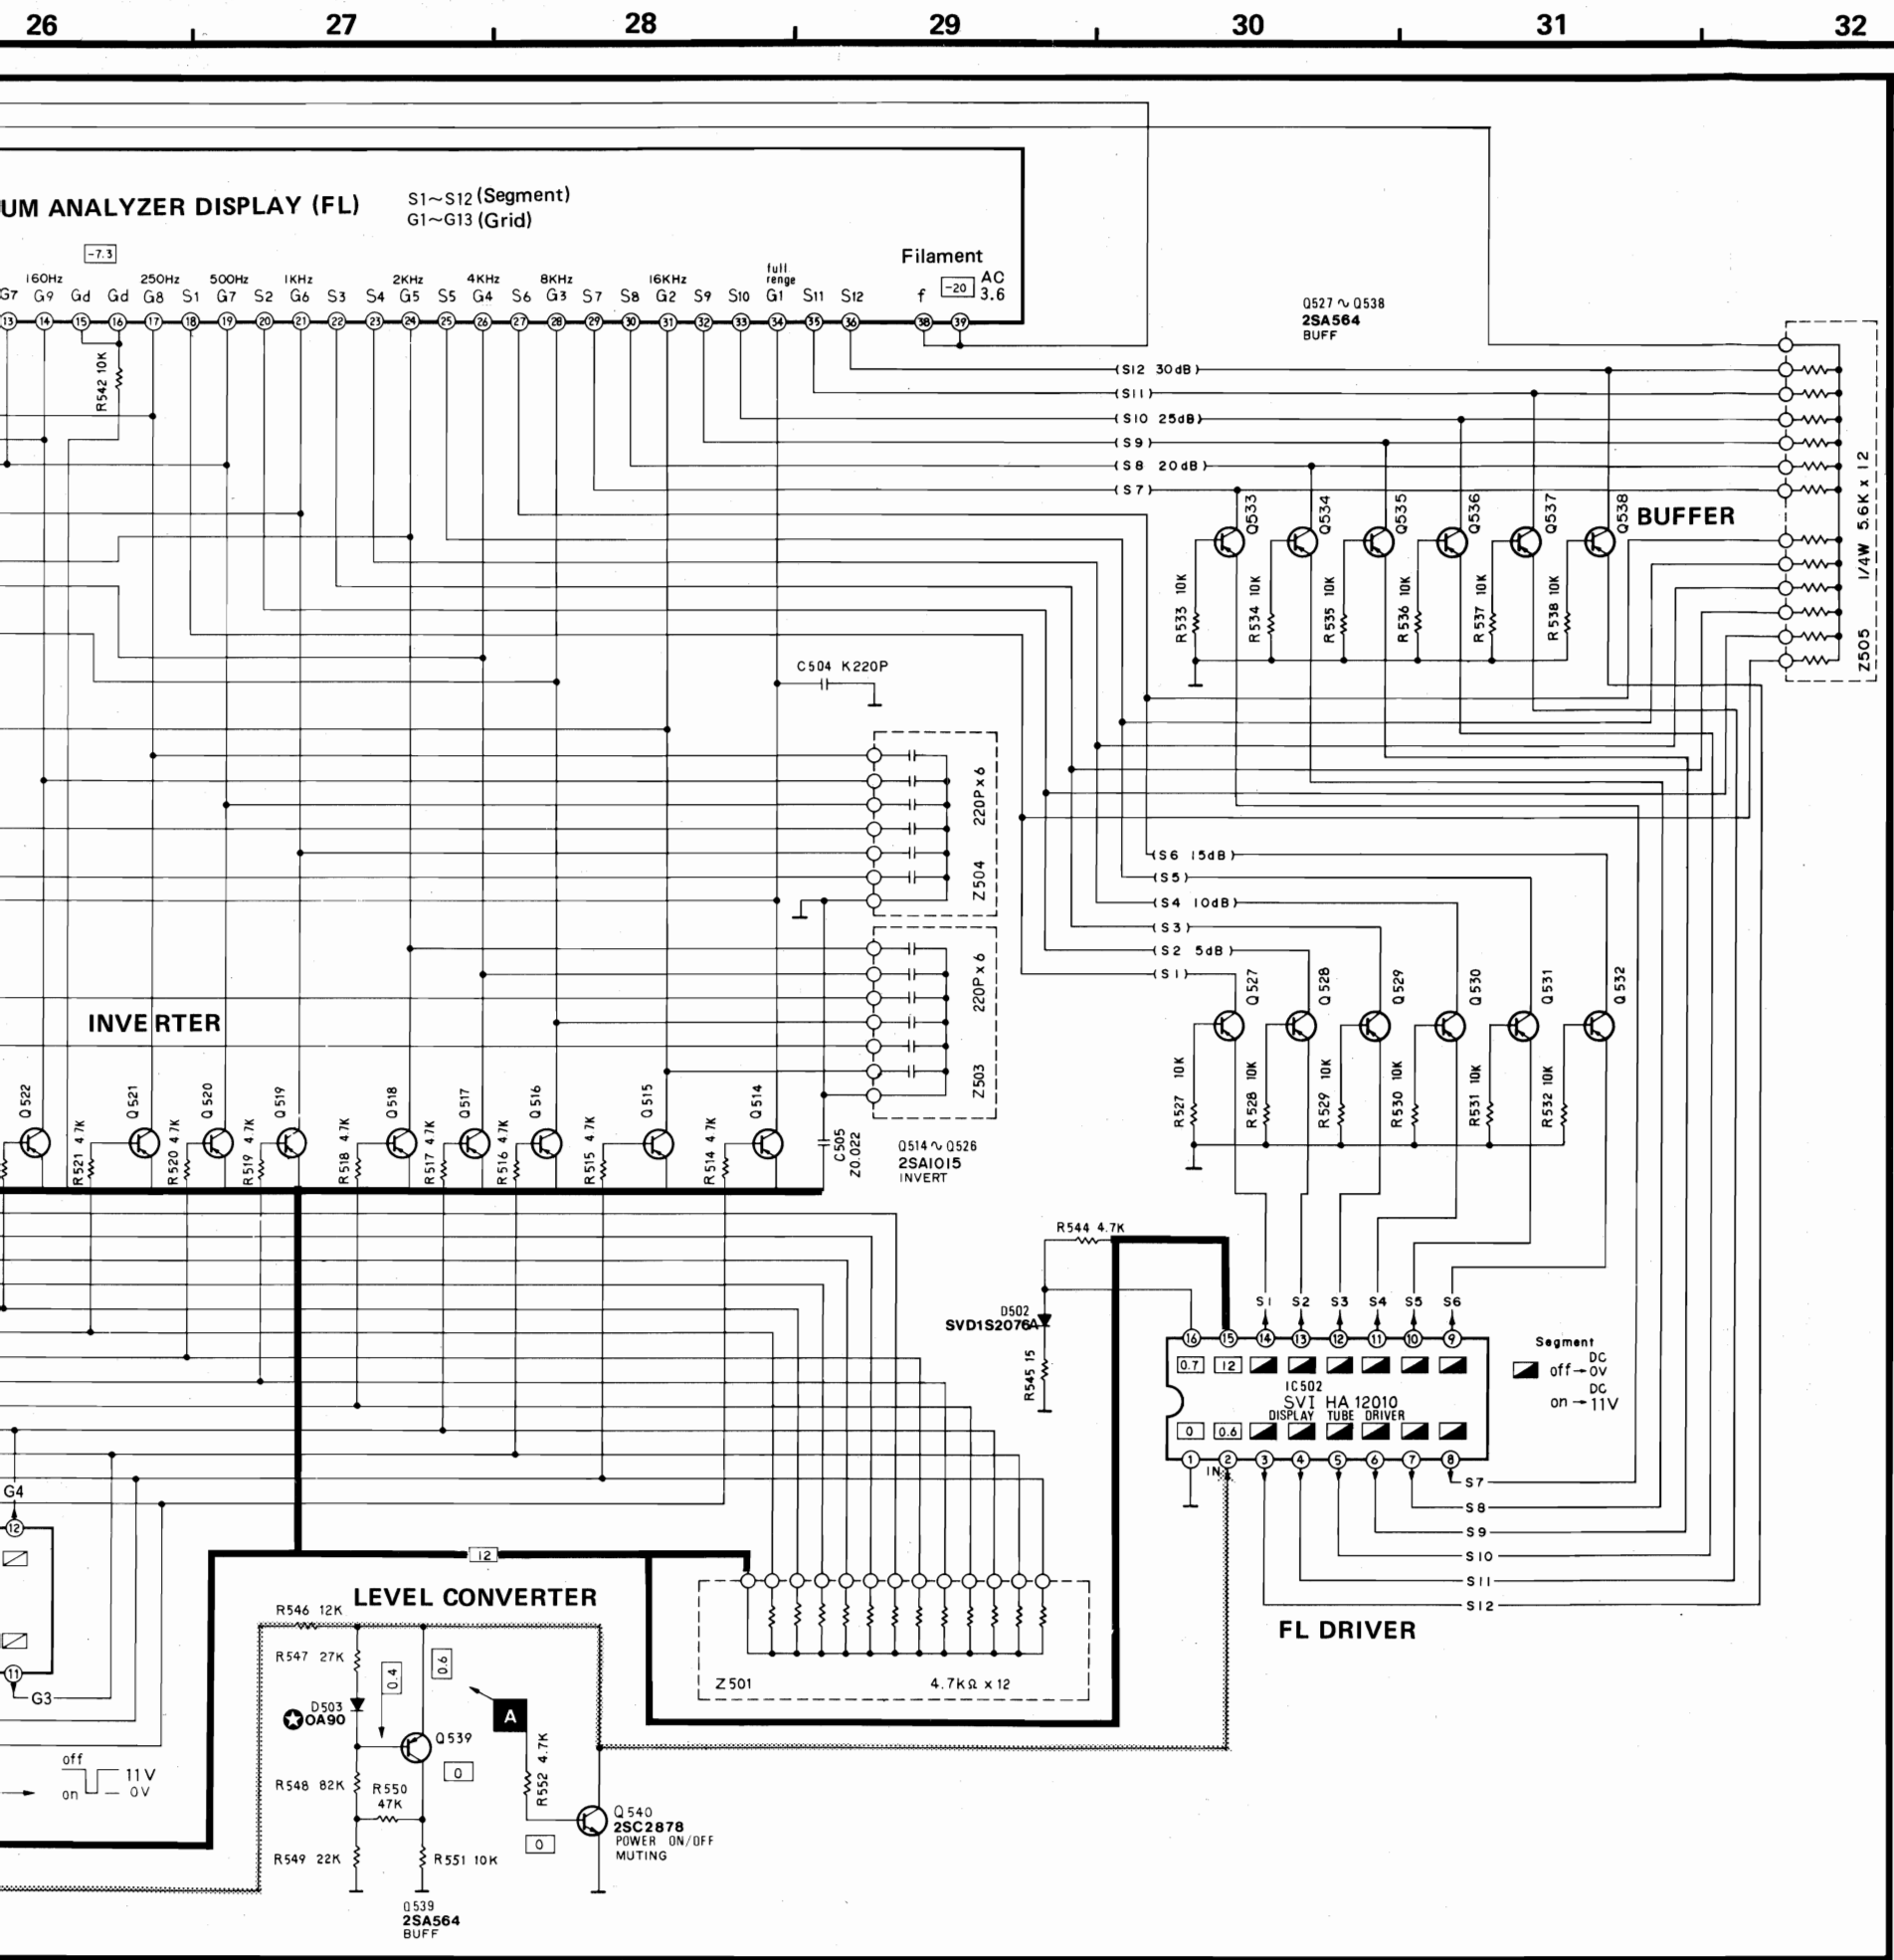

**SCHEMATIC DIAGRAM (B)**

(This schematic diagram may be modified at any time with the development of new technology.)

• Spectrum analyzer

• The part No. of transistors, IC and diodes mentioned in the schematic diagram stand for production part No. Regarding the part No. which  $\odot$  mark, the production part No. are different from the replacement part No. Therefore, when placing an order for replacement parts, please use the part No. in the replacement parts list.




Notes:

- This is basic circuit diagram (For continental Europe) of this unit.
- Regarding the circuits to be changed in the basic circuit diagram (For continental Europe) and related areas ([PA], [PE] and [XA]) refer to the booklet contains (Order No. SD83062526C9-A).
- S1 ~ S3** : Input selector in "source" position.  
(S1-1 ~ S1-3 : source, S2-1 ~ S2-6 : Tape 1, S3-1 ~ S3-5 : Tape 2)
- S4-1 ~ S4-2** : Pink noise generator switch in "off" position.
- S5-1 ~ S5-6** : Equalizer on/off selector in "on" position.
- S6-1 ~ S6-2** : Recording mode selector in "EQ" position.  
(straight  $\leftrightarrow$  EQ)
- S7-1 ~ S7-2** : Display mode (left channel) switch in "on" position.
- S8-1 ~ S8-2** : Display mode (right channel) switch in "on" position.
- S9-1** : Microphone attenuator switch in "0dB" position.  
(0dB  $\leftrightarrow$  -20dB)  
\* S9-2 is muting switch incase attenuator selection.
- S10** : Power source switch in "on" position.
- S11** : Voltage selector in "220V" position.  
(110V  $\leftrightarrow$  120V  $\leftrightarrow$  220V  $\leftrightarrow$  240V)
- The circuit is same for both L and R channels.
- Indicated voltage values are the standard values for the DC electronic circuit tester (high impedance) with the ground point taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.
- Signal lines of left channel.
- Signal lines of band pass filter.
- Signal lines of mic.
- Positive (+B) voltage lines.
- Important safety notice:  
Components identified by  $\Delta$  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.





BLOCK DIAGRAM

SPECTRUM

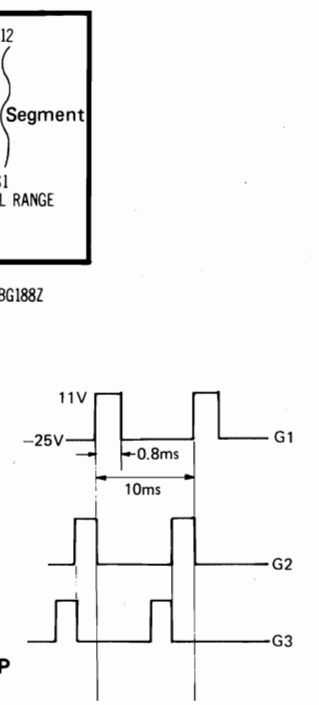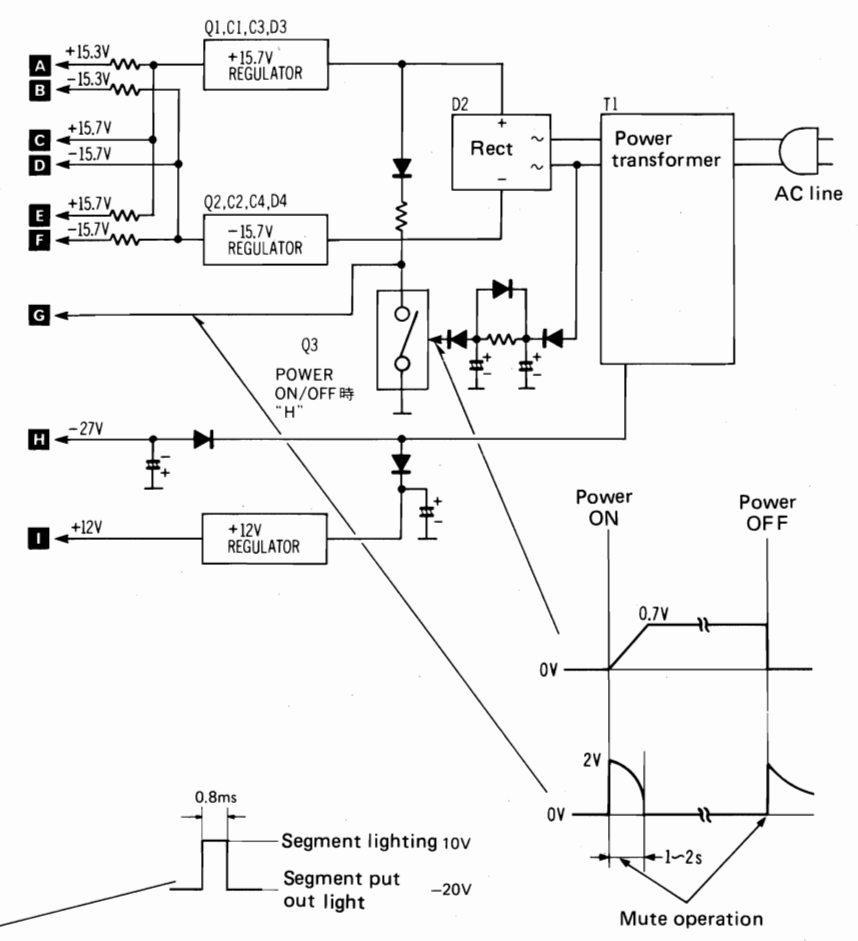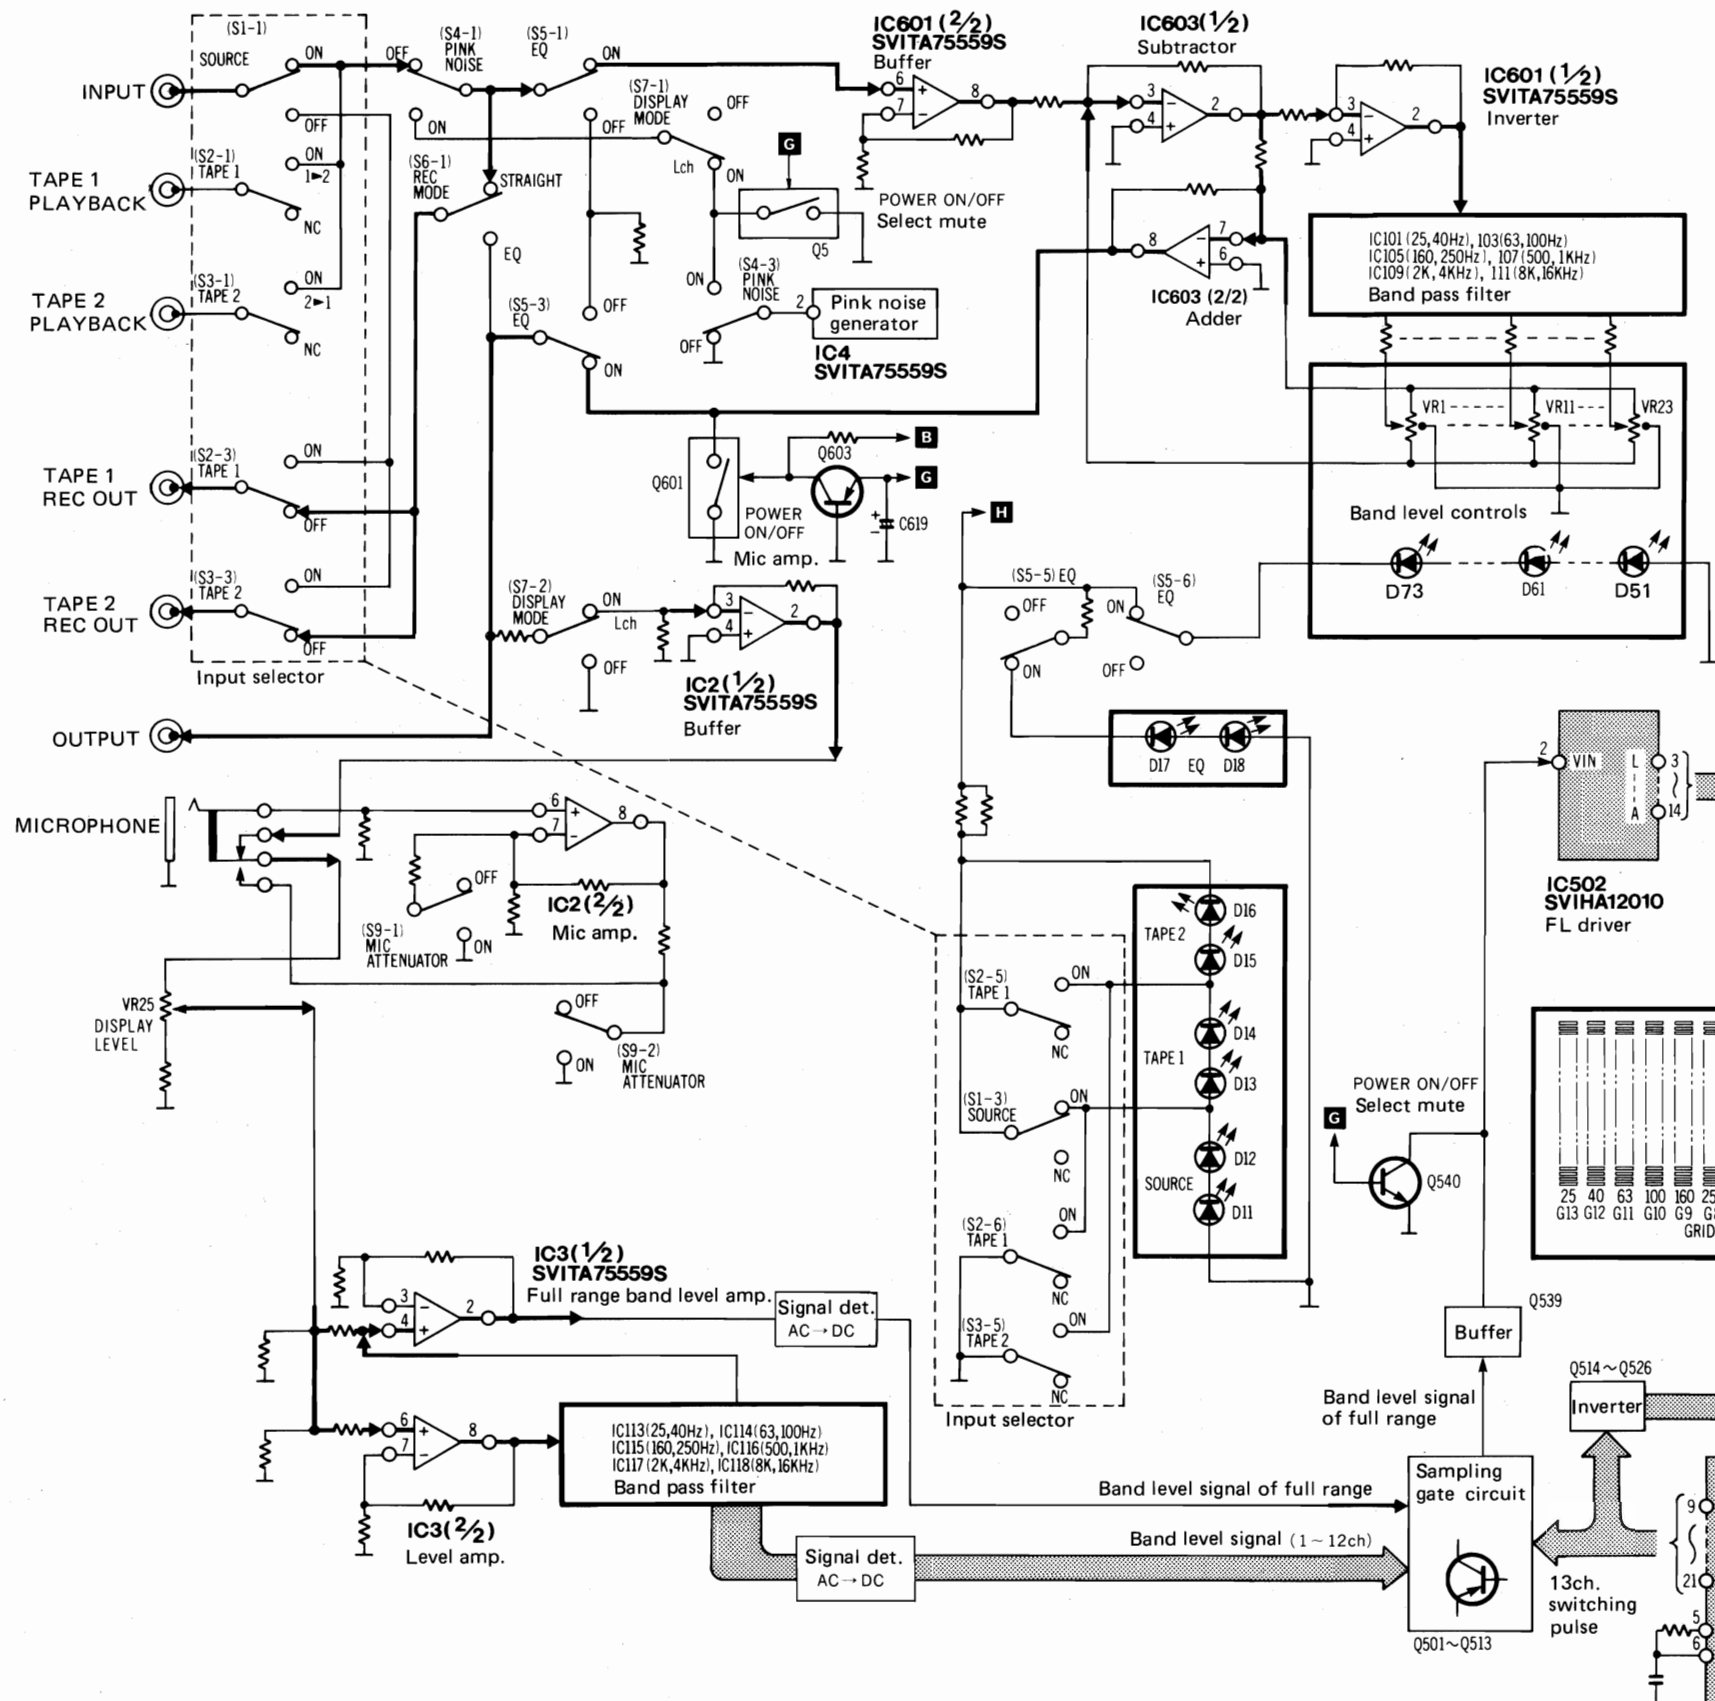

■ SPECTRUM ANALYZER(FL) AND TIMING CHART

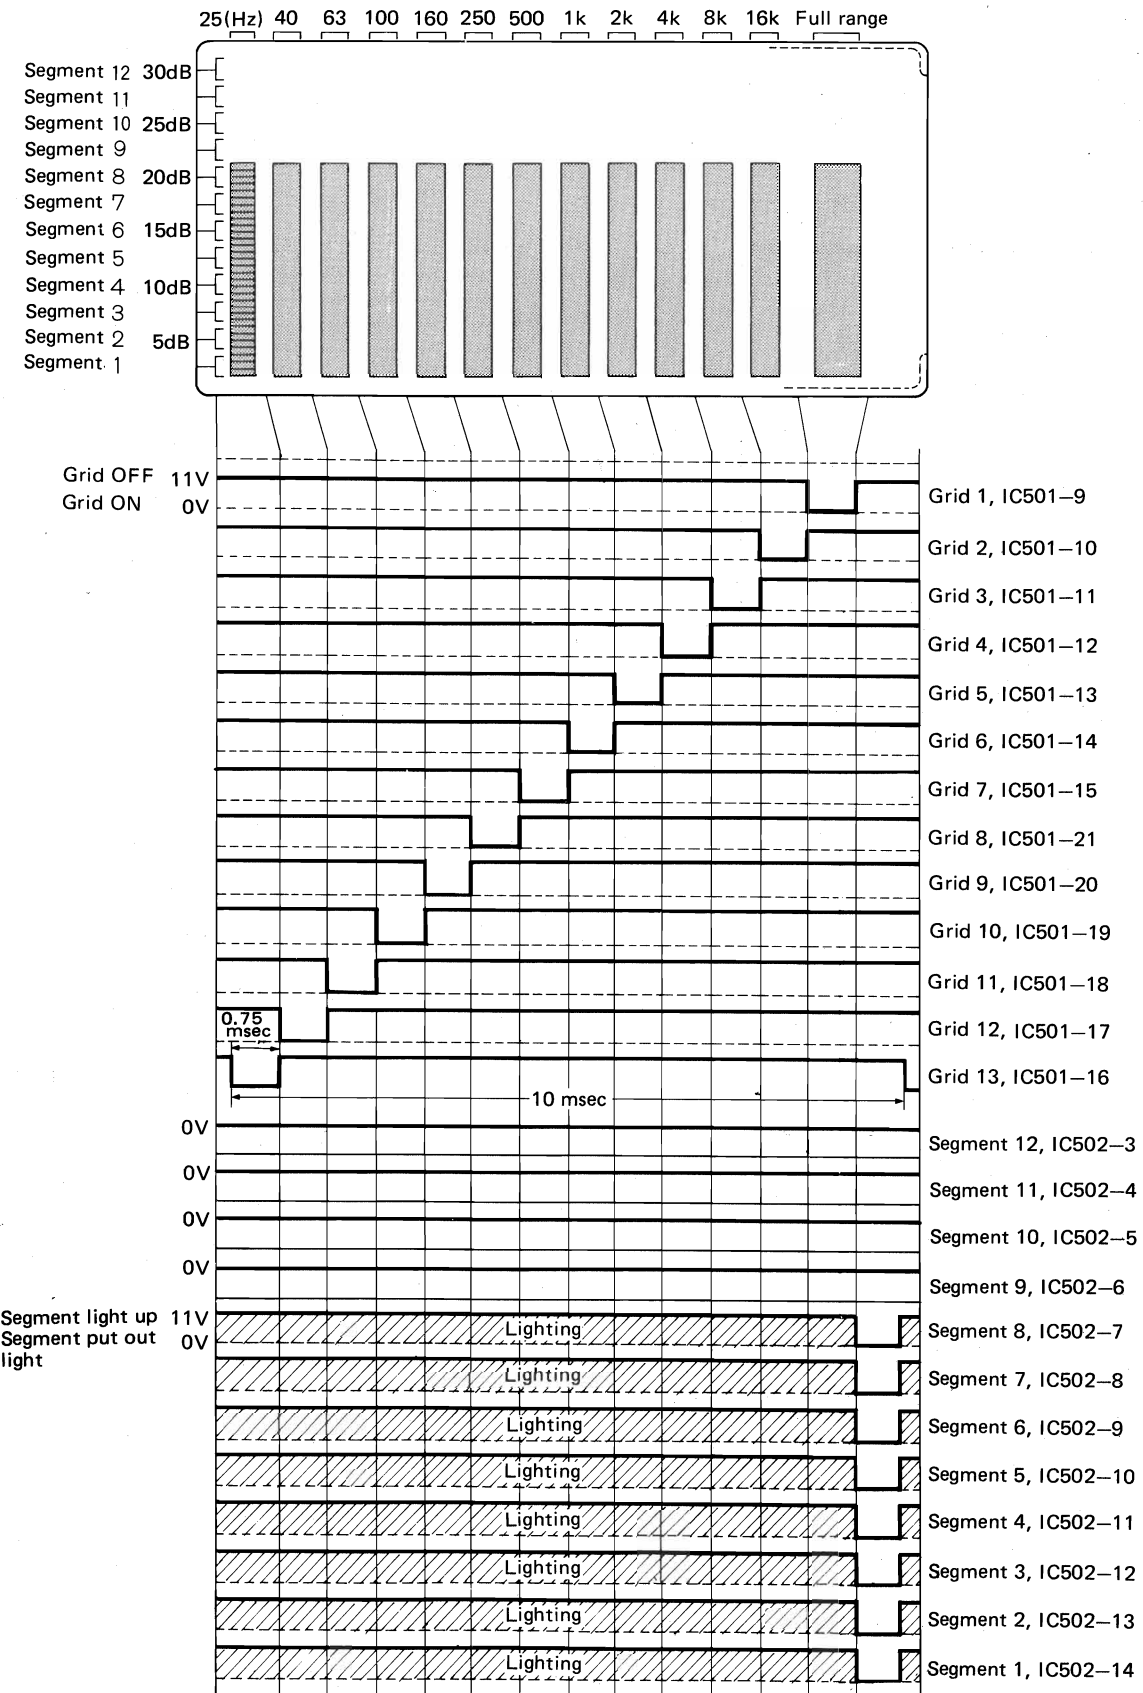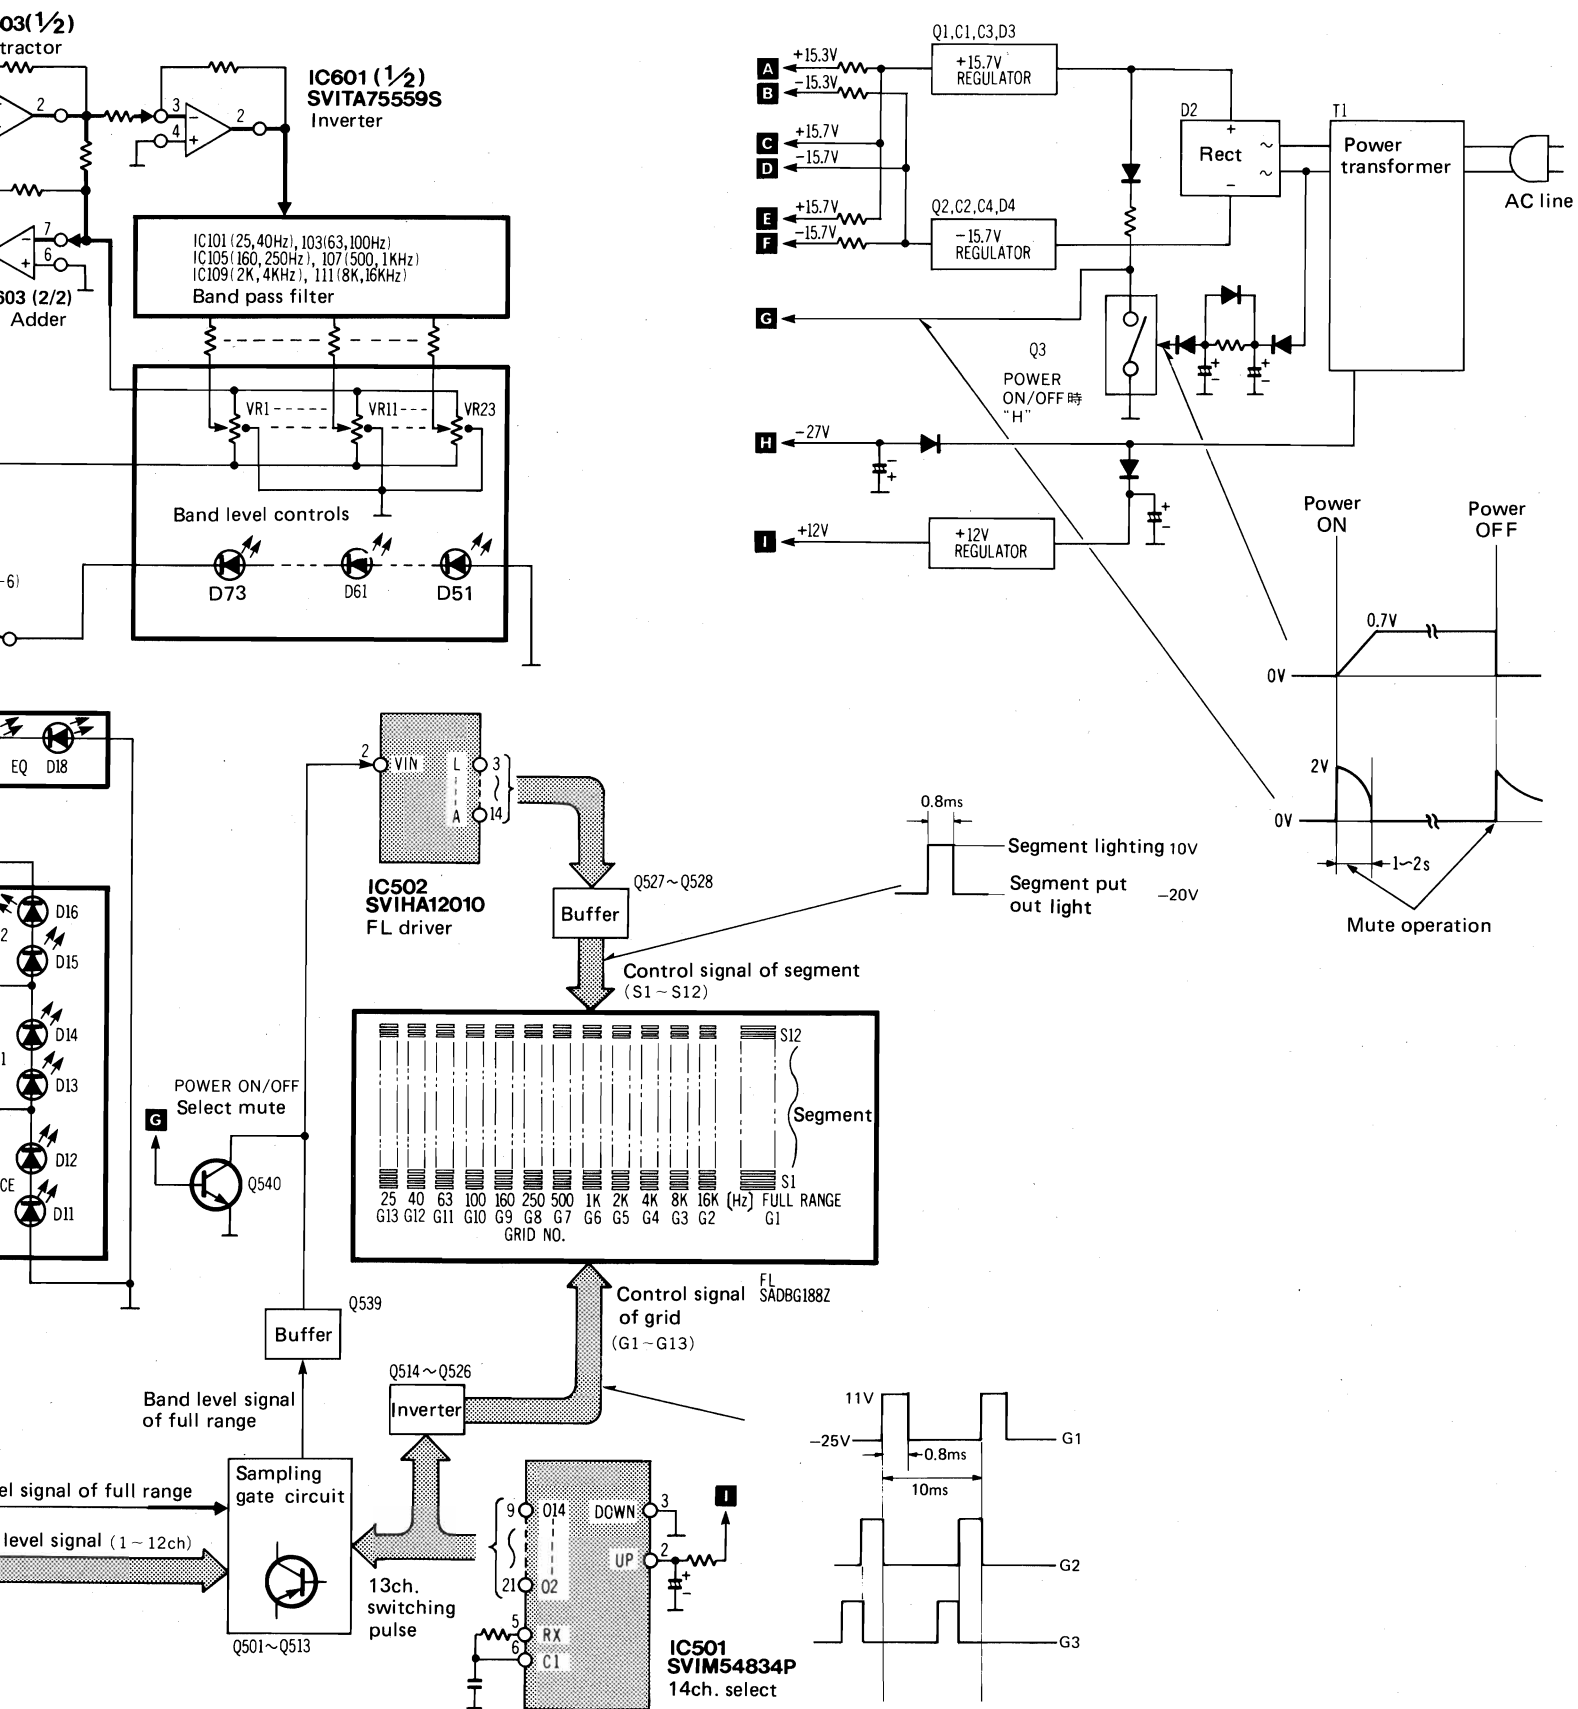

# Service Manual

Stereo Graphic Equalizer  
(With Spectrum Analyzer)

Equalizer

## SH-8055

Color

(K) . . . Black Type

| Color | Area                         |
|-------|------------------------------|
| (K)   | [PA] . . . Far East PX       |
| (K)   | [PE] . . . European Military |

Please use this manual together with the service manual for Model No. SH-8055, Order No. SD83062526C9.

### CHANGE

## REPLACEMENT PARTS LIST

### Notes:

- Mentioned in this parts list are only those changed in Model No. SH-8055 for destination [PA, PE] area (silver type).
- Important safety notice:  
Components identified by  $\Delta$  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

| Ref. No.                         | Change of Parts No.            |                               | Part Name & Description                | Per Set (Pcs.) | Remarks |
|----------------------------------|--------------------------------|-------------------------------|--|----------------|---------|
|                                  | SH-8055<br>[PA,PE] Silver Type | SH-8055<br>[PA,PE] Black Type |  |                |         |
| <b>RESISTORS</b>                 |                                |                               |  |                |         |
| R45                              | ERD25TJ124                     | ERD25TJ154                    | Carbon, 150k $\Omega$ , 1/4W, $\pm$ 5% | 1              |         |
| R539                             | ERD25FJ471                     | ERD25FJ561                    | Carbon, 560 $\Omega$ , 1/4W, $\pm$ 5%  | 1              | Fig. 1  |
| R556                             | —————                          | ERD25FJ472                    | Carbon, 4.7k $\Omega$ , 1/4W, $\pm$ 5% | 1              | Fig. 1  |
| R643~646                         | ERD25FJ152                     | ERD25FJ222                    | Carbon, 2.2k $\Omega$ , 1/4W, $\pm$ 5% | 4              |         |
| <b>CABINET and CHASSIS PARTS</b> |                                |                               |  |                |         |
| 1                                | SGWK210PA                      | SGWK210BA                     | Front Panel                            | 1              |         |
| 2                                | SDUK8                          | SDUK8-1                       | Dial Plate                             | 1              |         |
| 3                                | SGXK75                         | SGXK75-1                      | Ornament Cover                         | 1              |         |
| 4                                | SGXK76                         | SGXK76-1                      | Ornament Cover                         | 1              |         |
| 5                                | SGUK10                         | SGUK10-1                      | Transparent Plate                      | 1              |         |
| 6                                | SGXK74                         | SGXK74-1                      | Sub Front Panel                        | 1              |         |
| 8                                | SBD69-3K                       | SBD69-1                       | Button, Display Level                  | 1              |         |
| 10                               | SBC475-1                       | SBC475                        | Button                                 | 4              |         |
| 26                               | SKCK110S                       | SKCK110B                      | Cabinet                                | 1              |         |
| <b>SCREWS</b>                    |                                |                               |  |                |         |
| N1                               | XTB3+8B                        | XTB3+8BFZ                     | Screw, Panel M'tg.                     | 3              |         |
| N12                              | SNE2095-2                      | SNE2095-5                     | Screw, Cabinet M'tg.                   | 4              |         |
| <b>PACKING PARTS</b>             |                                |                               |  |                |         |
| P1                               | SPGK116                        | SPGK208                       | Carton Box                             | 1              |         |
| P4                               | SPP699                         | SPPK47                        | Polyethylene Bag                       | 1              |         |

# Technics

Panasonic Tokyo Office  
Matsushita Electric Trading Co., Ltd.  
1-2, 1-chome, Shiba-koen, Minato-ku, Tokyo 105 Japan

Matsushita Electric Trading Co., Ltd.  
P.O. Box 288, Central Osaka Japan



## ■ ADDITION OF RESISTOR

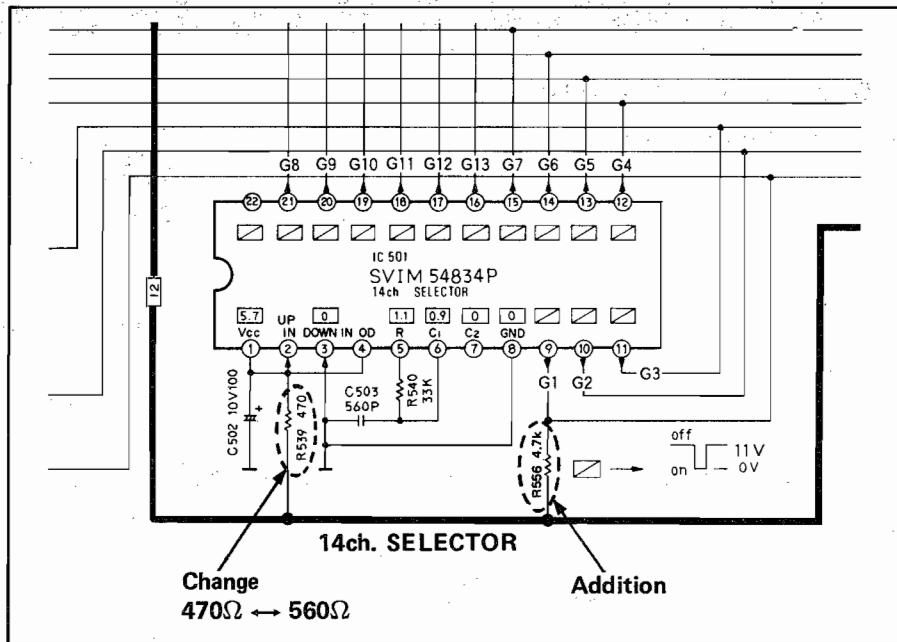


Fig. 1

## ■ POWER SOURCE CIRCUIT

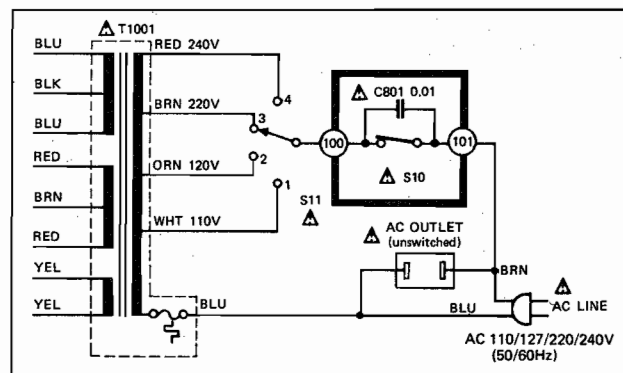


Fig. 2

# Parts Change Notice

SH-8055 [M, MC]  
 Model No. SH-8055 S/K [E, EK, EF, EB, EH, EGA, XA, XL]

Service Manual  
 Order No. SD83062579C1  
 Order No. SD83062569C9

Please revise the original parts list in the Service Manual to conform to the change (s) shown herein. If new part numbers are shown, be sure to use them when ordering parts.

| Reason for Change                |                                 | *The circled item indicates the reason. If no marking, see the Notes in the bottom column.              |  |             |                          |   |
|----------------------------------|---------------------------------|---|--|-------------|--------------------------|---|
| 1.                               | Improve performance             |   |  |             |                          |   |
| 2.                               | Change of material or dimension |   |  |             |                          |   |
| 3.                               | To meet approved specification  |   |  |             |                          |   |
| 4.                               | Standardization                 |   |  |             |                          |   |
| 5.                               | Addition                        |   |  |             |                          |   |
| 6.                               | Deletion                        |   |  |             |                          |   |
| 7.                               | Correction                      |   |  |             |                          |   |
| 8.                               | Other                           |   |  |             |                          |   |
| Interchangeability Code          |                                 | **The circled item Indicates the interchangeability. If no marking, see the Notes in the bottom column. |  |             |                          |   |
|                                  | Parts                           | Set Production  |  |             |                          |   |
| A                                | Original                        | Early   | Original or new parts may be used in early or late production set. Use original parts until exhausted, then stock new parts.   |             |                          |   |
|                                  | New                             | Late  |  |             |                          |   |
| B                                | Original                        | Early   | Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts. |             |                          |   |
|                                  | New                             | Late  |  |             |                          |   |
| C                                | Original                        | Early   | New parts only may be used in early or late production sets. Stock new parts.  |             |                          |   |
|                                  | New                             | Late  |  |             |                          |   |
| D                                | Original                        | Early   | Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.                           |             |                          |   |
|                                  | New                             | Late  |  |             |                          |   |
| E                                | Other                           |   |  |             |                          |   |
| Part Number                      |                                 |   |  |             |                          |   |
| Model No.                        | Ref. No.                        | Original Part No.   | New Part No.   | Notes (***) | Part Name & Descriptions |   |
| <b>CABINET and CHASSIS PARTS</b> |                                 |   |  |             |                          |   |
| SH-8055                          | 3                               | SGX75   | SGX76  | 7, E        | Ornament                 | 1 |
|                                  | 4                               | SGX76   | SGX75  | 7, E        | Ornament                 | 1 |
| SH-8055(S/K)                     | 3                               | SGXK75  | SGX76  | 7, E        | Ornament                 | 1 |
|                                  | 3                               | SGX75-1   | SGX76-1  | 7, E        | Ornament                 | 1 |
|                                  | 4                               | SGX76   | SGX75  | 7, E        | Ornament                 | 1 |
|                                  | 4                               | SGX76-1   | SGX75-1  | 7, E        | Ornament                 | 1 |

File this Parts Change Notice with your copy of the Service Manual.

## Technics

Matsushita Service Company  
 50 Meadowland Parkway,  
 Secaucus,  
 New Jersey 07094

Panasonic Hawaii, Inc.  
 91-238 Kauhū St., Ewa Beach  
 P.O. Box 774  
 Honolulu, Hawaii 96808-0774

Matsushita Electric Trading Co., Ltd.  
 P.O. Box 288, Central Osaka Japan

Panasonic Sales Company,  
 Division of Matsushita Electric  
 of Puerto Rico, Inc.  
 Ave. 65 De Infanteria, KM 9.7  
 Victoria, Industrial Park  
 Carolina, Puerto Rico 00630

Matsushita Electric  
 of Canada Limited  
 5770 Ambler Drive, Mississauga,  
 Ontario, L4W 2T3

Printed in Japan  
 851000400 © IM

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry should be supported by a valid receipt or invoice. This ensures transparency and allows for easy verification of the data.

In the second section, the author details the various methods used to collect and analyze the data. This includes both primary and secondary research techniques. The primary research involved direct observation and interviews with key stakeholders, while secondary research focused on reviewing existing literature and reports.

The third section presents the findings of the study. It highlights several key trends and patterns observed in the data. For example, there was a significant increase in the use of digital tools, which has led to more efficient processes. However, it also noted some challenges, such as the need for better training and support for users.

Finally, the document concludes with a series of recommendations for future work. These include the need for continued monitoring and evaluation of the implemented changes, as well as the importance of fostering a culture of continuous improvement. The author also suggests further research into the long-term impact of these initiatives.

# Service Manual

Stereo Graphic Equalizer  
(With Spectrum Analyzer)

Equalizer

## SH-8055

Color

(K) . . . Black Type

| Color | Area                         |
|-------|------------------------------|
| (K)   | [PA] . . . Far East PX       |
| (K)   | [PE] . . . European Military |

Please use this manual together with the service manual for Model No. SH-8055, Order No. SD83062526C9.

### CHANGE

## REPLACEMENT PARTS LIST

### Notes:

- (1) Mentioned in this parts list are only those changed in Model No. SH-8055 for destination [PA, PE] area (silver type).
- (2) Important safety notice:  
Components identified by  $\Delta$  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

| Ref. No.                         | Change of Parts No.             |                                | Part Name & Description                | Per Set (Pcs.) | Remarks |
|----------------------------------|---------------------------------|--------------------------------|--|----------------|---------|
|                                  | SH-8055<br>[PA, PE] Silver Type | SH-8055<br>[PA, PE] Black Type |  |                |         |
| <b>RESISTORS</b>                 |                                 |                                |  |                |         |
| R45                              | ERD25TJ124                      | ERD25TJ154                     | Carbon, 150k $\Omega$ , 1/4W, $\pm$ 5% | 1              |         |
| R539                             | ERD25FJ471                      | ERD25FJ561                     | Carbon, 560 $\Omega$ , 1/4W, $\pm$ 5%  | 1              | Fig. 1  |
| R556                             | —                               | ERD25FJ472                     | Carbon, 4.7k $\Omega$ , 1/4W, $\pm$ 5% | 1              | Fig. 1  |
| R643~646                         | ERD25FJ152                      | ERD25FJ222                     | Carbon, 2.2k $\Omega$ , 1/4W, $\pm$ 5% | 4              |         |
| <b>CABINET and CHASSIS PARTS</b> |                                 |                                |  |                |         |
| 1                                | SGWK210PA                       | SGWK210BA                      | Front Panel                            | 1              |         |
| 2                                | SDUK8                           | SDUK8-1                        | Dial Plate                             | 1              |         |
| 3                                | SGXK75                          | SGXK75-1                       | Ornament Cover                         | 1              |         |
| 4                                | SGXK76                          | SGXK76-1                       | Ornament Cover                         | 1              |         |
| 5                                | SGUK10                          | SGUK10-1                       | Transparent Plate                      | 1              |         |
| 6                                | SGXK74                          | SGXK74-1                       | Sub Front Panel                        | 1              |         |
| 8                                | SBD69-3K                        | SBD69-1                        | Button, Display Level                  | 1              |         |
| 10                               | SBC475-1                        | SBC475                         | Button                                 | 4              |         |
| 26                               | SKCK110S                        | SKCK110B                       | Cabinet                                | 1              |         |
| <b>SCREWS</b>                    |                                 |                                |  |                |         |
| N1                               | XTB3+8B                         | XTB3+8BFZ                      | Screw, Panel M'tg.                     | 3              |         |
| N12                              | SNE2095-2                       | SNE2095-5                      | Screw, Cabinet M'tg.                   | 4              |         |
| <b>PACKING PARTS</b>             |                                 |                                |  |                |         |
| P1                               | SPGK116                         | SPGK208                        | Carton Box                             | 1              |         |
| P4                               | SPP699                          | SPPK47                         | Polyethylene Bag                       | 1              |         |

# Technics

Panasonic Tokyo Office  
Matsushita Electric Trading Co., Ltd.  
1-2, 1-chome, Shiba-koen, Minato-ku, Tokyo 105 Japan

Matsushita Electric Trading Co., Ltd.  
P.O. Box 288, Central Osaka Japan

## ■ ADDITION OF RESISTOR

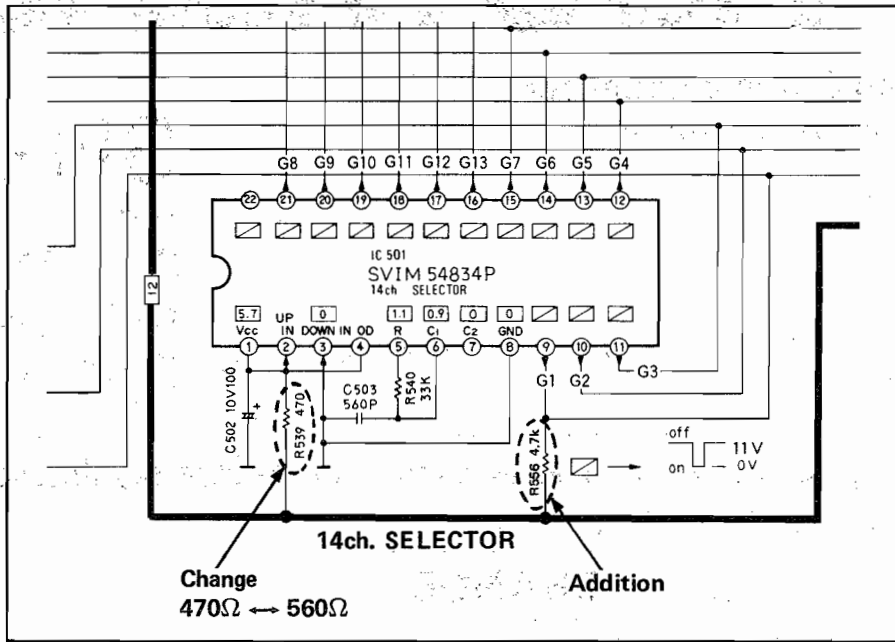


Fig. 1

## ■ POWER SOURCE CIRCUIT

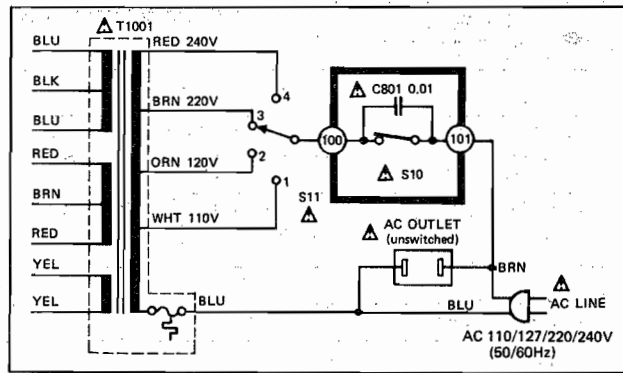


Fig. 2


# Stereo Graphic Equalizer SH-8055/SH-8055(K)

- This booklet contains the specifications for SH-8055, written in Germany, French and Spanish, and the circuits to be changed according to areas.
- File this manual together with the SH-8055 service manual (Order No. SD83062526C9).
- Das vorliegende Büchlein enthält die Spezifikationen für SH-8055 in deutscher, französischer und spanischer Sprache.
- Bewahren Sie das Büchlein zusammen mit der Bedienungsanleitung für SH-8055 (Bestell-Nr. SD83062526C9).
- Cette brochure contient les spécifications pour le SH-8055, écrites en allemand, en français et en espagnol.
- Classer ce manuel en même temps qu'avec le manuel de service du SH-8055 (N<sup>o</sup> d'ordre : (SD83062526C9).
- Este librito contiene la especificaciones para SH-8055, escritos en alemán, francés y español.
- Guardar este manual juntamente con el manual de servicio de SH-8055 (Pedido N<sup>o</sup>. SD83062526C9).


## CHANGE OF SCHEMATIC DIAGRAM

### Power source

For continental Europe

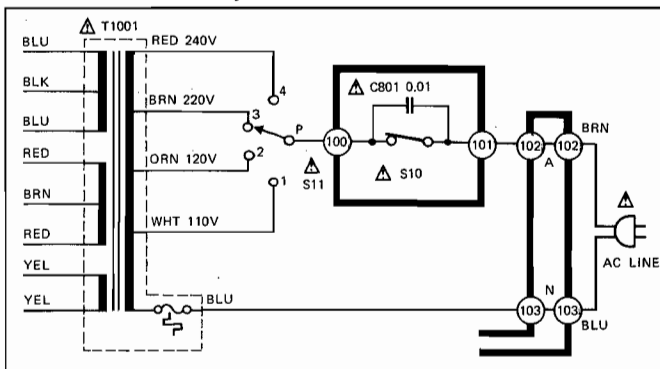

For [XA], [PA] and [PE] areas

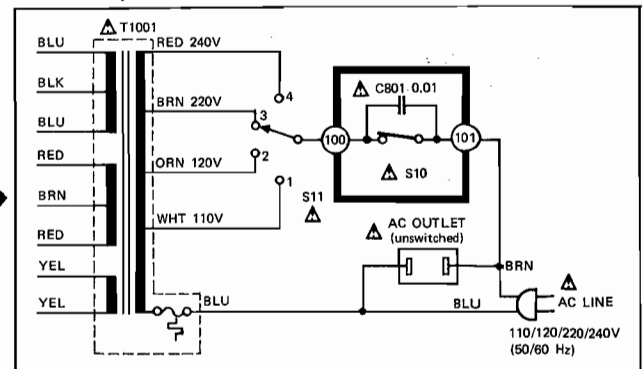

## DEUTSCH

## TECHNISCHE DATEN (Spezifikationen Können infolge von Verbesserungen ohne Ankündigung geändert werden.)

### (DIN 45 500)

|  |   |
|--|---|
| <b>Frequenzgang</b><br>(mittelstellung drehen) | : 5 Hz~100 kHz, -1 dB                     |
| <b>Maximalausgangsspannung</b>                 | : 8 V (1 kHz, THD 0,01%)                  |
| <b>Nennausgangsspannung</b>                    | : 1 V                                     |
| <b>Nennklirrfaktor</b>                         | : 0,003% (20 Hz~20 kHz)<br>0,002% (1 kHz) |
| <b>Eingangsspannung</b>                        | : 1 V                                     |
| <b>Geräuschabstand</b>                         | : 102 dB (110 dB, IHF, A)                 |
| <b>Maximaleingangsspannung</b>                 | : 8 V (1 kHz)                             |
| <b>Eingangsimpedanz</b>                        | : 47 kΩ                                   |
| <b>Verstärkung</b>                             | : 0±1 dB                                  |
| <b>Kanalsymmetrie</b>                          |   |
| 250 Hz~6300 Hz                                 | : ±0,5 dB                                 |
| <b>Kanaltrennung 1 kHz</b>                     | : 70 dB                                   |

|   |   |
|---|---|
| <b>Frequenzgangregler</b>                 | : +12 dB~-12 dB<br>(12 Regler, stufenlos verstellbar)   |
| <b>Mittelfrequenzen</b>                   | : 25 Hz, 40 Hz, 63 Hz, 100 Hz, 160 Hz,<br>250 Hz, 500 Hz, 1 kHz, 2 kHz, 4 kHz,<br>8 kHz, 16 kHz |
| <b>Ausgangsspannung für rosa Rauschen</b> | : 50 mV   |
| <b>Mikrofonempfindlichkeit</b>            | : über -74 dBV/μ bar (1 kHz)  |
| <b>Mikrofondämpfung</b>                   | : -20 dB  |
| <b>ALLGEMEINE DATEN</b>                   |   |
| <b>Stromversorgung</b>                    | : Wechselstrom, 110 V/120 V/220 V/<br>240 V, 50 Hz/60 Hz  |
| <b>Leistungsaufnahme</b>                  | : 17 W  |
| <b>Abmessungen</b><br>(H×B×T)             | : 108×430×270 mm<br>(4-1/4"×16-15/16"×10-5/8")  |
| <b>Gewicht</b>                            | : 4,1 kg (9,0 lb)   |

# FRANÇAIS

## CARACTERISTIQUES (Sujet a changement sans preavis.)

### (DIN 45 500)

|   |   |
|---|---|
| <b>Réponse de fréquence (position centrale)</b> | : 5 Hz~100 kHz, -1 dB                     |
| <b>Tension de sortie maximale</b>               | : 8 V (1 kHz, THD 0,01%)                  |
| <b>Tension de sortie nominale</b>               | : 1 V                                     |
| <b>Distortion harmonique total</b>              | : 0,003% (20 Hz~20 kHz)<br>0,002% (1 kHz) |
| <b>Sensibilité d'entrée</b>                     | : 1 V                                     |
| <b>Signal/Bruit</b>                             | : 102 dB (110 dB, IHF A)                  |
| <b>Tension d'entrée maximale</b>                | : 8 V (1 kHz)                             |
| <b>Impédance d'entrée</b>                       | : 47 kΩ                                   |
| <b>Gain</b>                                     | : 0±1 dB                                  |
| <b>Equilibrage de canal 250 Hz~6300 Hz</b>      | : ±0,5 dB                                 |
| <b>Séparation de canal 1 kHz</b>                | : 70 dB                                   |

### Commandes de niveau de gamme

: +12 dB~-12 dB  
(12 éléments, continuellement variables)

### Fréquences charnières

: 25 Hz, 40 Hz, 63 Hz, 100 Hz, 160 Hz, 250 Hz, 500 Hz, 1 kHz, 2 kHz, 4 kHz, 8 kHz, 16 kHz

### Tension de sortie des bruits roses

: 50 mV

### Sensibilité de microphone compatible

: plus de -74 dBV/μbar (1 kHz)

### Atténuateur de microphone

: -20 dB

### GENERALITES

#### Alimentation

: CA. 110 V/120 V/220 V/240 V, 50 Hz/60 Hz

#### Consommation

: 17 W

#### Dimensions

(h×l×pr) : 108×430×270 mm  
(4-1/4"×16-15/16"×10-5/8")

#### Poids

: 4,1 kg (9,0 lb)

# ESPAÑOL

## ESPECIFICACIONES (Estas especificaciones estan sujetas a cualquier cambio sin previo aviso.)

### (DIN 45 500)

|   |   |
|---|---|
| <b>Respuesta de frecuencia (posición central)</b> | : 5 Hz~100 kHz, -1 dB                     |
| <b>Tensión de salida máxima</b>                   | : 8 V (1 kHz, THD 0.01%)                  |
| <b>Tensión de salida de régimen</b>               | : 1 V                                     |
| <b>Distorsión armónica total nominal</b>          | : 0.003% (20 Hz~20 kHz)<br>0.002% (1 kHz) |
| <b>Sensibilidad de entrada</b>                    | : 1 V                                     |
| <b>Relación d señal ruido</b>                     | : 102 dB (110 dB, IHF A)                  |
| <b>Tensión de entrada máxima</b>                  | : 8 V (1 kHz)                             |
| <b>Impedancia de entrada</b>                      | : 47 kΩ                                   |
| <b>Ganancia</b>                                   | : 0±1 dB                                  |
| <b>Equilibrio de canales 250 Hz~6300 Hz</b>       | : ±0,5 dB                                 |
| <b>Separación de canales 1 kHz</b>                | : 70 dB                                   |

### Controles de nivel de banda

: +12 dB~-12 dB  
(12 elementos, continuamente variables)

### Frecuencia central

: 25 Hz, 40 Hz, 63 Hz, 100 Hz, 160 Hz, 250 Hz, 500 Hz, 1 kHz, 2 kHz, 4 kHz, 8 kHz, 16 kHz

### Voltaje de salida del ruido rosado

: 50 mV

### Sensibilidad del micrófono compatible

: por sobre -74 dBV/μbar (1 kHz)

### Atenuador de micrófono

: -20 dB

### EN GENERAL

#### Alimentación de corriente

: C.A. de 110 V/120 V/220 V/240 V, 50 Hz/60 Hz

#### Consumo de corriente

: 17 W

#### Dimensiones

(alto×ancho×prof.) : 108×430×270 mm  
(4-1/4"×16-15/16"×10-5/8")

#### Peso

: 4,1 kg (9,0 lb)