


5 Circuitry Schematics

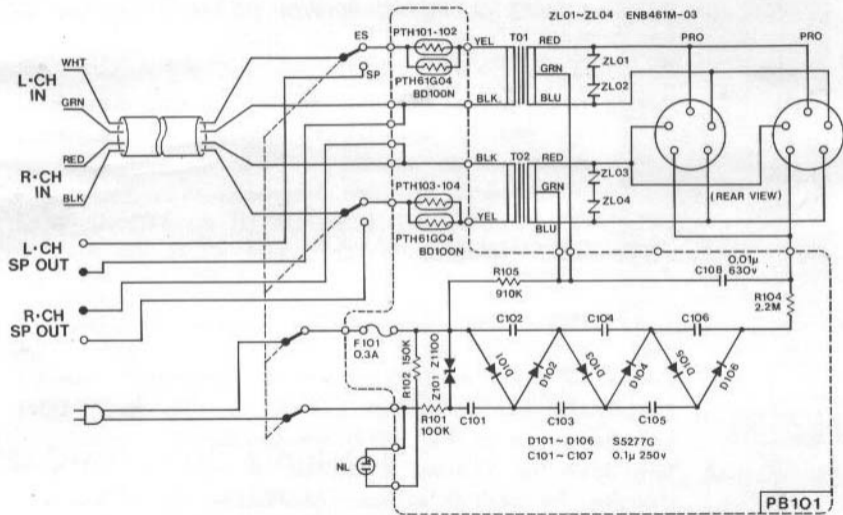

6 Specifications

- Maximum continuous power input: 8W (1kHz)
- Maximum peak power input: 30W (1kHz)
- Frequency range: 10 -30,000Hz
- Distortion: Less than 0.05% (1W at 50Hz)
Less than 0.02% (1W at 1kHz)
Less than 0.05% (1W at 10kHz)
- Power supply: 117 ~240V AC50/60Hz
- Bias voltage: PRO ONLY-580V DC
- Dimensions: 73x120x215 (mm)
- Weight: 1.5kg

It is our policy to continuously develop Stax products to always provide the best performance possible. Thus the specifications and external appearance of this product are subject to change without notice.