


NOTES:
 UNLESS OTHERWISE SPECIFIED:
 (1) RESISTORS ARE 1/4W/5% UNLESS OTHERWISE SPECIFIED.
 (2) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (3) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (4) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (5) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (6) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (7) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (8) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (9) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.
 (10) CAPACITORS ARE 50VDC UNLESS OTHERWISE SPECIFIED.

NOTES:
 UNLESS OTHERWISE SPECIFIED:
 (1) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (2) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (3) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (4) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (5) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (6) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (7) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (8) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (9) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.
 (10) TUBES ARE REQUIRED TO OPERATE WITH A 100V AC SUPPLY.

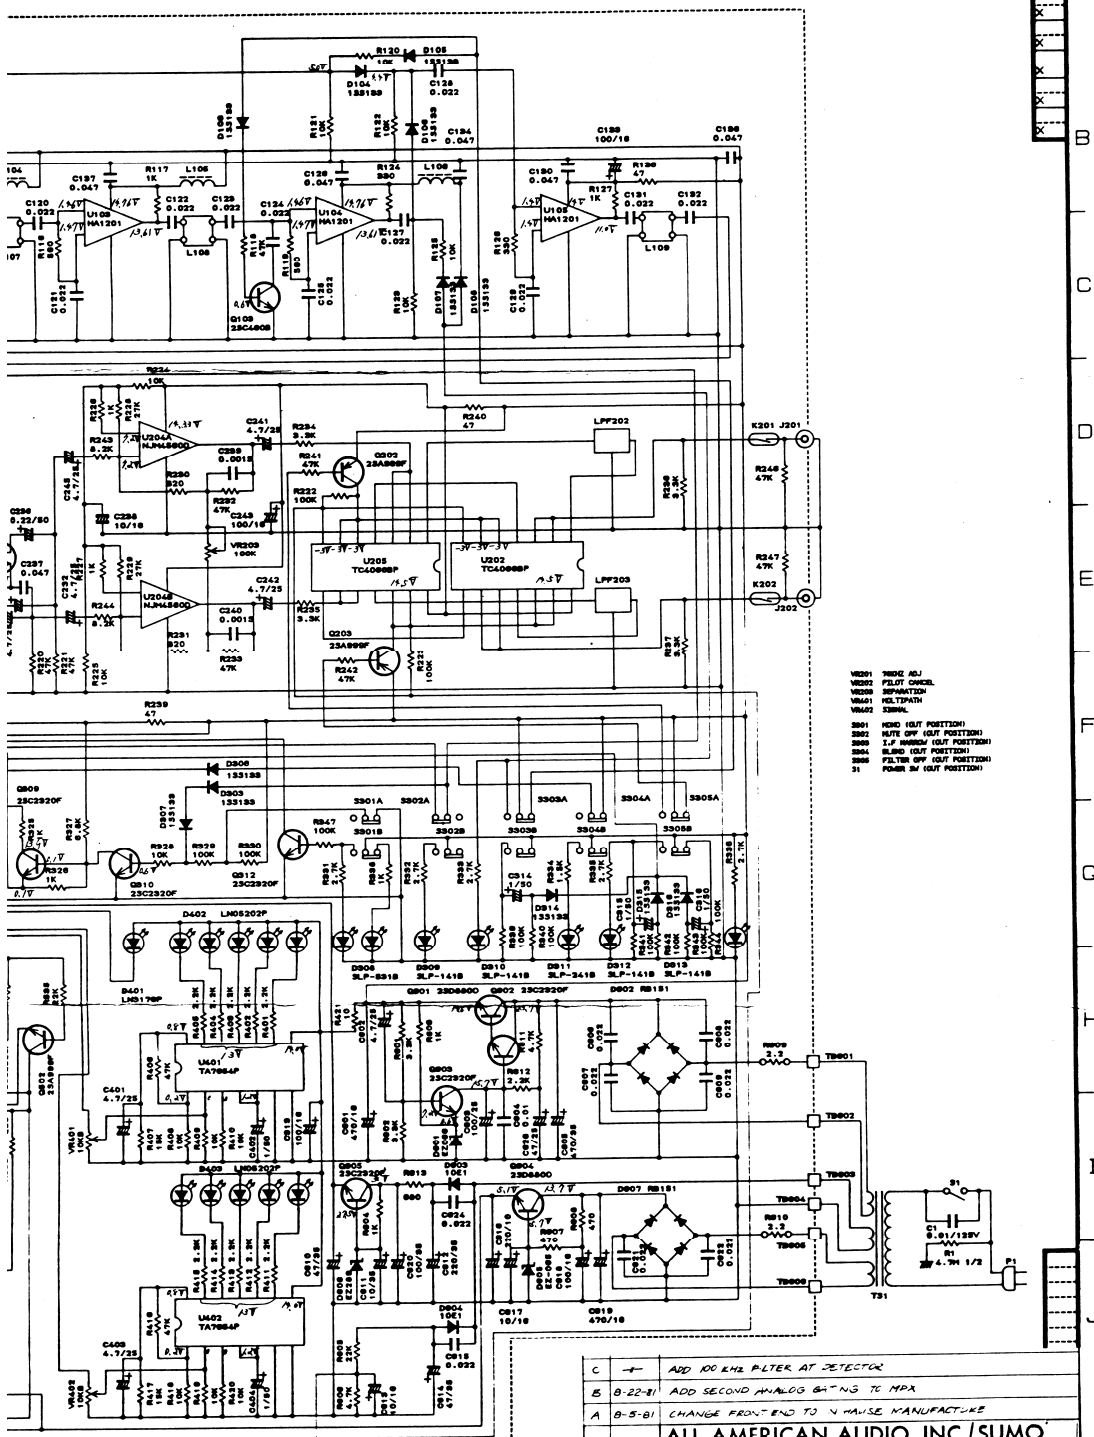

W201 TRIG. ADJ.
 W202 PILOT CONTROL
 W203 SEPARATION
 W204 MULTIPATH
 W205 SIGNAL
 S201 HEAD LEFT POSITION
 S202 HEAD OFF LEFT POSITION
 S203 I.F. SEARCH LEFT POSITION
 S204 BLANK LEFT POSITION
 S205 FILTER OFF LEFT POSITION
 S1 POWER SW LEFT POSITION

C	-	ADD 100 KHZ FILTER AT DETECTOR
B	8-22-81	ADD SECOND ANALOG GAIN TO MPA
A	8-5-81	CHANGE FRONT END TO 4 MAUSE MANUFACTURE
REV	DATE	ALL AMERICAN AUDIO, INC./SUMO 31316 VIA COLINAS • SUITE 103 WESTLAKE VILLAGE, CA 91362 CHARLIE THE TUNER TEL: (818) 991-5330
DATE	DRAWN	APPA
9-7-81	AZ	MODEL NO. 700

170
 15785
 15785
 10