

Service Manual


Digital Control Amplifier

Amplifier

SU-A60

Color

(K)Black Type

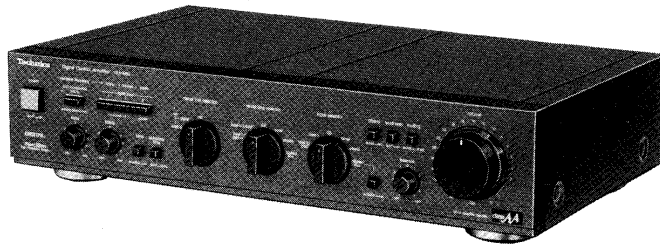

Area

Color	Area
(K)	(E)Continental Europe.
(K)	(EH)Holland.
(K)	(EB)Belgium.
(K)	(EF)France.
(K)	(EK)United Kingdom.
(K)	(EG)F.R.Germany.
(K)	(Ei)Italy.
(K)	(XL)Australia.
(K)	(XA)Asia, Latin America, Middle Near East, Africa & Oceania.
(K)	(PA)Far East PX.
(K)	(PE)European Military.

SPECIFICATIONS (DIN 45 500)

■ PRE AMPLIFIER SECTION

Input sensitivity and impedance

PHONO MM	2.5 mV/47 k Ω
PHONO MC	170 μ V/220 Ω
TUNER, CD, AUX, TAPE 1, TAPE 2 / DAT	150 mV/18 k Ω
DIRECT	1 V/47 k Ω

Phono maximum input voltage (1 kHz, RMS)

PHONO MM	170 mV
PHONO MC	13 mV

S/N

rated power	(4 Ω)
PHONO MM	79 dB (88 dB IHF, A)
PHONO MC	70 dB (72 dB, 250 μ V, IHF, A)
TUNER, CD, AUX, TAPE 1, TAPE 2 / DAT	100 dB (106 dB IHF, A)
DIRECT	106 dB (115 dB IHF, A)

Frequency response

PHONO	RIAA standard curve \pm 0.2 dB (20 Hz ~ 20 kHz)
TUNER, CD, AUX, TAPE 1, TAPE 2 / DAT	0.8 Hz ~ 150 kHz (-3 dB) +0, -0.1 dB (20 Hz ~ 20 kHz)
DIRECT	0.8 Hz ~ 150 kHz (-3 dB)

Tone controls

BASS	50 Hz, +10 dB ~ -10 dB
TREBLE	20 kHz, +10 dB ~ -10 dB

Muting

	-20 dB
--	--------

Subsonic filter

	19 Hz, -6 dB/oct
--	------------------

Loudness control (volume at -30 dB)

	50 Hz, +9 dB
--	--------------

Channel balance, AUX 250 Hz ~ 6.3 kHz

	\pm 1 dB
--	------------

Channel separation, AUX 1 kHz

	55 dB
--	-------

Harmonic distortion (20 Hz ~ 20 kHz)

PHONO MM	0.003%
PHONO MC	0.002%
TUNER, CD, AUX, TAPE 1, TAPE 2 / DAT	0.002%
DIRECT	0.0004%

Output voltage and impedance

TAPE 1, TAPE 2 / DAT REC OUT	150 mV
OUTPUT	
rated	1 V/4 Ω
maximum	10 V

■ DIGITAL SECTION

Harmonic distortion	0.0015% (EIAJ)
Total harmonic distortion	0.0025% (EIAJ)
S/N	111 dB (EIAJ)
Dinamic range	99 dB (EIAJ)
Frequency response	2 Hz ~ 20 kHz, +0.3 dB ~ -0.3 dB

■ GENERAL

Power consumption	20 W
Power supply	
For continental Europe	AC 50 Hz/60 Hz, 220 V
For United Kingdom, Australia and others	AC 50 Hz/60 Hz, 110 V/127 V/220 V/240 V

Dimensions (W x H x D)

	430 x 103 x 290 mm
	(16-15/16" x 4-1/16" x 11-6/16")

Weight

4.9 kg (10.78 lb.)

Notes:

- Specifications are subject to change without notice.
- Weight and dimensions are approximate.
- Total harmonic distortion is measured by the digital spectrum analyzer (H.P. 3045 system).

Technics

Matsushita Electric Trading Co., Ltd.
P.O. Box 288, CentraOsaka Japan

Panasonic Tokyo Office
Matsushita Electric Trading Co., Ltd.
6th Floor, World Trade Center Bldg.,
No. 4-1, Hamamatsu-cho 2-Chome, Minato-ku,
Tokyo 105, Japan

■ CONTENTS

	Page		Page
BEFORE REPAIR	2	SCHEMATIC DIAGRAM	11~18
ACCESSORIES	2	WIRING CONNECTION DIAGRAM	19, 20
LOCATION OF CONTROLS	3	BLOCK DIAGRAM	21, 22
DISASSEMBLY INSTRUCTIONS	4~6	FUNCTIONS OF IC TERMINALS	23, 24
PRINTED CIRCUIT BOARDS	7~10	MEASUREMENTS AND ADJUSTMENTS	25
TERMINAL GUIDE OF TRANSISTORS, DIODES AND IC'S	10	EXPLODED VIEW	26, 27
		REPLACEMENT PARTS LIST	28~30
		RESISTORS AND CAPACITORS	31~33


■ BEFORE REPAIR AND ADJUSTMENT

- (1) Turn off the power supply. Using a 10Ω, 5 W resistor, shortcircuit both ends of power supply capacitors (C501, C502, 3300μF) in order to discharge the voltage.
- (2) Before turning the power supply on, after completion of repair, slowly apply the primary voltage by using a power supply voltage controller to make sure that the consumed current at 50/60 Hz in NO SIGNAL mode should be shown below with respect to supply voltage 110 V/127 V/220 V/240 V.

Power supply voltage		AC 110 V	AC 127 V	AC 220 V	AC 240 V
Consumed current	50 Hz	60~130 mA	60~115 mA	30~65 mA	28~55 mA
	60 Hz	60~120 mA	55~105 mA	28~60 mA	28~53 mA


■ ACCESSORIES

- Stereo connection cable



(SJPD18) For all areas.


- AC power supply cord



(SJA 173)..... For (XL) area.
 (SFDAC05G02) For (EK) area.
 (SFDAC05E03) For others.






For United Kingdom and some areas, the power cord is directly attached to the unit.
 Configuration of AC power supply cord differs according to area.

LOCATION OF CONTROLS

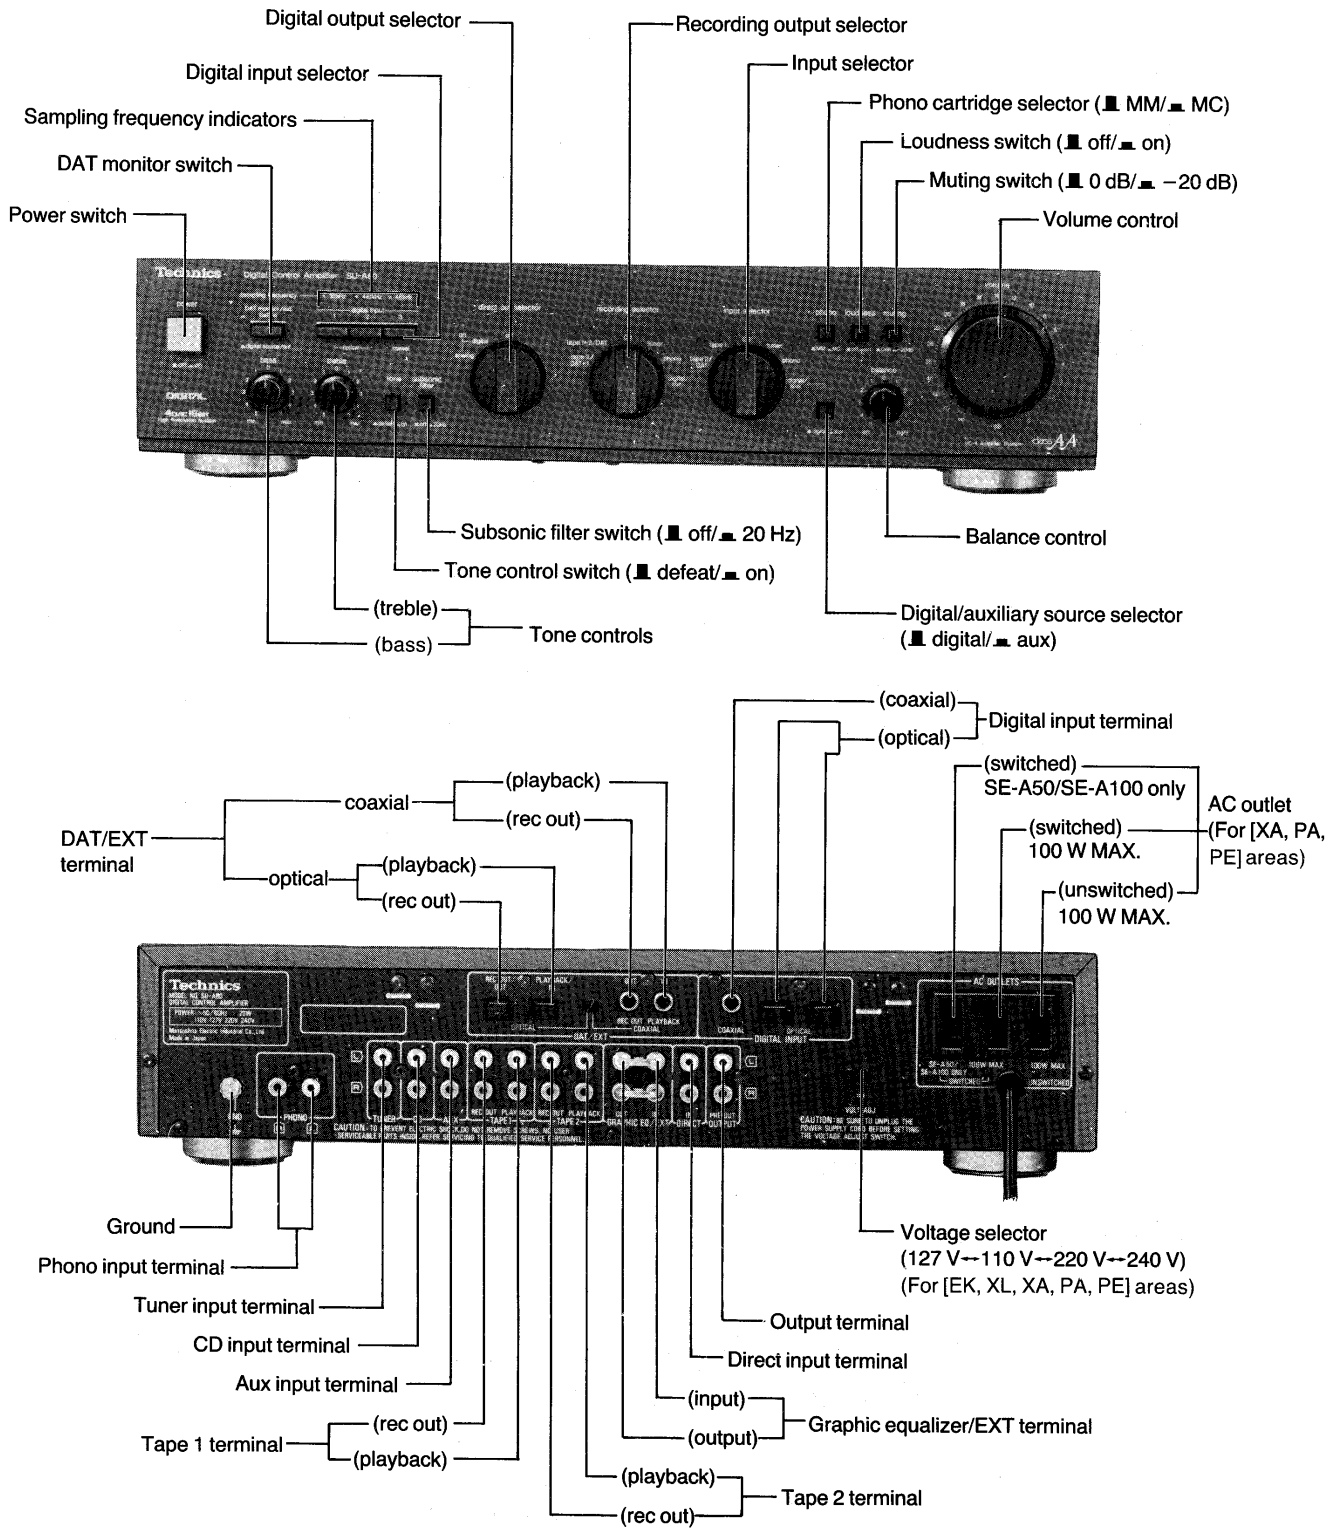

- The power supply for this unit varies depending upon the areas. Also, the parts used for power supply are different. So, refer to the circuit diagram and replacement parts list.
- *[XA, PA and PE] areas are provided with AC outlets.
- *220 V (50/60 Hz) for Continental Europe.
- *110 V/127 V/220 V/240 V (50/60 Hz) for other [EK, XL, XA, PA and PE] areas.
- *Phono input capacitance is about 100 pF.





■ DISASSEMBLY INSTRUCTIONS
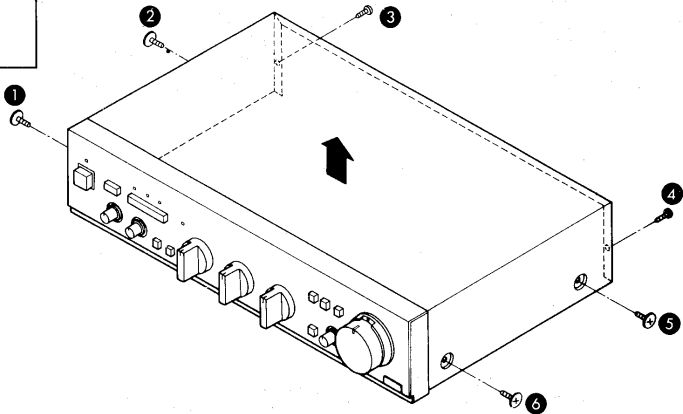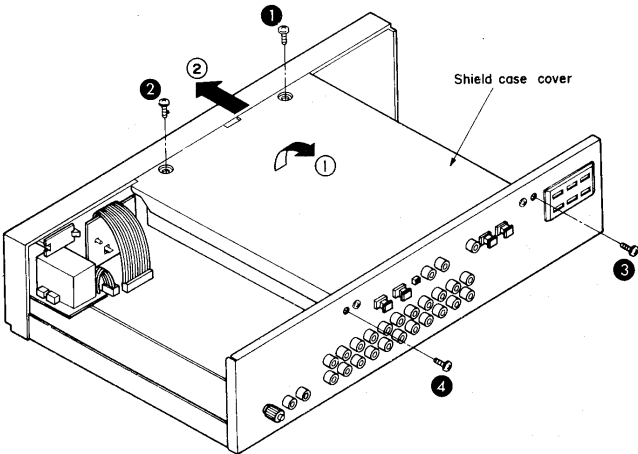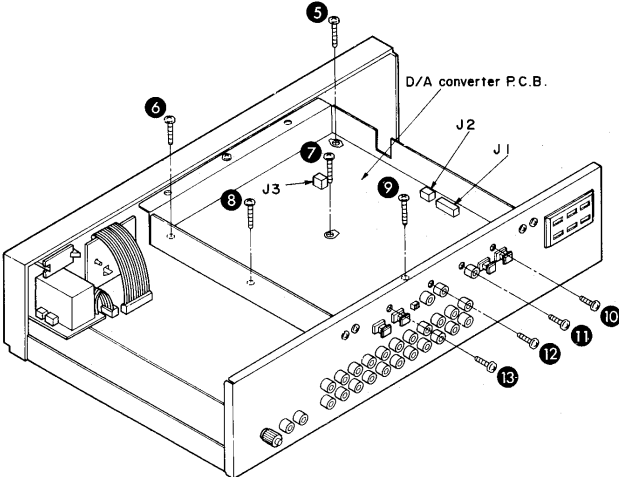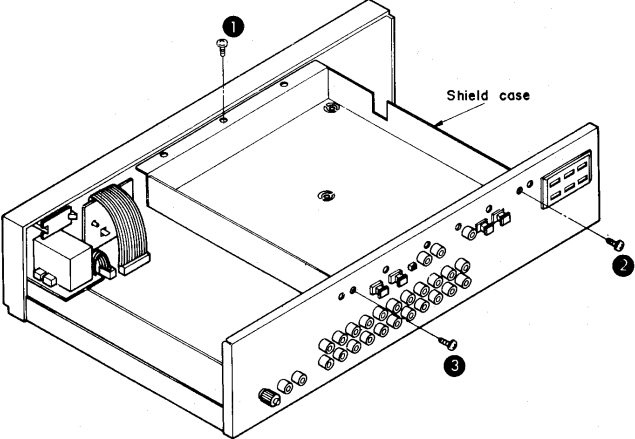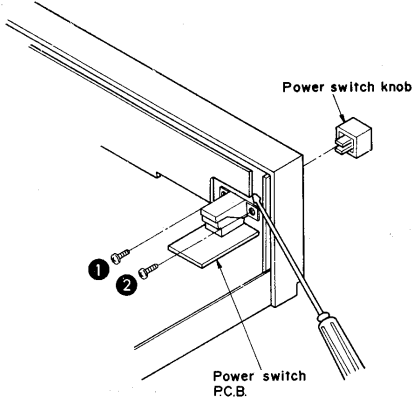
<p>Ref. No. 1</p>	<p>How to remove the cabinet</p>		
<p>Procedure 1</p>	<p>● Remove the 6 screws (1~6).</p>		
<p>Ref. No. 2</p>	<p>How to remove the D/A converter P.C.B.</p>	<ol style="list-style-type: none"> 1. Remove the 4 screws (1~4). 2. Remove the shield case cover in the direction of the arrows. 3. Pull out the 3 connectors (J1, J2, J3). 4. Remove the 9 screws (5~13). 5. Remove the D/A converter P.C.B. 	
<p>Procedure 1→2</p>			
<p>Ref. No. 3</p>	<p>How to remove the shield case</p>	<p>Ref. No. 4</p>	<p>How to remove the power switch P.C.B.</p>
<p>Procedure 1→2→3</p>	<p>● Remove the 3 screws (1~3).</p> 	<p>Procedure 1→4</p> <ol style="list-style-type: none"> 1. Remove the power switch knob by pushing it from behind the front panel. 2. Remove the 2 screws (1, 2). 	

Ref. No.
5

How to remove the front panel

- Procedure**
1→2→3→5
1. Remove the 4 screws (①~④).
 2. Pull out the 3 knobs (⑤~⑦).
 3. Remove the 3 nuts (⑧~⑩).
 4. Remove the flat cable (J4, J7, J8).
 5. Remove the connector (J5, J6).
 6. Remove the remote switch.

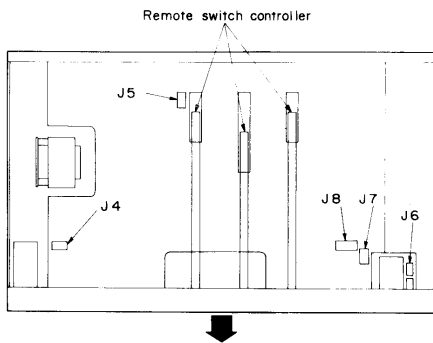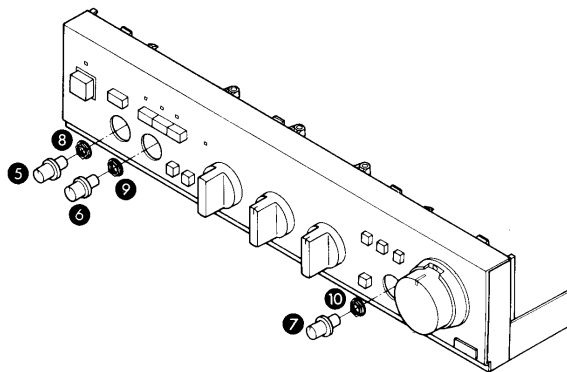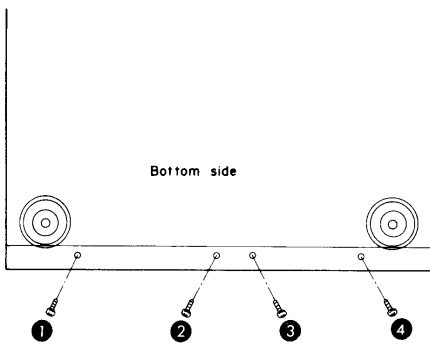


How to remove the remote switch controller

- Pull up the remote switch controller in the direction of the arrow as shown in figure 1 and then remove it.


How to replace the remote switch controller

1. Push the switch contact (on remote switch S201, S203 or S202) in the direction of the arrow (see Fig. 2).
2. Rotate the selector knob counterclockwise.
3. Install the remote switch controller in the remote switch (see Figs. 2 and 3).

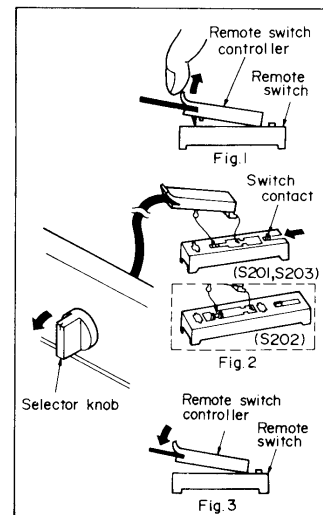

How to remove the flat cable


Pull out the flat cable while pressing the connector.







Ref. No.
6



How to remove the volume P.C.B., LED P.C.B. and loudness/muting switch P.C.B.


- Procedure**
1→6
1. Remove the flat cable (J7).
 2. Pull out the knob (①).
 3. Remove the nut (②).
 4. Remove the volume P.C.B.
 5. Release the 2 claws.
 6. Remove the LED P.C.B.
 7. Remove the flat cable (J8).
 8. Release the 2 claws.
 9. Remove the loudness/muting switch P.C.B.

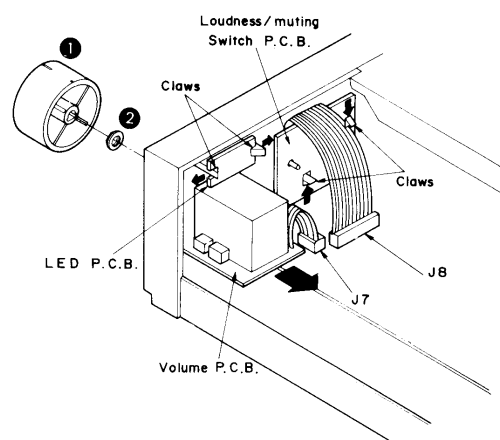

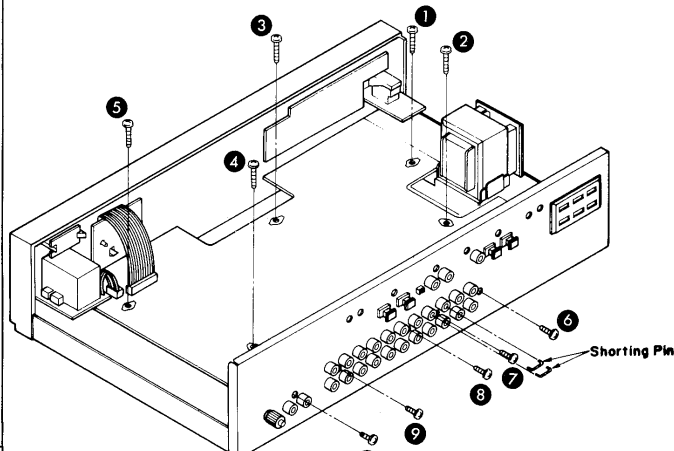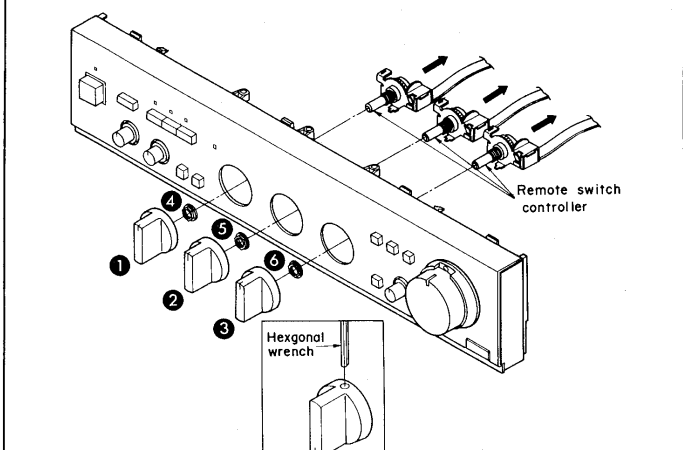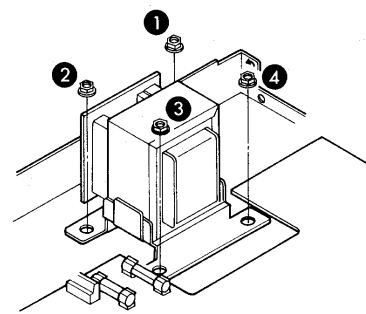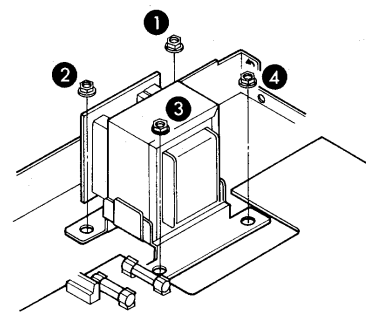
Ref. No. 7	How to remove the sampling frequency P.C.B.	Ref. No. 9	How to remove the main P.C.B.
Procedure 5→7	<ol style="list-style-type: none"> 1. Remove the 2 screws (①, ②). 2. Release the 3 claws. 3. Remove the sampling frequency P.C.B. 	Procedure 1→2→3→9	<ol style="list-style-type: none"> 1. Remove the 10 screws (①~⑩). 2. Remove the shorting pin. 3. Remove the 4 screws (⑪~⑭). 4. Remove the main P.C.B. in the direction of the arrow.
Ref. No. 8	How to remove the remote switch controller		
Procedure 5→8	<ol style="list-style-type: none"> 1. Loosen the screws set in the selector dials by using a hexagonal wrench and remove the 3 selector dials ①~③. 2. Remove the 3 nuts (④~⑥). 3. Remove the remote switch controller in the direction of the arrow. 		
Ref. No. 10		How to remove the power transformer	
Procedure 1→10		•Remove the 4 nuts (①~④).	
			

PRINTED CIRCUIT BOARDS

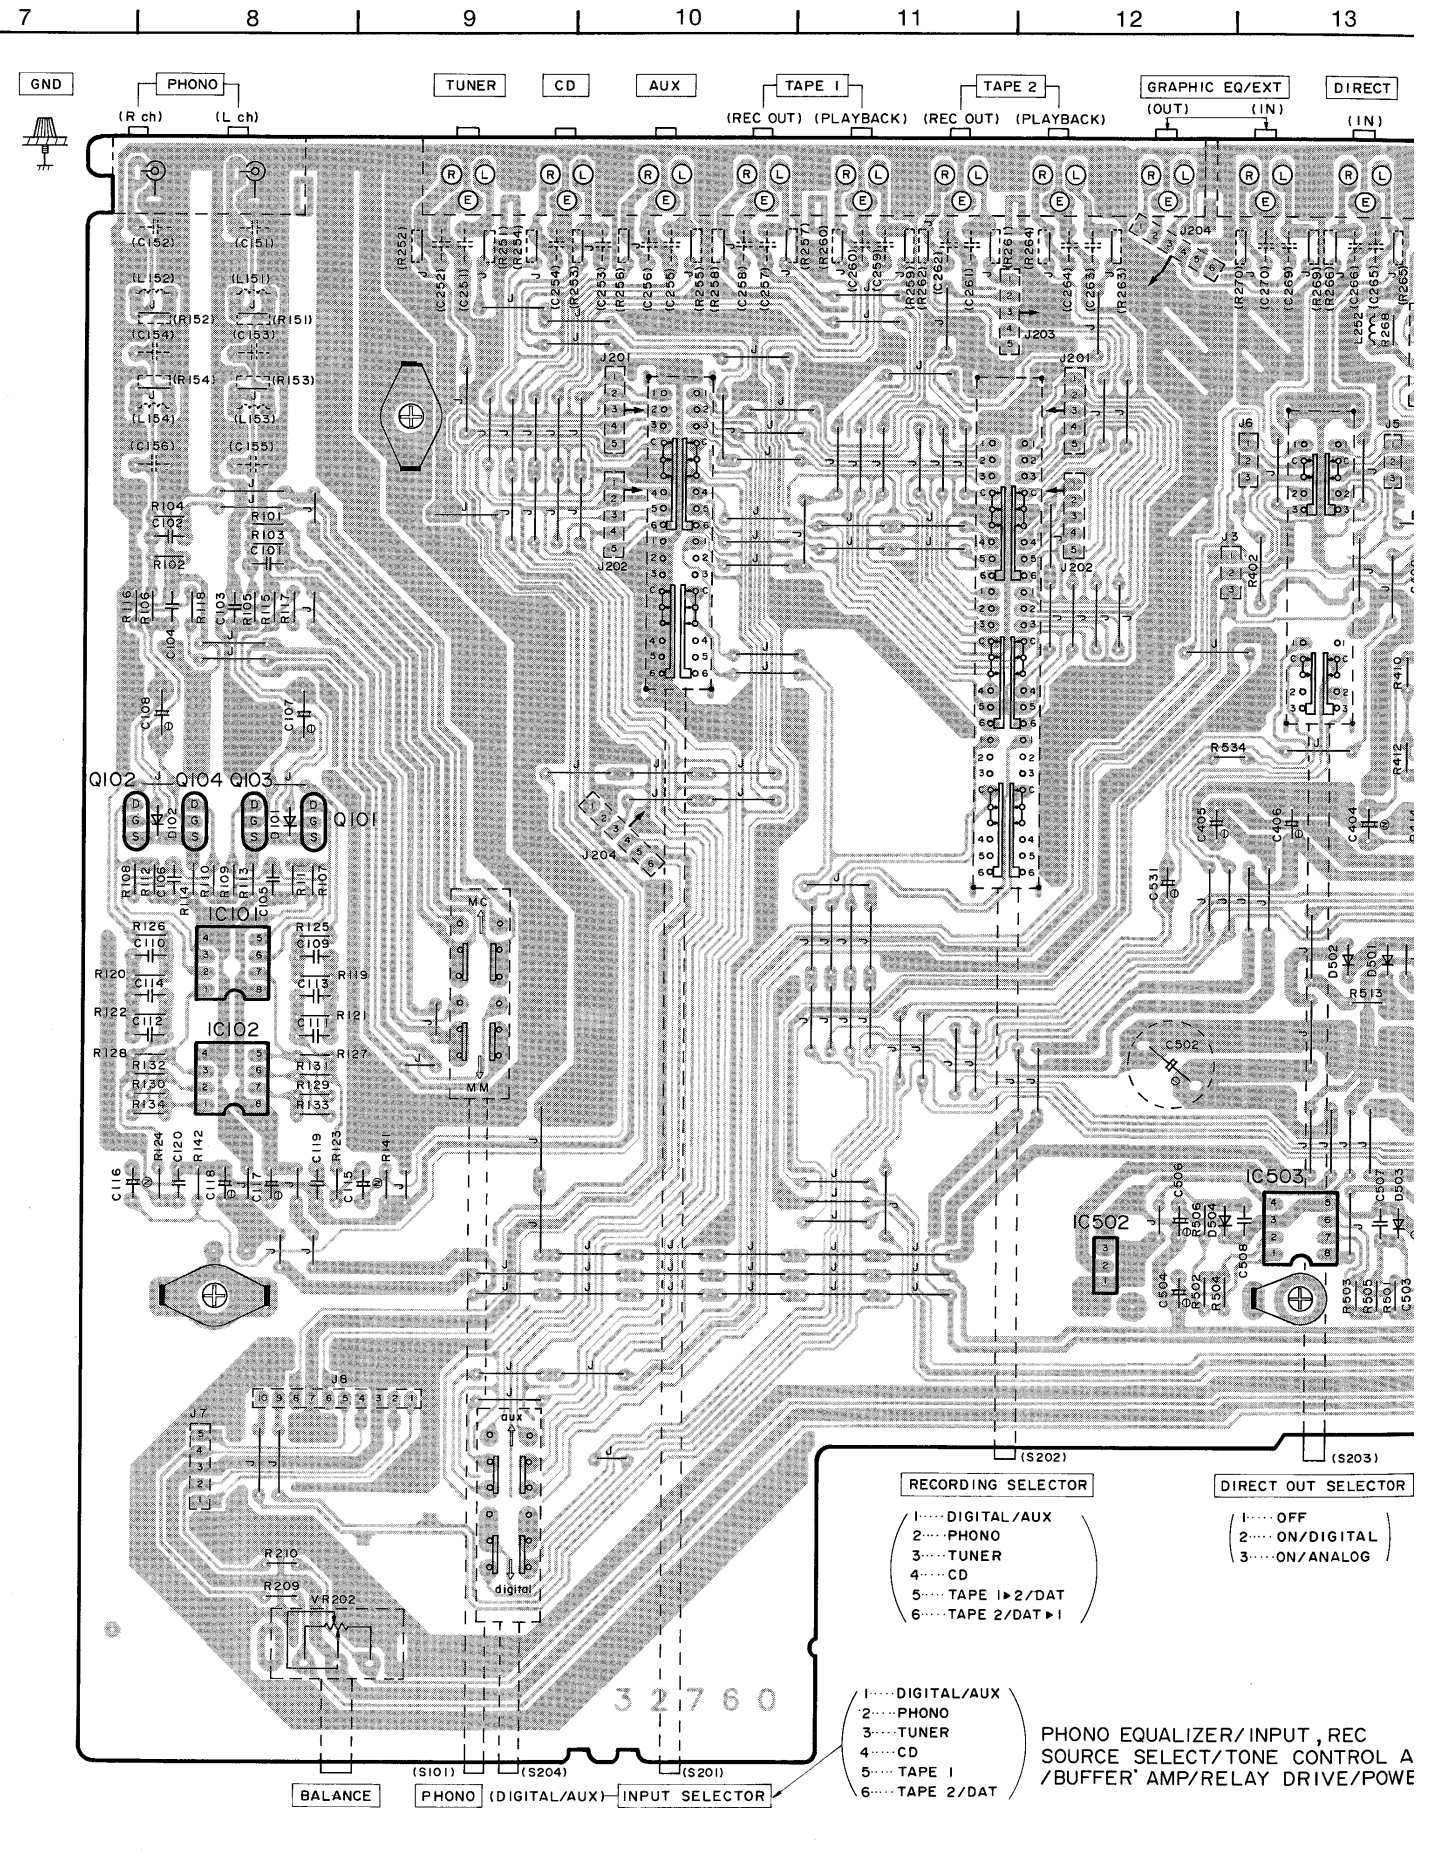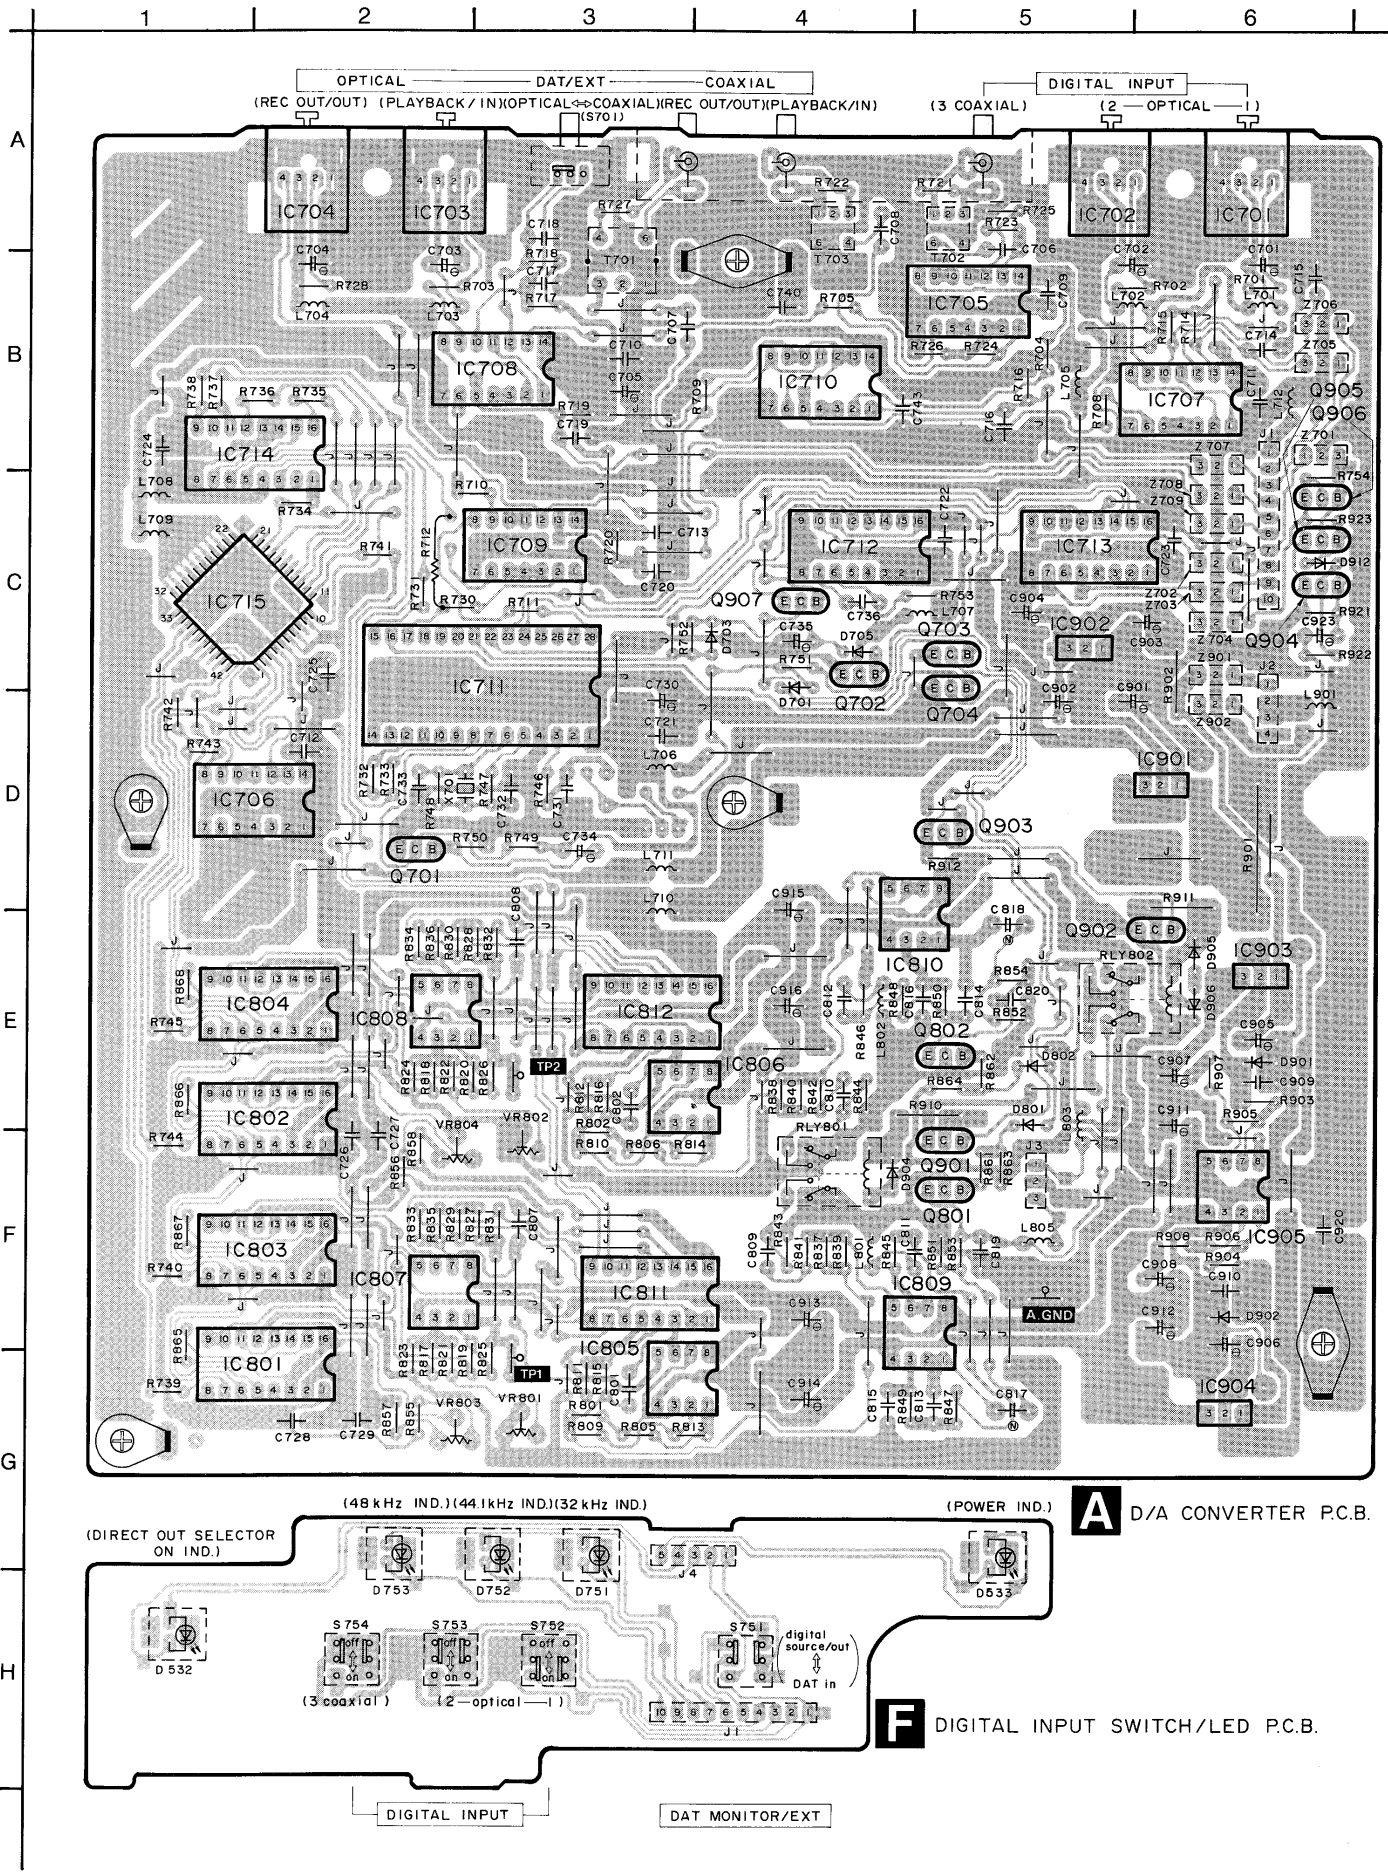


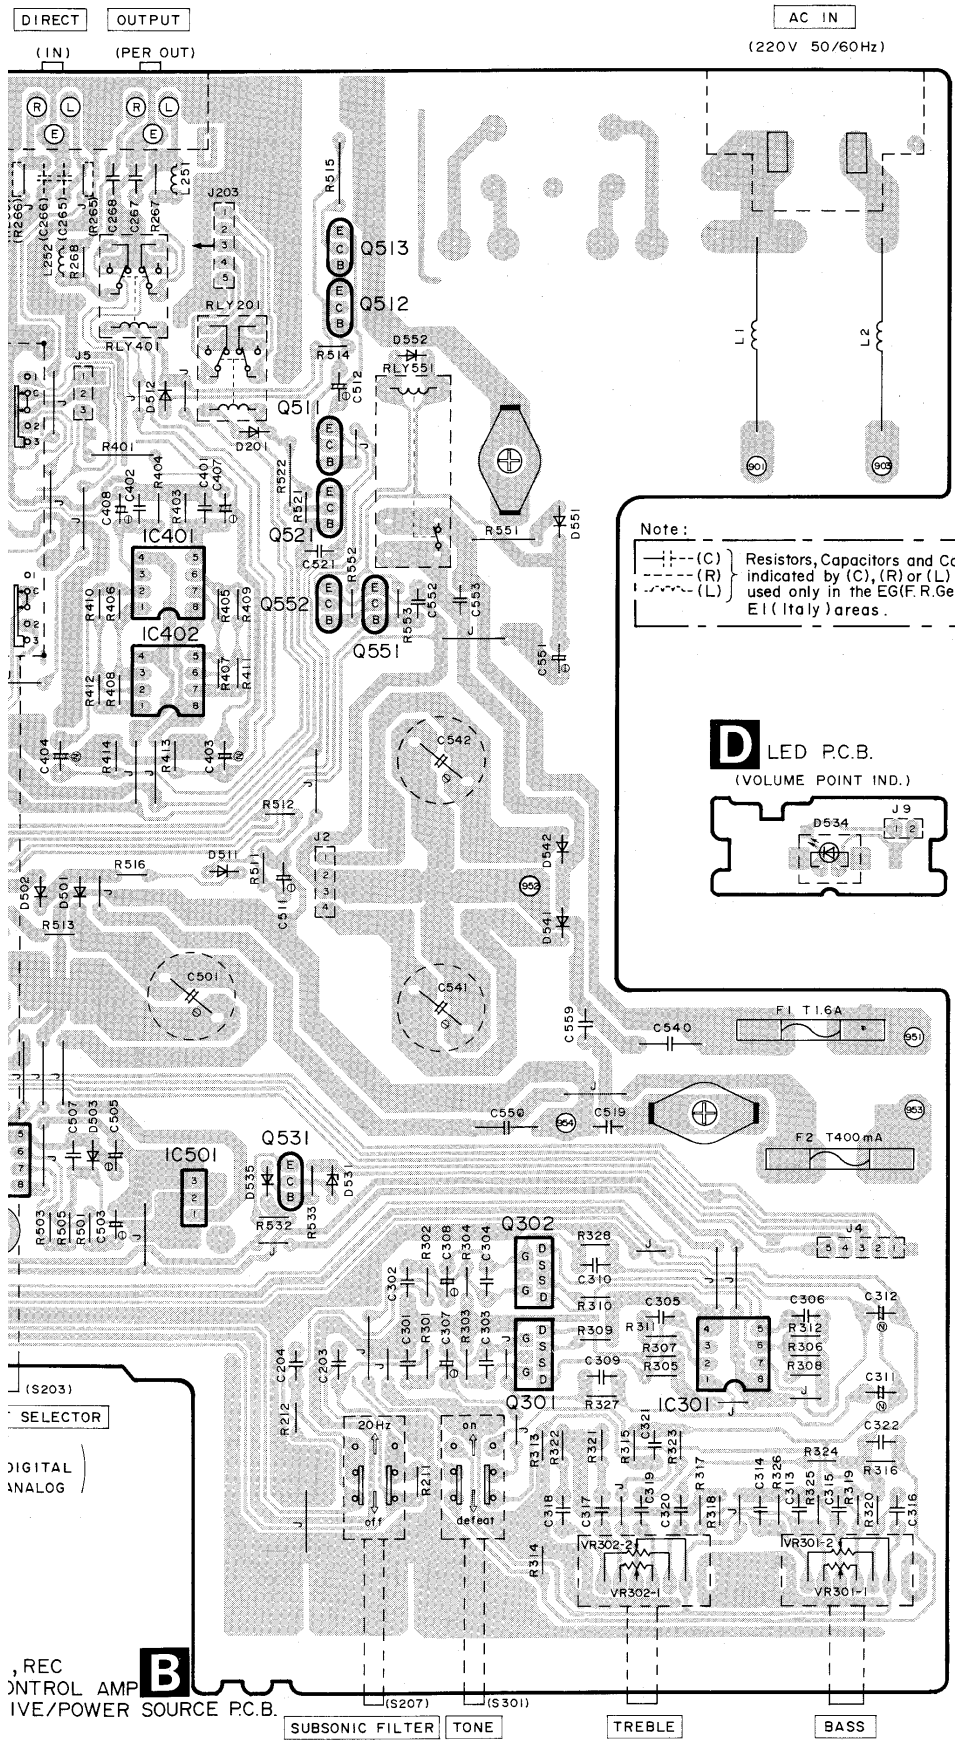



POWER SWITCH P.C.B.

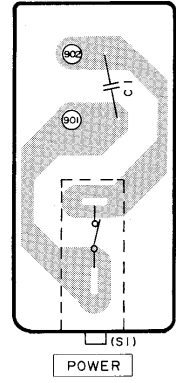

VOLUME P.C.B.

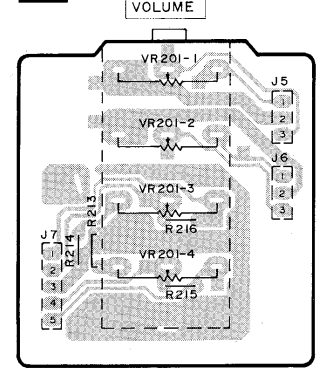


MUTING/LOUDNESS SWITCH P.C.B.

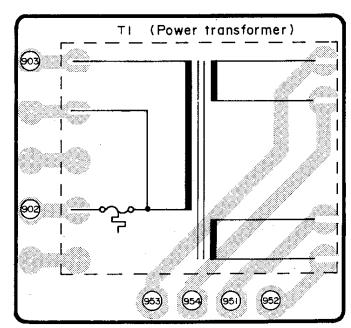


Note:
 ---(C) Resistors, Capacitors and Coils indicated by (C), (R) or (L) area used only in the EG(F.R.Germany), E1 (Italy) areas.

LED P.C.B. (VOLUME POINT IND.)




Power Source For (EK, XL, XA, PA, PE) areas.

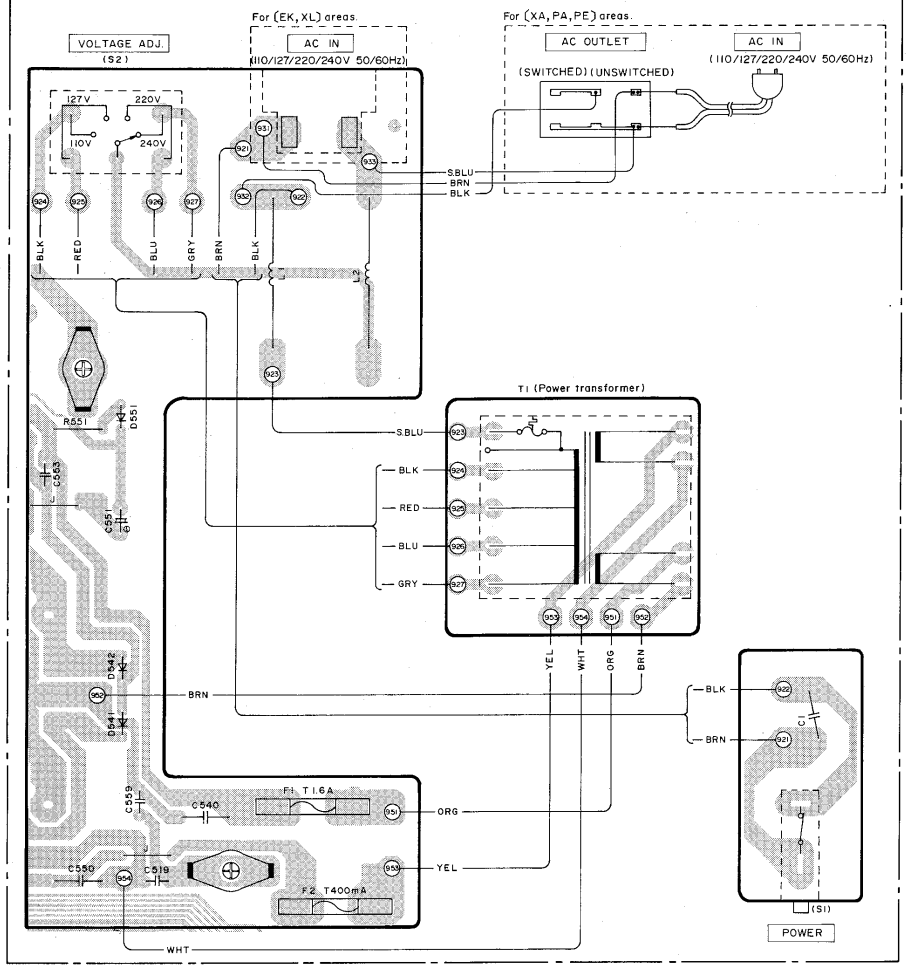



Terminal guide of transistors, diodes and IC's


SVINJM532DD M5218P M5219P MN74HCU04 MN74HC00	DN74LS145 PCM56P-J YM3404B SVIUPD4053BC MN123Z YM3623B	MN53010PEH 42pin	AN78M05 M5F78M08L AN78M18	AN79N05	UN4215
2SK389	UN4211	UN4111	M5F79M08L AN79M18	2SK369	
2SA1309, 2SC3311 2SD1330	ISR35200	LN018397PH LN013397PH	MA29WA, MA165 MA167, MA4062-M	MA4240H	LN018304P

SCHEMATIC DIAGRAM

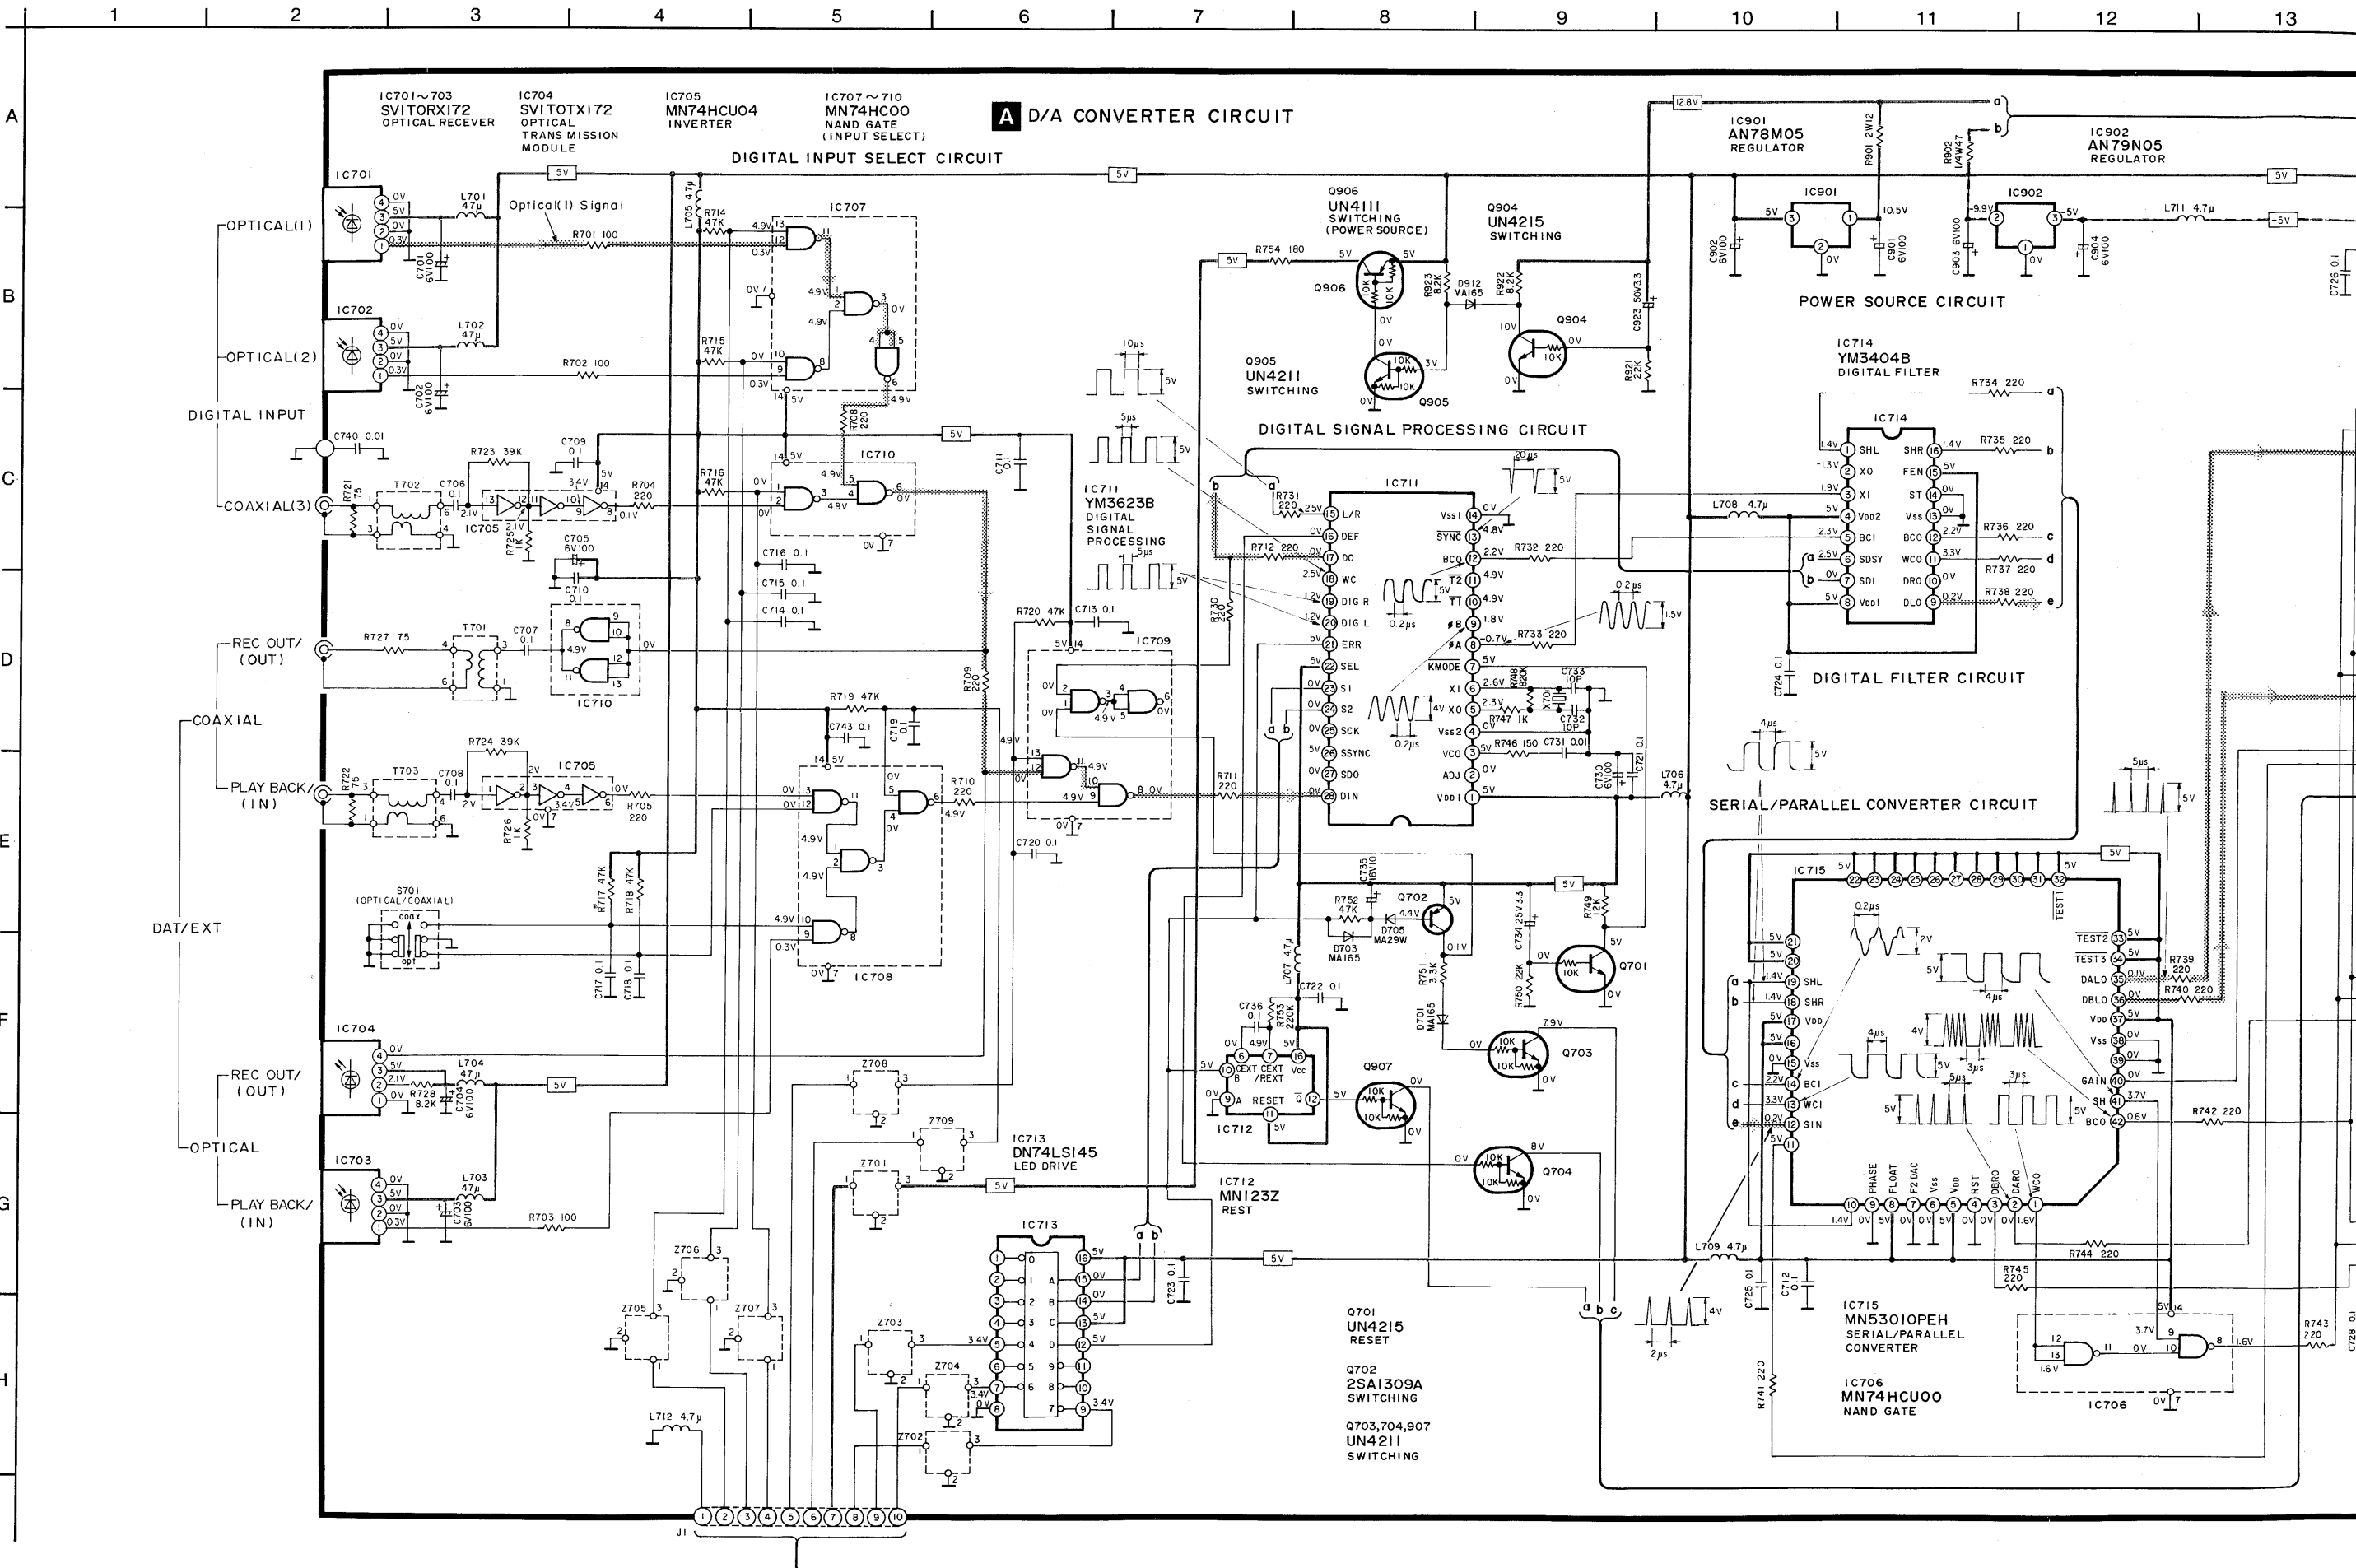

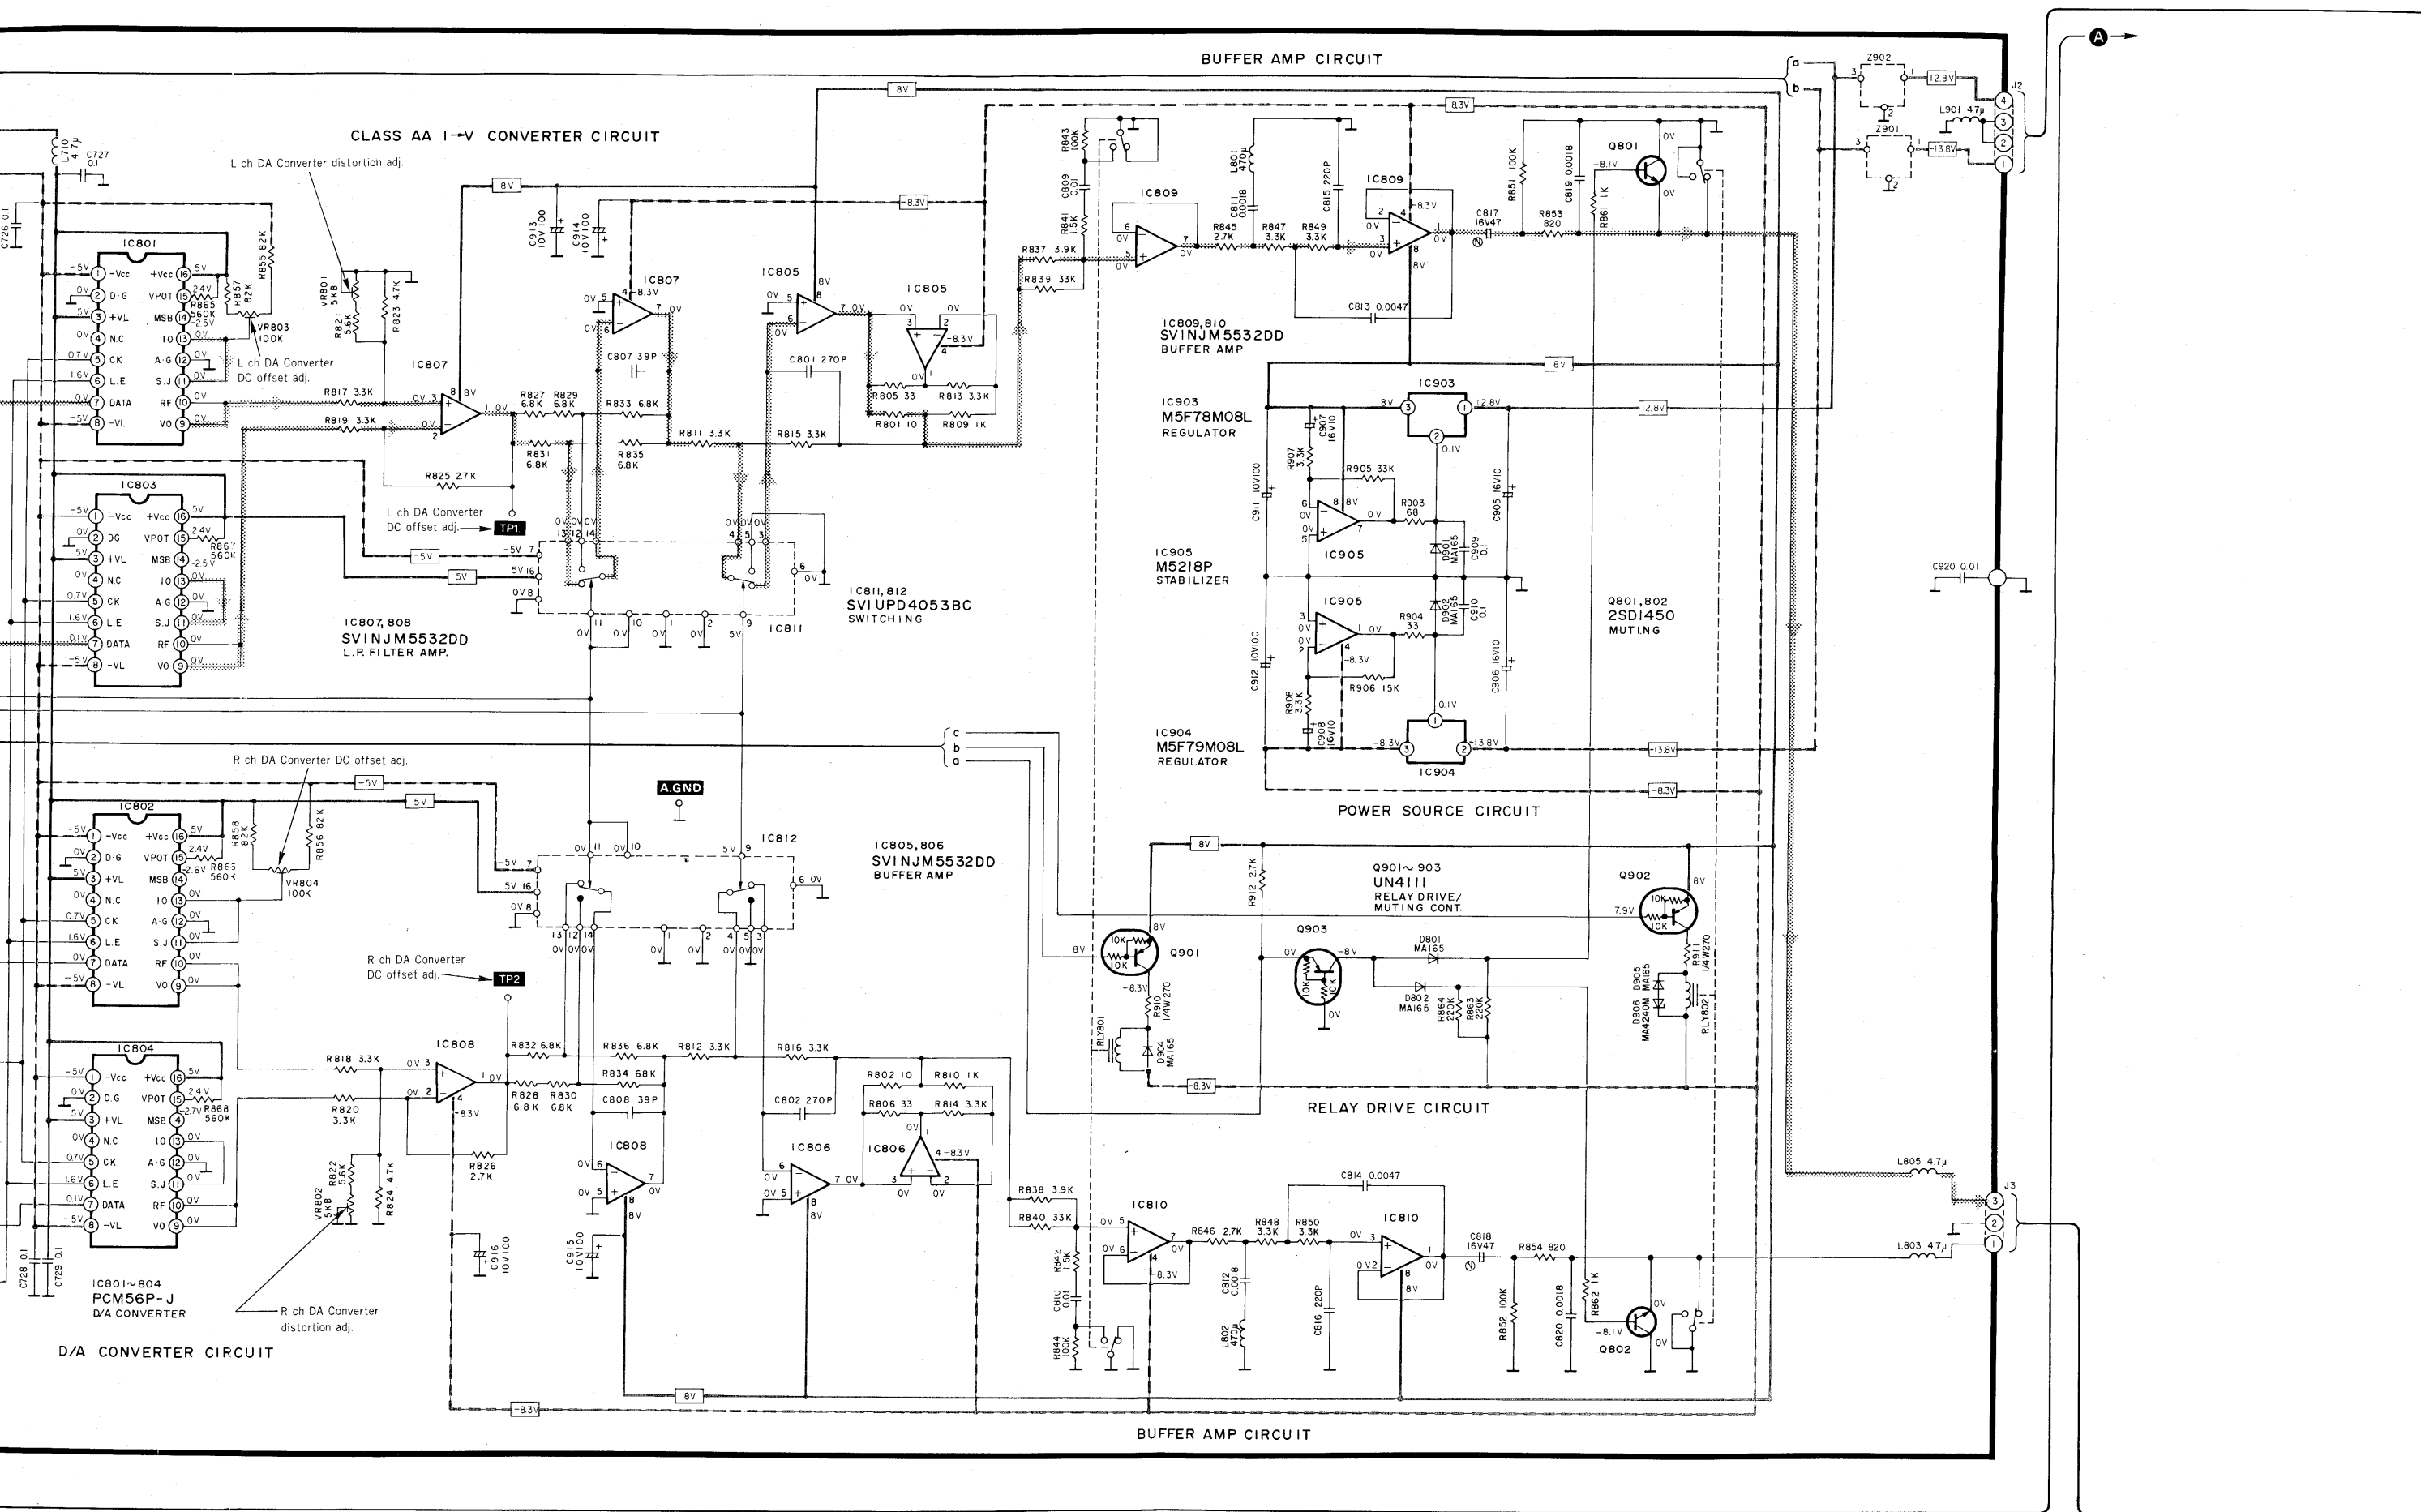

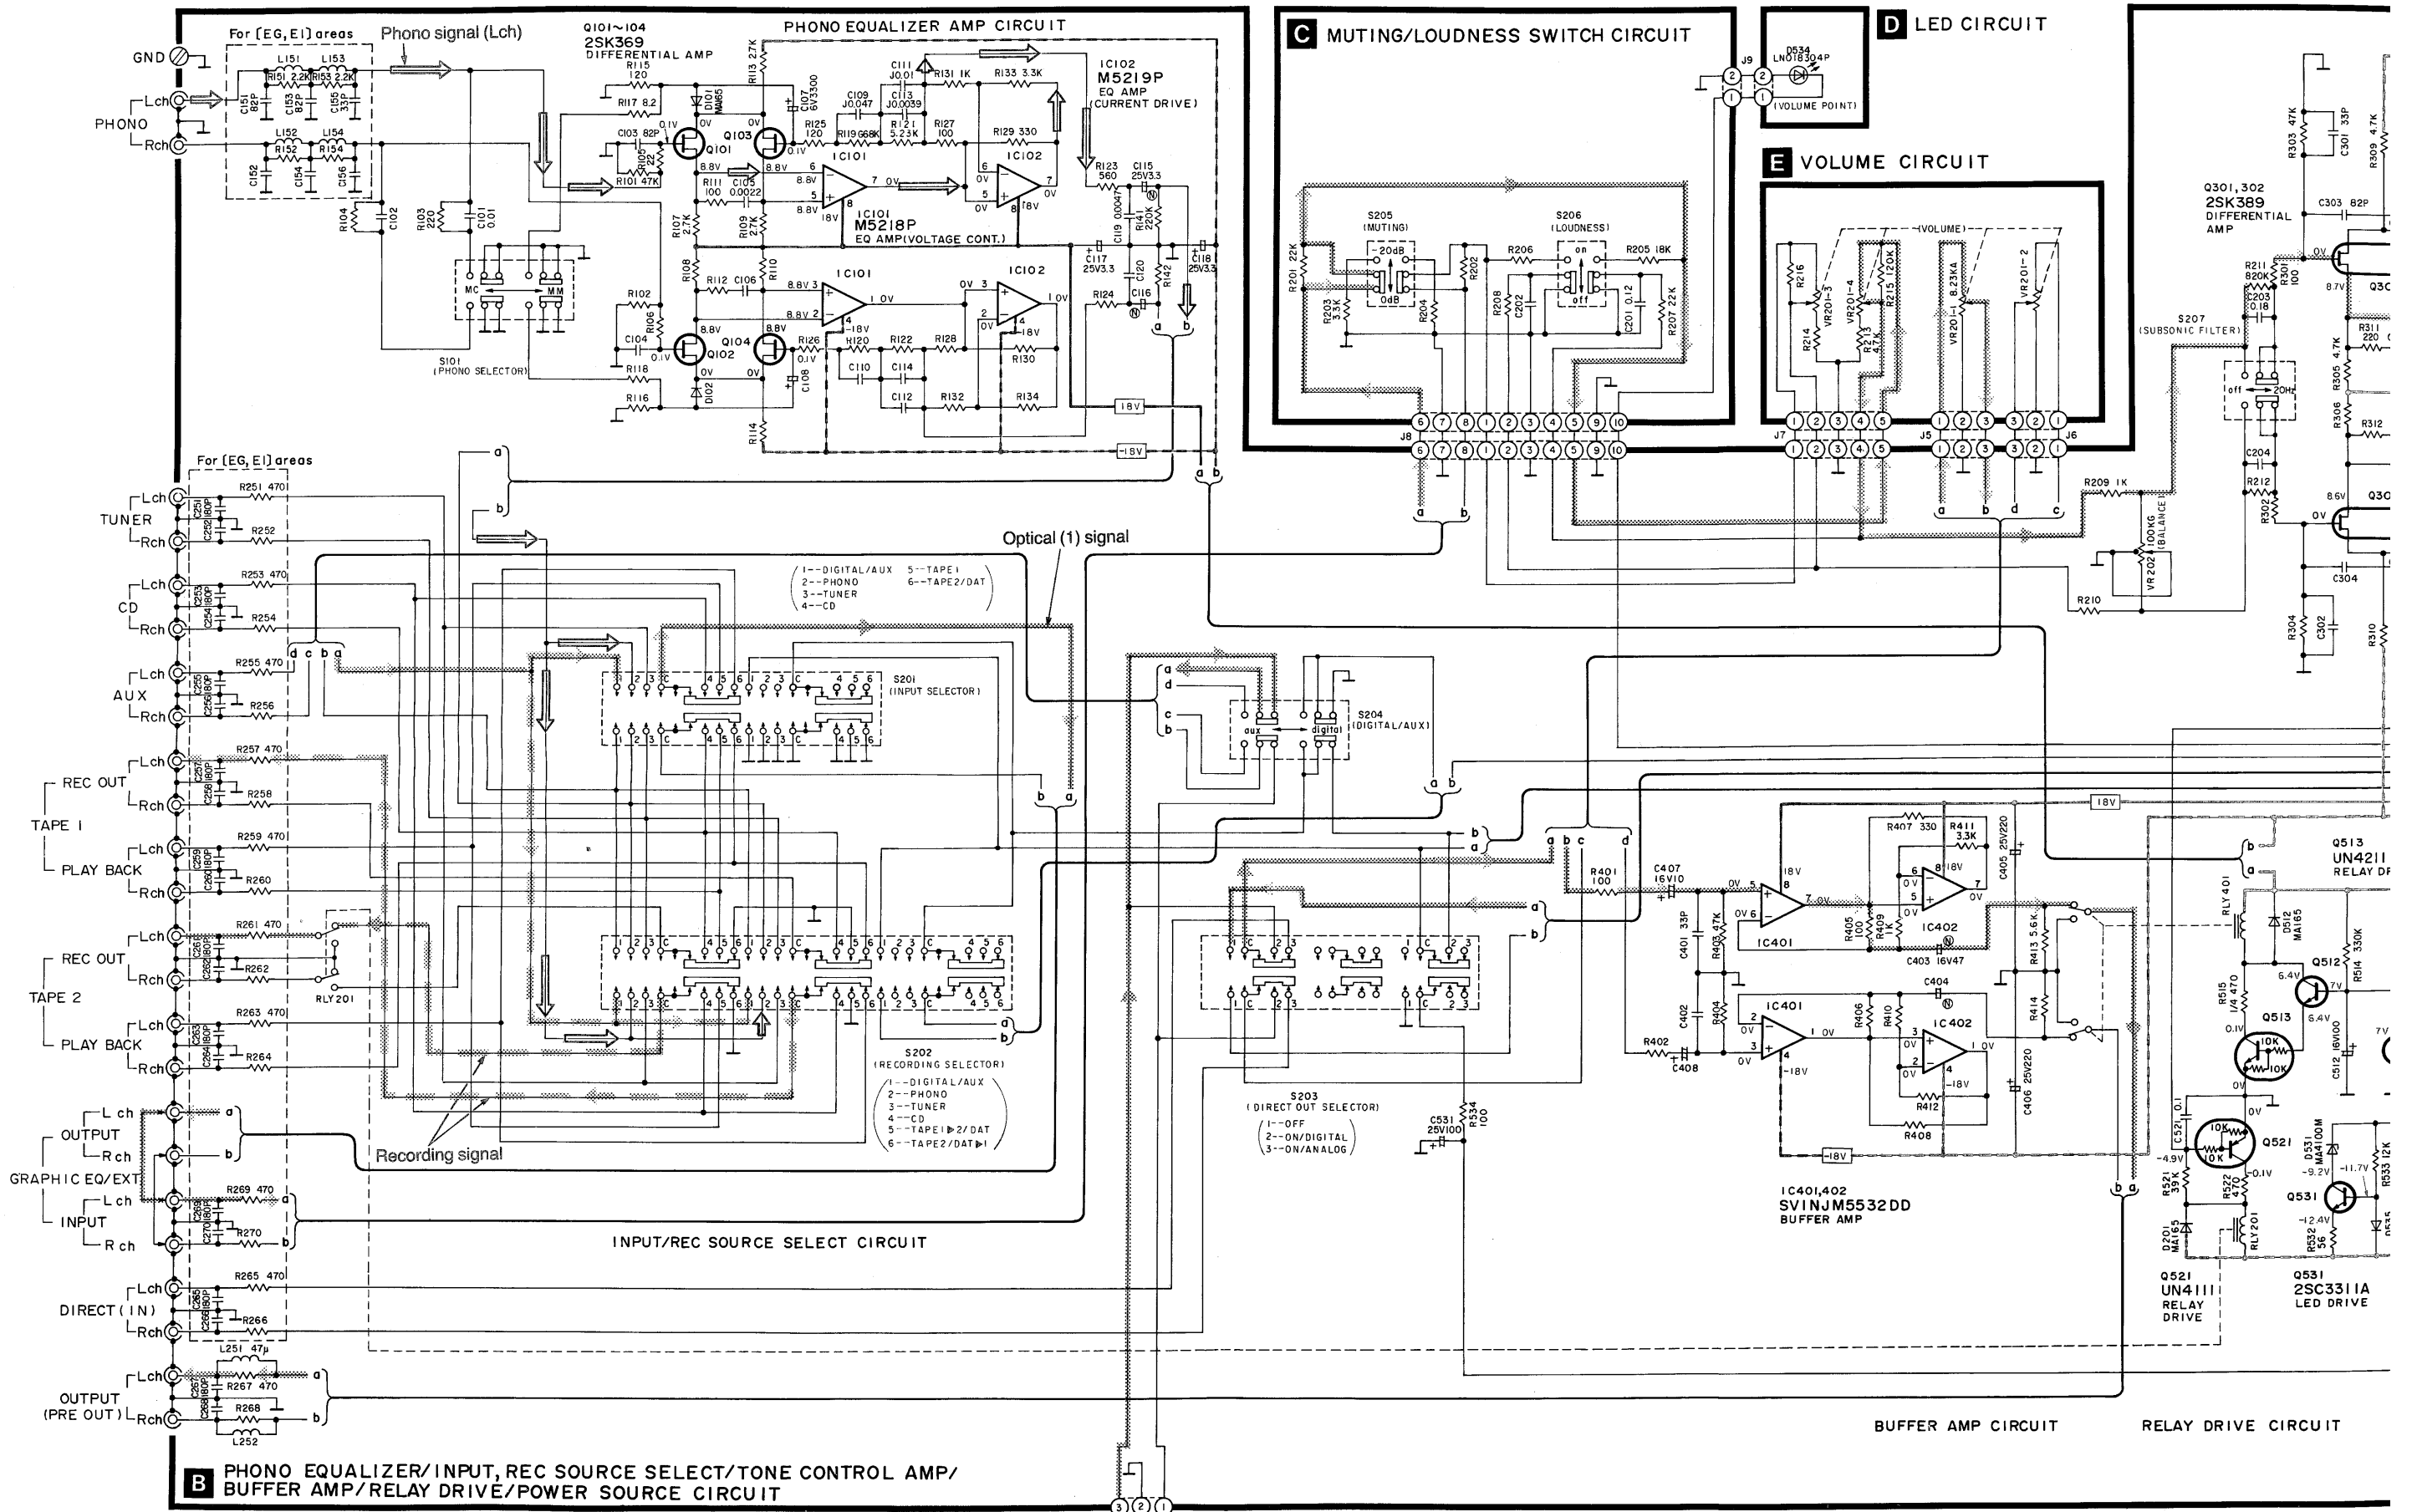

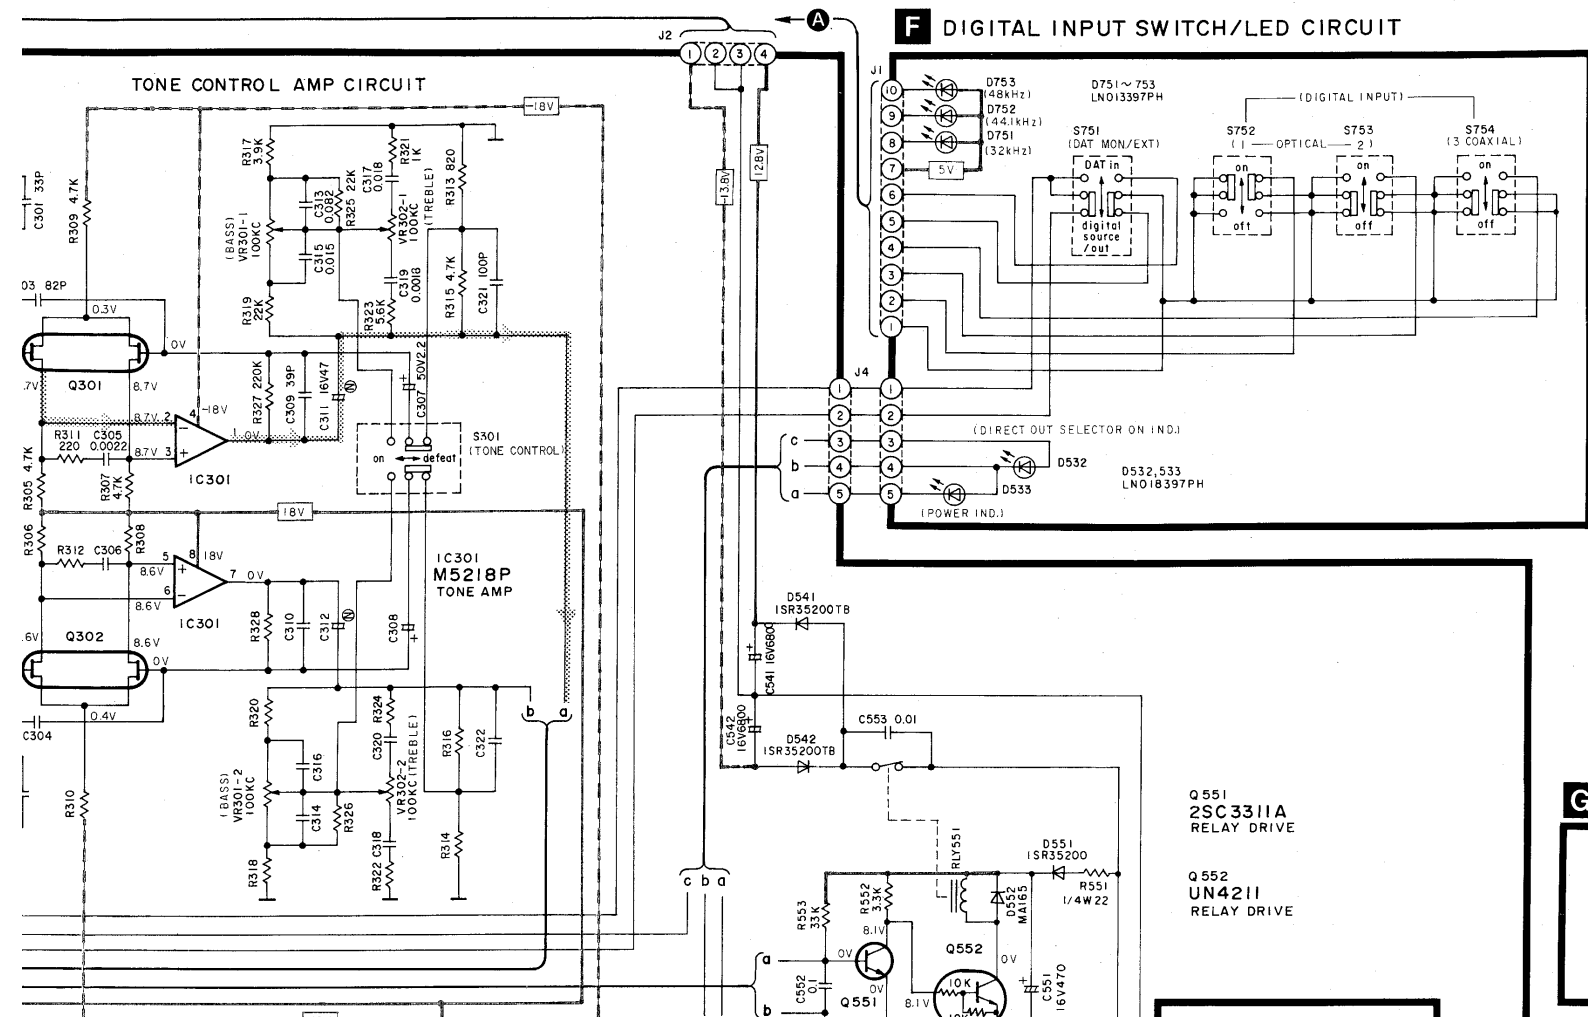


(This schematic diagram may be modified at any time with the development of new technology.)

Notes:


1. S1 : Power switch in "on" position. (■; off, ▬; on)
2. S2 : Voltage selector switch in "240 V" position. (For [EK], [XL], [XA], [PA] and [PE] areas.)
3. S101 : Phono cartridge selector switch in "MM" position. (■; MM, ▬; MC)
4. S201 : Input selector switch in "aux/digital" position. (Phono, tuner, CD, aux/digital, tap1, tap2/DAT)
5. S202 : Recording output selector switch in "aux/digital" position. (Phono, tuner, CD, aux/digital, tap1, tap2/DAT)
6. S203 : Direct output selector switch in "off" position. (analog, digital, off)
7. S204 : Digital/auxiliary source selector switch in "digital" position. (■; digital, ▬; aux)
8. S205 : Audio muting switch in "0 dB" position. (■; 0 dB, ▬; -20 dB)
9. S206 : Loudness switch in "off" position. (■; off, ▬; on)
10. S207 : Subsonic filter switch in "off" position. (■; off, ▬; 20 Hz)
11. S301 : Tone control switch in "defeat" position. (■; defeat, ▬; on)
12. S701 : Optical/coaxial selector switch in "Optical" position. (Optical, coaxial)

13. S751 : DAT monitor switch in "off" position. (■; off, ▬; on)
14. S752-S754 : Digital input selector switch in "off" position. S752: 1, S753: 2, S754: 3
15. Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.

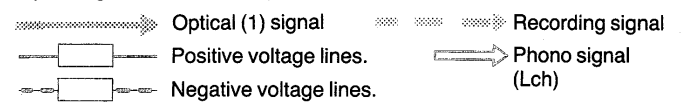


16. Important safety notice: Components identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.


***Caution!**
IC and LSI are sensitive to static electricity. Secondary trouble can be prevented by taking care during repair.
*Cover the parts boxes made of plastics with aluminum foil.
*Ground the soldering iron.
*Put a conductive mat on the work table.
*Do not touch the legs of IC or LSI with the fingers directly.

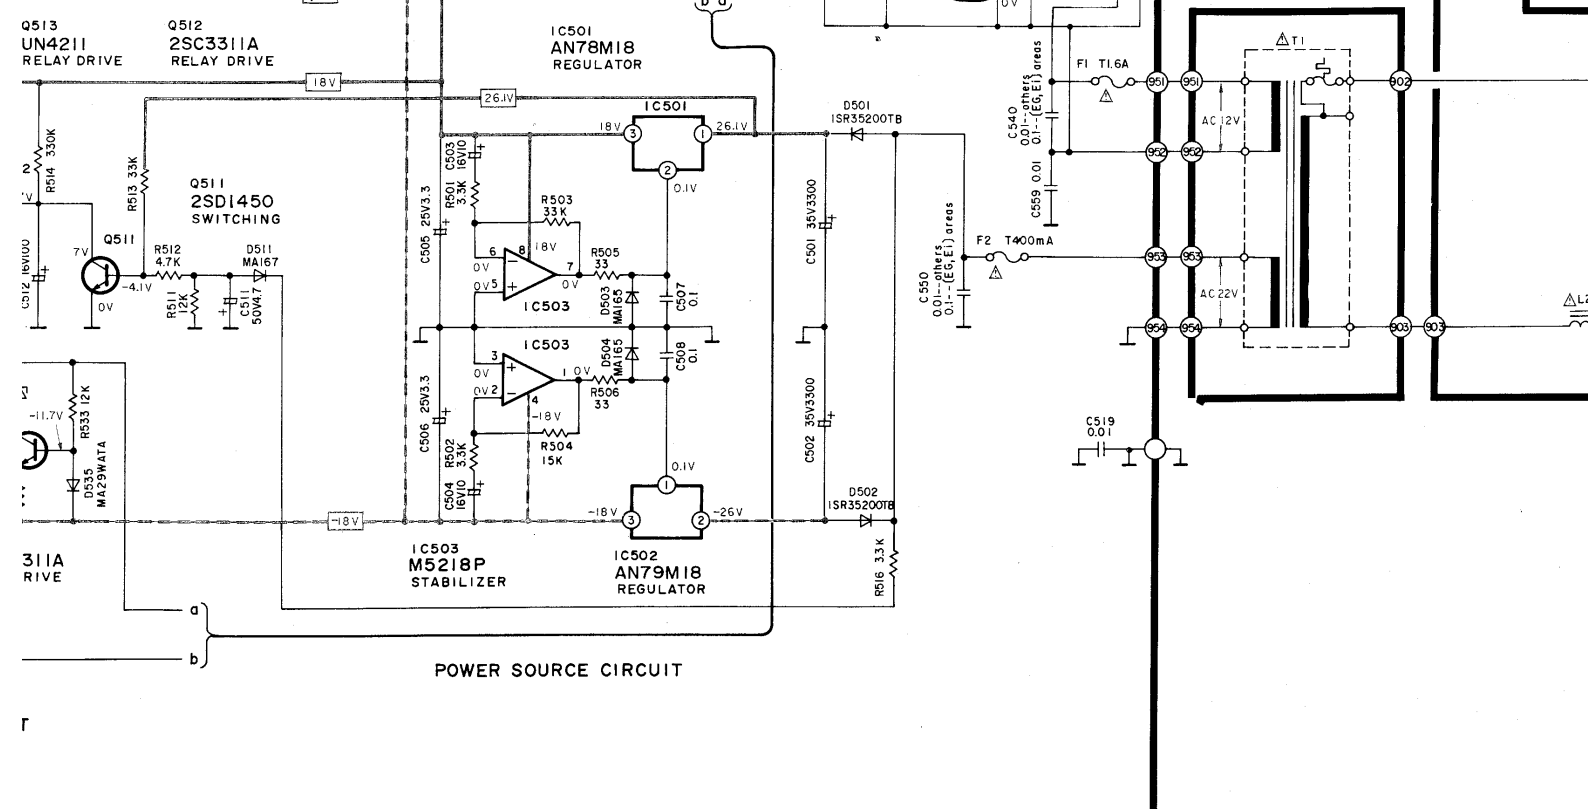


G POWER SWITCH CIRCUIT



Power Source For [EK, XL, XA, PA, PE] areas.

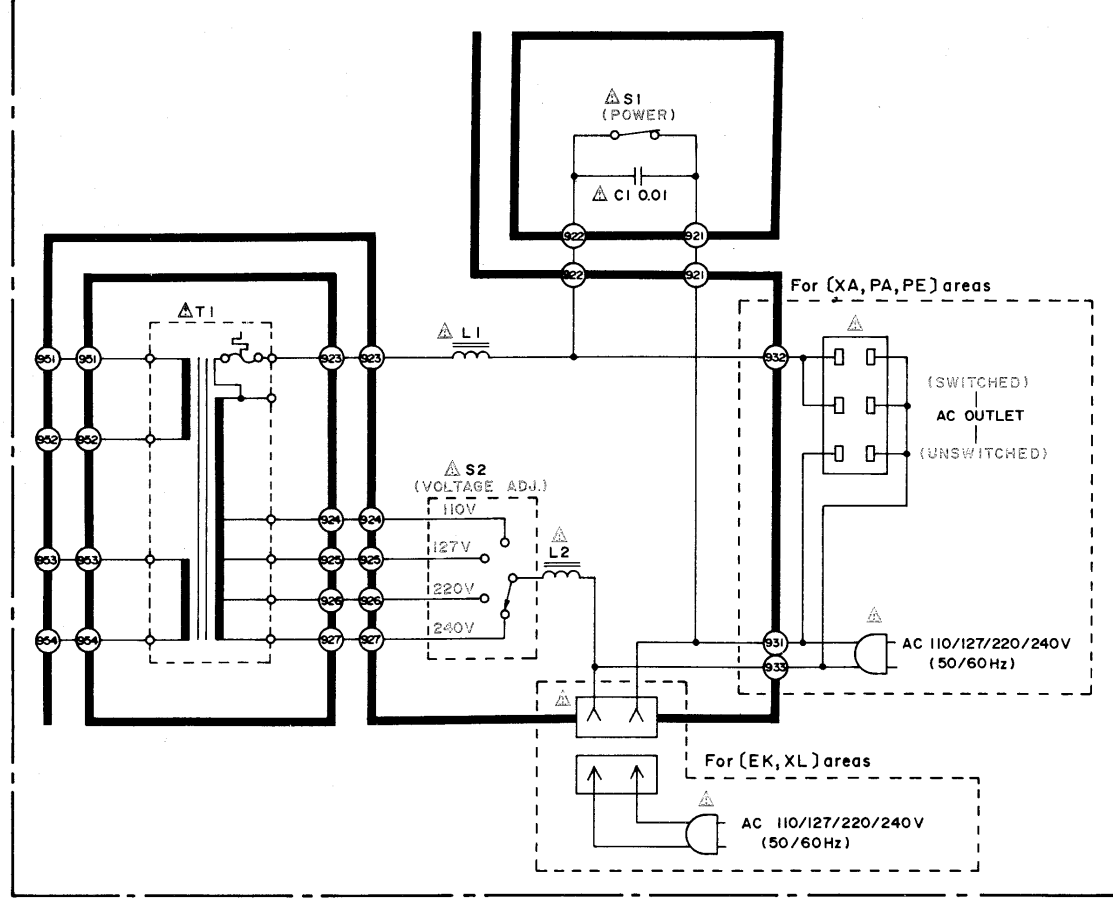


WIRING CONNECTION DIAGRAM

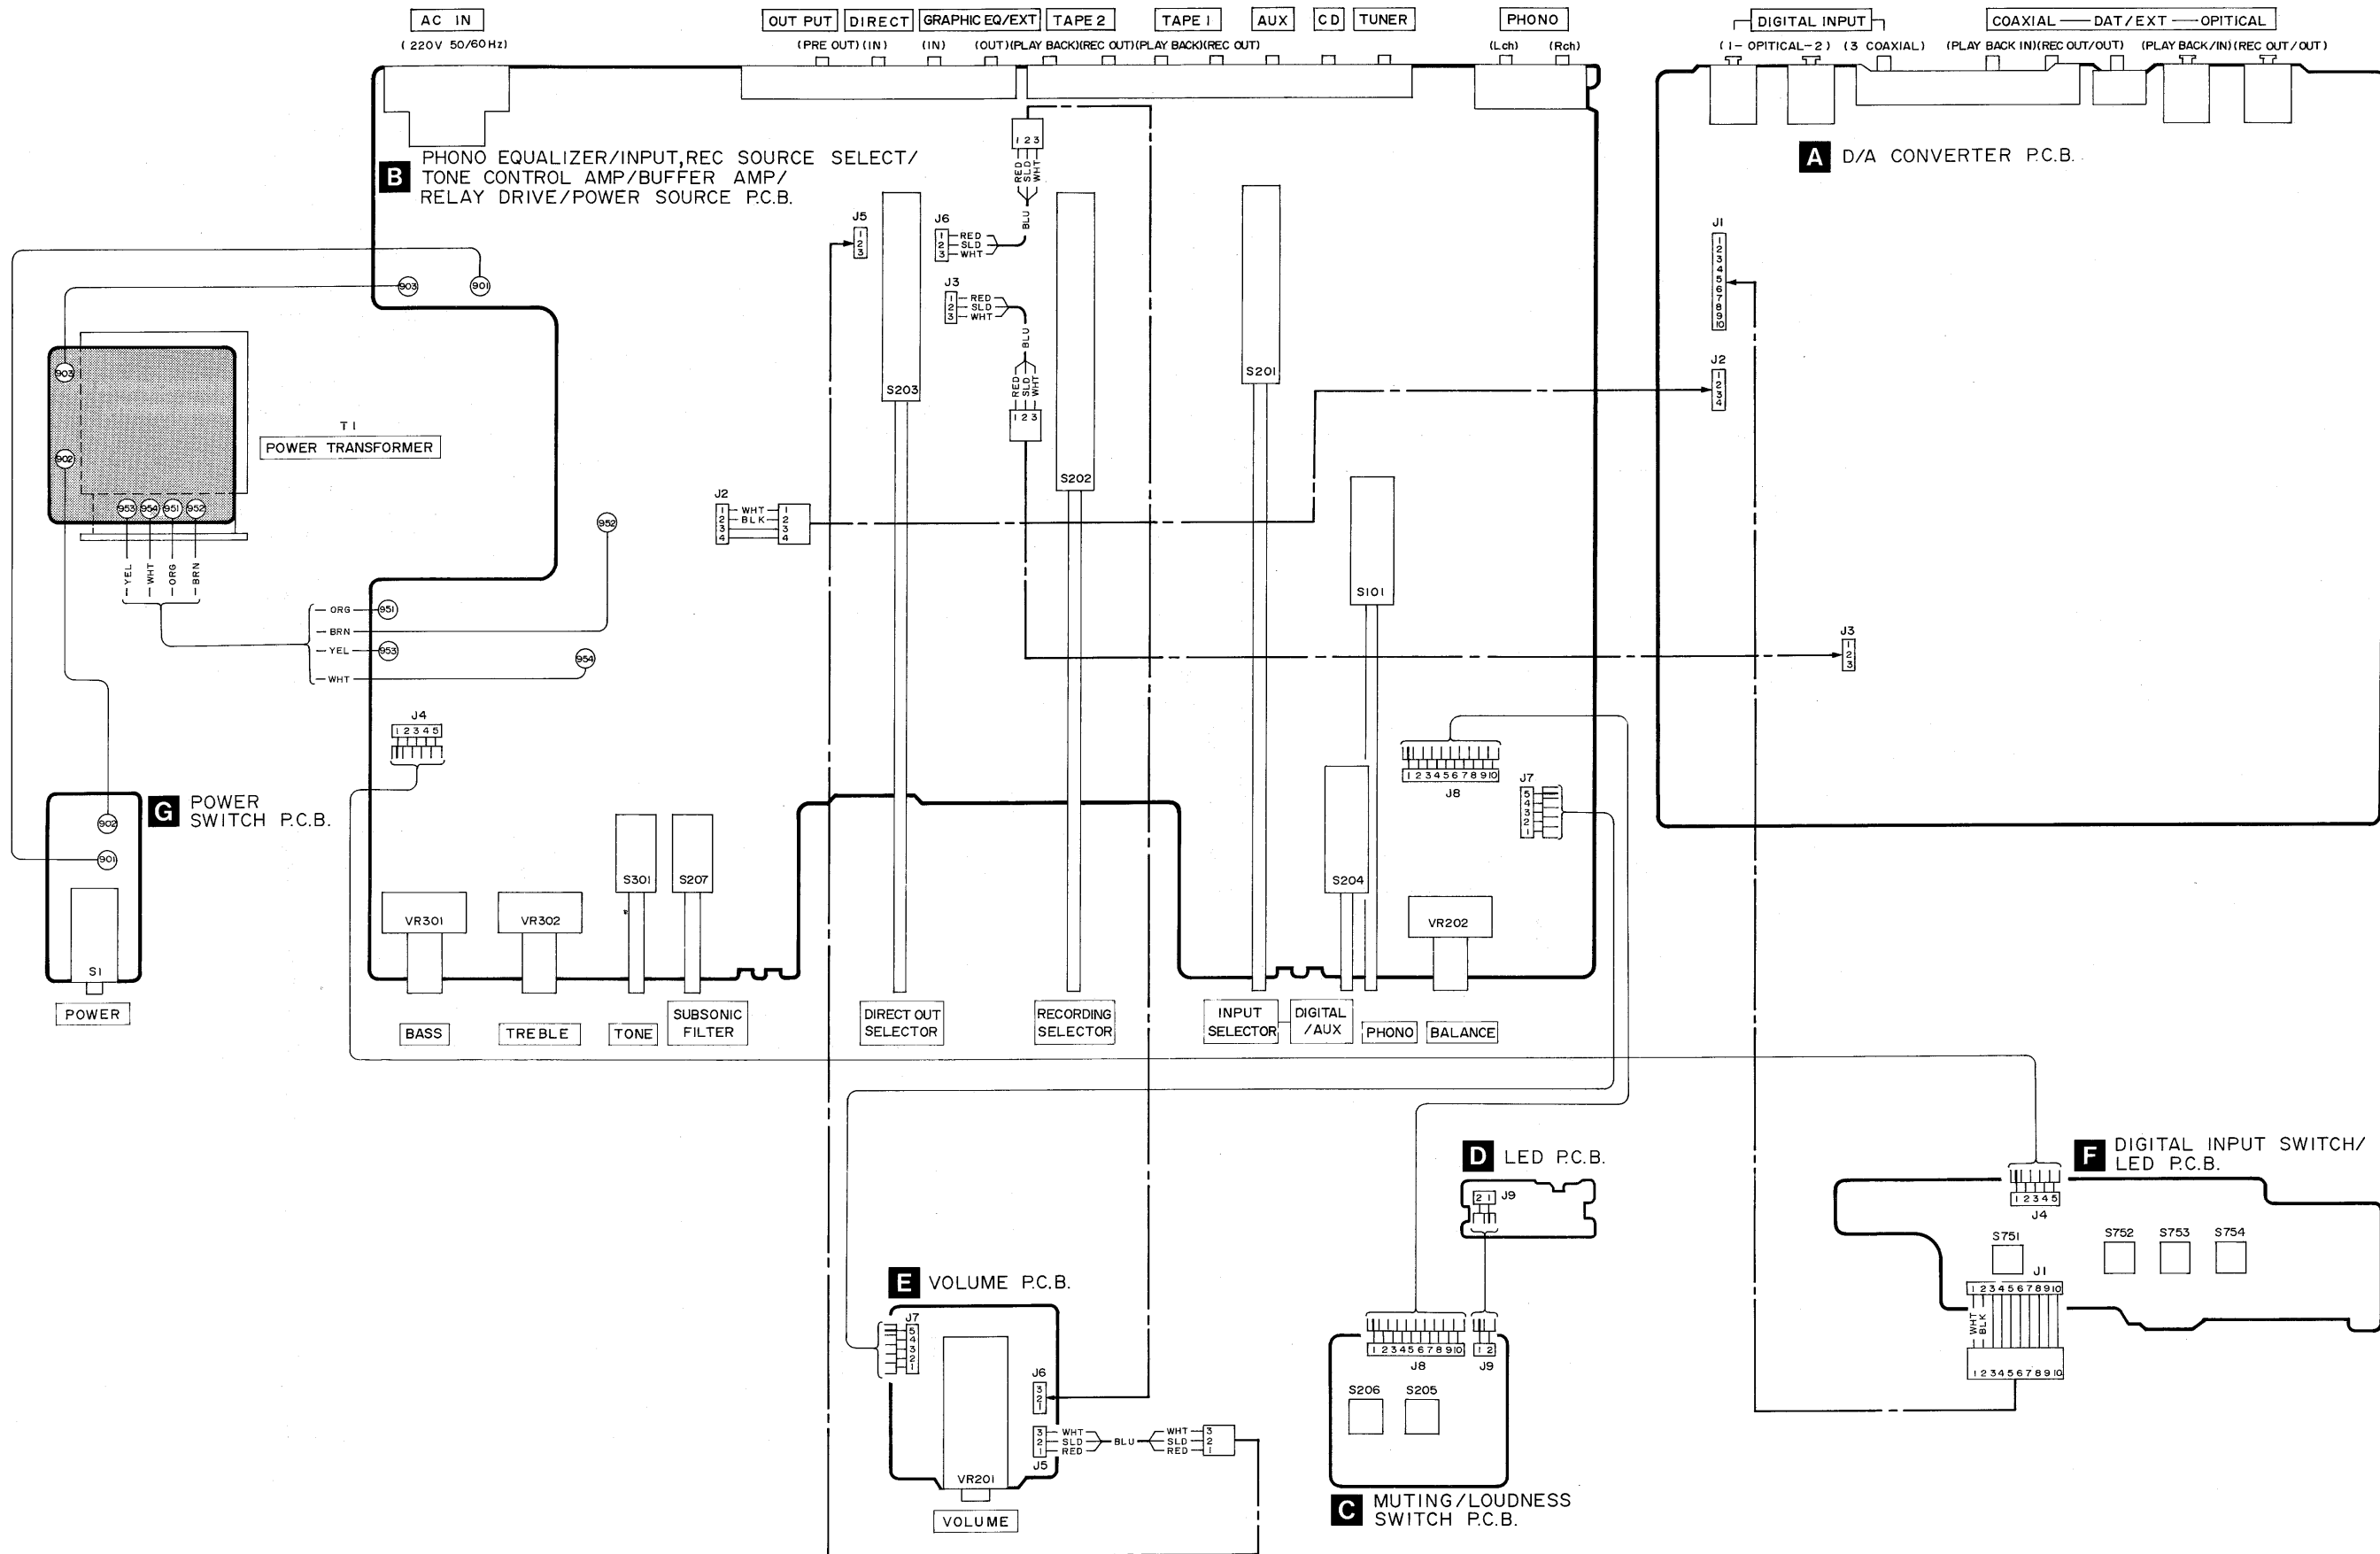

SU-A60 SU-A60

■ BLOCK DIAGRAM

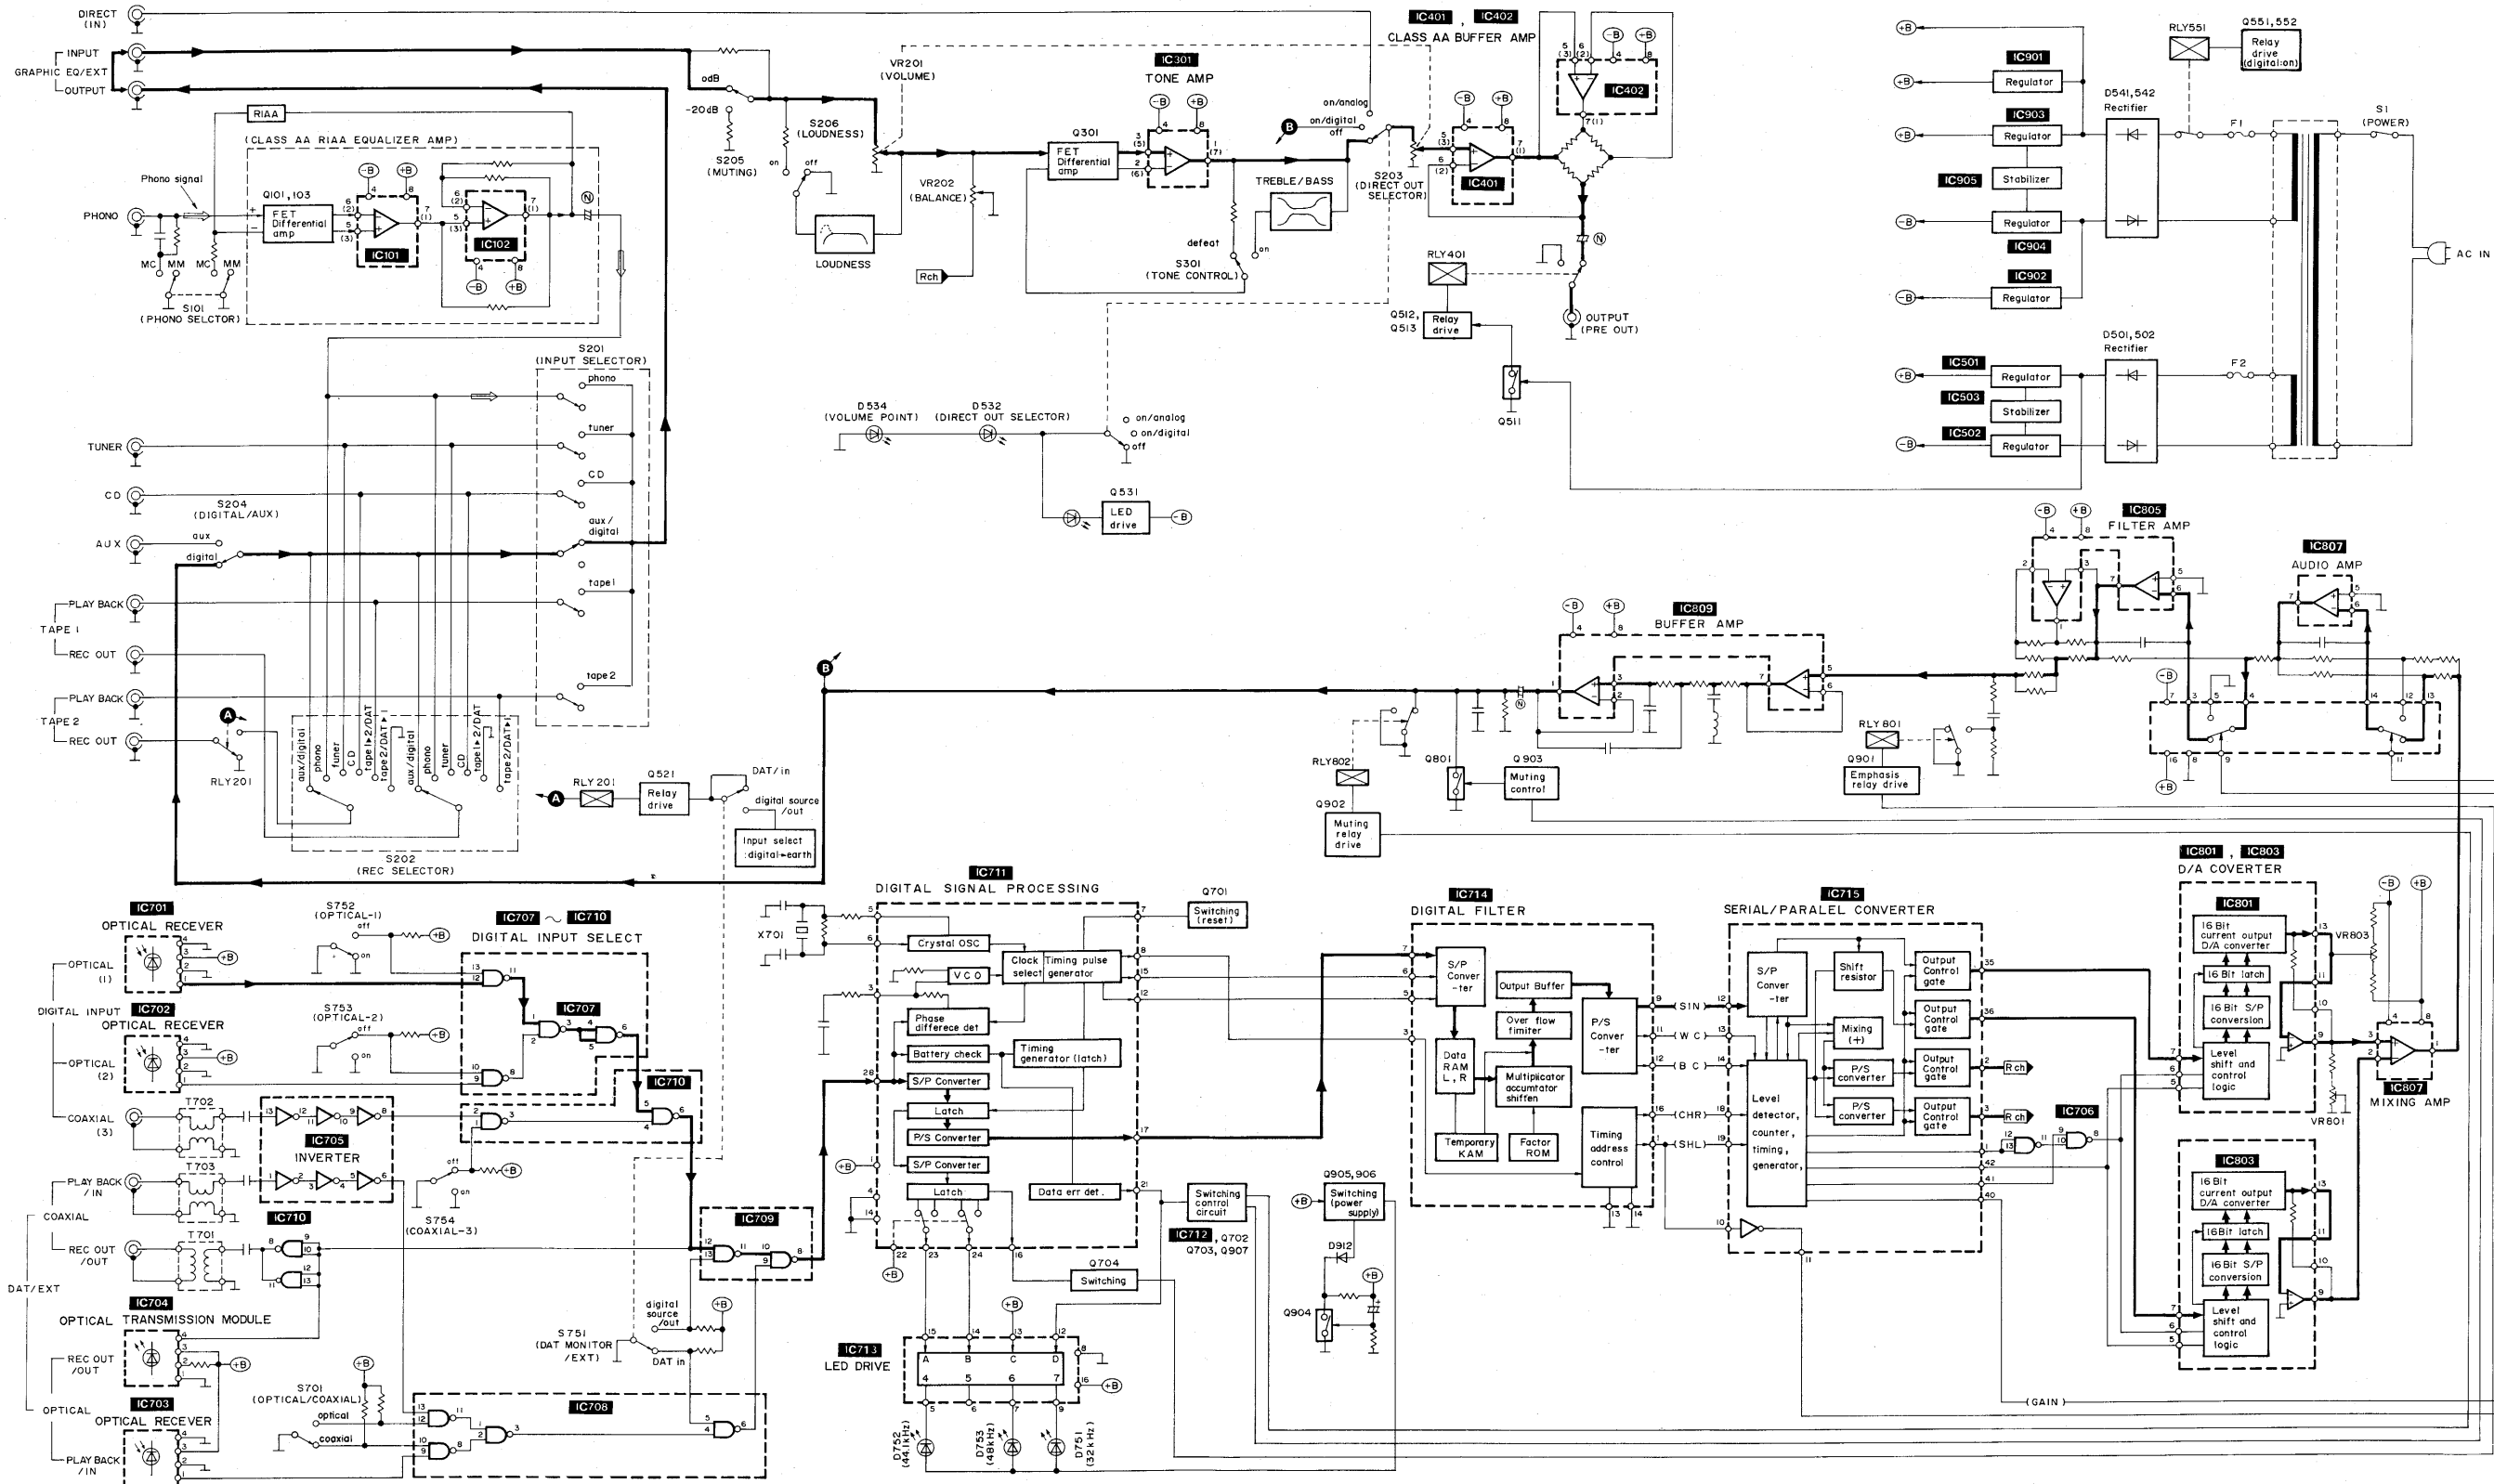

■ FUNCTIONS OF IC TERMINALS

● YM3623B DIGITAL INTERFACE RECEPTION

(PU) terminals are "pulled up".

Pin No.	Terminal Name	I/O	Function																				
1	VDD1	—	This is the power connection terminal (+5 V).																				
2	ADJ	I	This terminal is for the adjustment of the VCO oscillation frequency, but it is not used in this unit.																				
3	VCO	I/O	This is the external condenser terminal for the VCO circuitry.																				
4	VSS2	—	This is the ground connection terminal of the system.																				
5	XO	O	This is the output terminal for the crystal vibrator (16.9344 MHz).																				
6	XI	I	This is the input terminal for the crystal vibrator.																				
7	KMODE	I (PU)	At a high level...the PLL circuitry is activated when the DIN terminal receives an input signal. Otherwise, the crystal vibrator is activated. At a low level...the crystal vibrator is activated, regardless of the DIN terminal input.																				
8	∅A	O	This terminal outputs a 16.9344-MHz frequency when the crystal vibrator functions. When the PLL circuitry is activated, the frequency varies according to the speed of input data of the DIN terminal (fs=about 16.9344 MHz when it is 44.2 kHz).																				
9	∅B	O	The frequency of this terminal is divided into a third of that of terminal ∅A when the crystal vibrator functions. When the PLL circuitry is activated, the frequency varies according to the speed of input data of the DIN terminal (fs=about 16.9344 when it is 44.2 kHz).																				
10	T1	I (PU)	This is the input terminal for checking the internal circuitry.																				
11	T2	I (PU)	This is the input terminal for checking the internal circuitry.																				
12	BCO	O	Used to output the time-clock signal from the DO terminal.																				
13	SYNC	O	Used to output the synchronization signal.																				
14	VSS1	O	This is the ground connection terminal of the system (+0 V).																				
15	L/R	O	At a high level...data on the left channel is output from the DO terminal. At a low level...data on the right channel is output from the DO terminal.																				
16	DEF	O	At a high level...input data is emphasized. At a low level...input data is not emphasized.																				
17	DO	O	Outputs 16-bit data.																				
18	WC	O	This is the terminal for checking data output to the DO terminal.																				
19	DIGR	O	This terminal outputs the signal for the right channel.																				
20	DIGL	O	This terminal outputs the signal for the left channel.																				
21	ERR	O	Error detection terminal. H=Error is found during parity check L=No errors																				
22	SEL	I (PU)	<table border="1"> <thead> <tr> <th>Input</th> <th colspan="2">Output</th> </tr> <tr> <th>SEL</th> <th>S1</th> <th>S2</th> </tr> </thead> <tbody> <tr> <td rowspan="2">L</td> <td>L</td> <td>DC (except DAT)</td> </tr> <tr> <td>H</td> <td>DAT</td> </tr> <tr> <td rowspan="4">H</td> <td>L</td> <td>The sampling frequency of the DIN input signal is 44.1 kHz.</td> </tr> <tr> <td>L</td> <td>48 kHz</td> </tr> <tr> <td>H</td> <td>32 kHz</td> </tr> <tr> <td>H</td> <td>—</td> </tr> </tbody> </table>	Input	Output		SEL	S1	S2	L	L	DC (except DAT)	H	DAT	H	L	The sampling frequency of the DIN input signal is 44.1 kHz.	L	48 kHz	H	32 kHz	H	—
Input	Output																						
SEL	S1	S2																					
L	L	DC (except DAT)																					
	H	DAT																					
H	L	The sampling frequency of the DIN input signal is 44.1 kHz.																					
	L	48 kHz																					
	H	32 kHz																					
	H	—																					
23	S1	O																					
24	S2	O																					
25	SCK	O	Terminal for the clock-signal of the sub code output.																				
26	SSYNC	O	For the signal of the sub code.																				
27	SDO	O	For the output of sub code data.																				
28	DIN	I (PU)	For the input of data.																				

● YM3404B (Digital filter)

Pin No.	Mark	I/O	Function
1	SHL	O	1DAC(ST="L"): Lch Deglitcher signal 2DAC(ST="H"): L/Rch Deglitcher signal
2	X0	O	Clock output
3	X1	I	Clock input
4	VDD2	I	Power supply (connected to +5V)
5	BCI	I	Bit clock input (input data)
6	SDSY	I	R/L signal
7	SDI	I	Data input
8	VDD1	I	Power supply (connected to +5V)

Pin No.	Mark	I/O	Function
9	DLO	O	1DAC(ST="L"): L/Rch data output terminal 2DAC(ST="H"): Lch data output terminal
10	RDO	O	Rch data output (not connected)
11	WCO	O	Output data word clock
12	BCO	O	Bit clock output (output data)
13	VSS	I	GND terminal
14	ST	I	1DAC/2DAC selector terminal
15	FEN	I	System clock selector terminal
16	SHR	O	1DAC(SP="L"): Rch deglitch signal

● MN53010PEH (Serial/Parallel converter)

Pin No.	Mark	I/O	Function
1	WCO	O	Output data word clock (DALO,DBLO,DARO,DBRO)
2	DARO	O	Rch data output, (+)terminal
3	DBRO	O	Rch data output, (-)terminal
4	RST	O	Reset output data to "0"
5	VDD	I	Power supply (connected to +5V)
6	VSS	I	GND terminal
7	F2DAC	I	"H": 2DAC 18-bit "L": 2DAC 17-bit
8	FLOAT	I	"H": 4DAC 18-bit "L": 4DAC 17-bit
9	PHASE	I	"H": Phase inversion "L": Normal mode
10	LRCK	I	Inverter input
11	LRCK	O	LRCK signal inverter output
12	SIN	I	Data input
13	WCI	I	Input data word clock
14	BCI	I	Input data bit clock
15	VSS	I	GND terminal
16	NC	---	Not connected
17	VDD	I	Power supply (connected to +5V)
18	SHR	I	Rch Deglitcher signal

Pin No.	Mark	I/O	Function			
18	SHR	I	Rch Deglitcher signal			
19	SHL	I	Lch Deglitcher signal			
20	NC	---	Not connected			
31						
			NORMAL MODE delay: 180ms	TEST MODE delay: 1.45ms	TEST MODE delay: 0.73ms	TEST MODE delay: 0ms
32	NTEST1	I	H	L	H	L
33	NTEST2	I	H	H	L	L
34	NTEST3	I	"H": Normal mode "L": Reset			
35	DALO	O	Lch data output, (+)terminal			
36	DBLO	O	Rch data output, (-)terminal			
37	VDD	I	Power supply (connected to +5V)			
38	VSS	I	GND terminal			
39	NC	---	Not connected			
40	GAIN	O	Gain selector signal H: 0~-12dB L: below -12dB			
41	SH	O	Deglitch signal H: Sample L: Hold			
42	BCO	O	Output data bit clock			


MEASUREMENTS AND ADJUSTMENTS

Control positions and equipment used.

- Volume knob 0 dB (Max.)
- Balance control center
- Direct out selector digital
- DC electronic voltmeter (EVM)

DA CONVERTER DC OFFSET ADJUSTMENT


1. Test equipment connection is shown in figure. (Connect the DC EVM on both channels.)
2. Adjust **VR803** and **VR804** so that the voltage are less than 1 mV in 3 mV range.

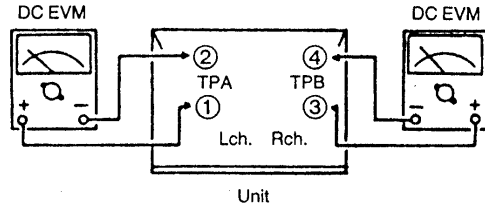

TPA=TP1, TPB=TP2


Note:

After replacing or repairing IC801-804 (Part No. PCM56P-J), rotate VR801 and VR802 fully clockwise (to point C) and counterclockwise (to point A). Afterwards, set the middle points between A and C to their center positions (B).



VR851 and VR852

Adjustment points

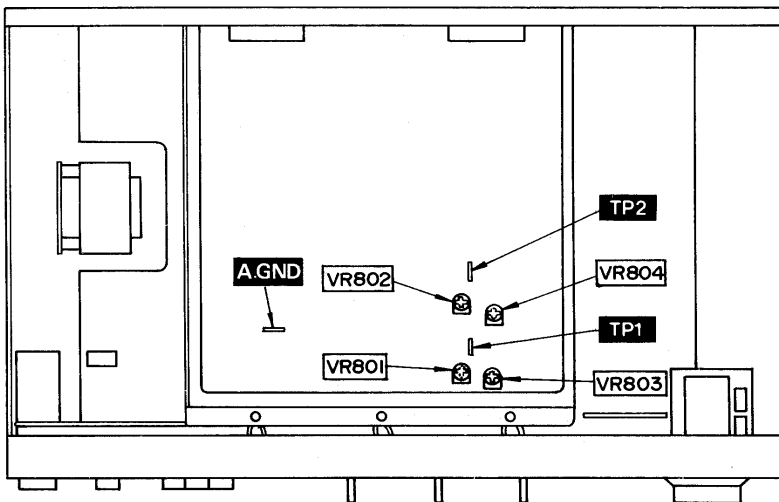

Test Point

- TP1 Lch DA Converter DC offset adj.
- TP2 Rch DA Converter DC offset adj.

Adjustment VR

- VR801 Lch DA Converter distortion adj.
- VR802 Rch DA Converter distortion adj.
- VR803 Lch DA Converter DC offset adj.
- VR804 Rch DA Converter DC offset adj.


Note:

Refer to the Supplement (Order No. HAD8803100S9) for the information about how to adjust the DA Converter DC offset, DA Converter distortion and check the optical terminal.

1 2 3 4 5 6 7 8 9 10 11 12

EXPLODED VIEW

A
B
C
D
E
F
G
H

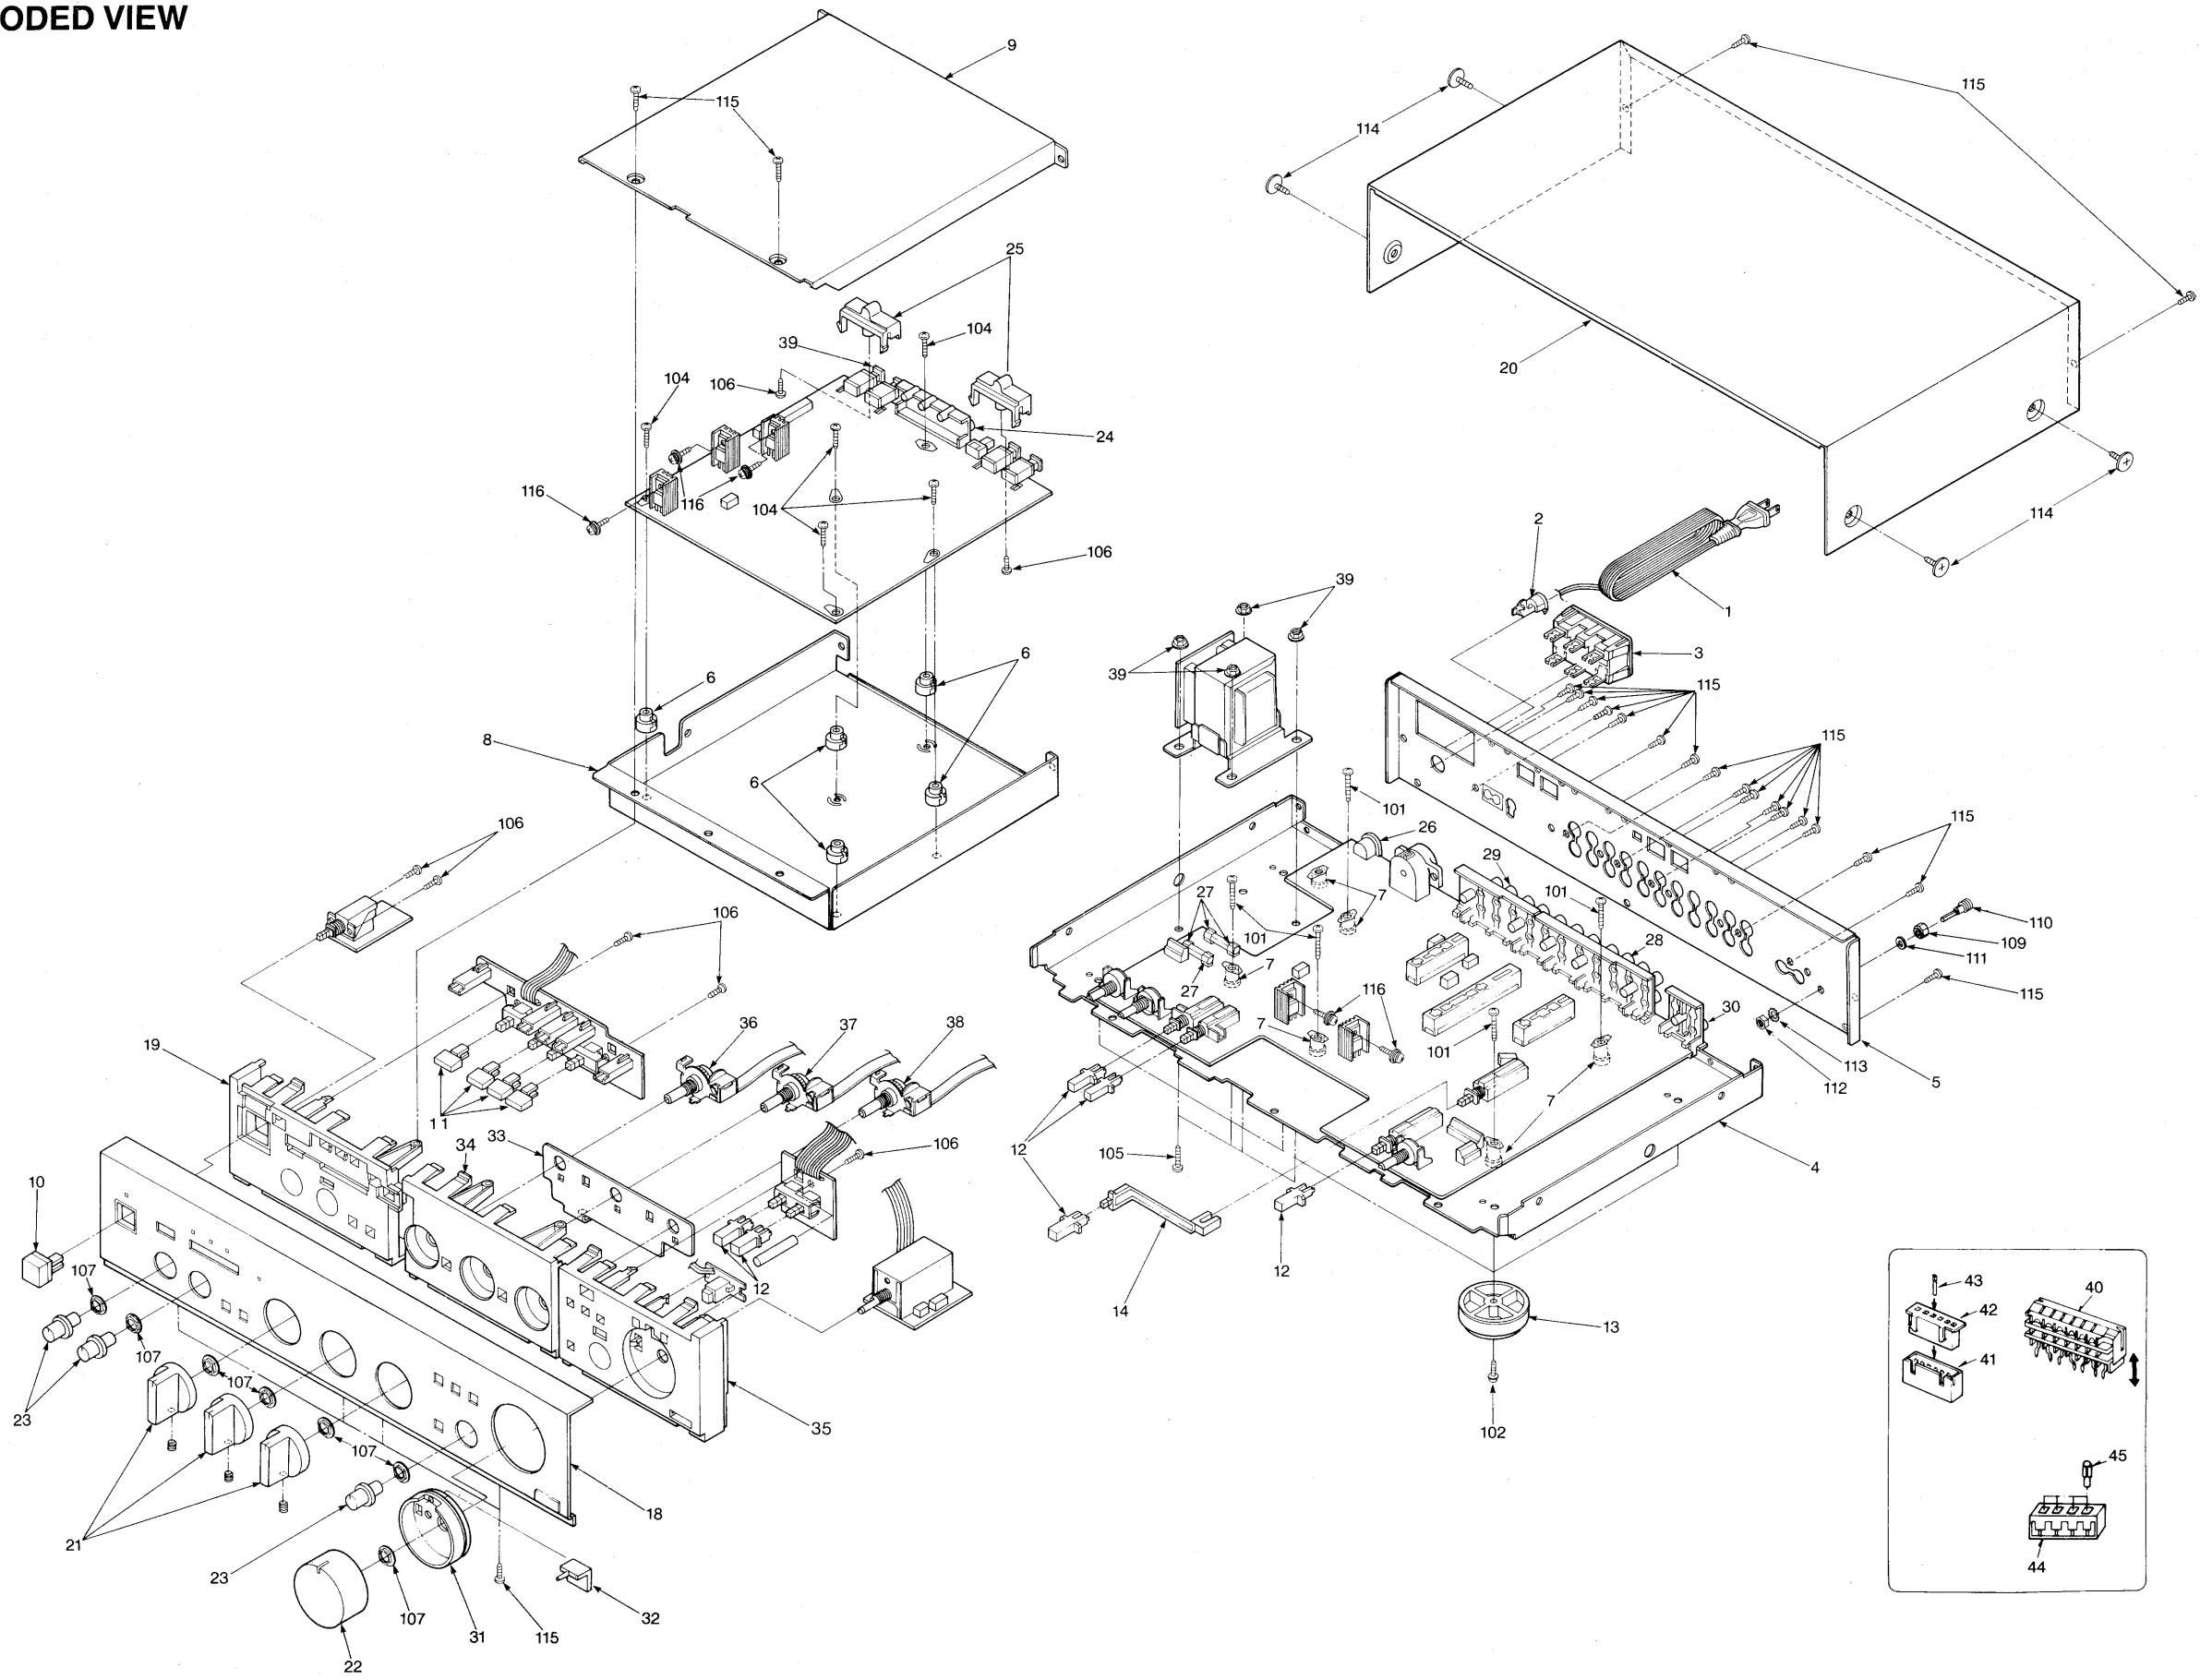

REPLACEMENT PARTS LIST

Notes : * Important safety notice :

Components identified by Δ mark have special characteristics important for safety. When replacing any of these components use only manufacturer's specified parts.

* Bracketed indications in Ref. No. columns specify the area. (Refer to the first page for area.)
Parts without these indications can be used for all areas.

●CABINET PARTS

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
CABINET AND CHASSIS			(PA, PE, E1)		
1	Δ SJA121	POWER CORD	(EH, EB, EF)		
[XA, PA, PE]			27	SJT390	FUSE HOLDER
2	SHR127	SPACER, POWER CORD	28	SJF3062-8A	TERMINAL
[XA, PA, PE]			29	SJF3062-11A	TERMINAL
3	Δ SJS601-3	SOCKET	30	SJF3057-9A	TERMINAL
[XA, PA, PE]			31	SGX7979	ORNAMENT
4	SKU11890	CABINET PLATE	32	SGL264	ORNAMENT
5	SGPUA60-KH	REAR PANEL	33	SUM3115	BRACKET
[EH, EB, EF]			34	SGXUA60-KE2	GRILLE ASS'Y
[XL]	SGPUA60-KL	REAR PANEL	35	SGXUA60-KE3	GRILLE ASS'Y
5	SGP7370-1A	REAR PANEL	36	ESA33291B	SWITCH
[EK]			37	ESA33292B	SWITCH
5	SGP7370-2A	REAR PANEL	38	ESA33293B	SWITCH
[XA, PA, PE]			39	VJA7135	CAP
5	SGP7370A	REAR PANEL	40	SJT30543-V	CONNECTOR(5P)
[E]			40	SJT31043-V	CONNECTOR
5	SGP7370B	REAR PANEL	41	SJT3319	CONNECTOR(3P)
[EG, E1]			42	SJS5331	SOCKET(3P)
6	SHE170-1	SPACER	42	SJS5425	SOCKET(4P)
7	SHE181	HOLDER	43	SJT783	CONTACT
8	SMC1287	SHIELD COVER	44	SJS5337	CONNECTOR(3P)
9	SMC1288	SHIELD COVER	44	SJS5431	SOCKET(4P)
10	SBC666-5	BUTTON, POWER	44	SJS5633	CONNECTOR(6P)
11	SBC993	BUTTON	45	SJT785	CONTACT
12	SBC719-1	BUTTON	SCREWS, WASHERS AND NUTS		
13	SKL306	INSULATOR	39	SNE452S	NUT
14	SUB153	CONNECTION ROD	101	XTB3*20F	TAPPING SCREW
18	SGWUA60-KE	FRONT PANEL	102	XTW3*8T	SCREW
19	SGXUA60-KE1	GRILLE ASS'Y	104	XTBS3*12F1	SCREW
20	SKC2190K99	CABINET BODY	105	XTB3*10F	TAPPING SCREW
21	SBN1240	KNOB, SELECTOR	106	XTB3*8G	SCREW
22	SBN1241	KNOB VR, VOLUME	107	SNE4021	NUT
23	SBN1242	BUTTON, TONE	109	SNE4017-1	TERMINAL
24	SJF3061-13A	TERMINAL PLATE	110	SNEA204-1S	TERMINAL
25	SGX7967	ORNAMENT	111	SNTA421-1	WASHER
26	Δ SJS16	AC INLET	112	XNG4BS	NUT
[XL]			113	XWC4B	WASHER
26	Δ SJS9236	AC INLET	114	SNE2129-3	SCREW
[E, EG, EK, XA]			115	XTBS3*8JFZ1	SCREW
			116	XYN3*F8	SCREW

•ELECTRICAL PARTS

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description	
INTEGRATED CIRCUITS						
IC101	M5218P	I.C. EQ AMP	D102	MA165	DIODE	
IC102	M5219P	I.C. EQ AMP	D201	MA165	DIODE	
IC301	M5218P	I.C. TONE AMP	D501	Δ SVD1SR35200A	RECTIFIER	
IC401	SV1NJM5532DD	I.C., BUFFER AMP	D502	Δ SVD1SR35200A	RECTIFIER	
IC402	SV1NJM5532DD	I.C., BUFFER AMP	D503	MA165	DIODE	
IC501	AN78M18	I.C., REGULATOR	D504	MA165	DIODE	
IC502	AN78M18	I.C., REGULATOR	D511	MA167	DIODE	
IC503	M5218P	I.C. BUFFER AMP	D512	MA165	DIODE	
IC701	SV1TORX172	I.C. OPTICAL REC.	D531	MA4100M	DIODE	
IC702	SV1TORX172	I.C. OPTICAL REC.	D532	LN018397PH	LED ASS'Y	
IC703	SV1TORX172	I.C. OPTICAL REC.	D533	LN018397PH	LED ASS'Y	
IC704	SV1TOTX172	I.C. OPTICAL REC.	D534	LN018304P	DIODE, GAASP	
IC705	MN74HCJ04	I.C. DIGITAL INPUT	D535	MA29WA	DIODE	
IC706	MN74HC00	I.C. DIGITAL INPUT	D541	Δ SVD1SR35200A	RECTIFIER	
IC707	MN74HC00	I.C. DIGITAL INPUT	D542	Δ SVD1SR35200A	RECTIFIER	
IC708	MN74HC00	I.C. DIGITAL INPUT	D551	Δ SVD1SR35200A	RECTIFIER	
IC709	MN74HC00	I.C. DIGITAL INPUT	D552	MA165	DIODE	
IC710	MN74HC00	I.C. DIGITAL INPUT	D701	MA165	DIODE	
IC711	YM3623B	I.C. DIGITAL SIG.	D703	MA165	DIODE	
IC712	MN123Z	I.C., FLIP-FLOP	D705	MA29WA	DIODE	
IC713	DN74LS145	I.C. LED DRIVE	D751	LN013397PH	DIODE, GAASP	
IC714	YM3404B	I.C. DIGITAL FIL.	D752	LN013397PH	DIODE, GAASP	
IC715	MN53010PEH	I.C. CONVERTER	D753	LN013397PH	DIODE, GAASP	
IC801	PCM56P-J	I.C. D/A CON.	D801	MA165	DIODE	
IC802	PCM56P-J	I.C. D/A CON.	D802	MA165	DIODE	
IC803	PCM56P-J	I.C. D/A CON.	D901	MA165	DIODE	
IC804	PCM56P-J	I.C. D/A CON.	D902	MA165	DIODE	
IC805	SV1NJM5532DD	I.C., BUFFER AMP	D904	MA165	DIODE	
IC806	SV1NJM5532DD	I.C., BUFFER AMP	D905	MA165	DIODE	
IC807	SV1NJM5532DD	I.C., BUFFER AMP	D906	MA4240H	DIODE	
IC808	SV1NJM5532DD	I.C., BUFFER AMP	D912	MA165	DIODE	
IC809	SV1NJM5532DD	I.C., BUFFER AMP	VARIABLE RESISTORS			
IC810	SV1NJM5532DD	I.C., BUFFER AMP	VR201	EW1PRA028231	V.R. VOLUME	
IC811	SV1UPD4053BC	I.C. SWITCHING	VR202	EWHFNAF20G15	V.R., BALANCE	
IC812	SV1UPD4053BC	I.C. SWITCHING	VR301	EWCSSAF20C15	V.R. BASS	
IC901	AN78M05	I.C. REGULATOR	VR302	EWCSSAF20C15	V.R. TREBLE	
IC902	AN78M05	I.C. REGULATOR	VR801	EVN38CA00B53	V.R., DISTORTION	
IC903	M5F79M08L	I.C. REGULATOR	VR802	EVN38CA00B53	V.R., DISTORTION	
IC904	M5F79M08L	I.C. REGULATOR	VR803	EVN38CA00B15	V.R. OFFSET	
IC905	M5218P	I.C. BUFFER AMP	VR804	EVN38CA00B15	V.R. OFFSET	
TRANSISTORS			COILS AND TRANSFORMERS			
Q101	2SK369-GR	TRANSISTOR	L1	Δ SLQX400-D	COIL	
Q102	2SK369-GR	TRANSISTOR	L2	Δ SLQX400-D	COIL	
Q103	2SK369-GR	TRANSISTOR	L151	SLQW471-1P3	CHOKE COIL	
Q104	2SK369-GR	TRANSISTOR	(EG, E1)			
Q301	2SK389BG	TRANSISTOR	L152	SLQW471-1P3	CHOKE COIL	
Q302	2SK389BG	TRANSISTOR	(EG, E1)			
Q511	2SD1330R	TRANSISTOR	L153	SLQW471-1P3	CHOKE COIL	
Q512	2SC3311A-Q	TRANSISTOR	(EG, E1)			
Q513	UN4211	TRANSISTOR	L154	SLQW471-1P3	CHOKE COIL	
Q521	UN4111	TRANSISTOR	(EG, E1)			
Q531	2SC3311A-Q	TRANSISTOR	L251	ELEPK470KA	COIL FILTER	
Q551	2SC3311A-Q	TRANSISTOR	L252	ELEPK470KA	COIL FILTER	
Q552	UN4211	TRANSISTOR	L701	ELEPK470KA	COIL FILTER	
Q701	UN4215	TRANSISTOR	L702	ELEPK470KA	COIL FILTER	
Q702	2SA1309AQ.S	TRANSISTOR	L703	ELEPK470KA	COIL FILTER	
Q703	UN4211	TRANSISTOR	L704	ELEPK470KA	COIL FILTER	
Q704	UN4211	TRANSISTOR	L705	ELEPK470KA	COIL FILTER	
Q801	2SD1330R	TRANSISTOR	L706	ELEPK470KA	COIL	
Q802	2SD1330R	TRANSISTOR	L707	ELEPK470KA	COIL	
Q901	UN4111	TRANSISTOR	L708	ELEPK470KA	COIL	
Q902	UN4111	TRANSISTOR	L709	ELEPK470KA	COIL	
Q903	UN4111	TRANSISTOR	L710	ELEPK470KA	COIL	
Q904	UN4215	TRANSISTOR	L711	ELEPK470KA	COIL	
Q905	UN4211	TRANSISTOR	L712	ELEPK470KA	COIL	
Q906	UN4111	TRANSISTOR	L801	ELEY471KA	COIL	
Q907	UN4211	TRANSISTOR	L802	ELEY471KA	COIL	
DIODES			L803	ELEPK470KA	COIL	
D101	MA165	DIODE	L805	ELEPK470KA	COIL	
			L901	ELEPK470KA	COIL	
			T1	(E, EH, EB) Δ (EF, EG, EI)	SLT5L292-W	POWER TRANSFORMER

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
T1 Δ (EK, XL, XA) (PA, PE)	SLT5L293-W	POWER TRANSFORMER	SWITCHES		
T701	SLZS10VN17-1	COIL	S1	ESB99714V	SW
T702	SLQB20G-1P	CHOCK COIL	S2 Δ	SSR187-1	SW, VOLTAGE SELECTOR
T703	SLQB20G-1P	CHOCK COIL	(EK, XL, X, XA) (PA, PE)		
COMPONENT COMBINATIONS			S101 Δ	SSH1235	SW, PHONO
Z701	EXCEMT103DC	CNMBINATION COM	S201	ESA26132	SW, INPUT
Z702	EXCEMT103DC	CNMBINATION COM	S202	ESA26134	SW, REC
Z703	EXCEMT103DC	CNMBINATION COM	S203	ESA26133	SW, DIRECT
Z704	EXCEMT103DC	CNMBINATION COM	S204	SSH1236	SW, AUX
Z705	EXCEMT103DC	CNMBINATION COM	S205	SSH2125	SW, MUTING
Z706	EXCEMT103DC	CNMBINATION COM	S206	SSH2125	SW, LOUDNESS
Z707	EXCEMT103DC	CNMBINATION COM	S207	SSH2135	SW, SUBSONIC
Z708	EXCEMT103DC	CNMBINATION COM	S301	SSH2135	SW, TONE
Z709	EXCEMT103DC	CNMBINATION COM	S701	SSS184	SLIDE SWITCH
Z901	EXCEMT103DC	CNMBINATION COM	S751	SSH4114	PUSH SWITCH
Z902	EXCEMT103DC	CNMBINATION COM	S752	SSH4114	PUSH SWITCH
OSCILLATORS			S753	SSH4114	PUSH SWITCH
X701	SVQAT1923	CRYSTAL OSCILLATOR	S754	SSH4114	PUSH SWITCH
FUSES			RELAYS		
F1 Δ	XBA2C16TB0	FUSE 250V, A1.6A	RLY201	SFDYG5A237P	RELAY
F2 Δ	XBA2C04TB0	FUSE, T0.4A250V	RLY401	SFDYG5A237P	RELAY
			RLY551	SSY137	RELAY
			RLY801	SFDYG5A237P	RELAY
			RLY802	SFDYG5A237P	RELAY

●PACKING PARTS

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
PACKING MATERIAL			[XA]		
P1	SPG6236	CARTON BOX	A1	SQF13216	INSTRUCTION BOOK
			[PA, PE]		
			A1	SQF13217	INSTRUCTION BOOK
			[XL]		
			A1	SQF13325	INSTRUCTION BOOK
			[EK]		
			A3	SJP5215	PLUG
			[XA]		
			A4	SPPH16	POLYETHYLENE BAG
			[XA]		
			A5 Δ	RJP120ZBS-H	AC PLUG ADAPTOR
			[PA, PE]		
			A6 Δ	SFDAC05E03	POWER CORD
			[E, EG, E1, EH]		
			[EB, EF]		
			A7 Δ	SFDAC05G02	POWER CORD
			[EK]		
			A7 Δ	SJA173	POWER CORD
			[XL]		
			A8	SJP9205-3Y	SHORT PIN
			A9	SJPD18	OUTPUT CORD
ACCESSORIES					
A1 Δ	SJP5213	PLUG			
[XA]					
A1	SQF13213	INSTRUCTION BOOK			
[E, E1, EB, EH]					
[EF]					
A1	SQF13214	INSTRUCTION BOOK			
[EG]					
A1	SQF13215	INSTRUCTION BOOK			

RESISTORS & CAPACITORS

Notes : * Important safety notice :

Components identified by Δ mark have special characteristics important for safety. When replacing any of these components use only manufacturer's specified parts.

* Bracketed indications in Ref. No. columns specify the area. (Refer to the first page for area.)

Parts without these indications can be used for all areas.

Numbering System of Resistor

Example:

ERD	25	F	J	102
Type	Wattage (1/4W)	Shape	Tolerance	Value (1K Ω)
ERX	2	AN	J	471
Type	Wattage (2W)	Shape	Tolerance	Value (470 Ω)

Numbering System of Capacitor

Example:

ECKD	1H	102	Z	F
Type	Voltage (50V)	Value (0.001 μ F)	Tolerance	Peculiarity
ECEA	50	M	330	
Type	Voltage (50V)	Peculiarity	Value (33 μ F)	

- Capacity are in microfarads (μ F) unless specified otherwise, P=Pico-farads (pF) F=Farads (F).
- Resistance are in ohms (Ω), unless specified otherwise, 1K=1,000 Ω , 1M=1,000k Ω

Resistor Type	Wattage		Tolerance
ERD : Carbon	10 : 1/8W	12 : 1/2W	J : \pm 5%
ERG : Metal Oxide	14 : 1/4W	25 : 1/4W	F : \pm 1%
ERQ : Fuse Type Metal	1A : 1W	18 : 1/8W	G : \pm 2%
ERX : Metal Film	S2 : 1/4W	S1 : 1/2W	J : \pm 5%
ERD L : Carbon (chip)	2F : 1/4W	50 : 1/2W	K : \pm 10%
ERO K : Metal Film (chip)	2A : 2W	3A : 3W	M : \pm 20%
ERC : Solid	6G : 1/10W	8G : 1/8W	
ERF : Incombustible Box-Shaped			
ERM : Wire-Wound			
RRJ : Chip Resistor			
ERJ : Chip Resistor			

Capacitor Type	Voltage		Tolerance
ECE : Electrolytic	0J : 6.3V	1A : 10V	K : \pm 10%
ECCD : Ceramic	1C : 16V	1E : 25V	M : \pm 20%
ECKD : Ceramic Capacitor	1H : 50V	1V : 35V	Z : +80 % -20
ECOM : Polyester	50 : 50V	05 : 50V	J : \pm 5%
ECQP : Polypropylene	2H : 500V	2A : 100V	G : \pm 2%
ECG : Ceramic	1 : 100V	1J : 63V	F : \pm 1%
ECEA N : Non Polar Electrolytic	KC : 400V AC		C : \pm 0.25pF
QCU : Ceramic (Chip Type)	KC : 125V AC		D : \pm 0.5pF
ECUX : Ceramic (Chip Type)	(UL)		
ECF : Semiconductor			
EECW : Liquid electrolyte double layer capacitor			

Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.
RESISTORS(VALUE,WATTAGE)			R153	ERDS2TJ222	2.2K 1/4	R267	ERDS2TJ471	470 1/4
R101	ERDS2TJ473	47K 1/4	(EG, E1)			R268	ERDS2TJ471	470 1/4
R102	ERDS2TJ473	47K 1/4	R154	ERDS2TJ222	2.2K 1/4	R269	ERDS2TJ471	470 1/4
R103	ERDS2TJ221	220 1/4	(EG, E1)			R270	ERDS2TJ471	470 1/4
R104	ERDS2TJ221	220 1/4	R201	ERDS2TJ223	22K 1/4	R301	ERDS2TJ101	100 1/4
R105	ERDS2TJ220	22 1/4	R202	ERDS2TJ223	22K 1/4	R302	ERDS2TJ101	100 1/4
R106	ERDS2TJ220	22 1/4	R203	ERDS2TJ332	3.3K 1/4	R303	ERDS2TJ473	47K 1/4
R107	ERD25FJ272	2.7K 1/4	R204	ERDS2TJ332	3.3K 1/4	R304	ERDS2TJ473	47K 1/4
R108	ERD25FJ272	2.7K 1/4	R205	ERDS2TJ183	18K 1/4	R305	ERDS2TJ472	4.7K 1/4
R109	ERD25FJ272	2.7K 1/4	R206	ERDS2TJ183	18K 1/4	R306	ERDS2TJ472	4.7K 1/4
R110	ERD25FJ272	2.7K 1/4	R207	ERDS2TJ223	22K 1/4	R307	ERDS2TJ472	4.7K 1/4
R111	ERDS2TJ101	100 1/4	R208	ERDS2TJ223	22K 1/4	R308	ERDS2TJ472	4.7K 1/4
R112	ERDS2TJ101	100 1/4	R209	ERDS2TJ102	1K 1/4	R309	ERDS2TJ472	4.7K 1/4
R113	ERD25FJ272	2.7K 1/4	R210	ERDS2TJ102	1K 1/4	R310	ERDS2TJ472	4.7K 1/4
R114	ERD25FJ272	2.7K 1/4	R211	ERDS2TJ824	820K 1/4	R311	ERDS2TJ221	220 1/4
R115	ERDS2TJ121	120 1/4	R212	ERDS2TJ824	820K 1/4	R312	ERDS2TJ221	220 1/4
R116	ERDS2TJ121	120 1/4	R213	ERDS2TJ472	4.7K 1/4	R313	ERD25FJ821	820 1/4
R117	ERDS2TJ8R2	8.2 1/4	R214	ERDS2TJ472	4.7K 1/4	R314	ERD25FJ821	820 1/4
R118	ERDS2TJ8R2	8.2 1/4	R215	ERDS2TJ124	120K 1/4	R315	ERD25FJ472	4.7K 1/4
R119	ERDS2TKG6802	68K 1/4	R216	ERDS2TJ124	120K 1/4	R316	ERD25FJ472	4.7K 1/4
R120	ERDS2TKG6802	68K 1/4	R251	ERDS2TJ471	470 1/4	R317	ERDS2TJ392	3.9K 1/4
R121	ERDS2TKF5231	5.23K 1/4	(EG, E1)			R318	ERDS2TJ392	3.9K 1/4
R122	ERDS2TKF5231	5.23K 1/4	R252	ERDS2TJ471	470 1/4	R319	ERDS2TJ223	22K 1/4
R123	ERDS2TJ561	560 1/4	(EG, E1)			R320	ERDS2TJ223	22K 1/4
R124	ERDS2TJ561	560 1/4	R253	ERDS2TJ471	470 1/4	R321	ERDS2TJ102	1K 1/4
R125	ERDS2TJ121	120 1/4	(EG, E1)			R322	ERDS2TJ102	1K 1/4
R126	ERDS2TJ121	120 1/4	R254	ERDS2TJ471	470 1/4	R323	ERDS2TJ562	5.6K 1/4
R127	ERDS2TJ101	100 1/4	(EG, E1)			R324	ERDS2TJ562	5.6K 1/4
R128	ERDS2TJ101	100 1/4	R255	ERDS2TJ471	470 1/4	R325	ERDS2TJ223	22K 1/4
R129	ERDS2TJ331	330 1/4	(EG, E1)			R326	ERDS2TJ223	22K 1/4
R130	ERDS2TJ331	330 1/4	R256	ERDS2TJ471	470 1/4	R327	ERDS2TJ224	220K 1/4
R131	ERDS2TJ102	1K 1/4	(EG, E1)			R328	ERDS2TJ224	220K 1/4
R132	ERDS2TJ102	1K 1/4	R257	ERDS2TJ471	470 1/4	R401	ERD25FJ101	100 1/4
R133	ERDS2TJ332	3.3K 1/4	R258	ERDS2TJ471	470 1/4	R402	ERD25FJ101	100 1/4
R134	ERDS2TJ332	3.3K 1/4	R259	ERDS2TJ471	470 1/4	R403	ERDS2TJ473	47K 1/4
R141	ERDS2TJ224	220K 1/4	R260	ERDS2TJ471	470 1/4	R404	ERDS2TJ473	47K 1/4
R142	ERDS2TJ224	220K 1/4	R261	ERDS2TJ471	470 1/4	R405	ERD25FJ101	100 1/4
R151	ERDS2TJ222	2.2K 1/4	R262	ERDS2TJ471	470 1/4	R406	ERD25FJ101	100 1/4
(EG, E1)			R263	ERDS2TJ471	470 1/4	R407	ERD25FJ331	330 1/4
R152	ERDS2TJ222	2.2K 1/4	R264	ERDS2TJ471	470 1/4	R408	ERD25FJ331	330 1/4
(EG, E1)			R265	ERDS2TJ471	470 1/4	R409	ERD25TJ102	1K 1/4
			R266	ERDS2TJ471	470 1/4	R410	ERD25TJ102	1K 1/4

Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.
R411	ERD25F J332	3.3K 1/4	R806	FSR25T J330T		C103	ECCD1H820K	82P 50
R412	ERD25F J332	3.3K 1/4	R809	ERD25T J102	1K 1/4	C104	ECCD1H820K	82P 50
R413	ERDS2T J562	5.6K 1/4	R810	ERD25T J102	1K 1/4	C105	ECKD1H222MD	0.0022 50
R414	ERDS2T J562	5.6K 1/4	R811	ERD25F J332	3.3K 1/4	C106	ECKD1H222MD	0.0022 50
R501	ERDS2T J332	3.3K 1/4	R812	ERD25F J332	3.3K 1/4	C107	ECEA0JPS332E	3300 6.3
R502	ERDS2T J332	3.3K 1/4	R813	ERD25F J332	3.3K 1/4	C108	ECEA0JPS332E	3300 6.3
R503	ERDS2T J333	33K 1/4	R814	ERD25F J332	3.3K 1/4	C109	ECQM1H473JZ	0.047 50
R504	ERDS2T J153	15K 1/4	R815	ERD25F J332	3.3K 1/4	C110	ECQM1H473JZ	0.047 50
R505	ERDS2T J330	33 1/4	R816	ERD25F J332	3.3K 1/4	C111	ECQB1H103JZ	0.01 50
R506	ERDS2T J330	33 1/4	R817	ERD25F J332	3.3K 1/4	C112	ECQB1H103JZ	0.01 50
R511	ERDS2T J123	12K 1/4	R818	ERD25F J332	3.3K 1/4	C113	ECQM1H392JZ	0.0039 50
R512	ERDS2T J472	4.7K 1/4	R819	ERD25F J332	3.3K 1/4	C114	ECQM1H392JZ	0.0039 50
R513	ERDS2T J333	33K 1/4	R820	ERD25F J332	3.3K 1/4	C115	ECEA1EPN3R3	3.3 25
R514	ERDS2T J334	330K 1/4	R821	FSR25T J562T2		C116	ECEA1EPN3R3	3.3 25
R515	ERD25F J471	470 1/4	R822	FSR25T J562T2		C117	ECEA1EK3R3	3.3 25
R516	ERDS2T J332	3.3K 1/4	R823	ERD25F J472	4.7K 1/4	C118	ECEA1EK3R3	3.3 25
R521	ERDS2T J332	3.9K 1/4	R824	ERD25F J472	4.7K 1/4	C119	ECQM1H472JZ	0.0047 50
R522	ERD25F J471	470 1/4	R825	ERD25F J272	2.7K 1/4	C120	ECQM1H472JZ	0.0047 50
R532	ERDS2T J560	56 1/4	R826	ERD25F J272	2.7K 1/4	C151	ECCD1H820K	82P 50
R533	ERDS2T J123	12K 1/4	R827	ERDS2TKF6801	6.8K 1/4	[EG. E1]		
R534	ERDS2T J101	100 1/4	R828	ERDS2TKF6801	6.8K 1/4	C152	ECCD1H820K	82P 50
R551	ERD2FCG220	22 1/4	R829	ERDS2TKF6801	6.8K 1/4	[EG. E1]		
R552	ERDS2T J332	3.3K 1/4	R830	ERDS2TKF6801	6.8K 1/4	C153	ECCD1H820K	82P 50
R553	ERDS2T J333	33K 1/4	R831	ERDS2TKF6801	6.8K 1/4	[EG. E1]		
R701	ERDS2T J101	100 1/4	R832	ERDS2TKF6801	6.8K 1/4	C154	ECCD1H820K	82P 50
R702	ERDS2T J101	100 1/4	R833	ERDS2TKF6801	6.8K 1/4	[EG. E1]		
R703	ERDS2T J101	100 1/4	R834	ERDS2TKF6801	6.8K 1/4	C155	ECCD1H330K	33P 50
R704	ERDS2T J221	220 1/4	R835	ERDS2TKF6801	6.8K 1/4	C156	ECCD1H330K	33P 50
R705	ERDS2T J221	220 1/4	R836	ERDS2TKF6801	6.8K 1/4	C201	ECQM1H124JZ	0.12 50
R708	ERDS2T J221	220 1/4	R837	FSR25TG392T2		C202	ECQM1H124JZ	0.12 50
R709	ERDS2T J221	220 1/4	R838	FSR25TG392T2		C203	ECQV1H184JZ	0.18 50
R710	ERDS2T J221	220 1/4	R839	FSR25T J333T2		C204	ECQV1H184JZ	0.18 50
R711	ERDS2T J221	220 1/4	R840	FSR25T J333T2		C251	ECCD1H181K	180P 50
R712	ERDS2T J221	220 1/4	R841	FSR25T J152T2		C252	ECCD1H181K	180P 50
R714	ERDS2T J473	47K 1/4	R842	FSR25T J152T2		C253	ECCD1H181K	180P 50
R715	ERDS2T J473	47K 1/4	R843	ERD25T J104	100K 1/4	C254	ECCD1H181K	180P 50
R716	ERDS2T J473	47K 1/4	R844	ERD25T J104	100K 1/4	C255	ECCD1H181K	180P 50
R717	ERDS2T J473	47K 1/4	R845	FSR25TG272T2		C256	ECCD1H181K	180P 50
R718	ERDS2T J473	47K 1/4	R846	FSR25TG272T2		C257	ECCD1H181K	180P 50
R719	ERDS2T J473	47K 1/4	R847	FSR25TG332T2		C258	ECCD1H181K	180P 50
R720	ERDS2T J473	47K 1/4	R848	FSR25TG332T2		C259	ECCD1H181K	180P 50
R721	ERDS2T J750	75 1/4	R849	FSR25TG332T2		C260	ECCD1H181K	180P 50
R722	ERDS2T J750	75 1/4	R850	FSR25TG332T2		C261	ECCD1H181K	180P 50
R723	ERDS2T J393	39K 1/4	R851	ERD25T J104	100K 1/4	C262	ECCD1H181K	180P 50
R724	ERDS2T J393	39K 1/4	R852	ERD25T J104	100K 1/4	C263	ECCD1H181K	180P 50
R725	ERDS2T J102	1K 1/4	R853	ERD25F J821	820 1/4	C264	ECCD1H181K	180P 50
R726	ERDS2T J102	1K 1/4	R854	ERD25F J821	820 1/4	C265	ECCD1H181K	180P 50
R727	ERDS2T J750	75 1/4	R855	ERDS2T J823	82K 1/4	C266	ECCD1H181K	180P 50
R728	ERDS2T J822	8.2K 1/4	R856	ERDS2T J823	82K 1/4	C267	ECCD1H181K	180P 50
R730	ERDS2T J221	220 1/4	R857	ERDS2T J823	82K 1/4	C268	ECCD1H181K	180P 50
R731	ERDS2T J221	220 1/4	R858	ERDS2T J823	82K 1/4	C269	ECCD1H181K	180P 50
R732	ERDS2T J221	220 1/4	R861	ERDS2T J102	1K 1/4	C270	ECCD1H181K	180P 50
R733	ERDS2T J221	220 1/4	R862	ERDS2T J102	1K 1/4	C301	ECCD1H330K	33P 50
R734	ERDS2T J221	220 1/4	R863	ERDS2T J224	220K 1/4	C302	ECCD1H330K	33P 50
R735	ERDS2T J221	220 1/4	R864	ERDS2T J224	220K 1/4	C303	ECCD1H820K	82P 50
R736	ERDS2T J221	220 1/4	R865	ERDS2T J564	560K 1/4	C304	ECCD1H820K	82P 50
R737	ERDS2T J221	220 1/4	R867	ERDS2T J564	560K 1/4	C305	ECKD1H222MD	0.0022 50
R738	ERDS2T J221	220 1/4	R868	ERDS2T J564	560K 1/4	C306	ECKD1H222MD	0.0022 50
R739	ERDS2T J221	220 1/4	R901	ERX2ANJ120	12 2	C307	ECEA1HPS2R2	2.2 50
R740	ERDS2T J221	220 1/4	R902	ERD2FCG470	47 1/4	C308	ECEA1HPS2R2	2.2 50
R741	ERDS2T J221	220 1/4	R903	ERDS2T J680	68 1/4	C309	ECCD1H390K	39P 50
R742	ERDS2T J221	220 1/4	R904	ERDS2T J330	33 1/4	C310	ECCD1H390K	39P 50
R743	ERDS2T J221	220 1/4	R905	ERDS2T J333	33K 1/4	C311	ECEA1CBH470E	47 16
R744	ERDS2T J221	220 1/4	R906	ERDS2T J153	15K 1/4	C312	ECEA1CBH470E	47 16
R745	ERDS2T J221	220 1/4	R907	ERDS2T J332	3.3K 1/4	C313	ECQV1H823JZ	0.082 50
R746	ERDS2T J151	150 1/4	R908	ERDS2T J332	3.3K 1/4	C314	ECQV1H823JZ	0.082 50
R747	ERDS2T J102	1K 1/4	R910	ERD25F J271	270 1/4	C315	ECQB1H153JZ	0.015 50
R748	ERDS2T J824	820K 1/4	R911	ERD25F J271	270 1/4	C316	ECQB1H153JZ	0.015 50
R749	ERDS2T J123	12K 1/4	R912	ERDS2T J272	2.7K 1/4	C317	ECQB1H183JZ	0.018 50
R750	ERDS2T J223	22K 1/4	R921	ERDS2T J223	22K 1/4	C318	ECQB1H183JZ	0.018 50
R751	ERDS2T J332	3.3K 1/4	R922	ERDS2T J822	8.2K 1/4	C319	ECQB1H182JZ	0.0018 50
R752	ERDS2T J473	47K 1/4	R923	ERDS2T J822	8.2K 1/4	C320	ECQB1H182JZ	0.0018 50
R753	ERDS2T J224	220K 1/4	CAPACITORS (VALUE, VOLTAGE)			C321	ECCD1H101K	100P 50
R754	ERDS2T J181	180 1/4	C1	△ ECKWNS103ZVS	0.01	C322	ECCD1H101K	100P 50
R801	FSR25T J100T		C101	ECQM1H103JZ	0.01 50	C401	ECCD1H330K	33P 50
R802	FSR25T J100T		C102	ECQM1H103JZ	0.01 50	C402	ECCD1H330K	33P 50
R805	FSR25T J330T					C403	ECEA1CBH470E	47 16

Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.	Ref. No.	Part No.	Value.
C404	ECEA1CBH470E	47 16	C706	ECQV1H104JZ	0.1 50	C801	ECQP2A271JSP	270P 100
C405	ECEA1EU221	220 25	C707	ECQV1H104JZ	0.1 50	C802	ECQP2A271JSP	270P 100
C406	ECEA1EU221	220 25	C708	ECQV1H104JZ	0.1 50	C807	ECCD1H390K	39P 50
C407	ECEA1CPS100	10 16	C709	ECFR1E104ZF	0.1 25	C808	ECCD1H390K	39P 50
C408	ECEA1CPS100	10 16	C710	ECFR1E104ZF	0.1 25	C809	ECQP2A103JSP	0.01 100
C501	ECES1VV332XM	3300 35	C711	ECFR1E104ZF	0.1 25	C810	ECQP2A103JSP	0.01 100
C502	ECES1VV332XM	3300 35	C712	ECFR1E104ZF	0.1 25	C811	ECQP2A182GSP	0.0018 100
C503	ECEA1CKS100	10 16	C713	ECFR1E104ZF	0.1 25	C812	ECQP2A182GSP	0.0018 100
C504	ECEA1CKS100	10 16	C714	ECQV1H104JZ	0.1 50	C813	ECQP2A472GSP	0.0047 100
C505	ECEA1EK3R3	3.3 25	C715	ECQV1H104JZ	0.1 50	C814	ECQP2A472GSP	0.0047 100
C506	ECEA1EK3R3	3.3 25	C716	ECQV1H104JZ	0.1 50	C815	ECQP2A221GSP	220P 100
C507	ECQV1H104JZ	0.1 50	C717	ECQV1H104JZ	0.1 50	C816	ECQP2A221GSP	220P 100
C508	ECQV1H104JZ	0.1 50	C718	ECQV1H104JZ	0.1 50	C817	ECEA1CBH470E	47 16
C511	ECEA1HK4R7	4.7 50	C719	ECQV1H104JZ	0.1 50	C818	ECEA1CBH470E	47 16
C512	ECEA1CU101	100 16	C720	ECQV1H104JZ	0.1 50	C819	ECQP1182JZ	0.0018 100
C519	ECKD1H103PF	0.01 50	C721	ECFR1E104ZF	0.1 25	C820	ECQP1182JZ	0.0018 100
C521	ECFR1E104ZF	0.1 25	C722	ECFR1E104ZF	0.1 25	C901	ECEA0JPU101	100 6.3
C531	ECEA1EU101	100 25	C723	ECFR1E104ZF	0.1 25	C902	ECEA0JPU101	100 6.3
C540	△ ECKD2H103PE	0.01 500	C724	ECFR1E104ZF	0.1 25	C903	ECEA0JPU101	100 6.3
C540	ECQE2104KS	0.1 250	C725	ECFR1E104ZF	0.1 25	C904	ECEA0JPU101	100 6.3
C541	ECES1CV682RM	6800 16	C726	ECFR1E104ZF	0.1 25	C905	ECEA1CPS100	10 16
C542	ECES1CV682RM	6800 16	C727	ECFR1E104ZF	0.1 25	C906	ECEA1CPS100	10 16
C550	△ ECKD2H103PE	0.01 500	C728	ECFR1E104ZF	0.1 25	C907	ECEA1CPS100	10 16
C550	ECQE2104KS	0.1 250	C729	ECFR1E104ZF	0.1 25	C908	ECEA1CPS100	10 16
C551	△ ECEA1CU471	470 16	C730	ECEA0JPU101	100 6.3	C909	ECQV1H104JZ	0.1 50
C552	ECFR1E104ZF	0.1 25	C731	ECQM1H103JZ	0.01 50	C910	ECQV1H104JZ	0.1 50
C553	ECKD1H103PF	0.01 50	C732	ECCD1H100KC	10P 50	C911	ECEA1APH101E	100 10
C559	ECKD1H103PF	0.01 50	C733	ECCD1H100KC	10P 50	C912	ECEA1APH101E	100 10
C701	ECEA0JPU101	100 6.3	C734	ECEA1EK3R3B	3.3 25	C913	ECEA1APH101E	100 10
C702	ECEA0JPU101	100 6.3	C735	ECEA1CKS100	10 16	C914	ECEA1APH101E	100 10
C703	ECEA0JPU101	100 6.3	C736	ECQV1H104JZ	0.1 50	C915	ECEA1APH101E	100 10
C704	ECEA0JPU101	100 6.3	C740	ECKD1H103PF	0.01 50	C916	ECEA1APH101E	100 10
C705	ECEA0JPU101	100 6.3	C743	ECFR1E104ZF	0.1 25	C920	ECKD1H103PF	0.01 50
						C923	ECEA1HK3R3	3.3 50