

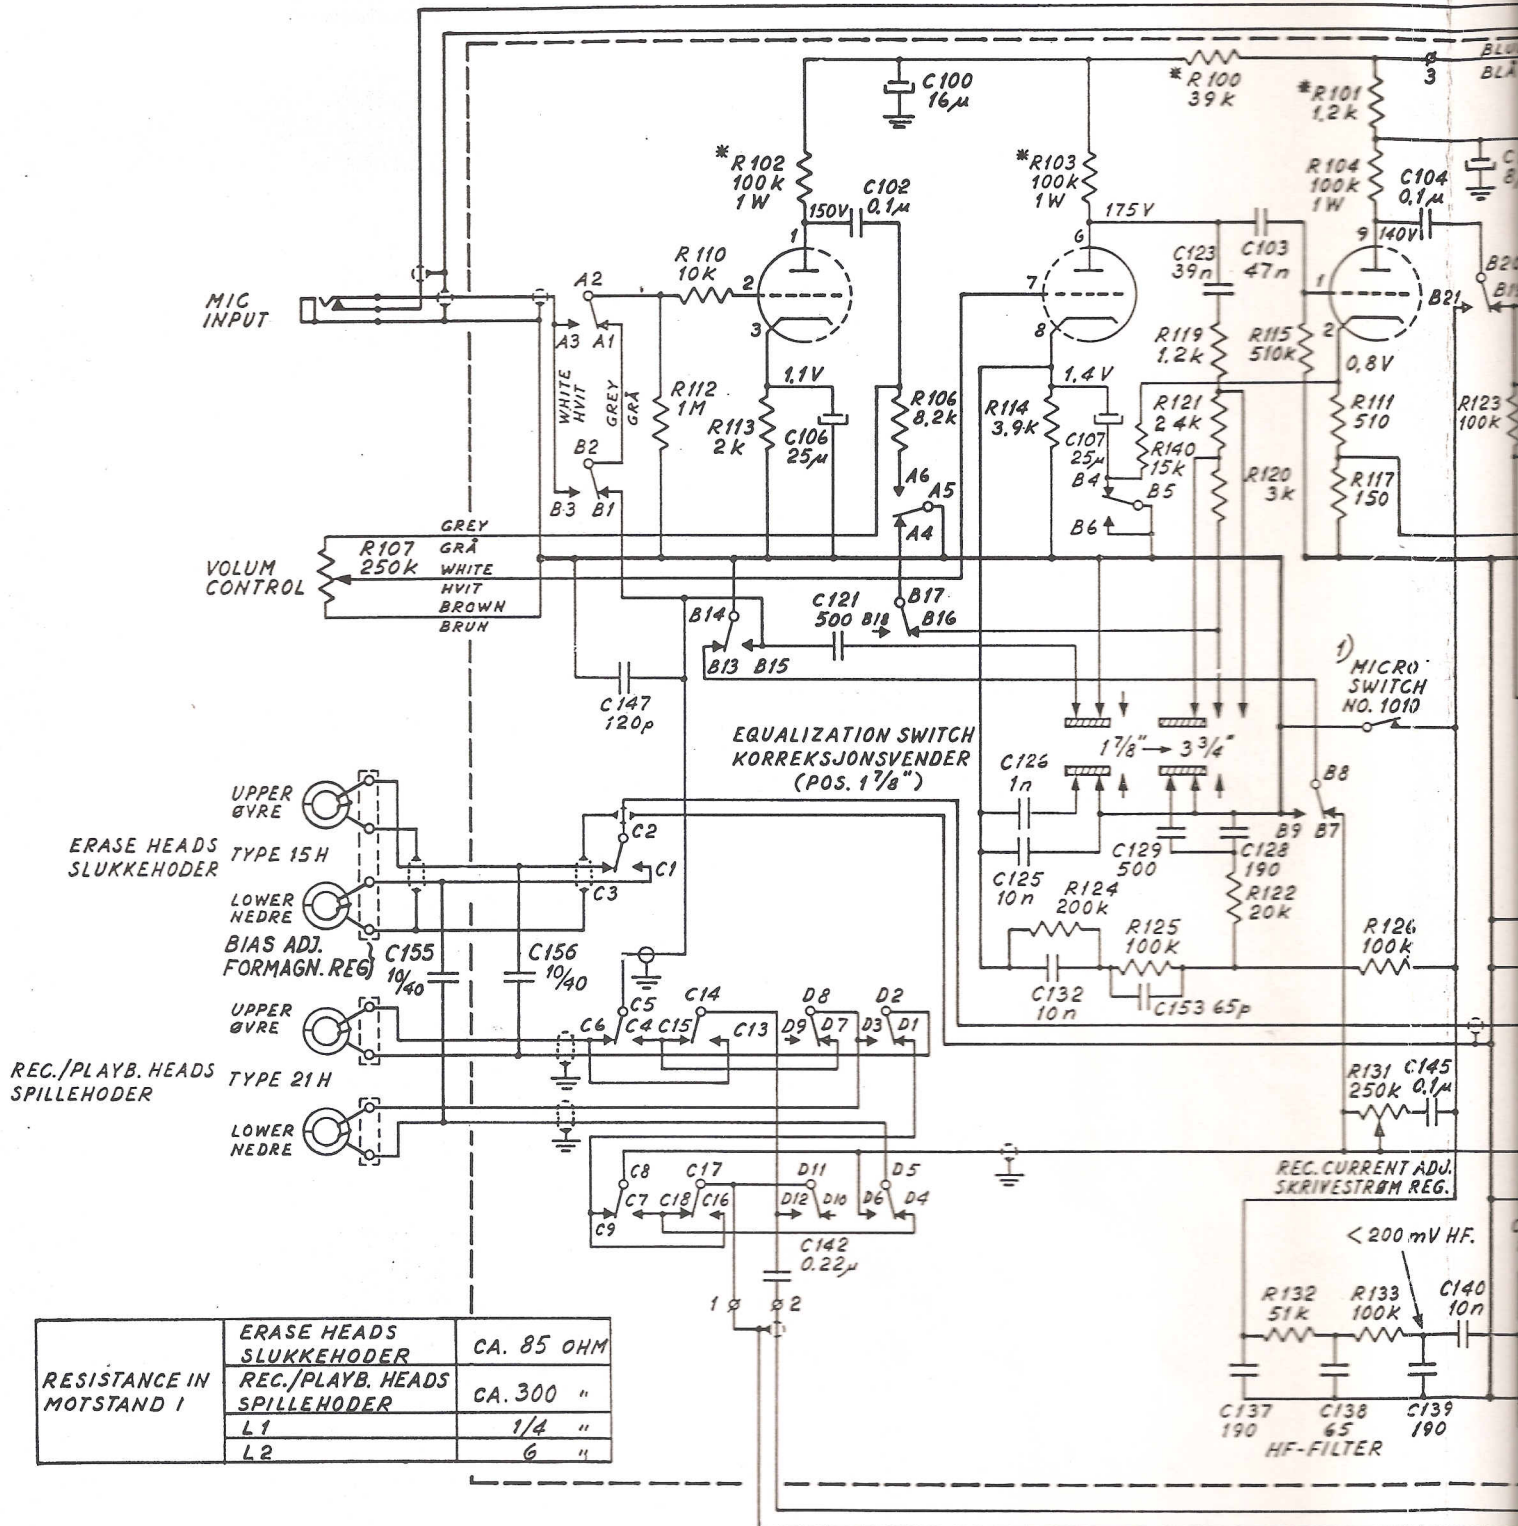


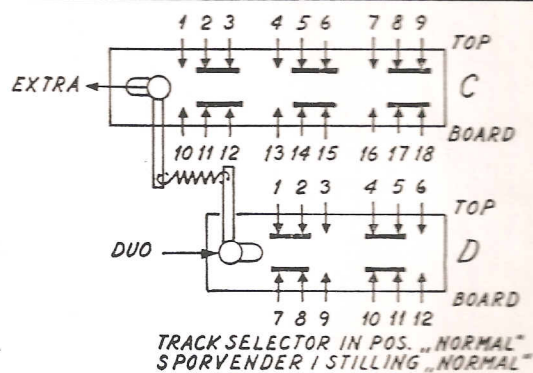

RESISTANCE IN MOTSTAND I	ERASE HEADS SLUKKEHODER	CA. 85 OHM
	REC./PLAYB. HEADS SPILLEHODER	CA. 300 "
	L1	1/4 "
	L2	6 "

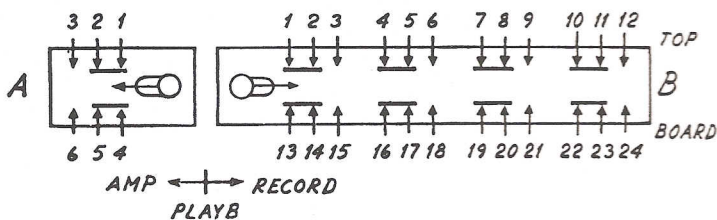

TO PREVENT DC PUL
THE REC./PLAYB. H
MUST SHORTCIRCU
CONTACTS ARE MA
MOVES FROM "REC
FOR Å HINDRE AT L
SERER GJENNOM S
BRYTEREN KORTS
KONTAKTDANNELSE
DER B BEVEGER S
"PLAYBACK".

RESISTORS :
INDICATED IN OHMS.
K = 1.000 OHMS.
M = 1.000.000 OHMS.
* = DEPOSITED CARBON RESISTORS.
RESISTORS $\pm 10\%$ UNLESS OTHERWISE SPECIFIED.

CAPACITORS:
INDICATED IN MICRO MICRO FARADS ($\mu\mu F$)
UNLESS OTHERWISE SPECIFIED.
 $n = 1000 \mu\mu F$.
CAPACITORS $\pm 20\%$.

TANDBERG TAPE RECORDER
MODEL 841, 842 AND 843

DRAWING NO. 5900 - 4
JAN. 1965