
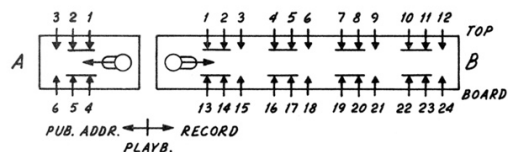


TANDBERG TAPE RECORDER
MODEL 921 AND 922
DRAWING NO. 5961

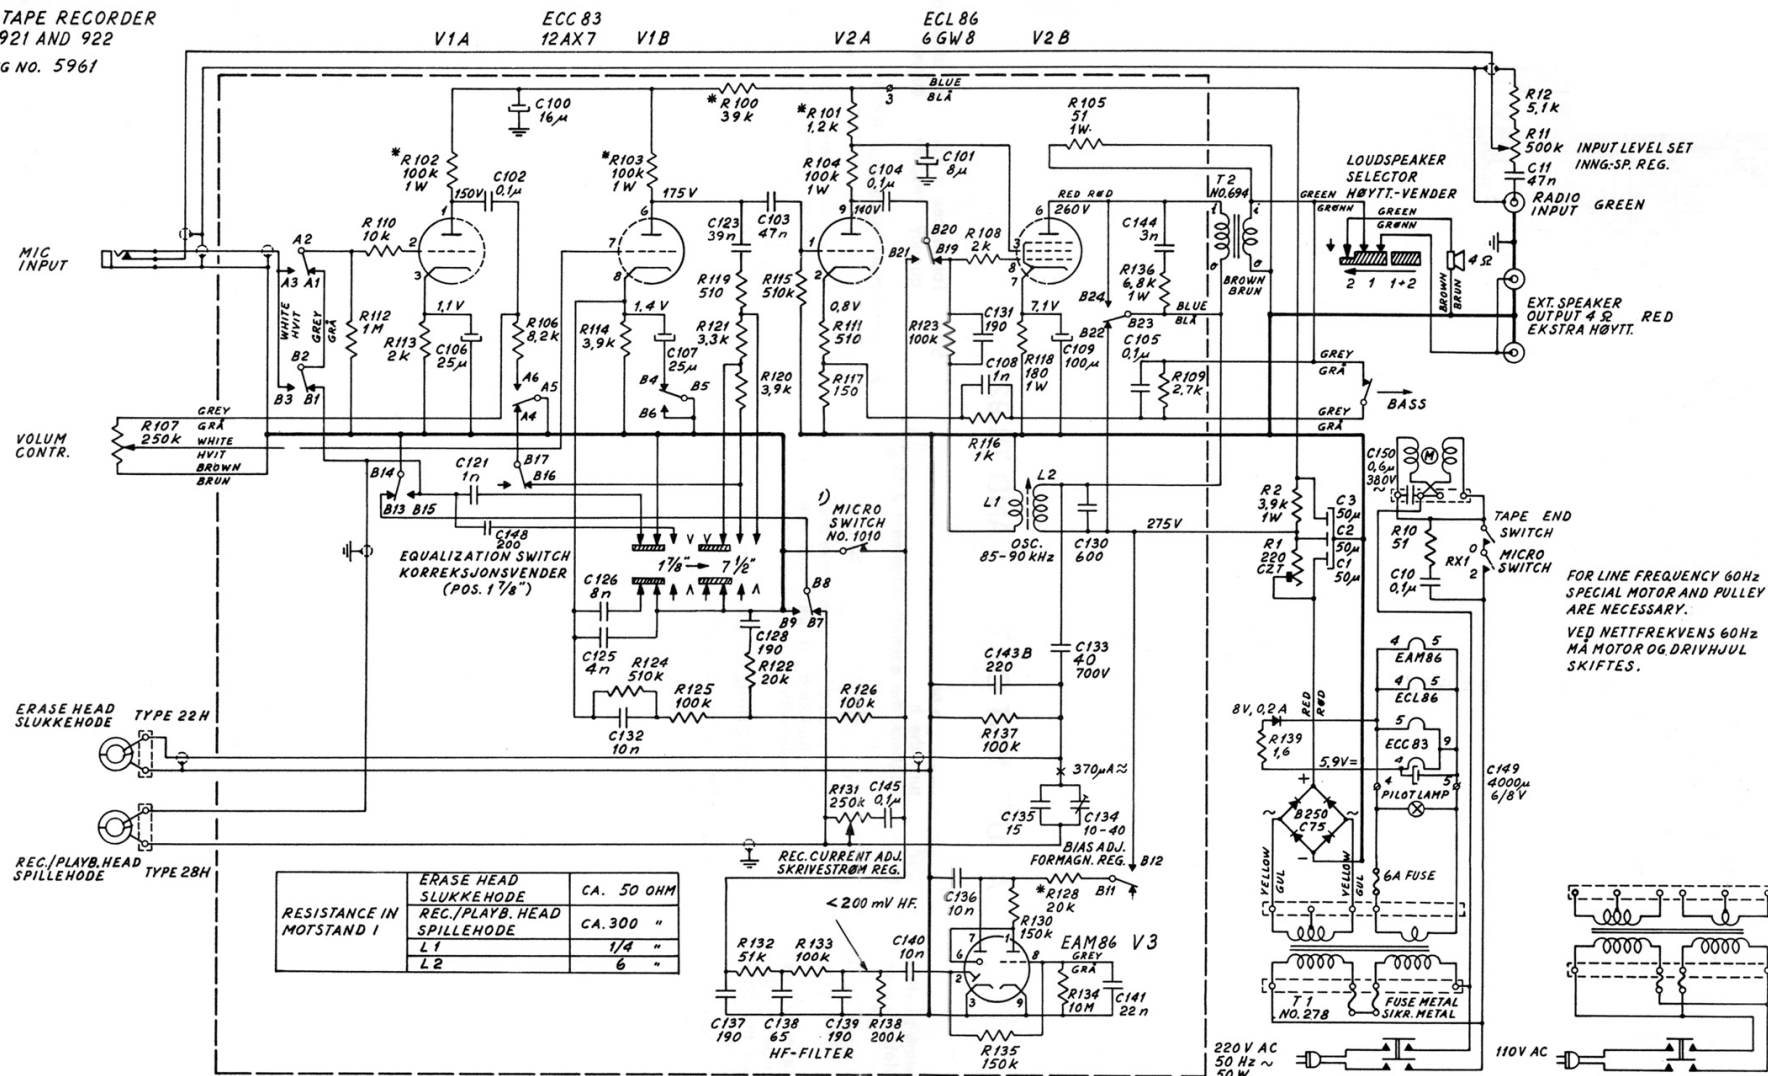

MODE SWITCH IN POS. „PLAYB.“
FUNKSJONSVENDER I STILLING „PLAYB.“

FOR Å HINDRE AT LIKESTRØMSPULSER PÅSERER GJENNOM SPILLEHODET, SKAL MICRO-BRYTEREN KORTSLUTTE FØR NOENANNEN KONTAKTDANNELSE INNTREFFER NÅRVENDER B BEVEGER SEG FRA „RECORD“ MOT „PLAYBACK“.


NAB - EQUALIZATION

RESISTORS
INDICATED IN OHMS.
K = 1,000 OHMS.
M = 1,000,000 OHMS.
* = DEPOSITED CARBON RESISTORS.
TOLERANCES ± 10% UNLESS OTHERWISE SPECIFIED.

MOTSTANDER
ANGITT I OHM
K = 1,000 OHM
M = 1,000,000 OHM
* = KULLSKIKTMOTSTANDER
TOLERANSE ± 10% HVIS IKKE ANNET ANGITT

CAPACITORS
INDICATED IN μμ FARADS UNLESS OTHERWISE SPECIFIED.
n = 1,000 μμF.
TOLERANCES ± 20%.

KONDENSATORER
ANGITT I μμ FARAD HVIS IKKE ANNET ANGITT.
n = 1,000 μμF
TOLERANSE ± 20%



1.1. Push Record-Playback Switch to «Record» position and Tape Motion Lever to position (Normal Forward Drive). Measure voltage across erase head with a low input capacity VTVM (Vacuum Tube Voltmeter). (Use a probe with input capacity less than 10 pF in order not to detune the erase head circuit.) Adjust the core in the oscillator coil to max. reading on VTVM. Check that the reading is the same (as close as possible) in positions «Normal» and «Extra». The frequency should then be 85—90 kHz and voltage 170—220 volts. The bias current should be 10—15 mA. The current may be varied $\pm 25\%$ by means of the variable capacitor C134 (see point 6.3).

- 2.1. **Demagnetizing.** Demagnetize the heads and adjacent parts.
- 2.2. Set Tape Motion Lever to Normal Forward Drive (→pos.) and check that the tape runs equidistant from the flanges of the adjustable tape guide.
- 2.3. **The playback head.**
 - 2.3.1. The head height is adjusted by the height adjustment screws. The upper edge of the tape should run even with the upper edge of head. Be sure that the mounting plate for the head and the upper mounting plate are parallel.
 - 2.3.2. Adjust the azimuth screw for azimuth alignment screw for max. reading on the output meter by playing back a standard azimuth alignment tape.
 - 2.3.3. Lift the pressure pad away from the tape. If the meter reading increases more than 3-4dB, turn the playback head by turning the head mounting plate. The direction is determined by increasing the contact angle to the right or left side of the head by means of a non-magnetic pin. If the meter reading increases with increasing con-

The Erase Head. .01" (.2 mm) of the face of the erase head should be visible above the tape. The footplate for the head must be parallel with the upper mounting plate.

Recording current in the recording head should be such that during recording at max. recording level one will get 4–5% distortion on the recorded program. $I_{\text{rec}} = 90$ mA.

Record 400 Hz signal with the recording level indicator light beams just touching each other. Play back and measure distortion at output terminals with a distortion meter. If distortion is too high or too low, the recording current is adjusted by means of the potentiometer R131 (increasing counterclockwise) on the amplifier board.

Measurements are repeated until satisfactory results are obtained.

With the Record-Playback Switch in «PUB. ADDR.» position the tape recorder functions as an amplifier for microphone or radio input. Input impedance for microphone: 1 M ohm, and for radio input: .5 M ohm. The voltage division from radio input is variable from 1:1 to 1:100 by means of a .5 M ohm potentiometer. From the factory set to about 1:50.

With Record-Playback Switch in «Playback» position and Tape Motion Lever in Normal Forward Drive (→ position) the playback function can be checked, preferably with a standard frequency tape.

- 6.1. With Recorder-Playback Switch in «Record» position and Motor Motion Lever in Normal Forward Record recording can be made from microphone or radio input input.
- 6.2. A 1000 Hz input signal is connected to radio input. Set $7\frac{1}{2}''$. Volume control is adjusted so that the record level indicator light beams touch each other. Reduce volume 20 dB and record the desired frequencies. By playing back the recording and measuring the output voltage of the frequency range the frequency response curves can be checked. Same procedure for $3\frac{3}{4}''$ and $7\frac{1}{2}''$ speed. Tolerances at all speed ± 3 dB.
- 6.3. If the tape recorder's treble response is too high or too low, the bias current can be adjusted (with the variable capacitor C134, Recheck point 3.2.

7.1 Make sure that the flywheel and the transfer wheel move freely. Use a tape with a marked section of 450 inches (1144 cm) (start and end markers). Measure the time it takes for the tape-section to pass by the recording head. Correct time: 1 min. for $7\frac{1}{2}''$, 2 min. for $3\frac{3}{4}''$ and 4 min. for $1\frac{1}{8}''$. Speed tolerances: $\pm 2\%$ at all speeds.

- 8.1. In «Normal» position, record from microphone at max. recording level. Rewind, play back and listen to check recording.
- 8.2. Set volume control to zero and erase the program. Rewind the tape and play back with the volume control on max. Check that the program is erased completely.