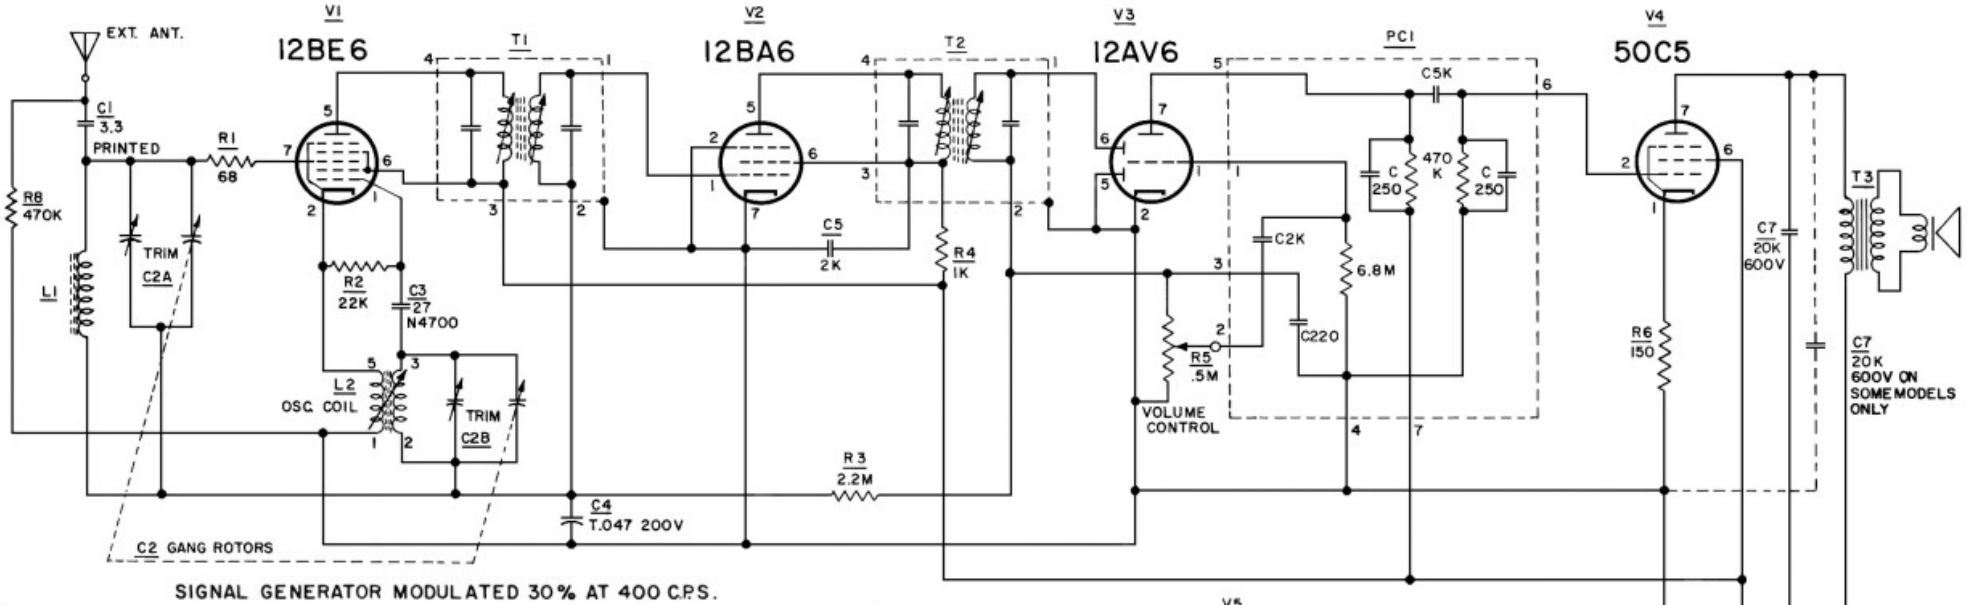

SIGNAL GENERATOR MODULATED 30% AT 400 C.P.S.

ALIGNMENT & SENSITIVITY							
STEP	APPLY SIGNAL KC	APPLY SIGNAL TO	THROUGH SERIES DUMMY	SET GANG AT	ADJUST FOR MAX OUTPUT	NOM. SENS. FOR 50 mw OUTPUT	NOM. SENS. FOR 100mw AT DIODE LD
1	455	PIN NO.1 V2	.05 ufd.	MAX. "C"	T2	1100 uV	1700 uV
2	455	PIN NO.7 V1	.05 ufd.	MAX. "C"	T1 & T2	48 uV	72 uV
3	1460	—	RADIATE	1460 KCS	C2A & C2B TRIMMERS	210 uV/M	350 uV/M
4	600	—	"	600 KCS	CHECK ONLY	225 uV/M	370 uV/M
5	535	—	"	MAX. "C"	" "	—	—
6	1650	—	"	MIN. "C"	" "	—	—

FASHION LOOP CONSISTING OF SEVERAL TURNS OF WIRE AND RADIATE SIGNAL, FROM GENERATOR TO LOOP OF RECEIVER.

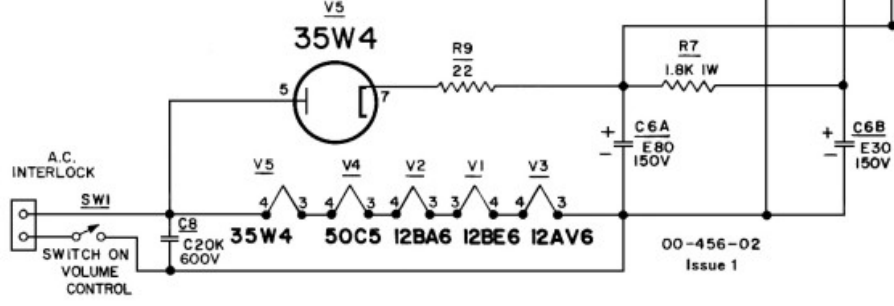

VIKING RM-517, RM-517R, RM-606