Schematic Diagram... Model ST-S1 (This schematic diagram may be modified at any time with the development of new technology.)

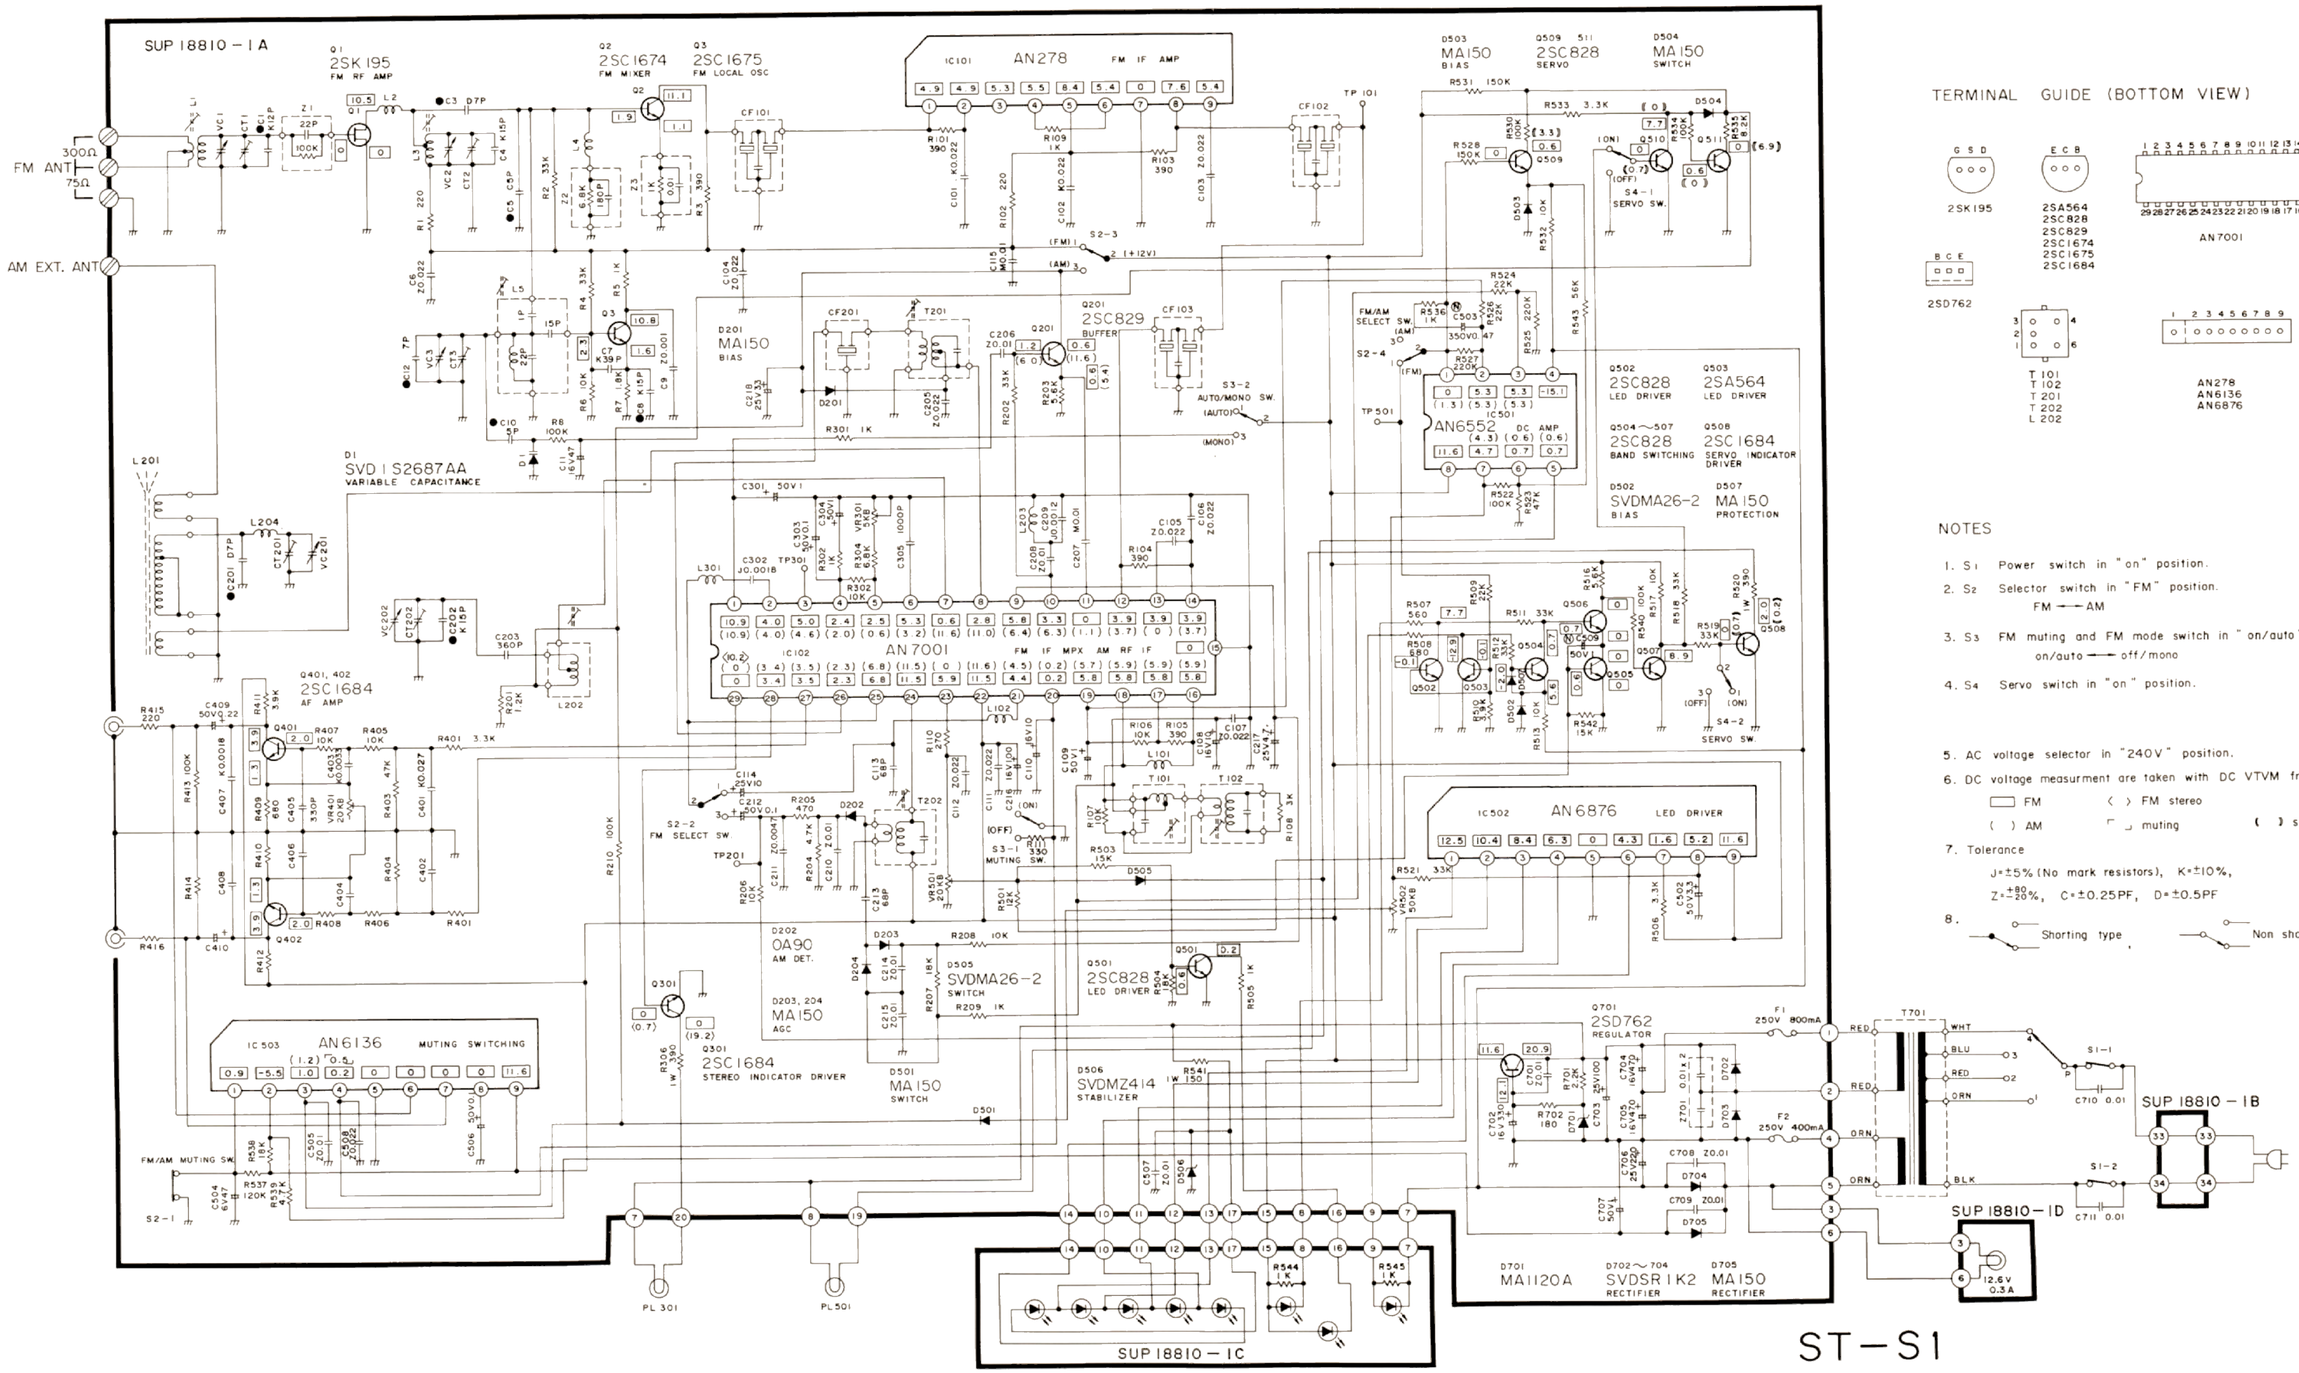

TERMINAL GUIDE (BOTTOM VIEW)

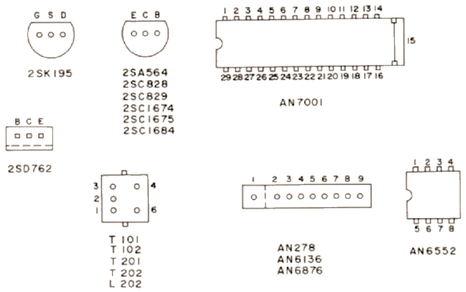

NOTES

1. S_1 Power switch in "on" position.
2. S_2 Selector switch in "FM" position.
   FM ⟷ AM
3. S_3 FM muting and FM mode switch in "on/auto" position.
   on/auto ⟷ off/mono
4. S_4 Servo switch in "on" position.
5. AC voltage selector in "240V" position.
6. DC voltage measurment are taken with DC VTVM from chassis ground.
   ▭ FM 〈 〉 FM stereo
   ( ) AM ⌐ ⌙ muting ( ) servo on
7. Tolerance
   J=±5% (No mark resistors), K=±10%,
   Z=$^{+80}_{-20}$%, C=±0.25PF, D=±0.5PF
8. Shorting type, Non shorting type

Printed in Japan SQX383