


SPEAKER SELECT CIRCUIT

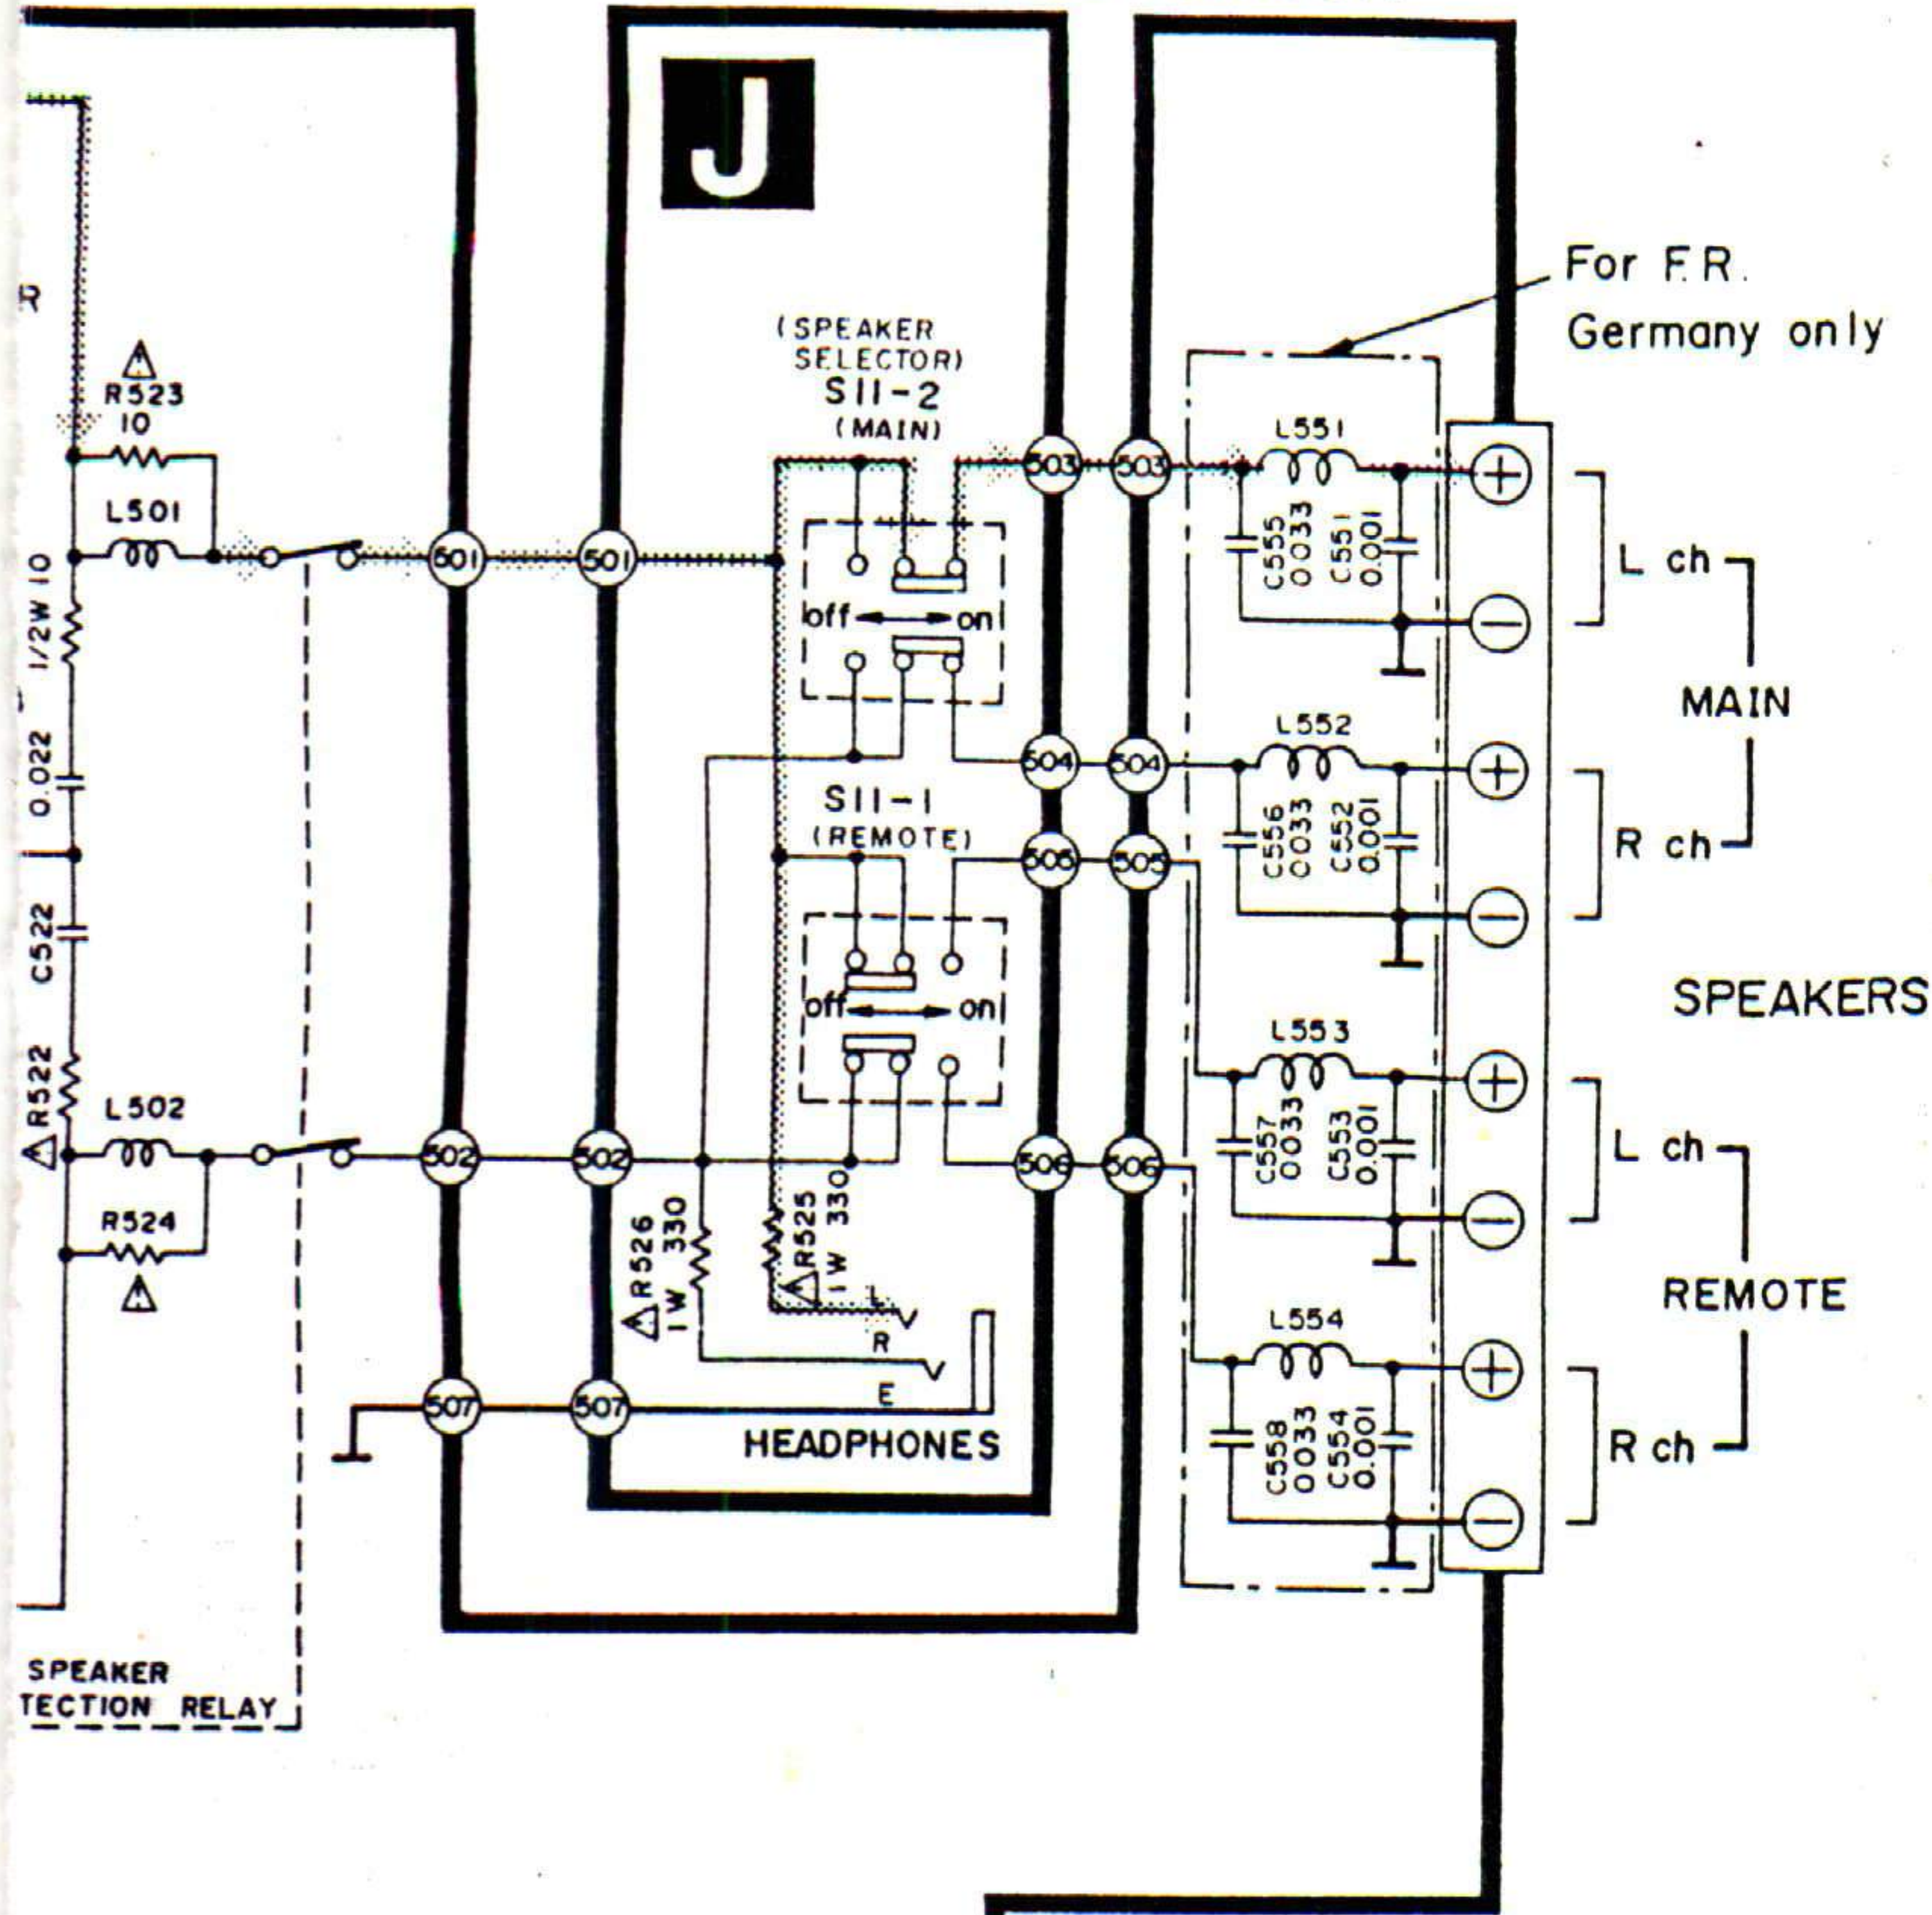




SCHEMATIC DIAGRAM

(This schematic diagram may be modified at any time with the development of new technology).

● The part No. of transistors, IC and diodes mentioned in the schematic diagram stand for production part No. Regarding the part No. with \odot mark, the production part No. are different from the replacement part No. Therefore, when placing an order for replacement parts, please use the part No. in the replacement parts list.

Notes:

- S1~S6 : Input selector switch in "phono" position.
S1: phono, S2: tuner, S3: CD, S4: video/aux, S5: tape 1/DA tape, S6: tape 2
- S7 : Recording selector switch in "off" position.
- S8 : Muting switch in "0dB" position. (0dB \leftrightarrow -20dB)
- S9-1 : Loudness switch in "off" position. (\blacksquare on, \blacktriangle off)
- S9-2 : Phono selector switch in "MM" position. (\blacksquare MM, \blacktriangle MC)
- S10-1 : Subsonic filter switch in "off" position. (\blacksquare off, \blacktriangle on)
- S10-2 : Tone switch in "defeat" position. (\blacksquare defeat, \blacktriangle on)
- S11-1 : Main speakers selector switch in "on" position. (\blacksquare off, \blacktriangle on)
- S11-2 : Remote speakers selector switch in "off" position. (\blacksquare off, \blacktriangle on)
- S12 : Speaker impedance selector switch in "8 Ω ~ 16 Ω /16 Ω " position. (\blacksquare 8 Ω ~ 16 Ω /16 Ω , \blacktriangle 4 Ω ~ 6 Ω /8 Ω)
- S13 : Power switch in "on" position.
- S14 : Voltage selector switch in "220V" position. 110V \leftrightarrow 120V \leftrightarrow 220V \leftrightarrow 240V

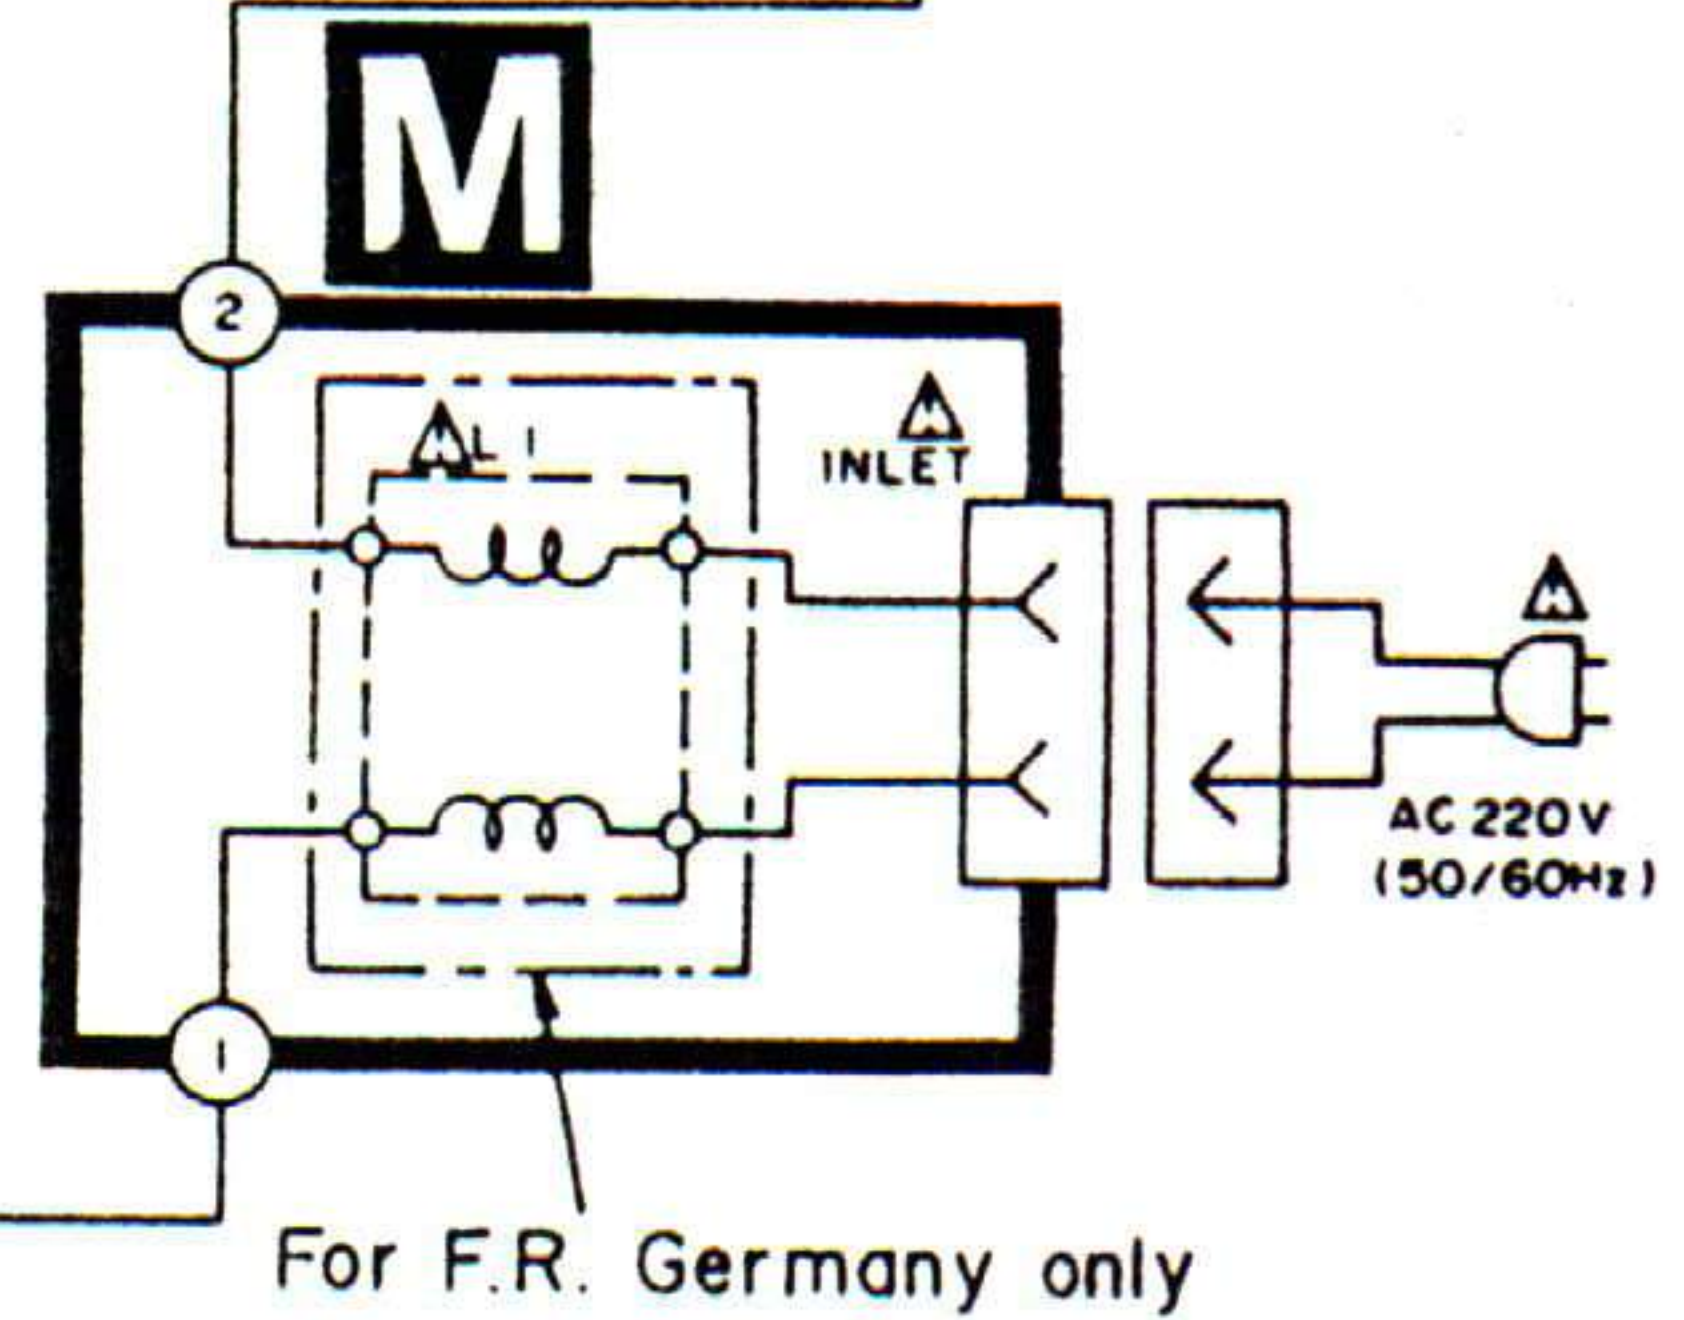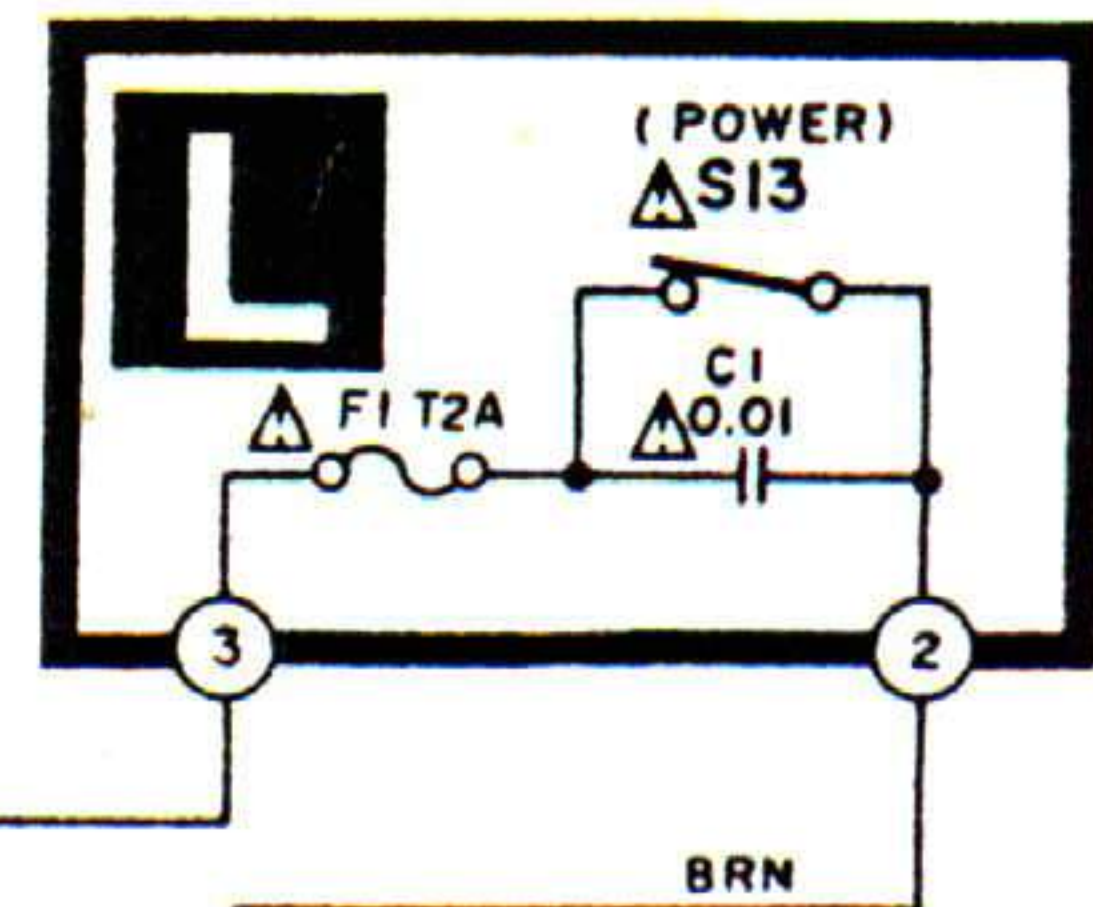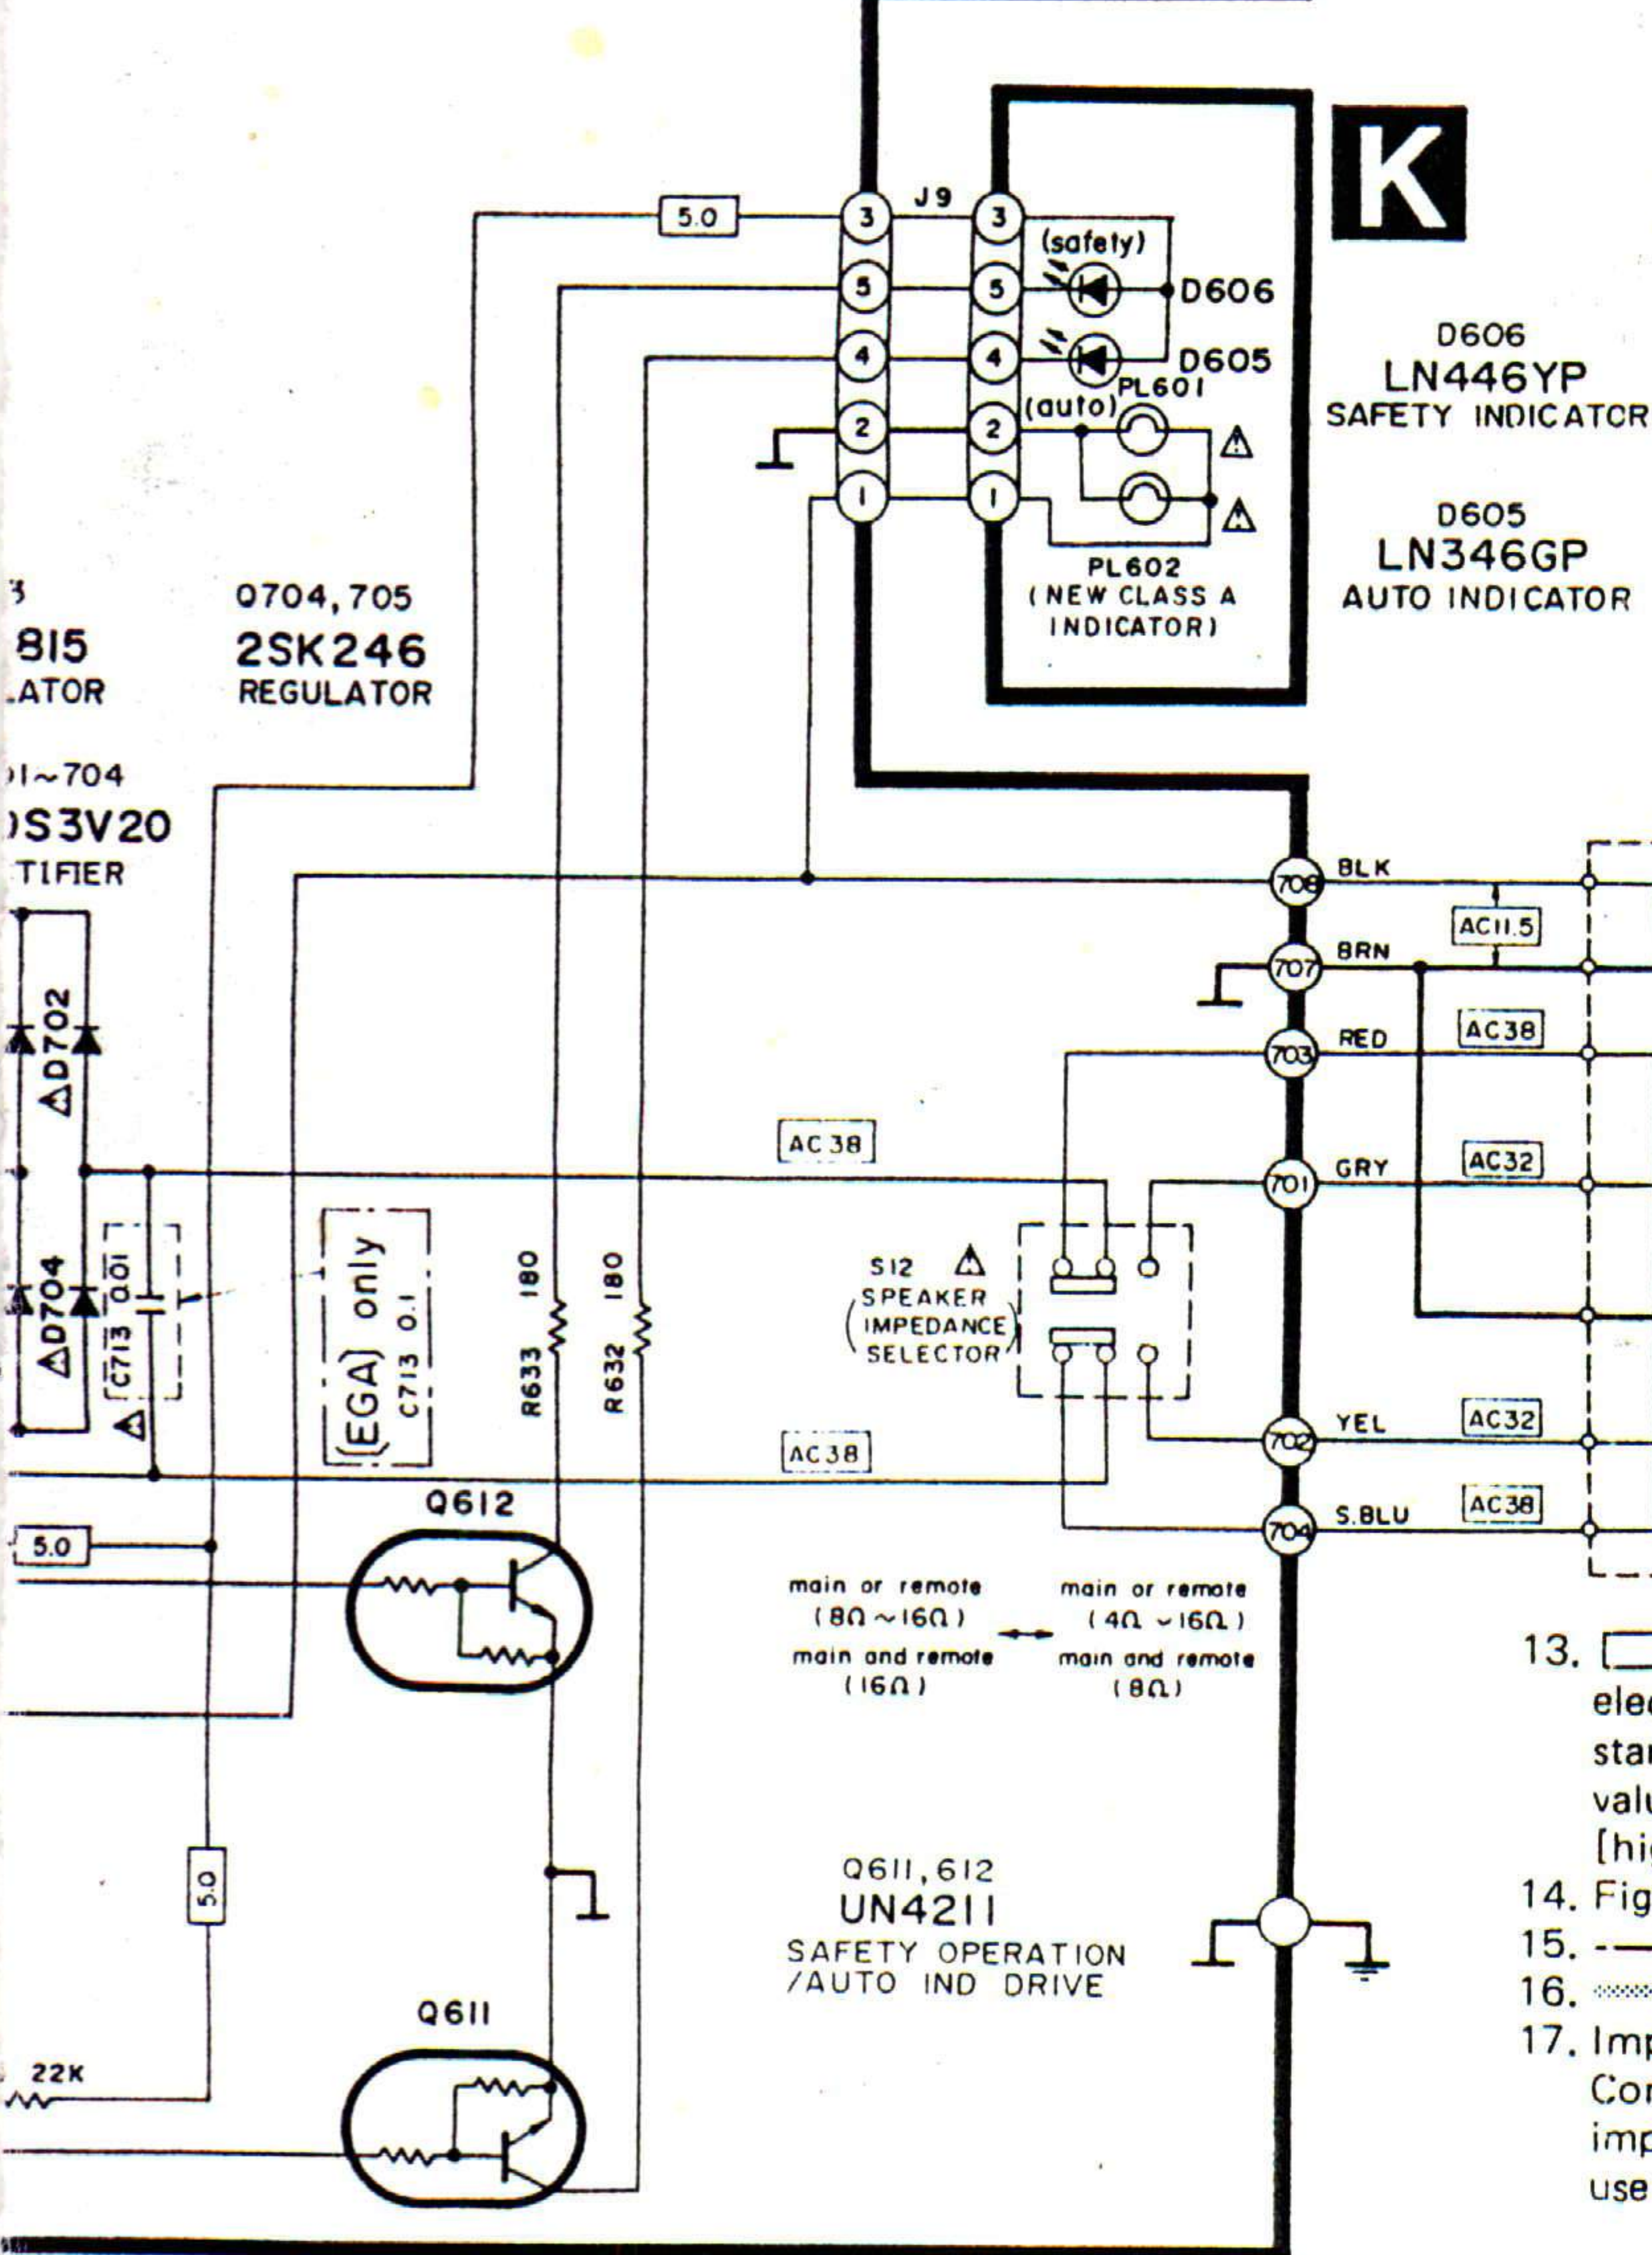

- Indicated voltage values are the standard values for the DC electronic circuit tester (high impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester. [high tap \rightarrow 8 Ω ~ 16 Ω /16 Ω]
- Figures in () standard for DC voltage in low tap.
- Positive (+B) voltage lines and negative (-B) voltage lines.
- Phono signal lines of left channel.
- Important safety notice:
Components identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

LOAD DET./POWER SUPPLY CIRCUIT