

Model: 5TP-90

SPECIFICATIONS

Frequency Range 540~1600 KC
 IF Frequency 455 KC
 Power Source Standard 9V Batt.
 Output 70 mw
 Speaker 2 1/4" P M Dynamic



Transistors

2SA521 (Converter)
 2SA491 (I. F. Amplifier)
 IN601 (Diode Detector)
 2SB541 (A. F. Amplifier)
 2SB562 (P. P. Amplifier)
 Dimensions4" x 2 1/2" x 1/8"

Weight8 ozs

Batteries Sold Everywhere

Toshiba 006P
 Eveready 216
 Burgess 2U6
 RCA VS312
 Ray.O.vac 1604

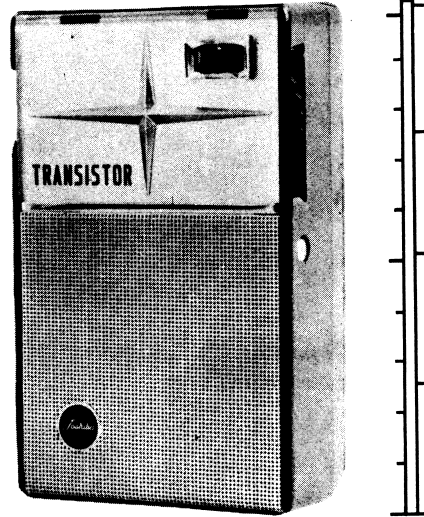

V₁ 2SA52

V₂ 2SA49

V₃ 2SB54

2SB56 × 2

