



# SPECIFICATIONS

- Frequency range...540~1,600kc
- IF frequency ....455 kc
- Power Source ....Standard 9V Batt.
- Output .....70 mw
- Speaker .....2 1/4" P.M. Dynamic
- Toshiba PNP alloy junction transistors
  - 2S52/2SA52 ....1 (Converter)
  - 2S49/2SA49 ....1 (I.F. Amplifier)
  - 2S53/2SA53 ....1 (I.F. Amplifier)
  - 1N60 .....1 (Germanium diode  
Detector AGC)
  - 2S54/2SB54 ....1 (A.F. Amplifier)
  - 2S56/2SB56 ....2 (class B Push Pull  
Power Amplifiers)
- Dimensions .....4 1/8" x 2 5/8" x 1 1/4"
- Weight .....10 ozs
- Batteries sold everywhere
  - Toshiba .....006P
  - Eveready .....216
  - Burgess .....2U6
  - RCA .....VS312
  - Ray-O-vac .....1604

# MODEL : 6TP-309A

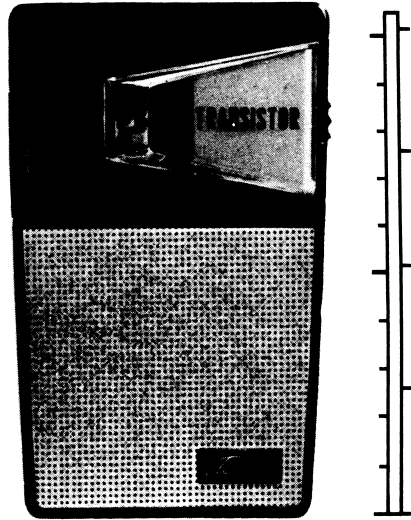

# CIRCUIT DIAGRAM

