


ZENITH RADIO CORP.

MODELS 4P26, 4T26, 4P51, 4T51

Chassis 5401

Schematic, Parts

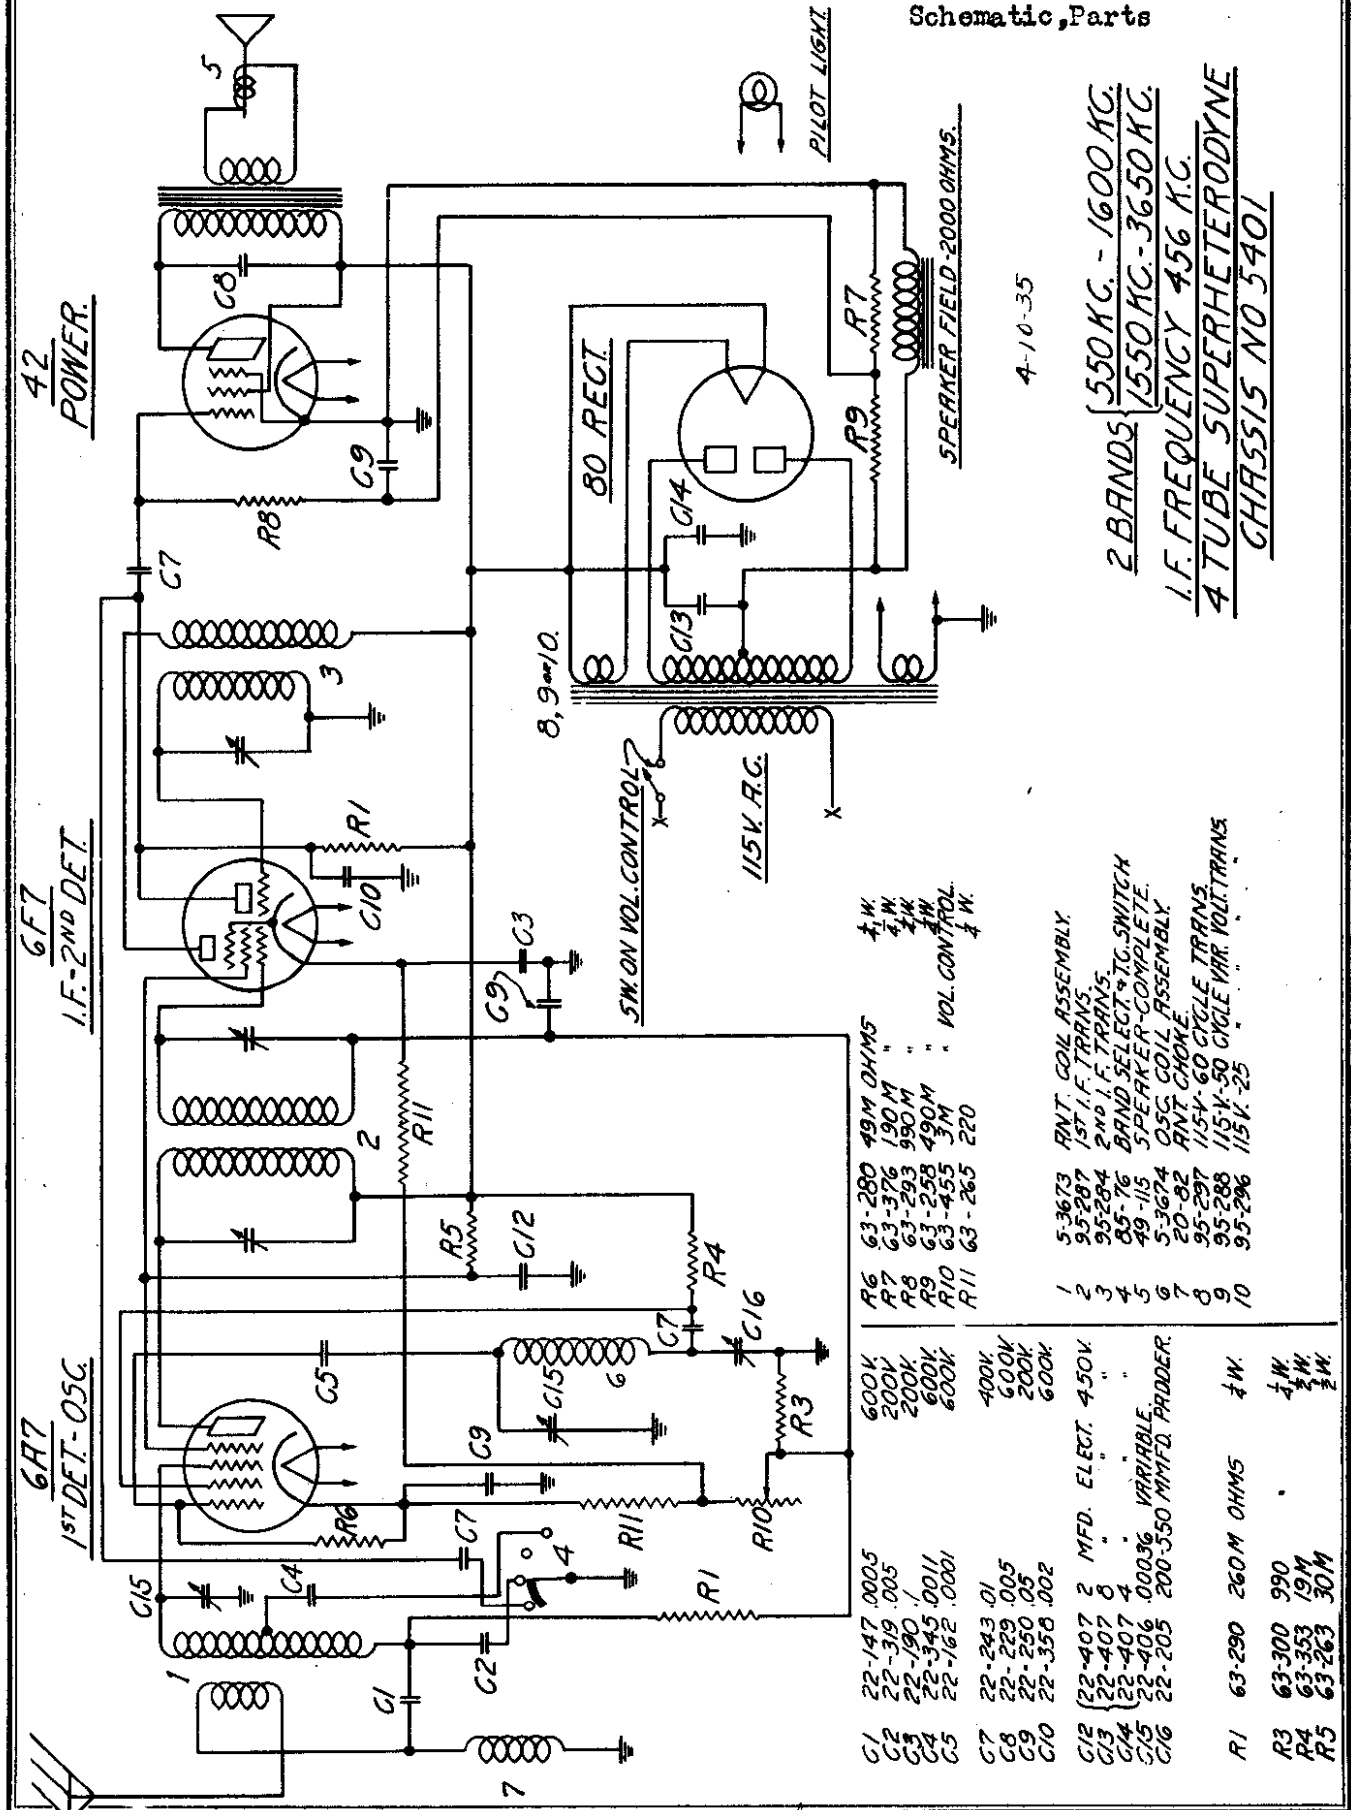

- R6 63-280 49M OHMS 1/4 W.
- R7 63-376 190 M " 1/4 W.
- R8 63-293 990 M " 1/4 W.
- R9 63-258 490M " 1/4 W.
- R10 63-455 3M " VOL. CONTROL.
- R11 63-265 220 " 1/4 W.

- 1 5-3673 ANT. COIL ASSEMBLY
- 2 95-287 1ST I.F. TRANS.
- 3 95-284 2ND I.F. TRANS.
- 4 85-76 BAND SELECT. T.C. SWITCH
- 5 49-115 SPEAKER-COMPLET.
- 6 5-3674 OSC. COIL ASSEMBLY
- 7 20-82 ANT. CHOK.
- 8 95-297 115V-60 CYCLE TRANS.
- 9 95-288 115V-90 CYCLE VAR. VOLT. TRANS.
- 10 95-296 115V-25

- C1 22-147 .0005
- C2 22-319 .005
- C3 22-190 1
- C4 22-345 .0011
- C5 22-162 .0001
- C6 600K
- C7 200V
- C8 200K
- C9 200K
- C10 600K
- C11 400K
- C12 600V
- C13 22-407 2 MFD. ELECT. 450V.
- C14 22-407 4
- C15 22-407 4
- C16 22-406 .00036 VARIABLE.
- C17 22-205 200-350 MMFD. PAPER.
- R1 63-290 260 M OHMS 1/4 W.
- R3 63-300 990 1/4 W.
- R4 63-353 19M 1/4 W.
- R5 63-263 30M 1/4 W.

4-10-35

2 BANDS { 550 KC. - 1600 KC.  
1550 KC. - 3650 KC.  
I.F. FREQUENCY 456 KC.  
4 TUBE SUPERHETERODYNE  
CHASSIS NO 5401

