


IC_{1,2,3}: LM1458N
 IC₄: LM741CH
 Q_{1,2,3,4}: 2SK-30A(C)
 D₁: RDS4-N
 D₂: TLR-102
 D₃: RD6A-L
 D₄: 1S958

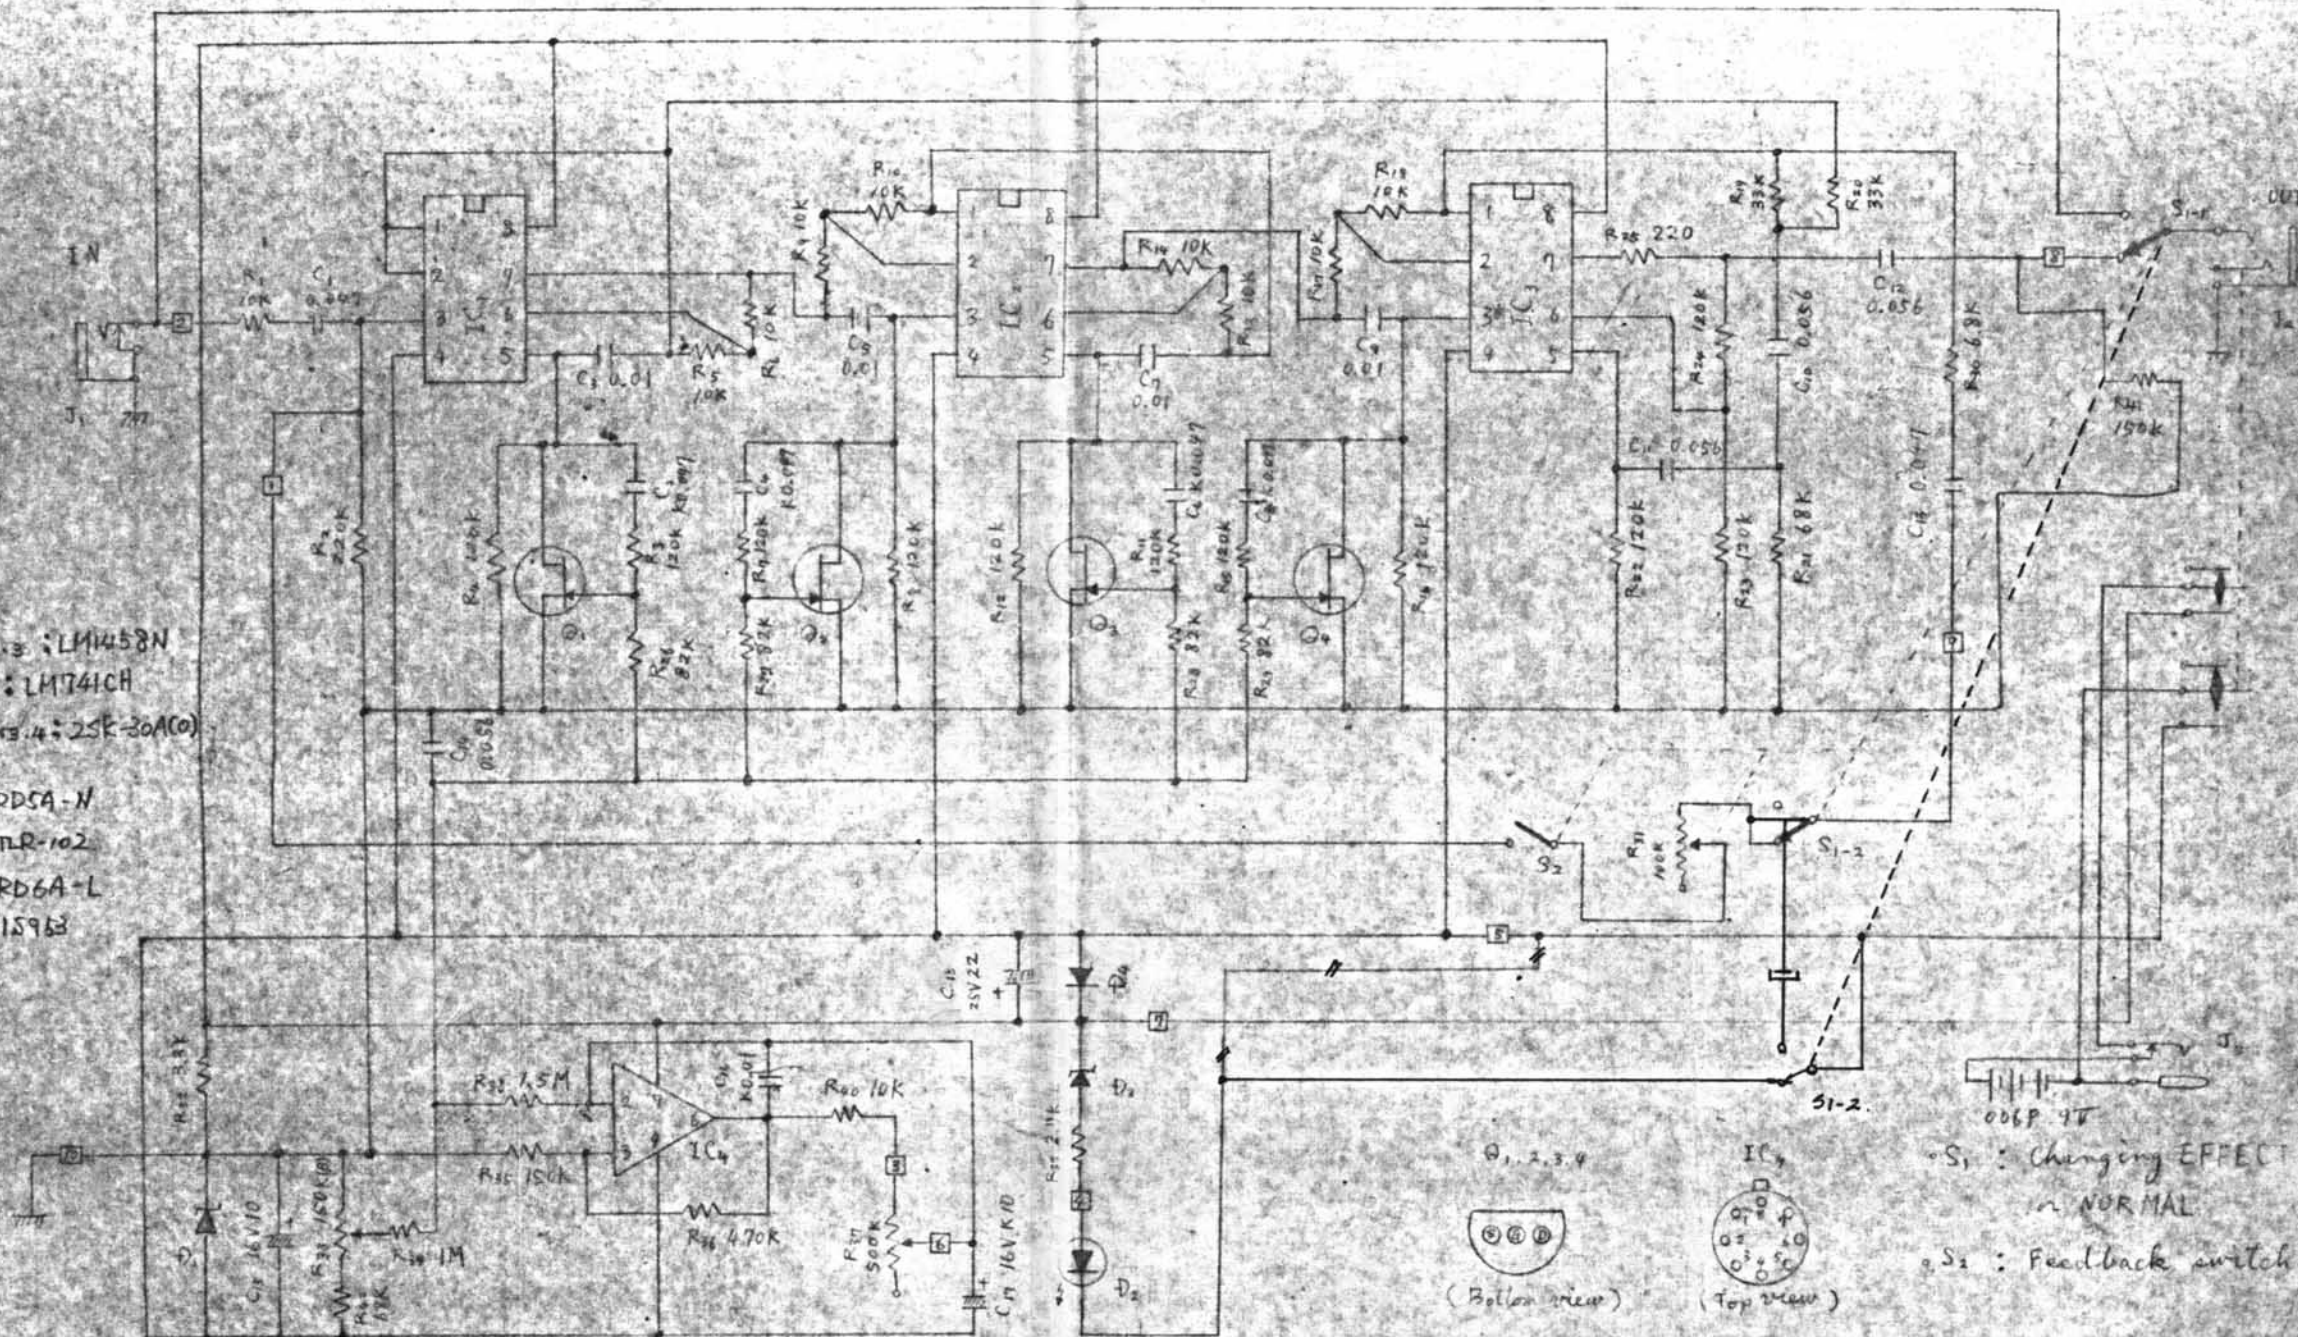

Vox 1900 PHASER

- Notes: All resistors value are in ohms. (k = 1000Ω, M = 10⁶Ω)
 All capacitors value are in micro farads. (p = 10⁻⁶μF)
 Tolerance of all resistors is k = ± 10%
 Tolerance of all capacitors (except the electrolytic capacitors) is M = ± 20% unless otherwise indicated.

tolerance of all capacitors (except the electrolytic capacitors) is M = ± 20% unless otherwise indicated.



S₁: Changing EFFECT in NORMAL

S₂: Feedback switch

型番		PS-101	図号	
名称		SCHEMATIC DIAGRAM	単位	
材質			単位	
①	PCB変換の為	78.8%	単位	単位
②	C ₁₂ 再追加	76.6%	単位	単位
③	C ₁₂ 再追加	76.6%	単位	単位
④	C ₁₂ 再追加	76.6%	単位	単位
作成 訂正 記 年 月 日		(株) ケヤ	図面作成 年 月 日	