

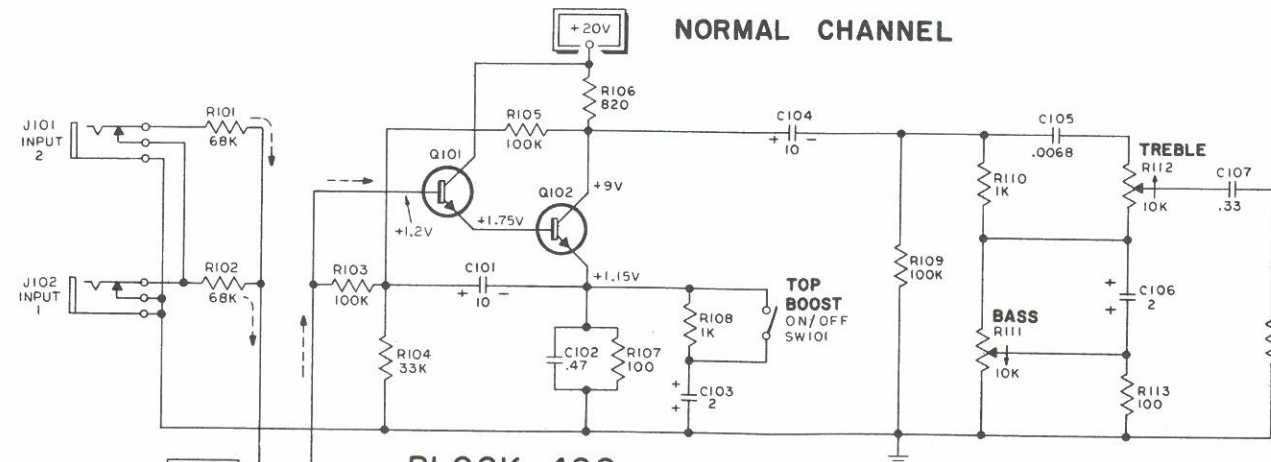
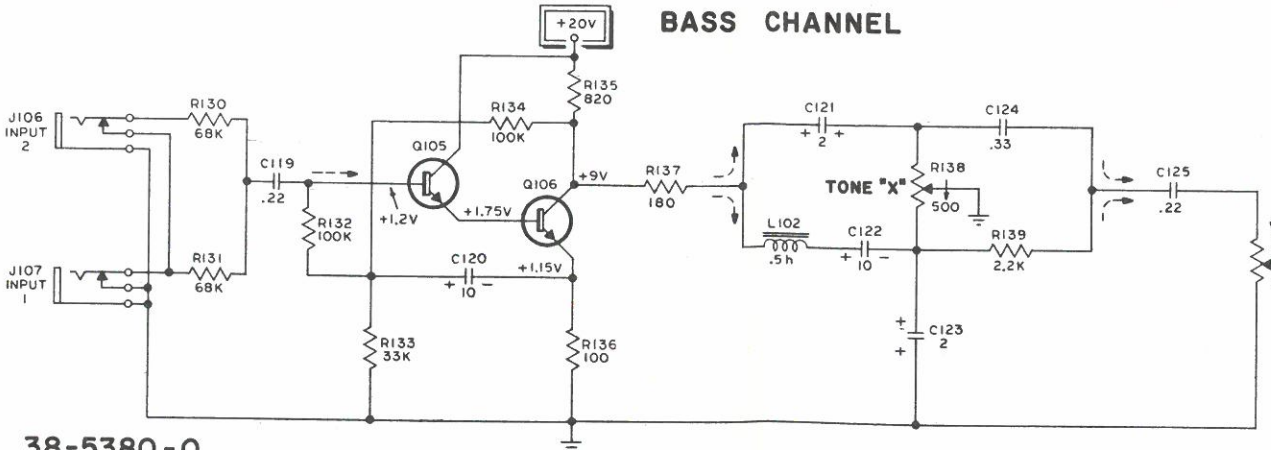


BLOCK 100

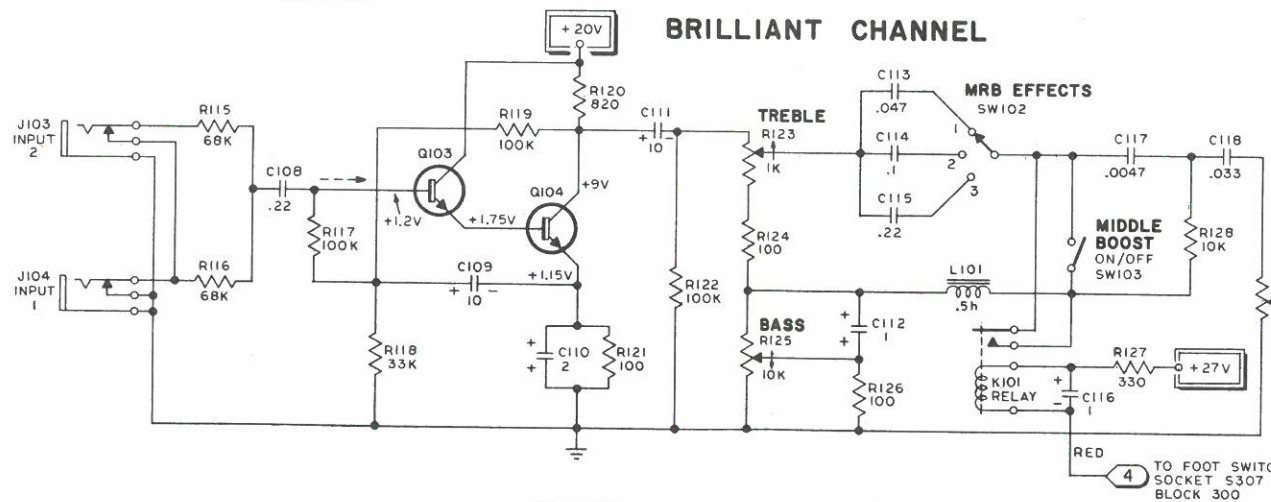


BLOCK 400 DISTORTION BOOSTER

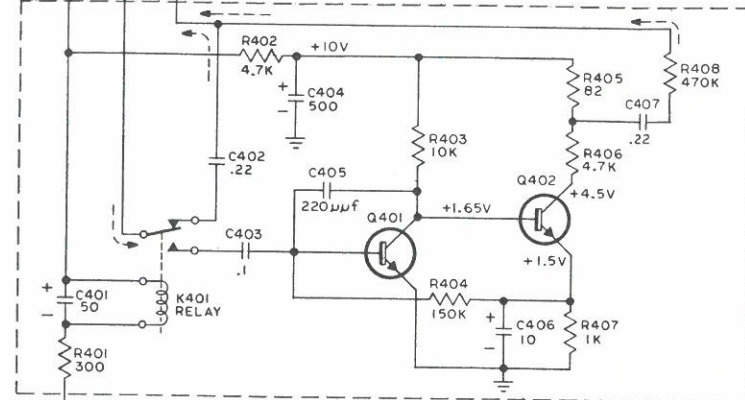

BLOCK 200

REVERB CHANNEL


SW201-A
BRILLIANT
OFF
NORMAL

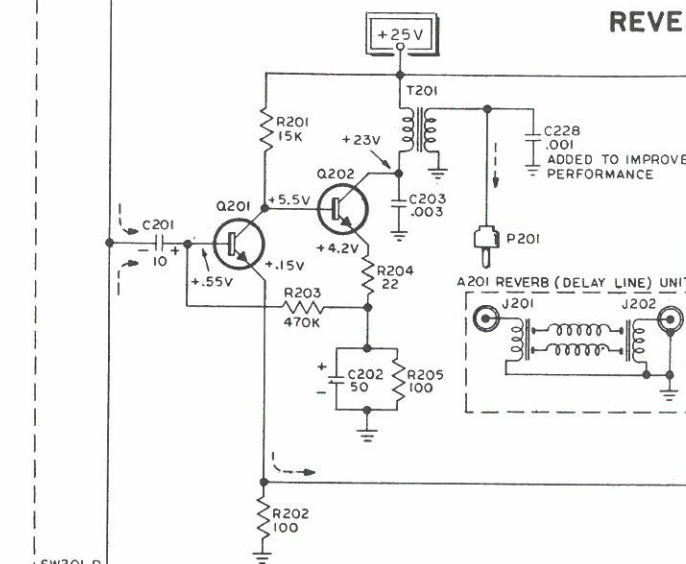

SW201-B
BRILLIANT
OFF
NORMAL

REVERB CHANNEL


SW201-C
BRILLIANT
OFF
NORMAL

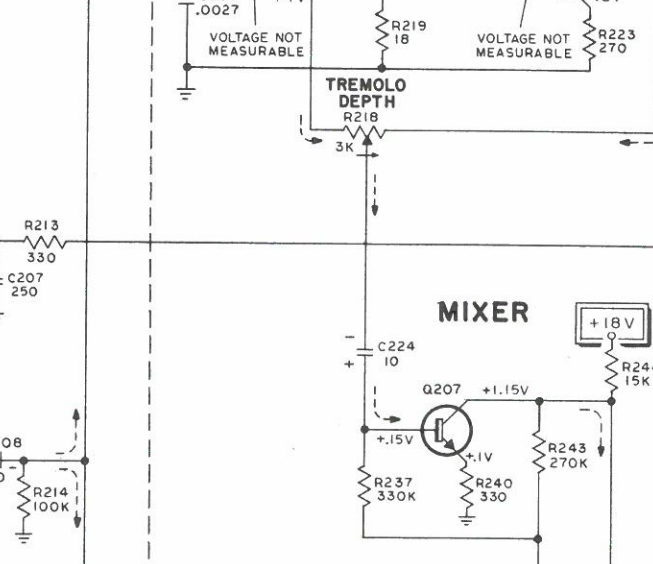


SW201-D
BRILLIANT
OFF
NORMAL

MIXER

SW201-E
BRILLIANT
OFF
NORMAL

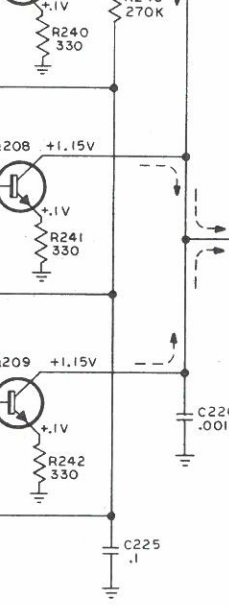

GENERAL INFORMATION




This symbol denotes the common connecting points for the various power supply connections throughout the organ. Note that several of these points are marked "source" which denotes the origin of the reference potential.



These symbols both represent B- (amplifier chassis ground).



Arrows indicate the direction of audio signal flow through the circuits.





This symbol indicates plug and socket terminal connections. Where it is not practical to draw the assembly as a complete unit.


1. All capacitors in MFD unless otherwise indicated.
2. All resistors 1/2W 10% unless otherwise indicated.
3. All voltage readings made with 20,000 ohm per volt meter (voltages $\pm 10\%$) with no signal applied.
4. Arrow drawn on pot. arm indicates clockwise rotation.

120 V.A.C.
60~
0.7 AMPS
60 WATTS


BLOCK 300

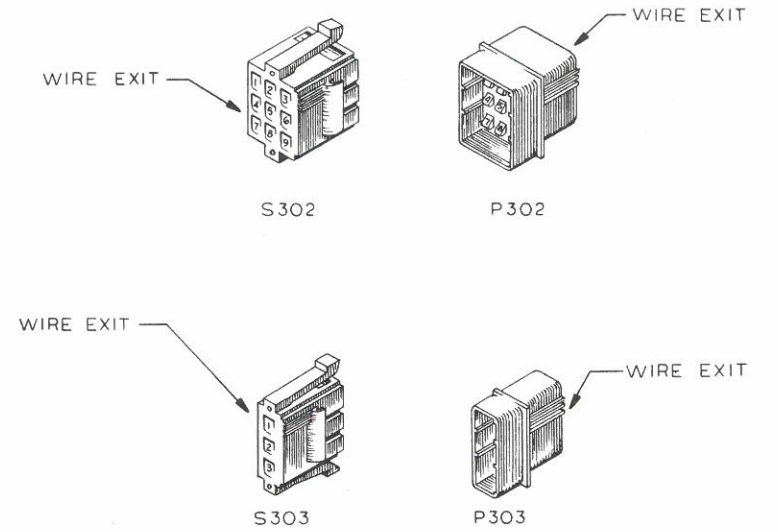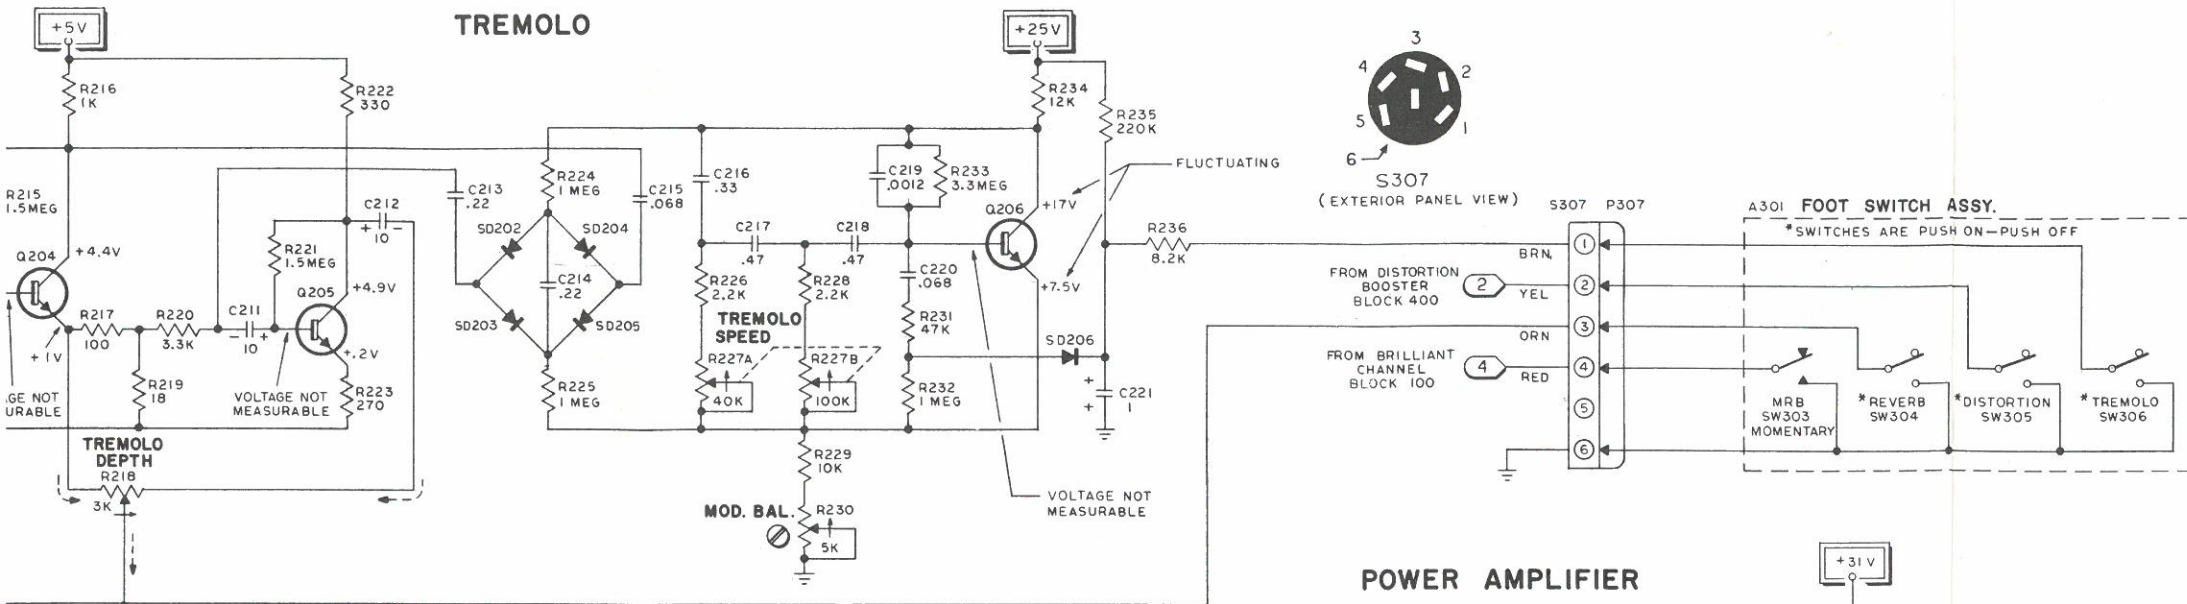

POWER AMPLIFIER

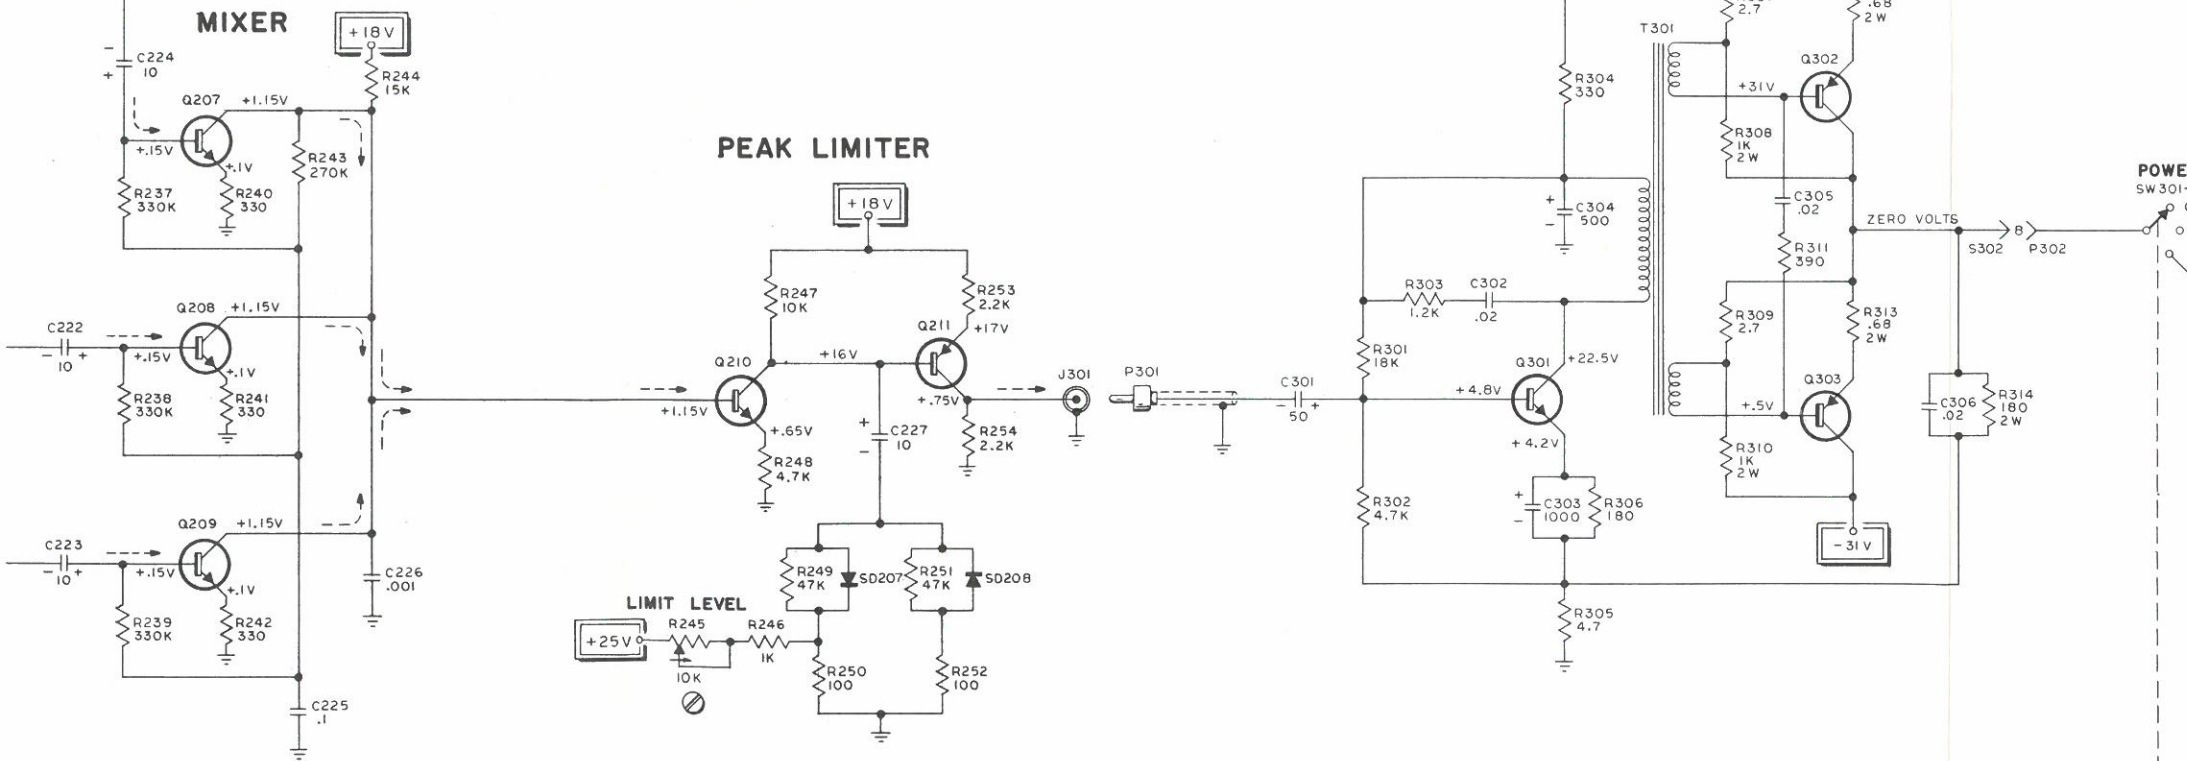


POWER SUPPLY

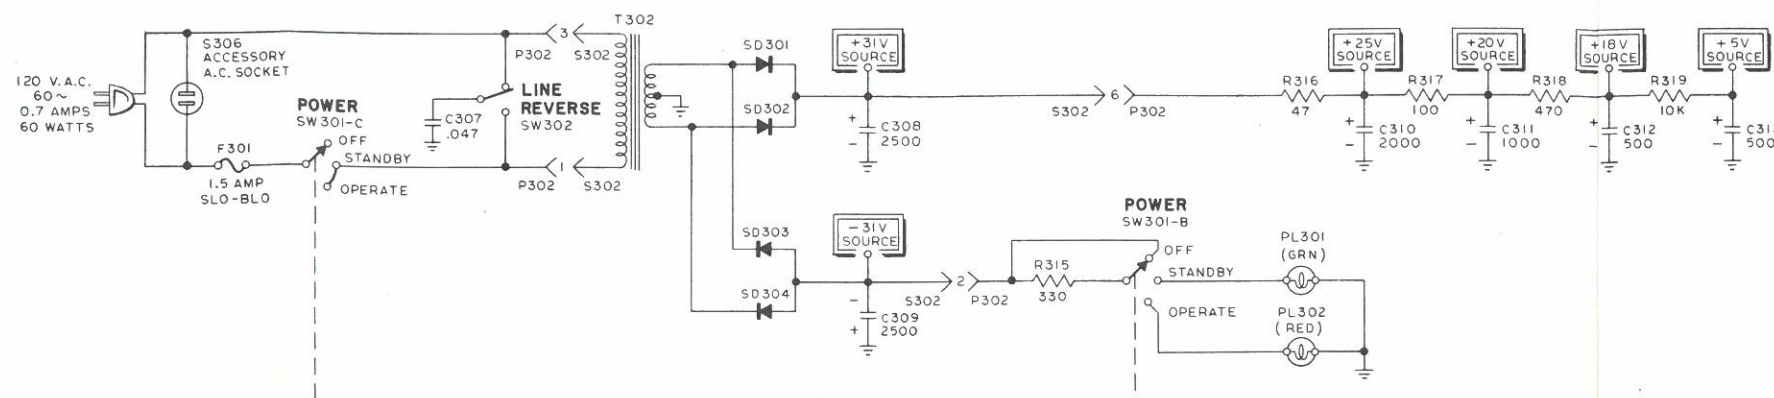


BUCKINGHAM
V 1121




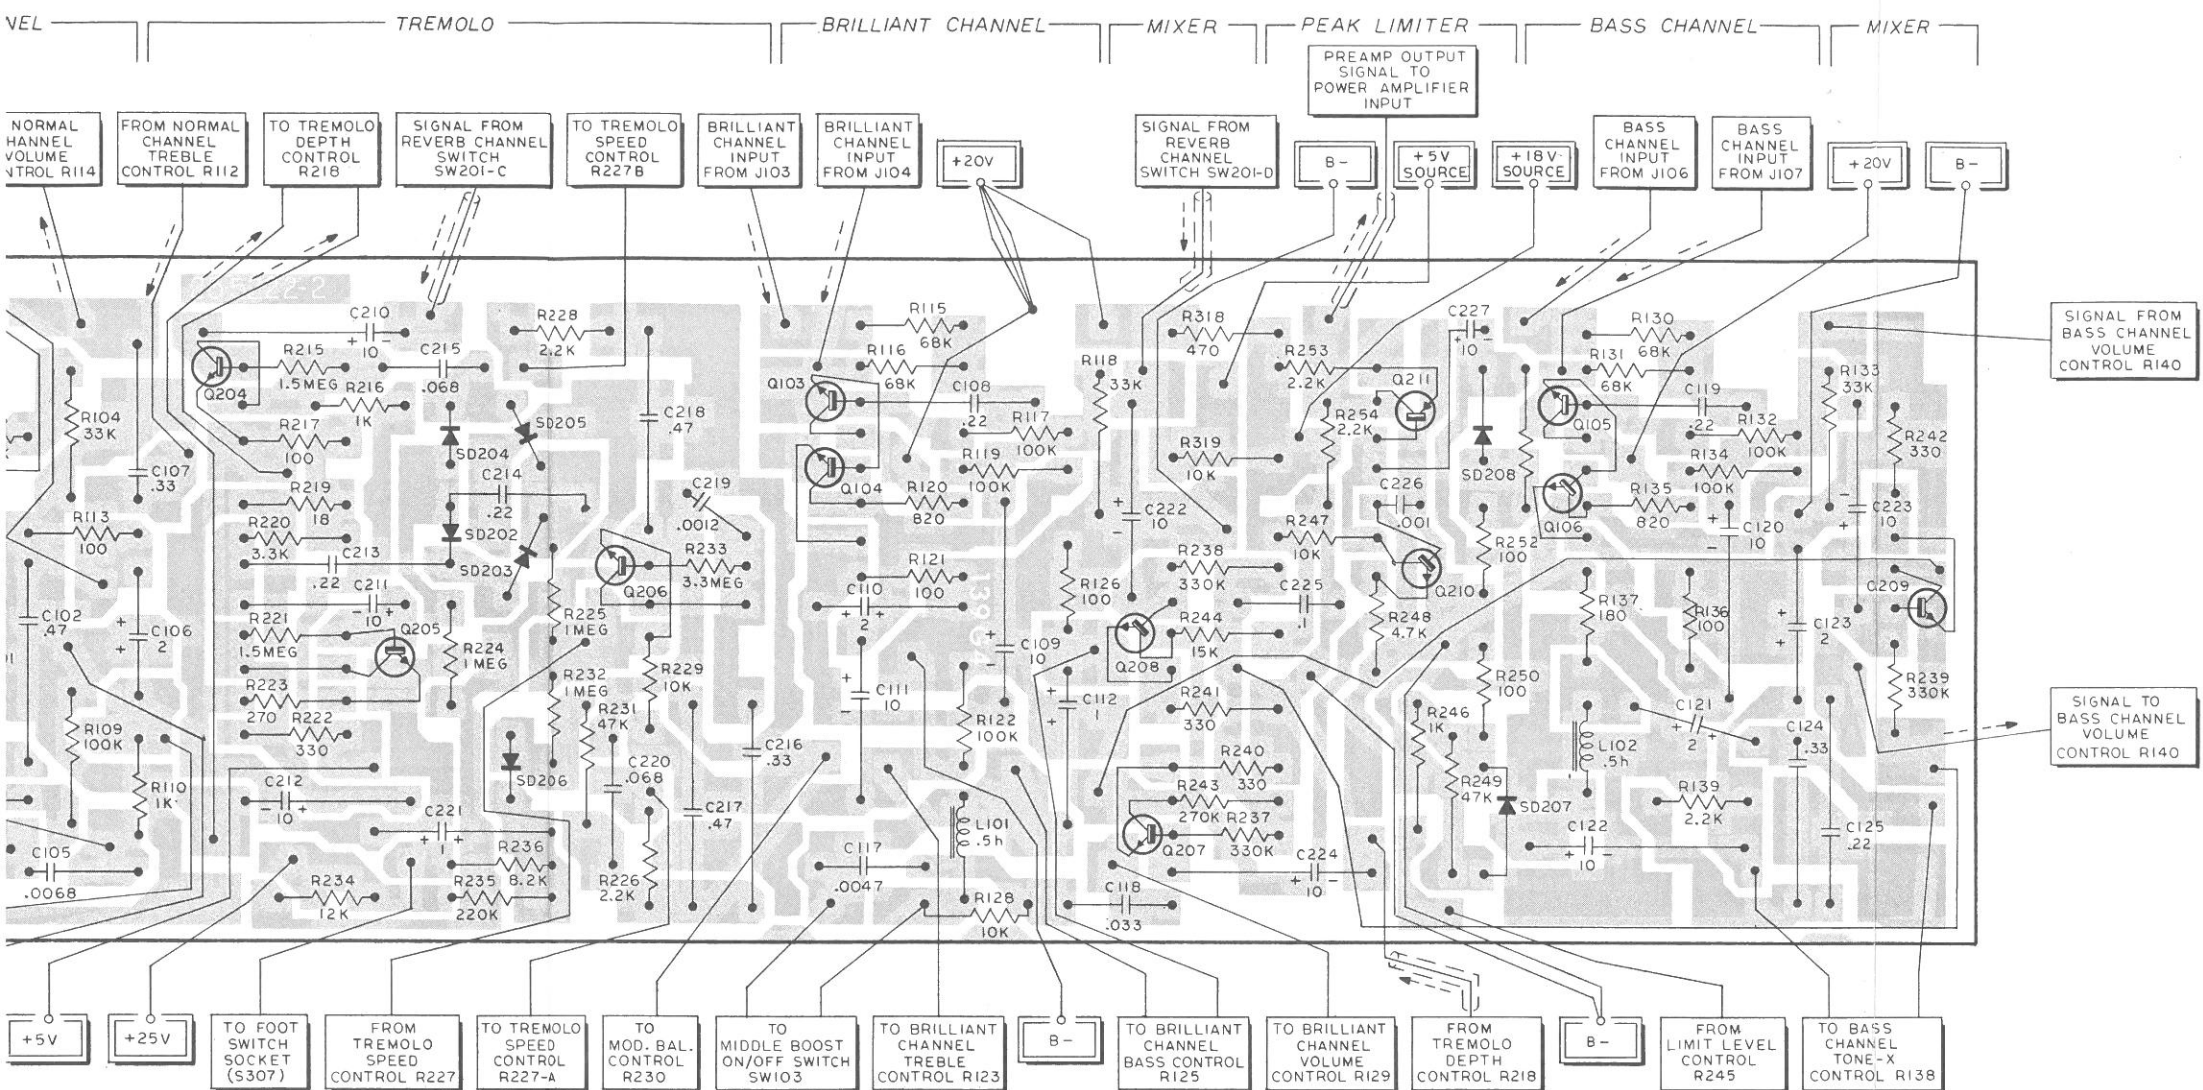



PREAMP P.C. BOARD & COMPONENTS
84-18443
 (SHOWN COPPER SIDE UP)

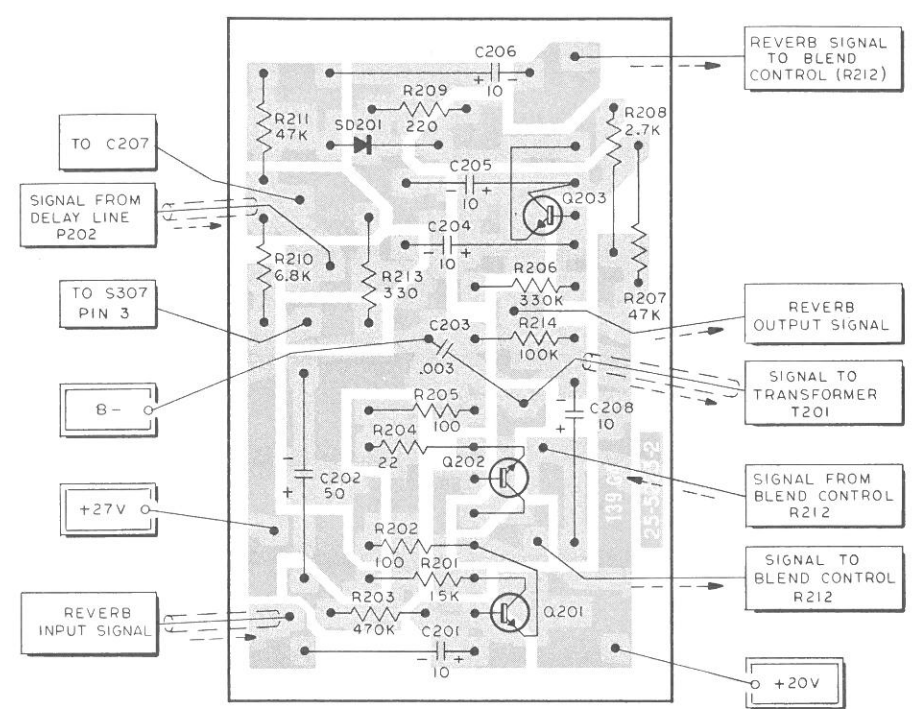

REVERB P.C. BOARD & COMPONENTS
84-18007
 (SHOWN COPPER SIDE UP)

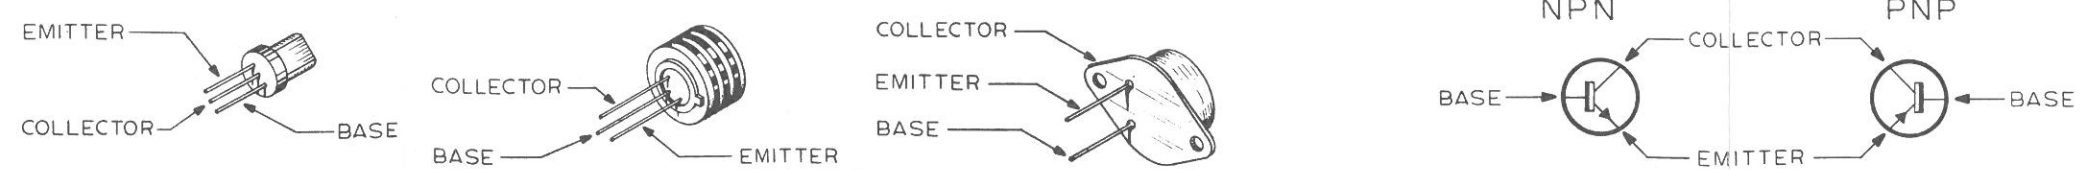

TRANSISTOR INFORMATION

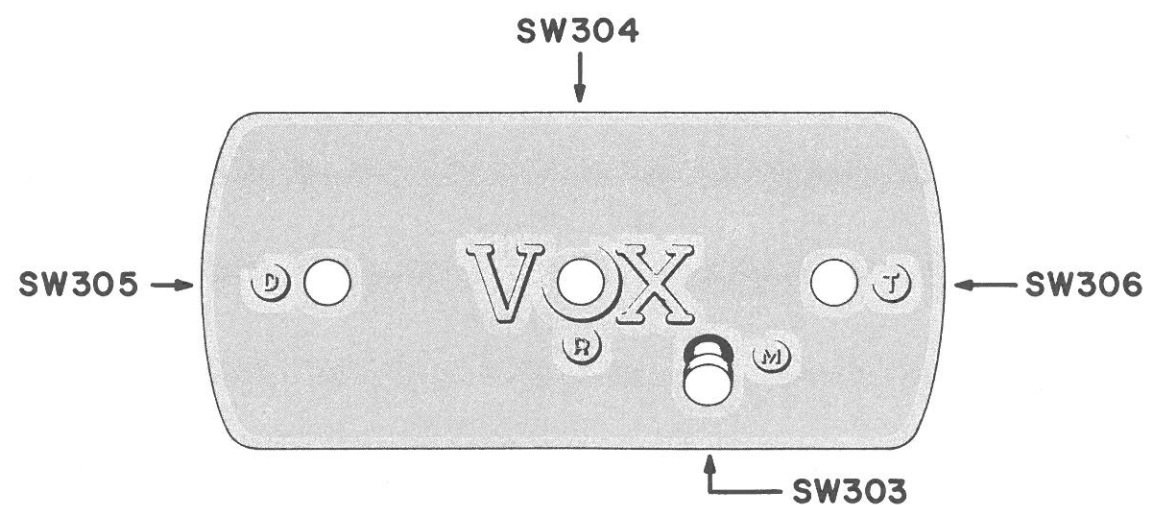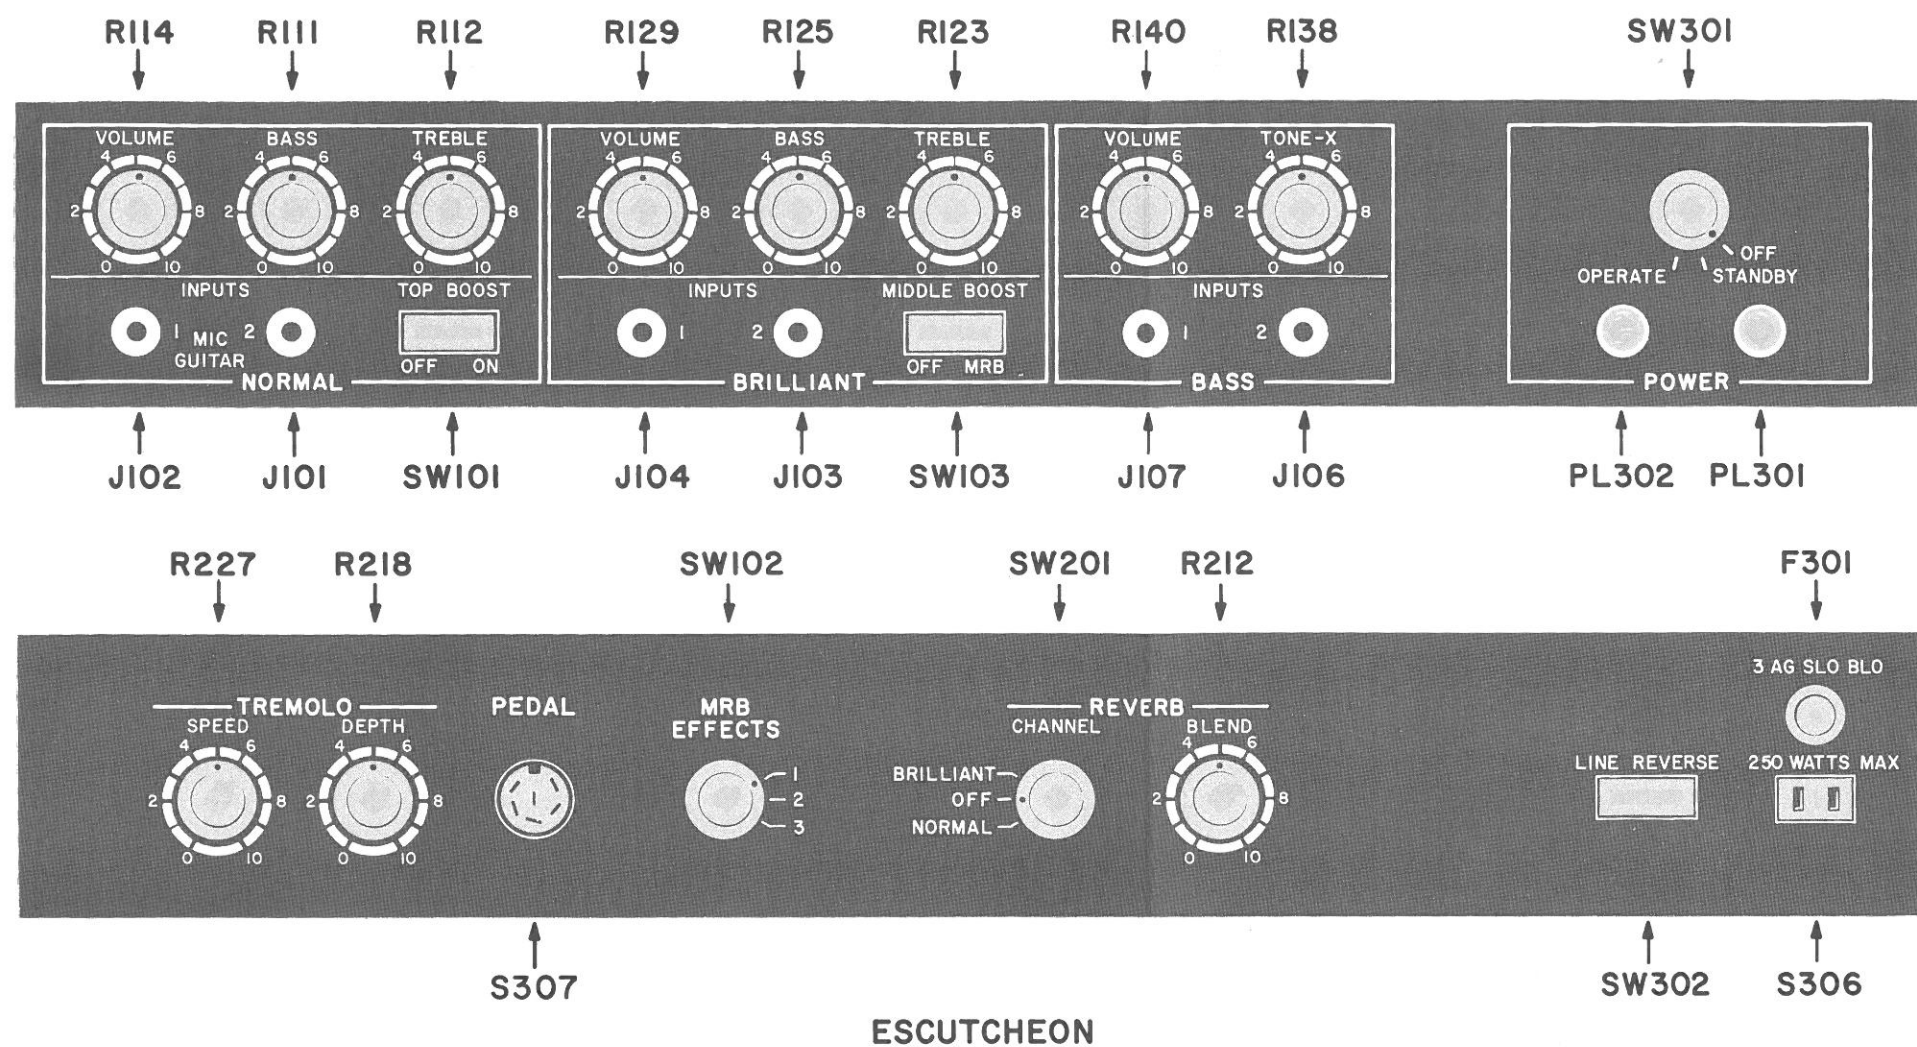

FOOT SWITCH ASSEMBLY
84-18441

DISTORTION BOOSTER
P.C. BOARD & COMPONENTS
84-18444
(SHOWN COPPER SIDE UP)

