



PRE-AMPLIFIER AF 37

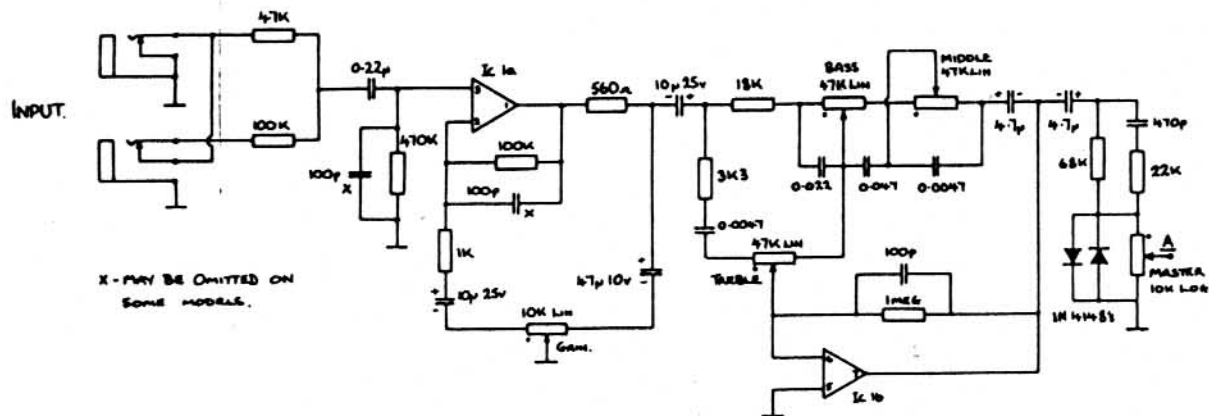

POWER AMPLIFIER
AF 37


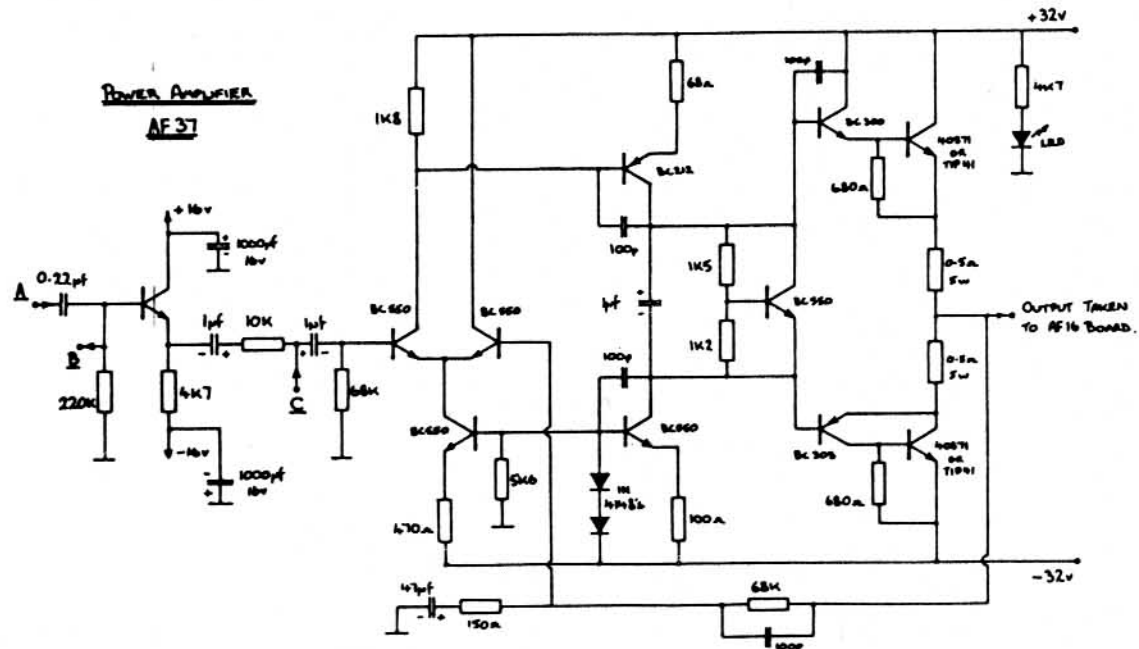


REVERB SECTION

Drive

AF 37

Pick-up

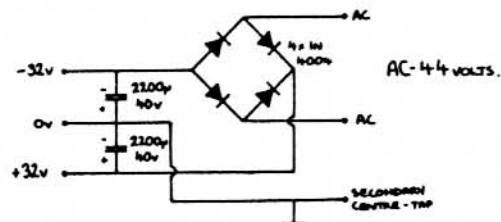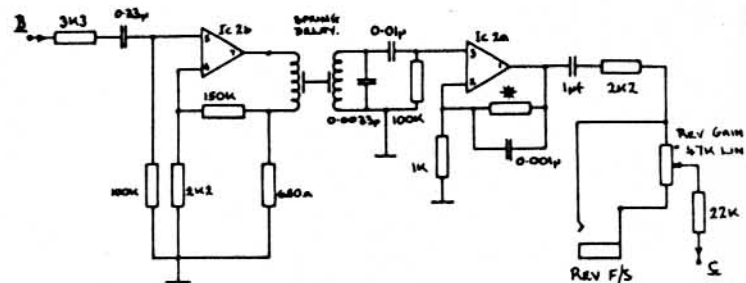

POWER SUPPLY UNIT AF35

Vox Venue Lead 30 - 1984

NOTES:-

- 1 * - THE VALUE OF THIS RESISTOR IS DEPENDANT ON THE TYPE OF SPRING DELAY USED. SOME BOARDS MAY HAVE A MXT SKELETON PRE-SET.
- 2 ALL IC's ARE 4558 DUAL OPERATIONAL AMPLIFIERS.
- 3 + 9KVOLT SUPPLY FOR PRE-AMP IS OBTAINED THROUGH 2 1M & 1/2 WATT RESISTORS WITH 2 10V ZENER DIODES (BZX 61-C-16) TO EARTH TO GIVE LOW CURRENT REGULATIONS. SUPPLY OMITTED FOR CLARITY. ALSO, THERE ARE 2 0.1 μ F CAPACITORS BETWEEN SUPPLY LINES AND OV.
- 4 DC 550's MAY BE BC182's OR 171's.