

SCHEMATIC DIAGRAM

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
□	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
◇	METAL FILM RESISTOR
○	METAL PLATE RESISTOR
○	FIRE PROOF CARBON FILM RESISTOR
○	CEMENT MOLDED RESISTOR
○	SEMI VARIABLE RESISTOR
○	CHIP RESISTOR

The voltages are measured using normal tape in the PLAY mode (no-signal condition). Only the voltage in ( ) are in the REC mode.







各電圧は、ノーマルテープで再生時の電圧です。ただし、( ) の電圧は録音時の電圧です。

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
□	TANTALUM CAPACITOR
○	CERAMIC TUBULAR CAPACITOR
○	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
○	MICA CAPACITOR
○	POLYPROPYLENE FILM CAPACITOR
○	SEMICONDUCTIVE CERAMIC CAPACITOR




NOTICE (model)

(J)..... JAPANESE  
(U)..... U.S.A  
(C)..... CANADIAN  
(R)..... GENERAL  
(A)..... AUSTRALIAN  
(B)..... BRITISH  
(G)..... EUROPEAN  
(T)..... CHINA  
(L)..... SINGAPORE

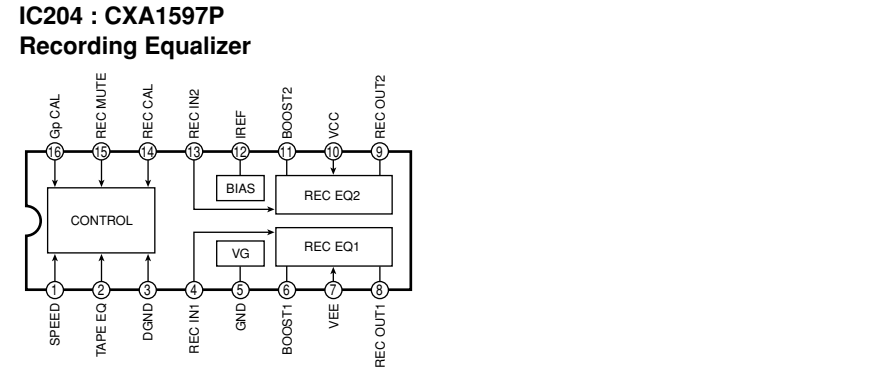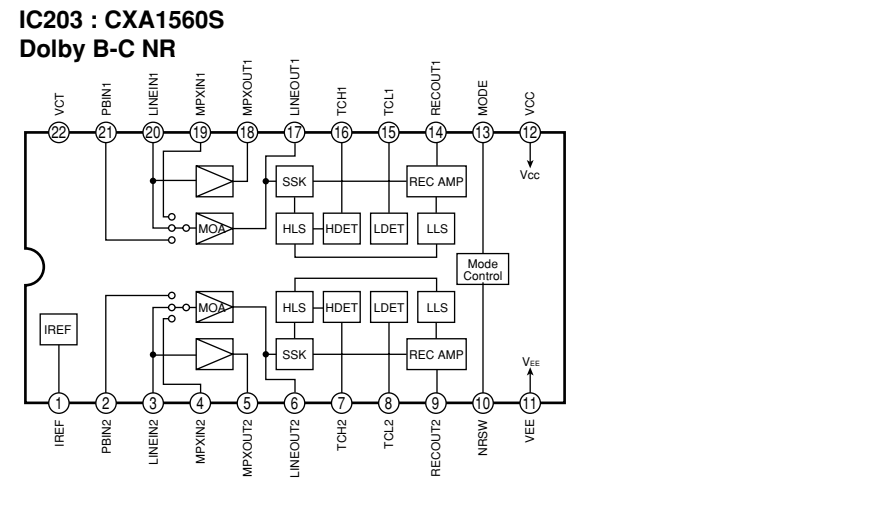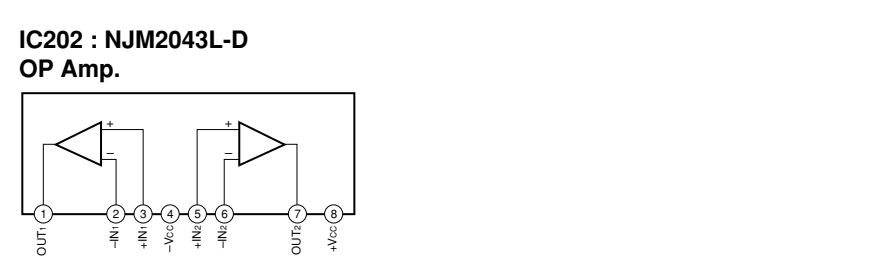
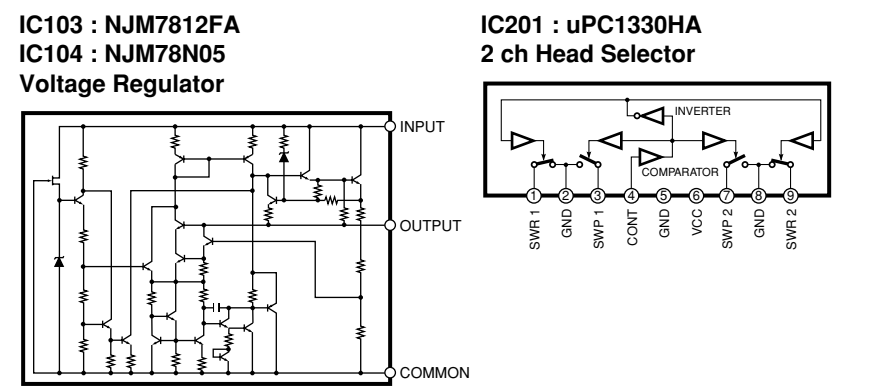
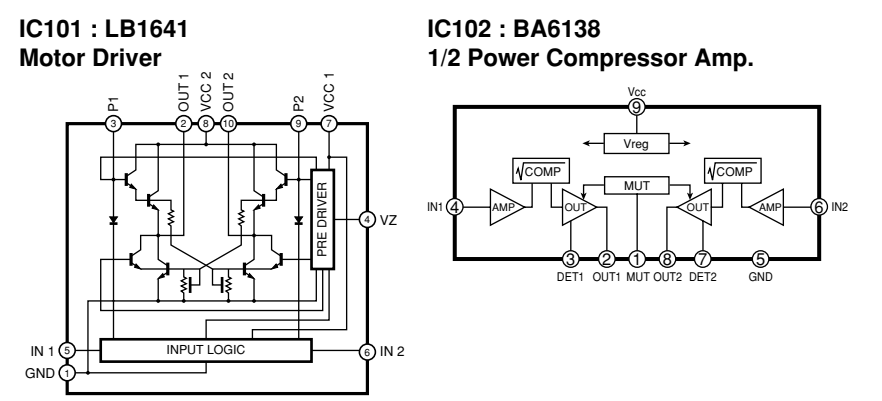
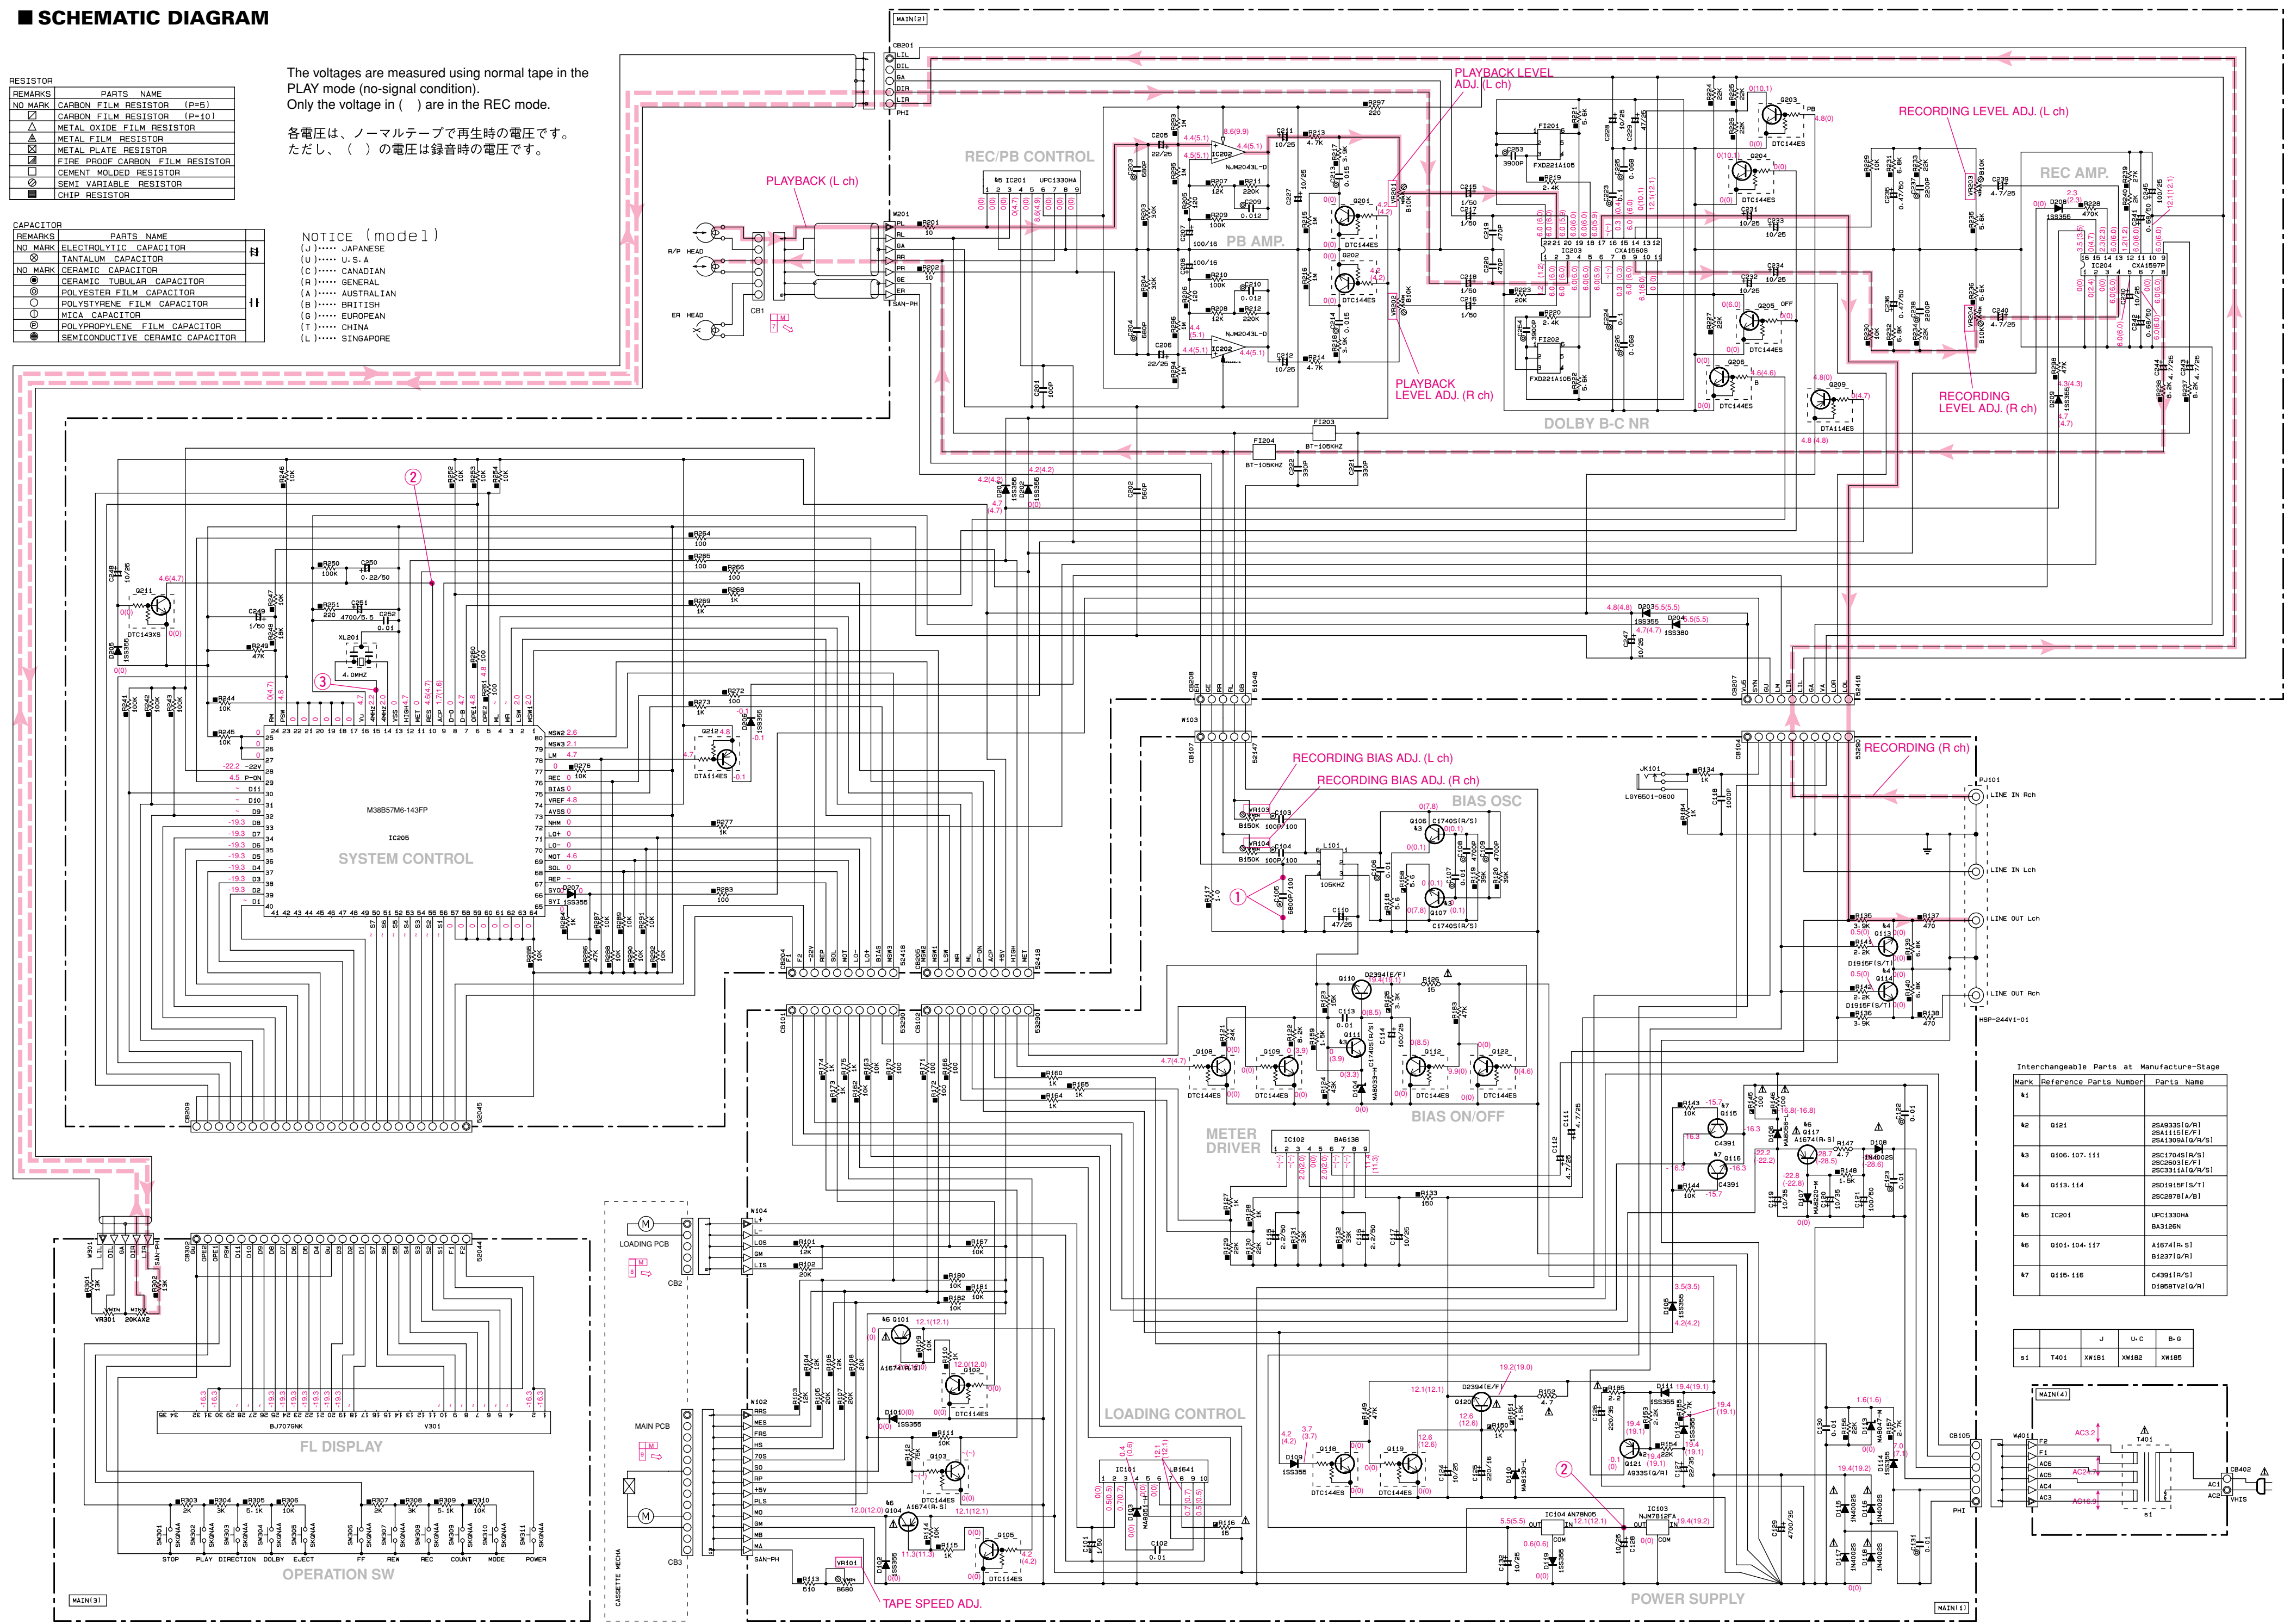


Interchangeable Parts at Manufacture-Stage

Mark	Reference	Parts Number	Parts Name
K1			
K2	G101	2S49301(G/R)	2S49301(G/R)
K3	G106, 507, 511	2SC1704B(R/S)	2SC1704B(R/S)
K4	G133, 514	2SD1915F(S/T)	2SD1915F(S/T)
K5	IC201	uPC1330HA	uPC1330HA
K6	G101, 104, 117	A167416-B1	A167416-B1
K7	G150, 516	C43911A/R/S1	D1687V2(G/R)

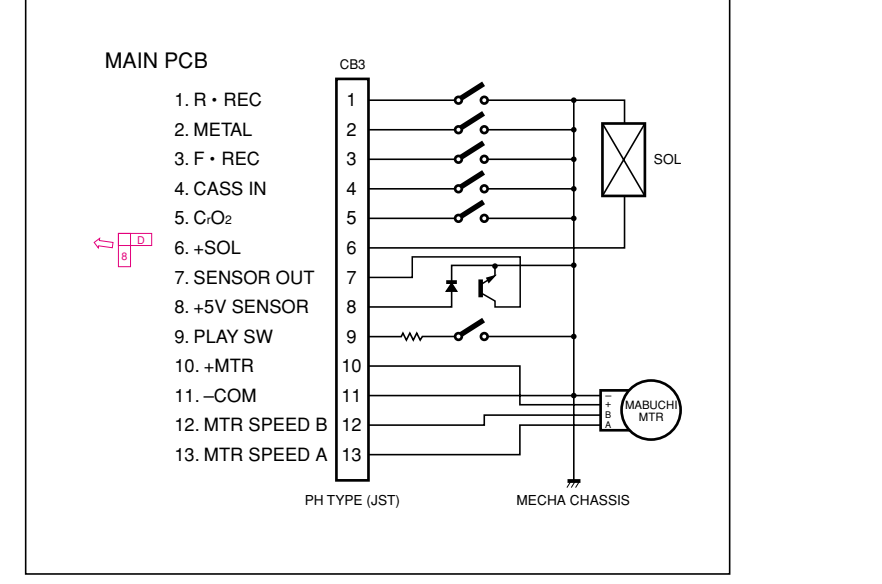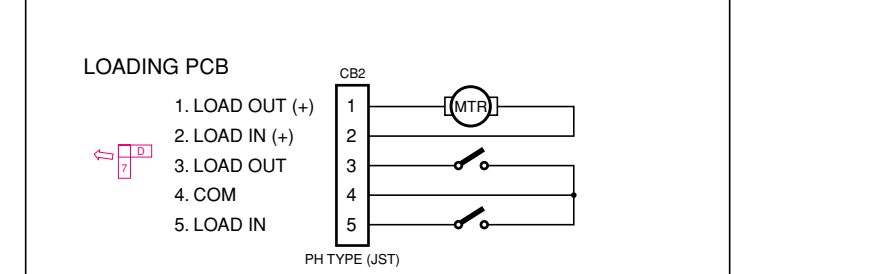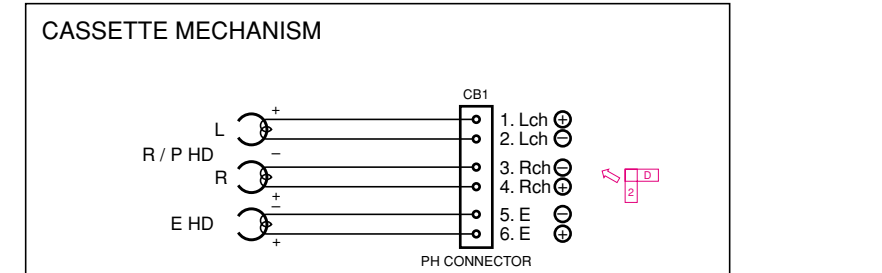

PIN CONNECTION OF TRANSISTORS, DIODES AND ICs.

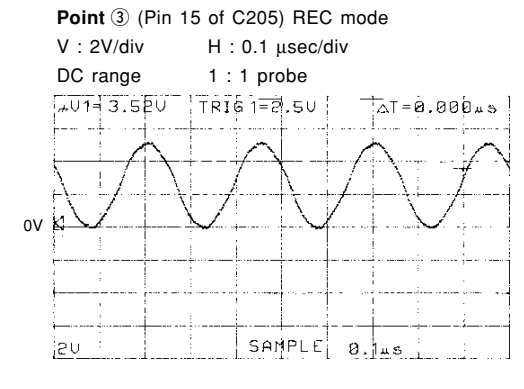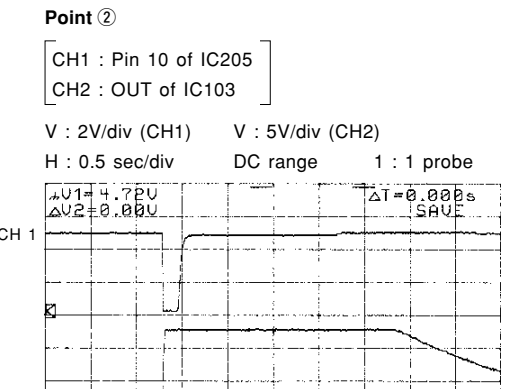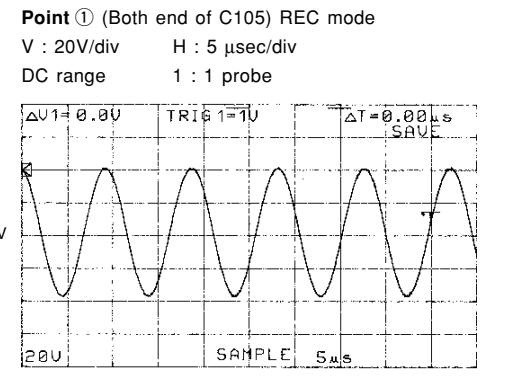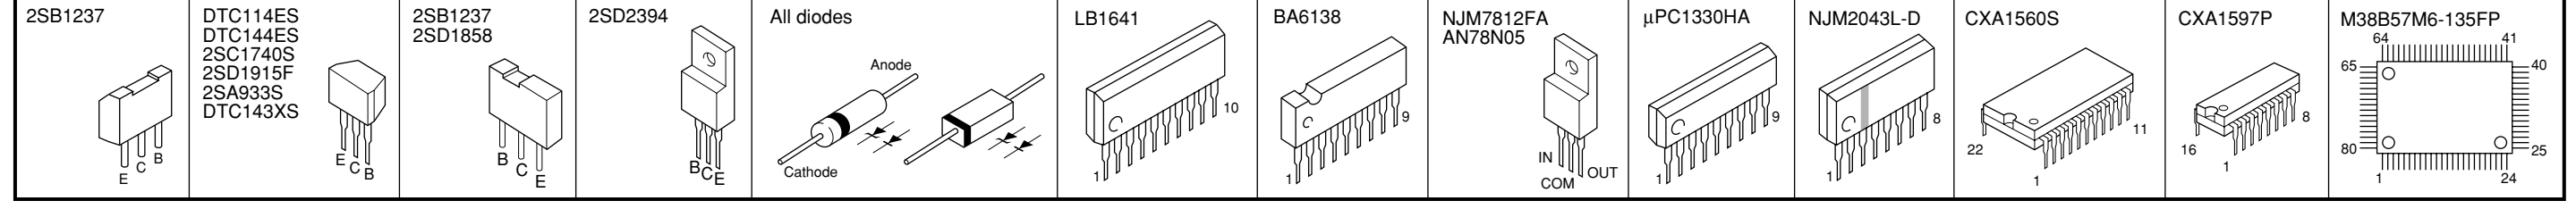

\* All voltage are measured with a 10MΩ/V DC electric volt meter.  
\* Components having special characteristics are marked △, and must be replaced with parts having specifications equal to those originally installed.  
\* Schematic diagram is subject to change without notice.

電圧は、内部抵抗10MΩの電圧計で測定したものです。  
△印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。  
本回路図は、標準回路図です。改良のため予告なく変更することがございます。