


NOTES: LEFT ch. PARTS ODD.  
 RIGHT ch. PARTS EVEN.  
 "RCV" = RELAY CONTROL VOLTAGE.  
 EACH DIP SWITCH (6) SECTIONS, DPST.





- PHONO - R. ch. 1
- PH. 1 RCV-OUT 2
- PH. 1 RCV-OUT 3
- PHONO - L. ch. 4
- PHONO GND. 5
- PHONO GND. 6
- PHONO GND. 7
- PHONO GND. 8
- PHONO GND. 9
- PHONO GND. 10
- PHONO GND. 11
- PHONO GND. 12
- PHONO GND. 13
- PHONO GND. 14
- PHONO GND. 15
- PHONO GND. 16
- PHONO GND. 17
- PHONO GND. 18
- PHONO GND. 19
- PHONO GND. 20
- PHONO GND. 21
- PHONO GND. 22
- PHONO GND. 23
- PHONO GND. 24
- PHONO GND. 25
- PHONO GND. 26
- PHONO GND. 27
- PHONO GND. 28
- PHONO GND. 29
- PHONO GND. 30
- PHONO GND. 31
- PHONO GND. 32
- PHONO GND. 33
- PHONO GND. 34
- PHONO GND. 35
- PHONO GND. 36

NOTE: THIS INFORMATION IS CONSIDERED PROPRIETARY TO CLASSÉ AUDIO INC. AND MAY BE SUBJECT TO PATENT, COPYRIGHT, TRADEMARK, OR OTHER FORMS OF LEGAL EXCLUSIVITY WORLDWIDE. ISSUE AND USE OF THIS DOCUMENT IS FOR REFERENCE ONLY WITH RESPECT TO THE PRODUCTS OF CLASSÉ AUDIO INC.


Classé Audio Inc.  
 DR-7 PREAMPLIFIER  
 DR-7-2r1 INPUT/OUTPUT

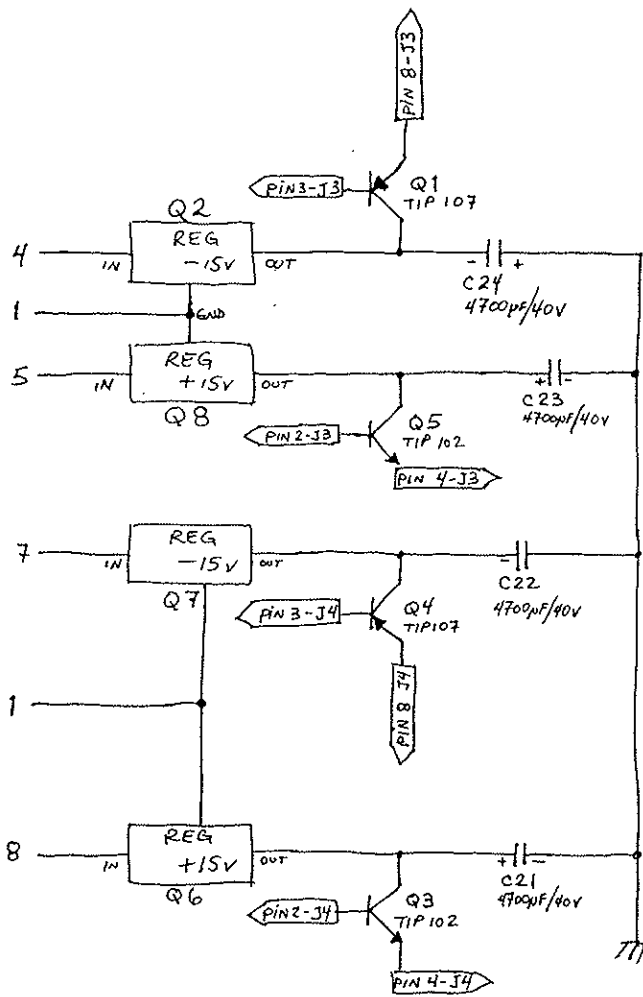

LINE OUTPUT AND  
LINE REGULATION

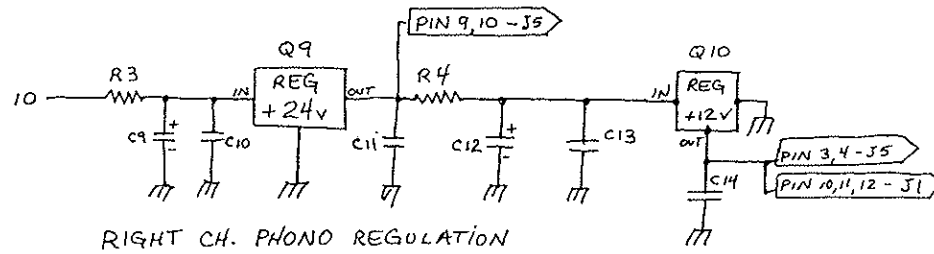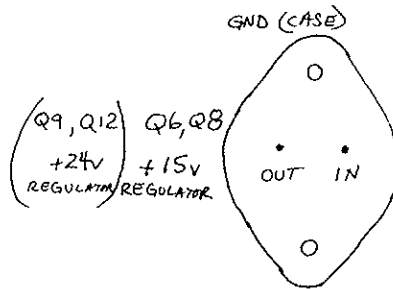


RIGHT CH. PHONO REGULATION

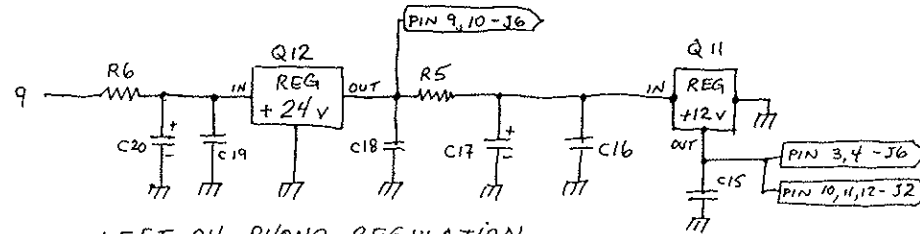


LEFT CH. PHONO REGULATION

R3,4,5,6 = 274  $\Omega$   
 C11,14,15,18 = 0.1  $\mu$ F/200V  
 C10,13,16,19 = 0.47  $\mu$ F/200V  
 C9,12,17,20 = 4700  $\mu$ F/40V

P100  
DR7-7RO

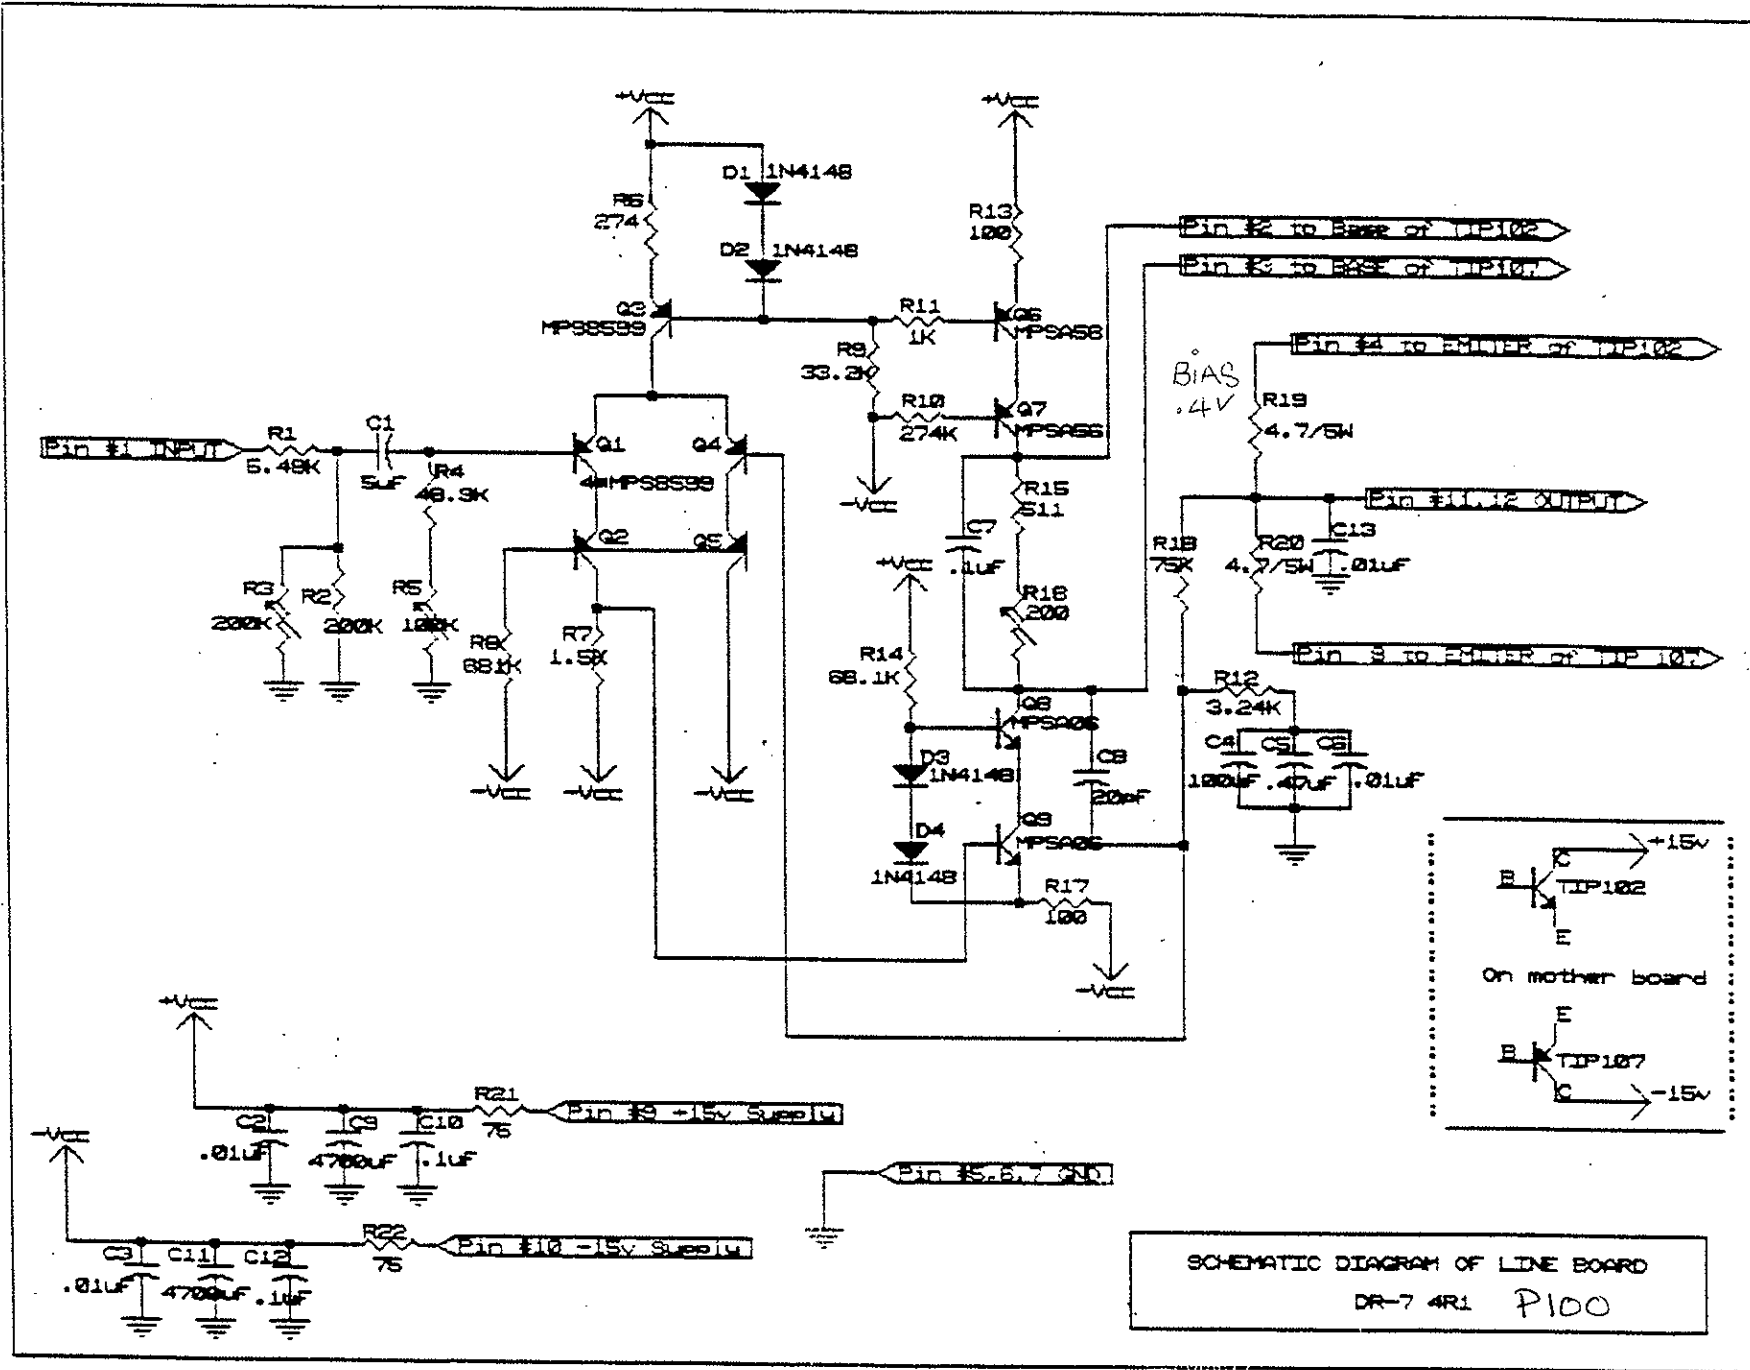



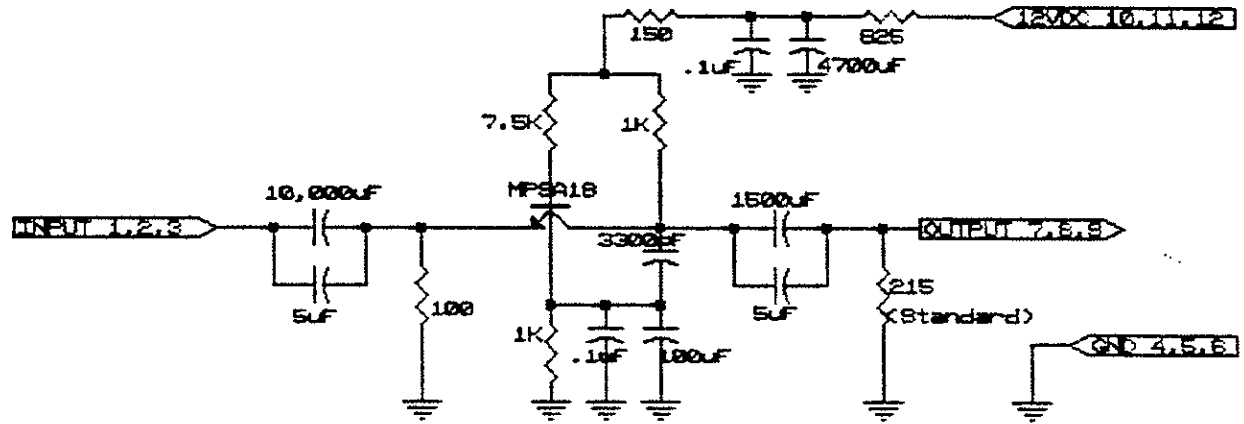


GAIN (db)	RESISTOR (ohm)
20	100
22	127
24	165
26	215 (Standard)
28	287
30	383
32	511
34	788
36	1150
38	1980
40	4220

SCHEMATIC DIAGRAM OF M.C./NIL-8  
DR-7 12R0

P100

# DR-7 SOLDERING SEQUENCE (1-10)

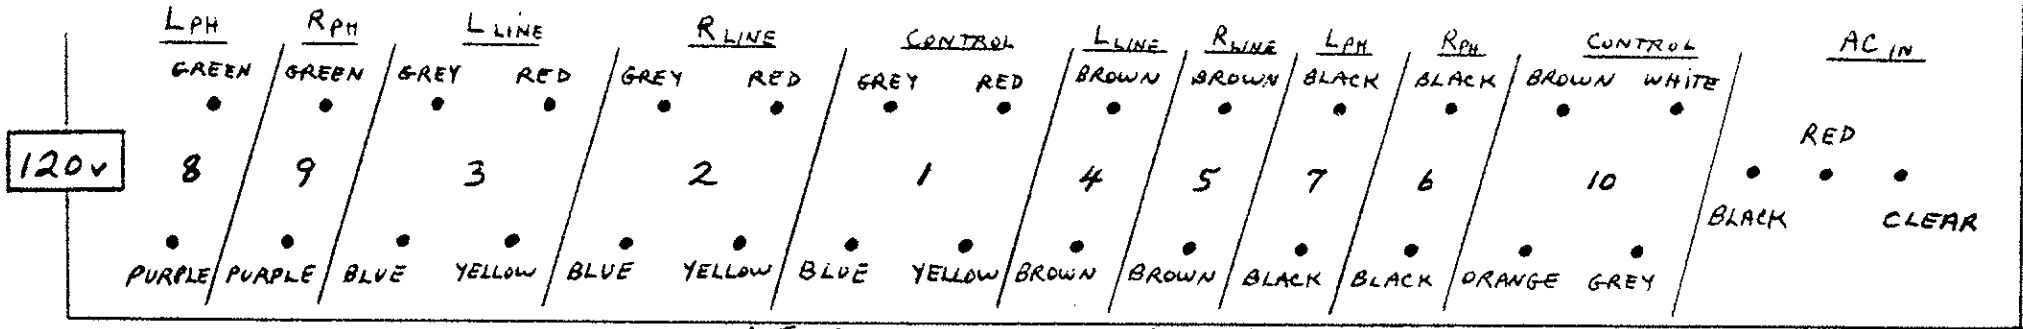


for 120v:


573  
572  
571

for 220v:

573  
572 RI  
571 RI

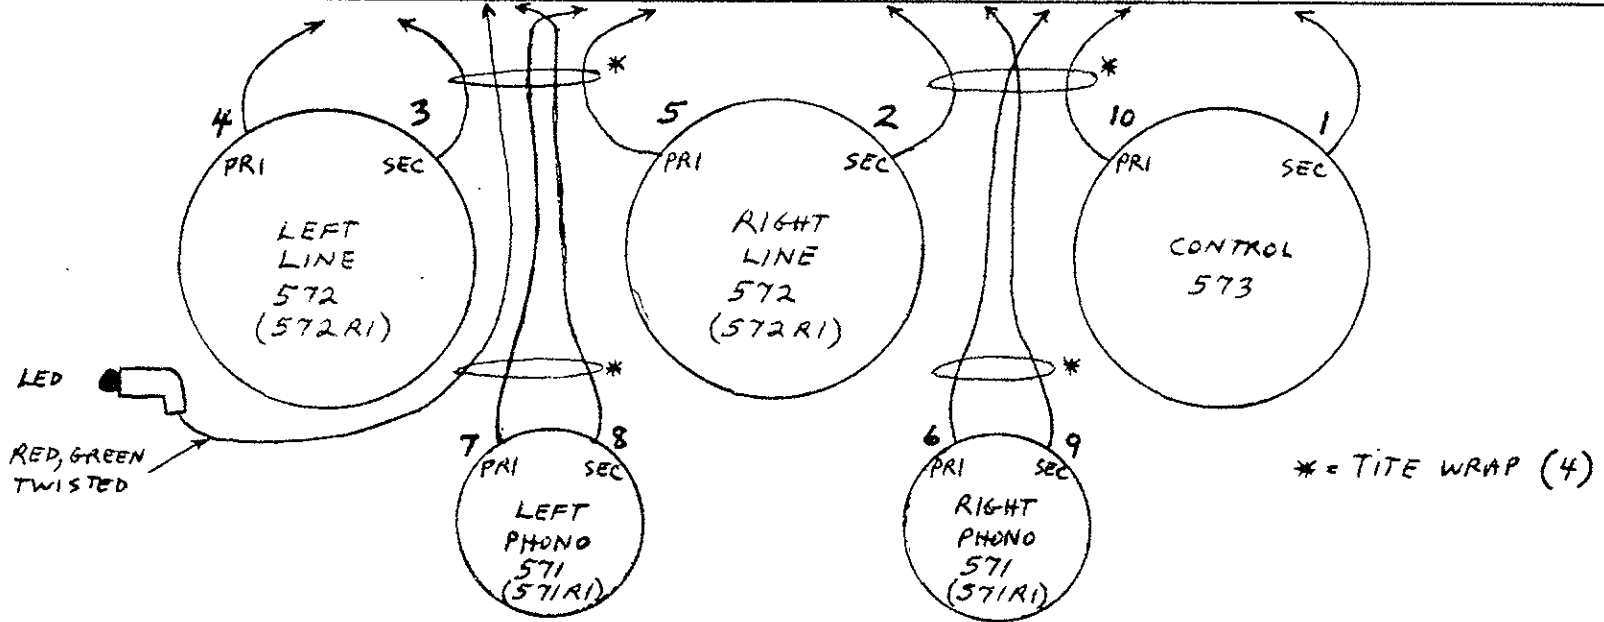


\* = TITE WRAP (4)


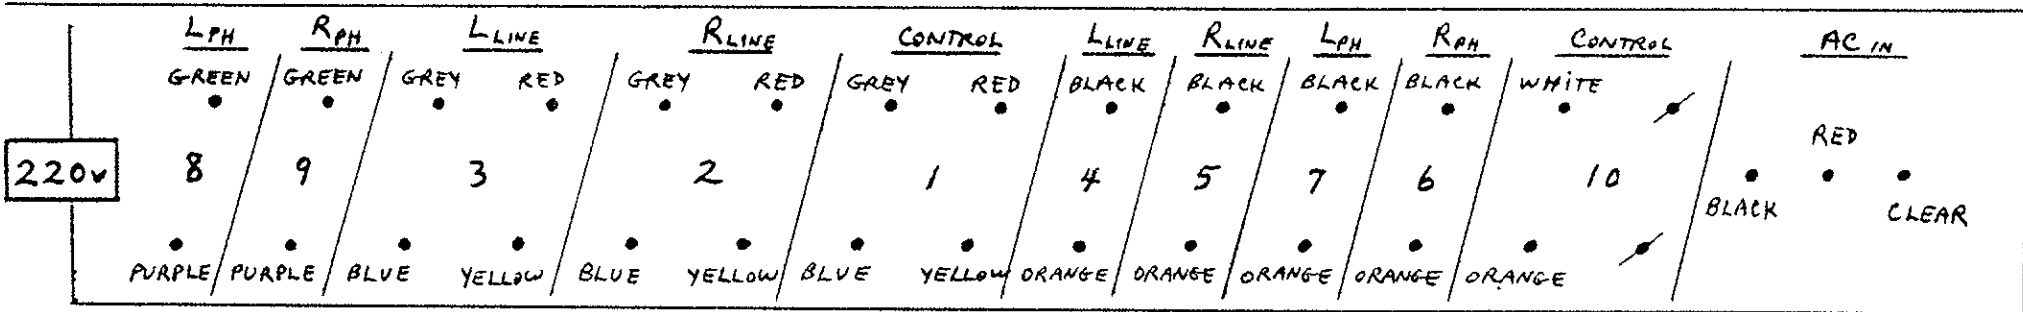


PRIMARIES:

220v

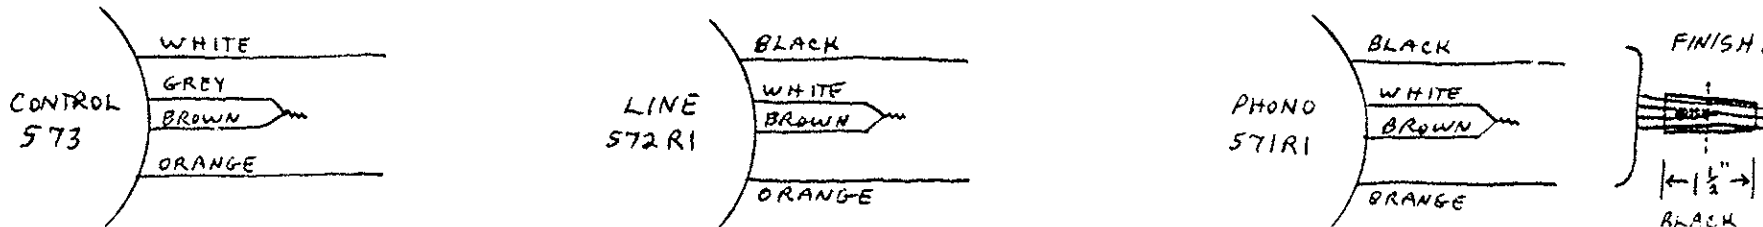

(LEMO INPUTS  
TO  
DR-7 FRO)

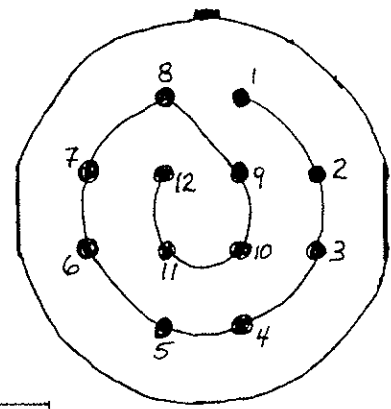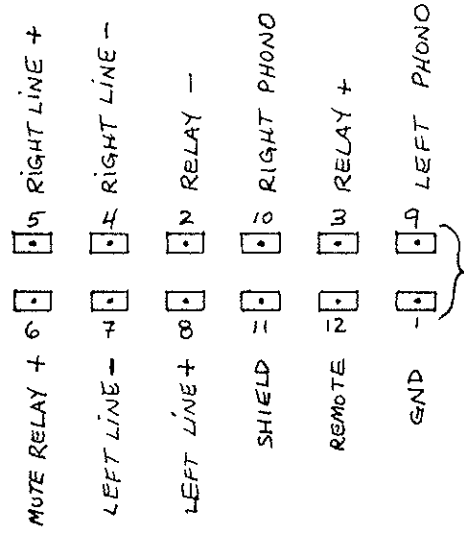


FEMALE  
LEMO  
(VIEW FROM  
INSIDE  
CHASSIS)

TO  
LEMO

P100  
DR7-FRO

DR-7 LEMO SOCKETS

FEMALE SOCKET.



BEGIN BY #12


WIRE PREPARATION

- 1- STRIP  $\frac{1}{8}$ "
- 2- SEPARATE OUTER STRANDS FROM INNER CORE OF 4 WIRES.
- 3- CUT OFF ALL BUT THIS INNER CORE, BY  $\frac{1}{16}$ ".



SOLDERING

- 1- USE SILVER SOLDER
- 2- INSERT 4-WIRE CORE INTO LEMO, SOLDER UNTIL JOINT IS FILLED AND BULGING SLIGHTLY.



P/S UNIT	FUNCTION
12 BLACK	REMOTE
11	— EMPTY —
10 RED	RPH
9 RED	LPH
8 CLEAR	RY -
7 ORANGE	RY +
6 BLUE	RL -
5 RED	RL +
4 YELLOW	MUTE RY +
3 BLUE	LL -
2 RED	LL +
1 GREEN	GROUND

YELLOW SHRINK TUBING

\* P/S-UNIT AND

MAIN-UNIT: SOLDER TO RESPECTIVE BOARDS IN SAME COLOR POSITION. AS SHOWN FOR NEW AMP CONNECTORS.

RED SHRINK TUBING

MATERIALS (1 SET)

- $\frac{3}{8}$ "  $\phi$  x  $\frac{3}{4}$ " RED H.S.
- $\frac{3}{8}$ "  $\phi$  x  $\frac{3}{4}$ " YELLOW H.S.
- 2x LEMO SOCKETS
- 1 SET 18ga WIRES
- 7" LONG (SEE DR-7 WIRE LIST).



# NEW DR-7 CONNECTOR

## CABLE (MALE PINS BOTH ENDS)


- 1 WHITE
- 2 WHITE - YELLOW
- 3 WHITE - ORANGE
- 4 RED - ORANGE
- 5 RED - GREEN
- 6 RED - BLACK
- 7 WHITE - RED
- 8 WHITE - GREEN
- 9 RED
- 10 RED - WHITE
- 11 SHIELD
- 12 RED - YELLOW

- GND
- LL ⊕
- LL ⊖
- MUTE RY ⊕
- RL ⊕
- RL ⊖
- RY ⊕
- RY ⊖
- L PH.
- R PH.
- SHIELD
- REMOTE

(WHITE-BLACK NOT USED)

NOTES: STRIP CABLE 1"  
STRIP EACH WIRE 1/8"  
SHIELD: USE ALL STRANDS


## P/S-U AND MAIN UNIT (FEMALE)



OUTSIDE VIEW  
(CABLE CONNECTION  
END)

- GREEN
- RED
- BLUE
- YELLOW
- RED
- BLUE
- ORANGE
- WHITE
- RED
- RED
- \* GREEN
- BLACK


\* MAIN UNIT ONLY \*



### PROCEDURE



- 1- INSERT 1, 2, 3
- 2- MOVE RED-YELLOW OUT BETWEEN WHITE AND WHITE-GREEN.
- 3- INSERT 4, 5, 6, 7
- 4- INSERT 8, 9, 10
- 5- INSERT 12

6- MOVE SHIELD WIRE NEAR POSITION 11, AND RETWIST IF NECESSARY. CUT TO 1" LENGTH, INSTALL MOLEX AND INSERT INTO BLOCK

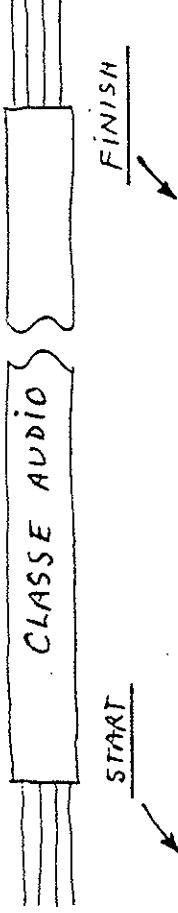

### PROCEDURE

- 1- INSERT 1, 2, 3 THEN TWIST C.W.
- 2- MOVE RED-YELLOW OUT BETWEEN WHITE-ORANGE AND RED-ORANGE.
- 3- MOVE WHITE-GREEN, RED, RED-WHITE, AND SHIELD OUT BETWEEN WHITE AND WHITE-RED. (SEE DIAGRAM)
- 4- INSERT 4, 5, 6, 7
- 5- INSERT 8, 9, 10, 12.
- 6- MOVE SHIELD WIRE NEAR POSITION 11, AND RETWIST IF NECESSARY. CUT TO 1" LENGTH, INSTALL MOLEX AND INSERT INTO BLOCK IN 11.

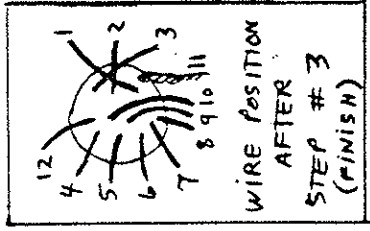



# NEW DR-7 CONNECTOR

## CABLE (MALE PINS BOTH ENDS)


- |    |                |           |
|----|----------------|-----------|
| 1  | WHITE          | GND       |
| 2  | WHITE - YELLOW | LL ⊕      |
| 3  | WHITE - ORANGE | LL ⊖      |
| 4  | RED - ORANGE   | MUTE RY ⊕ |
| 5  | RED - GREEN    | RL ⊕      |
| 6  | RED - BLACK    | RL ⊖      |
| 7  | WHITE - RED    | RY ⊕      |
| 8  | WHITE - GREEN  | RY ⊖      |
| 9  | RED            | L PH.     |
| 10 | RED - WHITE    | R PH.     |
| 11 | SHIELD         | SHIELD    |
| 12 | RED - YELLOW   | REMOTE    |

(WHITE-BLACK NOT USED)


NOTES: STRIP CABLE 1"  
STRIP EACH WIRE 1/8"  
SHIELD: USE ALL STRANDS

## P/S-U AND MAIN UNIT (FEMALE)

- |                          |
|--------------------------|
| GREEN                    |
| RED                      |
| BLUE                     |
| YELLOW                   |
| RED                      |
| BLUE                     |
| ORANGE                   |
| WHITE                    |
| RED                      |
| RED                      |
| * GREEN MAIN UNIT ONLY * |
| BLACK                    |




OUTSIDE VIEW  
(CABLE CONNECTION  
END)



### PROCEDURE

- 1- INSERT 1, 2, 3
- 2- MOVE RED-YELLOW OUT BETWEEN WHITE AND WHITE-GREEN.
- 3- INSERT 4, 5, 6, 7
- 4- INSERT 8, 9, 10
- 5- INSERT 12

6- MOVE SHIELD WIRE NEAR POSITION 11, AND RETWIST IF NECESSARY. CUT TO 1" LENGTH, INSTALL MOLEX AND INSERT INTO BLOCK IN POSITION 11.




START


FINISH

### PROCEDURE

- 1- INSERT 1, 2, 3 THEN TWIST CW.
- 2- MOVE RED-YELLOW OUT BETWEEN WHITE-ORANGE AND RED-ORANGE.
- 3- MOVE WHITE-GREEN, RED, RED-WHITE, AND SHIELD OUT BETWEEN WHITE AND WHITE-RED. (SEE DIAGRAM)
- 4- INSERT 4, 5, 6, 7
- 5- INSERT 8, 9, 10, 12.
- 6- MOVE SHIELD WIRE NEAR POSITION 11, AND RETWIST IF NECESSARY. CUT TO 1" LENGTH, INSTALL MOLEX AND INSERT INTO BLOCK IN 11.

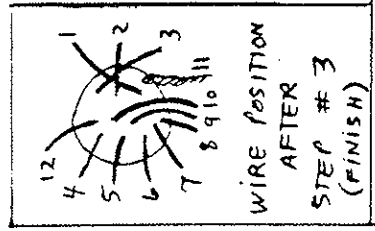


WIRE POSITION  
AFTER  
STEP #3  
(FINISH)



TWIST C.  
AFTER  
INSERT 1,  
2, 3


NEW DR-7 CONNECTOR FEMALE SOCKETS

P/S UNIT

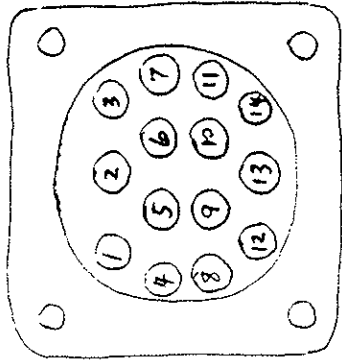


INSIDE VIEW

green red blue  
yellow red blue orange  
white red red  
black

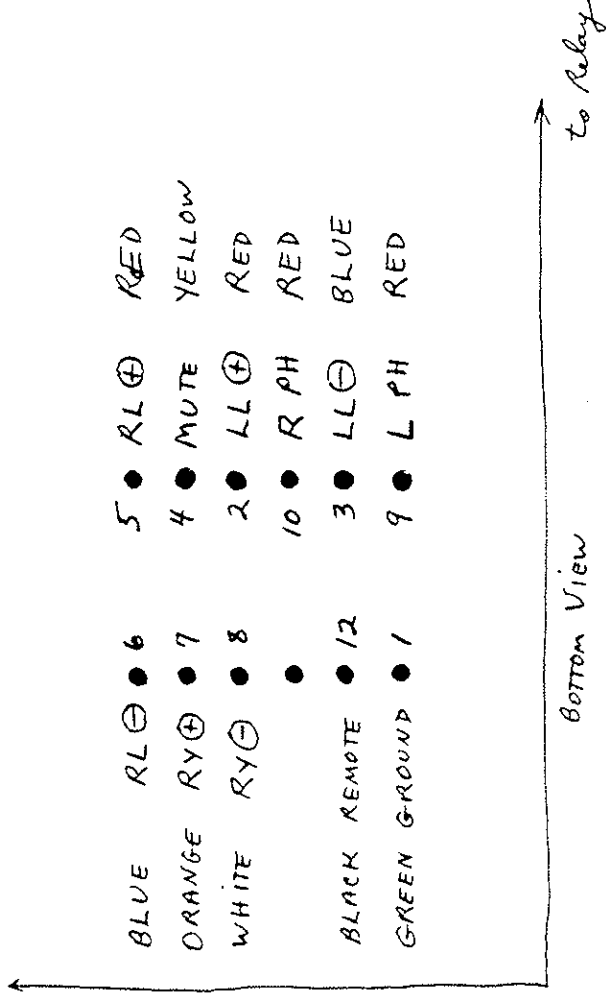


MAIN UNIT

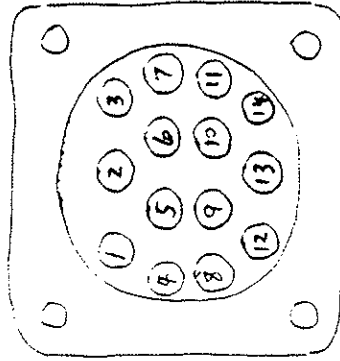


INSIDE VIEW

green red blue  
yellow red blue orange  
white red red green  
black

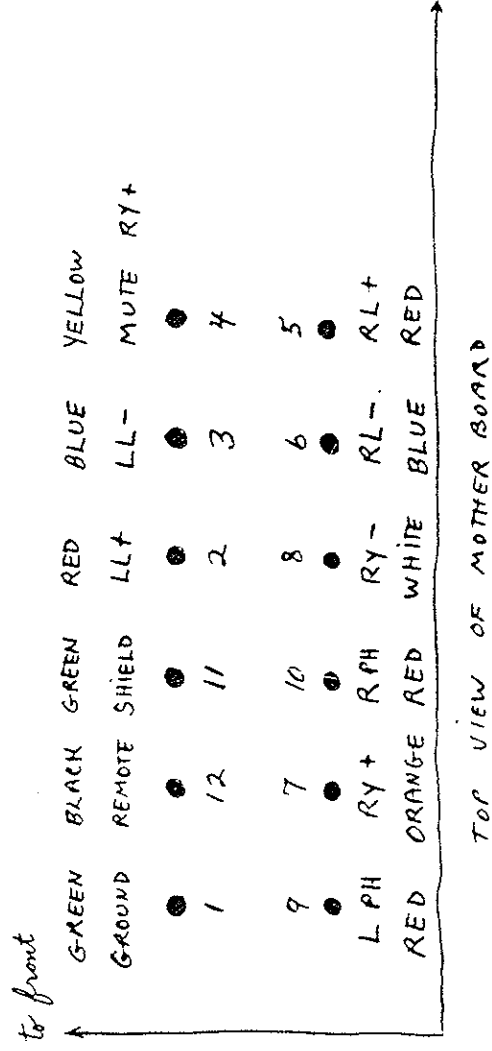

DR-7 LEMO CABLE

MALE PLUG



BEGIN BY #12

1- WIRE PREPARATION

AND SOLDERING IS

SAME AS FOR

SOCKETS.

2- CONSTRUCTION

AND FINISHING

DETAILS ARE ON

PAGE 2.

P/S	UNIT END	FUNCTION
12	RED-YELLOW	REMOTE
11	SHIELD	SHIELD
10	RED-WHITE	RPH
9	RED	LPH
8	WHITE-GREEN	RY-
7	WHITE-RED	RY+
6	RED-BLACK	RL-
5	RED-GREEN	RL+
4	RED-ORANGE	MUTE RY+
3	WHITE-ORANGE	LL-
2	WHITE-YELLOW	LL+
1	WHITE	GROUND

MATERIALS  
 LEMO CABLE  
 2 PLUG-ASSEMBLIES  
 2" CLEAR PVC TUBING  
 2 x  $\frac{3}{8}$ "  $\phi$  x  $\frac{1}{2}$ " RED HEAT SH.  
 24 x  $\frac{1}{8}$ "  $\phi$  x  $\frac{3}{8}$ " CLEAR HEAT SH.  
 2 x  $\frac{1}{2}$ "  $\phi$  x  $\frac{1}{4}$ " BLACK  
 ADHESIVE HEAT SH.

MAIN UNIT END	FUNCTION
12	RED-YELLOW
11	SHIELD
10	RED-WHITE
9	RED
8	WHITE-YELLOW
7	WHITE-ORANGE
6	RED-ORANGE
5	RED-GREEN
4	RED-BLACK
3	WHITE-RED
2	WHITE-GREEN
1	WHITE

