

DAEWOO

Service Manual

MINI COMPONENT SYSTEM

Model : AMI-926LW/RW



DAEWOO ELECTRONICS CO., LTD.

MINI COMPONENT SYSTEM

AMI-926LW/RW

Table of Contents

SAFETY PRECAUTIONS.....	2
ADJUSTMENTS.....	4
EXPLODED VIEW AND PARTS LIST	5
WIRING DIAGRAM	7
BLOCK DIAGRAM	8
SCHEMATIC DIAGRAM	9
MAIN.....	9
POWER.....	10
TUNER.....	11
TAPE.....	12
CD	13
CONTROL	14
PCB PATTERN LAYOUT	15
ELECTRICAL PART LIST	19

1. Safety Precautions

WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

	CAUTION RISK OF ELECTRIC SHOCKS DO NOT OPEN	
CAUTION : TO REDUCE THE RISK IF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.		
	THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" WITHIN THE PRODUCT'S ENCLOSURE THAT MAY BE SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK TO PERSONS.	
	THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF IMPORTANT OPERATING AND MAINTENANCE (SERVICING) INSTRUCTIONS IN THE LITERATURE ACCOMPANYING THE APPLIANCE.	

CAUTION
TO PREVENT ELECTRIC SHOCK, DO NOT USE THIS POLARIZED AC PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

LASER SAFETY
THIS UNIT EMPLOYS A LASER. ONLY QUALIFIED SERVICE PERSONNEL SHOULD REMOVE THE COVER OR ATTEMPT TO SERVICE THIS DEVICE DUE TO POSSIBLE EYE INJURY.

CAUTION : USE OF ANY CONTROLS, ADJUSTMENTS, OR PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

CAUTION : TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

ATTENTION : POUR EVITER LES CHOCs ELECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA BORNE CORRESPONDANTE DE LA PRISE ET POUSSER JUSQU'AU FOND.

Important Safety Instructions

- All the safety and operating instructions should be read before the appliance is operated.
 - The safety and operating instructions should be retained for future reference.
 - All warnings on the appliance and in the operating instructions should be adhered to.
 - All operating and use instructions should be followed.
1. Water and Moisture - The appliance should not be used near water - for example, near a bathtub, washbowl, kitchen sink,

laundry tub, in a wet basement, or near a swimming pool, and the like.

PORTABLE CART

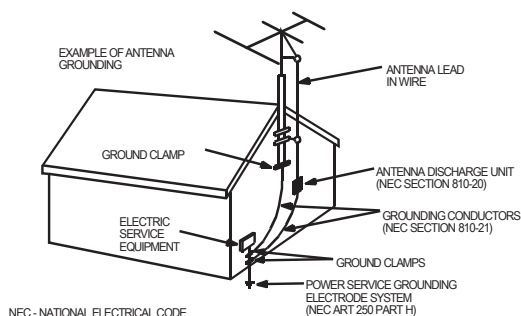


Figure 2

2. Carts and Stands - The appliance should be used only with a cart or stand that is recommended by the manufacturer.
3. An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the appliance and cart combination to overturn.
4. Wall or Ceiling Mounting - The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
5. Ventilation - The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings; or, placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
6. Heat - The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
7. Power Sources - The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
8. Grounding or Polarization - The precautions that should be taken so that the grounding or polarization means of an appliance is not defeated.
9. Power - Cord Protection - Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the appliance.
10. Protective Attachment Plug - If the appliance is equipped with an attachment plug having overload protection. This is a safety feature. See Instruction Manual for replacement or resetting of protective device. If replacement of the plug is required, be sure the service technician has used a replacement plug specified by the manufacturer that has the same overload protection as the original plug.
11. Cleaning - The appliance should be cleaned only as recommended by the manufacturer.
12. Power Lines - An outdoor antenna should be located away from power lines.

1. Safety Precautions

13. Outdoor Antenna Grounding - If an outside antenna is connected to the receiver be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna-discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes and requirements for the grounding electrode. See Figure 1.



14. Non-use Periods - The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.

15. Object and Liquid Entry - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.


16. Damage Requiring Service - The appliance should be serviced by qualified service personnel when:

- a) The power-supply cord or the plug has been damaged; or
- b) Objects have fallen, or liquid has been spilled into the appliance; or
- c) The appliance has been exposed to rain; or
- d) The appliance does not appear to operate normally or exhibits a marked change in performance; or
- e) The appliance has been dropped, or the enclosure damaged.

17. Servicing - The user should not attempt to service the appliance beyond that described in the operating instructions. All other servicing should be referred to qualified service personnel.

2. Adjustments

1. TAPE SECTION

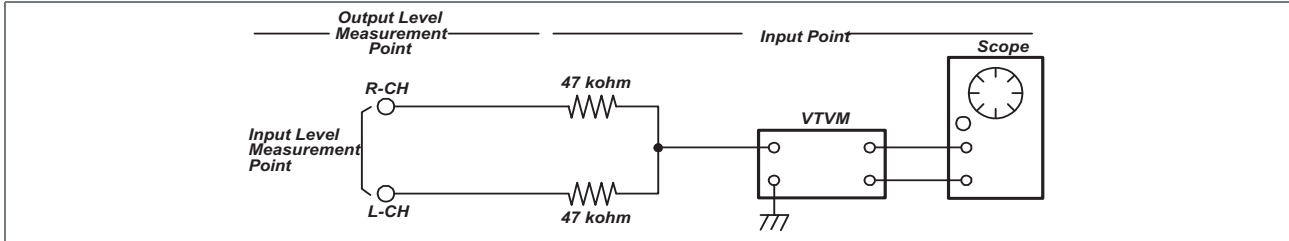

Test Tape be used

Tape	Contents	Use
MTT-111N	3 KHz	Tape Speed Adjustment
MTT-114N	10 KHz	Head Azimuth Adjustment
MTT-5511	Blank	Record Frequency Property

HEAD ADJUSTMENT (AZIMUTH)

- 10KHz test tape(example: MTT-114N) must be used for this adjustment.
- Connect to VTVM or oscilloscope to the headphone jack or speaker terminal.
- Press the play button.
- Adjust the azimuth by using a screw driver to maintain the max. L&R output voltage.
- Adjust tape A(1), tape B(2) respectively, Please secure the azimuth position by using locking paint.

RECORDING BIAS OSCILLATOR FREQUENCY ADJUSTMENT

- Connect the frequency counter to TP603, GND.
- Press the REC button.
- Adjust L603 to obtain 80 KHz $\pm$ 100Hz

TAPE ALIGNMENT CHART

Step	Item	Reference Value	Test Tape	Adjust Point	Test Point	Note	FIG.
1	Tape Speed Adjustment	3,015~3,025Hz	MTT-111N	RV601	Line Out L/R Channel	Confirm Wow & Flutter is within 0.35%	FIG.1
		3,000~3,010Hz	MTT-111N	RV601	Line Out L/R Channel	Confirm Tape Speed of end position after adjustment at tape start position	FIG.1
		5,820~6,180Hz	MTT-111N	-----	Shorted TP601, TP602	Confirm High speed after normal speed adjustment	FIG.1
2	Azimuth Adjustment	Maximum Level Phase: Within 90°	MTT-114N	Head Screw	Line Out L/R Channel		FIG.2,3,4
3	Recording Bias Oscillator Frequency Adjustment	80 KHz $\pm$ 0.5	MTT-5511	L603	TP603, GND	Adjust with frequency counter connected.	FIG.1

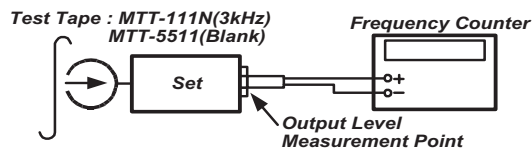


FIG. 1 : Tape Speed & Record Bias Oscillator Frequency Adjust Circuit




FIG. 2 : Tape Azimuth Adjust Location (Record/Playback Head)

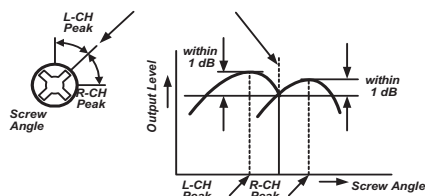


FIG. 3 : Tape Azimuth Adjust Head Screw & Waveform


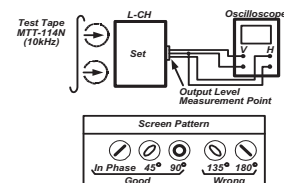



FIG. 4 : Tape Azimuth Adjust Circuit & Waveform

Exploded View and Mechanical Parts List

Model : AMI-926LW/RW

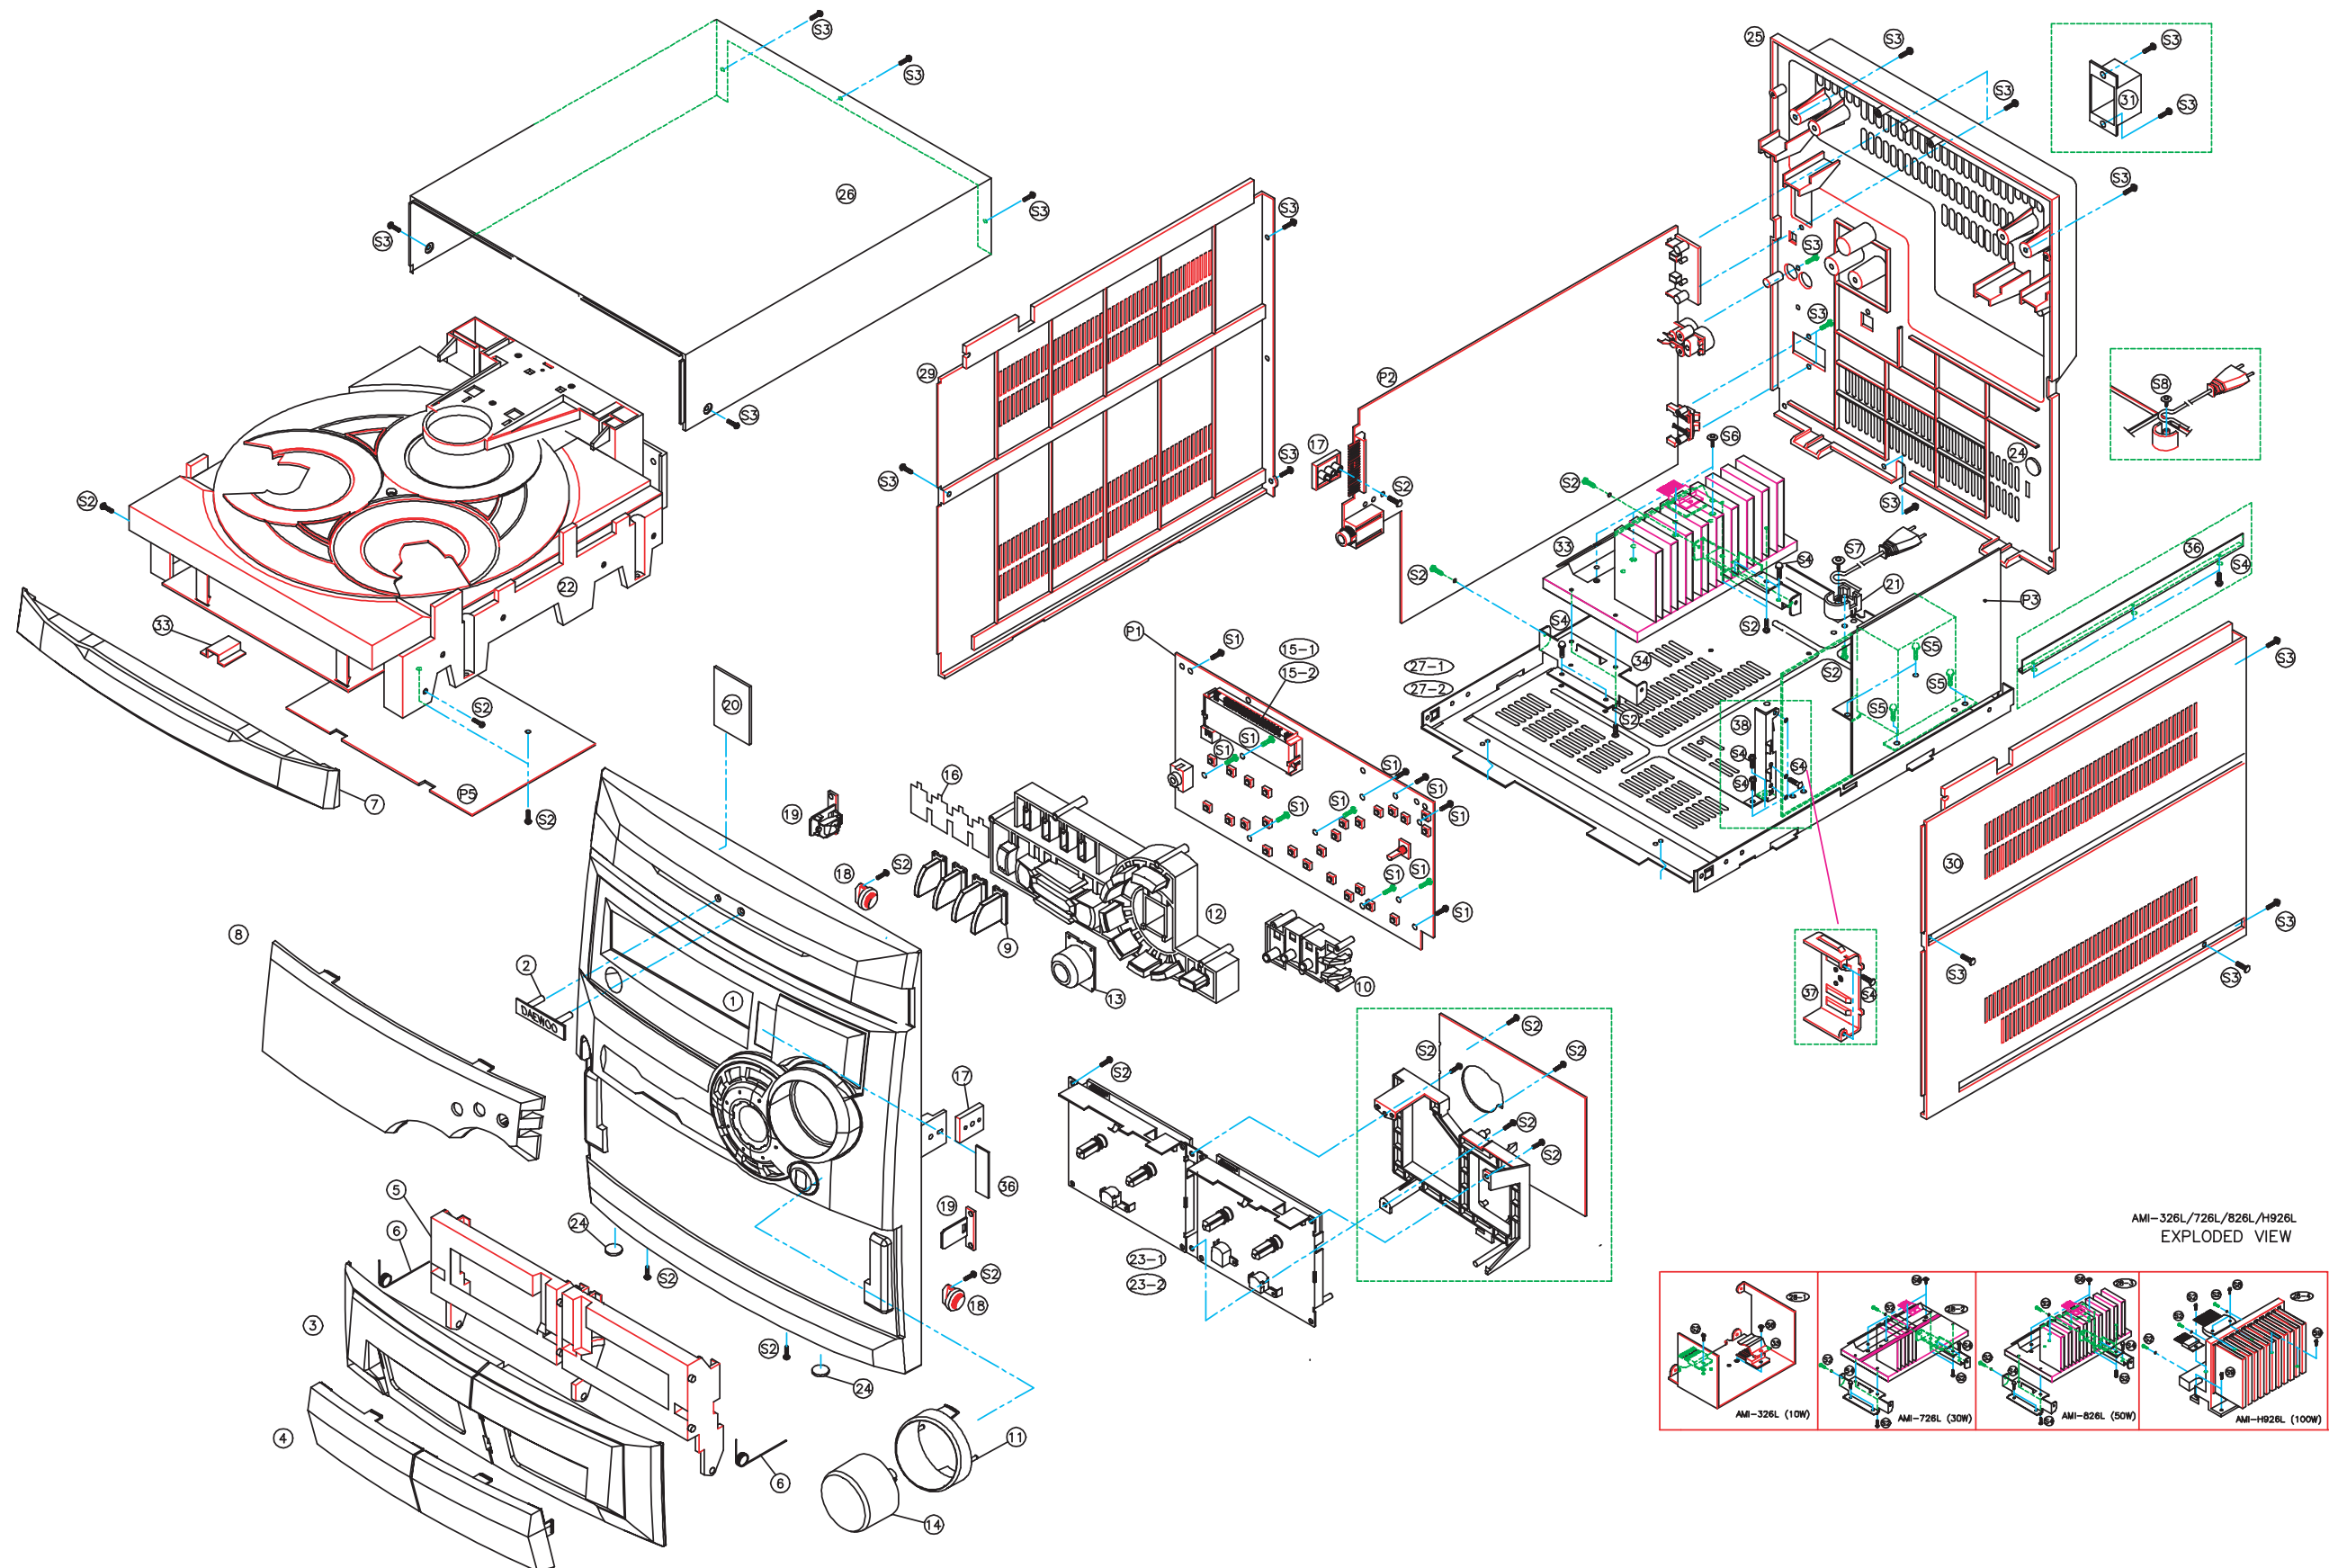

AMI-326L/726L/826L/H926L
EXPLODED VIEW

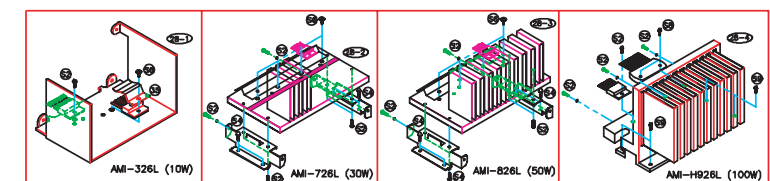

Exploded View and Mechanical Parts List

Model : AMI-926LW/RW

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
1	PANEL FRONT	9CD0307700	MIPS	1	
2	BADGE DAEWOO	9CD1500900	ABS	1	
3	DOOR COVER A/B	9CD18109A0/B0	MIPS	each1	
4	WINDOW DOOR A/B	9CD16161A1/B1	ACRYL	each1	
5	DOOR FRAME A/B	9CD18113A0/B0	ABS	each1	
6	SPRING DOOR EJECT L/R	9CD3008L0/R0	STS	each1	
7	DOOR CD	9CD1811000	MIPS	1	
8	WINDOW FLT	9CD1616201	ACRYL	1	
9	KNOB FUNCTION	9CD1338900	ACRYL	1	
10	KNOB OPEN	9CD1339200	ACRYL	1	
11	KNOB RING	9CD1339400	ABS	1	
12	KNOB CONTROL	9CD1338800	ABS	1	
13	KNOB UBS	9CD1339000	ACRYL	1	
14	KNOB VOL	9CD1339100	ABS	1	
15-1	GUIDE FLT	9CD2505600	ABS	1	326LW/726LW/826LW
15-2	GUIDE FLT	9CD2506600	ABS	1	H926LW
16	FILTER LED	9CD4700800	PC T0.15	1	
17	BRKT SIDE	9CD2412900	ABS	2	
18	DAMPER GEAR ASS'Y			2	
19	LOCKER ASS'Y			2	
20	PLATE FLT	9CD0911100	PVC SHEET T1.0	2	326LW/726LW/826LW
21	HOLDER AC CODE	9CD2303300	ABS	1	726LW/826LW/H926LW
22	CD DECK MECHA	9CD6009300	DCC-01BC+D73S	1	
23-1	CASSETTE DECK LOGIC	9CD6010000	PIGEON CWL-44FF-32	1	AUTO STOP (326LW)
23-2	CASSETTE DECK LOGIC	9CD6010100	PIGEON CWL-44FF-33	1	AUTO REVERSE
24	CUSHION FOOT	9CD4207700	URETHAN	2	
25	COVER BACK	9CD0411100	MIPS	1	
26	COVER TOP	9CD0411400	MIPS	1	
27-1	CHASSIS BOTTOM	9CD0607100	SECC 1.0T	1	726LW/826LW/H926LW
27-2	CHASSIS BOTTOM	9CD0607500	ABS	1	326LW
28-1	HEAT SINK 1	9CD4404500	AL	1	326LW
28-2	HEAT SINK N30	9CD4406200	AL	1	726LW
28-3	HEAT SINK N50	9CD4405900	AL	1	826LW
28-4	HEAT SINK N150	9CD4406000	AL	1	H926LW
29	COVER SIDE L	9CD04115L0	MIPS	1	
30	COVER SIDE R	9CD04115R0	MIPS	1	


NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
31	COVER ANT	9CD0410400	ABS	1	
32	HOLDER PCB	9CD2304800	MIPS	1	H926LW
33	BRACKET HEAT TR	9CD2414400	SUS 0.3T	1	726LW/826LW
34	BRACKET HEAT TR	9CD2414600	SECC 1.0T	2	726LW/826LW
35	BRACKET HEAT TR	9CD2413900	SUS 0.5T	1	326LW
36	FRAME BOTTOM	9CD0607800	SECC 1.0T	1	H926LW
37	HEAT SINK PW	9CD4404200	AL	1	H926LW
38	BRKT PCB C	9CD2414500	SECC 1.0T	1	H926LW
NO	SCREW	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
S1	SCREW TAPTTITE	7173261011	TT2 BIN 2.6 X 10 MFZN	11	AMI-826LW : Reference
S2	SCREW TAPTTITE	7173301011	TT2 BIN 3.0X10 MFZN	22	
S3	SCREW TAPTTITE	7173301212	TT2 BIN 3.0X12 BK	18	
S4	SCREW TAPTTITE	7173300611	TT2 BIN 3.0X6 MFZN	4	
S5	SCREW TAPTTITE	7173400611	TT2 BIN 4.0X6 MFZN	4	
S6	WASHER SCREW	9CD3102401	TT2 BIN 3.0X8 + D12	4	
S7	WASHER SCREW	9CD3102400	TT2 BIN 3.0X10 + D14	1	
S8	SCREW TAPTTITE	7173301411	TT2 BIN 3.0X14 MFZN	2	H926LW
S9	SCREW TAPTTITE	7173401011	TT2 BIN 4.0X10 MFZN	4	H926LW
NO	PARTS NAME		Q'ty	REMARKS	
P1	FRONT PCB		1		
P2	MAIN PCB		1		
P3	POWER PCB		1		
P4	DECK PCB		1	H926L	
P5	PCB CD		1		

Wiring Diagram

Model : AMI-926LW/RW

Block Diagram

Model : AMI-926LW/RW

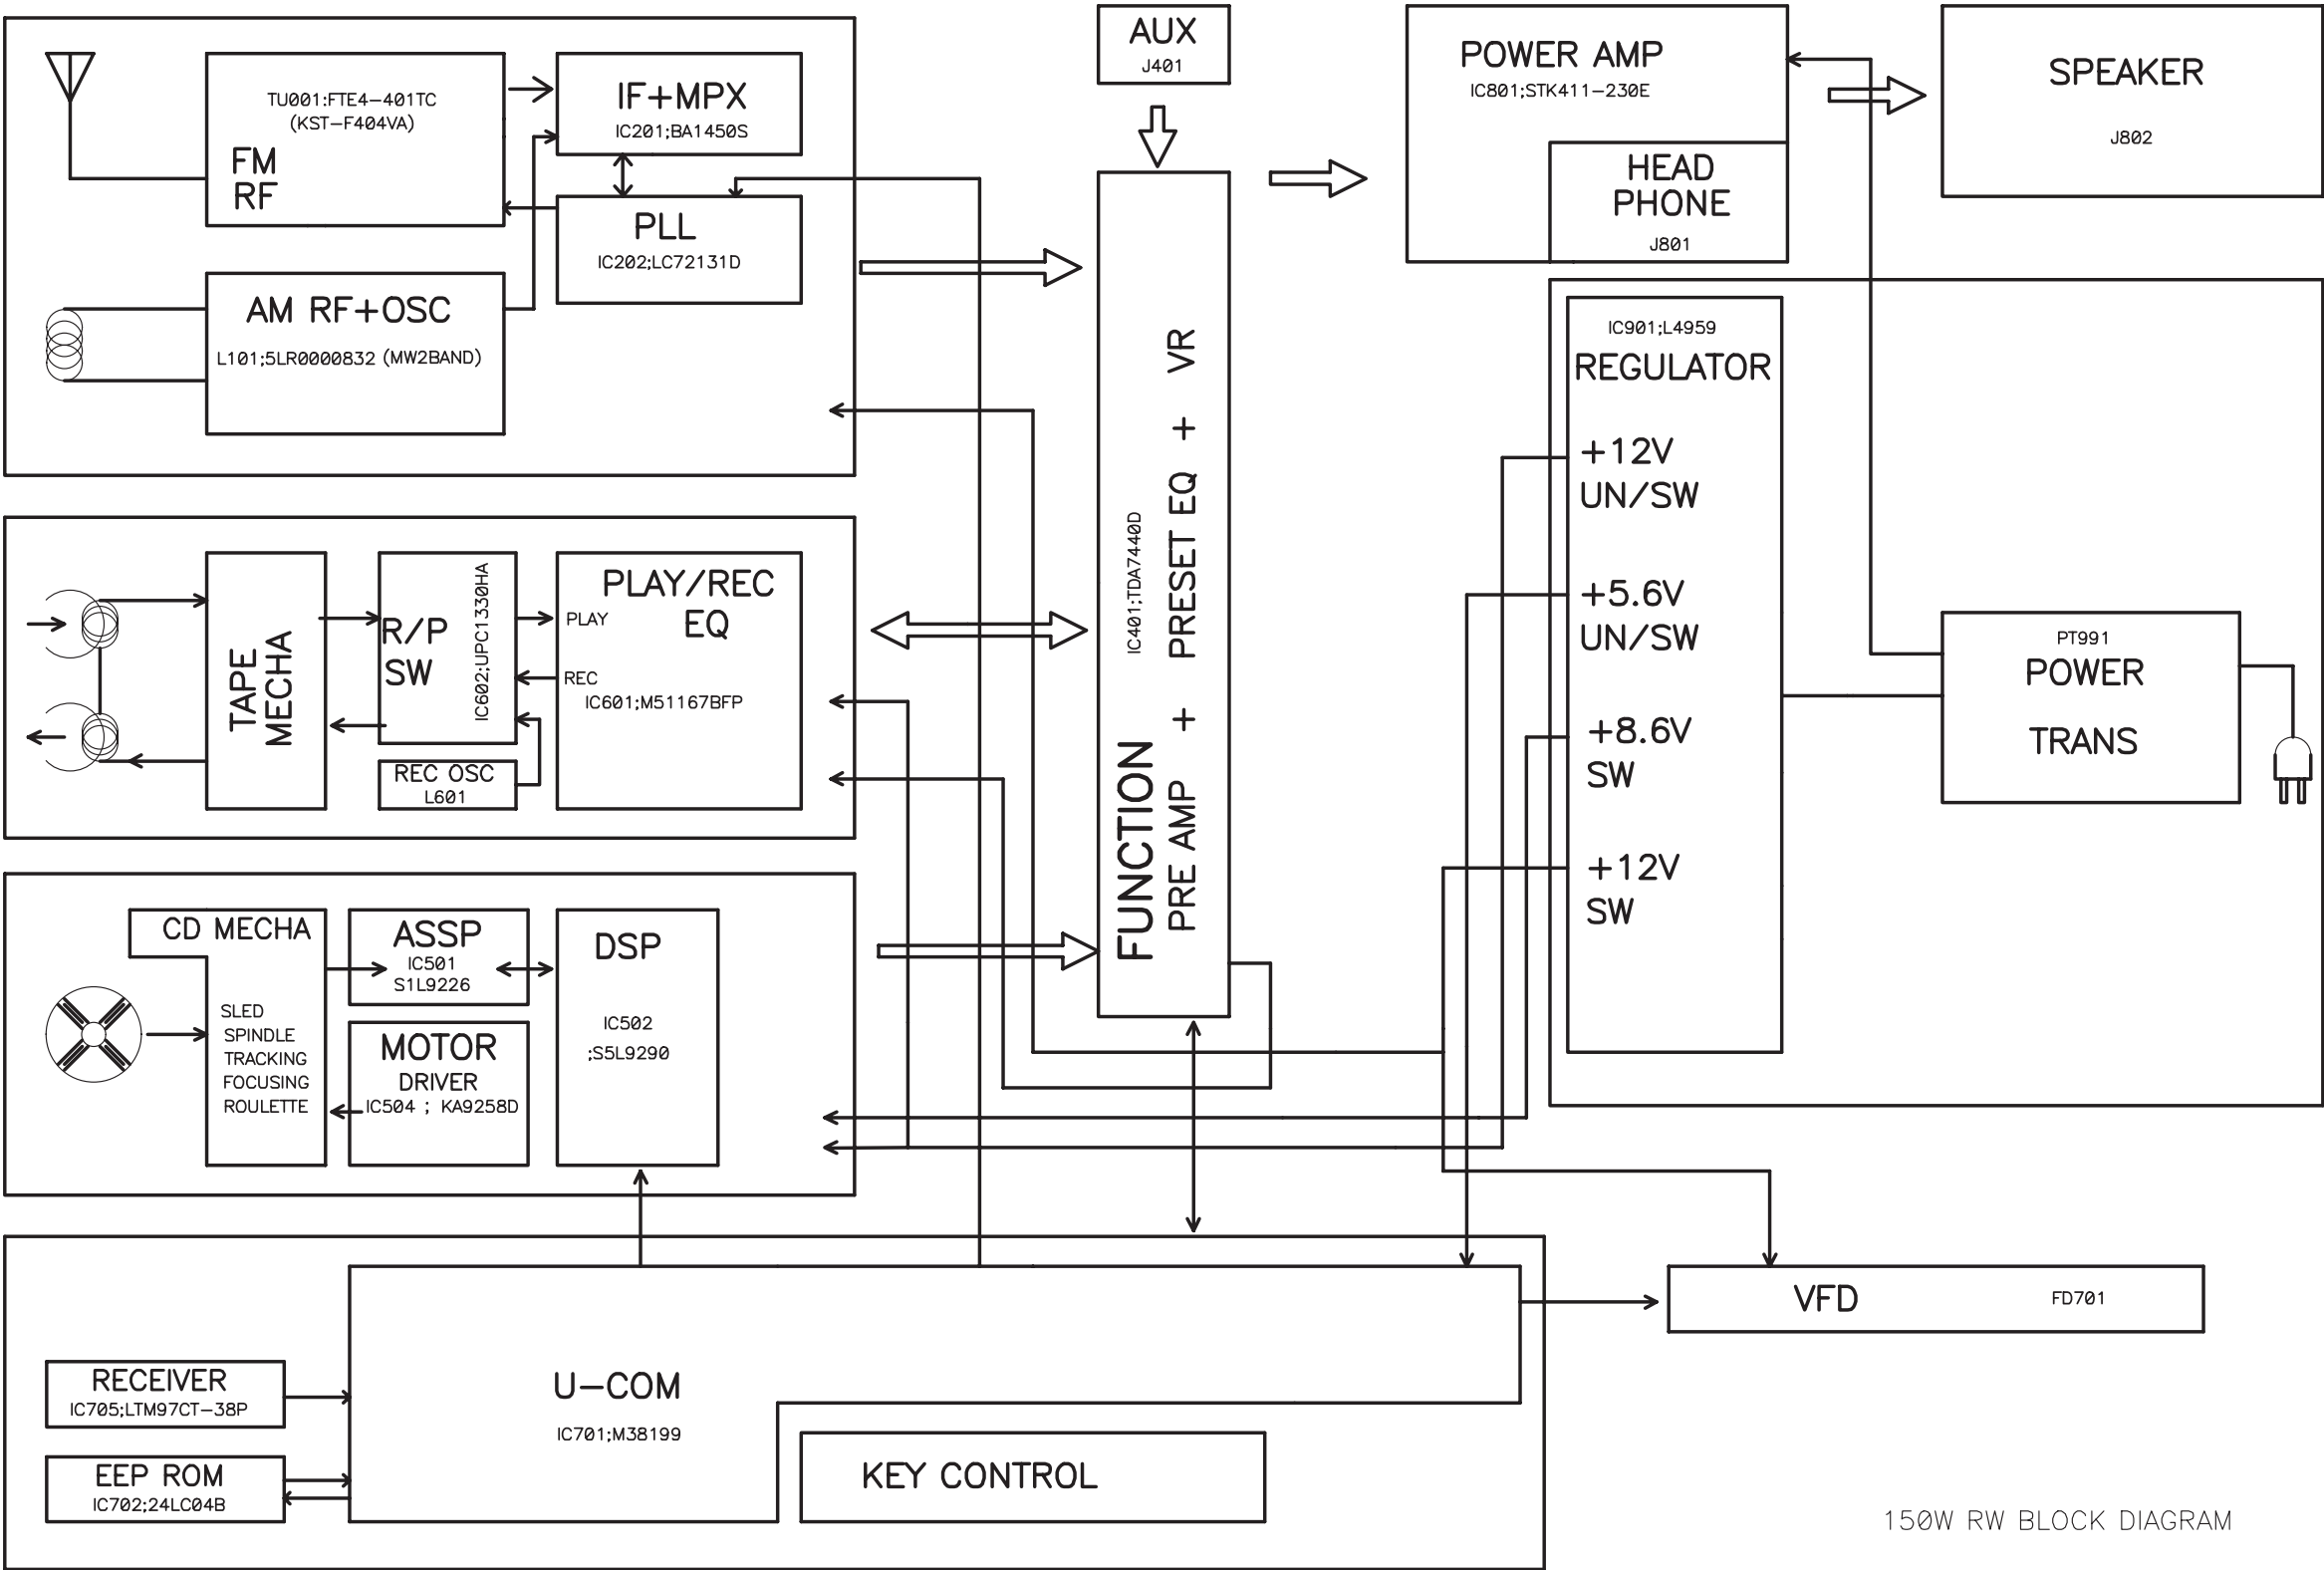


150W RW BLOCK DIAGRAM

Schematic Diagram

Model : AMI-926LW/RW

Ass'y Name : MAIN

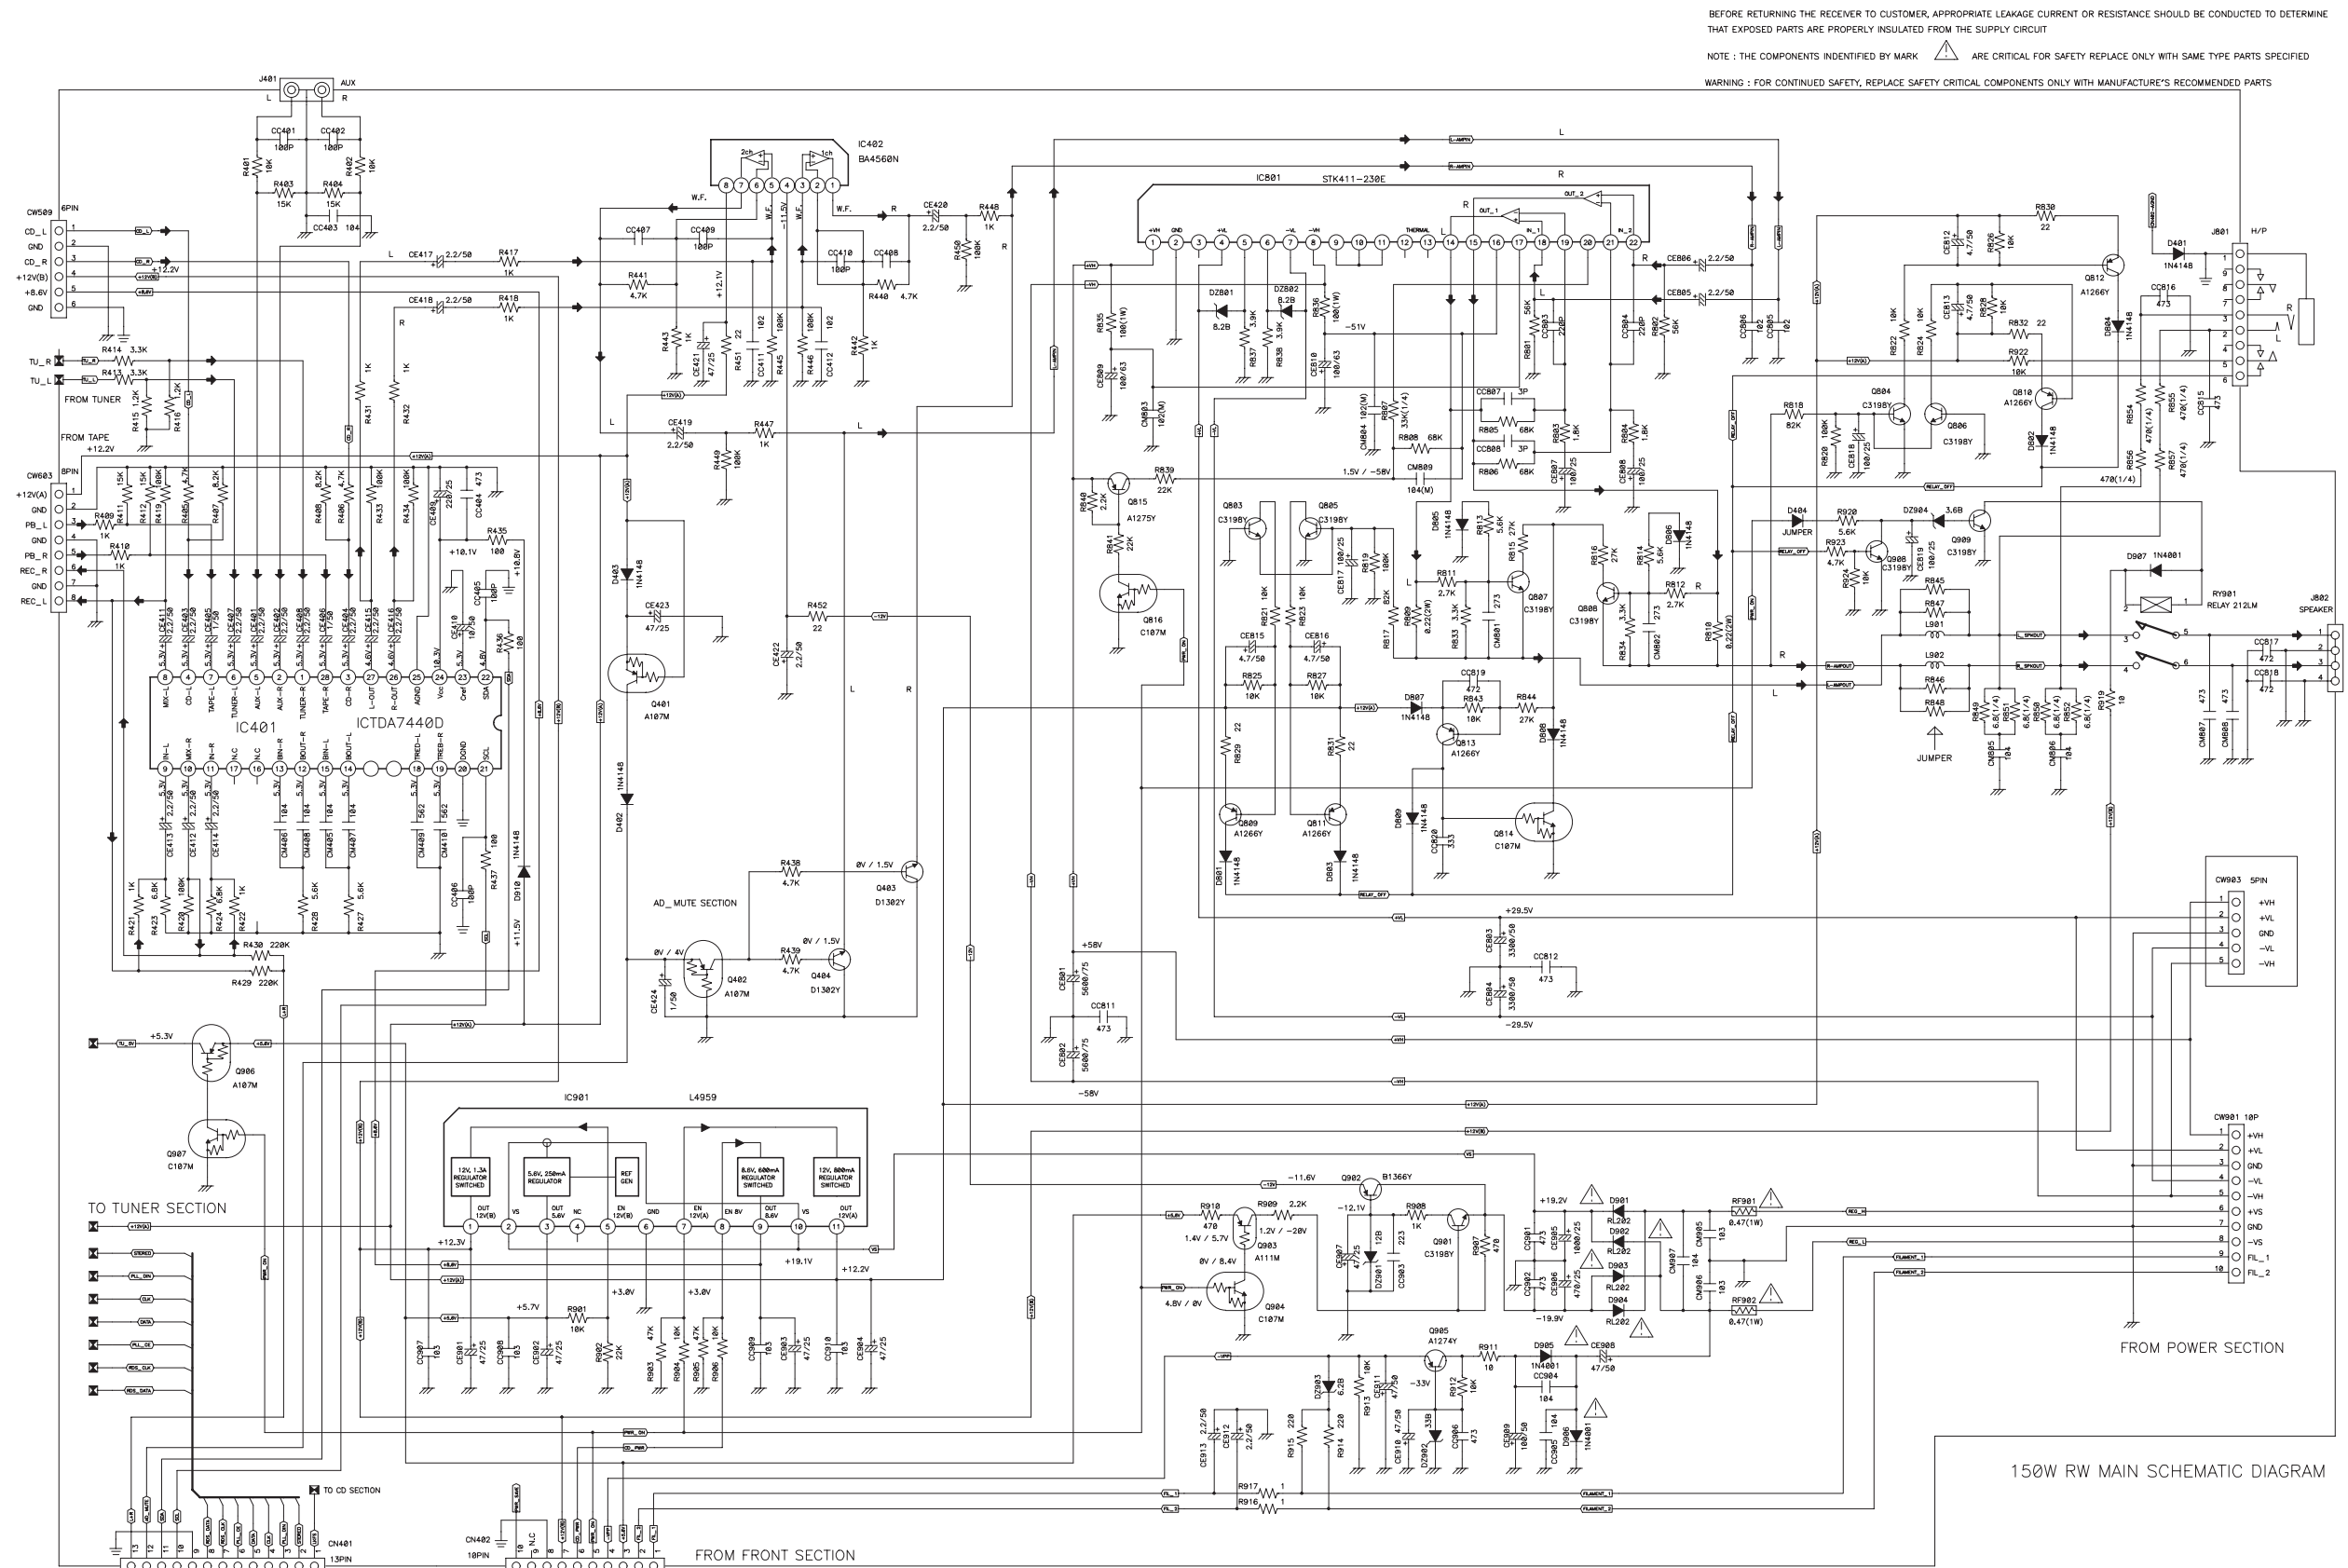


Schematic Diagram

Model : AMI-926LW/RW
 Ass'y Name : POWER

BEFORE RETURNING THE RECEIVER TO CUSTOMER, APPROPRIATE LEAKAGE CURRENT OR RESISTANCE SHOULD BE CONDUCTED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT


NOTE : THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY REPLACE ONLY WITH SAME TYPE PARTS SPECIFIED

WARNING : FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS

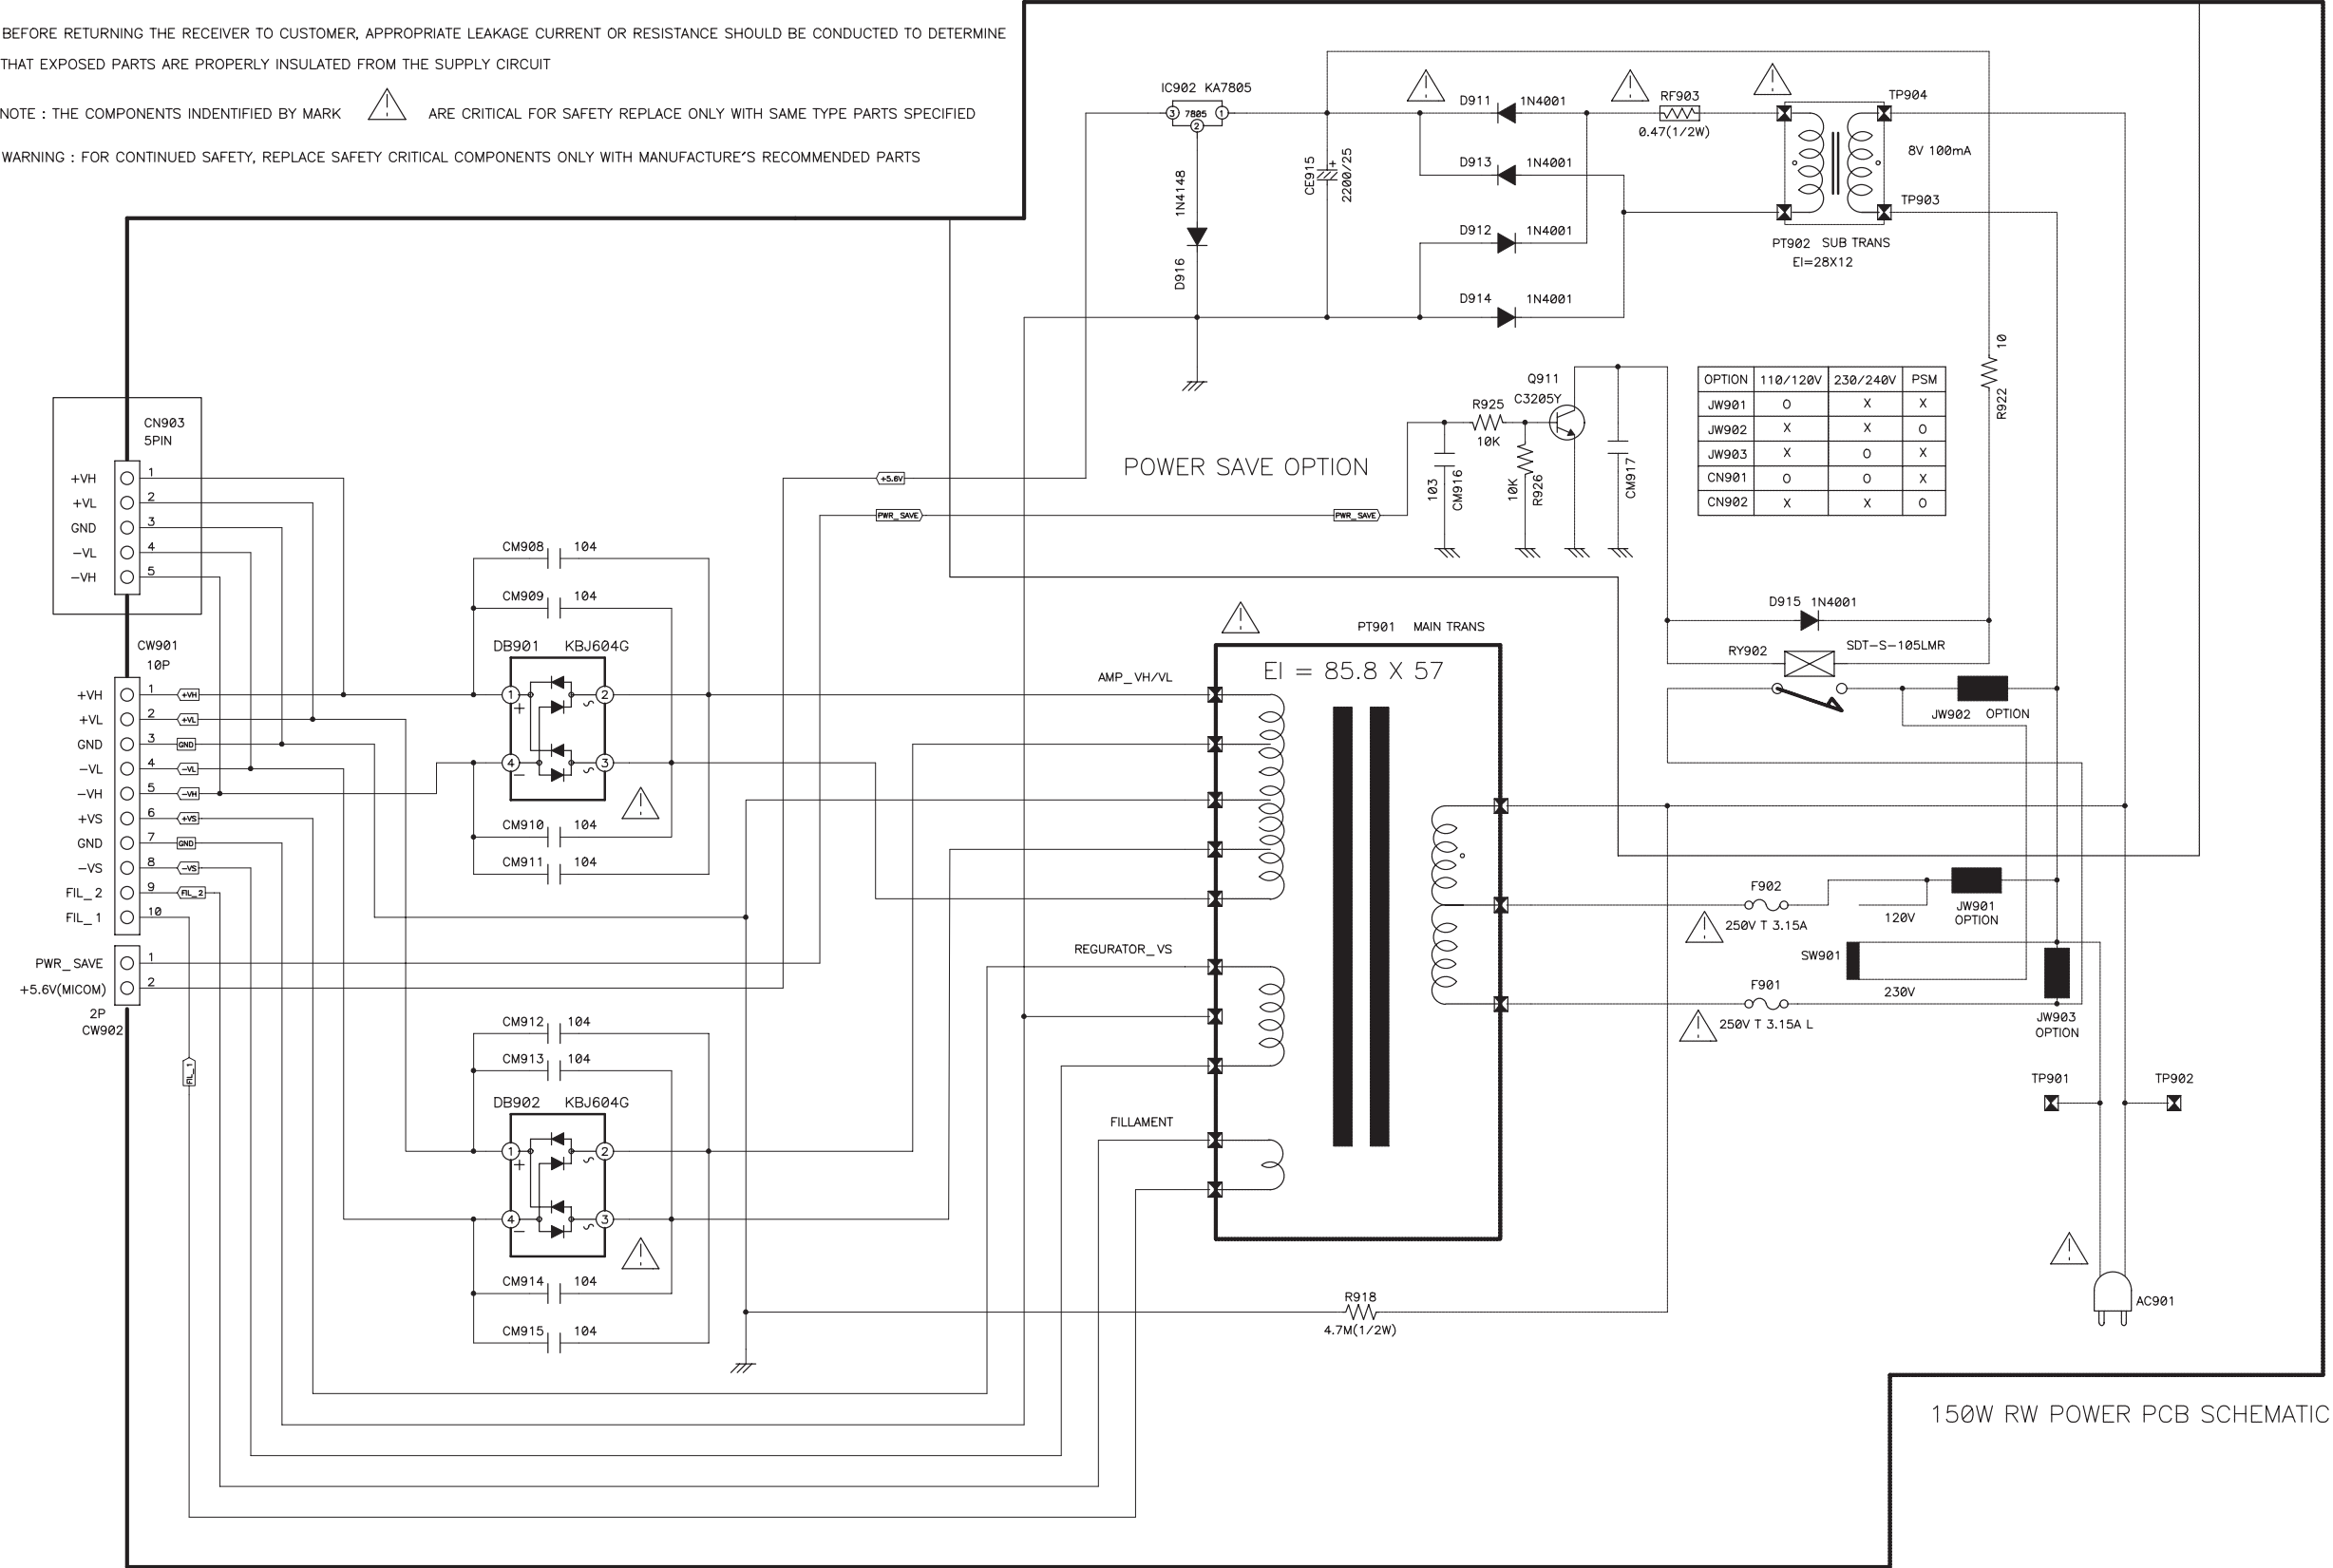

Schematic Diagram

Model : AMI-926LW/RW
Ass'y Name : TUNER


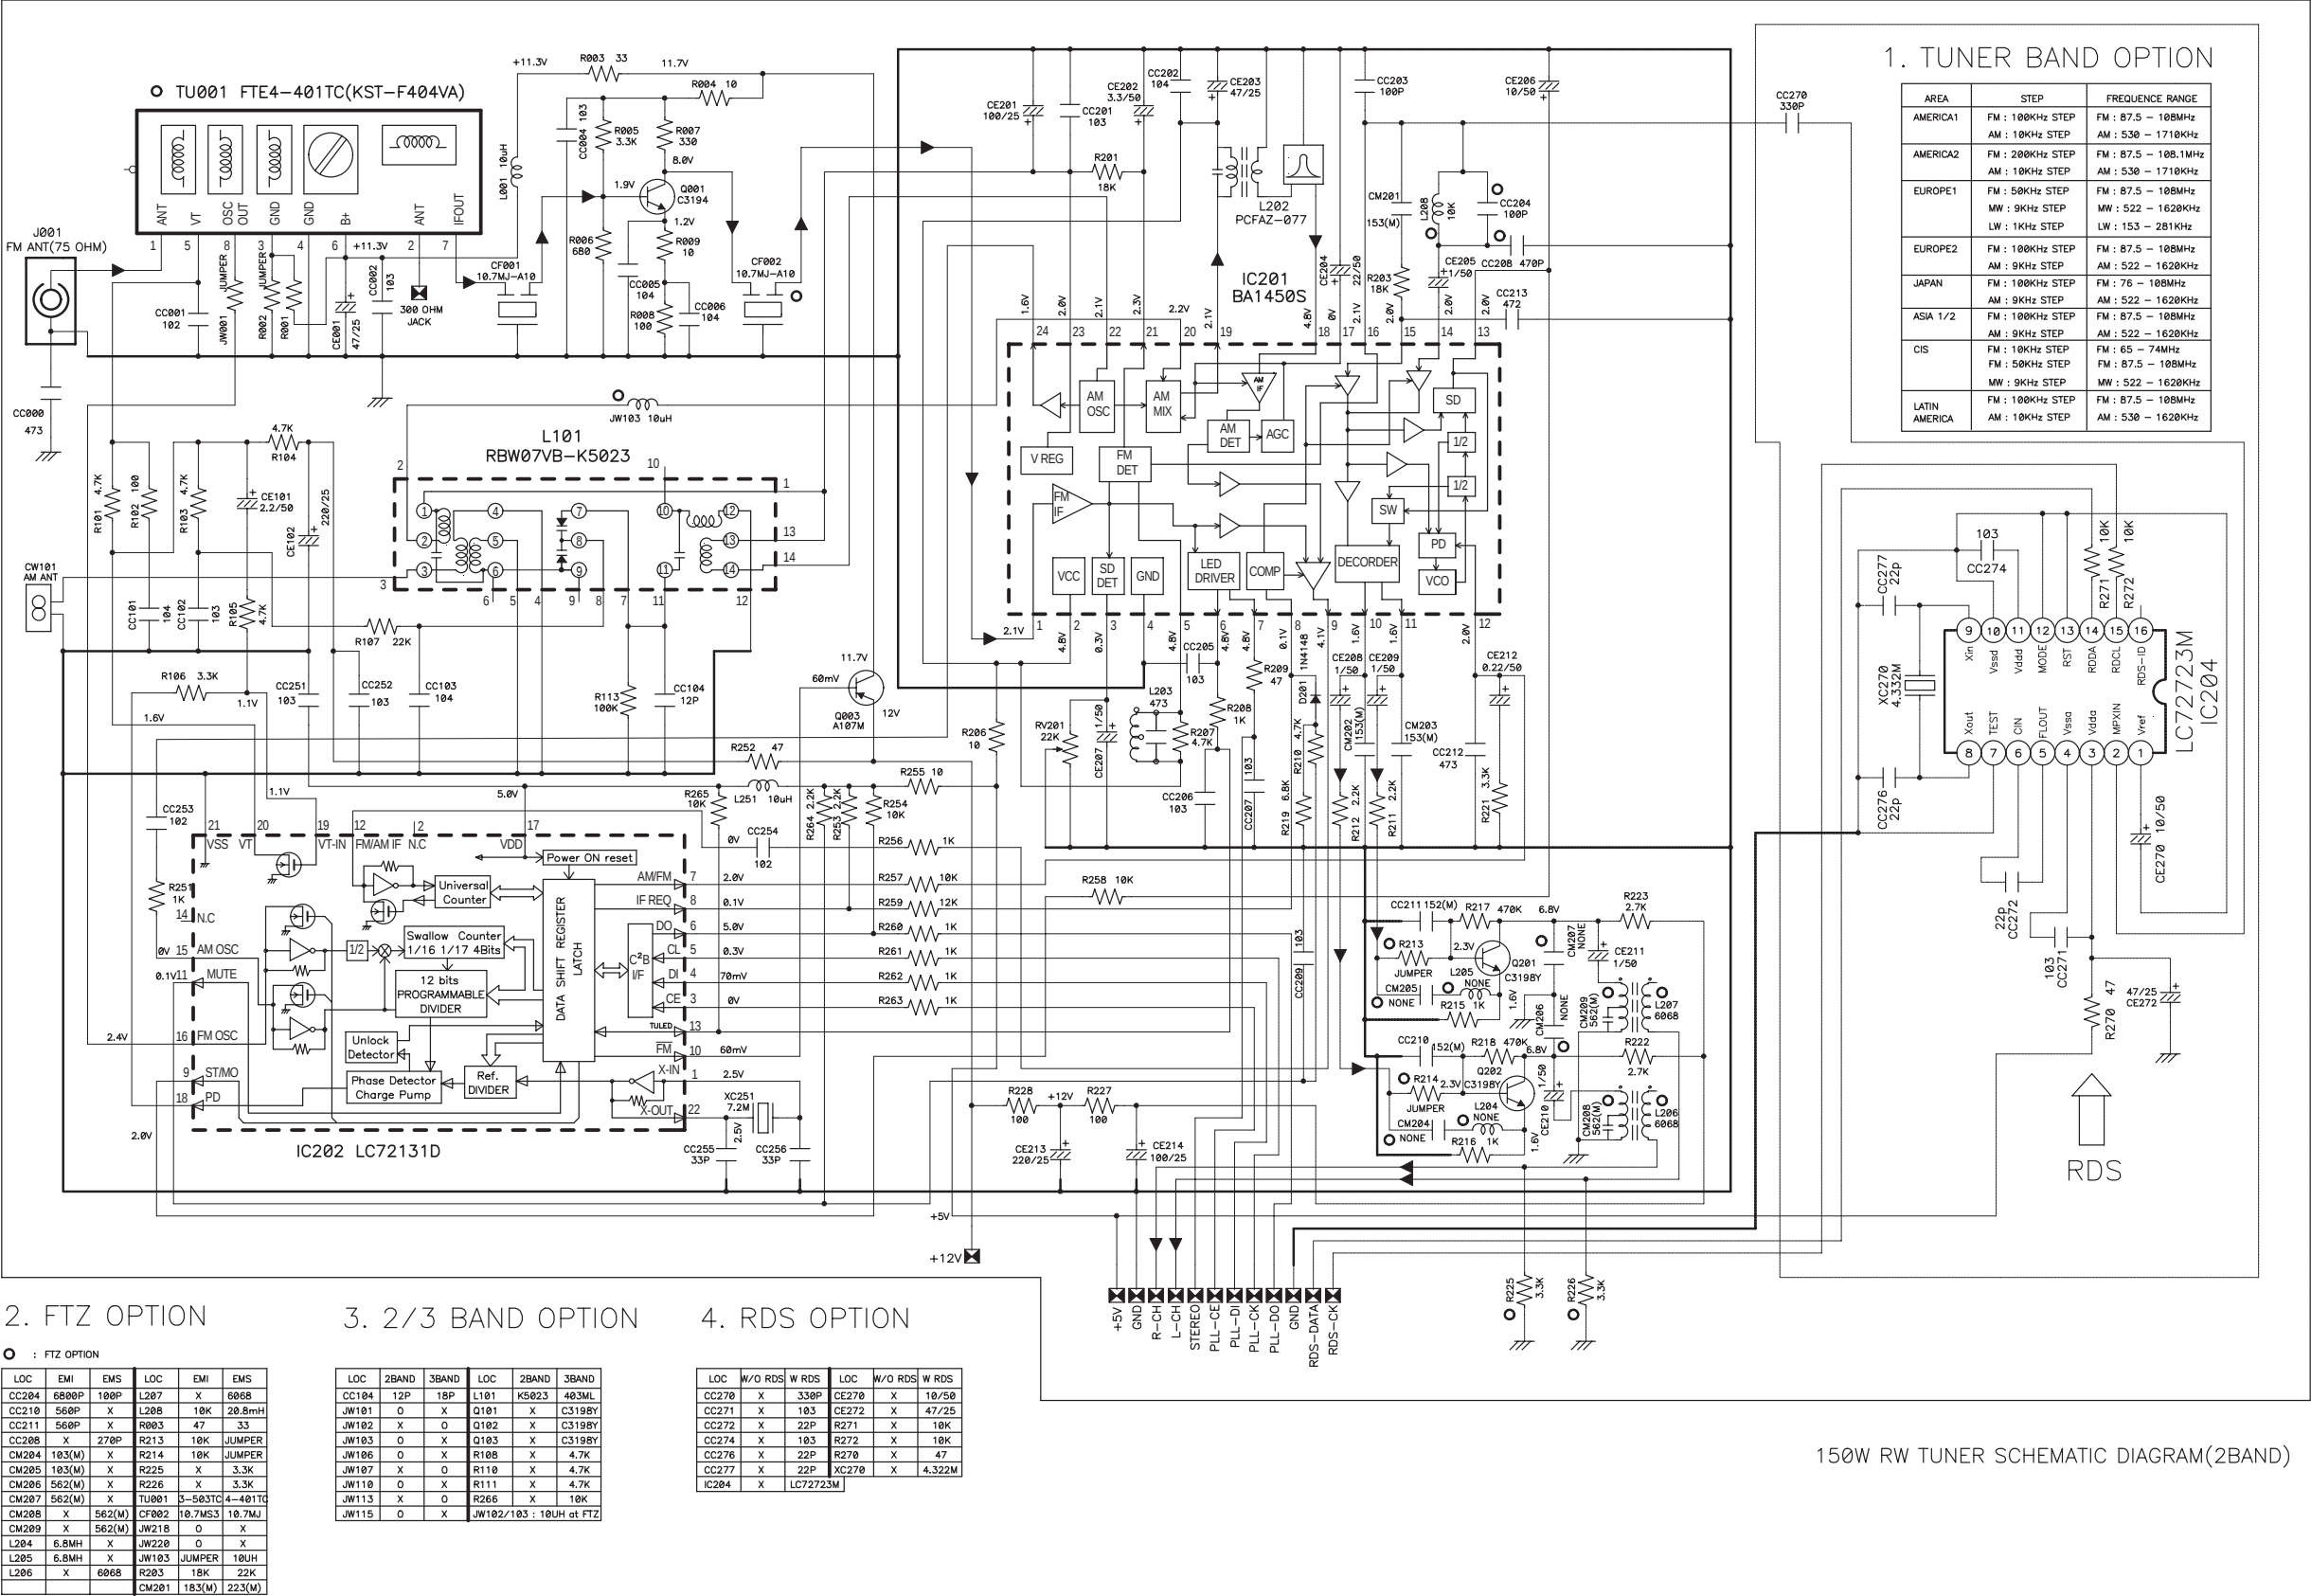


150W RW TUNER SCHEMATIC DIAGRAM(2BAND)


Schematic Diagram

Model : AMI-926LW/RW

Ass'y Name : TAPE

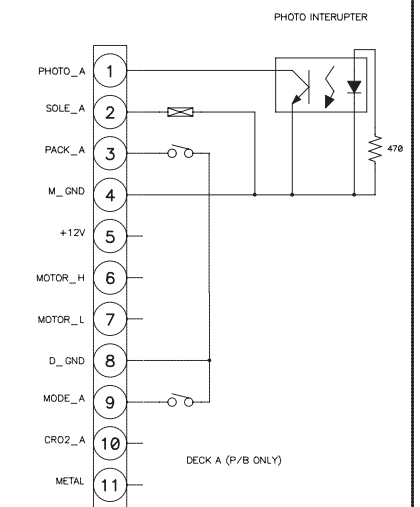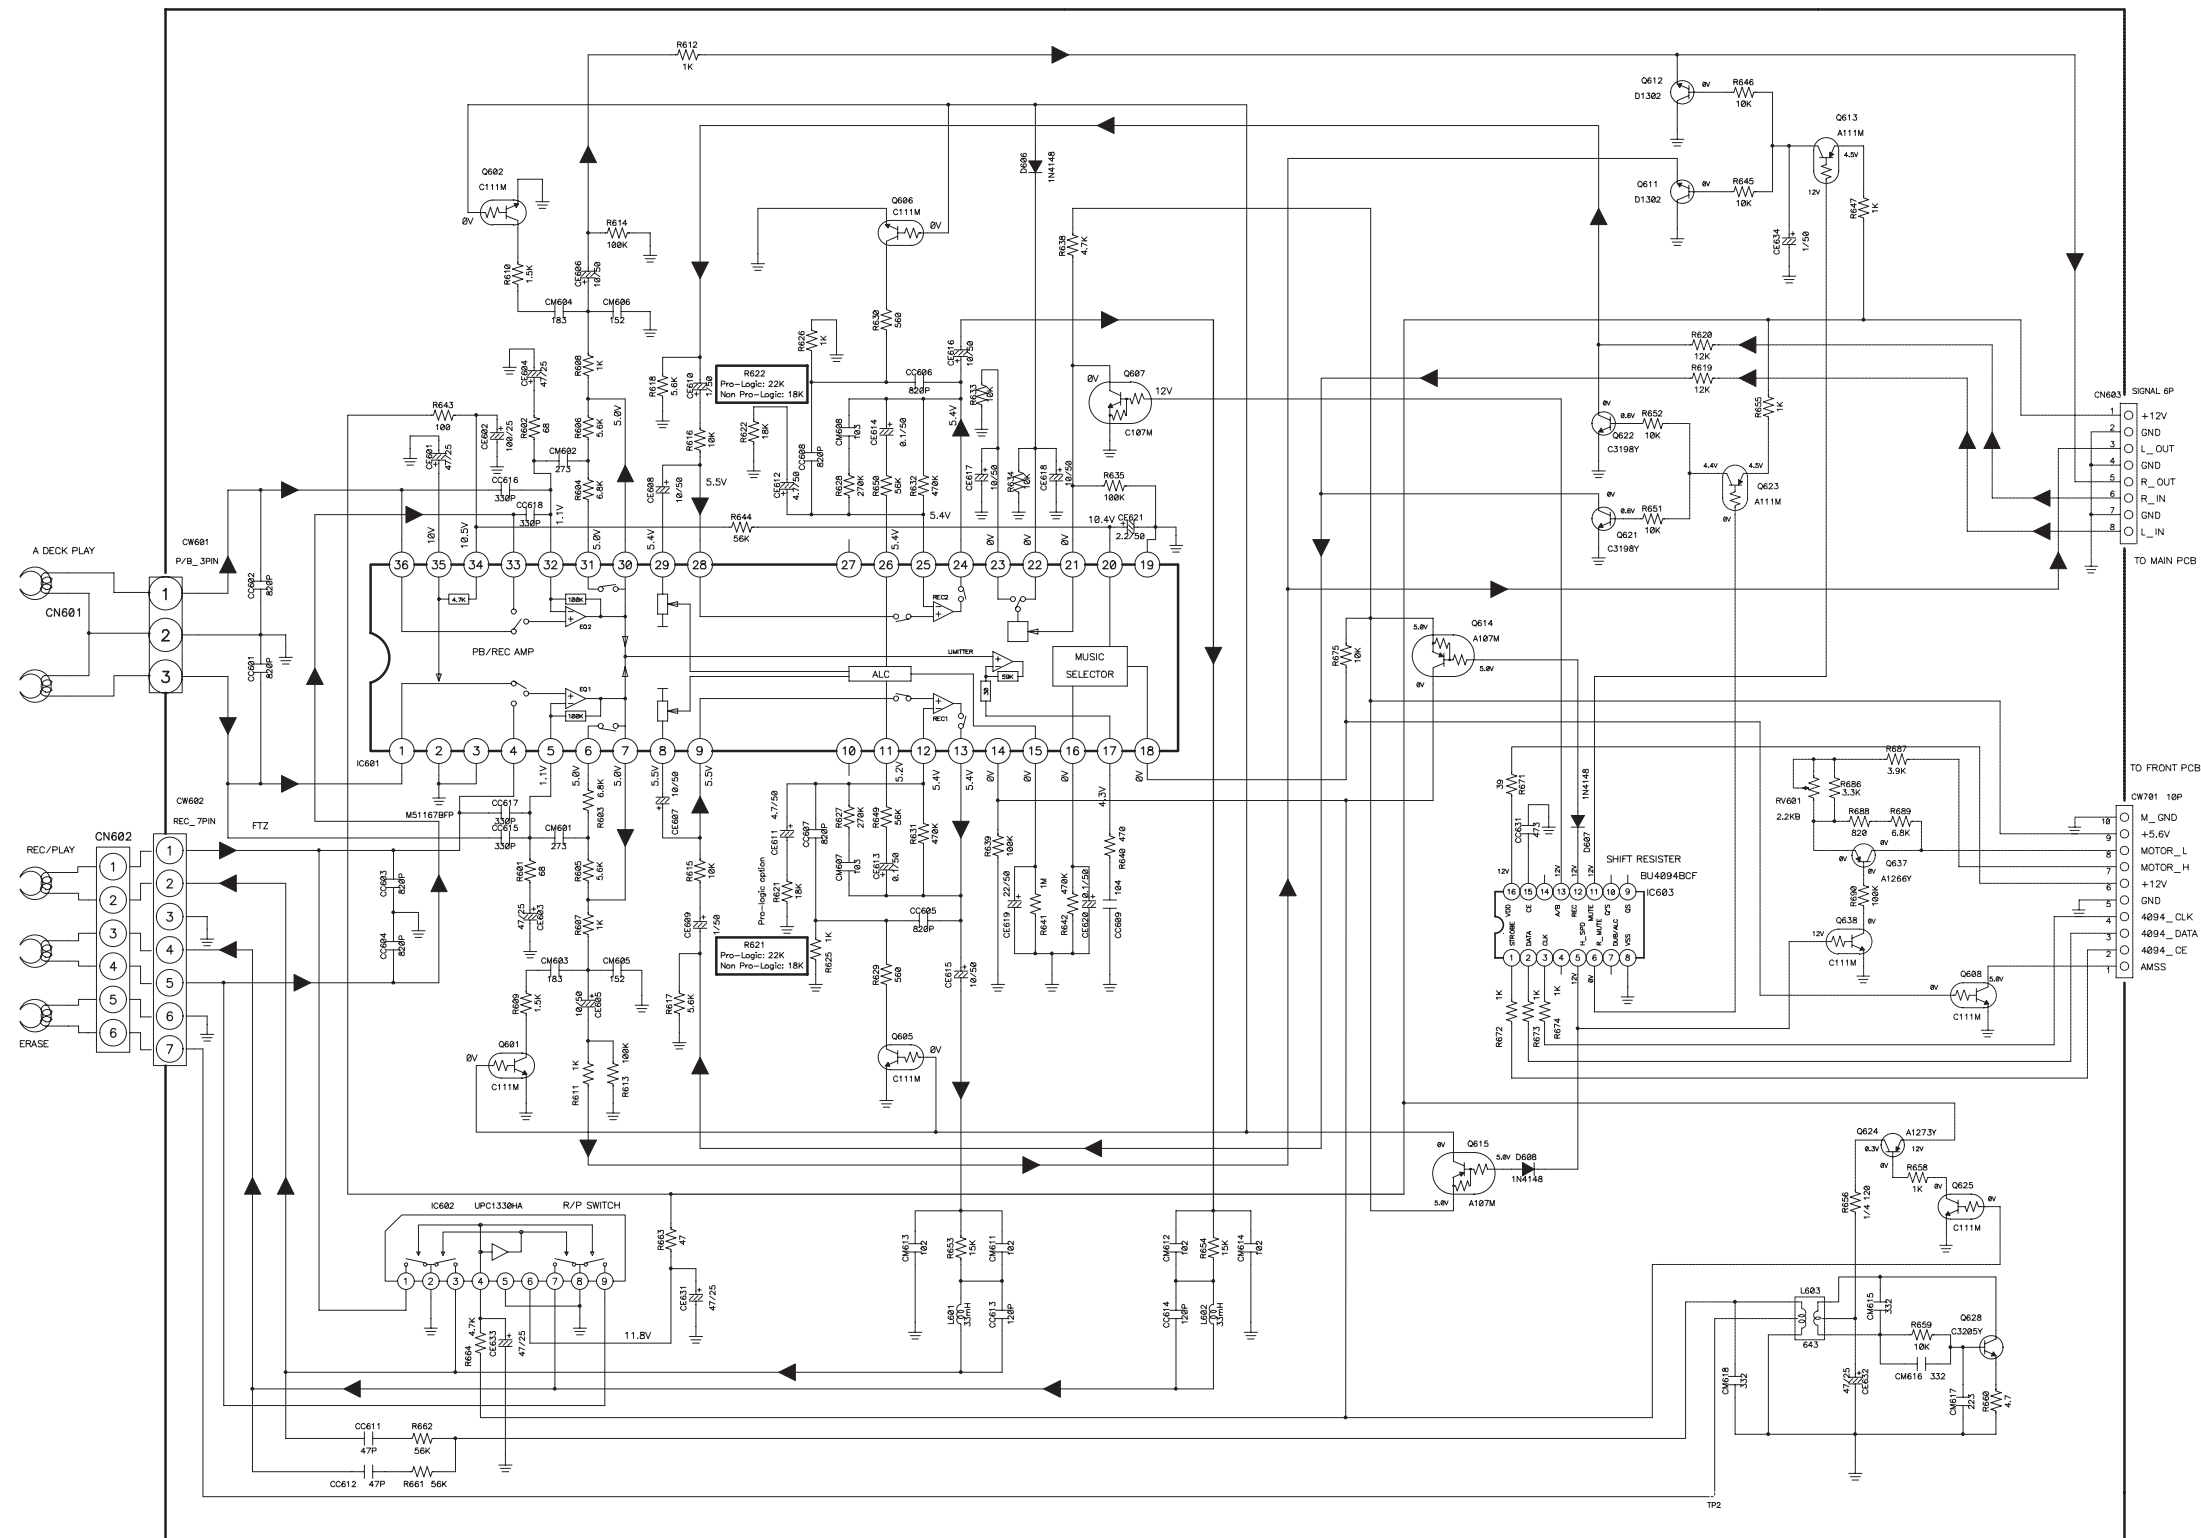

FROM FRONT SECTION

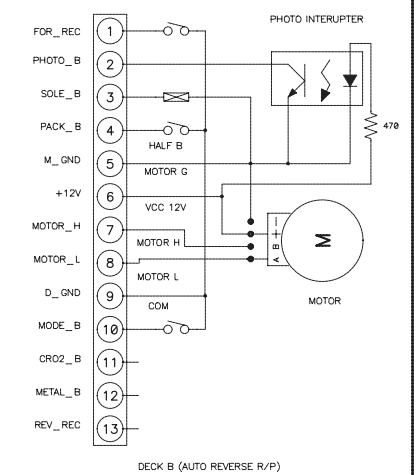


150W RW TAPE SCHEMATIC DIAGRAM
(USE FOR PIGEON DECK)

Model : AMI-926LW/RW
Ass'y Name : CD



Schematic Diagram


Model : AMI-926LW/RW
Ass'y Name : CONTROL

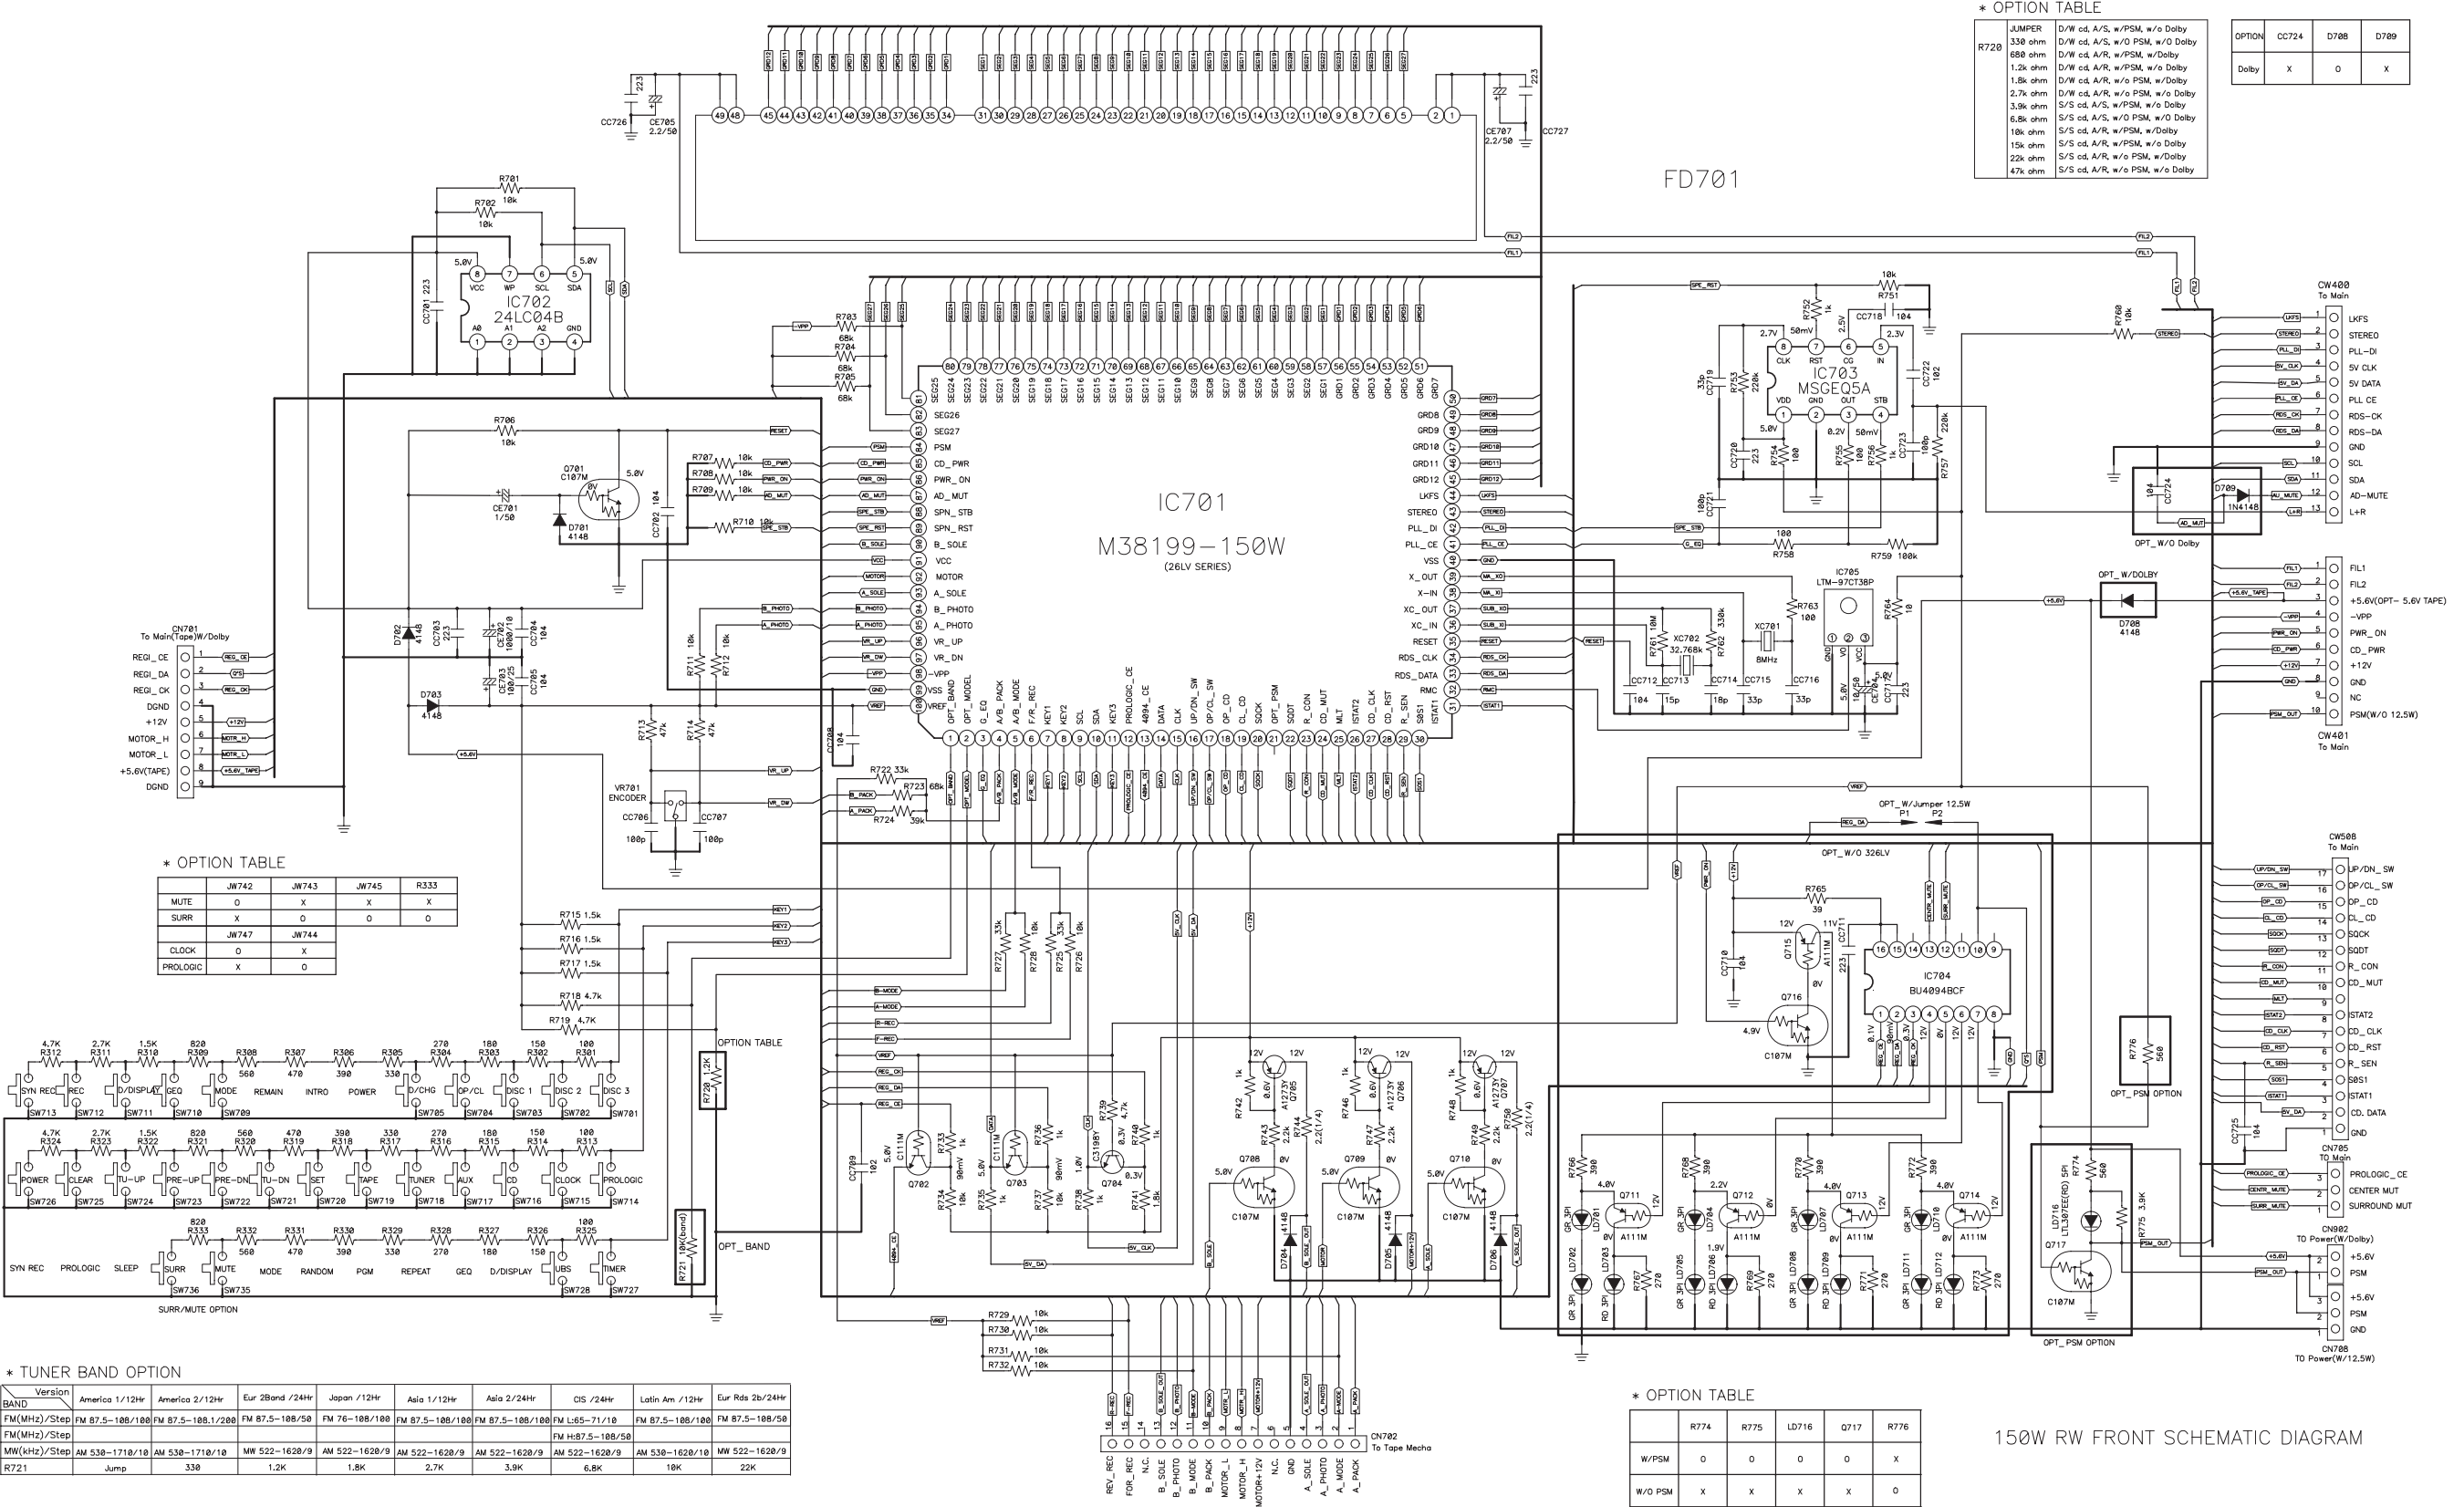

P.C.B Pattern Layout


Model : AMI-926LW/RW

Ass'y Name : MAIN PCB

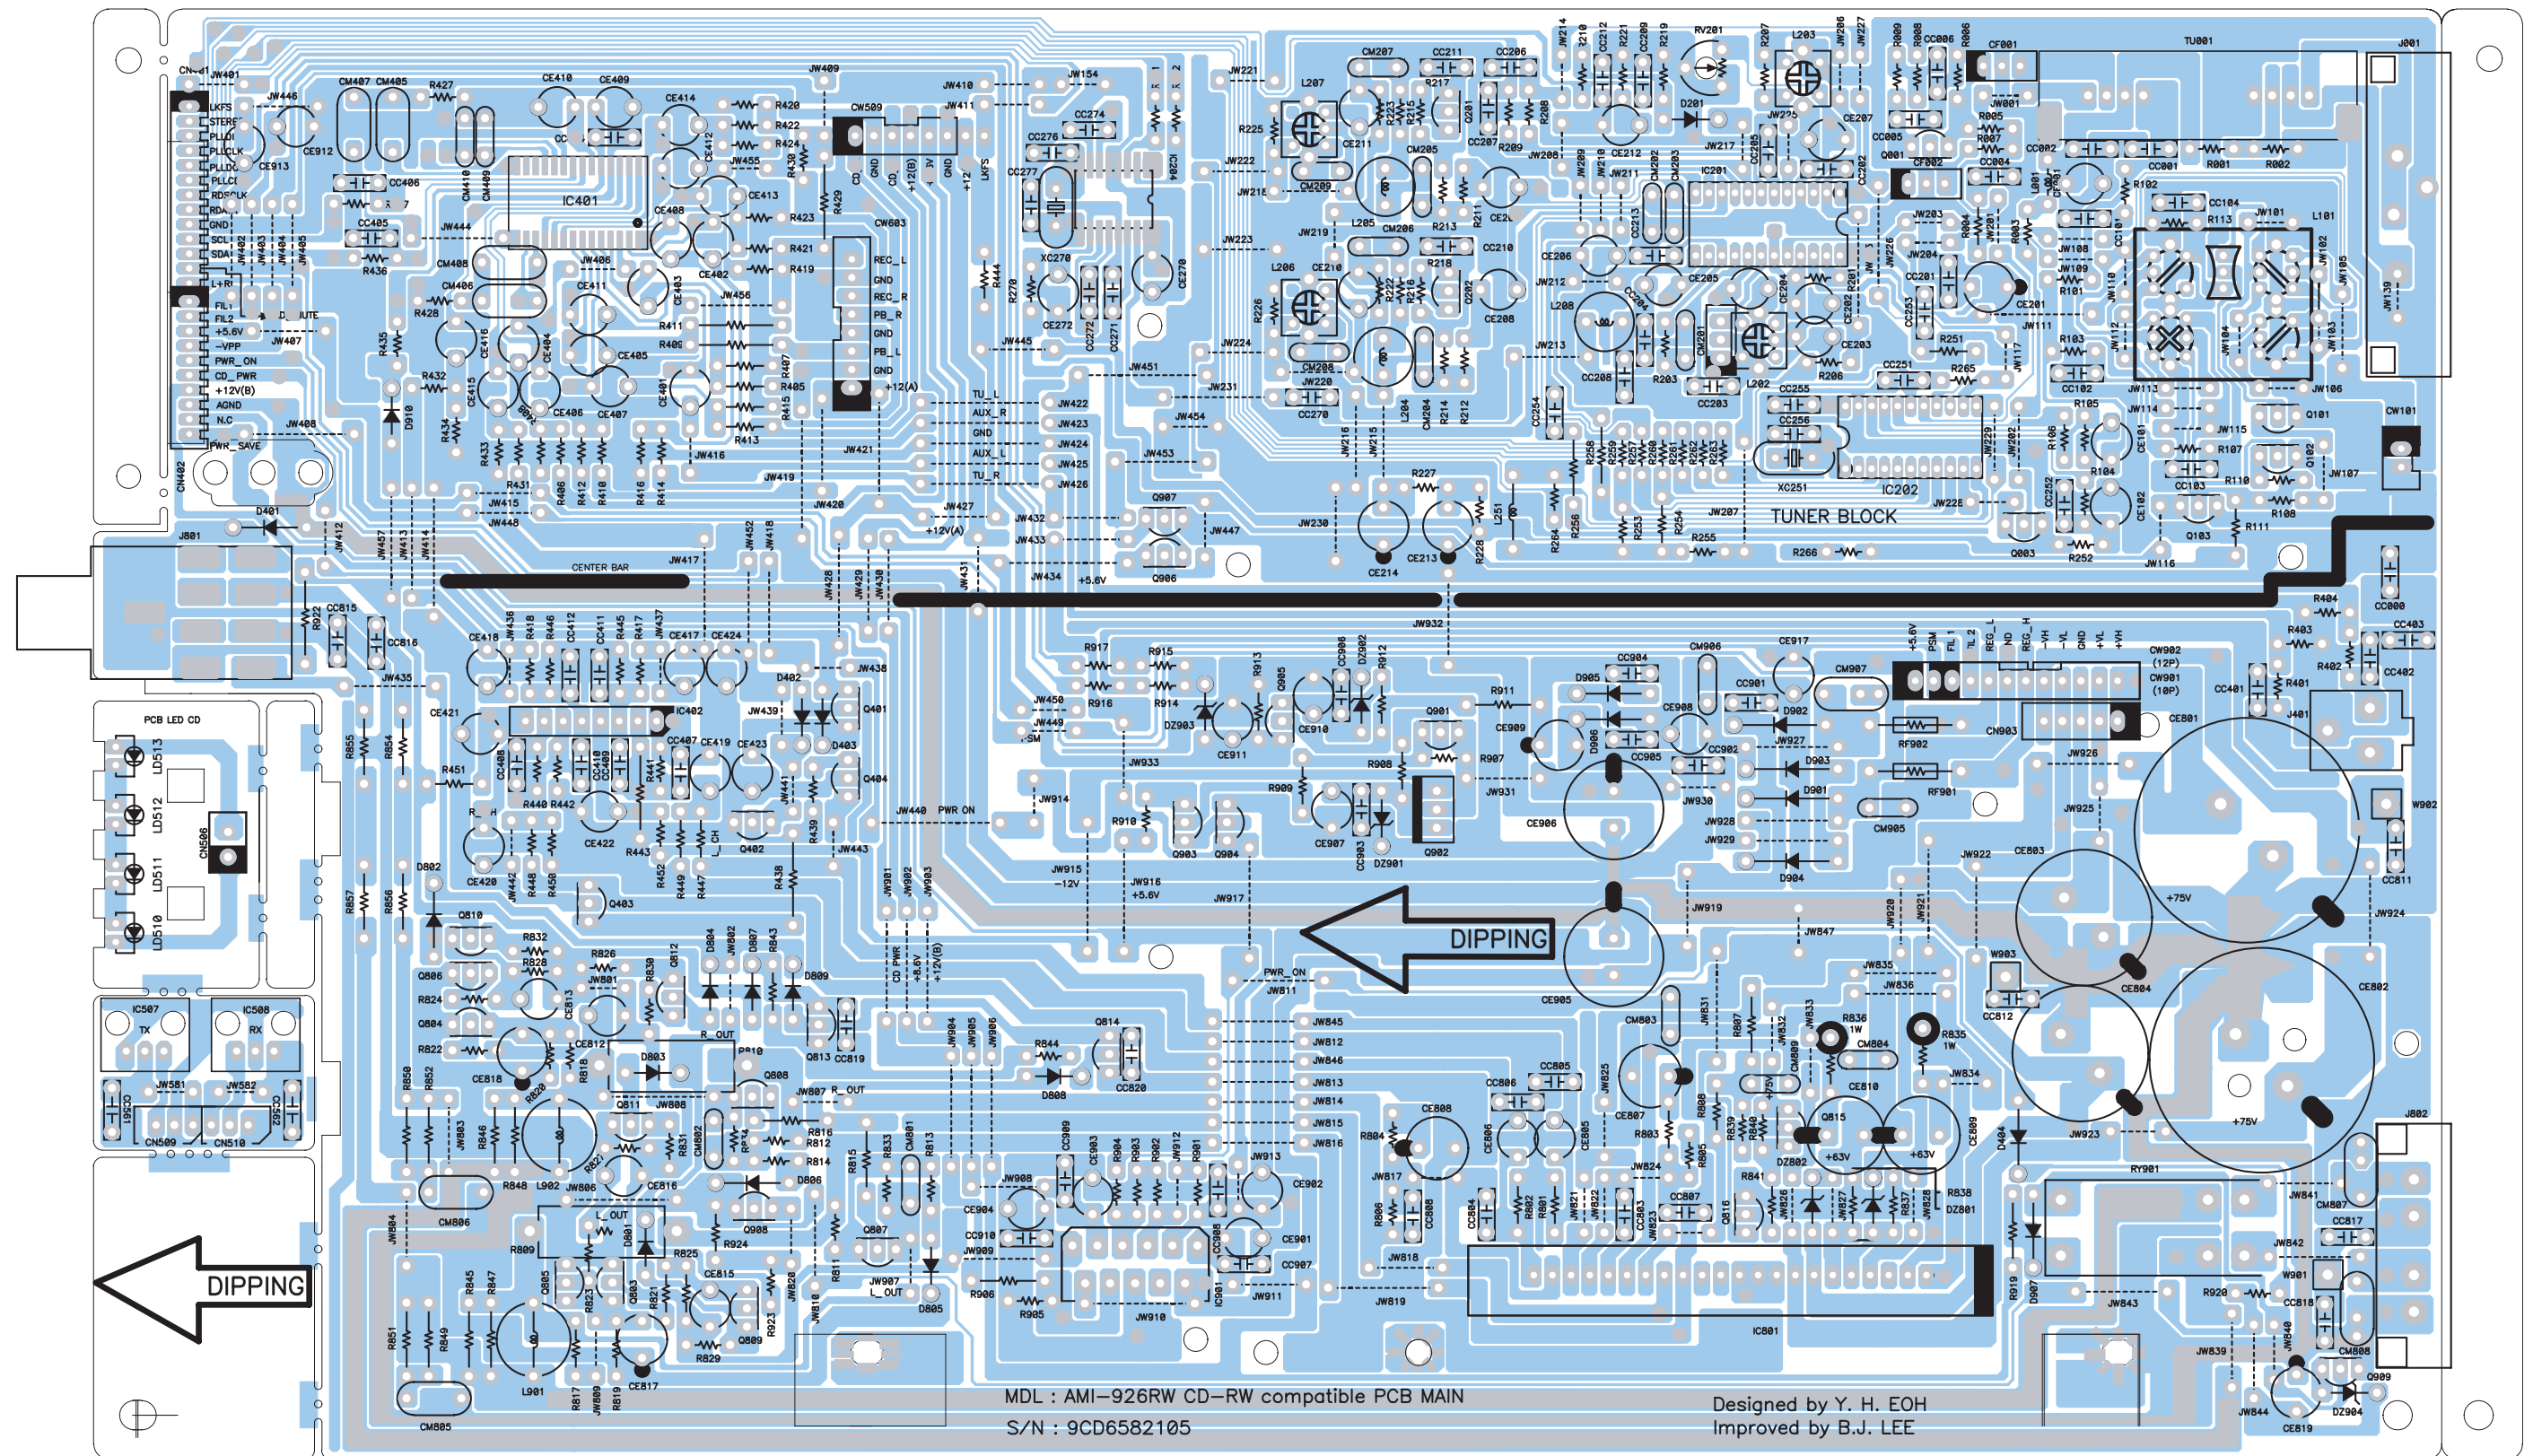


P.C.B Pattern Layout

Model : AMI-926LW/RW
Ass'y Name : POWER PCB

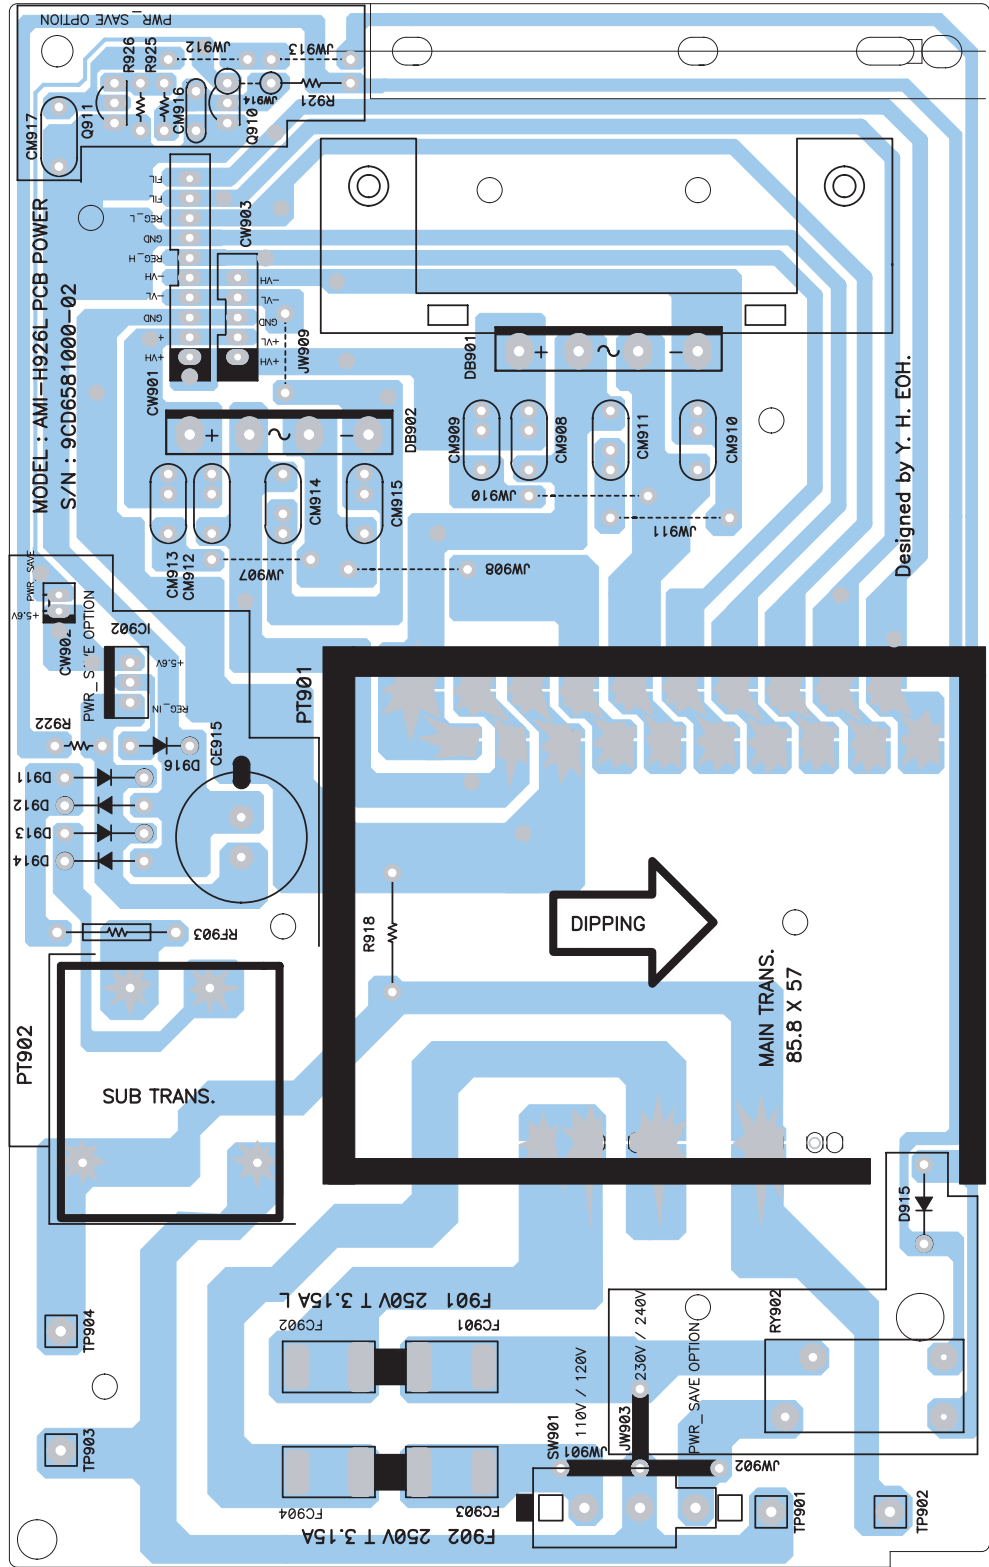


Model : AMI-926LW/RW
Ass'y Name : TAPE PCB

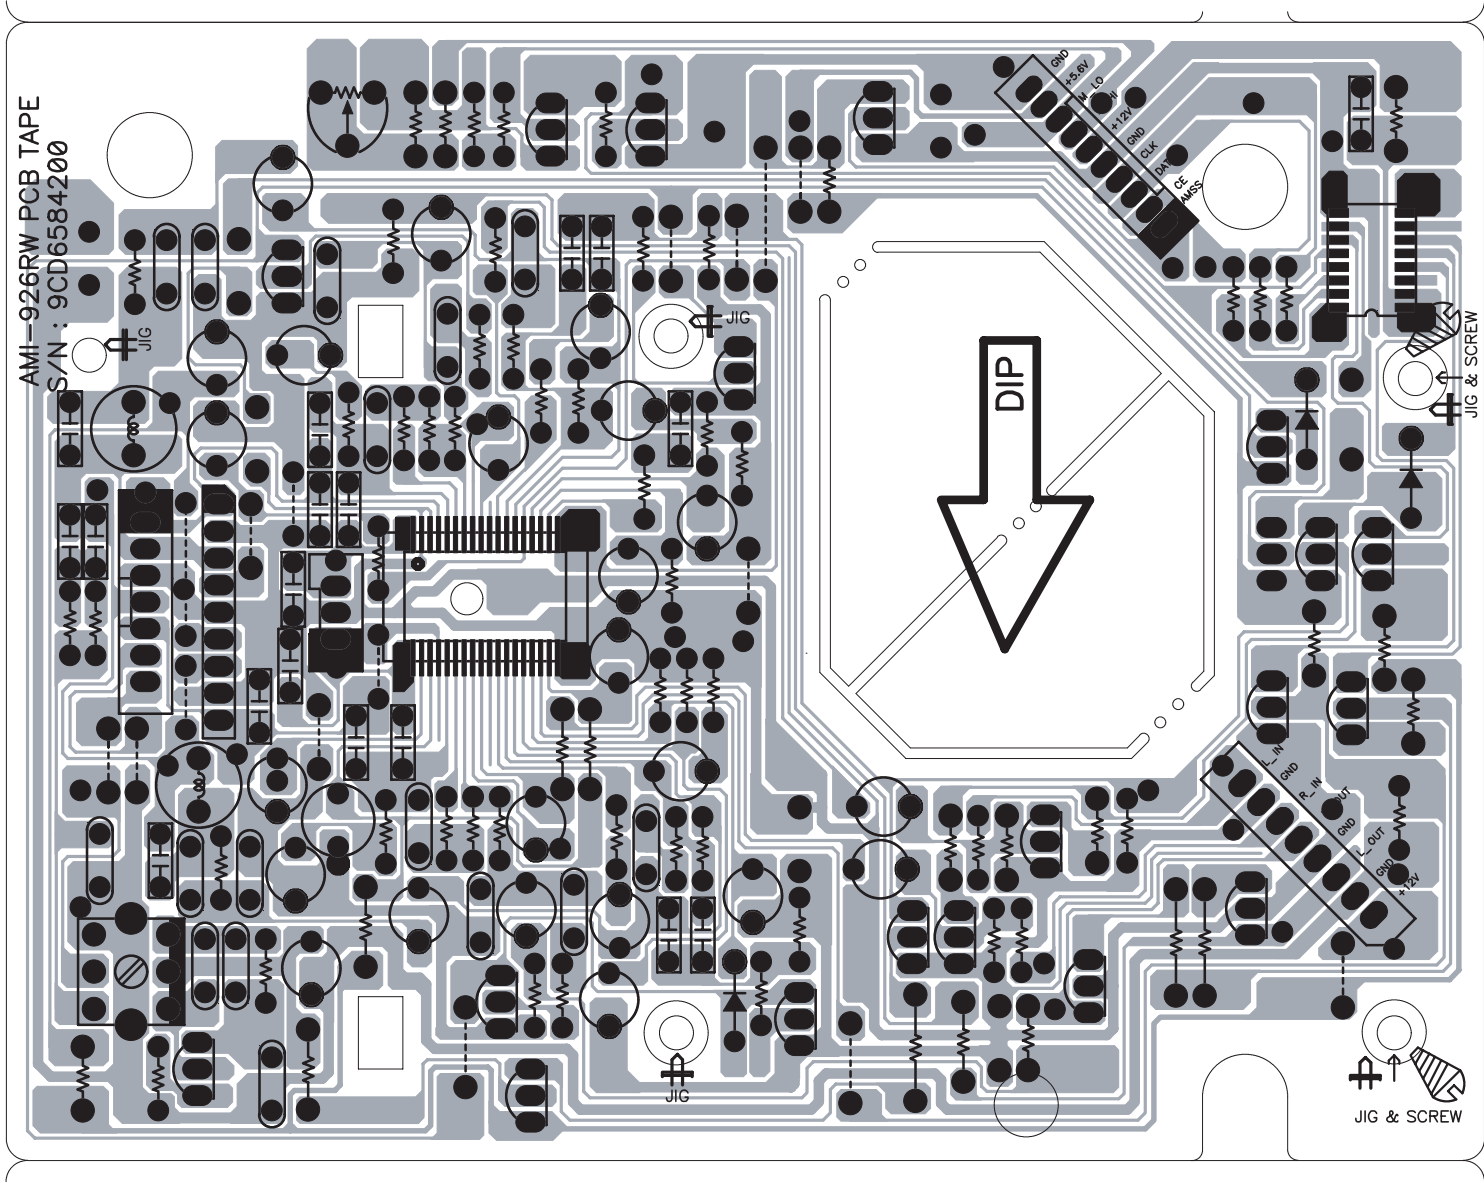

P.C.B Pattern Layout


Model : AMI-926LW/RW

Ass'y Name : CD PCB

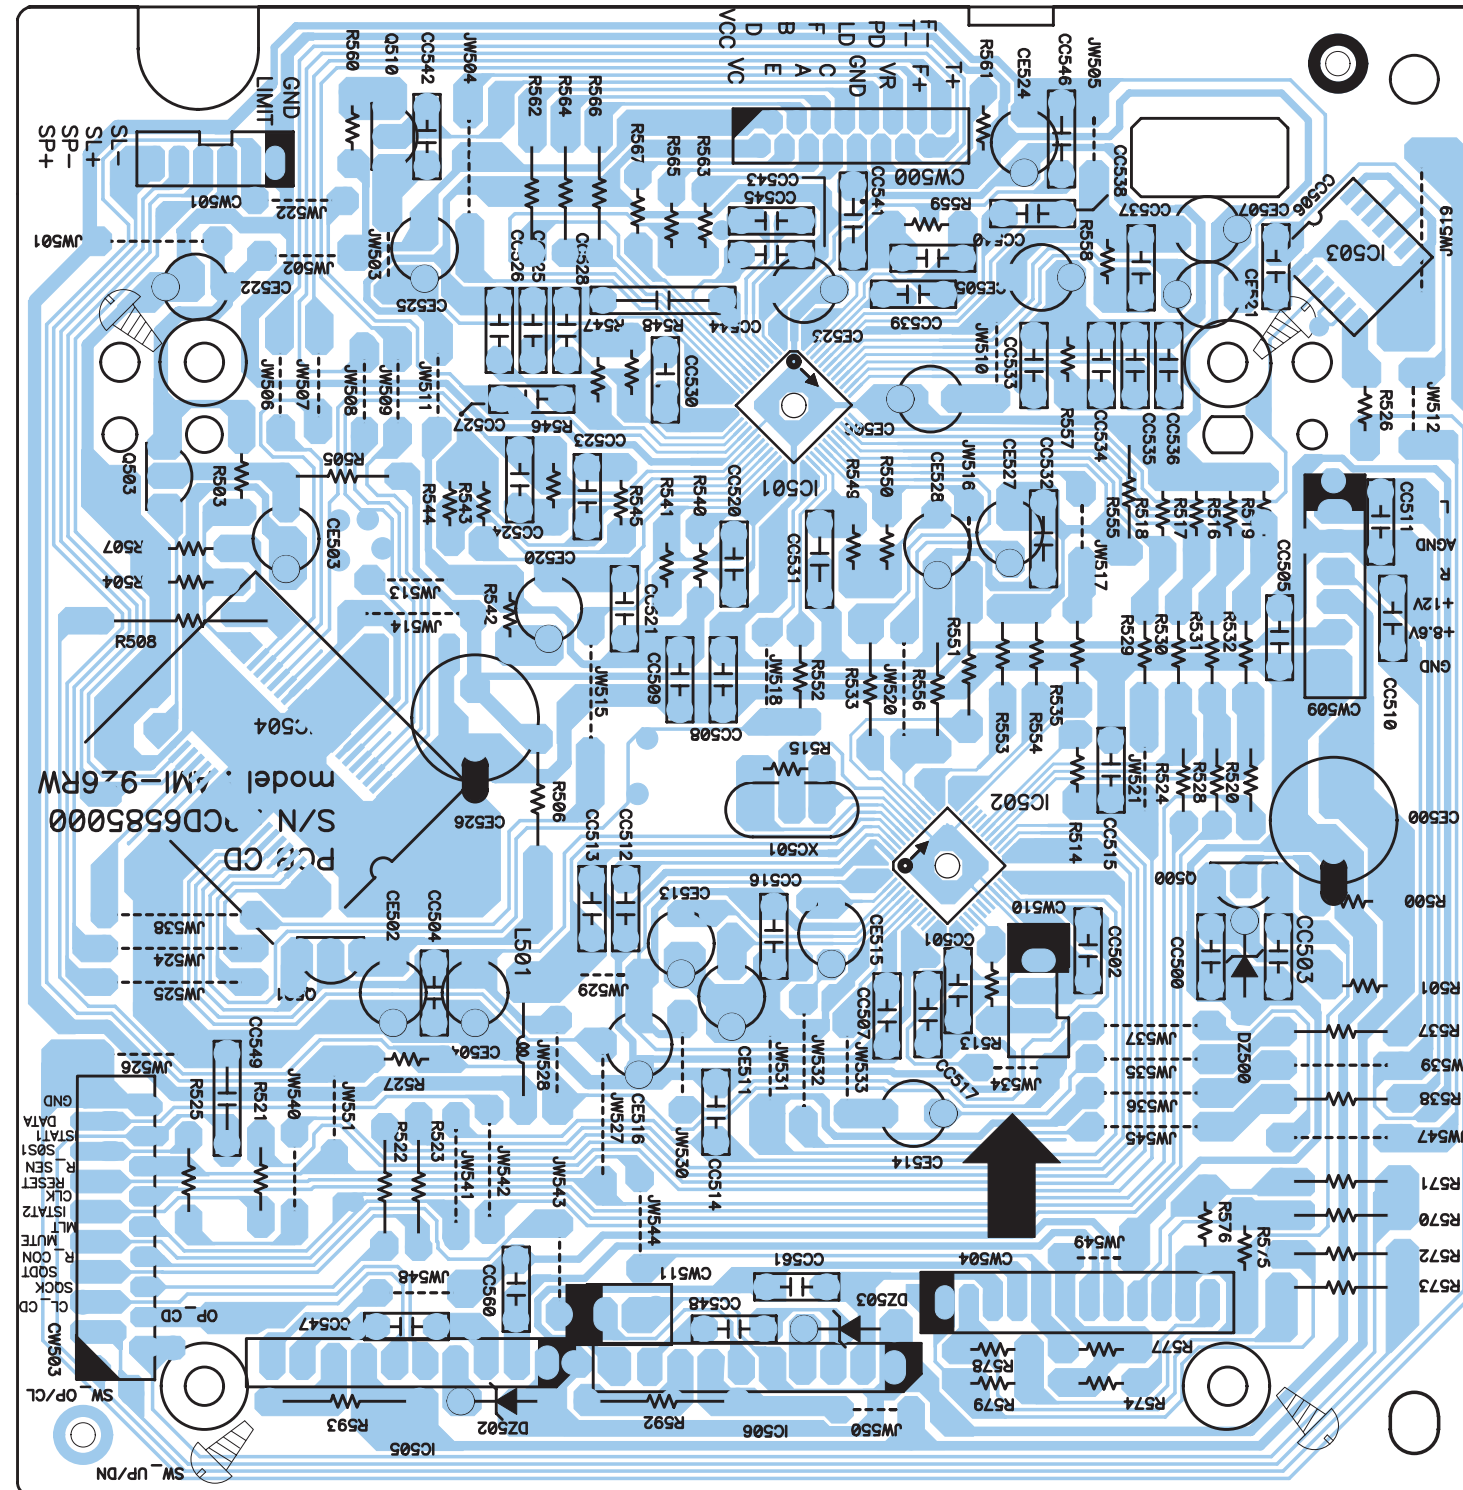

PC.B Pattern Layout

Model : AMI-926LW/RW
Ass'y Name : FRONT PCB

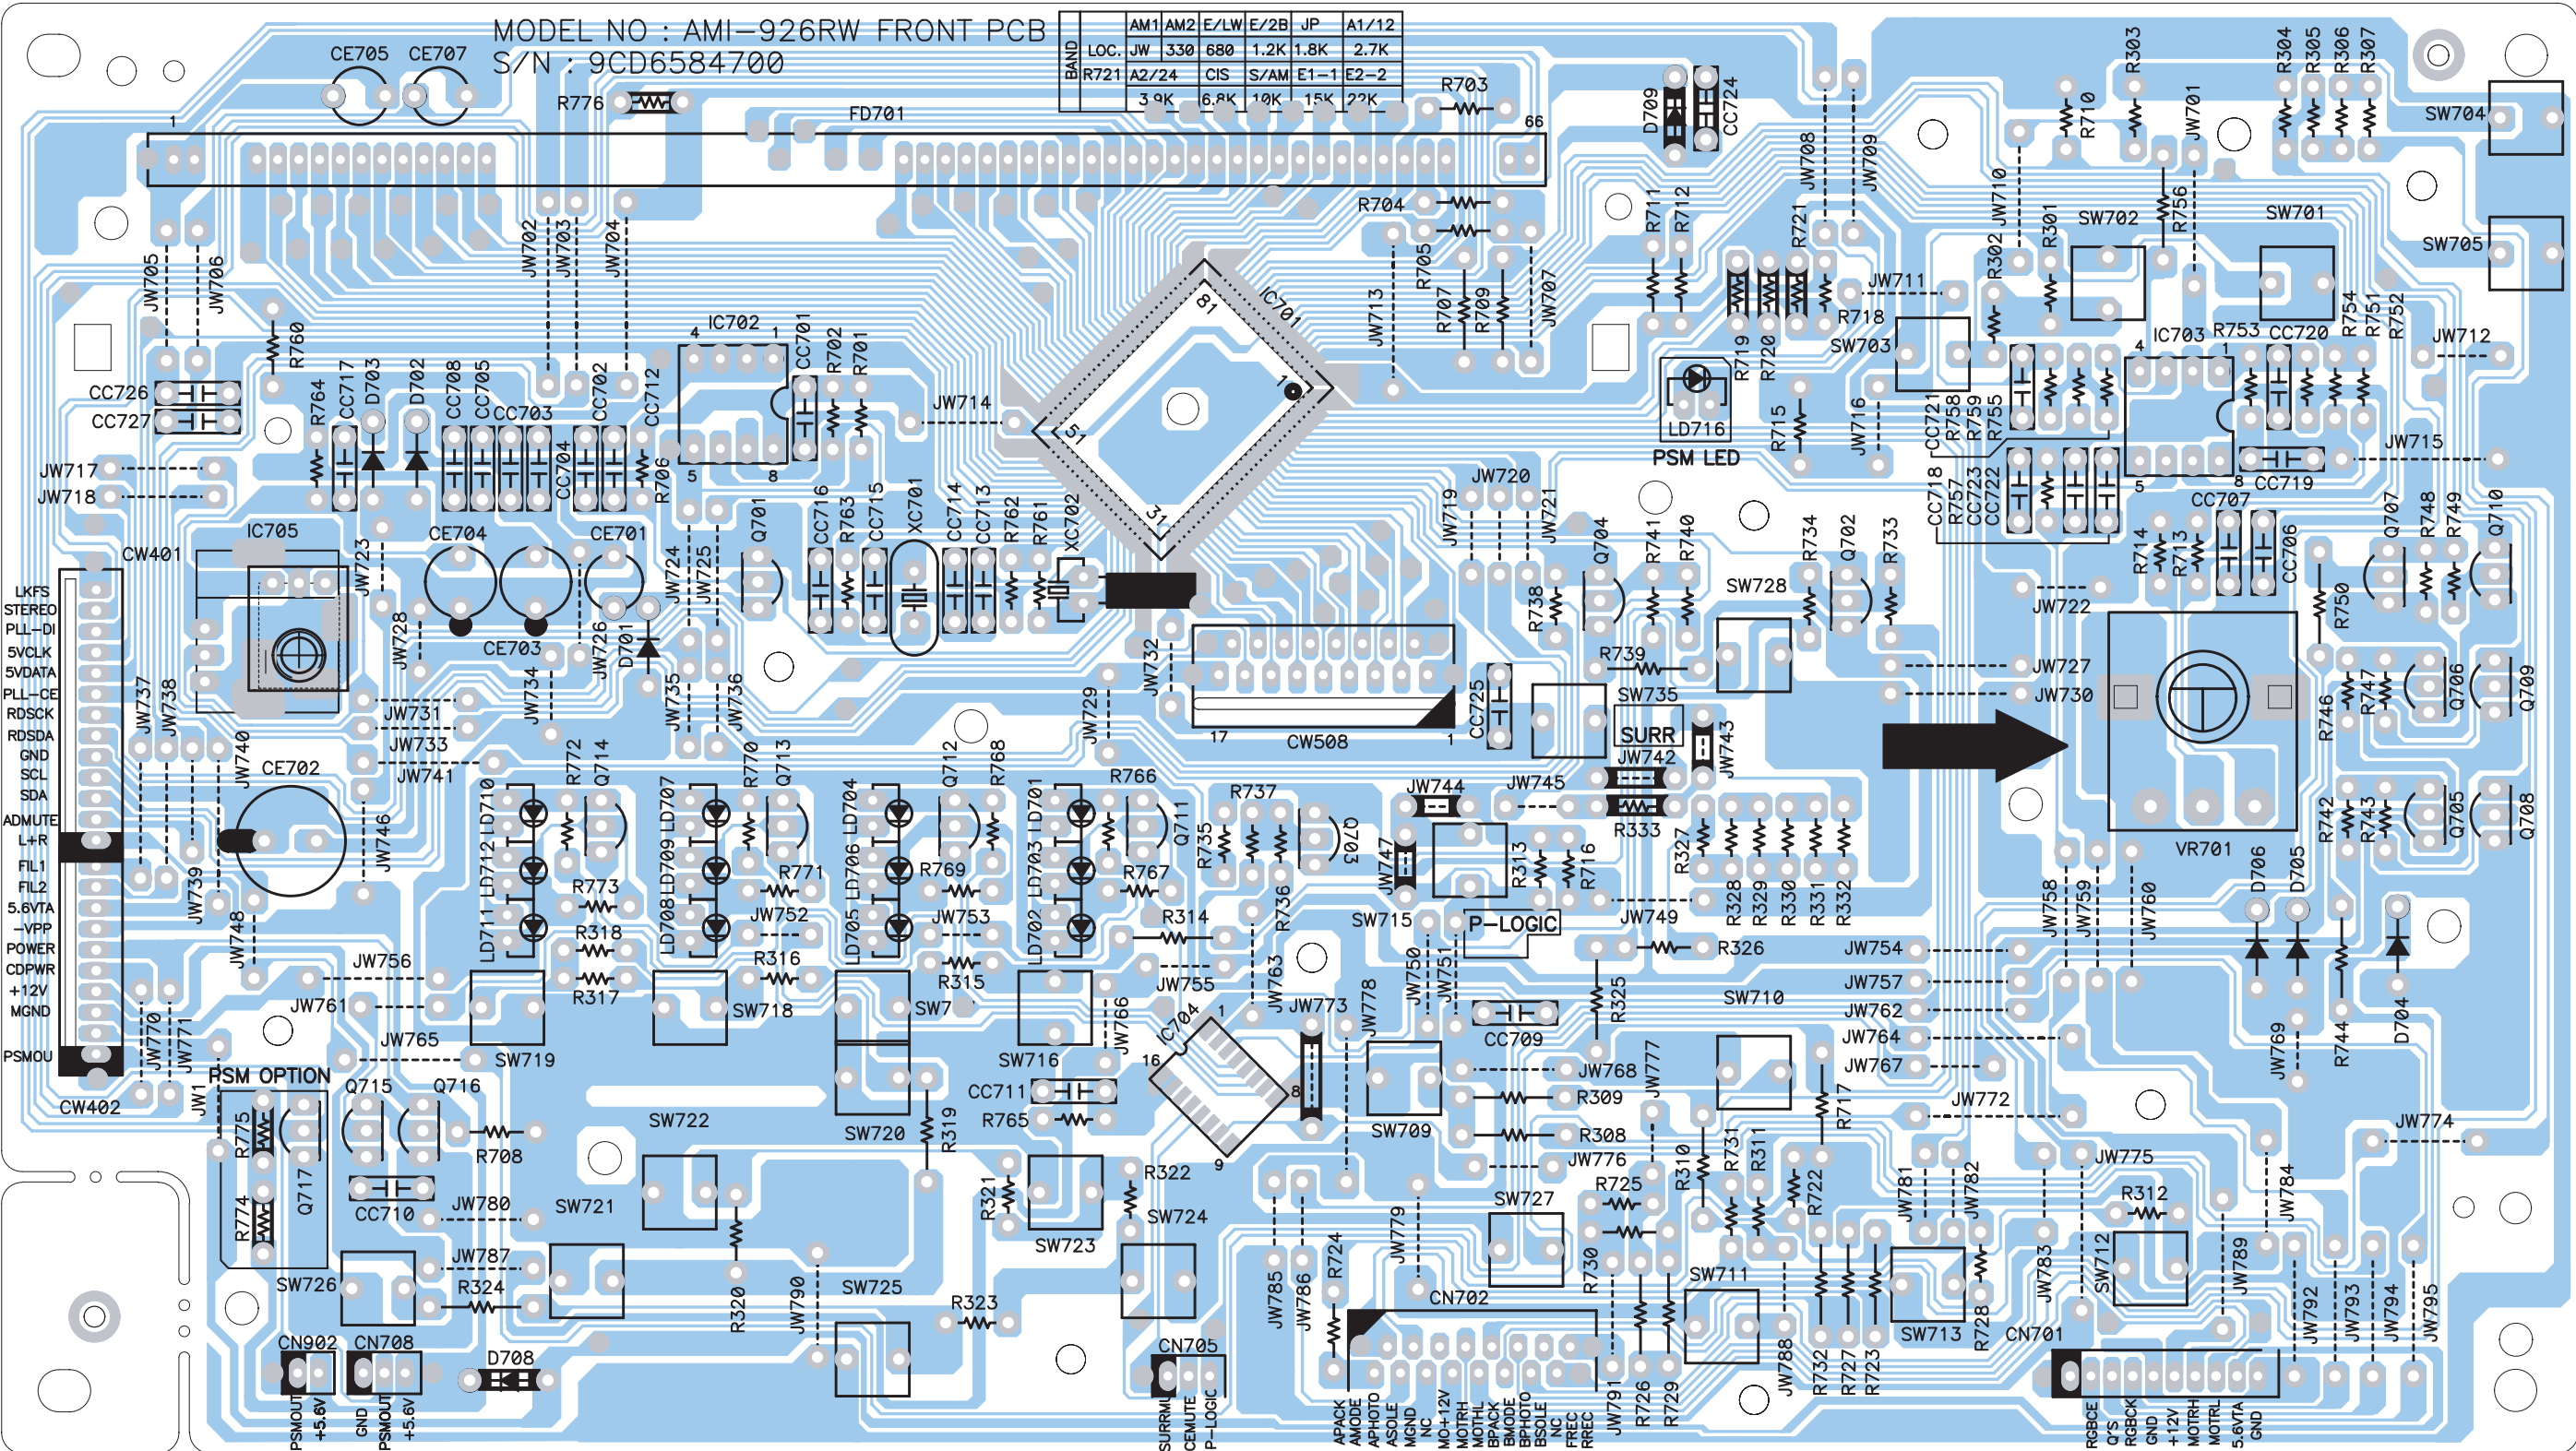

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
1	PCB CD AS	11000	9CDC059800	AMI-926RW		77	WIRE JUMPER	JW541-542	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
2	PCB CD	B501	9CD6585000	123.5X123.5X1.6T		78	WIRE JUMPER	JW543-544	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
3	C CERA	CC500-502	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		79	WIRE JUMPER	JW545	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
4	C CERA	CC503-505	CCXF1H104Z	50V F 0.1MF Z		80	WIRE JUMPER	JW547	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
5	C CERA	CC506-507	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		81	WIRE JUMPER	JW548	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
6	C CERA	CC508	CCXF1H104Z	50V F 0.1MF Z		82	WIRE JUMPER	JW549-550	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
7	C CERA	CC510-512	CCXB1H222K	50V B 2200PF K (TAPPING)		83	WIRE JUMPER	L501	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
8	C CERA	CC513-516	CCXF1H104Z	50V F 0.1MF Z		84	TR	Q500	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	
9	C CERA	CC520	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		85	TR	Q501	TKSA928AY-	KSA928A-Y	
10	C CERA	CC521-532	CCXF1H683Z	50V F 0.068MF Z		86	TR	Q503	TKSC2331Y-	KSC2331Y	
11	C CERA	CC523	CCXF1H104Z	50V F 0.1MF Z		87	TR	Q510	TKSA928AY-	KSA928A-Y	
12	C CERA	CC524	CCXB1H391K	50V B 390PF K (TAPPING)		88	R CARBON FILM	R500	RD-AZ100J-	1/6 10 OHM J	
13	C CERA	CC525	CCXF1H104Z	50V F 0.1MF Z		89	R CARBON FILM	R501	RD-AZ821J-	1/6 820 OHM J	
14	C CERA	CC526	CCXB1H681K	50V B 680PF K (TAPPING)		90	R CARBON FILM	R503	RD-AZ152J-	1/6 1.5K OHM J	
15	C CERA	CC527	CCXB1H222K	50V B 2200PF K (TAPPING)		91	R CARBON FILM	R504	RD-AZ472J-	1/6 4.7K OHM J	
16	C CERA	CC528	CCXF1H104Z	50V F 0.1MF Z		92	R CARBON FILM	R505-506	RD-4Z229J-	1/4 2.2 OHM J	
17	C CERA	CC529	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		93	R CARBON FILM	R507-508	RD-AZ103J-	1/6 10K OHM J	
18	C CERA	CC530	CCXB1H682K	50V B 6800PF K (TAPPING)		94	R CARBON FILM	R513	RD-AZ102J-	1/6 1K OHM J	
19	C CERA	CC531	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		95	R CARBON FILM	R514	RD-AZ103J-	1/6 10K OHM J	
20	C CERA	CC533	CCXF1H104Z	50V F 0.1MF Z		96	R CARBON FILM	R515	RD-AZ105J-	1/6 1M OHM J	
21	C CERA	CC534	CCXB1H102K	50V B 1000PF K (TAPPING)		97	R CARBON FILM	R516-519	RD-AZ104J-	1/6 100K OHM J	
22	C CERA	CC535-536	CCXF1H104Z	50V F 0.1MF Z		98	R CARBON FILM	R520-528	RD-AZ472J-	1/6 4.7K OHM J	
23	C CERA	CC537	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		99	R CARBON FILM	R529-532	RD-AZ473J-	1/6 47K OHM J	
24	C CERA	CC538-539	CCXB1H222K	50V B 2200PF K (TAPPING)		100	R CARBON FILM	R533	RD-AZ103J-	1/6 10K OHM J	
25	C CERA	CC540	CXCH1H209M	50V CH 2PF M (TAPPING)		101	R CARBON FILM	R535	RD-AZ103J-	1/6 10K OHM J	
26	C CERA	CC541	CXCH1H270J	50V CH 27PF J (TAPPING)		102	R CARBON FILM	R537-538	RD-AZ222J-	1/6 2.2K OHM J	
27	C CERA	CC542	CCXB1H102K	50V B 1000PF K (TAPPING)		103	R CARBON FILM	R540	RD-AZ223J-	1/6 22K OHM J	
28	C CERA	CC543-544	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		104	R CARBON FILM	R541	RD-AZ823J-	1/6 82K OHM J	
29	C CERA	CC545	CCXF1H333Z	50V F 0.033MF Z (TAPPING)		105	R CARBON FILM	R542	RD-AZ473J-	1/6 47K OHM J	
30	C CERA	CC546	CCXF1H473Z	50V F 0.047MF Z (TAPPING)		106	R CARBON FILM	R543	RD-AZ124J-	1/6 120K OHM J	
31	C CERA	CC547-548	CCXF1H104Z	50V F 0.1MF Z		107	R CARBON FILM	R544	RD-AZ104J-	1/6 100K OHM J	
32	C CERA	CC560-561	CCXF1H104Z	50V F 0.1MF Z		108	R CARBON FILM	R545	RD-AZ333J-	1/6 33K OHM J	
33	C ELECTRO	CE500-507	CEXF1C102V	16V RSS 1000MF (10X20) TP		109	R CARBON FILM	R546	RD-AZ104J-	1/6 100K OHM J	
34	C ELECTRO	CE511	CEXF1H100V	50V RSS 10MF (5X11) TP		110	R CARBON FILM	R547	RD-AZ473J-	1/6 47K OHM J	
35	C ELECTRO	CE513-516	CEXF1H100V	50V RSS 10MF (5X11) TP		111	R CARBON FILM	R548	RD-AZ823J-	1/6 82K OHM J	
36	C ELECTRO	CE520-528	CEXF1H100V	50V RSS 10MF (5X11) TP		112	R CARBON FILM	R549-550	RD-AZ103J-	1/6 10K OHM J	
37	CONN AS	CN500	9738840800	FFC 16P P1.0X250MM R		113	R CARBON FILM	R552	RD-AZ823J-	1/6 82K OHM J	
38	CONN AS	CN503	9728812200	FFC 17P P=1.25X1500M R		114	R CARBON FILM	R553	RD-AZ223J-	1/6 22K OHM J	
39	CONN WAFER	CW500	9CD6259300	52807-1610		115	R CARBON FILM	R554	RD-AZ822J-	1/6 8.2K OHM J	
40	CONN AS	CW501	9738832900	#30 UL1007 6P 170 P=2.0		116	R CARBON FILM	R555	RD-AZ153J-	1/6 15K OHM J	
41	CONN WAFER	CW503	9CD6263900	52045-1745		117	R CARBON FILM	R556	RD-AZ105J-	1/6 1M OHM J	
42	CONN WAFER	CW504	9CD6259400	2001-WS-12P		118	R CARBON FILM	R557	RD-AZ123J-	1/6 12K OHM J	
43	CONN AS	CW509	9728814100	UL2547 1533 6P 150MM		119	R CARBON FILM	R558	RD-AZ184J-	1/6 180K OHM J	
44	CONN AS	CW510	9738841800	#26 400MM 3P 2.5P		120	R CARBON FILM	R559	RD-AZ153J-	1/6 15K OHM J	
45	DIODE ZENER	DZ500	DZTZ5R6B-	UZ-5.6B		121	R CARBON FILM	R560	RD-AZ220J-	1/6 22 OHM J	
46	DIODE ZENER	DZ502	DZTZ5R6B-	UZ-5.6B		122	R CARBON FILM	R561	RD-AZ101J-	1/6 100 OHM J	
47	DIODE ZENER	DZ503	DZTZ4R7B-	MTZ 4.7B 26MM TAPING		123	R CARBON FILM	R562	RD-AZ823J-	1/6 82K OHM J	
48	IC SSP	IC501	1S1L9226-	S1L9226		124	R CARBON FILM	R563-566	RD-AZ563J-	1/6 56K OHM J	
49	IC DSP	IC502	1S5L9290-	S5L9290		125	R CARBON FILM	R567	RD-AZ823J-	1/6 82K OHM J	
50	IC	IC503	174HCT04AF	74HCT04		126	R CARBON FILM	R570	RD-AZ334J-	1/6 330K OHM J	
51	IC CHIP	IC504	1KA9258D-	KA9258D		127	R CARBON FILM	R571	RD-AZ104J-	1/6 100K OHM J	
52	IC	IC505-506	1DBL2084-	DBL2084(D/W)		128	R CARBON FILM	R572	RD-AZ334J-	1/6 330K OHM J	
53	WIRE JUMPER	JW501	W581GY1005	AWG22 1/0.65 SN 10 AUTO		129	R CARBON FILM	R573	RD-AZ104J-	1/6 100K OHM J	
54	WIRE JUMPER	JW502	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		130	R CARBON FILM	R574	RD-AZ101J-	1/6 100 OHM J	
55	WIRE JUMPER	JW503	W581GY6095	AWG22 1/0.65 SN 6 AUTO		131	R CARBON FILM	R575-576	RD-AZ104J-	1/6 100K OHM J	
56	WIRE JUMPER	JW504	W581GY1005	AWG22 1/0.65 SN 10 AUTO		132	R CARBON FILM	R577	RD-AZ472J-	1/6 4.7K OHM J	
57	WIRE JUMPER	JW505	W581GY6095	AWG22 1/0.65 SN 6 AUTO		133	R CARBON FILM	R578-579	RD-AZ104J-	1/6 100K OHM J	
58	WIRE JUMPER	JW506-511	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		134	R CARBON FILM	R592-593	RD-2Z100J-	1/2 10 OHM J	
59	WIRE JUMPER	JW512	W581GY6095	AWG22 1/0.65 SN 6 AUTO		135	RESONATOR CERA	XC501	5PCST16R93	CSTLS16M9X55-B0	
60	WIRE JUMPER	JW513	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		1	PCB FRONT AS	12000	9CDC059701	AMI-926RW	
61	WIRE JUMPER	JW514-515	W581GY1005	AWG22 1/0.65 SN 10 AUTO		2	PCB FRONT	B001	9CD6585500	247X139X1.6T	
62	WIRE JUMPER	JW516-517	W581GY6095	AWG22 1/0.65 SN 6 AUTO		3	C CERA	CC701	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
63	WIRE JUMPER	JW518	W581GY1005	AWG22 1/0.65 SN 10 AUTO		4	C CERA	CC702	CCXF1H104Z	50V F 0.1MF Z	
64	WIRE JUMPER	JW520	W581GY1005	AWG22 1/0.65 SN 10 AUTO		5	C CERA	CC703	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
65	WIRE JUMPER	JW521	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		6	C CERA	CC704-705	CCXF1H104Z	50V F 0.1MF Z	
66	WIRE JUMPER	JW524-525	W581GY1005	AWG22 1/0.65 SN 10 AUTO		7	C CERA	CC706-707	CZCH1H101J	CH 50V 100PF J AXIAL 52MM	
67	WIRE JUMPER	JW526	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		8	C CERA	CC708	CCXF1H104Z	50V F 0.1MF Z	
68	WIRE JUMPER	JW527	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		9	C CERA	CC709	CCZB1H102K	50V B 1000PF K AXIAL	
69	WIRE JUMPER	JW528	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		10	C CERA	CC710	CCXF1H104Z	50V F 0.1MF Z	
70	WIRE JUMPER	JW529	W581GY6095	AWG22 1/0.65 SN 6 AUTO		11	C CERA	CC711	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
71	WIRE JUMPER	JW530-531	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		12	C CERA	CC712	CCXF1H104Z	50V F 0.1MF Z	
72	WIRE JUMPER	JW532	W581GY1005	AWG22 1/0.65 SN 10 AUTO		13	C CERA	CC713	CZCH1H150J	50V CH 15PF J	
73	WIRE JUMPER	JW533	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		14	C CERA	CC714	CZCH1H180J	50V CH 18PF J	
74	WIRE JUMPER	JW534	W581GY6095	AWG22 1/0.65 SN 6 AUTO		15	C CERA	CC715-716	CZCH1H330J	CH 50V 33PF J AXIAL 52MM	
75	WIRE JUMPER	JW535-539	W581GY1005	AWG22 1/0.65 SN 10 AUTO		16	C CERA	CC717	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
76	WIRE JUMPER	JW540	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		17	C CERA	CC718	CCXF1H104Z	50V F 0.1MF Z	

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
18	C CERA	CC719	CZCH1H330J	CH 50V 33PF J AXIAL 52MM		94	WIRE JUMPER	JW775	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
19	C CERA	CC720	CCXF1H223Z	50V F 0.022MF Z (TAPPING)		95	WIRE JUMPER	JW776	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
20	C CERA	CC721	CZCH1H101J	CH 50V 100PF J AXL 52MM		96	WIRE JUMPER	JW777	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
21	C CERA	CC722	CCZB1H102K	50V B 1000PF K AXIAL		97	WIRE JUMPER	JW778	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
22	C CERA	CC723	CZCH1H101J	CH 50V 100PF J AXL 52MM		98	WIRE JUMPER	JW779-780	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
23	C CERA	CC724-725	CCXF1H104Z	50V F 0.1MF Z		99	WIRE JUMPER	JW781-783	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
24	C CERA	CC726-727	CCXF1H223Z	50V F 0.022MF Z (TAPPING)		100	WIRE JUMPER	JW784	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
25	C ELECTRO	CE701	CEXF1H109V	50V RSS 1MF (5X11) TP		101	WIRE JUMPER	JW785-786	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
26	C ELECTRO	CE702	CEYF1A102V	10V 1000MF RSS 10X16		102	WIRE JUMPER	JW787	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
27	C ELECTRO	CE703	CEXF1E101V	25V RSS 100MF (6.3X11) TP		103	WIRE JUMPER	JW788	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
28	C ELECTRO	CE704	CEXF1H100V	50V RSS 10MF (5X11) TP		104	WIRE JUMPER	JW789	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
29	C ELECTRO	CE705-706	CEXF1H229V	50V RSS 2.2MF (5X11) TP		105	WIRE JUMPER	JW790-791	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
30	CONN AS	CN508	9728812200	FFC 17P P=1.25X1500M R		106	WIRE JUMPER	JW792-795	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
31	CONN AS	CN701	9738836200	UL2468 160MM P2.0 8P/2P		107	LED	LD701-702	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1	
32	CONN AS	CN702	9728812100	FFC 16P P1.25X150MM R		108	LED	LD703	DLTL16KEE-	LTL-16KEE(RED)PI3.1	
33	CONN WAFER	CW400	9736407700	52084-1310 13P BOTTOM		109	LED	LD704-705	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1	
34	CONN WAFER	CW401	9736407900	52084-1010 10P BOTTOM		110	LED	LD706	DLTL16KEE-	LTL-16KEE(RED)PI3.1	
35	CONN WAFER	CW508	9CD6261700	52492-1720 BOTTOM ENTRY		111	LED	LD707-708	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1	
36	CONN WAFER	CW702	9CD6259700	52044-1645		112	LED	LD709	DLTL16KEE-	LTL-16KEE(RED)PI3.1	
37	DIODE	D701-706	DZN4148---	1N4148 AUTO 52MM		113	LED	LD710-711	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1	
38	WIRE JUMPER	D708	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		114	LED	LD712	DLTL16KEE-	LTL-16KEE(RED)PI3.1	
39	DIODE	D709	DZN4148---	1N4148 AUTO 52MM		115	LED	LD716	DLTL307EE-	LTL-307EE(RED)PI5	
40	VFD	FD701	DBJ703GNK-	BJ703GNK		116	TR	Q701	TKRC107M--	KRC107-M TAPPING(KSR1006)	
41	IC	IC701	1M38199RWL	U-COM M38199RW 926LW		117	TR	Q702-703	TKRC111M--	KRC111M (KSR1010)	
42	IC MEMORY	IC702	124LC04B--	24LC04B		118	TR	Q704	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	
43	IC	IC703	1MSGEQ5A--	MSGEQ5A		119	TR	Q705-707	TZTA1273Y-	KTA1273Y(966Y)	
44	IC	IC704	1BU4094BCF	BU4094BCF(SOP16)		120	TR	Q708-710	TKRC107M--	KRC107-M TAPPING(KSR1006)	
45	IC PRE AMP	IC705	1TM97CT38P	LTM97CT-38P		121	TR	Q711-715	TKRA111M--	KRA111-M TAPPING(KSR2010)	
46	WIRE JUMPER	JW701	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		122	TR	Q716-717	TKRC107M--	KRC107-M TAPPING(KSR1006)	
47	WIRE JUMPER	JW702-704	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO		123	R CARBON FILM	R301	RD-AZ101J-	1/6 100 OHM J	
48	WIRE JUMPER	JW705-706	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		124	R CARBON FILM	R302	RD-AZ151J-	1/6 150 OHM J	
49	WIRE JUMPER	JW707-710	W581GY1505	AWG22 1/0.65 GY 15 AUTO		125	R CARBON FILM	R303	RD-AZ181J-	1/6 180 OHM J	
50	WIRE JUMPER	JW711	W581GY1005	AWG22 1/0.65 SN 10 AUTO		126	R CARBON FILM	R304	RD-AZ271J-	1/6 270 OHM J	
51	WIRE JUMPER	JW712	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		127	R CARBON FILM	R305	RD-AZ331J-	1/6 330 OHM J	
52	WIRE JUMPER	JW713	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		128	R CARBON FILM	R306	RD-AZ391J-	1/6 390 OHM J	
53	WIRE JUMPER	JW714	W581GY1005	AWG22 1/0.65 SN 10 AUTO		129	R CARBON FILM	R307	RD-AZ471J-	1/6 470 OHM J	
54	WIRE JUMPER	JW715	W581GY1505	AWG22 1/0.65 GY 15 AUTO		130	R CARBON FILM	R308	RD-AZ561J-	1/6 560 OHM J	
55	WIRE JUMPER	JW716	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		131	R CARBON FILM	R309	RD-AZ821J-	1/6 820 OHM J	
56	WIRE JUMPER	JW717-718	W581GY1005	AWG22 1/0.65 SN 10 AUTO		132	R CARBON FILM	R310	RD-AZ152J-	1/6 1.5K OHM J	
57	WIRE JUMPER	JW719-723	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		133	R CARBON FILM	R311	RD-AZ272J-	1/6 2.7K OHM J	
58	WIRE JUMPER	JW724-725	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		134	R CARBON FILM	R312	RD-AZ472J-	1/6 4.7K OHM J	
59	WIRE JUMPER	JW726	W581GY1005	AWG22 1/0.65 SN 10 AUTO		135	R CARBON FILM	R313	RD-AZ101J-	1/6 100 OHM J	
60	WIRE JUMPER	JW727	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		136	R CARBON FILM	R314	RD-AZ151J-	1/6 150 OHM J	
61	WIRE JUMPER	JW728	W581GY6095	AWG22 1/0.65 SN 6 AUTO		137	R CARBON FILM	R315	RD-AZ181J-	1/6 180 OHM J	
62	WIRE JUMPER	JW729	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		138	R CARBON FILM	R316	RD-AZ271J-	1/6 270 OHM J	
63	WIRE JUMPER	JW730	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		139	R CARBON FILM	R317	RD-AZ331J-	1/6 330 OHM J	
64	WIRE JUMPER	JW731	W581GY1005	AWG22 1/0.65 SN 10 AUTO		140	R CARBON FILM	R318	RD-AZ391J-	1/6 390 OHM J	
65	WIRE JUMPER	JW732	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		141	R CARBON FILM	R319	RD-AZ471J-	1/6 470 OHM J	
66	WIRE JUMPER	JW733	W581GY1005	AWG22 1/0.65 SN 10 AUTO		142	R CARBON FILM	R320	RD-AZ561J-	1/6 560 OHM J	
67	WIRE JUMPER	JW734-736	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		143	R CARBON FILM	R321	RD-AZ821J-	1/6 820 OHM J	
68	WIRE JUMPER	JW737-738	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		144	R CARBON FILM	R322	RD-AZ152J-	1/6 1.5K OHM J	
69	WIRE JUMPER	JW739	W581GY1005	AWG22 1/0.65 SN 10 AUTO		145	R CARBON FILM	R323	RD-AZ272J-	1/6 2.7K OHM J	
70	WIRE JUMPER	JW740	W581GY1505	AWG22 1/0.65 GY 15 AUTO		146	R CARBON FILM	R324	RD-AZ472J-	1/6 4.7K OHM J	
71	WIRE JUMPER	JW741	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		147	R CARBON FILM	R325	RD-AZ101J-	1/6 100 OHM J	
72	WIRE JUMPER	JW742	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		148	R CARBON FILM	R326	RD-AZ151J-	1/6 150 OHM J	
73	WIRE JUMPER	JW745	W581GY6095	AWG22 1/0.65 SN 6 AUTO		149	R CARBON FILM	R327	RD-AZ181J-	1/6 180 OHM J	
74	WIRE JUMPER	JW746	W581GY1005	AWG22 1/0.65 SN 10 AUTO		150	R CARBON FILM	R328	RD-AZ271J-	1/6 270 OHM J	
75	WIRE JUMPER	JW747	W581GY6095	AWG22 1/0.65 SN 6 AUTO		151	R CARBON FILM	R329	RD-AZ331J-	1/6 330 OHM J	
76	WIRE JUMPER	JW748	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		152	R CARBON FILM	R330	RD-AZ391J-	1/6 390 OHM J	
77	WIRE JUMPER	JW749-751	W581GY1005	AWG22 1/0.65 SN 10 AUTO		153	R CARBON FILM	R331	RD-AZ471J-	1/6 470 OHM J	
78	WIRE JUMPER	JW752-753	W581GY6095	AWG22 1/0.65 SN 6 AUTO		154	R CARBON FILM	R332	RD-AZ561J-	1/6 560 OHM J	
79	WIRE JUMPER	JW754	W581GY1005	AWG22 1/0.65 SN 10 AUTO		155	R CARBON FILM	R333	RD-AZ821J-	1/6 820 OHM J	
80	WIRE JUMPER	JW755	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		156	R CARBON FILM	R701-702	RD-AZ103J-	1/6 10K OHM J	
81	WIRE JUMPER	JW756	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		157	R CARBON FILM	R703-705	RD-AZ683J-	1/6 68K OHM J	
82	WIRE JUMPER	JW757	W581GY1005	AWG22 1/0.65 SN 10 AUTO		158	R CARBON FILM	R706-712	RD-AZ103J-	1/6 10K OHM J	
83	WIRE JUMPER	JW758-760	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		159	R CARBON FILM	R713-714	RD-AZ473J-	1/6 4.7K OHM J	
84	WIRE JUMPER	JW761	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		160	R CARBON FILM	R715-717	RD-AZ152J-	1/6 1.5K OHM J	
85	WIRE JUMPER	JW762-763	W581GY1005	AWG22 1/0.65 SN 10 AUTO		161	R CARBON FILM	R718-719	RD-AZ472J-	1/6 4.7K OHM J	
86	WIRE JUMPER	JW764	W581GY1505	AWG22 1/0.65 GY 15 AUTO		162	R CARBON FILM	R720	RD-AZ122J-	1/6 1.2K OHM J	
87	WIRE JUMPER	JW765	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		163	R CARBON FILM	R721	RD-AZ223J-	1/6 22K OHM J	
88	WIRE JUMPER	JW766-767	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		164	R CARBON FILM	R722	RD-AZ333J-	1/6 33K OHM J	
89	WIRE JUMPER	JW768	W581GY1005	AWG22 1/0.65 SN 10 AUTO		165	R CARBON FILM	R723	RD-AZ683J-	1/6 68K OHM J	
90	WIRE JUMPER	JW769	W581GY6095	AWG22 1/0.65 SN 6 AUTO		166	R CARBON FILM	R724	RD-AZ393J-	1/6 39K OHM J	
91	WIRE JUMPER	JW770-771	W581GY1005	AWG22 1/0.65 SN 10 AUTO		167	R CARBON FILM	R725	RD-AZ333J-	1/6 33K OHM J	
92	WIRE JUMPER	JW772	W581GY1505	AWG22 1/0.65 GY 15 AUTO		168	R CARBON FILM	R726	RD-AZ103J-	1/6 10K OHM J	
93	WIRE JUMPER	JW774	W581GY1005	AWG22 1/0.65 SN 10 AUTO		169	R CARBON FILM	R727	RD-AZ333J-	1/6 33K OHM J	

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
170	R CARBON FILM	R728-732	RD-AZ103J-	1/6 10K OHM J		29	C CERA	CC401-402	CZCH1E101J	CH 25V 100PF J AXL 52MM	
171	R CARBON FILM	R733	RD-AZ102J-	1/6 1K OHM J		30	C CERA	CC403	CCXF1H104Z	50V F 0.1MF Z	
172	R CARBON FILM	R734	RD-AZ103J-	1/6 10K OHM J		31	C CERA	CC404	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
173	R CARBON FILM	R735-736	RD-AZ102J-	1/6 1K OHM J		32	C CERA	CC405-406	CZCH1E101J	CH 25V 100PF J AXL 52MM	
174	R CARBON FILM	R737	RD-AZ103J-	1/6 10K OHM J		33	C CERA	CC409-410	CZCH1E101J	CH 25V 100PF J AXL 52MM	
175	R CARBON FILM	R738	RD-AZ102J-	1/6 1K OHM J		34	C CERA	CC411-412	CCXB1H102K	50V B 1000PF K (TAPPING)	
176	R CARBON FILM	R739	RD-AZ472J-	1/6 4.7K OHM J		35	C CERA	CC803-804	CCZB1E221K	25V B 220PF K (AXIAL)	
177	R CARBON FILM	R740	RD-AZ102J-	1/6 1K OHM J		36	C CERA	CC805-806	CCXB1H102K	50V B 1000PF K (TAPPING)	
178	R CARBON FILM	R741	RD-AZ182J-	1/6 1.8K OHM J		37	C CERA	CC807-808	CZCH1E309J	CH 25V 3PF J (AXIAL)	
179	R CARBON FILM	R742	RD-AZ102J-	1/6 1K OHM J		38	C CERA	CC817-819	CCZB1E472K	25V B 4700PF K (AXIAL)	
180	R CARBON FILM	R743	RD-AZ222J-	1/6 2.2K OHM J		39	C CERA	CC820	CCXF1H333Z	50V F 0.033MF Z (TAPPING)	
181	R CARBON FILM	R744	RD-AZ229J-	1/4 2.2 OHM J		40	C CERA	CC901-902	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
182	R CARBON FILM	R746	RD-AZ102J-	1/6 1K OHM J		41	C CERA	CC903	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
183	R CARBON FILM	R747	RD-AZ222J-	1/6 2.2K OHM J		42	C CERA	CC904-905	CCXF1H104Z	50V F 0.1MF Z	
184	R CARBON FILM	R748	RD-AZ102J-	1/6 1K OHM J		43	C CERA	CC906	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
185	R CARBON FILM	R749	RD-AZ222J-	1/6 2.2K OHM J		44	C CERA	CC907-910	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	
186	R CARBON FILM	R750	RD-AZ229J-	1/4 2.2 OHM J		45	C ELECTRO	CE001	CEXF1E470V	25V RSS 47MF (5X11) TP	
187	R CARBON FILM	R751	RD-AZ103J-	1/6 10K OHM J		46	C ELECTRO	CE101	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
188	R CARBON FILM	R752	RD-AZ102J-	1/6 1K OHM J		47	C ELECTRO	CE102	CEXF1E221V	25V RSS 220MF (8X11.5) TP	
189	R CARBON FILM	R753	RD-AZ224J-	1/6 220K OHM J		48	C ELECTRO	CE201	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
190	R CARBON FILM	R754-755	RD-AZ101J-	1/6 100 OHM J		49	C ELECTRO	CE202	CEXF1H339V	50V RSS 3.3MF (5X11) TP	
191	R CARBON FILM	R756	RD-AZ102J-	1/6 1K OHM J		50	C ELECTRO	CE203	CEXF1E470V	25V RSS 47MF (5X11) TP	
192	R CARBON FILM	R757	RD-AZ224J-	1/6 220K OHM J		51	C ELECTRO	CE204	CEXF1H220V	50V RSS 22MF (5X11) TP	
193	R CARBON FILM	R758	RD-AZ101J-	1/6 100 OHM J		52	C ELECTRO	CE205	CEXF1H109V	50V RSS 1MF (5X11) TP	
194	R CARBON FILM	R759	RD-AZ104J-	1/6 100K OHM J		53	C ELECTRO	CE206	CEXF1H100V	50V RSS 10MF (5X11) TP	
195	R CARBON FILM	R760	RD-AZ103J-	1/6 10K OHM J		54	C ELECTRO	CE207-211	CEXF1H109V	50V RSS 1MF (5X11) TP	
196	R CARBON FILM	R761	RD-AZ106J-	1/6 10M OHM J		55	C ELECTRO	CE212	CEXF1H228V	50V RSS 0.22MF (5X11) TP	
197	R CARBON FILM	R762	RD-AZ334J-	1/6 330K OHM J		56	C ELECTRO	CE213	CEXF1E221V	25V RSS 220MF (8X11.5) TP	
198	R CARBON FILM	R763	RD-AZ101J-	1/6 100 OHM J		57	C ELECTRO	CE214	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
199	R CARBON FILM	R764	RD-AZ100J-	1/6 10 OHM J		58	C ELECTRO	CE270	CEXF1H100V	50V RSS 10MF (5X11) TP	
200	R CARBON FILM	R765	RD-AZ390J-	1/6 39 OHM J		59	C ELECTRO	CE272	CEXF1E470V	25V RSS 47MF (5X11) TP	
201	R CARBON FILM	R766	RD-AZ391J-	1/6 390 OHM J		60	C ELECTRO	CE401-404	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
202	R CARBON FILM	R767	RD-AZ271J-	1/6 270 OHM J		61	C ELECTRO	CE405-406	CEXF1H109V	50V RSS 1MF (5X11) TP	
203	R CARBON FILM	R768	RD-AZ391J-	1/6 390 OHM J		62	C ELECTRO	CE407-408	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
204	R CARBON FILM	R769	RD-AZ271J-	1/6 270 OHM J		63	C ELECTRO	CE409	CEXF1E221V	25V RSS 220MF (8X11.5) TP	
205	R CARBON FILM	R770	RD-AZ391J-	1/6 390 OHM J		64	C ELECTRO	CE410	CEXF1H100V	50V RSS 10MF (5X11) TP	
206	R CARBON FILM	R771	RD-AZ271J-	1/6 270 OHM J		65	C ELECTRO	CE411-420	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
207	R CARBON FILM	R772	RD-AZ391J-	1/6 390 OHM J		66	C ELECTRO	CE421	CEXF1E470V	25V RSS 47MF (5X11) TP	
208	R CARBON FILM	R773	RD-AZ271J-	1/6 270 OHM J		67	C ELECTRO	CE422	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
209	R CARBON FILM	R774	RD-AZ561J-	1/6 560 OHM J		68	C ELECTRO	CE423	CEXF1E470V	25V RSS 47MF (5X11) TP	
210	R CARBON FILM	R775	RD-AZ392J-	1/6 3.9K OHM J		69	C ELECTRO	CE424	CEXF1H109V	50V RSS 1MF (5X11) TP	
211	SW TACT	SW701-705	5S50101267	SKHV 10920A, 5MM		70	C ELECTRO	CE801-802	CEXF1K562V	RSS 80V 5600MF (5600/75V)	
212	SW TACT	SW709-713	5S50101267	SKHV 10920A, 5MM		71	C ELECTRO	CE803-804	CEXF1H332V	RSS 50V 3300MF 26*41	
213	SW TACT	SW715-728	5S50101267	SKHV 10920A, 5MM		72	C ELECTRO	CE805-806	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
214	SW TACT	SW735	5S50101267	SKHV 10920A, 5MM		73	C ELECTRO	CE807-808	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
215	SW ENCORDER	VR701	5SH162401-	EC16B24204 24P W/DETENT		74	C ELECTRO	CE809-810	CEXF1J101V	63V RSS 100MF (6.3X11) TP	
216	RESONATOR	XC701	5PCSABMTZ-	CSALA8M00T55-B0 (8.00MTZ)		75	C ELECTRO	CE812-813	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
217	X-TAL	XC702	5XA32R768-	DT-38 32.768KHZ 20PPM		76	C ELECTRO	CE815-816	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
1	PCB MAIN AS	10000	9CDC056903	AMI-926RW		77	C ELECTRO	CE817-819	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
2	PCB MAIN	B001	9CD6582105	247X197		78	C ELECTRO	CE901-904	CEXF1E470V	25V RSS 47MF (5X11) TP	
3	C CERA	CC000	CCXF1H473Z	50V F 0.047MF Z (TAPPING)		79	C ELECTRO	CE905	CEXF1E102V	25V RSS 1000MF (13X20) BK	
4	C CERA	CC001	CCXF1H102Z	50V F 1000PF Z (TAPPING)		80	C ELECTRO	CE906	CEYF1E471V	25V RSS 470MF (10X16)	
5	C CERA	CC002	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		81	C ELECTRO	CE907	CEXF1E470V	25V RSS 47MF (5X11) TP	
6	C CERA	CC004	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		82	C ELECTRO	CE908	CEXF1H470V	50V RSS 47MF (6.3X11) TP	
7	C CERA	CC005-006	CCXF1H104Z	50V F 0.1MF Z		83	C ELECTRO	CE909	CEXF1H101V	50V RSS 100MF (8X11.5) TP	
8	C CERA	CC101	CCXF1H104Z	50V F 0.1MF Z		84	C ELECTRO	CE910-911	CEXF1H470V	50V RSS 47MF (6.3X11) TP	
9	C CERA	CC102	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		85	C ELECTRO	CE912-913	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
10	C CERA	CC103	CCXF1H104Z	50V F 0.1MF Z		86	C ELECTRO	CE917	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
11	C CERA	CC104	CZCH1E120J	CH 25V 12PF J		87	FILTER CERA	CF001-002	5PE107MJA- SFE	10.7MHZ RED	
12	C CERA	CC201	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		88	C MYLAR	CM201	CMXM1H223J	50V 0.022MF J	
13	C CERA	CC202	CCXF1H104Z	50V F 0.1MF Z		89	C MYLAR	CM202-203	CMXM1H103J	50V 0.01MF J (TP)	
14	C CERA	CC203-204	CZCH1E101J	CH 25V 100PF J AXL 52MM		90	C MYLAR	CM208-209	CMXM1H562J	50V 5600 PF J	
15	C CERA	CC205-207	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		91	C MYLAR	CM405-408	CMXM1H104J	50V 0.1MF J	
16	C CERA	CC208	CCZB1E471K	25V B 470PF K (AXIAL)		92	C MYLAR	CM409-410	CMXM1H562J	50V 5600 PF J	
17	C CERA	CC209	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		93	C MYLAR	CM801-802	CMXM2A273J	100V 0.027MF J (TP)	
18	C MYLAR	CC210-211	CMXM1H152K	50V 1500 PF K		94	C MYLAR	CM803-804	CMXM2A102J	100V 1000PF J (TP)	
19	C CERA	CC212	CCXF1H473Z	50V F 0.047MF Z (TAPPING)		95	C MYLAR	CM805-806	CMXM2A104J	100V 0.1MF J (TP)	
20	C CERA	CC213	CCZB1E472K	25V B 4700PF K (AXIAL)		96	C MYLAR	CM807-808	CMXM2A473J	100V 0.047MF J (TP)	
21	C CERA	CC251-252	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		97	C MYLAR	CM809	CMXM2A104J	100V 0.1MF J (TP)	
22	C CERA	CC253-254	CCXF1H102Z	50V F 1000PF Z (TAPPING)		98	C MYLAR	CM905-906	CMXM2A103J	100V 0.01MF J (TP)	
23	C CERA	CC255-256	CZCH1E330J	CH 25V 33PF J AXIAL 52MM		99	C MYLAR	CM907	CMXM2A104J	100V 0.1MF J (TP)	
24	C CERA	CC270	CZCH1E331J	CH 25V 330PF J AXIAL 52MM		100	CONN AS	CN401	9736407600	PIN BASE 53095-1310 13P	
25	C CERA	CC271	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		101	CONN PIN	CN402	9736407800	53095-1010 10PIN ANGLE	
26	C CERA	CC272	CZCH1E220J	CH 25V 22PF J (AXIAL)		102	CONN WAFER	CN902	9728812700	#22 12P P2.5 350 BOARD-IN	
27	C CERA	CC274	CCXF1H103Z	50V F 0.01MF Z (TAPPING)		103	CONN WAFER	CW101	9CD6258800	2P S2B-XH-A	
28	C CERA	CC276-277	CZCH1E220J	CH 25V 22PF J (AXIAL)		104	CONN AS	CW509	9728814100	UL2547 1533 6P 150MM	

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
105	CONN AS	CW603	9728814000	UL2547 1533 8P 200MM		181	WIRE JUMPER	JW434	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO	
106	DIODE	D201	DZN4148---	1N4148 AUTO 52MM		182	WIRE JUMPER	JW435	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
107	DIODE	D401-403	DZN4148---	1N4148 AUTO 52MM		183	WIRE JUMPER	JW436-438	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
108	WIRE JUMPER	D404	W581GY1005	AWG22 1/0.65 SN 10 AUTO		184	WIRE JUMPER	JW439	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
109	DIODE	D801-809	DZN4148---	1N4148 AUTO 52MM		185	WIRE JUMPER	JW440	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO	
110	DIODE	D901-904	DRL202----	RL202		186	WIRE JUMPER	JW441-443	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
111	DIODE	D905-907	D1N4001---	1N4001		187	WIRE JUMPER	JW444	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
112	DIODE	D910	DZN4148---	1N4148 AUTO 52MM		188	WIRE JUMPER	JW445-446	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
113	DIODE ZENER	DZ801-802	DZT28R2B---	MTZ 8.2B		189	WIRE JUMPER	JW447	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
114	DIODE ZENER	DZ901	DZTZ12B---	MTZ 12V 26MM TAPPING		190	WIRE JUMPER	JW448	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
115	DIODE ZENER	DZ902	DZTZ33B---	MTZ-33B		191	WIRE JUMPER	JW449-450	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
116	DIODE ZENER	DZ903	DZTZ6R2B---	MTZ6.2B		192	WIRE JUMPER	JW451	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO	
117	DIODE ZENER	DZ904	DZTZ3R6B---	MTZ-3.6 52MM TAPPING		193	WIRE JUMPER	JW452-453	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
118	IC	IC201	1BA1450S--	BA1450S		194	WIRE JUMPER	JW454	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
119	IC PLL	IC202	1LC72131--	LC72131		195	WIRE JUMPER	JW455	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
120	IC	IC204	1LC72723M-	LC72723M		196	WIRE JUMPER	JW456	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
121	IC	IC401	1TDA7440D-	TDA7440D		197	WIRE JUMPER	JW457	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
122	IC	IC402	1BA4560N--	BA4560N(H/P AMP)		198	WIRE JUMPER	JW801	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
123	IC	IC801	1STK411230	STK411-230E		199	WIRE JUMPER	JW802	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
124	IC	IC901	1L4959----	L4959		200	WIRE JUMPER	JW803-804	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
125	JACK ANT	J001	9736321900	PAT645		201	WIRE JUMPER	JW806	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
126	JACK RCA	J401	9CD6313700	S-436P		202	WIRE JUMPER	JW807	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
127	JACK HEADPHONE	J801	9766319501	HTJ-064-05B GOLD		203	WIRE JUMPER	JW808	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
128	JACK SPEAKER	J802	9736320500	CJ-9007-040		204	WIRE JUMPER	JW809	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
129	WIRE JUMPER	JW001	W581GY6095	AWG22 1/0.65 SN 6 AUTO		205	WIRE JUMPER	JW810-816	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
130	WIRE JUMPER	JW101	W581GY6095	AWG22 1/0.65 SN 6 AUTO		206	WIRE JUMPER	JW817	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
131	COIL PEAKING	JW103	5CPZ100K02	10UH K (AXIAL 3.5MM)		207	WIRE JUMPER	JW818	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
132	WIRE JUMPER	JW104	W581GY6095	AWG22 1/0.65 SN 6 AUTO		208	WIRE JUMPER	JW819	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
133	WIRE JUMPER	JW105	W581GY1005	AWG22 1/0.65 SN 10 AUTO		209	WIRE JUMPER	JW820-822	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
134	WIRE JUMPER	JW106	W581GY6095	AWG22 1/0.65 SN 6 AUTO		210	WIRE JUMPER	JW823-824	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
135	WIRE JUMPER	JW108-109	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		211	WIRE JUMPER	JW825-828	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
136	WIRE JUMPER	JW110	W581GY6095	AWG22 1/0.65 SN 6 AUTO		212	WIRE JUMPER	JW831	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
137	WIRE JUMPER	JW111	W581GY1505	AWG22 1/0.65 GY 15 AUTO		213	WIRE JUMPER	JW832-833	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
138	WIRE JUMPER	JW112	W581GY6095	AWG22 1/0.65 SN 6 AUTO		214	WIRE JUMPER	JW834	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
139	WIRE JUMPER	JW114-117	W581GY6095	AWG22 1/0.65 SN 6 AUTO		215	WIRE JUMPER	JW835-836	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
140	WIRE JUMPER	JW154	W581GY6095	AWG22 1/0.65 SN 6 AUTO		216	WIRE JUMPER	JW839	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
141	WIRE JUMPER	JW201	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		217	WIRE JUMPER	JW840	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
142	WIRE JUMPER	JW202	W581GY1005	AWG22 1/0.65 SN 10 AUTO		218	WIRE JUMPER	JW841	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
143	WIRE JUMPER	JW203-204	W581GY6095	AWG22 1/0.65 SN 6 AUTO		219	WIRE JUMPER	JW842-843	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
144	WIRE JUMPER	JW205	W581GY1505	AWG22 1/0.65 GY 15 AUTO		220	WIRE JUMPER	JW844	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
145	WIRE JUMPER	JW206	W581GY6095	AWG22 1/0.65 SN 6 AUTO		221	WIRE JUMPER	JW845-846	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
146	WIRE JUMPER	JW207	W581GY1505	AWG22 1/0.65 GY 15 AUTO		222	WIRE JUMPER	JW847	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
147	WIRE JUMPER	JW208-212	W581GY6095	AWG22 1/0.65 SN 6 AUTO		223	WIRE JUMPER	JW901-906	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
148	WIRE JUMPER	JW213	W581GY1005	AWG22 1/0.65 SN 10 AUTO		224	WIRE JUMPER	JW907	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
149	WIRE JUMPER	JW214	W581GY6095	AWG22 1/0.65 SN 6 AUTO		225	WIRE JUMPER	JW908	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
150	WIRE JUMPER	JW215-216	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		226	WIRE JUMPER	JW909	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
151	WIRE JUMPER	JW217	W581GY6095	AWG22 1/0.65 SN 6 AUTO		227	WIRE JUMPER	JW910	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
152	WIRE JUMPER	JW219	W581GY6095	AWG22 1/0.65 SN 6 AUTO		228	WIRE JUMPER	JW911	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
153	WIRE JUMPER	JW221	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		229	WIRE JUMPER	JW912-914	W581GY6095	AWG22 1/0.65 SN 6 AUTO	
154	WIRE JUMPER	JW222-224	W581GY1005	AWG22 1/0.65 SN 10 AUTO		230	WIRE JUMPER	JW915	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO	
155	WIRE JUMPER	JW225	W581GY6095	AWG22 1/0.65 SN 6 AUTO		231	WIRE JUMPER	JW916-917	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
156	WIRE JUMPER	JW226	W581GY1505	AWG22 1/0.65 GY 15 AUTO		232	WIRE JUMPER	JW919-920	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
157	WIRE JUMPER	JW227-228	W581GY6095	AWG22 1/0.65 SN 6 AUTO		233	WIRE JUMPER	JW921	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
158	WIRE JUMPER	JW229-230	W581GY1005	AWG22 1/0.65 SN 10 AUTO		234	WIRE JUMPER	JW922	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
159	WIRE JUMPER	JW231	W581GY1505	AWG22 1/0.65 GY 15 AUTO		235	WIRE JUMPER	JW923	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
160	WIRE JUMPER	JW401	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		236	WIRE JUMPER	JW924	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
161	WIRE JUMPER	JW402-405	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		237	WIRE JUMPER	JW925	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
162	WIRE JUMPER	JW406	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		238	WIRE JUMPER	JW926-929	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
163	WIRE JUMPER	JW407	W581GY1005	AWG22 1/0.65 SN 10 AUTO		239	WIRE JUMPER	JW930	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
164	WIRE JUMPER	JW408	W581GY1505	AWG22 1/0.65 GY 15 AUTO		240	WIRE JUMPER	JW931	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
165	WIRE JUMPER	JW409-412	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		241	WIRE JUMPER	JW932	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
166	WIRE JUMPER	JW413	W581GY1505	AWG22 1/0.65 GY 15 AUTO		242	WIRE JUMPER	JW933	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
167	WIRE JUMPER	JW414	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO		243	COIL PEAKING	L001	5CPZ100K02	10UH K (AXIAL 3.5MM)	
168	WIRE JUMPER	JW415	W581GY1005	AWG22 1/0.65 SN 10 AUTO		244	AM RF UNIT	L101	5LR0000832	RBW07VB-K5023	
169	WIRE JUMPER	JW416	W581GY6095	AWG22 1/0.65 SN 6 AUTO		245	FILTER	L202	5PPCFAZ077	PCFAZ077	
170	WIRE JUMPER	JW417	W581GY1505	AWG22 1/0.65 GY 15 AUTO		246	COIL DISCRIMINATO	L203	5107FBK473	7X7 BLK KSZ-73S	
171	WIRE JUMPER	JW418	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		247	COIL	L206-207	5P076068--	6068MPX	
172	WIRE JUMPER	JW419	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO		248	COIL	L208	5LC213K828	20.8MH	
173	WIRE JUMPER	JW420	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		249	COIL PEAKING	L251	5CPZ100K02	10UH K (AXIAL 3.5MM)	
174	WIRE JUMPER	JW421	W581GY1505	AWG22 1/0.65 GY 15 AUTO		250	WIRE JUMPER	L901-902	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
175	WIRE JUMPER	JW422-426	W581GY17J5	AWG22 1/0.65 SN 17.5 AUTO		251	TR	Q001	TZTC3194Y-	KTC3194Y	
176	WIRE JUMPER	JW427	W581GY1005	AWG22 1/0.65 SN 10 AUTO		252	TR	Q003	TZRA107M--	KRA107M (KSR2006)	
177	WIRE JUMPER	JW428	W581GY1505	AWG22 1/0.65 GY 15 AUTO		253	TR	Q201-202	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	
178	WIRE JUMPER	JW429-430	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO		254	TR	Q401-402	TZRA107M--	KRA107M (KSR2006)	
179	WIRE JUMPER	JW431	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		255	TR	Q403-404	TZTD1302Y-	KTD1302Y AUTO	
180	WIRE JUMPER	JW432-433	W581GY1005	AWG22 1/0.65 SN 10 AUTO		256	TR	Q803-808	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
257	TR	Q809-813	TZTA1266Y-	KTA1266Y-(AUTO)(1015Y)		333	R CARBON FILM	R449-450	RD-AZ104J-	1/6 100K OHM J	
258	TR	Q814	TKRC107M--	KRC107-M TAPPING(KSR1006)		334	R CARBON FILM	R451-452	RD-AZ220J-	1/6 22 OHM J	
259	TR	Q815	TZTA1275Y-	KTA1275-Y (AUTO)		335	R CARBON FILM	R801-802	RD-AZ563J-	1/6 56K OHM J	
260	TR	Q816	TKRC107M--	KRC107-M TAPPING(KSR1006)		336	R CARBON FILM	R803-804	RD-AZ182J-	1/6 1.8K OHM J	
261	TR	Q901	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)		337	R CARBON FILM	R805-806	RD-AZ683J-	1/6 68K OHM J	
262	TR	Q902	TKTB1366Y-	KTb1366Y		338	R CARBON FILM	R807	RD-4Z333J-	1/4 33K OHM J	
263	TR	Q903	TKRA111M--	KRA111-M TAPPING(KSR2010)		339	R CARBON FILM	R808	RD-4Z683J-	1/4 68K OHM J	
264	TR	Q904	TKRC107M--	KRC107-M TAPPING(KSR1006)		340	R CEMENT	R809-810	RX02L228J-	2W 0.22 OHM J	
265	TR	Q905	TZTA1274Y-	KTA1274Y-		341	R CARBON FILM	R811-812	RD-AZ272J-	1/6 2.7K OHM J	
266	TR	Q906	TZRA107M--	KRA107M (KSR2006)		342	R CARBON FILM	R813-814	RD-AZ562J-	1/6 5.6K OHM J	
267	TR	Q907	TKRC107M--	KRC107-M TAPPING(KSR1006)		343	R CARBON FILM	R815-816	RD-AZ273J-	1/6 27K OHM J	
268	TR	Q908-909	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)		344	R CARBON FILM	R817-818	RD-AZ823J-	1/6 82K OHM J	
269	WIRE JUMPER	R002	W581GY6095	AWG22 1/0.65 SN 6 AUTO		345	R CARBON FILM	R819-820	RD-AZ104J-	1/6 100K OHM J	
270	R CARBON FILM	R003	RD-AZ330J-	1/6 33 OHM J		346	R CARBON FILM	R821-828	RD-AZ103J-	1/6 10K OHM J	
271	R CARBON FILM	R004	RD-AZ100J-	1/6 10 OHM J		347	R CARBON FILM	R829-832	RD-AZ220J-	1/6 22 OHM J	
272	R CARBON FILM	R005	RD-AZ332J-	1/6 3.3K OHM J		348	R CARBON FILM	R833-834	RD-AZ332J-	1/6 3.3K OHM J	
273	R CARBON FILM	R006	RD-AZ681J-	1/6 680 OHM J		349	R CARBON FILM	R835-836	RD01Y101J-	1W 100 OHM J	
274	R CARBON FILM	R007	RD-AZ331J-	1/6 330 OHM J		350	R CARBON FILM	R837-838	RD-AZ392J-	1/6 3.9K OHM J	
275	R CARBON FILM	R008	RD-AZ101J-	1/6 100 OHM J		351	R CARBON FILM	R839	RD-AZ223J-	1/6 22K OHM J	
276	R CARBON FILM	R009	RD-AZ100J-	1/6 10 OHM J		352	R CARBON FILM	R840	RD-AZ222J-	1/6 2.2K OHM J	
277	R CARBON FILM	R101	RD-AZ472J-	1/6 4.7K OHM J		353	R CARBON FILM	R841	RD-AZ223J-	1/6 22K OHM J	
278	R CARBON FILM	R102	RD-AZ101J-	1/6 100 OHM J		354	R CARBON FILM	R843	RD-AZ103J-	1/6 10K OHM J	
279	R CARBON FILM	R103-105	RD-AZ472J-	1/6 4.7K OHM J		355	R CARBON FILM	R844	RD-AZ273J-	1/6 27K OHM J	
280	R CARBON FILM	R106	RD-AZ332J-	1/6 3.3K OHM J		356	WIRE JUMPER	R845-848	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
281	R CARBON FILM	R107	RD-AZ223J-	1/6 22K OHM J		357	R CARBON FILM	R849-852	RD-4Z689J-	1/4 6.8 OHM J	
282	R CARBON FILM	R113	RD-AZ104J-	1/6 100K OHM J		358	R CARBON FILM	R854-857	RD-4Z471J-	1/4 470 OHM J	
283	R CARBON FILM	R201	RD-AZ183J-	1/6 18K OHM J		359	R CARBON FILM	R901	RD-AZ103J-	1/6 10K OHM J	
284	R CARBON FILM	R203	RD-AZ223J-	1/6 22K OHM J		360	R CARBON FILM	R902	RD-AZ223J-	1/6 22K OHM J	
285	R CARBON FILM	R206	RD-AZ100J-	1/6 10 OHM J		361	R CARBON FILM	R903	RD-AZ473J-	1/6 47K OHM J	
286	R CARBON FILM	R207	RD-AZ472J-	1/6 4.7K OHM J		362	R CARBON FILM	R904	RD-AZ103J-	1/6 10K OHM J	
287	R CARBON FILM	R208	RD-AZ102J-	1/6 1K OHM J		363	R CARBON FILM	R905	RD-AZ473J-	1/6 47K OHM J	
288	R CARBON FILM	R209	RD-AZ470J-	1/6 47 OHM J		364	R CARBON FILM	R906	RD-AZ103J-	1/6 10K OHM J	
289	R CARBON FILM	R210	RD-AZ472J-	1/6 4.7K OHM J		365	R CARBON FILM	R907	RD-AZ471J-	1/6 470 OHM J	
290	R CARBON FILM	R211-212	RD-AZ222J-	1/6 2.2K OHM J		366	R CARBON FILM	R908	RD-AZ102J-	1/6 1K OHM J	
291	WIRE JUMPER	R213-214	W581GY6095	AWG22 1/0.65 SN 6 AUTO		367	R CARBON FILM	R909	RD-AZ222J-	1/6 2.2K OHM J	
292	R CARBON FILM	R215-216	RD-AZ102J-	1/6 1K OHM J		368	R CARBON FILM	R910	RD-AZ471J-	1/6 470 OHM J	
293	R CARBON FILM	R217-218	RD-AZ474J-	1/6 470K OHM J		369	R CARBON FILM	R911	RD-AZ100J-	1/6 10 OHM J	
294	R CARBON FILM	R219	RD-AZ682J-	1/6 6.8K OHM J		370	R CARBON FILM	R912-913	RD-AZ103J-	1/6 10K OHM J	
295	R CARBON FILM	R221	RD-AZ332J-	1/6 3.3K OHM J		371	R CARBON FILM	R914-915	RD-AZ221J-	1/6 220 OHM J	
296	R CARBON FILM	R222-223	RD-AZ272J-	1/6 2.7K OHM J		372	R CARBON FILM	R916-917	RD-AZ109J-	1/6 1 OHM J	
297	R CARBON FILM	R225-226	RD-AZ332J-	1/6 3.3K OHM J		373	R CARBON FILM	R919	RD-AZ100J-	1/6 10 OHM J	
298	R CARBON FILM	R227-228	RD-AZ101J-	1/6 100 OHM J		374	R CARBON FILM	R920	RD-AZ562J-	1/6 5.6K OHM J	
299	R CARBON FILM	R251	RD-AZ102J-	1/6 1K OHM J		375	R CARBON FILM	R922	RD-AZ103J-	1/6 10K OHM J	
300	R CARBON FILM	R252	RD-AZ470J-	1/6 47 OHM J		376	R CARBON FILM	R923	RD-AZ472J-	1/6 4.7K OHM J	
301	R CARBON FILM	R253	RD-AZ222J-	1/6 2.2K OHM J		377	R CARBON FILM	R924	RD-AZ103J-	1/6 10K OHM J	
302	R CARBON FILM	R254	RD-AZ103J-	1/6 10K OHM J		378	R FUSIBLE	RF901-902	RF01F4780J	0.47OHM 1W	
303	R CARBON FILM	R255	RD-AZ100J-	1/6 10 OHM J		379	R SEMI FIXED	RV201	RV6417223-	VM6CK-PV(1S) B 22K OHM	
304	R CARBON FILM	R256	RD-AZ102J-	1/6 1K OHM J		380	SW RELAY	RY901	5SC0201103	HR-CR323 2C-1P DC12V	
305	R CARBON FILM	R257-258	RD-AZ103J-	1/6 10K OHM J		381	TUNER PACK	TU001	9737613500	FTE4-401TC	
306	R CARBON FILM	R259	RD-AZ123J-	1/6 12K OHM J		382	X-TAL	XC251	5XA7R20000	7.2M	
307	R CARBON FILM	R260-263	RD-AZ102J-	1/6 1K OHM J		383	X-TAL	XC270	5XA4R332M-	4.332M	
308	R CARBON FILM	R264	RD-AZ222J-	1/6 2.2K OHM J		1	PCB POWER AS	13000	9CDC057102	AMI-926RW	
309	R CARBON FILM	R265	RD-AZ103J-	1/6 10K OHM J		2	CORD AC	AC901	9736900200	KKP419C,KLCE-2F,0.75SQUIRE	
310	R CARBON FILM	R270	RD-AZ470J-	1/6 47 OHM J		3	PCB POWER	B001	9CD6581005	247X197X1.6T	
311	R CARBON FILM	R271-272	RD-AZ103J-	1/6 10K OHM J		4	C ELECTRO	CE915	CEYF1E222V	25V RSS 2200MF (16X25)	
312	R CARBON FILM	R401-402	RD-AZ103J-	1/6 10K OHM J		5	C MYLAR	CM908-915	CMXM1H104J	50V 0.1MF J	
313	R CARBON FILM	R403-404	RD-AZ153J-	1/6 15K OHM J		6	C MYLAR	CM916	CMXM1H103J	50V 0.01MF J (TP)	
314	R CARBON FILM	R405-406	RD-AZ472J-	1/6 4.7K OHM J		7	C MYLAR	CM917	CMXM1H104J	50V 0.1MF J	
315	R CARBON FILM	R407-408	RD-AZ822J-	1/6 8.2K OHM J		8	CONN WAFER	CW902	9728812700	#22 12P P2.5 350 BOARD-IN	
316	R CARBON FILM	R409-410	RD-AZ102J-	1/6 1K OHM J		9	DIODE	D911-915	D1N4001---	1N4001	
317	R CARBON FILM	R411-412	RD-AZ153J-	1/6 15K OHM J		10	DIODE	D916	DZN4148---	1N4148 AUTO 52MM	
318	R CARBON FILM	R413-414	RD-AZ332J-	1/6 3.3K OHM J		11	DIODE	DB901-902	DKBJ604G--	KBJ604G	
319	R CARBON FILM	R415-416	RD-AZ122J-	1/6 1.2K OHM J		12	FUSE GLASS TUBE	F901	5FSGB3122L	SEMKO MF51 3.15A 250V TL	
320	R CARBON FILM	R417-418	RD-AZ102J-	1/6 1K OHM J		13	CLIP FUSE	FC901-902	9734600700	FC-5N	
321	R CARBON FILM	R419-420	RD-AZ104J-	1/6 100K OHM J		14	IC REGULATOR	IC902	1KA7805---	KA7805	
322	R CARBON FILM	R421-422	RD-AZ102J-	1/6 1K OHM J		15	WIRE JUMPER	JW902-903	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
323	R CARBON FILM	R423-424	RD-AZ682J-	1/6 6.8K OHM J		16	WIRE JUMPER	JW907	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO	
324	R CARBON FILM	R427-428	RD-AZ562J-	1/6 5.6K OHM J		17	WIRE JUMPER	JW908	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
325	R CARBON FILM	R429-430	RD-AZ224J-	1/6 220K OHM J		18	WIRE JUMPER	JW909	W581GY1005	AWG22 1/0.65 SN 10 AUTO	
326	R CARBON FILM	R431-432	RD-AZ102J-	1/6 1K OHM J		19	WIRE JUMPER	JW910-911	W581GY1505	AWG22 1/0.65 GY 15 AUTO	
327	R CARBON FILM	R433-434	RD-AZ104J-	1/6 100K OHM J		20	WIRE JUMPER	JW912	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO	
328	R CARBON FILM	R435-437	RD-AZ101J-	1/6 100 OHM J		21	TRANS POWER	PT901	5TP8086819	EI-85.8X57 230V 50HZ	
329	R CARBON FILM	R438-441	RD-AZ472J-	1/6 4.7K OHM J		22	TRANS POWER	PT902	5TP8028829	EI-28X12 230V 50HZ	
330	R CARBON FILM	R442-443	RD-AZ102J-	1/6 1K OHM J		23	TR	Q911	TZTC3205Y-	KTC3205Y (2236Y)	
331	R CARBON FILM	R445-446	RD-AZ104J-	1/6 100K OHM J		24	R CARBON FILM	R918	RD-2Y475J-	1/2 4.7M OHM J	
332	R CARBON FILM	R447-448	RD-AZ102J-	1/6 1K OHM J		25	R CARBON FILM	R922	RD-AZ100J-	1/6 10 OHM J	

Electrical Parts List

Model : AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS	NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	REMARKS
26	R CARBON FILM	R925-926	RD-AZ103J-	1/6 10K OHM J		73	R CARBON FILM	R625-626	RD-AZ102J-	1/6 1K OHM J	
27	R FUSIBLE	RF903	RF-2F478J-	1/2 0.47 OHM J		74	R CARBON FILM	R627-628	RD-AZ274J-	1/6 270K OHM J	
28	SW RELAY	RY902	5SC2001A01	SDT-S-105LMR		75	R CARBON FILM	R629-630	RD-AZ561J-	1/6 560 OHM J	
29	PIN WRAPPING	TP901-902	9716404000	MFZN1.1X1.1 PANASERT		76	R CARBON FILM	R631-632	RD-AZ474J-	1/6 470K OHM J	
1	PCB TAPE AS	14000	9CDC050504	AMI-H926L0FP		77	R CARBON FILM	R633-634	RD-AZ103J-	1/6 10K OHM J	
2	PCB TAPE(PIGEON)	B001	9CD6584200	247X139X1.6T (1/2)		78	R CARBON FILM	R635	RD-AZ104J-	1/6 100K OHM J	
3	C CERA	CC601-608	CCZB1E821K	25V B 820PF K AXIAL		79	R CARBON FILM	R638	RD-AZ472J-	1/6 4.7K OHM J	
4	C CERA	CC609	CCXF1H104Z	50V F 0.1MF Z		80	R CARBON FILM	R639	RD-AZ104J-	1/6 100K OHM J	
5	C CERA	CC611-612	CZCH1E470J	CH 25V 47PF J AX		81	R CARBON FILM	R640	RD-AZ471J-	1/6 470 OHM J	
6	C CERA	CC613-614	CCZB1E121K	25V B 120PF K (AXIAL)		82	R CARBON FILM	R641	RD-AZ105J-	1/6 1M OHM J	
7	C CERA	CC615-618	CCZB1H331K	50V B 330PF K		83	R CARBON FILM	R642	RD-AZ474J-	1/6 470K OHM J	
8	C CERA	CC631	CCXF1H473Z	50V F 0.047MF Z (TAPPING)		84	R CARBON FILM	R643	RD-AZ101J-	1/6 100 OHM J	
9	C ELECTRO	CE601	CEXF1E470V	25V RSS 47MF (5X11) TP		85	R CARBON FILM	R644	RD-AZ563J-	1/6 56K OHM J	
10	C ELECTRO	CE602	CEXF1E101V	25V RSS 100MF (6.3X11) TP		86	R CARBON FILM	R645-646	RD-AZ103J-	1/6 10K OHM J	
11	C ELECTRO	CE603-604	CEXF1E470V	25V RSS 47MF (5X11) TP		87	R CARBON FILM	R647	RD-AZ102J-	1/6 1K OHM J	
12	C ELECTRO	CE605-608	CEXF1H100V	50V RSS 10MF (5X11) TP		88	R CARBON FILM	R649-650	RD-AZ563J-	1/6 56K OHM J	
13	C ELECTRO	CE609-610	CEXF1H109V	50V RSS 1MF (5X11) TP		89	R CARBON FILM	R651-652	RD-AZ103J-	1/6 10K OHM J	
14	C ELECTRO	CE611-612	CEXF1H479V	50V RSS 4.7MF (5X11) TP		90	R CARBON FILM	R653-654	RD-AZ153J-	1/6 15K OHM J	
15	C ELECTRO	CE613-614	CEXF1H108V	50V RSS 0.1MF (5X11) TP		91	R CARBON FILM	R655	RD-AZ102J-	1/6 1K OHM J	
16	C ELECTRO	CE615-618	CEXF1H100V	50V RSS 10MF (5X11) TP		92	R CARBON FILM	R656	RD-4Z121J-	1/4 120 OHM J	
17	C ELECTRO	CE619	CEXF1E220V	25V RSS 22MF 5X11		93	R CARBON FILM	R658	RD-AZ102J-	1/6 1K OHM J	
18	C ELECTRO	CE620	CEXF1H108V	50V RSS 0.1MF (5X11) TP		94	R CARBON FILM	R659	RD-AZ103J-	1/6 10K OHM J	
19	C ELECTRO	CE621	CEXF1H229V	50V RSS 2.2MF (5X11) TP		95	R CARBON FILM	R660	RD-AZ479J-	1/6 4.7 OHM J	
20	C ELECTRO	CE631-633	CEXF1E470V	25V RSS 47MF (5X11) TP		96	R CARBON FILM	R661-662	RD-AZ563J-	1/6 56K OHM J	
21	C MYLAR	CM601-602	CMXM1H273J	50V 0.027 MF J		97	R CARBON FILM	R663	RD-AZ470J-	1/6 47 OHM J	
22	C MYLAR	CM603-604	CMXM1H183J	50V 0.018MF J		98	R CARBON FILM	R664	RD-AZ472J-	1/6 4.7K OHM J	
23	C MYLAR	CM605-606	CMXM1H152K	50V 1500 PF K		99	R CARBON FILM	R671	RD-AZ390J-	1/6 39 OHM J	
24	C MYLAR	CM607-608	CMXM1H103J	50V 0.01MF J (TP)		100	R CARBON FILM	R672-674	RD-AZ102J-	1/6 1K OHM J	
25	C MYLAR	CM611-614	CMXM1H102J	50V 0.001MF J (TP)		101	R CARBON FILM	R675	RD-AZ103J-	1/6 10K OHM J	
26	C MYLAR	CM615-616	CMXM1H332J	50V 3300 PF J		102	R CARBON FILM	R686	RD-AZ332J-	1/6 3.3K OHM J	
27	C MYLAR	CM617	CMXM1H223J	50V 0.022MF J		103	R CARBON FILM	R687	RD-AZ392J-	1/6 3.9K OHM J	
28	C MYLAR	CM618	CMXM1H332J	50V 3300 PF J		104	R CARBON FILM	R688	RD-AZ821J-	1/6 820 OHM J	
29	CONN AS	CN603	9728814000	UL2547 1533 8P 200MM		105	R CARBON FILM	R689	RD-AZ682J-	1/6 6.8K OHM J	
30	CONN AS	CW601	9738828700	AWG28 3P SHIELD 220MM		106	R CARBON FILM	R690	RD-AZ104J-	1/6 100K OHM J	
31	CONN AS	CW602	9738828800	AWG28 7P SHIELD 100MM		107	R SEMI FIXED	RV601	RV1417222-	1/10 2.2K OHM B V6EK-PV1S	
32	CONN AS	CW701	9738836200	UL2468 160MM P2.0 8P/2P							
33	DIODE	D606-608	DZN4148--	1N4148 AUTO 52MM							
34	IC	IC601	1M51167BFP	M51167BFP (SOP36S)							
35	IC	IC602	1UPC1330HA	UPC1330HA							
36	IC	IC603	1BU4094BCF	BU4094BCF(SOP16)							
37	WIRE JUMPER	JW601-603	W581GY6095	AWG22 1/0.65 SN 6 AUTO							
38	WIRE JUMPER	JW604	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO							
39	WIRE JUMPER	JW605-608	W581GY6095	AWG22 1/0.65 SN 6 AUTO							
40	WIRE JUMPER	JW609	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO							
41	WIRE JUMPER	JW610-612	W581GY6095	AWG22 1/0.65 SN 6 AUTO							
42	WIRE JUMPER	JW613	W581GY12J5	AWG22 1/0.65 SN 12.5 AUTO							
43	WIRE JUMPER	JW614	W581GY6095	AWG22 1/0.65 SN 6 AUTO							
44	WIRE JUMPER	JW615	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO							
45	WIRE JUMPER	JW616	W581GY6095	AWG22 1/0.65 SN 6 AUTO							
46	COIL CHOKE	L601-602	5LC333K804	33MH K							
47	COIL BIAS OSC	L603	5L0503K643	SM-10F 5.04MH							
48	TR	Q601-602	TKRC111M--	KRC111M (KSR1010)							
49	TR	Q605-606	TKRC111M--	KRC111M (KSR1010)							
50	TR	Q607	TKRC107M--	KRC107-M TAPPING(KSR1006)							
51	TR	Q608	TKRC111M--	KRC111M (KSR1010)							
52	TR	Q611-612	TZTD1302-	KTD1302							
53	TR	Q613	TKRA111M--	KRA111-M TAPPING(KSR2010)							
54	TR	Q614-615	TZRA107M--	KRA107M (KSR2006)							
55	TR	Q621-622	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)							
56	TR	Q623	TKRA111M--	KRA111-M TAPPING(KSR2010)							
57	TR	Q624	TZTA1273Y-	KTA1273Y(966Y)							
58	TR	Q625	TKRC111M--	KRC111M (KSR1010)							
59	TR	Q628	TZTC3205Y-	KTC3205Y (2236Y)							
60	TR	Q637	TZTA1266Y-	KTA1266Y- (AUTO)(1015Y)							
61	TR	Q638	TKRC111M--	KRC111M (KSR1010)							
62	R CARBON FILM	R601-602	RD-AZ680J-	1/6 68 OHM J							
63	R CARBON FILM	R603-604	RD-AZ682J-	1/6 6.8K OHM J							
64	R CARBON FILM	R605-606	RD-AZ562J-	1/6 5.6K OHM J							
65	R CARBON FILM	R607-608	RD-AZ102J-	1/6 1K OHM J							
66	R CARBON FILM	R609-610	RD-AZ152J-	1/6 1.5K OHM J							
67	R CARBON FILM	R611-612	RD-AZ102J-	1/6 1K OHM J							
68	R CARBON FILM	R613-614	RD-AZ104J-	1/6 100K OHM J							
69	R CARBON FILM	R615-616	RD-AZ103J-	1/6 10K OHM J							
70	R CARBON FILM	R617-618	RD-AZ562J-	1/6 5.6K OHM J							
71	R CARBON FILM	R619-620	RD-AZ123J-	1/6 12K OHM J							
72	R CARBON FILM	R621-622	RD-AZ183J-	1/6 18K OHM J							