

Model: AXW-217
AXW-117
AMI-926LW/RW



AMI-926LW/RW

<http://svc.dwe.co.kr>

Sep. 2002

MINI COMPONENT SYSTEM

AXW-217

AXW-117

AMI-926LW/RW

Table of Contents

SAFETY PRECAUTIONS.....	2
ADJUSTMENTS.....	4
EXPLODED VIEW AND PARTS LIST	6
AXW-217.....	6
AXW-117.....	8
AMI-926LW/RW.....	10
WIRING DIAGRAM	12
BLOCK DIAGRAM	13
SCHEMATIC DIAGRAM	14
MAIN.....	14
TUNER.....	15
TAPE.....	16
CD	17
FRONT(AXW-217).....	18
FRONT(AXW-117).....	19
FRONT(AMI-926LW/RW).....	20
POWER.....	21
PCB PATTERN LAYOUT	22
ELECTRICAL PART LIST	28

Safety Precautions

WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

	CAUTION RISK OF ELECTRIC SHOCKS DO NOT OPEN	
CAUTION : TO REDUCE THE RISK IF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.		
THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" WITHIN THE PRODUCT'S ENCLOSURE THAT MAY BE SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK TO PERSONS.		
THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF IMPORTANT OPERATING AND MAINTENANCE (SERVICING) INSTRUCTIONS IN THE LITERATURE ACCOMPANYING THE APPLIANCE.		

CAUTION

TO PREVENT ELECTRIC SHOCK, DO NOT USE THIS POLARIZED AC PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

LASER SAFETY

THIS UNIT EMPLOYS A LASER. ONLY QUALIFIED SERVICE PERSONNEL SHOULD REMOVE THE COVER OR ATTEMPT TO SERVICE THIS DEVICE DUE TO POSSIBLE EYE INJURY.

CAUTION : USE OF ANY CONTROLS, ADJUSTMENTS, OR PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

CAUTION : TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

ATTENTION : POUR EVITER LES CHOCs ELECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA BORNE CORRESPONDANTE DE LA PRISE ET POUSSER JUSQU'AU FOND.

Important Safety Instructions

- All the safety and operating instructions should be read before the appliance is operated.
 - The safety and operating instructions should be retained for future reference.
 - All warnings on the appliance and in the operating instructions should be adhered to.
 - All operating and use instructions should be followed.
1. Water and Moisture - The appliance should not be used near water - for example, near a bathtub, washbowl, kitchen sink,

laundry tub, in a wet basement, or near a swimming pool, and the like.

PORTABLE CART

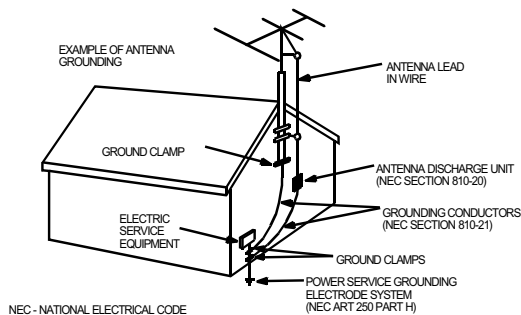


Figure 2

2. Carts and Stands - The appliance should be used only with a cart or stand that is recommended by the manufacturer.
3. An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the appliance and cart combination to overturn.
4. Wall or Ceiling Mounting - The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
5. Ventilation - The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings; or, placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
6. Heat - The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
7. Power Sources - The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
8. Grounding or Polarization - The precautions that should be taken so that the grounding or polarization means of an appliance is not defeated.
9. Power - Cord Protection - Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the appliance.
10. Protective Attachment Plug - If the appliance is equipped with an attachment plug having overload protection. This is a safety feature. See Instruction Manual for replacement or resetting of protective device. If replacement of the plug is required, be sure the service technician has used a replacement plug specified by the manufacturer that has the same overload protection as the original plug.
11. Cleaning - The appliance should be cleaned only as recommended by the manufacturer.
12. Power Lines - An outdoor antenna should be located away from power lines.

Safety Precautions

13. Outdoor Antenna Grounding - If an outside antenna is connected to the receiver be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna-discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes and requirements for the grounding electrode. See Figure 1.



14. Non-use Periods - The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.

15. Object and Liquid Entry - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.

16. Damage Requiring Service - The appliance should be serviced by qualified service personnel when:

- a) The power-supply cord or the plug has been damaged; or
- b) Objects have fallen, or liquid has been spilled into the appliance; or
- c) The appliance has been exposed to rain; or
- d) The appliance does not appear to operate normally or exhibits a marked change in performance; or
- e) The appliance has been dropped, or the enclosure damaged.

17. Servicing - The user should not attempt to service the appliance beyond that described in the operating instructions. All other servicing should be referred to qualified service personnel.

Adjustments

1. TUNER SECTION

TEST EQUIPMENT


1. Signal Generator with a frequency range of FM broadcast.
2. Oscilloscope with a side amplifier of approximately 100 KHz.
3. FM 75/50Ω dummy antenna.
4. VTVM

FM ALIGNMENT

1. Turn on the FM signal generator and the VTVM allowing 15 minutes warming-up period.
2. Connect the VTVM across the headphone jack or speaker terminal.
3. Set signal generator frequency as listed in ALIGNMENT CHART and maintain a sufficient output level to provide an indication on VTVM.

NOTE

1. Use a screwdriver with plastic or ceramic grip for all adjustments.
2. Standard test frequency 1 KHz and deviation 75 KHz for FM.

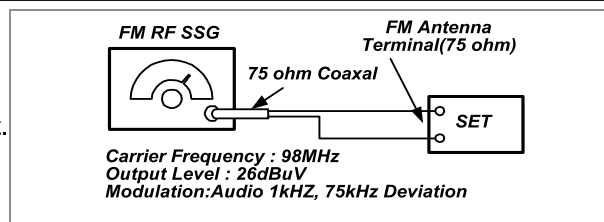

- FM RF, IF ALIGNMENT CHART -


Step	Item	Input Circuit Setup	Output Circuit Setup	Tuner Setting	Adjust Point	Adjustment
1	FM IF Adjustment	Connect stereo signal generator to FM ANT terminal (J001)	Connect DC voltmeter to edge R201	FM98MHz75KHz Dev. 26dBμ	L203	Adjust for DC 0V±0.1V
2	Auto Stop Sensitivity	Connect stereo signal generator to FM ANT terminal (J001)	Connect DC voltmeter to edge of RV201	FM 98MHz 75KHz Dev. 26dBμ	RV201	Adjust for DC 1.17V±0.02V Confirm stereo indicator is lighted and L/R channel is separated.

Unless other specified set being switched FM mode, adjust generator's frequency to center of the FM band where no FM broadcast exists. Otherwise adjustment of FM usable sensitivity, frequency range for FM band are not needed, but confirm these data are satisfied with specification.

CAUTION : When realigning the FM receiving frequency the highest end of the frequency range should not be more than 108 MHz and the lowest end of the frequency range should not be less than 87.5 MHz, in order to comply with FTZ regulation in West Germany.

Adjustments

2. TAPE SECTION

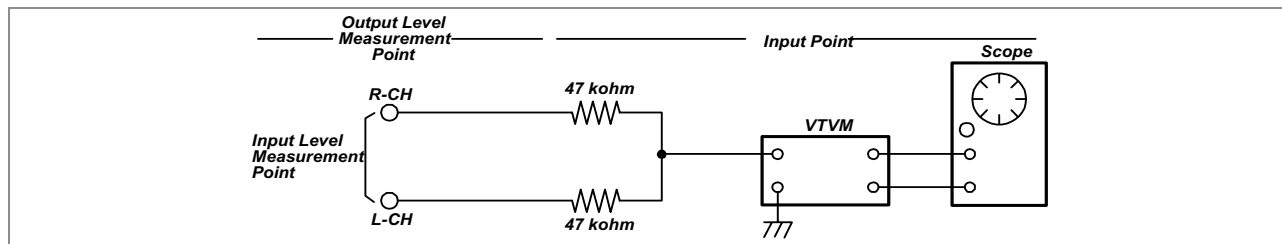

Test Tape be used

Tape	Contents	Use
MTT-111N	3 KHz	Tape Speed Adjustment
MTT-114N	10 KHz	Head Azimuth Adjustment
MTT-5511	Blank	Record Frequency Property

HEAD ADJUSTMENT (AZIMUTH)

- 10KHz test tape(example: MTT-114N) must be used for this adjustment.
- Connect to VTVM or oscilloscope to the headphone jack or speaker terminal.
- Press the play button.
- Adjust the azimuth by using a screw driver to maintain the max. L&R output voltage.
- Adjust tape A(1), tape B(2) respectively, Please secure the azimuth position by using locking paint.

RECORDING BIAS OSCILLATOR FREQUENCY ADJUSTMENT

- Connect the frequency counter to TP603, GND.
- Press the REC button.
- Adjust L603 to obtain 80 KHz $\pm$ 500Hz

TAPE ALIGNMENT CHART

Step	Item		Reference Value	Test Tape	Adjust Point	Test Point	Note	FIG.
1	Tape Speed Adjustment	Normal	3,015~3,025Hz	MTT-111N	RV601	Line Out L/R Channel	Confirm Wow & Flutter is within 0.35%	FIG.1
			3,000~3,010Hz	MTT-111N	RV601	Line Out L/R Channel	Confirm Tape Speed of end position after adjustment at tape start position	FIG.1
		High	5,820~6,180Hz	MTT-111N	-----	Line Out L/R Channel	Confirm High speed after normal speed adjustment	FIG.1
2	Azimuth Adjustment		Maximum Level Phase:Within90°	MTT-114N	Head Screw	Line Out L/R Channel		FIG.2,3,4
3	Recording Bias Oscillator Frequency Adjustment		80 KHz±0.5	MTT-5511	L603	TP603,GND	Adjust with frequency counter connected.	FIG.1

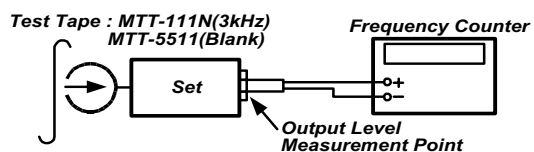


FIG. 1 : Tape Speed & Record Bias Oscillator Frequency Adjust Circuit




FIG. 2 : Tape Azimuth Adjust Location (Record/Playback Head)

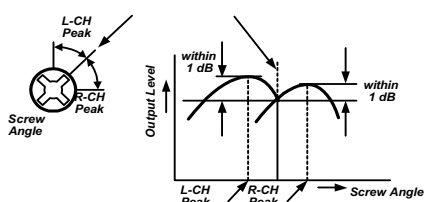


FIG. 3 : Tape Azimuth Adjust Head Screw & Waveform





FIG. 4 : Tape Azimuth Adjust Circuit & Waveform

Exploded View and Mechanical Parts List

Model : AXW-217

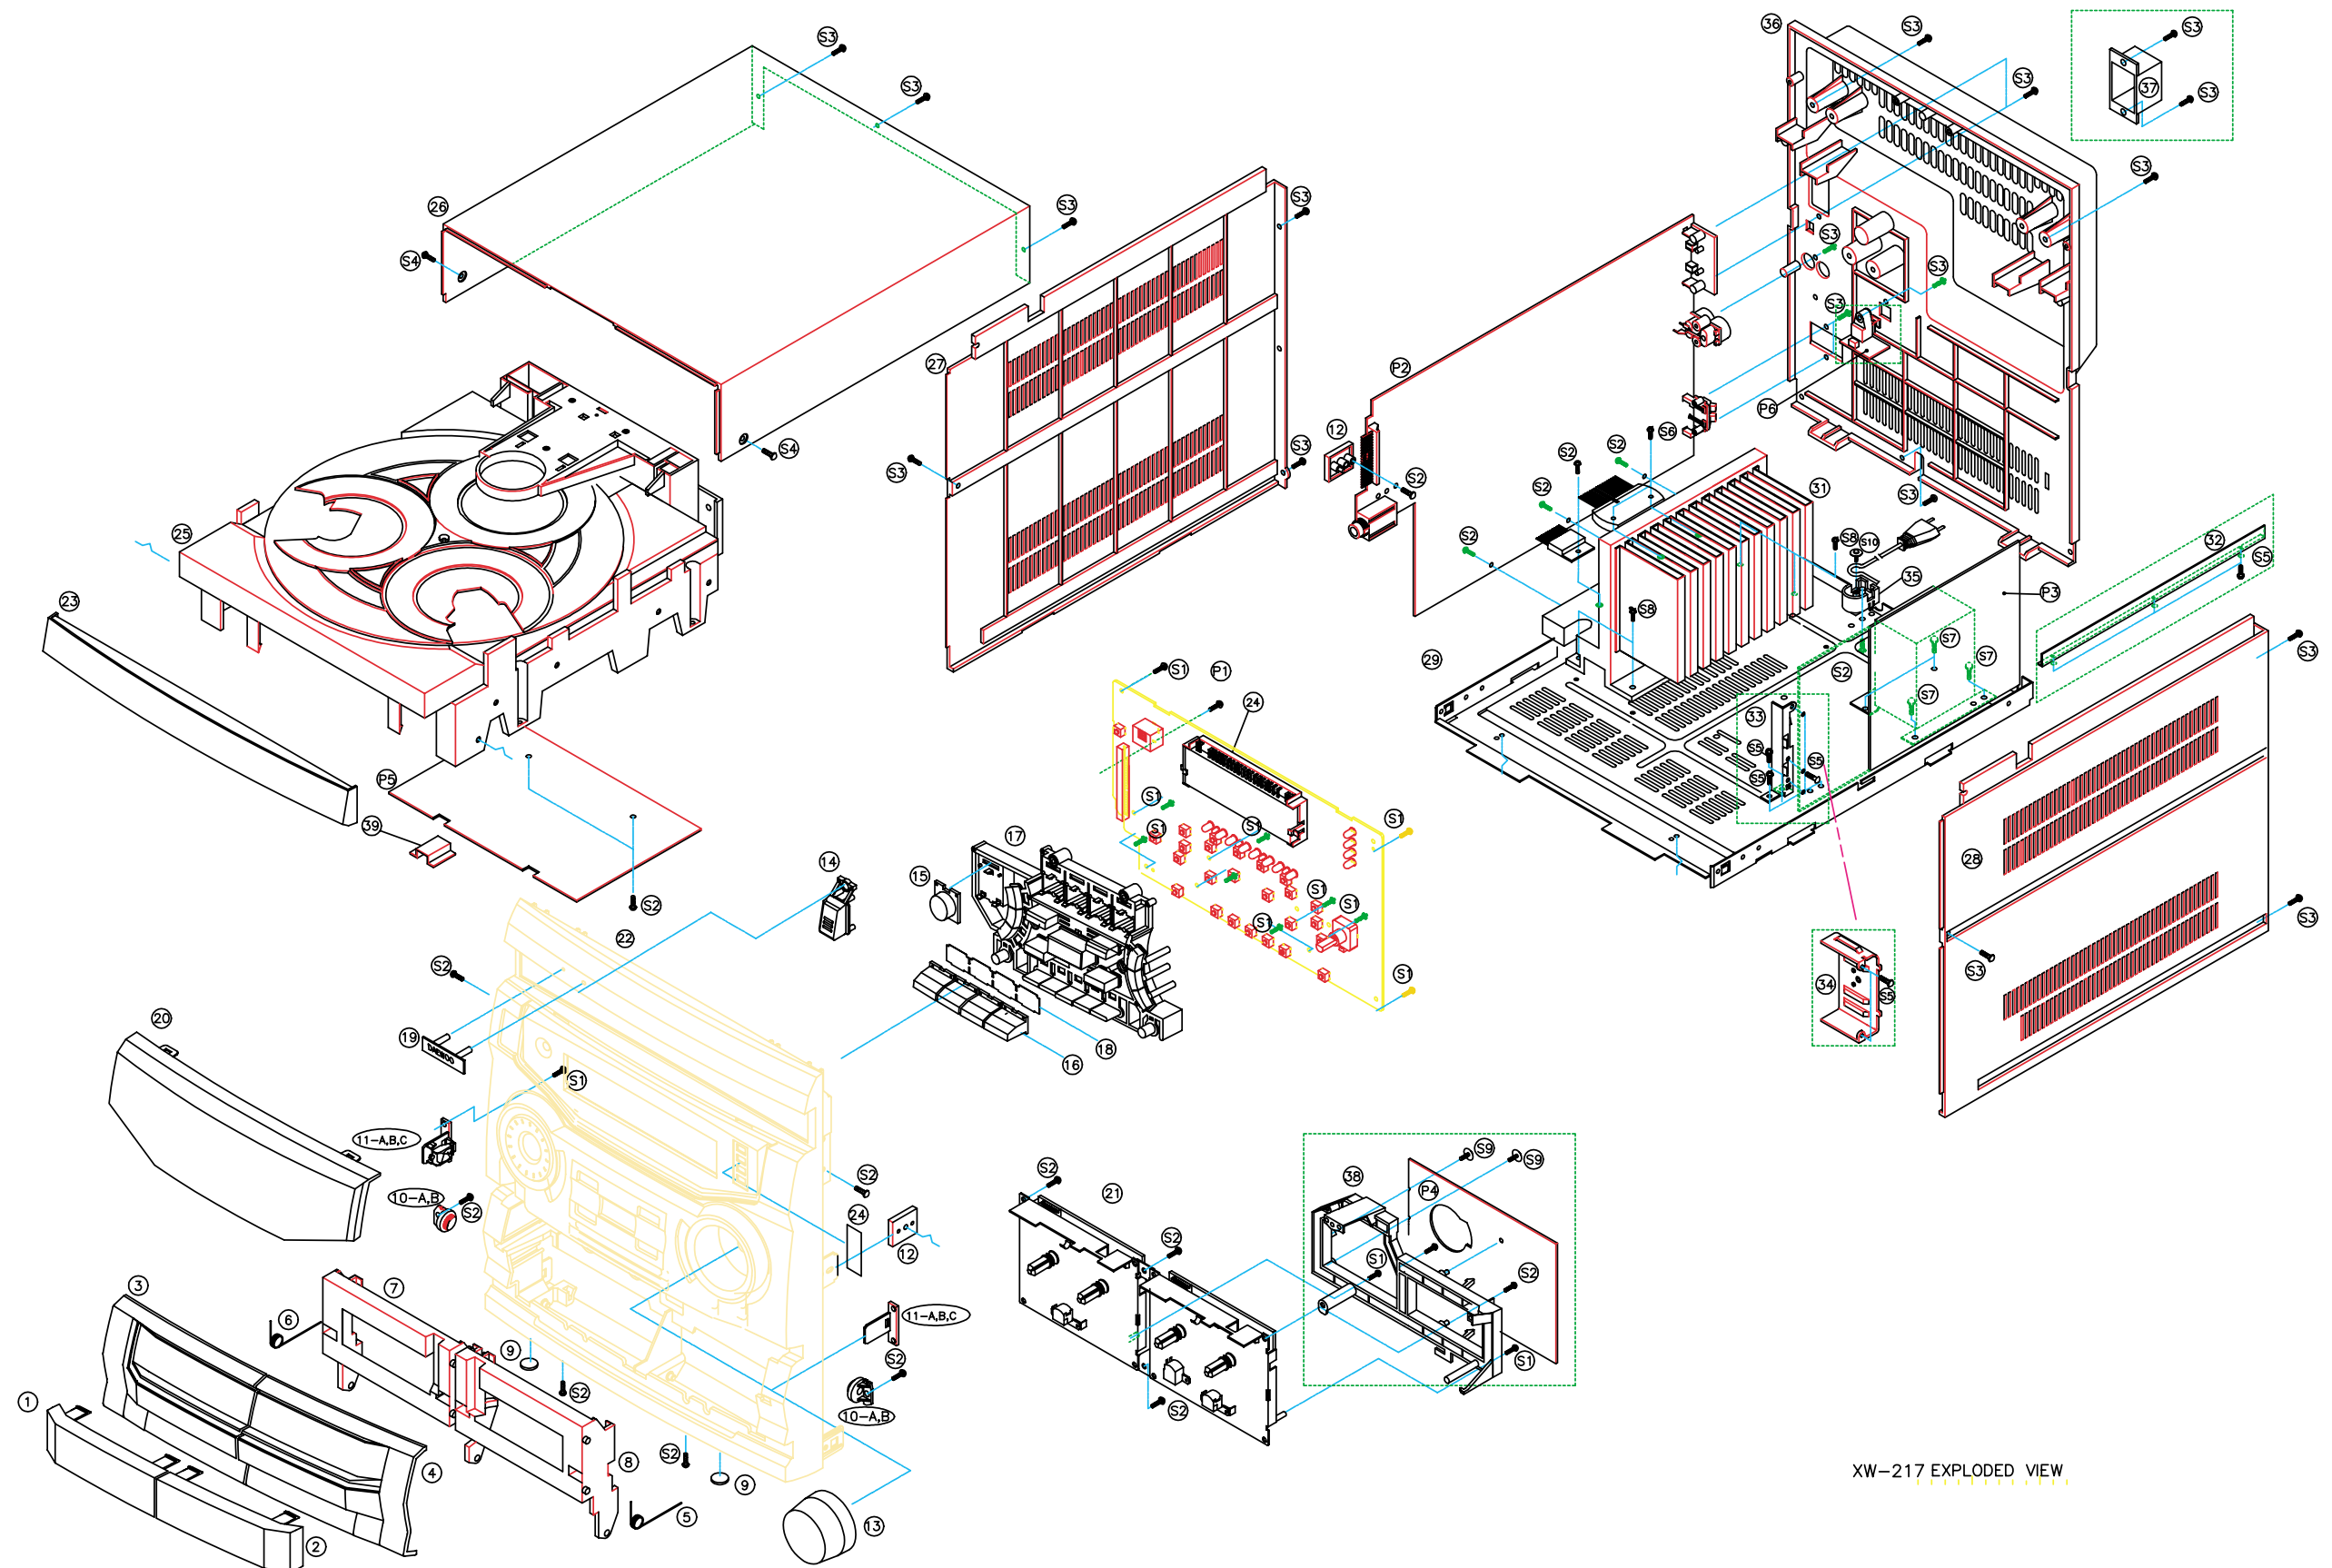

XW-217 EXPLODED VIEW

Exploded View and Mechanical Parts List


Model : AXW-217

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'TY	REMARKS
1	WINDOW DOOR A	9CD16161A0	MIPS	1	
2	WINDOW DOOR B	9CD16161B0	MIPS	1	
3	DOOR COVER A	9CD18109A0	MIPS	1	
4	DOOR COVER B	9CD18109B0	MIPS	1	
5	SRING DOOR EJECT R	9CD30080R0	STS 0.9	1	
6	SRING DOOR EJECT L	9CD30080L0	STS 0.9	1	
7	DOOR FRAME A	9CD18113A0	MIPS	1	
8	DOOR FRAME B	9CD18113B0	MIPS	1	
9	CUSHION FOOT	9CD4207700	URETHAN	2	
10-A	DAMPER GEAR B	9CD2603200	ACETAL	2	
10-B	DAMPER BASE B	9CD2603300	ABS	2	
11-A	LOCKER BASE	9CDOB01900	ABS	2	
11-B	LOCKER CAM	9CDOB02000	ABS	2	
11-C	LOCKER SPRING	9CDOB01600	STS	2	
12	BRKT SIDE	9CD2412900	ABS	2	
13	KNOB VOL	9CD1339100	ABS	1	
14	KNOB POWER	9CD1339400	ABS	1	
15	KNOB UBS	9CD1339000	ACRYL	1	
16	KNOB FUNCTION	9CD1338900	ACRYL	1	
17	KNOB CONTROL	9CD1338800	ABS	1	
18	PLATE FUNCTION	9CD0911100	PVC SHEET	1	
19	BADGE DAEWOO	9CD1500900	ABS	1	
20	WINDOW FLT	9CD1616200	ACRYL	1	
21	CASSETTE DECK LOGIC	9CD6007800	ADR-243AMW	1	217
22	PANEL FRONT	9CD0307700	MIPS	1	
23	DOOR CD	9CD1811000	MIPS	1	
24	PLATE FUNCTION	9CD0910000	PVC SHEET T0.5	1	
25	CD DECK MECHA	9CD6006900		1	
26	COVER TOP	9CD0411400	MIPS	1	
27	COVER SIDE L	9CD04115L0	MIPS	1	
28	COVER SIDE R	9CD04115R0	MIPS	1	
29	CHASSIS BOTTOM	9CD0607100	SECC 1.0T	1	
30	GUIDE FLT	9CD2506300	ABS	1	
31	HEAT SINK N100	9CD4406000	AL	1	
32	FRAME BOTTOM	9CD0607800	SECC 1.0T	1	
33	BRKT PCB C	9CD2414500	SECC 1.0T	1	
34	HEAT SINK PW	9CD4404200	AL	1	
35	HOLDER AC CORD	9CD2303300	ABS	1	
36	COVER BACK	9CD0409800	MIPS	1	OPTION
37	COVER ANT	9CD0410400	ABS	1	
38	HOLDER PCB	9CD2304000	MIPS	1	
39	HEAT SINK	9CD4402800	BSP 0.5T	1	

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'TY	REMARKS
S1	SCREW TAPTTITE	7173261011	TT2 BIN 2.6 X 10 MFZN	11	XW-217 Z P
S2	SCREW TAPTTITE	7173301011	TT2 BIN 3.0X10 MFZN	18	
S3	SCREW TAPTTITE	7173301212	TT2 BIN 3.0X12 BK	18	
S4	SCREW TAPTTITE	7173301612	TT2 BIN 3.0X16 BK	2	
S5	SCREW TAPTTITE	7173300611	TT2 BIN 3.0X6 MFZN	7	
S6	SCREW TAPTTITE	7173301411	TT2 BIN 3.0X14 MFZN	2	
S7	SCREW TAPTTITE	7173400611	TT2 BIN 4.0X6 MFZN	4	
S8	SCREW TAPTTITE	7173401011	TT2 BIN 4.0X10 MFZN	4	
S9	WASHER SCREW	9CD3102401	TT2 BIN 3.0X8 + D12	2	
S10	WASHER SCREW	9CD3102400	TT2 BIN 3.0X10 + D14	1	
W1	WASHER PLAIN			1	
NO	PARTS NAME		Q'TY		REMARKS
P1	FRONT PCB		1		
P2	MAIN PCB		1		
P3	POWER PCB		1		
P4	DECK PCB		1		217/217DP
P5	PCB CD		1		
P6	PCB JACK		1		OPTION

Exploded View and Mechanical Parts List

Model : AXW-117

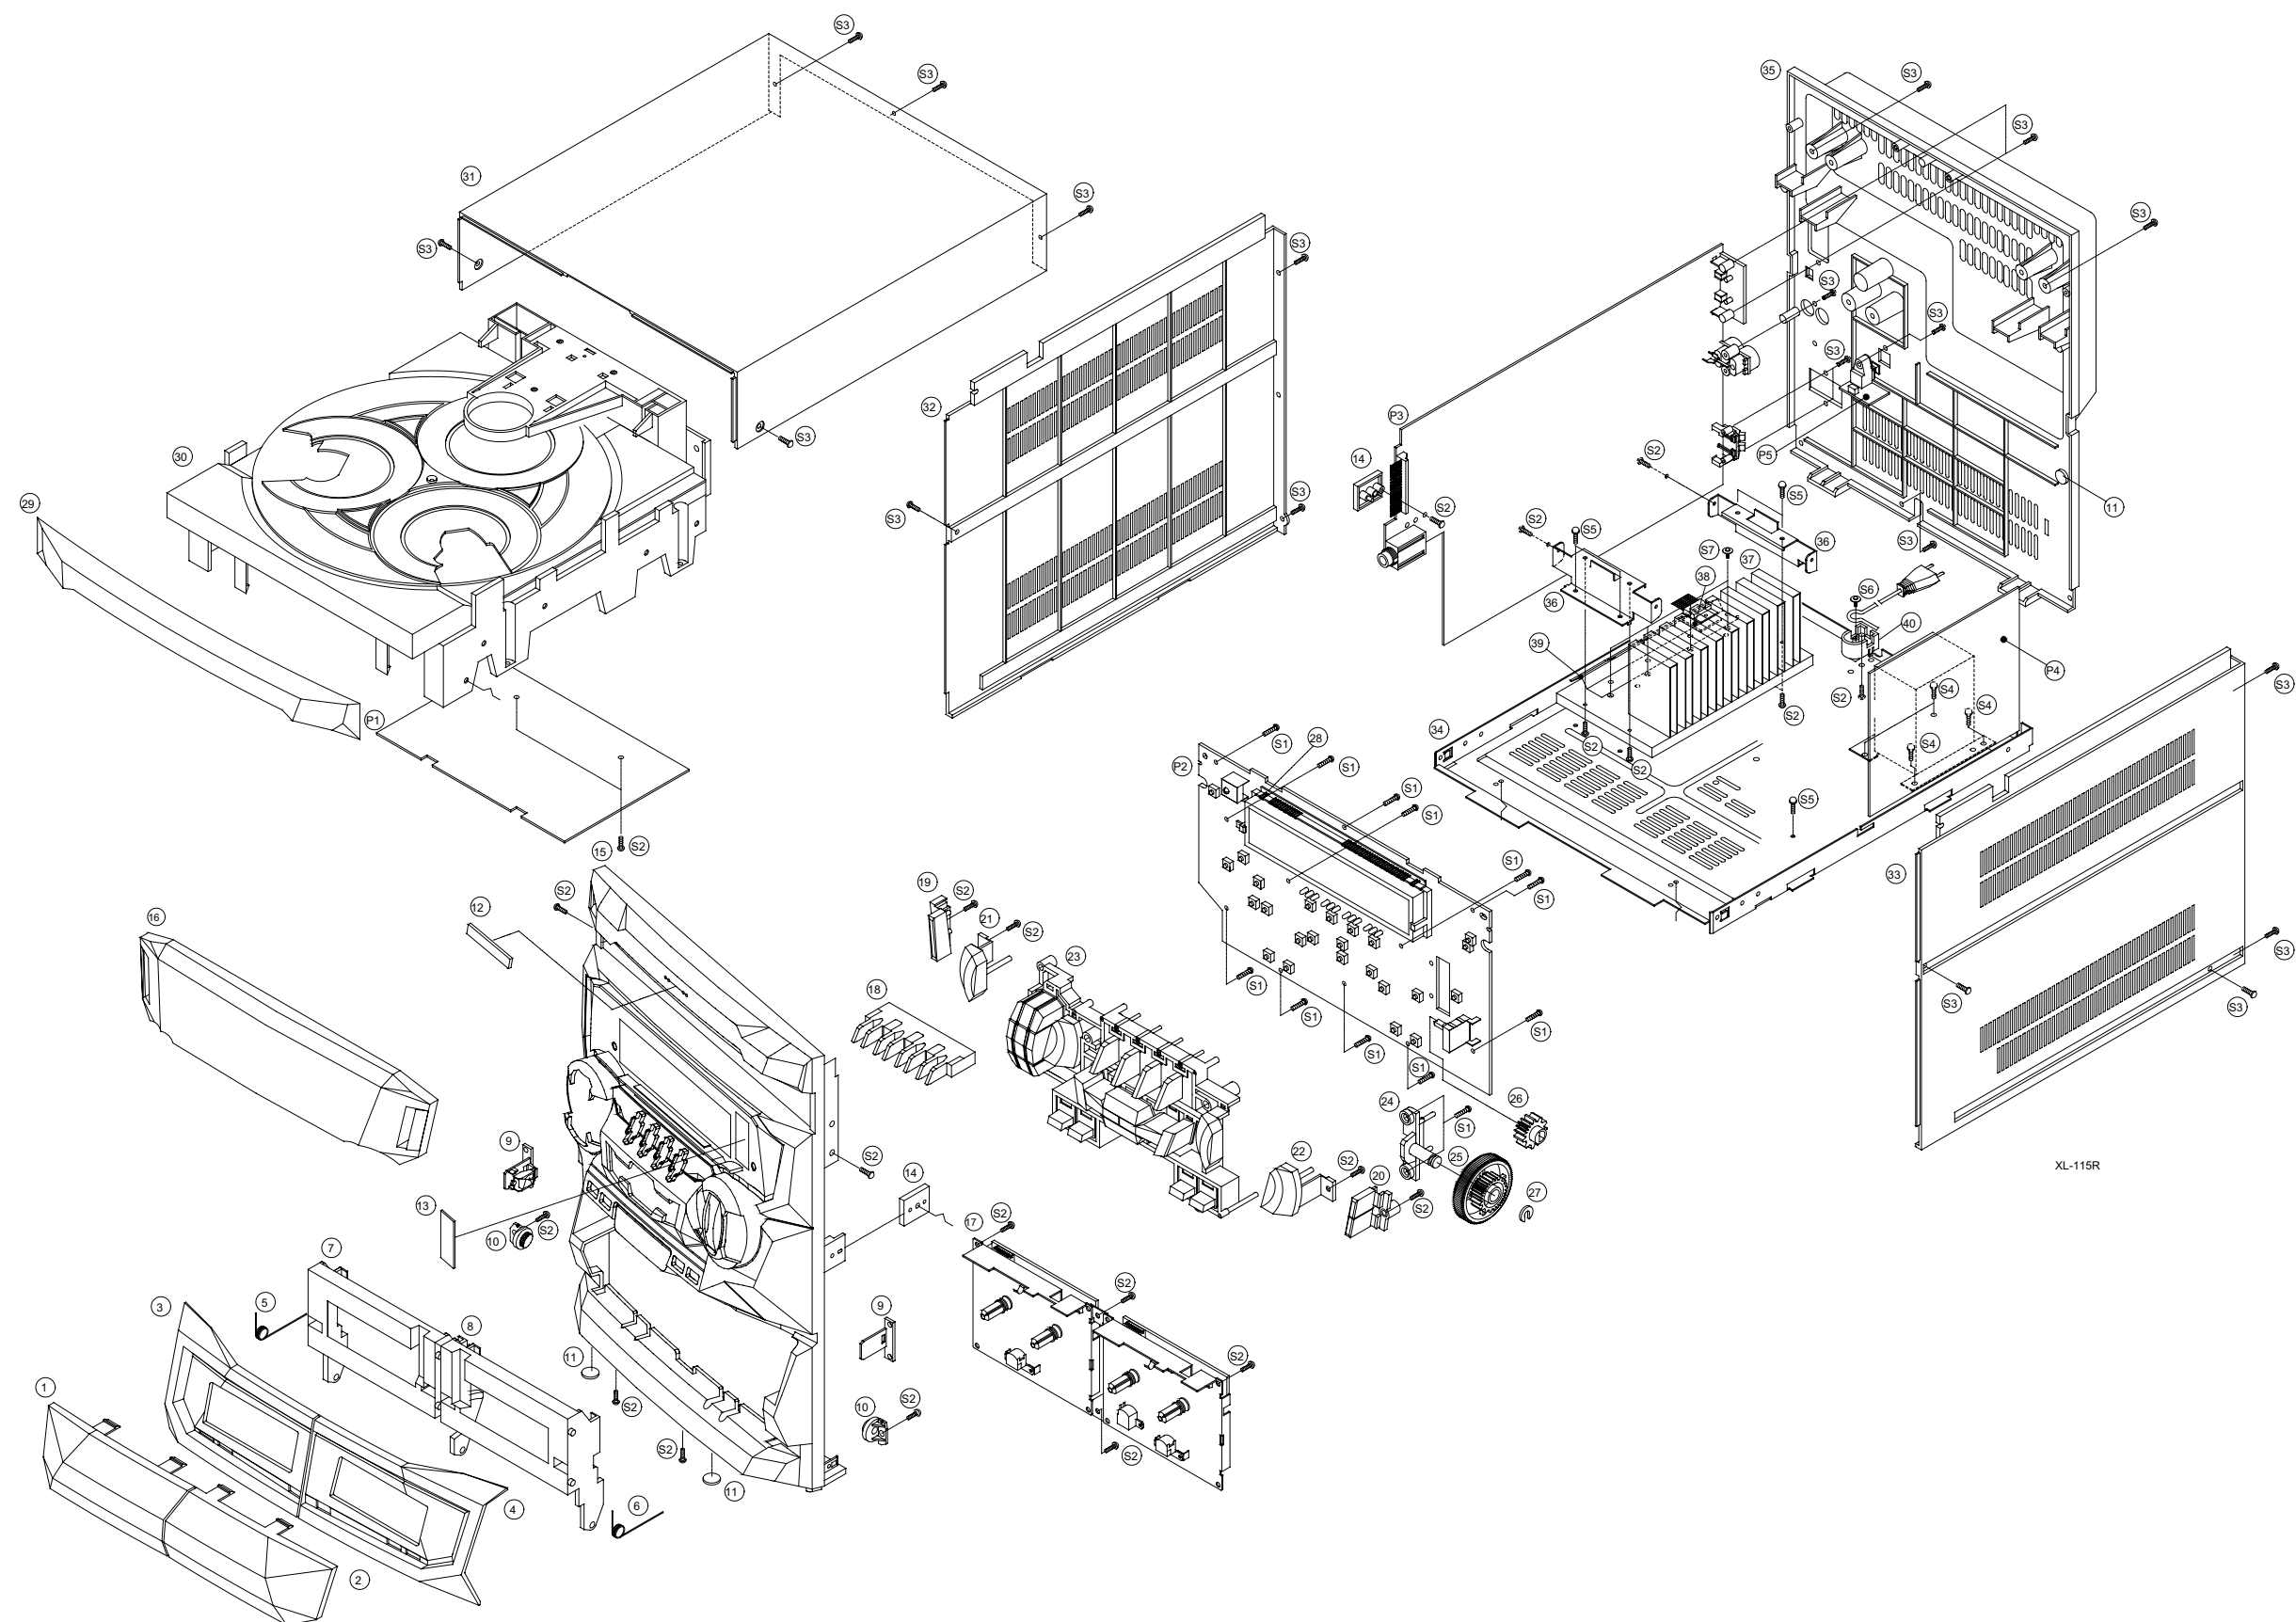

Exploded View and Mechanical Parts List


Model : AXW-117

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'TY	REMARKS
1	WINDOW DOOR "A"	9CD18173A0	ACRYL	1	
2	WINDOW DOOR "B"	9CD18173B0	ACRYL	1	
3	DOOR COVER "A"	9CD18122A0	MIPS	1	
4	DOOR COVER "B"	9CD18122B0	MIPS	1	
5	SPRING DOOR EJECT "L"	9CD30078A0	STS	1	
6	SPRING DOOR EJECT "R"	9CD30078B0	STS	1	
7	DOOR FRAME "A"	9CD18113A0	ABS	1	
8	DOOR FRAME "B"	9CD18113B0	ABS	1	
9	LOCKER ASS'Y			2	
10	DAMPER ASS'Y			2	
11	CUSHION FOOT	9CD4207700	URETHAN RUBBER	3	
12	BADGE DAEWOO	9CD1500900	ABS	1	
13	PLATE LED	9CD0911700	PVC 0.5T	1	
14	BRKT SIDE	9CD2412900	MIPS	2	
15	PANEL FRONT	9CD0308200	MIPS	1	
16	WINDOW FLT	9CD1617400	ACRYL	1	
17	CASSETTE DECK LOGIC	9CD6010000	PIGEON CWL-44FF-32	1	AUTO STOP
		9CD6010100	PIGEON CWL-44FF-33		AUTO REVERSE
18	LENS FUNCTION	9CD1617500	ACRYL	1	
19	KNOB POWER	9CD1341800	MIPS	1	
20	KNOB DEMO	9CD1341700	MIPS	1	
21	KNOB UBS "L"	9CD13419L0	MIPS	1	
22	KNOB UBS "R"	9CD13419R0	MIPS	1	
23	KNOB CONTROL	9CD1341600	MIPS	1	
24	HOLDER VOLUME	9CD2304200	MIPS	1	
25	KNOB VOLUME	9CD1342000	MIPS	1	
26	GEAR VOLUME	9CD2701700	POM	1	
27	SHAFT STOPPER	9CD3601800	POM	1	
28	GUIDE FLT	9CD2506700	ABS	1	
29	DOOR CD	9CD1812100	MIPS	1	
30	CD DECK MECHA	9CD6009300	DCC-01BC+D73S	1	
31	COVER TOP	9CD0409600	MIPS	1	
32	COVER SIDE "L"	9CD0409900	MIPS	1	

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'TY	REMARKS
33	COVER SIDE "R"	9CD0410000	MIPS	1	
34	CHASSIS BOTTOM	9CD0607100	SECC	1	
35	COVER BACK	9CD0411100	MIPS	1	
36	BRKT HEAT SINK	9CD2414600	SECC 1.0T	2	
37	HEAT SINK N50	9CD4405800	AL 7.0T	1	
38	PLATE MICA "A"	9CD0910600	MICA	2	
39	BRKT HEAT SINK	9CD2414400	STS 0.3T	1	
40	HOLDER AC CORD	9CD2303300	ABS	1	
S1	SCREW TAPTTITE	7173261011	TT2 BIN 2.6 X 10 MFZN	15	
S2	SCREW TAPTTITE	7173301011	TT2 BIN 3.0 X 10 MFZN	22	
S3	SCREW TAPTTITE	7173301212	TT2 BIN 3.0 X 12 BK	19	
S4	SCREW TAPTTITE	7173301612	TT2 BIN 4.0 X 6 MFZN	4	
S5	SCREW TAPTTITE	7173400611	TT2 BIN 3.0 X 6 MFZN	5	
S6	SCREW WASHER	9CD3102400	TT2 BIN 3.0 X 10 + D14	1	
S7	SCREW WASHER	9CD3102401	TT2 BIN 3.0 X 8 + D10	4	
P1	PCB CD	9CD6574300 9CD6574800	197X123X1.6T	1	FR-3 DCC-01B
P2	PCB FRONT	9CD6583000	247X139X1.6T	1	
P3	PCB MAIN	9CD6580500	319X197X1.6T	1	
P4	PCB POWER	9CD6580600	106.5X88X1.6T	1	
P5	PCB OPTICAL JACK	9CD6577800	29X21.5X1.6T	1	

Exploded View and Mechanical Parts List

Model : AMI-926LW/RW

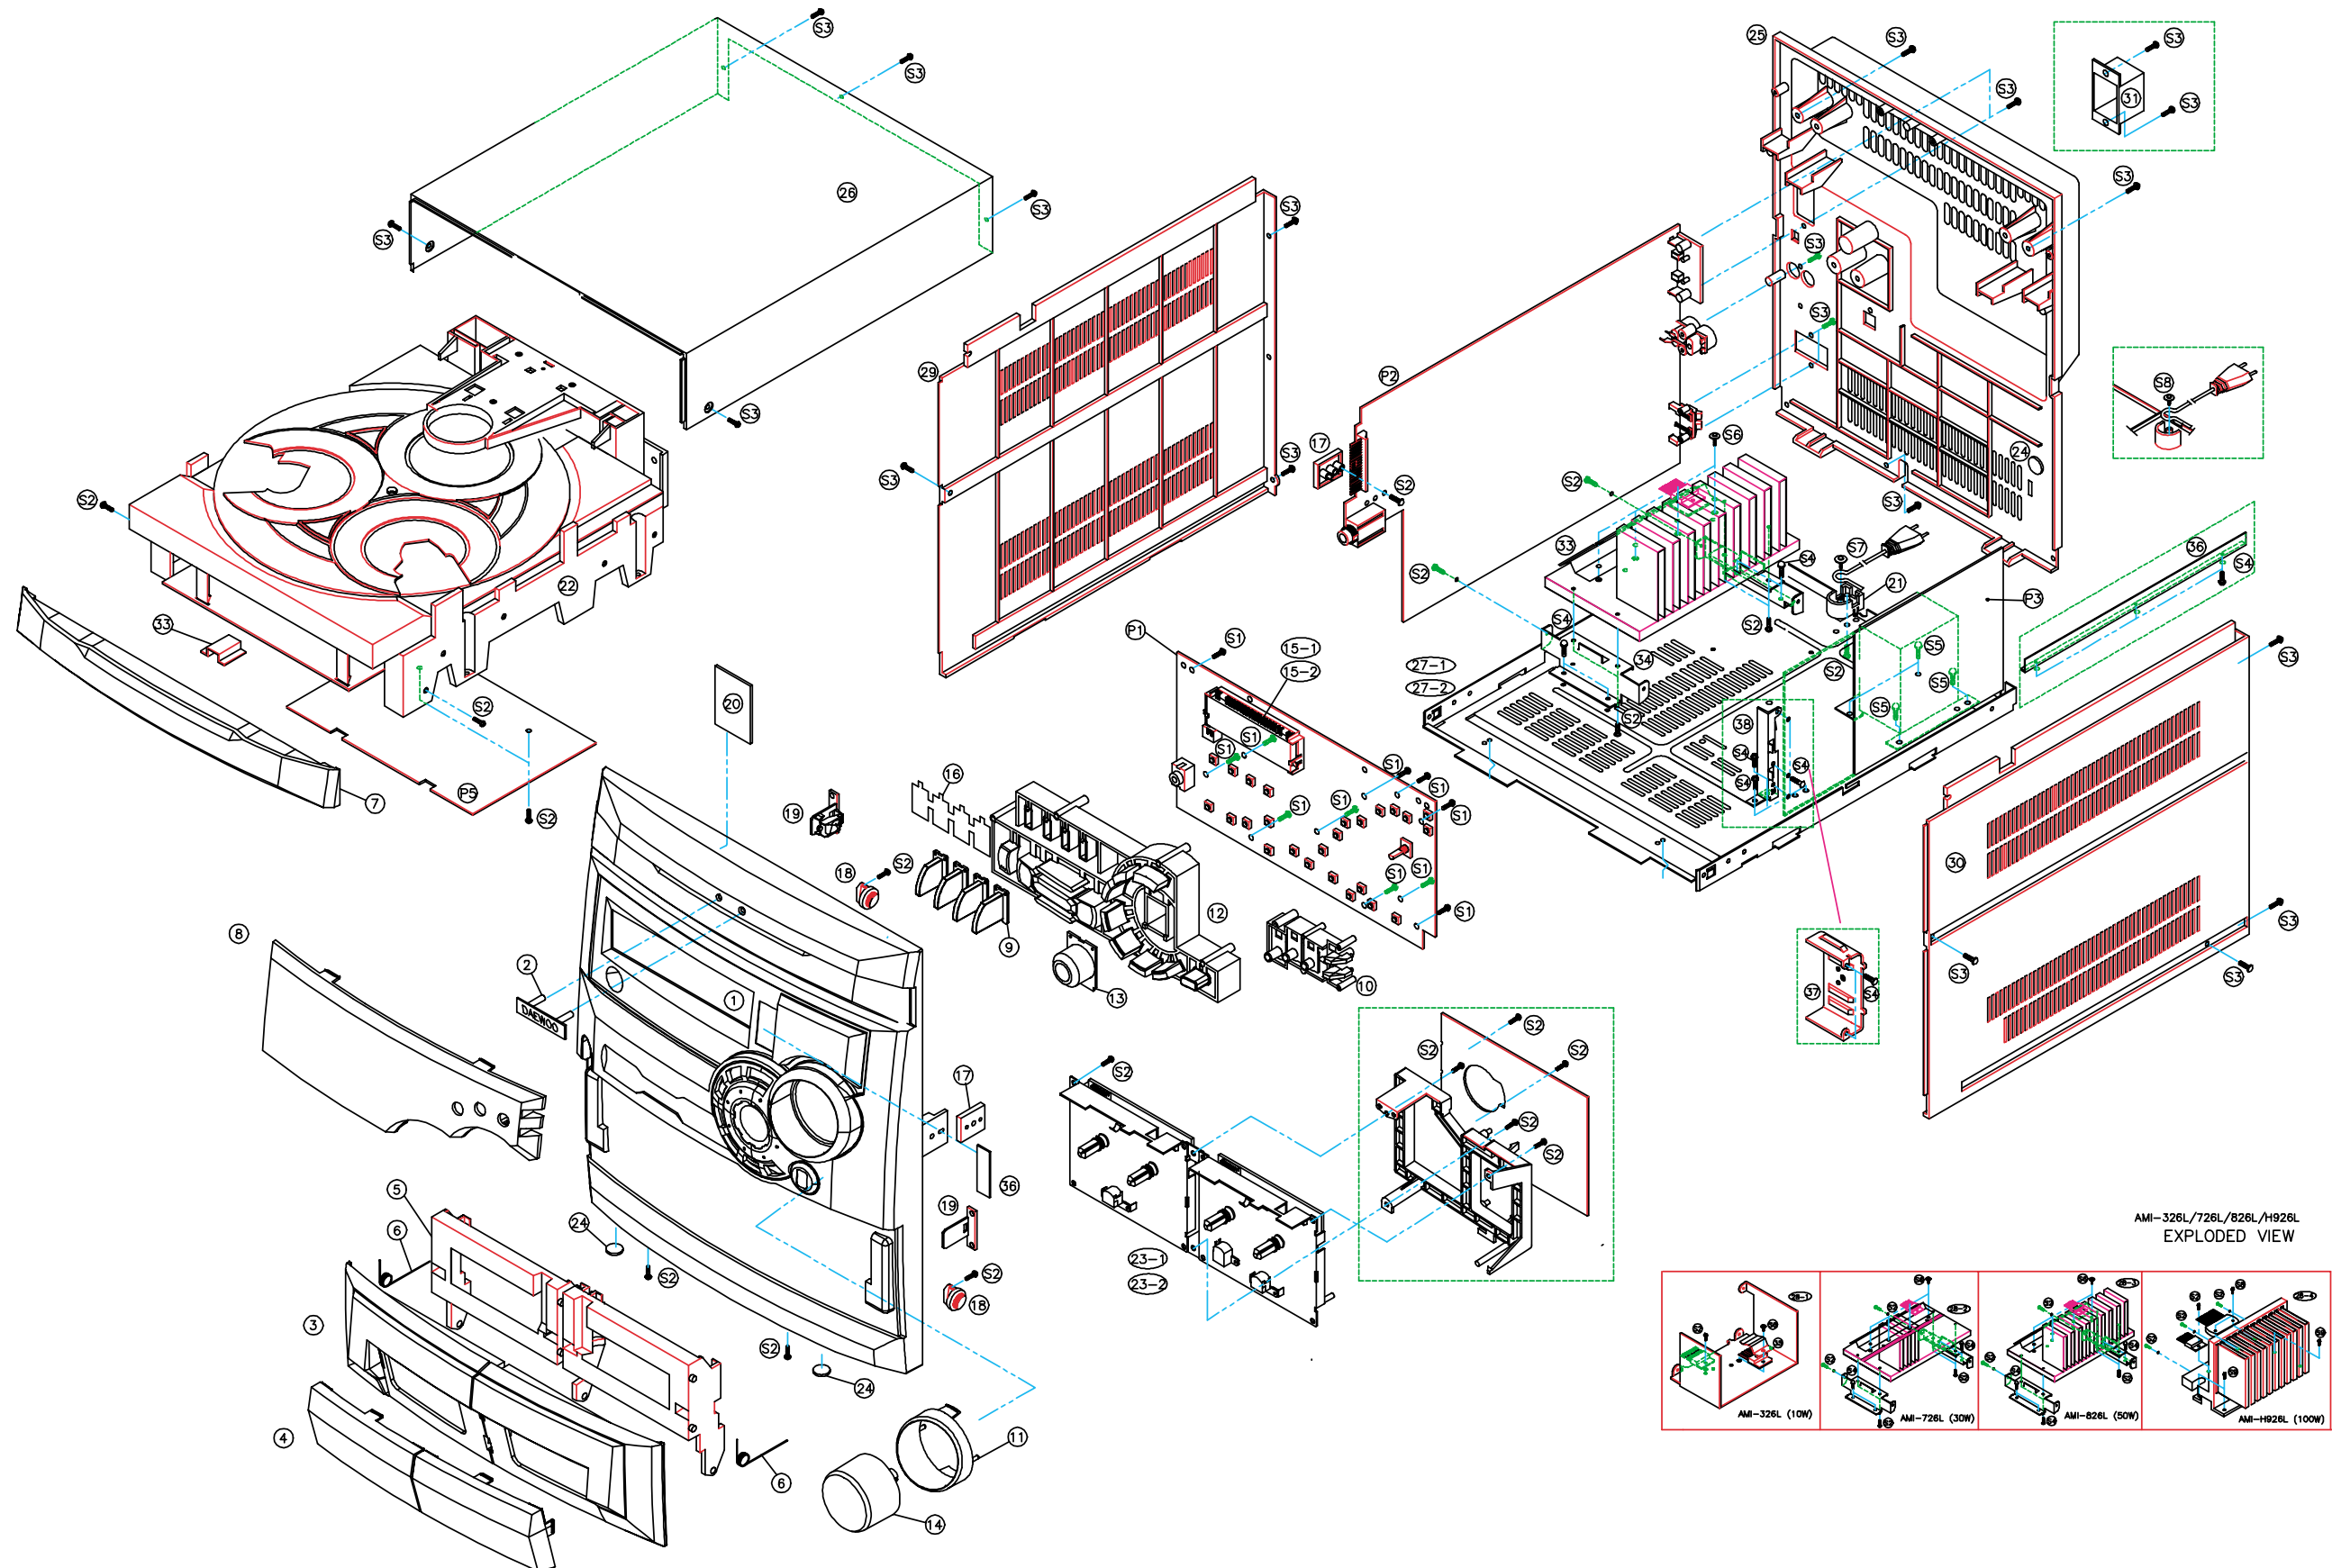

Exploded View and Mechanical Parts List


Model : AMI-926LW/RW

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
1	PANEL FRONT	9CD0307700	MIPS	1	
2	BADGE DAEWOO	9CD1500900	ABS	1	
3	DOOR COVER A/B	9CD18109A0/B0	MIPS	each1	
4	WINDOW DOOR A/B	9CD16161A1/B1	ACRYL	each1	
5	DOOR FRAME A/B	9CD18113A0/B0	ABS	each1	
6	SPRING DOOR EJECT L/R	9CD3008L0/R0	STS	each1	
7	DOOR CD	9CD1811000	MIPS	1	
8	WINDOW FLT	9CD1616201	ACRYL	1	
9	KNOB FUNCTION	9CD1338900	ACRYL	1	
10	KNOB OPEN	9CD1339200	ACRYL	1	
11	KNOB RING	9CD1339400	ABS	1	
12	KNOB CONTROL	9CD1338800	ABS	1	
13	KNOB UBS	9CD1339000	ACRYL	1	
14	KNOB VOL	9CD1339100	ABS	1	
15-1	GUIDE FLT	9CD2505600	ABS	1	326LW/726LW/826LW
15-2	GUIDE FLT	9CD2506600	ABS	1	H926LW
16	FILTER LED	9CD4700800	PC T0.15	1	
17	BRKT SIDE	9CD2412900	ABS	2	
18	DAMPER GEAR ASS'Y			2	
19	LOCKER ASS'Y			2	
20	PLATE FLT	9CD0911100	PVC SHEET T1.0	2	326LW/726LW/826LW
21	HOLDER AC CODE	9CD2303300	ABS	1	726LW/826LW/H926LW
22	CD DECK MECHA	9CD6009300	DCC-01BC+D73S	1	
23-1	CASSETTE DECK LOGIC	9CD6010000	PIGEON CWL-44FF-32	1	AUTO STOP (326LW)
23-2	CASSETTE DECK LOGIC	9CD6010100	PIGEON CWL-44FF-33	1	AUTO REVERSE
24	CUSHION FOOT	9CD4207700	URETHAN	2	
25	COVER BACK	9CD0411100	MIPS	1	
26	COVER TOP	9CD0411400	MIPS	1	
27-1	CHASSIS BOTTOM	9CD0607100	SECC 1.0T	1	726LW/826LW/H926LW
27-2	CHASSIS BOTTOM	9CD0607500	ABS	1	326LW
28-1	HEAT SINK 1	9CD4404500	AL	1	326LW
28-2	HEAT SINK N30	9CD4406200	AL	1	726LW
28-3	HEAT SINK N50	9CD4405900	AL	1	826LW
28-4	HEAT SINK N150	9CD4406000	AL	1	H926LW
29	COVER SIDE L	9CD04115L0	MIPS	1	
30	COVER SIDE R	9CD04115R0	MIPS	1	

NO	PARTS NAME	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
31	COVER ANT	9CD0410400	ABS	1	
32	HOLDER PCB	9CD2304800	MIPS	1	H926LW
33	BRACKET HEAT TR	9CD2414400	SUS 0.3T	1	726LW/826LW
34	BRACKET HEAT TR	9CD2414600	SECC 1.0T	2	726LW/826LW
35	BRACKET HEAT TR	9CD2413900	SUS 0.5T	1	326LW
36	FRAME BOTTOM	9CD0607800	SECC 1.0T	1	H926LW
37	HEAT SINK PW	9CD4404200	AL	1	H926LW
38	BRKT PCB C	9CD2414500	SECC 1.0T	1	H926LW
NO	SCREW	PARTS CODE	DESCRIPTION	Q'ty	REMARKS
S1	SCREW TAPTTITE	7173261011	TT2 BIN 2.6 X 10 MFZN	11	AMI-826LW : Reference
S2	SCREW TAPTTITE	7173301011	TT2 BIN 3.0X10 MFZN	22	
S3	SCREW TAPTTITE	7173301212	TT2 BIN 3.0X12 BK	18	
S4	SCREW TAPTTITE	7173300611	TT2 BIN 3.0X6 MFZN	4	
S5	SCREW TAPTTITE	7173400611	TT2 BIN 4.0X6 MFZN	4	
S6	WASHER SCREW	9CD3102401	TT2 BIN 3.0X8 + D12	4	
S7	WASHER SCREW	9CD3102400	TT2 BIN 3.0X10 + D14	1	
S8	SCREW TAPTTITE	7173301411	TT2 BIN 3.0X14 MFZN	2	H926LW
S9	SCREW TAPTTITE	7173401011	TT2 BIN 4.0X10 MFZN	4	H926LW
NO	PARTS NAME		Q'ty	REMARKS	
P1	FRONT PCB		1		
P2	MAIN PCB		1		
P3	POWER PCB		1		
P4	DECK PCB		1	H926L	
P5	PCB CD		1		


Wiring Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW

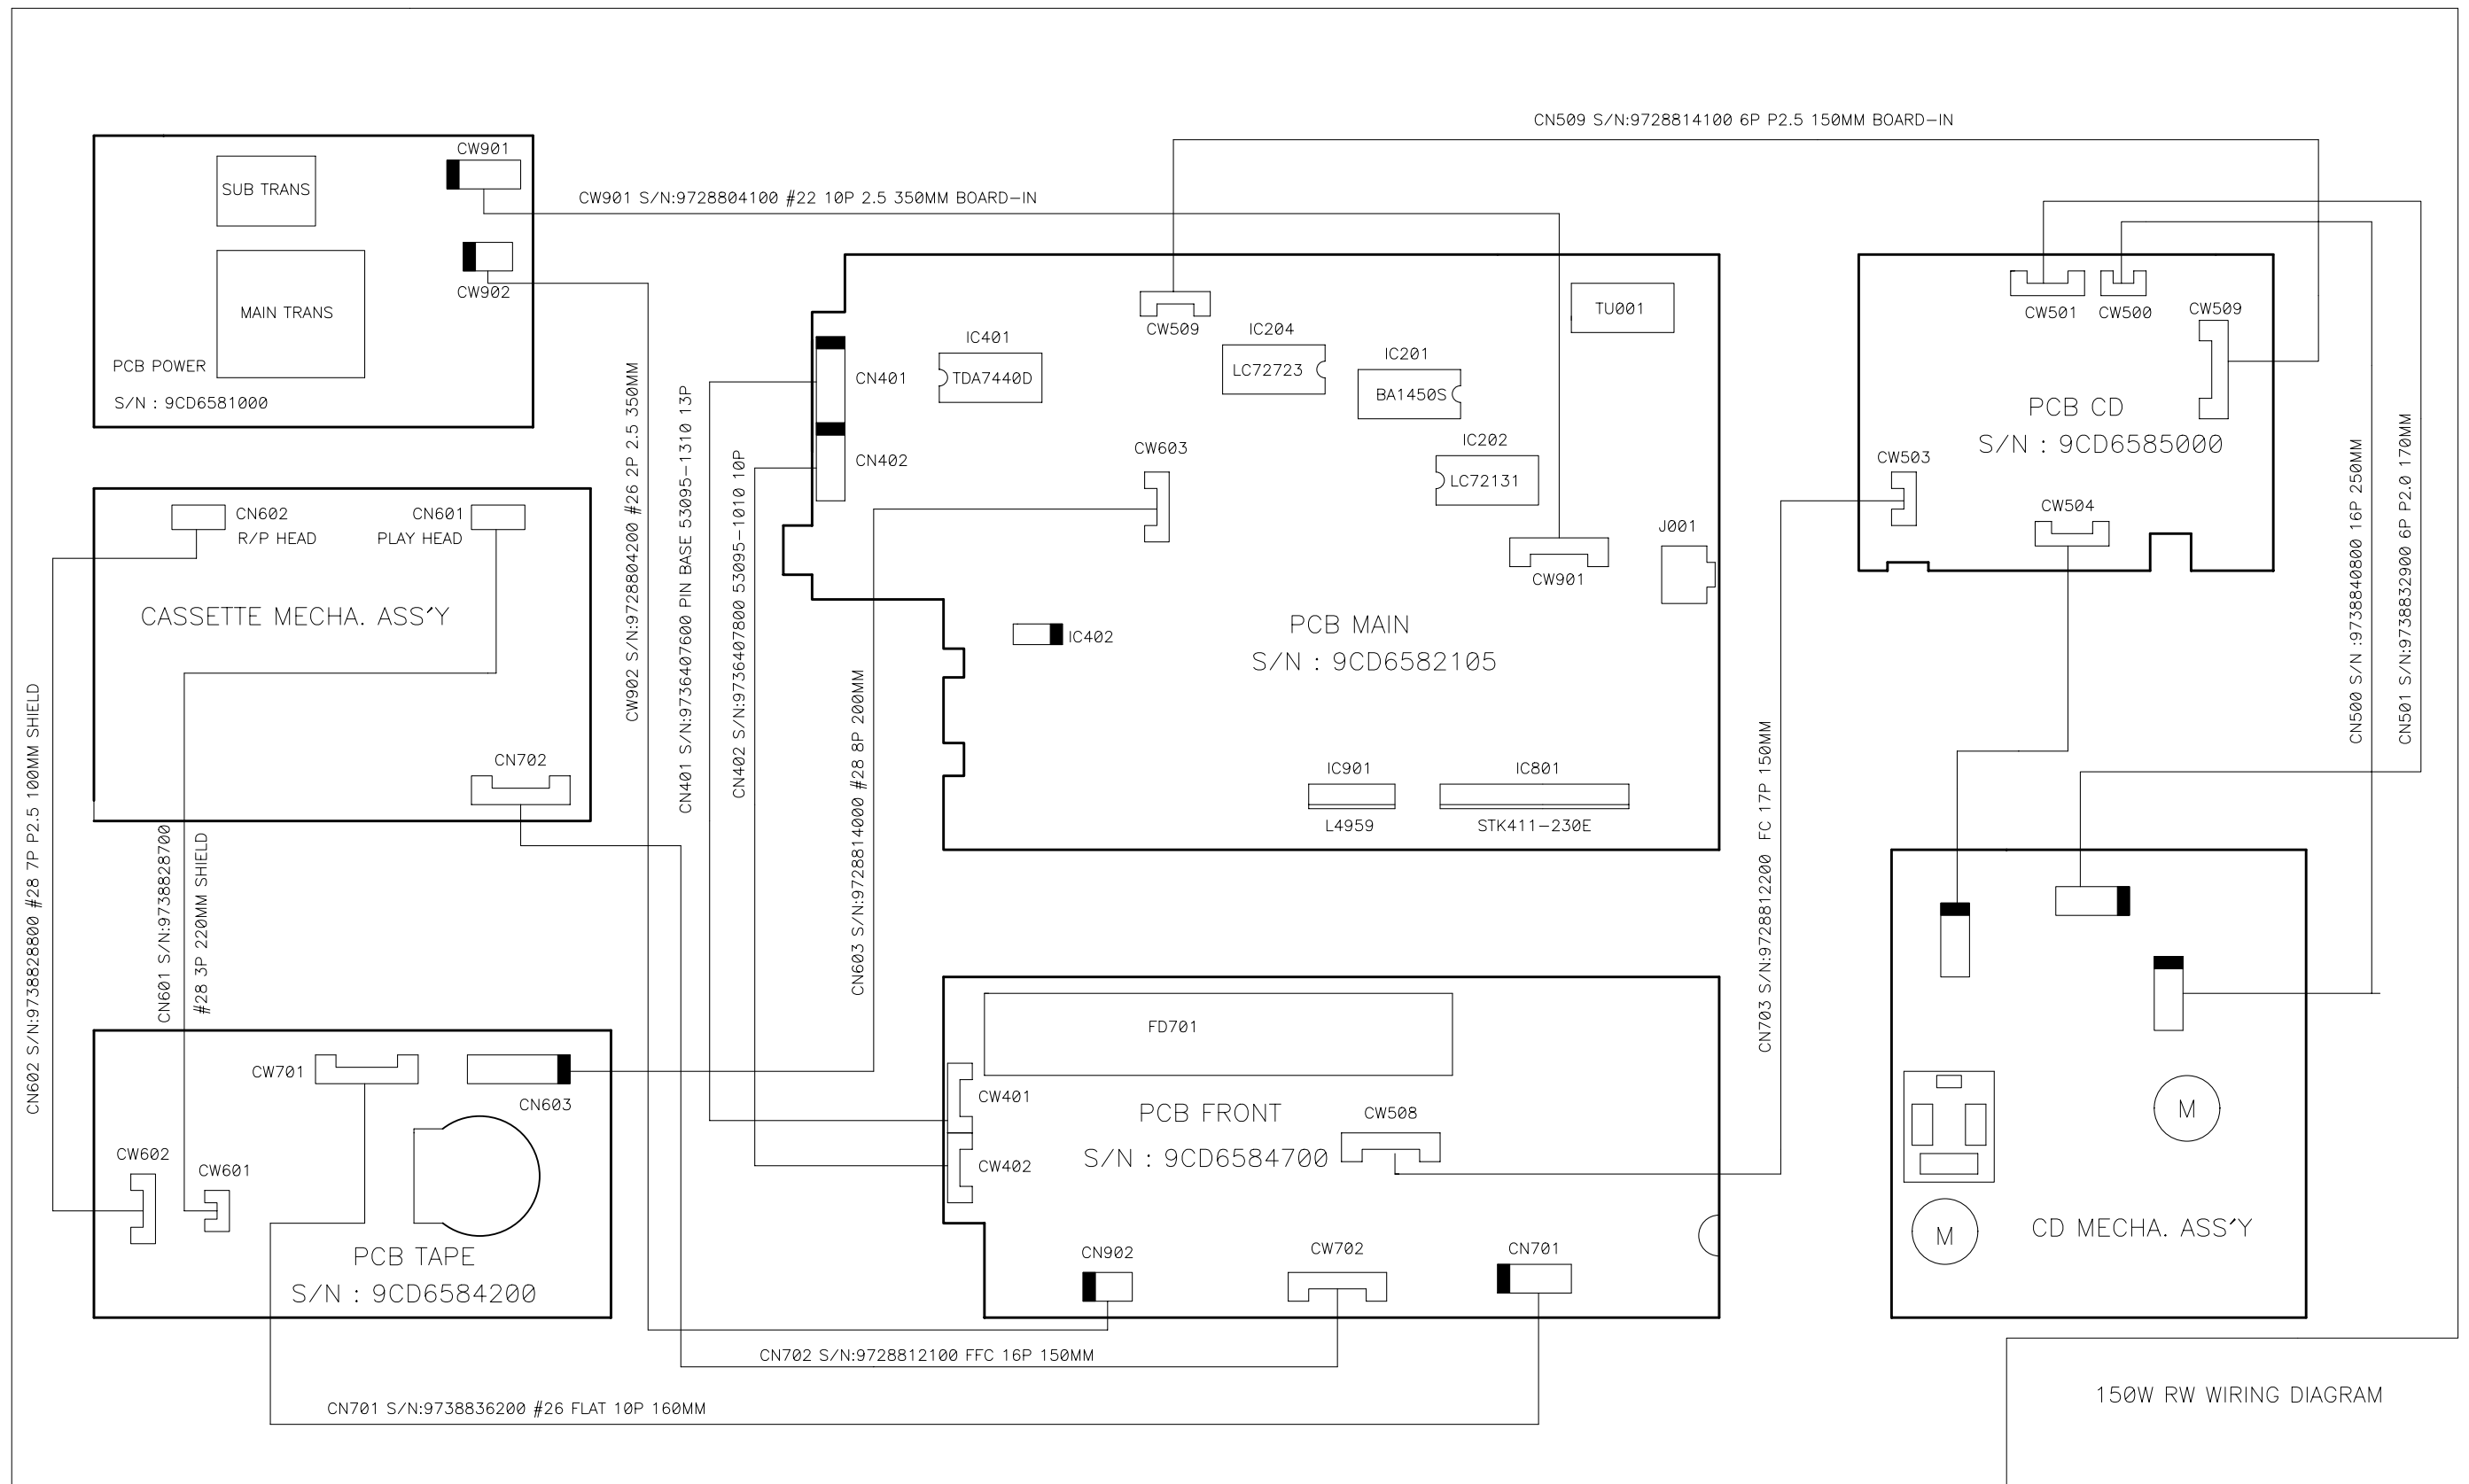

Block Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW

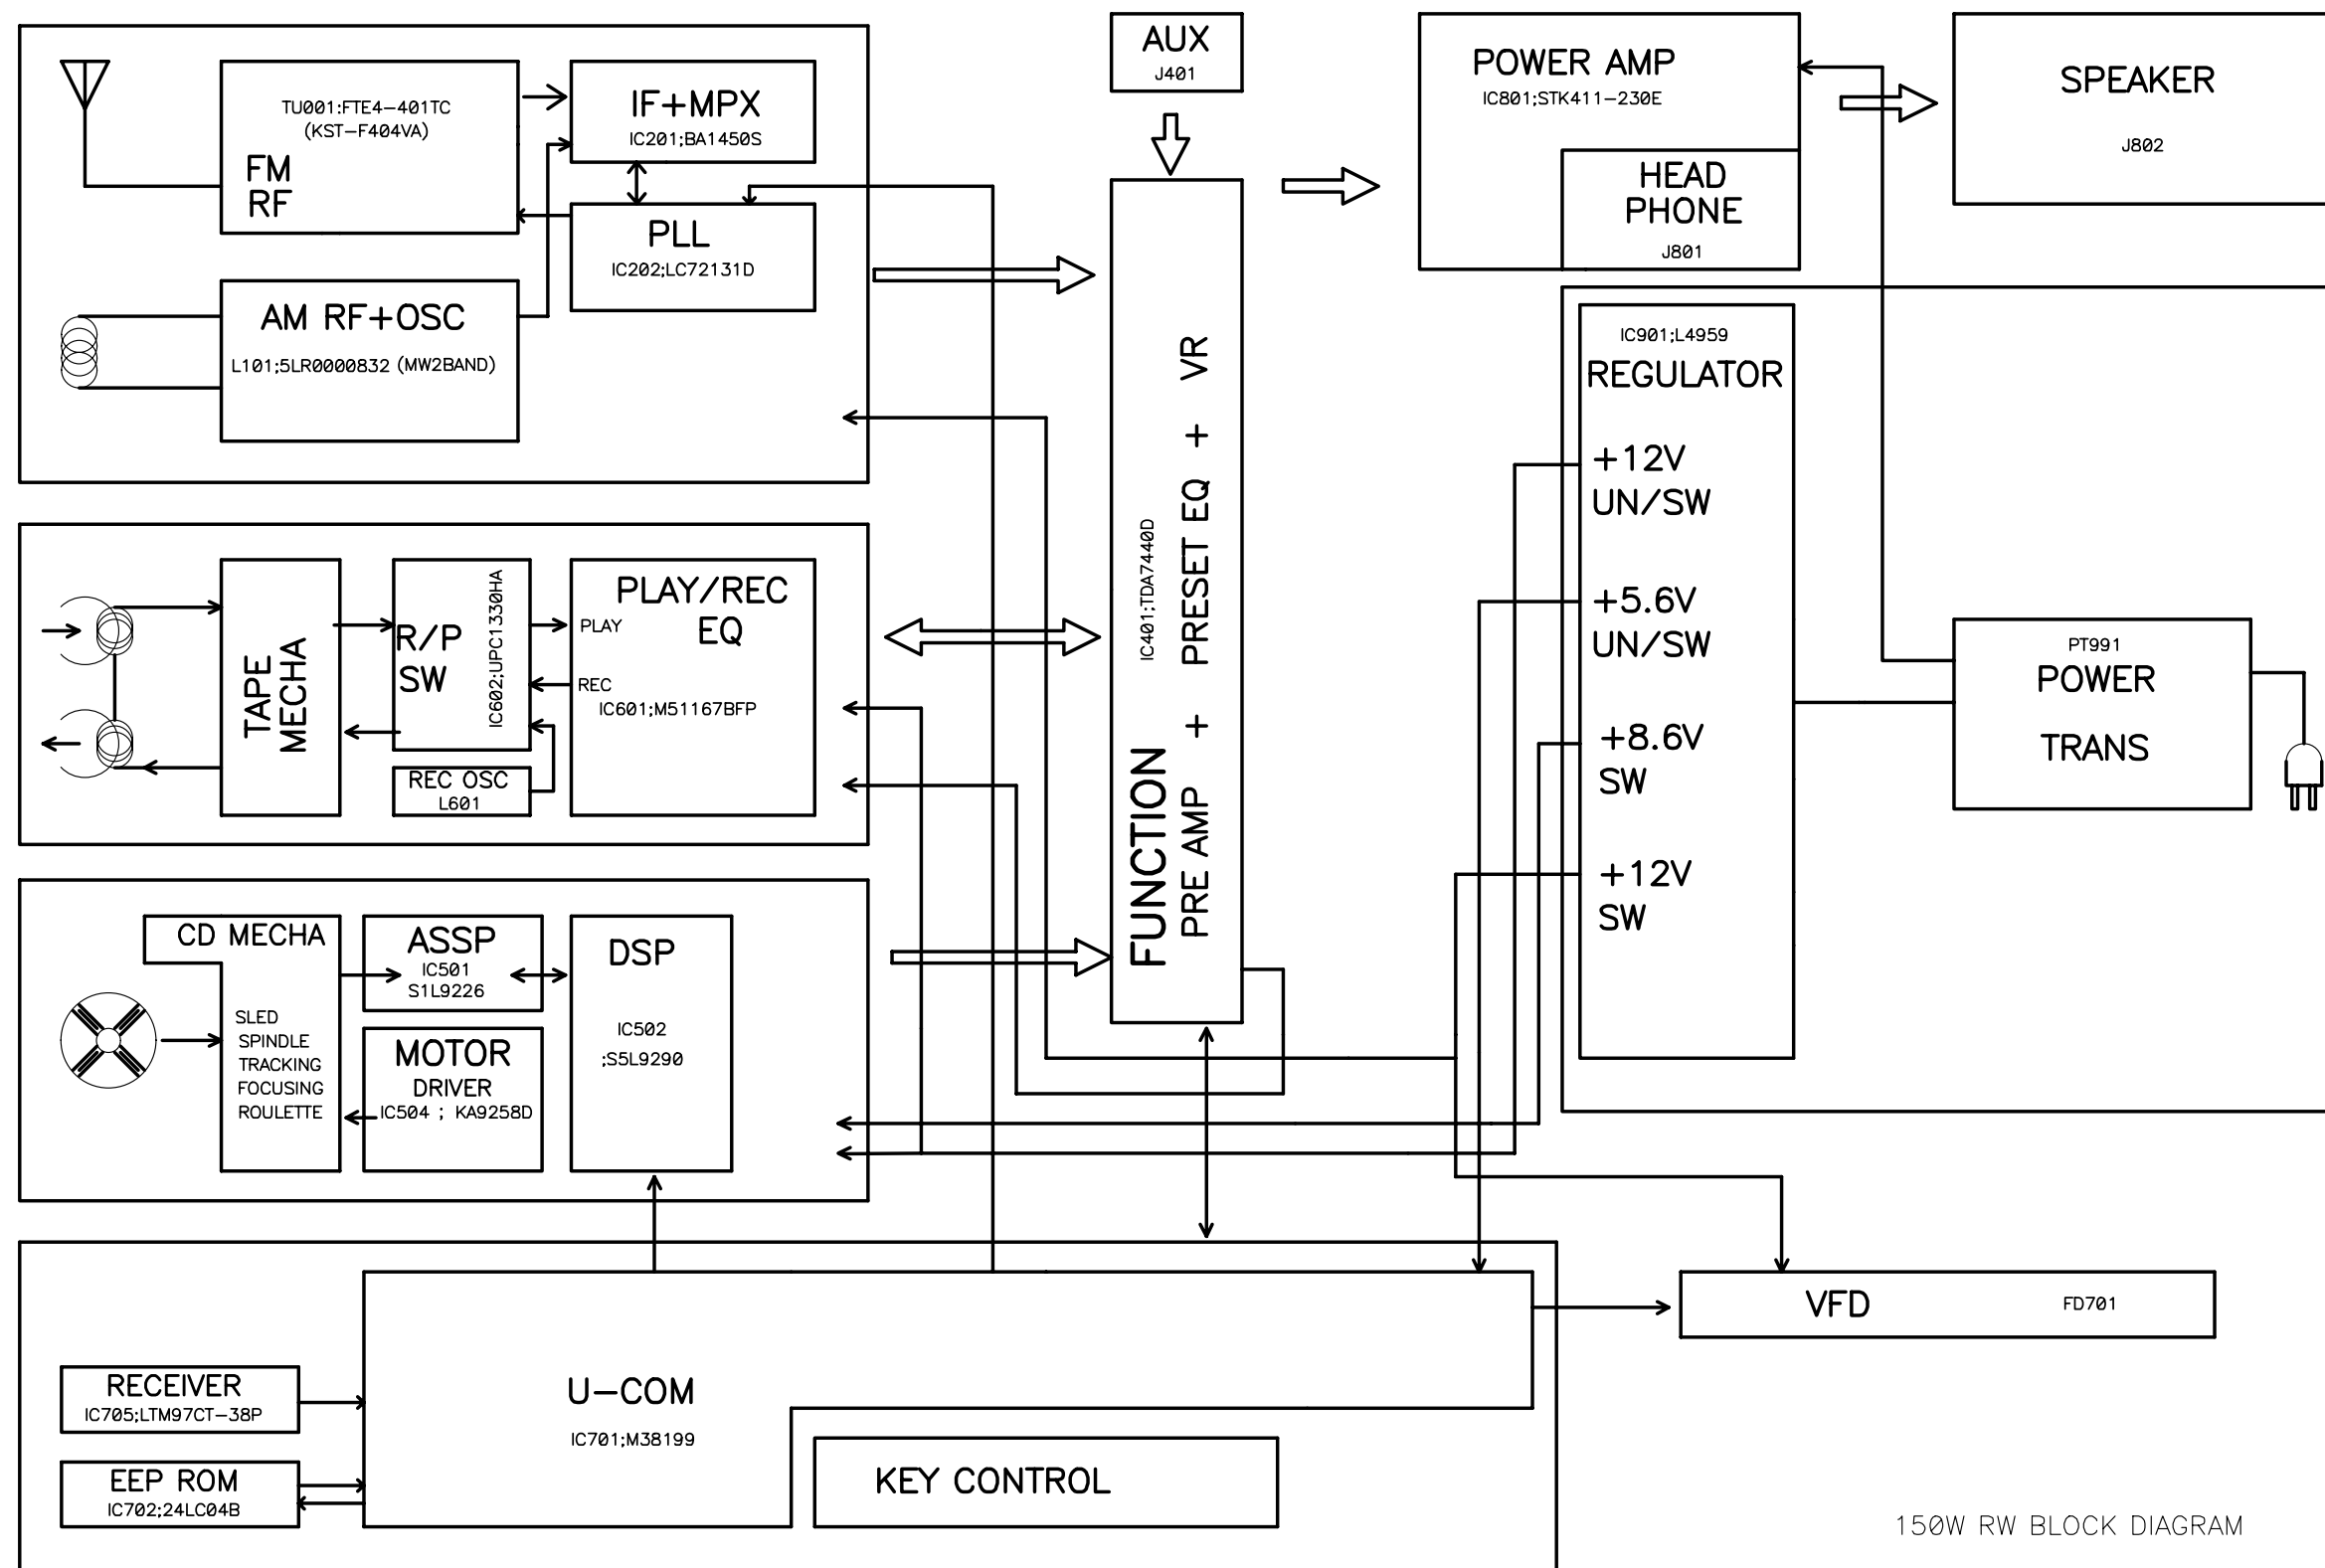

150W RW BLOCK DIAGRAM

Schematic Diagram


Model : AXW-217/ AXW-117/ AMI-926LW/RW

Ass'y Name : MAIN

BEFORE RETURNING THE RECEIVER TO CUSTOMER, APPROPRIATE LEAKAGE CURRENT OR RESISTANCE SHOULD BE CONDUCTED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT


NOTE : THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY REPLACE ONLY WITH SAME TYPE PARTS SPECIFIED

WARNING : FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS

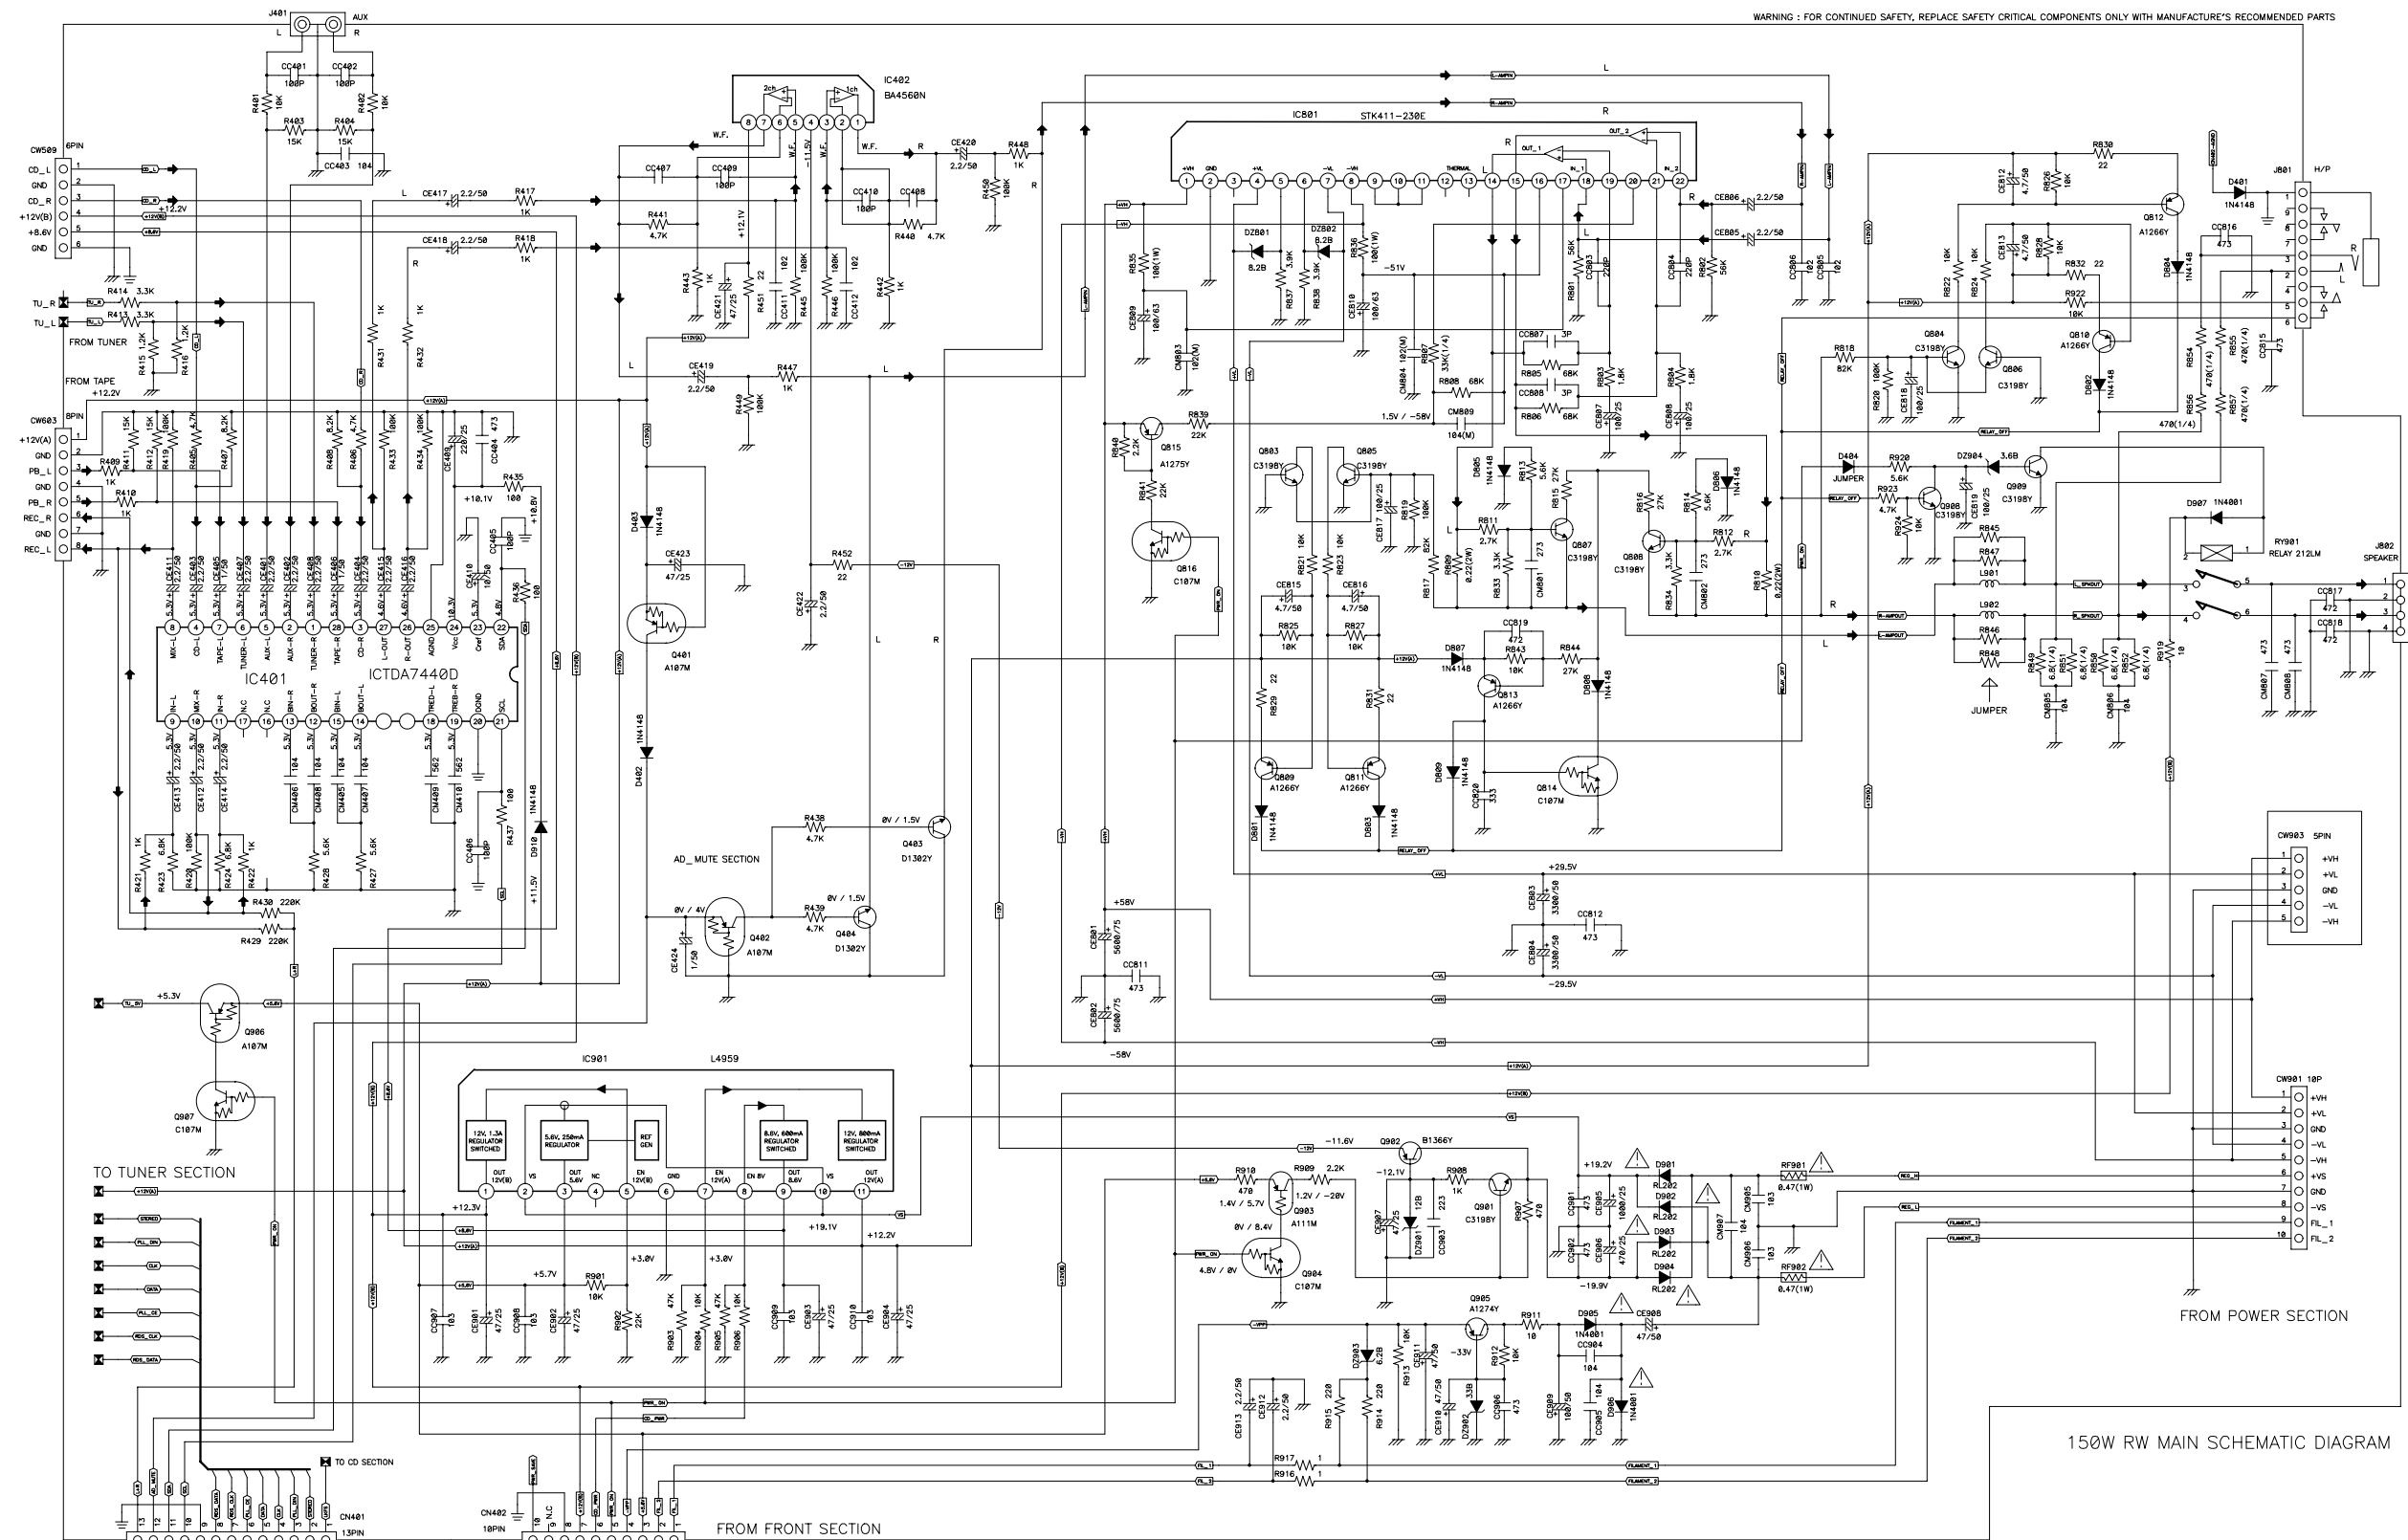



Schematic Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : TUNER

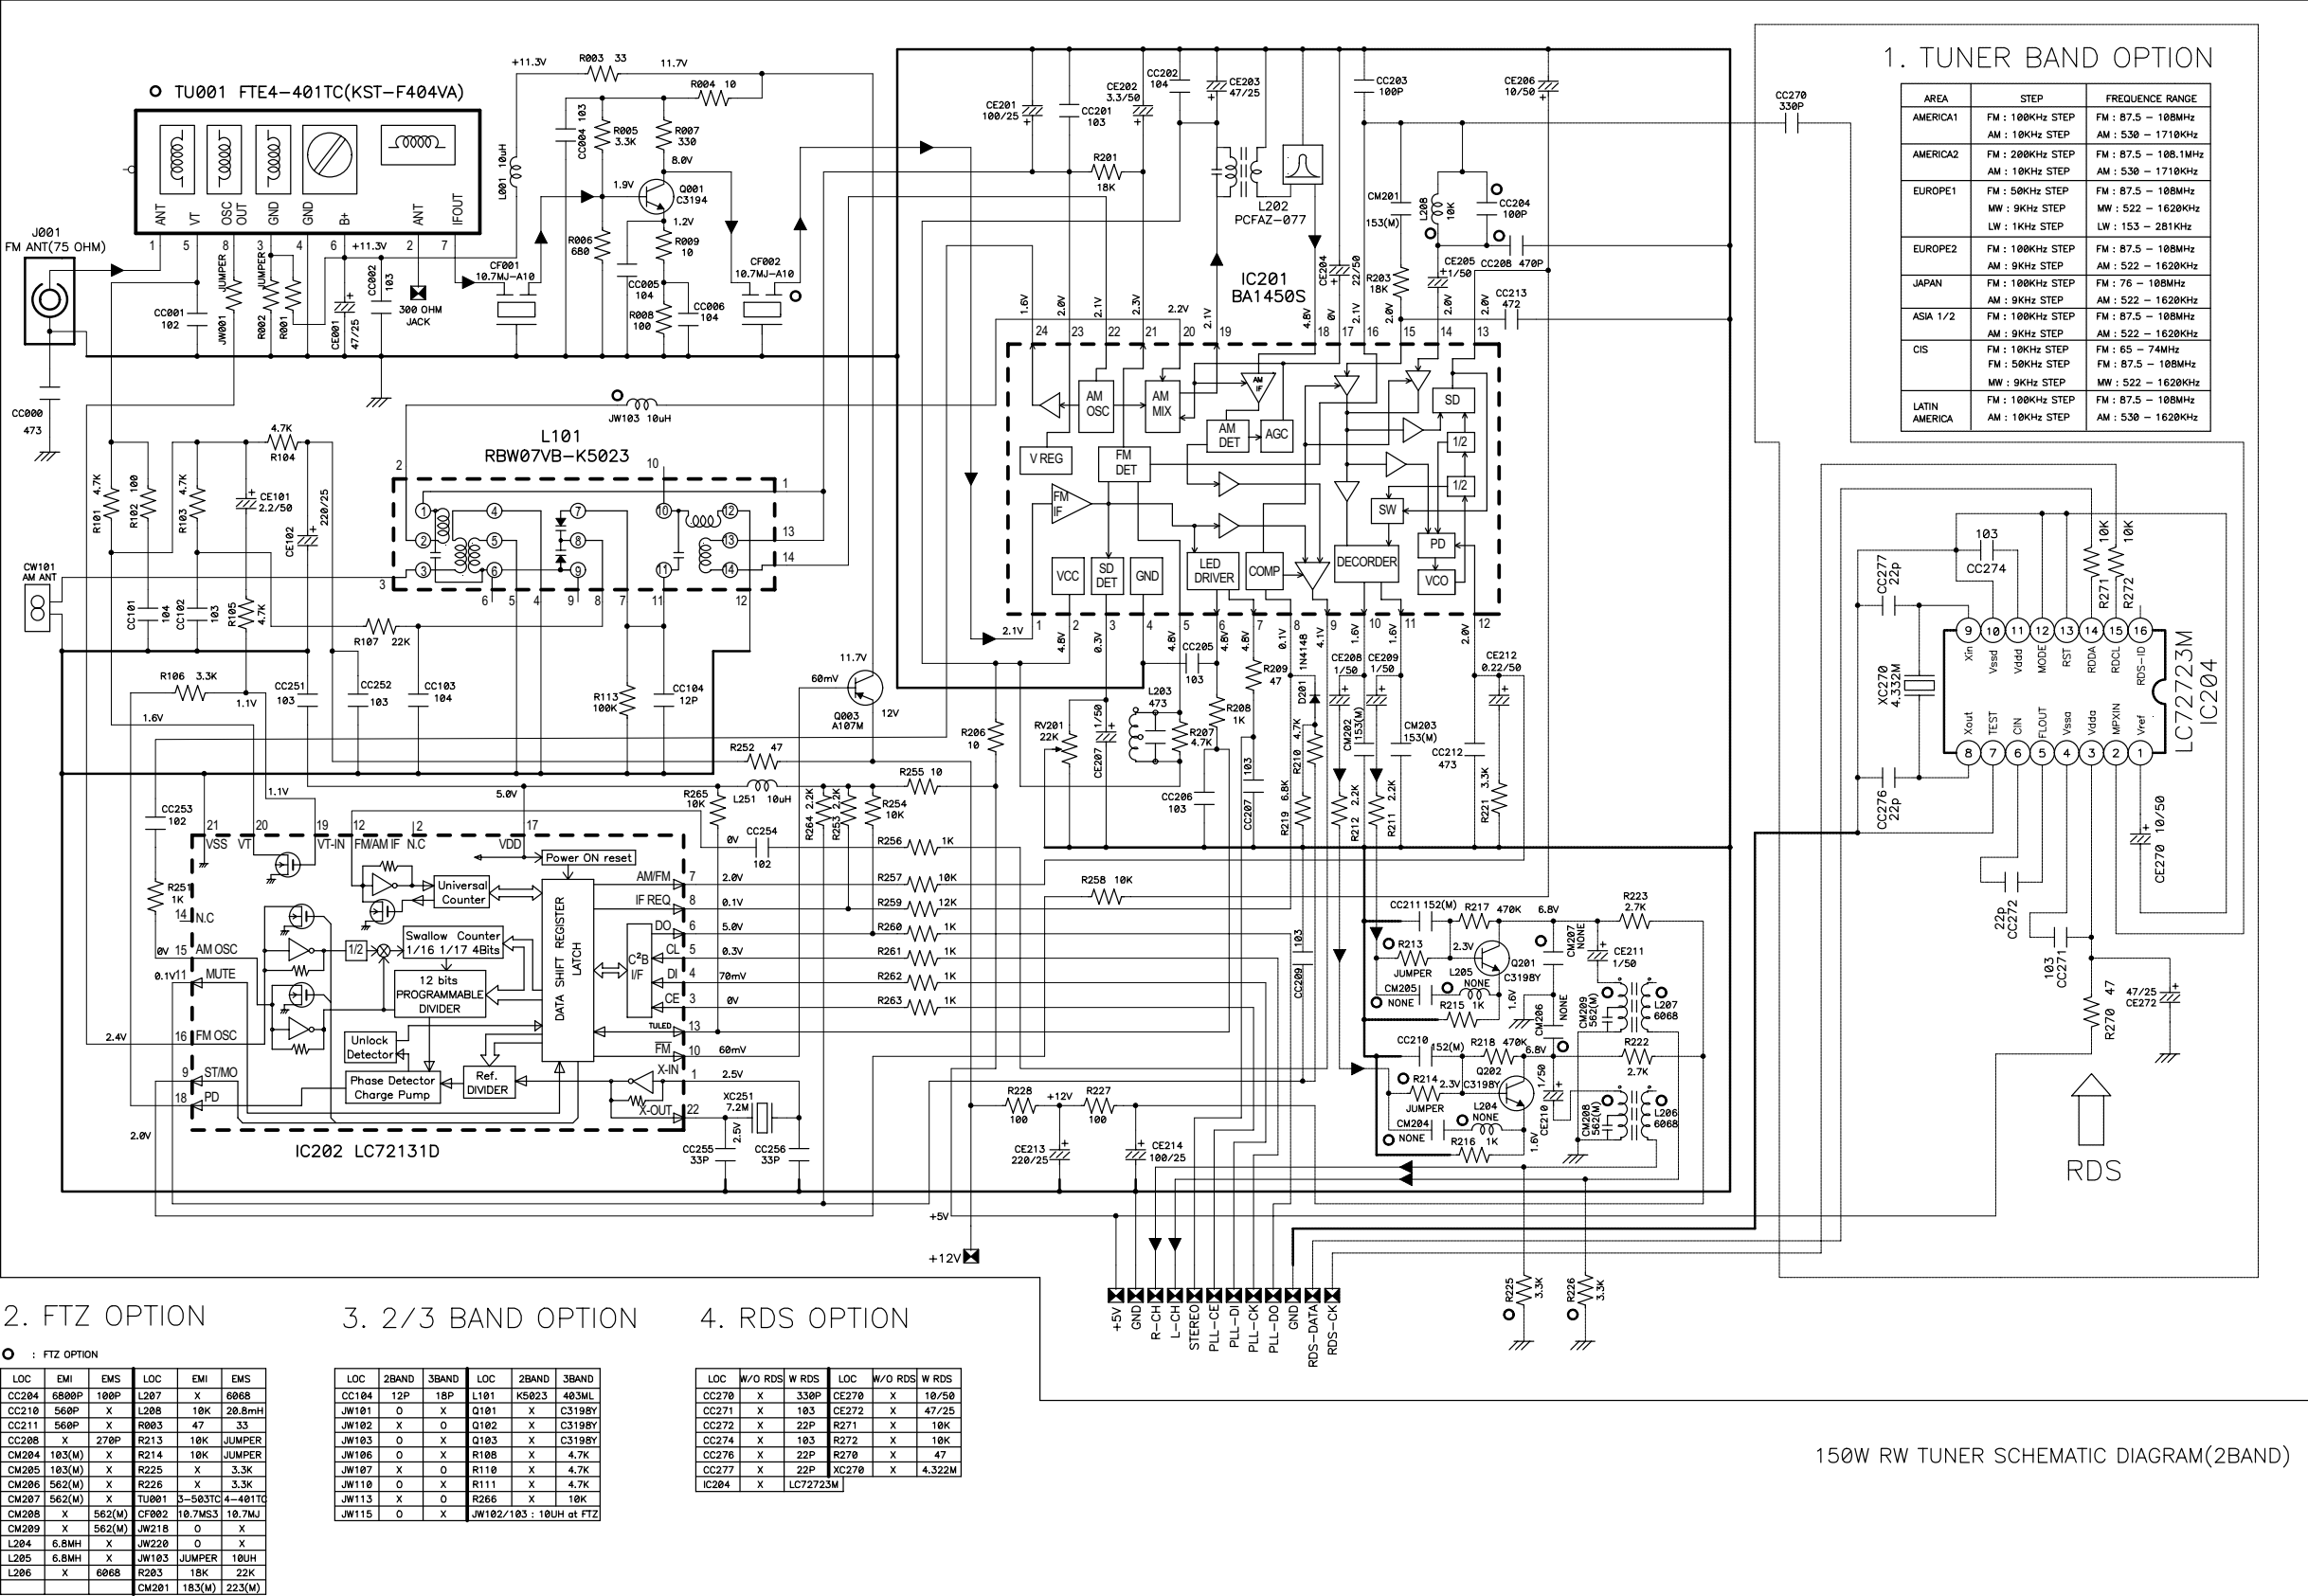

Schematic Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : TAPE

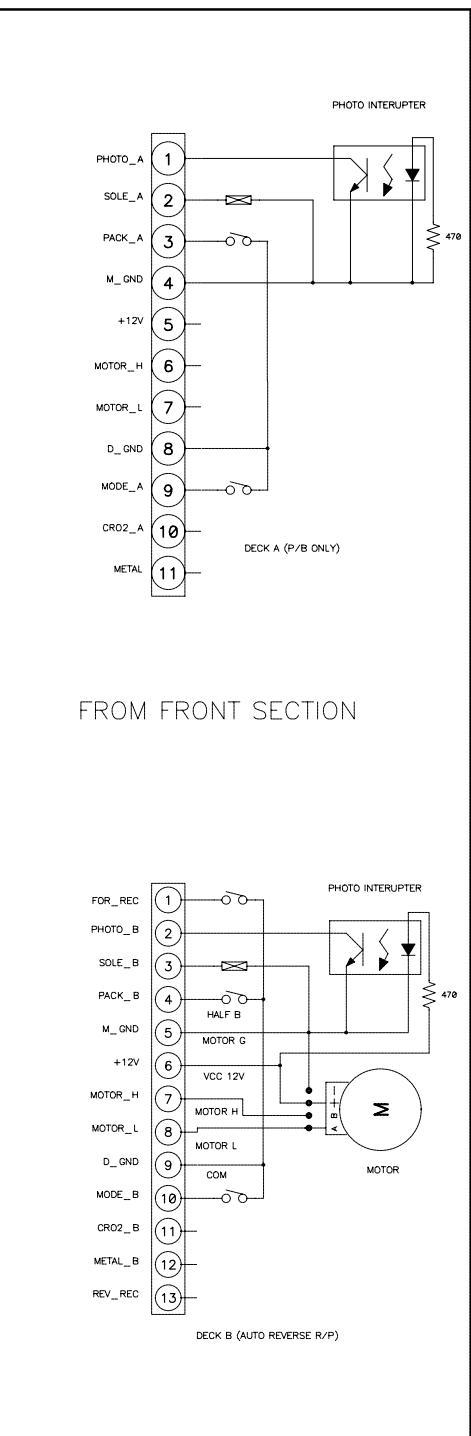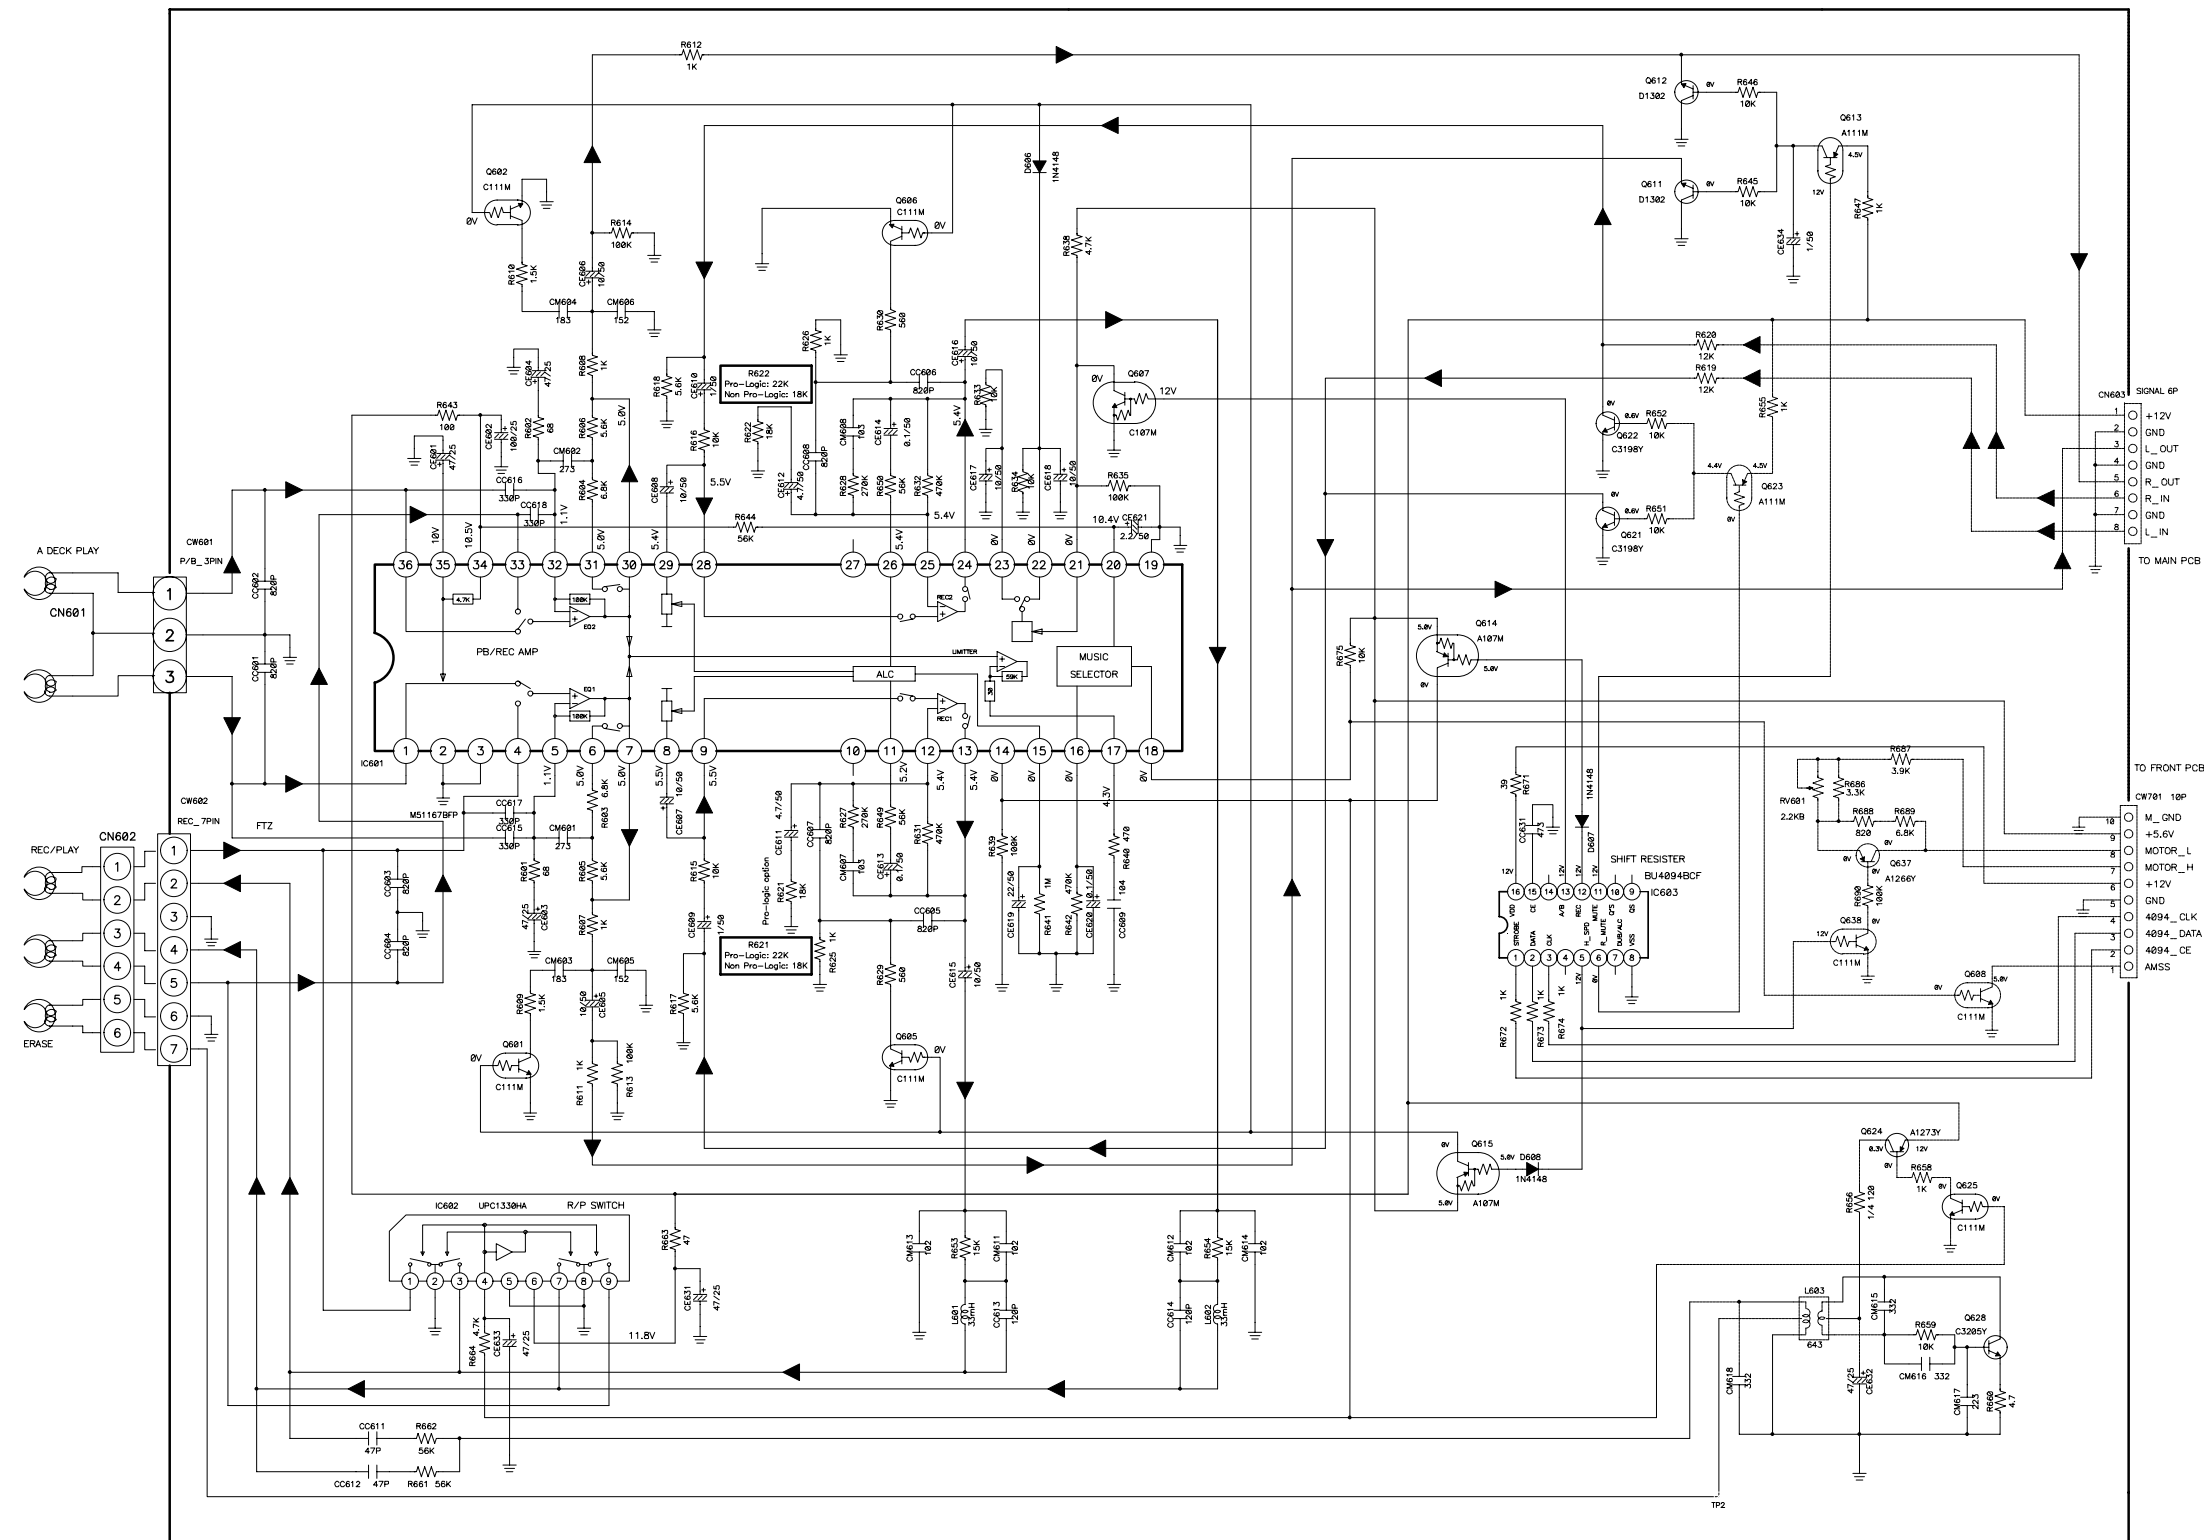


150W RW TAPE SCHEMATIC DIAGRAM
(USE FOR PIGEON DECK)

Schematic Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW

Ass'y Name : CD

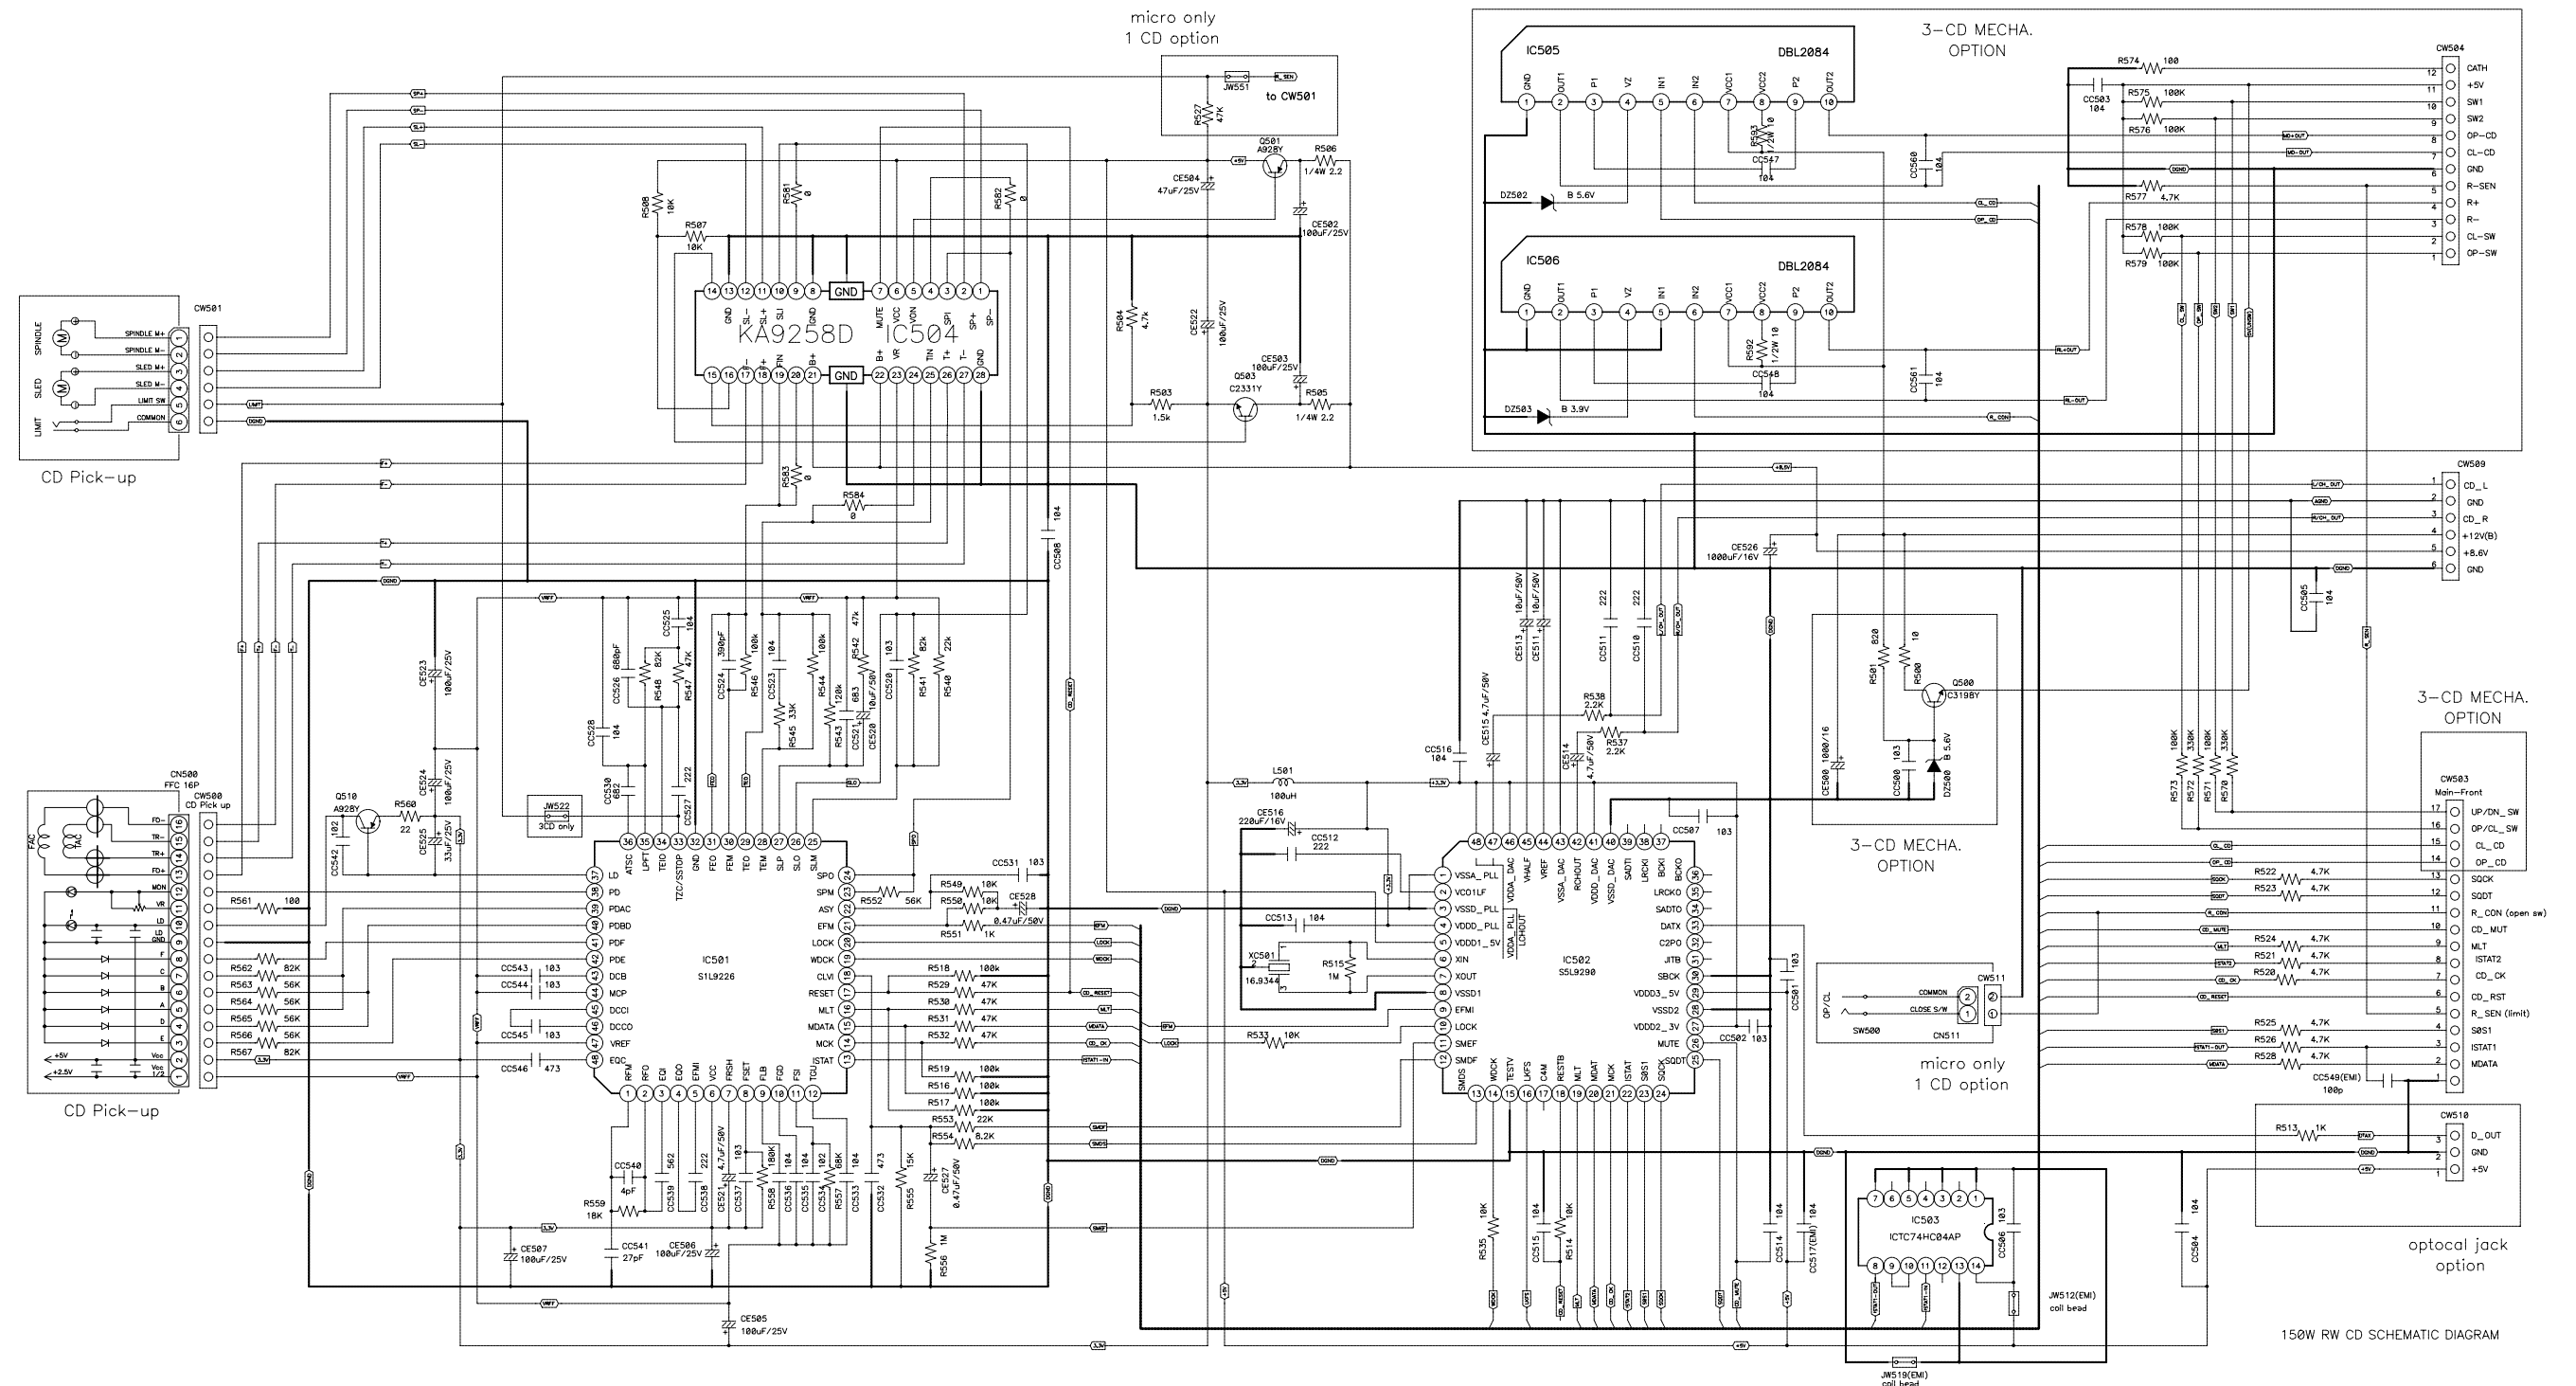


Model : AXW-217
Ass'y Name : FRONT



Schematic Diagram

Model : AXW-117


Ass'y Name : FRONT

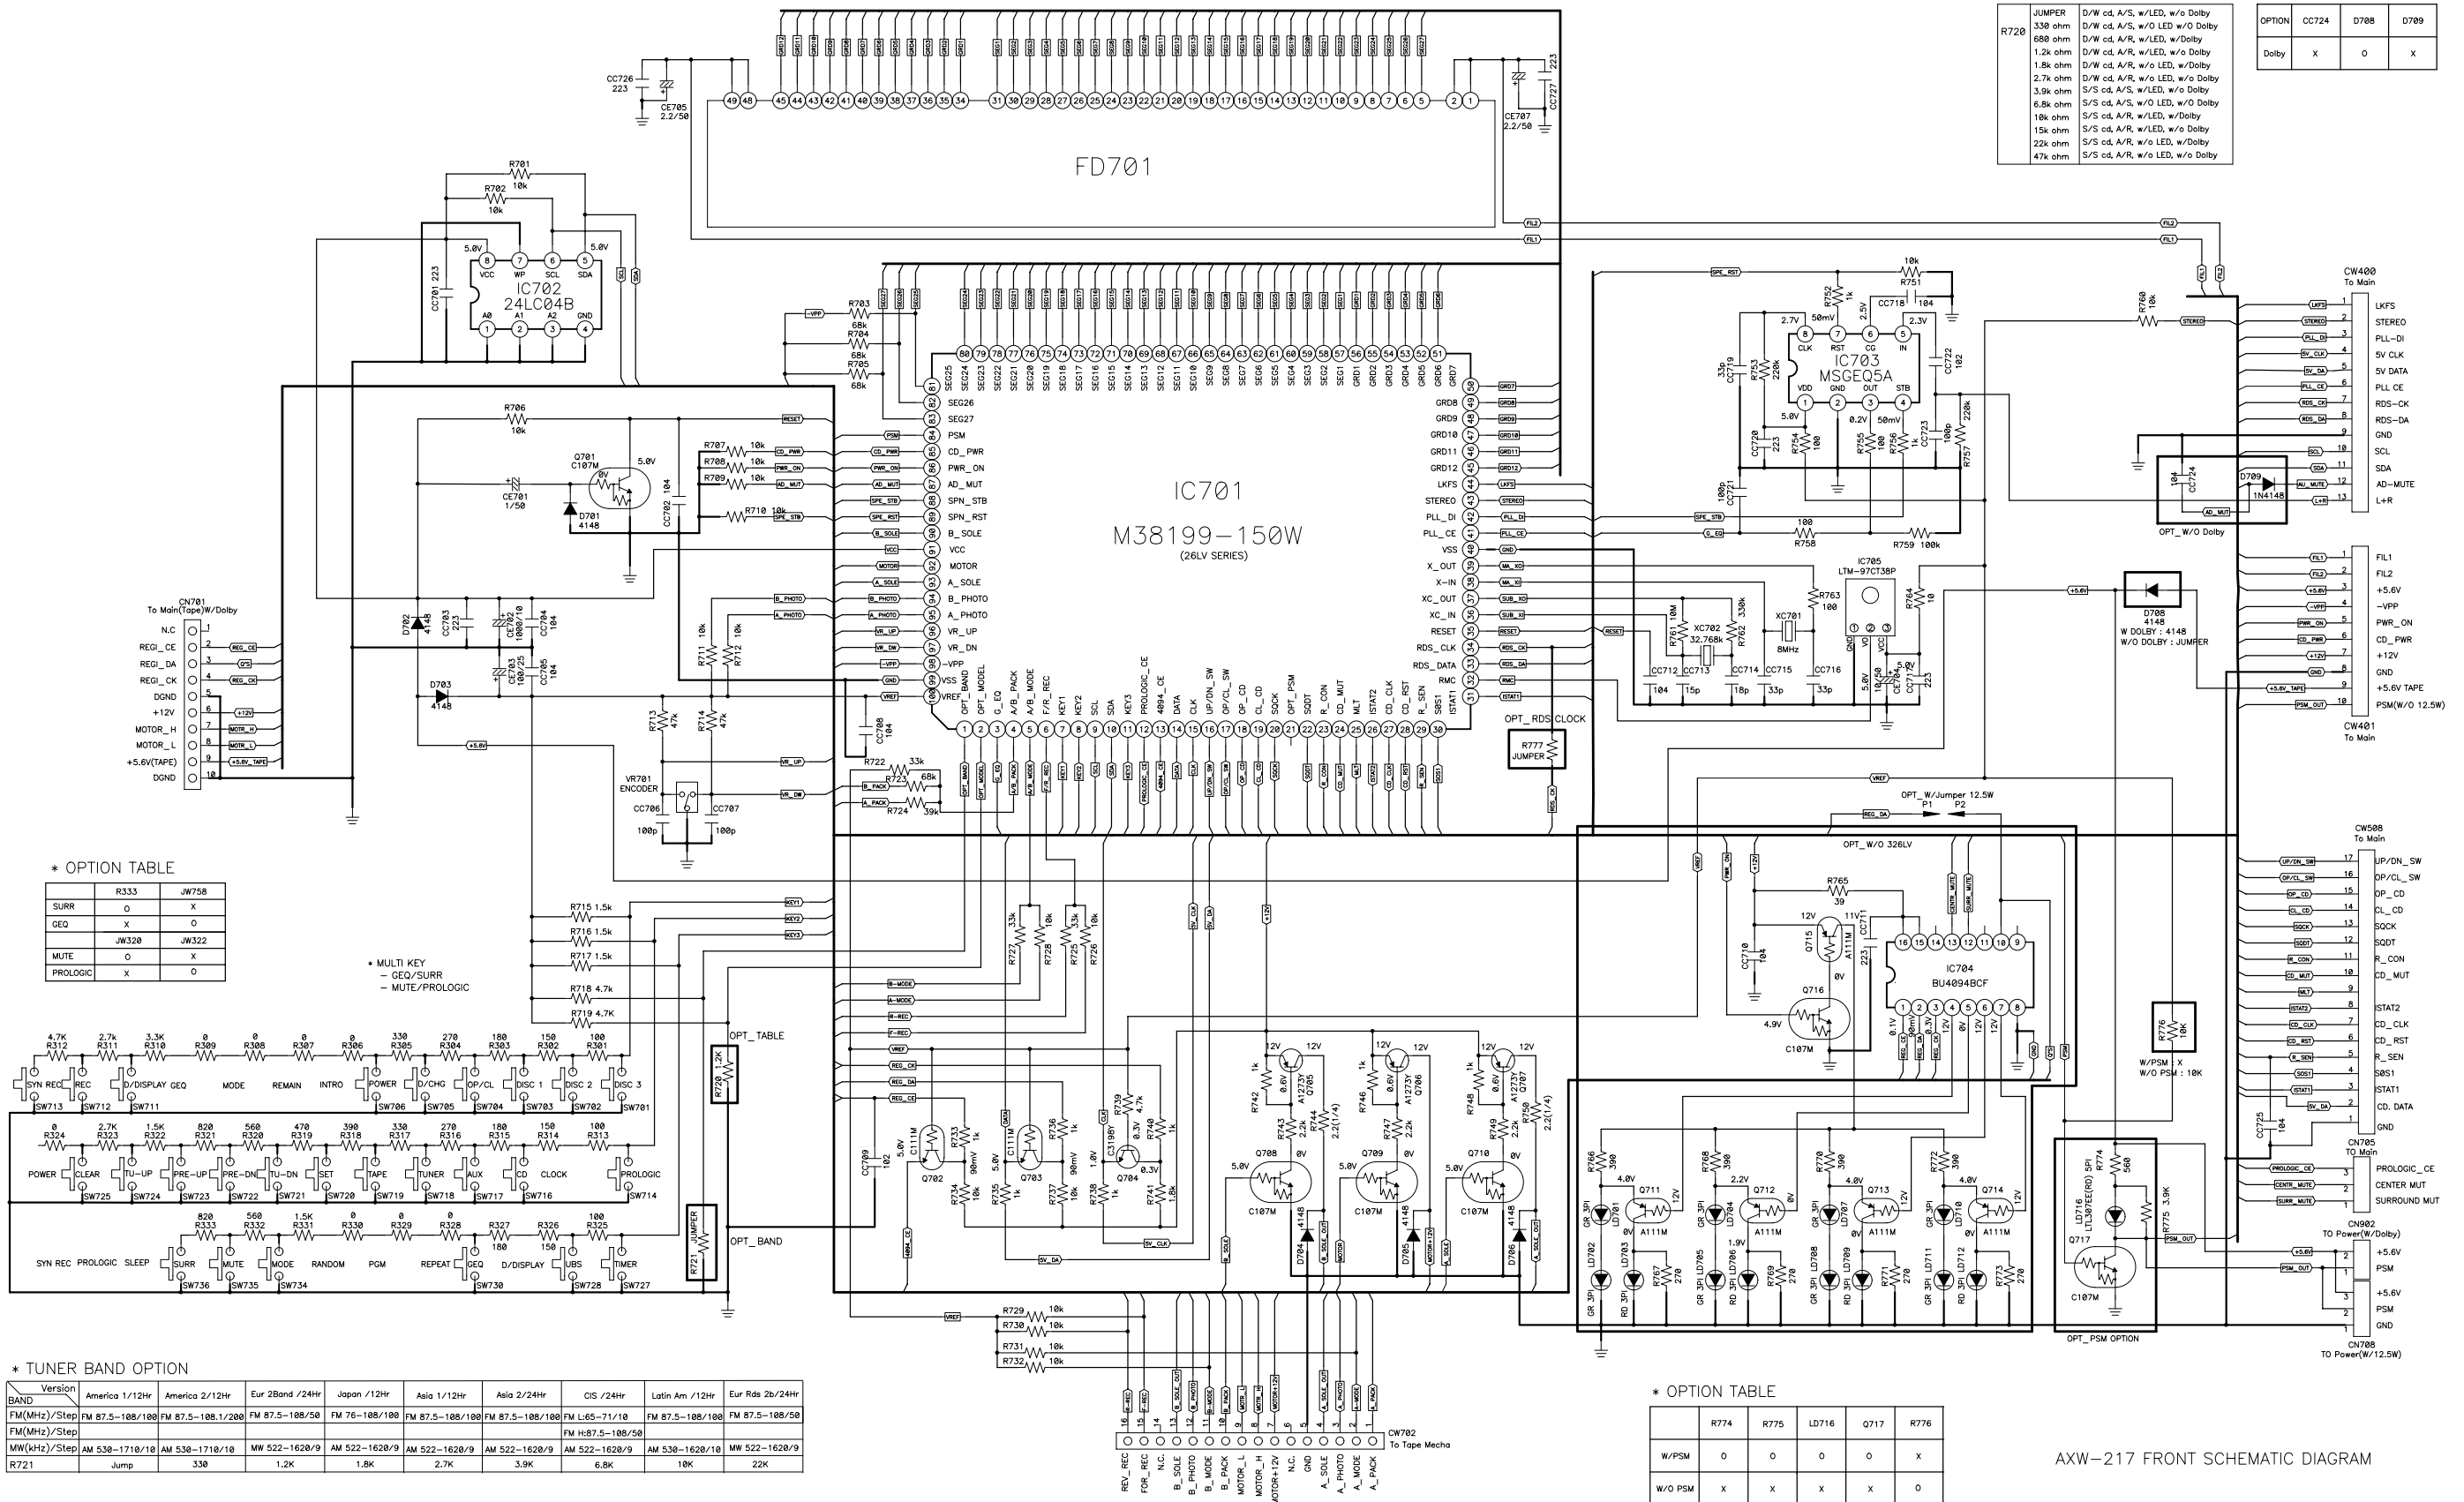

Schematic Diagram

Model : AMI-926LW/RW

Ass'y Name : FRONT

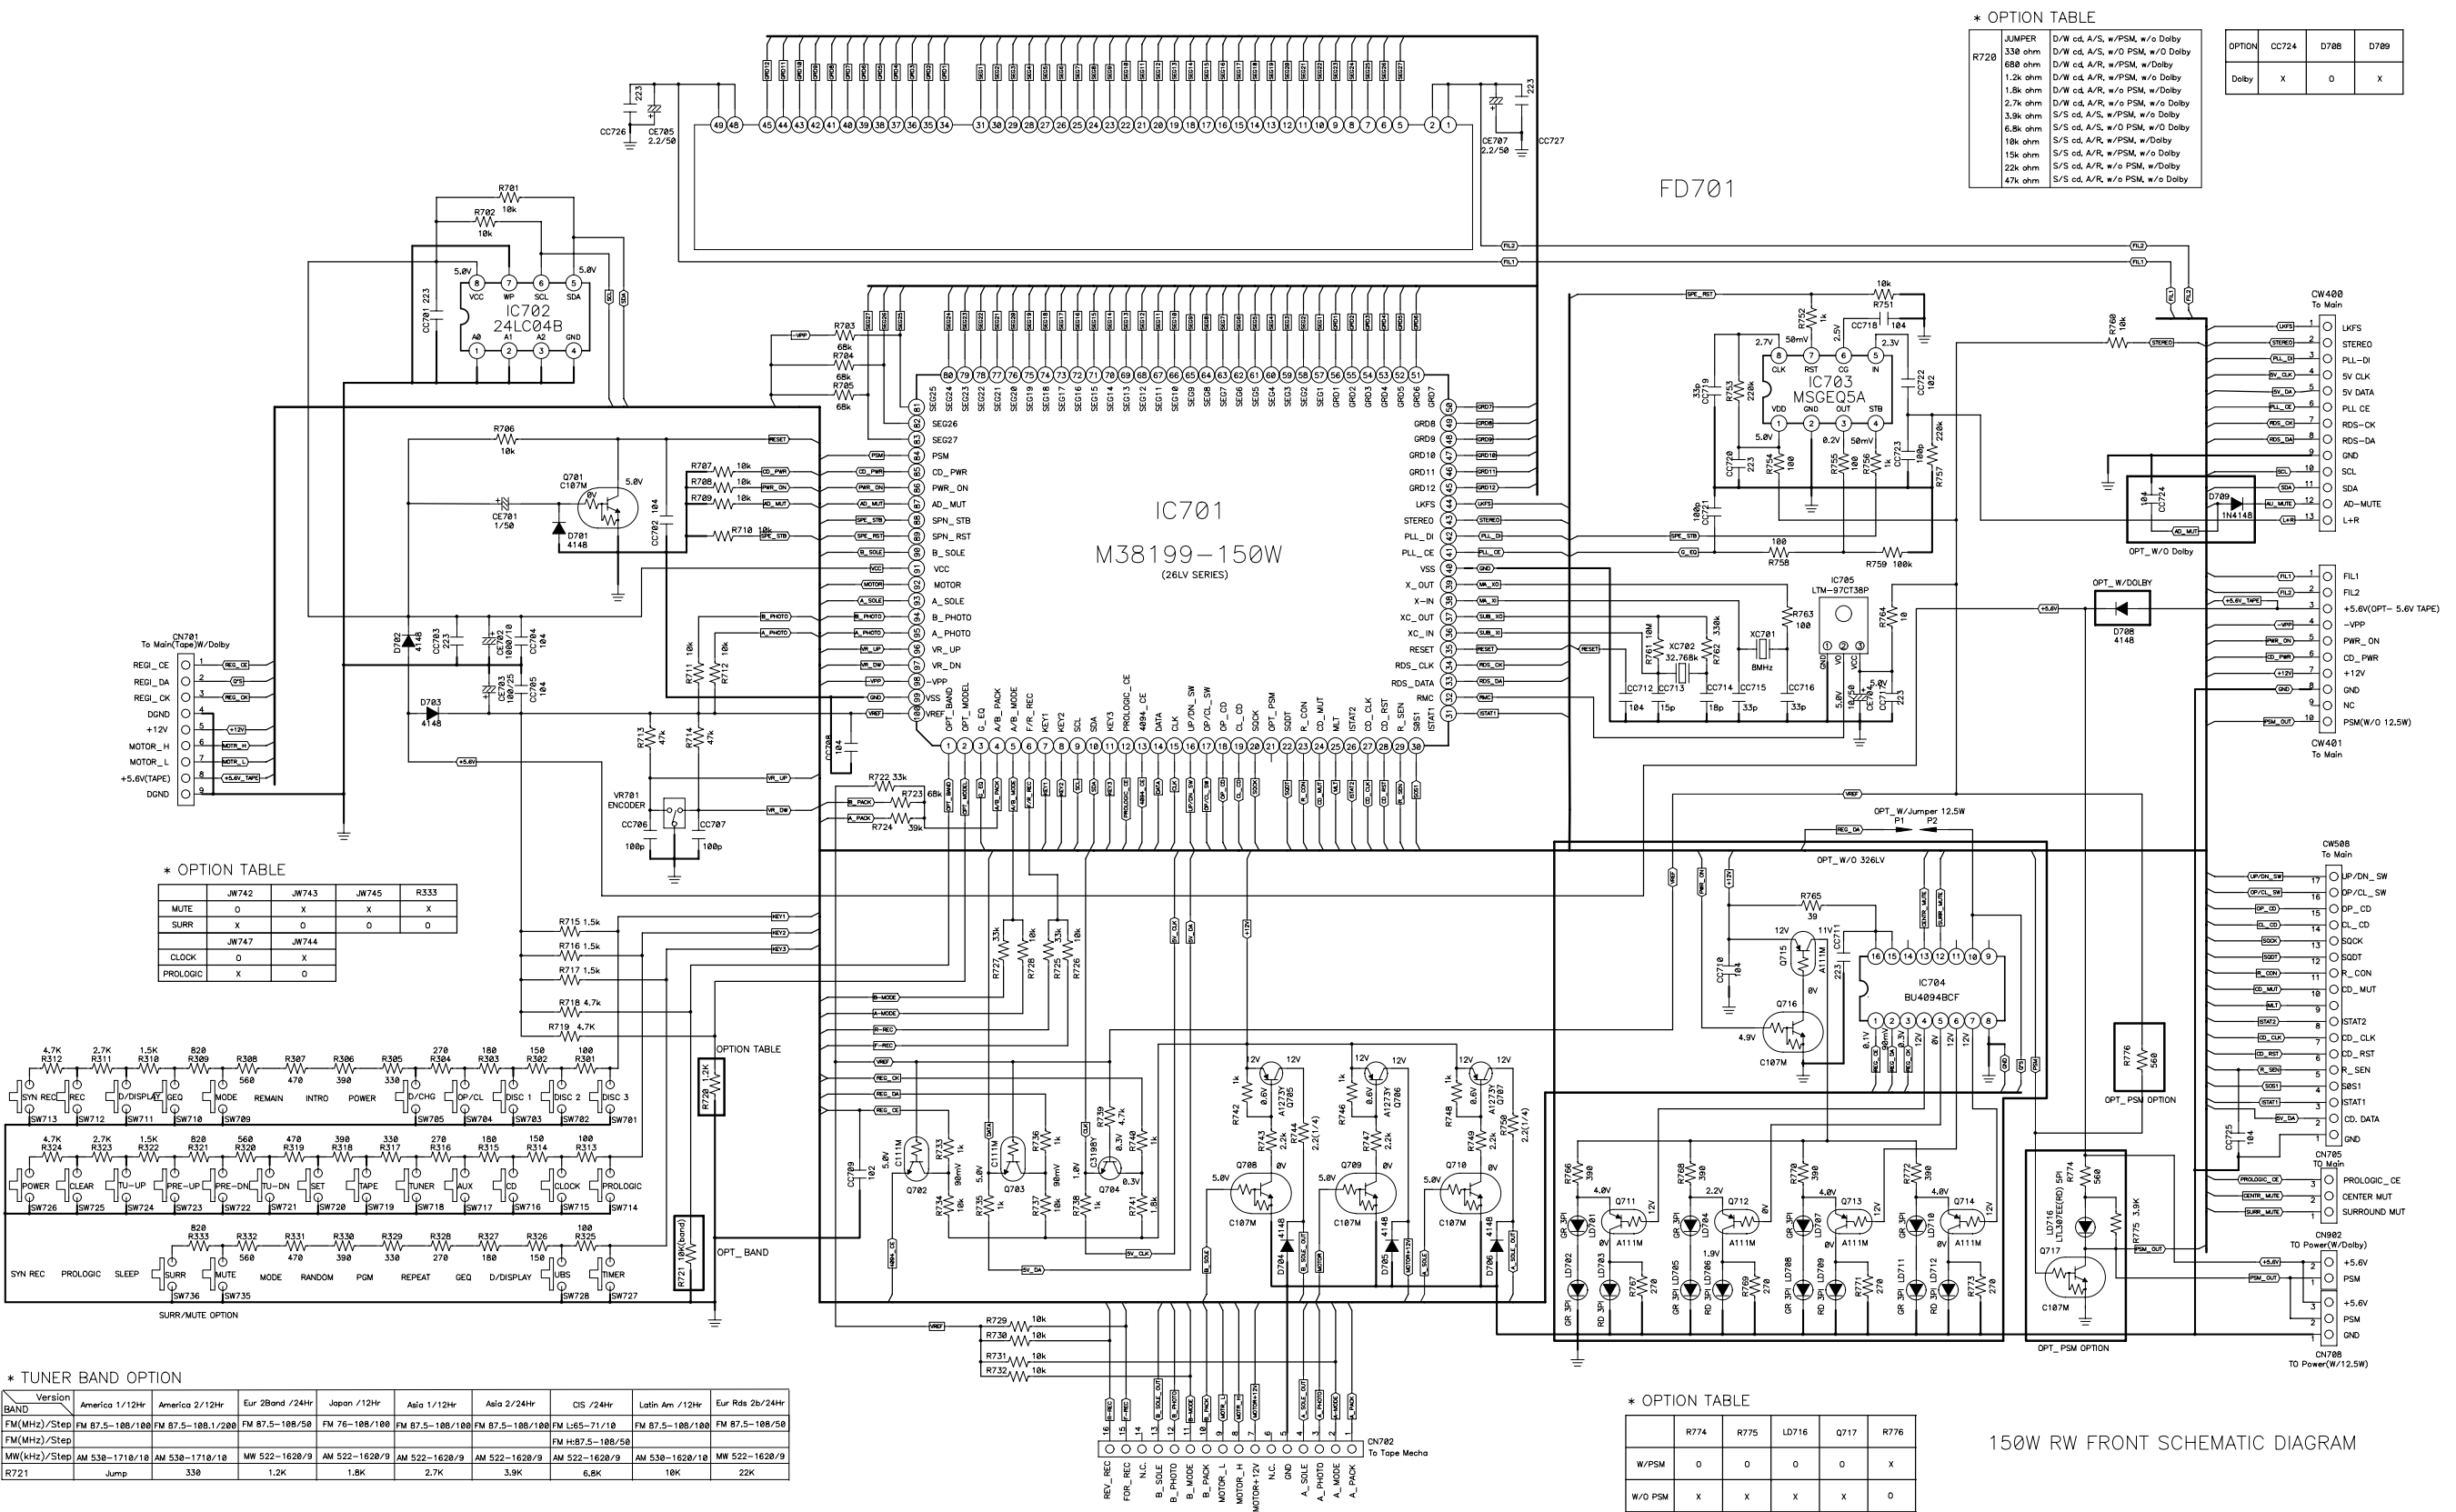


Schematic Diagram

Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : POWER

BEFORE RETURNING THE RECEIVER TO CUSTOMER, APPROPRIATE LEAKAGE CURRENT OR RESISTANCE SHOULD BE CONDUCTED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT

NOTE : THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY REPLACE ONLY WITH SAME TYPE PARTS SPECIFIED


WARNING : FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS

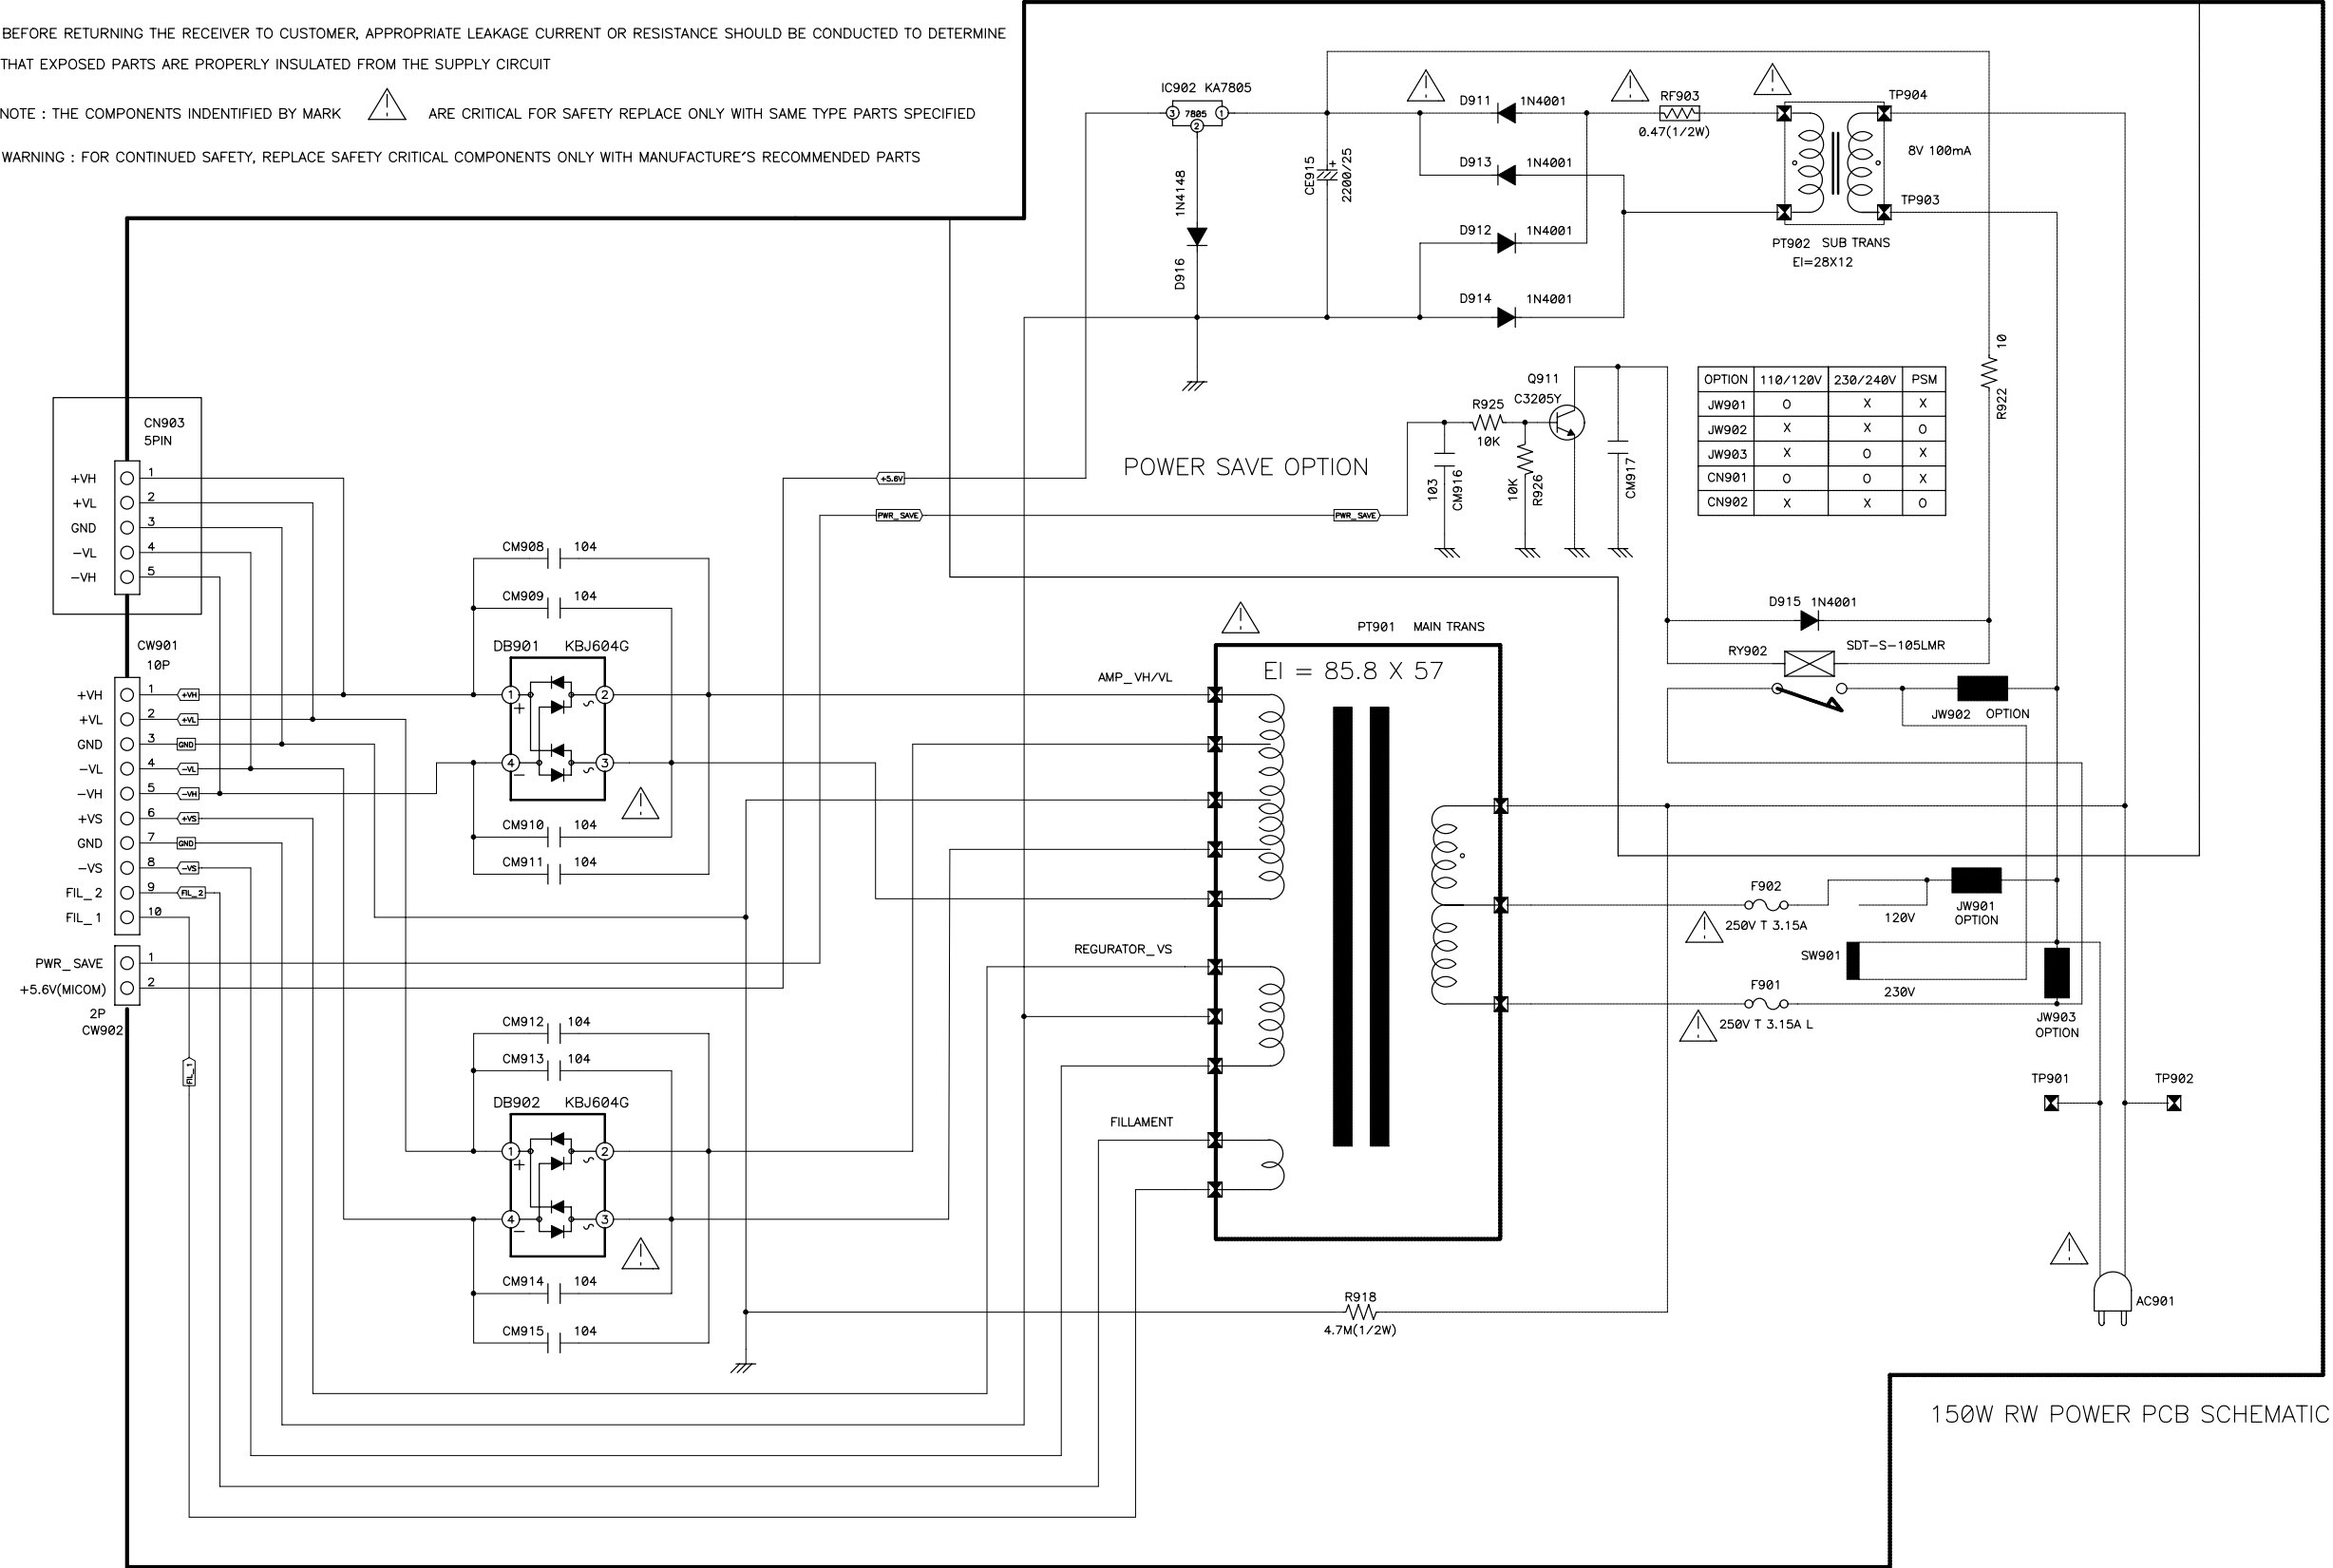

P.C.B Pattern Layout


Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : MAIN PCB

Ass'y Name : MAIN PCB

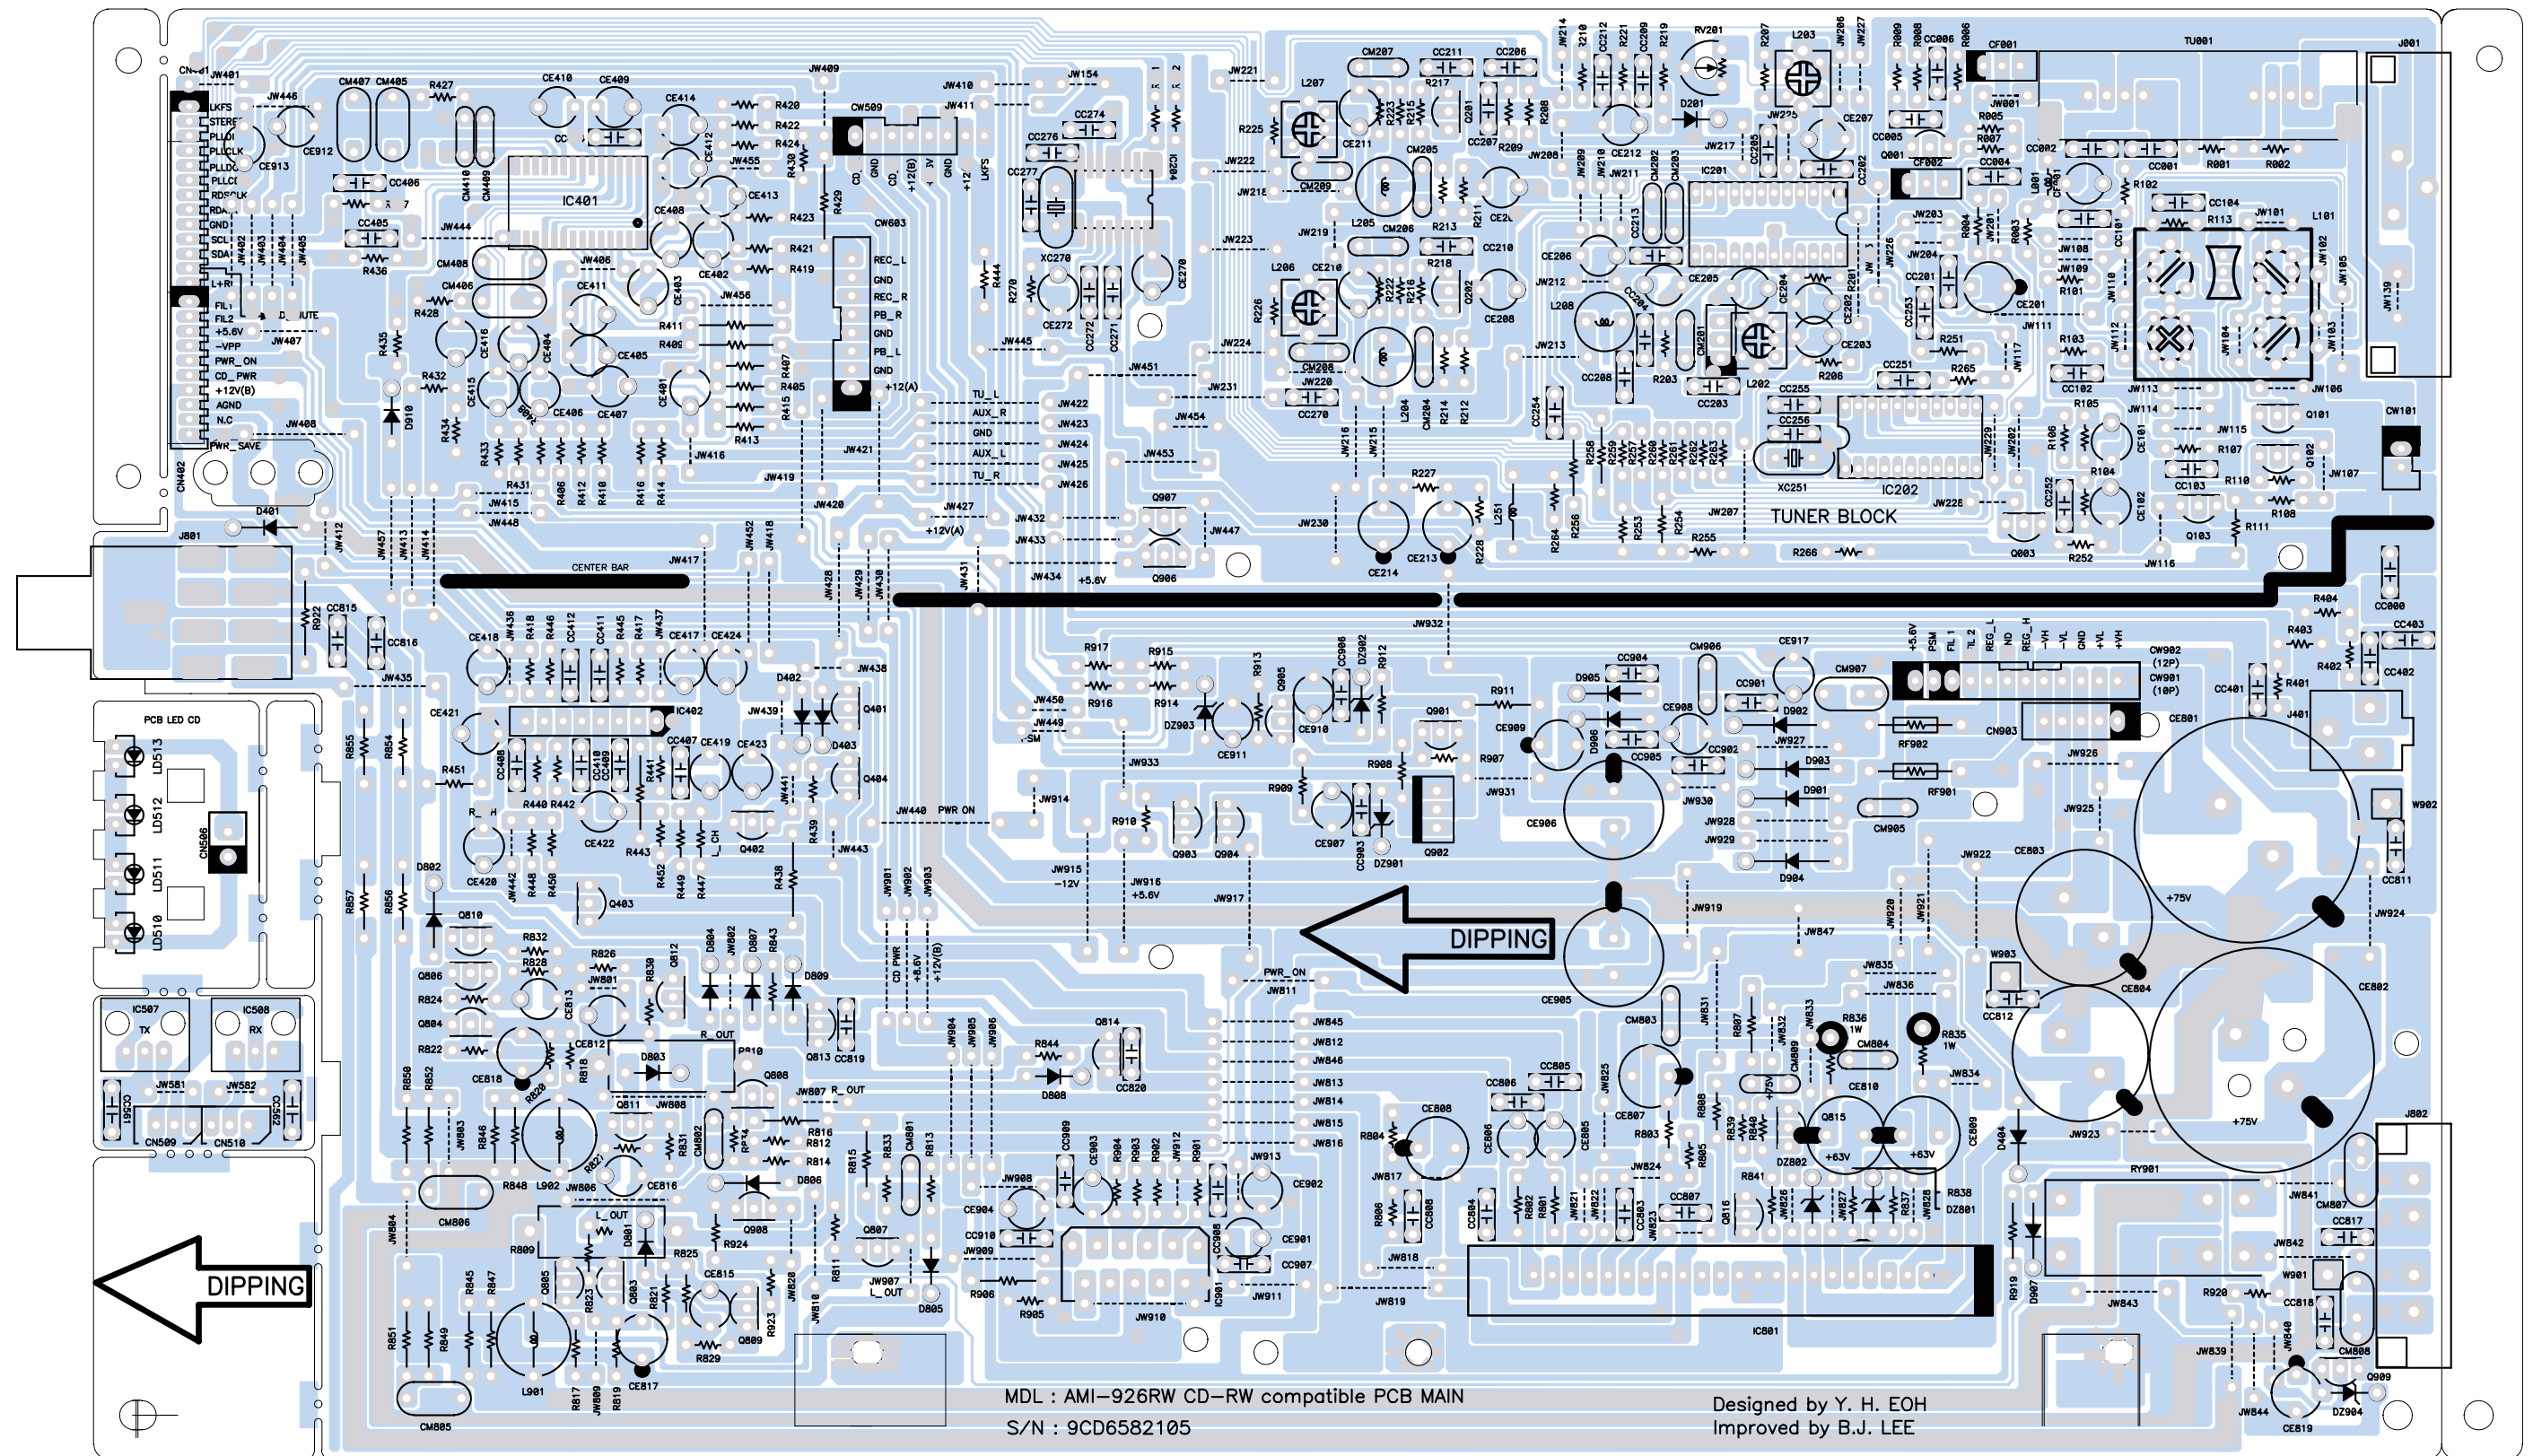


P.C.B Pattern Layout

Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : POWER PCB

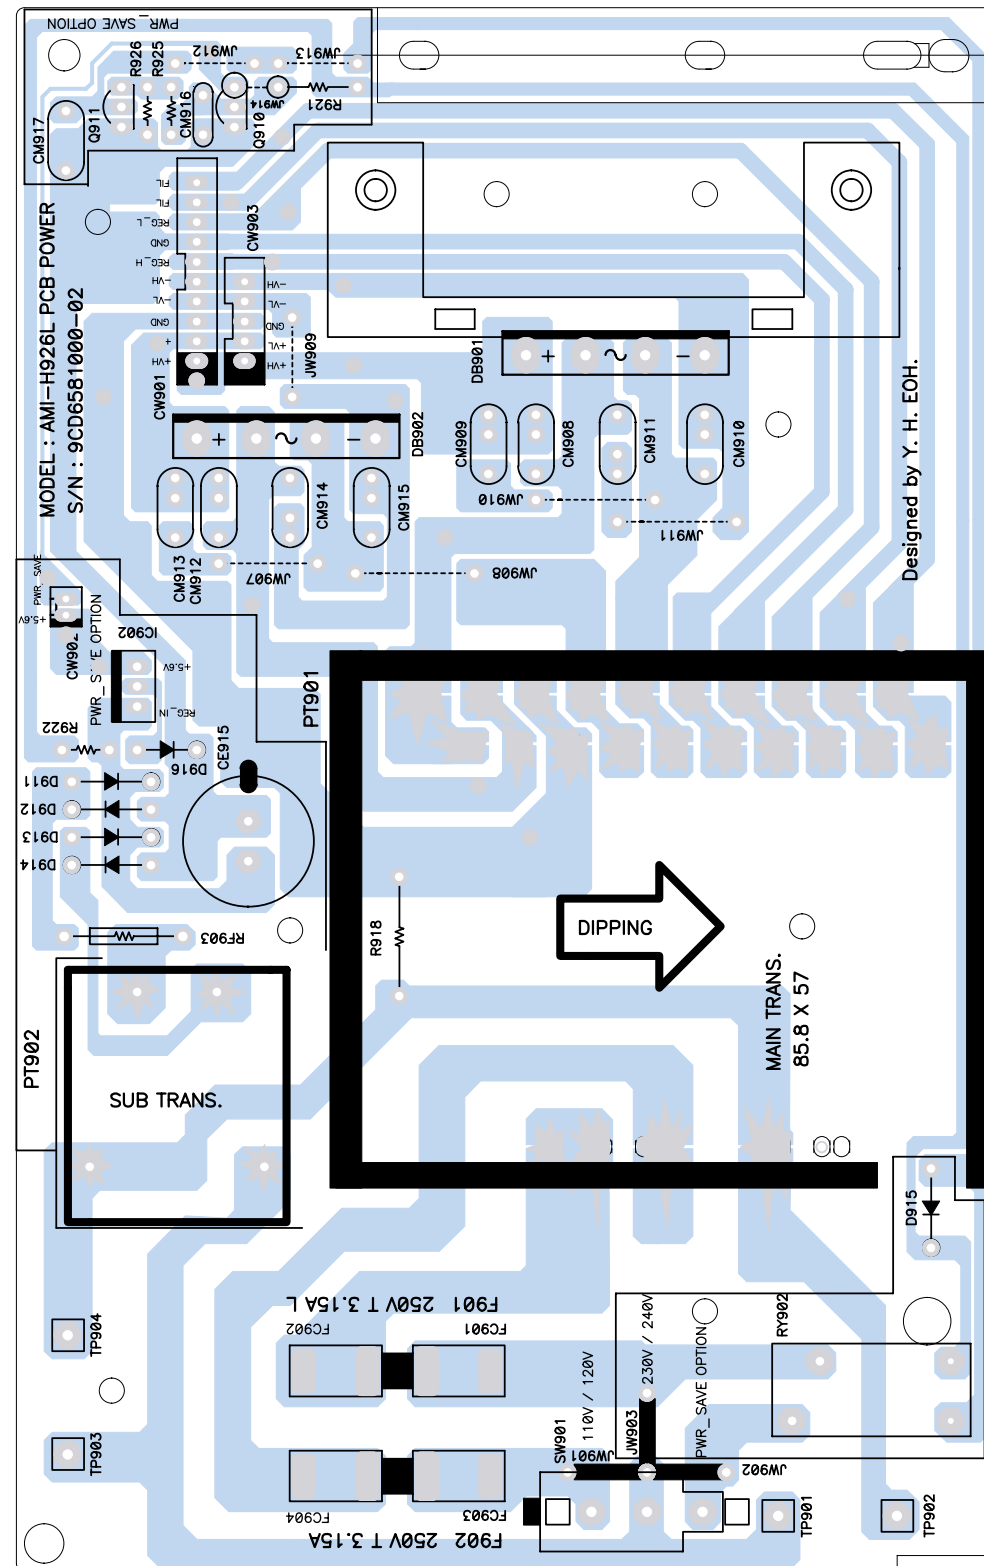


Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : TAPE PCB

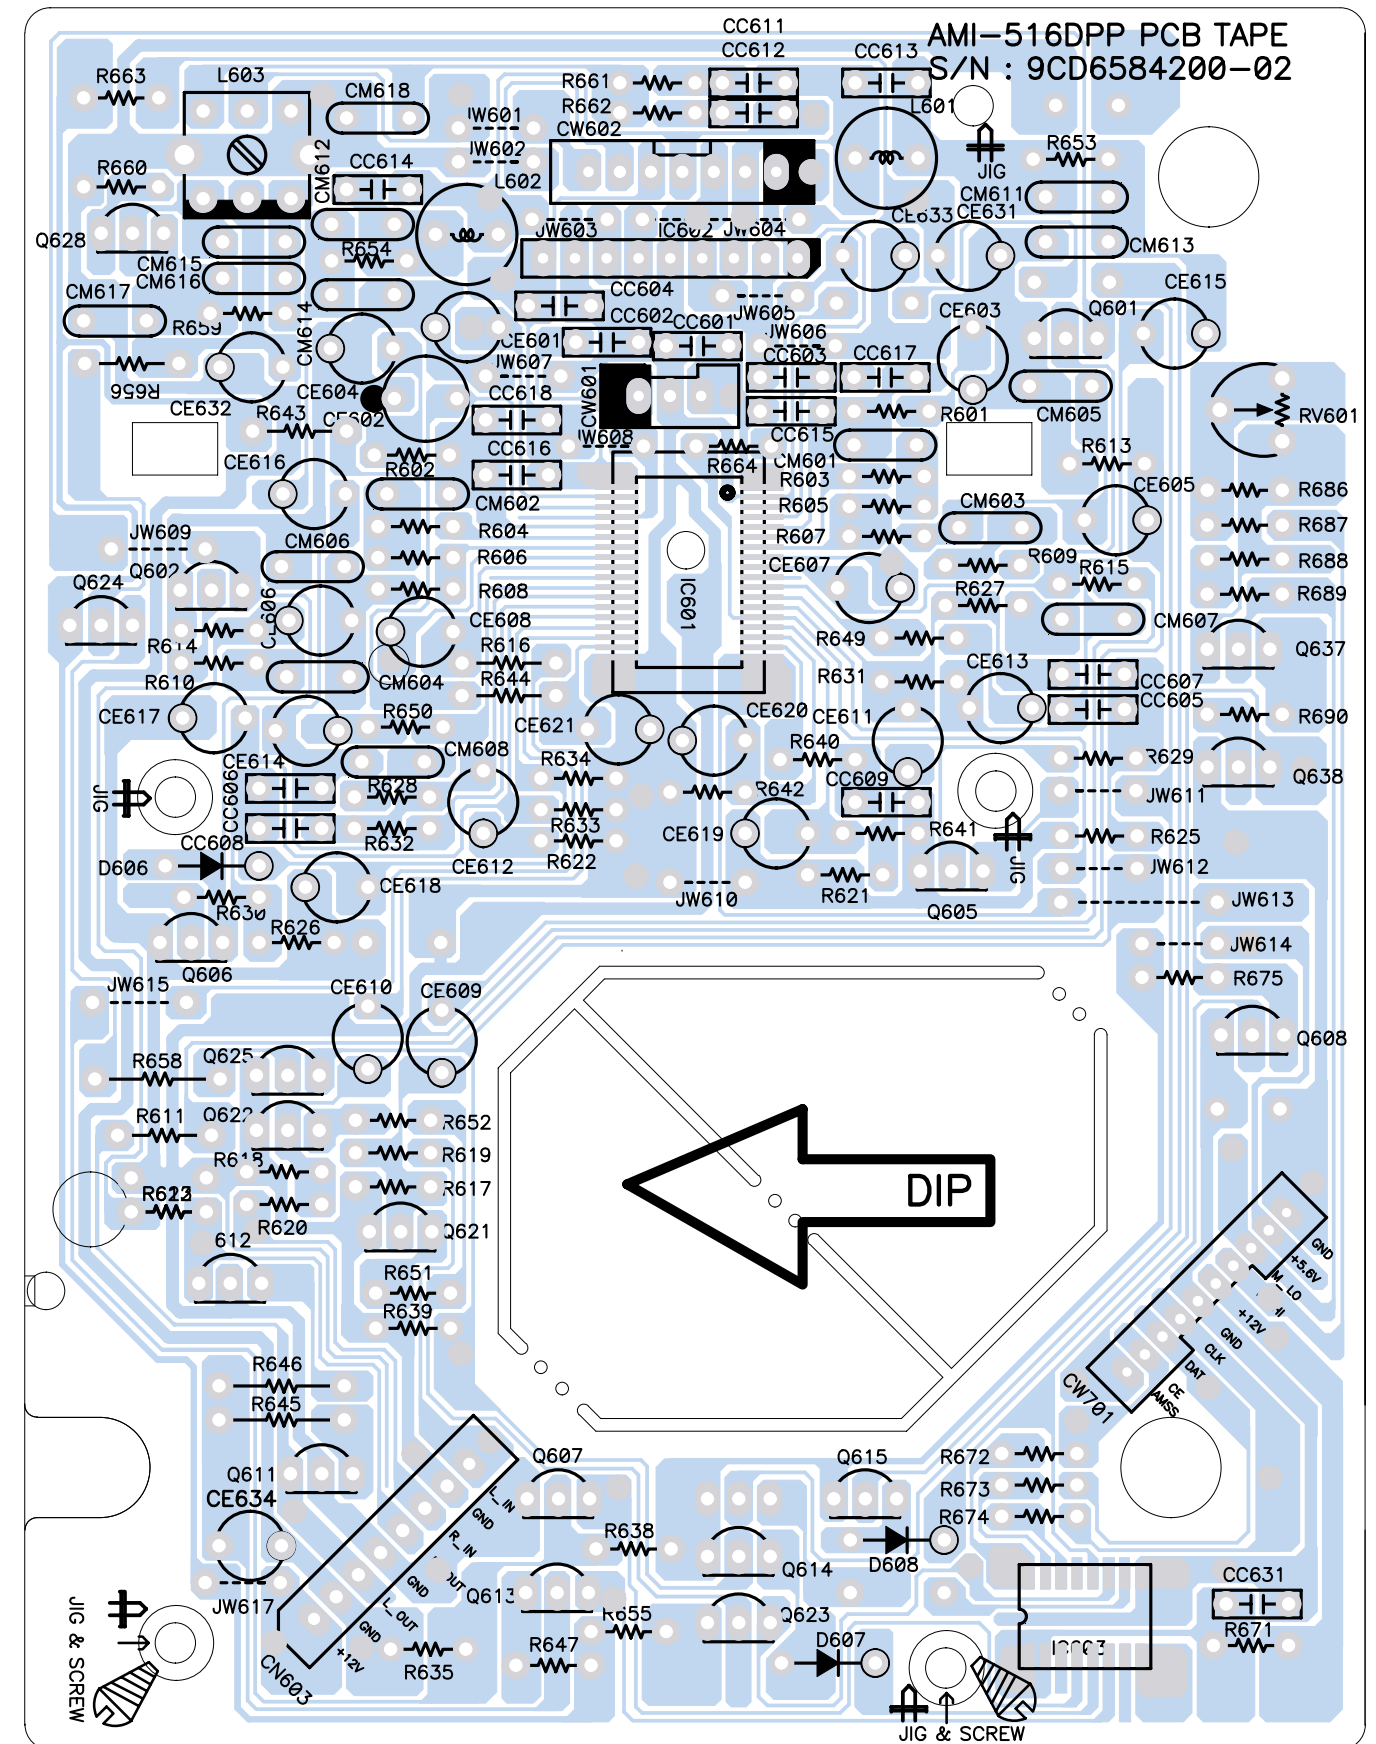

P.C.B Pattern Layout


Model : AXW-217/ AXW-117/ AMI-926LW/RW
Ass'y Name : CD PCB

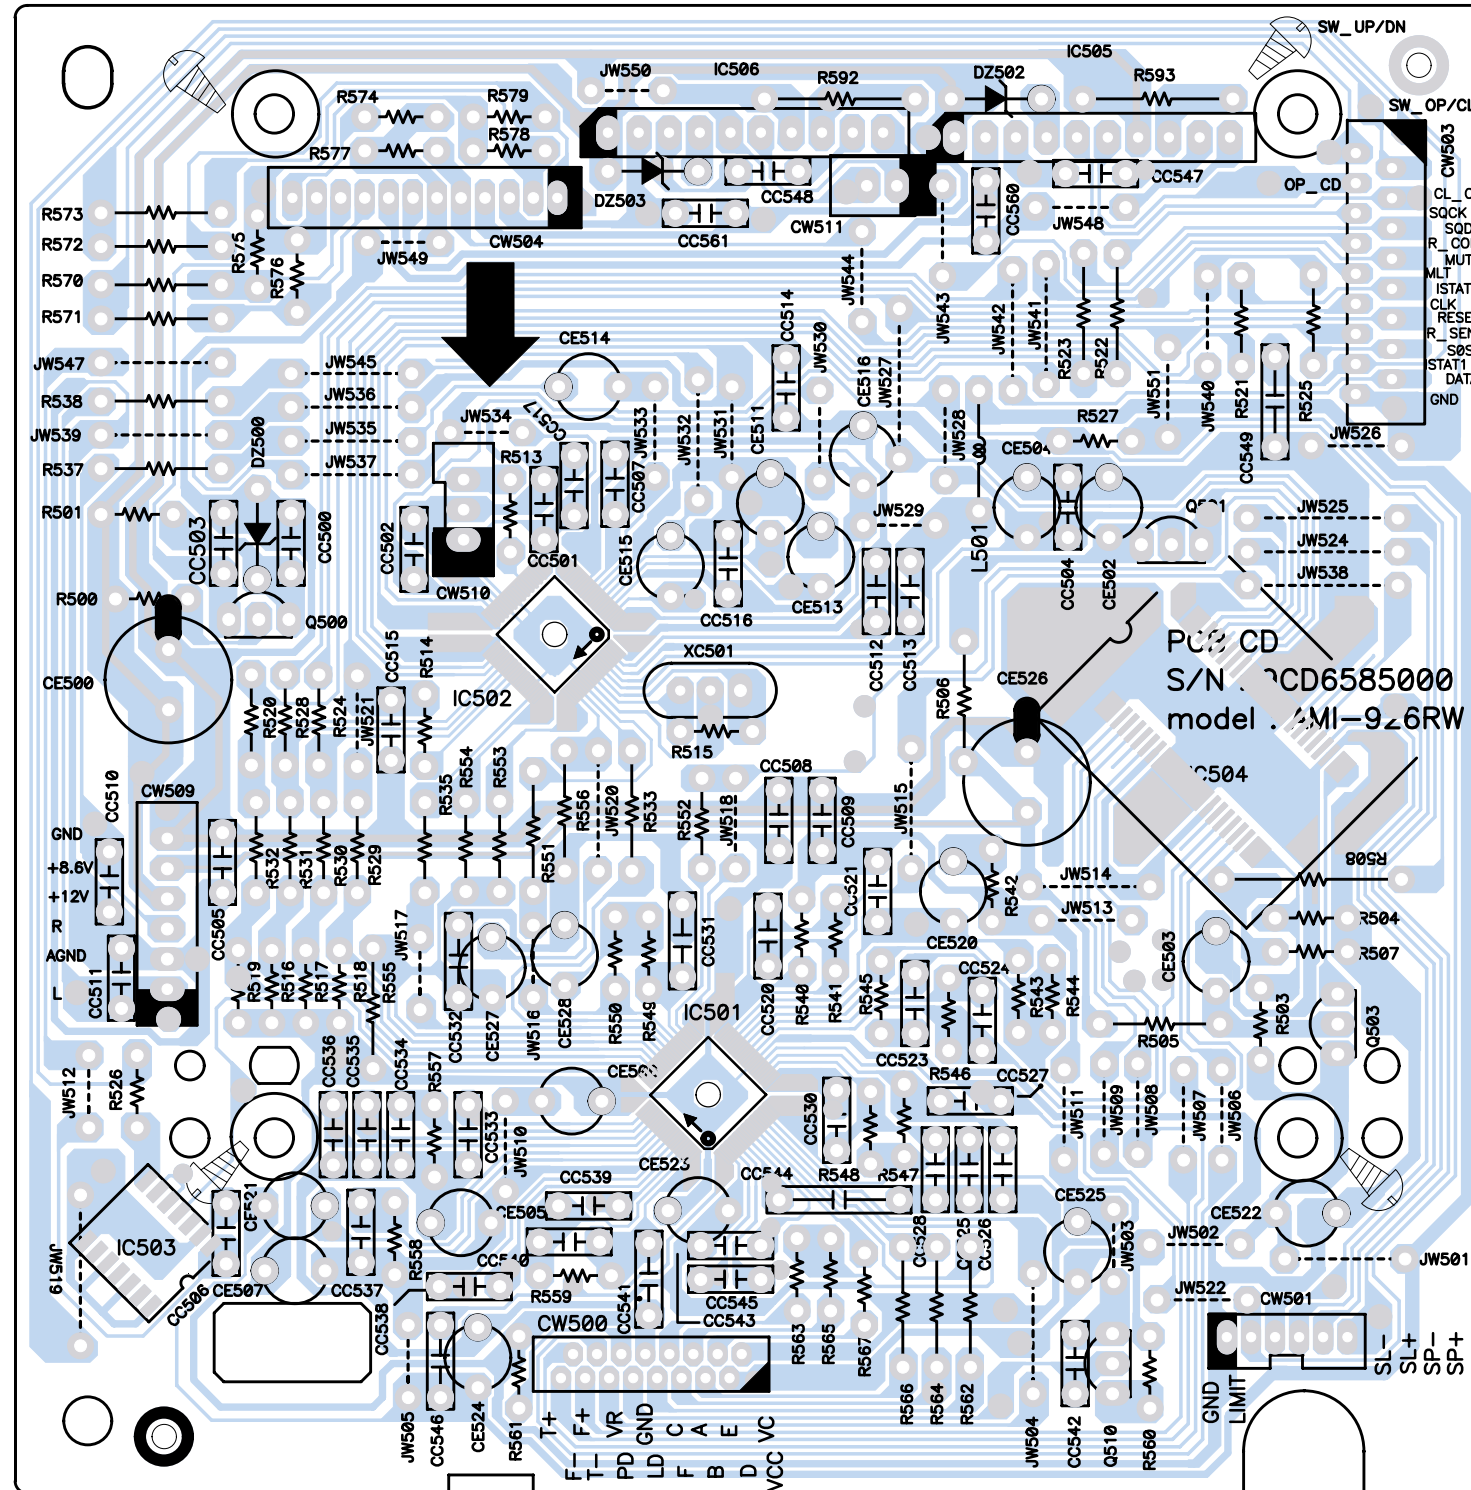

P.C.B Pattern Layout

Model : AXW-217


Ass'y Name : FRONT PCB

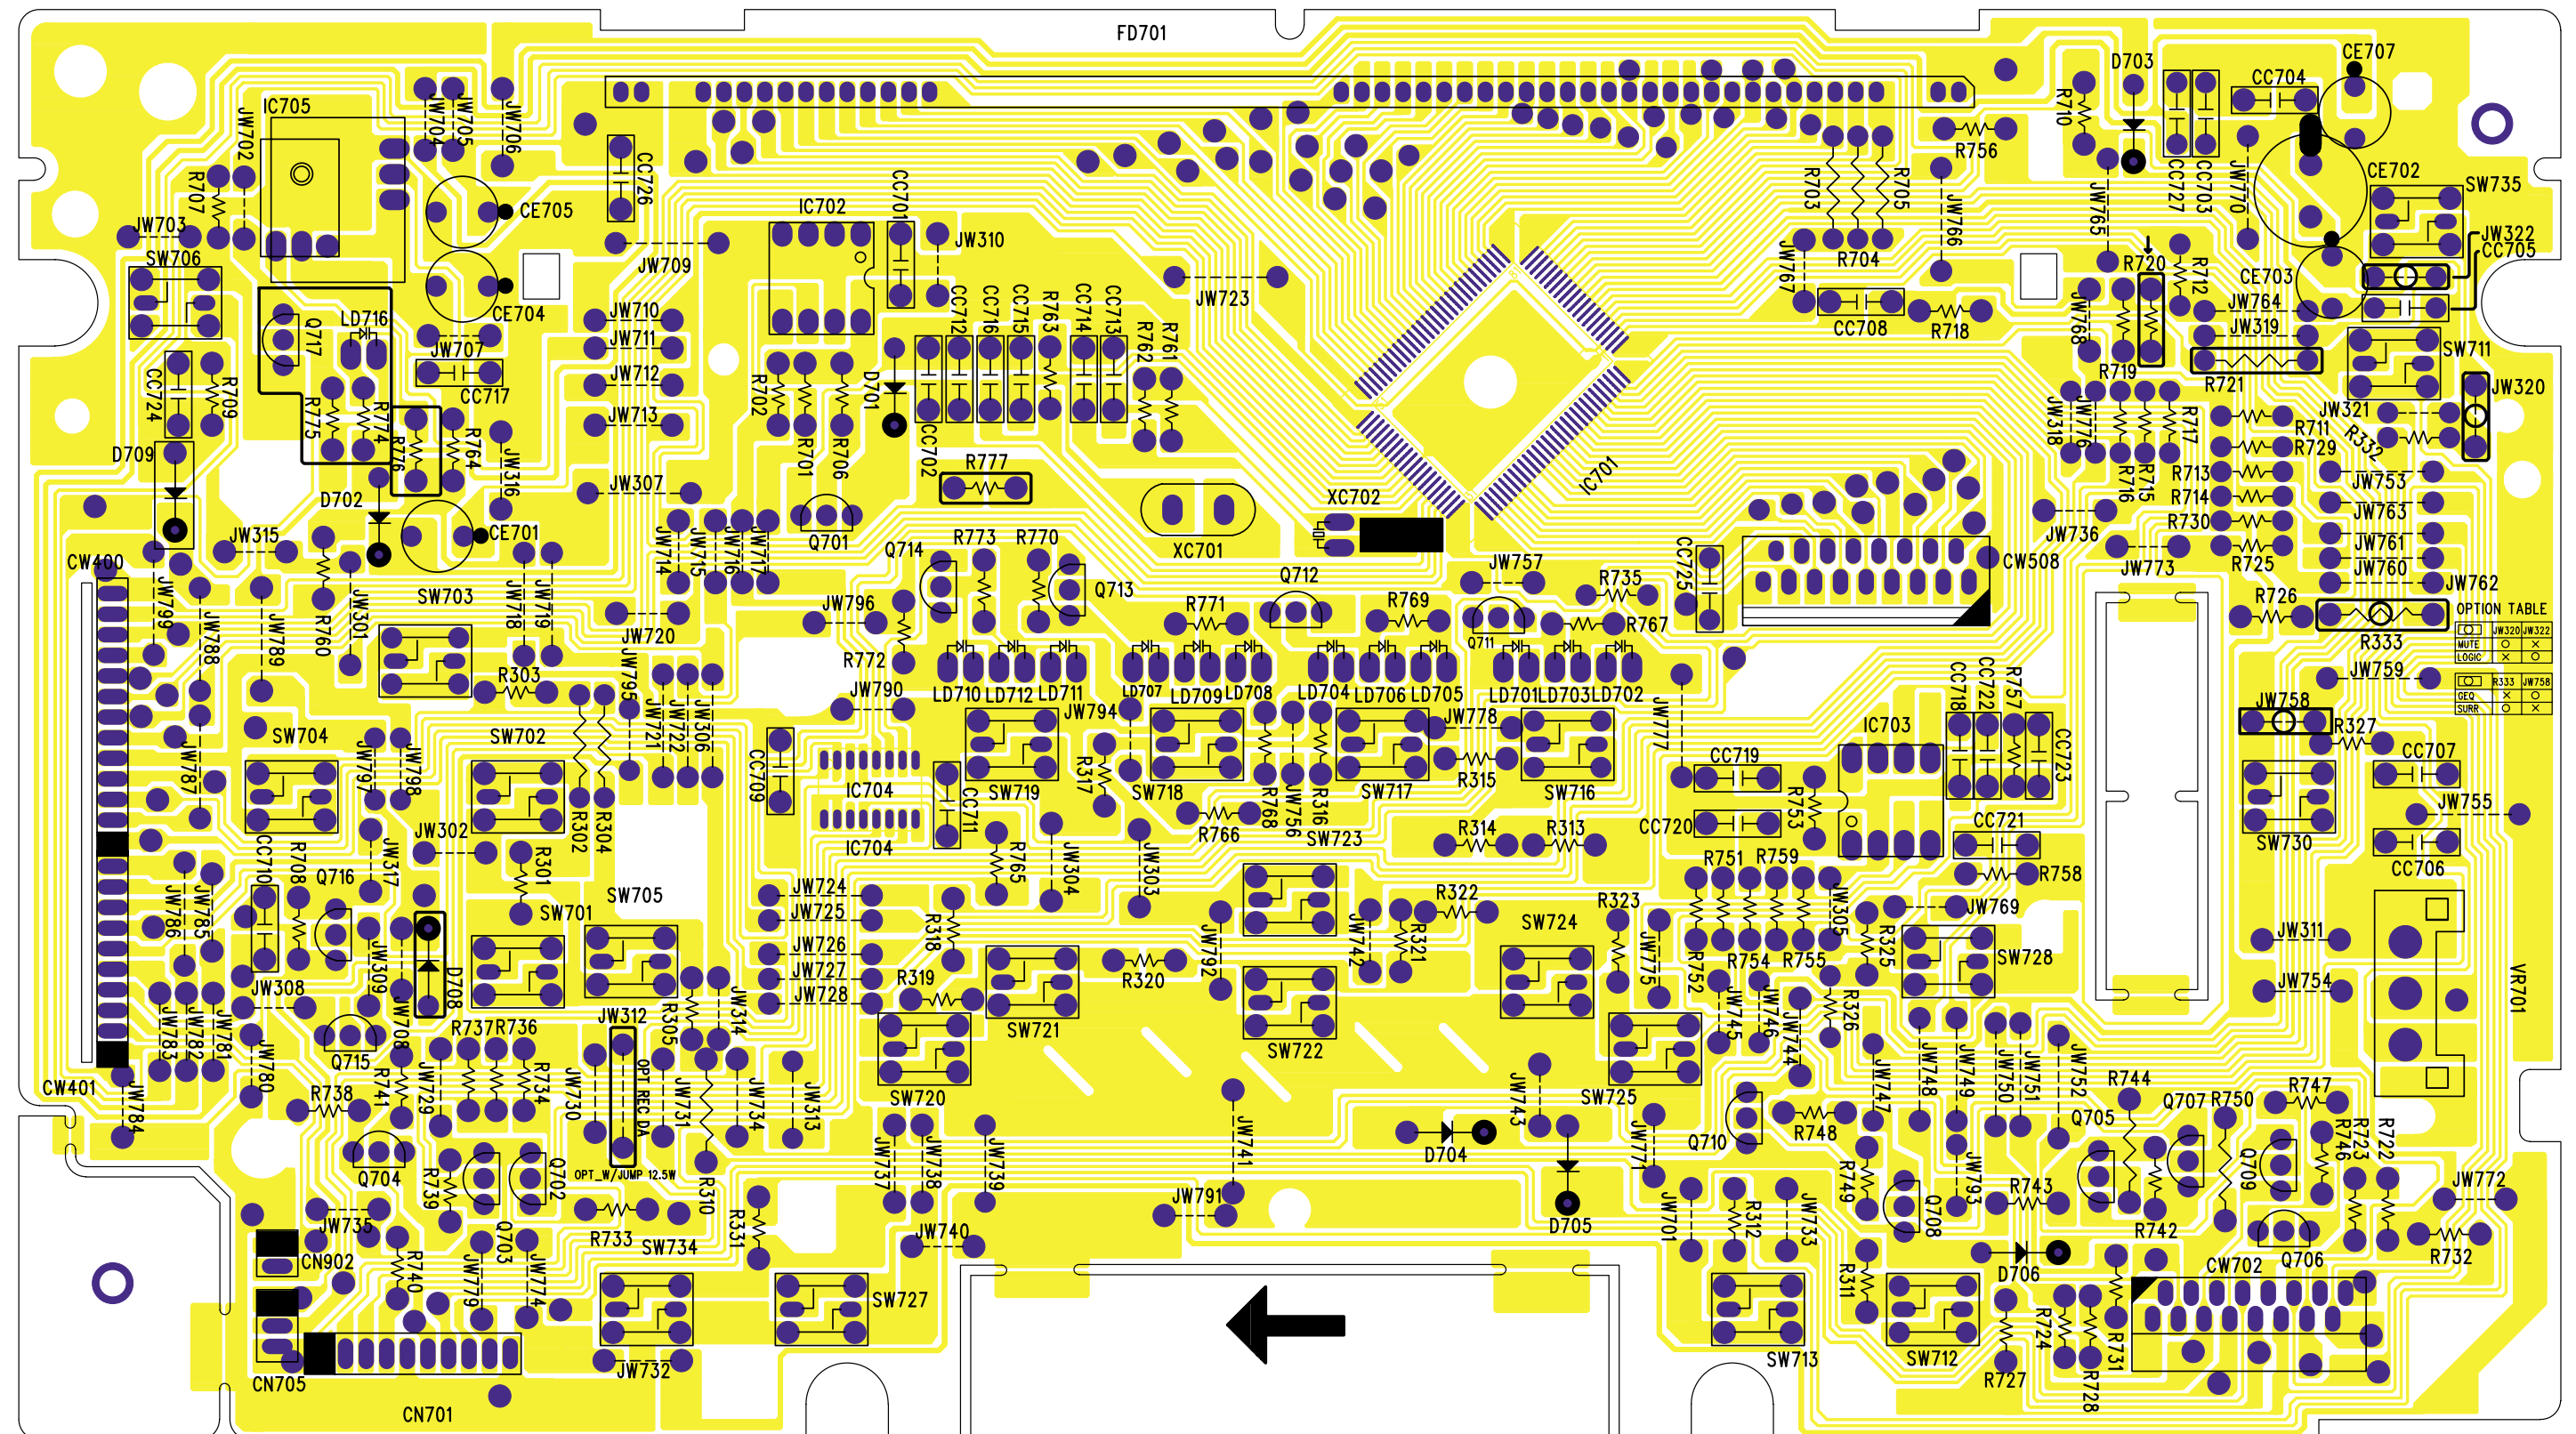

P.C.B Pattern Layout

Model : AXW-117


Ass'y Name : FRONT PCB

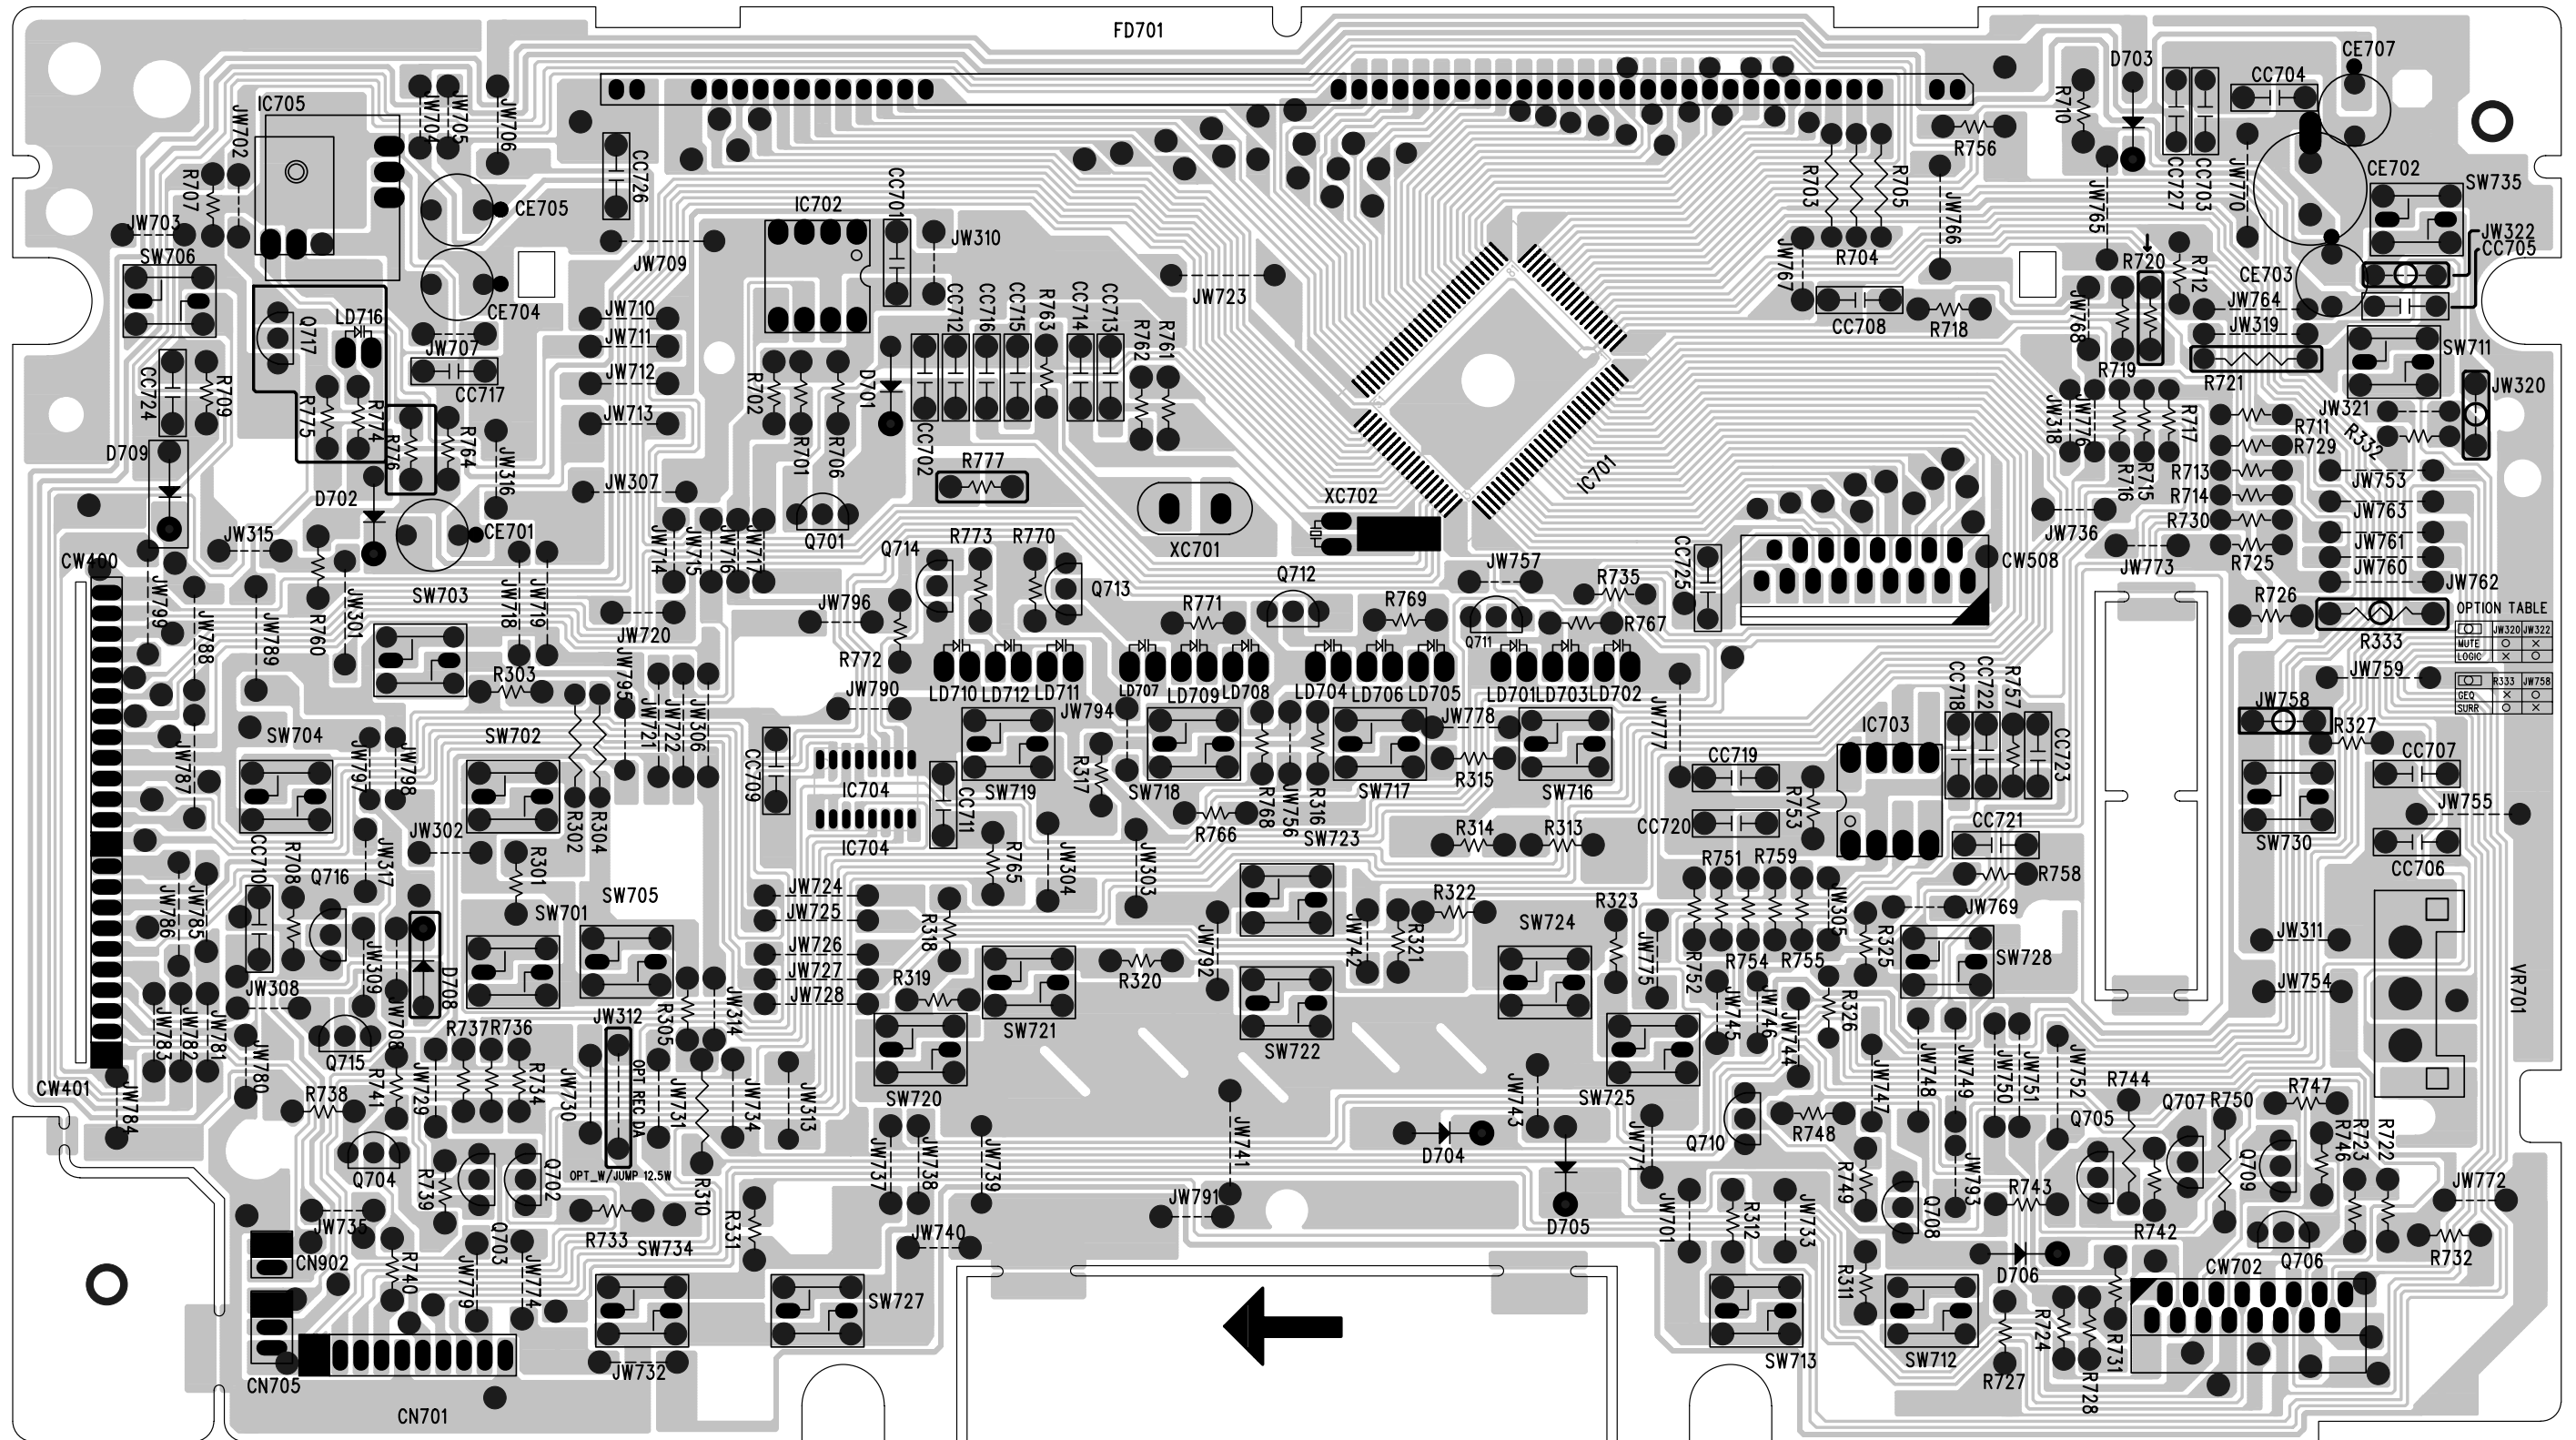

P.C.B Pattern Layout

Model : AMI-926LW/RW
Ass'y Name : FRONT PCB

Ass'y Name : FRONT PCB

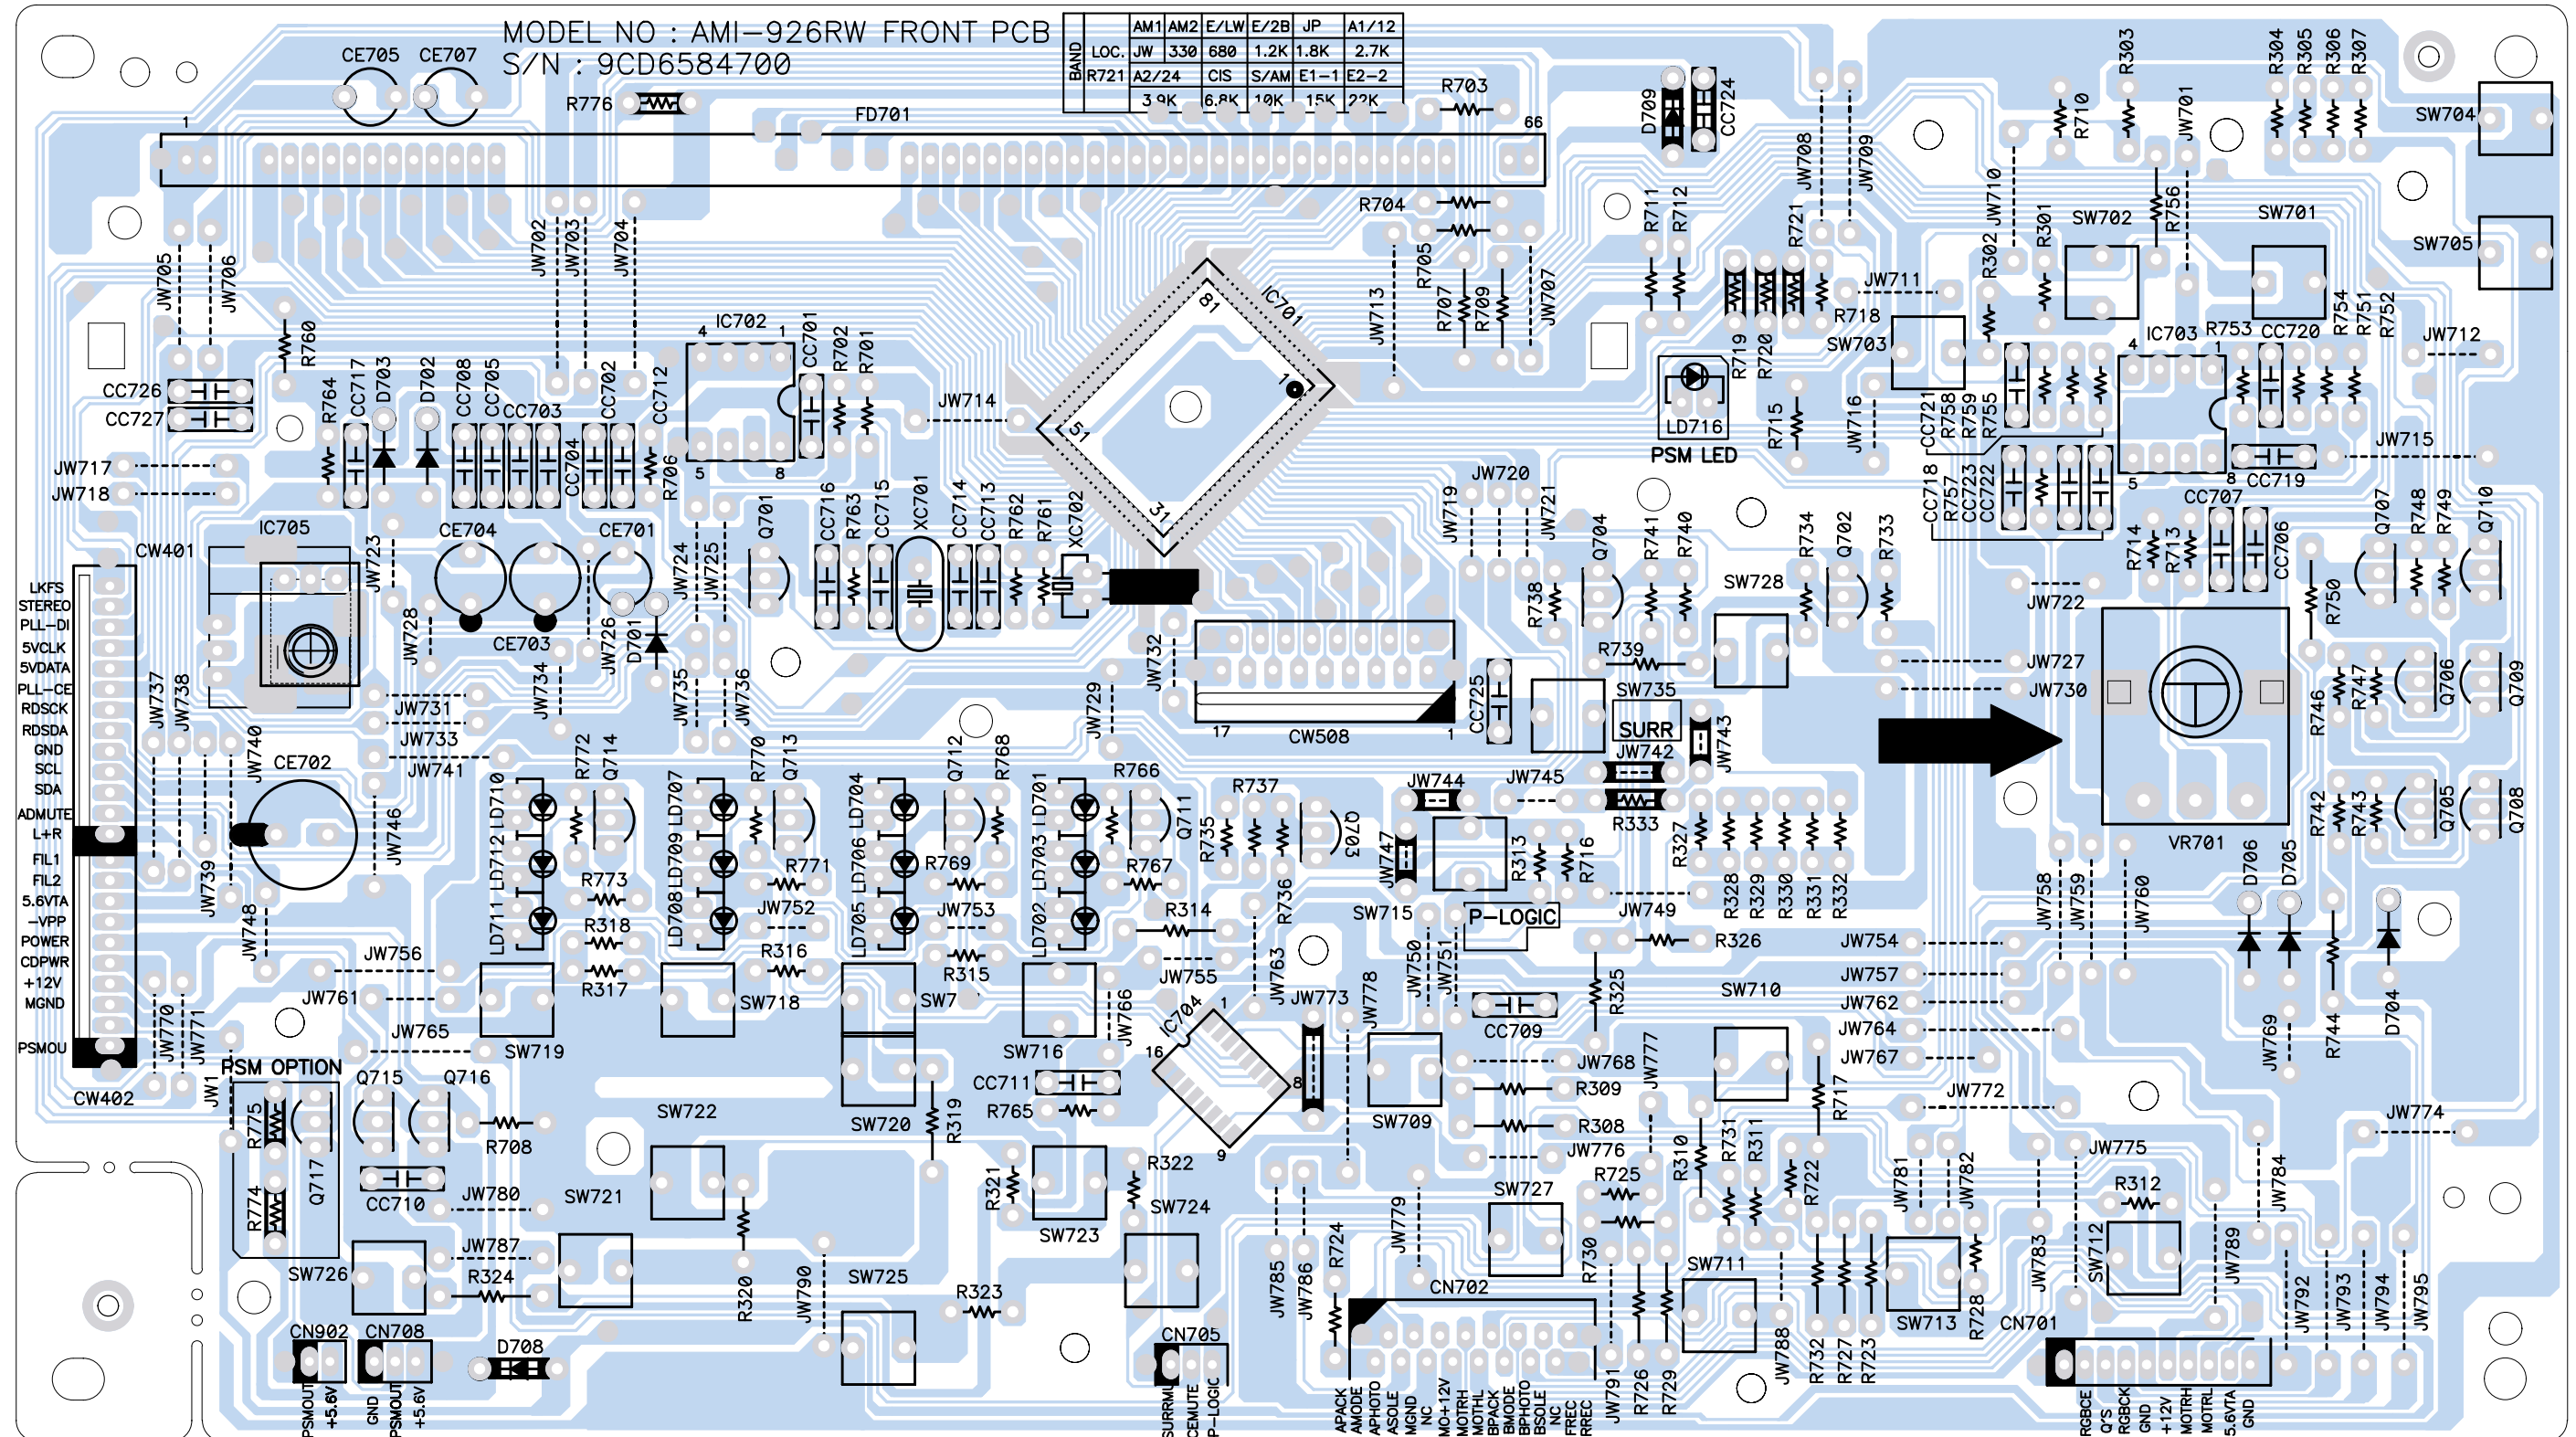

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
1	PCB MAIN AS	10000	9CDC056904	AMI-926LW-SEMP	O	O	O
2	PCB MAIN	B001	9CD6582105	247X197	O	O	O
3	C CERA	CC000	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
4	C CERA	CC001	CCXF1H102Z	50V F 1000PF Z (TAPPING)	O	O	O
5	C CERA	CC002	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
6	C CERA	CC004	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
7	C CERA	CC005-006	CCXF1H104Z	50V F 0.1MF Z	O	O	O
8	C CERA	CC101	CCXF1H104Z	50V F 0.1MF Z	O	O	O
9	C CERA	CC102	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
10	C CERA	CC103	CCXF1H104Z	50V F 0.1MF Z	O	O	O
11	C CERA	CC104	CZCH1E120J	CH 25V 12PF J	O	O	O
12	C CERA	CC201	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
13	C CERA	CC202	CCXF1H104Z	50V F 0.1MF Z	O	O	O
14	C CERA	CC203	CZCH1E101J	CH 25V 100PF J AXIAL 52MM	O	O	O
15	C CERA	CC204	CCZB1E682K	25V B 6800PF K (AXIAL)	O	O	O
16	C CERA	CC205-207	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
17	C CERA	CC209	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
18	C CERA	CC210-211	CCZB1E561K	25V B 560PF K (AXIAL)	O	O	O
19	C CERA	CC212	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
20	C CERA	CC213	CCZB1E472K	25V B 4700PF K (AXIAL)	O	O	O
21	C CERA	CC251-252	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
22	C CERA	CC253-254	CCXF1H102Z	50V F 1000PF Z (TAPPING)	O	O	O
23	C CERA	CC255-256	CZCH1E330J	CH 25V 33PF J AXIAL 52MM	O	O	O
24	C CERA	CC270	CZCH1E331J	CH 25V 330PF J AXIAL 52MM	O	O	O
25	C CERA	CC271	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
26	C CERA	CC401-402	CZCH1E101J	CH 25V 100PF J AXIAL 52MM	O	O	O
27	C CERA	CC403	CCXF1H104Z	50V F 0.1MF Z	O	O	O
28	C CERA	CC404	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
29	C CERA	CC405-406	CZCH1E101J	CH 25V 100PF J AXIAL 52MM	O	O	O
30	C CERA	CC409-410	CZCH1E101J	CH 25V 100PF J AXIAL 52MM	O	O	O
31	C CERA	CC411-412	CCXB1H102K	50V B 1000PF K (TAPPING)	O	O	O
32	C CERA	CC803-804	CCZB1E221K	25V B 220PF K (AXIAL)	O	O	O
33	C CERA	CC805-806	CCXB1H102K	50V B 1000PF K (TAPPING)	O	O	O
34	C CERA	CC807-808	CZCH1E309J	CH 25V 3PF J (AXIAL)	O	O	O
35	C CERA	CC815-816	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
36	C CERA	CC817-819	CCZB1E472K	25V B 4700PF K (AXIAL)	O	O	O
37	C CERA	CC820	CCXF1H333Z	50V F 0.033MF Z (TAPPING)	O	O	O
38	C CERA	CC901-902	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
39	C CERA	CC903	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O	O	O
40	C CERA	CC904-905	CCXF1H104Z	50V F 0.1MF Z	O	O	O
41	C CERA	CC906	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
42	C CERA	CC907-910	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	O	O	O
43	C ELECTRO	CE001	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
44	C ELECTRO	CE101	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
45	C ELECTRO	CE102	CEXF1E221V	25V RSS 220MF (8X11.5) TP	O	O	O
46	C ELECTRO	CE201	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O	O	O
47	C ELECTRO	CE202	CEXF1H339V	50V RSS 3.3MF (5X11) TP	O	O	O
48	C ELECTRO	CE203	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
49	C ELECTRO	CE204	CEXF1H220V	50V RSS 22MF (5X11) TP	O	O	O
50	C ELECTRO	CE205	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
51	C ELECTRO	CE206	CEXF1H100V	50V RSS 10MF (5X11) TP	O	O	O
52	C ELECTRO	CE207-211	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
53	C ELECTRO	CE212	CEXF1H228V	50V RSS 0.22MF (5X11) TP	O	O	O
54	C ELECTRO	CE213	CEXF1E221V	25V RSS 220MF (8X11.5) TP	O	O	O
55	C ELECTRO	CE214	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O	O	O
56	C ELECTRO	CE401-404	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
57	C ELECTRO	CE405-406	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
58	C ELECTRO	CE407-408	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
59	C ELECTRO	CE409	CEXF1E221V	25V RSS 220MF (8X11.5) TP	O	O	O
60	C ELECTRO	CE410	CEXF1H100V	50V RSS 10MF (5X11) TP	O	O	O
61	C ELECTRO	CE411-420	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
62	C ELECTRO	CE421	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
63	C ELECTRO	CE422	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
64	C ELECTRO	CE423	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
65	C ELECTRO	CE424	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
66	C ELECTRO	CE801-802	CEXF1K562V	RSS 80V 5600MF (5600/75V)	O	O	O
67	C ELECTRO	CE803-804	CEXF1H332V	RSS 50V 3300MF 26*41	O	O	O
68	C ELECTRO	CE805-806	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
69	C ELECTRO	CE807-808	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O	O	O
70	C ELECTRO	CE809-810	CEXF1J101V	63V RSS 100MF (6.3X11) TP	O	O	O
71	C ELECTRO	CE812-813	CEXF1H479V	50V RSS 4.7MF (5X11) TP	O	O	O
72	C ELECTRO	CE815-816	CEXF1H479V	50V RSS 4.7MF (5X11) TP	O	O	O
73	C ELECTRO	CE817-819	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O	O	O
74	C ELECTRO	CE901-904	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
75	C ELECTRO	CE905	CEXF1E102V	25V RSS 1000MF (13X20) TP	O	O	O
76	C ELECTRO	CE906	CEYF1E471V	25V RSS 470MF (10X16)	O	O	O
77	C ELECTRO	CE907	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
78	C ELECTRO	CE908	CEXF1H470V	50V RSS 47MF (6.3X11) TP	O	O	O
79	C ELECTRO	CE909	CEXF1H101V	50V RSS 100MF (8X11.5) TP	O	O	O
80	C ELECTRO	CE910-911	CEXF1H470V	50V RSS 47MF (6.3X11) TP	O	O	O
81	C ELECTRO	CE912-913	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
82	FILTER CERA	CF001-002	5PE107MS3A	SFE107MS3-A	O	O	O
83	C MYLAR	CM201-203	CMXM1H153J	50V 0.015MF J (TP)	O	O	O
84	C MYLAR	CM204-205	CMXM1H103J	50V 0.01MF J (TP)	O	O	O
85	C MYLAR	CM206-207	CMXM1H562J	50V 5600 PF J	O	O	O
86	C MYLAR	CM405-408	CMXM1H104J	50V 0.1MF J	O	O	O
87	C MYLAR	CM409-410	CMXM1H562J	50V 5600 PF J	O	O	O
88	C MYLAR	CM801-802	CMXM2A273J	100V 0.027MF J (TP)	O	O	O
89	C MYLAR	CM803-804	CMXM2A102J	100V 1000PF J (TP)	O	O	O
90	C MYLAR	CM805-806	CMXM2A104J	100V 0.1MF J (TP)	O	O	O
91	C MYLAR	CM807-808	CMXM2A473J	100V 0.047MF J (TP)	O	O	O
92	C MYLAR	CM809	CMXM2A104J	100V 0.1MF J (TP)	O	O	O
93	C MYLAR	CM905-906	CMXM2A103J	100V 0.01MF J (TP)	O	O	O
94	C MYLAR	CM907	CMXM2A104J	100V 0.1MF J (TP)	O	O	O
95	CONN PIN	CN401	9736407600	PIN BASE 53095-1310 13P	O	O	O
96	CONN PIN	CN402	9736407800	53095-1010 10PIN ANGLE	O	O	O
97	CONN WAFER	CN902	9728812700	#22 12P P2.5 350 BOARD-IN	O	O	O
98	CONN WAFER	CW101	9CD6258800	2P S2B-XH-A	O	O	O
99	CONN AS	CW509	9728814100	UL2547 1533 6P 150MM	O	O	O
100	CONN AS	CW603	9728814000	UL2547 1533 8P 200MM	O	O	O
101	CONN WAFER	CW901	9728804100	#22 10P P2.5 350 BOARD-IN	O	O	O
102	DIODE	D201	DZN4148---	1N4148 AUTO 52MM	O	O	O
103	DIODE	D401-403	DZN4148---	1N4148 AUTO 52MM	O	O	O
104	WIRE JUMPER	D404	W581GY1005	AWG22 1/0.65 SN 10 AUTO	O	O	O
105	DIODE	D801-809	DZN4148---	1N4148 AUTO 52MM	O	O	O
106	DIODE	D901-904	DRL202----	RL202	O	O	O
107	DIODE	D905-907	D1N4001---	1N4001	O	O	O
108	DIODE	D910	DZN4148---	1N4148 AUTO 52MM	O	O	O
109	DIODE ZENER	DZ801-802	DZT28R2B---	MTZ 8.2B	O	O	O
110	DIODE ZENER	DZ901	DZT212B---	MTZ 12V 26MM TAPPING	O	O	O
111	DIODE ZENER	DZ902	DZT233B---	MTZ-33B	O	O	O
112	DIODE ZENER	DZ903	DZT26R2B---	MTZ6.2B	O	O	O
113	DIODE ZENER	DZ904	DZT23R6B---	MTZ-3.6 52MM TAPPING	O	O	O
114	IC	IC201	1BA1450S---	BA1450S	O	O	O
115	IC PLL	IC202	1LC72131---	LC72131	O	O	O
116	IC	IC401	1TDA7440D-	TDA7440D	O	O	O
117	IC	IC402	1BA4560N---	BA4560N(H/P AMP)	O	O	O
118	IC	IC801	1STK411230	STK411-230E	O	O	O
119	IC	IC901	1L4959----	L4959	O	O	O
120	JACK ANT	J001	9736321900	PAT645	O	O	O
121	JACK RCA	J401	9CD6313700	S-436P	O	O	O
122	JACK HEADPHONE	J801	9766319501	HTJ-064-05B GOLD	O	O	O
123	JACK SPEAKER	J802	9736320500	CJ-9007-040	O	O	O
124	COIL PEAKING	L001	5CPZ100K02	10UH K (AXIAL 3.5MM)	O	O	O
125	AM RF UNIT	L101	5LR0000832	RBW07VB-K5023	O	O	O
126	FILTER	L202	5PPCFAZ077	PCFAZ077	O	O	O
127	COIL DISCRIMINATOR	L203	5107FBK473	7X7 BLK KSZ-73S	O	O	O
128	COIL CHOKE	L204-205	5LC682K822	6.8MH	O	O	O
129	R CARBON FILM	L208	RD-AZ103J-	1/6 10K OHM J	O	O	O
130	COIL PEAKING	L251	5CPZ100K02	10UH K (AXIAL 3.5MM)	O	O	O
131	WIRE JUMPER	L901-902	W581GY1005	AWG22 1/0.65 SN 10 AUTO	O	O	O
132	TR	Q001	TZTC3194Y-	KTC3194Y	O	O	O
133	TR	Q003	TZRA107M--	KRA107M (KSR2006)	O	O	O
134	TRANSISTOR	Q201-202	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	O	O	O
135	TR	Q401-402	TZRA107M--	KRA107M (KSR2006)	O	O	O
136	TR	Q403-404	TZTD1302Y-	KTD1302Y AUTO	O	O	O
137	TRANSISTOR	Q803-808	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	O	O	O
138	TR	Q809-813	TZTA1266Y-	KTA1266Y- (AUTO)(1015Y)	O	O	O
139	TR	Q814	TKRC107M--	KRC 107-M (TAPPING)	O	O	O
140	TR	Q815	TZTA1275Y-	KTA1275-Y (AUTO)	O	O	O

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
141	TR	Q816	TKRC107M--	KRC 107-M (TAPPING)		o	o
142	TRANSISTOR	Q901	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	o	o	o
143	TR	Q902	TKTB1366Y-	KTb1366Y	o	o	o
144	TR	Q903	TKRA111M--	KRA 111-M (TAPPING)	o	o	o
145	TR	Q904	TKRC107M--	KRC 107-M (TAPPING)	o	o	o
146	TR	Q905	TZTA1274Y-	KTA1274Y-	o	o	o
147	TR	Q906	TZRA107M--	KRA107M (KSR2006)	o	o	o
148	TR	Q907	TKRC107M--	KRC 107-M (TAPPING)	o	o	o
149	TRANSISTOR	Q908-909	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	o	o	o
150	WIRE JUMPER	R002	W581GY6095	AWG22 1/0.65 SN 6 AUTO	o	o	o
151	R CARBON FILM	R003	RD-AZ330J-	1/6 33 OHM J	o	o	o
152	R CARBON FILM	R004	RD-AZ100J-	1/6 10 OHM J	o	o	o
153	R CARBON FILM	R005	RD-AZ332J-	1/6 3.3K OHM J	o	o	o
154	R CARBON FILM	R006	RD-AZ681J-	1/6 680 OHM J	o	o	o
155	R CARBON FILM	R007	RD-AZ331J-	1/6 330 OHM J	o	o	o
156	R CARBON FILM	R008	RD-AZ101J-	1/6 100 OHM J	o	o	o
157	R CARBON FILM	R009	RD-AZ100J-	1/6 10 OHM J	o	o	o
158	R CARBON FILM	R101	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
159	R CARBON FILM	R102	RD-AZ101J-	1/6 100 OHM J	o	o	o
160	R CARBON FILM	R103-105	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
161	R CARBON FILM	R106	RD-AZ332J-	1/6 3.3K OHM J	o	o	o
162	R CARBON FILM	R107	RD-AZ223J-	1/6 22K OHM J	o	o	o
163	R CARBON FILM	R113	RD-AZ104J-	1/6 100K OHM J	o	o	o
164	R CARBON FILM	R201	RD-AZ183J-	1/6 18K OHM J	o	o	o
165	R CARBON FILM	R203	RD-AZ183J-	1/6 18K OHM J	o	o	o
166	R CARBON FILM	R206	RD-AZ100J-	1/6 10 OHM J	o	o	o
167	R CARBON FILM	R207	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
168	R CARBON FILM	R208	RD-AZ102J-	1/6 1K OHM J	o	o	o
169	R CARBON FILM	R209	RD-AZ470J-	1/6 47 OHM J	o	o	o
170	R CARBON FILM	R210	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
171	R CARBON FILM	R211-212	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
172	R CARBON FILM	R213-214	RD-AZ103J-	1/6 10K OHM J	o	o	o
173	R CARBON FILM	R215-216	RD-AZ102J-	1/6 1K OHM J	o	o	o
174	R CARBON FILM	R217-218	RD-AZ474J-	1/6 470K OHM J	o	o	o
175	R CARBON FILM	R219	RD-AZ682J-	1/6 6.8K OHM J	o	o	o
176	R CARBON FILM	R221	RD-AZ332J-	1/6 3.3K OHM J	o	o	o
177	R CARBON FILM	R222-223	RD-AZ272J-	1/6 2.7K OHM J	o	o	o
178	R CARBON FILM	R227-228	RD-AZ101J-	1/6 100 OHM J	o	o	o
179	R CARBON FILM	R251	RD-AZ102J-	1/6 1K OHM J	o	o	o
180	R CARBON FILM	R252	RD-AZ470J-	1/6 47 OHM J	o	o	o
181	R CARBON FILM	R253	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
182	R CARBON FILM	R254	RD-AZ103J-	1/6 10K OHM J	o	o	o
183	R CARBON FILM	R255	RD-AZ100J-	1/6 10 OHM J	o	o	o
184	R CARBON FILM	R256	RD-AZ102J-	1/6 1K OHM J	o	o	o
185	R CARBON FILM	R257-258	RD-AZ103J-	1/6 10K OHM J	o	o	o
186	R CARBON FILM	R259	RD-AZ123J-	1/6 12K OHM J	o	o	o
187	R CARBON FILM	R260-263	RD-AZ102J-	1/6 1K OHM J	o	o	o
188	R CARBON FILM	R264	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
189	R CARBON FILM	R265	RD-AZ103J-	1/6 10K OHM J	o	o	o
190	R CARBON FILM	R401-402	RD-AZ103J-	1/6 10K OHM J	o	o	o
191	R CARBON FILM	R403-404	RD-AZ153J-	1/6 15K OHM J	o	o	o
192	R CARBON FILM	R405-406	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
193	R CARBON FILM	R407-408	RD-AZ822J-	1/6 8.2K OHM J	o	o	o
194	R CARBON FILM	R409-410	RD-AZ102J-	1/6 1K OHM J	o	o	o
195	R CARBON FILM	R411-412	RD-AZ153J-	1/6 15K OHM J	o	o	o
196	R CARBON FILM	R413-414	RD-AZ332J-	1/6 3.3K OHM J	o	o	o
197	R CARBON FILM	R415-416	RD-AZ122J-	1/6 1.2K OHM J	o	o	o
198	R CARBON FILM	R417-418	RD-AZ102J-	1/6 1K OHM J	o	o	o
199	R CARBON FILM	R419-420	RD-AZ104J-	1/6 100K OHM J	o	o	o
200	R CARBON FILM	R421-422	RD-AZ102J-	1/6 1K OHM J	o	o	o
201	R CARBON FILM	R423-424	RD-AZ682J-	1/6 6.8K OHM J	o	o	o
202	R CARBON FILM	R427-428	RD-AZ562J-	1/6 5.6K OHM J	o	o	o
203	R CARBON FILM	R429-430	RD-AZ224J-	1/6 220K OHM J	o	o	o
204	R CARBON FILM	R431-432	RD-AZ102J-	1/6 1K OHM J	o	o	o
205	R CARBON FILM	R433-434	RD-AZ104J-	1/6 100K OHM J	o	o	o
206	R CARBON FILM	R435-437	RD-AZ101J-	1/6 100 OHM J	o	o	o
207	R CARBON FILM	R438-441	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
208	R CARBON FILM	R442-443	RD-AZ102J-	1/6 1K OHM J	o	o	o
209	R CARBON FILM	R445-446	RD-AZ104J-	1/6 100K OHM J	o	o	o
210	R CARBON FILM	R447-448	RD-AZ102J-	1/6 1K OHM J	o	o	o
211	R CARBON FILM	R449-450	RD-AZ104J-	1/6 100K OHM J	o	o	o
212	R CARBON FILM	R451-452	RD-AZ220J-	1/6 22 OHM J	o	o	o
213	R CARBON FILM	R801-802	RD-AZ563J-	1/6 56K OHM J	o	o	o
214	R CARBON FILM	R803-804	RD-AZ182J-	1/6 1.8K OHM J	o	o	o
215	R CARBON FILM	R805-806	RD-AZ683J-	1/6 68K OHM J	o	o	o
216	R CARBON FILM	R807	RD-AZ333J-	1/4 33K OHM J	o	o	o
217	R CARBON FILM	R808	RD-AZ683J-	1/4 68K OHM J	o	o	o
218	R CEMENT	R809-810	RX02L228J-	2W 0.22 OHM J	o	o	o
219	R CARBON FILM	R811-812	RD-AZ272J-	1/6 2.7K OHM J	o	o	o
220	R CARBON FILM	R813-814	RD-AZ562J-	1/6 5.6K OHM J	o	o	o
221	R CARBON FILM	R815-816	RD-AZ273J-	1/6 27K OHM J	o	o	o
222	R CARBON FILM	R817-818	RD-AZ823J-	1/6 82K OHM J	o	o	o
223	R CARBON FILM	R819-820	RD-AZ104J-	1/6 100K OHM J	o	o	o
224	R CARBON FILM	R821-828	RD-AZ103J-	1/6 10K OHM J	o	o	o
225	R CARBON FILM	R829-830	RD-AZ220J-	1/6 22 OHM J	o	o	o
226	R CARBON FILM	R831-832	RD-AZ220J-	1/6 22 OHM J	o	o	o
227	R CARBON FILM	R833-834	RD-AZ332J-	1/6 3.3K OHM J	o	o	o
228	R CARBON FILM	R835-836	RD01Y101J-	1W 100 OHM J	o	o	o
229	R CARBON FILM	R837-838	RD-AZ392J-	1/6 3.9K OHM J	o	o	o
230	R CARBON FILM	R839	RD-AZ223J-	1/6 22K OHM J	o	o	o
231	R CARBON FILM	R840	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
232	R CARBON FILM	R841	RD-AZ223J-	1/6 22K OHM J	o	o	o
233	R CARBON FILM	R843	RD-AZ103J-	1/6 10K OHM J	o	o	o
234	R CARBON FILM	R844	RD-AZ273J-	1/6 27K OHM J	o	o	o
235	WIRE JUMPER	R845-848	W581GY1005	AWG22 1/0.65 SN 10 AUTO	o	o	o
236	R CARBON FILM	R849-852	RD-AZ689J-	1/4 6.8 OHM J	o	o	o
237	R CARBON FILM	R854-857	RD-AZ471J-	1/4 470 OHM J	o	o	o
238	R CARBON FILM	R901	RD-AZ103J-	1/6 10K OHM J	o	o	o
239	R CARBON FILM	R902	RD-AZ223J-	1/6 22K OHM J	o	o	o
240	R CARBON FILM	R903	RD-AZ473J-	1/6 47K OHM J	o	o	o
241	R CARBON FILM	R904	RD-AZ103J-	1/6 10K OHM J	o	o	o
242	R CARBON FILM	R905	RD-AZ473J-	1/6 47K OHM J	o	o	o
243	R CARBON FILM	R906	RD-AZ103J-	1/6 10K OHM J	o	o	o
244	R CARBON FILM	R907	RD-AZ471J-	1/6 470 OHM J	o	o	o
245	R CARBON FILM	R908	RD-AZ102J-	1/6 1K OHM J	o	o	o
246	R CARBON FILM	R909	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
247	R CARBON FILM	R910	RD-AZ471J-	1/6 470 OHM J	o	o	o
248	R CARBON FILM	R911	RD-AZ100J-	1/6 10 OHM J	o	o	o
249	R CARBON FILM	R912-913	RD-AZ103J-	1/6 10K OHM J	o	o	o
250	R CARBON FILM	R914-915	RD-AZ221J-	1/6 220 OHM J	o	o	o
251	R CARBON FILM	R916-917	RD-AZ109J-	1/6 1 OHM J	o	o	o
252	R CARBON FILM	R919	RD-AZ100J-	1/6 10 OHM J	o	o	o
253	R CARBON FILM	R920	RD-AZ562J-	1/6 5.6K OHM J	o	o	o
254	R CARBON FILM	R922	RD-AZ103J-	1/6 10K OHM J	o	o	o
255	R CARBON FILM	R923	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
256	R CARBON FILM	R924	RD-AZ103J-	1/6 10K OHM J	o	o	o
257	R FUSIBLE	RF901-902	RF01F4780J	0.47OHM 1W	o	o	o
258	R SEMI FIXED	RV201	RV6417223-	VM6CK-PV(1S) B 22K OHM	o	o	o
259	SW RELAY	RY901	5SC0201103	HR-CR323 2C-1P DC12V	o	o	o
260	TUNER PACK	TU001	9737613201	KST-F401VA-3	o	o	o
261	X-TAL	XC251	5XA7R20000	7.2M	o	o	o
1	PCB CD AS	11000	9CDC059800	AMI-926RW	o	o	o
2	PCB CD	B501	9CD6585000	123.5X123.5X1.6T	o	o	o
3	C CERA	CC500-502	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
4	C CERA	CC503-505	CCXF1H104Z	50V F 0.1MF Z	o	o	o
5	C CERA	CC506-507	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
6	C CERA	CC508	CCXF1H104Z	50V F 0.1MF Z	o	o	o
7	C CERA	CC510-512	CCXB1H222K	50V B 2200PF K (TAPPING)	o	o	o
8	C CERA	CC513-517	CCXF1H104Z	50V F 0.1MF Z	o	o	o
9	C CERA	CC520	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
10	C CERA	CC521	CCXF1H683Z	50V F 0.068MF Z	o	o	o
11	C CERA	CC523	CCXF1H104Z	50V F 0.1MF Z	o	o	o
12	C CERA	CC524	CCXB1H391K	50V B 390PF K (TAPPING)	o	o	o
13	C CERA	CC525	CCXF1H104Z	50V F 0.1MF Z	o	o	o
14	C CERA	CC526	CCXB1H681K	50V B 680PF K (TAPPING)	o	o	o
15	C CERA	CC527	CCXB1H222K	50V B 2200PF K (TAPPING)	o	o	o
16	C CERA	CC528	CCXF1H104Z	50V F 0.1MF Z	o	o	o
17	C CERA	CC529	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
18	C CERA	CC530	CCXB1H682K	50V B 6800PF K (TAPPING)	o	o	o
19	C CERA	CC531	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
20	C CERA	CC532	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	o	o	o
21	C CERA	CC533	CCXF1H104Z	50V F 0.1MF Z	o	o	o
22	C CERA	CC534	CCXB1H102K	50V B 1000PF K (TAPPING)	o	o	o
23	C CERA	CC535-536	CCXF1H104Z	50V F 0.1MF Z	o	o	o
24	C CERA	CC537	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
25	C CERA	CC538	CCXB1H222K	50V B 2200PF K (TAPPING)	o	o	o
26	C CERA	CC539	CCXB1H562K	50V B 5600PF K (TAPPING)	o	o	o
27	C CERA	CC540	CXCH1H409D	50V CH 4PF D (TAPPING)	o	o	o
28	C CERA	CC541	CXCH1H270J	50V CH 27PF J (TAPPING)	o	o	o
29	C CERA	CC542	CCXB1H102K	50V B 1000PF K (TAPPING)	o	o	o
30	C CERA	CC543-545	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	o	o	o
31	C CERA	CC546	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	o	o	o
32	C CERA	CC547-548	CCXF1H104Z	50V F 0.1MF Z	o	o	o
33	C CERA	CC549	CCXB1H101K	50V B 100PF K (TAPPING)	o	o	o
34	C CERA	CC560-561	CCXF1H104Z	50V F 0.1MF Z	o	o	o
35	C ELECTRO	CE500	CEXF1C102V	16V RSS 1000MF (10X20) TP	o	o	o
36	C ELECTRO	CE502-503	CEXF1E101V	25V RSS 100MF (6.3X11) TP	o	o	o
37	C ELECTRO	CE504	CEXF1E470V	25V RSS 47MF (5X11) TP	o	o	o
38	C ELECTRO	CE505-507	CEXF1E101V	25V RSS 100MF (6.3X11) TP	o	o	o
39	C ELECTRO	CE511	CEXF1H100V	50V RSS 10MF (5X11) TP	o	o	o
40	C ELECTRO	CE513	CEXF1H100V	50V RSS 10MF (5X11) TP	o	o	o
41	C ELECTRO	CE514-515	CEXF1H479V	50V RSS 4.7MF (5X11) TP	o	o	o
42	C ELECTRO	CE516	CEXF1C221V	16V RSS 220MF (8X11.5) TP	o	o	o
43	C ELECTRO	CE520	CEXF1H100V	50V RSS 10MF (5X11) TP	o	o	o
44	C ELECTRO	CE521	CEXF1H479V	50V RSS 4.7MF (5X11) TP	o	o	o
45	C ELECTRO	CE522-524	CEXF1E101V	25V RSS 100MF (6.3X11) TP	o	o	o
46	C ELECTRO	CE525	CEXF1E330V	25V RSS 33MF (5X11) TP	o	o	o
47	C ELECTRO	CE526	CEXF1C102V	16V RSS 1000MF (10X20) TP	o	o	o
48	C ELECTRO	CE527-528	CEXF1H478V	50V RSS 0.47MF (5X11) TP	o	o	o
49	CONN AS	CN500	9738840800	FFC 16P P1.0X250MM R	o	o	o
50	CONN AS	CN503	9728812200	FFC 17P P=1.25X1500M R	o	o	o
51	CONN WAFER	CW500	9CD6259300	52807-1610	o	o	o
52	CONN AS	CW501	9738832900	#30 UL1007 6P 170 P=2.0	o	o	o
53	CONN WAFER	CW503	9CD6263900	52045-1745	o	o	o
54	CONN WAFER	CW504	9CD6259400	2001-WS-12P	o	o	o
55	CONN AS	CW509	9728814100	UL2547 1533 6P 150MM	o	o	o
56	CONN AS	CW510	9738841800	#26 400MM 3P 2.5P	o	o	o
57	DIODE ZENER	DZ500	DZT25R6B--	UZ-5.6B	o	o	o
58	DIODE ZENER	DZ502	DZT25R6B--	UZ-5.6B	o	o	o
59	DIODE ZENER	DZ503	DZT23R9B--	MTZ3.9B	o	o	o
60	IC SSP	IC501	1S1L9226--	S1L9226	o	o	o
61	IC DSP	IC502	1S5L9290--	S5L9290	o	o	o
62	IC	IC503	174HCT04AF	TC74HCT04AF	o	o	o
63	IC CHIP	IC504	1KA9258D--	KA9258D	o	o	o
64	IC	IC505-506	1DBL2084--	DBL2084(D/W)	o	o	o
65	WIRE JUMPER	L501	W581GY1005	AWG22 1/0.65 SN 10 AUTO	o	o	o
66	TRANSISTOR	Q500	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	o	o	o
67	TR	Q501	TKSA928AY-	KSA928A-Y	o	o	o
68	TR	Q503	TKSC2331Y-	KSC2331Y	o	o	o
69	TR	Q510	TKSA928AY-	KSA928A-Y	o	o	o
70	R CARBON FILM	R500	RD-AZ100J-	1/6 10 OHM J	o	o	o
71	R CARBON FILM	R501	RD-AZ821J-	1/6 820 OHM J	o	o	o
72	R CARBON FILM	R503	RD-AZ152J-	1/6 1.5K OHM J	o	o	o
73	R CARBON FILM	R504	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
74	R CARBON FILM	R505-506	RD-4Z229J-	1/4 2.2 OHM J	o	o	o
75	R CARBON FILM	R507-508	RD-AZ103J-	1/6 10K OHM J	o	o	o
76	R CARBON FILM	R513	RD-AZ102J-	1/6 1K OHM J	o	o	o
77	R CARBON FILM	R514	RD-AZ103J-	1/6 10K OHM J	o	o	o
78	R CARBON FILM	R515	RD-AZ105J-	1/6 1M OHM J	o	o	o
79	R CARBON FILM	R516-519	RD-AZ104J-	1/6 100K OHM J	o	o	o
80	R CARBON FILM	R520-526	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
81	R CARBON FILM	R528	RD-AZ472J-	1/6 4.7K OHM J	o	o	o
82	R CARBON FILM	R529-532	RD-AZ473J-	1/6 47K OHM J	o	o	o
83	R CARBON FILM	R533	RD-AZ103J-	1/6 10K OHM J	o	o	o
84	R CARBON FILM	R535	RD-AZ103J-	1/6 10K OHM J	o	o	o
85	R CARBON FILM	R537-538	RD-AZ222J-	1/6 2.2K OHM J	o	o	o
86	R CARBON FILM	R540	RD-AZ223J-	1/6 22K OHM J	o	o	o
87	R CARBON FILM	R541	RD-AZ823J-	1/6 82K OHM J	o	o	o
88	R CARBON FILM	R542	RD-AZ473J-	1/6 47K OHM J	o	o	o
89	R CARBON FILM	R543	RD-AZ124J-	1/6 120K OHM J	o	o	o
90	R CARBON FILM	R544	RD-AZ104J-	1/6 100K OHM J	o	o	o
91	R CARBON FILM	R545	RD-AZ333J-	1/6 33K OHM J	o	o	o
92	R CARBON FILM	R546	RD-AZ104J-	1/6 100K OHM J	o	o	o
93	R CARBON FILM	R547	RD-AZ473J-	1/6 47K OHM J	o	o	o
94	R CARBON FILM	R548	RD-AZ823J-	1/6 82K OHM J	o	o	o
95	R CARBON FILM	R549-550	RD-AZ103J-	1/6 10K OHM J	o	o	o
96	R CARBON FILM	R551	RD-AZ102J-	1/6 1K OHM J	o	o	o
97	R CARBON FILM	R552	RD-AZ563J-	1/6 56K OHM J	o	o	o
98	R CARBON FILM	R553	RD-AZ223J-	1/6 22K OHM J	o	o	o
99	R CARBON FILM	R554	RD-AZ822J-	1/6 8.2K OHM J	o	o	o
100	R CARBON FILM	R555	RD-AZ153J-	1/6 15K OHM J	o	o	o
101	R CARBON FILM	R556	RD-AZ105J-	1/6 1M OHM J	o	o	o
102	R CARBON FILM	R557	RD-AZ683J-	1/6 68K OHM J	o	o	o
103	R CARBON FILM	R558	RD-AZ184J-	1/6 180K OHM J	o	o	o
104	R CARBON FILM	R559	RD-AZ183J-	1/6 18K OHM J	o	o	o
105	R CARBON FILM	R560	RD-AZ220J-	1/6 22 OHM J	o	o	o
106	R CARBON FILM	R561	RD-AZ101J-	1/6 100 OHM J	o	o	o
107	R CARBON FILM	R562	RD-AZ823J-	1/6 82K OHM J	o	o	o
108	R CARBON FILM	R563-566	RD-AZ563J-	1/6 56K OHM J	o	o	o
109	R CARBON FILM	R567	RD-AZ823J-	1/6 82K OHM J	o	o	o
110	R CARBON FILM	R570	RD-AZ334J-	1/6 330K OHM J	o	o	o
111	R CARBON FILM	R571	RD-AZ104J-	1/6 100K OHM J	o	o	o
112	R CARBON FILM	R572	RD-AZ334J-	1/6 330K OHM J	o	o	o
113	R CARBON FILM	R573	RD-AZ104J-	1/6 100K OHM J	o	o	o
114	R CARBON FILM	R574	RD-AZ101J-	1/6 100 OHM J	o	o	o
115	R CARBON FILM	R575-576	RD-AZ104J-	1/6 100K OHM J	o	o	o
116	R CARBON FILM	R577	RD-AZ212J-	1/6 4.7K OHM J	o	o	o
117	R CARBON FILM	R578-579	RD-AZ104J-	1/6 100K OHM J	o	o	o
118	R CARBON FILM	R592-593	RD-22100J-	1/2 10 OHM J	o	o	o
119	RESONATOR CERA	XC501	5PCST16R93	CSTLS16M9X55-B0	o	o	o
1	PCB FRONT AS	F3000	9CDD063200	AXW-228	o		
2	PCB FRONT	B701	9CD6589700	247X139X1.6T	o		
3	C CERA	CC701	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
4	C CERA	CC702	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
5	C CERA	CC703	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
6	C CERA	CC704-705	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
7	C CERA	CC706-707	CCZB1H101K	HIKB 50V 100PF K (AXIAL)	o		
8	C CERA	CC708	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
9	C CERA	CC709	CCZB1H102K	HIKB 50V 1000PF K (AXIAL)	o		
10	C CERA	CC710	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
11	C CERA	CC711	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
12	C CERA	CC712	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
13	C CERA	CC713	CZCH1H150J	CH 50V 15PF J (AXIAL)	o		
14	C CERA	CC714	CZCH1H180J	CH 50V 18PF J (AXIAL)	o		
15	C CERA	CC715-716	CZSL1H330J	SL 50V 33PF J (AXIAL)	o		
16	C CERA	CC717	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
17	C CERA	CC718	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
18	C CERA	CC719	CZSL1H330J	SL 50V 33PF J (AXIAL)	o		
19	C CERA	CC720	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
20	C CERA	CC721	CCZB1H101K	HIKB 50V 100PF K (AXIAL)	o		
21	C CERA	CC722	CCZB1H102K	HIKB 50V 1000PF K (AXIAL)	o		
22	C CERA	CC723	CCZB1H103K	HIKB 50V 0.01MF K (AXIAL)	o		
23	C CERA	CC724-725	CCZF1H104Z	HIKF 50V 0.1MF Z (AXIAL)	o		
24	C CERA	CC726-728	CCZF1E223Z	HIKF 25V 0.022MF Z (AXIAL)	o		
25	C ELECTRO	CE701	CEXF1H109V	50V RSS 1MF (5X11) TP	o		
26	C ELECTRO	CE702	CEXF1A102V	10V RSS 1000MF (8X12.5) TP	o		
27	C ELECTRO	CE703	CEXF1E101V	25V RSS 100MF (6.3X11)	o		
28	C ELECTRO	CE704	CEXF1H100V	50V RSS 10MF (5X11) TP	o		
29	C ELECTRO	CE705	CEXF1H229V	50V RSS 2.2MF (5X11)	o		
30	C ELECTRO	CE707	CEXF1H229V	50V RSS 2.2MF (5X11)	o		
31	CONN AS	CN701	9738835900	UL2468 200MM P2.0 10P	o		
32	CONN AS	CN702	9728812101	FFC 16P P1.25X220MM R	o		
33	PIN WAFER	CW400	9736407700	52084-1310 13P BOTTOM	o		
34	PIN WAFER	CW401	9736407900	52084-1010 10P BOTTOM	o		
35	WAFER	CW508	9CD6261700	52492-1720 BOTTOM ENTRY	o		
36	WAFER	CW702	9CD6259700	52044-1645	o		
37	DIODE	D701-706	DZN4148---	IN4148 AUTO 52MM	o		
38	WIRE JUMPER	D708	W581GY6095	AWG22 1/0.65 SN 6 AUTO	o		
39	DIODE	D709	DZN4148---	IN4148 AUTO 52MM	o		
40	VFD	FD701	DBJ703GNK-	BJ703GNK	o		

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL			NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W						AXW-217	AXW-117	AMI-926W
41	IC	IC701	1M38199280F	U-COM M38199-280FP	O			111	R CARBON FILM	R746	RD-AZ102J-	1/6 1K OHM J	O		
42	IC MEMORY	IC702	1M24C04---	M24C04-BN6	O			112	R CARBON FILM	R747	RD-AZ222J-	1/6 2.2K OHM J	O		
43	IC	IC703	1MSGEQ5A--	MSGEQ5A	O			113	R CARBON FILM	R748	RD-AZ102J-	1/6 1K OHM J	O		
44	IC	IC704	1F4094BM1T	HCF4094M013TR	O			114	R CARBON FILM	R749	RD-AZ222J-	1/6 2.2K OHM J	O		
45	IC PRE AMP	IC705	1HK381B-DW	HK381B-T-DW	O			115	R CARBON FILM	R750	RD-AZ229J-	1/4 2.2 OHM J	O		
46	LED	LD701~702	DSLR332MC3F	SLR332MC3F(GREEN)PI3	O			116	R CARBON FILM	R751	RD-AZ103J-	1/6 10K OHM J	O		
47	LED	LD703	DSLR332VC3F	SLR332VC3F(RED)PI3	O			117	R CARBON FILM	R752	RD-AZ102J-	1/6 1K OHM J	O		
48	LED	LD704~705	DSLR332MC3F	SLR332MC3F(GREEN)PI3	O			118	R CARBON FILM	R753	RD-AZ224J-	1/6 220K OHM J	O		
49	LED	LD706	DSLR332VC3F	SLR332VC3F(RED)PI3	O			119	R CARBON FILM	R754~755	RD-AZ101J-	1/6 100 OHM J	O		
50	LED	LD707~708	DSLR332MC3F	SLR332MC3F(GREEN)PI3	O			120	R CARBON FILM	R756	RD-AZ102J-	1/6 1K OHM J	O		
51	LED	LD709	DSLR332VC3F	SLR332VC3F(RED)PI3	O			121	R CARBON FILM	R757	RD-AZ224J-	1/6 220K OHM J	O		
52	LED	LD710~711	DSLR332MC3F	SLR332MC3F(GREEN)PI3	O			122	R CARBON FILM	R758	RD-AZ101J-	1/6 100 OHM J	O		
53	LED	LD712	DSLR332VC3F	SLR332VC3F(RED)PI3	O			123	R CARBON FILM	R759	RD-AZ104J-	1/6 100K OHM J	O		
54	TR	Q701	TZRC107M--	KRC107M (DTC114YS) (KSR100)	O			124	R CARBON FILM	R760	RD-AZ103J-	1/6 10K OHM J	O		
55	TR	Q702~703	TZRC111M--	KRC111M (DTC114TS) (KSR100)	O			125	R CARBON FILM	R761	RD-AZ106J-	1/6 10M OHM J	O		
56	TR	Q704	TZTC3198Y-	KTC3198Y (2SC5343) AUTO	O			126	R CARBON FILM	R762	RD-AZ334J-	1/6 330K OHM J	O		
57	TR	Q705~707	TZTA1273Y-	KTA1273Y (A966Y) (KSA928A-Y)	O			127	R CARBON FILM	R763	RD-AZ101J-	1/6 100 OHM J	O		
58	TR	Q708~710	TZRC107M--	KRC107M (DTC114YS) (KSR100)	O			128	R CARBON FILM	R764	RD-AZ100J-	1/6 10 OHM J	O		
59	TR	Q711~715	TZRA111M--	KRA111M (KSR2010) AUTO	O			129	R CARBON FILM	R765	RD-AZ390J-	1/6 39 OHM J	O		
60	TR	Q716	TZRC107M--	KRC107M (DTC114YS) (KSR100)	O			130	R CARBON FILM	R766	RD-AZ391J-	1/6 390 OHM J	O		
61	R CARBON FILM	R301	RD-AZ101J-	1/6 100 OHM J	O			131	R CARBON FILM	R767	RD-AZ271J-	1/6 270 OHM J	O		
62	R CARBON FILM	R302	RD-AZ151J-	1/6 150 OHM J	O			132	R CARBON FILM	R768	RD-AZ391J-	1/6 390 OHM J	O		
63	R CARBON FILM	R303	RD-AZ181J-	1/6 180 OHM J	O			133	R CARBON FILM	R769	RD-AZ271J-	1/6 270 OHM J	O		
64	R CARBON FILM	R304	RD-AZ271J-	1/6 270 OHM J	O			134	R CARBON FILM	R770	RD-AZ391J-	1/6 390 OHM J	O		
65	R CARBON FILM	R305	RD-AZ331J-	1/6 330 OHM J	O			135	R CARBON FILM	R771	RD-AZ271J-	1/6 270 OHM J	O		
66	R CARBON FILM	R310	RD-AZ332J-	1/6 3.3K OHM J	O			136	R CARBON FILM	R772	RD-AZ391J-	1/6 390 OHM J	O		
67	R CARBON FILM	R311	RD-AZ272J-	1/6 2.7K OHM J	O			137	R CARBON FILM	R773	RD-AZ271J-	1/6 270 OHM J	O		
68	R CARBON FILM	R312	RD-AZ472J-	1/6 4.7K OHM J	O			138	R CARBON FILM	R776	RD-AZ103J-	1/6 10K OHM J	O		
69	R CARBON FILM	R313	RD-AZ101J-	1/6 100 OHM J	O			139	WIRE JUMPER	R777	W581GY6095	AWG22 1/0.65 SN 6 AUTO	O		
70	R CARBON FILM	R314	RD-AZ151J-	1/6 150 OHM J	O			140	SW TACT	SW701~706	5S50101001	KPT-1105A 1C-1P	O		
71	R CARBON FILM	R315	RD-AZ181J-	1/6 180 OHM J	O			141	SW TACT	SW712~713	5S50101001	KPT-1105A 1C-1P	O		
72	R CARBON FILM	R316	RD-AZ271J-	1/6 270 OHM J	O			142	SW TACT	SW715~725	5S50101001	KPT-1105A 1C-1P	O		
73	R CARBON FILM	R317	RD-AZ331J-	1/6 330 OHM J	O			143	SW TACT	SW727~730	5S50101001	KPT-1105A 1C-1P	O		
74	R CARBON FILM	R318	RD-AZ391J-	1/6 390 OHM J	O			144	SW TACT	SW734~735	5S50101001	KPT-1105A 1C-1P	O		
75	R CARBON FILM	R319	RD-AZ471J-	1/6 470 OHM J	O			145	SW ENCODER	VR701	5SH162401-	EC16B2404 24P W/DETENT	O		
76	R CARBON FILM	R320	RD-AZ561J-	1/6 560 OHM J	O			146	RESONATOR	XC701	5PCSASMTZ-	CSALA8M00T55-B0 (8.00MTZ)	O		
77	R CARBON FILM	R321	RD-AZ821J-	1/6 820 OHM J	O			147	X-TAL	XC702	5XA32R768-	DT-38 32.768KHZ 20PPM	O		
78	R CARBON FILM	R322	RD-AZ152J-	1/6 1.5K OHM J	O			1	PCB FRONT AS		12000	9CDC062500	AXW-217K-SEMP	O	
79	R CARBON FILM	R323	RD-AZ272J-	1/6 2.7K OHM J	O			2	PCB FRONT	B001	9CD6588100	247X139	O		
80	R CARBON FILM	R325	RD-AZ101J-	1/6 100 OHM J	O			3	C CERA	CC701	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
81	R CARBON FILM	R326	RD-AZ151J-	1/6 150 OHM J	O			4	C CERA	CC702	CCXF1H104Z	50V F 0.1MF Z	O		
82	R CARBON FILM	R327	RD-AZ181J-	1/6 180 OHM J	O			5	C CERA	CC703	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
83	R CARBON FILM	R331	RD-AZ152J-	1/6 1.5K OHM J	O			6	C CERA	CC704	CCXF1H104Z	50V F 0.1MF Z	O		
84	R CARBON FILM	R332	RD-AZ561J-	1/6 560 OHM J	O			7	C CERA	CC705	CCXF1H104Z	50V F 0.1MF Z	O		
85	WIRE JUMPER	R333	W581GY6095	AWG22 1/0.65 SN 6 AUTO	O			8	C CERA	CC706~707	CZCH1H101J	CH 50V 100PF J AXL 52MM	O		
86	R CARBON FILM	R701~702	RD-AZ103J-	1/6 10K OHM J	O			9	C CERA	CC708	CCXF1H104Z	50V F 0.1MF Z	O		
87	R CARBON FILM	R703~705	RD-AZ683J-	1/6 68K OHM J	O			10	C CERA	CC709	CCZB1H102K	50V B 1000PF K (AXIAL)	O		
88	R CARBON FILM	R706~712	RD-AZ103J-	1/6 10K OHM J	O			11	C CERA	CC710	CCXF1H104Z	50V F 0.1MF Z	O		
89	R CARBON FILM	R713~714	RD-AZ473J-	1/6 47K OHM J	O			12	C CERA	CC711	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
90	R CARBON FILM	R715~717	RD-AZ152J-	1/6 1.5K OHM J	O			13	C CERA	CC712	CCXF1H104Z	50V F 0.1MF Z	O		
91	R CARBON FILM	R718~719	RD-AZ472J-	1/6 4.7K OHM J	O			14	C CERA	CC713	CZCH1H150J	50V CH 15PF J (AXIAL)	O		
92	R CARBON FILM	R720~721	RD-AZ122J-	1/6 1.2K OHM J	O			15	C CERA	CC714	CZCH1H180J	50V CH 18PF J (AXIAL)	O		
93	R CARBON FILM	R722	RD-AZ333J-	1/6 33K OHM J	O			16	C CERA	CC715~716	CZCH1H330J	CH 50V 33PF J AXIAL 52MM	O		
94	R CARBON FILM	R723	RD-AZ683J-	1/6 68K OHM J	O			17	C CERA	CC717	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
95	R CARBON FILM	R724	RD-AZ393J-	1/6 39K OHM J	O			18	C CERA	CC718	CCXF1H104Z	50V F 0.1MF Z	O		
96	R CARBON FILM	R725	RD-AZ333J-	1/6 33K OHM J	O			19	C CERA	CC719	CZCH1H330J	CH 50V 33PF J AXIAL 52MM	O		
97	R CARBON FILM	R726	RD-AZ103J-	1/6 10K OHM J	O			20	C CERA	CC720	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
98	R CARBON FILM	R727	RD-AZ333J-	1/6 33K OHM J	O			21	C CERA	CC721	CZCH1H101J	CH 50V 100PF J AXL 52MM	O		
99	R CARBON FILM	R728~732	RD-AZ103J-	1/6 10K OHM J	O			22	C CERA	CC722	CCZB1H102K	50V B 1000PF K (AXIAL)	O		
100	R CARBON FILM	R733	RD-AZ102J-	1/6 1K OHM J	O			23	C CERA	CC723	CZCH1H101J	CH 50V 100PF J AXL 52MM	O		
101	R CARBON FILM	R734	RD-AZ103J-	1/6 10K OHM J	O			24	C CERA	CC724~725	CCXF1H104Z	50V F 0.1MF Z	O		
102	R CARBON FILM	R735~736	RD-AZ102J-	1/6 1K OHM J	O			25	C CERA	CC726~727	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	O		
103	R CARBON FILM	R737	RD-AZ103J-	1/6 10K OHM J	O			26	C ELECTRO	CE701	CEXF1H109V	50V RSS 1MF (5X11) TP	O		
104	R CARBON FILM	R738	RD-AZ102J-	1/6 1K OHM J	O			27	C ELECTRO	CE702	CEYF1A102V	10V 1000MF RSS 10X16	O		
105	R CARBON FILM	R739	RD-AZ472J-	1/6 4.7K OHM J	O			28	C ELECTRO	CE703	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O		
106	R CARBON FILM	R740	RD-AZ102J-	1/6 1K OHM J	O			29	C ELECTRO	CE704	CEXF1H100V	50V RSS 10MF (5X11) TP	O		
107	R CARBON FILM	R741	RD-AZ182J-	1/6 1.8K OHM J	O			30	C ELECTRO	CE705	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O		
108	R CARBON FILM	R742	RD-AZ102J-	1/6 1K OHM J	O			31	C ELECTRO	CE707	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O		
109	R CARBON FILM	R743	RD-AZ222J-	1/6 2.2K OHM J	O			32	CONN AS	CN508	9728812200	FFC 17P P=1.25X1500M R	O		
110	R CARBON FILM	R744	RD-AZ229J-	1/4 2.2 OHM J	O			33	CONN AS	CN701	9738836200	UL2468 160MM P2.0 8P/2P	O		

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
34	CONN AS	CN702	9728812100	FFC 16P P1.25X150MM R		O	
35	CONN WAFER	CW400	9736407700	52084-1310 13P BOTTOM		O	
36	CONN WAFER	CW401	9736407900	52084-1010 10P BOTTOM		O	
37	CONN WAFER	CW508	9CD6261700	52492-1720 BOTTOM ENTRY		O	
38	CONN WAFER	CW702	9CD6259700	52044-1645		O	
39	DIODE	D701-706	DZN4148---	1N4148 AUTO 52MM		O	
40	WIRE JUMPER	D708	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO		O	
41	DIODE	D709	DZN4148---	1N4148 AUTO 52MM		O	
42	VFD	FD701	DBJ703GNK-	BJ703GNK		O	
43	IC	IC701	1M38199RWL	U-COM M38199RW 926LW		O	
44	IC MEMORY	IC702	124LC04B--	24LC04B		O	
45	IC	IC703	1MSGE05A--	MSGE05A		O	
46	IC	IC704	1BU4094BCF	BU4094BCF(SOP16)		O	
47	IC PRE AMP	IC705	1TM97CT38P	LTM97CT-38P		O	
48	LED	LD701-702	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1		O	
49	LED	LD703	DLTL16KEE-	LTL-16KEE(RED)PI3.1		O	
50	LED	LD704-705	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1		O	
51	LED	LD706	DLTL16KEE-	LTL-16KEE(RED)PI3.1		O	
52	LED	LD707-708	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1		O	
53	LED	LD709	DLTL16KEE-	LTL-16KEE(RED)PI3.1		O	
54	LED	LD710-711	DLTL16KGE-	LTL-16KGE(GREEN)PI3.1		O	
55	LED	LD712	DLTL16KEE-	LTL-16KEE(RED)PI3.1		O	
56	TR	Q701	TKRC107M--	KRC 107-M (TAPPING)		O	
57	TR	Q702-703	TKRC111M--	KRC111M (KSR1010)		O	
58	TRANSISTOR	Q704	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)		O	
59	TR	Q705-707	TZTA1273Y-	KTA1273Y(966Y)		O	
60	TR	Q708-710	TKRC107M--	KRC 107-M (TAPPING)		O	
61	TR	Q711-715	TKRA111M--	KRA 111-M (TAPPING)		O	
62	TR	Q716	TKRC107M--	KRC 107-M (TAPPING)		O	
63	R CARBON FILM	R301	RD-AZ101J-	1/6 100 OHM J		O	
64	R CARBON FILM	R302	RD-AZ151J-	1/6 150 OHM J		O	
65	R CARBON FILM	R303	RD-AZ181J-	1/6 180 OHM J		O	
66	R CARBON FILM	R304	RD-AZ271J-	1/6 270 OHM J		O	
67	R CARBON FILM	R305	RD-AZ331J-	1/6 330 OHM J		O	
68	R CARBON FILM	R310	RD-AZ332J-	1/6 3.3K OHM J		O	
69	R CARBON FILM	R311	RD-AZ272J-	1/6 2.7K OHM J		O	
70	R CARBON FILM	R312	RD-AZ472J-	1/6 4.7K OHM J		O	
71	R CARBON FILM	R313	RD-AZ101J-	1/6 100 OHM J		O	
72	R CARBON FILM	R314	RD-AZ151J-	1/6 150 OHM J		O	
73	R CARBON FILM	R315	RD-AZ181J-	1/6 180 OHM J		O	
74	R CARBON FILM	R316	RD-AZ271J-	1/6 270 OHM J		O	
75	R CARBON FILM	R317	RD-AZ331J-	1/6 330 OHM J		O	
76	R CARBON FILM	R318	RD-AZ391J-	1/6 390 OHM J		O	
77	R CARBON FILM	R319	RD-AZ471J-	1/6 470 OHM J		O	
78	R CARBON FILM	R320	RD-AZ561J-	1/6 560 OHM J		O	
79	R CARBON FILM	R321	RD-AZ821J-	1/6 820 OHM J		O	
80	R CARBON FILM	R322	RD-AZ152J-	1/6 1.5K OHM J		O	
81	R CARBON FILM	R323	RD-AZ272J-	1/6 2.7K OHM J		O	
82	R CARBON FILM	R325	RD-AZ101J-	1/6 100 OHM J		O	
83	R CARBON FILM	R326	RD-AZ151J-	1/6 150 OHM J		O	
84	R CARBON FILM	R327	RD-AZ181J-	1/6 180 OHM J		O	
85	R CARBON FILM	R331	RD-AZ152J-	1/6 1.5K OHM J		O	
86	R CARBON FILM	R332	RD-AZ561J-	1/6 560 OHM J		O	
87	R CARBON FILM	R701-702	RD-AZ103J-	1/6 10K OHM J		O	
88	R CARBON FILM	R703-705	RD-AZ683J-	1/6 68K OHM J		O	
89	R CARBON FILM	R706-712	RD-AZ103J-	1/6 10K OHM J		O	
90	R CARBON FILM	R713-714	RD-AZ473J-	1/6 47K OHM J		O	
91	R CARBON FILM	R715-717	RD-AZ152J-	1/6 1.5K OHM J		O	
92	R CARBON FILM	R718-719	RD-AZ472J-	1/6 4.7K OHM J		O	
93	R CARBON FILM	R720	RD-AZ122J-	1/6 1.2K OHM J		O	
94	WIRE JUMPER	R721	W581GY1005	AWG22 1/0.65 SN 10 AUTO		O	
95	R CARBON FILM	R722	RD-AZ333J-	1/6 33K OHM J		O	
96	R CARBON FILM	R723	RD-AZ683J-	1/6 68K OHM J		O	
97	R CARBON FILM	R724	RD-AZ393J-	1/6 39K OHM J		O	
98	R CARBON FILM	R725	RD-AZ333J-	1/6 33K OHM J		O	
99	R CARBON FILM	R726	RD-AZ103J-	1/6 10K OHM J		O	
100	R CARBON FILM	R727	RD-AZ333J-	1/6 33K OHM J		O	
101	R CARBON FILM	R728-732	RD-AZ103J-	1/6 10K OHM J		O	
102	R CARBON FILM	R733	RD-AZ102J-	1/6 1K OHM J		O	
103	R CARBON FILM	R734	RD-AZ103J-	1/6 10K OHM J		O	
104	R CARBON FILM	R735-736	RD-AZ102J-	1/6 1K OHM J		O	
105	R CARBON FILM	R737	RD-AZ103J-	1/6 10K OHM J		O	
106	R CARBON FILM	R738	RD-AZ102J-	1/6 1K OHM J		O	
107	R CARBON FILM	R739	RD-AZ472J-	1/6 4.7K OHM J		O	
108	R CARBON FILM	R740	RD-AZ102J-	1/6 1K OHM J		O	
109	R CARBON FILM	R741	RD-AZ182J-	1/6 1.8K OHM J		O	
110	R CARBON FILM	R742	RD-AZ102J-	1/6 1K OHM J		O	
111	R CARBON FILM	R743	RD-AZ222J-	1/6 2.2K OHM J		O	
112	R CARBON FILM	R744	RD-4Z229J-	1/4 2.2 OHM J		O	
113	R CARBON FILM	R746	RD-AZ102J-	1/6 1K OHM J		O	
114	R CARBON FILM	R747	RD-AZ222J-	1/6 2.2K OHM J		O	
115	R CARBON FILM	R748	RD-AZ102J-	1/6 1K OHM J		O	
116	R CARBON FILM	R749	RD-AZ222J-	1/6 2.2K OHM J		O	
117	R CARBON FILM	R750	RD-4Z229J-	1/4 2.2 OHM J		O	
118	R CARBON FILM	R751	RD-AZ103J-	1/6 10K OHM J		O	
119	R CARBON FILM	R752	RD-AZ102J-	1/6 1K OHM J		O	
120	R CARBON FILM	R753	RD-AZ224J-	1/6 220K OHM J		O	
121	R CARBON FILM	R754-755	RD-AZ101J-	1/6 100 OHM J		O	
122	R CARBON FILM	R756	RD-AZ102J-	1/6 1K OHM J		O	
123	R CARBON FILM	R757	RD-AZ224J-	1/6 220K OHM J		O	
124	R CARBON FILM	R758	RD-AZ101J-	1/6 100 OHM J		O	
125	R CARBON FILM	R759	RD-AZ104J-	1/6 100K OHM J		O	
126	R CARBON FILM	R760	RD-AZ103J-	1/6 10K OHM J		O	
127	R CARBON FILM	R761	RD-AZ106J-	1/6 10M OHM J		O	
128	R CARBON FILM	R762	RD-AZ334J-	1/6 330K OHM J		O	
129	R CARBON FILM	R763	RD-AZ101J-	1/6 100 OHM J		O	
130	R CARBON FILM	R764	RD-AZ100J-	1/6 10 OHM J		O	
131	R CARBON FILM	R765	RD-AZ390J-	1/6 39 OHM J		O	
132	R CARBON FILM	R766	RD-AZ391J-	1/6 390 OHM J		O	
133	R CARBON FILM	R767	RD-AZ271J-	1/6 270 OHM J		O	
134	R CARBON FILM	R768	RD-AZ391J-	1/6 390 OHM J		O	
135	R CARBON FILM	R769	RD-AZ271J-	1/6 270 OHM J		O	
136	R CARBON FILM	R770	RD-AZ391J-	1/6 390 OHM J		O	
137	R CARBON FILM	R771	RD-AZ271J-	1/6 270 OHM J		O	
138	R CARBON FILM	R772	RD-AZ391J-	1/6 390 OHM J		O	
139	R CARBON FILM	R773	RD-AZ271J-	1/6 270 OHM J		O	
140	R CARBON FILM	R776	RD-AZ103J-	1/6 10K OHM J		O	
141	WIRE JUMPER	R777	W581GY6095	AWG22 1/0.65 SN 6 AUTO		O	
142	SW TACT	SW701-706	5S50101Z67	SKHV 10920A, 5MM		O	
143	SW TACT	SW711-713	5S50101Z67	SKHV 10920A, 5MM		O	
144	SW TACT	SW716-725	5S50101Z67	SKHV 10920A, 5MM		O	
145	SW TACT	SW727-728	5S50101Z67	SKHV 10920A, 5MM		O	
146	SW TACT	SW730	5S50101Z67	SKHV 10920A, 5MM		O	
147	SW TACT	SW734-735	5S50101Z67	SKHV 10920A, 5MM		O	
148	SW ENCODER	VR701	5SH162402-	EC16B24208 24P W/DETENT		O	
149	RESONATOR	XC701	5PCSAS8MTZ-	CSALA8M00T75-B0 (8.00MTZ)		O	
150	X-TAL	XC702	5XA32R768-	DT-38 32.768KHZ 20PPM		O	
1	PCB FRONT AS	12000	9CDO59703	AMI-926LW-SEMP			O
2	PCB FRONT	B001	9CD6585500	247X139X1.6T			O
3	C CERA	CC701	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
4	C CERA	CC702	CCXF1H104Z	50V F 0.1MF Z			O
5	C CERA	CC703	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
6	C CERA	CC704-705	CCXF1H104Z	50V F 0.1MF Z			O
7	C CERA	CC706-707	CZCH1H101J	CH 50V 100PF J AXL 52MM			O
8	C CERA	CC708	CCXF1H104Z	50V F 0.1MF Z			O
9	C CERA	CC709	CCZB1H102K	50V B 1000PF K (AXIAL)			O
10	C CERA	CC710	CCXF1H104Z	50V F 0.1MF Z			O
11	C CERA	CC711	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
12	C CERA	CC712	CCXF1H104Z	50V F 0.1MF Z			O
13	C CERA	CC713	CZCH1H150J	50V CH 15PF J (AXIAL)			O
14	C CERA	CC714	CZCH1H180J	50V CH 18PF J (AXIAL)			O
15	C CERA	CC715-716	CZCH1H330J	CH 50V 33PF J AXIAL 52MM			O
16	C CERA	CC717	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
17	C CERA	CC718	CCXF1H104Z	50V F 0.1MF Z			O
18	C CERA	CC719	CZCH1H330J	CH 50V 33PF J AXIAL 52MM			O
19	C CERA	CC720	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
20	C CERA	CC721	CZCH1H101J	CH 50V 100PF J AXL 52MM			O
21	C CERA	CC722	CCZB1H102K	50V B 1000PF K (AXIAL)			O
22	C CERA	CC723	CZCH1H101J	CH 50V 100PF J AXL 52MM			O
23	C CERA	CC724-725	CCXF1H104Z	50V F 0.1MF Z			O

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
24	C CERA	CC726-727	CCXF1H223Z	50V F 0.022MF Z (TAPPING)			O
25	C ELECTRO	CE701	CEXF1H109V	50V RSS 1MF (5X11) TP			O
26	C ELECTRO	CE702	CEYF1A102V	10V 1000MF RSS 10X16			O
27	C ELECTRO	CE703	CEXF1E101V	25V RSS 100MF (6.3X11) TP			O
28	C ELECTRO	CE704	CEXF1H100V	50V RSS 10MF (5X11) TP			O
29	C ELECTRO	CE705	CEXF1H229V	50V RSS 2.2MF (5X11) TP			O
30	C ELECTRO	CE707	CEXF1H229V	50V RSS 2.2MF (5X11) TP			O
31	CONN AS	CN508	9728812200	FFC 17P P=1.25X1500M R			O
32	CONN AS	CN701	9738836200	UL2468 160MM P2.0 8P/2P			O
33	CONN AS	CN702	9728812100	FFC 16P P1.25X150MM R			O
34	CONN WAFER	CN902	9728804200	#26 2P P2.0 350 BOARD-IN			O
35	CONN WAFER	CW400	9736407700	52084-1310 13P BOTTOM			O
36	CONN WAFER	CW401	9736407900	52084-1010 10P BOTTOM			O
37	CONN WAFER	CW508	9CD6261700	52492-1720 BOTTOM ENTRY			O
38	CONN WAFER	CW702	9CD6259700	52044-1645			O
39	DIODE	D701-706	DZN4148---	1N4148 AUTO 52MM			O
40	WIRE JUMPER	D708	W581GY7595	AWG22 1/0.65 SN 7.5 AUTO			O
41	DIODE	D709	DZN4148---	1N4148 AUTO 52MM			O
42	VFD	FD701	DBJ703GNK-	BJ703GNK			O
43	IC	IC701	1M38199RWL	U-COM M38199RW 926LW			O
44	IC MEMORY	IC702	124LC04B--	24LC04B			O
45	IC	IC703	1MSGEQ5A--	MSGEQ5A			O
46	IC	IC704	1BU4094BCF	BU4094BCF(SOP16)			O
47	IC PRE AMP	IC705	1TM97CT38P	LTM97CT-38P			O
48	LED	LD701-702	DLTL307GE-	LTL-307GE(GREEN)PI5			O
49	LED	LD703	DLTL16KEE-	LTL-16KEE(RED)PI3.1			O
50	LED	LD704-705	DLTL307GE-	LTL-307GE(GREEN)PI5			O
51	LED	LD706	DLTL16KEE-	LTL-16KEE(RED)PI3.1			O
52	LED	LD707-708	DLTL307GE-	LTL-307GE(GREEN)PI5			O
53	LED	LD709	DLTL16KEE-	LTL-16KEE(RED)PI3.1			O
54	LED	LD710-711	DLTL307GE-	LTL-307GE(GREEN)PI5			O
55	LED	LD712	DLTL16KEE-	LTL-16KEE(RED)PI3.1			O
56	TR	Q701	TKRC107M--	KRC 107-M (TAPPING)			O
57	TR	Q702-703	TKRC111M--	KRC111M (KSR1010)			O
58	TRANSISTOR	Q704	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)			O
59	TR	Q705-707	TZTA1273Y-	KTA1273Y(966Y)			O
60	TR	Q708-710	TKRC107M--	KRC 107-M (TAPPING)			O
61	TR	Q711-715	TKRA111M--	KRA 111-M (TAPPING)			O
62	TR	Q716	TKRC107M--	KRC 107-M (TAPPING)			O
63	R CARBON FILM	R301	RD-AZ101J-	1/6 100 OHM J			O
64	R CARBON FILM	R302	RD-AZ151J-	1/6 150 OHM J			O
65	R CARBON FILM	R303	RD-AZ181J-	1/6 180 OHM J			O
66	R CARBON FILM	R304	RD-AZ271J-	1/6 270 OHM J			O
67	R CARBON FILM	R305	RD-AZ331J-	1/6 330 OHM J			O
68	R CARBON FILM	R306	RD-AZ391J-	1/6 390 OHM J			O
69	R CARBON FILM	R307	RD-AZ471J-	1/6 470 OHM J			O
70	R CARBON FILM	R308	RD-AZ561J-	1/6 560 OHM J			O
71	R CARBON FILM	R309	RD-AZ821J-	1/6 820 OHM J			O
72	R CARBON FILM	R310	RD-AZ152J-	1/6 1.5K OHM J			O
73	R CARBON FILM	R311	RD-AZ272J-	1/6 2.7K OHM J			O
74	R CARBON FILM	R312	RD-AZ472J-	1/6 4.7K OHM J			O
75	R CARBON FILM	R313	RD-AZ101J-	1/6 100 OHM J			O
76	R CARBON FILM	R314	RD-AZ151J-	1/6 150 OHM J			O
77	R CARBON FILM	R315	RD-AZ181J-	1/6 180 OHM J			O
78	R CARBON FILM	R316	RD-AZ271J-	1/6 270 OHM J			O
79	R CARBON FILM	R317	RD-AZ331J-	1/6 330 OHM J			O
80	R CARBON FILM	R318	RD-AZ391J-	1/6 390 OHM J			O
81	R CARBON FILM	R319	RD-AZ471J-	1/6 470 OHM J			O
82	R CARBON FILM	R320	RD-AZ561J-	1/6 560 OHM J			O
83	R CARBON FILM	R321	RD-AZ821J-	1/6 820 OHM J			O
84	R CARBON FILM	R322	RD-AZ152J-	1/6 1.5K OHM J			O
85	R CARBON FILM	R323	RD-AZ272J-	1/6 2.7K OHM J			O
86	R CARBON FILM	R324	RD-AZ472J-	1/6 4.7K OHM J			O
87	R CARBON FILM	R325	RD-AZ101J-	1/6 100 OHM J			O
88	R CARBON FILM	R326	RD-AZ151J-	1/6 150 OHM J			O
89	R CARBON FILM	R327	RD-AZ181J-	1/6 180 OHM J			O
90	R CARBON FILM	R328	RD-AZ271J-	1/6 270 OHM J			O
91	R CARBON FILM	R329	RD-AZ331J-	1/6 330 OHM J			O
92	R CARBON FILM	R330	RD-AZ391J-	1/6 390 OHM J			O
93	R CARBON FILM	R331	RD-AZ471J-	1/6 470 OHM J			O
94	R CARBON FILM	R332	RD-AZ561J-	1/6 560 OHM J			O
95	R CARBON FILM	R333	RD-AZ821J-	1/6 820 OHM J			O
96	R CARBON FILM	R701-702	RD-AZ103J-	1/6 10K OHM J			O
97	R CARBON FILM	R703-705	RD-AZ683J-	1/6 68K OHM J			O
98	R CARBON FILM	R706-712	RD-AZ103J-	1/6 10K OHM J			O
99	R CARBON FILM	R713-714	RD-AZ473J-	1/6 47K OHM J			O
100	R CARBON FILM	R715-717	RD-AZ152J-	1/6 1.5K OHM J			O
101	R CARBON FILM	R718-719	RD-AZ472J-	1/6 4.7K OHM J			O
102	R CARBON FILM	R720	RD-AZ122J-	1/6 1.2K OHM J			O
103	WIRE JUMPER	R721	W581GY6095	AWG22 1/0.65 SN 6 AUTO			O
104	R CARBON FILM	R722	RD-AZ333J-	1/6 33K OHM J			O
105	R CARBON FILM	R723	RD-AZ683J-	1/6 68K OHM J			O
106	R CARBON FILM	R724	RD-AZ393J-	1/6 39K OHM J			O
107	R CARBON FILM	R725	RD-AZ333J-	1/6 33K OHM J			O
108	R CARBON FILM	R726	RD-AZ103J-	1/6 10K OHM J			O
109	R CARBON FILM	R727	RD-AZ333J-	1/6 33K OHM J			O
110	R CARBON FILM	R728-732	RD-AZ103J-	1/6 10K OHM J			O
111	R CARBON FILM	R733	RD-AZ102J-	1/6 1K OHM J			O
112	R CARBON FILM	R734	RD-AZ102J-	1/6 1K OHM J			O
113	R CARBON FILM	R735-736	RD-AZ102J-	1/6 1K OHM J			O
114	R CARBON FILM	R737	RD-AZ103J-	1/6 10K OHM J			O
115	R CARBON FILM	R738	RD-AZ102J-	1/6 1K OHM J			O
116	R CARBON FILM	R739	RD-AZ472J-	1/6 4.7K OHM J			O
117	R CARBON FILM	R740	RD-AZ102J-	1/6 1K OHM J			O
118	R CARBON FILM	R741	RD-AZ103J-	1/6 10K OHM J			O
119	R CARBON FILM	R742	RD-AZ102J-	1/6 1K OHM J			O
120	R CARBON FILM	R743	RD-AZ222J-	1/6 2.2K OHM J			O
121	R CARBON FILM	R744	RD-AZ229J-	1/4 2.2 OHM J			O
122	R CARBON FILM	R746	RD-AZ102J-	1/6 1K OHM J			O
123	R CARBON FILM	R747	RD-AZ222J-	1/6 2.2K OHM J			O
124	R CARBON FILM	R748	RD-AZ102J-	1/6 1K OHM J			O
125	R CARBON FILM	R749	RD-AZ222J-	1/6 2.2K OHM J			O
126	R CARBON FILM	R750	RD-AZ229J-	1/4 2.2 OHM J			O
127	R CARBON FILM	R751	RD-AZ103J-	1/6 10K OHM J			O
128	R CARBON FILM	R752	RD-AZ102J-	1/6 1K OHM J			O
129	R CARBON FILM	R753	RD-AZ224J-	1/6 220K OHM J			O
130	R CARBON FILM	R754-755	RD-AZ101J-	1/6 100 OHM J			O
131	R CARBON FILM	R756	RD-AZ102J-	1/6 1K OHM J			O
132	R CARBON FILM	R757	RD-AZ224J-	1/6 220K OHM J			O
133	R CARBON FILM	R758	RD-AZ101J-	1/6 100 OHM J			O
134	R CARBON FILM	R759	RD-AZ104J-	1/6 100K OHM J			O
135	R CARBON FILM	R760	RD-AZ103J-	1/6 10K OHM J			O
136	R CARBON FILM	R761	RD-AZ106J-	1/6 10M OHM J			O
137	R CARBON FILM	R762	RD-AZ334J-	1/6 330K OHM J			O
138	R CARBON FILM	R763	RD-AZ101J-	1/6 100 OHM J			O
139	R CARBON FILM	R764	RD-AZ100J-	1/6 10 OHM J			O
140	R CARBON FILM	R765	RD-AZ390J-	1/6 39 OHM J			O
141	R CARBON FILM	R766	RD-AZ391J-	1/6 390 OHM J			O
142	R CARBON FILM	R767	RD-AZ271J-	1/6 270 OHM J			O
143	R CARBON FILM	R768	RD-AZ391J-	1/6 390 OHM J			O
144	R CARBON FILM	R769	RD-AZ271J-	1/6 270 OHM J			O
145	R CARBON FILM	R770	RD-AZ391J-	1/6 390 OHM J			O
146	R CARBON FILM	R771	RD-AZ271J-	1/6 270 OHM J			O
147	R CARBON FILM	R772	RD-AZ391J-	1/6 390 OHM J			O
148	R CARBON FILM	R773	RD-AZ271J-	1/6 270 OHM J			O
149	R CARBON FILM	R776	RD-AZ103J-	1/6 10K OHM J			O
150	SW TACT	SW701-705	5S50101267	SKHV 10920A, 5MM			O
151	SW TACT	SW709-713	5S50101267	SKHV 10920A, 5MM			O
152	SW TACT	SW715-728	5S50101267	SKHV 10920A, 5MM			O
153	SW TACT	SW735	5S50101267	SKHV 10920A, 5MM			O
154	SW ENCODER	VR701	5SH162401-	EC16B2420A 24P W/DETENT			O
155	RESONATOR	XC701	5PCSAS8MTZ-	CSALA8M00T55-B0 (8.00MTZ)			O
156	X-TAL	XC702	5XA32R768-	DT-38 32.768KHZ 20PPM			O

Electrical Parts List

Model : AXW-217/ AXW-117/AMI-926LW/RW

NO	PART-NAME	LOCATION	PART-CODE	PART-DESC	MODEL		
					AXW-217	AXW-117	AMI-926W
1	PCB POWER AS	13000	9CDC057103	AMI-926LW-SEMP	O	O	O
2	CORD AC	AC901	9736908900	1T1OS2	O	O	O
3	PCB POWER	B001	9CD6581000	247X197	O	O	O
4	C MYLAR	CM908-915	CMXM1H104J	50V 0.1MF J	O	O	O
5	C MYLAR	CM917	CMXM1H104J	50V 0.1MF J	O	O	O
6	CONN WAFER	CW901	9728804100	#22 10P P2.5 350 BOARD-IN	O	O	O
7	CONN WAFER	CW902	9728804200	#26 2P P2.0 350 BOARD-IN	O	O	O
8	DIODE	DB901-902	DKBJ604G--	KBJ604G	O	O	O
9	FUSE GLASS TUBE	F901	5FSGB3122L	SEMKO MF51 3.15A 250V TL	O	O	O
10	FUSE GLASS TUBE	F902	5F1GB3122M	UL/CSA NM 3.15A 250V MF51	O	O	O
11	CLIP FUSE	FC901-904	9734600700	FC-5N	O	O	O
12	TRANS POWER	PT901	5TP8086821	EI=85.8X57 115/230V 50/60	O	O	O
13	R CARBON FILM	R918	RD-2Y475J	1/2 4.7M OHM J	O	O	O
14	SW VOLTAGE SELE	SW901	5S30102361	SDKHA2-P 1C2P	O	O	O
15	PIN WRAPPING	TP901-902	9716404000	MFZN1.1X1.1 PANASERT	O	O	O
1	PCB TAPE AS	14000	9CDC050504	AMI-H926L0FP	O	O	O
2	PCB TAPE(PIGEON)	B001	9CD6584200	247X139X1.6T (1/2)	O	O	O
3	C CERA	CC601-608	CCZB1E821K	25V B 820PF K AXIAL	O	O	O
4	C CERA	CC609	CCXF1H104Z	50V F 0.1MF Z	O	O	O
5	C CERA	CC611-612	CZCH1E470J	CH 25V 47PF J AX	O	O	O
6	C CERA	CC613-614	CCZB1E121K	25V B 120PF K (AXIAL)	O	O	O
7	C CERA	CC615-618	CCZB1H331K	50V B 330PF K (AXIAL)	O	O	O
8	C CERA	CC631	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	O	O	O
9	C ELECTRO	CE601	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
10	C ELECTRO	CE602	CEXF1E101V	25V RSS 100MF (6.3X11) TP	O	O	O
11	C ELECTRO	CE603-604	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
12	C ELECTRO	CE605-608	CEXF1H100V	50V RSS 10MF (5X11) TP	O	O	O
13	C ELECTRO	CE609-610	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
14	C ELECTRO	CE611-612	CEXF1H479V	50V RSS 4.7MF (5X11) TP	O	O	O
15	C ELECTRO	CE613-614	CEXF1H108V	50V RSS 0.1MF (5X11) TP	O	O	O
16	C ELECTRO	CE615-618	CEXF1H100V	50V RSS 10MF (5X11) TP	O	O	O
17	C ELECTRO	CE619	CEXF1E220V	25V RSS 22MF 5X11	O	O	O
18	C ELECTRO	CE620	CEXF1H108V	50V RSS 0.1MF (5X11) TP	O	O	O
19	C ELECTRO	CE621	CEXF1H229V	50V RSS 2.2MF (5X11) TP	O	O	O
20	C ELECTRO	CE631-633	CEXF1E470V	25V RSS 47MF (5X11) TP	O	O	O
21	C ELECTRO	CE634	CEXF1H109V	50V RSS 1MF (5X11) TP	O	O	O
22	C MYLAR	CM601-602	CMXM1H273J	50V 0.027 MF J	O	O	O
23	C MYLAR	CM603-604	CMXM1H183J	50V 0.018MF J	O	O	O
24	C MYLAR	CM605-606	CMXM1H152K	50V 1500 PF K	O	O	O
25	C MYLAR	CM607-608	CMXM1H103J	50V 0.01MF J (TP)	O	O	O
26	C MYLAR	CM611-614	CMXM1H102J	50V 0.001MF J (TP)	O	O	O
27	C MYLAR	CM615-616	CMXM1H332J	50V 3300 PF J	O	O	O
28	C MYLAR	CM617	CMXM1H223J	50V 0.022MF J	O	O	O
29	C MYLAR	CM618	CMXM1H332J	50V 3300 PF J	O	O	O
30	CONN AS	CN603	9728814000	UL2547 1533 8P 200MM	O	O	O
31	CONN AS	CW601	9738828700	AWG28 3P SHIELD 220MM	O	O	O
32	CONN AS	CW602	9738828800	AWG28 7P SHIELD 100MM	O	O	O
33	CONN AS	CW701	9738836200	UL2468 160MM P2.0 8P/2P	O	O	O
34	DIODE	D606-608	DZN4148---	1N4148 AUTO 52MM	O	O	O
35	IC	IC601	1M51167BFP	M51167BFP (SOP36S)	O	O	O
36	IC	IC602	1UPC1330HA	UPC1330HA	O	O	O
37	IC	IC603	1BU4094BCF	BU4094BCF (SOP16)	O	O	O
38	COIL CHOKE	L601-602	5LC333K804	33MH K	O	O	O
39	COIL BIAS OSC	L603	5L0503K643	SM-10F 5.04MH	O	O	O
40	TR	Q601-602	TKRC111M--	KRC111M (KSR1010)	O	O	O
41	TR	Q605-606	TKRC111M--	KRC111M (KSR1010)	O	O	O
42	TR	Q607	TKRC107M--	KRC 107-M (TAPPING)	O	O	O
43	TR	Q608	TKRC111M--	KRC111M (KSR1010)	O	O	O
44	TR	Q611-612	TZTD1302--	KTD1302	O	O	O
45	TR	Q613	TKRA111M--	KRA 111-M (TAPPING)	O	O	O
46	TR	Q614-615	TZRA107M--	KRA107M (KSR2006)	O	O	O
47	TRANSISTOR	Q621-622	TZTC3198Y-	KTC3198Y-(1815Y) (AUTO)	O	O	O
48	TR	Q623	TKRA111M--	KRA 111-M (TAPPING)	O	O	O
49	TR	Q624	TZTA1273Y-	KTA1273Y(966Y)	O	O	O
50	TR	Q625	TKRC111M--	KRC111M (KSR1010)	O	O	O
51	TR	Q628	TZTC3205Y-	KTC3205Y (2236Y)	O	O	O
52	TR	Q637	TZTA1266Y-	KTA1266Y- (AUTO)(1015Y)	O	O	O
53	TR	Q638	TKRC111M--	KRC111M (KSR1010)	O	O	O
54	R CARBON FILM	R601-602	RD-AZ680J-	1/6 68 OHM J	O	O	O
55	R CARBON FILM	R603-604	RD-AZ682J-	1/6 6.8K OHM J	O	O	O
56	R CARBON FILM	R605-606	RD-AZ562J-	1/6 5.6K OHM J	O	O	O
57	R CARBON FILM	R607-608	RD-AZ102J-	1/6 1K OHM J	O	O	O
58	R CARBON FILM	R609-610	RD-AZ152J-	1/6 1.5K OHM J	O	O	O
59	R CARBON FILM	R611-612	RD-AZ102J-	1/6 1K OHM J	O	O	O
60	R CARBON FILM	R613-614	RD-AZ104J-	1/6 100K OHM J	O	O	O
61	R CARBON FILM	R615-616	RD-AZ103J-	1/6 10K OHM J	O	O	O
62	R CARBON FILM	R617-618	RD-AZ562J-	1/6 5.6K OHM J	O	O	O
63	R CARBON FILM	R619-620	RD-AZ123J-	1/6 12K OHM J	O	O	O
64	R CARBON FILM	R621-622	RD-AZ183J-	1/6 18K OHM J	O	O	O
65	R CARBON FILM	R625-626	RD-AZ102J-	1/6 1K OHM J	O	O	O
66	R CARBON FILM	R627-628	RD-AZ274J-	1/6 270K OHM J	O	O	O
67	R CARBON FILM	R629-630	RD-AZ561J-	1/6 560 OHM J	O	O	O
68	R CARBON FILM	R631-632	RD-AZ474J-	1/6 470K OHM J	O	O	O
69	R CARBON FILM	R633-634	RD-AZ103J-	1/6 10K OHM J	O	O	O
70	R CARBON FILM	R635	RD-AZ104J-	1/6 100K OHM J	O	O	O
71	R CARBON FILM	R638	RD-AZ472J-	1/6 4.7K OHM J	O	O	O
72	R CARBON FILM	R639	RD-AZ104J-	1/6 100K OHM J	O	O	O
73	R CARBON FILM	R640	RD-AZ471J-	1/6 470 OHM J	O	O	O
74	R CARBON FILM	R641	RD-AZ105J-	1/6 1M OHM J	O	O	O
75	R CARBON FILM	R642	RD-AZ474J-	1/6 470K OHM J	O	O	O
76	R CARBON FILM	R643	RD-AZ101J-	1/6 100 OHM J	O	O	O
77	R CARBON FILM	R644	RD-AZ563J-	1/6 56K OHM J	O	O	O
78	R CARBON FILM	R645-646	RD-AZ103J-	1/6 10K OHM J	O	O	O
79	R CARBON FILM	R647	RD-AZ102J-	1/6 1K OHM J	O	O	O
80	R CARBON FILM	R649-650	RD-AZ563J-	1/6 56K OHM J	O	O	O
81	R CARBON FILM	R651-652	RD-AZ103J-	1/6 10K OHM J	O	O	O
82	R CARBON FILM	R653-654	RD-AZ153J-	1/6 15K OHM J	O	O	O
83	R CARBON FILM	R655	RD-AZ102J-	1/6 1K OHM J	O	O	O
84	R CARBON FILM	R656	RD-4Z121J-	1/4 120 OHM J	O	O	O
85	R CARBON FILM	R658	RD-AZ102J-	1/6 1K OHM J	O	O	O
86	R CARBON FILM	R659	RD-AZ103J-	1/6 10K OHM J	O	O	O
87	R CARBON FILM	R660	RD-AZ479J-	1/6 4.7 OHM J	O	O	O
88	R CARBON FILM	R661-662	RD-AZ563J-	1/6 56K OHM J	O	O	O
89	R CARBON FILM	R663	RD-AZ470J-	1/6 47 OHM J	O	O	O
90	R CARBON FILM	R664	RD-AZ472J-	1/6 4.7K OHM J	O	O	O
91	R CARBON FILM	R671	RD-AZ390J-	1/6 39 OHM J	O	O	O
92	R CARBON FILM	R672-674	RD-AZ102J-	1/6 1K OHM J	O	O	O
93	R CARBON FILM	R675	RD-AZ103J-	1/6 10K OHM J	O	O	O
94	R CARBON FILM	R686	RD-AZ332J-	1/6 3.3K OHM J	O	O	O
95	R CARBON FILM	R687	RD-AZ392J-	1/6 3.9K OHM J	O	O	O
96	R CARBON FILM	R688	RD-AZ821J-	1/6 820 OHM J	O	O	O
97	R CARBON FILM	R689	RD-AZ682J-	1/6 6.8K OHM J	O	O	O
98	R CARBON FILM	R690	RD-AZ104J-	1/6 100K OHM J	O	O	O
99	R SEMI FIXED	RV601	RV1417222-	1/10 2.2K OHM B V6EK-PV1S	O	O	O