



S/N No. : 9CD8302400

Service Manual

Mini Component System

Model: XG-315



XG-315

MINI COMPONENT SYSTEM

XG-315

Table of Contents

SAFETY PRECAUTIONS	2~3
ADJUSTMENTS	4
EXPLODED VIEW AND PARTS LIST	5~6
WIRING DIAGRAM	7
BLOCK DIAGRAM	8
SCHEMATIC DIAGRAM	9~13
• TUNER/TAPE/AMP/POWER	9
• MP3 CD	10
• FRONT	11
PCB PATTERN LAYOUT	12~15
• MAIN	12
• MP3 CD	13
• FRONT	14
• POWER	15
ELECTRICAL PART LIST	Appendix

Safety Precautions

WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.



CAUTION
RISK OF ELECTRIC SHOCKS
DO NOT OPEN



CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" WITHIN THE PRODUCT'S ENCLOSURE THAT MAY BE SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK TO PERSONS.



THIS SYMBOL IS INTENDED TO ALERT THE USER TO THE PRESENCE OF IMPORTANT OPERATING AND MAINTENANCE (SERVICING) INSTRUCTIONS IN THE LITERATURE ACCOMPANYING THE APPLIANCE.

CAUTION

TO PREVENT ELECTRIC SHOCK, DO NOT USE THIS POLARIZED AC PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

LASER SAFETY

THIS UNIT EMPLOYS A LASER. ONLY QUALIFIED SERVICE PERSONNEL SHOULD REMOVE THE COVER OR ATTEMPT TO SERVICE THIS DEVICE DUE TO POSSIBLE EYE INJURY.

CAUTION : USE OF ANY CONTROLS, ADJUSTMENTS, OR PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

CAUTION : TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

ATTENTION : POUR EVITER LES CHOCS ELECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA BORNE CORRESPONDANTE DE LA PRISE ET POUSSER JUSQU'AU FOND.

Important Safety Instructions

- All the safety and operating instructions should be read before the appliance is operated.
 - The safety and operating instructions should be retained for future reference.
 - All warnings on the appliance and in the operating instructions should be adhered to.
 - All operating and use instructions should be followed.
1. Water and Moisture - The appliance should not be used near water - for example, near a bathtub, washbowl, kitchen sink,

laundry tub, in a wet basement, or near a swimming pool, and the like.

PORTABLE CART

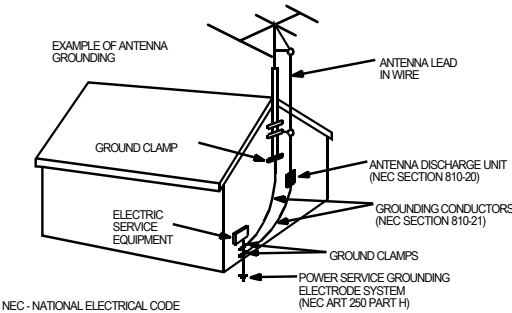


Figure 2

2. Carts and Stands - The appliance should be used only with a cart or stand that is recommended by the manufacturer.
3. An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the appliance and cart combination to overturn.
4. Wall or Ceiling Mounting - The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
5. Ventilation - The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings; or, placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
6. Heat - The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
7. Power Sources - The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
8. Grounding or Polarization - The precautions that should be taken so that the grounding or polarization means of an appliance is not defeated.
9. Power - Cord Protection - Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the appliance.
10. Protective Attachment Plug - If the appliance is equipped with an attachment plug having overload protection. This is a safety feature. See Instruction Manual for replacement or resetting of protective device. If replacement of the plug is required, be sure the service technician has used a replacement plug specified by the manufacturer that has the same overload protection as the original plug.
11. Cleaning - The appliance should be cleaned only as recommended by the manufacturer.
12. Power Lines - An outdoor antenna should be located away from power lines.

Safety Precautions

13. Outdoor Antenna Grounding - If an outside antenna is connected to the receiver be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna-discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes and requirements for the grounding electrode. See Figure 1.




14. Non-use Periods - The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.

15. Object and Liquid Entry - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
16. Damage Requiring Service - The appliance should be serviced by qualified service personnel when:
- a) The power-supply cord or the plug has been damaged; or
 - b) Objects have fallen, or liquid has been spilled into the appliance; or
 - c) The appliance has been exposed to rain; or
 - d) The appliance does not appear to operate normally or exhibits a marked change in performance; or
 - e) The appliance has been dropped, or the enclosure damaged.
17. Servicing - The user should not attempt to service the appliance beyond that described in the operating instructions. All other servicing should be referred to qualified service personnel.

Adjustments

1. TAPE SECTION

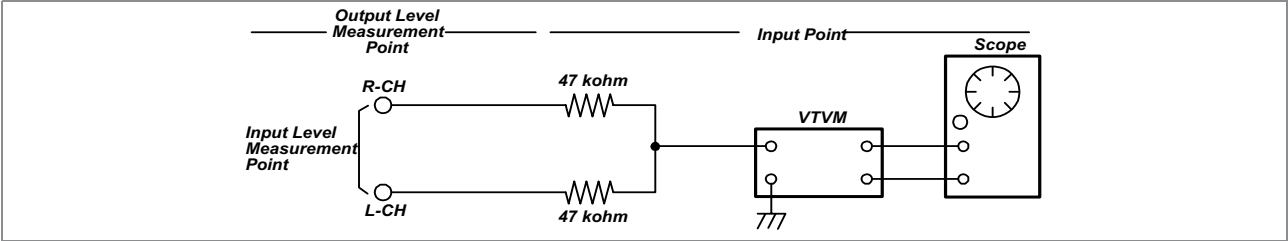

Test Tape be used

Tape	Contents	Use
MTT-111N	3 KHz	Tape Speed Adjustment
MTT-114N	10 KHz	Head Azimuth Adjustment
MTT-5511	Blank	Record Frequency Property





HEAD ADJUSTMENT (AZIMUTH)

- 10KHz test tape(example: MTT-114N) must be used for this adjustment.
- Connect to VTVM or oscilloscope to the headphone jack or speaker terminal.
- Press the play button.
- Adjust the azimuth by using a screw driver to maintain the max. L&R output voltage.
- Adjust tape A(1), tape B(2) respectively, Please secure the azimuth position by using locking paint.


RECORDING BIAS OSCILLATOR FREQUENCY ADJUSTMENT

- Connect the frequency counter to TP603, GND.
- Press the REC button.
- Adjust L600 to obtain 80 KHz±500Hz

TAPE ALIGNMENT CHART								
Step	Item		Reference Value	Test Tape	Adjust Point	Test Point	Note	FIG.
1	Tape Speed Adjustment	Normal	3,015~3,025Hz	MTT-111N	RV600	Line Out L/R Channel	Confirm Wow & Flutter is within 0.35%	FIG.1
			3,000~3,010Hz	MTT-111N	RV600	Line Out L/R Channel	Confirm Tape Speed of end position after adjustment at tape start position	FIG.1
		High	5,820~6,180Hz	MTT-111N	-----	Line Out L/R Channel	Confirm High speed after normal speed adjustment	FIG.1
2	Azimuth Adjustment		Maximum Level Phase:Within90°	MTT-114N	Head Screw	Line Out L/R Channel		FIG.2,3,4
3	Recording Bias Oscillator Frequency Adjustment		80 KHz±0.5	MTT-5511	L600	TP603,GND	Adjust with frequency counter connected.	FIG.1

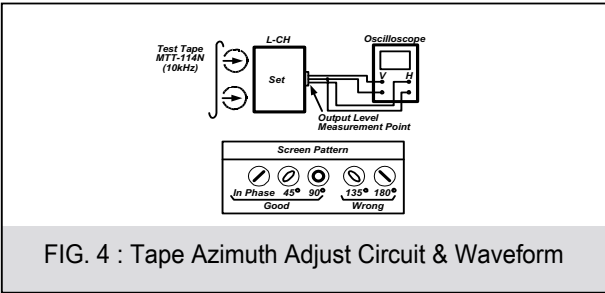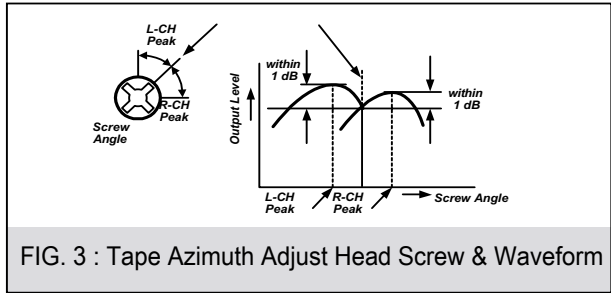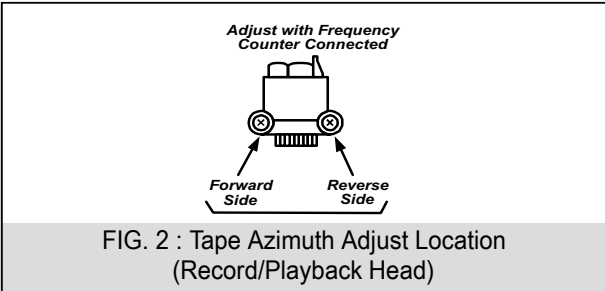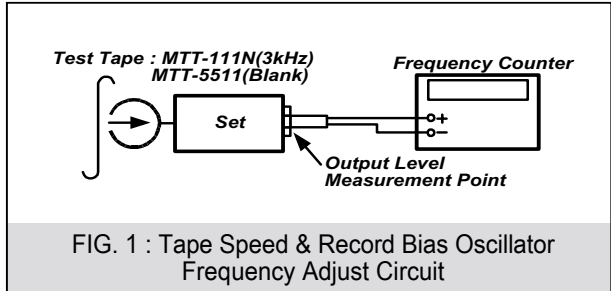

Exploded View and Mechanical Parts List

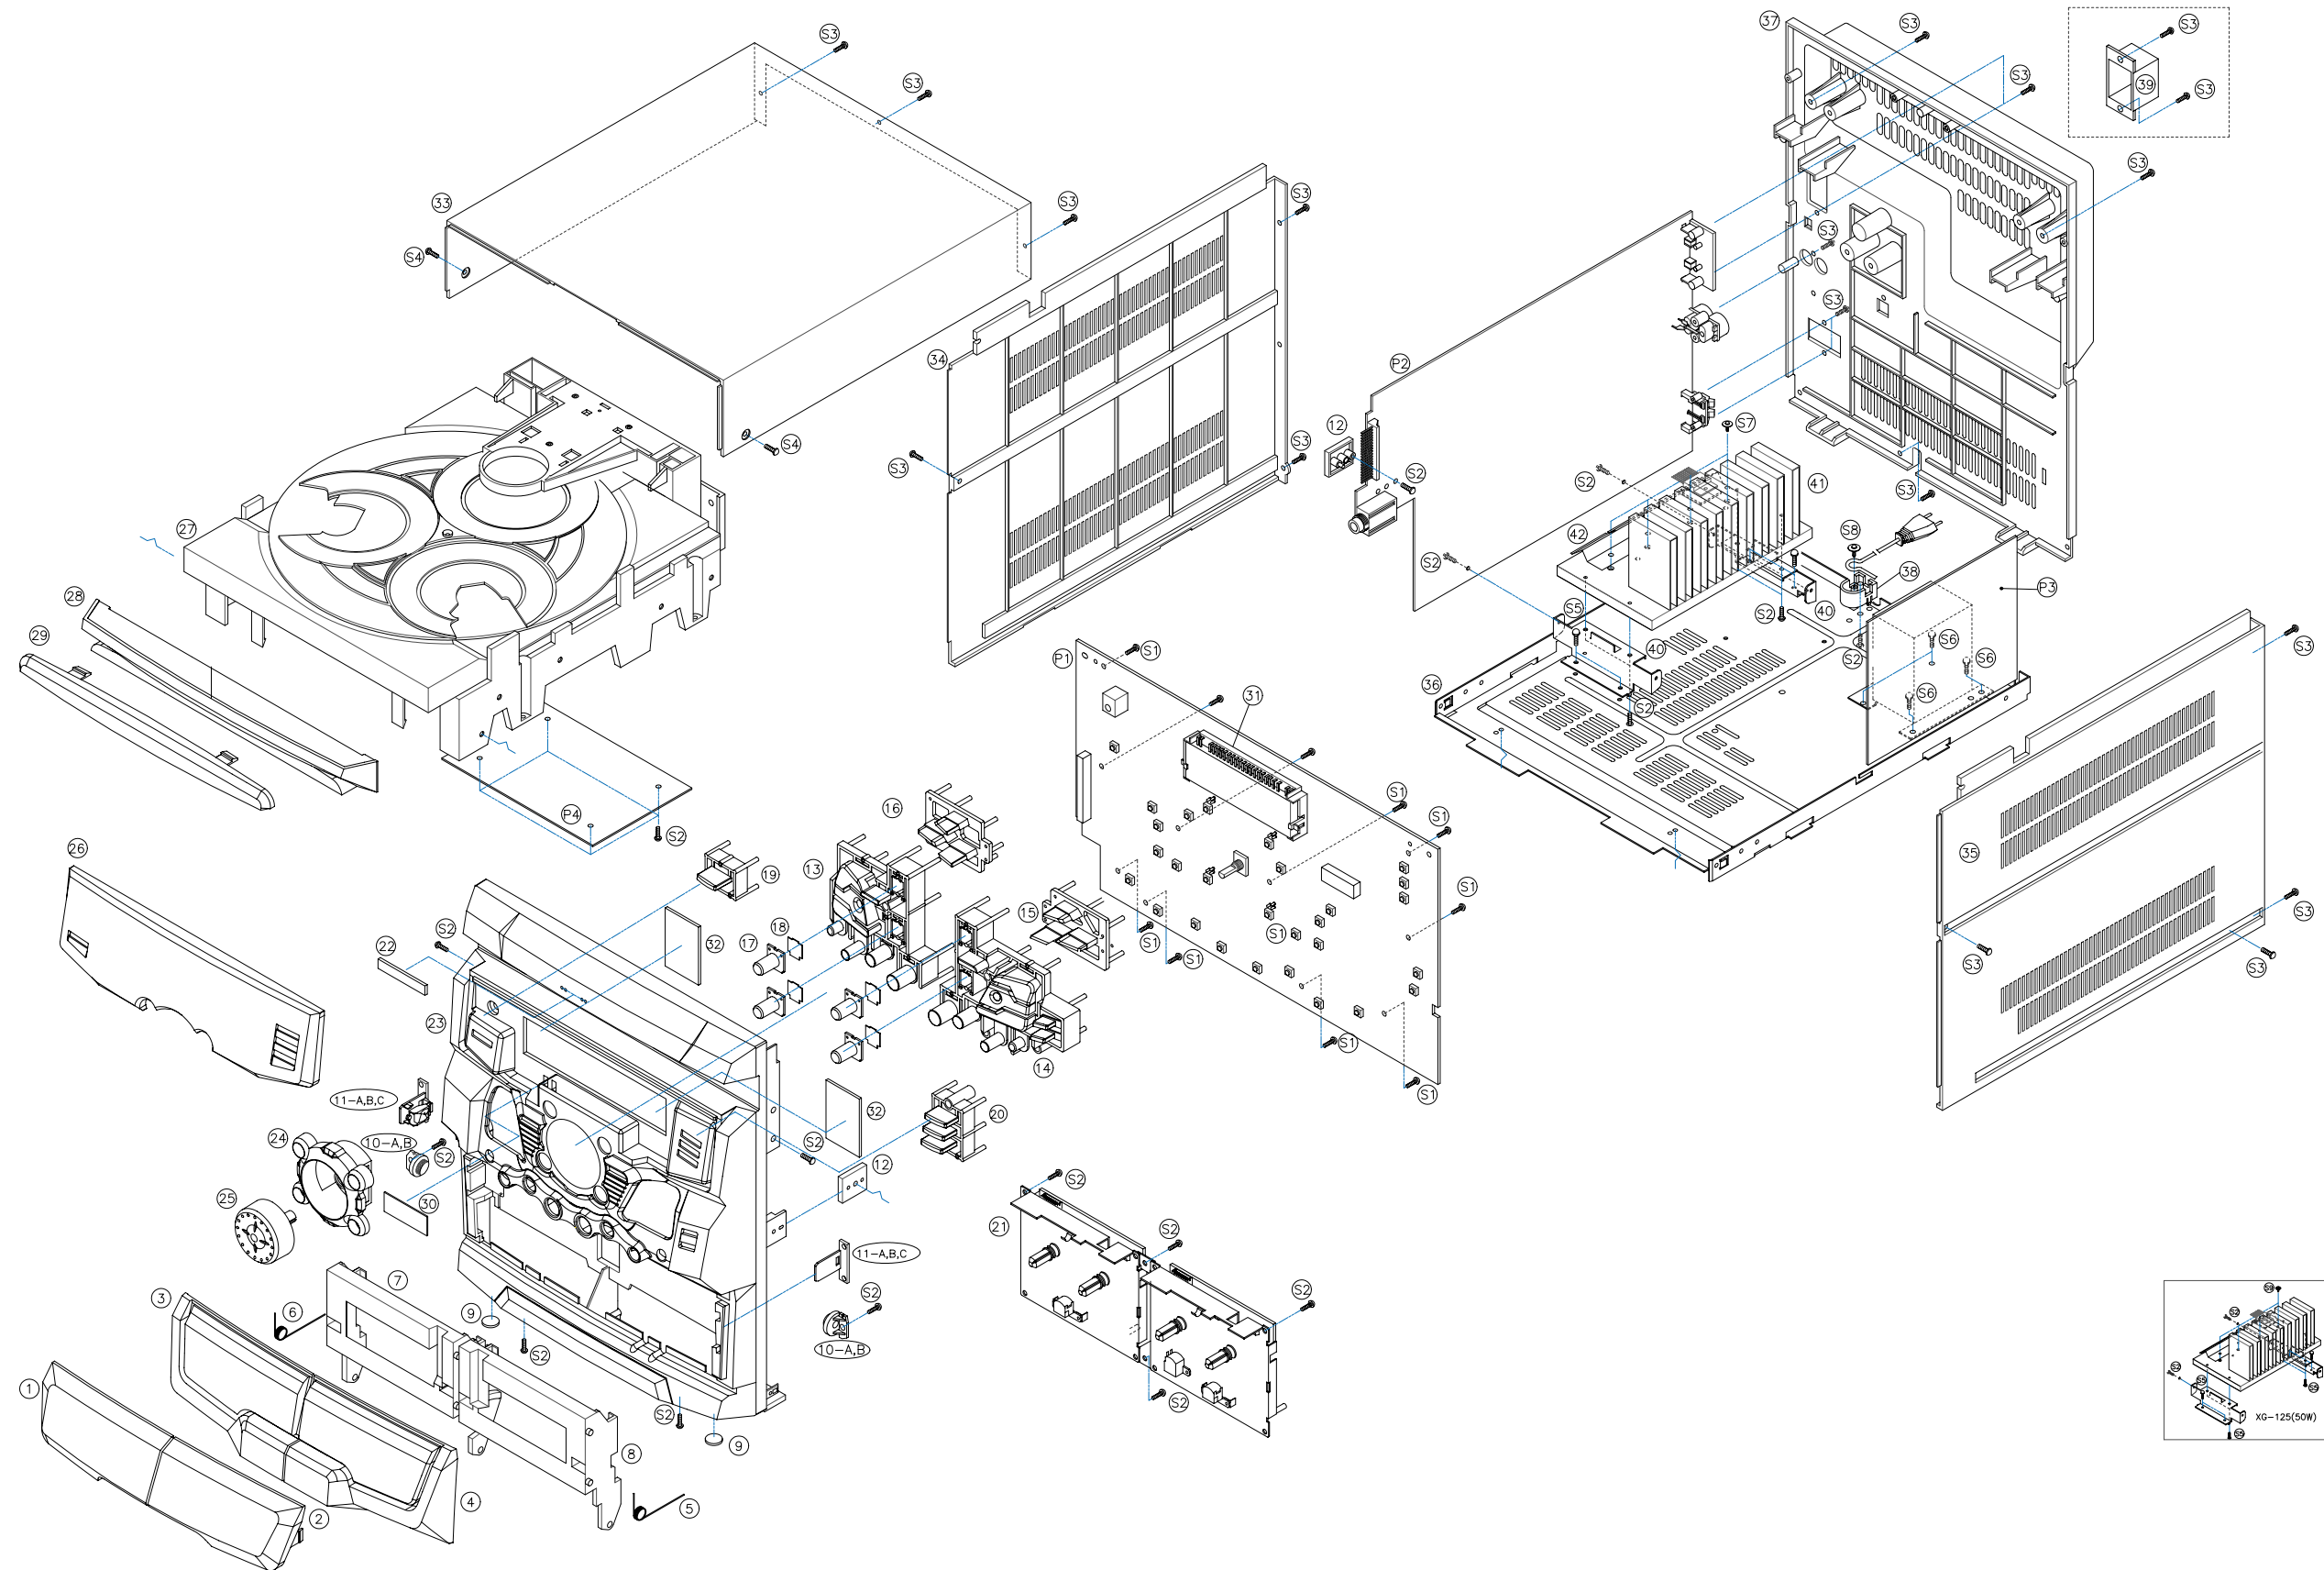


Exploded View and Mechanical Parts List


No.	Part Name	Part Code	Material	Q'ty	Remark/Option
1	WINDOW DOOR A	9CD16177A0	MIPS	1	
2	WINDOW DOOR B	9CD16177B0	MIPS	1	
3	DOOR COVER A	9CD18123A0	MIPS	1	
4	DOOR COVER B	9CD18123B0	MIPS	1	
5	SRING DOOR EJECT R	9CD30080R0	STS 0.9	1	
6	SRING DOOR EJECT L	9CD30080L0	STS 0.9	1	
7	DOOR FRAME A	9CD18113A0	MIPS	1	
8	DOOR FRAME B	9CD18113B0	MIPS	1	
9	CUSHION FOOT	9CD4207700	URETHAN	2	
10-A	DAMPER GEAR B	9CD2603200	ACETAL	2	
10-B	DAMPER BASE B	9CD2603300	ABS	2	
11-A	LOCKER BASE	9CDOB01900	ABS	2	
11-B	LOCKER CAM	9CDOB02000	ABS	2	
11-C	LOCKER SPRING	9CDOB01600	STS	2	
12	BRKT SIDE	9CD2412900	ABS	2	
13	KNOB CD A	9CD1342200	ABS	1	
14	KNOB CD B	9CD1342300	ABS	1	
15	DECO EQ L	9CD10034L0	ACRYL	1	
16	DECO EQ R	9CD10034R0	ACRYL	1	
17	KNOB FUNCTION	9CD1342400	ACRYL	4	
18	PLATE FUNCTION	9CD0911900	PC	4	
19	KNOB POWER	9CD1342600	ABS	1	
20	KNOB DISC	9CD1342500	ABS	1	
21	CASSETTE DECK LOGIC	9CD6010900	CWM-43FR-22	1	
22	BADGE DAEWOO	9CD1500900	ABS	1	
23	PANEL FRONT	9CD0308600	MIPS	1	
24	DECO VOL	9CD1003300	ABS	1	
25	KNOB VOL	9CD1342700	ABS	1	
26	WINDOW FLT	9CD1617800	ACRYL	1	
27	CD DECK MECHANISM	9CD6009300	DCC-01B	1	
28	DOOR CD	9CD1812400	MIPS	1	
29	WIN DOOR CD	9CD1617600	ACRYL	1	
30	PLATE LED	9CD0911700	PVC T=0.5	1	
31	GUIDE FLT	9CD2506500	ABS	1	
32	PLATE FLT	9CD0909800	PVC T=1.0	2	
33	COVER TOP	9CD0411400	MIPS		
34	COVER SIDE L	9CD04115L0	MIPS	1	
35	COVER SIDE R	9CD04115R0	MIPS	1	
36	CHASSIS BOTTOM	9CD0607100	SECC 1.0T	1	
37	COVER BACK	9CD0409800	MIPS	1	OPTION

No.	Part Name	Part Code	Material	Q'ty	Remark/Option
38	HOLDER AC CORD	9CD2303300	ABS	1	
39	COVER ANT	9CD0410400	ABS	1	
40	BRACKET HEAT TR	9CD2414600	SECC 1.0T	2	
41	HEAT SINK N50	9CD4405900	AL	1	
42	BRACKET HEAT TR	9CD2414400	SUS 0.3T	1	
No.	Screw Type	Part Code	Material	Q'ty	Remark/Option
S1	SCREW TAPTTITE	7173261011	TT2 BIN 2.6 X 10 MFZN	10	REF : XG-125
S2	SCREW TAPTTITE	7173301011	TT2 BIN 3.0X10 MFZN	22	
S3	SCREW TAPTTITE	7173301212	TT2 BIN 3.0X12 BK	19	
S4	SCREW TAPTTITE	7173301612	TT2 BIN 3.0X16 BK	2	
S5	SCREW TAPTTITE	7173300611	TT2 BIN 3.0X6 MFZN	4	
S6	SCREW TAPTTITE	7173400611	TT2 BIN 4.0X6 MFZN	4	
S7	WASHER SCREW	9CD3102401	TT2 BIN 3.0X8 + D12	4	
S8	WASHER SCREW	9CD3102400	TT2 BIN 3.0X10 + D14	1	
No.	Part Name		Q'ty		Remark/Option
P1	FRONT PCB		1		
P2	MAIN PCB		1		
P3	POWER PCB		1		
P4	PCB MP3 CD		1		

Wiring Diagram

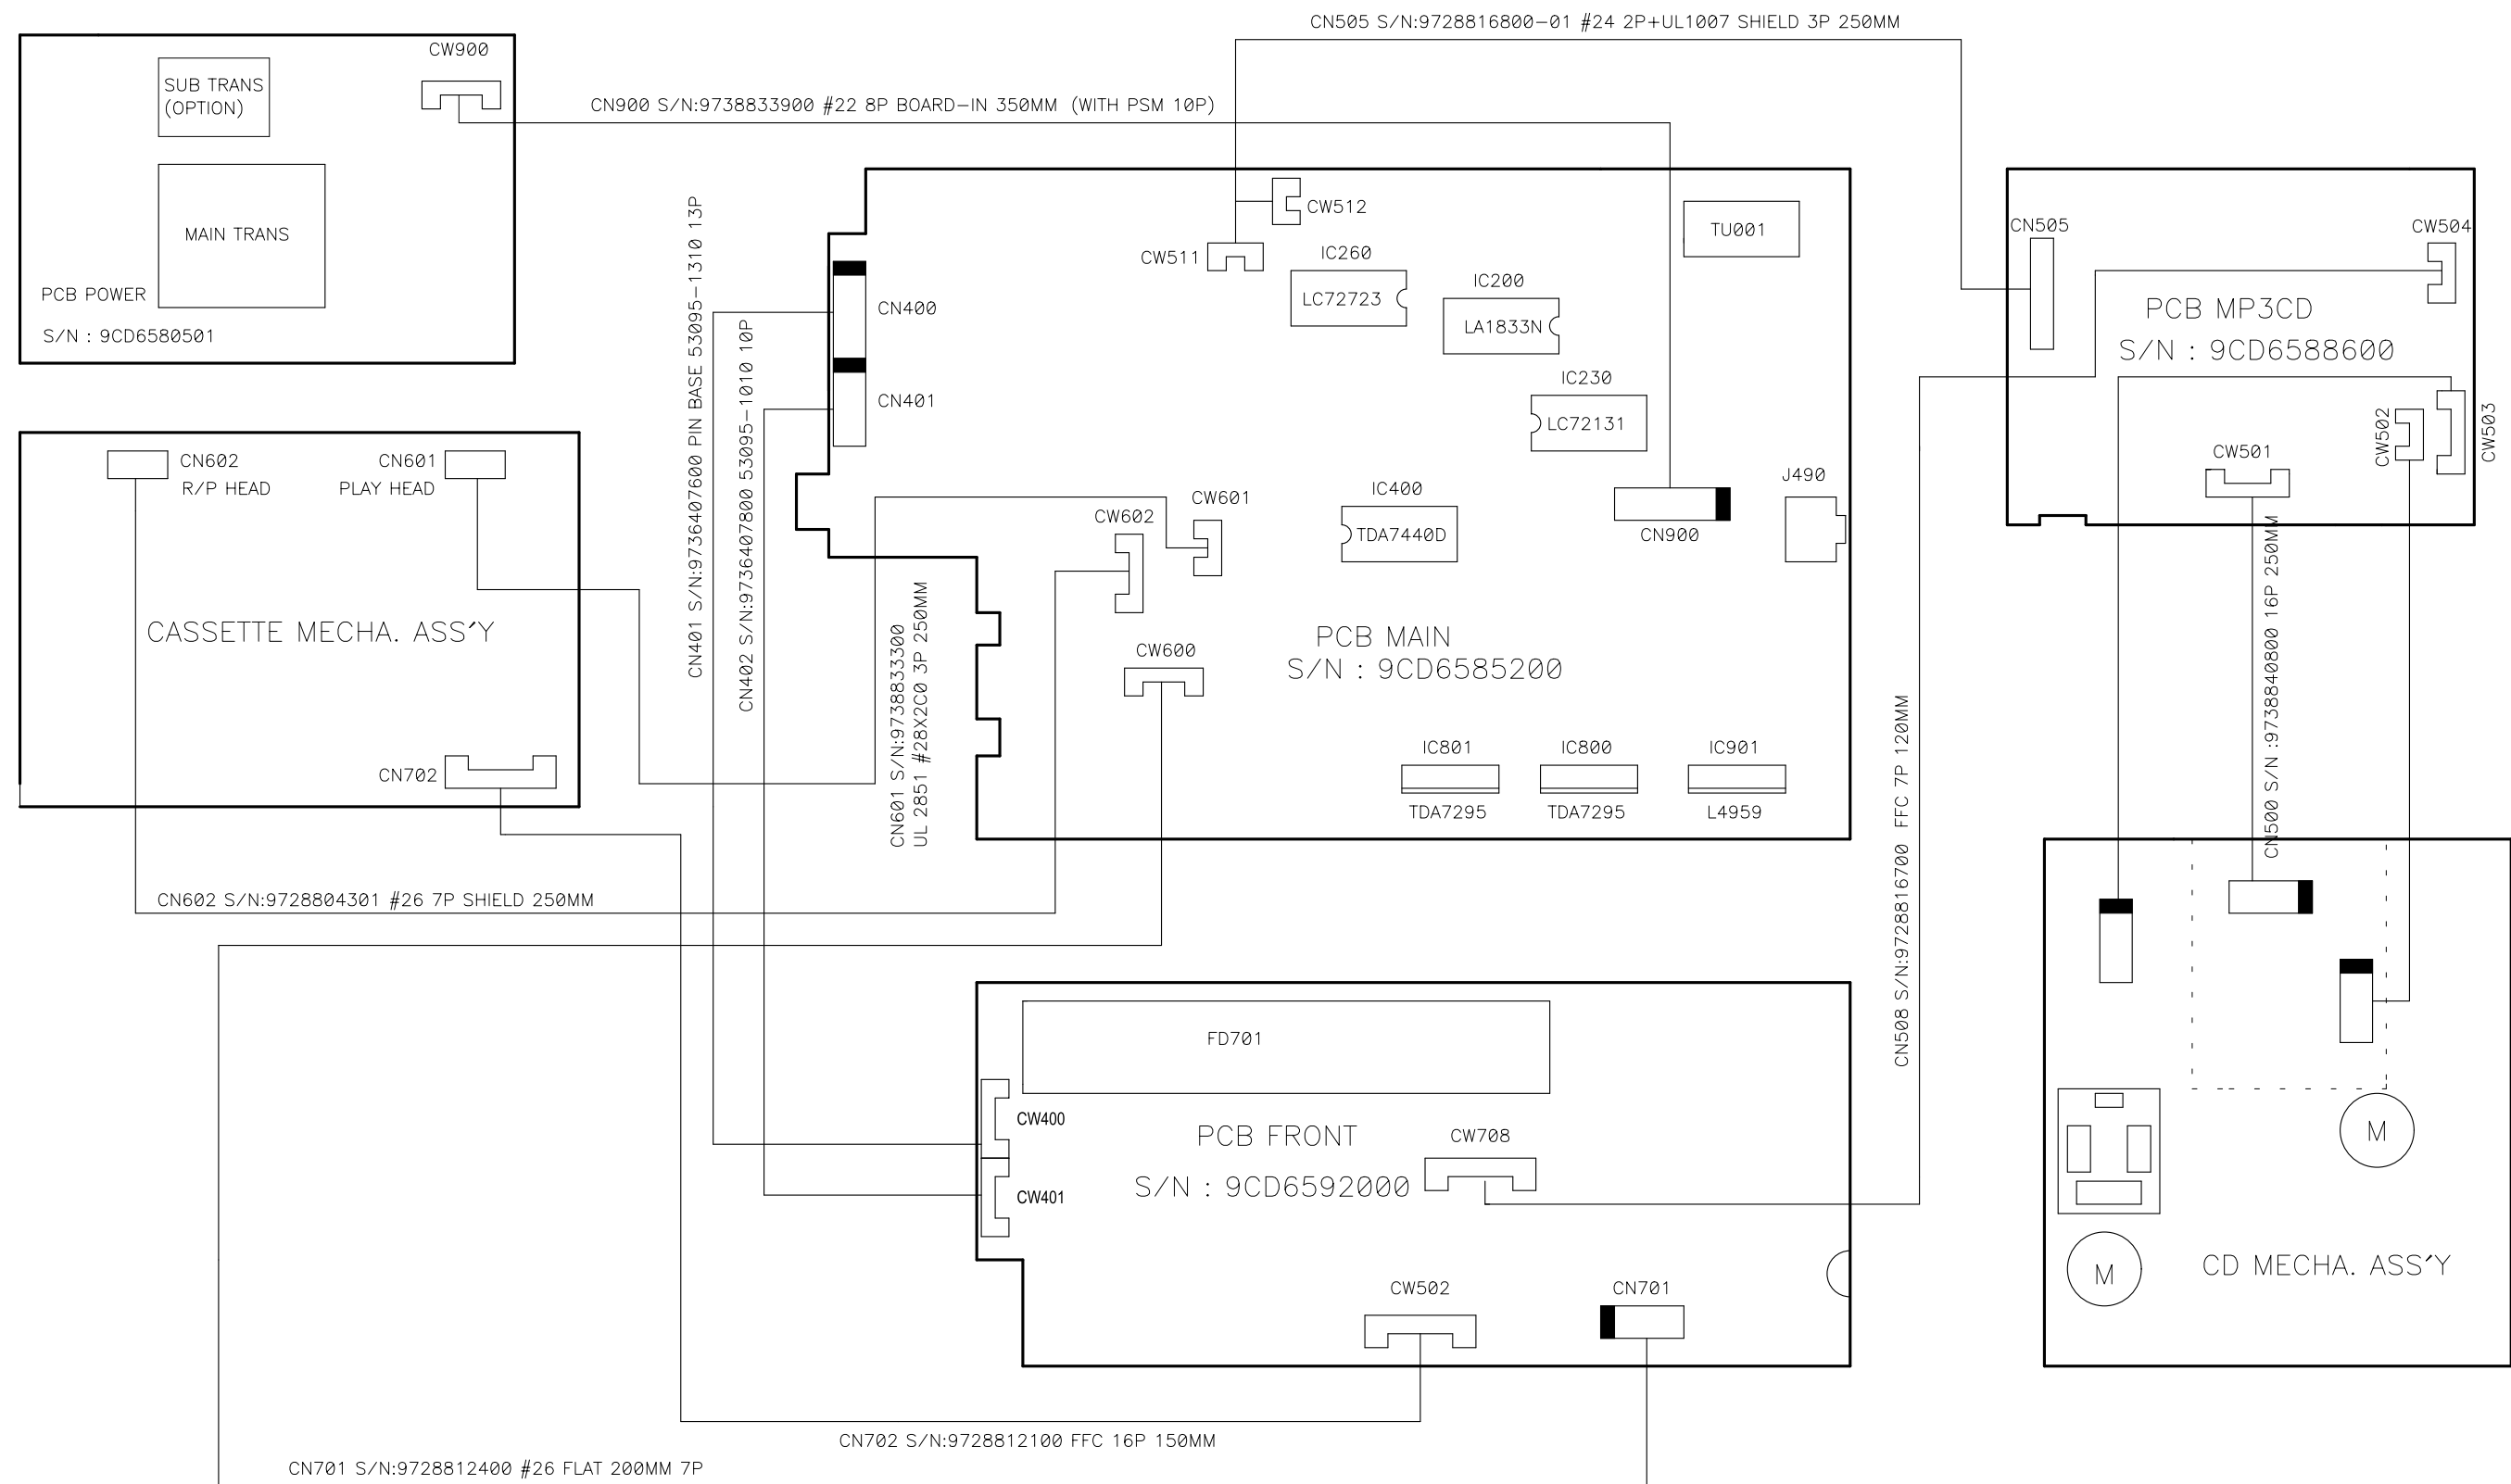

Block Diagram

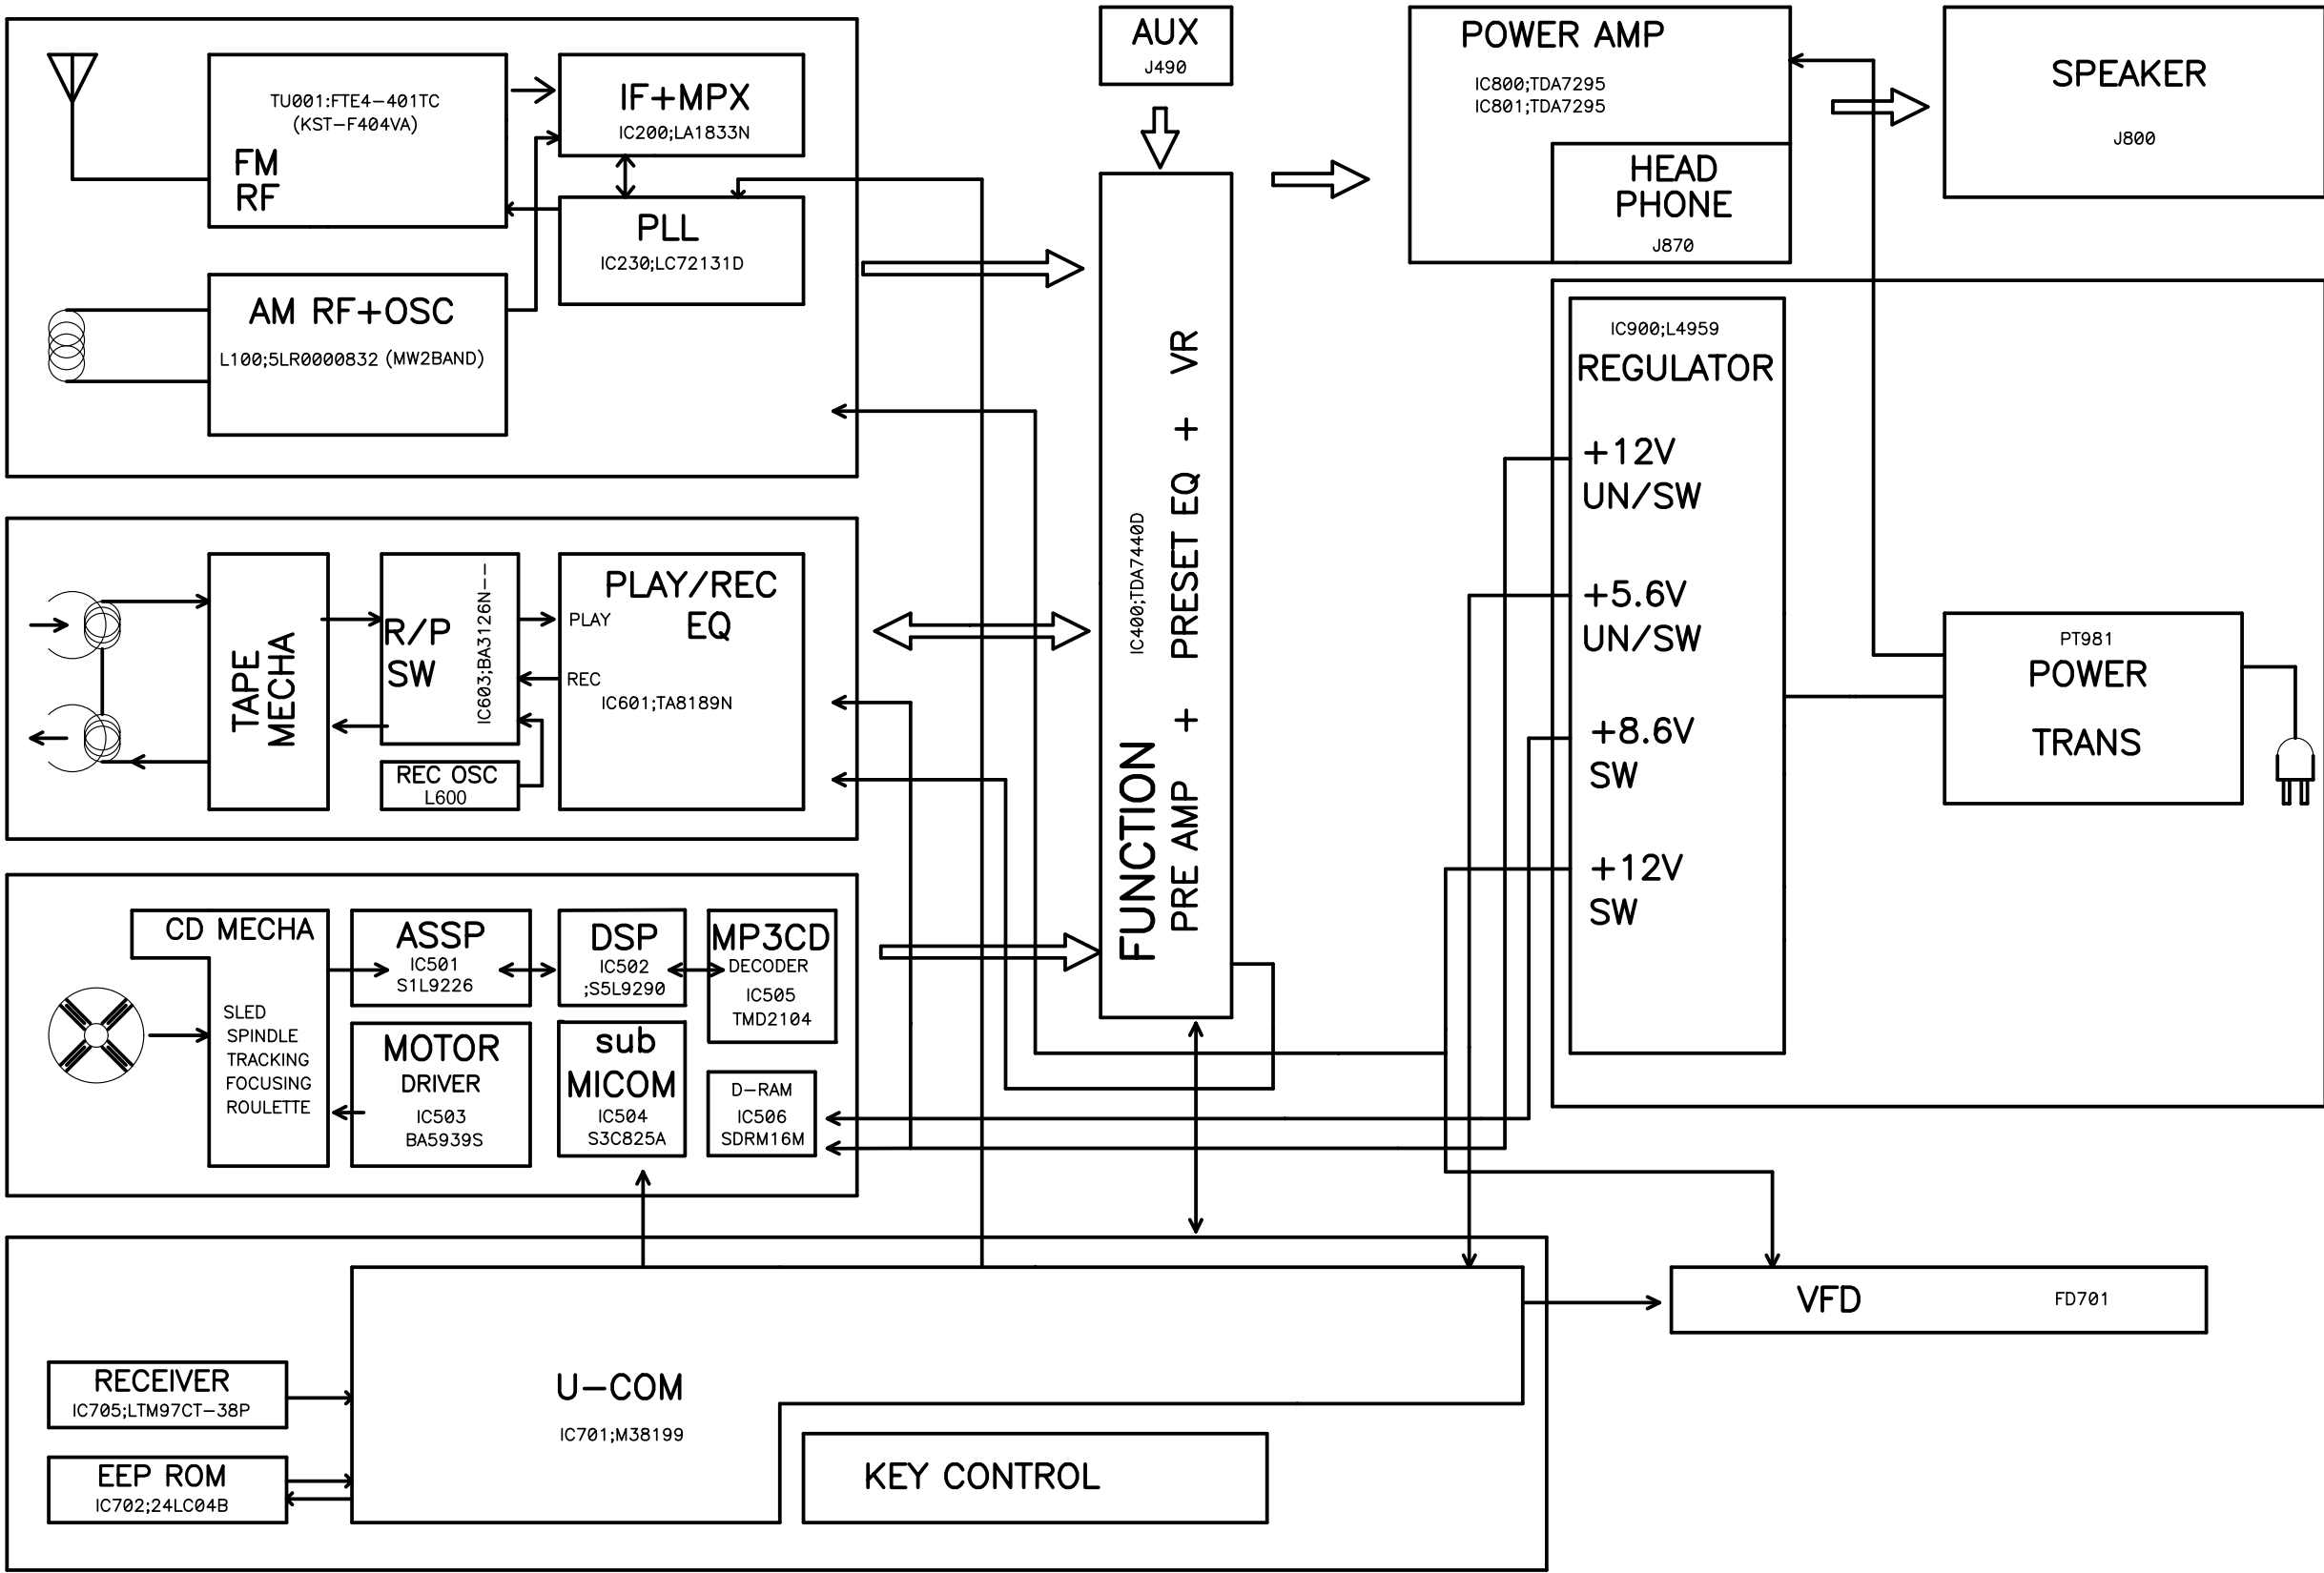


• TUNER / TAPE / AMP / POWER



Schematic Diagram

• MP3 CD

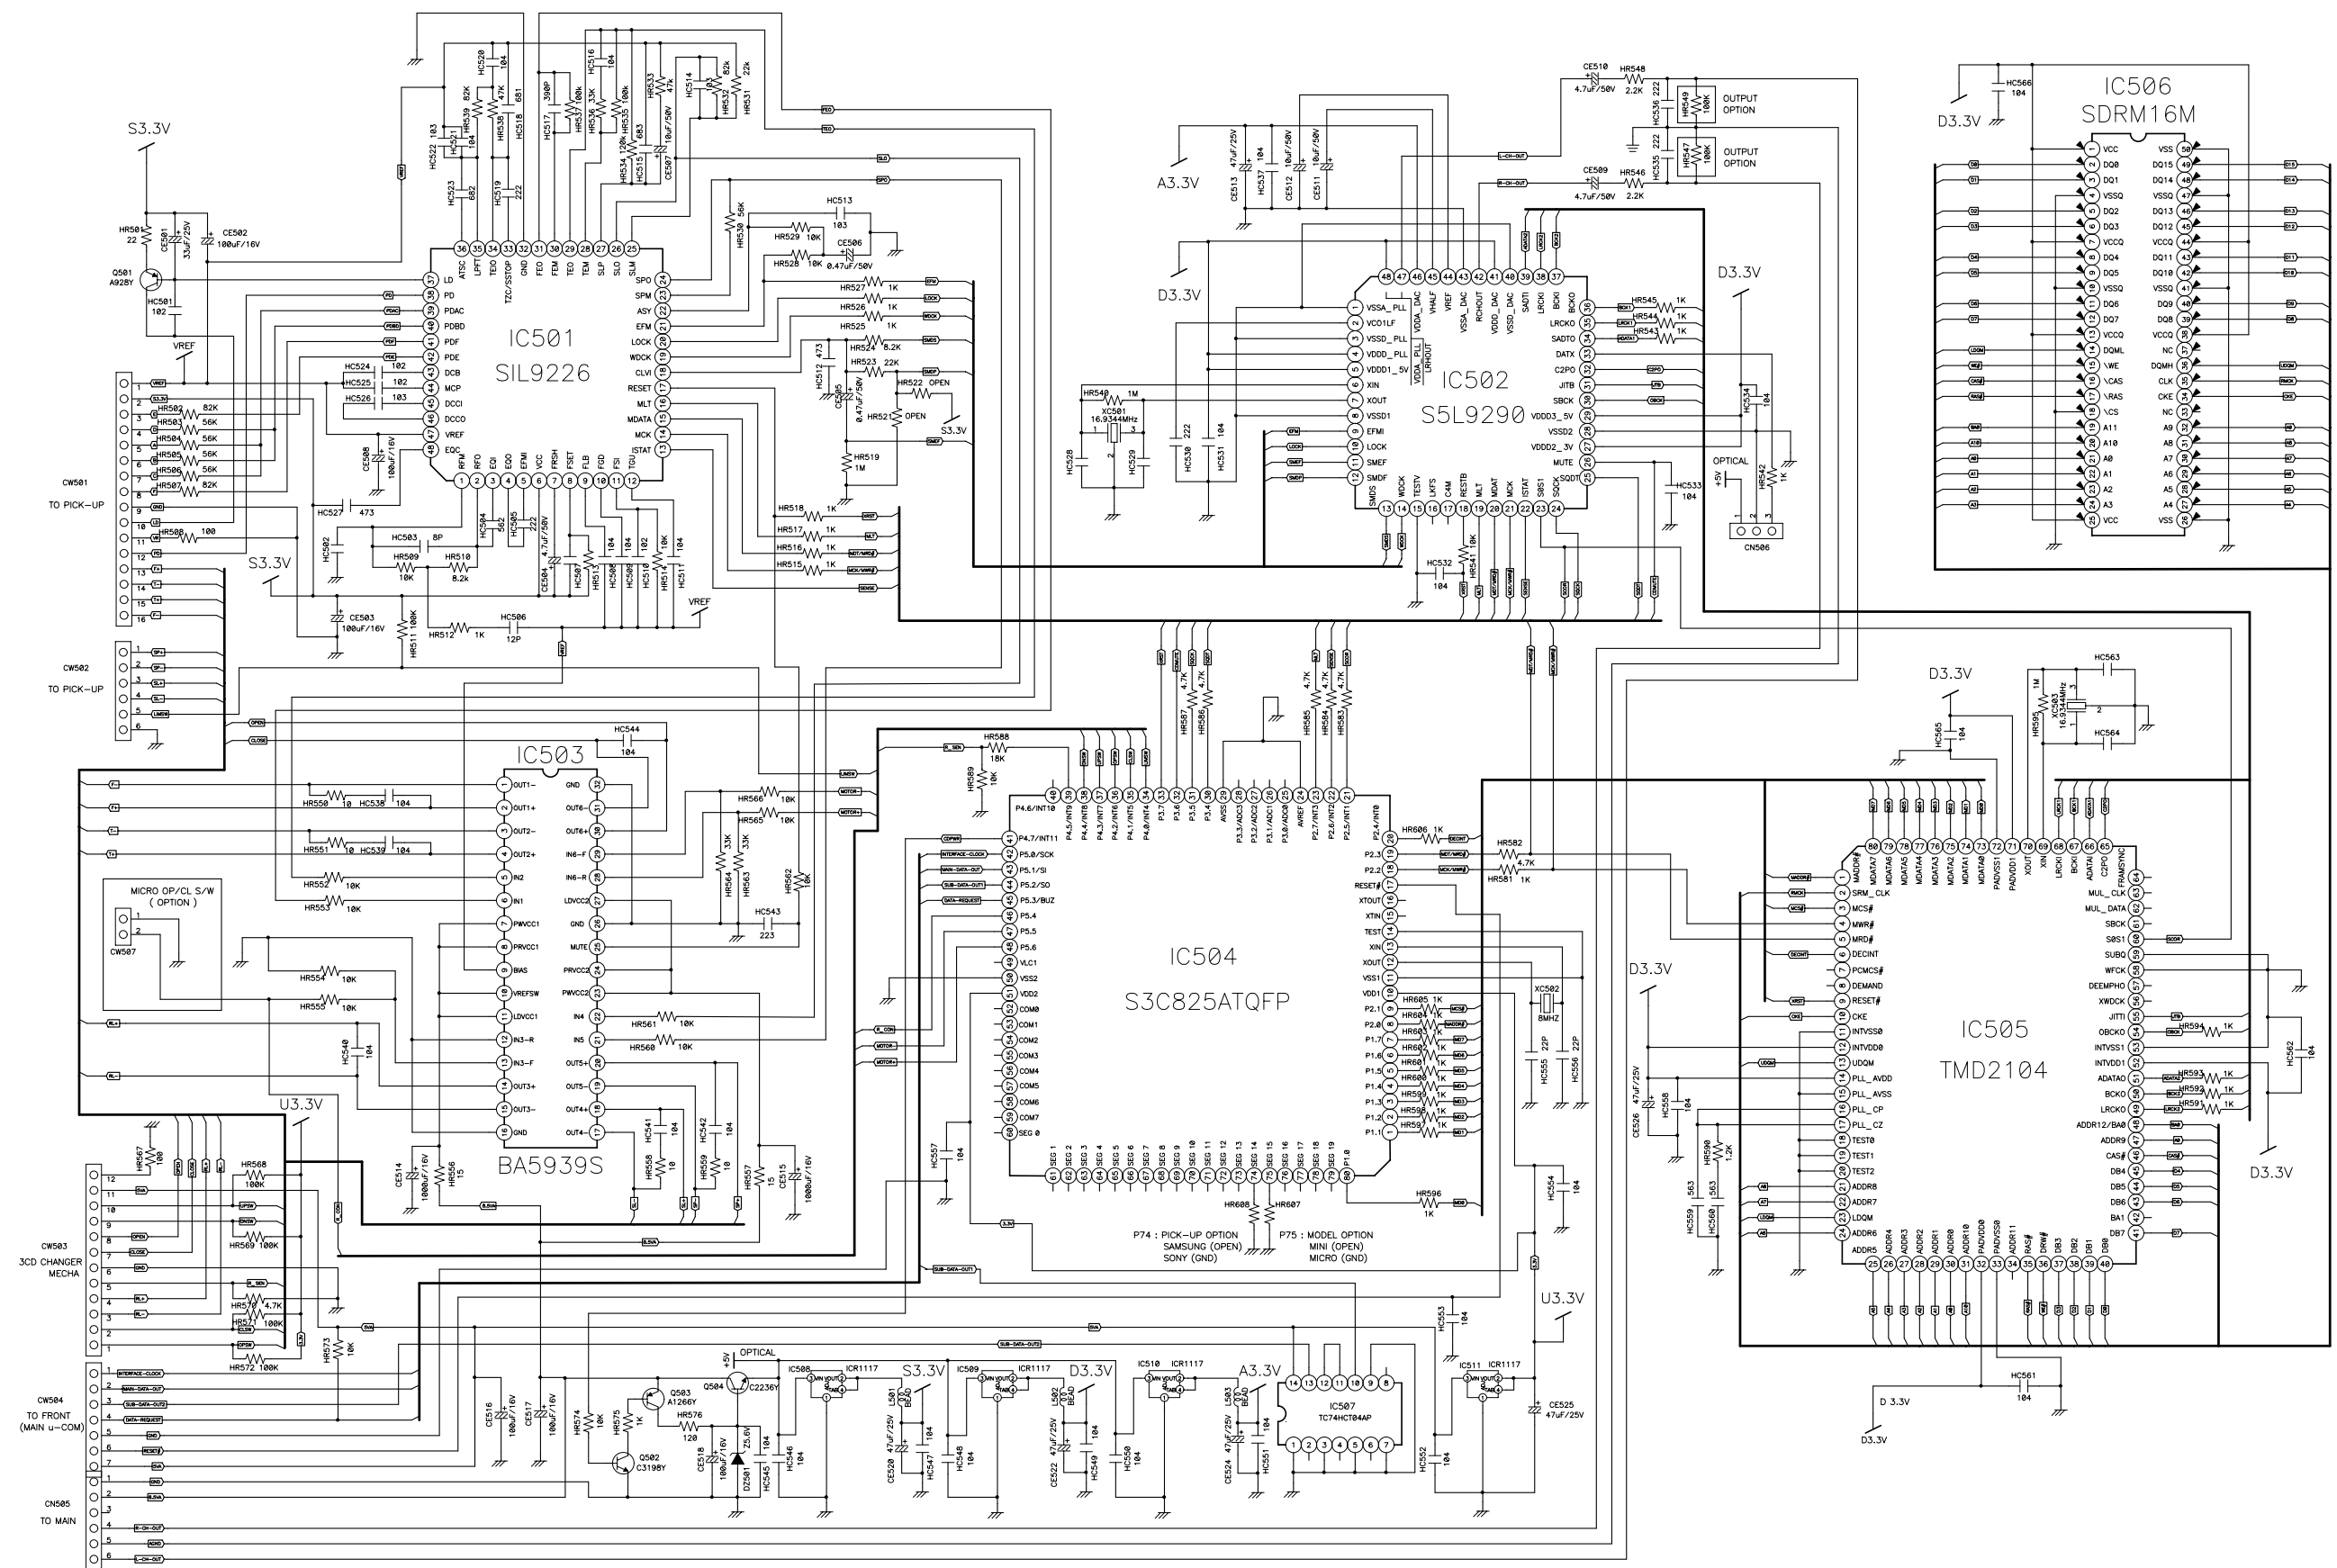

- **FRONT**




- **Main**




P.C.B Pattern Layout

• MP3 CD

<TOP VIEW>

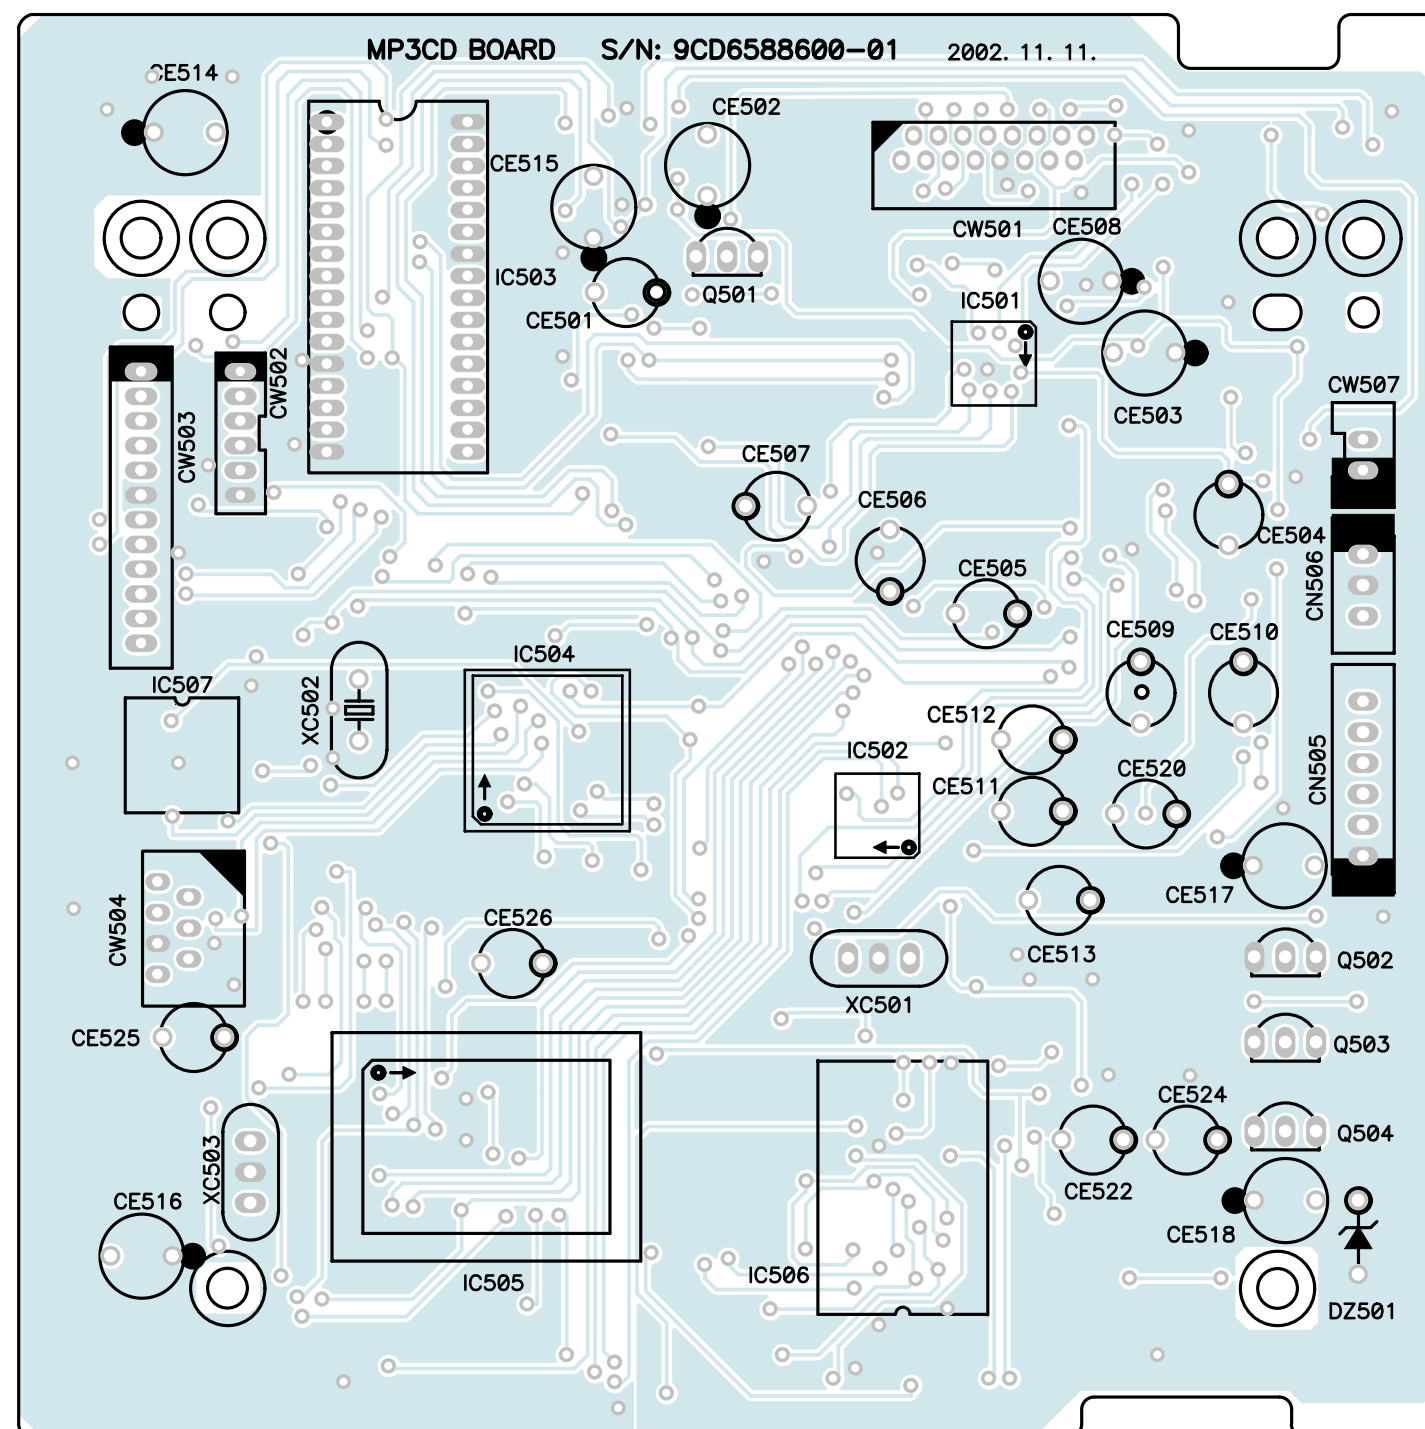


<BOTTOM VIEW>

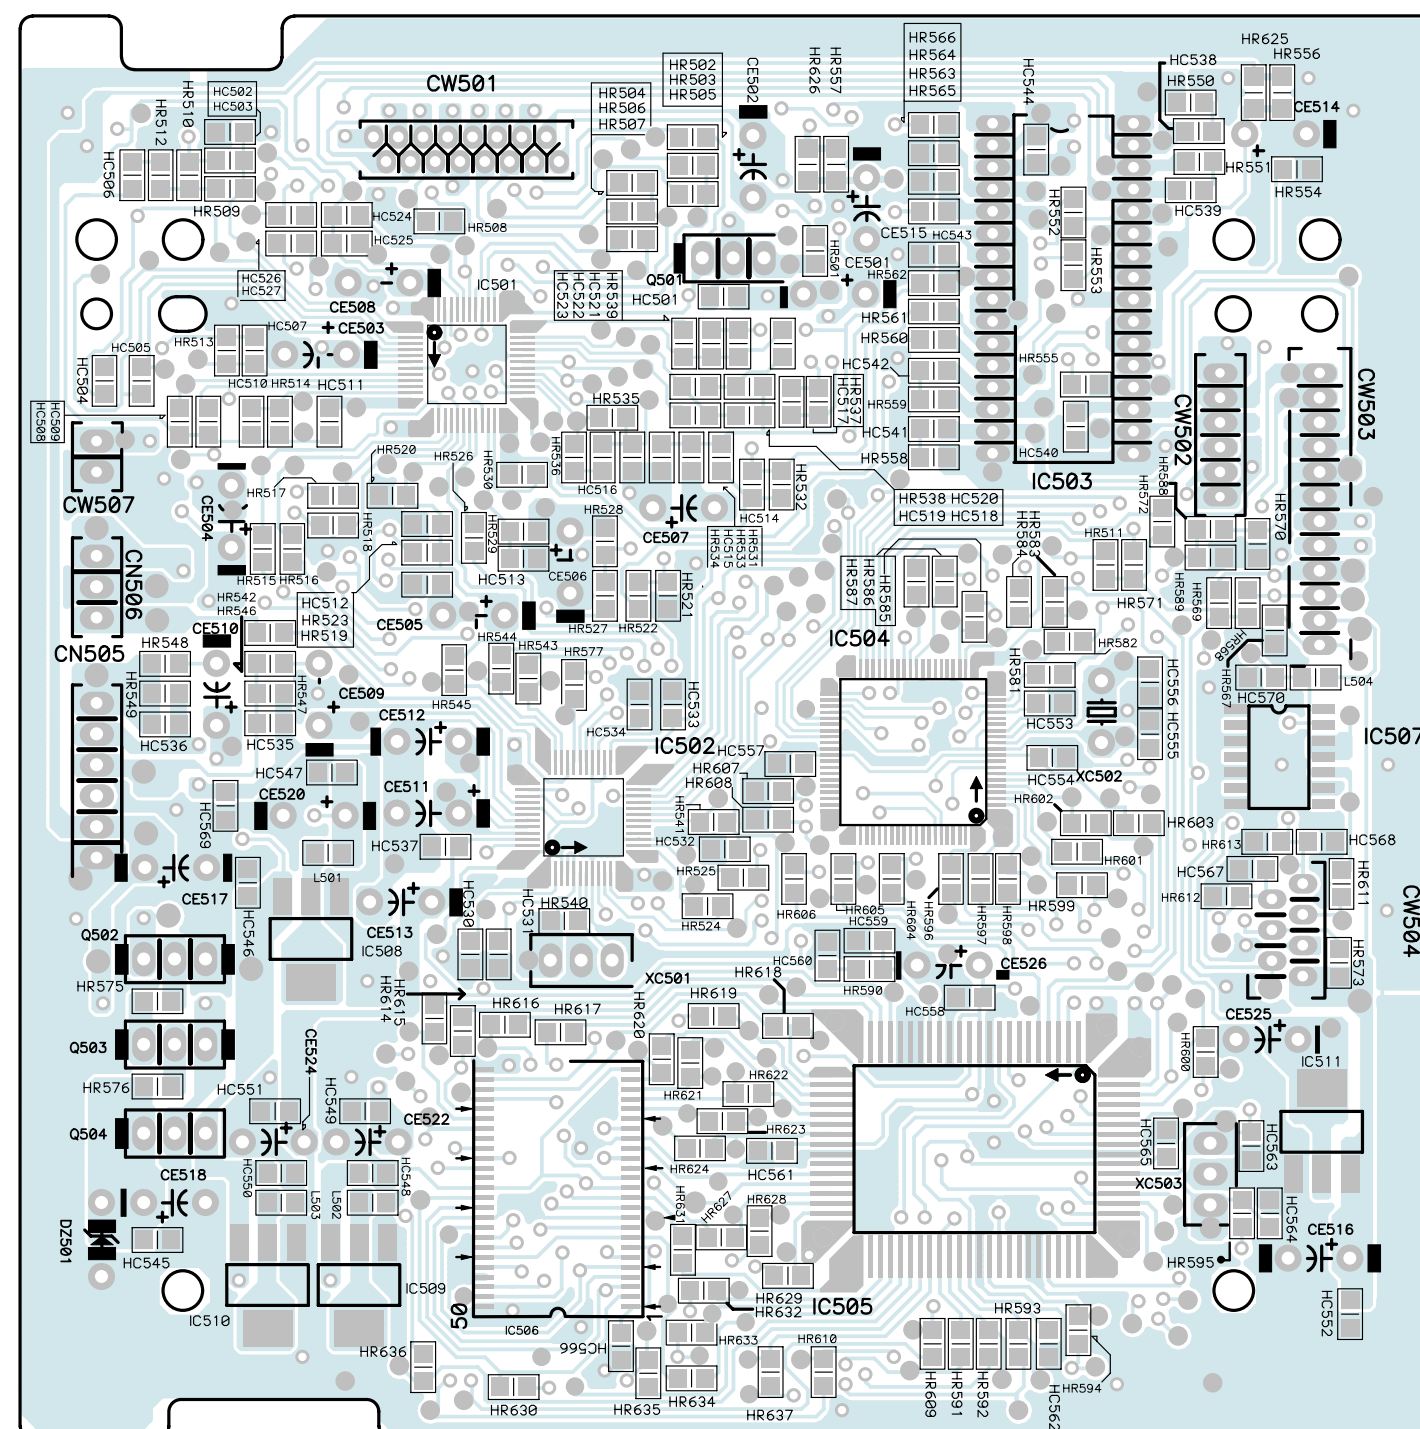


P.C.B Pattern Layout

• FRONT

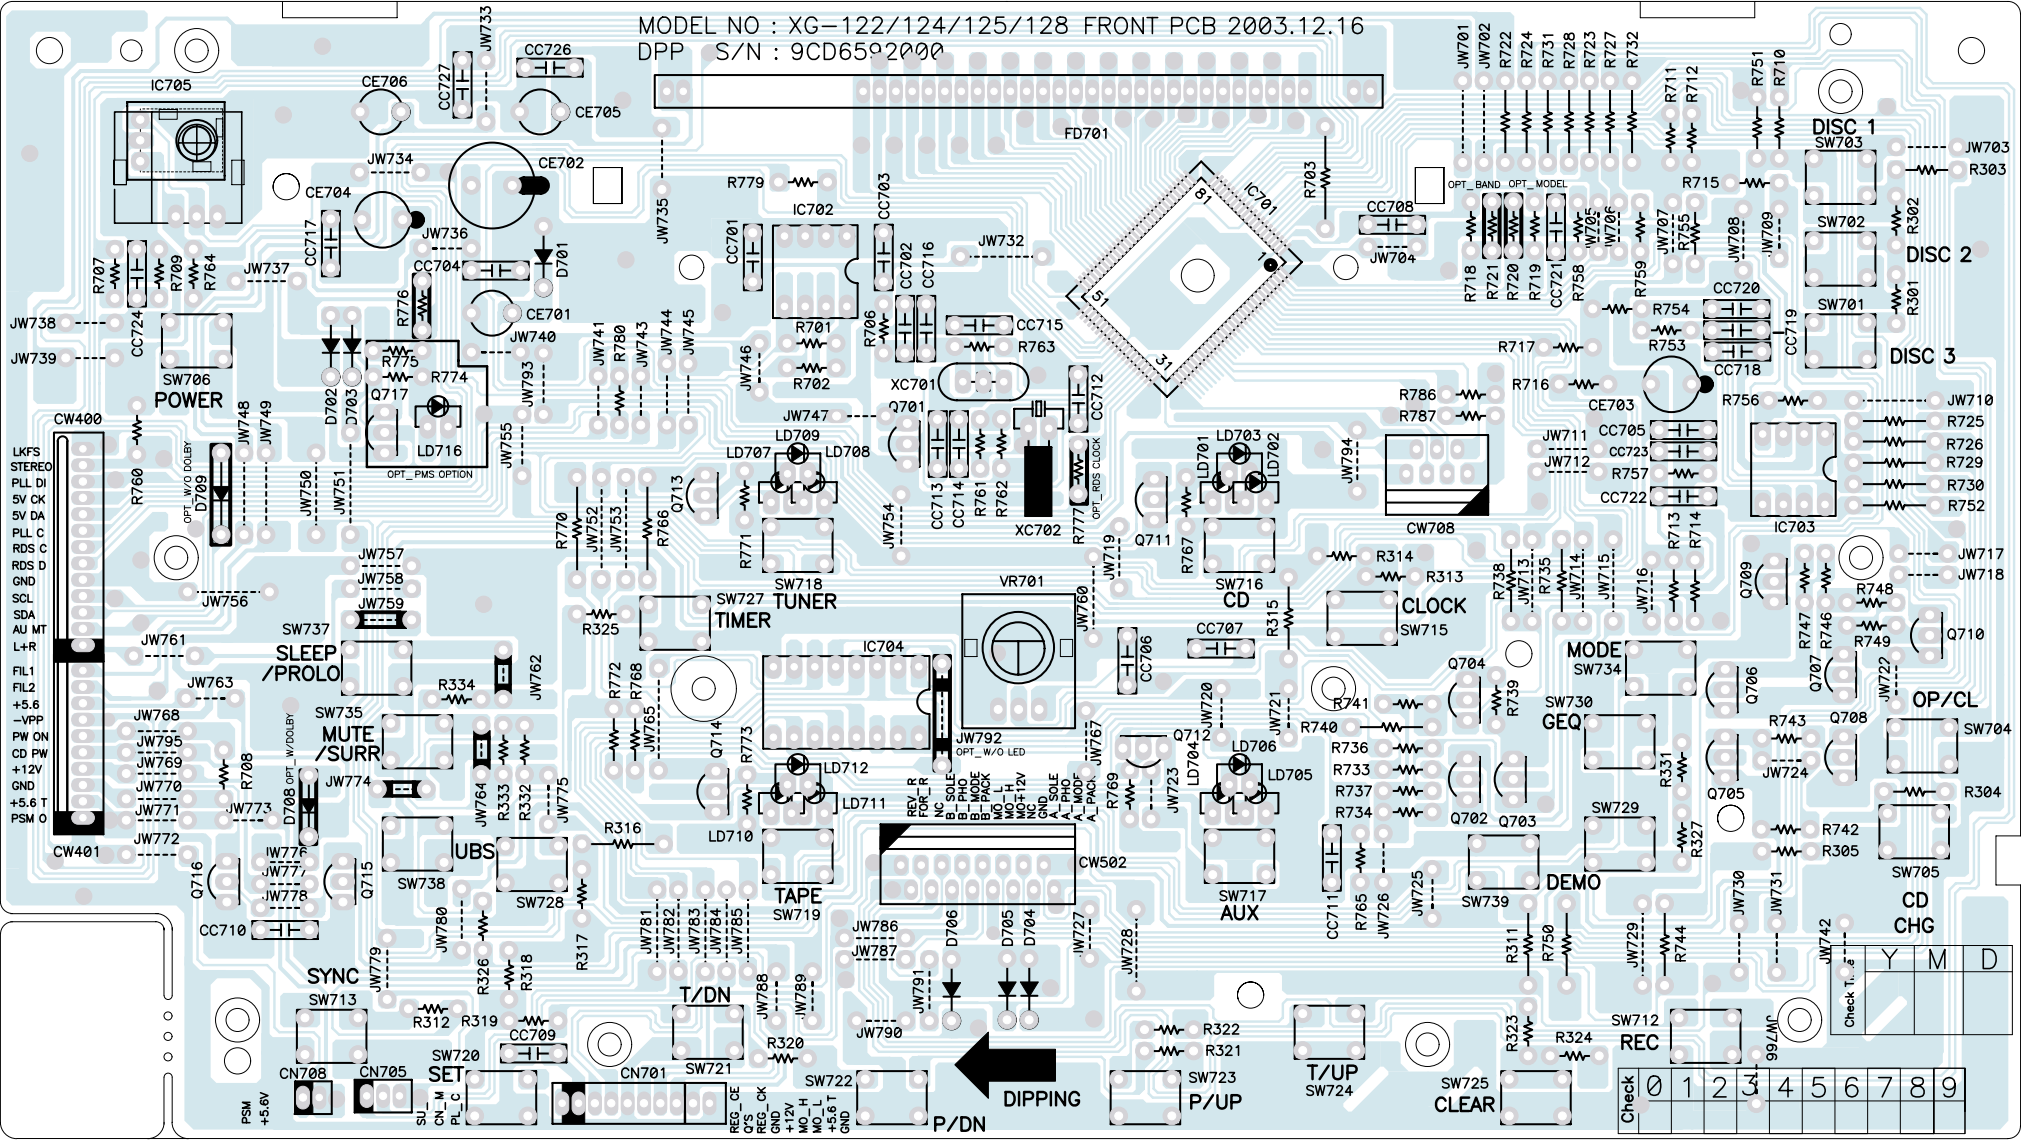

P.C.B Pattern Layout

• POWER

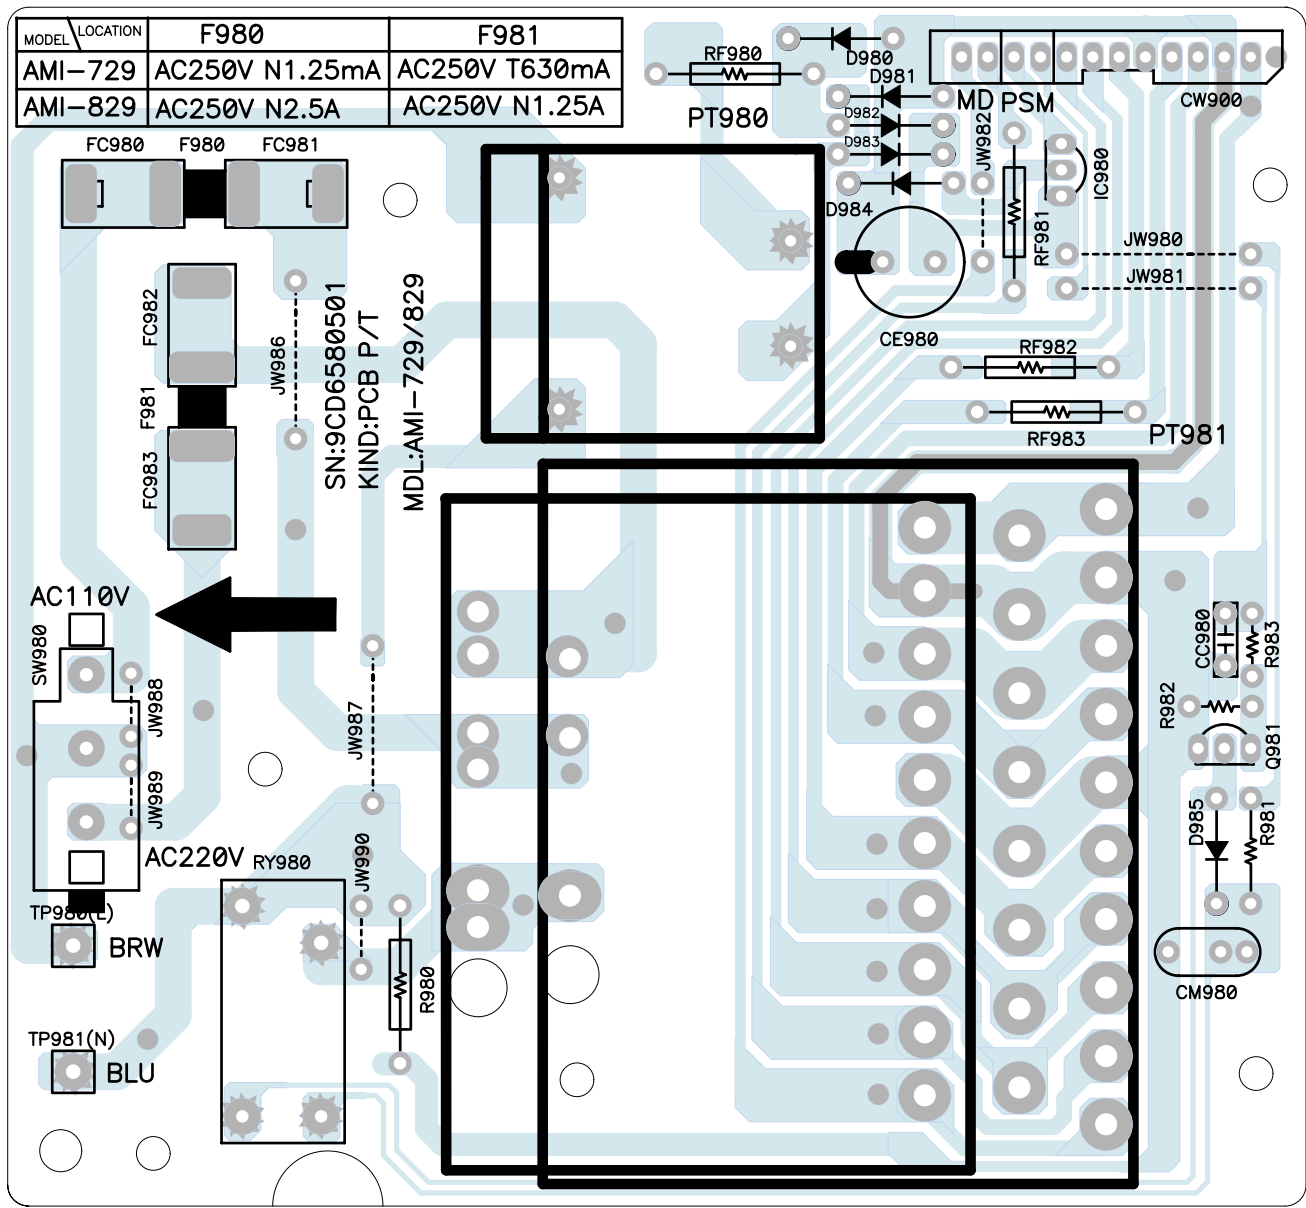

Electrical Part List

PCB MAIN Ass'y [9CDC057256]

Loc.	Part Code	Part Name	Description	Remark/Option
B1000	9CD6585200-06	PCB MAIN	330X197X1.6T	
CC001	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC002	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC003	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC004	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC100	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC101	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC102	CZCH1H150J	C CERA	CH 50V 15PF J (AXIAL)	
CC103	CZSL1H470J	C CERA	SL 50V 47PF J (AXIAL)	
CC200	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC201	CCZF1H473Z	C CERA	HIKF 50V 0.047MF Z (AXIAL)	
CC202	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC203	CCZF1H473Z	C CERA	HIKF 50V 0.047MF Z (AXIAL)	
CC204	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC205	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC206	CCZB1H471K	C CERA	HIKB 50V 470PF K (AXIAL)	CE only
	CCZB1H821K	C CERA	HIKB 50V 820PF K (AXIAL)	Asia/USA/Korea only
CC207	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC209	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC210	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC211	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC230	CZSL1H390J	C CERA	SL 50V 39PF J (AXIAL)	
CC232	CZSL1H330J	C CERA	SL 50V 33PF J (AXIAL)	
CC234	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC235	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC236	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC237	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC238	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC239	CZSL1H390J	C CERA	SL 50V 39PF J (AXIAL)	
CC260	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	RDS Only
CC261	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	RDS only
CC262	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	RDS only
CC263	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	RDS only
CC264	CZSL1H820J	C CERA	SL 50V 82PF J (AXIAL)	RDS only
CC265	CZSL1H470J	C CERA	SL 50V 47PF J (AXIAL)	RDS only
CC267	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC401	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC490	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC491	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC492	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC493	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC494	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC600	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC603	CZSL1H470J	C CERA	SL 50V 47PF J (AXIAL)	
CC604	CZSL1H470J	C CERA	SL 50V 47PF J (AXIAL)	
CC605	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC606	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC609	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC610	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC611	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC612	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC613	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC614	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC615	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC616	CCZB1H821K	C CERA	HIKB 50V 820PF K (AXIAL)	
CC617	CCZB1H821K	C CERA	HIKB 50V 820PF K (AXIAL)	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
CC618	CCZB1H821K	C CERA	HIKB 50V 820PF K (AXIAL)	
CC619	CCZB1H821K	C CERA	HIKB 50V 820PF K (AXIAL)	
CC620	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC621	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC622	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC623	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC800	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC801	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC804	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC805	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC870	CCZF1H473Z	C CERA	HIKF 50V 0.047MF Z (AXIAL)	
CC871	CCZF1H473Z	C CERA	HIKF 50V 0.047MF Z (AXIAL)	
CC872	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC873	CCZB1H221K	C CERA	HIKB 50V 220PF K (AXIAL)	
CC874	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC875	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC876	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC877	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC878	CCZB1H331K	C CERA	HIKB 50V 330PF K (AXIAL)	
CC900	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC901	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC902	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC904	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CC906	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	
CE001	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE201	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)	
CE202	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE203	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE205	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE206	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP	
CE207	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE208	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE209	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE210	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE230	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE231	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE232	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE260	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	RDS only
CE261	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	RDS only
CE270	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE271	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE272	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE400	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE401	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE402	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE404	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE405	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE406	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE408	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE409	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE410	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE411	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE412	CEXF1E100V	C ELECTRO	25V RSS 10MF (5X11) TP	
CE413	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
CE414	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE415	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE601	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
CE602	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)	
CE605	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE606	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE607	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE608	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE609	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE610	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE611	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE612	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE613	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE614	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE615	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE616	CEXF1E339V	C ELECTRO	25V RSS 3.3MF	
CE617	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE618	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE619	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE620	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE621	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE801	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE802	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE803	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP	
CE804	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP	
CE805	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	
CE806	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	
CE807	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE808	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE809	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE810	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE870	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE871	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE872	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE873	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE900	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE901	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE902	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE903	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP	
CE904	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE905	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE906	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP	
CE907	CEXF1V222V-1	C ELECTRO	35V RSS 2200MF (13X32.5)	
CE908	CEXF1V222V-1	C ELECTRO	35V RSS 2200MF (13X32.5)	
CE910	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP	
CE913	CEXF1H332V	C ELECTRO	50V RSS 3300MF (26X41)	
CE914	CEXF1H332V	C ELECTRO	50V RSS 3300MF (26X41)	
CF001	5PE107MJA-	FILTER CERA	SFE 10.7MHZ RED	Full FTZ only
	5PE107MS3A	FILTER CERA	SFE107MS3-A	Non Full FTZ only
	5PE107MA5-	FILTER CERA	SFE 10.7M5-A	Asia/USA/Kore only
CF002	5PE107MJA-	FILTER CERA	SFE 10.7MHZ RED	Full FTZ only
	5PE107MS3A	FILTER CERA	SFE107MS3-A	Non Full FTZ only
	5PE107MA5-	FILTER CERA	SFE 10.7M5-A	Asia/USA/Kore only
CF200	5PPCFAC016	FILTER	PCFAC016	
CM200	CMXM2A153J	C MYLAR	100V 0.015MF J	CE only
	CMXM2A223J	C MYLAR	100V 0.022MF J	Asia/USA/Kore only
CM201	CMXM2A153J	C MYLAR	100V 0.015MF J	CE only
	CMXM2A223J	C MYLAR	100V 0.022MF J	Asia/USA/Kore only
CM270	CMXM2A103J	C MYLAR	100V 0.01MF J	
CM271	CMXM2A103J	C MYLAR	100V 0.01MF J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
CM400	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM401	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM402	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM403	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM404	CMXM2A562J	C MYLAR	100V 5600PF J	
CM405	CMXM2A562J	C MYLAR	100V 5600PF J	
CM600	CMXM2A683J	C MYLAR	100V 0.068MF J	
CM601	CMXM2A683J	C MYLAR	100V 0.068MF J	
CM602	CMXM2A103J	C MYLAR	100V 0.01MF J	
CM603	CMXM2A332J	C MYLAR	100V 3300PF J	
CM605	CMXM2A392J	C MYLAR	100V 3900PF J	
CM606	CMXM2A123J	C MYLAR	100V 0.012MF J	
CM607	CMXM2A123J	C MYLAR	100V 0.012MF J	
CM608	CMXM2A102J	C MYLAR	100V 1000PF J	
CM609	CMXM2A682J	C MYLAR	100V 6800PF J	
CM610	CMXM2A682J	C MYLAR	100V 6800PF J	
CM611	CMXM2A223J	C MYLAR	100V 0.022MF J	
CM612	CMXM2A223J	C MYLAR	100V 0.022MF J	
CM613	CMXM2A102J	C MYLAR	100V 1000PF J	
CM802	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM803	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM808	CMXM2A392J	C MYLAR	100V 3900PF J	
CM809	CMXM2A392J	C MYLAR	100V 3900PF J	
CM900	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM901	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM902	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM903	CMXM2A104J	C MYLAR	100V 0.1MF J	
CM904	CMXM2A103J	C MYLAR	100V 0.01MF J	
CM905	CMXM2A103J	C MYLAR	100V 0.01MF J	
CM906	CMXM2A103J	C MYLAR	100V 0.01MF J	
CN400	9736407600	CONN PIN	53095-1310 13PIN BASE	
CN401	9736407800	CONN PIN	53095-1010 10PIN ANGLE	
CN601	9738833300	CONN AS	UL 2851 #28X2C0 3P 250MM	
CN602	9728804301	CONN AS	#26 7P SHIELD 250MM	
CN900	9738833900	CONN AS	#22 8P BOARD-IN 350MM	
CW100	2503-WR-02	WAFER	2P S2B-XH-A	
CW511	2503-WS-03	WAFER	3P 2.5MM	
CW512	2503-WS-02	WAFER	2P 2.5MM	
CW600	2503-WS-07	WAFER	7P 2.5MM	
CW601	2503-WS-03	WAFER	3P 2.5MM	
CW602	2503-WS-07	WAFER	7P 2.5MM	
D400	DZN4148---	DIODE	IN4148 AUTO 52MM	
D601	DZN4148---	DIODE	IN4148 AUTO 52MM	
D802	DZN4148---	DIODE	IN4148 AUTO 52MM	
D870	DZN4148---	DIODE	IN4148 AUTO 52MM	
D900	DIN4001---	DIODE	IN4001	
D901	DIN4001---	DIODE	IN4001	
D902	DRL202----	DIODE	RL202	
D903	DRL202----	DIODE	RL202	
D904	DRL202----	DIODE	RL202	
D905	DRL202----	DIODE	RL202	
D910	DIN5402---	DIODE	IN5402	
D911	DIN5402---	DIODE	IN5402	
D912	DIN5402---	DIODE	IN5402	
D913	DIN5402---	DIODE	IN5402	
D914	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
DZ900	DZTZ6R2B--	DIODE ZENER	MTZ6.2B	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
DZ901	DZTZ12B---	DIODE ZENER	MTZ 12V 26MM TAPPING	
DZ902	DZTZ30B---	DIODE ZENER	MTZ-30B	
IC200	1LA1833N--	IC	LA1833N	
IC201	1KIA78L05B	IC REGULATOR	KIA78L05BP	
IC230	1LC72131D-	IC PLL	LC72131D	
IC260	1TDA7479D-	IC	TDA7479D	RDS Only
IC400	1TDA7440D-	IC	TDA7440D	
IC600	1F4094BM1T	IC	HCF4094M013TR	
IC602	1TA8189N--	IC	TA8189N	
IC603	1BA3126N--	IC	BA3126N--	
IC800	1TDA7295--	IC	TDA7295	
IC801	1TDA7295--	IC	TDA7295	
IC870	1BA4560N--	IC	BA4560N(H/P AMP)	
IC900	1L4959----	IC	L4959	
J001	9736321900	JACK ANT	PAT-645	FCC & Simple CE & FTZ only
	9736322201	JACK ANT	PAT-646	Non FCC & Simple CE & FTZ only
J490	9CD6313700	JACK RCA	S-436P	
J800	9736320500	JACK SPEAKER	CJ-9007-040	
J870	9766319501	JACK HEADPHONE	HTJ-064-05B GOLD	
JW101	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW102	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW103	W581GY1505	WIRE JUMPER	AWG22 1/0.65 GY 15 AUTO	
JW105	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW106	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW107	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW108	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	RDS Only
JW109	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW110	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW111	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW112	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW114	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW115	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW116	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW117	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW118	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW119	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW120	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW121	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	FCC & Simple CE & FTZ only
JW122	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW123	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW124	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW125	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW126	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW127	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW128	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW129	RD-AZ220J-	R CARBON FILM	1/6 22 OHM J	
JW130	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW132	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW133	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW134	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW135	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW137	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW138	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW139	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW140	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW141	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW142	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
JW401	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW402	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW403	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW404	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW405	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW406	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW407	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW408	W581GY1505	WIRE JUMPER	AWG22 1/0.65 GY 15 AUTO	
JW409	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW410	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW411	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW412	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW413	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW414	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW415	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW416	W581GY1505	WIRE JUMPER	AWG22 1/0.65 GY 15 AUTO	
JW417	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW418	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW419	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW420	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW421	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW422	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW423	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW424	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW425	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW426	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW427	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW428	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW429	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW430	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW431	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW432	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW433	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW501	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW503	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW504	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW505	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW506	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW507	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW508	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW509	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW540	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW541	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW561	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW562	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW570	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW601	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW602	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW603	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW604	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW605	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW606	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW607	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW608	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW609	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW610	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW611	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
JW612	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW613	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW614	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW615	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW616	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW617	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW618	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW619	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW620	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW621	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW622	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW623	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW624	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW625	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW626	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW627	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW628	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW629	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW630	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW631	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW632	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW801	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW802	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW803	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW804	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW805	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW806	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW807	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW808	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW809	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW810	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW811	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW812	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW813	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW814	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW815	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW816	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW817	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW818	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW819	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW820	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW821	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW822	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW823	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW901	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW902	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW903	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW904	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW905	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	
JW906	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW907	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW908	RD-4Z121J-	R CARBON FILM	1/4 120 OHM J	
JW909	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW910	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW911	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW912	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW913	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
JW914	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
L001	5CPZ100K02	COIL PEAKING	10UH K (AXIAL 3.5MM)	
L100	5LR0000835	AM RF UNIT	KSNT-213M-1	
L102	5CPZ100K02	COIL PEAKING	10UH K (AXIAL 3.5MM)	Full FTZ only
L270	5P076068--	COIL	6068MPX	
L271	5P076068--	COIL	6068MPX	
L600	5L0503K643	COIL BIAS OSC	SM-10F 5.04MH	
L601	5LC333K804	COIL CHOKE	33MH K	
L602	5LC333K804	COIL CHOKE	33MH K	
Q001	TZTC3194Y-	TR	KTC3194Y (KTC1923Y) AUTO	
Q231	TZRA107M--	TR	KRA107M (KSR2006) AUTO	
Q270	TZTC3198Y-	TR	KTC3198Y (2SC5343) AUTO	
Q271	TZTC3198Y-	TR	KTC3198Y (2SC5343) AUTO	
Q600	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q601	TZRA107M--	TR	KRA107M (KSR2006) AUTO	
Q602	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q603	TZSA1980Y-	TR	2SA1980Y (KTA1266Y) AUTO	
Q604	TZSA1980Y-	TR	2SA1980Y (KTA1266Y) AUTO	
Q605	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q606	TZTD1302Y-	TR	KTD1302Y AUTO	
Q607	TZTC3205Y-	TR	KTC3205Y (KTC2236Y) AUTO	
Q608	TZSA1980Y-	TR	2SA1980Y (KTA1266Y) AUTO	
Q609	TZTD1302Y-	TR	KTD1302Y AUTO	
Q610	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
Q612	TZTD1302Y-	TR	KTD1302Y AUTO	
Q614	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q616	TZTD1302Y-	TR	KTD1302Y AUTO	
Q802	TZRA107M--	TR	KRA107M (KSR2006) AUTO	
Q803	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q804	TZTD1302Y-	TR	KTD1302Y AUTO	
Q805	TZTD1302Y-	TR	KTD1302Y AUTO	
Q870	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q871	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q872	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q873	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q900	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
R001	RD-AZ475J-	R CARBON FILM	1/6 4.7M OHM J	USA only
R002	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
R003	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	
R004	RD-AZ470J-	R CARBON FILM	1/6 47 OHM J	
R005	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R006	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J	
R007	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	
R009	RD-AZ121J-	R CARBON FILM	1/6 120 OHM J	
R010	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R100	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R101	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R102	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R200	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	
R201A	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R201B	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R202	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R203	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R204	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R205	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R206	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R207	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R208	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R209	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R210	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R211	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R212	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R213	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J	
R230	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R231	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R232	RD-AZ470J-	R CARBON FILM	1/6 47 OHM J	
R233	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R234	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R235	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R236	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R237	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R239	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R241	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R242	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R243	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R244	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R245	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R246	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R253	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R254	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R260	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	RDS Only
R261	RD-AZ823J-	R CARBON FILM	1/6 82K OHM J	RDS Only
R262	RD-AZ823J-	R CARBON FILM	1/6 82K OHM J	RDS Only
R270	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
R271	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
R272	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R273	RD-AZ474J-	R CARBON FILM	1/6 470K OHM J	
R274	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R275	RD-AZ474J-	R CARBON FILM	1/6 470K OHM J	
R276	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R277	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R278	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R400	RD-AZ105J-	R CARBON FILM	1/6 1M OHM J	
R401	RD-AZ105J-	R CARBON FILM	1/6 1M OHM J	
R402	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R403	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R404	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R405	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R406	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
R407	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
R408	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R409	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R410	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R411	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R412	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R413	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R414	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R415	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R416	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R430	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R431	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R490	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
R491	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R492	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R493	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
R600	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R601	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	
R602	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
R603	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
R604	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	
R605	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R606	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	
R607	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R608	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R609	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R610	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R611	RD-AZ479J-	R CARBON FILM	1/6 4.7 OHM J	
R613	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R614	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R615	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R616	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R618	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R619	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R620	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R621	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R622	RD-AZ184J-	R CARBON FILM	1/6 180K OHM J	
R623	RD-AZ184J-	R CARBON FILM	1/6 180K OHM J	
R624	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R626	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R627	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
R628	RD-AZ823J-	R CARBON FILM	1/6 82K OHM J	
R629	RD-AZ823J-	R CARBON FILM	1/6 82K OHM J	
R633	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R634	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R635	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R636	RD-AZ105J-	R CARBON FILM	1/6 1M OHM J	
R637	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R638	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
R639	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
R640	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R641	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R642	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R643	RD-AZ184J-	R CARBON FILM	1/6 180K OHM J	
R644	RD-AZ184J-	R CARBON FILM	1/6 180K OHM J	
R645	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R646	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R647	RD-AZ470J-	R CARBON FILM	1/6 47 OHM J	
R648	RD-AZ334J-	R CARBON FILM	1/6 330K OHM J	
R649	RD-AZ334J-	R CARBON FILM	1/6 330K OHM J	
R650	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R651	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R652	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R653	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R654	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R655	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R656	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R657	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R658	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R659	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	
R660	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	
R661	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R662	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
R663	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
R664	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J	
R665	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J	
R666	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R667	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R668	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R669	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R670	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R671	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R672	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R673	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R674	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R675	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R676	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R677	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R802	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R803	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R804	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R805	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R806	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R808	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R810	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R811	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R812	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R813	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J	
R814	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J	
R815	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R816	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R817	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R818	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R819	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R820	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R870	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R871	RD-AZ560J-	R CARBON FILM	1/6 56 OHM J	
R872	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J	
R874	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R876	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R877	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R878	RD-AZ183J-	R CARBON FILM	1/6 18K OHM J	
R879	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R880	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R881	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R882	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J	
R883	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R900	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
R901	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
R902	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R903	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R904	RD-4Z121J-	R CARBON FILM	1/4 120 OHM J	
R905	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
R906	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R907	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R908	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R909	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
R910	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R911	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R912	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
R913	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
RV600	RV1417222-	R SEMI FIXED	1/10 2.2K OHM B V6EK-PV1S	
TU001	9737613201	TUNER PACK	KST-F401VA-3	Non Full FTZ only
	9737613500	TUNER PACK	FTE-401TC	Full FTZ only
XC200	5P107MG86C	C DISCRIMINATOR	CDA10.7MG86N-C	
XC230	5XA7R2000D	X-TAL	7.2M	
XC260	5XA4R332M-	X-TAL	4.332M	RDS Only

PCB MP3CD Ass'y [9CDC063501]

Loc.	Part Code	Part Name	Description	Remark/Option
B001	9CD6588600-01	PCB MP3CD	110X110	
CE501	CEXF1E330V	C ELECTRO	25V RSS 33MF (5X11) TP	
CE502	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE503	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE504	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)	
CE505	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP	
CE506	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP	
CE507	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE508	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE509	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)	
CE510	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)	
CE511	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE512	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE514	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20)	
CE515	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20)	
CE516	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE517	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE518	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP	
CE520	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE524	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CE525	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
CN501	9738840800	CONN AS	FFC 16P P1.0X250MM R	
CN504	9728816700	CONN AS	FFC 7P P1.25X120MM R	
CN505	9728816800-01	CONN AS	#24 2P+UL1007 SHIELD 3P 250MM	
CW501	9CD6259300	WAFER	52807-1610 SID ENTRY	
CW502	2001-WS-06	WAFER	6P 2.0MM	
CW503	2001-WS-12	WAFER	12P 2.0MM	
CW504	9CD6260300	WAFER	52045-0745 TOP EMTRY	
DZ501	DZTZ5R6B--	DIODE ZENER	MTZ-5.6B 52MM TAPPING	
HC501	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608	
HC502	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608	
HC503	HCQK409DBA	C CHIP CERA	50V CH 4PF D 1608	
HC504	HCBK562KBA	C CHIP CERA	50V X7R 5600PF K 1608	
HC505	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608	
HC508	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC509	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC510	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608	
HC511	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC512	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF M 1608	
HC513	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF M 1608	
HC514	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF M 1608	
HC515	HCBK683KBA	C CHIP CERA	50V X7R 0.068MF M 1608	
HC516	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC517	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608	
HC518	HCQK681JBA	C CHIP CERA	50V CH 680PF J 1608	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
HC519	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608	
HC520	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC521	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC522	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF M 1608	
HC523	HCBK682KBA	C CHIP CERA	50V X7R 6800PF K 1608	
HC524	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608	
HC525	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608	
HC526	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF M 1608	
HC527	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF M 1608	
HC530	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608	
HC532	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC533	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC534	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC535	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608	
HC536	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608	
HC538	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC539	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC540	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC541	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC542	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC543	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF M 1608	
HC544	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC545	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC546	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC547	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF M 1608	
HC548	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC549	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC550	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC551	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC553	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC554	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC555	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608	
HC556	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608	
HC557	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC559	HCBK563KBA	C CHIP CERA	50V X7R 0.056MF M 1608	
HC560	HCBK563KBA	C CHIP CERA	50V X7R 0.056MF M 1608	
HC561	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC562	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC565	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC566	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC567	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608	
HC568	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608	
HC569	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF Z 1608	
HC570	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608	
HC571	HCQK150JBA	C CHIP CERA	50V CH 15PF J 1608	
HR501	HRFT220JBA	R CHIP	1/10W 22 OHM J 1608	
HR502	HRFT823JBA	R CHIP	1/10 82K OHM J 1608	
HR503	HRFT563JBA	R CHIP	1/10 56K OHM J 1608	
HR504	HRFT563JBA	R CHIP	1/10 56K OHM J 1608	
HR505	HRFT563JBA	R CHIP	1/10 56K OHM J 1608	
HR506	HRFT563JBA	R CHIP	1/10 56K OHM J 1608	
HR507	HRFT823JBA	R CHIP	1/10 82K OHM J 1608	
HR508	HRFT101JBA	R CHIP	1/10 100 OHM J 1608	
HR509	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR510	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608	
HR511	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR514	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
HR515	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR516	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR517	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR518	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR519	HRFT105JBA	R CHIP	1/10 1M OHM J 1608	
HR523	HRFT223JBA	R CHIP	1/10 22K OHM J 1608	
HR524	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608	
HR525	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR526	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR527	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR528	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR529	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR530	HRFT563JBA	R CHIP	1/10 56K OHM J 1608	
HR531	HRFT223JBA	R CHIP	1/10 22K OHM J 1608	
HR532	HRFT823JBA	R CHIP	1/10 82K OHM J 1608	
HR533	HRFT473JBA	R CHIP	1/10 47K OHM J 1608	
HR534	HRFT124JBA	R CHIP	1/10 120K OHM J 1608	
HR535	HRFT184JBA	R CHIP	1/10 180K OHM J 1608	
HR536	HRFT333JBA	R CHIP	1/10 33K OHM J 1608	
HR537	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR538	HRFT473JBA	R CHIP	1/10 47K OHM J 1608	
HR539	HRFT823JBA	R CHIP	1/10 82K OHM J 1608	
HR540	HRFT105JBA	R CHIP	1/10 1M OHM J 1608	
HR541	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR542	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR543	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR544	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR545	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR546	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608	
HR548	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608	
HR550	HRFT100JBA	R CHIP	1/10 10 OHM J 1608	
HR551	HRFT100JBA	R CHIP	1/10 10 OHM J 1608	
HR552	HRFT223JBA	R CHIP	1/10 22K OHM J 1608	
HR553	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR554	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR555	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR556	HRF4150JEA	R CHIP	1/4 15 OHM J 3216	
HR557	HRF4150JEA	R CHIP	1/4 15 OHM J 3216	
HR558	HRFT100JBA	R CHIP	1/10 10 OHM J 1608	
HR559	HRFT100JBA	R CHIP	1/10 10 OHM J 1608	
HR560	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR561	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR562	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR563	HRFT333JBA	R CHIP	1/10 33K OHM J 1608	
HR564	HRFT333JBA	R CHIP	1/10 33K OHM J 1608	
HR565	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR566	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR567	HRFT101JBA	R CHIP	1/10 100 OHM J 1608	
HR568	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR569	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR570	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR571	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR572	HRFT104JBA	R CHIP	1/10 100K OHM J 1608	
HR573	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR575	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR576	HRFT121JBA	R CHIP	1/10 120 OHM J 1608	
HR577	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
HR581	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR582	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR583	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR584	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR585	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR586	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR587	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608	
HR588	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR589	HRFT473JBA	R CHIP	1/10 47K OHM J 1608	
HR590	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608	
HR591	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR592	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR593	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR594	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR595	HRFT105JBA	R CHIP	1/10 1M OHM J 1608	
HR596	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR597	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR598	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR599	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR600	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR601	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR602	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR603	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR604	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR605	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR606	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR609	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR610	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR611	HRFT103JBA	R CHIP	1/10 10K OHM J 1608	
HR612	HRFT223JBA	R CHIP	1/10 22K OHM J 1608	
HR613	HRFT223JBA	R CHIP	1/10 22K OHM J 1608	
HR614	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR615	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR616	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR617	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR618	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR619	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR620	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR621	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR622	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR623	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR624	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR625	HRF4150JEA	R CHIP	1/4 15 OHM J 3216	
HR626	HRF4150JEA	R CHIP	1/4 15 OHM J 3216	
HR627	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR628	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR629	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR630	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR631	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR632	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR633	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR634	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR635	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR636	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
HR637	HRFT102JBA	R CHIP	1/10 1K OHM J 1608	
IC501	1S1L9226--	IC SSP	S1L9226	
IC502	1S5L9290--	IC DSP	S5L9290	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
IC503	1BA5939S--	IC MOTOR DRIVE	BA5939S	
IC504	1S3C825-1-	IC	S3C825-1	
IC505	1TMD2104--	IC	TMD2104	
IC506	1HY57V1616	IC SDRAM	HY57V1616	
IC507	1TC74HCT04AF	IC	TC74HCT04AF	
IC508	1LD1117S33	IC REGULATOR	LD117AS33TR 3.3V (TO-223)	
IC509	1LD1117S33	IC REGULATOR	LD117AS33TR 3.3V (TO-223)	
IC510	1LD1117S33	IC REGULATOR	LD117AS33TR 3.3V (TO-223)	
IC511	1LD1117S33	IC REGULATOR	LD117AS33TR 3.3V (TO-223)	
L501	HLC104J01A	COIL CHIP	BEAD 120 OHM 100MHZ 2012	
L502	HLC104J01A	COIL CHIP	BEAD 120 OHM 100MHZ 2012	
L503	HLC104J01A	COIL CHIP	BEAD 120 OHM 100MHZ 2012	
L504	HLC104J01A	COIL CHIP	BEAD 120 OHM 100MHZ 2012	
Q501	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
Q502	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q503	TZSA1980Y-	TR	2SA1980Y (KTA1266Y) AUTO	
Q504	TZTC3205Y-	TR	KTC3205Y (KTC2236Y) AUTO	
XC501	5PQZTT1693	RESONATOR CERA	QZTT16.93MMX(3PIN)	
XC502	5PQZTA80MT	RESONATOR CERA	8 MHz RESONATOR(2PIN)	
XC503	5PQZTT1693	RESONATOR CERA	QZTT16.93MMX(3PIN)	

PCB FRONT Ass'y [9CDC061500]

Loc.	Part Code	Part Name	Description	Remark/Option
B001	9CD6592000	PCB FRONT	247X139X1.6T	
CC701	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC702	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC703	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC704	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC705	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC706	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC707	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC708	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC709	CCZB1H102K	C CERA	HIKB 50V 1000PF K (AXIAL)	
CC710	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC711	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC712	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC713	CZCH1H150J	C CERA	CH 50V 15PF J (AXIAL)	
CC714	CZCH1H180J	C CERA	CH 50V 18PF J (AXIAL)	
CC715	CZSL1H330J	C CERA	SL 50V 33PF J (AXIAL)	
CC716	CZSL1H330J	C CERA	SL 50V 33PF J (AXIAL)	
CC717	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC718	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CC719	CZSL1H330J	C CERA	SL 50V 33PF J (AXIAL)	
CC720	CCZF1E223Z	C CERA	HIKF 25V 0.022MF Z (AXIAL)	
CC721	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC722	CCZB1H102K	C CERA	HIKB 50V 1000PF K (AXIAL)	
CC723	CCZB1H101K	C CERA	HIKB 50V 100PF K (AXIAL)	
CC724	CCZF1H104Z	C CERA	HIKF 50V 0.1MF Z (AXIAL)	
CE701	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
CE702	CEXF1A102V	C ELECTRO	10V RSS 1000MF (8X12.5) TP	
CE703	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
CE704	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CE705	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CE706	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CN701	9728812400	CONN AS	#26 FLAT 200MM 7P	
CN702	9728812100	CONN AS	FFC 16P P1.25X150MM R	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
CW400	9736407700	PIN WAFER	52084-1310 13P BOTTOM	
CW401	9736407900	PIN WAFER	52084-1010 10P BOTTOM	
CW502	9CD6261600	WAFER	52492-1620 BOTTOM	
CW708	9CD6259900	WAFER	52492-0720	
D701	DZN4148---	DIODE	IN4148 AUTO 52MM	
D702	DZN4148---	DIODE	IN4148 AUTO 52MM	
D703	DZN4148---	DIODE	IN4148 AUTO 52MM	
D704	DZN4148---	DIODE	IN4148 AUTO 52MM	
D705	DZN4148---	DIODE	IN4148 AUTO 52MM	
D706	DZN4148---	DIODE	IN4148 AUTO 52MM	
D708	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
D709	DZN4148---	DIODE	IN4148 AUTO 52MM	
FD701	DHNA11MS26	VFD	HNA-11MS26	
IC701	1M38199290F	IC	U-COM M38199-290FP	
IC702	1M24C04---	IC MEMORY	M24C04-BN6	
IC703	1MSGEQ5A--	IC	MSGEQ5A	
IC704	1BU4094BC-	IC	BU4094BC	
IC705	1HK381B-DW	IC PRE AMP	HK381BT-DW	
JW701	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW702	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW703	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW704	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW705	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW706	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW707	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW708	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW709	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW710	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW711	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW712	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW713	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW714	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW715	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW716	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW717	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW718	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW719	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW720	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW721	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW722	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW723	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW724	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW725	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW726	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW727	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW728	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW729	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW730	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW731	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW732	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW733	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW734	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW735	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW736	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW737	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW738	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW739	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
JW740	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW741	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW742	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW743	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW744	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW745	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW746	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW747	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW748	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW749	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW750	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW751	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW752	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW753	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW754	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW755	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW756	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW757	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW758	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW760	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW761	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW762	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW763	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW765	W581GY12J5	WIRE JUMPER	AWG22 1/0.65 SN 12.5 AUTO	
JW766	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW767	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW768	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW769	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW770	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW771	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW772	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW773	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW774	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW775	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW776	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW777	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW778	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW779	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW780	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW781	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW782	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW783	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW784	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW785	W581GY1005	WIRE JUMPER	AWG22 1/0.65 SN 10 AUTO	
JW786	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW787	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW788	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW789	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW790	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
JW791	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW793	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW794	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
JW795	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	
LD701	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD702	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD703	DSL332VC3F	LED	SLR332VC3F(RED)PI3	
LD704	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
LD705	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD706	DSL332VC3F	LED	SLR332VC3F(RED)PI3	
LD707	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD708	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD709	DSL332VC3F	LED	SLR332VC3F(RED)PI3	
LD710	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD711	DSL332MC3F	LED	SLR332MC3F(GREEN)PI3	
LD712	DSL332VC3F	LED	SLR332VC3F(RED)PI3	
LD716	DSL56VC3F	LED	SLR56VC3F(RED)PI5	With PSM only
Q701	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q702	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q703	TZRC111M--	TR	KRC111M (DTC114TS) (KSR1010)	
Q704	TZTC3198Y-	TR	KTC3198Y (2SC5343) AUTO	
Q705	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
Q706	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
Q707	TZTA1273Y-	TR	KTA1273Y (A966Y) (KSA928A-Y)	
Q708	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q709	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q710	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q711	TZRA111M--	TR	KRA111M (KSR2010) AUTO	
Q712	TZRA111M--	TR	KRA111M (KSR2010) AUTO	
Q713	TZRA111M--	TR	KRA111M (KSR2010) AUTO	
Q714	TZRA111M--	TR	KRA111M (KSR2010) AUTO	
Q715	TZRA111M--	TR	KRA111M (KSR2010) AUTO	
Q716	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	
Q717	TZRC107M--	TR	KRC107M (DTC114YS) (KSR1006)	With PSM only
R301	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R302	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R303	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
R304	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R305	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	
R311	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	
R312	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R313	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R314	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R315	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
R316	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R317	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	
R318	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
R319	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J	
R320	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	
R321	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
R322	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R323	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R325	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R326	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
R327	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
R331	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R332	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	
R333	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
R334	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R701	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R702	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R703	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
R706	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R707	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R708	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R709	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R710	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R711	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R712	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R713	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R714	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R715	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R716	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R717	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
R718	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R719	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R720	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	W/O MP3 ,A/S, w/LED,w/o Dolby
	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	W/O MP3,A/S,w/o LED,w/o Dolby
	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J	W/O MP3,A/R, w/LED,w/Dolby
	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	W/O MP3,A/R, w/LED,w/o Dolby
	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	W/O MP3,A/R, w/o LED,w/Dolby
	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	W/O MP3,A/R, w/o LED,w/o Dolby
	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	W/MP3,A/s, w/LED,w/o Dolby
	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	W/MP3,A/s, w/o LED,w/o Dolby
	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	W/MP3,A/R, w/LED,w/Dolby
	RD-AZ153J-	R CARBON FILM	1/6 15K OHM J	W/MP3,A/R, w/LED,w/o Dolby
	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	W/MP3,A/R, w/o LED,w/Dolby
	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	W/MP3,A/R, w/o LED,w/o Dolby
R721	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	AMERICA 1/12HR
	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J	AMERICA 2/12HR
	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	EUR 2BAND /24HR
	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	JAPAN/12HR
	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	ASIA 1/12HR
	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	ASIA 2/24HR
	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J	CIS/24HR
	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	LATIN AM/12HR
	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	EUR RDS 2B/24HR
R722	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R723	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
R724	RD-AZ393J-	R CARBON FILM	1/6 39K OHM J	
R725	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R726	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R727	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R728	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R729	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R730	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R731	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R732	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R733	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R734	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R735	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R736	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R737	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R738	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R739	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R740	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R741	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R742	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R743	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
R744	RD-4Z229J-	R CARBON FILM	1/4 2.2 OHM J	
R746	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R747	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
R748	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R749	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
R750	RD-4Z229J-	R CARBON FILM	1/4 2.2 OHM J	
R751	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R752	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R753	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J	
R754	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R755	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R756	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R757	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J	
R758	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R759	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R760	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R761	RD-AZ106J-	R CARBON FILM	1/6 10M OHM J	
R762	RD-AZ334J-	R CARBON FILM	1/6 330K OHM J	
R763	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R764	RD-AZ100J-	R CARBON FILM	1/6 10 OHM J	
R765	RD-AZ390J-	R CARBON FILM	1/6 39 OHM J	
R766	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
R767	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R768	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
R769	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R770	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
R771	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R772	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
R773	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R774	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	With PSM only
R775	RD-AZ392J-	R CARBON FILM	1/6 3.9k OHM J	With PSM only
R776	RD-AZ103J-	R CARBON FILM	1/6 10k OHM J	Without PSM only
R777	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	
R779	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R780	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R786	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R787	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
SW701	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW702	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW703	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW704	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW705	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW706	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW712	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW713	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW715	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW716	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW717	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW718	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW719	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW720	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW721	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW722	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW723	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW724	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW725	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW727	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW728	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW729	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW730	5S50101001	SW TACT	KPT-1105A 1C-1P	

Electrical Part List

Loc.	Part Code	Part Name	Description	Remark/Option
SW734	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW735	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW737	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW738	5S50101001	SW TACT	KPT-1105A 1C-1P	
SW739	5S50101001	SW TACT	KPT-1105A 1C-1P	
VR701	5SH122403-	SW ENCODER	EC12E24204A9	
XC701	5PCSA8MTZ-	RESONATOR	CSALA8M00T55-B0 (8.00MTZ)	
XC702	5XA32R768-	X-TAL	DT-38 32.768KHZ 20PPM	

PCB POWER Ass'y [9CDC060000]

Loc.	Part Code	Part Name	Description	Remark/Option
B901	9CD6580501-04	PCB POWER	108X123X1.6T	
CC980	CCZF1E103Z	C CERA	HIKF 25V 0.01MF Z (AXIAL)	With PSM only
CD900	9736900200	CORD AC	KKP419C,KLCE-2F,0.75SQURE	CE only
CE980	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20)	With PSM only
CN900	9728804100	CONN AS	#22 10P P2.5 350 BOARD-IN	with PSM only
	9738833900	CONN AS	#22 8P BOARD-IN 350MM	without PSM only
CW900	2503-WS-08	WAFER	8P 2.5MM	without PSM only
	2503-WS-10	WAFER	10P 2.5MM	with PSM only
D980	DIN4001---	DIODE	IN4001	with PSM only
D981	DIN4001---	DIODE	IN4001	with PSM only
D982	DIN4001---	DIODE	IN4001	with PSM only
D983	DIN4001---	DIODE	IN4001	with PSM only
D984	DIN4001---	DIODE	IN4001	with PSM only
D985	DIN4001---	DIODE	IN4001	with PSM only
F980	5F1GB2522L	FUSE GLASS TUBE	UL/CSA TL 2.5A 250V MF51	USA only
F981	5FSGB1222R	FUSE GLASS TUBE	VDE N/T 1.25A 250V	CE only
FC980	9734600700	CLIP FUSE	FC-5N	
FC981	9734600700	CLIP FUSE	FC-5N	
IC980	1KIA78L05B	IC REGULATOR	KIA78L05BP	with PSM only
JW980	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	with PSM only
JW981	W581GY17J5	WIRE JUMPER	AWG22 1/0.65 SN 17.5 AUTO	with PSM only
JW982	W581GY7595	WIRE JUMPER	AWG22 1/0.65 SN 7.5 AUTO	with PSM only
JW986	W581GY1505	WIRE JUMPER	AWG22 1/0.65 GY 15 AUTO	without PSM only
JW987	W581GY1505	WIRE JUMPER	AWG22 1/0.65 GY 15 AUTO	with PSM only
JW988	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	without PSM only
JW989	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	with PSM only
JW990	W581GY6095	WIRE JUMPER	AWG22 1/0.65 SN 6 AUTO	without PSM only
PT980	5TP8028829	TRANS POWER	EI=28X12 230V 50HZ	with PSM only
PT981	5TP1074838	TRANS POWER	EI=74X42 127V/60Hz	
Q981	TZTC3205Y-	TR	KTC3205Y (KTC2236Y) AUTO	with PSM only
R980	RN-2Y475J-	R METAL FILM	1/2 4.7M OHM J	
R981	RD-4Z101J-	R CARBON FILM	1/4 100 OHM J	with PSM only
R982	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	with PSM only
R983	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	with PSM only
RF980	RF01F4780J-32	R FUSIBLE	1W 0.47 OHM J (32倍)	with PSM only
RF981	RF01F4780J-32	R FUSIBLE	1W 0.47 OHM J (32倍)	with PSM only
RF982	RF01F4780J-32	R FUSIBLE	1W 0.47 OHM J (32倍)	
RF983	RF01F4780J-32	R FUSIBLE	1W 0.47 OHM J (32倍)	
RY980	5SC2001A01	SW RELAY	SDT-S-105LMR	with PSM only
TP980	9716404000	PIN WRAPPING	MFZN1.1X1.1 PANASERT	
TP981	9716404000	PIN WRAPPING	MFZN1.1X1.1 PANASERT	

REMOCON Ass'y

Loc.	Part Code	Part Name	Description	Remark/Option
10	9CDM046619	REMOCON	ARM-4015	