


JVC

SERVICE MANUAL

STEREO DOUBLE CASSETTE DECK RECEIVER

DR-E300BK


MODEL No. **DR-E300LBK**

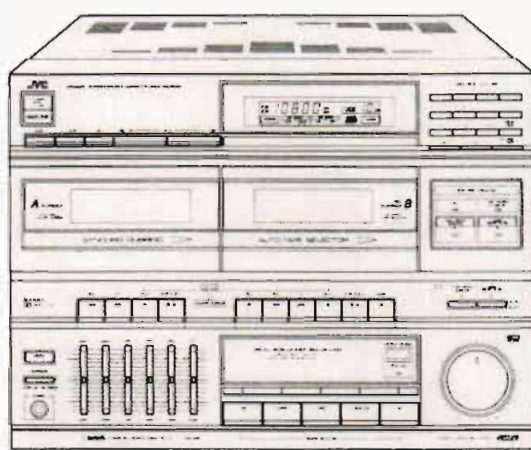


Contents

	Page
Safety Precautions	1- 2
Instruction Book	1- 3
Block Diagram	1-23
Removal Procedures	1-25
FM/MW/LW Tuner Alignment Procedures	1-27
Cassette Deck Adjustment Procedures	1-30
Troubleshooting the Cassette Amplifier P.C. Board	1-33
Internal Block Diagrams of Major ICs	1-36
Connection Diagram	1-41
Parts List	Separate Volume Insertion
Schematic Diagrams	Insertion

(3) Cassette & Power Amplifier Section

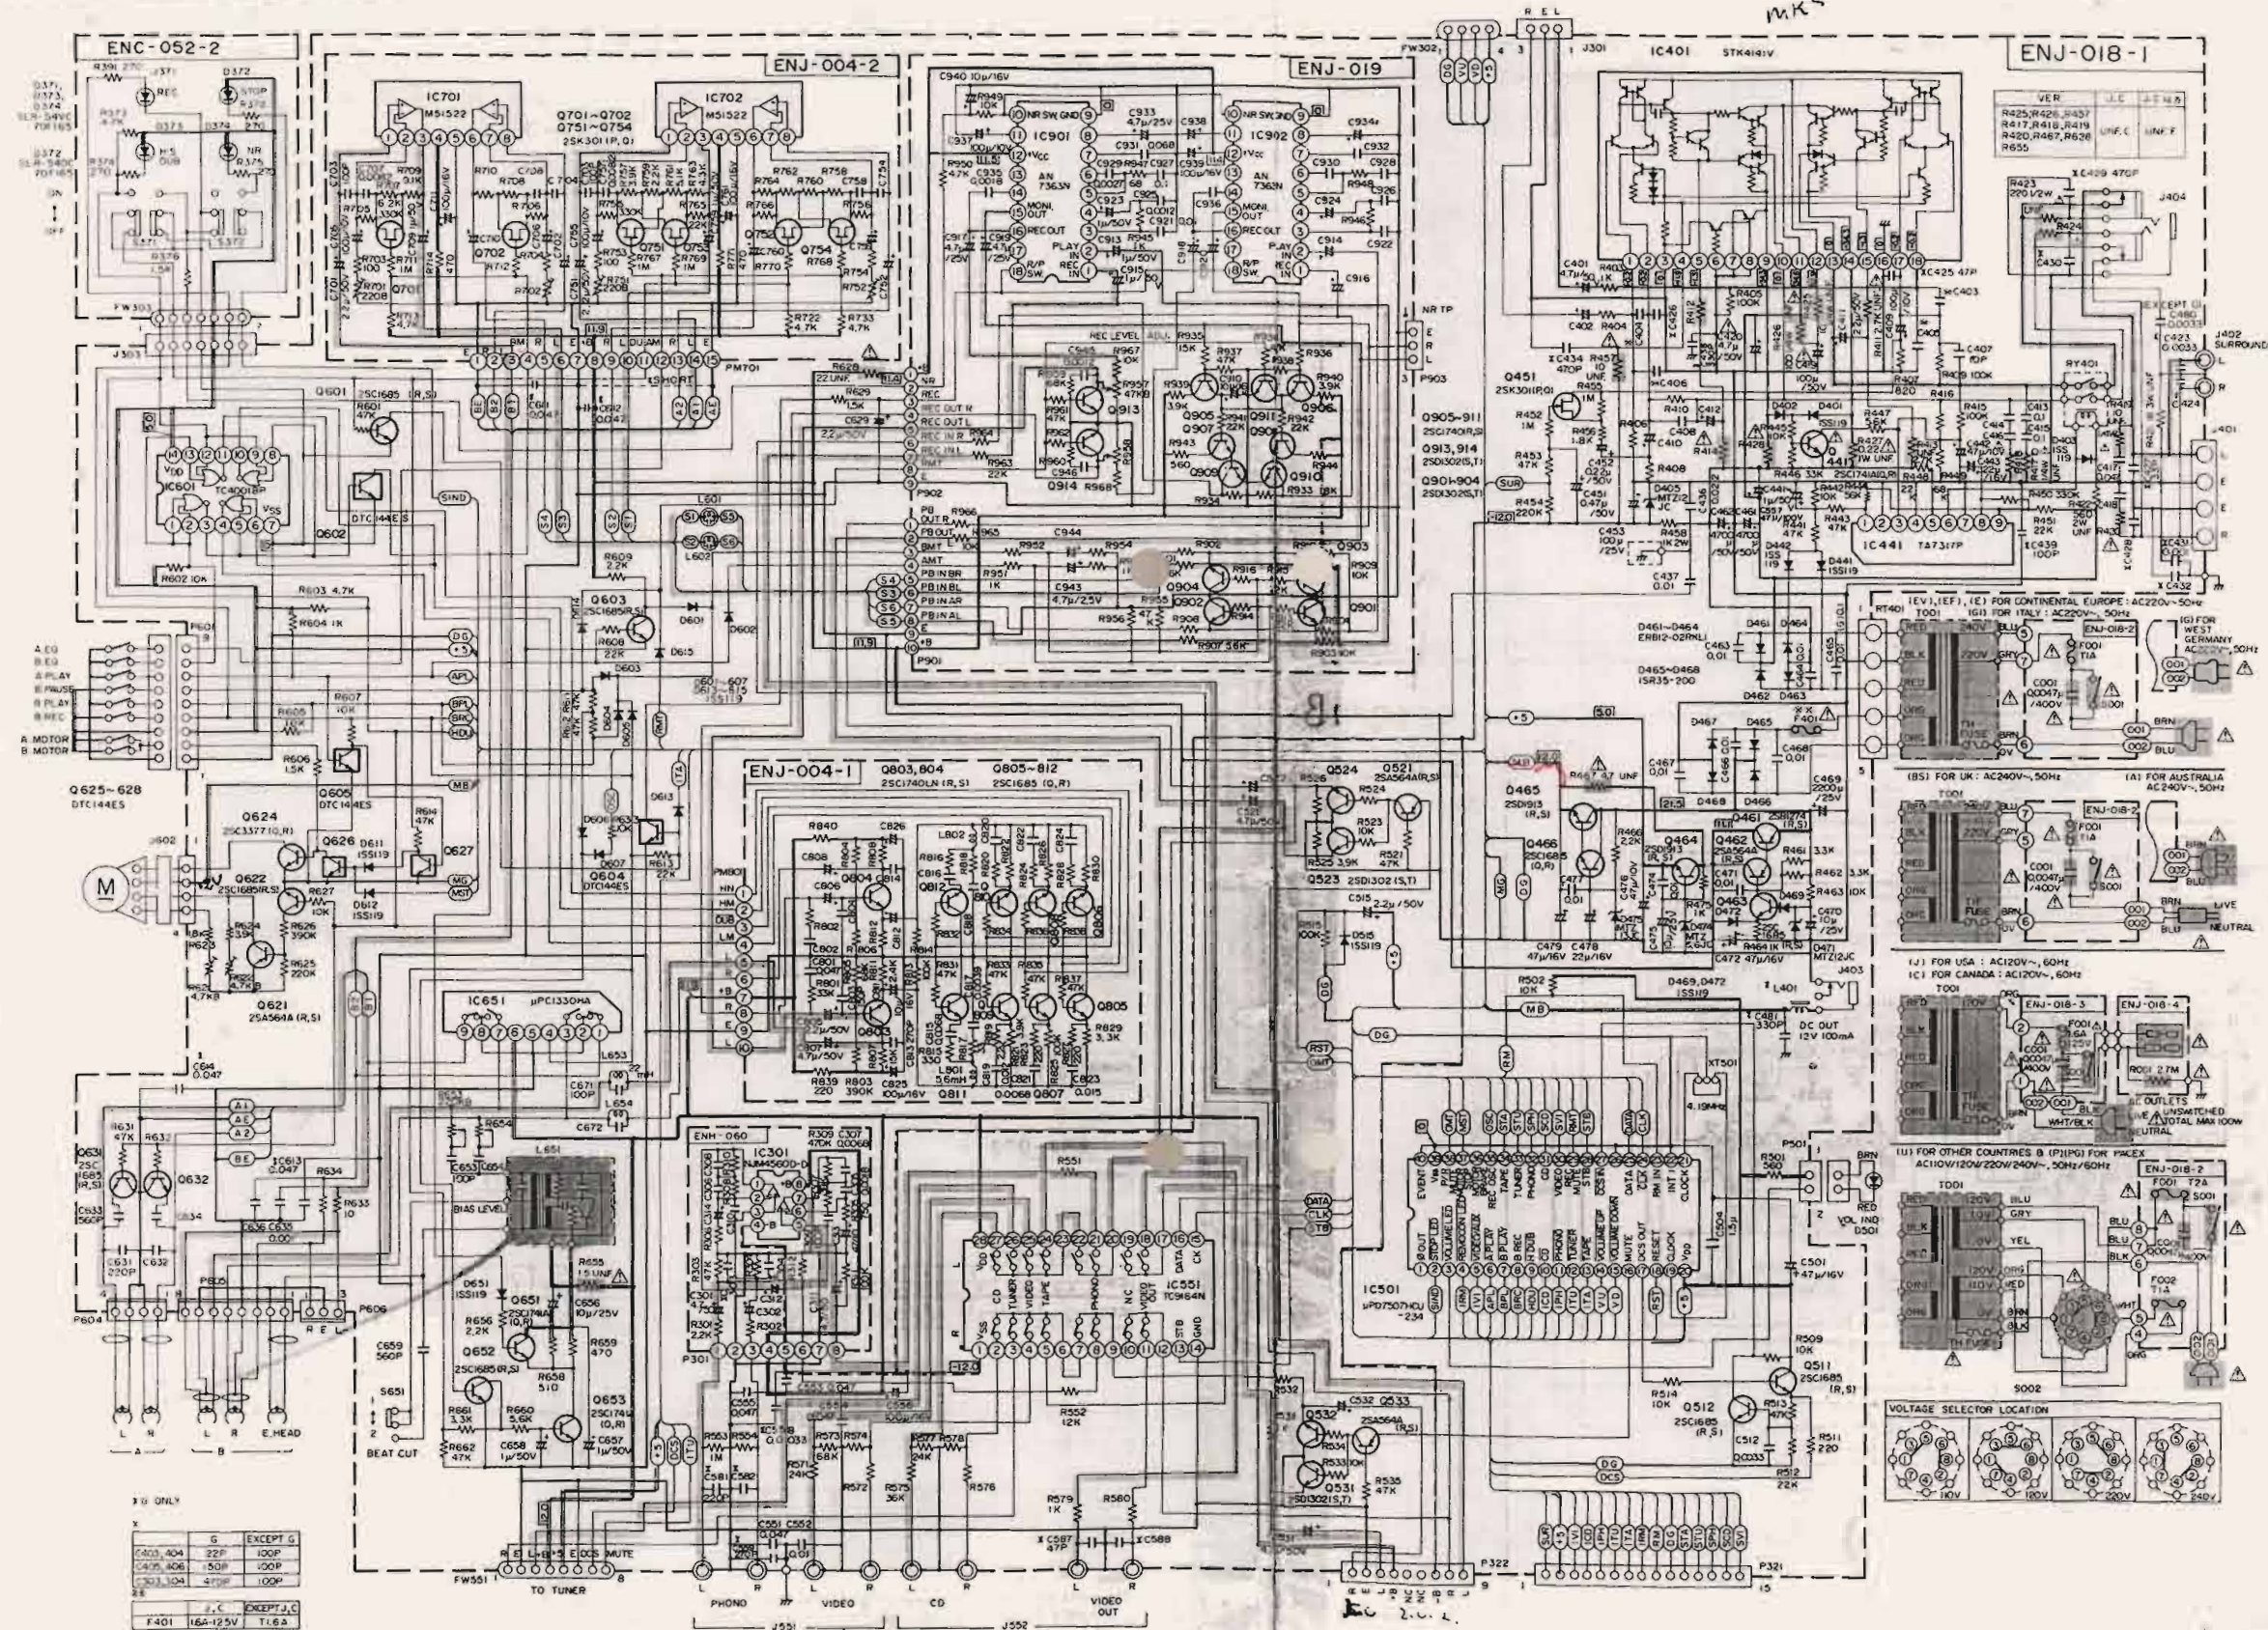

Schematic Diagrams (1) FM/AM Tuner Section

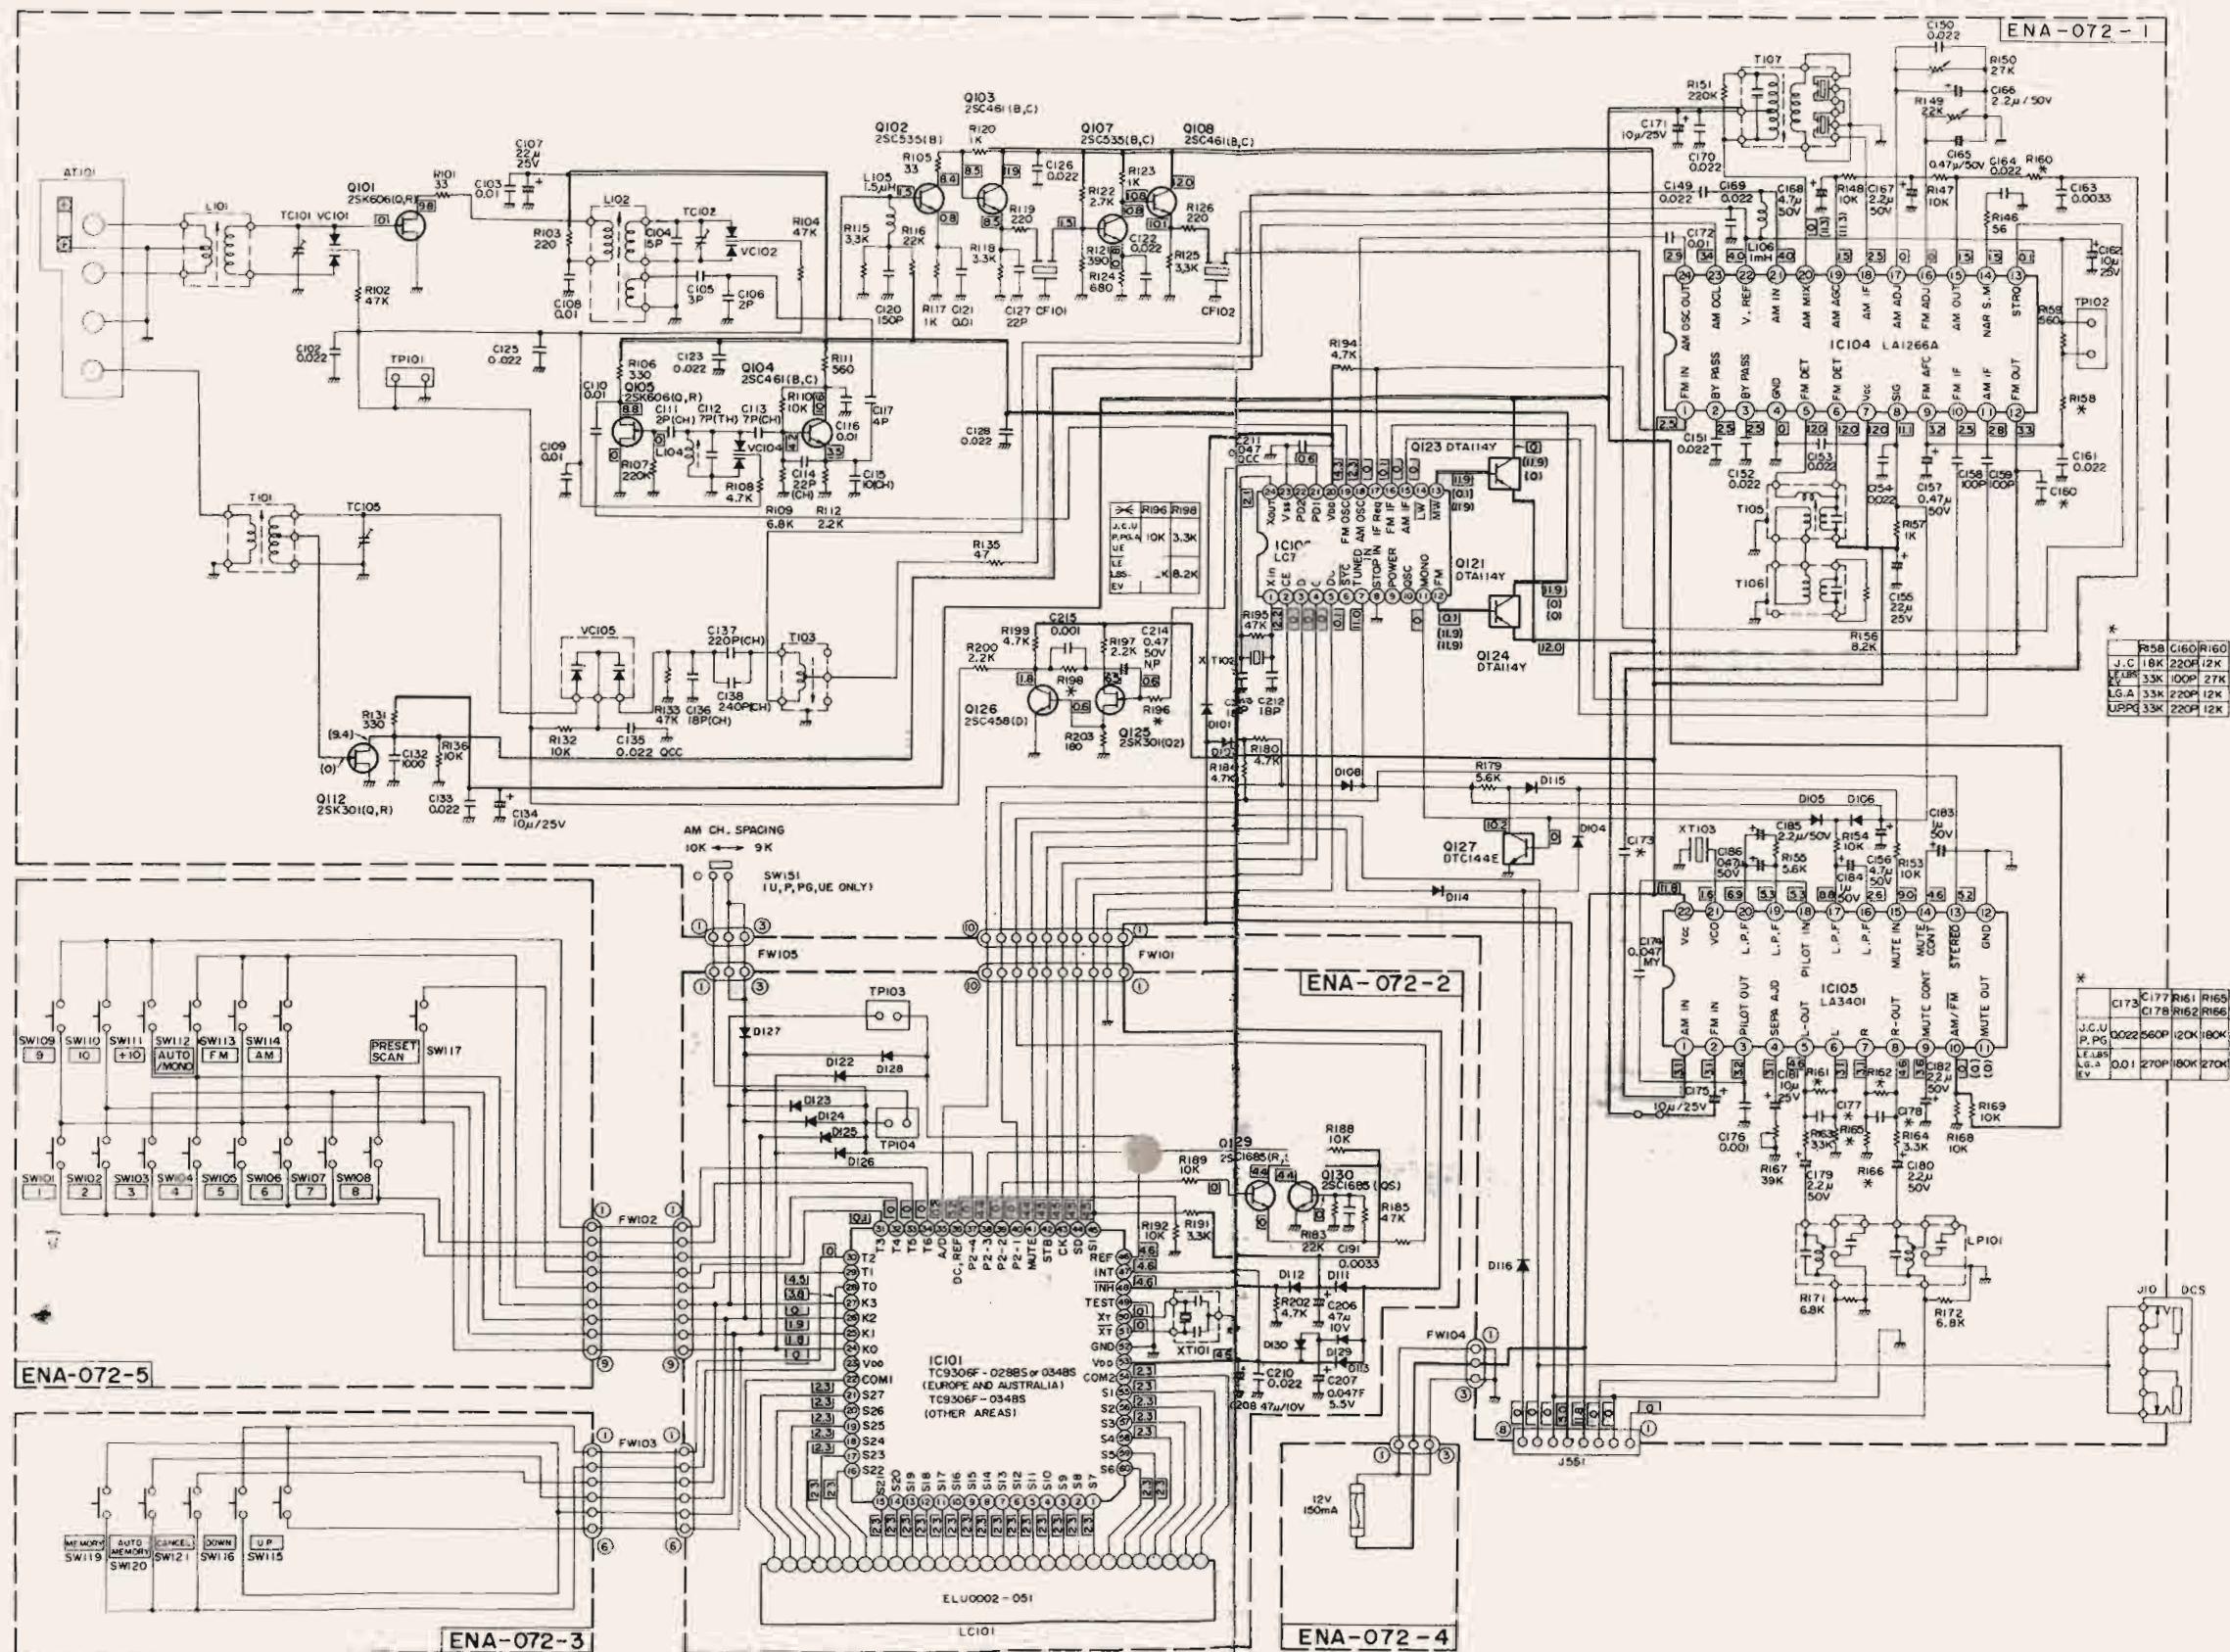


Notes:

1. shows DC voltage to the chassis with no signal input.
2. indicates $\pm B$ power supply.
3. indicates signal path.
4. When replacing the parts in the darkened are () and those marked with Δ , be sure to use the designated parts to ensure safety.
5. This is the standard circuit diagram.
The design and contents are subject to change without notice.

DR-E300BK
DR-E300LBK

DR-E300BK
DR-E300LBK


(2) FM/MW/LW Tuner Section

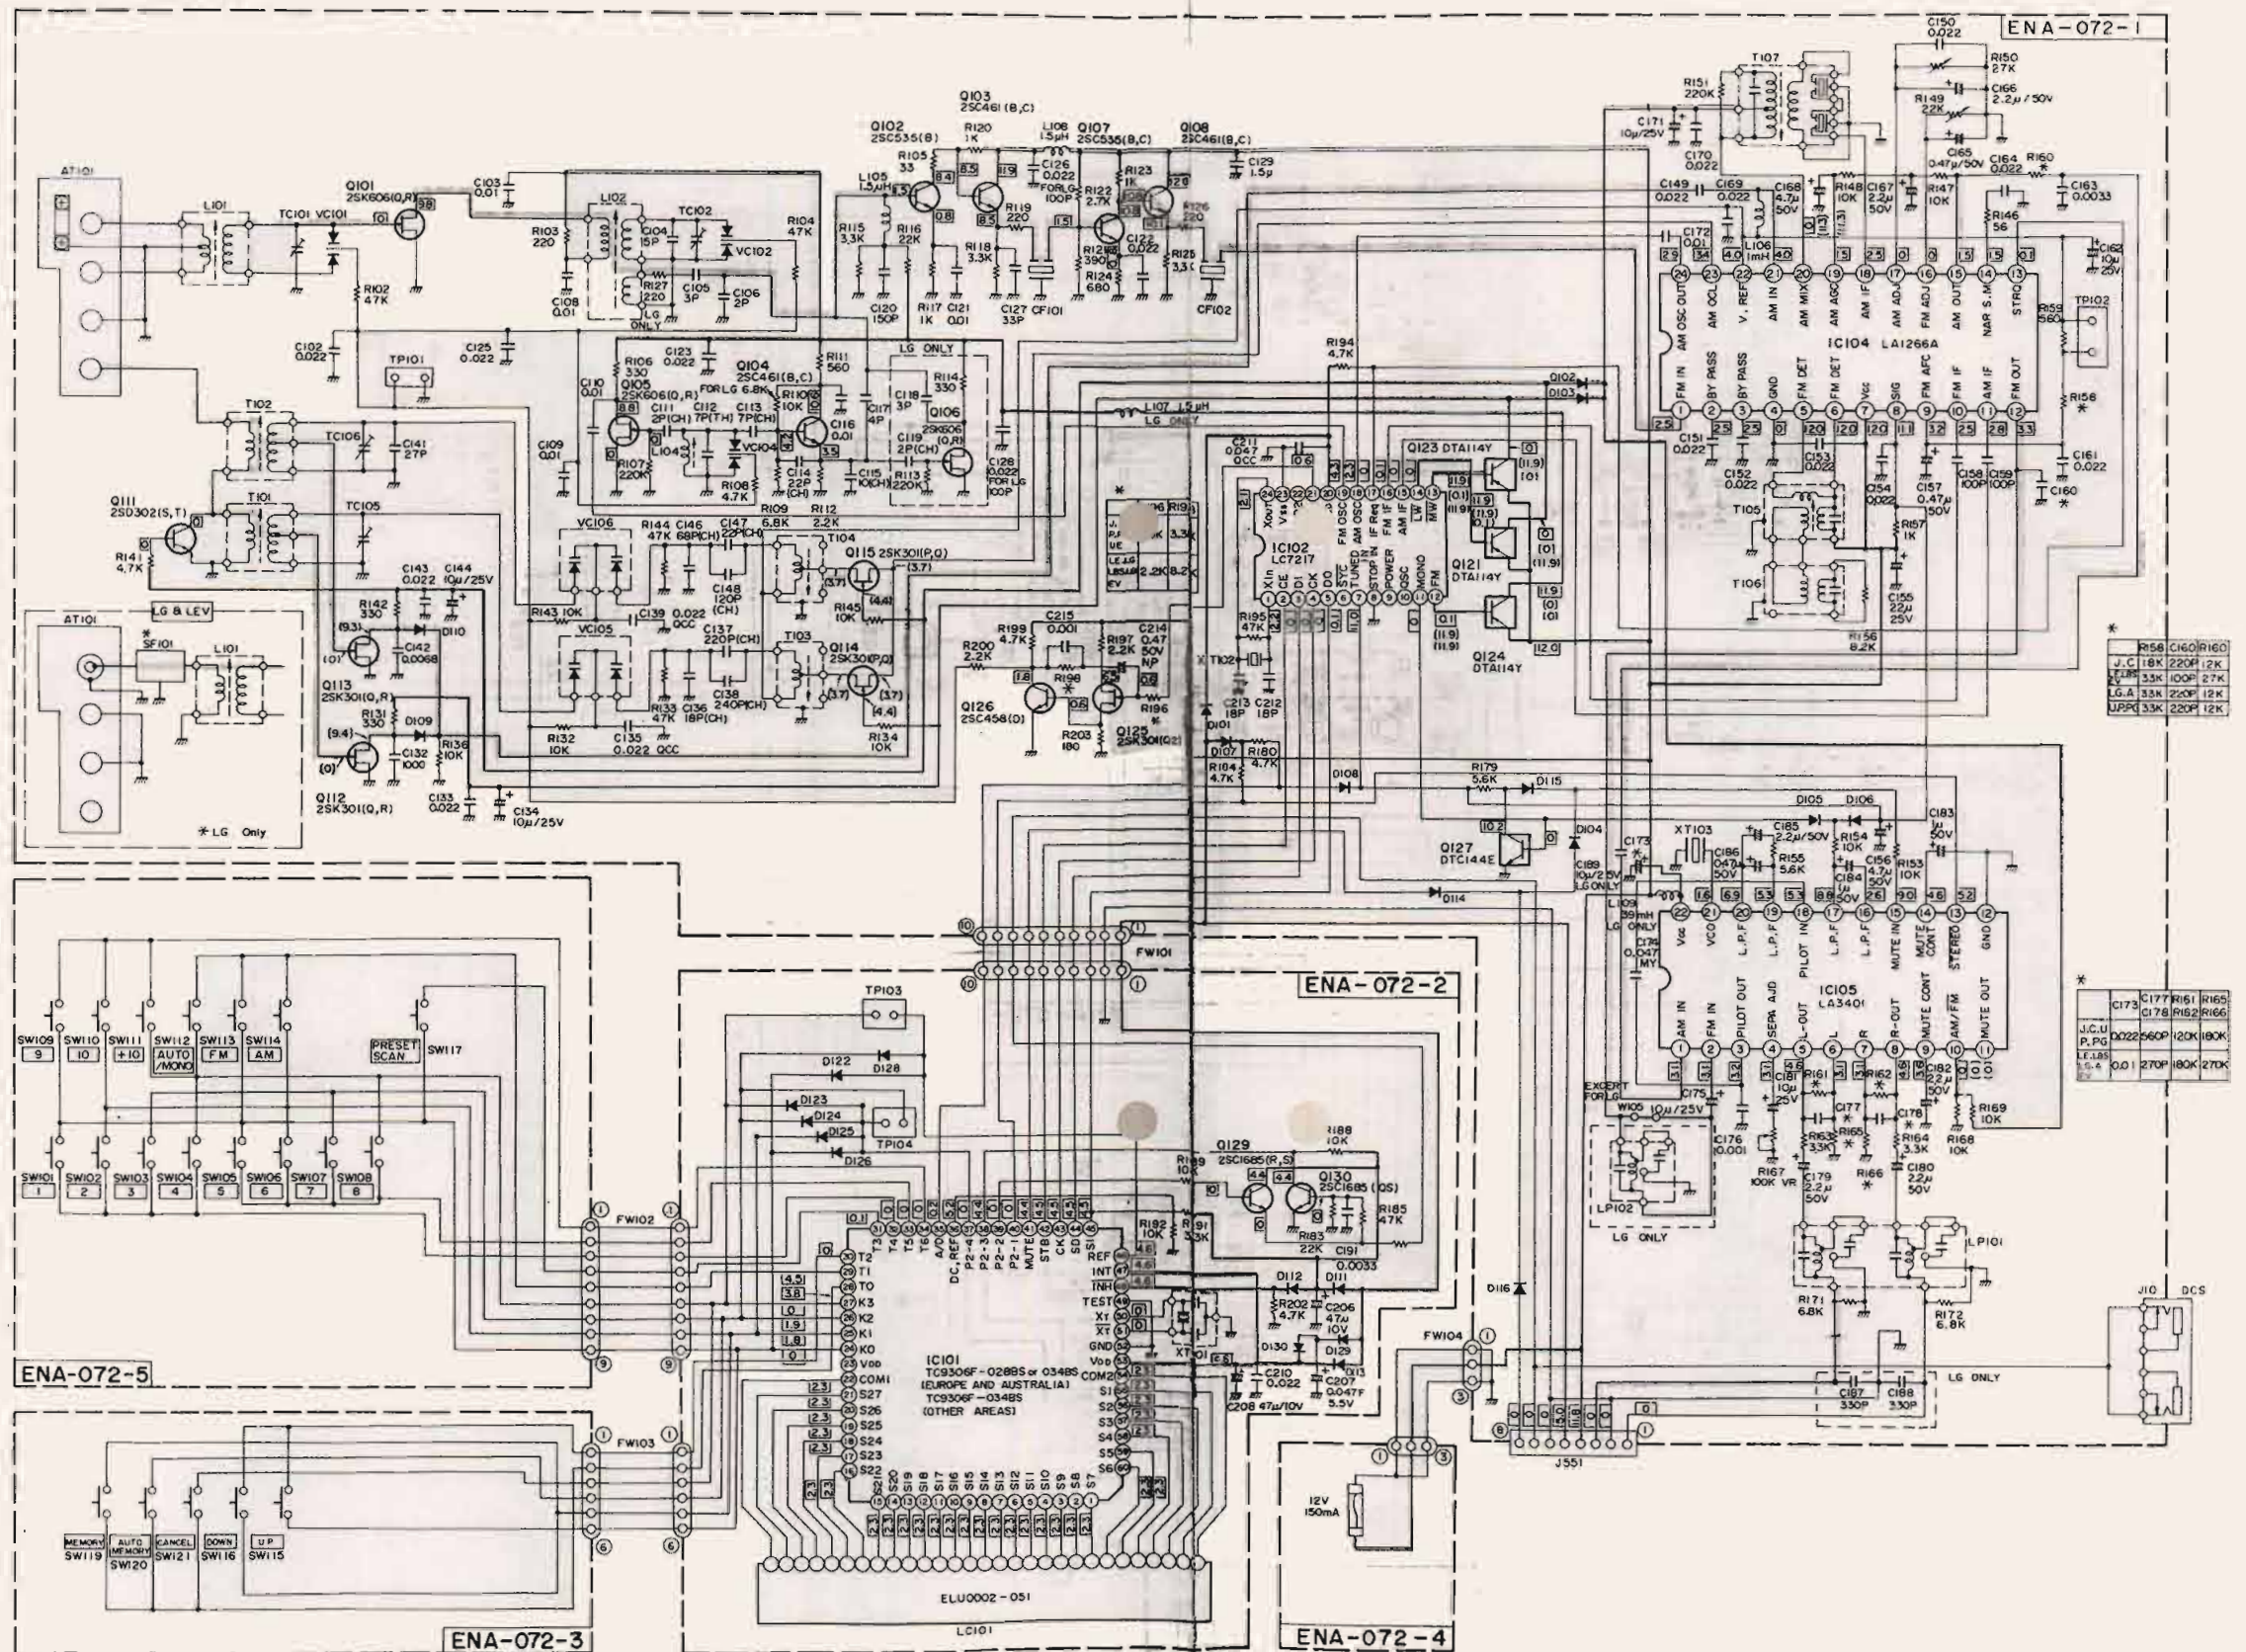

Notes:

1. shows DC voltage to the chassis with no signal input.
2. indicates $\pm B$ power supply.
3. indicates signal path.
4. When replacing the parts in the darkened are () and those marked with Δ , be sure to use the designated parts to ensure safety.
5. This is the standard circuit diagram.
The design and contents are subject to change without notice.

ENJ-018

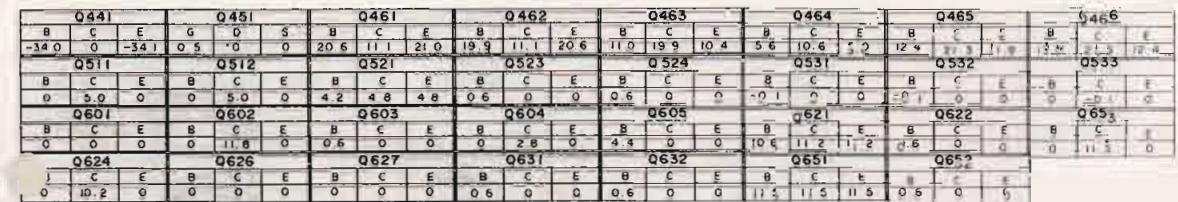

P602	1	2	3	4
	10.2	11.2	11.2	11.2
P601	1	2	3	4
	11.9	5.0	4.5	0
P501	1	2		
	2.2	0.2		

FW551	1	2	3	4	5	6	7	8
	0	0	0	12.0	5.1	0	0	0.2

IC301	1	2	3	4	5	6	7	8
	0	0	0	-11.8	0	0	0	12.0
P301	1	2	3	4	5	6	7	8
	0	0	0	12.0	-11.8	0	0	0

PM801	1	2	3	4	5	6	7	8	9	10
	0	0	37	50	0	0	119	0	0	0

PM701	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	0	0	0	11.9	0	0	0	11.9	0	0	0	11.9	0	0	0

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
K901	6.0	6.0	5.9	6.0	6.0	6.0	6.0	6.0	0	1.8	6.0	11.5	3.3	6.0	6.1	6.1	5.0	2.7
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
K902	6.0	5.9	5.9	6.0	6.0	6.0	6.0	6.0	0	1.8	6.0	11.4	3.3	6.0	6.1	6.1	5.0	2.7

Q901			Q902			Q903			Q904			Q905			Q906			Q907			Q908		
B	C	E	B	C	E	B	C	E	B	C	E	B	C	E	B	C	E	B	C	E	B	C	E
0.6	0	0	0.6	0	0	0.6	0	0	0.6	0	0	0	11.9	0	0	11.9	0	0	11.9	0	0	11.9	0
Q909			Q910			Q911			Q913			Q914											
B	C	E	B	C	E	B	C	E	B	C	E	B	C	E									
0	0	0	0	0	0	0.6	0	0	0.6	0	0	0.6	0	0									

P901	1	2	3	4	5	6	7	8	9	10
	0	0	2.3	3.9	0	0	0	0	0	11.9
P902	1	2	3	4	5	6	7	8	9	
	11.4	0.1	2.7	0	0	0	0	3.3	0	

(iv. 20024)