

KRF-V5300D


ACCESSORIES / CAUTIONS

Accessories


FM indoor antenna (1)
(T90-0877-05)




AM loop antenna (1)
(T90-0893-05)



Remote control unit (1)
RC-R0517
(A70-1719-05)



Batteries (R03) (2)
(-)



Note: Block diagram and Circuit Description are available from KRF-V5200D service manual (B53-4008-00).

Cautions

Information on Disposal of Old Electrical and Electronic Equipment (applicable for EU countries that have adopted separate waste collection systems)



Products with the symbol (crossed-out wheeled bin) cannot be disposed as household waste. Old electrical and electronic equipment should be recycled at a facility capable of handling these items and their waste by products.

Contact your local authority for details in locating a recycle facility nearest to you.

Proper recycling and waste disposal will help conserve resources whilst preventing detrimental effects on our health and the environment.

Resetting the Microcomputer

The microcomputer may malfunction (unit cannot be operated, or shows an erroneous display) if the power cord is unplugged while the power is ON, or due to some other external factor. If this happens, execute the following procedure to reset the microcomputer and return the unit to its normal operating condition.

While holding down [⏻] key on the unit, unplug the power cord and plug it back in.

- Please note that resetting the microcomputer will clear the contents of the memory and return the unit to the state it was in when it left the factory.

Memory back up function

Please note that the following items will be deleted from the unit's memory if the power cord is disconnected from the AC outlet for approximately 1 day.

- **Input selector settings**
- **Volume level**
- **BASS, TREBLE, INPUT level**
- **TONE ON/OFF**
- **ACTIVE EQ mode**
- **Dimmer level**
- **Speaker settings**
- **Sound Adjustment (Input level, Midnight mode, Panorama mode, Dimension mode, Center Width mode)**
- **Listen mode setting**
- **Tuner setting**

RDS


Manufactured under license from Dolby Laboratories. "Dolby", "Pro Logic" and the double-D symbol are trademarks of Dolby Laboratories.



"DTS" and "DTS Digital Surround" are registered trademarks of DTS, Inc.



EXPLODED VIEW

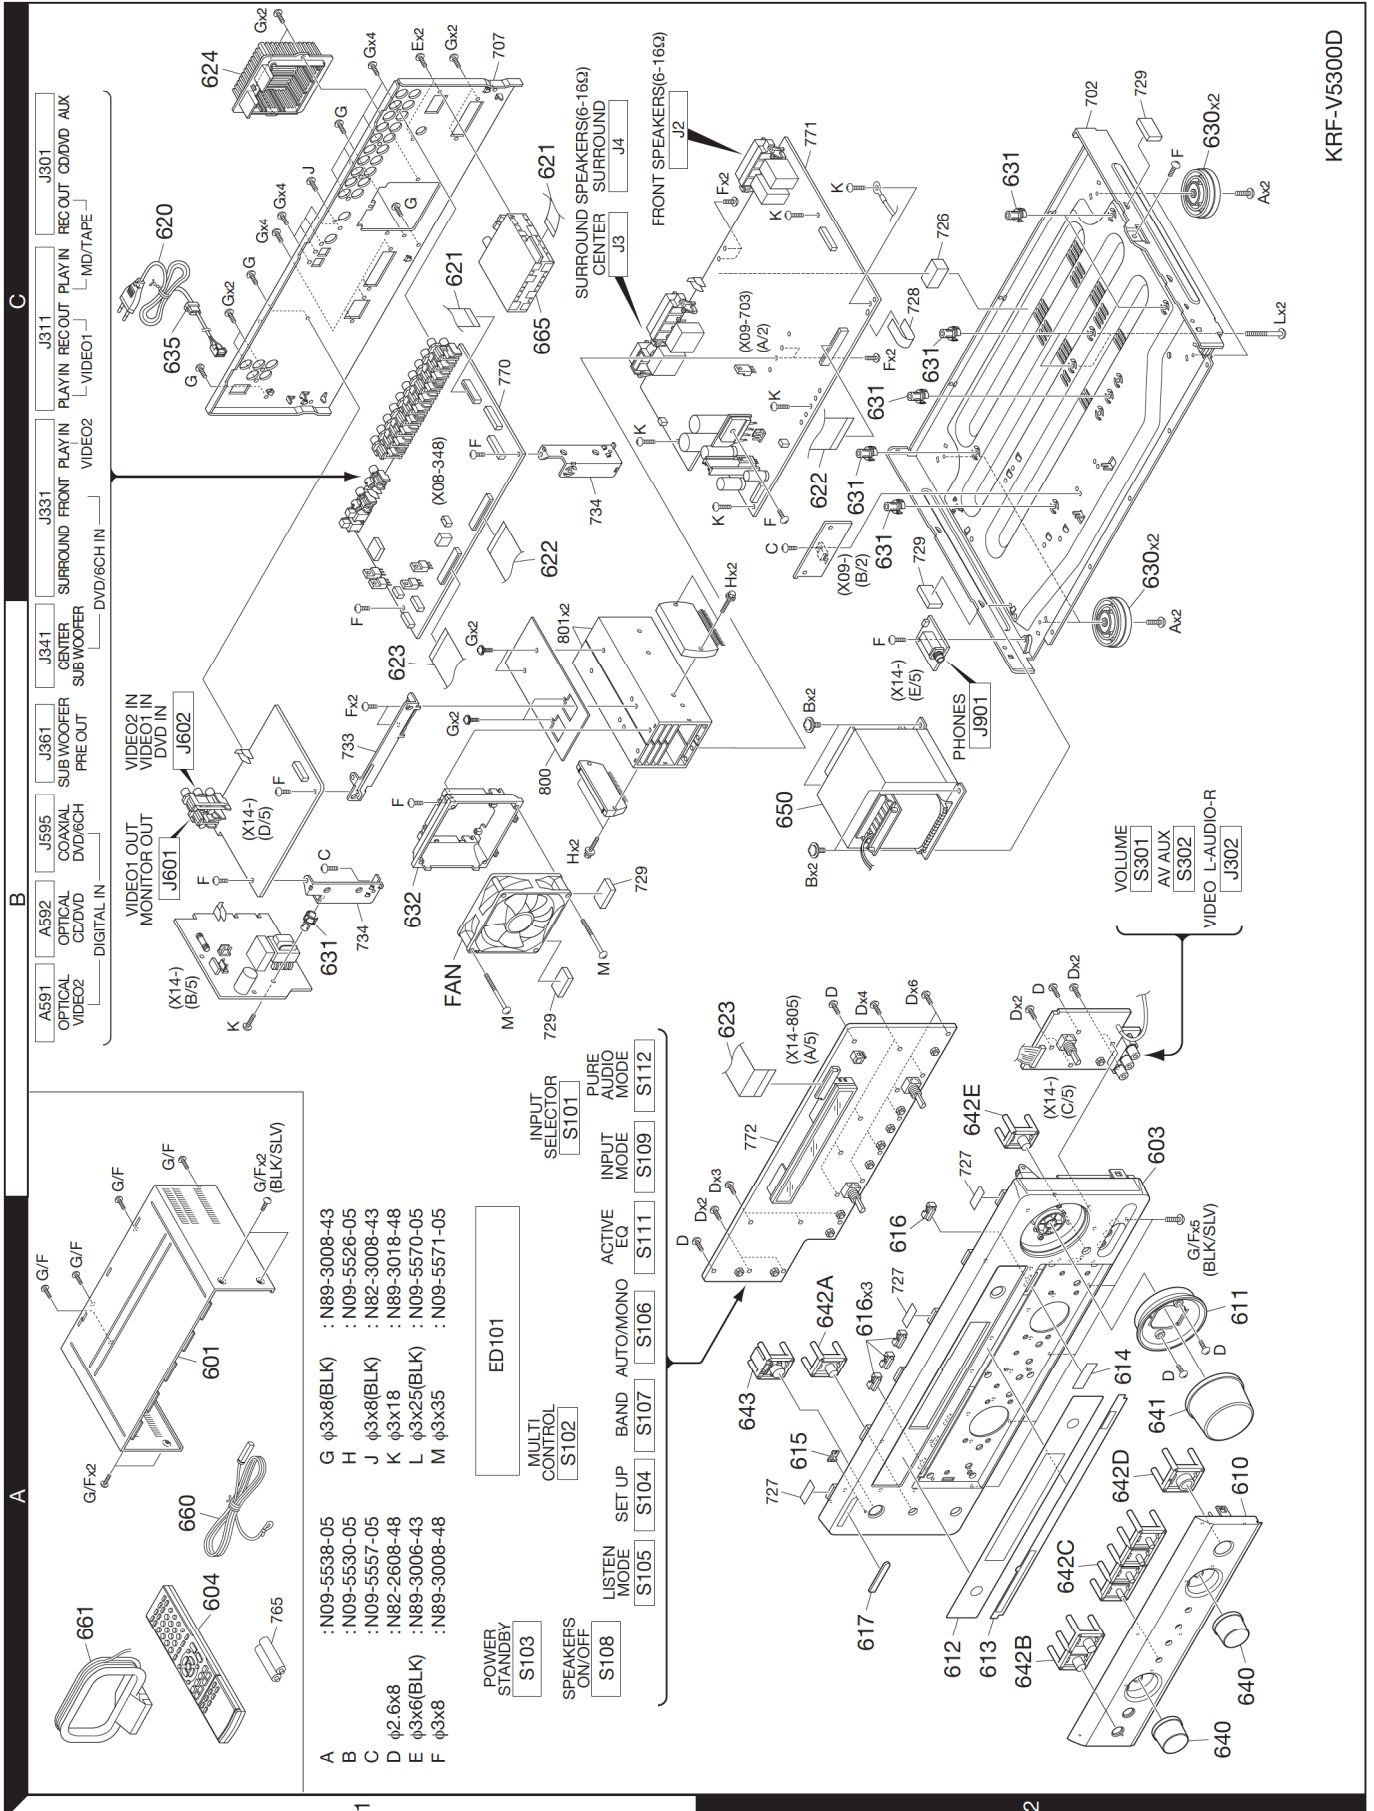

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

1

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
KRF-V5300D						
601	1A		A01-3976-11	METALLIC CABINET,SILVER	S	
601	1A		A01-3977-11	METALLIC CABINET,#3976BLACK	S	
603	2B	*	A60-2538-01	PANEL,#2508-5300S	S	
603	2B	*	A60-2539-01	PANEL,#2508-5300	S	
604	1A		A70-1719-05	REMOTE CONTROL ASSY,RC-F0517	B	
-		*	B60-5738-00	INSTRUCTION MANUAL,EN		
-		*	B60-5739-00	INSTRUCTION MANUAL,S-LAN		
610	2A		B07-2745-11	ESCU TCHEON,SILVER	E	
610	2A		B07-2746-11	ESCU TCHEON,#2746BLACK	S	
611	2A		B07-2754-03	ESCU TCHEON,RING-S	B	
611	2A		B07-2755-03	ESCU TCHEON,#2754BLACK	S	
612	2A		B10-5621-02	FRONT GLASS,DISPLAY	B	
613	2A		B10-5623-03	FRONT GLASS,SELECTOR		
614	2A		B11-1634-04	COLOR FILTER,PURE-AUDIO		
615	2A		B12-1408-04	INDICATOR,POWER		
616	2A		B12-1409-04	INDICATOR,SELECTOR		
617	2A		B43-0336-04	BADGE,36*BLACK		
620	1C		E30-7330-05+	AC POWER CORD,AS ROUND PLUG	X	
620	1C		E30-7368-05	AC POWER CORD,EN 2.5A	E	
621	1C		E35-3943-05	FLAT CABLE,TUNER		
622	1C,2C		E35-3948-05	FLAT CABLE,29P X09-X08		
623	1B,2B		E35-3953-05	FLAT CABLE,27P X14-X08		
624	1C		F07-2037-12	COVER,FAN		
FAN	1B		F09-0192-05	FAN		
630	2C		J61-0307-05	WIRE BAND		
631	1B,2C		J02-1464-03	FOOT		
632	1B		J19-3751-04	UNIT HO_LDER		
632	1B		J19-6471-12	HOLDER,FAN		
635	1C		J42-0349-05	POWER CORD BUSHING		
640	2A		K29-8585-04	KNOB,JOG-S	S	
640	2A		K29-8586-04	KNOB,#8586BLACK	B	
641	2A		K29-8103-04	KNOB,VOL-B	B	
641	2A		K29-8104-04	KNOB,#103SILVER	B	
642	2A,2B		K29-8589-02	KNOB,TACT-S	S	
642	2A,2B		K29-8590-02	KNOB,#8589BLACK	S	
643	2A		K29-8591-03	KNOB,POWER	B	
643	2A		K29-8592-03	KNOB,#8591BLACK	S	
650	2B		L07-3353-05	POWER TRANSFORMER,230V	E	
650	2B		L07-3354-05	POWER TRANSFORMER,240V	X	
D			N82-2608-48	BINDING HEAD,TAPTITE SCREW		
F			N89-3008-48	BINDING HEAD,TAPTITE SCREW		
K			N89-3018-48	BINDING HEAD,TAPTITE SCREW		
660	1A		T90-0877-05	LEAD WIRE ANTENNA		
661	1A		T90-0893-05	LOOP ANTENNA,8T		
665	1C		W02-4609-05	TUNER ASSY		
SURROUND (X08-3482-70)						
C11,12			GD04BJ1H100M	10UF		
C13,14			CC73GGCH1H222J	2200PF		50WV
C15,16			CC73GGCH1H101J	100PF		J
C17,18			CC73GGCH1H221J	100PF		J

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C19			CC73GGCH1H470J	47PF		
C20			CC73GGCH1H101J	100PF		J
C21			CK73GB1H472K	4700PF		J
C31,32			CD04BJ1H100M	ELECTRO		K
C33,34			CC73GGCH1H821J	820PF		50WV
C35,36			CC73GGCH1H222J	2200PF		J
C37,38			CC73GGCH1H100D	10UF		J
C37,38			CC73GGCH1H100D	10UF		D
C51,52			CD04BJ1H100M	ELECTRO		50WV
C53			CC73GGCH1H222J	2200PF		J
C54			CQ93FMG1H822J	8200PF		J
C55			CC73GGCH1H182J	1800PF		J
C56			CQ93FMG1H822J	8200PF		J
C57,58			CC73GGCH1H100D	10PF		D
C59			CC73GGCH1H470J	47PF		J
C60			CC73GGCH1H330J	33PF		J
C91,92			CC73GGCH1H220J	22PF		J
C93,94			CC73GGCH1H100D	10PF		D
C95			CK73GB1H102K	1000PF		K
C96			CC73GGCH1H101J	100PF		J
C111			CD04BJ1H2R2M	2.2UF		50WV
C112			CC73GGCH1H471J	470PF		J
C113			CC73GGCH1H222J	2200PF		J
C114			CD04BJ1E470M	47UF		25WV
C115			CC73GGCH1H220J	22PF		J
C116,117			CC73GGCH1H101J	100PF		J
C118			CC73GGCH1H182J	1800PF		J
C128			CC73GGCH1H102J	1000PF		J
C153,154			CC73GGCH1H100D	10PF		D
C158			CC73GGCH1H100D	10PF		D
C161,162			CK73GB1E154K	0.15UF		K
C163,164			CK73GB1H473K	0.047UF		K
C165,166			CK73GB1H223K	0.022UF		K
C171,172			CC73GGCH1H101J	100PF		J
C173,174			CC73GGCH1H100D	10PF		D
C175,176			CC73GGCH1H330J	33PF		J
C177			CC73GGCH1H102J	1000PF		J
C181,182			CC73GGCH1H101J	100PF		J
C183,184			CC73GGCH1H100D	10PF		D
C185,186			CC73GGCH1H330J	33PF		J
C191			CC73GGCH1H101J	100PF		J
C193			CC73GGCH1H100D	10PF		D
C195			CC73GGCH1H330J	33PF		J
C201-218			CD04BJ1H100M	ELECTRO		50WV
C219,220			CC73GGCH1H101J	100PF		J
C221-226			CD04BJ1H100M	ELECTRO		50WV
C231-236			CD04BJ1H100M	ELECTRO		50WV
C237			CC73GGCH1H102J	1000PF		J
C239			CC73GGCH1H100D	10PF		D
C241-244			CD04BJ1H100M	ELECTRO		50WV
C301,302			CC73GGCH1H221J	220PF		J
C303,304			CC73GGCH1H101J	100PF		J
C305,306			CC73GGCH1H221J	220PF		J
C307,308			CC73GGCH1H101J	100PF		J
C309			CK73GB1H102K	1000PF		K
C311,312			CC73GGCH1H221J	220PF		J

L: Scandinavia
Y: PX(Far East,Hawaii)
Y: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
G: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Saghai)
M: Other Areas

I: Malaysia
G: Mexico
H: Korea

Δ Indicates safety critical components.

PARTS LIST

4

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C712			CD04BJ1H100M	ELECTRO		
C713			CK73GCH1H100D	CHIP C		
C714			CD04BJ1H100M	CHIP C		
C715-720			CK73GB1H104K	CHIP C		
C725			CK73GB1H104K	CHIP C		
C731			CK73GB1H104K	CHIP C		
C732			CK73GCH1H101J	CHIP C		
C741-743			CK73GCH1H101J	CHIP C		
C751			CK73GB1H104K	CHIP C		
C761			CK73GCH1H331J	CHIP C		
C762			CK73GCH1H561J	CHIP C		
C763,764			CK73GCH1H220J	CHIP C		
C772			CD04BJ1H100M	ELECTRO		
C773,774			CK73GB1H104K	CHIP C		
C801			CK73GB1H104K	CHIP C		
C802			CD04BJ1A101M	ELECTRO		
C805			CK73GB1H104K	CHIP C		
C806			CD04BJ1A101M	ELECTRO		
C812			CD04BJ1A101M	ELECTRO		
C813			CK73GB1H104K	CHIP C		
C815			CD04BJ1H100M	ELECTRO		
C816			CD04BH1D470M	ELECTRO		
C819			CK73GCH1H100D	CHIP C		
C826			CK73GB1H104K	CHIP C		
C831,832			CK73GB1H102K	CHIP C		
C833,834			CD04BJ1A101M	ELECTRO		
C835,836			CD04BJ1E470M	ELECTRO		
C837			CD04BJ1A101M	ELECTRO		
C851			CK73GB1H103K	CHIP C		
C852			CK73GB1H104K	CHIP C		
C853			CD04AU1E220M	NP ELEC		
C861			CK73GB1H102K	CHIP C		
C862			CK73GB1H104K	CHIP C		
C863			CK73GB1A105K	CHIP C		
C864			CK73GB1H103K	CHIP C		
C871			CD04BJ1H2R2M	ELECTRO		
C872			CK73GB1H104K	CHIP C		
C873			C90-5839-05	BACKUP C		
C874			CD04BJ1A101M	ELECTRO		
C877			CK73GB1H104K	CHIP C		
C878			CK73GB1H103K	CHIP C		
C881			CD04BJ1H100M	ELECTRO		
C882			CK73GB1H103K	CHIP C		
C883			CK73GB1H104K	CHIP C		
C885			CK73GB1H104K	CHIP C		
C886			CK73GCH1H101J	CHIP C		
CN601			E41-1472-05	FLAT CABLE CONNECTOR,1,25MM,29P		
CN604			E41-1470-05	FLAT CABLE CONNECTOR,1,25MM,27P		
CN761			E41-1429-05	FLAT CABLE CONNECTOR,1,25MM,15P		
J301			E63-1338-05	PIN JACK,6P,RED,WHT		
J311			E63-1338-05	PIN JACK,6P,RED,WHT		
J331			E63-1338-05	PIN JACK,6P,RED,WHT		
J341			E63-1417-05	PIN JACK,2P,BLK,BLK		
J361			E63-1146-15	PIN JACK,1P,BLK		
J595			E63-1416-05	PIN JACK,1P,ORG		

L: Scandinavia
Y: PX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shanghai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

3

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C313,314			CK73GCH1H101J	CHIP C		
C315,316			CK73GCH1H221J	CHIP C		
C317,318			CK73GCH1H101J	CHIP C		
C319			CK73GB1H102K	CHIP C		
C321,322			CK73GCH1H221J	CHIP C		
C323,324			CK73GCH1H101J	CHIP C		
C331,332			CK73GCH1H221J	CHIP C		
C333,334			CK73GCH1H101J	CHIP C		
C337,338			CK73GCH1H101J	CHIP C		
C339			CK73GB1H102K	CHIP C		
C341,342			CK73GCH1H221J	CHIP C		
C343,344			CK73GCH1H101J	CHIP C		
C345,346			CK73GCH1H221J	CHIP C		
C347,348			CK73GCH1H101J	CHIP C		
C351,352			CK73GCH1H221J	CHIP C		
C355,356			CK73GCH1H221J	CHIP C		
C361			CD04BJ1H100M	ELECTRO		
C362			CK73GCH1H102J	CHIP C		
C363			CK73GCH1H221J	CHIP C		
C401,402			CK73GCH1H220J	CHIP C		
C416			CK73GCH1H20J	CHIP C		
C421,422			CD04BJ1H100M	ELECTRO		
C423,424			CK73GCH1H471J	CHIP C		
C431			CK73GB1H104K	CHIP C		
C432			CD04BJ1H100M	ELECTRO		
C433,434			CK73GB1H104K	CHIP C		
C435			CD04BJ1A101M	ELECTRO		
C436			CD04BJ1H4R7M	ELECTRO		
C437			CK73GB1H104K	CHIP C		
C438			CK73GCH1H220J	CHIP C		
C439			CD04BJ1H100M	ELECTRO		
C441			CK73GCH1H070D	CHIP C		
C442			CK73GCH1H100D	CHIP C		
C501			CK73GB1H102K	CHIP C		
C502			CD04BJ1H2R2M	ELECTRO		
C503			CK73GB1H103K	CHIP C		
C504			CK73GCH1H471J	CHIP C		
C505			CK73GB1H103K	CHIP C		
C531-534			CK73GB1H104K	CHIP C		
C541			CK73GCH1H100D	CHIP C		
C551			CK73GB1H102K	CHIP C		
C552			CK73GCH1H270J	CHIP C		
C553-555			CK73GCH1H220J	CHIP C		
C556			CK73GB1H102K	CHIP C		
C561			CK73GB1H103K	CHIP C		
C571			CK73GB1H103K	CHIP C		
C581			CD04BJ1A101M	ELECTRO		
C593			CK73GCH1H220J	CHIP C		
C595			CK73GB1H472K	CHIP C		
C596			CK73GB1H103K	CHIP C		
C601			CK73GB1H103K	CHIP C		
C602			CK73GCH1H101J	CHIP C		
C603,604			CK73GB1H102K	CHIP C		
C605-608			CK73GB1H103K	CHIP C		
C711			CK73GCH1H100D	CHIP C		

L: Scandinavia
Y: PX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shanghai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R305,306			RK73GB2A221J	CHIP R		1/10W
R307,308			RK73GB2A224J	CHIP R		1/10W
R309			RK73GB2A2R2J	CHIP R		1/10W
R311,312			RK73GB2A221J	CHIP R		1/10W
R313,314			RK73GB2A224J	CHIP R		1/10W
R315,316			RK73GB2A221J	CHIP R		1/10W
R317,318			RK73GB2A224J	CHIP R		1/10W
R319			RK73GB2A2R2J	CHIP R		1/10W
R321,322			RK73GB2A221J	CHIP R		1/10W
R323,324			RK73GB2A224J	CHIP R		1/10W
R331,332			RK73GB2A221J	CHIP R		1/10W
R333,334			RK73GB2A224J	CHIP R		1/10W
R335,336			RK73GB2A123J	CHIP R		1/10W
R337,338			RK73GB2A223J	CHIP R		1/10W
R339			RK73GB2A2R2J	CHIP R		1/10W
R341,342			RK73GB2A123J	CHIP R		1/10W
R343,344			RK73GB2A223J	CHIP R		1/10W
R345,346			RK73GB2A123J	CHIP R		1/10W
R347,348			RK73GB2A223J	CHIP R		1/10W
R351,352			RK73GB2A224J	CHIP R		1/10W
R353,354			RK73GB2A471J	CHIP R		1/10W
R355,356			RK73GB2A224J	CHIP R		1/10W
R357,358			RK73GB2A471J	CHIP R		1/10W
R361			RK73GB2A152J	CHIP R		1.5K
R362			RK73GB2A104J	CHIP R		100K
R363			RK73GB2A101J	CHIP R		100
R364			RK73GB2A102J	CHIP R		1.0K
R371,372			RK73GB2A220J	CHIP R		22
R373,374			RK73GB2A102J	CHIP R		1.0K
R375,376			RK73GB2A220J	CHIP R		22
R377,378			RK73GB2A102J	CHIP R		1.0K
R401			RK73GB2A220J	CHIP R		22
R403			RK73GB2A151J	CHIP R		150
R405			RK73GB2A151J	CHIP R		150
R407			RK73GB2A220J	CHIP R		22
R408-410			RK73GB2A181J	CHIP R		180
R411,412			RK73GB2A221J	CHIP R		220
R413,414			RK73GB2A220J	CHIP R		22
R415			RK73GB2A183J	CHIP R		18K
R416			RK73GB2A101J	CHIP R		100
R421,422			RK73GB2A103J	CHIP R		10K
R423,424			RK73GB2A183J	CHIP R		18K
R431			RK73GB2A3R3J	CHIP R		3.3
R432			RK73GB2A1R0J	CHIP R		1.0
R434			RK73GB2A2R2J	CHIP R		2.2
R437			RK73GB2A1R0J	CHIP R		1.0
R438			RK73GB2A102J	CHIP R		1.0K
R441,442			RK73GB2A100J	CHIP R		10
R502,503			RK73GB2A332J	CHIP R		3.3K
R504-507			RK73GB2A221J	CHIP R		220
R508			RK73GB2A332J	CHIP R		3.3K
R509			RK73GB2A221J	CHIP R		220
R510			RK73GB2A332J	CHIP R		3.3K
R511			RK73GB2A103J	CHIP R		10K
R512-517			RK73GB2A220J	CHIP R		22

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
E1			J11-0898-05	WIRE CLAMPER		
X551			L77-2296-15	CRYSTAL RESONATOR (12.288MHZ)		
X601			L78-0725-05	RESONATOR (8.38MHZ)		
X761			L77-2002-05	CRYSTAL RESONATOR (4.332MHZ)		
CP501,502			RK74GB1J103J	CHIP-COM		1/16W
R11,12			RK73GB2A104J	CHIP R		100K
R13,16			RK73GB2A222J	CHIP R		2.2K
R17,18			RK73GB2A472J	CHIP R		4.7K
R19,20			RK73GB2A103J	CHIP R		10K
R21,22			RK73GB2A331J	CHIP R		330
R23,24			RK73GB2A220J	CHIP R		22
R31,32			RK73GB2A104J	CHIP R		100K
R33,34			RK73GB2A332J	CHIP R		3.3K
R35,36			RK73GB2A222J	CHIP R		2.2K
R37,38			RK73GB2A562J	CHIP R		5.6K
R39,40			RK73GB2A272J	CHIP R		2.7K
R41,42			RK73GB2A351J	CHIP R		330
R43,44			RK73GB2A220J	CHIP R		22
R51,52			RK73GB2A104J	CHIP R		100K
R53			RK73GB2A222J	CHIP R		2.2K
R54			RK73GB2A153J	CHIP R		15K
R55			RK73GB2A222J	CHIP R		2.2K
R56			RK73GB2A183J	CHIP R		18K
R57			RK73GB2A472J	CHIP R		4.7K
R58			RK73GB2A562J	CHIP R		5.6K
R59,60			RK73GB2A103J	CHIP R		10K
R61,62			RK73GB2A351J	CHIP R		330
R63,64			RK73GB2A220J	CHIP R		22
R91,92			RK73GB2A272J	CHIP R		2.7K
R93-96			RK73GB2A103J	CHIP R		10K
R97,98			RK73GB2A331J	CHIP R		330
R11			RK73GB2A104J	CHIP R		100K
R12			RK73GB2A333J	CHIP R		33K
R13			RK73GB2A102J	CHIP R		1.0K
R14			RK73GB2A333J	CHIP R		33K
R15			RK73GB2A162J	CHIP R		1.6K
R121,122			RK73GB2A472J	CHIP R		4.7K
R123,124			RK73GB2A562J	CHIP R		5.6K
R126-128			RK73GB2A101J	CHIP R		100
R151-153			RK73GB2A331J	CHIP R		330
R161,162			RK73GB2A472J	CHIP R		4.7K
R171,172			RK73GB2A101J	CHIP R		100
R173,174			RK73GB2A103J	CHIP R		10K
R175,176			RK73GB2A472J	CHIP R		4.7K
R181,182			RK73GB2A101J	CHIP R		100
R183,184			RK73GB2A103J	CHIP R		10K
R185,186			RK73GB2A472J	CHIP R		4.7K
R191			RK73GB2A101J	CHIP R		100
R193			RK73GB2A103J	CHIP R		10K
R195			RK73GB2A472J	CHIP R		4.7K
R201-206			RK73GB2A101J	CHIP R		100
R209			RK73GB2A100J	CHIP R		10
R301,302			RK73GB2A221J	CHIP R		220
R303,304			RK73GB2A224J	CHIP R		220K

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
E1			J11-0898-05	WIRE CLAMPER		
X551			L77-2296-15	CRYSTAL RESONATOR (12.288MHZ)		
X601			L78-0725-05	RESONATOR (8.38MHZ)		
X761			L77-2002-05	CRYSTAL RESONATOR (4.332MHZ)		
CP501,502			RK74GB1J103J	CHIP-COM		1/16W
R11,12			RK73GB2A104J	CHIP R		100K
R13,16			RK73GB2A222J	CHIP R		2.2K
R17,18			RK73GB2A472J	CHIP R		4.7K
R19,20			RK73GB2A103J	CHIP R		10K
R21,22			RK73GB2A331J	CHIP R		330
R23,24			RK73GB2A220J	CHIP R		22
R31,32			RK73GB2A104J	CHIP R		100K
R33,34			RK73GB2A332J	CHIP R		3.3K
R35,36			RK73GB2A222J	CHIP R		2.2K
R37,38			RK73GB2A562J	CHIP R		5.6K
R39,40			RK73GB2A272J	CHIP R		2.7K
R41,42			RK73GB2A351J	CHIP R		330
R43,44			RK73GB2A220J	CHIP R		22
R51,52			RK73GB2A104J	CHIP R		100K
R53			RK73GB2A222J	CHIP R		2.2K
R54			RK73GB2A153J	CHIP R		15K
R55			RK73GB2A222J	CHIP R		2.2K
R56			RK73GB2A183J	CHIP R		18K
R57			RK73GB2A472J	CHIP R		4.7K
R58			RK73GB2A562J	CHIP R		5.6K
R59,60			RK73GB2A103J	CHIP R		10K
R61,62			RK73GB2A351J	CHIP R		330
R63,64			RK73GB2A220J	CHIP R		22
R91,92			RK73GB2A272J	CHIP R		2.7K
R93-96			RK73GB2A103J	CHIP R		10K
R97,98			RK73GB2A331J	CHIP R		330
R11			RK73GB2A104J	CHIP R		100K
R12			RK73GB2A333J	CHIP R		33K
R13			RK73GB2A102J	CHIP R		1.0K
R14			RK73GB2A333J	CHIP R		33K
R15			RK73GB2A162J	CHIP R		1.6K
R121,122			RK73GB2A472J	CHIP R		4.7K
R123,124			RK73GB2A562J	CHIP R		5.6K
R126-128			RK73GB2A101J	CHIP R		100
R151-153			RK73GB2A331J	CHIP R		330
R161,162			RK73GB2A472J	CHIP R		4.7K
R171,172			RK73GB2A101J	CHIP R		100
R173,174			RK73GB2A103J	CHIP R		10K
R175,176			RK73GB2A472J	CHIP R		4.7K
R181,182			RK73GB2A101J	CHIP R		100
R183,184			RK73GB2A103J	CHIP R		10K
R185,186			RK73GB2A472J	CHIP R		4.7K
R191			RK73GB2A101J	CHIP R		100
R193			RK73GB2A103J	CHIP R		10K
R195			RK73GB2A472J	CHIP R		4.7K
R201-206			RK73GB2A101J	CHIP R		100
R209			RK73GB2A100J	CHIP R		10
R301,302			RK73GB2A221J	CHIP R		220
R303,304			RK73GB2A224J	CHIP R		220K

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
E1			J11-0898-05	WIRE CLAMPER		
X551			L77-2296-15	CRYSTAL RESONATOR (12.288MHZ)		
X601			L78-0725-05	RESONATOR (8.38MHZ)		
X761			L77-2002-05	CRYSTAL RESONATOR (4.332MHZ)		
CP501,502			RK74GB1J103J	CHIP-COM		1/16W
R11,12			RK73GB2A104J	CHIP R		100K
R13,16						

PARTS LIST

8

* New parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R642			RK73GB2A104J	CHIP R	J	1/10W
R643-645			RK73GB2A101J	CHIP R	J	1/10W
R646			RK73GB2A222J	CHIP R	J	1/10W
R647			RK73GB2A101J	CHIP R	J	1/10W
R649,650			RK73GB2A101J	CHIP R	J	1/10W
R652			RK73GB2A101J	CHIP R	J	1/10W
R653			RK73GB2A223J	CHIP R	J	1/10W
R654			RK73GB2A101J	CHIP R	J	1/10W
R655			RK73GB2A223J	CHIP R	J	1/10W
R656			RK73GB2A101J	CHIP R	J	1/10W
R657			RK73GB2A223J	CHIP R	J	1/10W
R658			RK73GB2A101J	CHIP R	J	1/10W
R659			RK73GB2A473J	CHIP R	J	1/10W
R660			RK73GB2A101J	CHIP R	J	1/10W
R661			RK73GB2A473J	CHIP R	J	1/10W
R662,663			RK73GB2A101J	CHIP R	J	1/10W
R664			RK73GB2A473J	CHIP R	J	1/10W
R665-673			RK73GB2A101J	CHIP R	J	1/10W
R674			RK73GB2A222J	CHIP R	J	1/10W
R675-685			RK73GB2A101J	CHIP R	J	1/10W
R686			RK73GB2A104J	CHIP R	J	1/10W
R687,688			RK73GB2A101J	CHIP R	J	1/10W
R689			RK73GB2A223J	CHIP R	J	1/10W
R690			RK73GB2A101J	CHIP R	J	1/10W
R691			RK73GB2A223J	CHIP R	J	1/10W
R692			RK73GB2A101J	CHIP R	J	1/10W
R693			RK73GB2A223J	CHIP R	J	1/10W
R694			RK73GB2A101J	CHIP R	J	1/10W
R695			RK73GB2A223J	CHIP R	J	1/10W
R696-699			RK73GB2A101J	CHIP R	J	1/10W
R701			RK73GB2A223J	CHIP R	J	1/10W
R702			RK73GB2A101J	CHIP R	J	1/10W
R703			RK73GB2A223J	CHIP R	J	1/10W
R704-706			RK73GB2A101J	CHIP R	J	1/10W
R707			RK73GB2A332J	CHIP R	J	1/10W
R708			RK73GB2A221J	CHIP R	J	1/10W
R709			RK73GB2A332J	CHIP R	J	1/10W
R711			RK73GB2A1R0J	CHIP R	J	1/10W
R713			RK73GB2A1R0J	CHIP R	J	1/10W
R721-723			RK73GB2A181J	CHIP R	J	1/10W
R725			RK73GB2A100J	CHIP R	J	1/10W
R731			RK73GB2A100J	CHIP R	J	1/10W
R741-744			RK73GB2A101J	CHIP R	J	1/10W
R751			RK73GB2A100J	CHIP R	J	1/10W
R761			RK73GB2A101J	CHIP R	J	1/10W
R762			RK73GB2A471J	CHIP R	J	1/10W
R763			RK73GB2A100J	CHIP R	J	1/10W
R771			RK73GB2A100J	CHIP R	J	1/10W
R801,802			RK73GB2A1R0J	CHIP R	J	1/10W
R803			RS14KB3A151J	FL-PROOF RS	J	1W
R805			RK73GB2A100J	CHIP R	J	1/10W
R806			RK73GB2A1R0J	CHIP R	J	1/10W
R811,812			RK73GB2A101J	CHIP R	J	1/10W
R815			RS14KB3D180J	FL-PROOF RS	J	2W
R817			RK73GB2A561J	CHIP R	J	1/10W

L: Scandinavia
 Y: P(Far East,Hawaii)
 V: AAFES(Europe)

K: USA
 T: England
 X: Australia

P: Canada
 E: Europe
 Q: Russia

R: Mexico
 G: Germany
 H: Korea

C: China
 V: China(Shaqhai)
 M: Other Areas

I: Malaysia
 Δ: Indicates safety critical components.

7

* New parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R518			RK73GB2A103J	CHIP R	J	1/10W
R519			RK73GB2A333J	CHIP R	J	1/10W
R520			RK73GB2A101J	CHIP R	J	1/10W
R521,522			RK73GB2A472J	CHIP R	J	1/10W
R523-525			RK73GB2A181J	CHIP R	J	1/10W
R526,527			RK73GB2A151J	CHIP R	J	1/10W
R528			RK73GB2A220J	CHIP R	J	1/10W
R531-534			RK73GB2A100J	CHIP R	J	1/10W
R541			RK73GB2A100J	CHIP R	J	1/10W
R551			RK73GB2A221J	CHIP R	J	1/10W
R552,553			RK73GB2A105J	CHIP R	J	1/10W
R554,555			RK73GB2A221J	CHIP R	J	1/10W
R561			RK73GB2A1R0J	CHIP R	J	1/10W
R571			RK73GB2A101J	CHIP R	J	1/10W
R572			RK73GB2A104J	CHIP R	J	1/10W
R573			RK73GB2A103J	CHIP R	J	1/10W
R581			RK73GB2A1R0J	CHIP R	J	1/10W
R591,592			RK73GB2A471J	CHIP R	J	1/10W
R593			RK73GB2A4R7J	CHIP R	J	1/10W
R595			RK73GB2A750J	CHIP R	J	1/10W
R601			RK73GB2A101J	CHIP R	J	1/10W
R602			RK73GB2A104J	CHIP R	J	1/10W
R603			RK73GB2A101J	CHIP R	J	1/10W
R604			RK73GB2A104J	CHIP R	J	1/10W
R605			RK73GB2A101J	CHIP R	J	1/10W
R606			RK73GB2A104J	CHIP R	J	1/10W
R607			RK73GB2A101J	CHIP R	J	1/10W
R608			RK73GB2A104J	CHIP R	J	1/10W
R609			RK73GB2A101J	CHIP R	J	1/10W
R610			RK73GB2A104J	CHIP R	J	1/10W
R611			RK73GB2A101J	CHIP R	J	1/10W
R612			RK73GB2A104J	CHIP R	J	1/10W
R613			RK73GB2A101J	CHIP R	J	1/10W
R614			RK73GB2A104J	CHIP R	J	1/10W
R615			RK73GB2A101J	CHIP R	J	1/10W
R616			RK73GB2A104J	CHIP R	J	1/10W
R617			RK73GB2A222J	CHIP R	J	1/10W
R618			RK73GB2A332J	CHIP R	J	1/10W
R619,620			RK73GB2A101J	CHIP R	J	1/10W
R621			RK73GB2A472J	CHIP R	J	1/10W
R622,623			RK73GB2A101J	CHIP R	J	1/10W
R624			RK73GB2A104J	CHIP R	J	1/10W
R625			RK73GB2A101J	CHIP R	J	1/10W
R626			RK73GB2A104J	CHIP R	J	1/10W
R627			RK73GB2A101J	CHIP R	J	1/10W
R628			RK73GB2A104J	CHIP R	J	1/10W
R629			RK73GB2A101J	CHIP R	J	1/10W
R631			RK73GB2A104J	CHIP R	J	1/10W
R632			RK73GB2A222J	CHIP R	J	1/10W
R633			RK73GB2A332J	CHIP R	J	1/10W
R634			RK73GB2A104J	CHIP R	J	1/10W
R635			RK73GB2A102J	CHIP R	J	1/10W
R636-639			RK73GB2A101J	CHIP R	J	1/10W
R640			RK73GB2A104J	CHIP R	J	1/10W
R641			RK73GB2A101J	CHIP R	J	1/10W

L: Scandinavia
 Y: P(Far East,Hawaii)
 V: AAFES(Europe)

K: USA
 T: England
 X: Australia

P: Canada
 E: Europe
 Q: Russia

R: Mexico
 G: Germany
 H: Korea

C: China
 V: China(Shaqhai)
 M: Other Areas

I: Malaysia
 Δ: Indicates safety critical components.

PARTS LIST

* New parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

10

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
D815			UDZS3.9B	ZENER DIODE		
D821			UDZS3.9B	ZENER DIODE		
D822-824			1SS355	DIODE		
D831			UDZS2.4B	ZENER DIODE		
D851			UDZS3.3B	ZENER DIODE		
D852			1SS355	DIODE		
D861			UDZS3.3B	ZENER DIODE		
D862-864			1SS355	DIODE		
D871-875			1SS355	DIODE		
IC11			NJM4565MD-ZB	ANALOGUE IC		
IC31			NJM4565MD-ZB	ANALOGUE IC		
IC51			NJM4565MD-ZB	ANALOGUE IC		
IC91			NJM4565MD-ZB	ANALOGUE IC		
IC111			NJM4565MD-ZB	ANALOGUE IC		
IC121			NJU7311AM-ZB	ANALOGUE IC		
IC151			R9S15205FP	ANALOGUE IC		
IC171			NJM4565MD-ZB	ANALOGUE IC		
IC181			NJM4565MD-ZB	ANALOGUE IC		
IC191			NJM4565MD-ZB	ANALOGUE IC		
IC401			AK4586VQP	MOS-IC		
IC501			CS493263-CLZ	MOS-IC		
IC551			74HC3GU04DP	MOS-IC		
IC571			TC7WH123FU-F	MOS-IC		
IC601			MN101C49KDF	MICROCONTROLLER IC		
IC721			TC74HCT7007FF	MOS-IC		
IC731			TC74HCT7007FF	MOS-IC		
IC741			TC74HCT7007FF	MOS-IC		
IC761			LC72725KV	ANALOGUE IC		
IC801			KIAY805API-P	ANALOGUE IC		
IC805			KIAY805API-P	ANALOGUE IC		
IC811			XC6206P332PRN	ANALOGUE IC		
IC815			XC62EP2502MFRN	ANALOGUE IC		
IC871			XC61CN2702MRN	ANALOGUE IC		
IC881			XC62HR4102PRN	ANALOGUE IC		
Q361			2SC4213(B)-F	TRANSISTOR		
Q371,372			2SC4213(B)-F	TRANSISTOR		
Q375,376			DTC124EUJ	DIGITAL TRANSISTOR		
Q571			2SB1375-F	TRANSISTOR		
Q815			2SA1576A(R,S)	TRANSISTOR		
Q821			2SC4081(R,S)	TRANSISTOR		
Q822			2SC4081(R,S)	TRANSISTOR		
Q831			2SC2003-A(L,K)	TRANSISTOR		
Q832			2SA4954-A(L,K)	TRANSISTOR		
Q833,834			2SK4870-FY GR	FET		
Q835			2SC4081(R,S)	TRANSISTOR		
Q836			2SA1576A(R,S)	TRANSISTOR		
Q851			2SA1576A(R,S)	TRANSISTOR		
Q861			2SA1576A(R,S)	TRANSISTOR		
Q871			2SA1576A(R,S)	TRANSISTOR		
Q872			2SC4081(R,S)	TRANSISTOR		
Q891			2SB1375-F	TRANSISTOR		
A591,592			W02-4652-05	OPTIC RECEIVING MODULE		

* New parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

9

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R818			RK73GB2A223J	CHIP R	1/10W	
R819			RK73GB2A151J	CHIP R	1/10W	
R820			RK73GB2A1R0J	CHIP R	1.0	
R821			RK73GB2A222J	CHIP R	2.2K	
R822			RK73GB2A473J	CHIP R	47K	
R823			RK73GB2A102J	CHIP R	1.0K	
R824			RK73GB2A472J	CHIP R	4.7K	
R825			RK73GB2A102J	CHIP R	1.0K	
R826			RK73GB2A103J	CHIP R	10K	
R831,832			RK73GB2A2R2J	CHIP R	2.2	
R833,834			RK73GB2A121J	CHIP R	120	
R835			RK73GB2A122J	CHIP R	1.2K	
R836			RK73GB2A682J	CHIP R	6.8K	
R837			RK73GB2A102J	CHIP R	1.0K	
R838			RK73GB2A822J	CHIP R	8.2K	
R839			RK73GB2A222J	CHIP R	2.2K	
R840			RK73GB2A2R2J	CHIP R	2.2	
R841			RK73GB2A101J	CHIP R	100	
R851			RK73GB2A222J	CHIP R	2.2K	
R852			RK73GB2A103J	CHIP R	10K	
R853			RK73GB2A101J	CHIP R	100	
R854,855			RK73GB2A103J	CHIP R	10K	
R856			RK73GB2A222J	CHIP R	2.2K	
R861			RK73GB2A222J	CHIP R	2.2K	
R862			RK73GB2A103J	CHIP R	10K	
R863			RK73GB2A101J	CHIP R	100	
R864,865			RK73GB2A103J	CHIP R	10K	
R866,867			RK73GB2A222J	CHIP R	2.2K	
R871			RK73GB2A102J	CHIP R	1.0K	
R872,873			RK73GB2A104J	CHIP R	100K	
R874			RK73GB2A102J	CHIP R	1.0K	
R875			RK73GB2A103J	CHIP R	10K	
R876			RK73GB2A102J	CHIP R	1.0K	
R877			RK73GB2A244J	CHIP R	240K	
R878			RK73GB2A104J	CHIP R	100K	
R881			RK73GB2A1R0J	CHIP R	1.0	
R882			RK73GB2A104J	CHIP R	100K	
R883			RK73GB2A474J	CHIP R	470K	
R885			RK73GB2A2R2J	CHIP R	2.2	
R886			RK73GB2A100J	CHIP R	10	
R891			RK73GB2A561J	CHIP R	560	
R892			RK73GB2A223J	CHIP R	2.2K	
R893			RK73GB2A1R0J	CHIP R	1.0	
R921,922			RK73GB2A000J	CHIP R	0.0	
D301			DA204U	DIODE		
D311			DA204U	DIODE		
D331			DA204U	DIODE		
D401			UDZS4.7B	ZENER DIODE		
D421,422			DA204U	DIODE		
D571			1SS355	DIODE		
D595			1SS355	DIODE		
D601			1SS355	DIODE		
D801			UDZS5.6B	ZENER DIODE		
D811			UDZS5.6B	ZENER DIODE		

L: Scandinavia
 K: USA
 T: England
 X: Australia
 Y: AAFES(Europe)
 R: Mexico
 G: Germany
 H: Korea
 C: China
 V: China(Shanghai)
 M: Other Areas
 I: Malaysia
 Δ: Indicates safety critical components.

PARTS LIST

12

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
CN3			E41-1443-05	FLAT CABLE CONNECTOR;1.25MM;29P		
J2 ,3			E7C-1032-05	LOCK TERMINAL BOARD,4P		
J4			E7C-1031-05	LOCK TERMINAL BOARD,2P		
E1			J11-0898-05	WIRE CLAMPER		
L3 -7			L39-1631-05+	PHASE COMPENSATION COIL		
R1 ,2			RK73GB2A222J	CHIP R		1/10W
R3			RK73GB2A473J	CHIP R		1/10W
R4			RK73GB2A1R0J	CHIP R		1/10W
R5 ,6			RK73GB2A222J	CHIP R		1/10W
R11 ,12			RK73GB2A104J	CHIP R		1/10W
R13 ,14			RK73GB2A563J	CHIP R		1/10W
R15 ,16			RK73GB2A101J	CHIP R		1/10W
R17 ,18			RK73GB2A182J	CHIP R		1/10W
R19 ,20			RK73GB2A102J	CHIP R		1/10W
R23 -26			RS14KB3DR22J	FL-PROOF RS		2W
R31 ,32			RS14KB3D391J	FL-PROOF RS		2W
R33 ,34			RK73GB2A222J	CHIP R		1/10W
R35 ,36			RK73GB2A104J	CHIP R		1/10W
R37 ,38			RK73GB2A563J	CHIP R		1/10W
R39 ,40			RK73GB2A101J	CHIP R		1/10W
R41 ,42			RK73GB2A182J	CHIP R		1/10W
R43 ,44			RK73GB2A102J	CHIP R		1/10W
R47 -50			RS14KB3DR22J	FL-PROOF RS		2W
R51 ,52			RD14NB2E4R7J	RD		1/4W
R53 ,54			RS14KB3D4R7J	FL-PROOF RS		2W
R61			RK73GB2A000J	CHIP R		1/10W
R69 ,70			RK73GB2A122J	CHIP R		1/10W
R101			RK73GB2A222J	CHIP R		1/10W
R102			RK73GB2A104J	CHIP R		1/10W
R103			RK73GB2A563J	CHIP R		1/10W
R104			RK73GB2A101J	CHIP R		1/10W
R105			RK73GB2A182J	CHIP R		1/10W
R106			RK73GB2A102J	CHIP R		1/10W
R108 ,109			RS14KB3DR22J	FL-PROOF RS		2W
R110			RD14NB2E4R7J	RD		1/4W
R111			RS14KB3D4R7J	FL-PROOF RS		2W
R112			RK73GB2A153J	CHIP R		1/10W
R113			RK73GB2A333J	CHIP R		1/10W
R259-264			RK73GB2A473J	CHIP R		1/10W
R265,266			RD14NB2E4R7J	RD		1/4W
R267,268			RS14KB3D4R7J	FL-PROOF RS		2W
R301			RK73GB2A272J	CHIP R		1/10W
R302-305			RK73GB2A103J	CHIP R		1/10W
R306			RK73GB2A104J	CHIP R		1/10W
R307			RK73GB2A330J	CHIP R		1/10W
R308			RK73GB2A104J	CHIP R		1/10W
R309			RK73GB2A102J	CHIP R		1/10W
R310			RK73GB2A183J	CHIP R		1/10W
R311			RK73GB2A104J	CHIP R		1/10W
R312			RK73GB2A183J	CHIP R		1/10W
R313			RK73GB2A104J	CHIP R		1/10W
R314			RK73GB2A222J	CHIP R		1/10W
R315			RK73GB2A152J	CHIP R		1/10W

L: Scandinavia
Y: FX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shaqhai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

11

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
AUDIO (X09-7032-70)						
C1 ,2			CC73GCH1H102J	CHIP C		J
C3 ,4			CD04BJ1H2R2M	ELECTRO		50WV
C5 ,6			CC73GCH1H471J	CHIP C		J
C7 ,8			CC73GCH1H391J	CHIP C		35WV
C9 ,10			CD04BJ1V330M	ELECTRO		
C11 ,12			CC73GCH1H270J	CHIP C		J
C17 -20			CK73GB1H223K	CHIP C		K
C25 ,26			CD04BJ1H2R2M	ELECTRO		50WV
C27 ,28			CC73GCH1H471J	CHIP C		J
C29 ,30			CC73GCH1H391J	CHIP C		J
C31 ,32			CD04BJ1V330M	ELECTRO		35WV
C33 ,34			CC73GCH1H270J	CHIP C		J
C35 -38			C91-1577-05	MIP-C		J
C39 -42			CK73GB1H223K	CHIP C		K
C44			CK73GB1H223K	CHIP C		K
C46			CK73GB1H223K	CHIP C		K
C47 -51			CD04BJ1H100M	ELECTRO		50WV
C101			CD04BJ1H2R2M	ELECTRO		50WV
C102			CC73GCH1H471J	CHIP C		J
C103			CC73GCH1H391J	CHIP C		J
C104			CD04BJ1V330M	ELECTRO		35WV
C105			CC73GCH1H270J	CHIP C		J
C106 ,107			C91-1577-05	MIP-C		J
C243-246			C91-1577-05	MIP-C		J
C301			CD04AU1H2R2M	NP-ELEC		50WV
C302			CD04BJ1E470M	ELECTRO		25WV
C303			CD04BJ1H100M	ELECTRO		50WV
C304			CD04BJ1H010M	ELECTRO		50WV
C305			CD04BJ1V330M	ELECTRO		35WV
C306			CD04BJ1A101M	ELECTRO		10WV
C307			CD04BJ1H010M	ELECTRO		50WV
C308			CD04BJ1H100M	ELECTRO		50WV
C309			CD04BJ1E470M	ELECTRO		25WV
C311 -315			CK73GB1H472K	CHIP C		K
C501,502			C91-1567-05	FILM		J
C503,504			C90-5775-05	ELECTRO		75WV
C505,506			CQ93FMG1H104J	MYLAR		J
C507			CD04BJ1E222M1	ELECTRO		25WV
C508			CD04BJ1E471M1	ELECTRO		25WV
C509,510			CK73GB1H104K	CHIP C		K
C511			CD04BJ1E101M	ELECTRO		25WV
C512			CD04BJ1E470M	ELECTRO		25WV
C513			CD04BJ1J471M1	ELECTRO		63WV
C514			CD04BJ1J330M	ELECTRO		63WV
C515			CD04BJ1J470M	ELECTRO		63WV
C516			CK45FF1H103Z	GERAMIC		Z
C517			CD04BJ1C472M1	ELECTRO		16WV
C518			CD04BJ1H100M	ELECTRO		50WV
C519			CD04BJ1H470M	ELECTRO		50WV
C520			CK73GB1H223K	CHIP C		K
C522,523			CD04BJ2A100M	ELECTRO		100WV
C524,525			CD04BJ1J330M	ELECTRO		63WV
C526,527			CK73GB1H104K	CHIP C		K

L: Scandinavia
Y: FX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shaqhai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

PARTS LIST

14

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
D306			1S5133	DIODE		
D307			DAP202U	DIODE		
D308			1S5133	DIODE		
D309,310			DAN202U	DIODE		
D311,312			1S5133	DIODE		
D314,315			DAN202U	DIODE		
D316,317			1S5133	DIODE		
D319,320			1S5133	DIODE		
D322			1S5355	DIODE		
D501			TS6P03G-B	DIODE		
D502-507			S5688B(TPB5)Q	DIODE		
D508			MITZJ16(B)	ZENER DIODE		
D509			MITZJ15(B)	ZENER DIODE		
D510			TS-4B03G-B1	DIODE		
D511			1S5355	DIODE		
D512			UDZS11B	ZENER DIODE		
D513			UDZS6.2B	ZENER DIODE		
D514			1S5133	DIODE		
D515			S5688B(TPB5)Q	DIODE		
D516,517			UDZS15B	ZENER DIODE		
D518,519			UDZS7.5B	ZENER DIODE		
D520			UDZS16B	ZENER DIODE		
D521			UDZS30B	ZENER DIODE		
D522			MITZJ3.9(B)	ZENER DIODE		
D523			1S5355	DIODE		
D524			UDZS5.6B	ZENER DIODE		
D525			UDZS5.1B	ZENER DIODE		
IC1			STK433-330-E	HYBRID IC		
IC2			STR433-130-E	HYBRID IC		
IC3			KIAY812API-UP	ANALOGUE IC		
IC4			KIAY912API-UP	ANALOGUE IC		
Q1,2			DTC6643TU	DIGITAL TRANSISTOR		
Q5-8			DTC6643TU	DIGITAL TRANSISTOR		
Q101			DTC6643TU	DIGITAL TRANSISTOR		
Q301,302			2SA1576A(R,S)	TRANSISTOR		
Q303,304			2SC4081(R,S)	TRANSISTOR		
Q305			2SA1576A(R,S)	TRANSISTOR		
Q306,307			2SC4081(R,S)	TRANSISTOR		
Q308			2SA1576A(R,S)	TRANSISTOR		
Q309-313			2SC1845-A(F,E)	TRANSISTOR		
Q314,315			DTC113ZUA	DIGITAL TRANSISTOR		
Q317,318			DTC113ZUA	DIGITAL TRANSISTOR		
Q501			2SB1640-Q	TRANSISTOR		
Q502			2SC4081(R,S)	TRANSISTOR		
Q503			2SA1576A(R,S)	TRANSISTOR		
Q504			2SB1640-Q	TRANSISTOR		
Q505			2SA1576A(R,S)	TRANSISTOR		
Q506			2SD2525-Q	TRANSISTOR		
Q507			2SB1640-Q	TRANSISTOR		
Q508			2SK879-F(Y,GR)	FET		
Q510			2SC4081(R,S)	TRANSISTOR		
TH1			NCP18WB473J05	THERMISTOR		
TH3			NCP18WB473J05	THERMISTOR		

13

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R320			RK73GB2A152J	CHIP R	1/10W	
R321			RK73GB2A102J	CHIP R	1/10W	
R322			RK73GB2A473J	CHIP R	1/10W	
R323			RK73GB2A102J	CHIP R	1/10W	
R324			RK73GB2A473J	CHIP R	1/10W	
R325			RK73GB2A333J	CHIP R	1/10W	
R326			RK73GB2A221J	CHIP R	1/10W	
R327			RK73GB2A103J	CHIP R	1/10W	
R328			RK73GB2A102J	CHIP R	1/10W	
R329,330			RK73GB2A473J	CHIP R	1/10W	
R331			RK73GB2A332J	CHIP R	1/10W	
R333			RK73GB2A473J	CHIP R	1/10W	
R335,336			RK73GB2A473J	CHIP R	1/10W	
R340,341			RK73GB2A473J	CHIP R	1/10W	
R344			RK73GB2A473J	CHIP R	1/10W	
R345			RK73GB2A333J	CHIP R	1/10W	
R346			RK73GB2A473J	CHIP R	1/10W	
R347			RK73GB2A362J	CHIP R	1/10W	
R349-351			RK73GB2A471J	CHIP R	1/10W	
R352-354			RK73GB2A912J	CHIP R	1/10W	
R355-357			RK73GB2A303J	CHIP R	1/10W	
R358,359			RK73GB2A471J	CHIP R	1/10W	
R360,361			RK73GB2A912J	CHIP R	1/10W	
R362,363			RK73GB2A303J	CHIP R	1/10W	
R364			RK73GB2A102J	CHIP R	1/10W	
R367			RK73GB2A102J	CHIP R	1/10W	
R371,372			RK73GB2A102J	CHIP R	1/10W	
R501			RD14NB2E1R0J	RD	1/4W	
R503			RK73GB2A471J	CHIP R	1/10W	
R504			RK73GB2A4R7J	CHIP R	1/10W	
R505,506			RK73GB2A473J	CHIP R	1/10W	
R508			RD14NB2E222J	RD	1/4W	
R510			RS14KB3D470J	FL-PROOF RS	2W	
R512			RK73GB2A473J	CHIP R	1/10W	
R513			RK73GB2A2R2J	CHIP R	1/10W	
R514,515			RK73GB2A1R0J	CHIP R	1/10W	
R517			RD14NB2E822J	RD	1/4W	
R518			RS14KB3D102J	FL-PROOF RS	2W	
R519,520			RS14KB3D332J	FL-PROOF RS	2W	
R522			RD14NB2E182J	RD	1/4W	
R523			RS14KB3D331J	FL-PROOF RS	2W	
R524			RK73GB2A561J	CHIP R	1/10W	
R526			RK73GB2A473J	CHIP R	1/10W	
R527,528			RD14NB2E1R0J	RD	1/4W	
R529-533			RK73GB2A1R0J	CHIP R	1/10W	
R702,703			RK73GB2A000J	CHIP R	1/10W	
R802			RK73GB2A000J	CHIP R	1/10W	
R804			RK73GB2A000J	CHIP R	1/10W	
K1,2			S76-0097-05	MAGNETIC RELAY		
K4,5			S76-0097-05	MAGNETIC RELAY		
D3,7			1S5133	DIODE		
D301,302			UDZS3.3B	ZENER DIODE		
D304			DAN202U	DIODE		
D305			UDZS3.3B	ZENER DIODE		

L: Scandinavia
 K: USA
 T: England
 X: Australia
 Y: AAFES(Europe)
 R: Mexico
 G: Germany
 H: Korea
 C: China
 V: China(Shanghai)
 M: Other Areas
 I: Malaysia
 Δ Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C715			GD04BUJA471M	ELECTRO		
C716			CD04BUJ1H010M	ELECTRO	X	
C717,718			CK73GB1H103K	CHIP C	X	
C719,720			CD04BUJ1H010M	ELECTRO	X	
C721,722			CK73GB1H103K	CHIP C	X	
C723,724			CD04BUJ1H010M	ELECTRO	X	
C725,726			CK73GB1H103K	CHIP C	X	
C727			CD04BUJ1H010M	ELECTRO	X	
C728-734			CC73GCH1H200D	CHIP C	X	
C735			CC73GCH1H820J	CHIP C	X	
C736			CC73GCH1H100D	CHIP C	X	
C737			CC73GCH1H820J	CHIP C	X	
C738			CC73GCH1H100D	CHIP C	X	
C739			CC73GCH1H820J	CHIP C	X	
C901,902			CC73GCH1H471J	CHIP C	X	
CN101			E41-1470-05	FLAT CABLE CNCTR, 1.25MM,27P		
J302			E63-1388-05	PIN JACK,3P,BLK/BLK/BLK		
J601			E63-1371-05	PIN JACK,2P2L,YEL,NILF		
J602			E63-1368-05	PIN JACK, 3P,YEL,NILF		
J701,702			E63-1414-05	PIN JACK,VERTICAL 3P *2		
J901			E11-0271-05	PHONE JACK (METAL SLEEVE)	X	
F201			F5C-0332-05	FUSE (5X20), T3,15A, L 250V		
CN203,204			J13-0075-05	FUSE CLIP		
T201			L07-2980-05	POWER TRANSFORMER,220V 7V/10MA		
X101			L78-0747-05	RESONATOR (4MHZ)		
R102,103			RD14BB2C221J	RD	J	1/6W
R106			RK73GB2A100J	CHIP R	J	1/10W
R107			RK73GB2A101J	CHIP R	J	1/10W
R111			RK73GB2A104J	CHIP R	J	1/10W
R112			RK73GB2A2R2J	CHIP R	J	1/10W
R113-119			RK73GB2A104J	CHIP R	J	1/10W
R124			RK73GB2A473J	CHIP R	J	1/10W
R129			RK73GB2A473J	CHIP R	J	1/10W
R132			RK73GB2A473J	CHIP R	J	1/10W
R136			RK73GB2A473J	CHIP R	J	1/10W
R139			RK73GB2A473J	CHIP R	J	1/10W
R141			RK73GB2A2R2J	CHIP R	J	1/10W
R143-145			RK73GB2A101J	CHIP R	J	1/10W
R149			RK73GB2A104J	CHIP R	J	1/10W
R153,154			RK73GB2A100J	CHIP R	J	1/10W
R161			RK73GB2A102J	CHIP R	J	1/10W
R201			RD14NB2E1R0J	RD	J	1/4W
R202			RD14NB2E330J	RD	J	1/4W
R211			RK73GB2A2R2J	CHIP R	J	1/10W
R301-303			RK73GB2A101J	CHIP R	J	1/10W
R305,306			RK73GB2A104J	CHIP R	J	1/10W
R307			RK73GB2A750J	CHIP R	J	1/10W
R321,322			RK73GB2A104J	CHIP R	J	1/10W
R323-326			RK73GB2A100J	CHIP R	J	1/10W
R331,332			RK73GB2A100J	CHIP R	J	1/10W
R402			RK73GB2A332J	CHIP R	J	1/10W
R403			RK73GB2A223J	CHIP R	J	1/10W

L: Scandinavia
Y: PX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shaqhai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
D102-104			DISPLAY (X14-8052-70)			
D106			B30-2597-05	LED (LED RED (HIGH))		
D108			B30-2597-05	LED (LED RED (HIGH))		
			B30-2684-05	LED (LED BLUE 3PH)		
C101			CC73GCH1H101J	CHIP C	J	
C102			CK73GB1H103K	CHIP C	K	
C103			CD04BUJA101M	ELECTRO	10WV	
C104,105			CD04BUJ1H2R2M	ELECTRO	50WV	
C106			CD04AU1H220M	NP-ELEC	50WV	
C107,108			CC73GCH1H103K	CHIP C	J	
C109			CC73GCH1H102J	CHIP C	K	
C110,111			CK73GB1H103K	CHIP C	K	
C112			CD04BUJ1J330M	ELECTRO	63WV	
C113,114			CC73GCH1H101J	CHIP C	J	
C115			CD04BUJH470M	ELECTRO	50WV	
C116-118			CC73GCH1H101J	CHIP C	J	
C119			CD04BUJA101M	ELECTRO	10WV	
C120			CC73GCH1H101J	CHIP C	J	
C121,122			CC73GCH1H100D	CHIP C	D	
C131,132			CD04BUJ1H2R2M	ELECTRO	50WV	
C201			CK73GB1H103K	CHIP C	K	
C203			CK73GB1H103K	CHIP C	K	
C204			C91-1643-05	MIF-C	J	
C222			CD04BUJA471M	ELECTRO	10WV	
C301-303			CC73GCH1H101J	CHIP C	J	
C305,306			CC73GCH1H102J	CHIP C	J	
C307			CC73GCH1H101J	CHIP C	J	
C311,312			CK73GB1H103K	CHIP C	K	
C321,322			CK73GB1A105K	CHIP C	K	
C323,324			CC73GCH1H220J	CHIP C	J	
C325,326			CK73GB1H104K	CHIP C	K	
C331			CK73GB1H103K	CHIP C	K	
C332			CC73GCH1H101J	CHIP C	J	
C401,402			CK73GB1H104K	CHIP C	K	
C403			CD04BUJE470M	ELECTRO	25WV	
C406,407			CK73GB1H104K	CHIP C	K	
C408			CD04BUJE470M	ELECTRO	25WV	
C640			CD04BUJE470M	ELECTRO	25WV	
C641			CK73GB1H472K	CHIP C	K	
C642			CK73GB1H103K	CHIP C	K	
C643			CK73GB1H472K	CHIP C	K	
C644			CK73GB1H103K	CHIP C	K	
C645-647			CD04BUJE470M	ELECTRO	25WV	
C648,649			CC73GCH1H101J	CHIP C	J	
C650-652			CC73GCH1H470J	CHIP C	J	X
C701-703			CK73GB1H104K	CHIP C	K	X
C704			CD04BUJ1H010M	ELECTRO	50WV	X
C705,706			CK73GB1H103K	CHIP C	K	X
C707			CD04BUJA471M	ELECTRO	10WV	X
C708			CD04BUJ1H010M	ELECTRO	50WV	X
C709,710			CK73GB1H103K	CHIP C	K	X
C711			CD04BUJA471M	ELECTRO	10WV	X
C712			CD04BUJ1H010M	ELECTRO	50WV	X
C713,714			CK73GB1H103K	CHIP C	K	X

L: Scandinavia
Y: PX(Far East,Hawaii)
V: AAFES(Europe)

K: USA
T: England
X: Australia

P: Canada
E: Europe
Q: Russia

R: Mexico
G: Germany
H: Korea

C: China
V: China(Shaqhai)
M: Other Areas

I: Malaysia
Δ: Indicates safety critical components.

PARTS LIST

* New parts
 Parts without **Parts No.** are not supplied.
 Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
 Teile ohne **Parts No.** werden nicht geliefert.

17

Ref. No.	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
△ R407			RS14KB3D821J	FL-PROOF RS		
△ R413			RS14KB3D821J	FL-PROOF RS		X
△ R421,422			RK73GB2A2R2J	CHIP R	J	X
△ R423			RK73GB2A472J	CHIP R	J	
△ R425,426			RK73GB2A472J	CHIP R	J	
△ R451			RK73GB2A000J	CHIP R	J	
△ R611,612			RK73GB2A2R2J	CHIP R	J	
△ R619			RK73GB2A102J	CHIP R	J	
△ R620-622			RK73GB2A101J	CHIP R	J	
△ R623,624			RK73GB2A750J	CHIP R	J	
△ R625,626			RK73GB2A104J	CHIP R	J	
△ R627-629			RK73GB2A750J	CHIP R	J	
△ R651-653			RK73GB2A102J	CHIP R	J	
△ R655			RK73GB2A000J	CHIP R	J	
△ R701-703			RK73GB2A102J	CHIP R	J	X
△ R704-713			RK73GB2A750J	CHIP R	J	X
△ R714			RK73GB2A104J	CHIP R	J	X
△ R715			RK73GB2A750J	CHIP R	J	X
△ R716			RK73GB2A104J	CHIP R	J	X
△ R717			RK73GB2A750J	CHIP R	J	X
△ R718			RK73GB2A104J	CHIP R	J	X
△ R721,722			RK73GB2A2R2J	CHIP R	J	X
△ K201			S76-0131-15	MAGNETIC RELAY		
△ S103-109			S70-0086-05	TACT SWITCH		
△ S111,112			S70-0086-05	TACT SWITCH		
△ S302			S70-0086-05	TACT SWITCH		
△ S101,102			T99-0666-05	ROTARY ENCODER		
△ S301			T99-0664-05	ROTARY ENCODER		
△ D101			MTZJ6.2(B)	ZENER DIODE		
△ D105			1S5133	DIODE		
△ D107			1S5133	DIODE		
△ D109			1S5133	DIODE		
△ D201,202			1S5133	DIODE		
△ D204-208			1S5133	DIODE		
△ D301-304			1S5133	DIODE		
△ D401			MTZJ3.3(B)	ZENER DIODE		
△ ED101			11-MT-143GNK	FLUORESCENT INDICATOR TUBE		
△ IC101			MN12510F	MOS-IC		
△ IC321			BA4560RF	ANALOGUE IC		
△ IC401			KIA7805API-P	ANALOGUE IC		
△ IC402			KIA7905PI-P	ANALOGUE IC		
△ IC602			NUM2595M-ZB	ANALOGUE IC		
△ IC701			NUM2586AM-ZB	ANALOGUE IC		
△ Q101-106			2SC1740S(Q,R)	TRANSISTOR		
△ Q111			DTC124EUA	DIGITAL TRANSISTOR		
△ Q112-114			DTA143TUA	DIGITAL TRANSISTOR		
△ Q201			2SC1740S(Q,R)	TRANSISTOR		
△ Q401			2SA1576A(R,S)	TRANSISTOR		X
△ Q402			DTC124EUA	DIGITAL TRANSISTOR		
△ Q403,404			2SA1576A(R,S)	TRANSISTOR		
△ Q405			2SC4081(R,S)	TRANSISTOR		
△ A101			W02-4600-05	ELECTRIC CIRCUIT MODULE		

L: Scandinavia
 K: USA
 T: England
 Y: AAFES(Europe)
 P: Canada
 E: Europe
 G: Russia
 R: Mexico
 G: Germany
 H: Korea
 C: China
 V: China(Shanghai)
 M: Other Areas
 I: Malaysia
 △ Indicates safety critical components.

HOW TO READ THE PARTS LIST

ABBREVIATION OF MODEL AND MASS PRODUCTION'S DESTINATIONS

MODEL	ABB.	Australia	Europe
		X	E
KRF-V5300D	B	XB	EB
KRF-V5300D-S	S	XS	ES