KENWOOD

AM-FM STEREO TUNER

KT-2001A

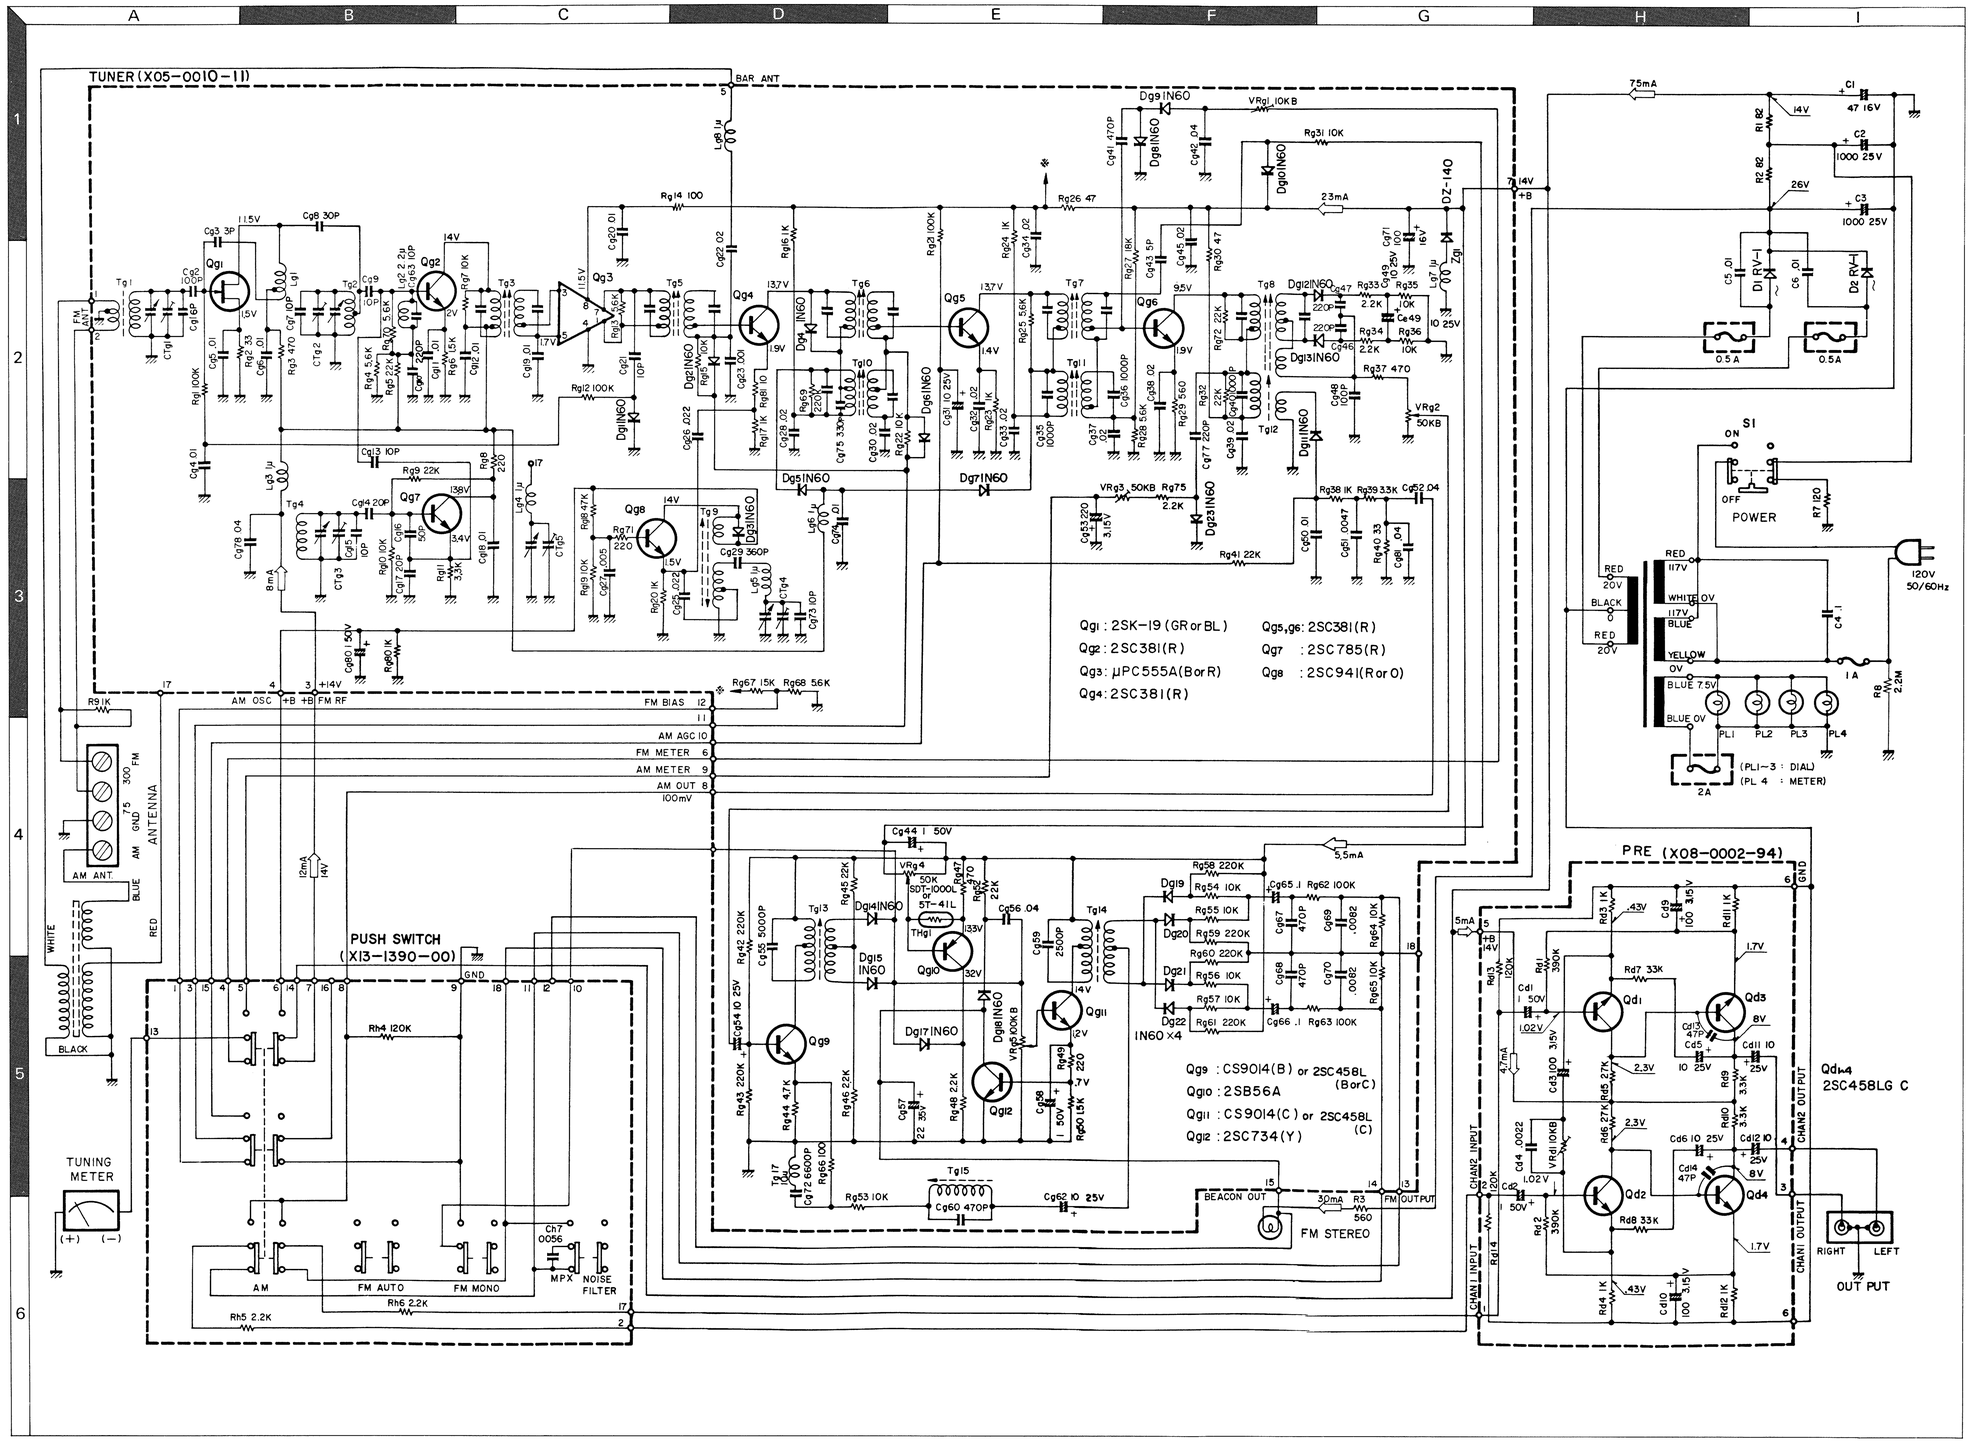

SPECIFICATIONS

FM TUNER SECTION

Antenna Impedance	:	300 ohms Balanced & 75 ohms Unbalanced
Usable Sensitivity IHF	:	2 μV
Harmonic Distortion	:	0.5%
Signal to Noise Ratio	:	60 dB
Capture Ratio	:	4.0 dB
Selectivity IHF (Alt Channel)	:	Better than 45 dB
Image Rejection	:	Better than 60 dB
IF Rejection	:	Better than 100 dB
AM Suppression	:	Better than 45 dB

FM MPX SECTION

Stereo Separation	:	Better than 30 dB at 1,000 Hz Better than 20 dB at 10,000 Hz
Harmonic Distortion	:	0.7%
Sub Carrier Suppression	:	Better than 40 dB

AM TUNER SECTION

Antenna	:	Built-in ferrite antenna, External antenna terminals
Usable Sensitivity IHF	:	25 μV
Signal to Noise Ratio	:	Better than 45 dB
Selectivity IHF	:	Better than 25 dB
Image Rejection	:	Better than 45 dB
IF Rejection	:	Better than 35 dB

OUTPUT VOLTAGE

FM	:	1.0 V (at 400 Hz 100% Mod)
AM	:	0.4 V (at 400 Hz 30% Mod)

GENERAL

Selector Switches	:	AM, FM AUTO, FM MONO
Switch	:	MPX NOISE FILTER
Power Consumption	:	15 w
Dimensions	:	W 13-7/8" (352mm), H 4-5/8" (118mm), D 9-7/16" (240mm)
Weight	:	9.92 lbs. (4.5 kg)