


AV RECEIVER

Service Manual

TX-RZ1100

✓ Pre Issue (2016-Oct)

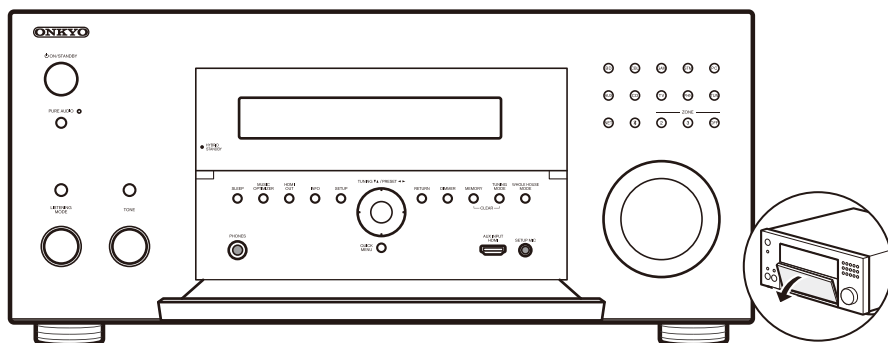

CONTENTS

- ✓ [Title Page \(This page\)](#)
- ✓ [Note for Parts List](#)
- ✓ [Panel](#)
- ✓ [Reset](#)
- ✓ [Protection](#)
- ✓ [Model and Destination](#)
- ✓ [WiFi 5GHz Setting](#)
- ✓ [Firmware](#)
- Hookup and Setting
- Trouble Shoot
- Disassembly
- ✓ [Schematic Diagram](#)
- ✓ [Exploded View](#)
- Appendix

SAFETY-RELATED COMPONENT WARNING!! : COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL. MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.



This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual. Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.


ONKYO®

Published by Onkyo & Pioneer Corporation Global CS Department

File Name of Parts List File (EXCEL File)

Note for Parts List

When parts list is EXCEL file, please refer to the following explanation about file name.

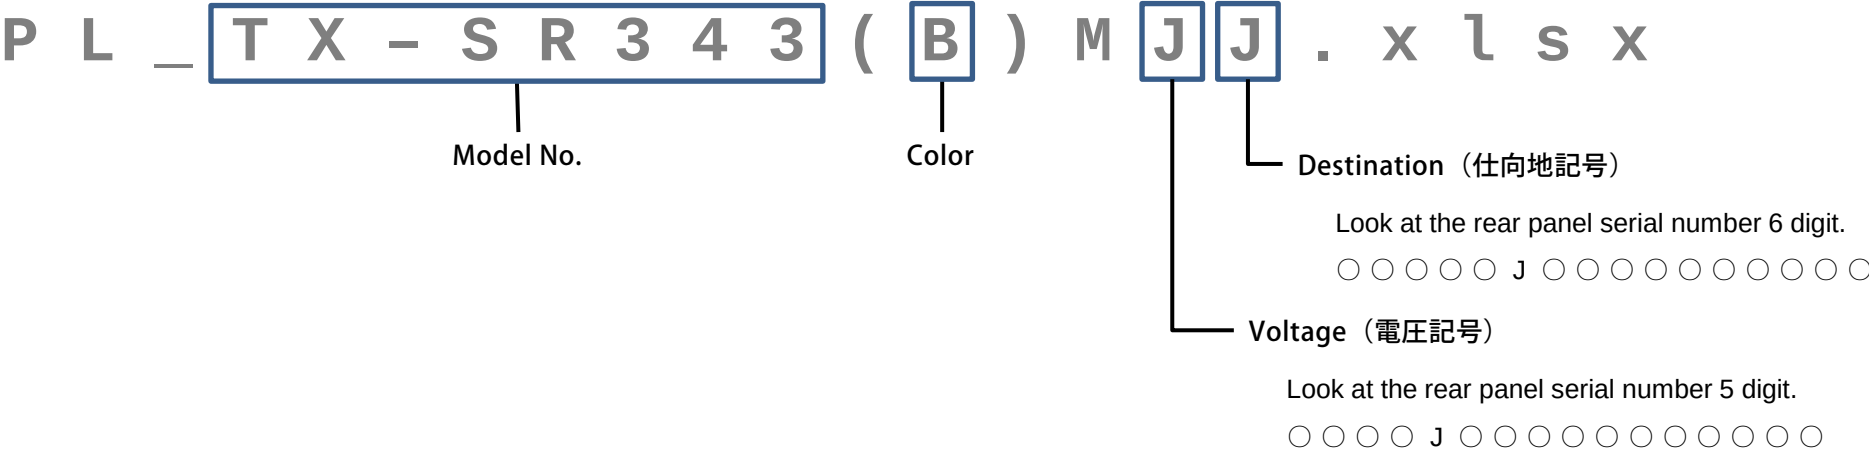


Color (色記号)			
(X)	Not related to color		
(B)	Black	(M)	Wood
(BR)	Brown	(O)	Orange
(C)	Cherry	(P)	Pink
(G)	Gold	(R)	Red
(GR)	Green	(S)	Silver
(H)	Gray	(V)	Violet
(K)	Black	(W)	White
(L)	Blue	(Y)	Yellow
(LB)	Light Blue		


Voltage (電圧記号)	
D	120V AC
G	220~230V
H	220~230／240V
J	100V AC
M	220~240V AC
P	230V AC
U	100~240V AC
V	110~240V
W	120V／220~240V
Speaker System (without AMP.) :	
0	Passive Subwoofer
F	Front Speaker
C	Center Speaker
R	Rear Speaker
B	Back Speaker

Destination (仕向地記号)		
A	Australia	Speaker System (without AMP.) :
B	United Kingdom	
C	North American	
D	USA	
F	Taiwan	
J	Japan	
K	Korea	
L	Russia	
P	Europe	
Q	Hong Kong	
R	China	
S	Brazil	L Left channel
T	Thai	
U	Worldwide	
		R Right channel
		0 Center channel

Front Panel

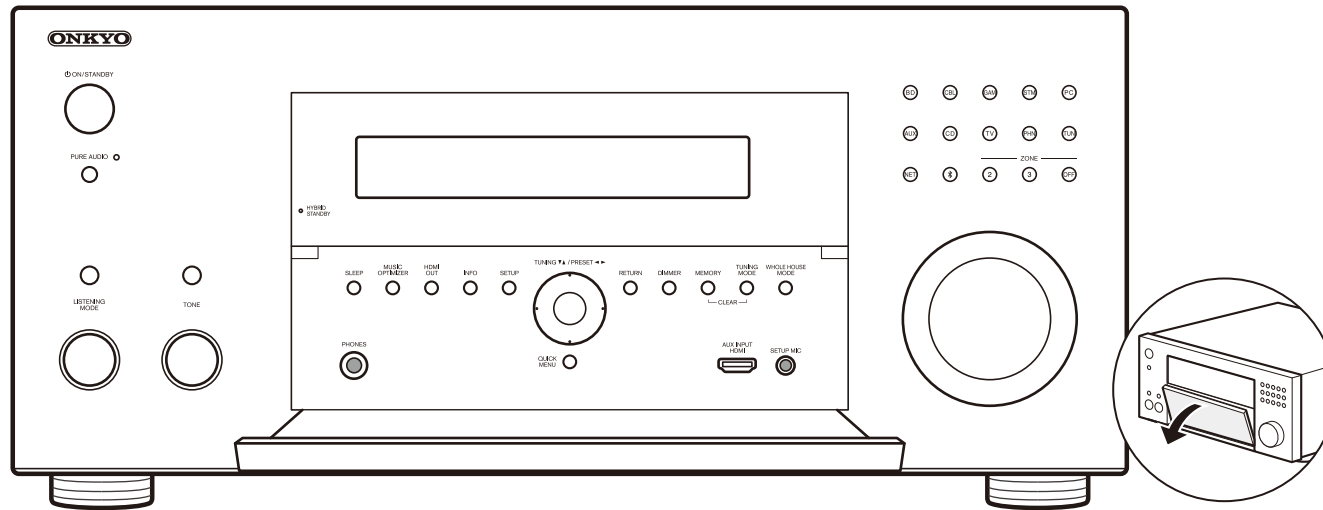


Rear Panel

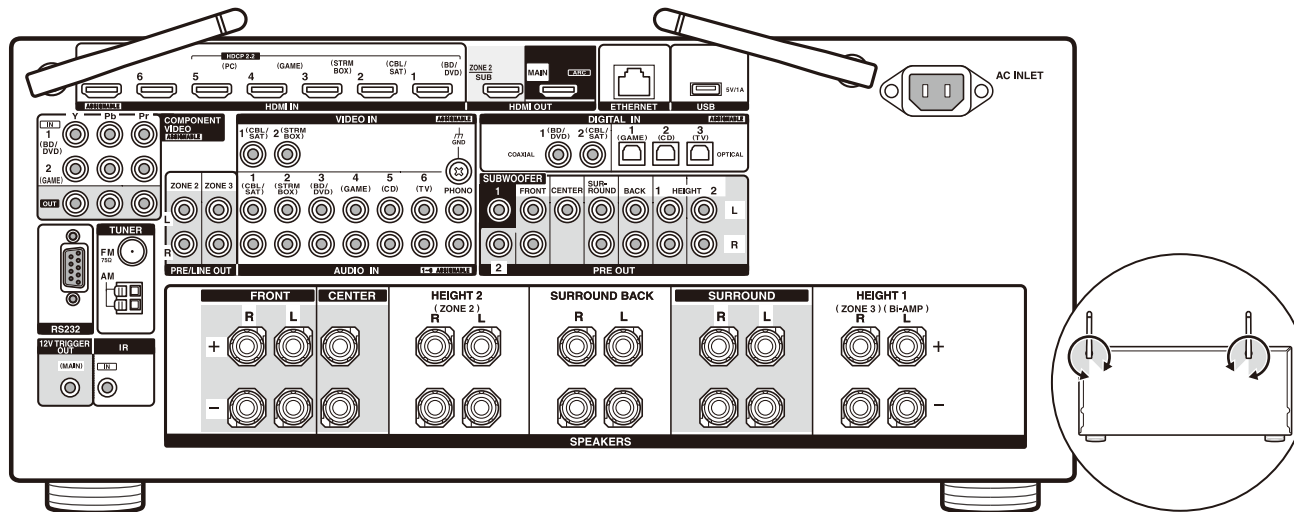

Panel

Remote Control Unit RC-926R

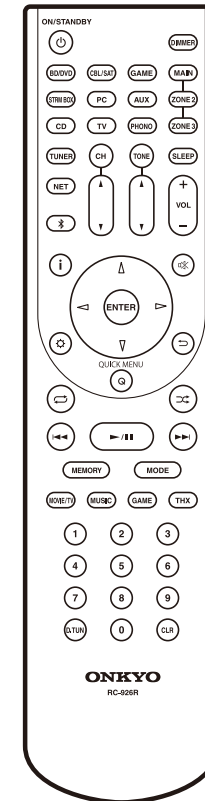

Accessory

1. Remote controller (RC-926R) ×1
2. Batteries (AA/R6) ×2
3. Indoor FM antenna ×1
4. Speaker setup microphone ×1
5. Power cord ×1

How to Reset the Unit

Reset

- Step1.

STORE (To save user preferences.)

While pressing [SETUP] button, press [ENTER] button twice.
- Step2.

RESET

While pressing [CBL] or [CBL/SAT] button, press [ON/STANDBY] button.

※) "Clear" appears on the display and the unit returns to standby. Do not unplug the power cord until "Clear" disappears from the display.
- Step3.

RECALL (To load user preferences.)

While pressing [SETUP] button, press [RETURN] button twice.

Process List

Protection

Item (signal name)	Detection Method	Status of Equipment	Warning Indication	Service information display	Recovery Procedure
DC detection (XDCERR)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	Case A) When detect XDCERR continuously after previously shutdown by XDCERR. (At the start of power on) 1) MUTE on and Speaker Relay off. 2) Flashes "AMP ERR". 3) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled. Case B) When detect XDCERR while normal operation. 1) MUTE on and Speaker Relay off. 2) Flashes "AMP ERR". 3) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled for 1 minute.	Case A) Blinks Hybrid standby LED indicator. (2Hz) Case B) Blinks Hybrid standby LED indicator. (1Hz)	DC	INFO + ZONE(long press)
Over Current Detection (XOLERR)	Observe with 20 msec interval and Decide by low level detection.	Shut down	N/A	OL	POWER ON
Combination of DC and Overcurrent	Decide by Over Current detection within 3 seconds after DC detection.	Shut down	N/A	COM	POWER ON
Overheat Detection (TEMPERR5)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	1) Flashes "AMP OVERHEAT". 2) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled for 1 minute.	Blinks Hybrid standby LED indicator. (1Hz)	STMP	INFO + ZONE(long press)
XVDDERR failure Detection (XVDDERR)	Observe with 20 msec interval and Decide by 10 times continuously low level detection.	Shut down	N/A	DERR	POWER ON
Amplifier Power Supply Failure Detection (XBERR)	A/D conversion with 5 msec interval and Decide by 8 times continuously low level detection.	Shut down *Operation (except recovery procedure) is disabled.	Blinks Hybrid standby LED indicator. (2Hz)	BERR	INFO + ZONE(long press)
AC Pulse failure Detection (ACWP)	Observe with 1~ 2 msec interval.	1) There are no change of signal(low or high) among 32 msec. Turn on the mute. 2) There are change of signal among 32msec to 42msec. Turn off the mute and reset the count. 3) There are no change of signal among 42msec. Shutdown.	N/A	N/A	POWER ON
Fan Abnormality Detection (XFANERR)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	1) Flashes "FAN STOP". 2) Shuts down when abnormality continues for more than 3 seconds.	N/A	FAN	POWER ON

Service information (Detected protection history)

Protection

Purpose

The number of detections for various protection processes are displayed.

How to enter to service information mode.

Step1 :
[INFO] + [ON/STANDBY] x 2

M1.xx / xxxxxAxx — The version of main microprocessor.


Step2 :
[SETUP]

DC : * * DERR : * *

DC : DC Detection DERR : XVDERR failure Detection

Count of each protect

Step3 :
[TUNING UP] or [TUNING DOWN]

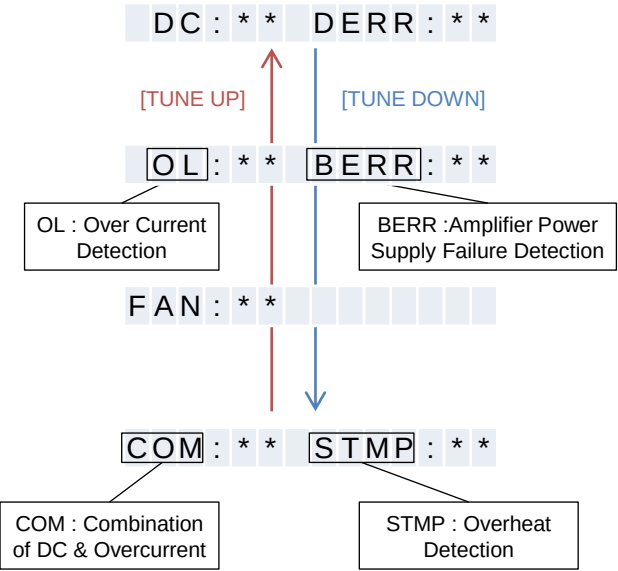

How to exit the service information mode.

Step :
[INFO]

Normal Display

How to initialize the data in the service information.

Step :
[RETURN]


ProtectDataCLR

*Unit will once become standby and then turn on again automatically.

Detection circuit

Protection


DC Detection

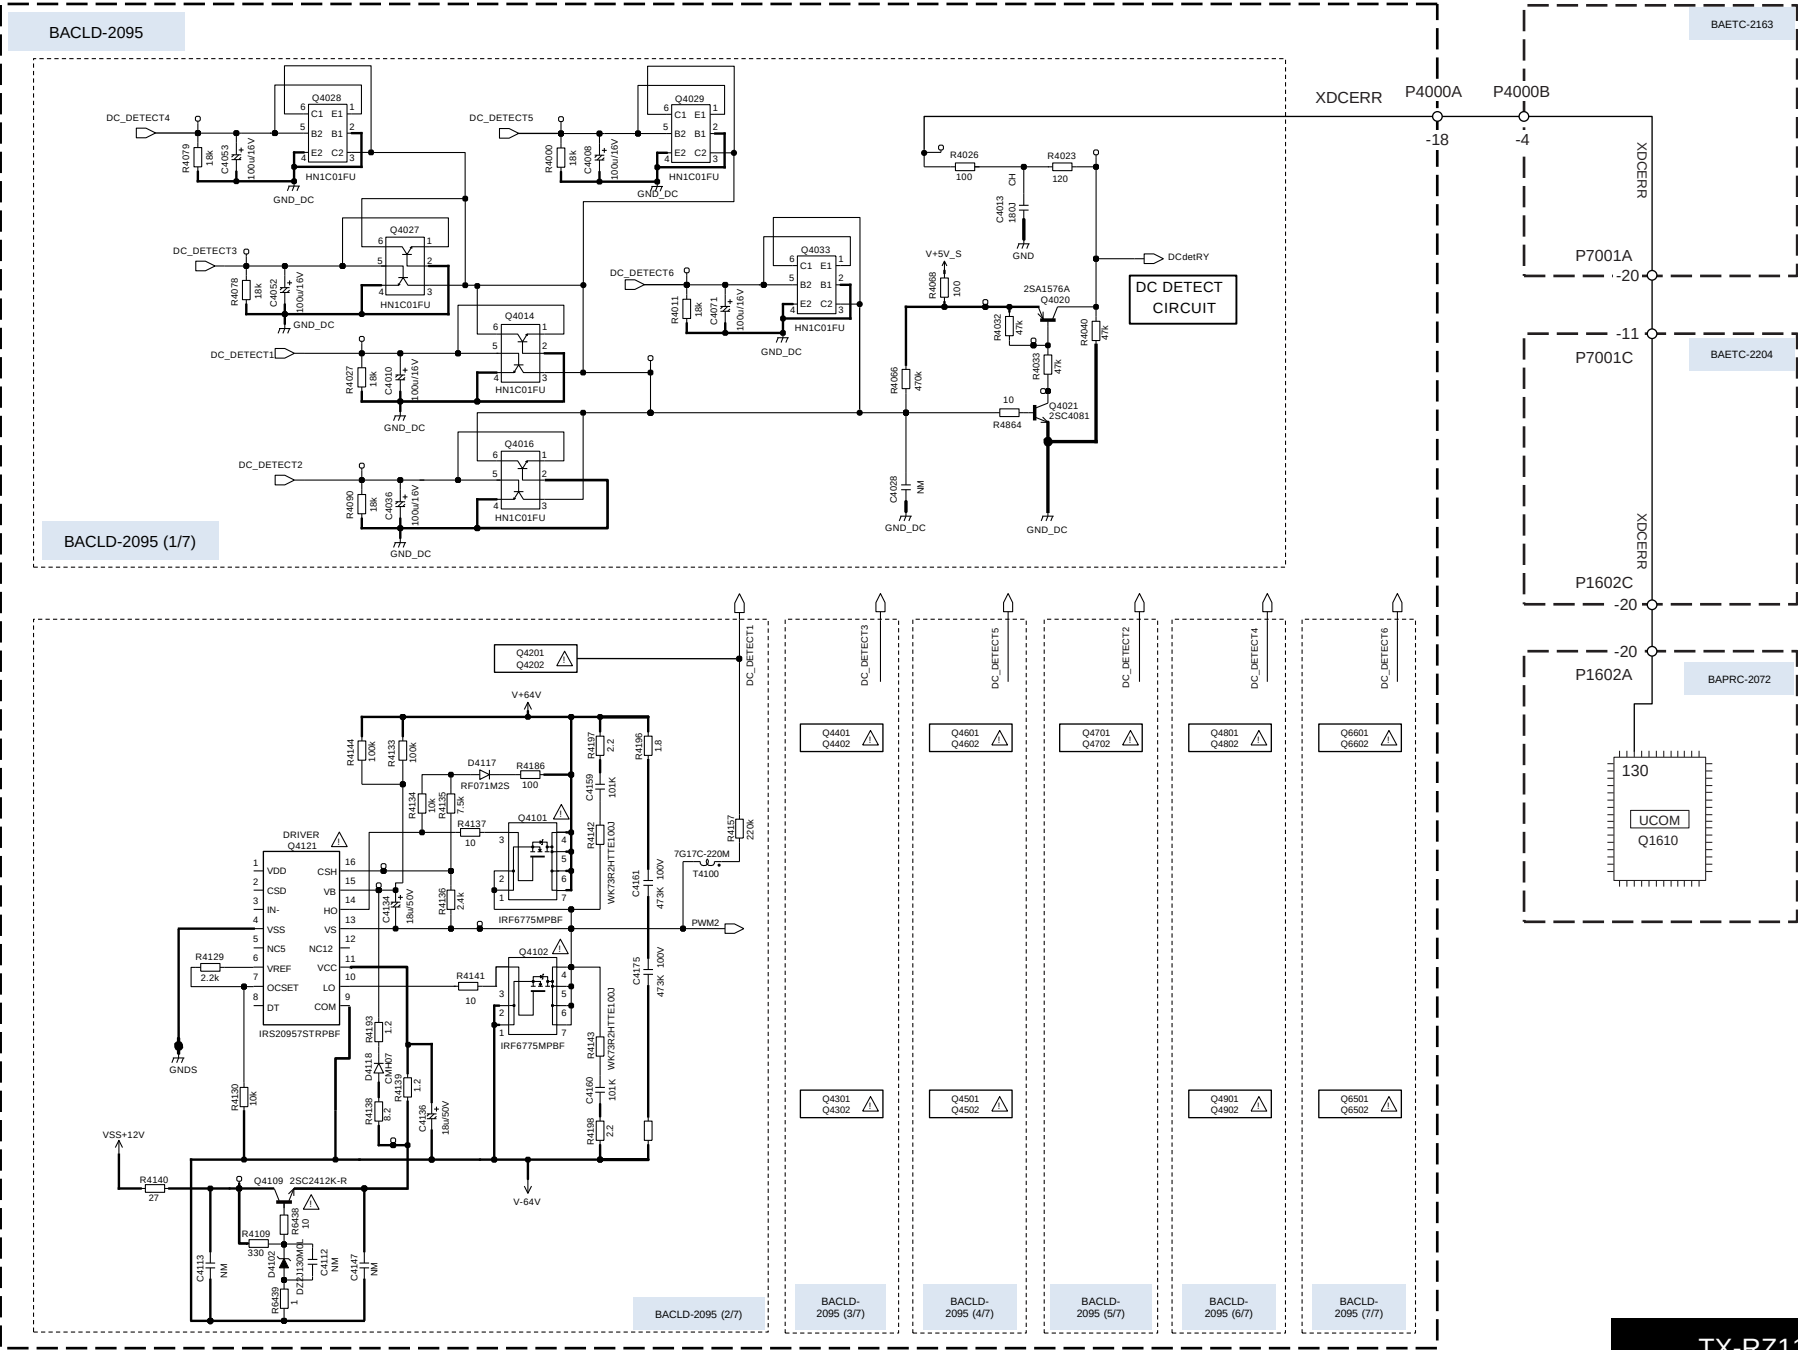

Detection circuit



Protection

Over Current Detection of MOS FET in Output Stage

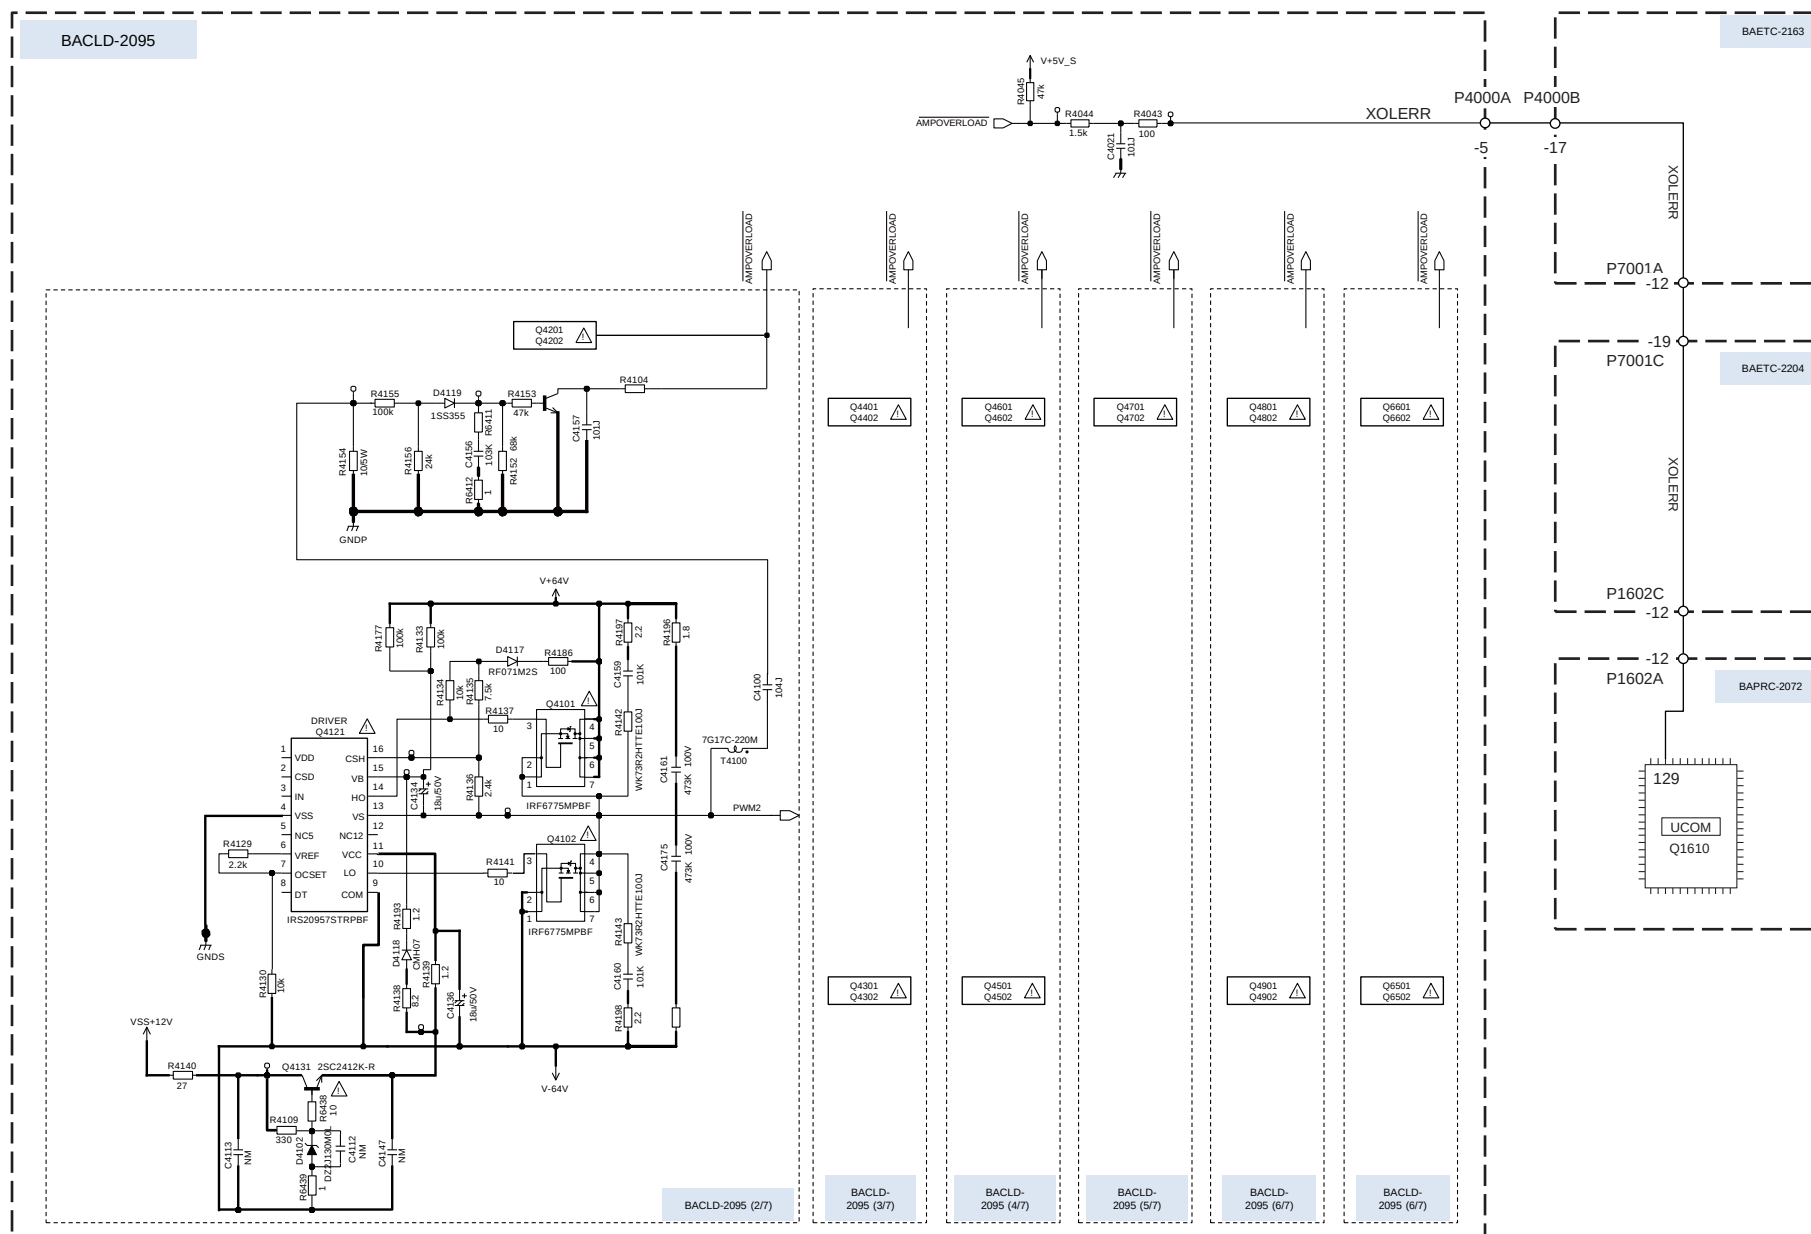


Detection circuit

Fan Abnormality Detection

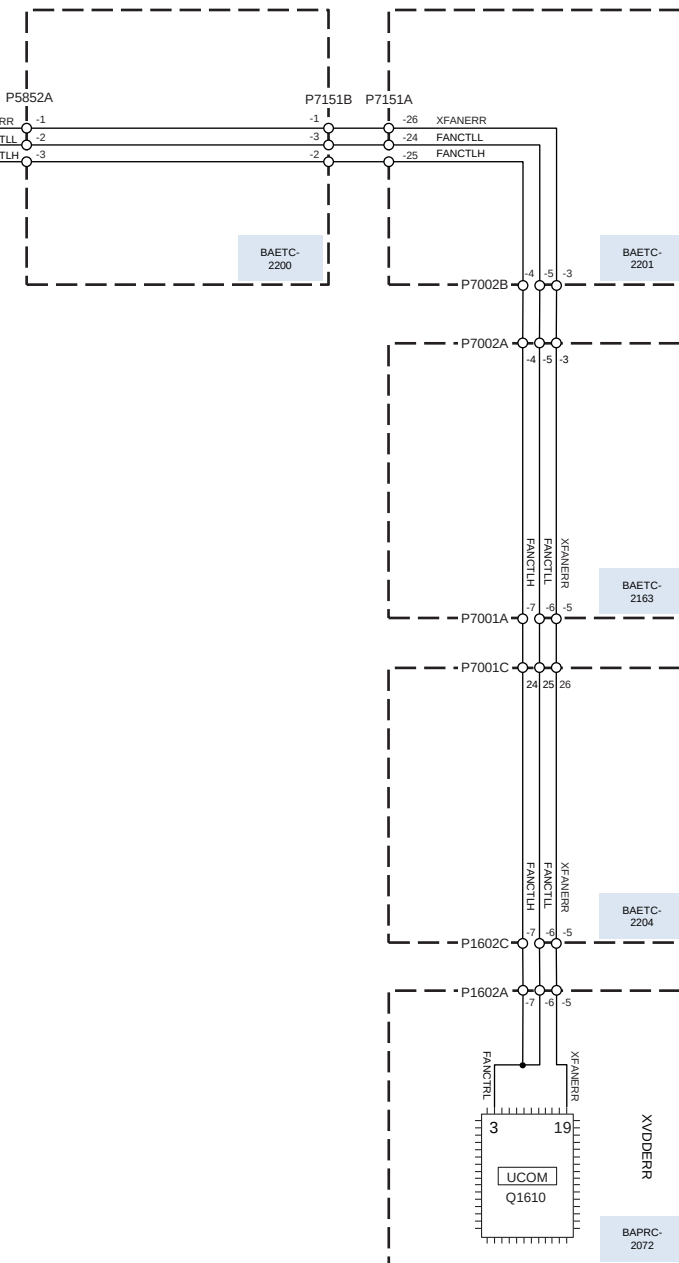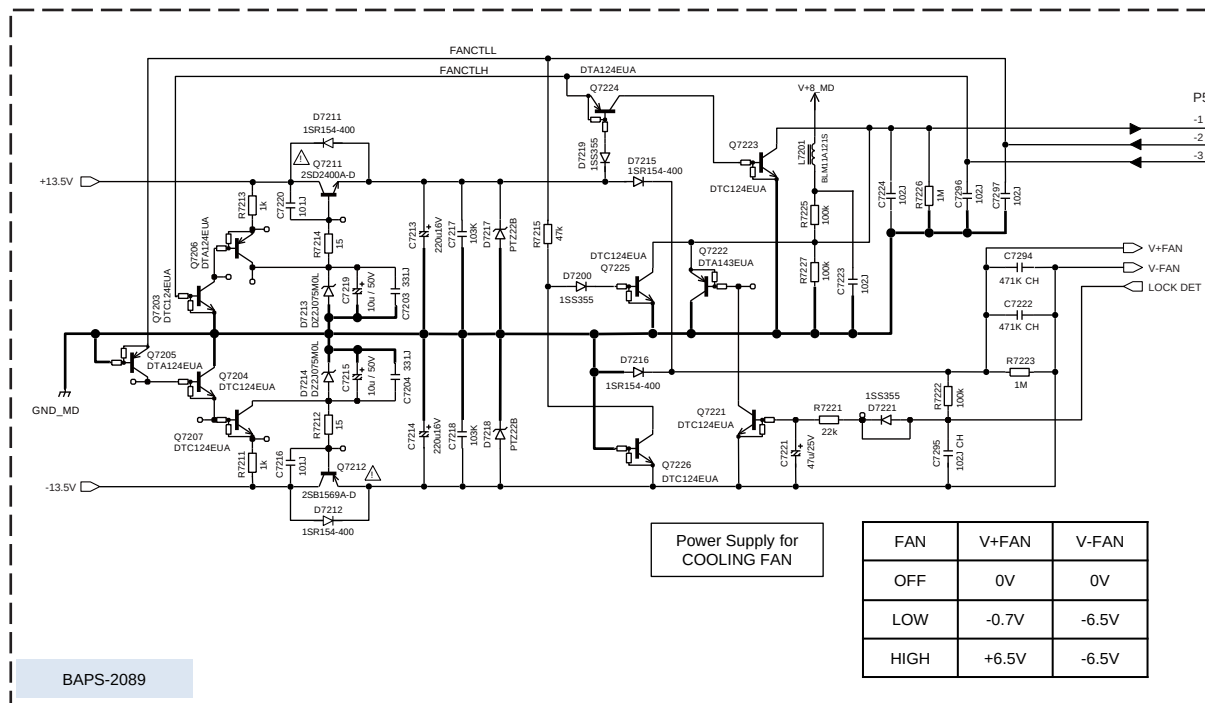

Overheat Detection


TX-RZ1100/3100

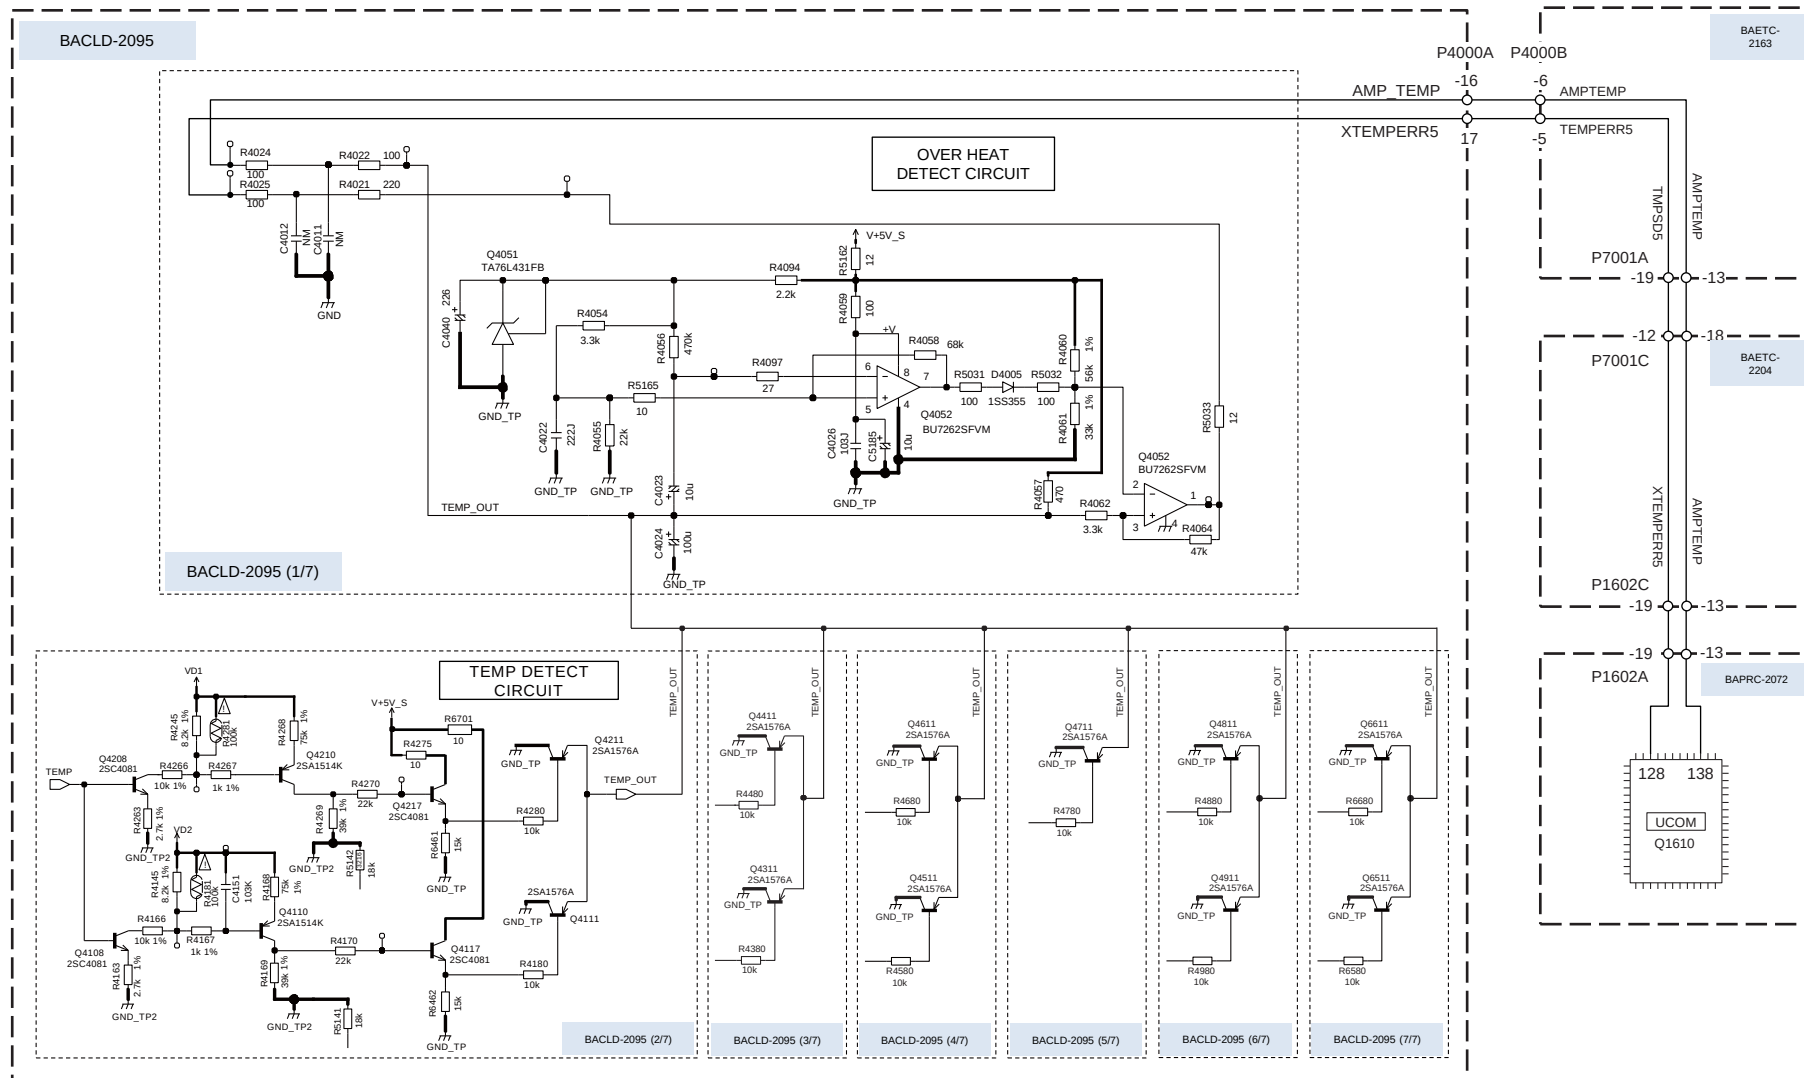


Detection circuit

Protection

XVDDERR Detection

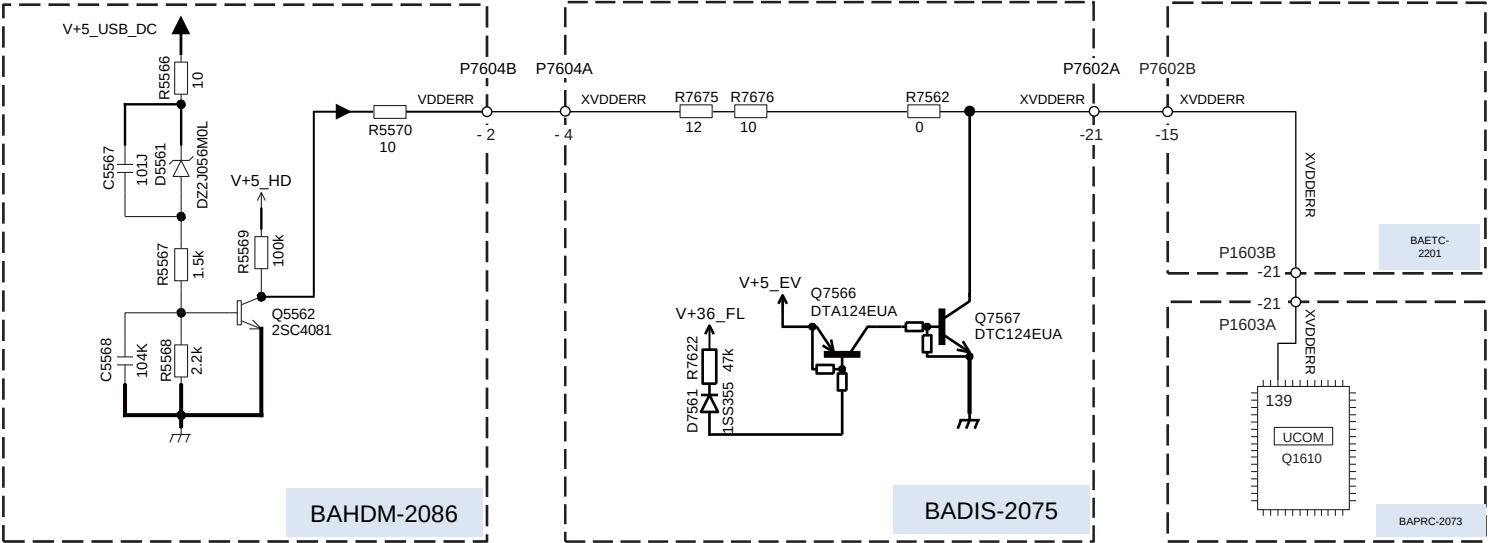

AC Pulse failure Detection

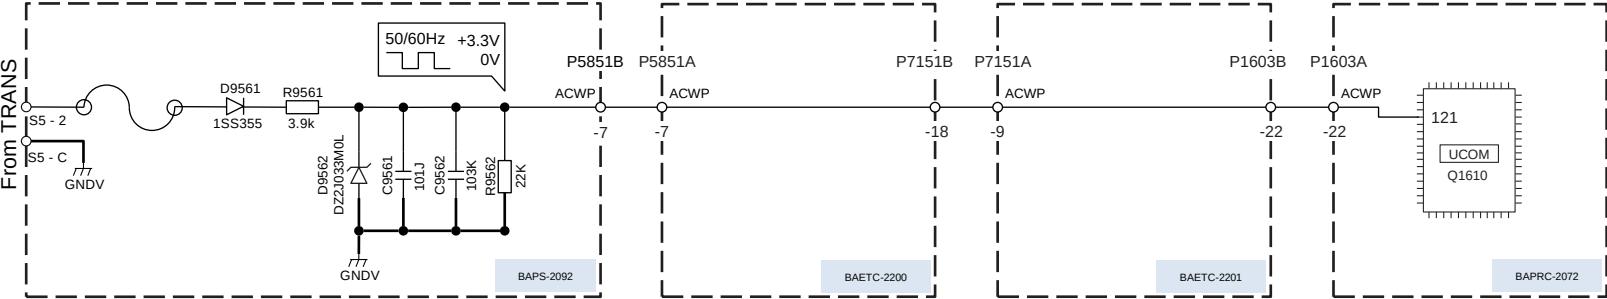

Protection

D		V+5V S			BAETL-2163	D
---	--	--------	--	--	------------	---



How to check Model & Destination

Model & Destination

- Step1 :
Set VOL Level = 40
- Step2 :
[TV] + [ON/STANDBY] → [DIMMER] → [TONE+] x 5

Model Name	Distination	FL Display													
TX-RZ1100	DC	R	Z	1	1	0	0		D	C		0	7	0	0
TX-RZ1100	xx	R	Z	1	1	0	0		x	x		0	7	1	0
TX-RZ1100	xR	R	Z	1	1	0	0		x	R		0	7	5	0
DRX-7	DD	D	R	X	-	7			D	D		1	7	0	0
DRX-7	xA	D	R	X	-	7			x	A		1	7	4	0
TX-RZ3100	DC	R	Z	3	1	0	0		D	C		0	8	0	0
TX-RZ3100	xx	R	Z	3	1	0	0		x	x		0	8	1	0
TX-RZ3100	xR	R	Z	3	1	0	0		x	R		0	8	5	0
DRX-R1	DD	D	R	X	-	R	1		D	D		1	8	0	0
DRX-R1	xx	D	R	X	-	R	1		x	x		1	8	1	0
DRX-R1	JJ	D	R	X	-	R	1		J	J		1	8	2	0
DRX-R1	xR	D	R	X	-	R	1		x	R		1	8	5	0
PR-RZ5100	DC	R	Z	5	1	0	0		D	C		0	9	0	0
PR-RZ5100	xx	R	Z	5	1	0	0		x	x		0	9	1	0
PR-RZ5100	xR	R	Z	5	1	0	0		x	R		0	9	5	0
DRC-R1	DD	D	R	C	-	R	1		D	D		1	9	0	0
DRC-R1	JJ	D	R	C	-	R	1		J	J		1	9	2	0
DRC-R1	xA	D	R	C	-	R	1		x	A		1	9	4	0
DRC-R1	xR	D	R	C	-	R	1		x	R		1	9	5	0

This list is MCU internal value,
And The destination code of this list,
it is different from Wi-Fi 5GHz setting Destination Code

IMPORTANT!!

Back Ground:

It is totally different from Radio Law at the each country on 5GHz band.
It means it is totally different from enabled Channel of 5GHz band at the each country.
We define the “Country Code” for 5GHz band.
You must set up the appropriate country code to the product.

Example;

Case1:
When you use the “P” destination products and bring move to Russia or Israel,
If you did not setup change country code and use in Russia and Israel,
You will be on the illegal Radio Law in Russia and Israel.
Case2;
When you use “C” or “D” destination product bring move to Japan or Taiwan,
If you did not setup change country code and use in Japan and Taiwan,
You will be on the illegal Radio Law in Japan and Taiwan.

Service Parts information:

The default country code is set on “Processing Circuit Board(PRC board)”.
You must make sure and set up the “Country Code” when you replace the processing circuit pc board (i.e. BAPRC-2072).
Otherwise You and your customer should be on the illegal Radio Law and

IT HAS POSSIBILITY TO HAVE A RISK OF
PUNISHMENT FROM EACH COUNTRY GOVERNMENT.

If you did not make sure country code and no setup code and face any trouble,
We does not have any responsibility.

For setting up the Country Code,
**Please ask the procedure of changing country code
to your distributor or our sales.**
It is no described the procedure of changing Country Code on this Service Manual

If you have any trouble of unclear procedure for update country code,
Please contact our sales department.

PRC Board Default Value of Country Code

The PRC board is already set default Country Code by the representative destination.
To confirm the default country code, Please refer to the "How to read PRC Board part
number and Default value of Country Code" section.

IMPOTANT!!**Make sure and Setup Country Code**


You have to make sure country code for using or replacing “Processing Circuit PC Board”.

It means that you have to make sure [country code](#) between using Processing Circuit PC board(PRC Board) and your customer’s country code.


When it is not match PRC board default country code and customer’s country, you have to setup [Country Code](#).

Case3;


When you repair the “P” destination products and replace “P” destination PRC Board and the customer live in UK, It is no necessary to setup Country Code
Because “P” destination PRC board already setup “EU” country code.

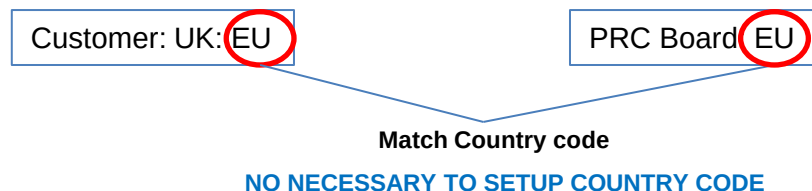**Case4;**


When you repair the “P” destination products and replace “P” destination PRC board and the customer live in Russia, It is necessary to setup Country Code
Because “P” destination PRC Board already setup “EU” country code.
However, the customer’s country code is “RU”. It means no match PRC Board code and Customer’s code.

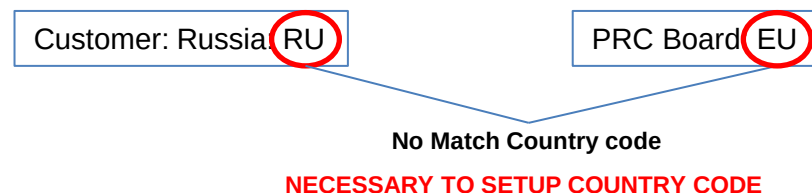**Case5;**

When you repair the “C” destination products and replace “C” destination PRC board and the customer live in US, it is no necessary to setup Country Code
Because “C” destination PRC board already setup “US” country code.

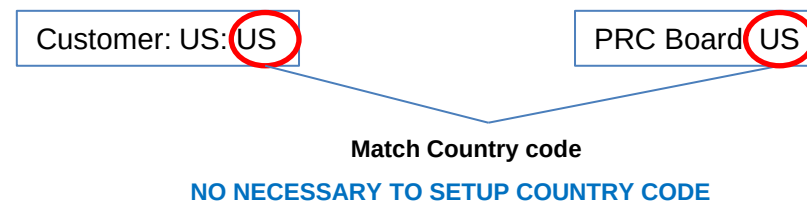**Case6;**

When you repair the “C” destination product and replace “C” destination PRC board and the customer live in Taiwan, It is necessary to setup Country Code.
Because “C” destination PRC Board already setup “US” country code as default.
However, the customer’s country code is “TW”. It means no match PRC Board code and the customer’s country code

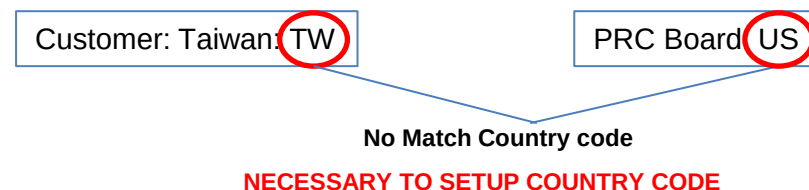

Region	Country	Code
America	USA	US
	Canada	US
	Mexico	US
	Brazil	US
	Chile	CL
	Guatemala	US
	Puerto Rico	US
	Trinidad	TT
	Dominican Rep	US
	Argentina	AR
	Ecuador	US
	Paraguay	PY
	Colombia	US
	Guam	US
	Panama	US
	Costa Rica	US
	Uruguay	UY
	Peru	PE

Region	Country	Code
Asia / Oceania	Japan	JP
	China	CN
	Hong Kong	EU
	Korea	KR
	Taiwan	TW
	Singapore	SG
	Malaysia	MY
	Philippines	EU
	Vietnam	EU
	Indonesia	ID
	Sri Lanka	EU
	Australia	AU
	New Zealand	AU
	Thailand	EU
	India	IN
	Pakistan	PK

Region	Country	Code
Middle East	UAE	EU
	Bahrain	BH
	Kuwait	KW
	Oman	EU
	Qatar	QA
	Lebanon	EU
	Jordan	JO
	Saudi Arabia	EU

Region	Country	Code
Europe / Africa	Germany	EU
	UK	EU
	France	EU
	Netherlands	EU
	Italy	EU
	Switzerland	EU
	Denmark	EU
	Sweden	EU
	Austria	EU
	Belgium	EU
	Spain	EU
	Norway	EU
	Finland	EU
	Czech	EU
	Israel	IL
	Ukraine	EU
	Hungary	EU
	Slovakia	EU
	Luxembourg	EU
	Turkey	EU
	Portugal	EU
	Malta	EU
	Latvia	EU
	Poland	EU

Region	Country	Code
Europe / Africa	Cyprus	EU
	Estonia	EU
	Slovenia	EU
	Bulgaria	EU
	Greece	EU
	Romania	EU
	Lithuania	EU
	Serbia	EU
	Croatia	EU
	Ireland	EU
	Macedonia	EU
	Moldova	EU
	Russia	RU
	Andorra	EU
	Armenia	EU
	Azerbaijan	EU
	Belarus	EU
	Bosnia and Herzegovina	EU
	Northern Cyprus(Turkey)	EU
	Georgia	EU
	Iceland	EU
	Kazakhstan	EU

Region	Country	Code
Europe / Africa	Liechtenstein	EU
	Monaco	EU
	Montenegro	EU
	San Marino	EU
	Vatican City	EU
	Kosovo	EU
	Kaliningrad(Russia)	RU
	Gibraltar(UK)	EU
	Canary Islands(Spain)	EU
	Ceuta	EU
	Melilla	EU
	Morocco	MA
	Algeria	EU
	Tunisia	TN
	Egypt	EG
	Mauritius	US
	South Africa	EU

1B5142072-1A310MDC

Board No.

Suffix No.

Model Number Last 3 Digit

- 110 : TX-RZ1100
- 310 : TX-RZ3100
- 100 : PR-RZ5100

Destination

PRC Board Default setting Country Code

Dst	Code	Main Country
C	US	North America
D	US	United State
S	US	Brazil
P	EU	Europe
B	EU	United Kingdom
Q	EU	Hong Kong
T	EU	Thai
L	RU	Russia
A	AU	Australia / New Zealand
R	CN	China
F	TW	Taiwan
K	KR	Korea
J	JP	Japan

How to check Firmware Version & Preparation of Update

Firmware

- Step1** : [INFO] + [ON/STANDBY] x 2
Main Firmware Version will appear on the main unit's display.
- Step2** : [TONE +1] (Rotate "TONE" knob right 1 click)
NET Firmware Version will appear on the main unit's display.
- Step3** : [TONE +2] (Rotate "TONE" knob right 2 click)
DSP1 Firmware Version will appear on the main unit's display.
- Step4** : [TONE +3] (Rotate "TONE" knob right 3 click)
DSP2 Firmware Version will appear on the main unit's display.
- Step5** : [TONE +4] (Rotate "TONE" knob right 4 click)
DSP2 Firmware Version will appear on the main unit's display.
- Step6** : [TONE +5] (Rotate "TONE" knob right 5 click)
Video Firmware Version will appear on the main unit's display.
- Step7** : [TONE +6] (Rotate "TONE" knob right 6 click)
OSD Firmware Version will appear on the main unit's display.
- Step8** : [TONE +7 over] (Push Up Key 7 click over)
Return to Display Main Firmware Version (Return Step1)
- When it is rotated TONE knob to left , the order will be reversed.

[Preparation of Update]

1. Connect the USB storage device to your PC. If there is any data in the USB storage device, remove it.
2. Download the firmware file (package file) from the service website normally accessed.

Filename is as follows: ONKAVR0022*****.zip

Unzip the downloaded file. A following file is created.

ONKAVR0022*****.of0
ONKAVR0022*****.of1
ONKAVR0022*****.of2
ONKAVR0022*****.of3
ONKAVR0022*****.of4

3. Copy it to the USB storage device. Be careful not to copy the zip file.
4. Remove the USB storage device from your PC.

How to Update (service mode) 1/2

Overwriting is also possible.

1. Connect the USB storage to the USB port on the unit.



2. Turn on the unit. It takes some time to start after you switch on the unit.

Press: [INFO] + [ON/STANDBY] x 2

3. Press [RETURN] button, Then it is displayed as below



If you need each module of the firmware update, you can select the module by pressing PRESET < and > button.

If you need change source NET or USB, you can select the source by pressing TUNING UP and Down key

It should be updated firmware by selecting USB -> ALL normally.

Please do NOT choose T-SRV(it is test server)

Firmware

USB -> ALL: ALL firmware update (default)

USB -> DSP1: DSP1 firmware update

USB -> DSP2: DSP2 firmware update

USB -> DSP3: DSP3 firmware update

USB -> OSD: OSD firmware update

USB -> VMPU: VMPU firmware update

USB -> NET: NET firmware update

USB -> MMPU: Main MPU firmware update

USB -> WORK: Compare between AVR and USB, Only update new version firmware

NET -> ALL: ALL firmware update (default)

NET -> DSP1: DSP1 firmware update

NET -> DSP2: DSP2 firmware update

NET -> DSP3: DSP3 firmware update

NET -> OSD: OSD firmware update

NET -> VMPU: VMPU firmware update

NET -> NET: NET firmware update

NET -> MMPU: Main MPU firmware update

NET -> WORK: Compare between AVR and server, Only update new version firmware

The default setting is " ALL"



**CAUTION: When you will update each module firmware,
you have to keep combination of firmware.**

TX-RZ1100/3100/PR-RZ5100

4. Press [ENTER] button. Start update firmware.



5. Wait until update is completed. When the update ends, "Completed!" is displayed. When " Completed!" message appeared, you can power off by pressing " ON/STANDBY" button.




6. Press [ON/STANDBY] button, and the unit turns on.

7. Check the new FW version number.

<Note>

If the procedure might not be successful, please select "USB -> ALL".

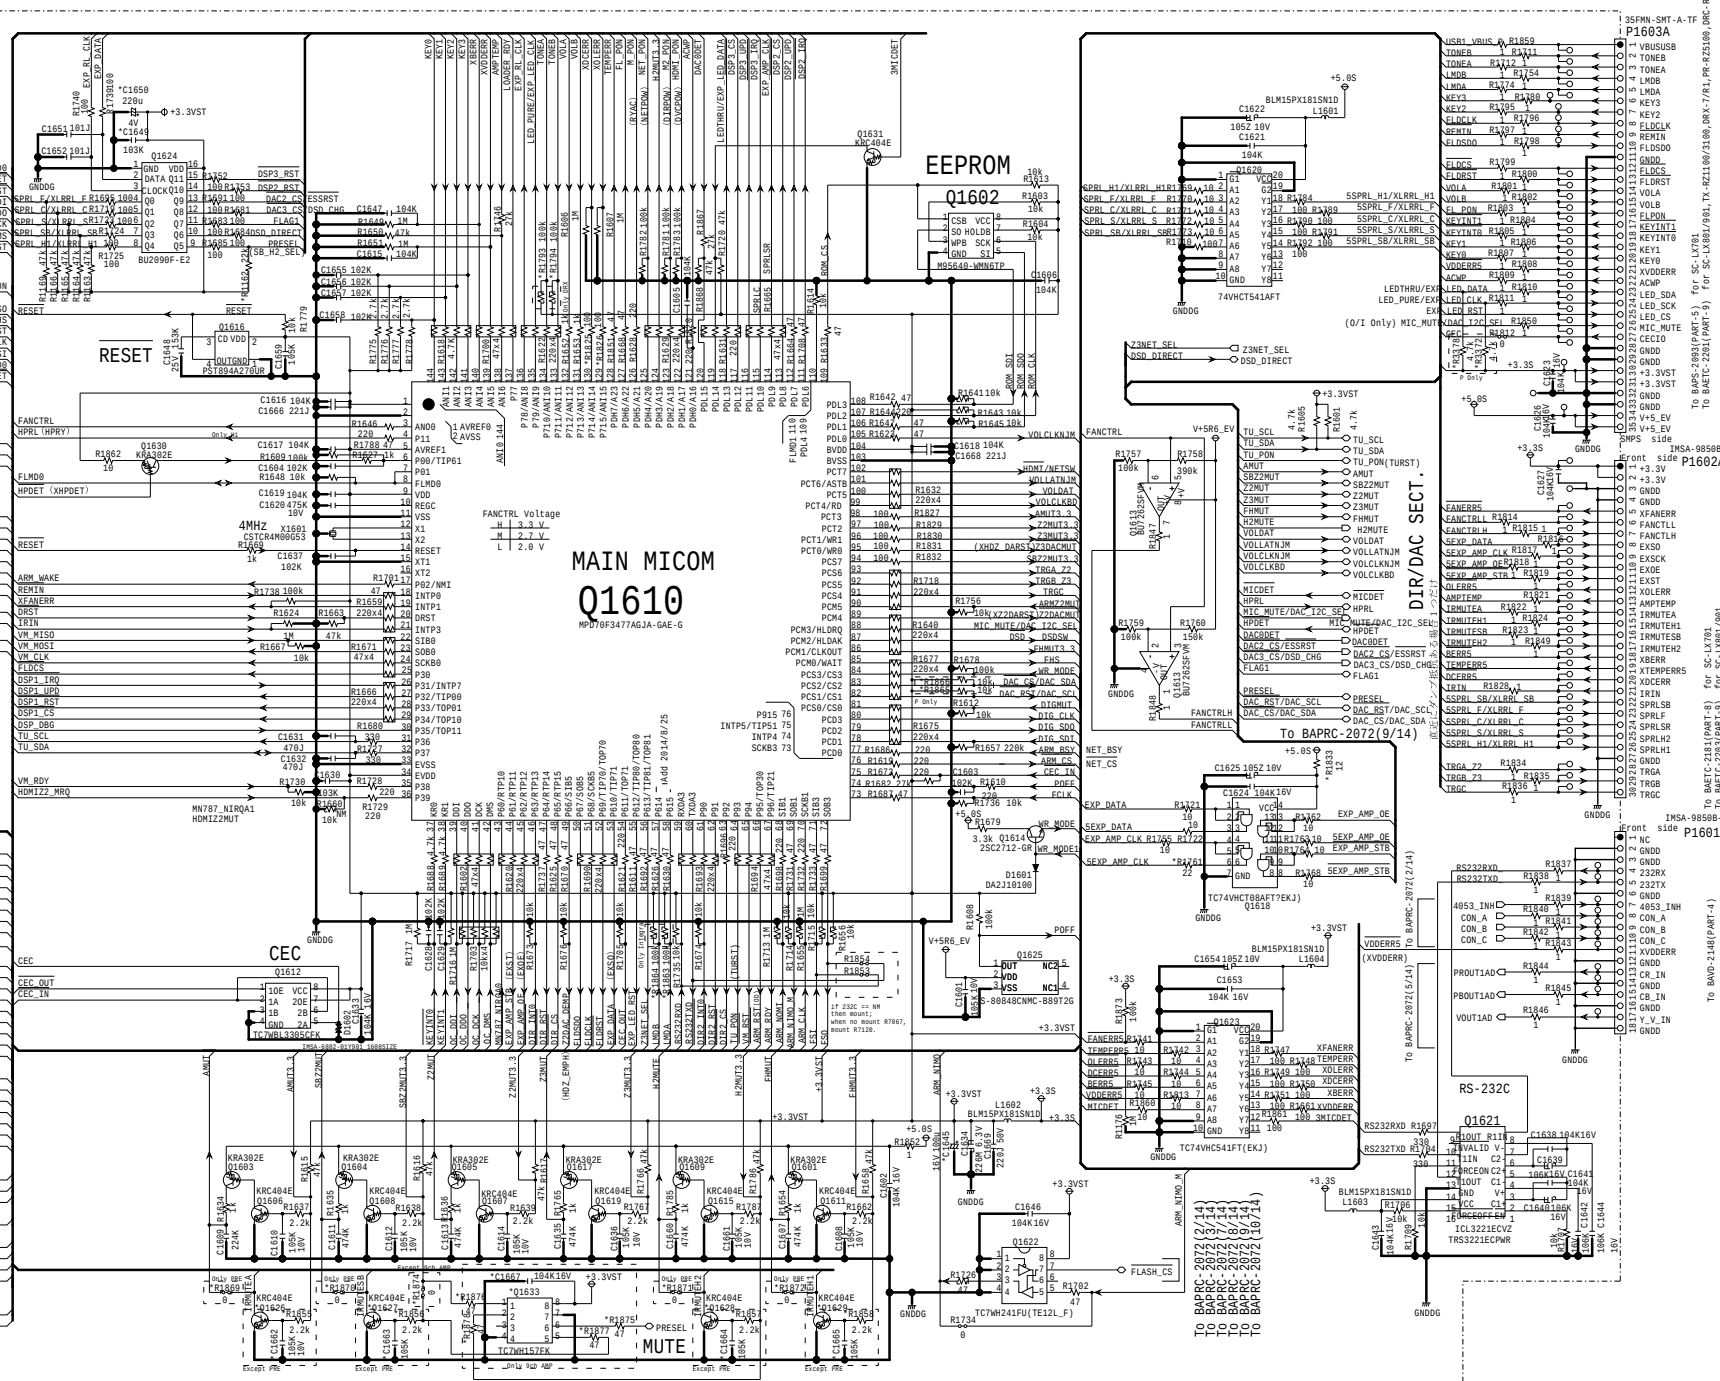

Schematic Diagram

	5	6
	Schematic Diagram	


E



A

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-1) VSP SECTION

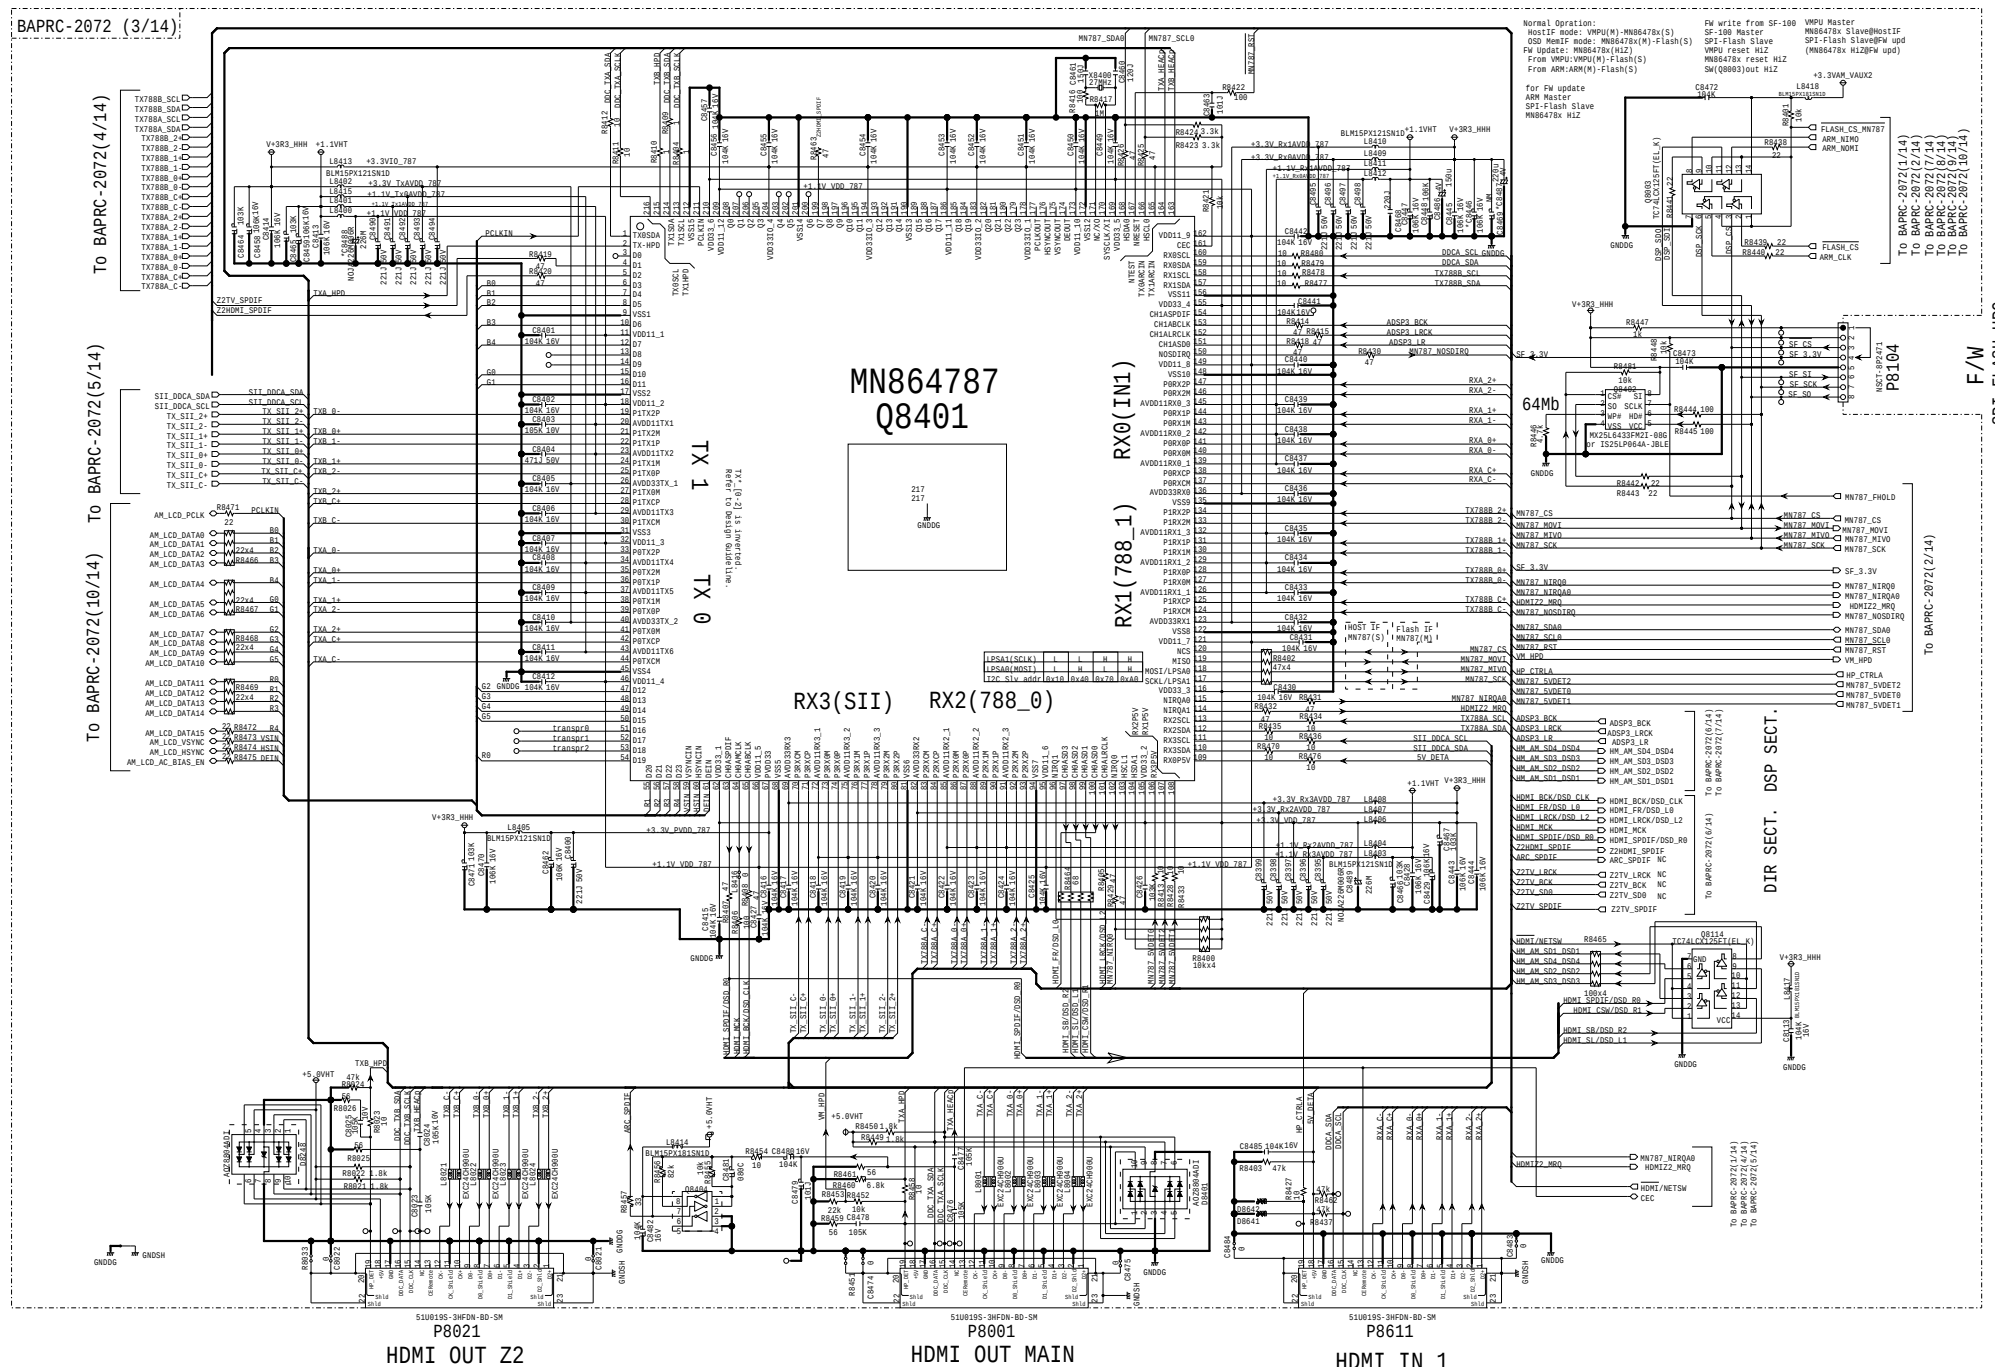


Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,
DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-1) HDMI RX1 SECTION

BAPRC-2072 (4/14)

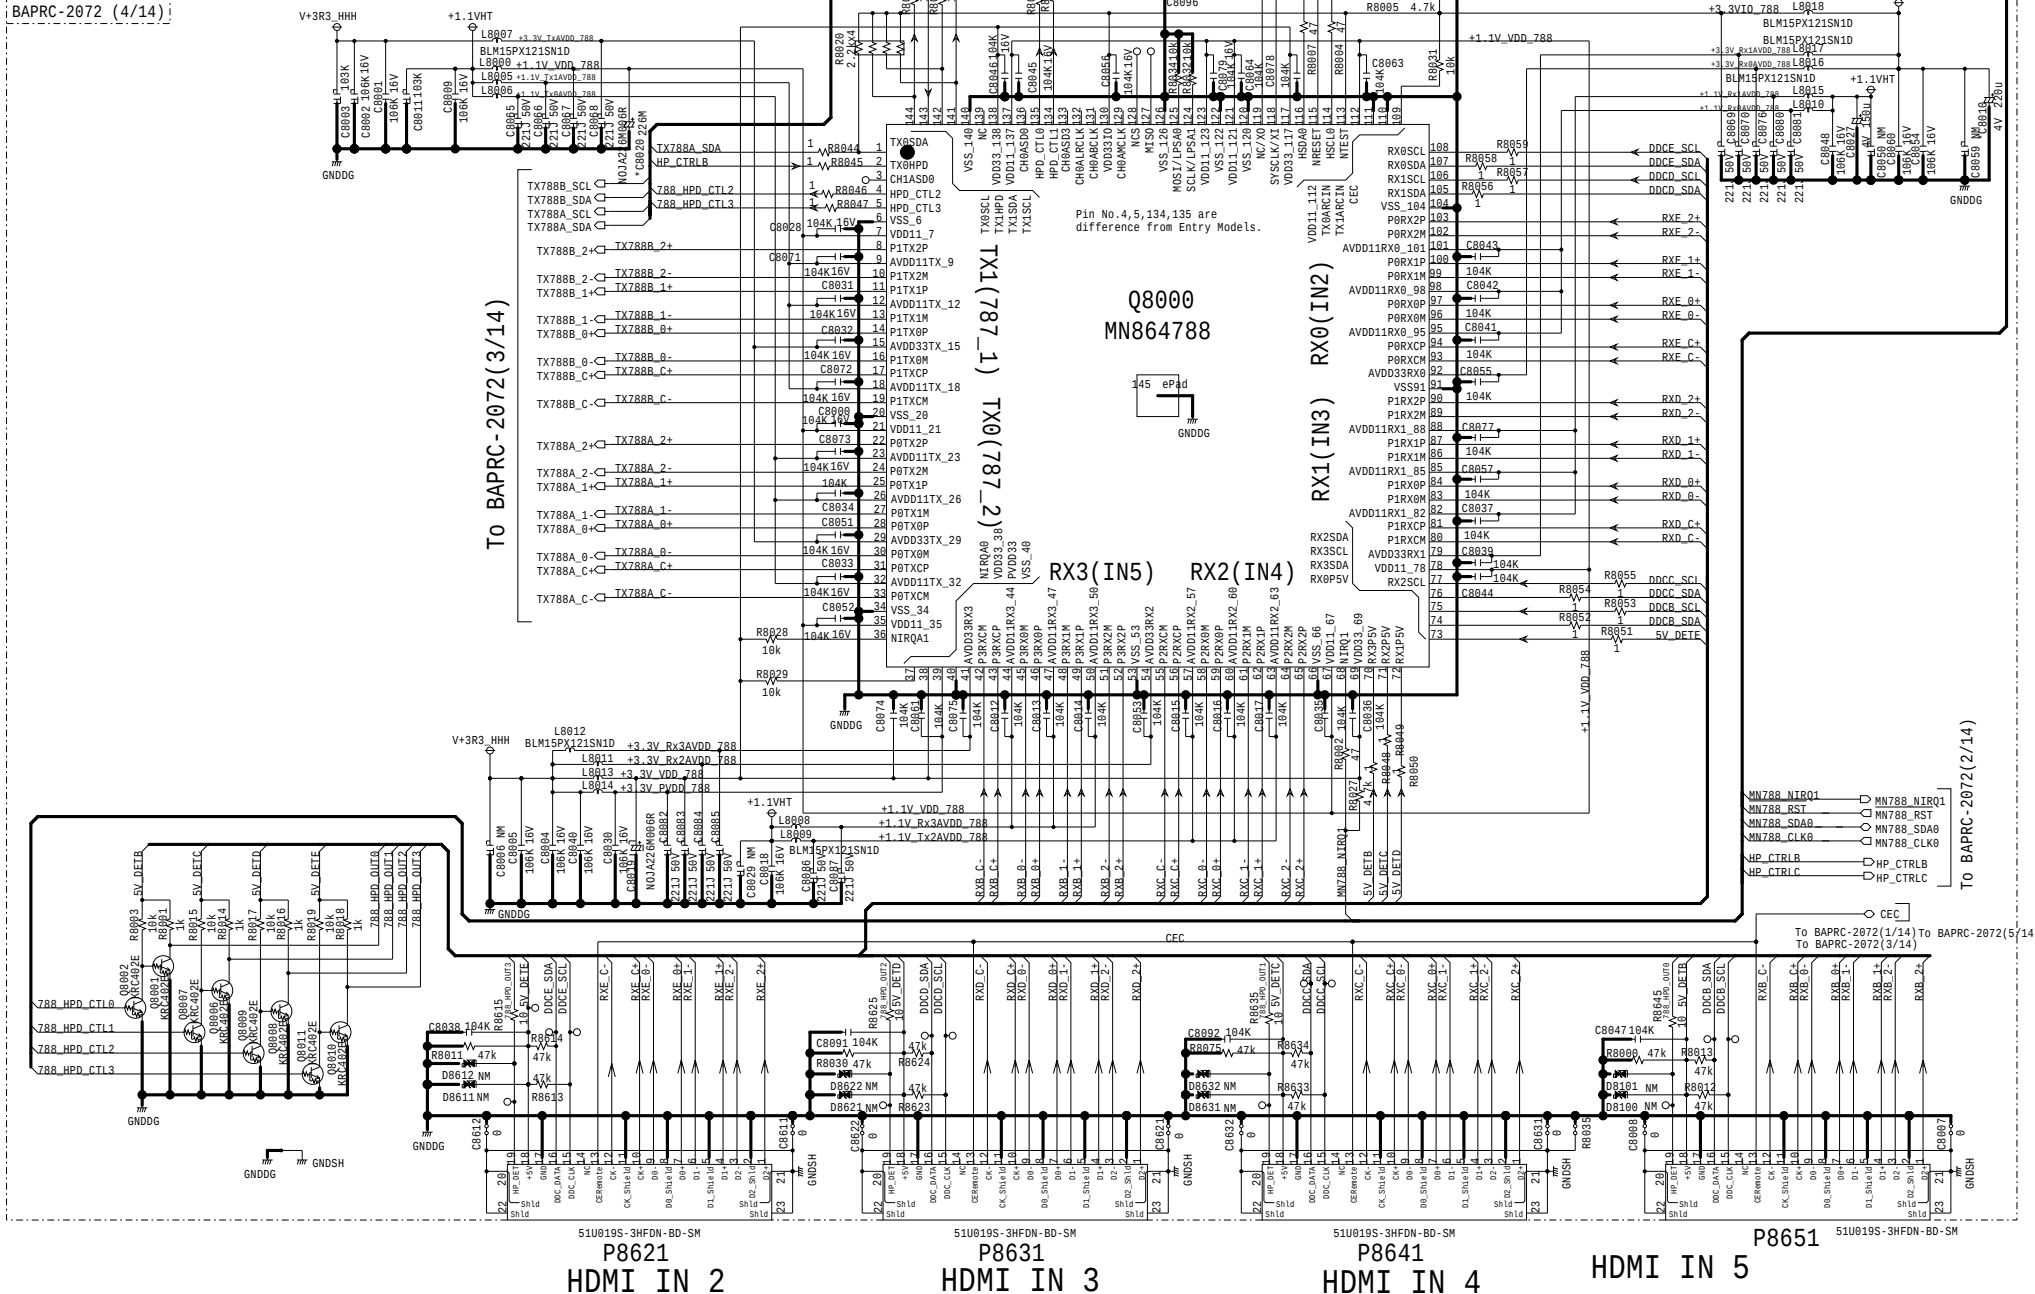


MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1)


HDMI RX2 SECTION

BAPRC-2072 (5/14)

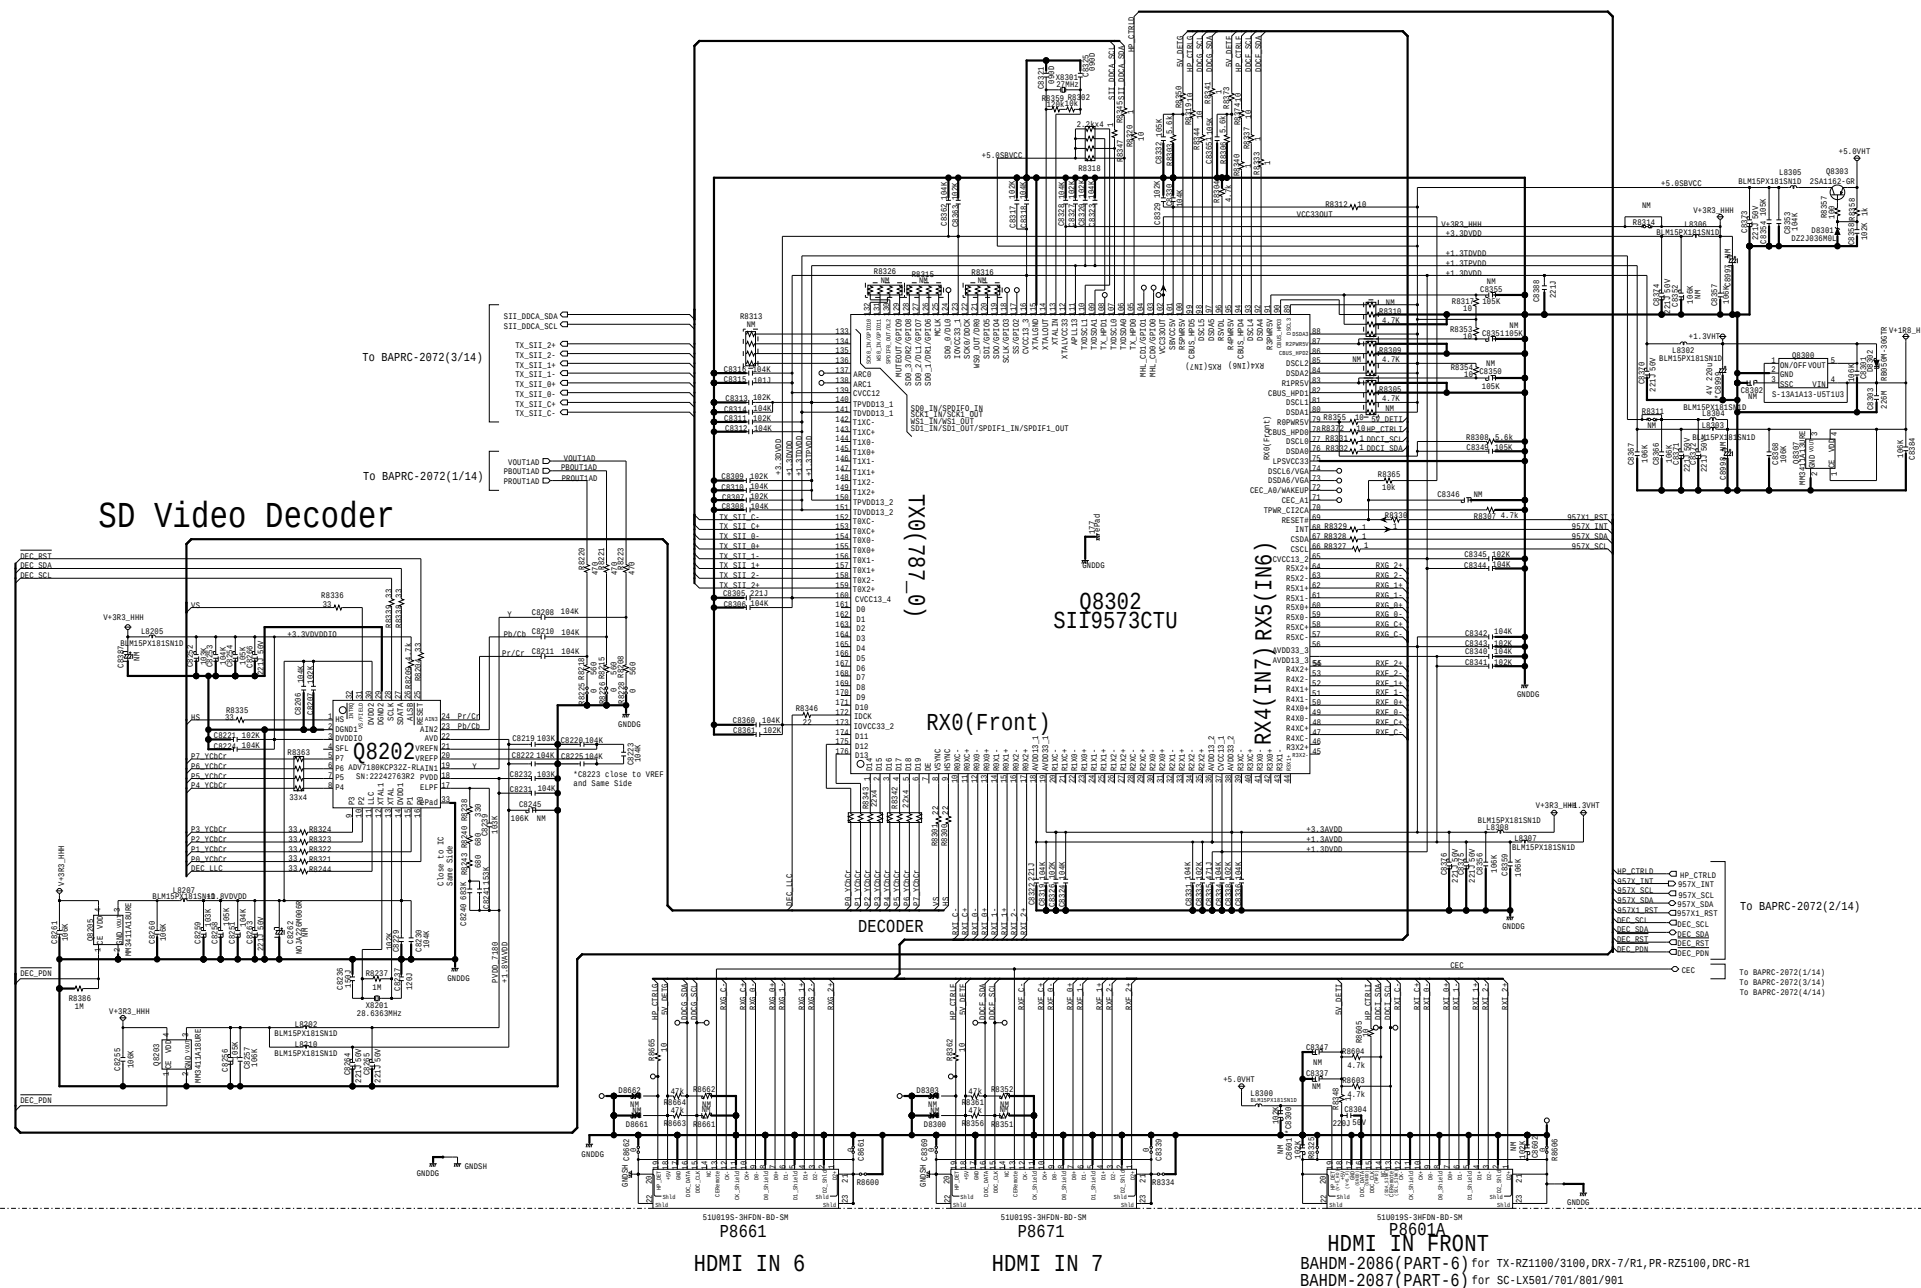

SCHEMATIC DIAGRAM (PART-1) DIR SECTION

BAPRC-2072 (6/14)

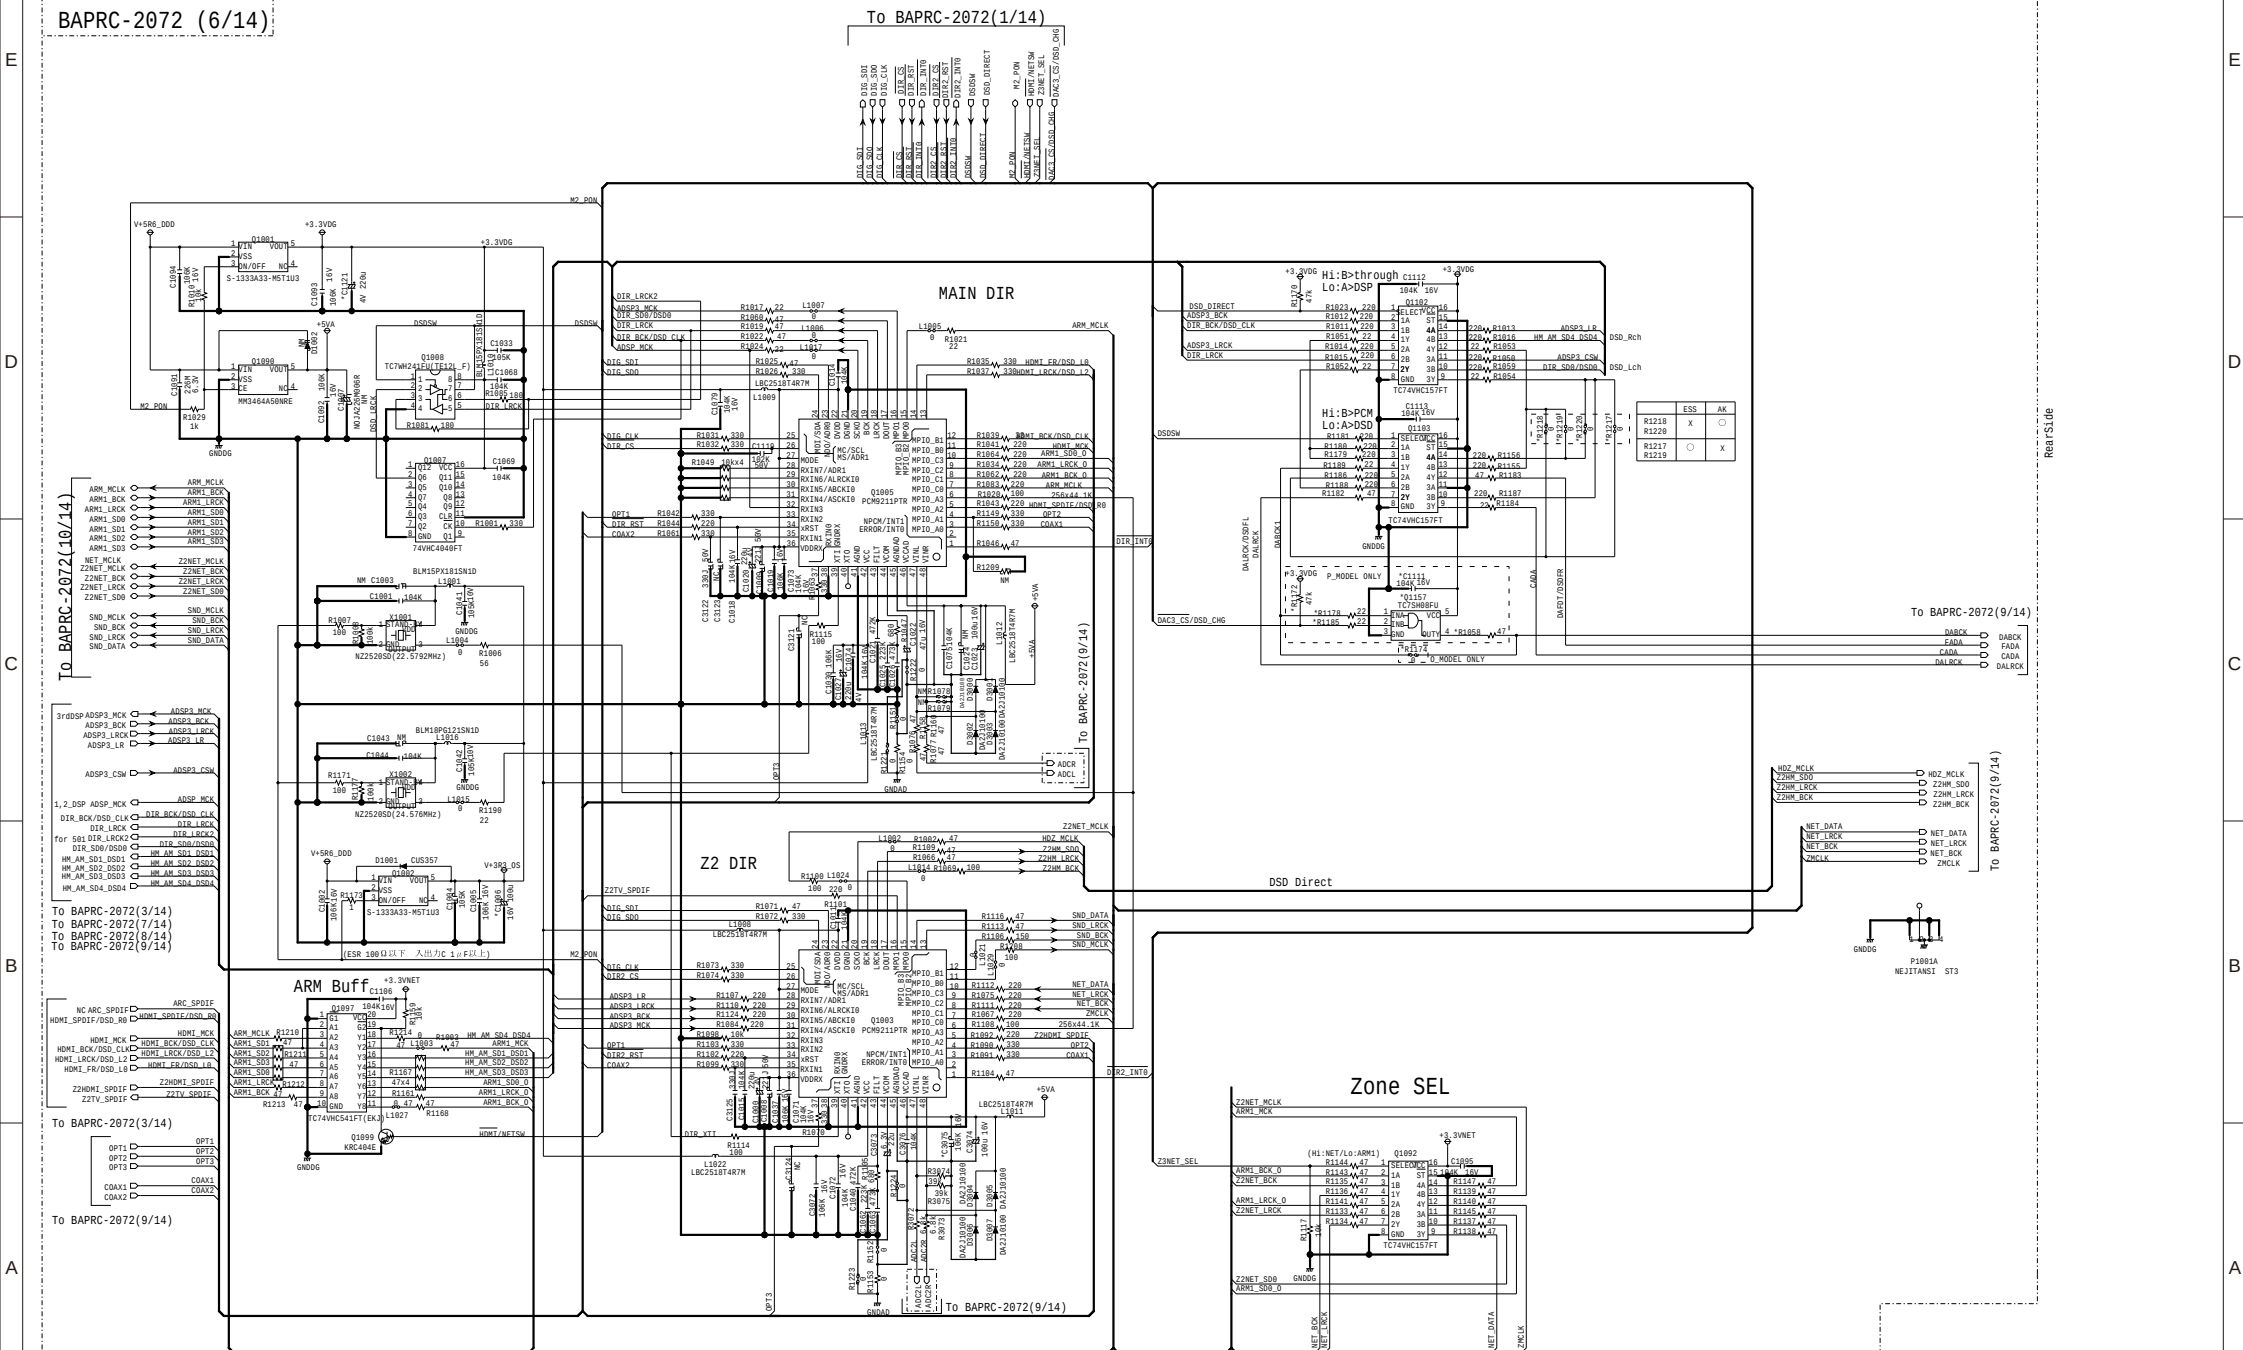


Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1) 1stDSP SECTION


BAPRC-2072 (7/14)

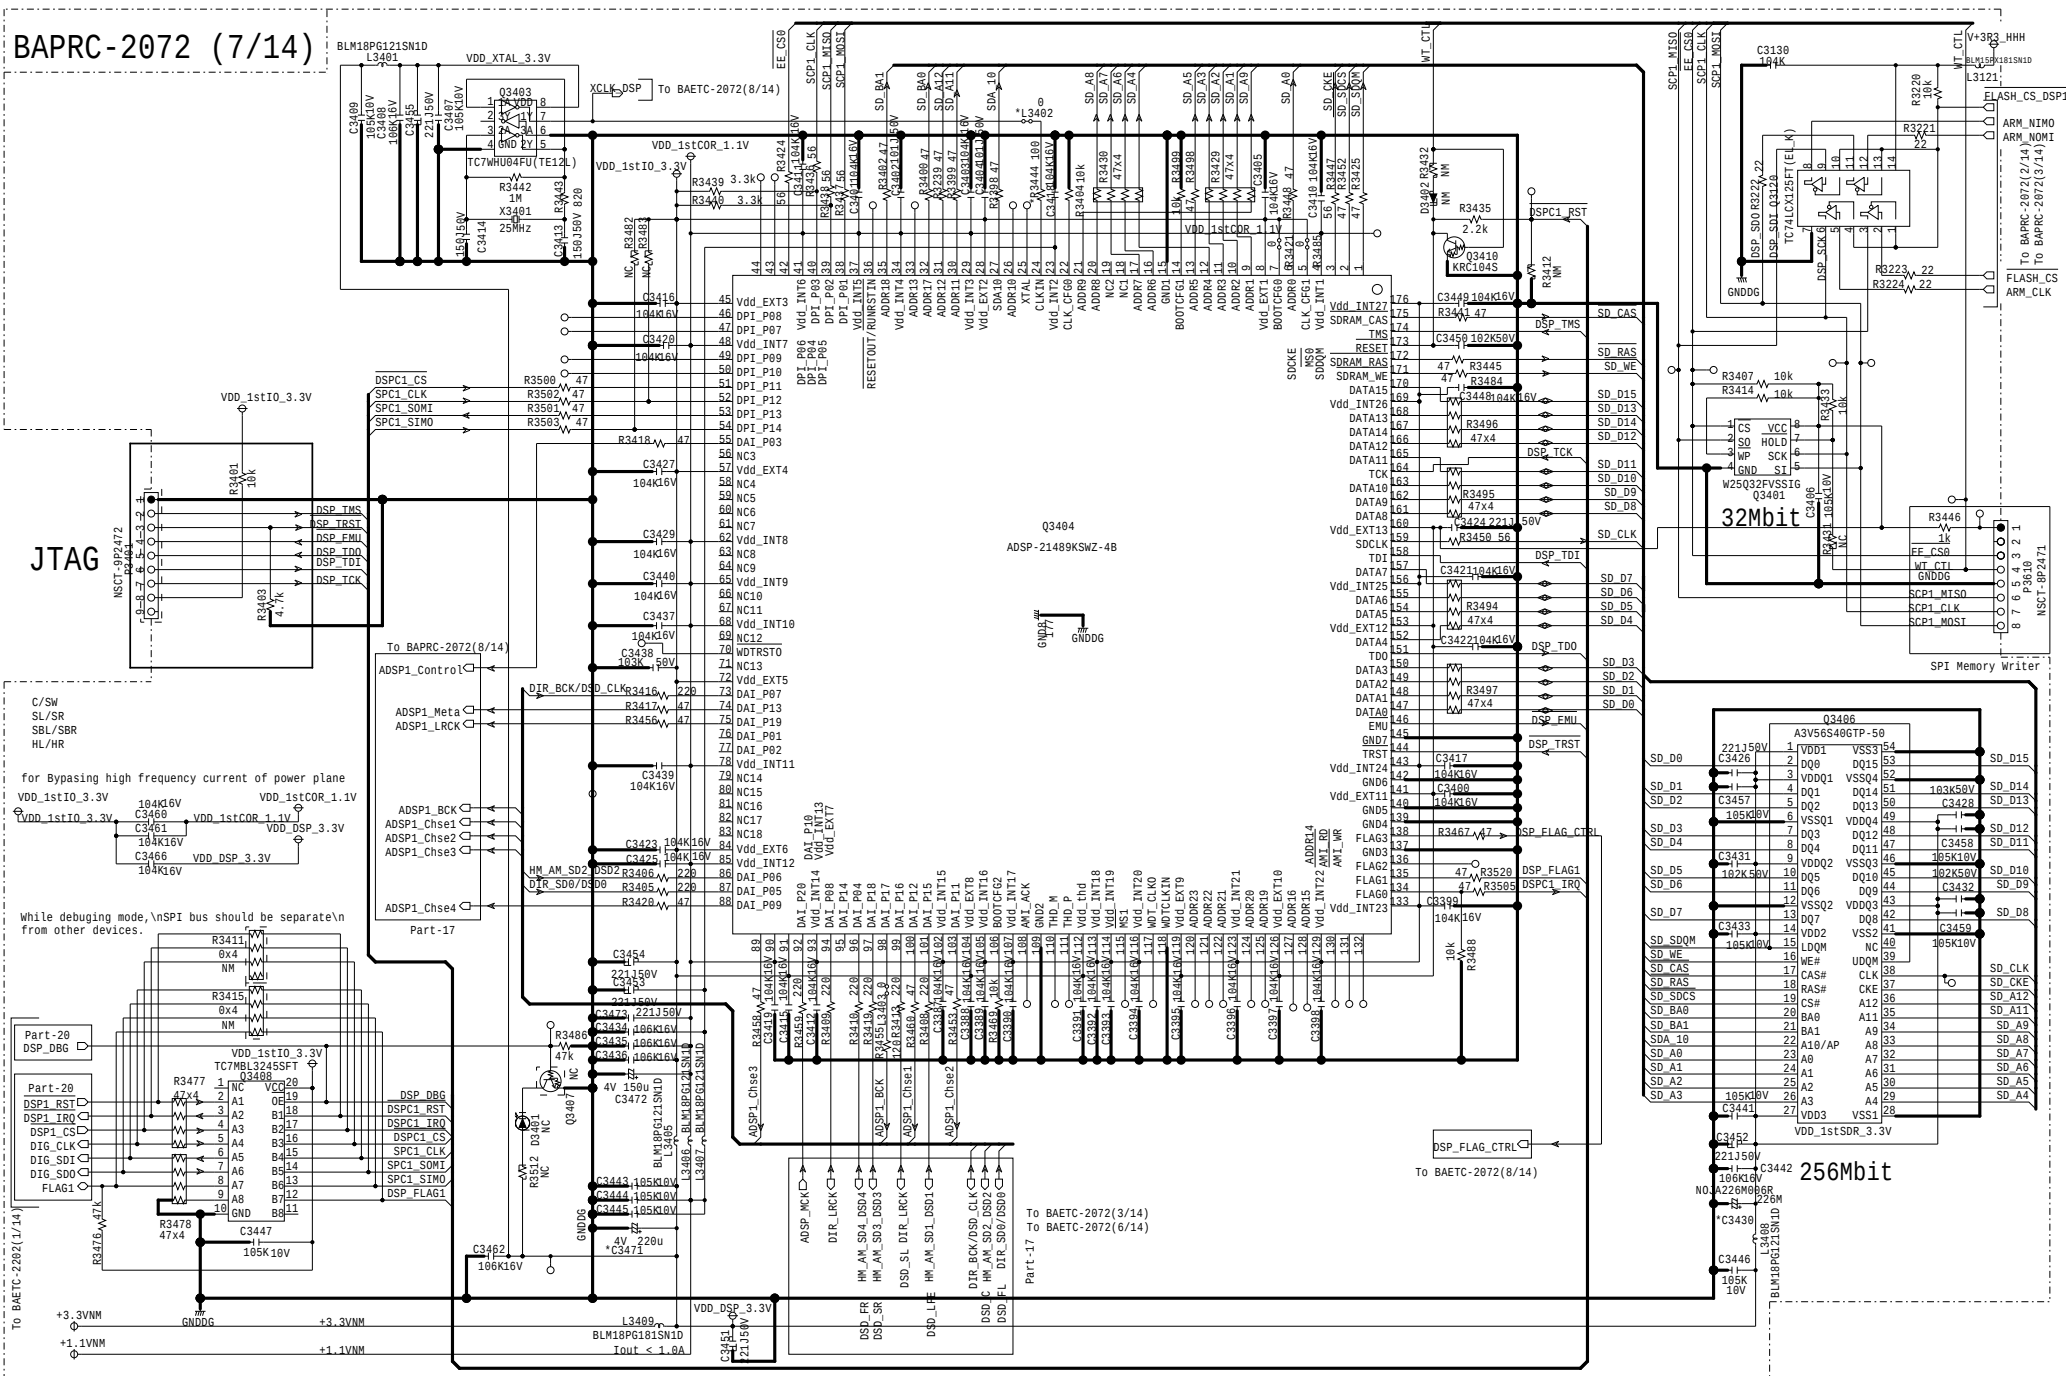

Schematic Diagram

SCHEMATIC DIAGRAM (PART-1) 2ndDSP SECTION

BAPRC-2072 (8/14)

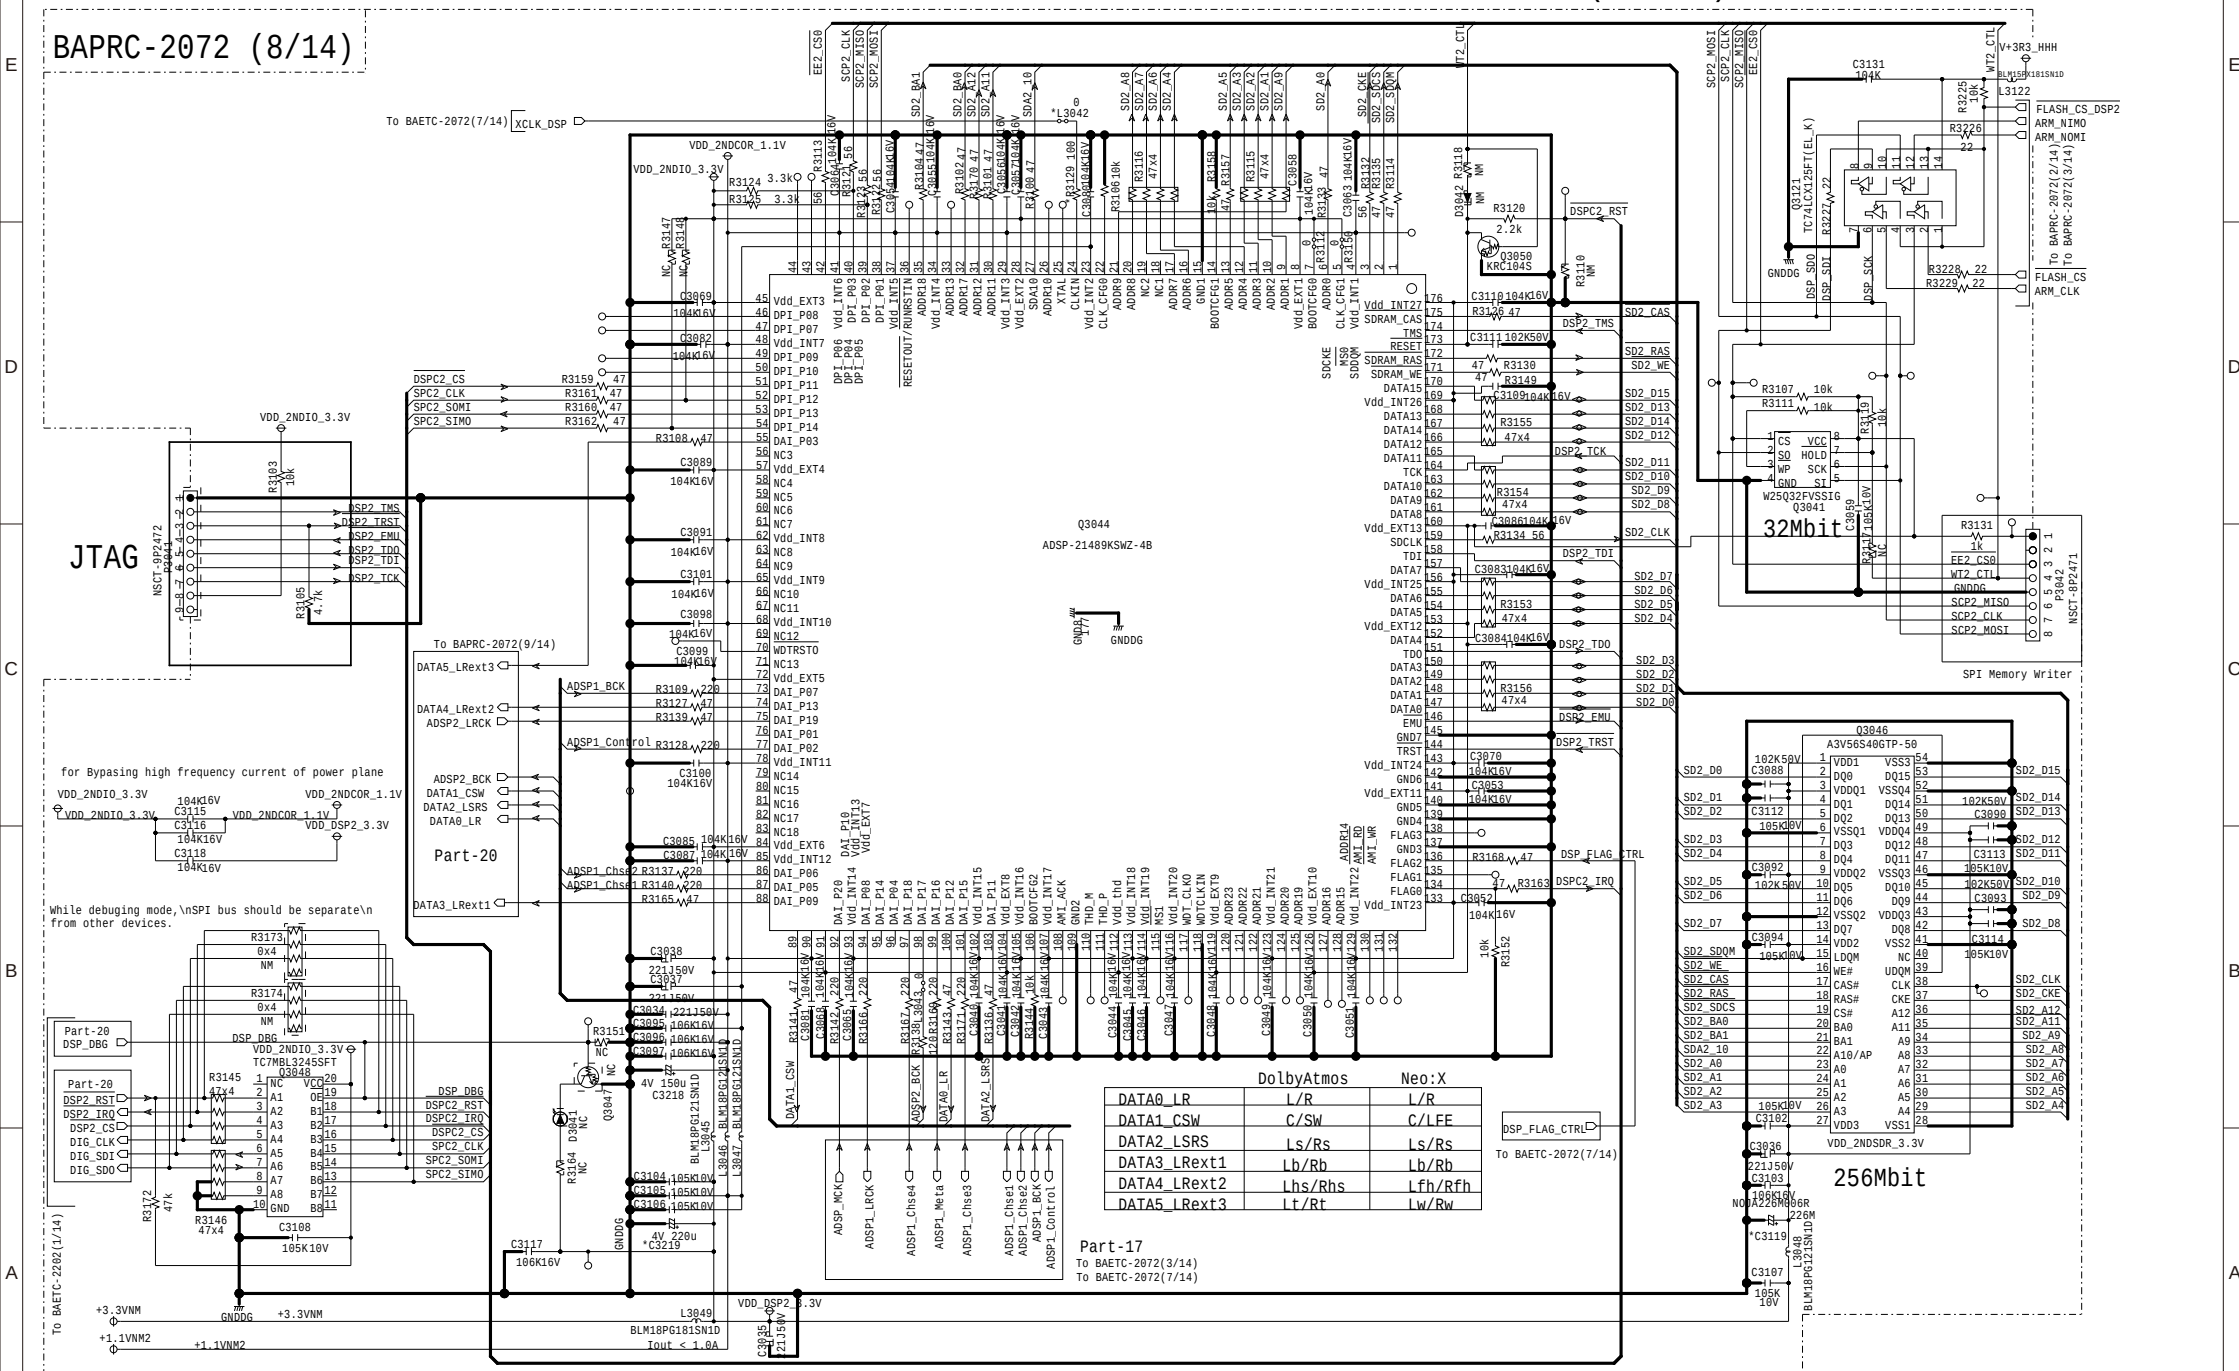


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1) ARM IO SECTION


BAPRC-2072 (10/14)

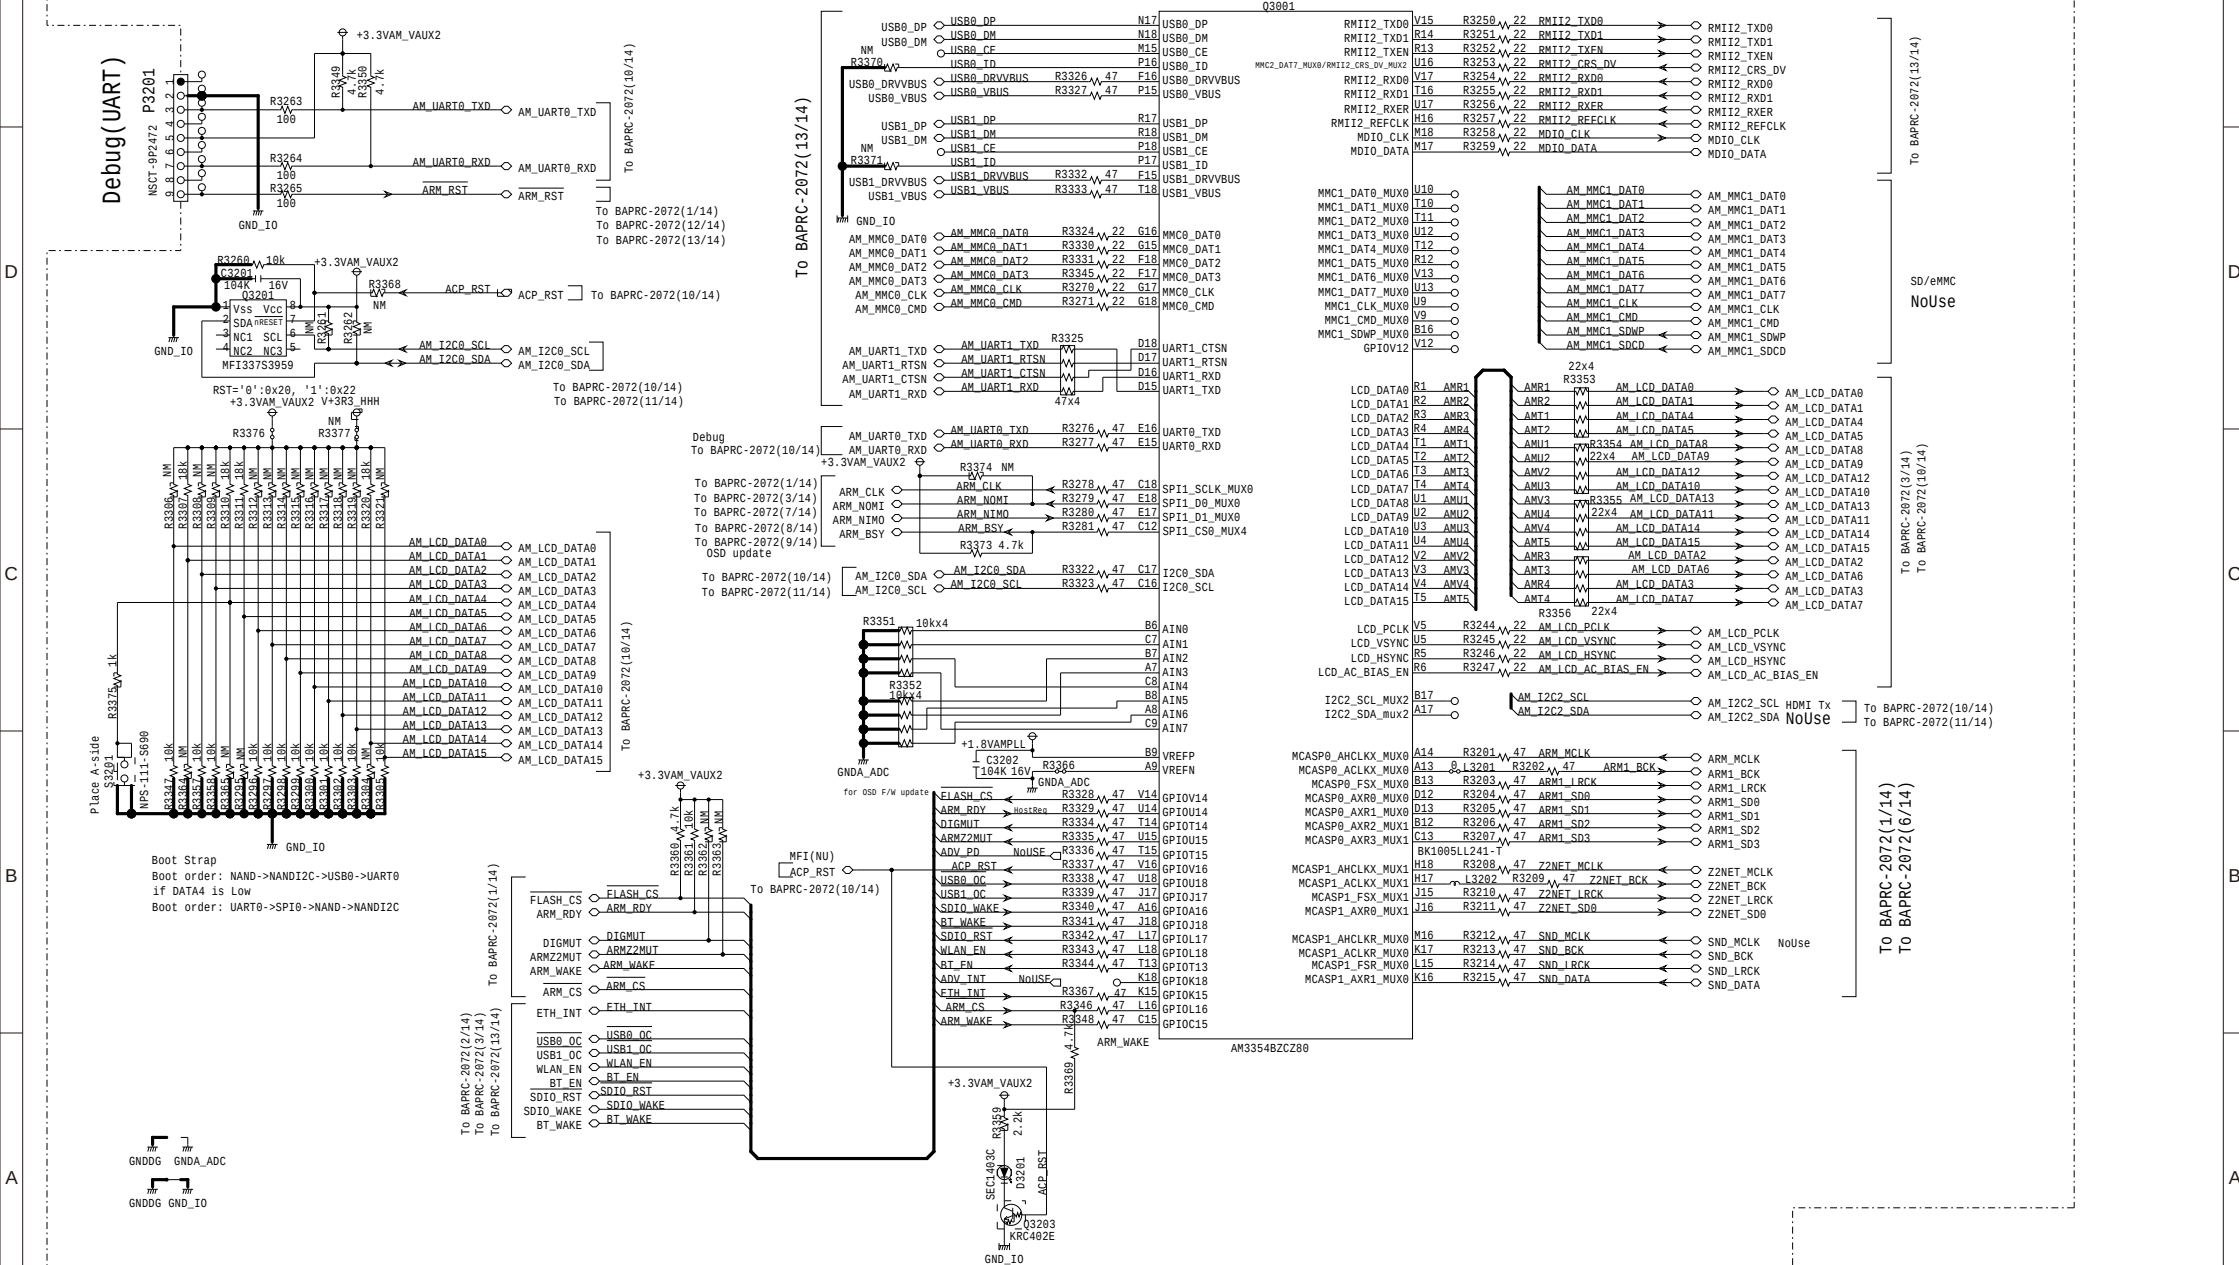

Schematic Diagram


E BAPRC-2072 (11/14)

SCHEMATIC DIAGRAM (PART-1) ARM PS SECTION

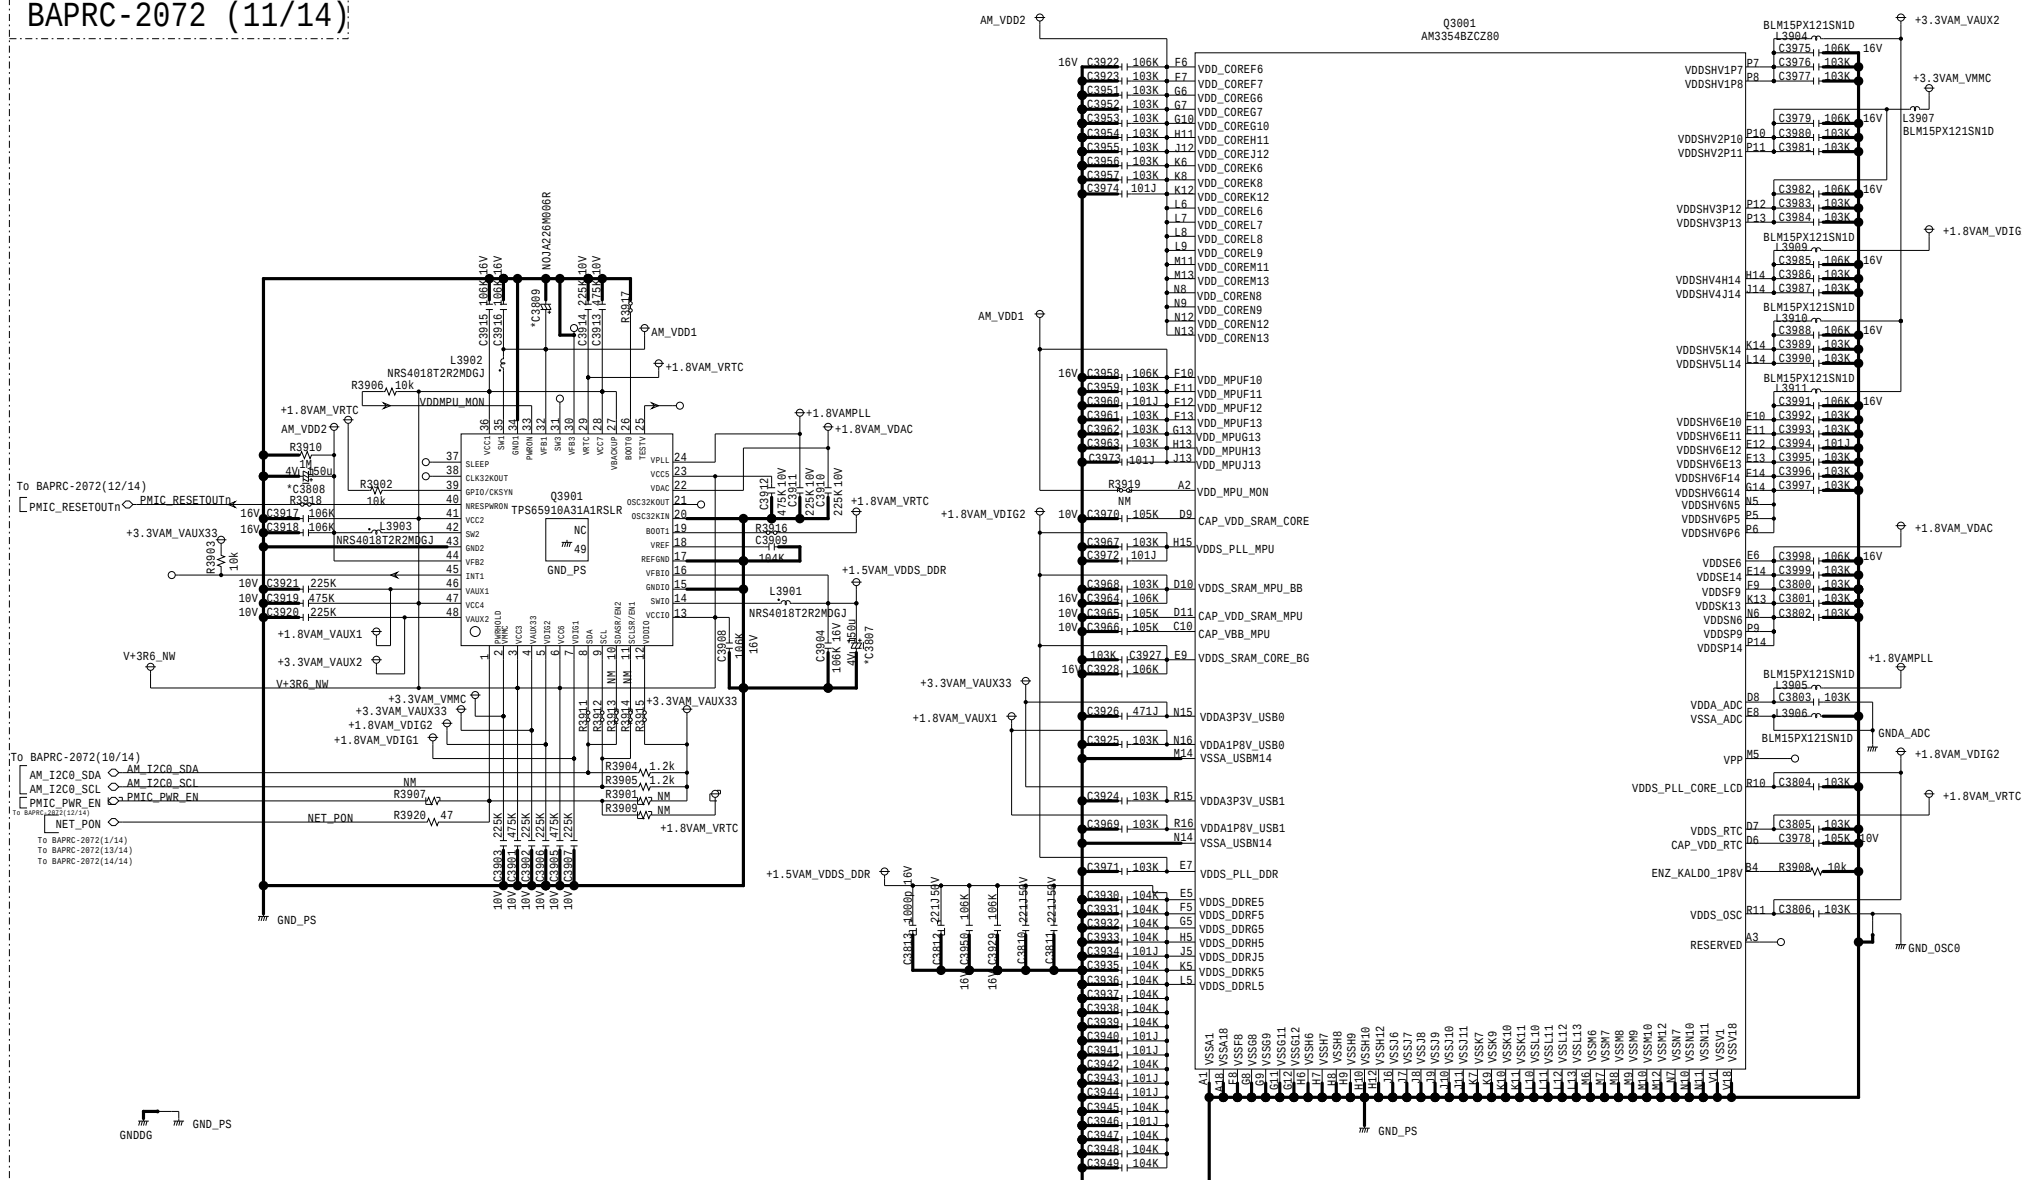

SCHEMATIC DIAGRAM (PART-1)

BAPRC-2072 (12/14)

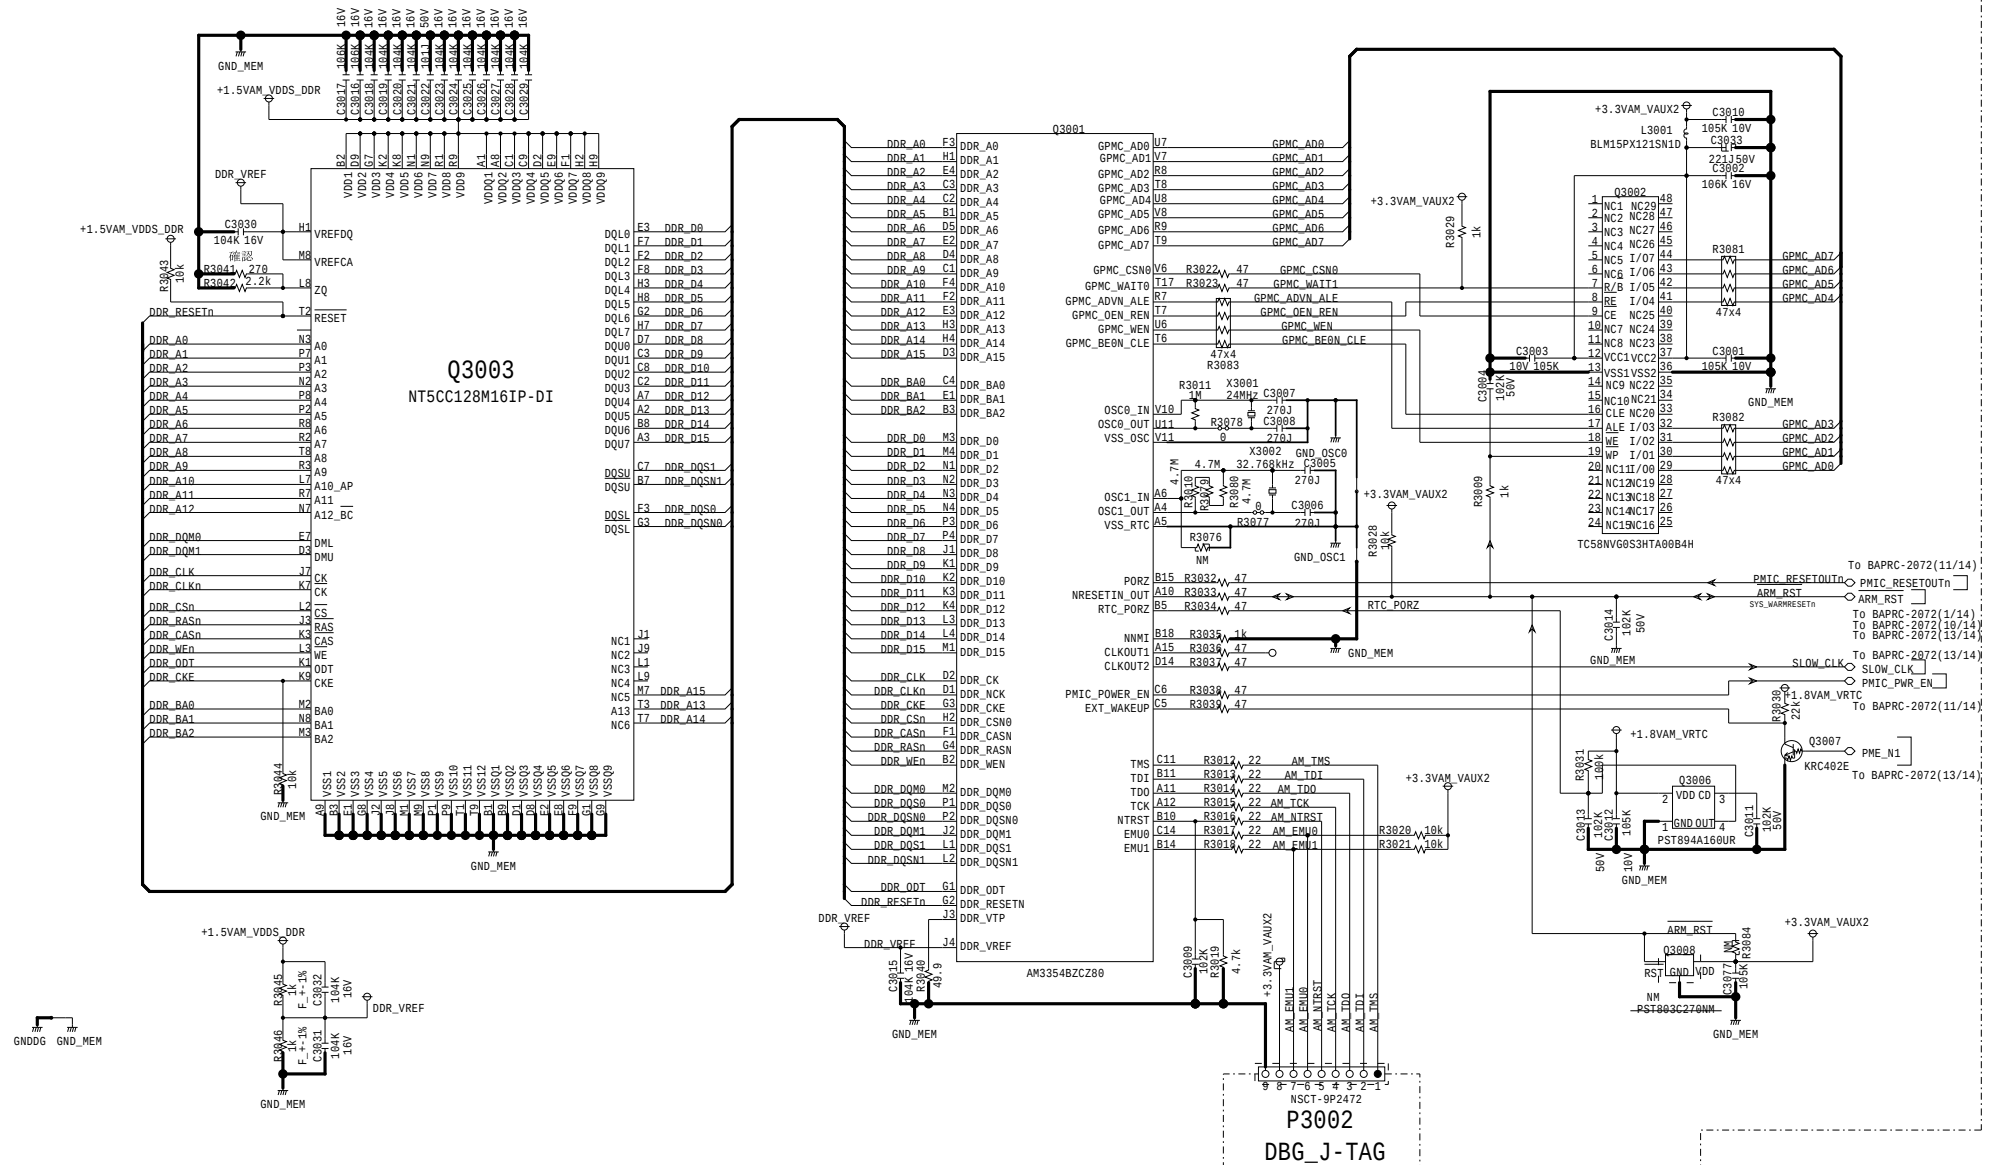


Schematic Diagram


MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

BAPRC-2072 (13/14)

SCHEMATIC DIAGRAM (PART-10)


ARM USB/Ethwernet/WiFi SECTION

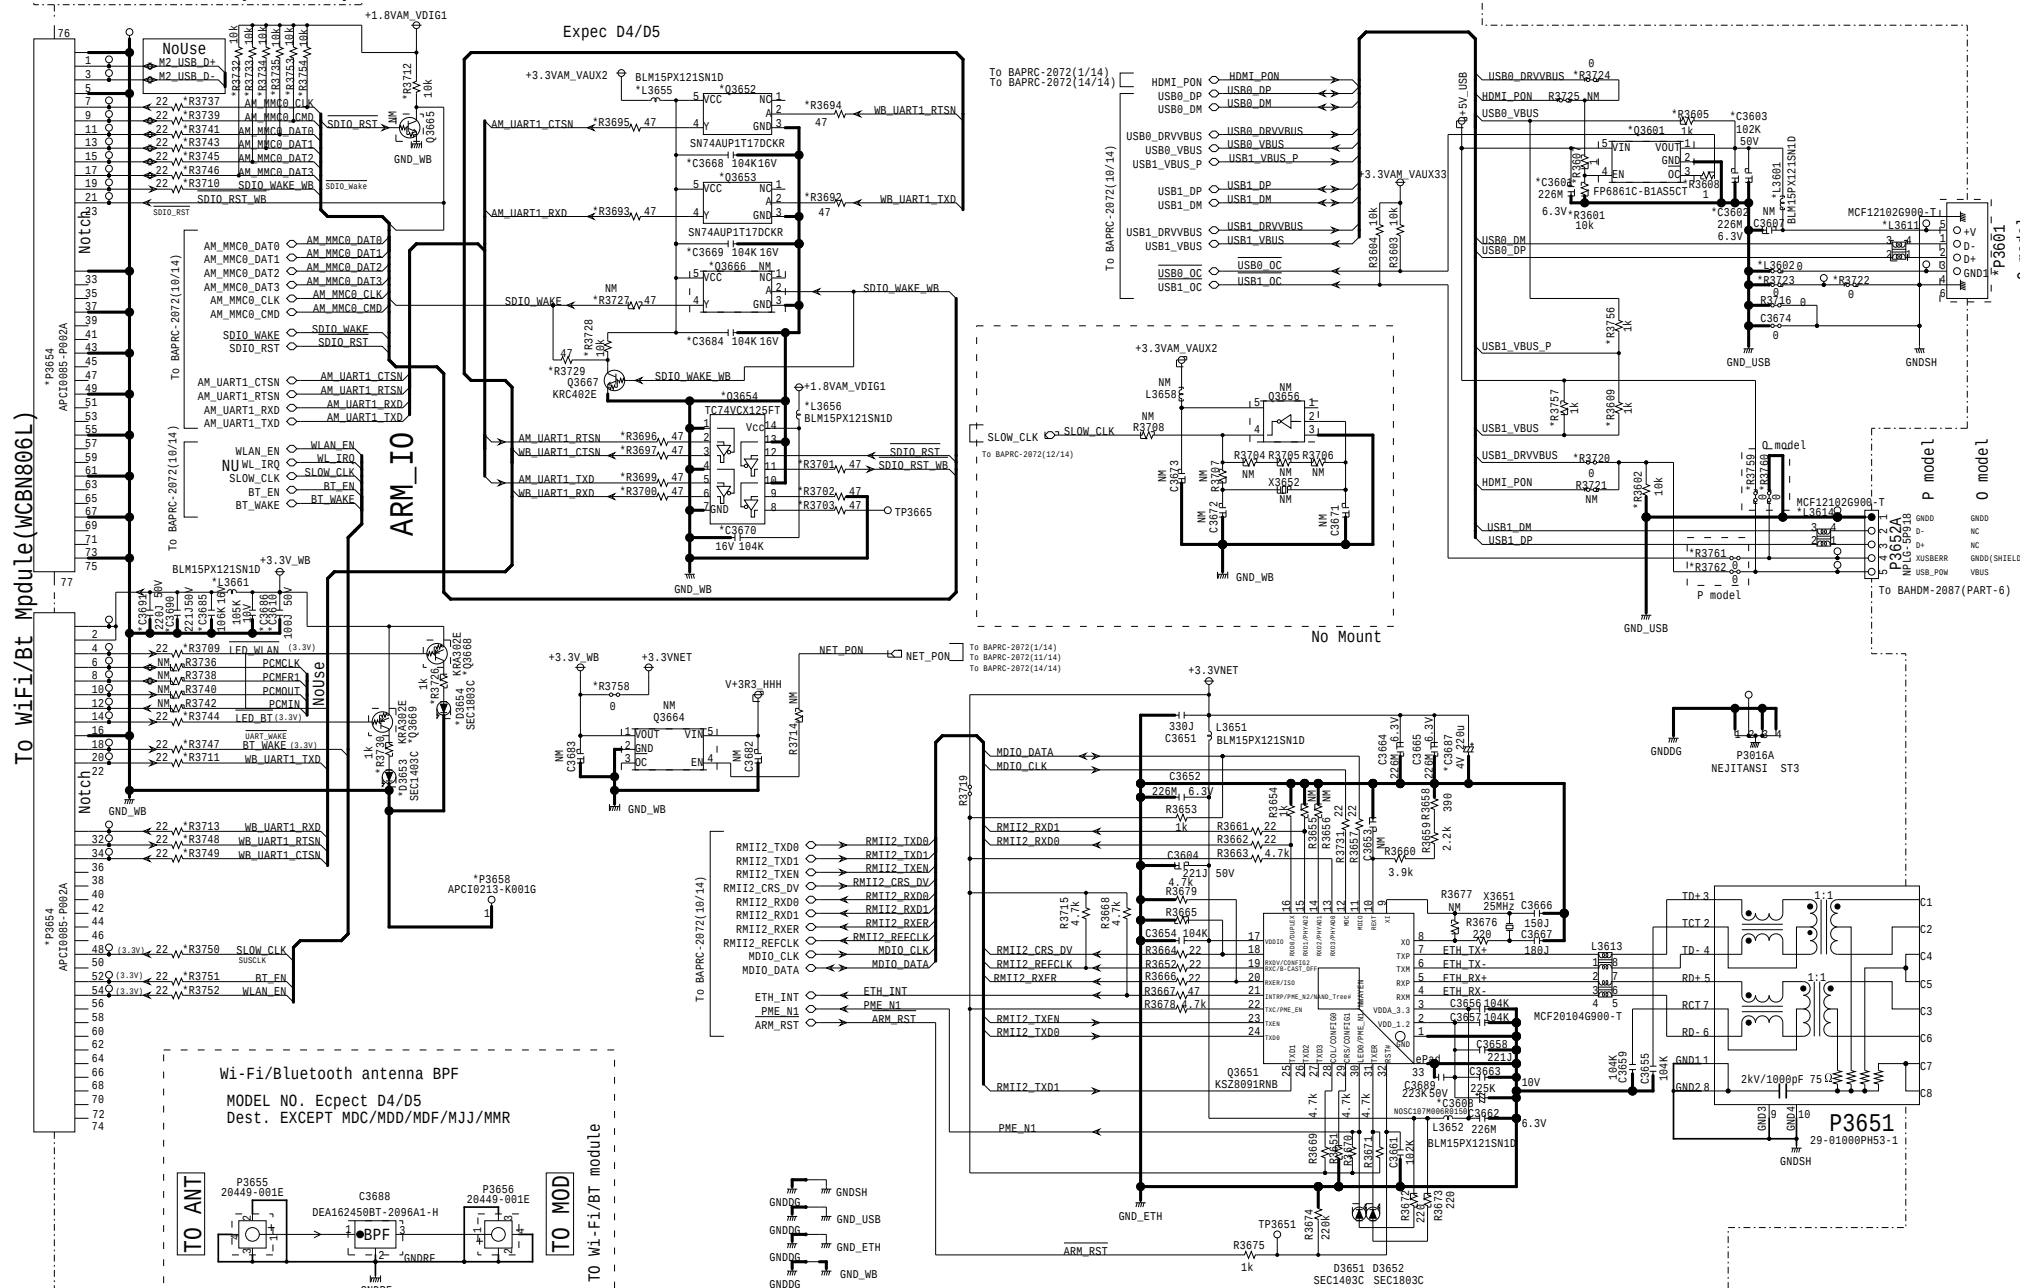

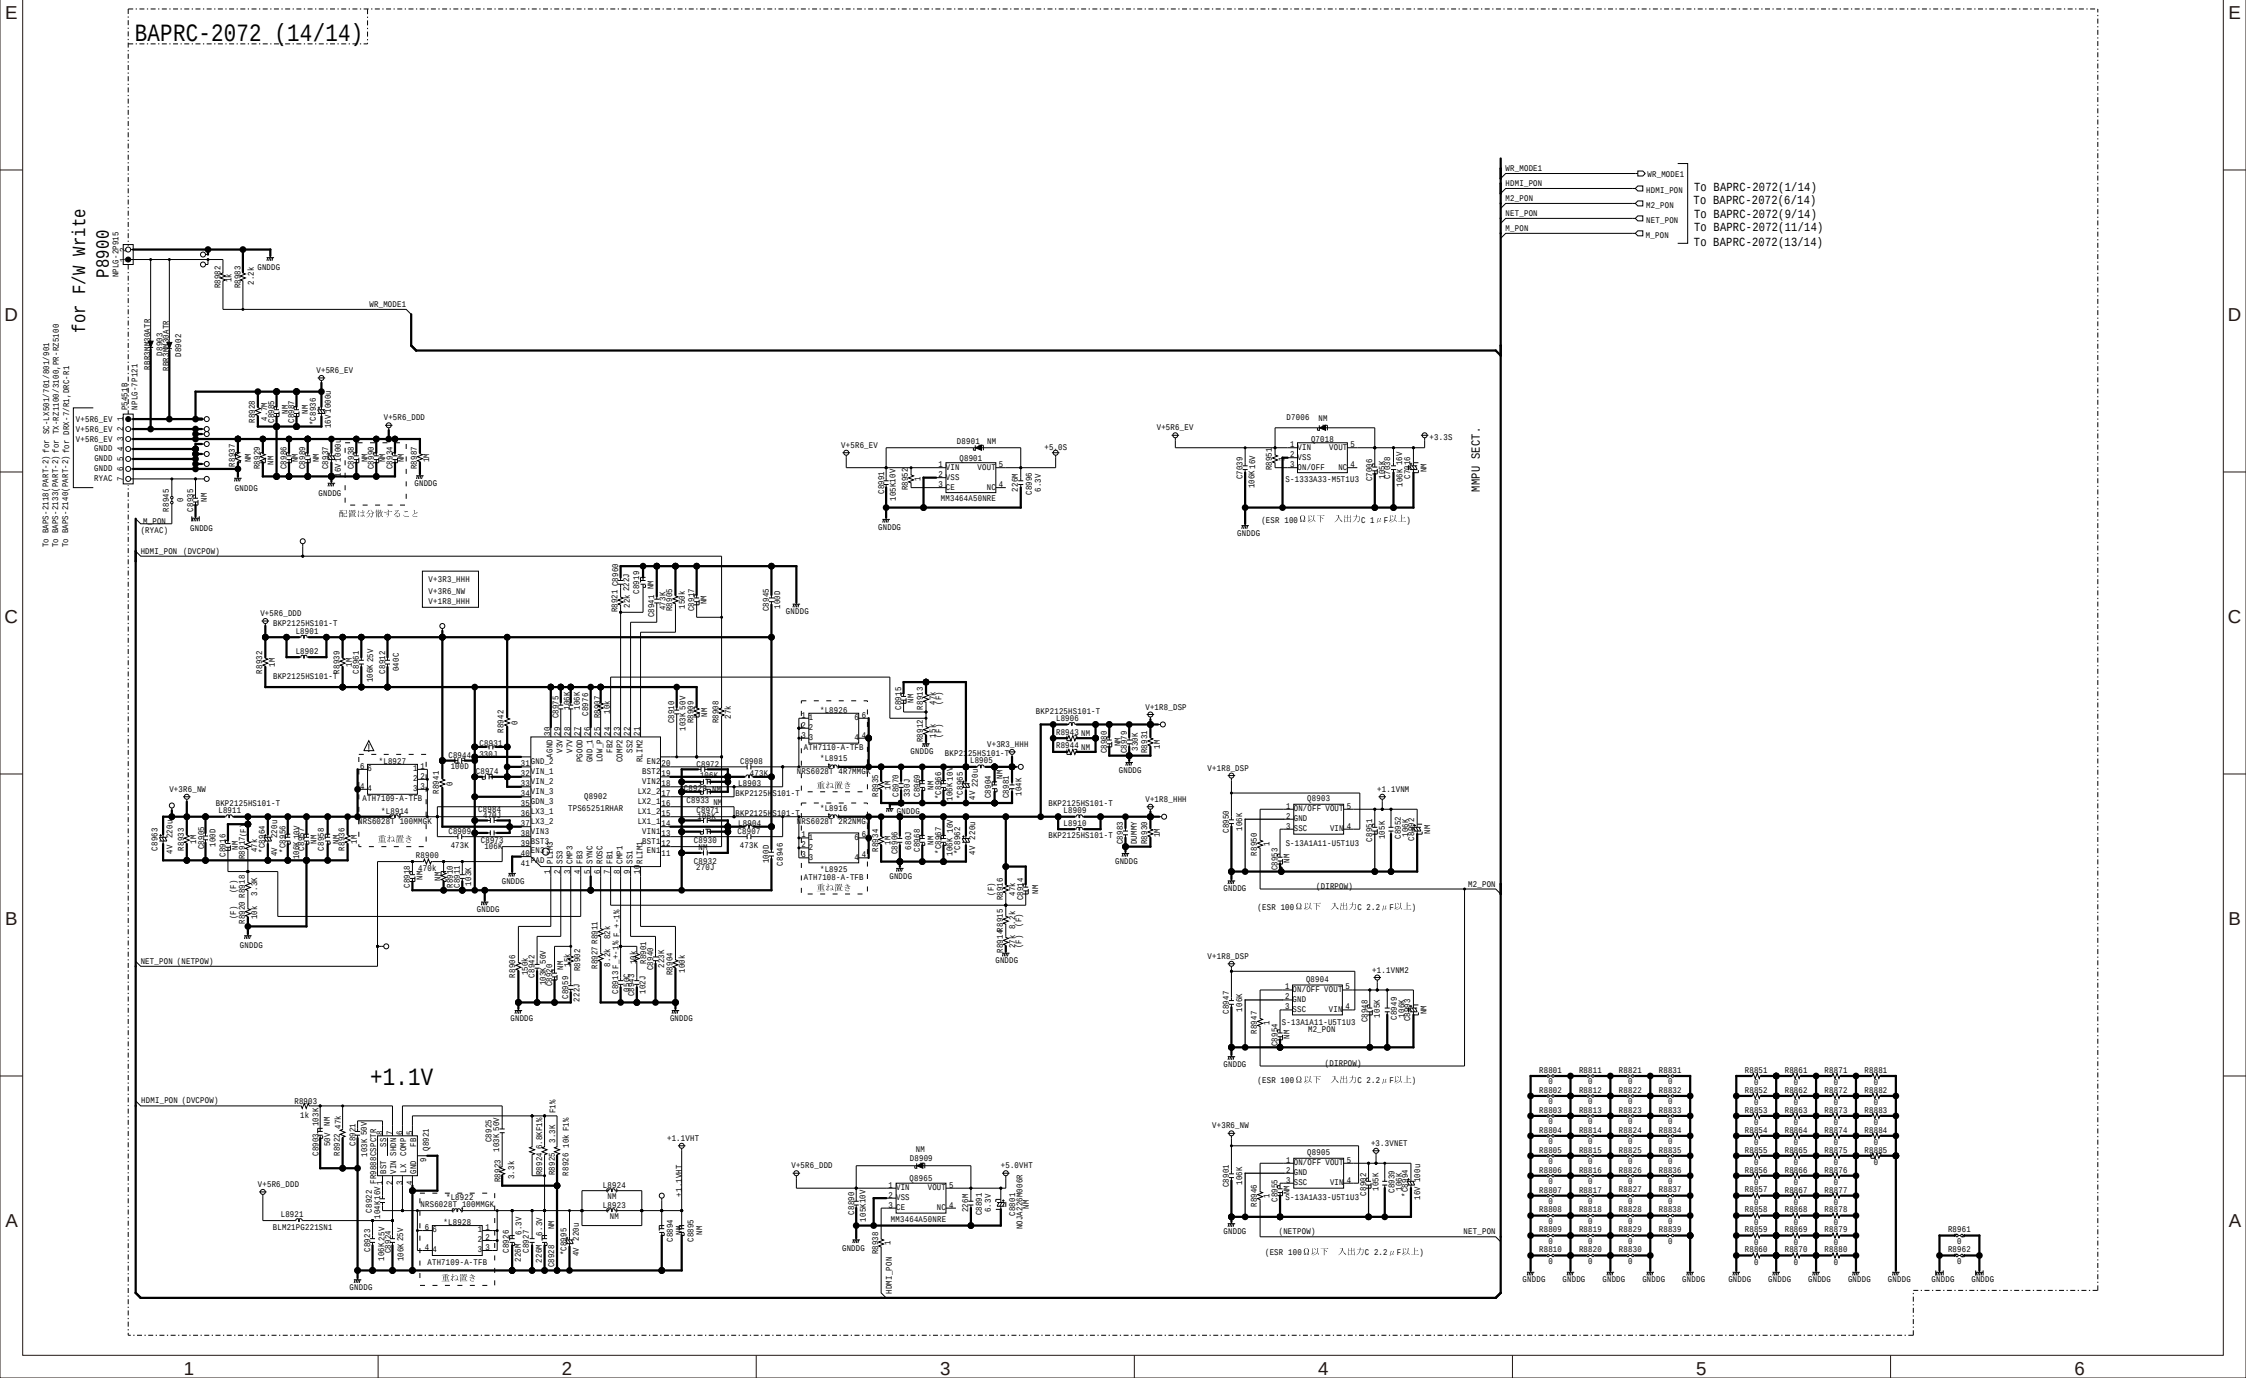[illegible][illegible]


MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM (PART-2) DISPLAY SECTION

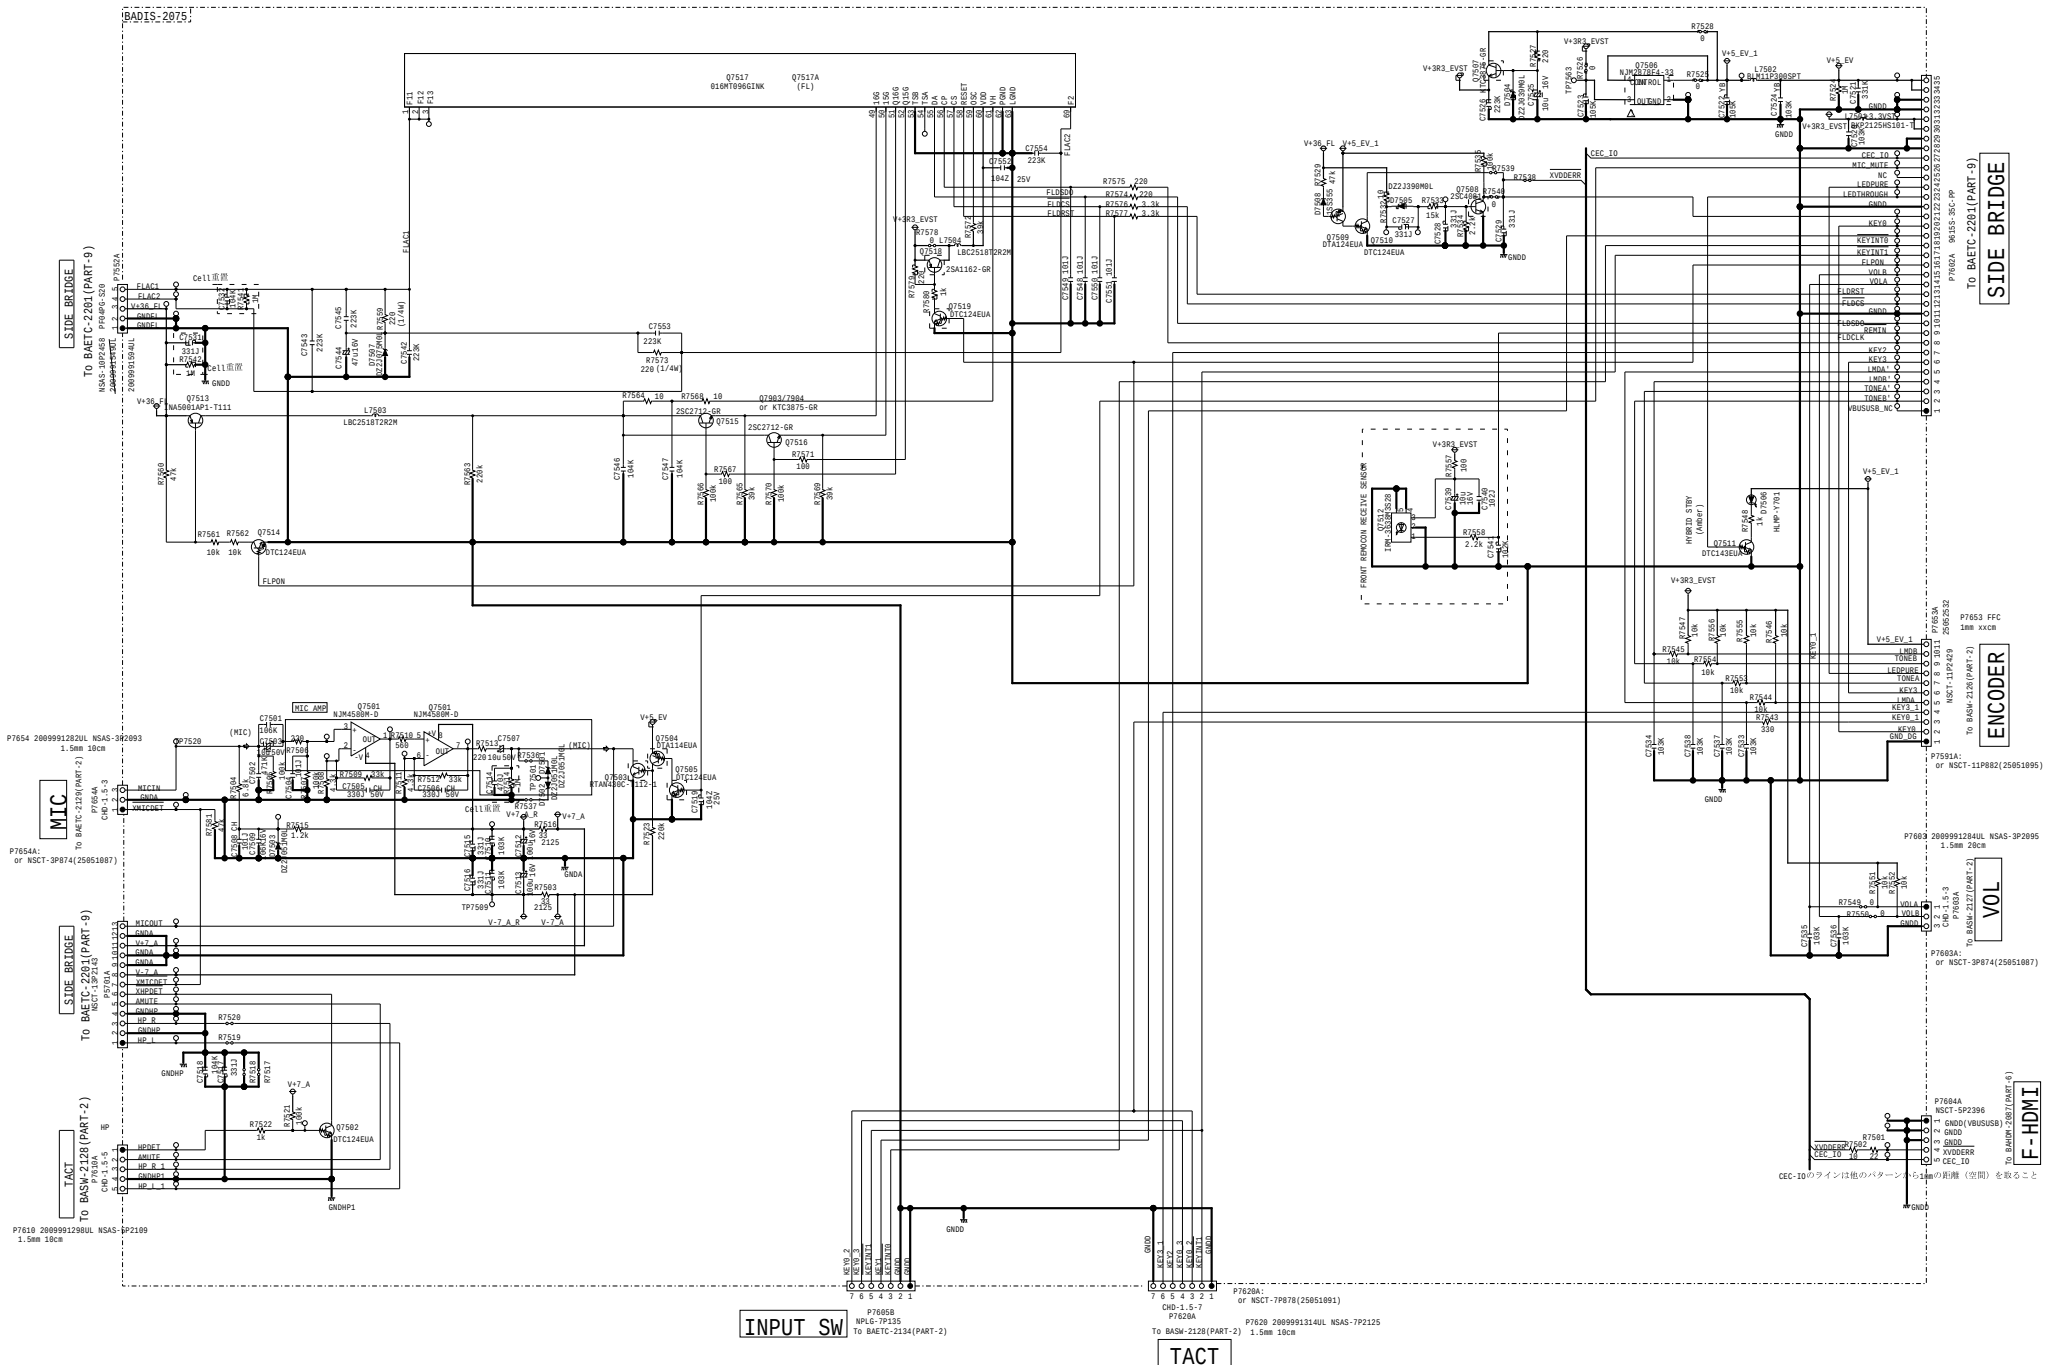


MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) ENCODER SECTION

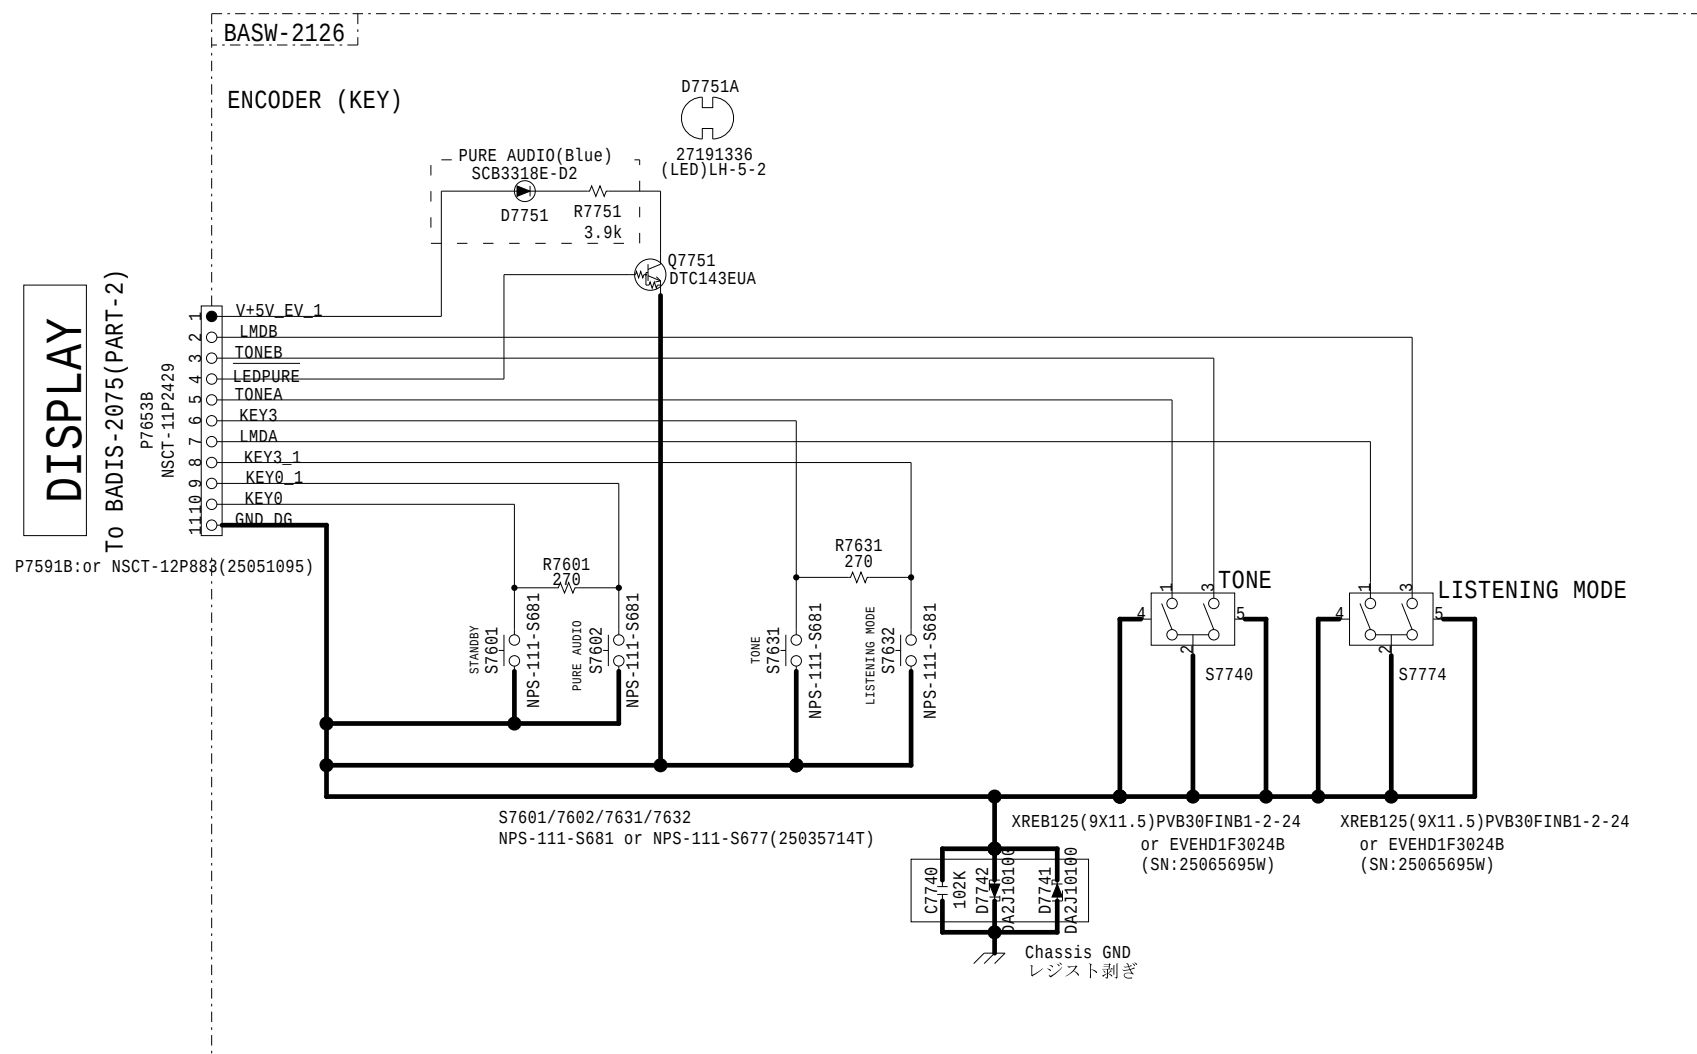


MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) VOL SECTION

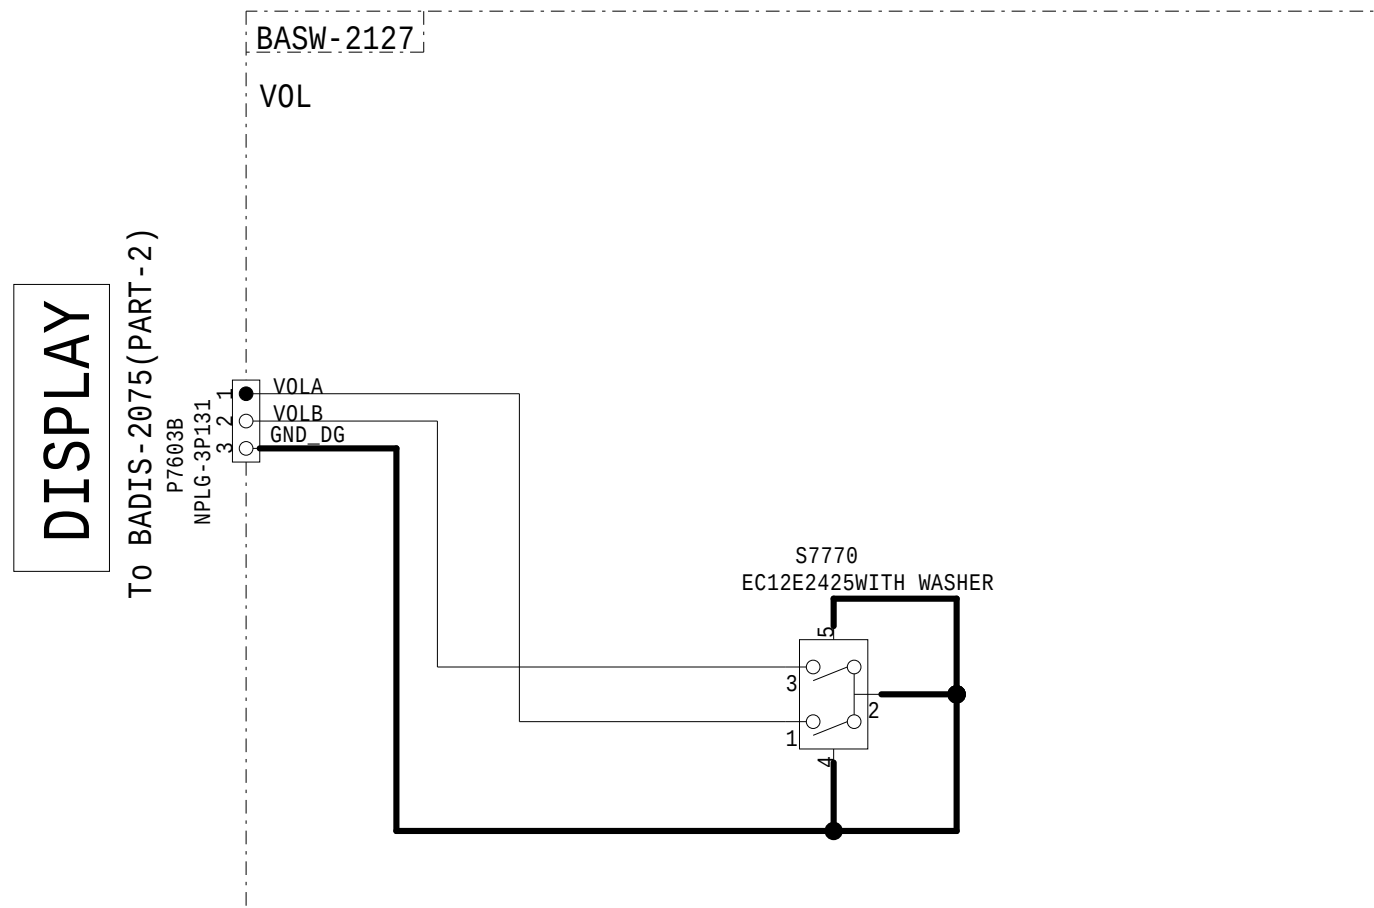


MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) TACT SECTION

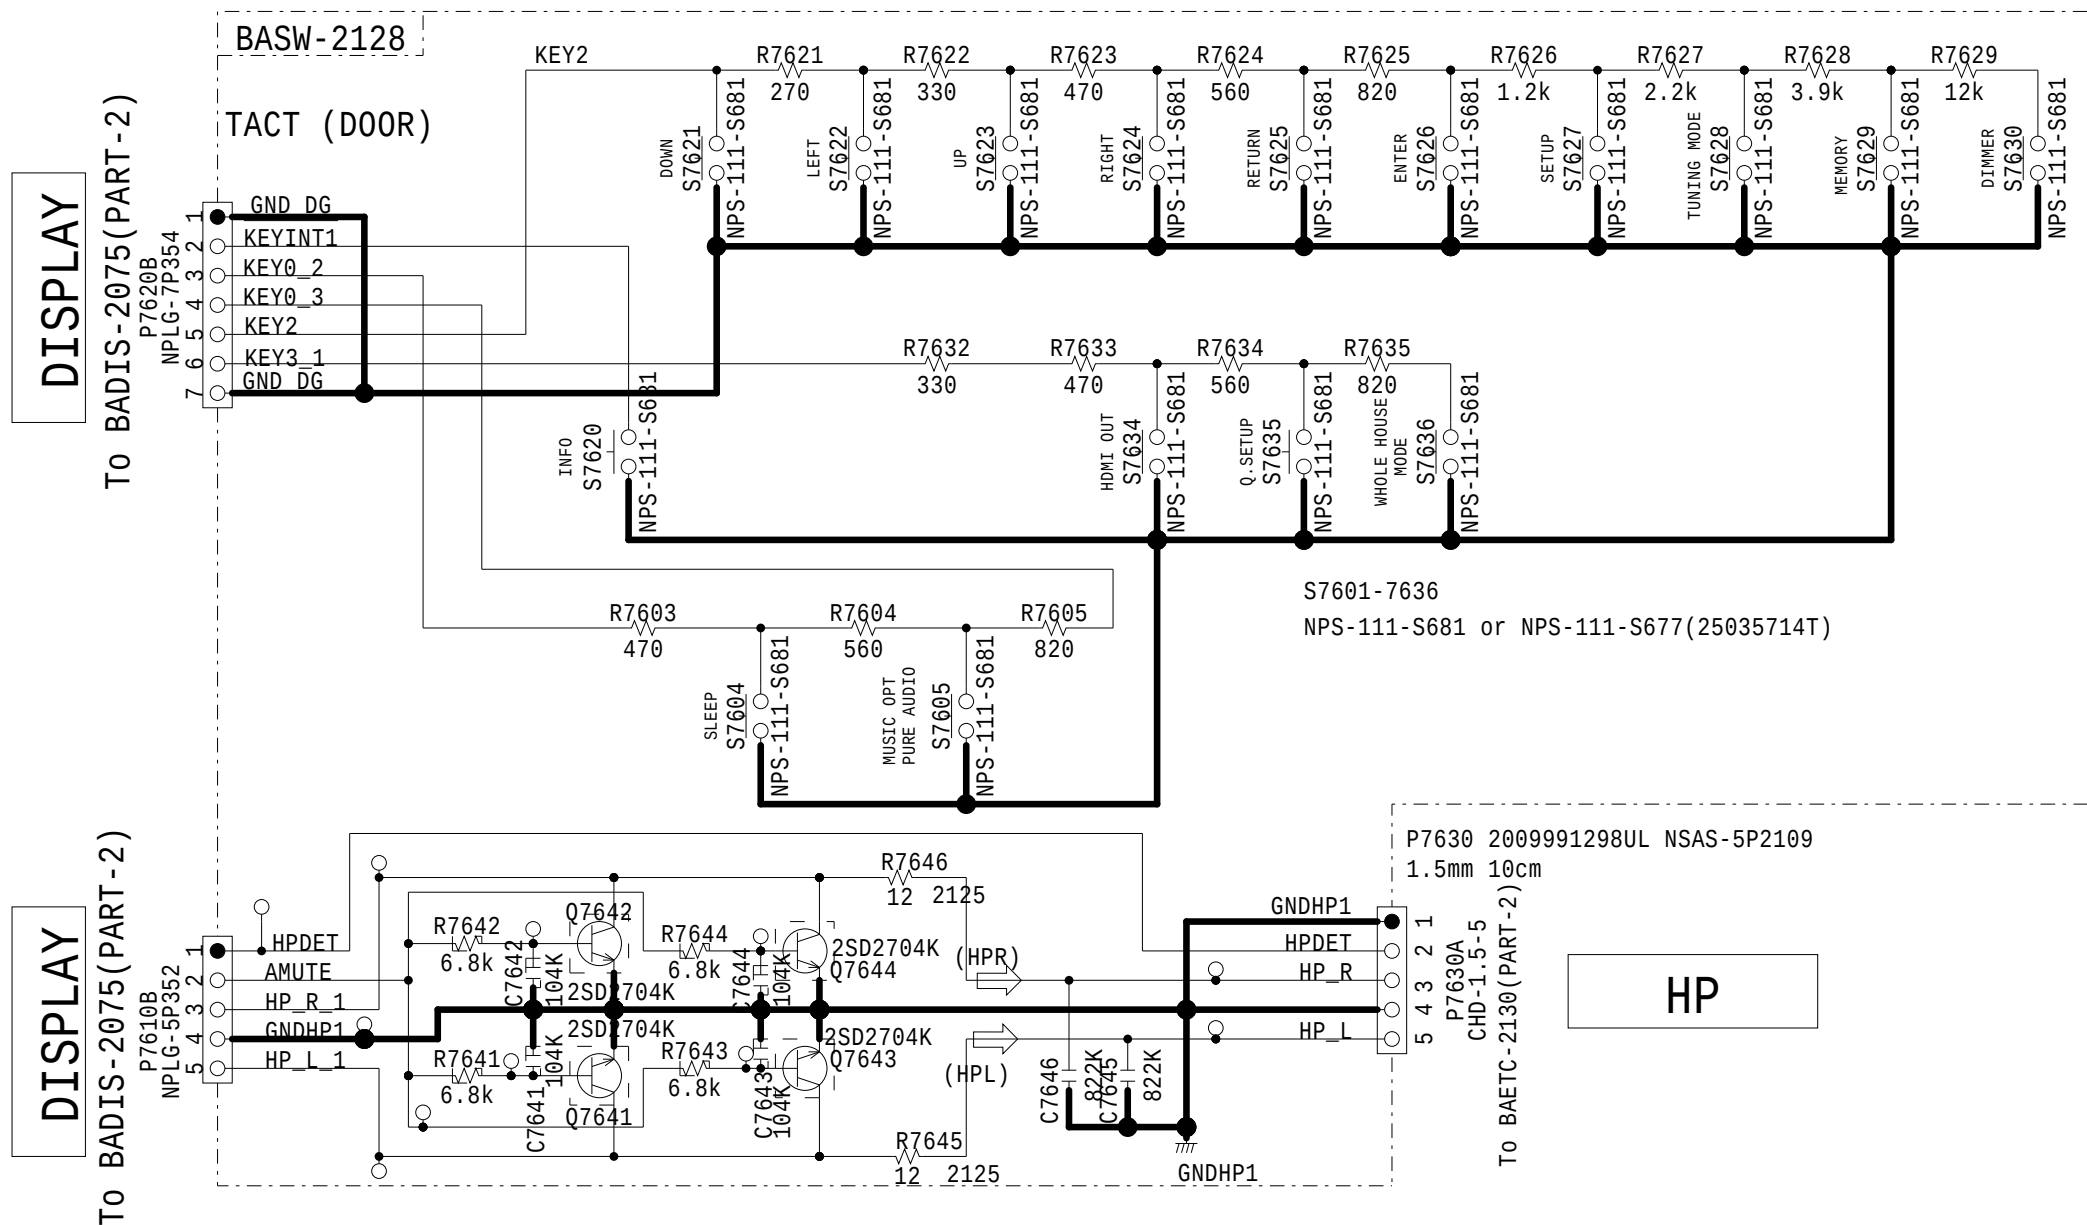

MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) MIC SECTION

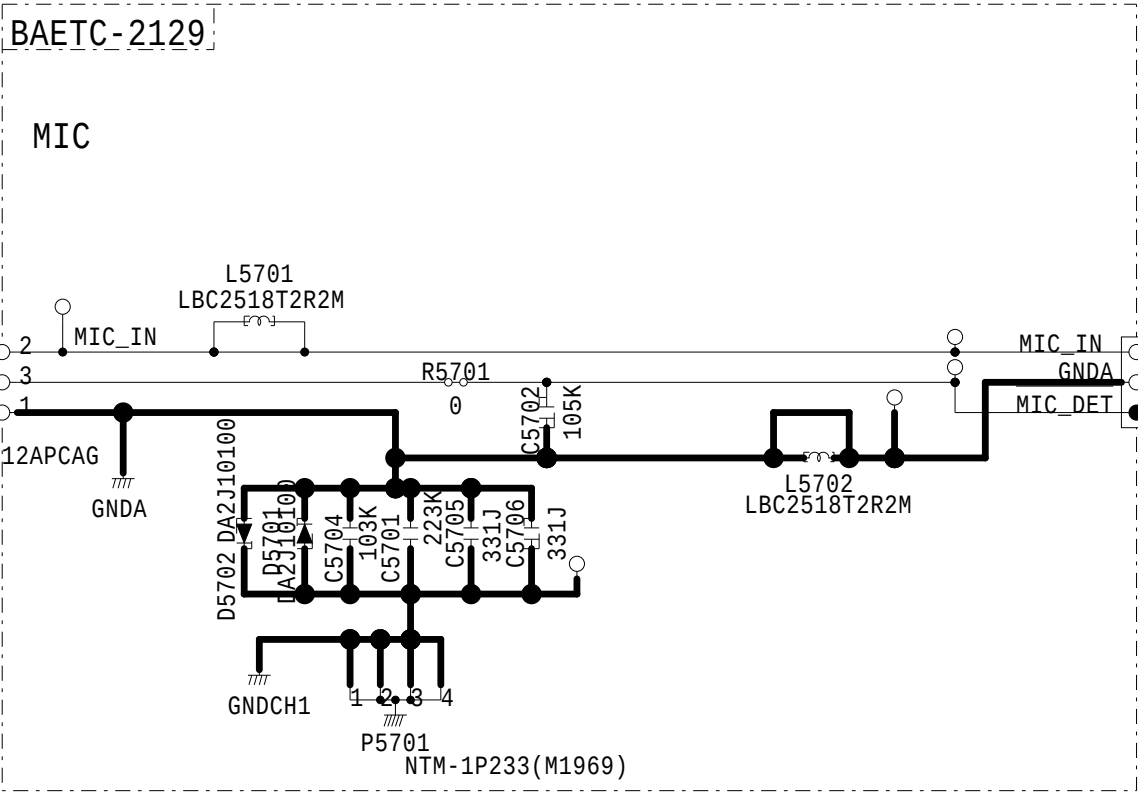


TO BADIS-2075(PART-2)

DISPLAY

MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) HP SECTION

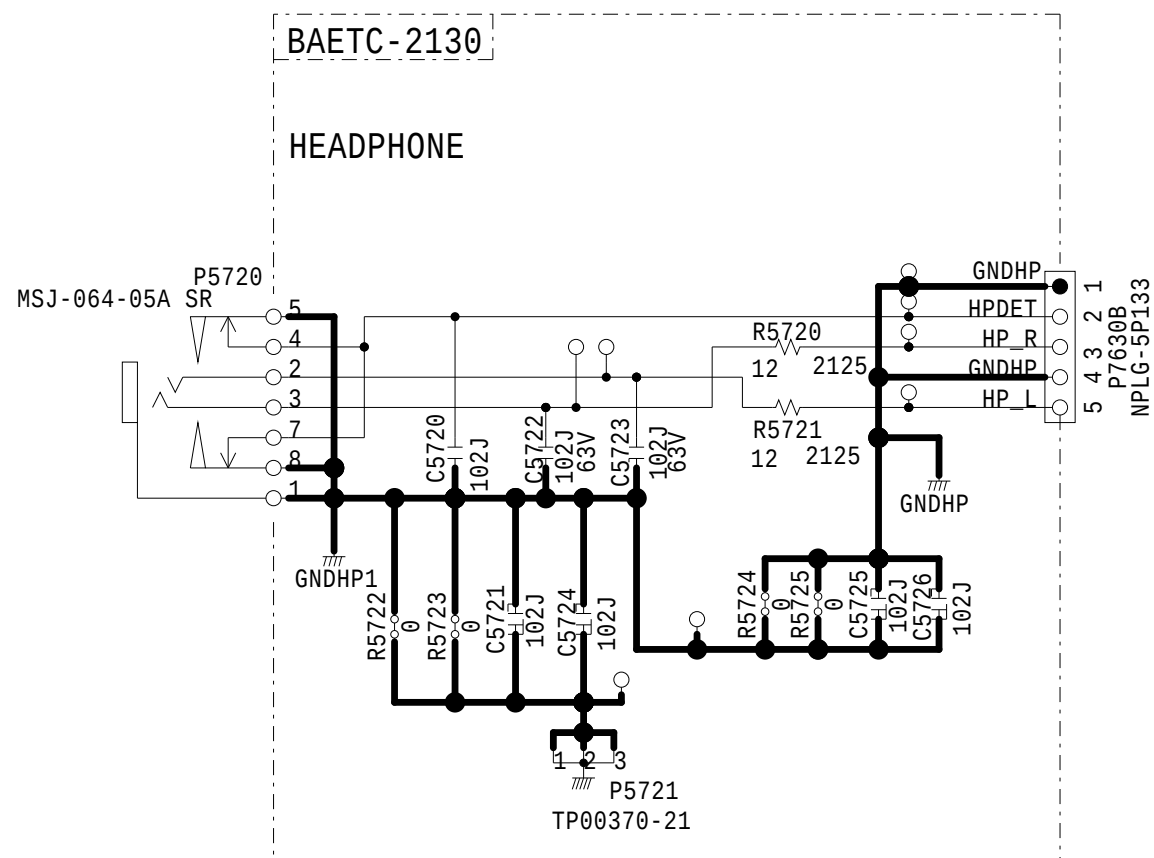

TO BASW-2128(PART-2)

TO TACT

E

E



TS BAPPC 2073 (PART 1)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTRLYTIC CAPACITORS (∇) ARE IN μ F/WV.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

△印は火災、感電の危険に關する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位は $\mu\text{F}/\text{WV}$ である。
記入なきコンデンサの単位は $\text{pF}/50\text{WV}$ である。
例) 630 → 3P, 330 → 33P, 33 → 330P, 333 → 0.0333V
但し例図に基本配線図につき性能改善等により予告なく変更する事がある。

CAUTION
 FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
 REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.


ATTENTION
 AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,
 REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE. RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENT, N'UTILISER QUE DES FUSIBLES DE MEME TYPE.
CE DERNIER EST INDIQUE LA OU LE PRESENT SYMBOL EST APPOSE.

A

MODEL NO. TX-RZ1100/3100, PR-RZ5100
SCHEMATIC DIAGRAM(PART-2) INPUT SW SECTION

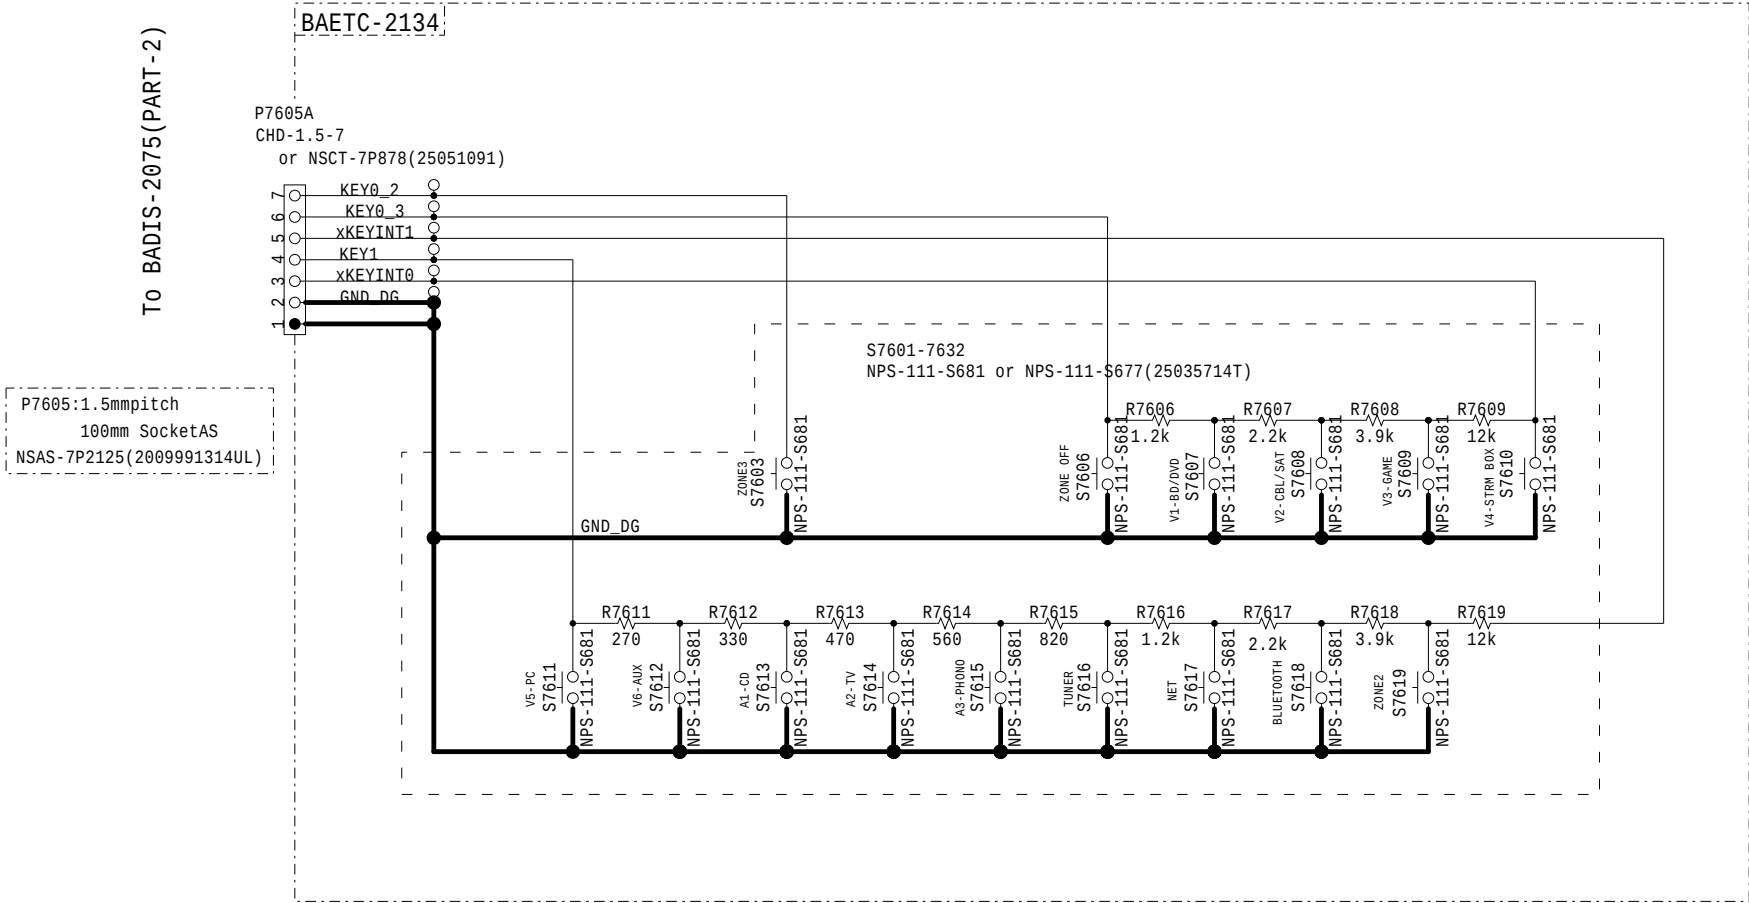


MODEL No. TX-RZ1100/3100, PR-RZ5100
SCHEMATIC DIAGRAM(PART-2) BIND_DM_CABLE SECTION

BAETC-2141



P5901
260261
CB-71683(L=50)

E

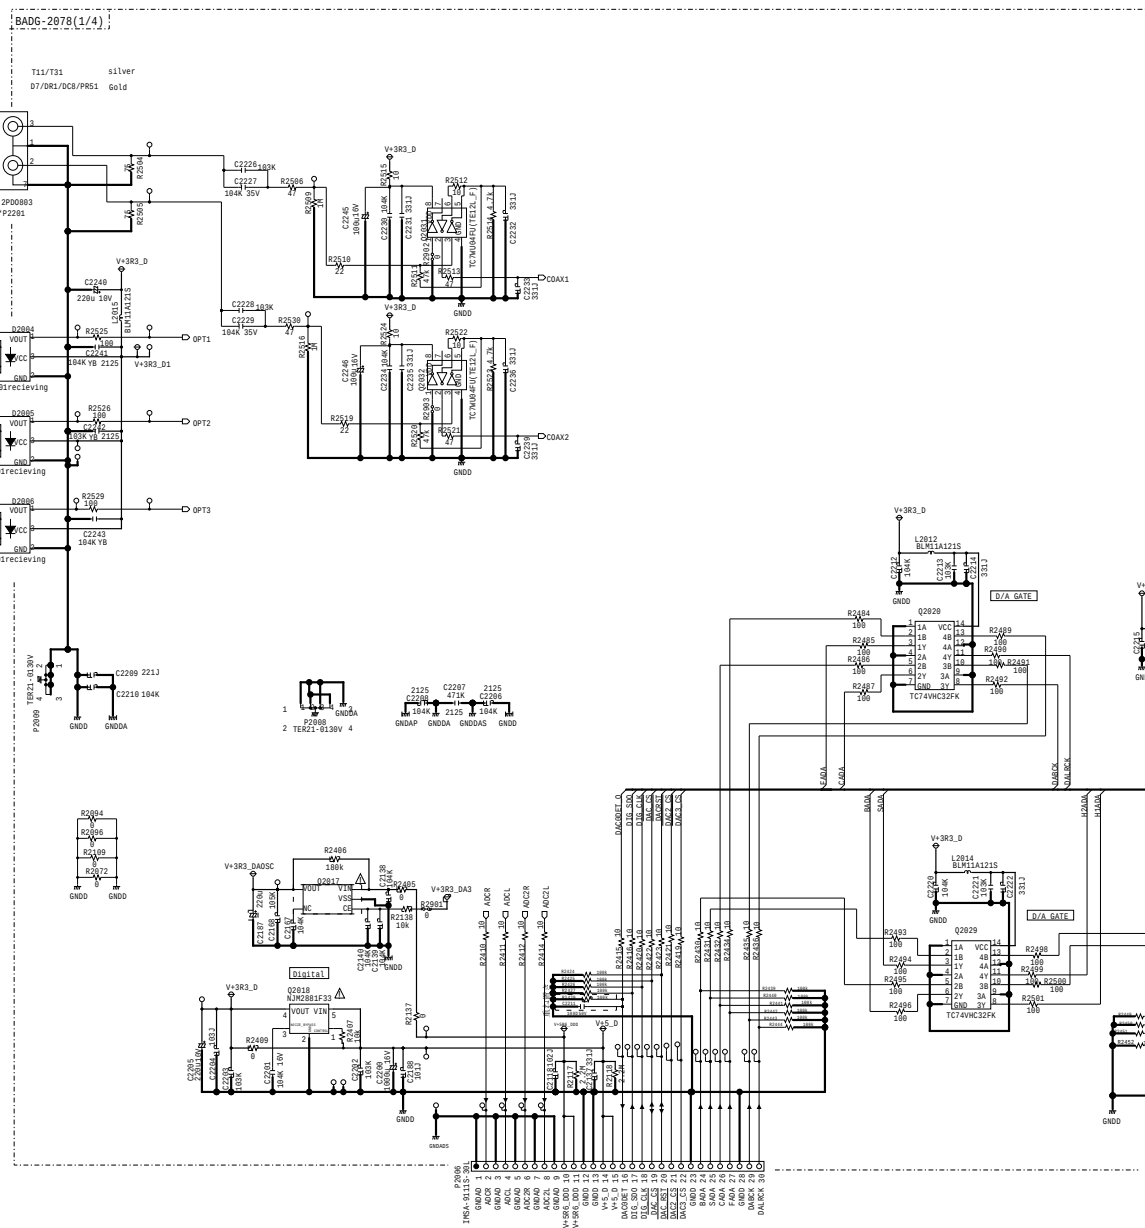

A

VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTROLYTIC CAPACITORS (-99) ARE IN $\mu\text{F}/\text{V}$.
ALL CAPACITORS ARE IN $\text{pF}/50\text{mV}$ UNLESS OTHERWISE NOTED.
EX) 030 $\rightarrow$ 3pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 330pF, 333 $\rightarrow$ 0.033 μF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


△印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位は $\mu\text{F}/50\text{mV}$ である。
記入なきコンデンサの単位は $\text{pF}/50\text{mV}$ である。
例) 030 $\rightarrow$ 3pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 330pF, 333 $\rightarrow$ 0.033 μF
本配線図は基本配線図につき性能改修等により予告なく変更する事が有る。

A

Schematic Diagram

MODEL NO. TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1
BADG-2078(2/4)

SCHEMATIC DIAGRAM(PART-3) DAC_0 SECTION

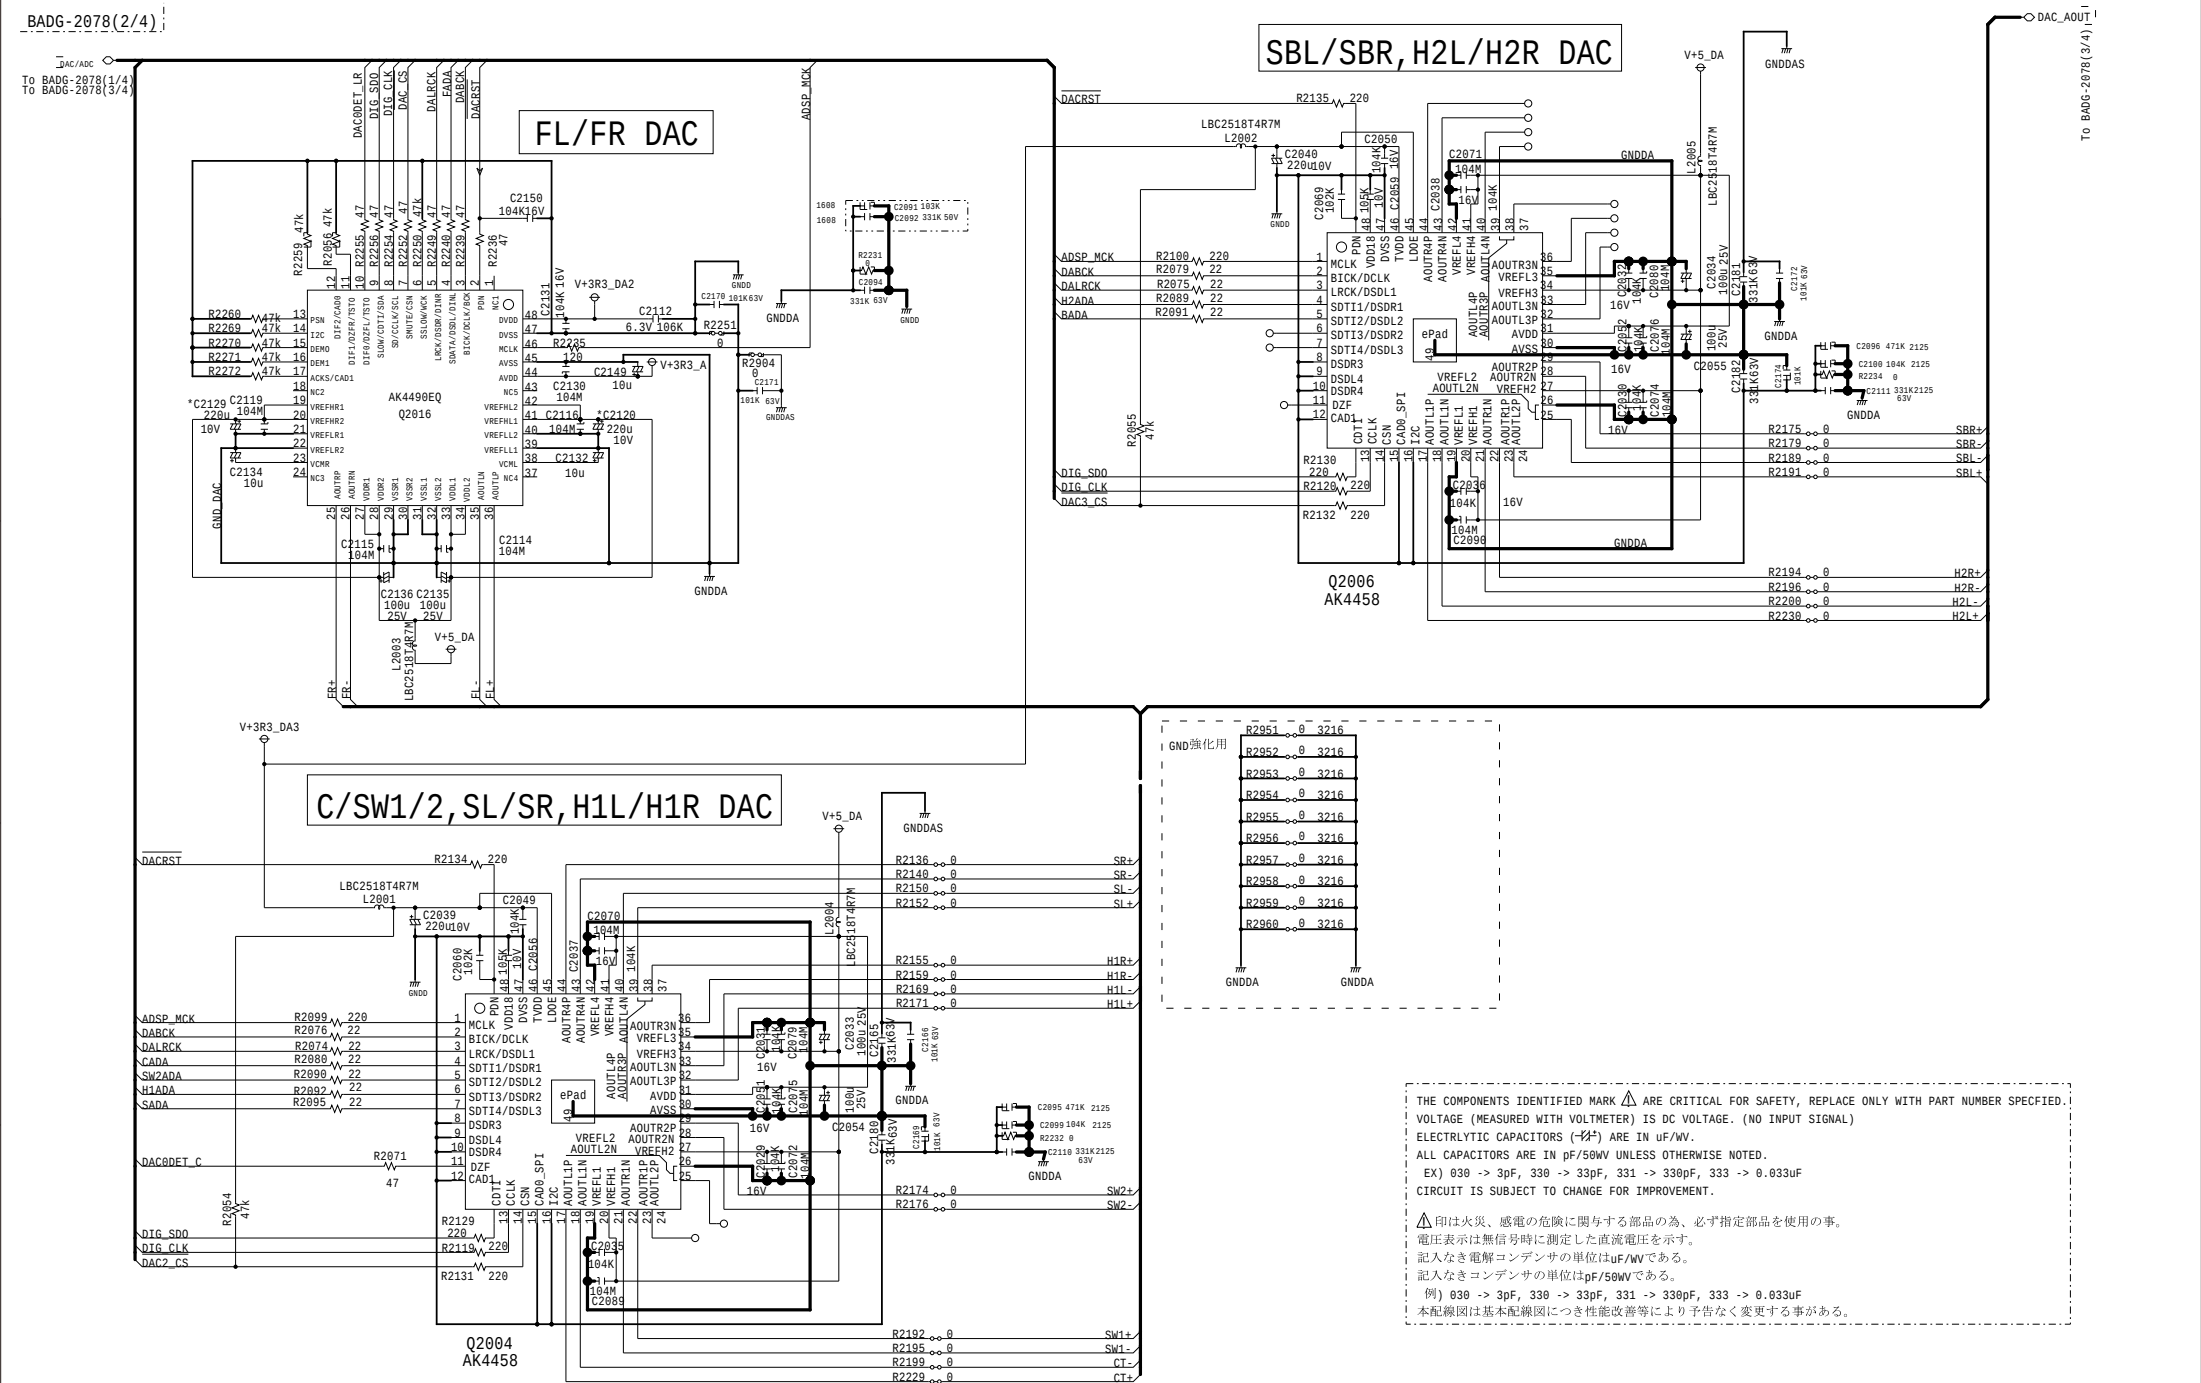

Schematic Diagram

E

E



C

B


A

A



MODEL NO.TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-3) DAC_0 SECTION


BADG-2078(4/4)

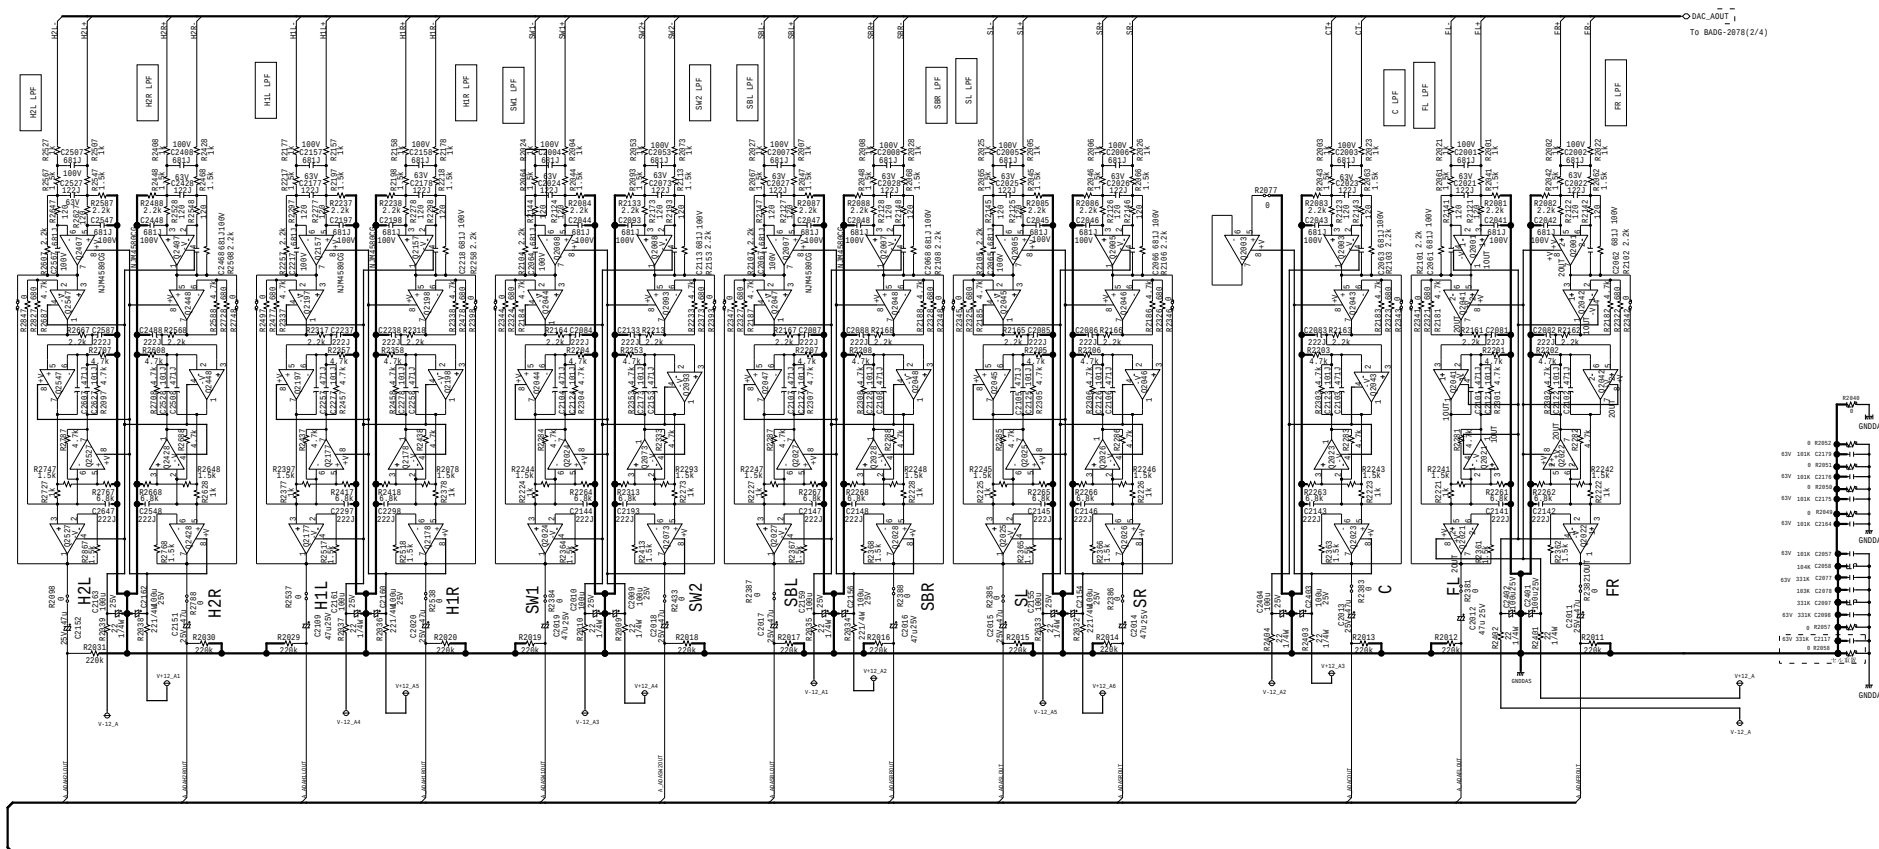

* ALL OPAMP are NJM4580CG(2242922R2)
Q1501/1503/1505/1507/1521-1528/1541-1548
* VLS2C and Filter ->2016EntryAVR

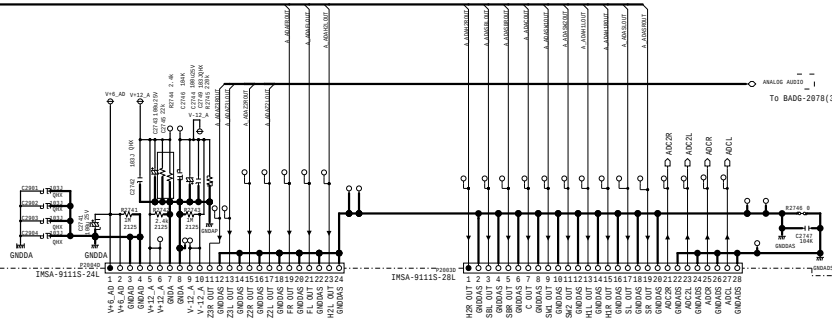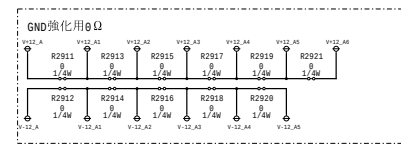

To BAETC-2150(PART-4)

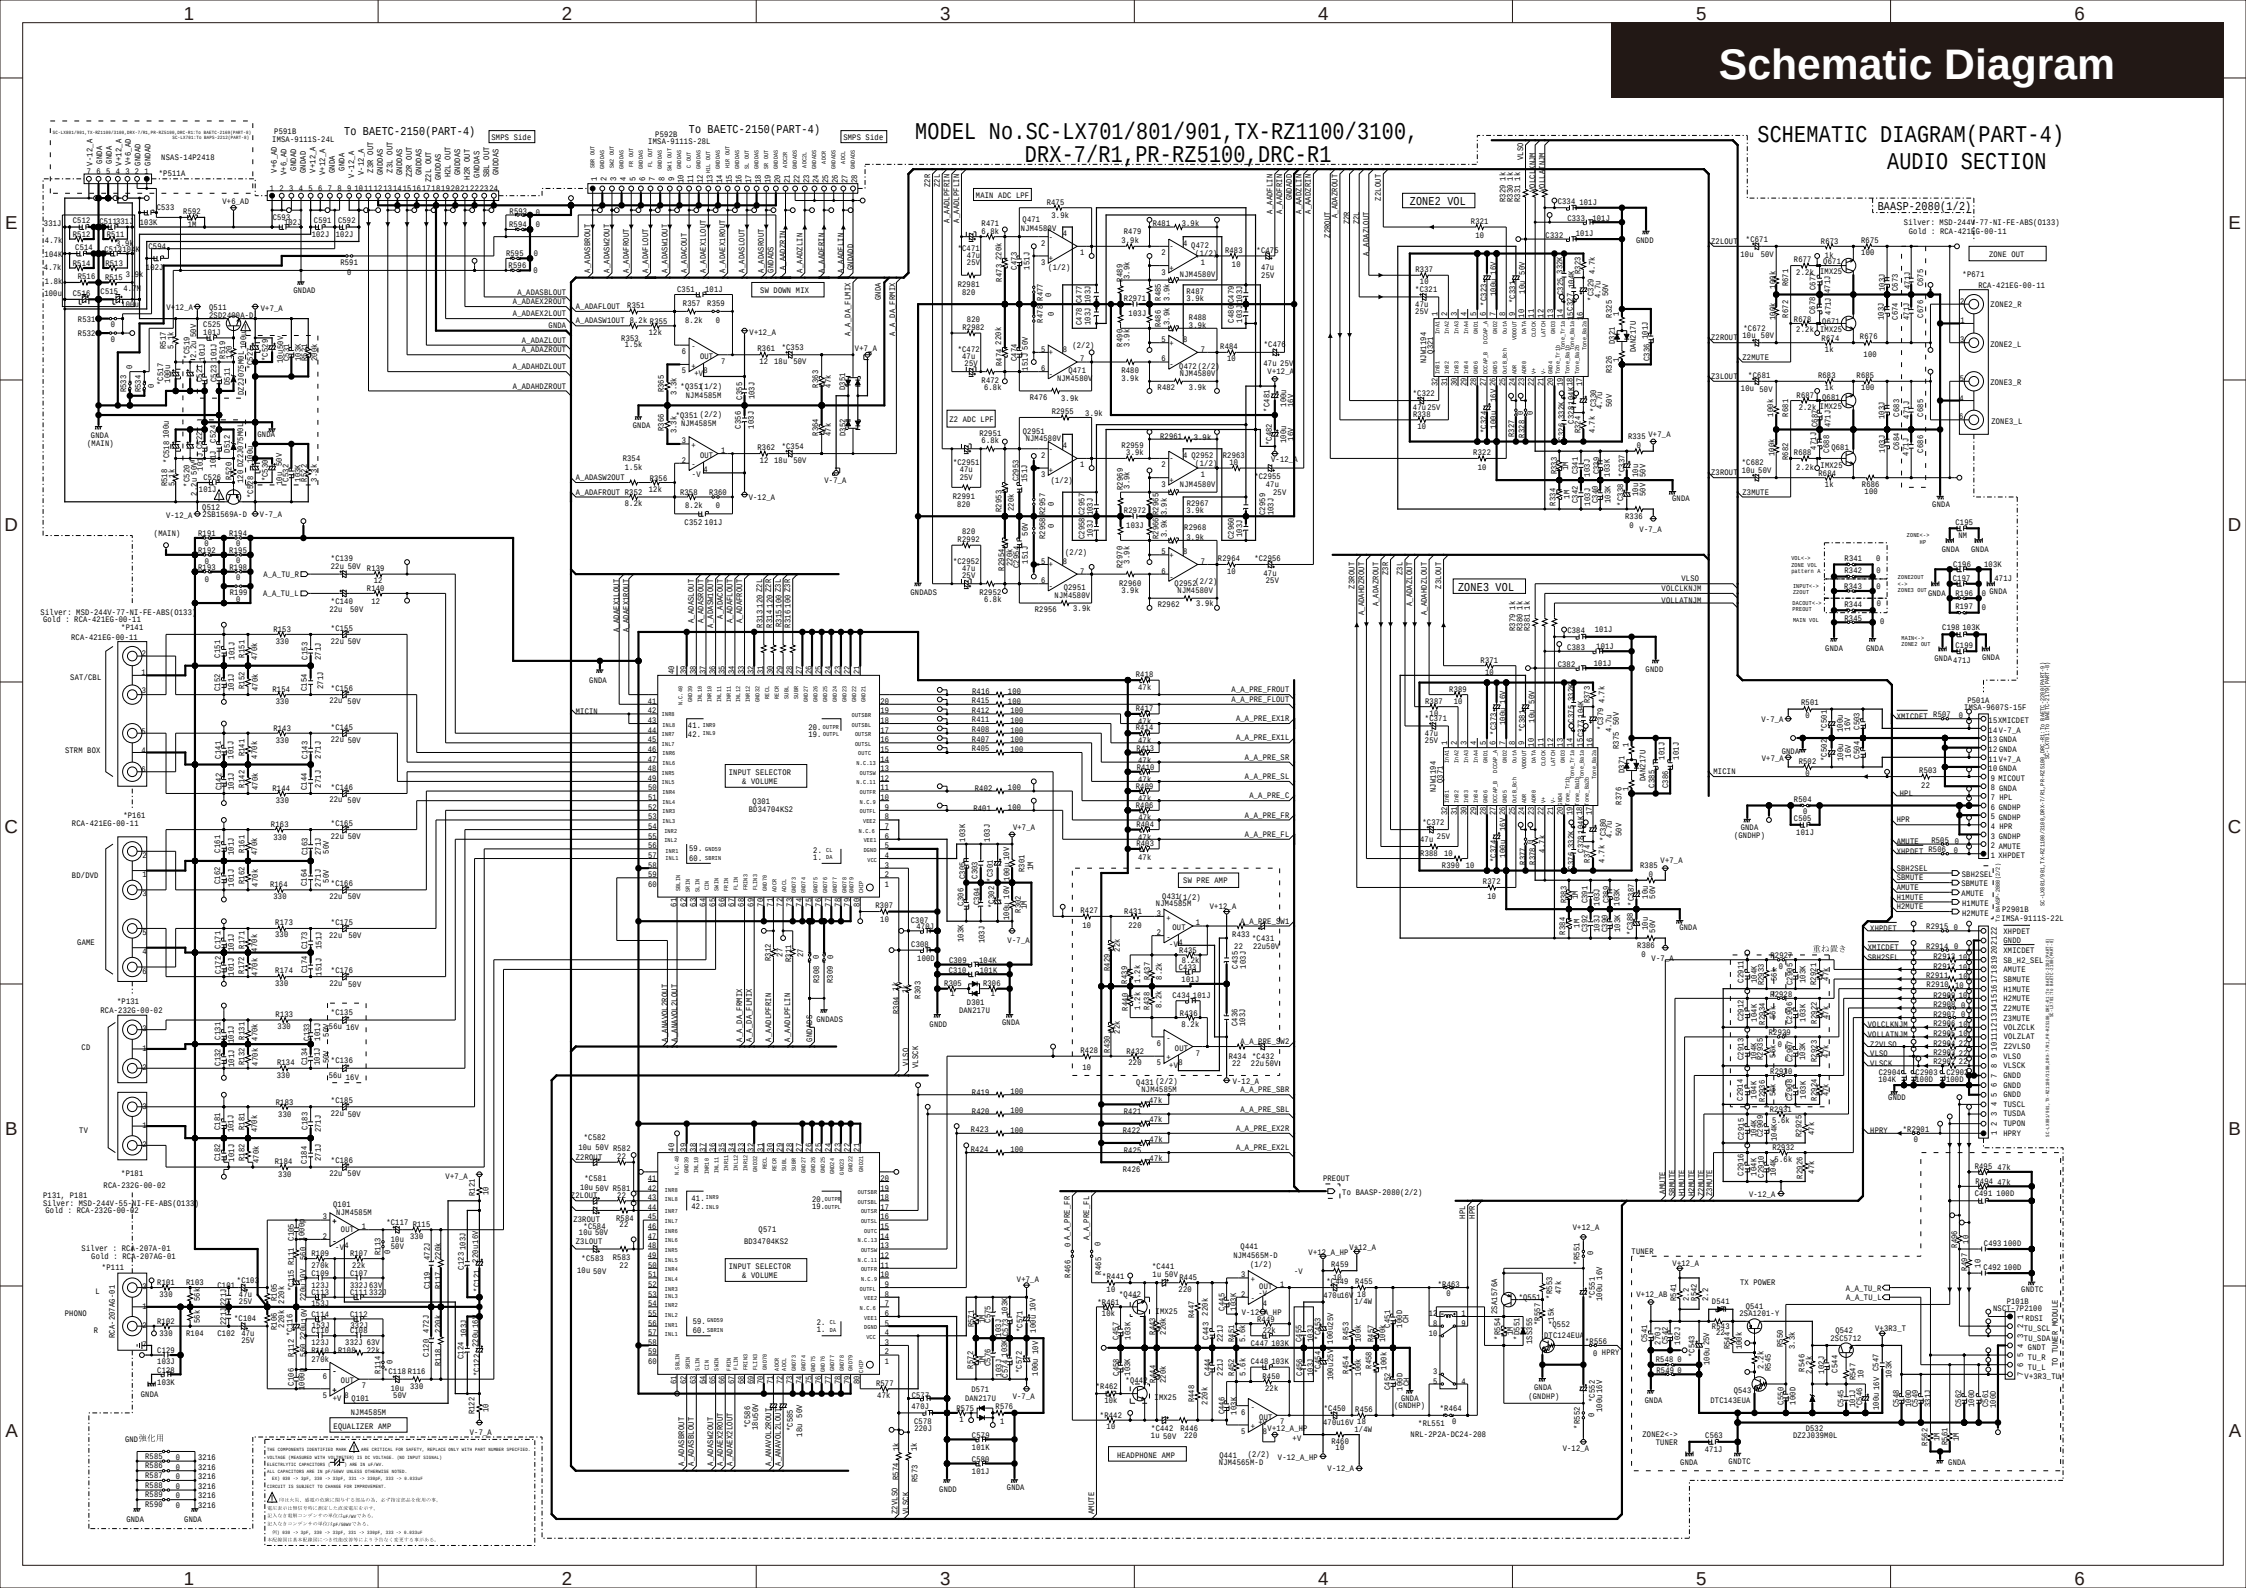


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1


PRE BUFFER

SCHEMATIC DIAGRAM(PART-4) AUDIO SECTION

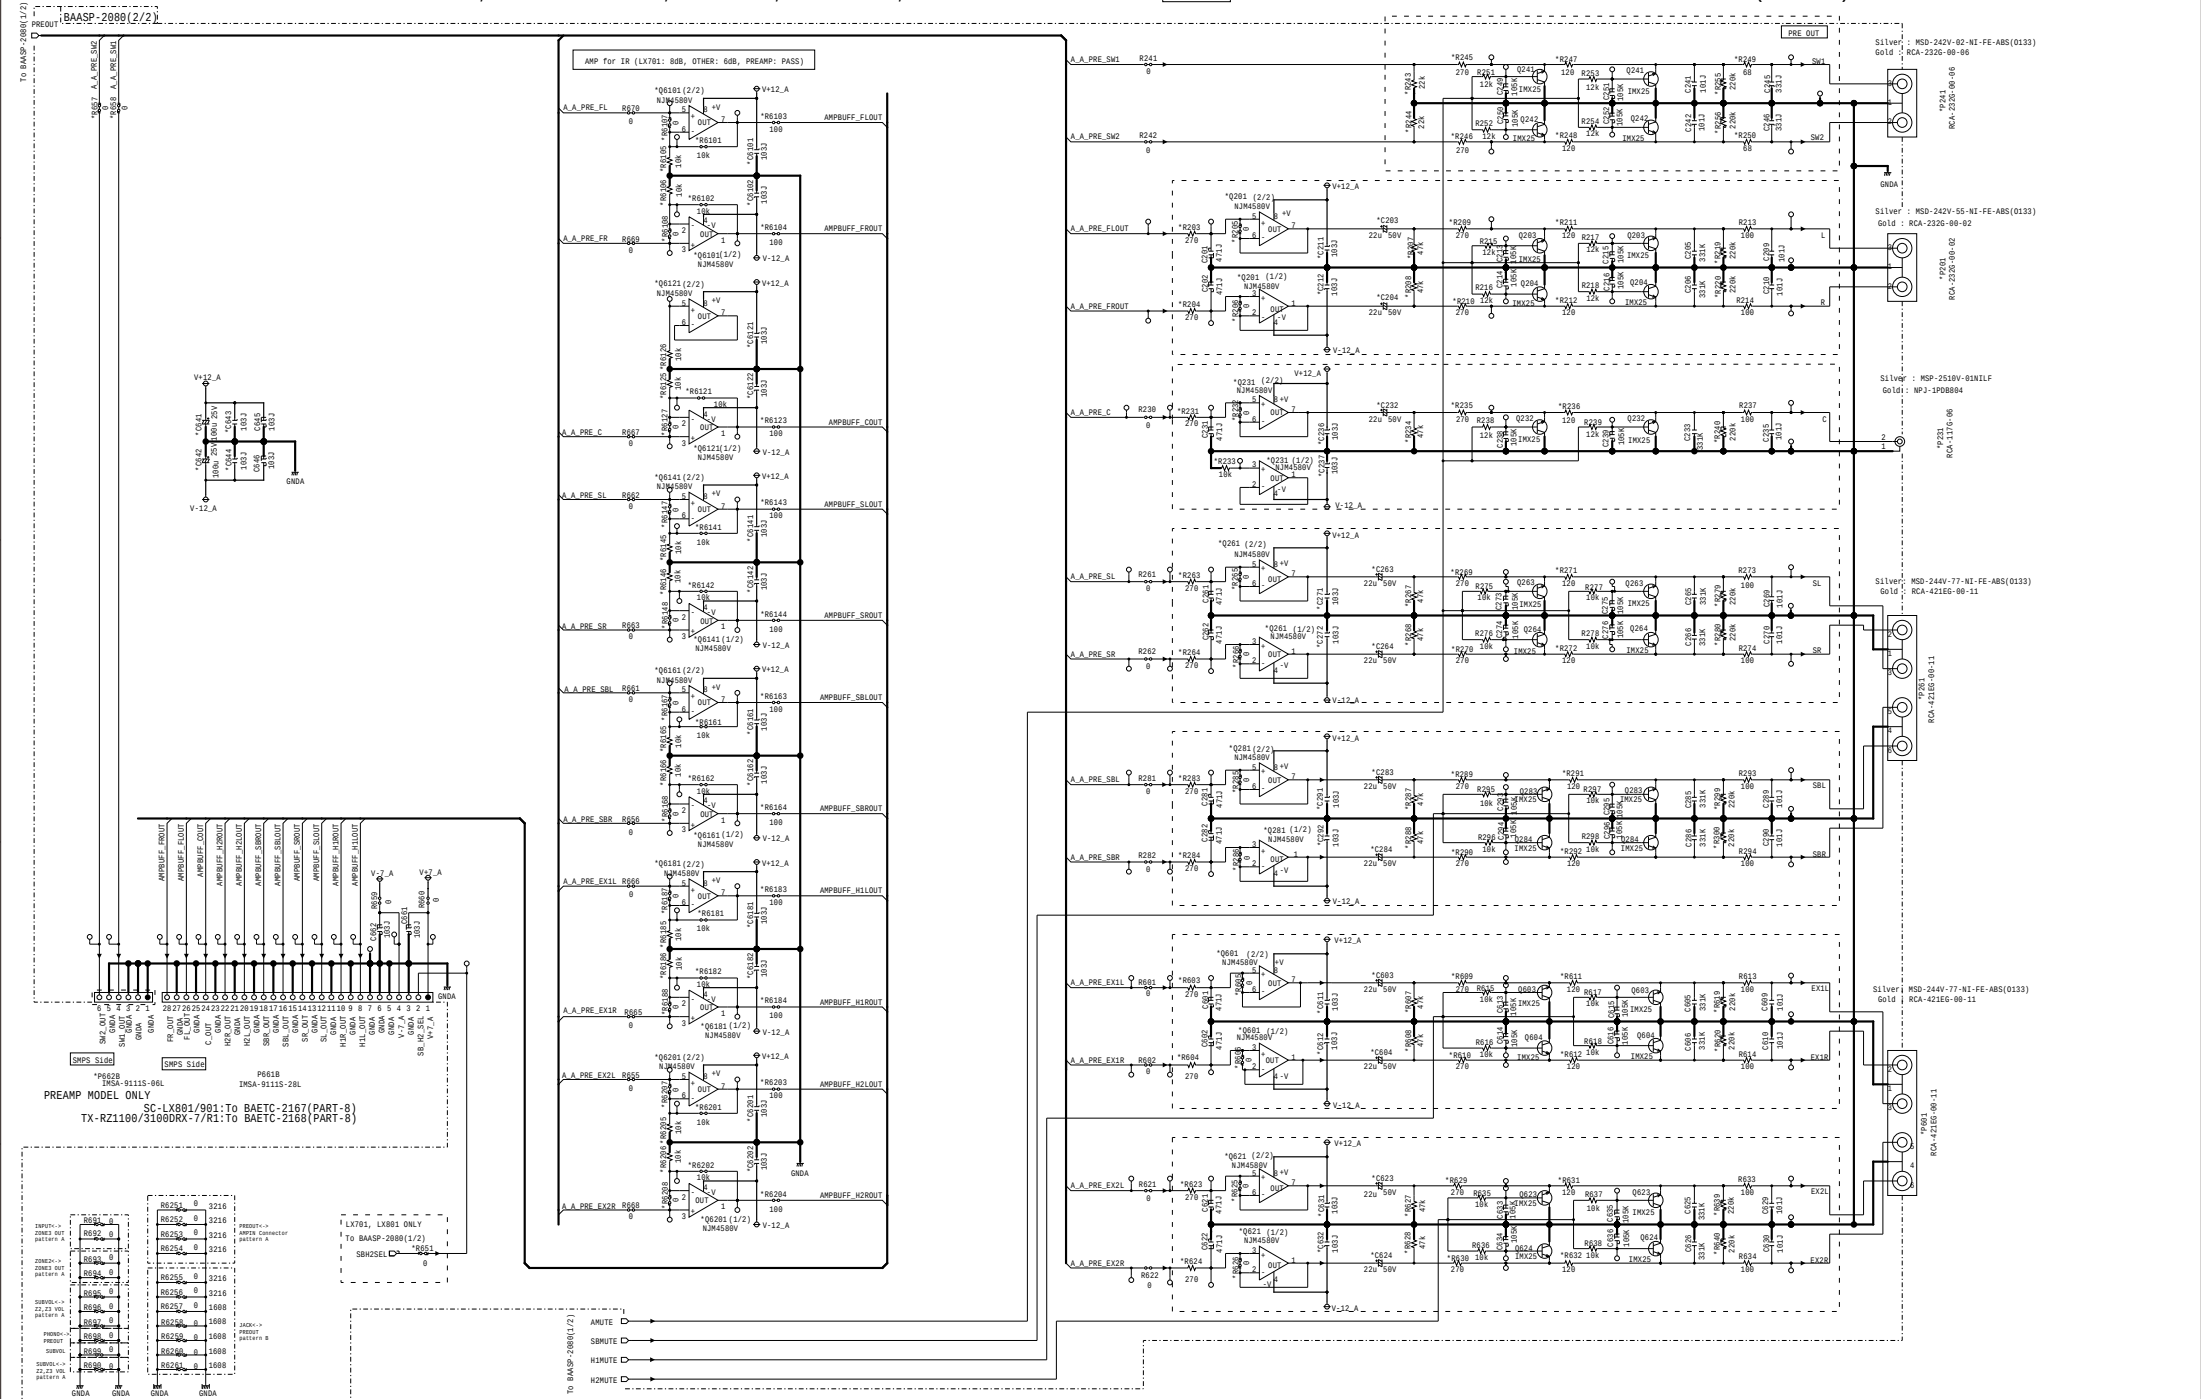

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM(PART-4) COMPOSITE SECTION

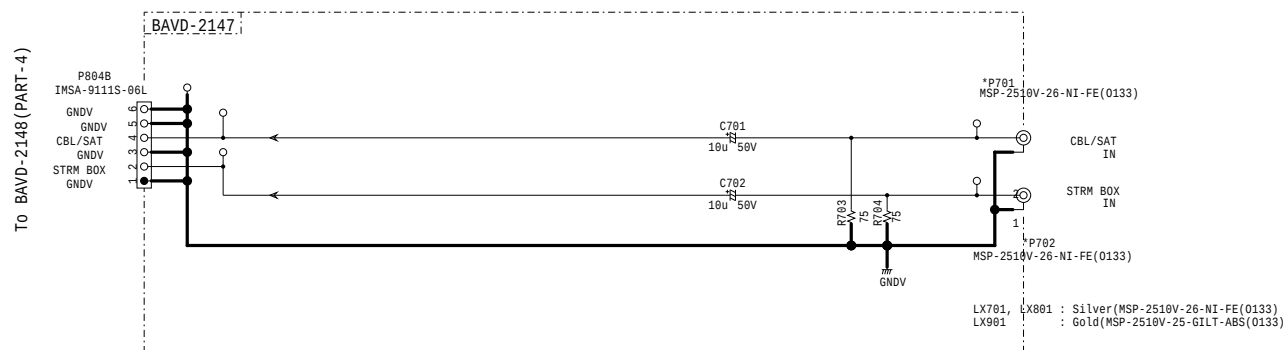

reference 1A 1B 1C 1D 1E 1F 1G 1H 1I 1J 1K 1L 1M 1N 1P 1Q 1R

*P701 - MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P702 - MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P701 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133)

*P702 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133)

*P701 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)

*P702 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)

NOTE

1. RESISTORS
MULT. k, M, or U unless
otherwise noted.
Rated Power: 1/8W unless
otherwise noted.
Tolerances: 1% unless
otherwise noted.

2. CAPACITORS
MULT. p, uF or uF unless
otherwise noted.
Ratings: Capacity(F)/Voltage(V)
unless otherwise noted.
C = CERAMIC
NO MARKED : CDSRB
S, W: No Mount

Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-4) COMPONENT SECTION

Table 1: Component Values

Function	INPUT PIN	CON.A	CON.B	CON.C
BD	3	H	H	L
GAME	8	L	L	L
CBL/SAT	6	L	H	H
STRM BOX	5	H	L	H

Table 2: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 3: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 4: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 5: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 6: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 7: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 8: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 9: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 10: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 11: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 12: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 13: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 14: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 15: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 16: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 17: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 18: Component Values


Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

Table 19: Component Values

Function	4053_INH	CON.A	CON.B	CON.C
BD	L	L	L	L
GAME	L	H	H	H
NON	H	*	*	*

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-4) COMPONENT SECTION

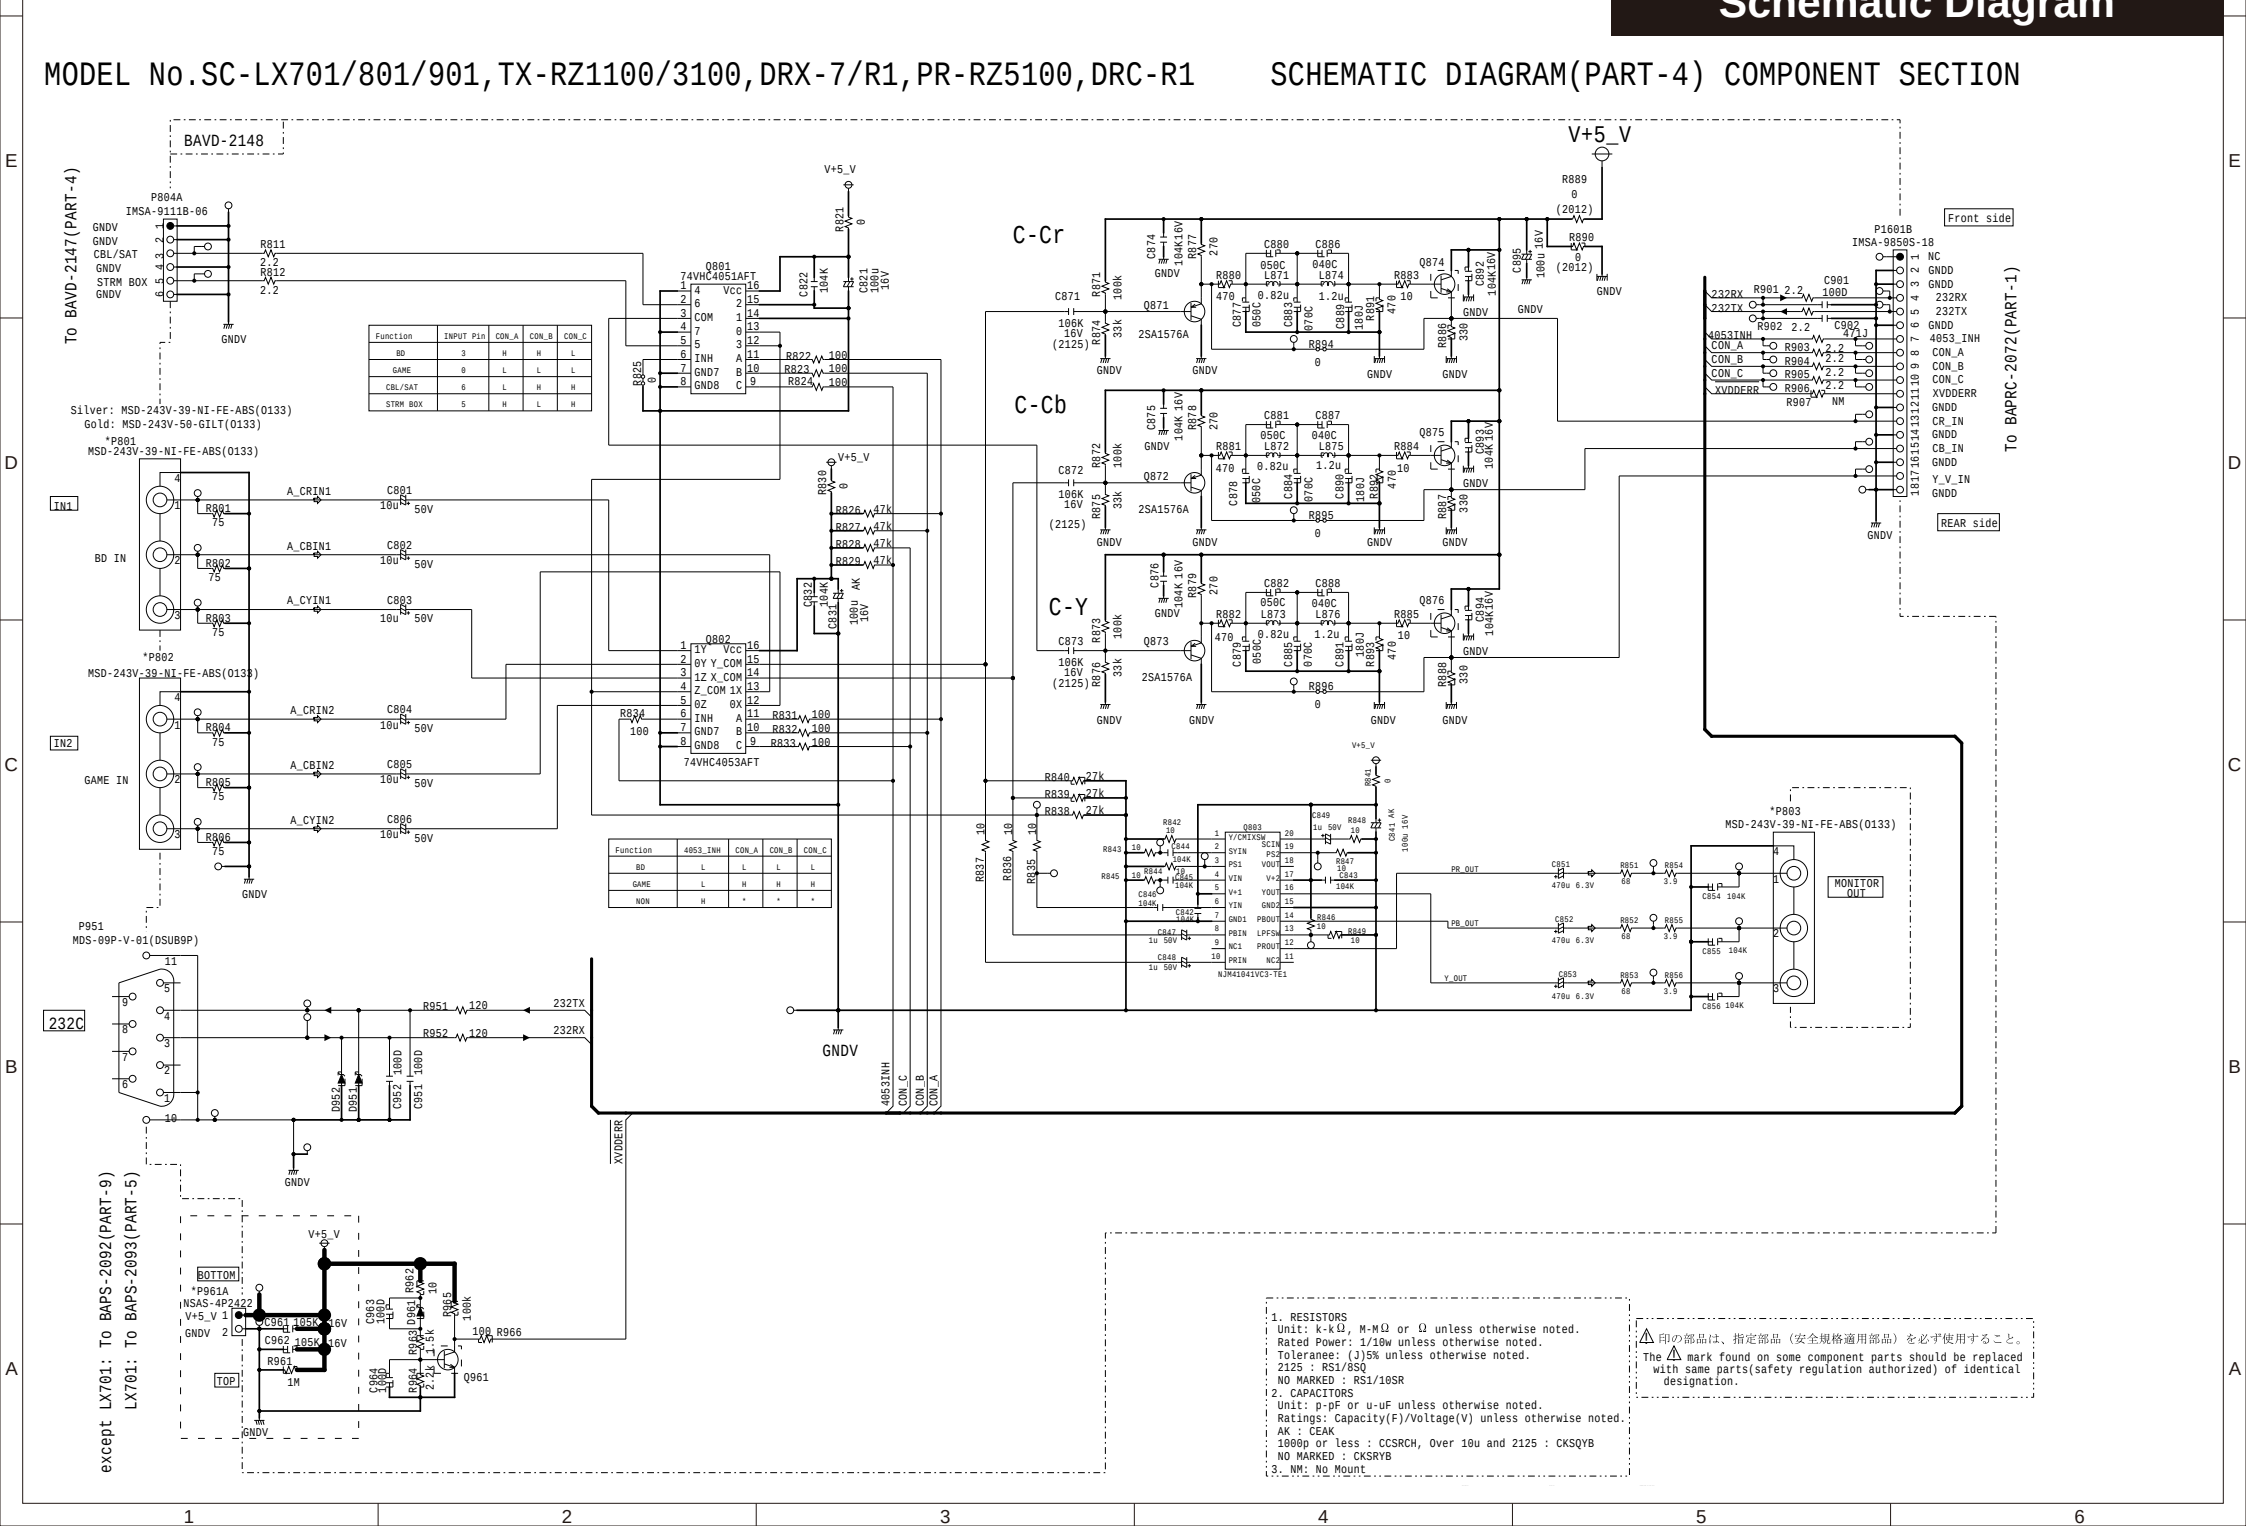


1. RESISTORS
Unit: k- $k\Omega$, M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10W unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2125 = RS1/BSQ
NO MARKED = RS1/16SR
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacitance(F)/Voltage(V) unless otherwise noted.
C = Ceramic, C = Carbon, C = Electrolytic
100pF or less = CCSRCH, Over 10u and 2125 = CKSQB
NO MARKED = CKSRBY
3. NM: NO Mount

△ 印の部品は、指定部品（安全規格適用部品）を必ず使用すること。
The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

Schematic Diagram


MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DCR-R1 SCHEMATIC DIAGRAM(PART-4) D-DAC BRIDGE SECTION

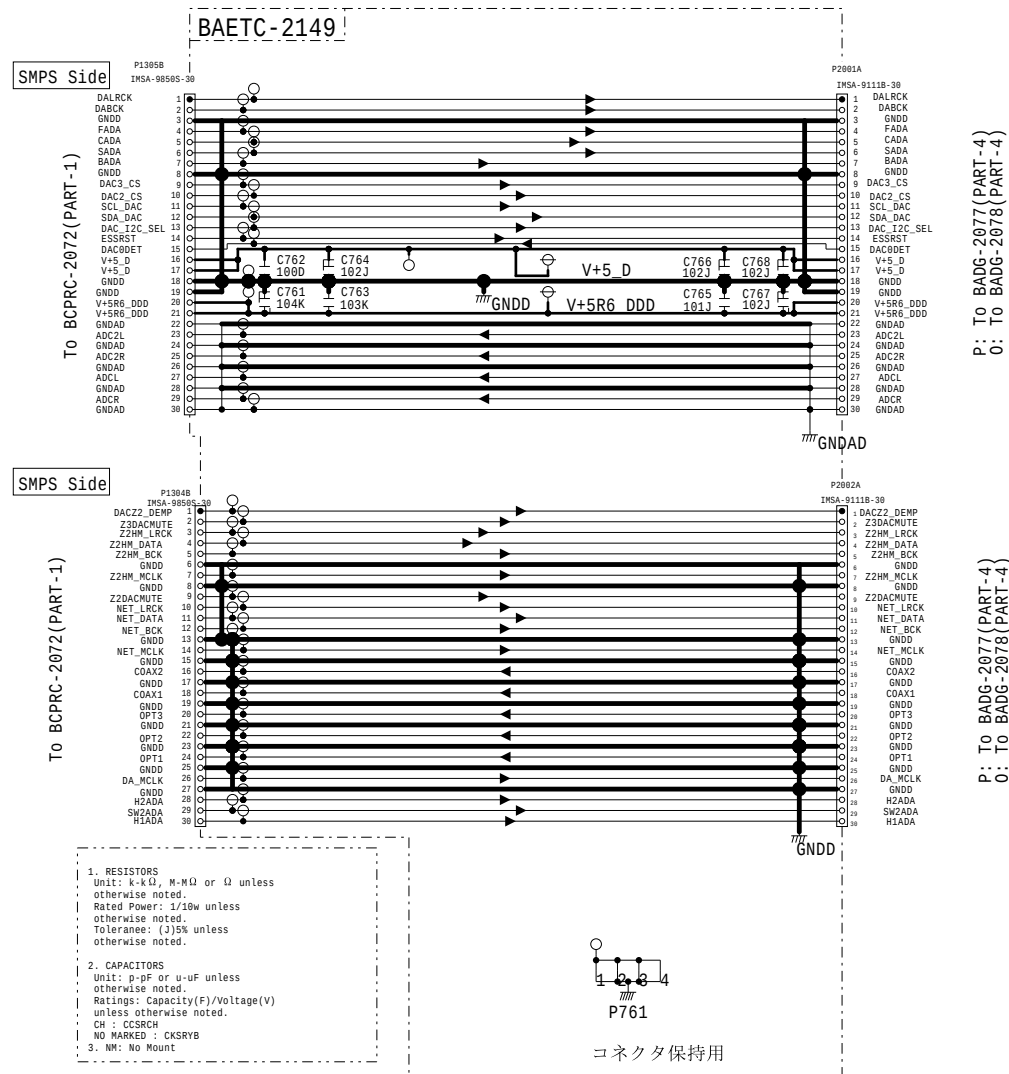

Schematic Diagram

MODEL No.SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1 SCHEMATIC DIAGRAM(PART-5) IR_INTERFACE_M5 SECTION

To BCAF-2083(PART-5)

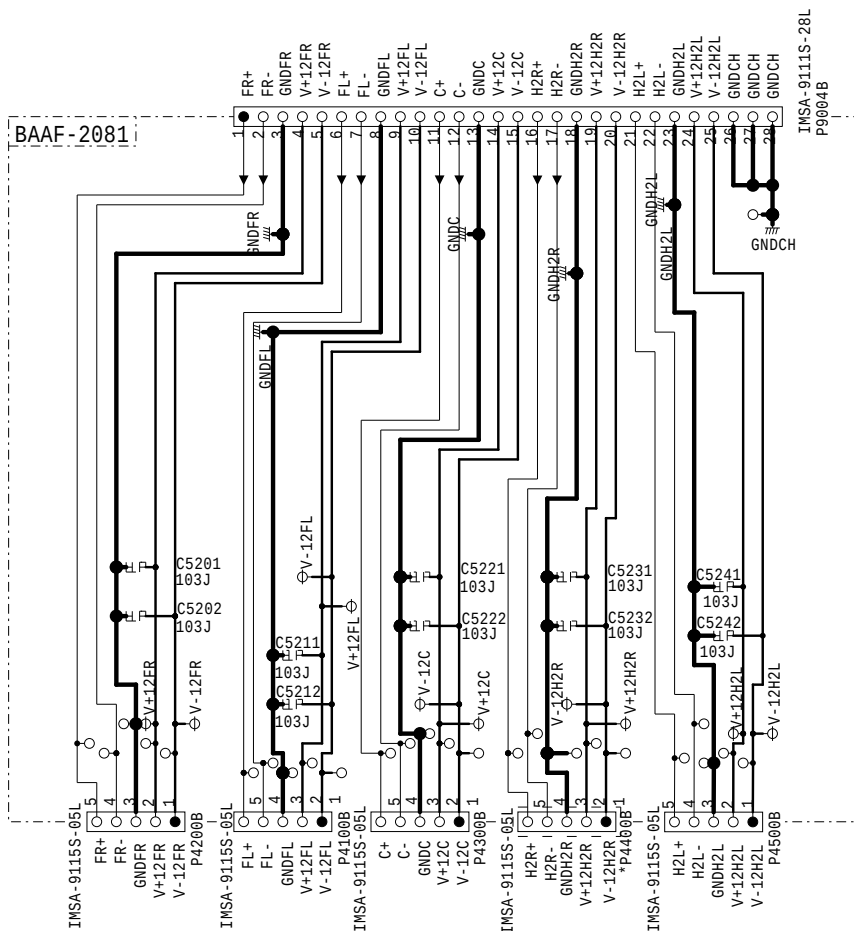

To BACLD-2095(PART-10)

NOTE

1. RESISTORS
Unit: k-kΩ, M-MΩ or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRVB, CH:CCSRCH
3. NM: No Mount


Reference 1A 1B 1C 1D
P4400B IMSA-9115S-05L IMSA-9115S-05L

1A	SC-LX801(B)MDC SC-LX801(B)MGP SC-LX801(B)MJJ	
1B	SC-LX901(B)MDC SC-LX901(B)MGP SC-LX901(B)MHB SC-LX901(B)MJJ	SC-LX901(S)MGP
1C	TX-RZ1100(B)MDC TX-RZ1100(B)MGP TX-RZ1100(B)MHB TX-RZ1100(B)MGR	TX-RZ1100(S)MGP
1D	DRX-7(B)MDD DRX-7(B)MGA TX-RZ3100(B)MDC TX-RZ3100(B)MGP TX-RZ3100(B)MHB TX-RZ3100(B)MGR DRX-R1(B)MDD DRX-R1(B)MGR DRX-R1(B)MGA DRX-R1(B)MJJ	TX-RZ3100(S)MGP

Schematic Diagram

MODEL No.SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1 SCHMATIC DIAGRAM(PART-5) IR_INTERFACE_M6 SECTION

To BAAF-2083(PART-5)

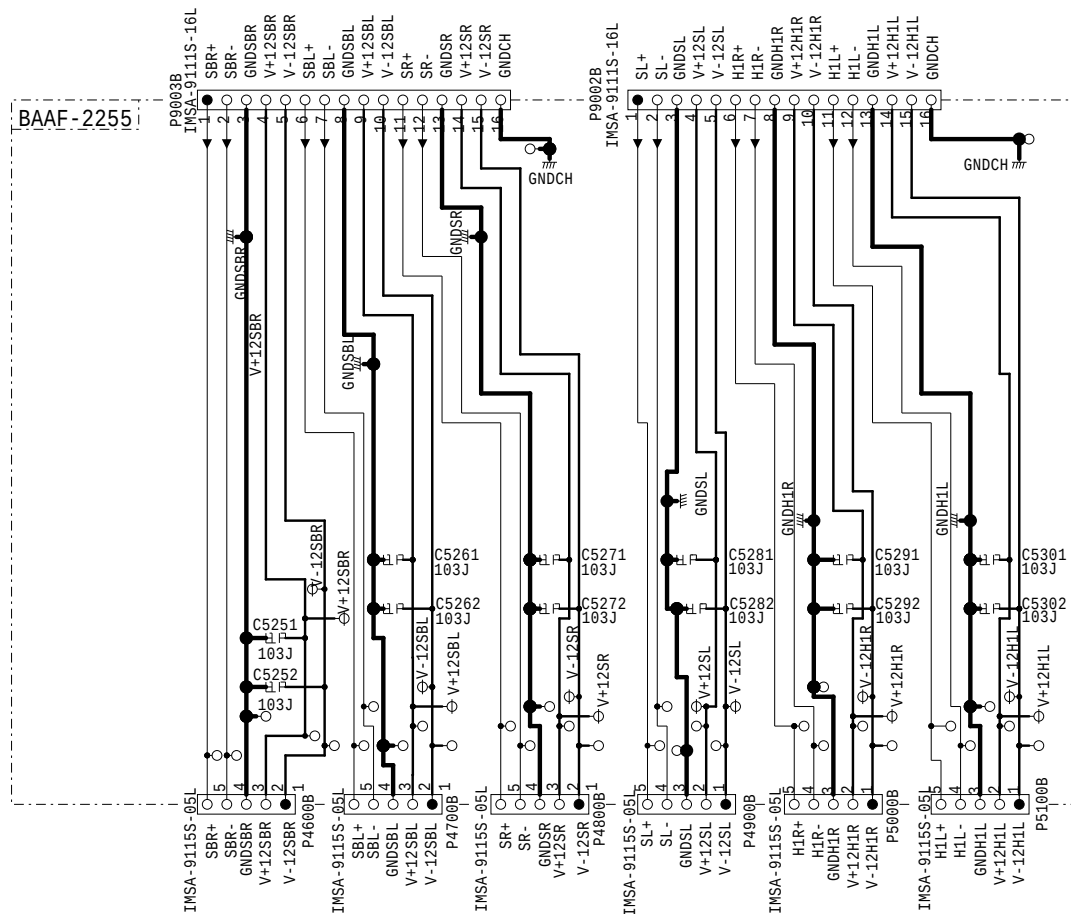

To BACLD-2095(PART-10)


NOTE

1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSR YB,CH:CCSRCH
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
$\square$ RS1/16S*** $\square$ RS1/16S***	$\square$ RS1/10S*** $\square$ RS1/8SQ***	$\square$ RS1/8S*** $\square$ RS1/4SA***
$\square$ CCSR*** $\square$ CKSR***	$\square$ 1/8W $\square$ CCSQ*** $\square$ CKSQ***	$\square$ 1/4W $\square$ CCS*** $\square$ CKS***

MODEL No. SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1

SCHMATIC DIAGRAM(PART-5) BUFFER GND_M SECTION

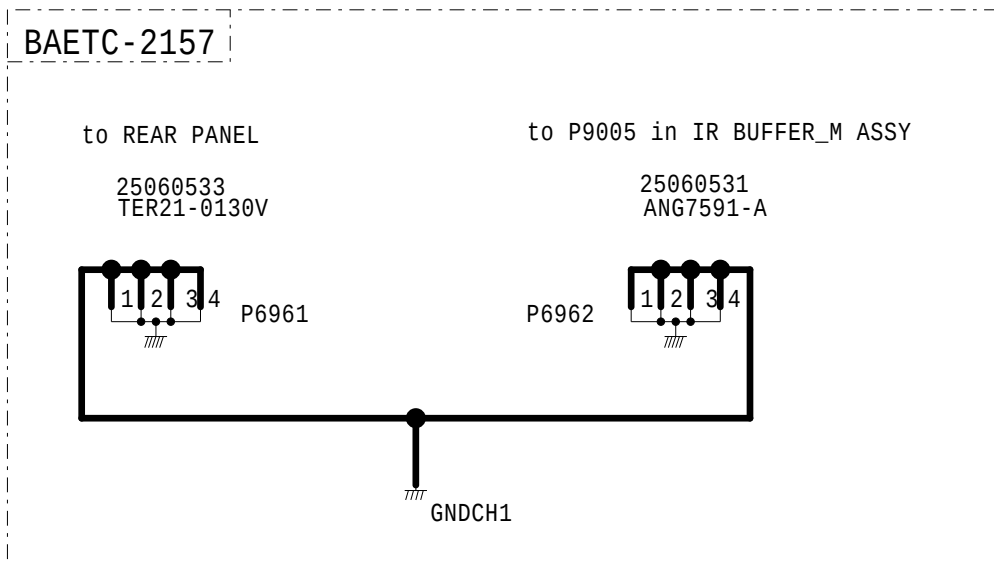

Schematic Diagram

E



B

A

	reference 1A	1B	1C	1D
Q9301	TC40538FT	TC40538FT		
Q9302	DTC115EUA	DTC115EUA		
Q9303	DTC124EUA	DTC124EUA		
Q9307	50MU103KY11608	50MU103KY11608		
Q9308	50MU103KY11608	50MU103KY11608		
	reference 1E	1F	1G	1H
Q9301	TC40538FT	TC40538FT		
Q9302	DTC115EUA	DTC115EUA		
Q9303	DTC124EUA	DTC124EUA		
Q9307	50MU103KY11608	50MU103KY11608		
Q9308	50MU103KY11608	50MU103KY11608		

reference	1A	1B	1C	1D
R9383	RN72K1J-080JE	RN72K1J-080JE		
R9384	RN72K1J-473JE	RN72K1J-473JE		
R9385	RN72K1J-473JE	RN72K1J-473JE		
R9386	RN72K1J-106JE	RN72K1J-106JE		
R9387	RN72K2B-080JE2	RN72K2B-080JE2		
reference	1E	1F	1G	1H
R9383	RN72K1J-080JE	RN72K1J-080JE		
R9384	RN72K1J-473JE	RN72K1J-473JE		
R9385	RN72K1J-473JE	RN72K1J-473JE		
R9386	RN72K1J-106JE	RN72K1J-106JE		
R9387	RN72K2B-080JE2	RN72K2B-080JE2		

[illegible]

- ```


1. RESISTORS
Unit: k-kΩ, M-MΩ or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
WB-CKSRVB CH:CCSRCH
3. NH: No Mount

```

### Schematic Diagram

MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1

SCHEMATIC DIAGRAM(PART-5) IR BUFFER\_M SECTION

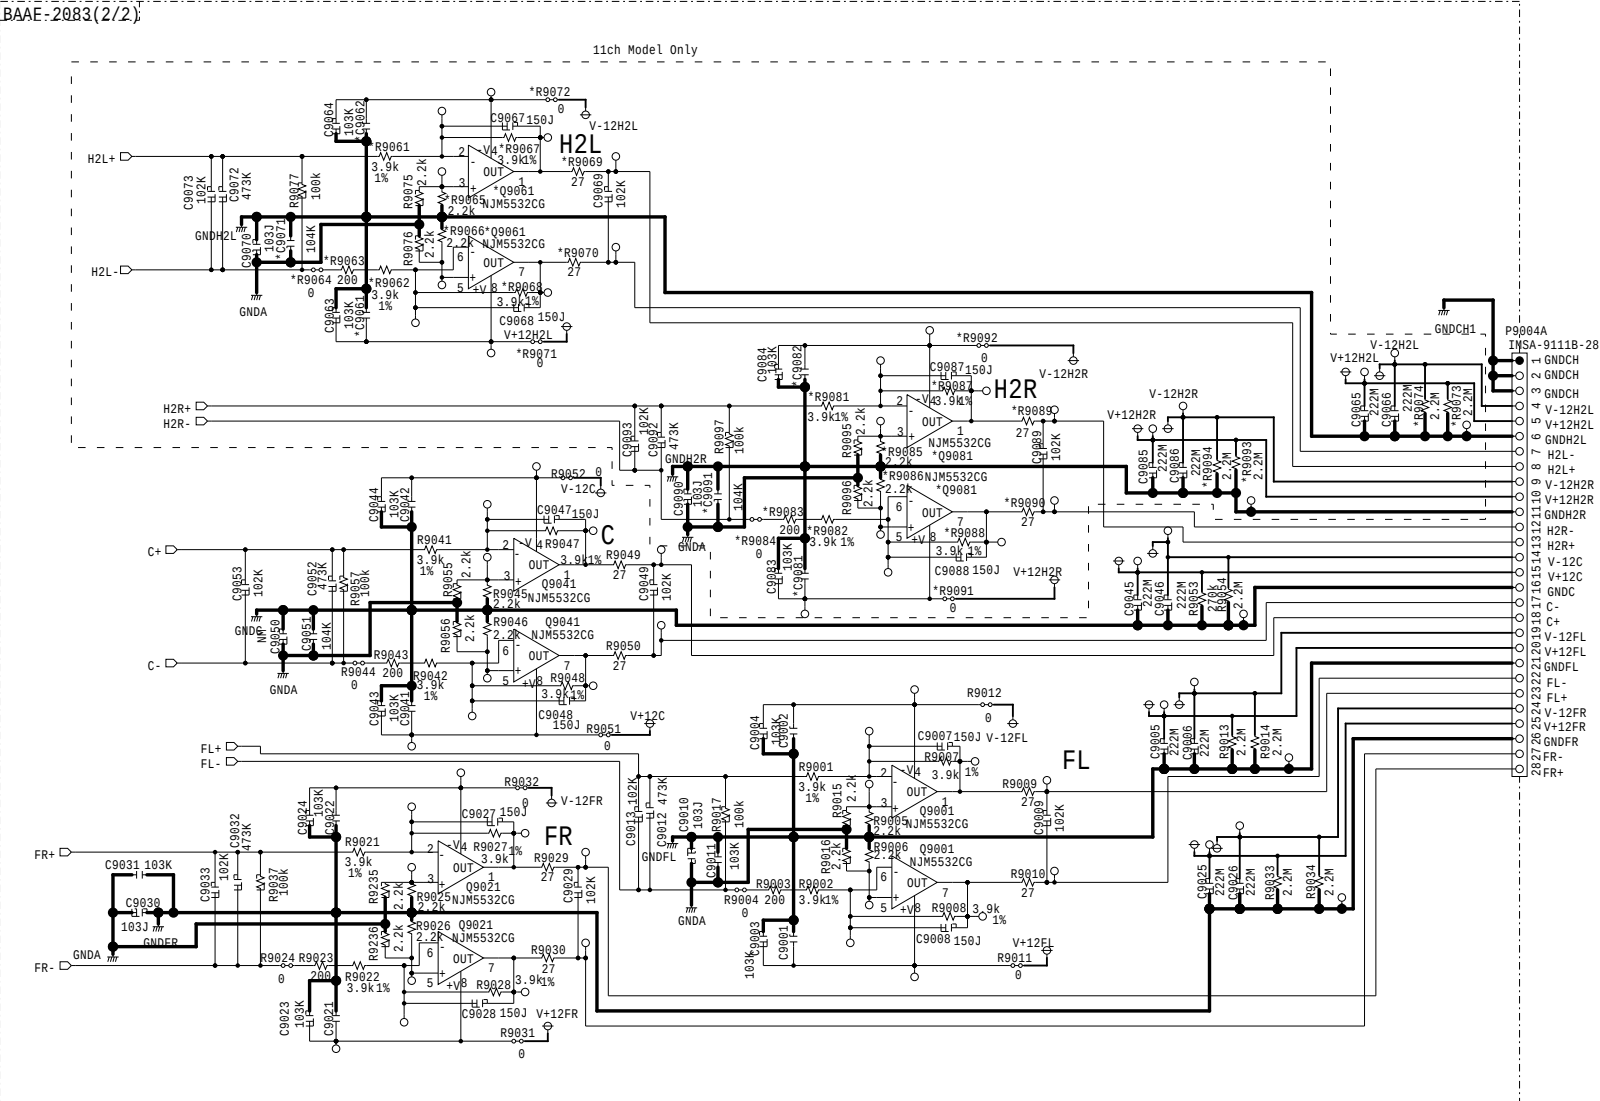

## Schematic Diagram

|   |   |   |   |   |
|---|---|---|---|---|
| A | B | C | D | E |
|---|---|---|---|---|


|  |   |                   |   |
|--|---|-------------------|---|
|  | 4 | 5                 | 6 |
|  |   | Schematic Diagram |   |

TX-RZ1100/3100, PR-RZ5100: To BADIS-2075 (PART-2)  
DRX-7/R1, DRC-R1: To BADIS-2076 (PART-2)

TO BAPS-2205 (PART-8)

To BAPRC-2072 (PAER-1)

SCHEMATIC DIAGRAM (PART-6) A-DAC BRIDGE\_0 SECTION

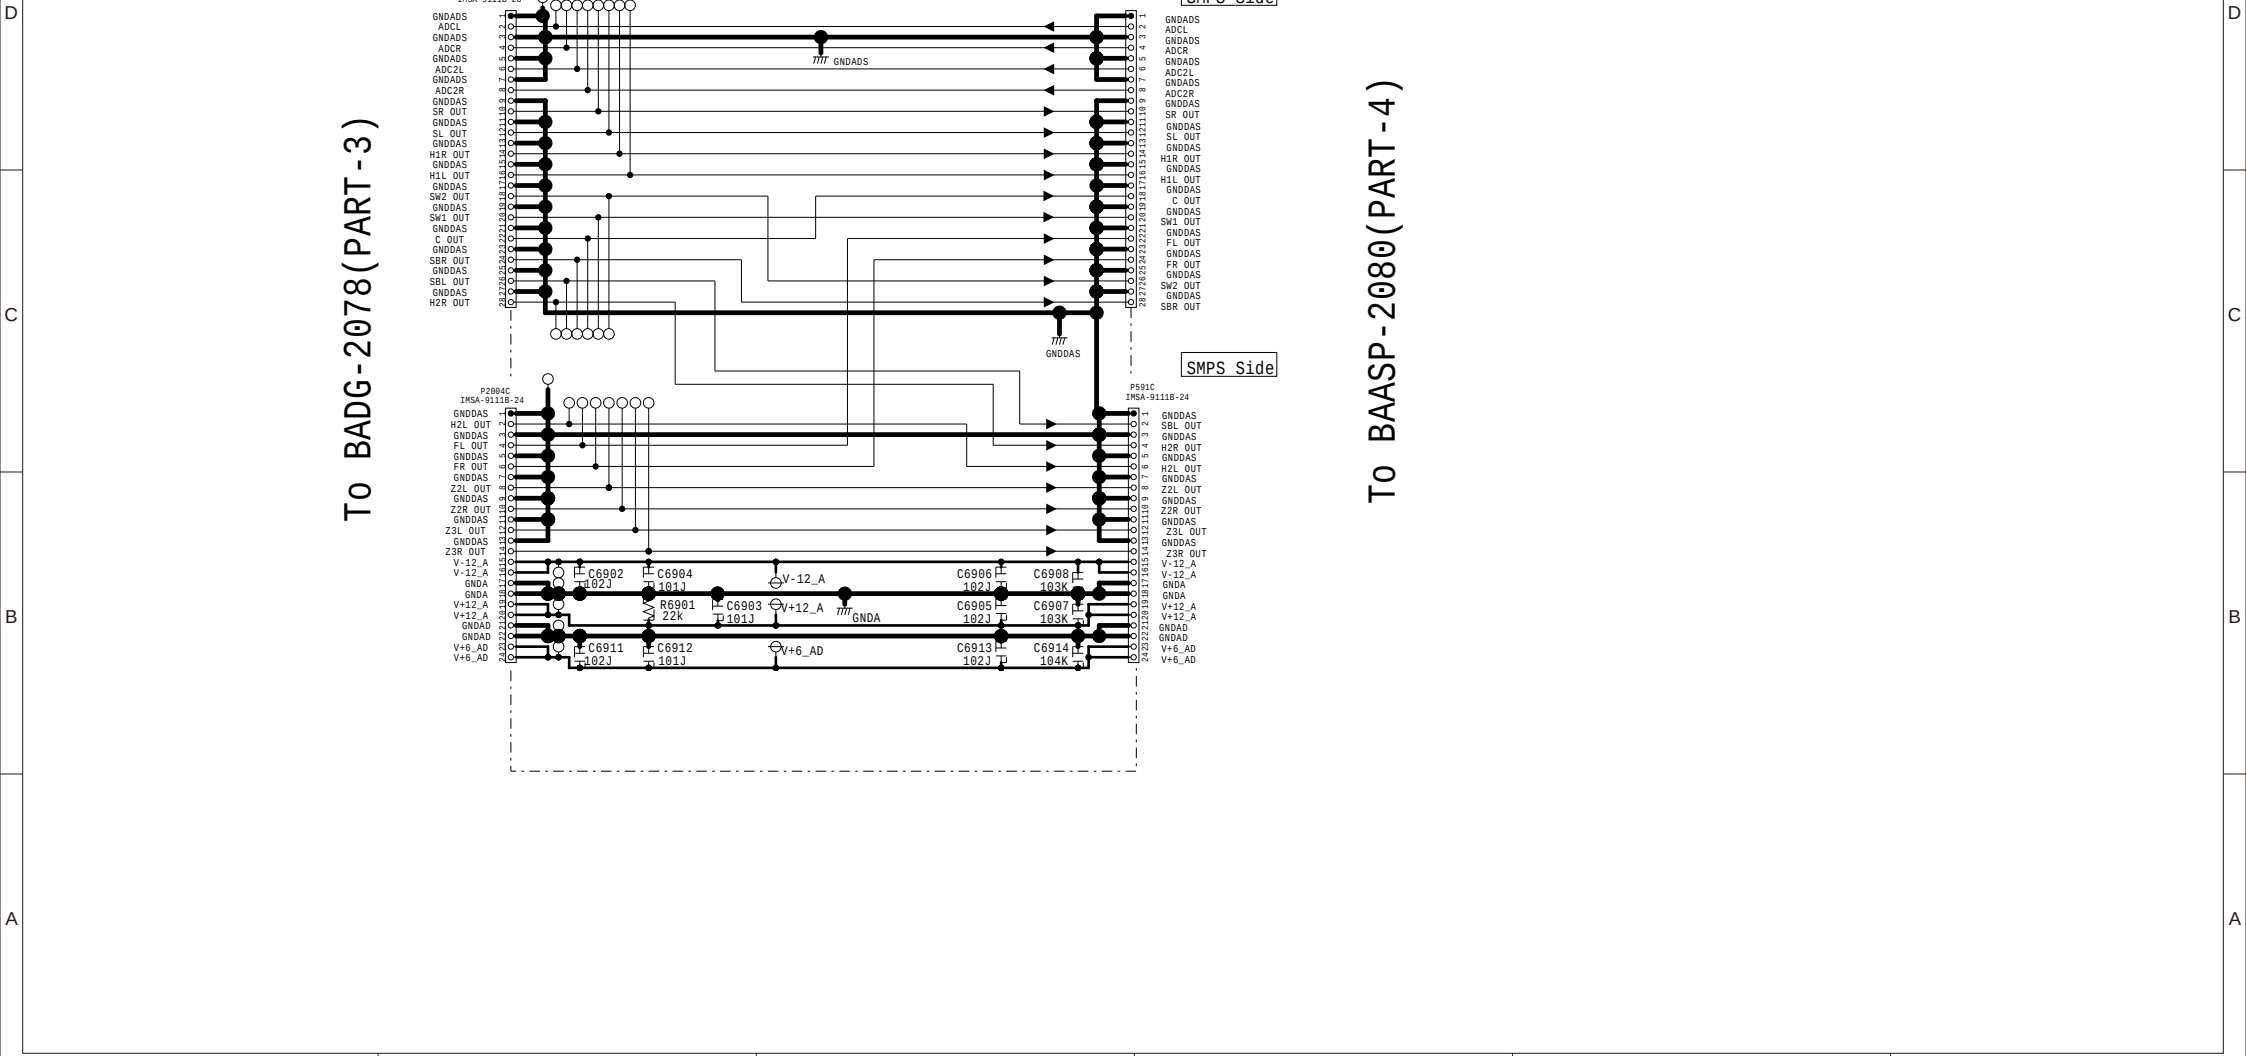

## E




## Schematic Diagram

MODEL No. SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1

BAPS-2089

SCHEMATIC DIAGRAM(PART-8) IR REG M SECTION

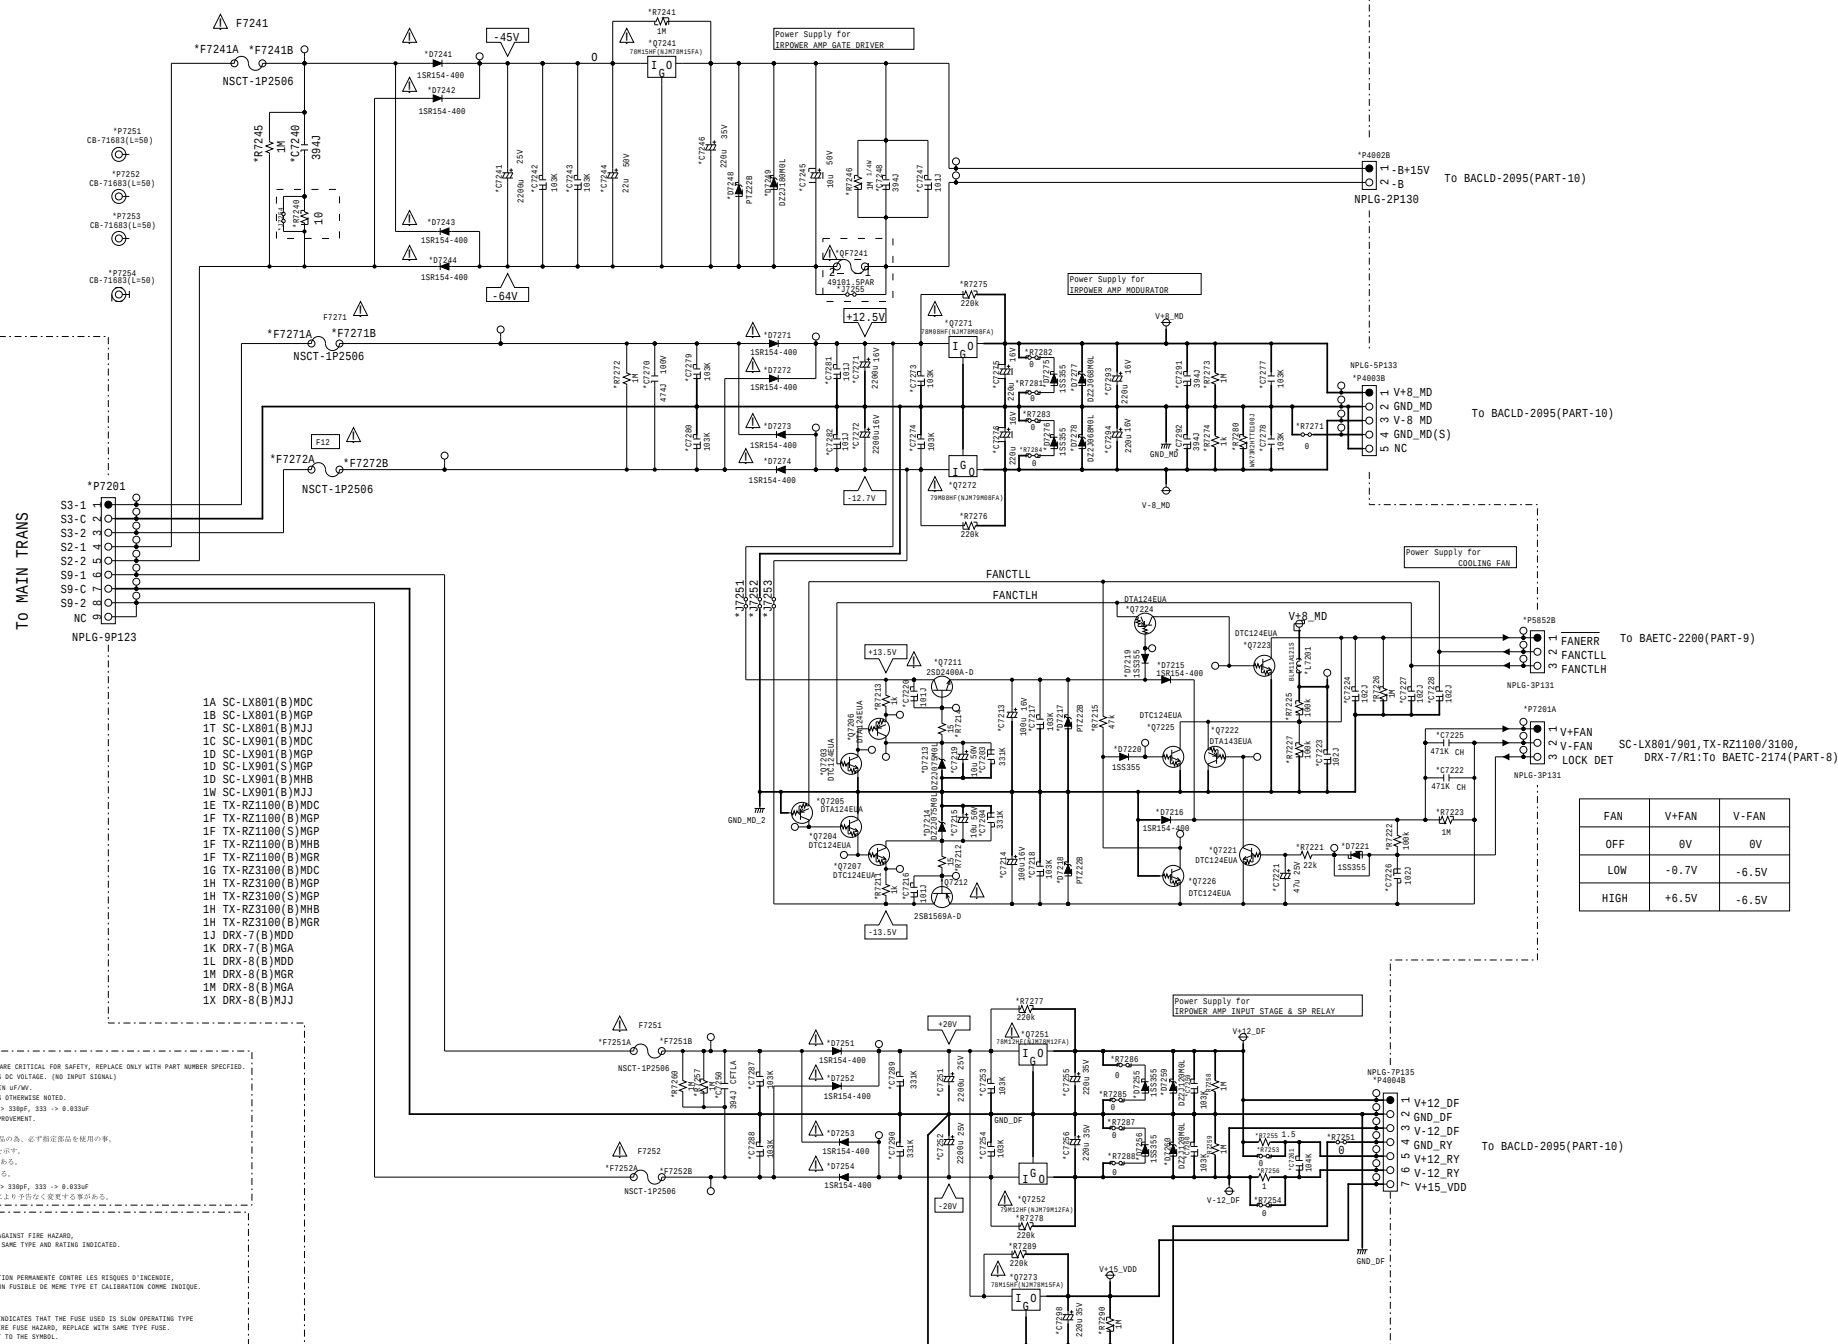

THE COMPONENTS IDENTIFIED BY  ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED IN TABLE (MEASURED WITH VOLTAGE) IS DC VOLTAGE. (NO INPUT SIGNAL).

ELECTRIC CAPACITORS  ARE IN  $\mu\text{F}$ .

ALL CAPACITORS ARE IN  $\mu\text{F}$  UNLESS OTHERWISE SPECIFIED.

EX 830  $\rightarrow$  340, 330  $\rightarrow$  330p, 331  $\rightarrow$  330pF, 333  $\rightarrow$  0.033 $\mu\text{F}$

CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

① 圧入した際、感電の危険に関する部品のため、必ず指定部品を使用の事。  
電圧表示は動作時時に測定した直流電圧を示す。  
記入なき電解コンデンサの単位は10 $\mu\text{F}$ である。  
記入なきコンデンサの単位は10pF/50Vである。  
② 例) 830  $\rightarrow$  340, 330  $\rightarrow$  330p, 331  $\rightarrow$  330pF, 333  $\rightarrow$  0.033 $\mu\text{F}$   
③ 電圧表示は動作時時に測定した直流電圧を示す。  
④ 記入なき電解コンデンサの単位は10 $\mu\text{F}$ である。  
⑤ 記入なきコンデンサの単位は10pF/50Vである。

**CAUTION**  
 FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,  
 REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

**ATTENTION**  
 AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,  
 REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.

 THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE WITH SAME TYPE FUSE.

 RATING REFERS TO THE MAKING ADJACENT TO THE SYMBOL.

 CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENTE, REMPLACER QUE DES FUSIBLES DE MEME TYPE.


 CE DERNIER EST INDIQUE LA OU IL PRESENT SYMBOLE EST ADJOSSE

MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1

SCHEMATIC DIAGRAM(PART-8) B\_DIODE SECTION

[illegible]

|    |            |        |
|----|------------|--------|
| 1A | SC-X8081   | (8)MDC |
| 1B | SC-X8081   | (8)MGP |
| 1C | 1SC-X8081  | (8)MGP |
| 1C | SC-X8081   | (8)MGP |
| 1D | SC-X8081   | (8)MGP |
| 1E | 1SC-X8081  | (8)MGP |
| 1D | SC-X8081   | (8)MGP |
| 1W | SC-X8081   | (8)MJB |
| 1E | TX-R21180  | (8)MDC |
| 1F | 1TX-R21180 | (8)MGP |
| 1F | TX-R21180  | (8)MGP |
| 1F | TX-R21180  | (8)MGP |
| 1G | TX-R21180  | (8)MGP |
| 1H | TX-R21180  | (8)MGP |
| 1H | TX-R21180  | (8)MGP |
| 1H | TX-R21180  | (8)MGP |
| 1H | TX-R21180  | (8)MGP |
| 1H | TX-R21180  | (8)MGP |
| 1I | TX-R21180  | (8)MGP |
| 1J | TX-R21180  | (8)MGP |
| 1K | TX-R21180  | (8)MGP |
| 1L | TX-R21180  | (8)MGP |
| 1M | TX-R21180  | (8)MGP |
| 1N | TX-R21180  | (8)MGP |
| 1O | TX-R21180  | (8)MGP |
| 1P | TX-R21180  | (8)MGP |
| 1Q | TX-R21180  | (8)MGP |
| 1R | TX-R21180  | (8)MGP |
| 1S | TX-R21180  | (8)MGP |
| 1T | TX-R21180  | (8)MGP |
| 1U | TX-R21180  | (8)MGP |
| 1V | TX-R21180  | (8)MGP |
| 1W | TX-R21180  | (8)MGP |
| 1X | TX-R21180  | (8)MGP |
| 1Y | TX-R21180  | (8)MGP |
| 1Z | TX-R21180  | (8)MGP |

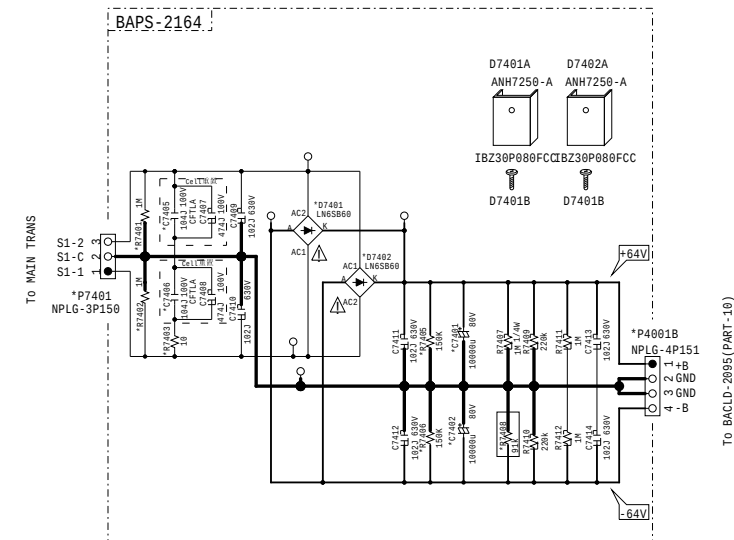

| Reference | I0             | I1H             | I1                            |
|-----------|----------------|-----------------|-------------------------------|
| *C7481    | LMSB80         | LMSB80          | LMSB80                        |
| *C7482    | LMSB80         | LMSB80          | LMSB80                        |
| *C7481    | CE69W80V-1000M | LKS1K103MESQBP  | CE69W80V-1000M_LKS1K103MESQBP |
| *C7482    | CE69W80V-1000M | LKS1K103MESQBP  | CE69W80V-1000M_LKS1K103MESQBP |
| *C7485    | EQC-V100V-104J | IECQ-V100V-104J | EQC-V100V-104J                |
| *C7486    | EQC-V100V-104J | IECQ-V100V-104J | EQC-V100V-104J                |
| *R7481    | KTR18E2P105    | KTR18E2P105     | KTR18E2P105                   |
| *R7482    | KTR18E2P105    | KTR18E2P105     | KTR18E2P105                   |
| *R7483    | RZ5J-10        | RZ5J-10         | RZ5J-10                       |
| *R7485    | RW7K2E-154JE   | RW7K2E-154JE    | RW7K2E-154JE                  |
| *R7486    | RW7K2E-154JE   | RW7K2E-154JE    | RW7K2E-154JE                  |
| *R7488    | RW7K2E-913JE   | RW7K2E-913JE    | RW7K2E-913JE                  |
| *P490B1   | NPLG-4P151     | NPLG-4P151      | NPLG-4P151                    |
| *P7491    | NPLG-3P150     | NPLG-3P150      | NPLG-3P150                    |

```

- - - - -
IV-10000M_LKS1K103MESQ
IV-10000M_LKS1K103MESQ
QV-104J
QV-104J
PJ105
PJ105
- - - - -
-154JE
-154JE
-913JE
-151
-150

```

```

11
 LW6SB60
 LW6SB60
PCB E699W8BV-1000M LKS1K103MESQ
PCB E699W8BV-1000M LKS1K103MESQ
IEQ-V180V:104J
IEQ-V180V:104J
KTR18E2PJ105
KTR18E2PJ105
R25J-18
RN72K2E-154JE
RN72K2E-154JE
RN72K2E-913JE
NPLG-4P15J
NPLG-3P150

```

```

1M
LN6SB60
LN6SB60
C C69N80V-10000M_LK51K103MES0PB
C C69N80V-10000M_LK51K103MES0PB
ECQ-V100V-104J
ECQ-V100V-104J
KTR18EPZJ105
KTR18EPZJ105
LR25J-10
RN72K2E-154JE
RN72K2E-154JE
RN72K2E-913JE
LNPLG-4P151
NPLG-3P150

```

```

IN IP TO RT - - -
I- I- E ILN6SB60
I- I- E ILN6SB60
I- I- E CE9N80V-1000M LK
I- I- E CE9N80V-1000M LK
I- I- E ECQ-V100Y-104J
I- I- E ECQ-V100Y-104J
I- I- E KTR18EZP105
I- I- E KTR18EZP105
I- I- E IR25J-10
I- I- E RN72K2E-154JE
I- I- E RN72K2E-154JE
I- I- E RN72K2E-913JE
I- I- E INPLG-4P151
I- I- C NPLG-3P150

```

```

 LW
 LN6SB6Q
 LN6SB6Q
S1K103MESQBP C6E9W88V-10000M LK5
S1K103MESQBP C6E9W88V-10000M LK5
 EQV-V100V-104J
 EQV-V100V-104J
 KTR18EZP J105
 KTR18EZP J105
 R25J-1Q
 RN7K2E-154JE
 RN7K2E-154JE
 RN7K2E-913JE
 NPLG-4P151
 NPLG-3P150

```

```

- Fx
- LN6SB60
- LN6SB60
-1K103MESQBP C6F90W8V-10000M LKS
-1K103MESQBP C6F90W8V-10000M LKS
- EQC-V100V-104J
- EQC-V100V-104J
- KTR18E2PJ105
- KTR18E2PJ105
- R25J-10
- RN72K2E-154JE
- RN72K2E-154JE
- RN72K2E-913JE
- NPL6-4P151
- NPL6-3P150

```

1K103MES0PB

MODEL No.SC-LX801/901,TZ-RZ1100/3100,PR-RZ5100


## SCHEMATIC DIAGRAM(PART-8) PRIMARY SHIELD SECTION

| reference | 1A          | 1B          | 1C          | 1D          | 1E          | 1F          | 1G          | 1H          |
|-----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| *P5751    | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V |
| *P5752    | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V |
| *P5753    | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V | TER21-0130V |

| reference | 1J | 1K | 1L | 1M | 1N          | 1P          | 1Q | 1R | 1T          | 1W          | 1X | 1Z          |
|-----------|----|----|----|----|-------------|-------------|----|----|-------------|-------------|----|-------------|
| *P5751    | -  | -  | -  | -  | TER21-0130V | TER21-0130V | -  | -  | TER21-0130V | TER21-0130V | -  | -           |
| *P5752    | -  | -  | -  | -  | TER21-0130V | TER21-0130V | -  | -  | TER21-0130V | TER21-0130V | -  | -           |
| *P5753    | -  | -  | -  | -  | TER21-0130V | TER21-0130V | -  | -  | TER21-0130V | TER21-0130V | -  | TER21-0130V |

BAETC-2165

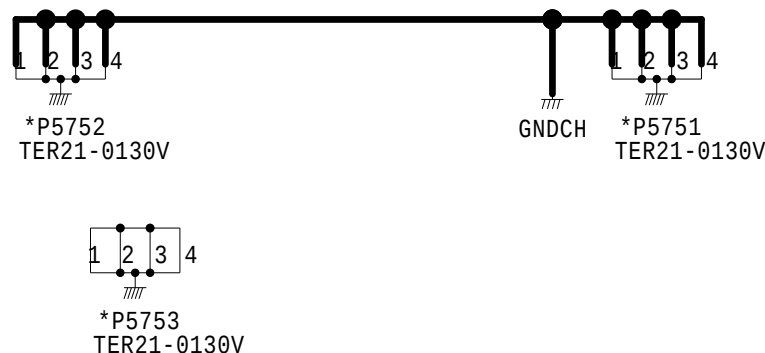

|    |                 |
|----|-----------------|
| 1A | SC-LX801(B)MDC  |
| 1B | SC-LX801(B)MGP  |
| 1T | SC-LX801(B)MJJ  |
| 1C | SC-LX901(B)MDC  |
| 1D | SC-LX901(B)MGP  |
| 1D | SC-LX901(S)MGP  |
| 1D | SC-LX901(B)MHB  |
| 1W | SC-LX901(B)MJJ  |
| 1E | TX-RZ1100(B)MDC |
| 1F | TX-RZ1100(B)MGP |
| 1F | TX-RZ1100(S)MGP |
| 1F | TX-RZ1100(B)MHB |
| 1F | TX-RZ1100(B)MGR |
| 1G | TX-RZ3100(B)MDC |
| 1H | TX-RZ3100(B)MGP |
| 1H | TX-RZ3100(S)MGP |
| 1H | TX-RZ3100(B)MHB |
| 1H | TX-RZ3100(B)MGR |
| 1N | PR-RZ5100(B)MDC |
| 1P | PR-RZ5100(B)MGP |
| 1P | PR-RZ5100(B)MHB |
| 1P | PR-RZ5100(B)MGR |

MODEL No.TZ-RZ1100/3100, DRX-7/R1


## SCHEMATIC DIAGRAM(PART-8) PRE BRIDGE\_M\_0 SECTION

| reference | 1A | 1B | 1C | 1D | 1E            | 1F            | 1G            | 1H            | 1J            |
|-----------|----|----|----|----|---------------|---------------|---------------|---------------|---------------|
| *P661C    | -  | -  | -  | -  | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 |
| *P9001C   | -  | -  | -  | -  | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 |

| reference | 1K            | 1L            | 1M            | 1N | 1P | 1Q | 1R | 1T | 1W            | 1X | 1Z |
|-----------|---------------|---------------|---------------|----|----|----|----|----|---------------|----|----|
| *P661C    | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | -  | -  | -  | -  | -  | IMSA-9111B-28 | -  | -  |
| *P9001C   | IMSA-9111B-28 | IMSA-9111B-28 | IMSA-9111B-28 | -  | -  | -  | -  | -  | IMSA-9111B-28 | -  | -  |

TO BAAF-2083(PART-5)

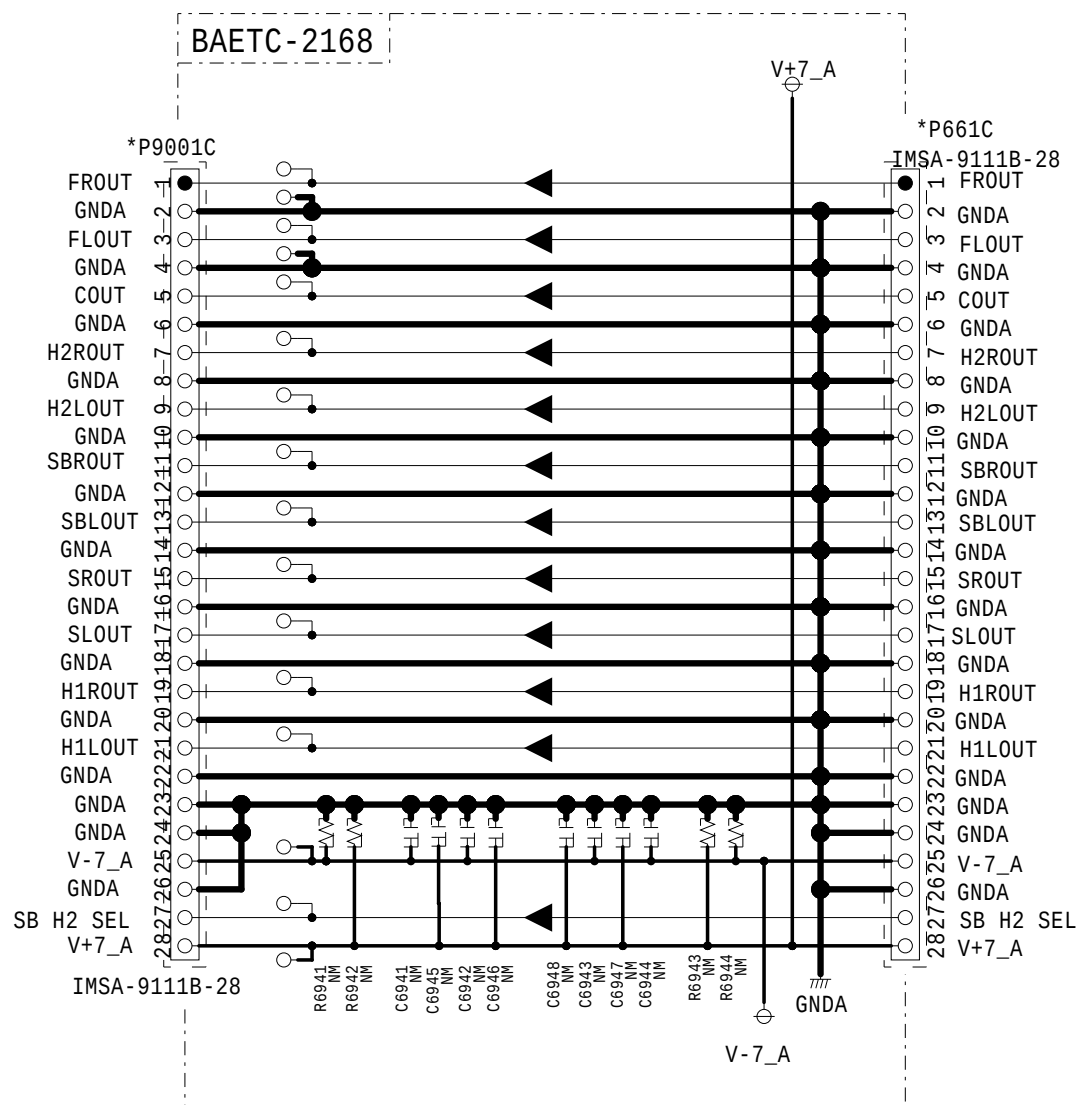


TO BAASP-2080(PART-4)

|    |                 |
|----|-----------------|
| 1E | TX-RZ1100(B)MDC |
| 1F | TX-RZ1100(B)MGP |
| 1F | TX-RZ1100(S)MGP |
| 1F | TX-RZ1100(B)MHB |
| 1F | TX-RZ1100(B)MGR |
| 1G | TX-RZ3100(B)MDC |
| 1H | TX-RZ3100(B)MGP |
| 1H | TX-RZ3100(S)MGP |
| 1H | TX-RZ3100(B)MHB |
| 1H | TX-RZ3100(B)MGR |
| 1J | DRX-7(B)MDD     |
| 1K | DRX-7(B)MGA     |
| 1L | DRX-8(B)MDD     |
| 1M | DRX-8(B)MGR     |
| 1M | DRX-8(B)MGA     |
| 1X | DRX-8(B)MJJ     |

MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-8) A REG BRIDGE SECTION

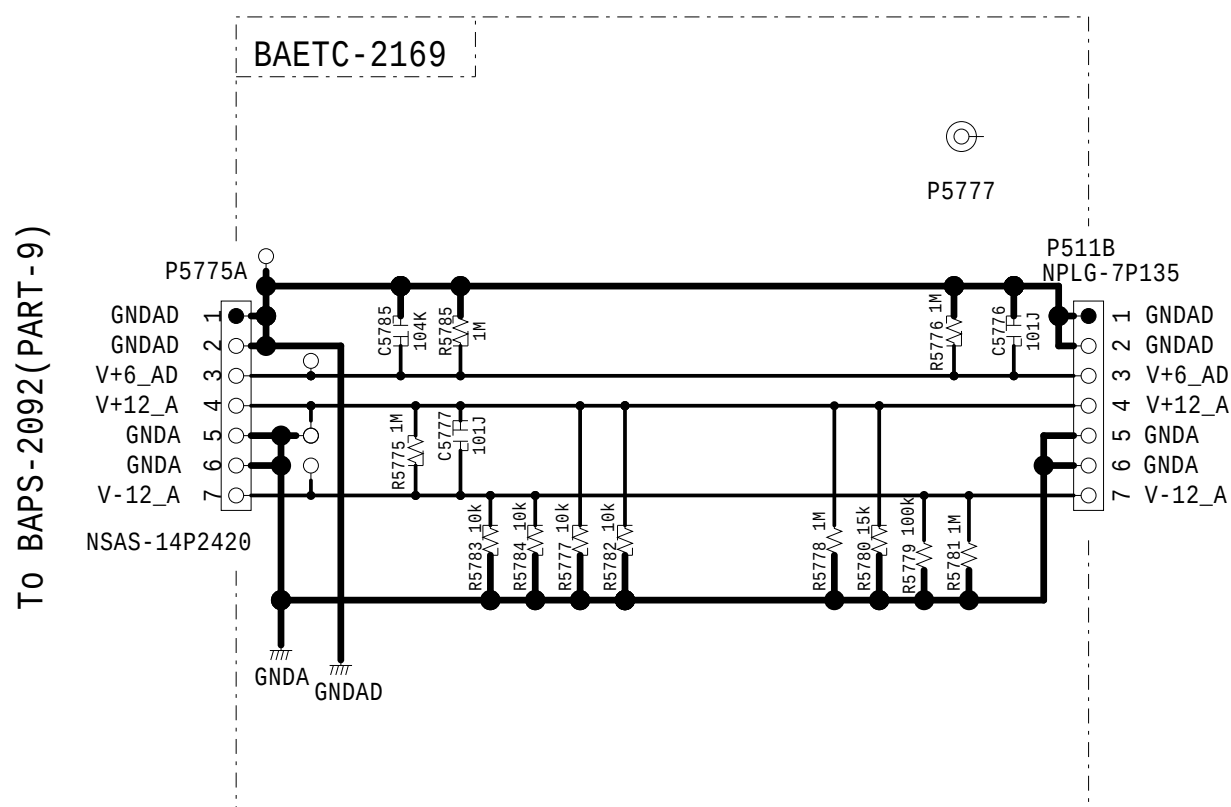

|    |                 |
|----|-----------------|
| 1A | SC-LX801(B)MDC  |
| 1B | SC-LX801(B)MGP  |
| 1T | SC-LX801(B)MJJ  |
| 1C | SC-LX901(B)MDC  |
| 1D | SC-LX901(B)MGP  |
| 1D | SC-LX901(S)MGP  |
| 1D | SC-LX901(B)MHB  |
| 1W | SC-LX901(B)MJJ  |
| 1E | TX-RZ1100(B)MDC |
| 1F | TX-RZ1100(B)MGP |
| 1F | TX-RZ1100(S)MGP |
| 1F | TX-RZ1100(B)MHB |
| 1F | TX-RZ1100(B)MGR |
| 1G | TX-RZ3100(B)MDC |
| 1H | TX-RZ3100(B)MGP |
| 1H | TX-RZ3100(S)MGP |
| 1H | TX-RZ3100(B)MHB |
| 1H | TX-RZ3100(B)MGR |
| 1J | DRX-7(B)MDD     |
| 1K | DRX-7(B)MGA     |
| 1L | DRX-8(B)MDD     |
| 1M | DRX-8(B)MGR     |
| 1M | DRX-8(B)MGA     |
| 1X | DRX-8(B)MJJ     |
| 1N | PR-RZ5100(B)MDC |
| 1P | PR-RZ5100(B)MGP |
| 1P | PR-RZ5100(B)MHB |
| 1P | PR-RZ5100(B)MGR |
| 1Q | DRC-8(B)MDD     |
| 1R | DRC-8(B)MGR     |
| 1R | DRC-8(B)MGA     |
| 1Z | DRC-8(B)MJJ     |

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-8) IR AMP FFC GUARD SECTION

BAETC-2170

PR-RZ5100,DRC-8=NM



\*P6071

260261


CB-71683(L=50)

- 1A SC-LX801(B)MDC
- 1B SC-LX801(B)MGP
- 1T SC-LX801(B)MJJ
- 1C SC-LX901(B)MDC
- 1D SC-LX901(B)MGP
- 1D SC-LX901(S)MGP
- 1D SC-LX901(B)MHB
- 1W SC-LX901(B)MJJ
- 1E TX-RZ1100(B)MDC
- 1F TX-RZ1100(B)MGP
- 1F TX-RZ1100(S)MGP
- 1F TX-RZ1100(B)MHB
- 1F TX-RZ1100(B)MGR
- 1G TX-RZ3100(B)MDC
- 1H TX-RZ3100(B)MGP
- 1H TX-RZ3100(S)MGP
- 1H TX-RZ3100(B)MHB
- 1H TX-RZ3100(B)MGR
- 1J DRX-7(B)MDD
- 1K DRX-7(B)MGA
- 1L DRX-8(B)MDD
- 1M DRX-8(B)MGR
- 1M DRX-8(B)MGA
- 1X DRX-8(B)MJJ
- 1N PR-RZ5100(B)MDC
- 1P PR-RZ5100(B)MGP
- 1P PR-RZ5100(B)MHB
- 1P PR-RZ5100(B)MGR
- 1Q DRC-8(B)MDD
- 1R DRC-8(B)MGR
- 1R DRC-8(B)MGA
- 1Z DRC-8(B)MJJ

|           |                |                |                |                |                |                |                |                |                |                |                |    |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|
| reference | 1A             | 1B             | 1C             | 1D             | 1E             | 1F             | 1G             | 1H             |                |                |                |    |
| *P6071    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |                |                |                |    |
| reference | 1J             | 1K             | 1L             | 1M             | 1N             | 1P             | 1Q             | 1R             | 1T             | 1W             | 1X             | 1Z |
| *P6071    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -              | -              | -              | -              | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -  |

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1

SCHEMATIC DIAGRAM(PART-8) B CABLE GUARD SECTION

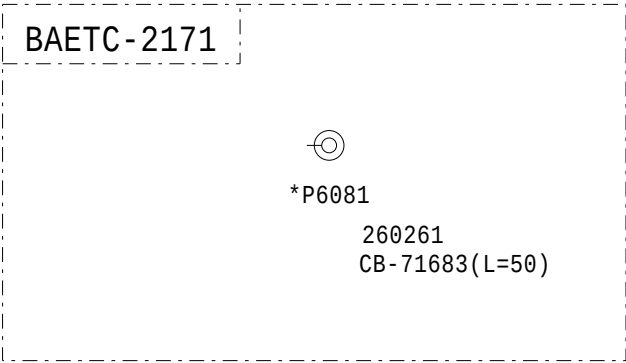


- 1A SC-LX801(B)MDC
- 1B SC-LX801(B)MGP
- 1T SC-LX801(B)MJJ
- 1C SC-LX901(B)MDC
- 1D SC-LX901(B)MGP
- 1D SC-LX901(S)MGP
- 1D SC-LX901(B)MHB
- 1W SC-LX901(B)MJJ
- 1E TX-RZ1100(B)MDC
- 1F TX-RZ1100(B)MGP
- 1F TX-RZ1100(S)MGP
- 1F TX-RZ1100(B)MHB
- 1F TX-RZ1100(B)MGR
- 1G TX-RZ3100(B)MDC
- 1H TX-RZ3100(B)MGP
- 1H TX-RZ3100(S)MGP
- 1H TX-RZ3100(B)MHB
- 1H TX-RZ3100(B)MGR
- 1J DRX-7(B)MDD
- 1K DRX-7(B)MGA
- 1L DRX-8(B)MDD
- 1M DRX-8(B)MGR
- 1M DRX-8(B)MGA
- 1X DRX-8(B)MJJ

|           |                |                |                |                |                |                |                |                |                |                |                |    |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|
| reference | 1A             | 1B             | 1C             | 1D             | 1E             | 1F             | 1G             | 1H             |                |                |                |    |
| *P6081    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |                |                |                |    |
| reference | 1J             | 1K             | 1L             | 1M             | 1N             | 1P             | 1Q             | 1R             | 1T             | 1W             | 1X             | 1Z |
| *P6081    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -              | -              | -              | -              | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -  |

MODEL No.SC-LX801/901, TX-RZ-1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

## SCHEMATIC DIAGRAM(PART-8) D-AUDIO BRIDGE SECTION

To BAPRC-2072(PART-1)

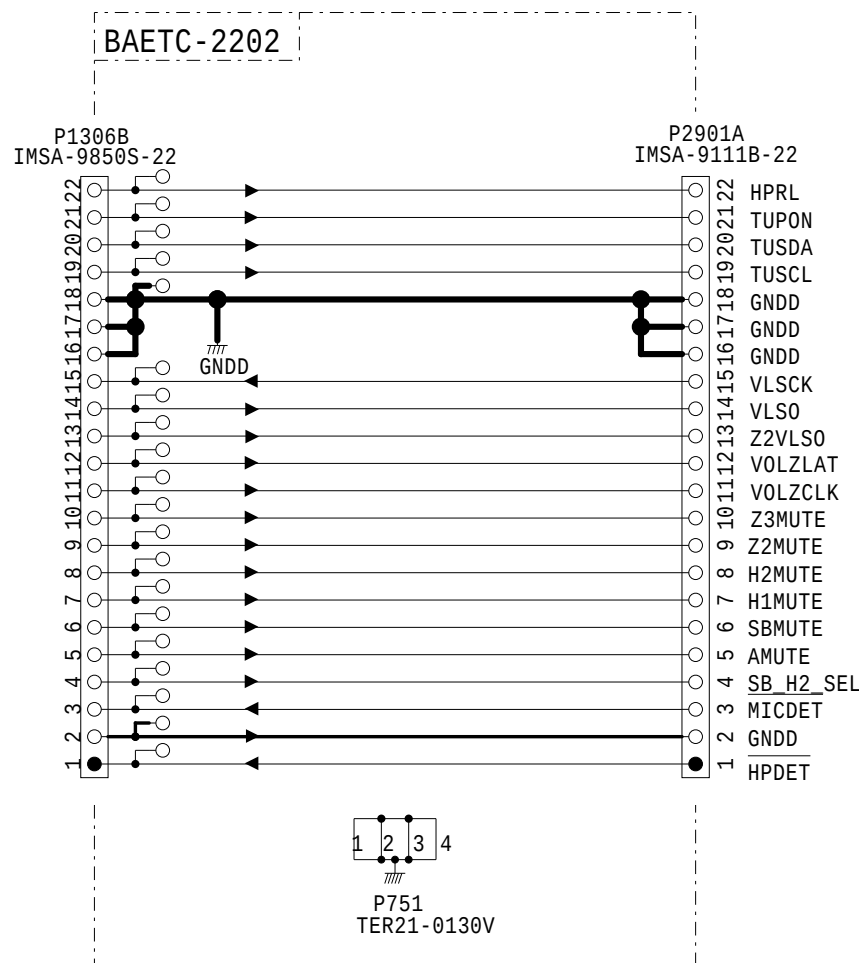

To BAASP-2080(PART-4)

1A SC-LX801(B)MDC  
1B SC-LX801(B)MGP  
1T SC-LX801(B)MJJ  
1C SC-LX901(B)MDC  
1D SC-LX901(B)MGP  
1D SC-LX901(S)MGP  
1D SC-LX901(B)MHB  
1W SC-LX901(B)MJJ

# Schematic Diagram

## MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM(PART-8) TUNER SECTION


|           |                |                |                |                |                |                |                |                |                |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| reference | 1A             | 1B             | 1C             | 1D             | 1E             | 1F             | 1G             | 1H             | 1I             |
| *Q1       | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0001E2 | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 |
| *P1       | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   |

|           |                |                |                |                |                |                |                |                |                |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| reference | 1K             | 1L             | 1M             | 1N             | 1P             | 1Q             | 1R             | 1T             | 1W             |
| *Q1       | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0002E2 | RZ5B801-0001E2 | RZ5B801-0001E2 |
| *P1       | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC438   | NTM-1PDSC437   | NTM-1PDSC437   |

|           |                |                |
|-----------|----------------|----------------|
| reference | 1X             | 1Z             |
| *Q1       | RZ5B801-0001E2 | RZ5B801-0001E2 |
| *P1       | NTM-1PDSC437   | NTM-1PDSC437   |




|    |                 |
|----|-----------------|
| 1A | SC-LX801(B)MDC  |
| 1B | SC-LX801(B)MGP  |
| 1T | SC-LX801(B)MJJ  |
| 1C | SC-LX901(B)MDC  |
| 1D | SC-LX901(B)MGP  |
| 1D | SC-LX901(S)MGP  |
| 1D | SC-LX901(B)MHB  |
| 1W | SC-LX901(B)MJJ  |
| 1E | TX-RZ1100(B)MDC |
| 1F | TX-RZ1100(B)MGP |
| 1F | TX-RZ1100(S)MGP |
| 1F | TX-RZ1100(B)MHB |
| 1F | TX-RZ1100(B)MGR |
| 1G | TX-RZ3100(B)MDC |
| 1H | TX-RZ3100(B)MGP |
| 1H | TX-RZ3100(S)MGP |
| 1H | TX-RZ3100(B)MHB |
| 1H | TX-RZ3100(B)MGR |
| 1J | DRX-7(B)MDD     |
| 1K | DRX-7(B)MGA     |
| 1L | DRX-8(B)MDD     |
| 1M | DRX-8(B)MGR     |
| 1M | DRX-8(B)MGA     |
| 1X | DRX-8(B)MJJ     |
| 1N | PR-RZ5100(B)MDC |
| 1P | PR-RZ5100(B)MGP |
| 1P | PR-RZ5100(B)MHB |
| 1P | PR-RZ5100(B)MGR |
| 1Q | DRC-8(B)MDD     |
| 1R | DRC-8(B)MGR     |
| 1R | DRC-8(B)MGA     |
| 1Z | DRC-8(B)MJJ     |

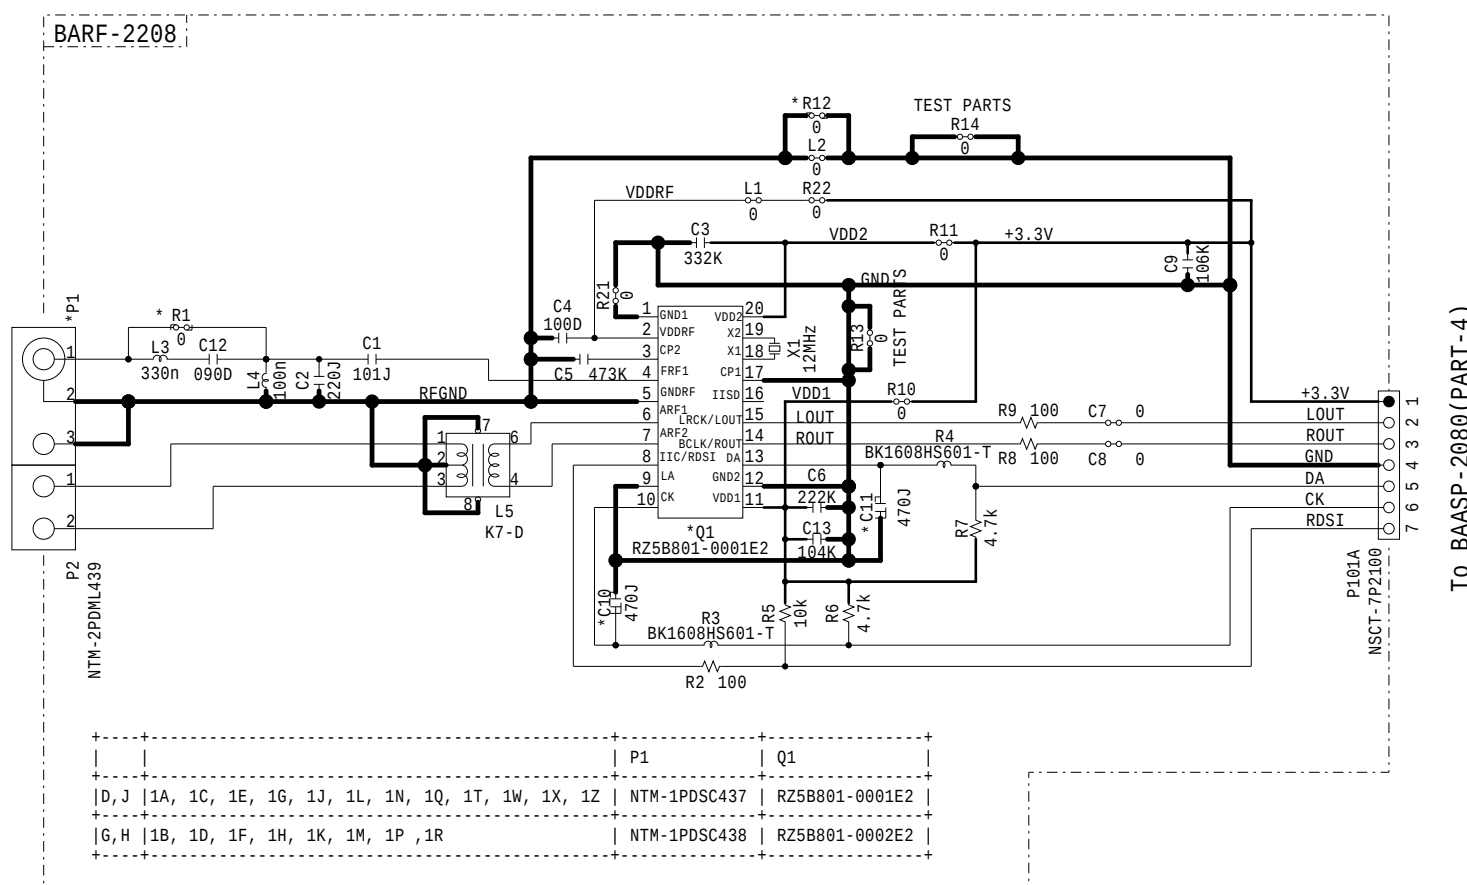MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1

## SCHEMATIC DIAGRAM(PART-8) FAN\_CONNECT SECTION

| reference | 1A             | 1B             | 1C             | 1D             | 1E             | 1F             | 1G             | 1H             | 1J             |                |    |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|
| *P5931    | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     |                |    |
| *P5932    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |                |    |
| *P5933    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |                |    |
| *P7201B   | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     |                |    |
| reference | 1K             | 1L             | 1M             | 1N             | 1P             | 1Q             | 1R             | 1T             | 1W             | 1X             | 1Z |
| *P5931    | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | -              | -              | -              | -              | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | -  |
| *P5932    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -              | -              | -              | -              | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -  |
| *P5933    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -              | -              | -              | -              | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | -  |
| *P7201B   | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | -              | -              | -              | -              | NPLG-3P131     | NPLG-3P131     | NPLG-3P131     | -  |

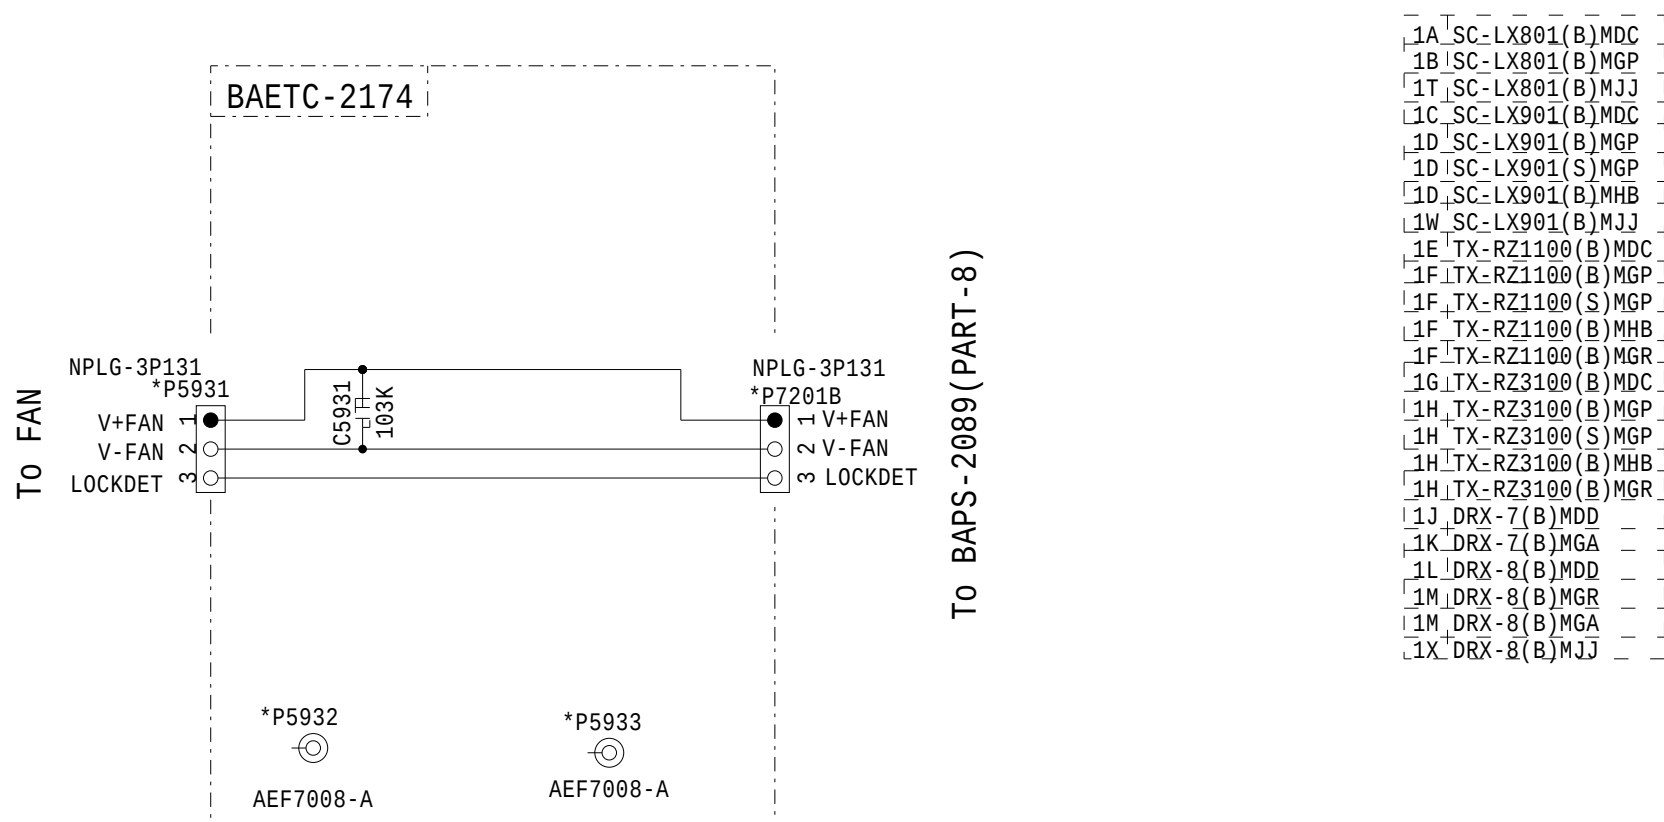


# Schematic Diagram

MODEL No.SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DCR-R1

SCHEMATIC DIAGRAM (PART-9) REG SECTION

FROM MAIN TRANS

FROM MAIN TRANS

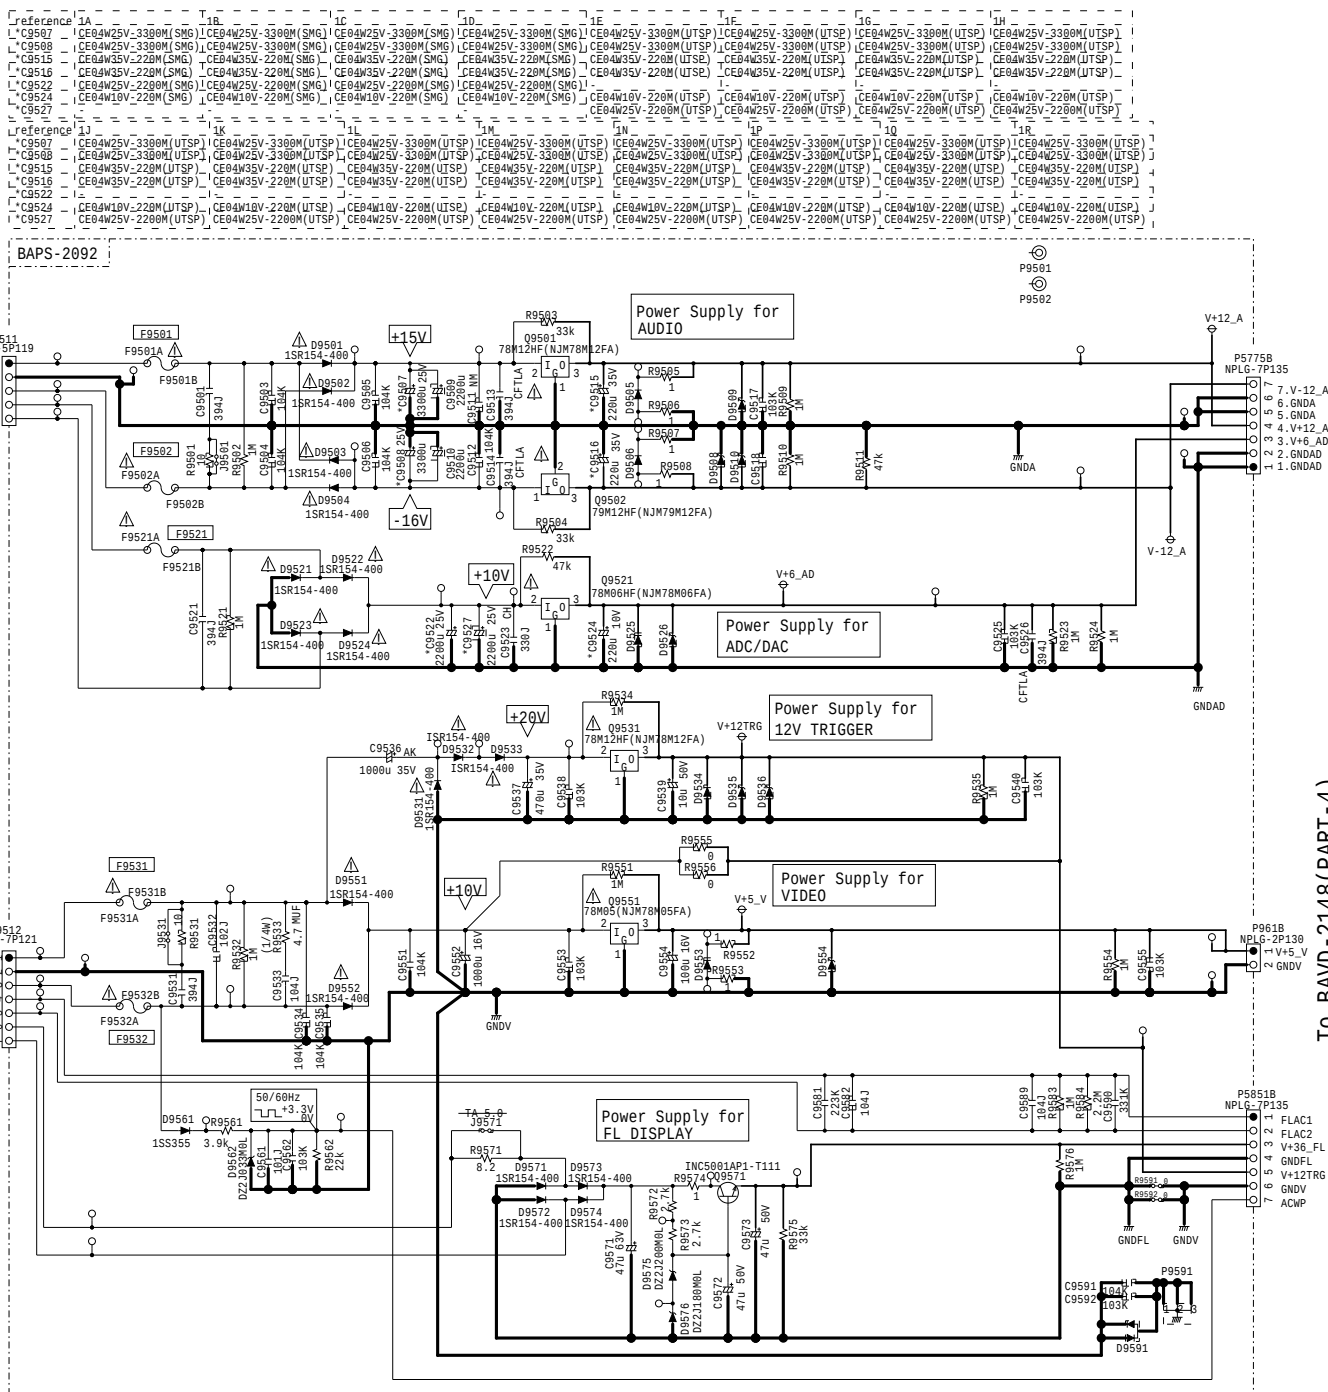

1. RESISTORS  
Unit: k- $\Omega$ , M- $\Omega$  or  $\Omega$  unless otherwise noted.  
Rated Power: 1/16W unless otherwise noted.  
Tolerance: (J)5% unless otherwise noted.  
MUF: RD1/4MUF
2. CAPACITORS  
Unit: p-pF or u-uF unless otherwise noted.  
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.  
CH: CCSRCH, CFTLA: CFTLA  
NP: CEANP, AK: CEAK  
NO MARKED: CCSRBY or CEAT  
3. NM: No Mount

TO BAETC-2169 (PART-8)

TO BAETC-2169 (PART-8)


TO BAETC-2169 (PART-8)

THE COMPONENTS IDENTIFIED MARK  $\Delta$  ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.  
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)  
ELECTRIC CAPACITORS ARE IN uF/NV  
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.  
EX: 800  $\rightarrow$  30p, 330  $\rightarrow$  33p, 331  $\rightarrow$  330p, 333  $\rightarrow$  0.033uF  
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

CAUTION  
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,  
REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.  
ATTENTION  
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,  
REPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.  
THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE  
FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE.  
RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.  
CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENT,  
N'UTILISER QUE DES FUSIBLES DE MEME TYPE.  
CE DERNIER EST INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

MODEL No. SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DRC-R1

### SCHEMATIC DIAGRAM (PART-9) FRONT BRIDGE SECTION

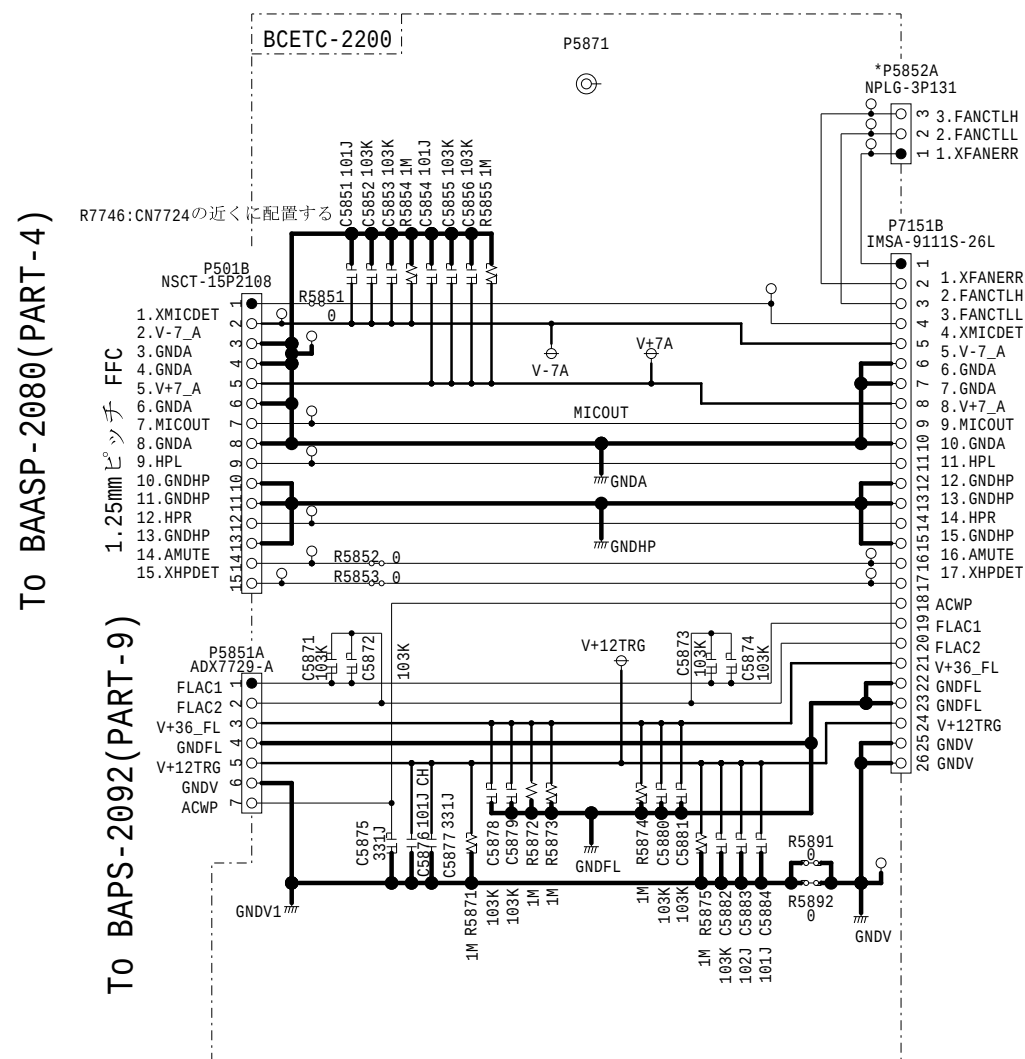

TO BAPS-2089(PART-8)

TO BAETC-2201(PART-9)

| reference | 1A          | 1B          | 1C          | 1D          | 1E          | 1F          | 1G          | 1H          | 1J          | 1K          | 1L          | 1M          | 1N          | 1P | 1Q | 1R |
|-----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|----|----|----|
| *P5852A   | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | INPLG-3P131 | -  | -  | -  |




## E

D

A

# Schematic Diagram

## MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1 SCHEMATIC DIAGRAM (PART-9) USB RECT\_M SECTION

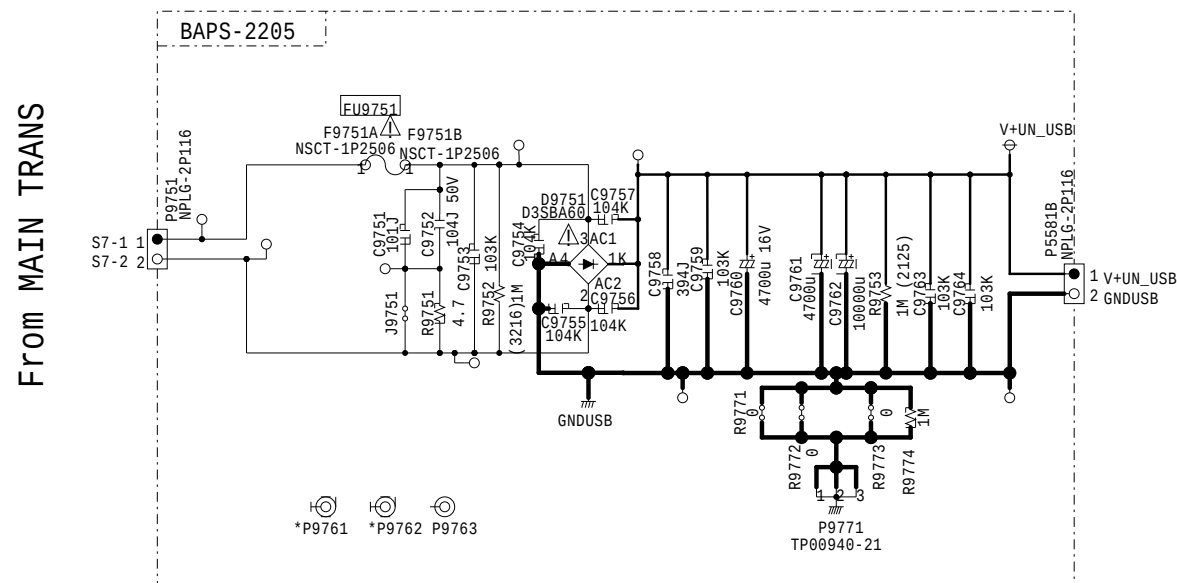

SC-LX801/901:TO BAHDM-2086(PART-6)  
TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1:TO BAHDM-2087(PART-6)

| reference | 1A | 1B | 1C | 1D | 1E | 1F | 1G | 1H | 1J | 1K             | 1L             | 1M             | 1N             | 1P | 1Q             | 1R             |
|-----------|----|----|----|----|----|----|----|----|----|----------------|----------------|----------------|----------------|----|----------------|----------------|
| *P9761    |    |    |    |    |    |    |    |    |    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |    | CB-71683(L=50) | CB-71683(L=50) |
| *P9762    |    |    |    |    |    |    |    |    |    | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) | CB-71683(L=50) |    | CB-71683(L=50) | CB-71683(L=50) |


THE COMPONENTS IDENTIFIED MARK  $\Delta$  ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.  
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)  
ELECTRLYTIC CAPACITORS (㏑) ARE IN  $\mu$ F/WV.  
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.  
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF  
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

$\Delta$ 印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。  
電圧表示は無信号時に測定した直流電圧を示す。  
記入なき電解コンデンサの単位は $\mu$ F/WVである。  
記入なきコンデンサの単位はpF/50WVである。  
例) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF  
本配線図は基本配線図につき性能改善等により予告なく変更する事がある。

MODEL No. TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1  
SCHEMATIC DIAGRAM(PART-9) CONTROL\_0 SECTION

### SCHEMATIC DIAGRAM(PART-9) CONTROL\_0 SECTION


| reference | 1A | 1B | 1C | 1D | 1E | 1F | 1G | 1H | 1J             | 1K             | 1L             | 1M             | 1N | 1P | 1Q             | 1R             |
|-----------|----|----|----|----|----|----|----|----|----------------|----------------|----------------|----------------|----|----|----------------|----------------|
| *L5821    | -  | -  | -  | -  | -  | -  | -  | -  | BLM11A121S     | BLM11A121S     | BLM11A121S     | BLM11A121S     | -  | -  | BLM11A121S     | BLM11A121S     |
| *L5822    | -  | -  | -  | -  | -  | -  | -  | -  | BLM11A121S     | BLM11A121S     | BLM11A121S     | BLM11A121S     | -  | -  | BLM11A121S     | BLM11A121S     |
| *L5823    | -  | -  | -  | -  | -  | -  | -  | -  | BLM11A121S     | BLM11A121S     | BLM11A121S     | BLM11A121S     | -  | -  | BLM11A121S     | BLM11A121S     |
| *C5823    | -  | -  | -  | -  | -  | -  | -  | -  | BLM11A121S     | BLM11A121S     | BLM11A121S     | BLM11A121S     | -  | -  | BLM11A121S     | BLM11A121S     |
| *C5824    | -  | -  | -  | -  | -  | -  | -  | -  | CK725B1H-103K  | CK725B1H-103K  | CK725B1H-103K  | CK725B1H-103K  | -  | -  | CK725B1H-103K  | CK725B1H-103K  |
| *C5825    | -  | -  | -  | -  | -  | -  | -  | -  | CK725B1H-103K  | CK725B1H-103K  | CK725B1H-103K  | CK725B1H-103K  | -  | -  | CK725B1H-103K  | CK725B1H-103K  |
| *P5821    | -  | -  | -  | -  | -  | -  | -  | -  | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | -  | -  | HSJ1002-016010 | HSJ1002-016010 |
| *P5822    | -  | -  | -  | -  | -  | -  | -  | -  | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | -  | -  | HSJ1002-016010 | HSJ1002-016010 |
| *P5823    | -  | -  | -  | -  | -  | -  | -  | -  | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | HSJ1002-016010 | -  | -  | HSJ1002-016010 | HSJ1002-016010 |
| *P7061C   | -  | -  | -  | -  | -  | -  | -  | -  | NSCST-11P2191  | NSCST-11P2191  | NSCST-11P2191  | NSCST-11P2191  | -  | -  | NSCST-11P2191  | NSCST-11P2191  |
| *TP5821   | -  | -  | -  | -  | -  | -  | -  | -  | CAD PART       | CAD PART       | CAD PART       | CAD PART       | -  | -  | CAD PART       | CAD PART       |

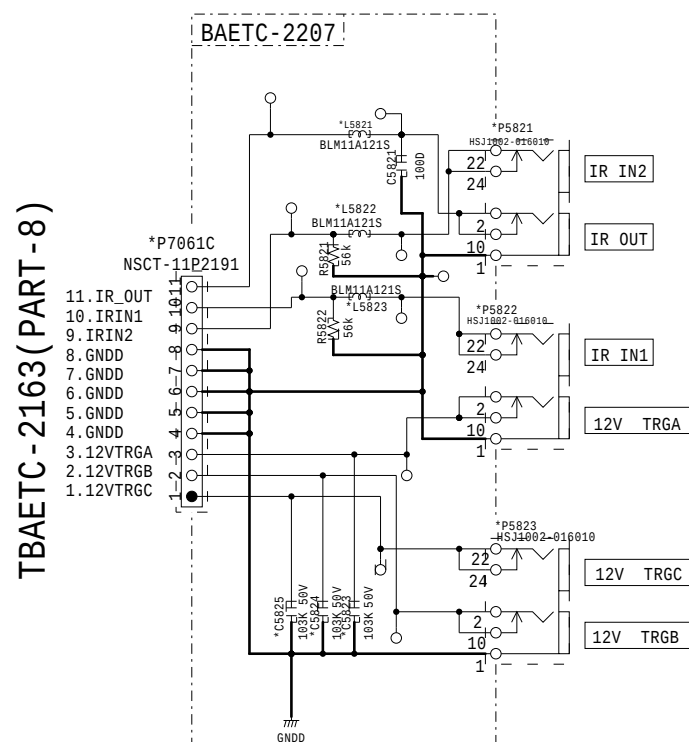

# Schematic Diagram

MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1  
BACLD-2095(1/7)


## SCHEMATIC DIAGRAM(PART-10) D-AMP SECTION

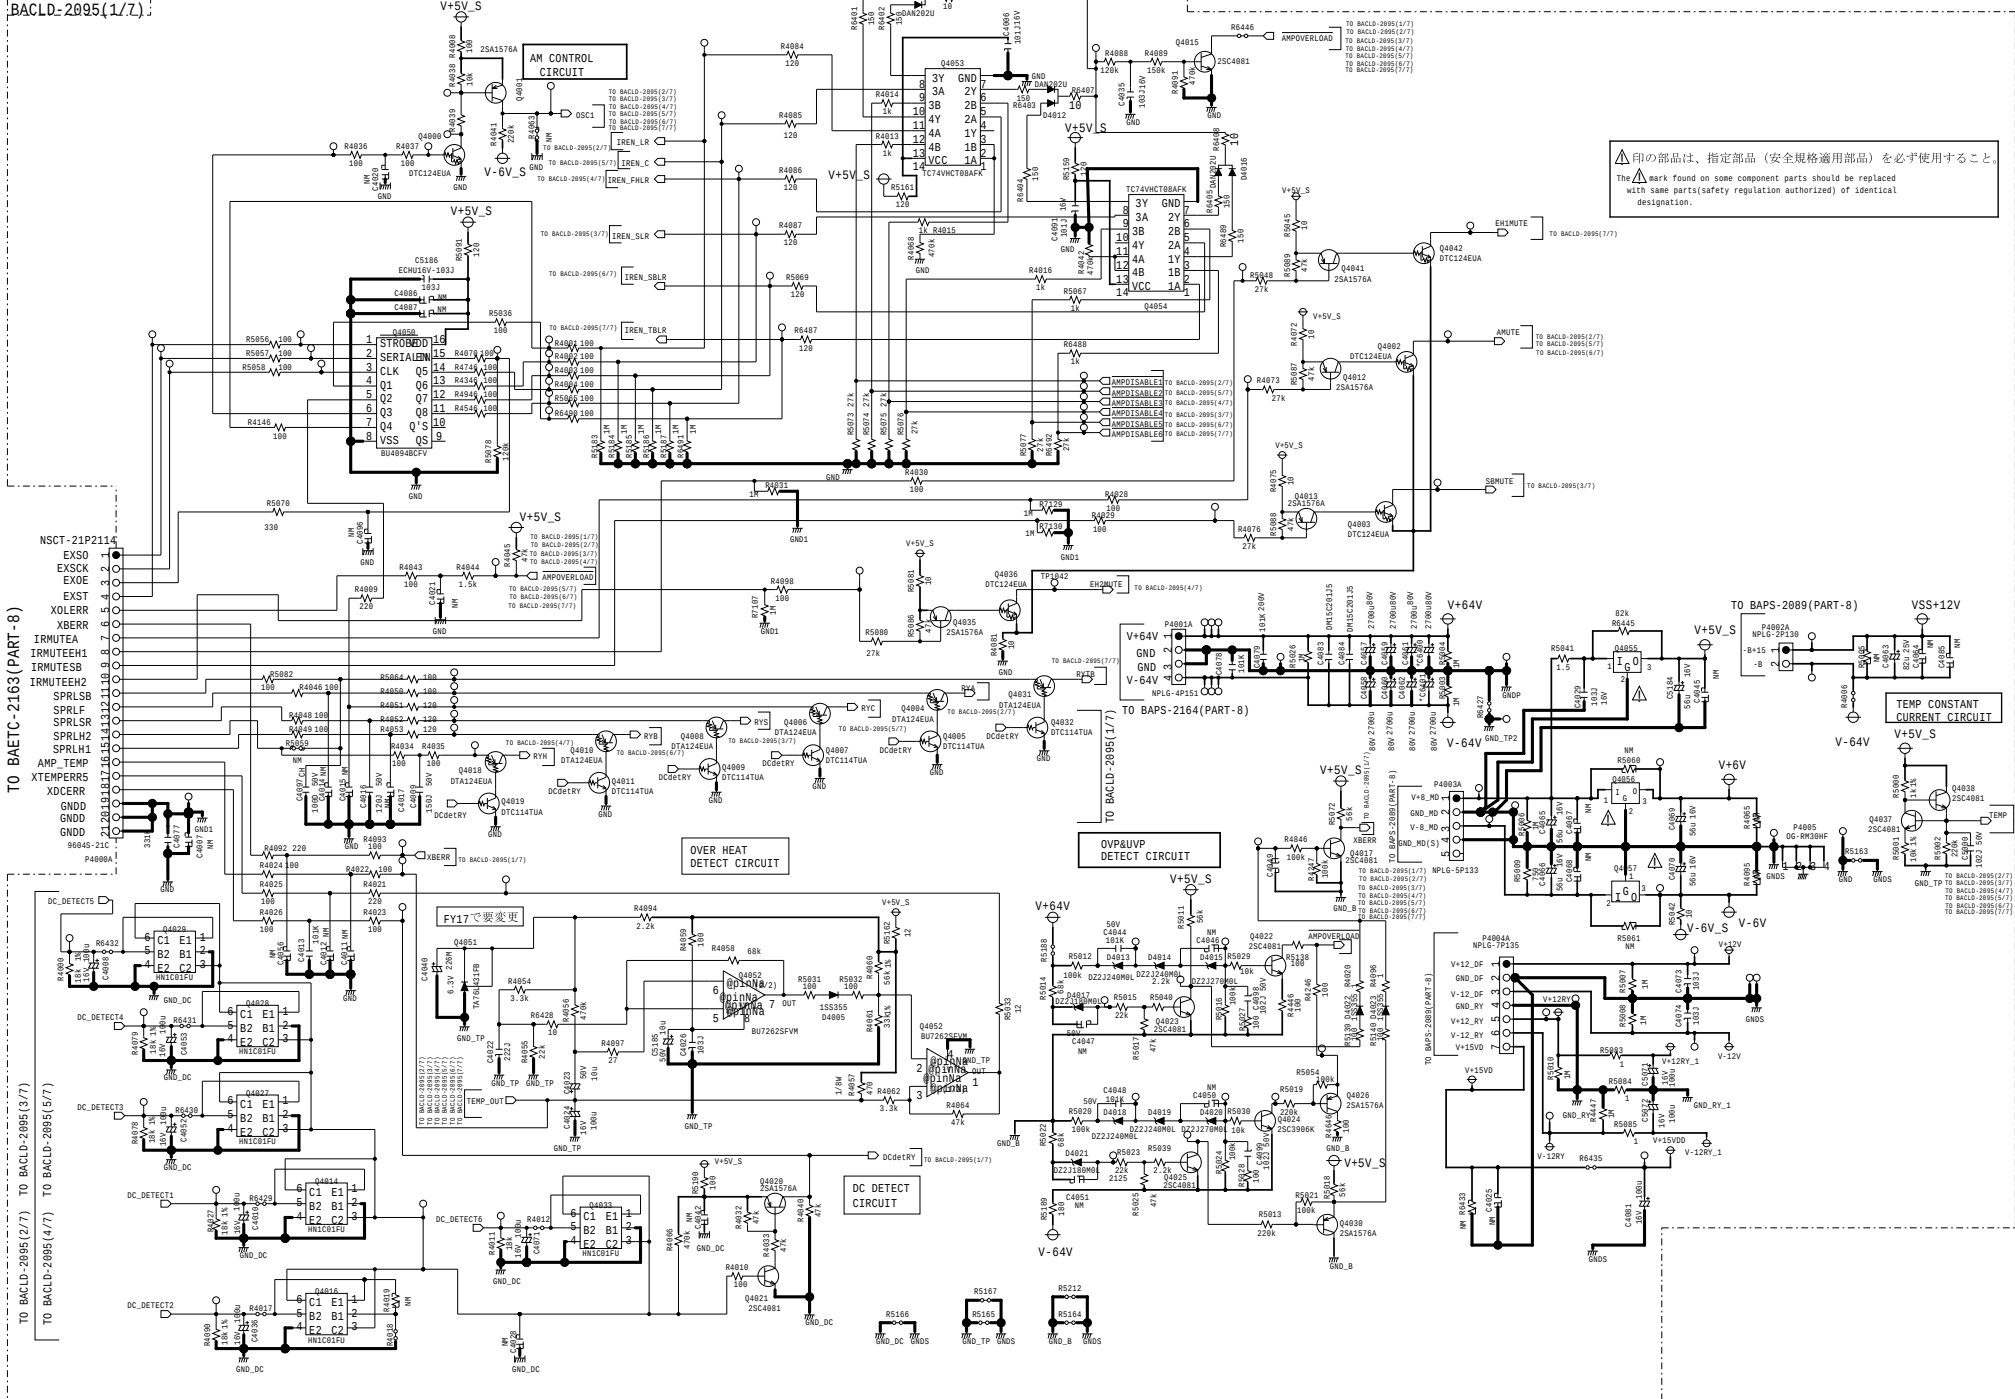

# Schematic Diagram

MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1

SCHEMATIC DIAGRAM(PART-10) D-AMP SECTION

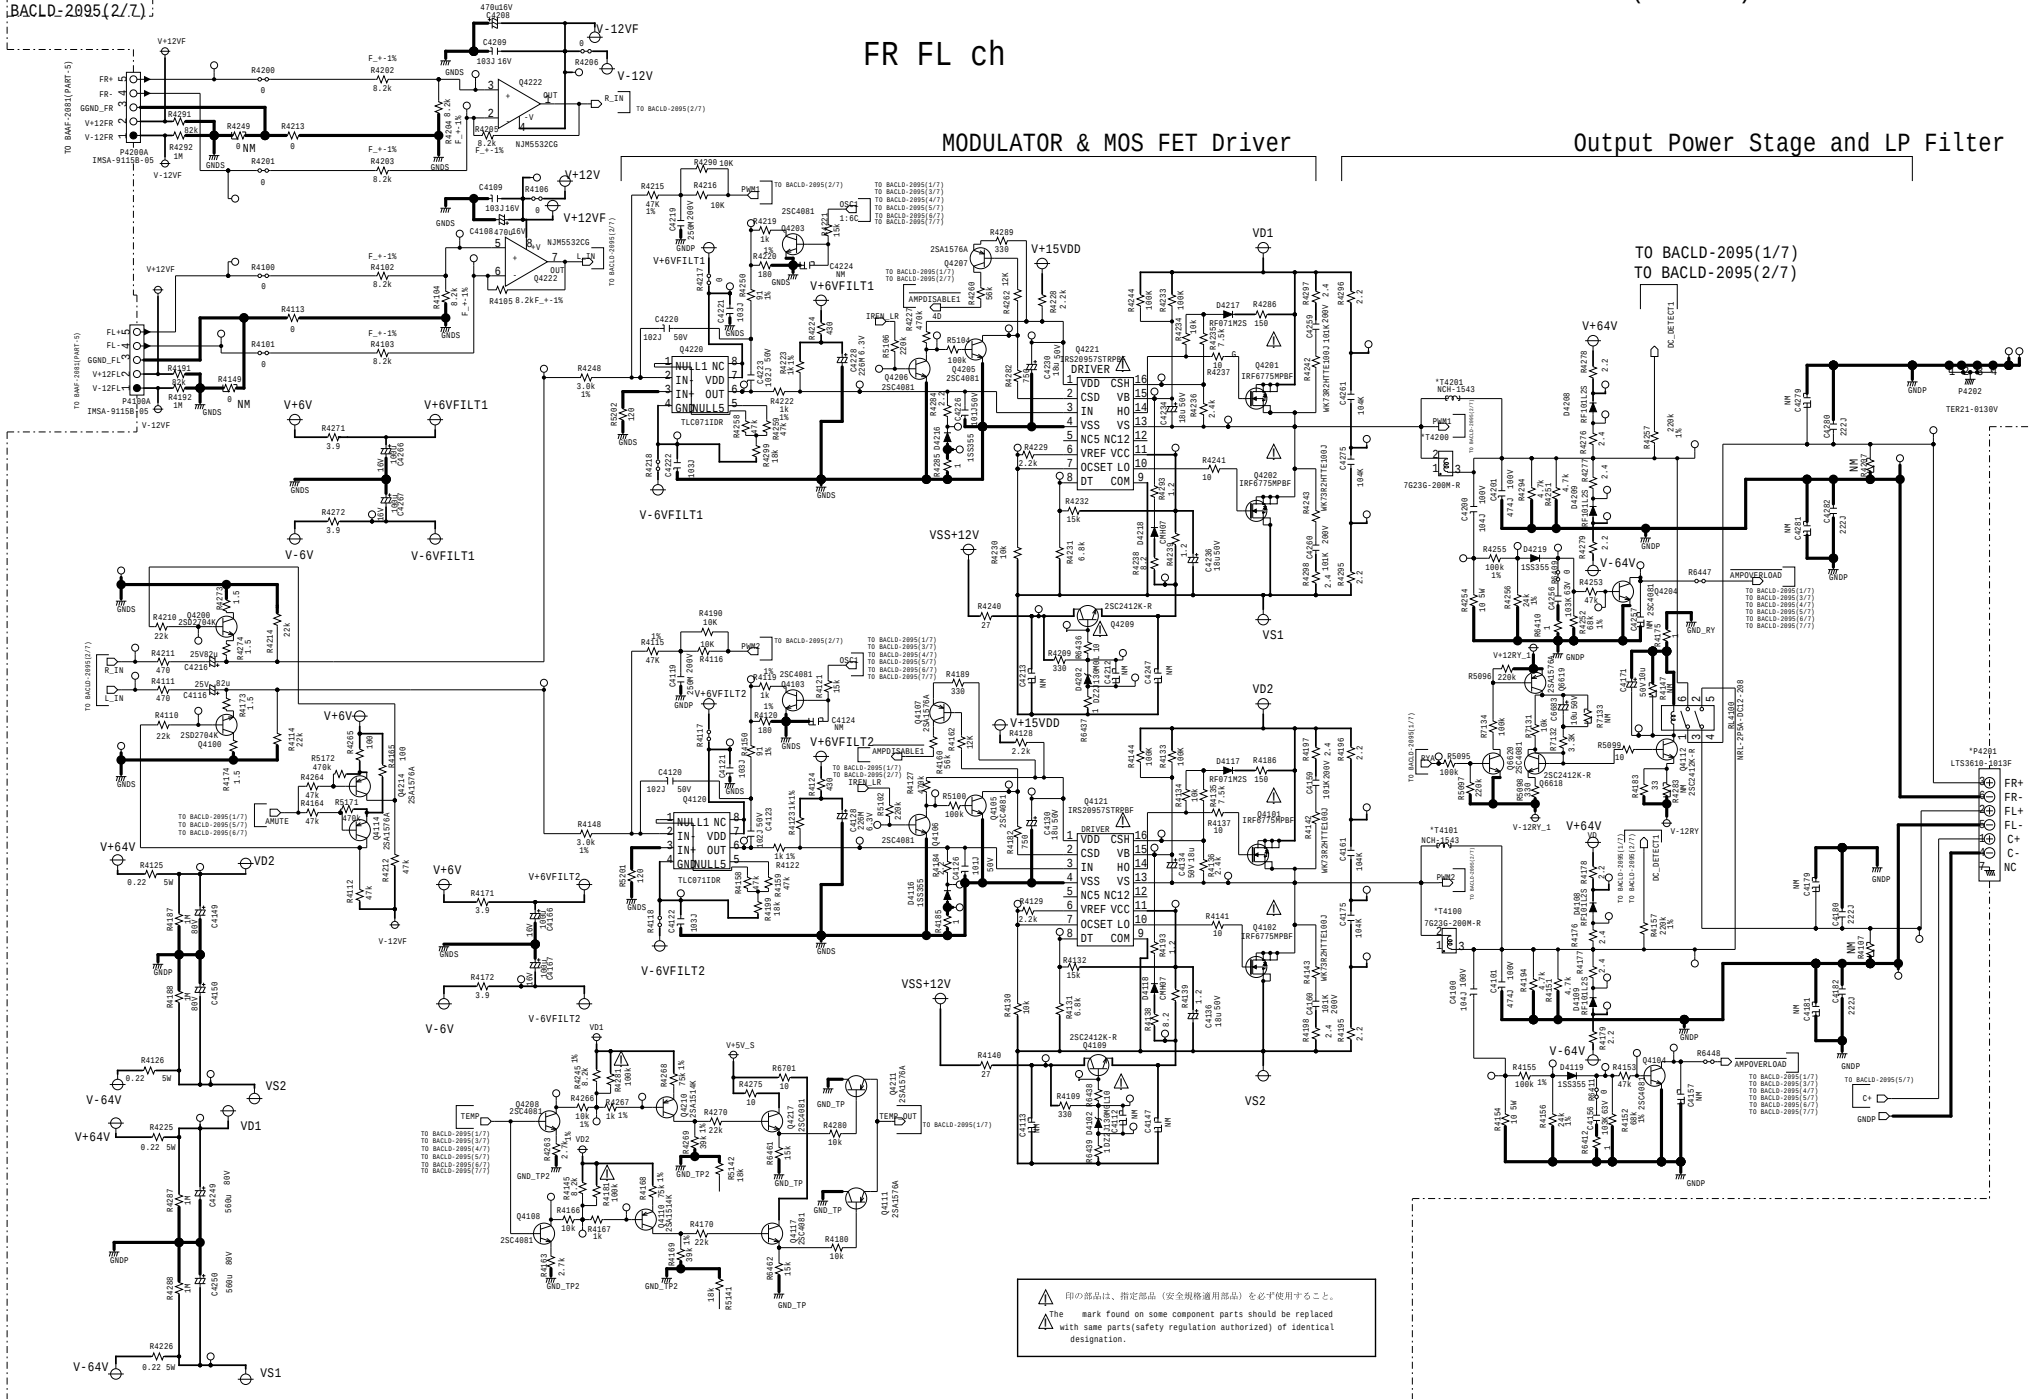

## Schematic Diagram

E

E

D

D

D

D

A

A

## Schematic Diagram

|                                                             |                                                    |
|-------------------------------------------------------------|----------------------------------------------------|
| MODEL No.SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1 | SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1 |
|-------------------------------------------------------------|----------------------------------------------------|

CHEMATIC DIAGRAM(PART-10) D-AMP SECTION

BACLD-2095(4/7)

△印の部品は、指定部品（安全規格適用部品）を必ず使用すること。  
The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

H2R H2L ch

## MODULATOR & MOS FET Driver

### Output Power Stage and LP Filter

TO BACLD-2095(1/7)  
TO BACLD-2095(4/7)

64V ○ \*R6450 AMPOVERLOAD

V-12RY

TO BACLD-2005(6)  
TO BACLD-2005(7)

## Schematic Diagram

E

D

C




A

## Schematic Diagram

MODEL No.SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1 S

CHEMATIC DIAGRAM(PART-10) D-AMP SECTION

BACLD-2095(6/7)

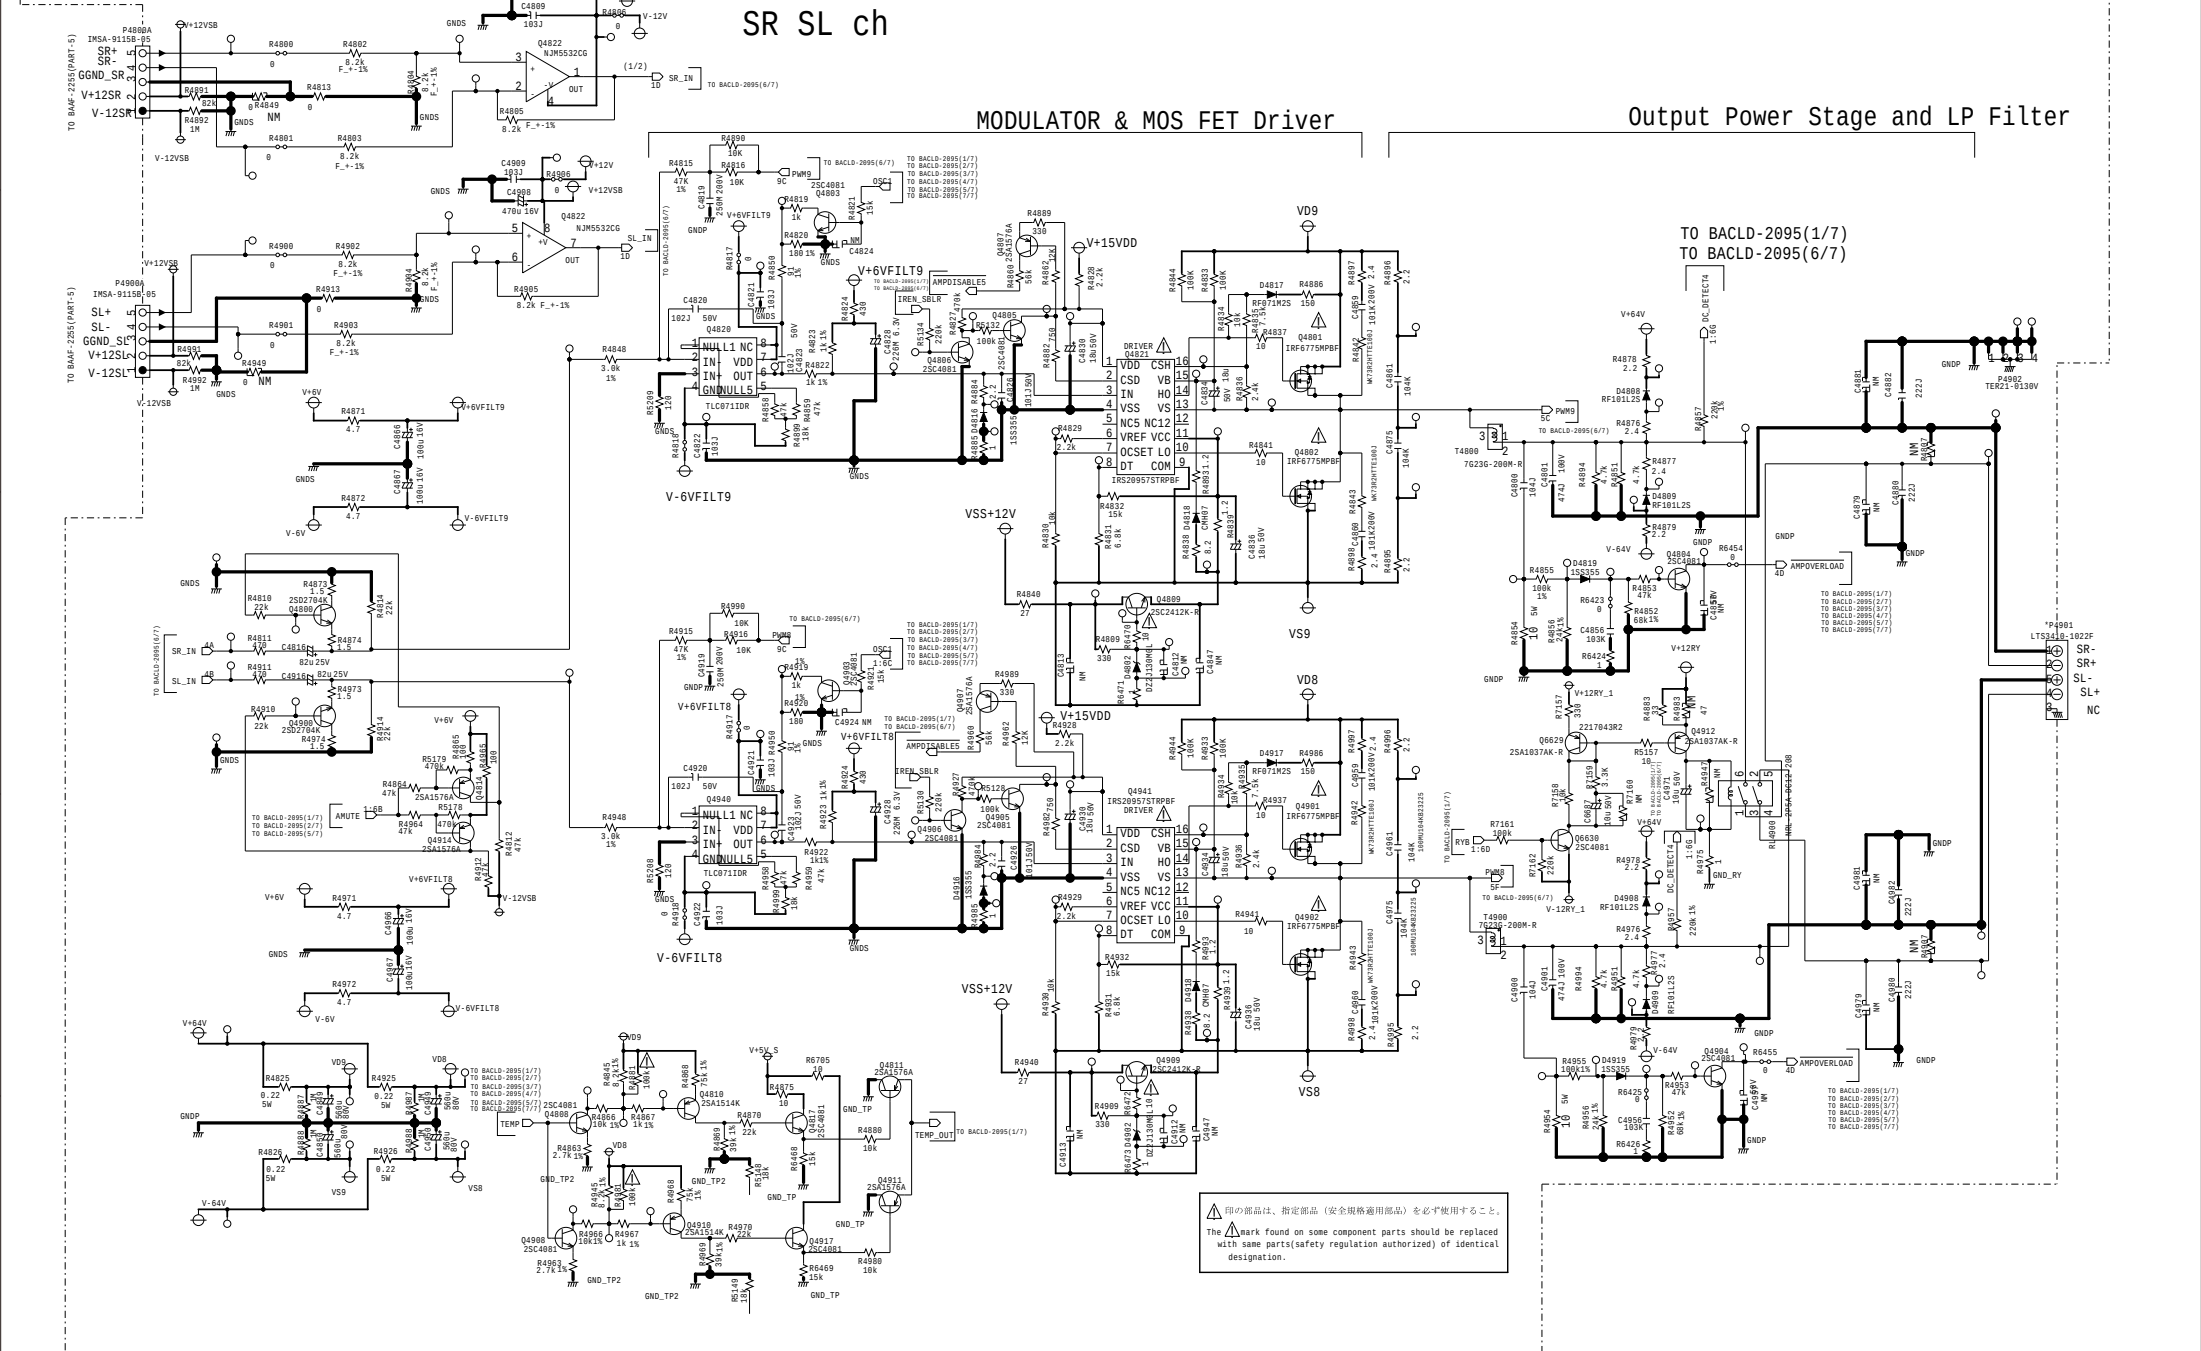


 印の部品は、指定部品（安全規格適用部品）を必ず使用すること。  
The  mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

# Schematic Diagram

MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1

SCHEMATIC DIAGRAM(PART-10). D-AMP SECTION

FROM/TO IR INTERFACE ASSY

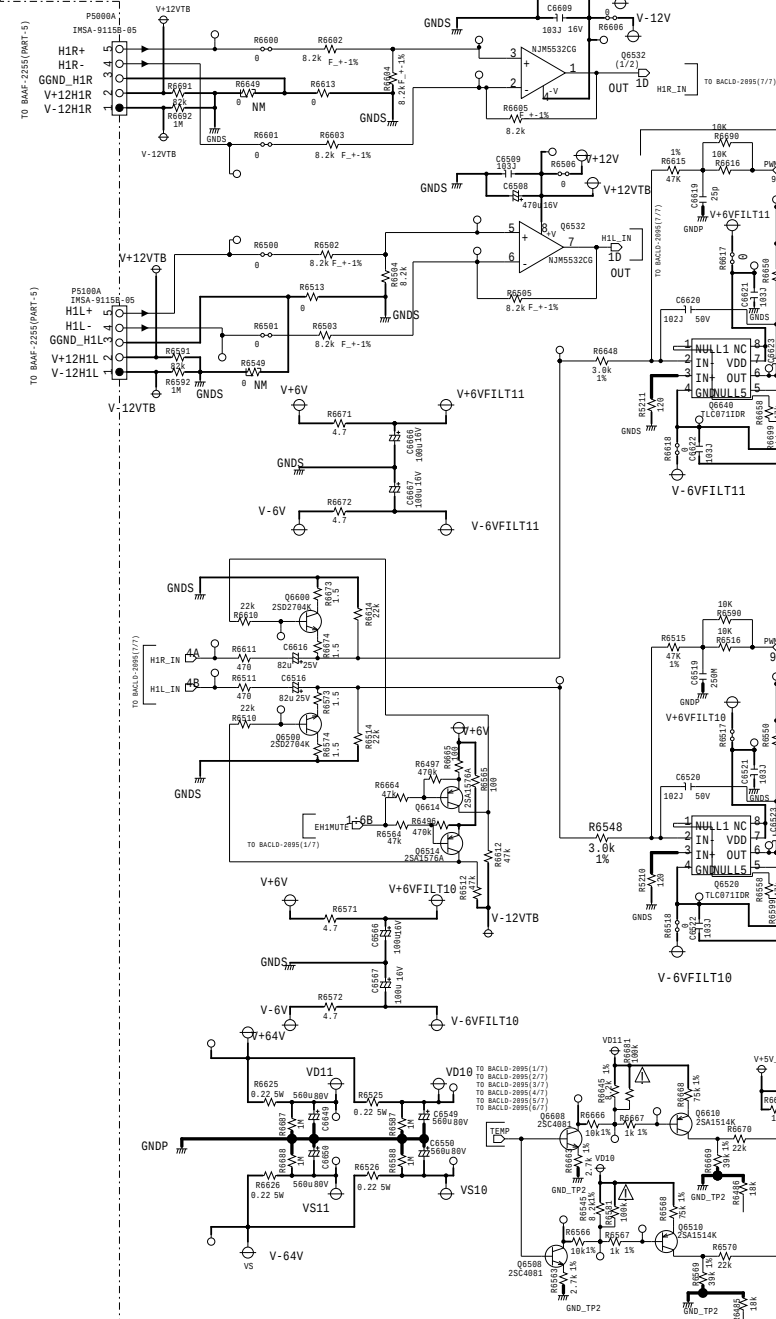


H1R H1L ch

MODULATOR & MOS FET Driver


Output Power Stage and LP Filter

△印の部品は、指定部品（安全規格適用部品）を必ず使用すること。  
The △ mark found on some component parts should be replaced with same parts(safety regulation authorized) of identical designation.

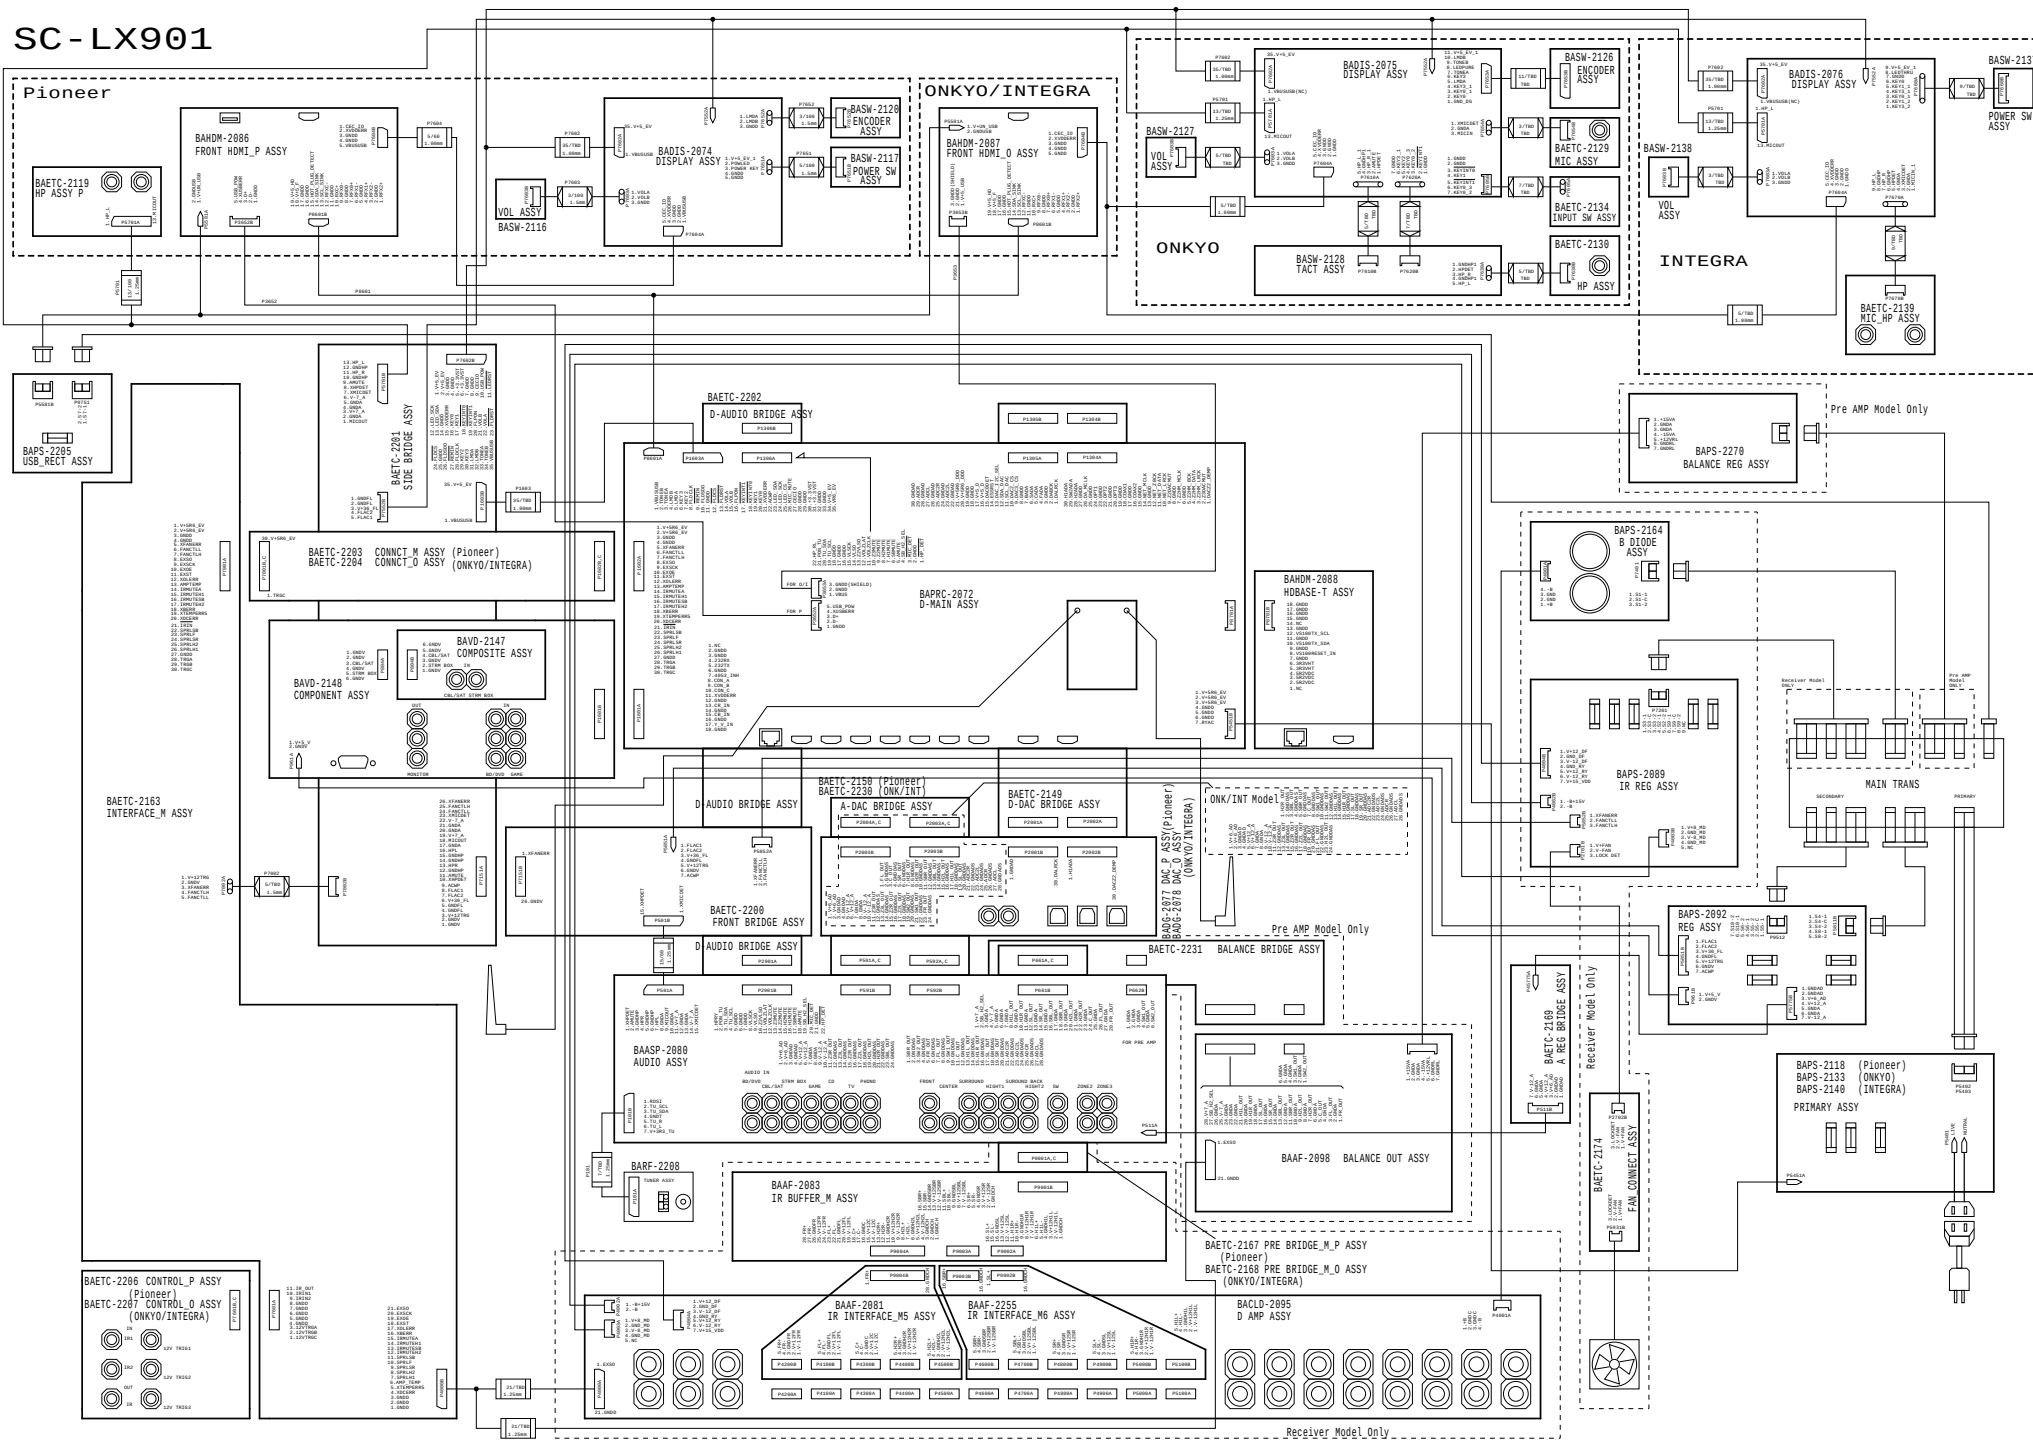


# Overview

## Exploded View

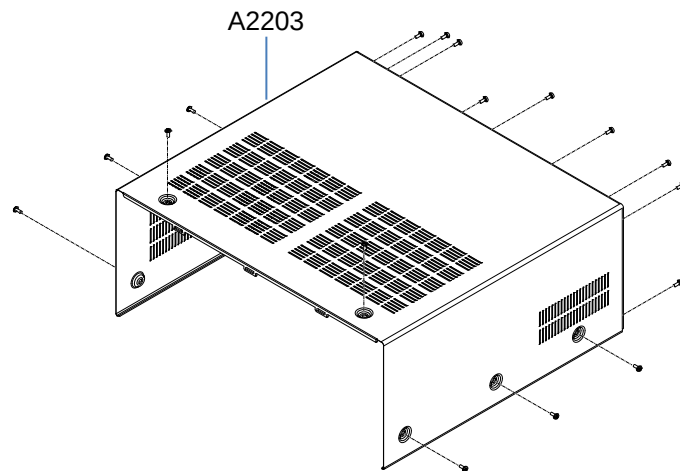

### P3654A : WiFi/Bluetooth Module

\* This module transmitter does not have RF shielding, therefore it will be equipped only the tested Audio system mentioning this document.  
Additional test will be required if it will be equipped to the other devices

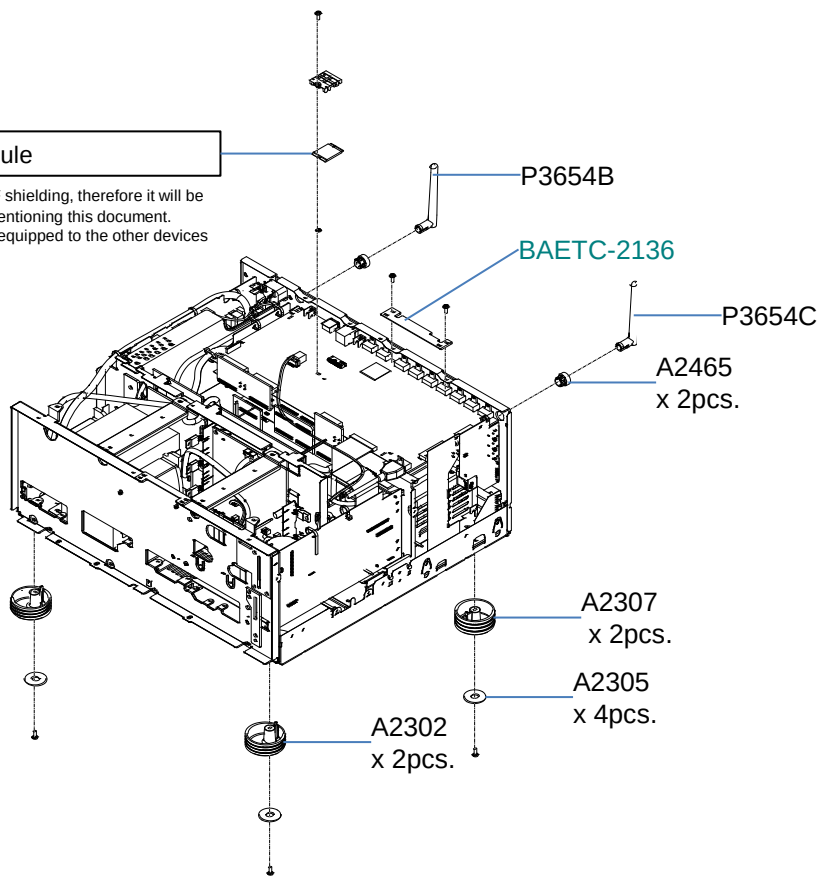

### \*WiFi & Bluetooth Module has already been certificated by FCC and IC.

Information to the user.

Indicate "Contains FCC ID: TX2-RTL8821AE", "Contains IC: 6317A-RTL8821AE" and following information to the host device installed.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Describe the following sentence to a user's manual of the host device.

[For FCC]

FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

[For IC]

CAN ICES-3 B/NMB-3 B

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts d'licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).

[illegible][illegible]

Front2


# Exploded View

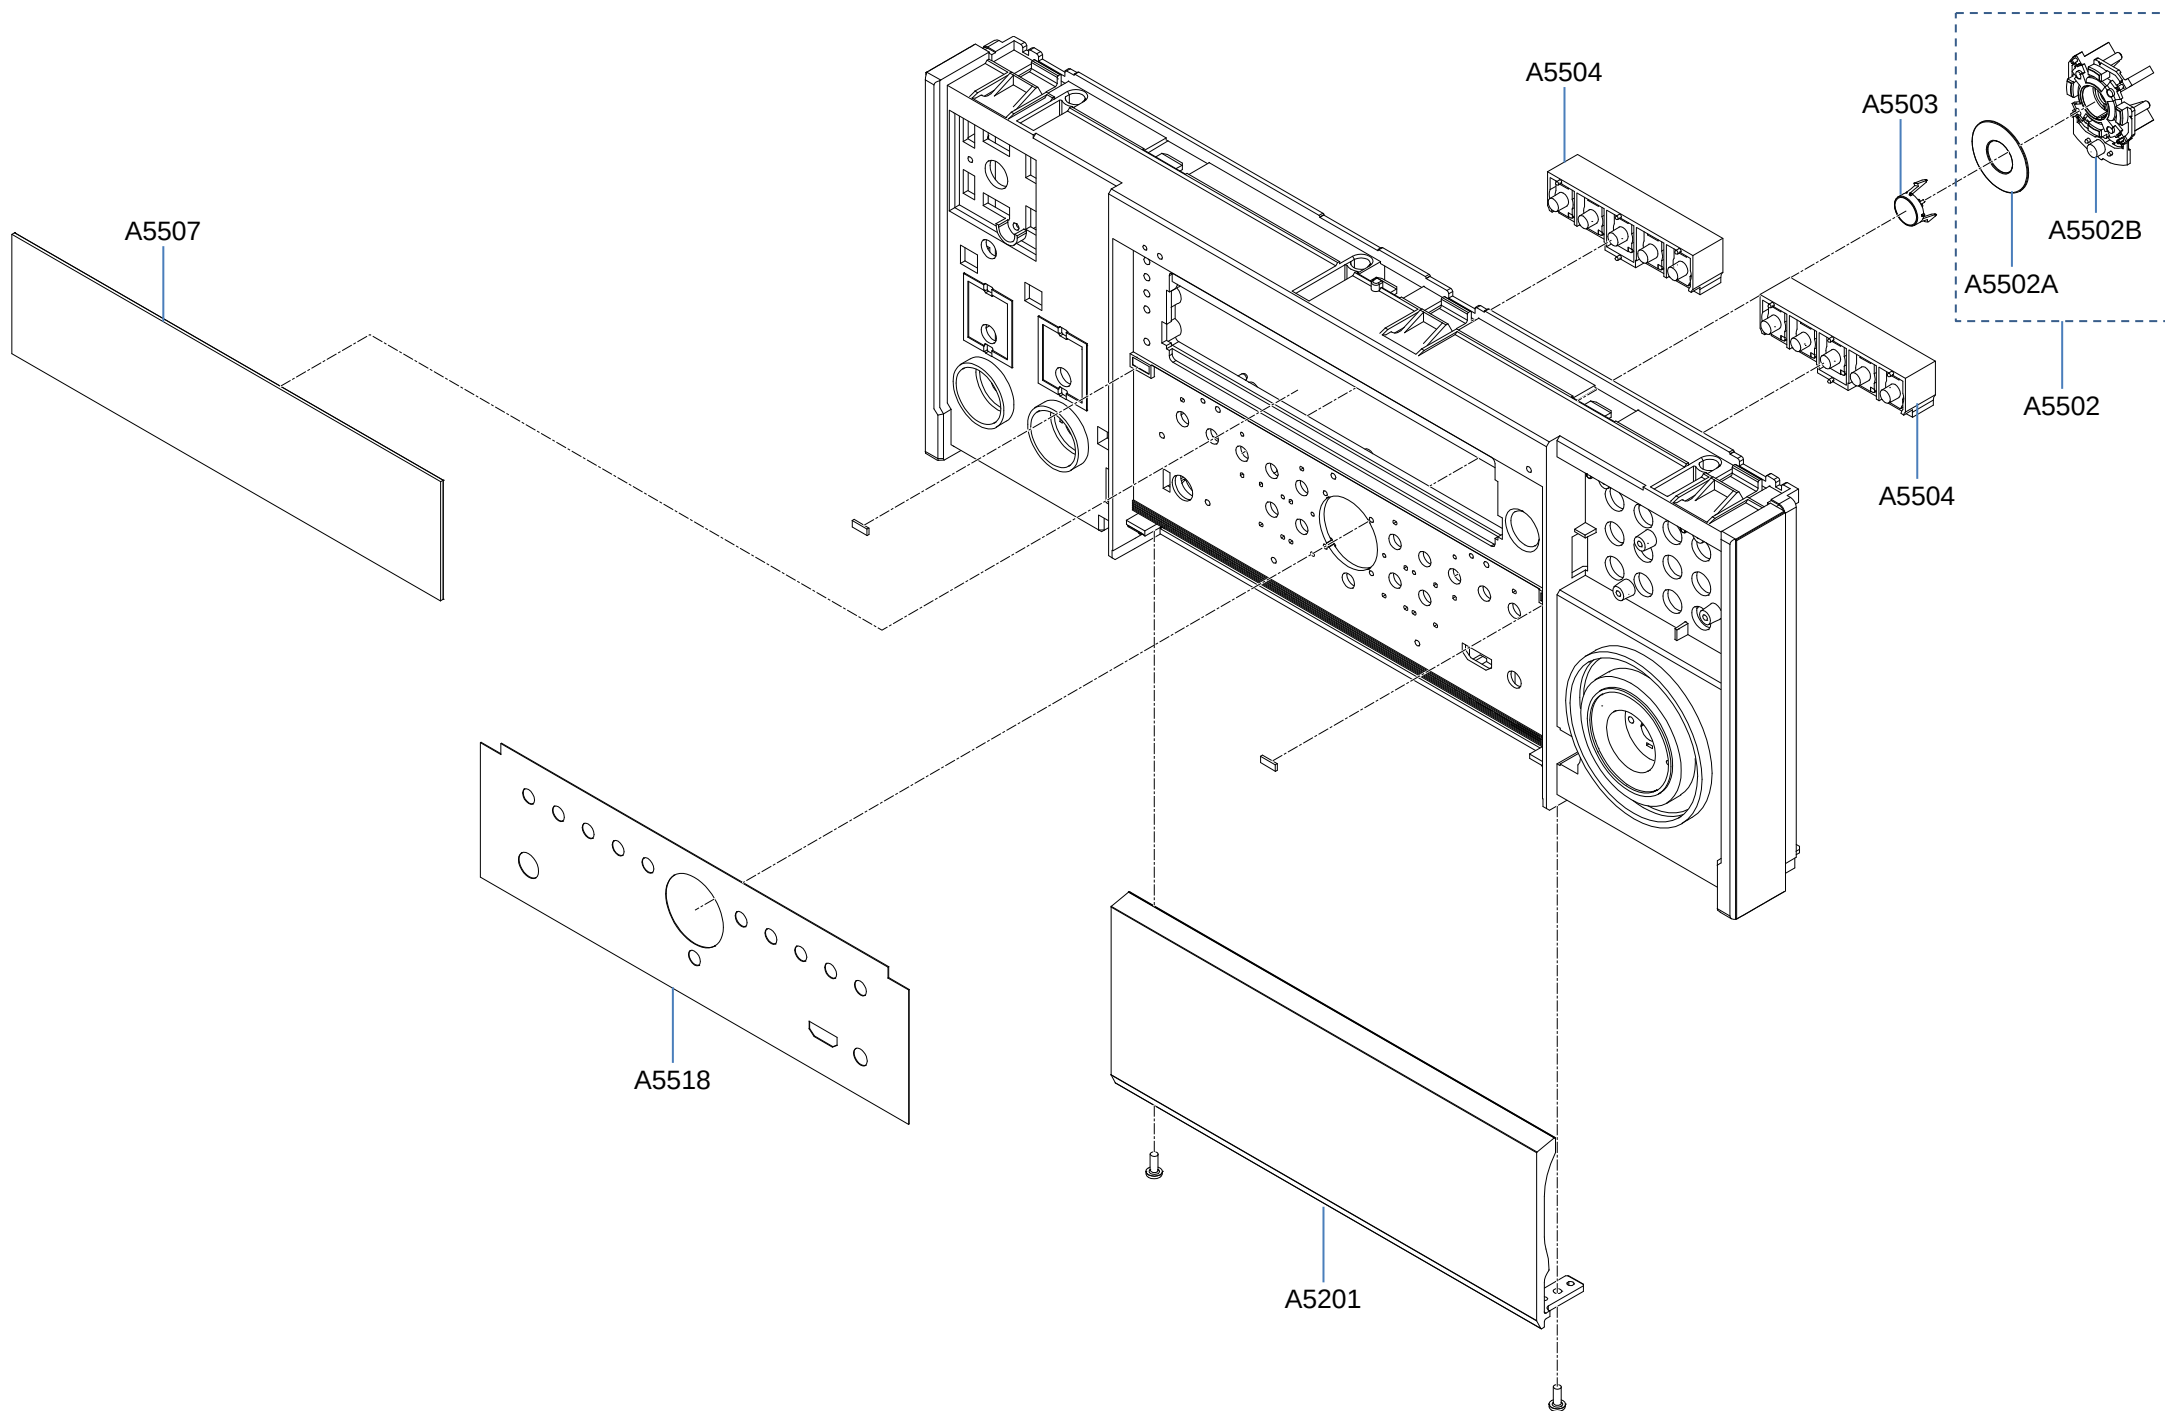


TX-RZ1100/3100


Front3


Exploded View

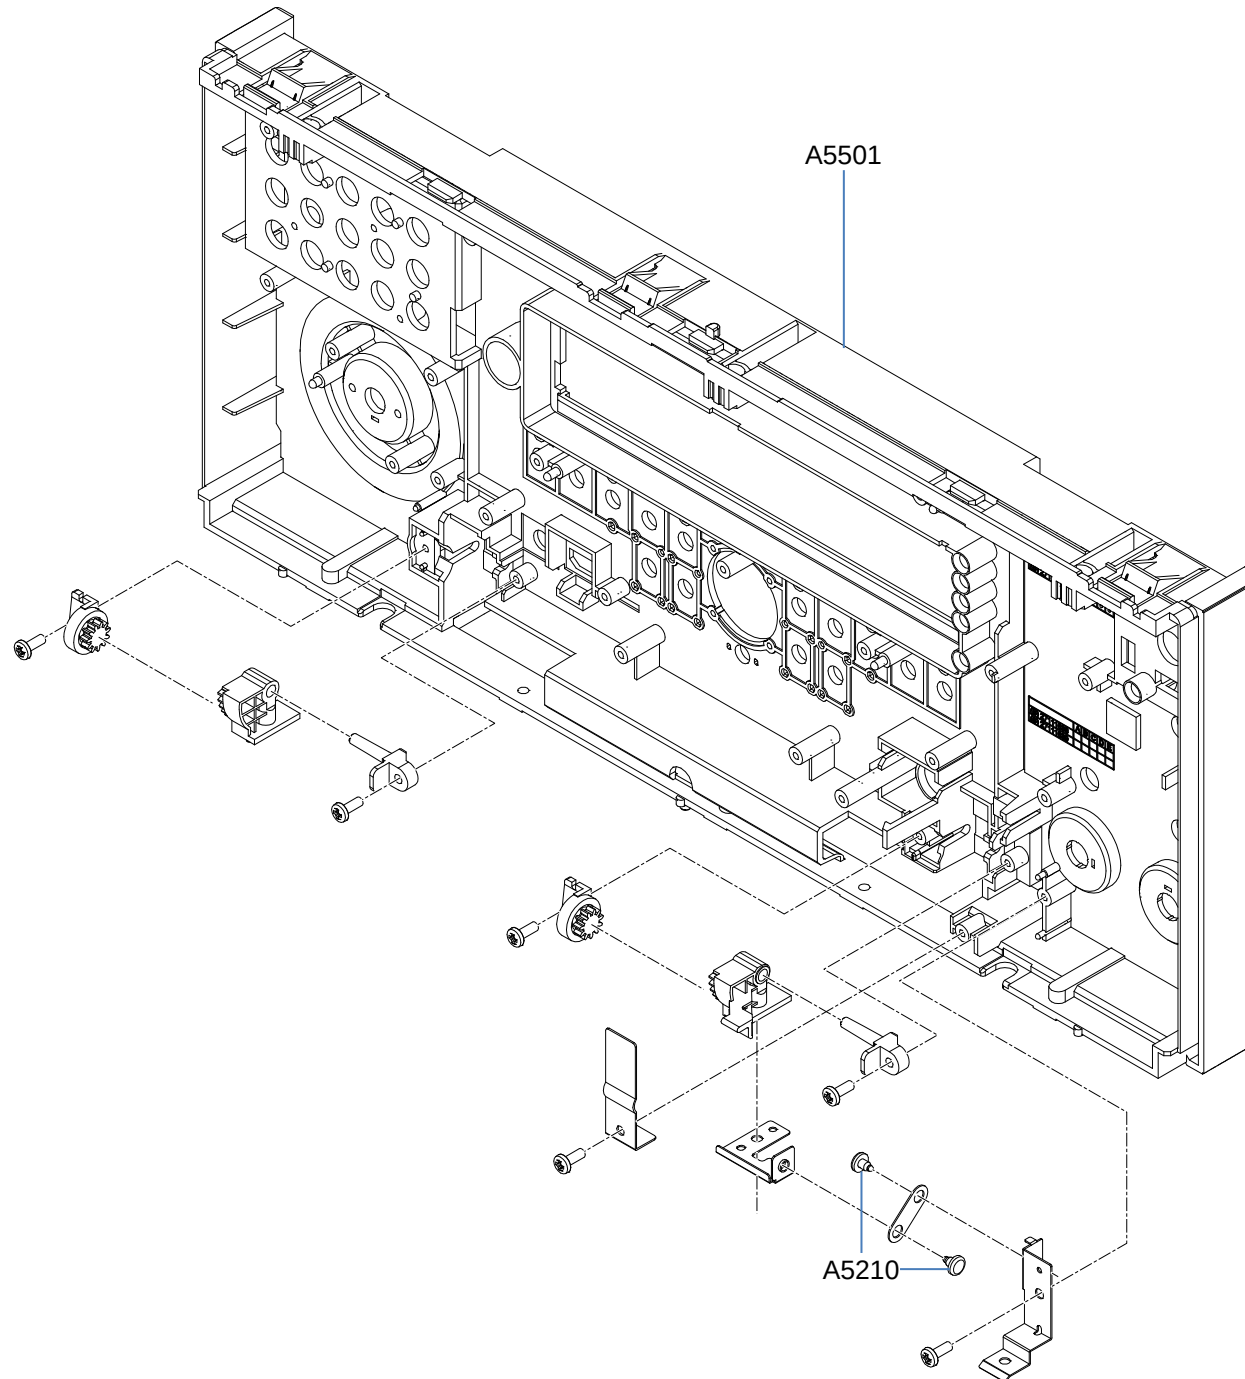




TX-RZ1100/3100

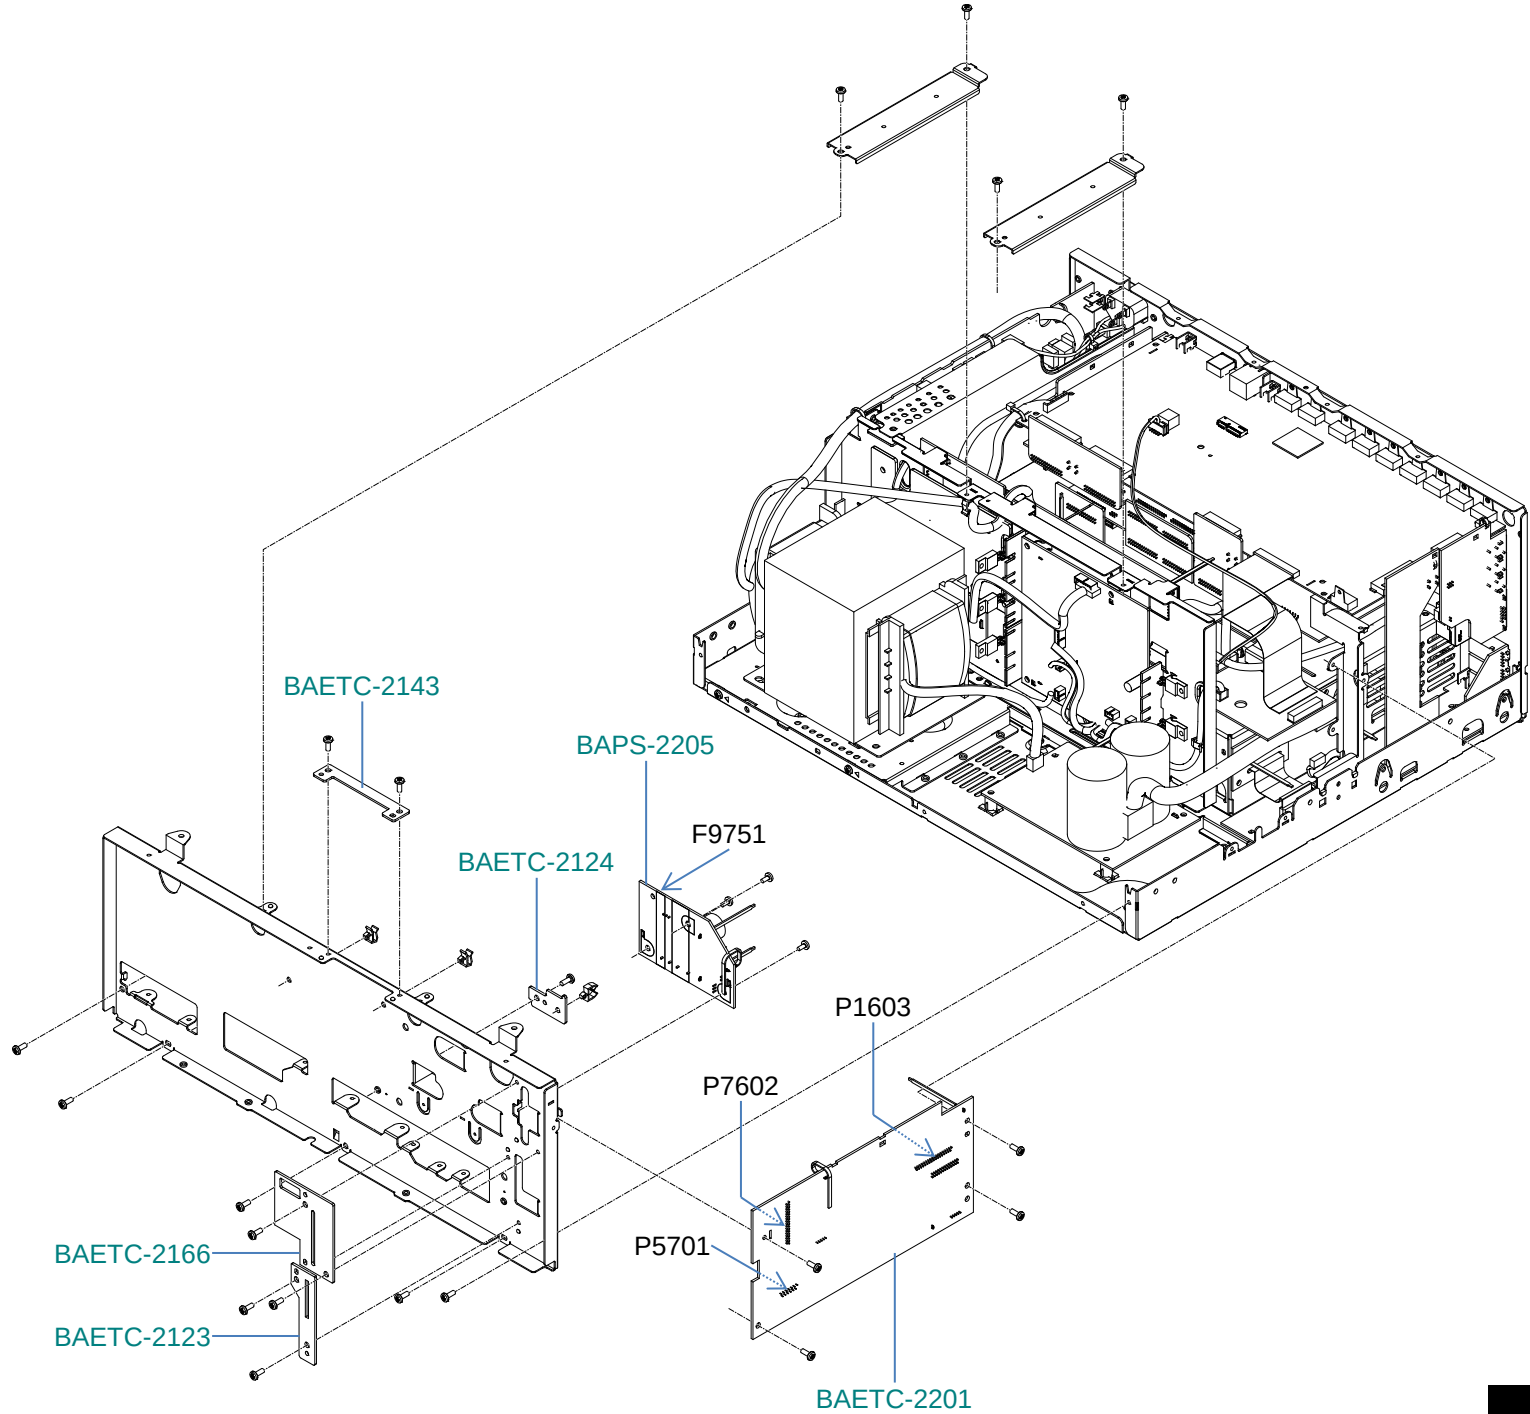

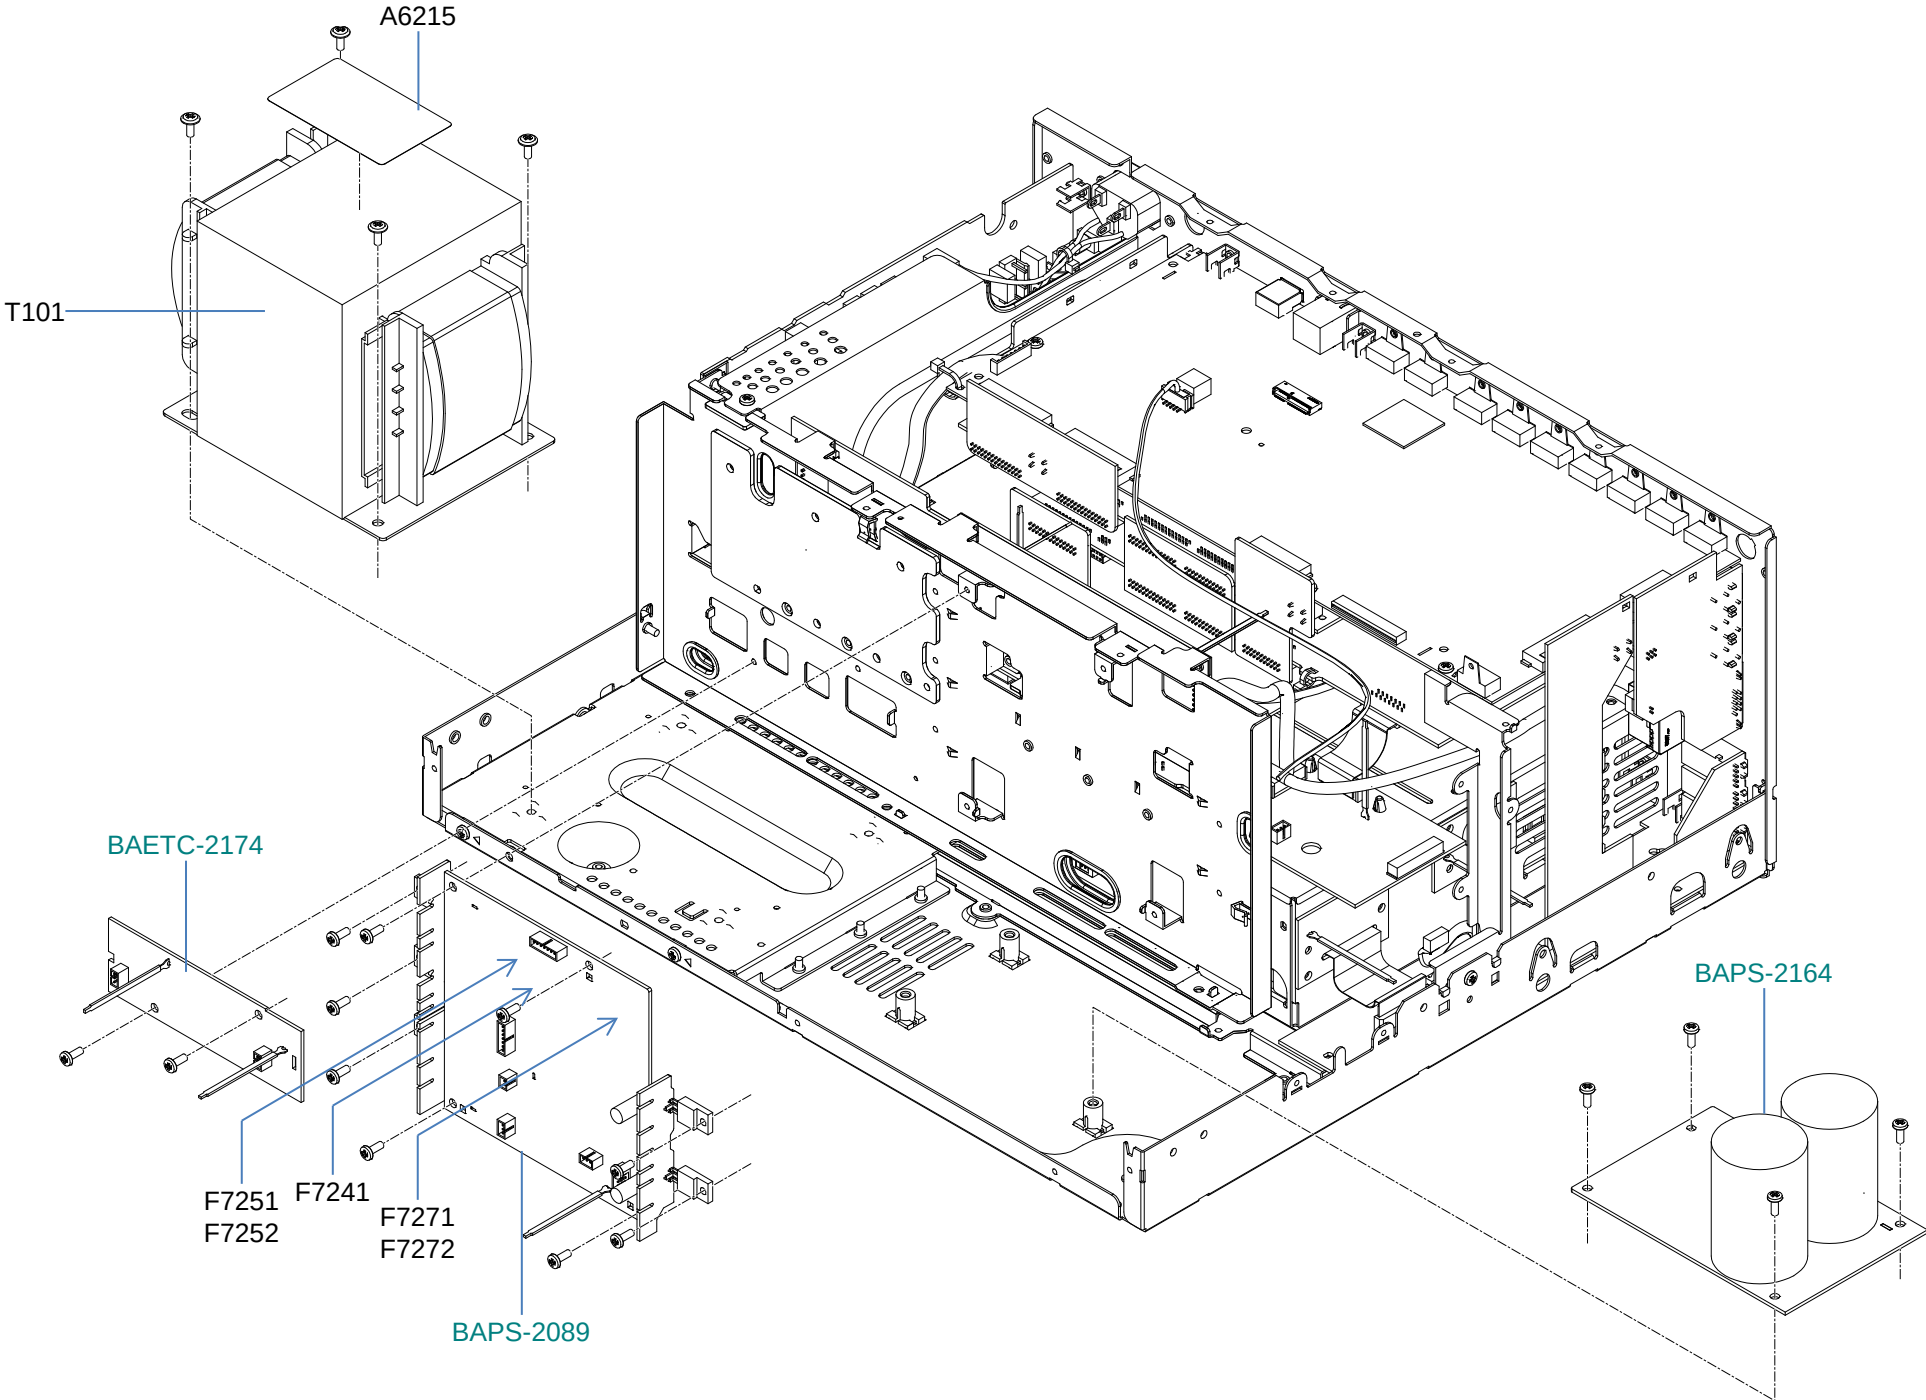

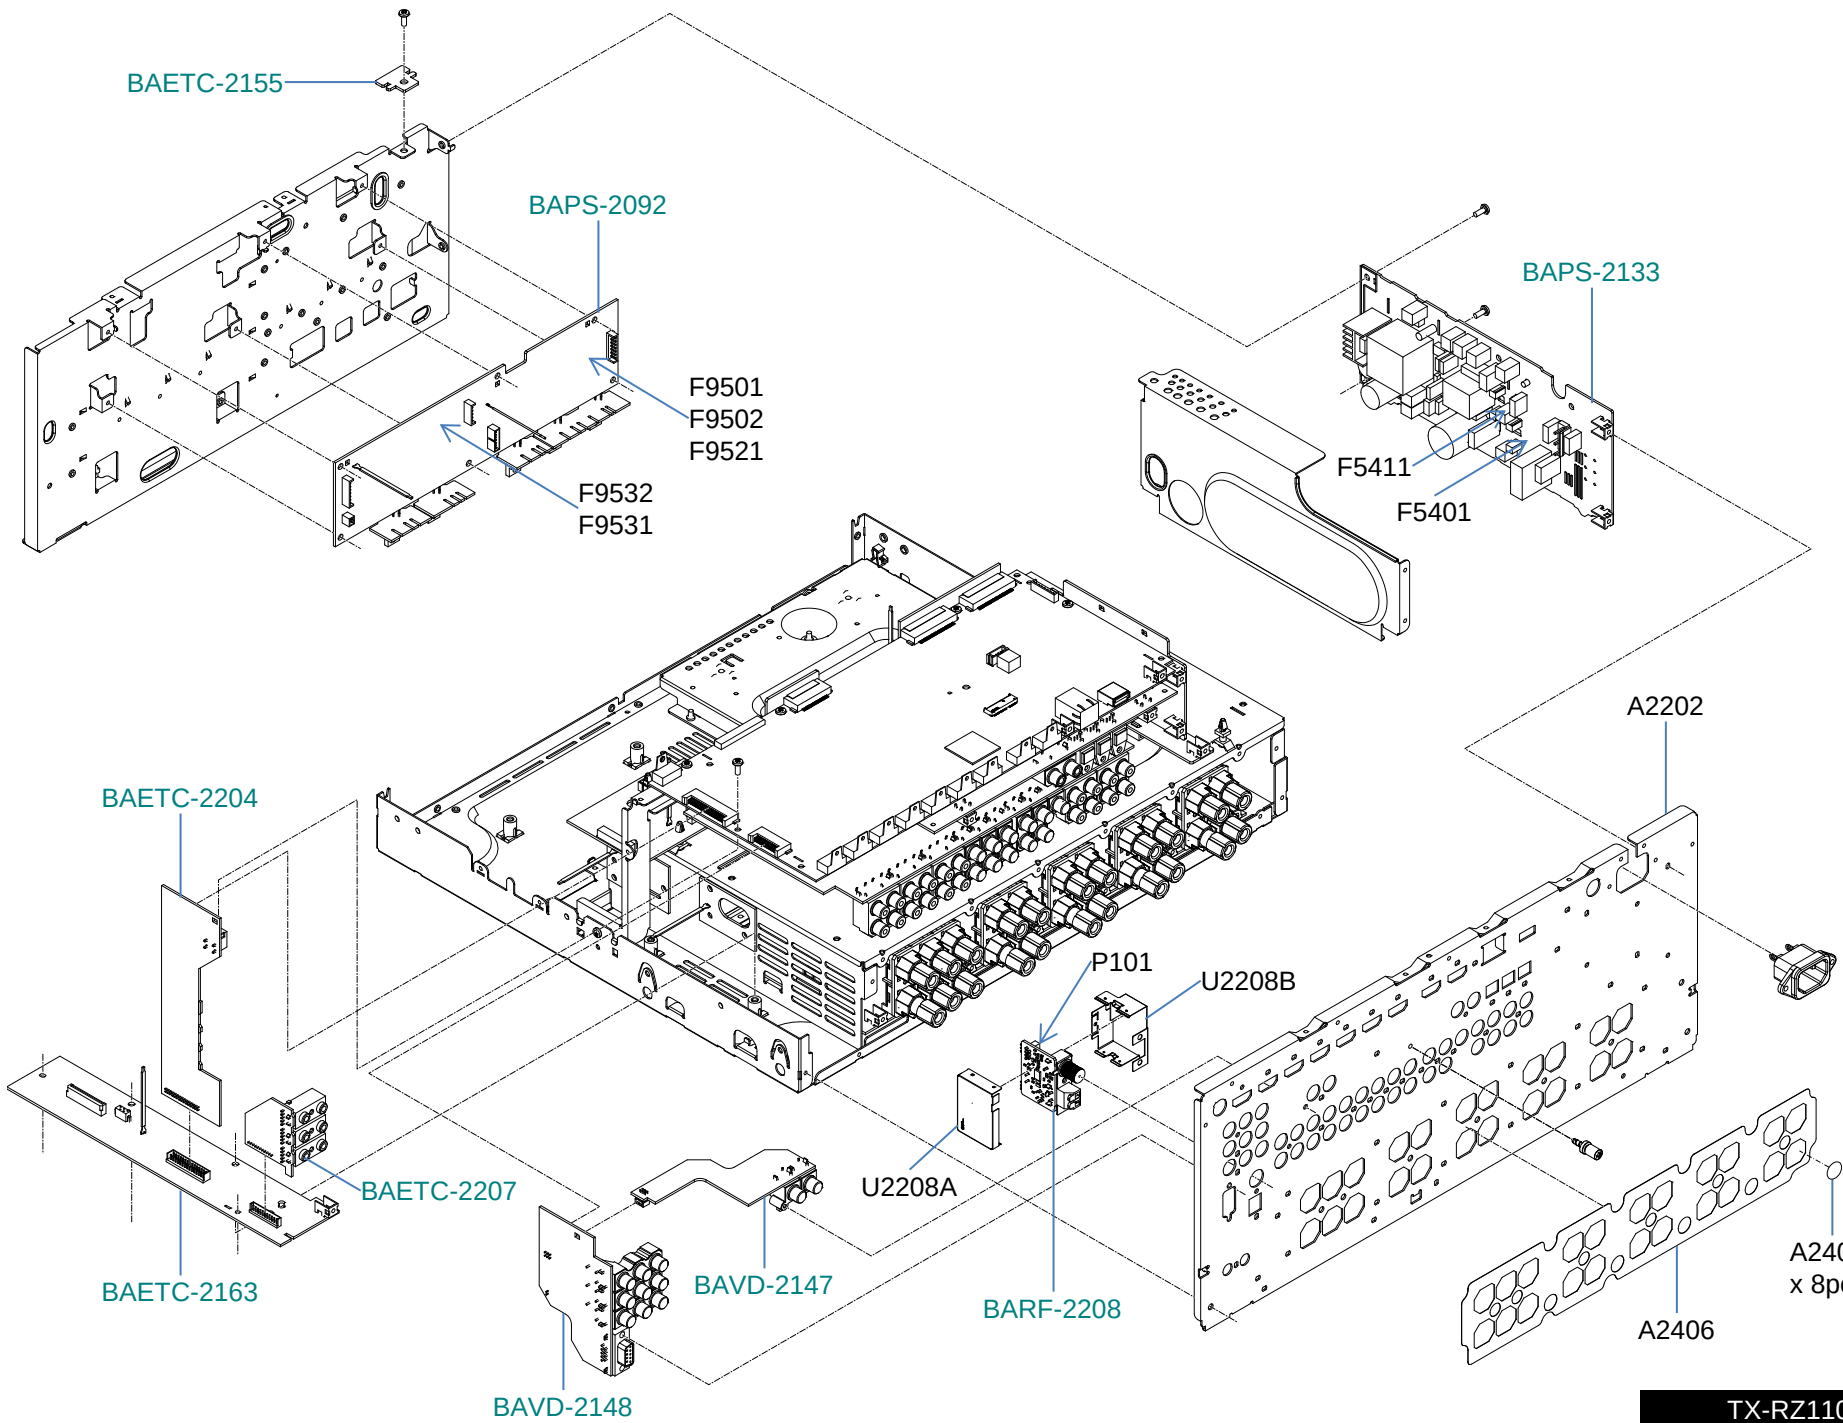

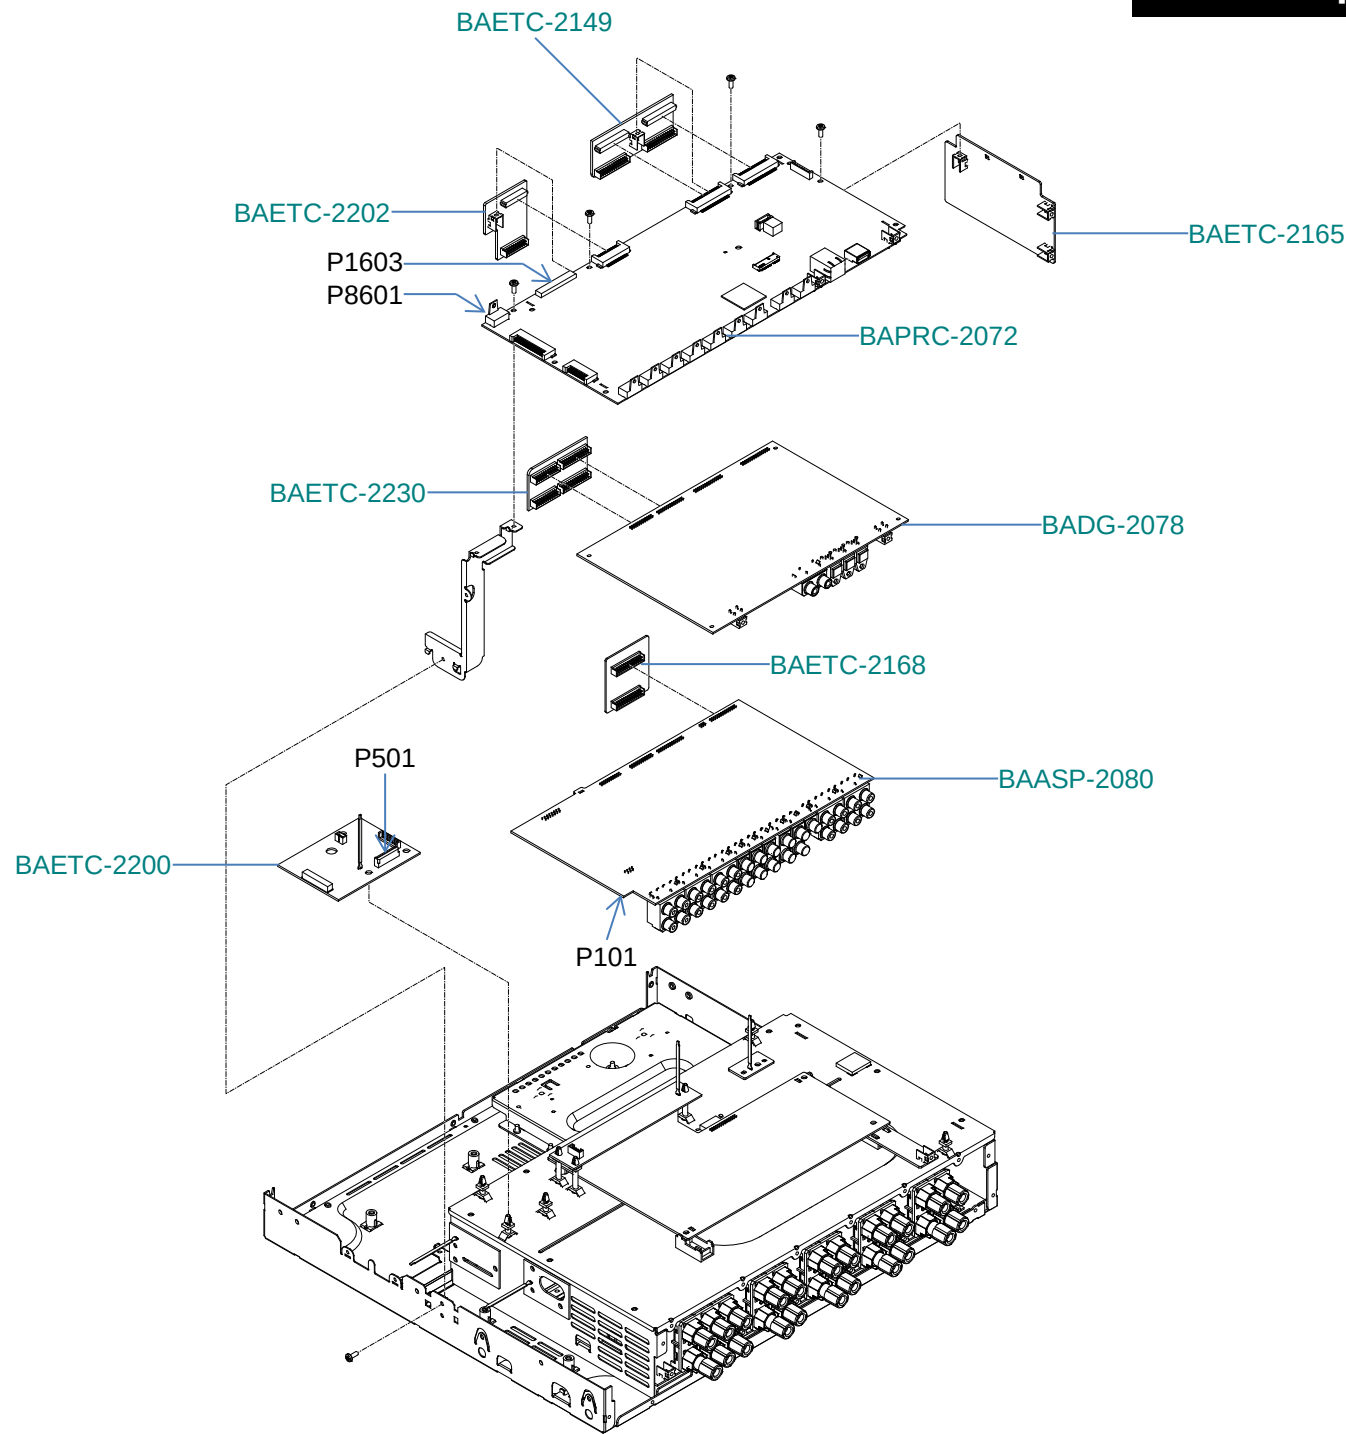

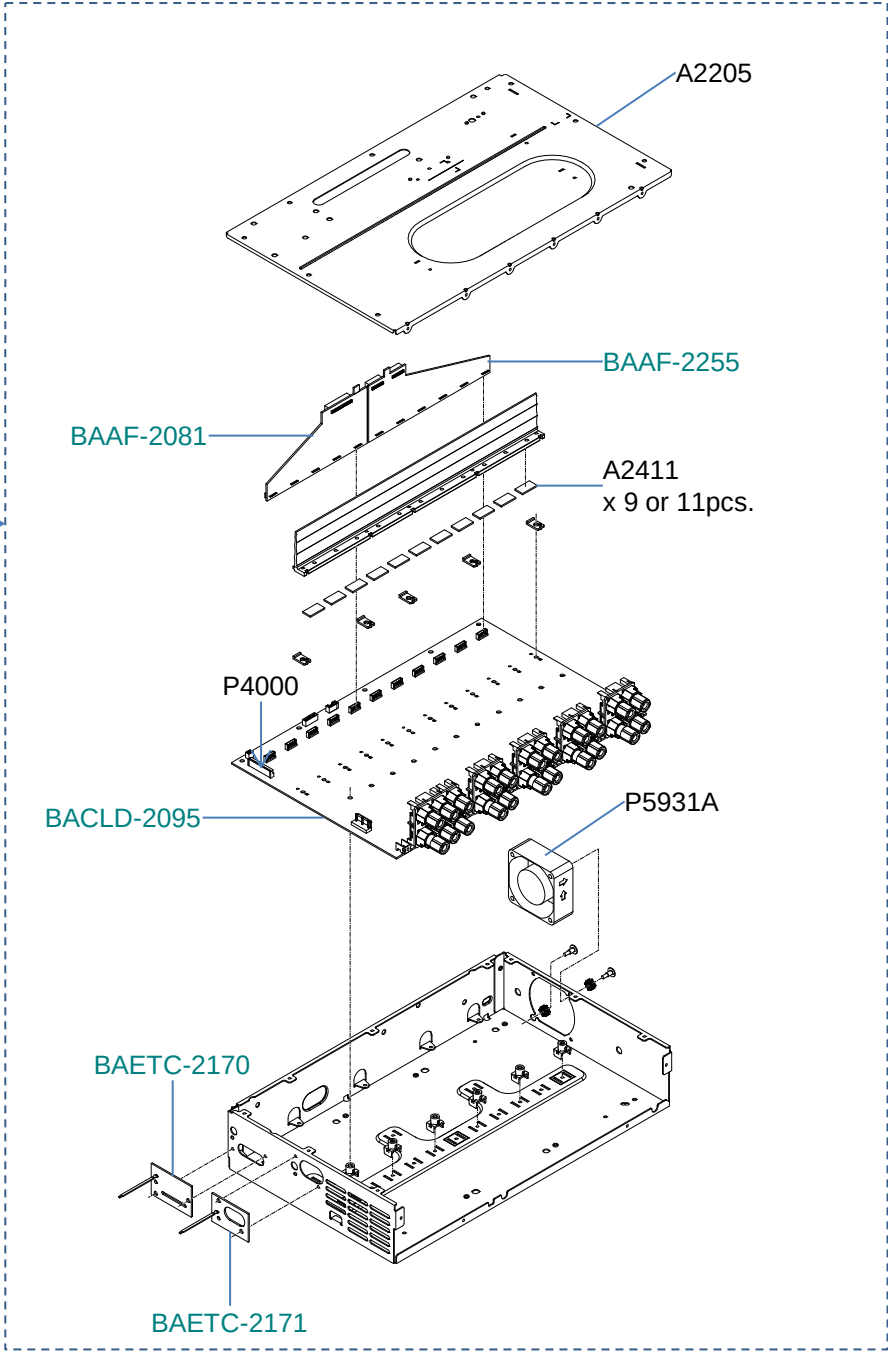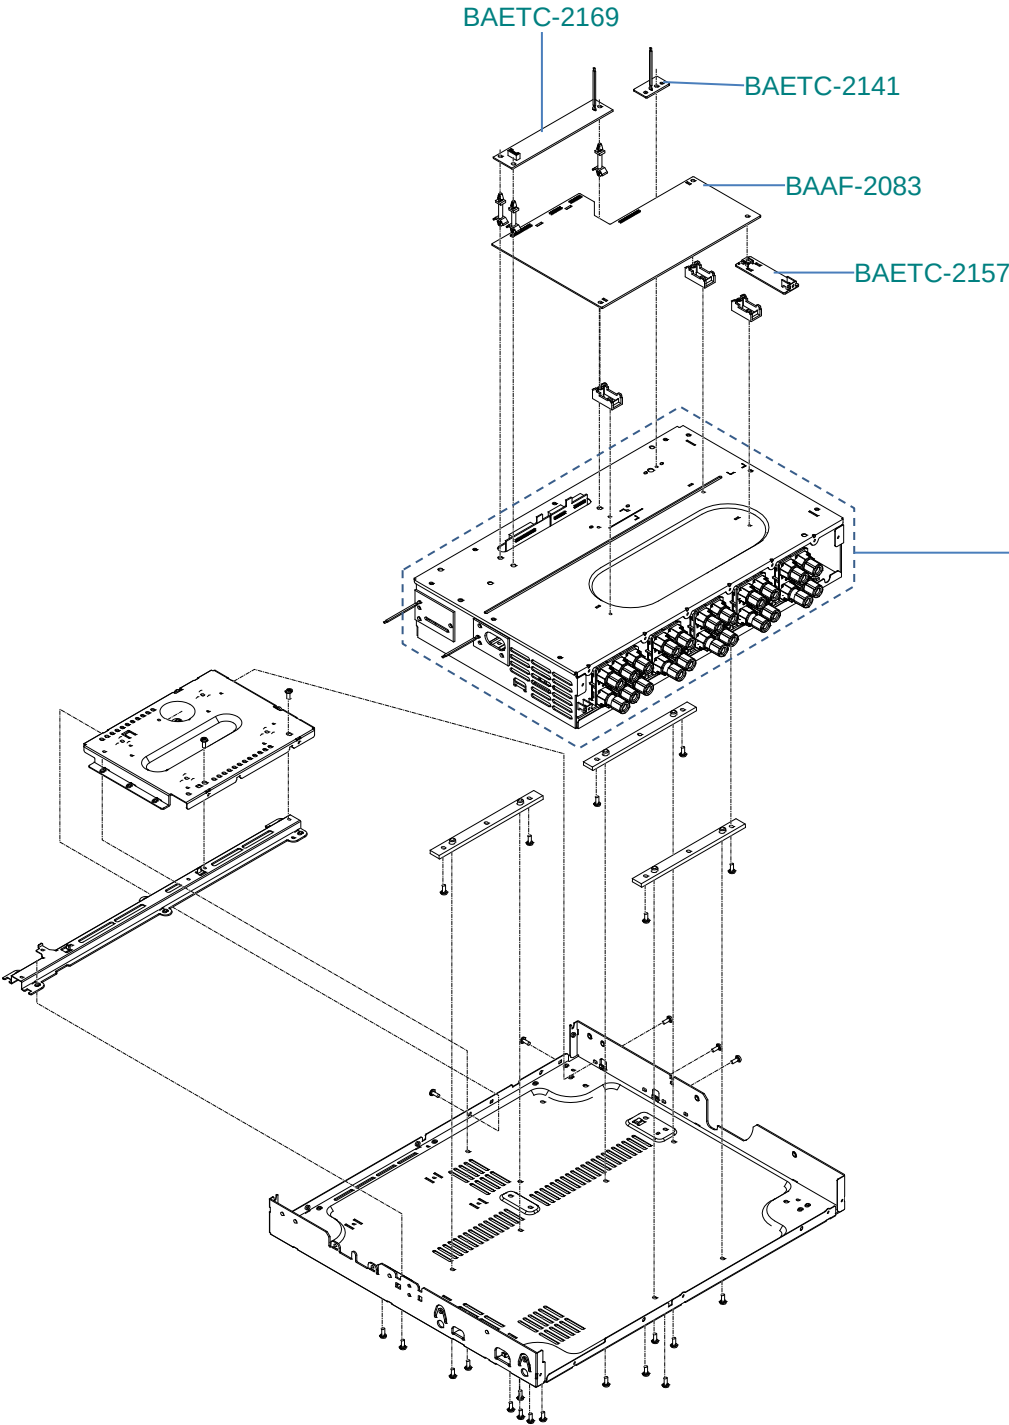

## TX-RZ1100(B)MDC

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
  2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

(B) : Black color model

&lt;MDC&gt; : 120V

Canadian/USA/(Mexico) model

: NSP

| REF. NO.                           | PART NAME             | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|------------------------------------|-----------------------|--------------------|------|---------------|---------|
| [ Cabinet, Chassis, Screws, Nuts ] |                       |                    |      |               |         |
| A2201                              | CHASSIS               | (OI)AS             | 1    | 27100619A     | NSP     |
| A2202                              | REAR PANEL            | RZ1100MDC          | 1    | 27124774A     | N       |
| A2203                              | COVER                 | (B)1100 (Bent)     | 1    | 28210173A     |         |
| A2203                              | COVER                 | (B)1100 (Not Bent) | 1    | 28210173AZ    |         |
| A2204                              | CHASSIS               | (SUB)LX901         | 1    | 27100613A     | NSP     |
| A2205                              | COVER                 | (IR)LX901          | 1    | 28210161B     |         |
| A2209                              | BRACKET               | (F)OI              | 1    | 27131166A     | N NSP   |
| A2211                              | TOP BEAM              | 85(MTL)            | 2    | ANG7726-B     | N NSP   |
| A2215                              | BRACKET               | (REG)              | 1    | 27131168A     | NSP     |
| A2216                              | HEAT SINK             | LX901              | 1    | 27160708      | NSP     |
| A2232                              | BRACKET               | (RIGHT)LX901       | 1    | 27131170      | NSP     |
| A2233                              | SHIELD PLATE          | (PRIMARY)          | 1    | 27150545      | NSP     |
| A2234                              | HEAT SINK             | (REG)              | 1    | 27160717      | NSP     |
| A2301                              | PCB MOLD(PP)          | .                  | 5    | AMR2533-B     | NSP     |
| A2302                              | BOTTOM LEG            | (FRONT)            | 2    | 27175477A     | N       |
| A2303                              | INSULATOR ICE(PLS)    | .                  | 3    | AMR7523-A     | NSP     |
| A2304                              | PCB MOLD(PP)          | .                  | 6    | AMR7536-B     | NSP     |
| A2305                              | CUSHION               | (CORK)D25*9*T2     | 4    | 28141968      |         |
| A2307                              | BOTTOM LEG            | (REAR)             | 2    | 27175478A     |         |
| A2401                              | DAMPER BUSHING 83     | .                  | 2    | AEB7425-A     | NSP     |
| A2402                              | CUSHION 5X8           | .                  | 1    | AEB7397-A     | NSP     |
| A2406                              | SHEET                 | SP_LX901           | 1    | 29096191      |         |
| A2409                              | CUSHION CIRCLE 14B    | .                  | 8    | AED7081-A     |         |
| A2411                              | HEAT COND SHEET       | .                  | 9    | AEB7434-A     |         |
| A2412                              | MINI CLAMP            | .                  | 2    | VEC1597-A     | N NSP   |
| A2413                              | HOLDER                | KGLS-6S            | 5    | 27190011      | NSP     |
| A2414                              | HEAT SINK SPACER(PLS) | .                  | 5    | AMR7568-A     | N NSP   |
| A2416                              | HOLDER                | KGLS-14S           | 3    | 27190164      | NSP     |
| A2454                              | CUSHION/T3            | .                  | 6    | AEB7448-A     | NSP     |
| A2455                              | CUSHION               | t4.0x20x17         | 1    | 28142010      | NSP     |
| A2459                              | CORD CLAMPER/HL       | .                  | 1    | AEC7653-A     | N NSP   |
| A2465                              | BUSH/ANT              | .                  | 2    | AMR7706-B     |         |
| A2468                              | CUSHION/T8            | .                  | 1    | AEB7442-A     | N NSP   |
| A2469                              | HOLDER                | (PLUG)             | 1    | 27191418A     | NSP     |
| A2470                              | SPACER                | (BUFFER)           | 3    | 27270578      | NSP     |
| A2471                              | CLAMPER               | YMC-10-0 V0        | 2    | 27301970      | N NSP   |
| A2472                              | RIVET                 | P4050              | 1    | 880057        | N NSP   |
| A2472or                            | RIVET                 | R4050B             | (1)  | 880064        | N NSP   |
| A2474                              | HOLDER                | (クランプ) UA-0        | 1    | 27190432      | NSP     |
| A2481                              | TAPE                  | TAPE(CLOTH-8U)     | 0.26 | 29110082      | NSP     |
| A2482                              | IB CUSHION            | W15*3t TAPE        | 0.03 | 28141585A     | NSP     |
| A2483                              | CUSHION               | (PORON)10*15*T1.5  | 2    | 28142018      | N NSP   |
| A2484                              | CUSHION               | (FELT)170*10*T1.0  | 1    | 28142020      | N NSP   |
| A5201                              | DOOR                  | (B)                | 1    | 28148858      |         |

|         |               |                     |      |             |       |
|---------|---------------|---------------------|------|-------------|-------|
| A5202   | HOLDER        | (L)                 | 1    | 27191411B   | NSP   |
| A5203   | HOLDER        | (R)                 | 1    | 27191412A   | NSP   |
| A5204   | SHAFT         | .                   | 2    | 27260383    | NSP   |
| A5205   | DAMPER        | (11.3)              | 2    | 27301969    | NSP   |
| A5206   | RETAINER      | (SPRING)            | 1    | 27142345A   | NSP   |
| A5207   | RETAINER      | (DOOR)              | 1    | 27142341    | NSP   |
| A5208   | RETAINER      | (LINK)              | 1    | 27142342    | NSP   |
| A5209   | RETAINER      | (ERH-L)             | 1    | 27142343    | NSP   |
| A5210   | PLASTIC RIVET | P3035B              | 2    | 880016      |       |
| A5210or | RIVET         | R3035B              | (2)  | 880062      | N NSP |
| A5211   | KNOB          | (TONE)(B)AS         | 2    | 28327232    |       |
| A5211A  | KNOB          | (TONE)(B)           | {2}  | 28327211    | N     |
| A5211B  | SPRING        | .                   | {2}  | 27180575    |       |
| A5212   | KNOB          | (VOL)AS(B)          | 1    | 28327219    |       |
| A5212A  | KNOB          | (VOL)CAP(B)         | {1}  | 28327221    | N     |
| A5212B  | KNOB          | (VOL)BASE           | {1}  | 28327223    | N     |
| A5212C  | SPRING        | .                   | {1}  | 27180575    |       |
| A5213   | CUSHION       | (PORON)8*3*T1.5     | 3    | 28141969    | NSP   |
| A5214   | SPACER        | (PC)D7*d4*t0.25     | 1    | 27270575    | NSP   |
| A5501   | FRONT BRACKET | 810(B)              | 1    | 27111638    |       |
| A5502   | KNOB          | (CUR)AS BLACK       | 1    | 28326994C   |       |
| A5502A  | KNOB          | (CUR) BLK           | {1}  | 28326988A   |       |
| A5502B  | KNOB          | (CUR-BASE) BLK      | {1}  | 28326986C   | N     |
| A5503   | KNOB          | (ENTER) BLK         | 1    | 28326990    |       |
| A5504   | KNOB          | (5)(B)              | 2    | 28327225    |       |
| A5505   | PLATE         | (VOL)               | 1    | 27262931A   |       |
| A5506   | HOLDER        | (PLT)               | 1    | 27191413A   | N NSP |
| A5507   | CLEAR PLATE   | TX-RZ810            | 1    | 28192475    |       |
| A5508   | KNOB          | (PURE)              | 1    | 28327208    | N     |
| A5509   | GUIDE         | (STBY)(B)           | 1    | 27268323    | NSP   |
| A5510   | KNOB          | (STBY)(B)           | 1    | 28327234    |       |
| A5511   | KNOB          | (1)(B)              | 2    | 28327209    |       |
| A5512   | FACET         | .                   | 1    | 28198905    |       |
| A5513   | BADGE         | .                   | 1    | 28135317    |       |
| A5514   | KNOB          | (INP-C)(B)          | 1    | 28327272A   | N     |
| A5515   | KNOB          | (INP-L)(B)          | 1    | 28327274A   | N     |
| A5516   | KNOB          | (INP-R)(B)          | 1    | 28327276A   | N     |
| A5517   | FRONT PANEL   | TXRZ1100(B)         | 1    | 27213853    |       |
| A5518   | PLATE         | (DOOR)(B)US_TXRZ810 | 1    | 27262934A   |       |
| A5519   | BACK PLATE    | .(B)                | 1    | 28133428    |       |
| A5520   | IB CUSHION    | W15*3t TAPE         | 0.01 | 28141585A   | NSP   |
| A5550   | SCREW         | 3TTB+8B(3BC)        | 4    | 838430088GR | NSP   |
| A5551   | SCREW         | 3TTB+8B(3BC)        | 2    | 838430088GR | NSP   |
| A5552   | SCREW         | 3TTB+8B(3BC)        | 6    | 838430088GR | NSP   |
| A5553   | SCREW         | 3TTB+8B(3BC)        | 4    | 838430088GR | NSP   |
| A5554   | SCREW         | 3TTB+8B(3BC)        | 1    | 838430088GR | NSP   |
| A5555   | SCREW         | 3TTB+8B(3BC)        | 1    | 838430088GR | NSP   |
| A5556   | SCREW         | 3TTB+8B(3BC)        | 1    | 838430088GR | NSP   |
| A5557   | SCREW         | 3TTB+8B(3BC)        | 5    | 838430088GR | NSP   |
| A5558   | SCREW         | 3TTB+8B(3BC)        | 2    | 838430088GR | NSP   |
| A5559   | SCREW         | 3TTB+8B(3BC)        | 1    | 838430088GR | NSP   |
| A5560   | SCREW         | 3TTB+8B(3BC)        | 2    | 838430088GR | NSP   |
| A5561   | SCREW         | 3TTB+8B(3BC)        | 2    | 838430088GR | NSP   |
| A5562   | SCREW         | 3TTB+8B(3BC)        | 1    | 838430088GR | NSP   |
| A5563   | SCREW         | 3TTB+10B(3BC)       | 2    | 838430108GR | NSP   |

|       |        |                |    |             |       |
|-------|--------|----------------|----|-------------|-------|
| A5564 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A5565 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A5566 | SCREW  | 3TTB+8B(3BC)   | 1  | 838430088GR | NSP   |
| A5567 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A6215 | LABEL  | (PT)ONK        | 1  | 29392650    |       |
| A7913 | SCREW  | 3TTB+6B(3BC)   | 6  | 838430068GR | NSP   |
| A7914 | SCREW  | 3TTB+6B(3BC)   | 6  | 838430068GR | NSP   |
| A7915 | SCREW  | SCREW(3*11.6)  | 2  | 801661      | NSP   |
| A7916 | SCREW  | 3TTB+8B(3CM)SR | 5  | 801637      | NSP   |
| A7917 | SCREW  | SCREW          | 5  | 801665      | NSP   |
| A7918 | SCREW  | SCREW          | 6  | 801663      | NSP   |
| A7919 | SCREW  | SCREW          | 9  | 801666      | N NSP |
| A7920 | SCREW  | 3TTB+6B(3BC)   | 1  | 838430068GR | NSP   |
| A7921 | SCREW  | 3TTB+6B(3BC)   | 3  | 838430068GR | NSP   |
| A7922 | SCREW  | 3TTB+8B(3CM)SR | 2  | 801637      | NSP   |
| A7923 | SCREW  | 3TTB+8B(3CM)SR | 1  | 801637      | NSP   |
| A7924 | SCREW  | BBZ30P060FCC   | 4  | 838630068   | N NSP |
| A7925 | SCREW  | BBZ30P060FCC   | 5  | 838630068   | N NSP |
| A7926 | SCREW  | BBZ30P060FCC   | 6  | 838630068   | N NSP |
| A7927 | SCREW  | BBZ30P060FCC   | 5  | 838630068   | N NSP |
| A7928 | SCREW  | BBZ30P060FCC   | 2  | 838630068   | N NSP |
| A7929 | SCREW  | BMZ30P040FTB   | 9  | 82543004GR  | NSP   |
| A7930 | SCREW  | 3TTB+8B(3BC)   | 2  | 838430088GR | NSP   |
| A7932 | SCREW  | 3TTB+8B(3BC)   | 1  | 838430088GR | NSP   |
| A7933 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A7934 | SCREW  | 3TTB+8B(3BC)   | 2  | 838430088GR | NSP   |
| A7935 | SCREW  | 3TTB+8B(3BC)   | 11 | 838430088GR | NSP   |
| A7936 | SCREW  | 3TTB+8B(3BC)   | 2  | 838430088GR | NSP   |
| A7937 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A7939 | SCREW  | 3TTB+8B(3BC)   | 2  | 838430088GR | NSP   |
| A7940 | SCREW  | 3TTB+6B(3BC)   | 4  | 838430068GR | NSP   |
| A7941 | SCREW  | 3TTB+8B(3BC)   | 3  | 838430088GR | NSP   |
| A7942 | SCREW  | 3TTB+8B(3BC)   | 4  | 838430088GR | NSP   |
| A7943 | SCREW  | 3TTB+8B(3BC)   | 6  | 838430088GR | NSP   |
| A7944 | SCREW  | 3TTB+8B(3BC)   | 6  | 838430088GR | NSP   |
| A7945 | SCREW  | 3TTB+10P(3CM)  | 6  | 838130100GR | N NSP |
| A7946 | SCREW  | BPZ30P080FNI   | 6  | 838230080   | NSP   |
| A7947 | SCREW  | 3TTB+8B(3CM)SR | 1  | 801637      | NSP   |
| A7948 | SCREW  | BBZ30P180FCC   | 2  | 838630188   | NSP   |
| A7949 | SCREW  | 3TTB+8B(3CM)SR | 1  | 801637      | NSP   |
| A7950 | SCREW  | 3TTB+6B(3BC)   | 2  | 838430068GR | NSP   |
| A7951 | SCREW  | 3TTB+8B(3CM)SR | 3  | 801637      | NSP   |
| A7952 | SCREW  | 3TTB+6B(3BC)   | 2  | 838430068GR | NSP   |
| A7954 | SCREW  | 3TTB+6B(3BC)   | 2  | 838430068GR | NSP   |
| A7955 | SCREW  | 3TTB+6B(3BC)   | 2  | 838430068GR | NSP   |
| A7956 | SCREW  | 3TTB+6B(3BC)   | 6  | 838430068GR | NSP   |
| A7957 | SCREW  | 3TTB+8B(3BC)   | 2  | 838430088GR | NSP   |
| A7958 | SCREW  | 3TTB+6B(3BC)   | 3  | 838430068GR | NSP   |
| A7959 | SCREW  | SCREW 4X12(FE) | 4  | 801660      | NSP   |
| A7960 | WASHER | WH40FNI        | 1  | 87324009    | N NSP |
| A7961 | SCREW  | 3TTB+6B(3BC)   | 1  | 838430068GR | NSP   |
| A7962 | SCREW  | 3TTB+6B(3BC)   | 3  | 838430068GR | NSP   |
| A7963 | SCREW  | BBZ30P180FCC   | 3  | 838630188   | NSP   |
| A7964 | SCREW  | 3TTB+8B(3CM)SR | 1  | 801637      | NSP   |
| A7965 | SCREW  | 3TTB+6B(3BC)   | 2  | 838430068GR | NSP   |

|                                |                       |                    |    |              |       |
|--------------------------------|-----------------------|--------------------|----|--------------|-------|
| A7966                          | SCREW                 | 3TTB+6B(3BC)       | 2  | 838430068GR  | NSP   |
| A7967                          | SCREW                 | 3TTB+6B(3BC)       | 1  | 838430068GR  | NSP   |
| A7968                          | SCREW                 | 3TTB+8B(3CM)SR     | 1  | 801637       | NSP   |
| A7969                          | SCREW                 | 3TTB+6B(3BC)       | 2  | 838430068GR  | NSP   |
| A7970                          | SCREW                 | 3TTB+6B(3BC)       | 5  | 838430068GR  | NSP   |
| A7971                          | SCREW                 | 3TTB+8B(3BC)       | 1  | 838430088GR  | NSP   |
| A7972                          | SCREW                 | 3TTB+8B(3BC)       | 1  | 838430088GR  | NSP   |
| A7973                          | SCREW                 | 3TTB+8B(3BC)       | 1  | 838430088GR  | NSP   |
| A7975                          | SCREW                 | 3TTF+8B(BC)        | 2  | 835430088    | N NSP |
| A7977                          | SCREW                 | 3TTB+8B(3BC)       | 2  | 838430088GR  | NSP   |
| A7981                          | SCREW                 | 3TTB+8B(3CM)SR     | 2  | 801637       | NSP   |
| A7982                          | SCREW                 | 3TTB+8B(3CM)SR     | 2  | 801637       | NSP   |
| A7983                          | SCREW                 | 3TTB+8B(3BC)       | 8  | 838430088GR  | NSP   |
| A7984                          | SCREW                 | 3TTB+8B(3BC)       | 1  | 838430088GR  | NSP   |
| A7985                          | SCREW                 | BCZ40P060FTB       | 2  | 838440069GR  | NSP   |
| A7986                          | SCREW                 | BCZ40P060FTB       | 3  | 838440069GR  | NSP   |
| A7987                          | SCREW                 | BCZ40P060FTB       | 3  | 838440069GR  | NSP   |
| A7988                          | TERMINAL              | Eターミナル             | 1  | 25060151     | NSP   |
| A7990                          | BINDER(BK-1)          | .                  | 15 | ZCA-BK1      | NSP   |
| A7996                          | SCREW                 | 2B+5FN(3CM)        | 1  | 82512005     | NSP   |
| A7997                          | SCREW                 | 3TTB+8B(3CM)SR     | 2  | 801637       | NSP   |
| A8000                          | WASHER                | W3*10F(3BC)        | 1  | 87643010GR   | NSP   |
| A8002                          | SCREW                 | 3TTB+8B(3CM)SR     | 4  | 801637       | NSP   |
| A8003                          | SCREW                 | BBZ30P060FCC       | 7  | 838630068    | N NSP |
| A8004                          | SCREW                 | 3TTB+8B(3BC)       | 2  | 838430088GR  | NSP   |
| A8005                          | SCREW                 | 3TTB+6B(3BC)       | 2  | 838430068GR  | NSP   |
| A8006                          | SCREW                 | 3TTB+8B(3CM)SR     | 1  | 801637       | NSP   |
| [ Transformers, Coils ]        |                       |                    |    |              |       |
| T101                           | POWER TRANSFORMER     | NPT-1677D          | 1  | 2302175      | !, N  |
| [ Switches, Terminals, Wires ] |                       |                    |    |              |       |
| F5401                          | FUSE                  | 10A-UL/T-233       | 1  | 252330GR     | !     |
| F5411                          | FUSE                  | 215002.MXP         | 1  | 252400       | !     |
| F7241                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F7251                          | FUSE                  | 1A-UL/T-233        | 1  | 252317GR     | !     |
| F7252                          | FUSE                  | 1A-UL/T-233        | 1  | 252317GR     | !     |
| F7271                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F7272                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9501                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9502                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9521                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9531                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9532                          | FUSE                  | 1.25A-UL/T-233     | 1  | 252318GR     | !     |
| F9751                          | FUSE                  | 2A-UL/T-233        | 1  | 252320GR     | !     |
| P101                           | FLEXIBLE FLAT CABLE   | NCFC7-070712       | 1  | 2047070712   | N     |
| P1603                          | FLEXIBLE FLAT CABLE   | NCFC5-351512       | 1  | 2045351512   | N     |
| P3652                          | WIRE HARNESS ASSEMBLY | NSAS-8P2463        | 1  | 2009991599UL | N NSP |
| P3654A                         | ASSEMBLED PWB         | WCBN806L           | 1  | 24150135     | N     |
| P3654B                         | WIFI BT ANTENNA       | RFDPA870918EMLB302 | 1  | 2050102      | N     |
| P3654C                         | WIFI BT ANTENNA       | RFDPA870940EMLB303 | 1  | 2050103      | N     |
| P4000                          | FLEXIBLE FLAT CABLE   | NCFC7-210812       | 1  | 204321045    | N     |
| P4001                          | WIRE HARNESS ASSEMBLY | NSAS-8P2462        | 1  | 2009991598UL | N NSP |
| P4002                          | WIRE HARNESS ASSEMBLY | NSAS-4P2434        | 1  | 2009991570UL | N NSP |
| P4003                          | WIRE HARNESS ASSEMBLY | NSAS-10P2435       | 1  | 2009991571UL | N NSP |
| P4004                          | WIRE HARNESS ASSEMBLY | NSAS-14P2436       | 1  | 2009991572UL | N NSP |
| P501                           | FLEXIBLE FLAT CABLE   | ADD7725-A          | 1  | 204315043    |       |

|                            |                                            |                        |          |                           |                 |
|----------------------------|--------------------------------------------|------------------------|----------|---------------------------|-----------------|
| P5701                      | FLEXIBLE FLAT CABLE                        | NCFC7-131512           | 1        | 2047131512                |                 |
| P5852                      | WIRE HARNESS ASSEMBLY                      | ADX7759-A              | 1        | 2009991538UL              | NSP             |
| P5931A                     | FAN                                        | 2410RL-04W-S29-C07     | 1        | 24502340                  |                 |
| P7201                      | WIRE HARNESS ASSEMBLY                      | ADX7766-A              | 1        | 2009991539UL              | NSP             |
| P7602                      | FLEXIBLE FLAT CABLE                        | NCFC4-35067            | 1        | 204435067                 | N               |
| P7604                      | FLEXIBLE FLAT CABLE                        | NCFC4-05071            | 1        | 204405071                 | N               |
| P7653                      | FLEXIBLE FLAT CABLE                        | NCFC4-11068            | 1        | 204411068                 | N               |
| P8601                      | CORD ASSEMBLY                              | TYX1622-114047         | 1        | 2010519                   |                 |
| <b>[ Frontend, Units ]</b> |                                            |                        |          |                           |                 |
| <b>U080</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAPRC-2072-1G-P</b> | <b>1</b> | <b>1B5142072-1G110MDC</b> | <b>N Parent</b> |
| BAPRC-2072                 | Processing circuit pc board AS             | BAPRC-2072-1G          | 1        | 1B5142072-1G-C110MDC      | N Child         |
| <b>U190</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BADIS-2075-1A-P</b> | <b>1</b> | <b>1B5142075-1A</b>       | <b>N Parent</b> |
| BADIS-2075                 | Display circuit pc board AS                | BADIS-2075-1A          | 1        | 1B5142075-1A-C            | Child           |
| BAETC-2123                 | Et cetra pc board AS                       | BAETC-2123-1A          | 1        | 1B5142123-1A-C            | Child           |
| BAETC-2124                 | Et cetra pc board AS                       | BAETC-2124-1A          | 1        | 1B5142124-1A-C            | Child           |
| BASW-2126                  | Switch circuit pc board AS                 | BASW-2126-1A           | 1        | 1B5142126-1A-C            | Child           |
| BASW-2127                  | Switch circuit pc board AS                 | BASW-2127-1A           | 1        | 1B5142127-1A-C            | Child           |
| BASW-2128                  | Switch circuit pc board AS                 | BASW-2128-1A           | 1        | 1B5142128-1A-C            | Child           |
| BAETC-2129                 | Et cetra pc board AS                       | BAETC-2129-1A          | 1        | 1B5142129-1A-C            | Child           |
| BAETC-2130                 | Et cetra pc board AS                       | BAETC-2130-1A          | 1        | 1B5142130-1A-C            | Child           |
| BAETC-2131                 | Et cetra pc board AS                       | BAETC-2131-1A          | 1        | 1B5142131-1A-C            | Child           |
| BAETC-2132                 | Et cetra pc board AS                       | BAETC-2132-1A          | 1        | 1B5142132-1A-C            | Child           |
| BAPS-2133                  | Power supply circuit pc board AS           | BAPS-2133-1A           | 1        | 1B5142133-1A-C            | Child           |
| BAETC-2134                 | Et cetra pc board AS                       | BAETC-2134-1A          | 1        | 1B5142134-1A-C            | Child           |
| BAETC-2136                 | Et cetra pc board AS                       | BAETC-2136-1A          | 1        | 1B5142136-1A-C            | Child           |
| BAETC-2141                 | Et cetra pc board AS                       | BAETC-2141-1A          | 1        | 1B5142141-1A-C            | Child           |
| BAETC-2143                 | Et cetra pc board AS                       | BAETC-2143-1A          | 1        | 1B5142143-1A-C            | Child           |
| BAETC-2155                 | Et cetra pc board AS                       | BAETC-2155-1A          | 1        | 1B5142155-1A-C            | Child           |
| <b>U200</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BADG-2078-1A-P</b>  | <b>1</b> | <b>1B5142078-1A</b>       | <b>N Parent</b> |
| BADG-2078                  | Digital circuit pc board AS                | BADG-2078-1A           | 1        | 1B5142078-1A-C            | N Child         |
| <b>U100</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAASP-2080-1G-P</b> | <b>1</b> | <b>1B5142080-1G</b>       | <b>N Parent</b> |
| BAASP-2080                 | Audio signal processor circuit pc board AS | BAASP-2080-1G          | 1        | 1B5142080-1G-C            | N Child         |
| BAVD-2147                  | Video circuit pc board AS                  | BAVD-2147-1G           | 1        | 1B5142147-1G-C            | N Child         |
| BAVD-2148                  | Video circuit pc board AS                  | BAVD-2148-1G           | 1        | 1B5142148-1G-C            | N Child         |
| BAETC-2149                 | Et cetra pc board AS                       | BAETC-2149-1G          | 1        | 1B5142149-1G-C            | N Child         |
| <b>U140</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAAF-2081-1C-P</b>  | <b>1</b> | <b>1B5142081-1C</b>       | <b>N Parent</b> |
| BAAF-2081                  | Audio frequency circuit pc board AS        | BAAF-2081-1C           | 1        | 1B5142081-1C-C            | Child           |
| BAETC-2157                 | Et cetra pc board AS                       | BAETC-2157-1C          | 1        | 1B5142157-1C-C            | Child           |
| BAAF-2255                  | Audio frequency circuit pc board AS        | BAAF-2255-1C           | 1        | 1B5142255-1C-C            | Child           |
| <b>U150</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAAF-2083-1E-P</b>  | <b>1</b> | <b>1B5142083-1E</b>       | <b>N Parent</b> |
| BAAF-2083                  | Audio frequency circuit pc board AS        | BAAF-2083-1E           | 1        | 1B5142083-1E-C            | N Child         |
| <b>U210</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAHDM-2087-1A-P</b> | <b>1</b> | <b>1B5142087-1A</b>       | <b>N Parent</b> |
| BAHDM-2087                 | HDMI circuit pc board AS                   | BAHDM-2087-1A          | 1        | 1B5142087-1A-C            | N Child         |
| BAETC-2230                 | Et cetra pc board AS                       | BAETC-2230-1A          | 1        | 1B5142230-1A-C            | N Child         |
| <b>U160</b>                | <b>PARENT PC BOARD AS</b>                  | <b>BAPS-2089-1E-P</b>  | <b>1</b> | <b>1B5142089-1E</b>       | <b>N Parent</b> |
| BAPS-2089                  | Power supply circuit pc board AS           | BAPS-2089-1E           | 1        | 1B5142089-1E-C            | N Child         |
| BAETC-2163                 | Et cetra pc board AS                       | BAETC-2163-1E          | 1        | 1B5142163-1E-C            | N Child         |
| BAPS-2164                  | Power supply circuit pc board AS           | BAPS-2164-1E           | 1        | 1B5142164-1E-C            | N Child         |
| BAETC-2165                 | Et cetra pc board AS                       | BAETC-2165-1E          | 1        | 1B5142165-1E-C            | N Child         |
| BAETC-2166                 | Et cetra pc board AS                       | BAETC-2166-1E          | 1        | 1B5142166-1E-C            | N Child         |
| BAETC-2168                 | Et cetra pc board AS                       | BAETC-2168-1E          | 1        | 1B5142168-1E-C            | N Child         |
| BAETC-2169                 | Et cetra pc board AS                       | BAETC-2169-1E          | 1        | 1B5142169-1E-C            | N Child         |
| BAETC-2170                 | Et cetra pc board AS                       | BAETC-2170-1E          | 1        | 1B5142170-1E-C            | N Child         |
| BAETC-2171                 | Et cetra pc board AS                       | BAETC-2171-1E          | 1        | 1B5142171-1E-C            | N Child         |
| BAETC-2174                 | Et cetra pc board AS                       | BAETC-2174-1E          | 1        | 1B5142174-1E-C            | N Child         |

|                                                 |                         |          |                     |          |               |
|-------------------------------------------------|-------------------------|----------|---------------------|----------|---------------|
| BAETC-2202 Et cetra pc board AS                 | BAETC-2202-1E           | 1        | 1B5142202-1E-C      | N        | Child         |
| BARF-2208 Radio frequency circuit pc board AS   | BARF-2208-1E            | 1        | 1B5142208-1E-C      | N        | Child         |
| <b>U170 PARENT PC BOARD AS</b>                  | <b>BAPS-2092-1E-P</b>   | <b>1</b> | <b>1B5142092-1E</b> | <b>N</b> | <b>Parent</b> |
| BAPS-2092 Power supply circuit pc board AS      | BAPS-2092-1E            | 1        | 1B5142092-1E-C      | N        | Child         |
| BAETC-2200 Et cetra pc board AS                 | BAETC-2200-1E           | 1        | 1B5142200-1E-C      | N        | Child         |
| BAETC-2201 Et cetra pc board AS                 | BAETC-2201-1E           | 1        | 1B5142201-1E-C      | N        | Child         |
| BAETC-2204 Et cetra pc board AS                 | BAETC-2204-1E           | 1        | 1B5142204-1E-C      | N        | Child         |
| BAPS-2205 Power supply circuit pc board AS      | BAPS-2205-1E            | 1        | 1B5142205-1E-C      | N        | Child         |
| BAETC-2207 Et cetra pc board AS                 | BAETC-2207-1E           | 1        | 1B5142207-1E-C      | N        | Child         |
| <b>U180 PARENT PC BOARD AS</b>                  | <b>BACLD-2095-1G-P</b>  | <b>1</b> | <b>1B5142095-1G</b> | <b>N</b> | <b>Parent</b> |
| BACLD-2095 ClassD amplifier circuit pc board AS | BACLD-2095-1G           | 1        | 1B5142095-1G-C      | N        | Child         |
| U2208A SHIELD CASE                              | (TUNER-BTM)             | 1        | 27225207A           | N        |               |
| U2208B SHIELD CASE                              | (UPPER)                 | 1        | 27225208            |          |               |
| <b>[ Packing ]</b>                              |                         |          |                     |          |               |
| A6901 PAD                                       | (AS)1100                | 1        | 29092773A           |          |               |
| A6901A PAD                                      | (F)1100                 | {1}      | 29092774A           | N        |               |
| A6901B PAD                                      | (R)1100                 | {1}      | 29092775            | N        |               |
| A6903A UPC LABEL                                | TXRZ1100(B)MDC          | 1        | 29393290            | N        |               |
| A6904 CARTON                                    | TXRZ1100DC              | 1        | 29055657            |          |               |
| A6905 PACKING SHEET                             | .                       | 1        | RHC1023-A           |          | NSP           |
| A6909 CUSHION                                   | (EVA)20*40*T7.5         | 2        | 28141973            |          | NSP           |
| A6910 POLYPROPYLENE TAPE                        | W50 SBT-70              | 1.8      | 29110200            |          | NSP           |
| A6913 TAPE                                      | FIXLON #813N W12        | 0.1      | 29110230            | N        | NSP           |
| A6921 LABEL                                     | (fwup-wo-dtsx)CNT_ONK   | 1        | 29393452            | N        |               |
| <b>[ Accessories ]</b>                          |                         |          |                     |          |               |
| A6301 FM ANT AS                                 | Type W                  | 1        | 292191              |          |               |
| A6302 POLYETHYLENE BAG                          | .                       | 1        | AHG7117-A           |          | NSP           |
| A6303 MIC                                       | KHM0028-010020          | 1        | 245048A             |          |               |
| A6305 CAUTION CARD/SPE                          | .                       | 1        | ARM7161-A           |          | NSP           |
| A6306 WARRANTY CARD                             | (ONKYO RZ-SERIES)       | 1        | 29365230A           | N        |               |
| A6307 ANTENNA COIL                              | AM LOOP-ANTENNA         | 1        | 232207              |          |               |
| A6307or ANTENNA COIL                            | AM LOOP ANTENNA (S&O)   | (1)      | 232216              |          |               |
| A6308 REMOTE CONTROL TRANSMITTER                | RC-926R                 | 1        | 24140926            |          |               |
| A6309 BATTERY                                   | R6/AA(UM-3)             | 2        | 3010194             |          | NSP           |
| A6311 POWER SUPPLY CORD                         | ADG7118-A(122111/16)    | 1        | 253454VOL           | !        |               |
| A6340 INSTRUCTION MANUAL                        | En(TXRZ1100)_BAS        | 1        | 29402415            |          |               |
| A6341 INSTRUCTION MANUAL                        | U2FrEs(TXRZ1100)_BAS    | 1        | 29402416            |          |               |
| A6345 INSTRUCTION MANUAL                        | SAFETY_ONK_16HI_U3(EnFr | 1        | 29402488            |          |               |
| A6346 INSTRUCTION SHEET                         | (Google cast)           | 1        | 29355956            |          |               |
| A6347 INSTRUCTION SHEET                         | (internet radio-2016)   | 1        | 29355957            |          |               |
| A6350 SHEET                                     | (FLYER-US AVR 2015)     | 1        | 29380164            |          |               |
| A6352 INSTRUCTION SHEET                         | (FWupdate-Fireconnect)  | 1        | 29355967            |          |               |

**BAAF-2081-1C****<Note>**

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.                       | PART NAME            | DESCRIPTION    | Q'TY | PART NO. (SN) | REMARKS      |
|--------------------------------|----------------------|----------------|------|---------------|--------------|
| [ Switches, Terminals, Wires ] |                      |                |      |               |              |
| P140                           | PRINTED WIRING BOARD | BCAF-2081      | {1}  | 25142081      | NSP          |
| P140                           | PRINTED WIRING BOARD | BCETC-2157     | {1}  | 25142157      | <b>N</b> NSP |
| P140                           | PRINTED WIRING BOARD | BCAF-2255      | {1}  | 25142255      | <b>N</b> NSP |
| P4100B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4200B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4300B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4500B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4600B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4700B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4800B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P4900B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P5000B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P5100B                         | SOCKET               | IMSA-9115S-05L | 1    | 25052985      | NSP          |
| P6961                          | TRM(SCREW)           | TER21-0130V    | 1    | 25060533      | <b>N</b> NSP |
| P6962                          | TRM(SCREW)           | ANG7591-A      | 1    | 25060531      | <b>N</b> NSP |
| P9002B                         | SOCKET               | IMSA-9111S-16L | 1    | 25053258      | NSP          |
| P9003B                         | SOCKET               | IMSA-9111S-16L | 1    | 25053258      | NSP          |
| P9004B                         | SOCKET               | IMSA-9111S-28L | 1    | 25053567      | <b>N</b> NSP |

## BAAF-2083-1E

## &lt;Note&gt;

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME                        | DESCRIPTION   | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|----------------------------------|---------------|------|---------------|---------|
| [ Semi-conductors ] |                                  |               |      |               |         |
| Q9001               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9021               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9041               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9101               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9121               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9141               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9161               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9181               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9201               | HYBRID IC                        | NJM5532CG     | 1    | 22243204R2    | NSP     |
| Q9301               | HYBRID IC                        | TC4053BFT     | 1    | 222840533R2TO | NSP     |
| Q9302               | TRANSISTOR                       | DTC115EUA     | 1    | 2218500R2     | NSP     |
| Q9303               | TRANSISTOR                       | DTC124EUA     | 1    | 2218510R2     | NSP     |
| [ Capacitors ]      |                                  |               |      |               |         |
| C9001               | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J  | 1    | 373041034R2   | NSP     |
| C9001or             | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J | (1)  | 376641034R2   | NSP     |
| C9002               | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J  | 1    | 373041034R2   | NSP     |
| C9002or             | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J | (1)  | 376641034R2   | NSP     |
| C9010               | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J  | 1    | 373041034R2   | NSP     |
| C9010or             | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J | (1)  | 376641034R2   | NSP     |
| C9021               | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J  | 1    | 373041034R2   | NSP     |

[illegible]





|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R9302 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R9303 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R9304 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R9305 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R9306 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R9307 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R9308 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |

#### [ Switches, Terminals, Wires ]

|        |                      |                |     |            |       |
|--------|----------------------|----------------|-----|------------|-------|
| P150   | PRINTED WIRING BOARD | BCAF-2083      | {1} | 25142083   | N NSP |
| P9001B | SOCKET               | IMSA-9111S-28L | 1   | 25053567   | NSP   |
| P9002A | PLUG                 | IMSA-9111B-16  | 1   | 25056620   | NSP   |
| P9003A | PLUG                 | IMSA-9111B-16  | 1   | 25056620   | NSP   |
| P9004A | PLUG                 | IMSA-9111B-28  | 1   | 25056742   | NSP   |
| P9005  | TRM(EARTH)           | OG-RM30HF      | 1   | 25060534R2 | NSP   |

#### BAASP-2080-1G

#### <Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

2. The ! mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME       | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|-----------------|-------------|------|---------------|---------|
| [ Semi-conductors ] |                 |             |      |               |         |
| D301                | CHIP TYPE DIODE | DAN217U     | 1    | 223323R2      | NSP     |
| D321                | CHIP TYPE DIODE | DAN217U     | 1    | 223323R2      | NSP     |
| D371                | CHIP TYPE DIODE | DAN217U     | 1    | 223323R2      | NSP     |
| D511                | ZENER DIODE     | DZ2J075M0L  | 1    | 224760750R2   | NSP     |
| D512                | ZENER DIODE     | DZ2J075M0L  | 1    | 224760750R2   | NSP     |
| D532                | ZENER DIODE     | DZ2J039M0L  | 1    | 224760390R2   | NSP     |
| D551                | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D571                | CHIP TYPE DIODE | DAN217U     | 1    | 223323R2      | NSP     |
| Q101                | HYBRID IC       | NJM4585M    | 1    | 22242981R2    | NSP     |
| Q201                | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q203                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q204                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q231                | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q232                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q241                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q242                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q261                | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q263                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q264                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q281                | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q283                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q284                | TRANSISTOR      | IMX25       | 1    | 2218600R2     | NSP     |
| Q2951               | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q2952               | HYBRID IC       | NJM4580V    | 1    | 22242130R2    | NSP     |
| Q301                | HYBRID IC       | BD34704KS2  | 1    | 22242977R3    |         |
| Q321                | HYBRID IC       | NJW1194     | 1    | 22242893R2    |         |

|                |                                  |                     |     |               |       |
|----------------|----------------------------------|---------------------|-----|---------------|-------|
| Q351           | HYBRID IC                        | NJM4585M            | 1   | 22242981R2    | NSP   |
| Q371           | HYBRID IC                        | NJW1194             | 1   | 22242893R2    |       |
| Q431           | HYBRID IC                        | NJM4585M            | 1   | 22242981R2    | NSP   |
| Q441           | HYBRID IC                        | NJM4565M-D          | 1   | 22241383R2    | NSP   |
| Q471           | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q472           | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q511           | TRANSISTOR                       | 2SD2400A-D          | 1   | 2202734       |       |
| Q512           | TRANSISTOR                       | 2SB1569A-D          | 1   | 2202724       |       |
| Q541           | TRANSISTOR                       | 2SA1201-Y           | 1   | 2217554AR2    | NSP   |
| Q542           | TRANSISTOR                       | 2SC5712             | 1   | 2217310R2     | NSP   |
| Q543           | TRANSISTOR                       | DTC143EUA           | 1   | 2218520R2     | NSP   |
| Q551           | TRANSISTOR                       | 2SA1576A            | 1   | 2218540R2     | NSP   |
| Q552           | TRANSISTOR                       | DTC124EUA           | 1   | 2218510R2     | NSP   |
| Q571           | HYBRID IC                        | BD34704KS2          | 1   | 22242977R3    |       |
| Q601           | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q603           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q604           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q6101          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q6121          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q6141          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q6161          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q6181          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q6201          | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q621           | HYBRID IC                        | NJM4580V            | 1   | 22242130R2    | NSP   |
| Q623           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q624           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q671           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q681           | TRANSISTOR                       | IMX25               | 1   | 2218600R2     | NSP   |
| Q801           | HYBRID IC                        | 74VHC4051AFT        | 1   | 22274051ER2TO | NSP   |
| Q802           | HYBRID IC                        | 74VHC4053AFT        | 1   | 22274053ER2TO | NSP   |
| Q803           | HYBRID IC                        | NJM41041VC3-TE1     | 1   | 22242931R2    | NSP   |
| Q871           | TRANSISTOR                       | 2SA1576A            | 1   | 2218540R2     | NSP   |
| Q872           | TRANSISTOR                       | 2SA1576A            | 1   | 2218540R2     | NSP   |
| Q873           | TRANSISTOR                       | 2SA1576A            | 1   | 2218540R2     | NSP   |
| [ Capacitors ] |                                  |                     |     |               |       |
| C101           | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1     | 1   | 342102214R1   | NSP   |
| C102           | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1     | 1   | 342102214R1   | NSP   |
| C103           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST   | N     |
| C104           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST   | N     |
| C105           | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-102J        | 1   | 373041024R2   | NSP   |
| C105or         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-102J       | (1) | 376641024R2   | N NSP |
| C106           | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-102J        | 1   | 373041024R2   | NSP   |
| C106or         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-102J       | (1) | 376641024R2   | N NSP |
| C107           | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTEF332JE      | 1   | 376593324T    | NSP   |
| C108           | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTEF332JE      | 1   | 376593324T    | NSP   |
| C109           | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTEF123JE      | 1   | 376591234T    | NSP   |
| C110           | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTEF123JE      | 1   | 376591234T    | NSP   |
| C115           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST   | N     |
| C116           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST   | N     |
| C117           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST   | N     |
| C118           | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST   | N     |
| C119           | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-472J        | 1   | 373044724R2   | NSP   |
| C119or         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-472J       | (1) | 376644724R2   | NSP   |
| C120           | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-472J        | 1   | 373044724R2   | NSP   |
| C120or         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-472J       | (1) | 376644724R2   | NSP   |

|        |                                  |                     |     |             |     |
|--------|----------------------------------|---------------------|-----|-------------|-----|
| C121   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |
| C122   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |
| C123   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C123or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C124   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C124or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C129   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C129or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C133   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C133or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C134   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C134or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C135   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C136   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C139   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C140   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C143   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C144   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C145   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C146   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C153   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C154   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C155   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C156   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C163   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C164   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C165   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C166   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C173   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-151J      | 1   | 3400046R1   | NSP |
| C174   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-151J      | 1   | 3400046R1   | NSP |
| C175   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C176   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C183   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C184   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-271J      | 1   | 3400044R1   | NSP |
| C185   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C186   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C203   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C204   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C205   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C206   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C209   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C210   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C211   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C211or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C212   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C212or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C232   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C233   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C235   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C236   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C236or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C237   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C237or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C241   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C241or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |

|         |                                  |                     |     |             |     |
|---------|----------------------------------|---------------------|-----|-------------|-----|
| C242    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C242or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C245    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-331J        | 1   | 373023314R2 | NSP |
| C245or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-331J       | (1) | 376623314R2 | NSP |
| C246    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-331J        | 1   | 373023314R2 | NSP |
| C246or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-331J       | (1) | 376623314R2 | NSP |
| C263    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C264    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C265    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C266    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C269    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C270    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C271    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C271or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C272    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C272or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C283    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C284    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C285    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C286    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C289    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C290    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C291    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C291or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C292    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C292or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2955   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2956   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2957   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2957or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2958   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2958or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C301    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C302    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C303    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C303or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C304    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C304or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C321    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C322    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C323    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C324    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C325    | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C326    | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C327    | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C328    | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C329    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-4.7M(UTSP) | 1   | 397580477ST | N   |
| C330    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-4.7M(UTSP) | 1   | 397580477ST | N   |
| C331    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C337    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C338    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C341    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C341or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C342    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C342or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |

|        |                                  |                     |     |             |     |
|--------|----------------------------------|---------------------|-----|-------------|-----|
| C353   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C354   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C355   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C355or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C356   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C356or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C371   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C372   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C373   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C374   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C375   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C376   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C377   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C378   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C379   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-4.7M(UTSP) | 1   | 397580477ST | N   |
| C380   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-4.7M(UTSP) | 1   | 397580477ST | N   |
| C381   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C387   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C388   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C391   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C391or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C392   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C392or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C431   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C432   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C435   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C435or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C436   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C436or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C441   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-1M(UTSP)   | 1   | 397580107ST | N   |
| C442   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-1M(UTSP)   | 1   | 397580107ST | N   |
| C449   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-470M(UTSP) | 1   | 397544717T  |     |
| C450   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-470M(UTSP) | 1   | 397544717T  |     |
| C453   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C454   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C455   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C455or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C456   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C456or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C475   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C476   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C477   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C477or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C478   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C478or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C481   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C482   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C492   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1     | 1   | 342101002R1 | NSP |
| C493   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1     | 1   | 342101002R1 | NSP |
| C501   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C502   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C519   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M(UTSP) | 1   | 397580227ST | N   |
| C520   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M(UTSP) | 1   | 397580227ST | N   |
| C529   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C530   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |

|         |                                  |                     |     |             |     |
|---------|----------------------------------|---------------------|-----|-------------|-----|
| C543    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C545    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C546    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C547    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C547or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C551    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C552    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W16V-100M(UTSP) | 1   | 397541017ST | N   |
| C571    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C572    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C575    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C575or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C576    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C576or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C581    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C582    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C583    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C584    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C585    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C586    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C603    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C604    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C605    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C606    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C609    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C610    | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C6101   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6101or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6102   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6102or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C611    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C611or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C612    | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C612or  | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6121   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6121or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6122   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6122or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6141   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6141or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6142   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6142or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6161   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6161or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6162   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6162or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6181   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6181or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6182   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6182or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6201   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6201or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C6202   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C6202or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C623    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C624    | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |

|        |                                  |                     |     |             |     |
|--------|----------------------------------|---------------------|-----|-------------|-----|
| C625   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C626   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C629   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C630   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C631   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C631or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C632   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C632or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C641   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C642   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C643   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C643or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C644   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C644or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C671   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C672   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C675   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C676   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C681   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C682   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C685   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C686   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C701   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C702   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C801   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C802   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C803   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C804   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C805   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C806   | SMG C                            | CE04W50V-10M(SMG)   | 1   | 395081007ST |     |
| C821   | SMG C                            | CE04W16V-100M(SMG)  | 1   | 395041017ST |     |
| C822   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C831   | SMG C                            | CE04W16V-100M(SMG)  | 1   | 395041017ST |     |
| C832   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C841   | SMG C                            | CE04W16V-100M(SMG)  | 1   | 395041017ST |     |
| C842   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C843   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C844   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C845   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C846   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C847   | SMG C                            | CE04W50V-1M(SMG)    | 1   | 395080107ST |     |
| C848   | SMG C                            | CE04W50V-1M(SMG)    | 1   | 395080107ST |     |
| C849   | SMG C                            | CE04W50V-1M(SMG)    | 1   | 395080107ST |     |
| C851   | SMG C                            | CE04W6.3V-470M(SMG) | 1   | 395024717T  |     |
| C852   | SMG C                            | CE04W6.3V-470M(SMG) | 1   | 395024717T  |     |
| C853   | SMG C                            | CE04W6.3V-470M(SMG) | 1   | 395024717T  |     |
| C871   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1   | 332071065R2 | NSP |
| C872   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1   | 332071065R2 | NSP |
| C873   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1   | 332071065R2 | NSP |
| C874   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1   | 332011045R1 | NSP |
| C875   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1   | 332011045R1 | NSP |
| C876   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1   | 332011045R1 | NSP |
| C895   | SMG C                            | CE04W16V-100M(SMG)  | 1   | 395041017ST |     |
| C901   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1     | 1   | 342101002R1 | NSP |
| C902   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |

|               |                             |                 |   |             |     |
|---------------|-----------------------------|-----------------|---|-------------|-----|
| C951          | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-100D1 | 1 | 342101002R1 | NSP |
| C952          | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-100D1 | 1 | 342101002R1 | NSP |
| [ Resistors ] |                             |                 |   |             |     |
| R101          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R102          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R103          | CHIP TYPE CARBON RESISTOR   | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R104          | CHIP TYPE CARBON RESISTOR   | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R105          | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R106          | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R107          | CHIP TYPE CARBON RESISTOR   | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R108          | CHIP TYPE CARBON RESISTOR   | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R109          | CHIP TYPE CARBON RESISTOR   | RN72K1J-274JE   | 1 | 435032744R1 | NSP |
| R110          | CHIP TYPE CARBON RESISTOR   | RN72K1J-274JE   | 1 | 435032744R1 | NSP |
| R111          | CHIP TYPE CARBON RESISTOR   | RN72K1J-561JE   | 1 | 435035614R1 | NSP |
| R112          | CHIP TYPE CARBON RESISTOR   | RN72K1J-561JE   | 1 | 435035614R1 | NSP |
| R113          | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R114          | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R115          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R116          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R117          | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R118          | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R121          | C-METAL R                   | RN72K2B-100JE2  | 1 | 435111004R1 | NSP |
| R122          | C-METAL R                   | RN72K2B-100JE2  | 1 | 435111004R1 | NSP |
| R131          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R132          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R133          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R134          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R139          | CHIP TYPE CARBON RESISTOR   | RN72K1J-120JE   | 1 | 435031204R1 | NSP |
| R140          | CHIP TYPE CARBON RESISTOR   | RN72K1J-120JE   | 1 | 435031204R1 | NSP |
| R141          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R142          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R143          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R144          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R151          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R152          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R153          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R154          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R161          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R162          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R163          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R164          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R171          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R172          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R173          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R174          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R181          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R182          | CHIP TYPE CARBON RESISTOR   | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R183          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R184          | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R194          | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R195          | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R198          | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R199          | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R203          | CHIP TYPE CARBON RESISTOR   | RN72K1J-271JE   | 1 | 435032714R1 | NSP |
| R204          | CHIP TYPE CARBON RESISTOR   | RN72K1J-271JE   | 1 | 435032714R1 | NSP |

[illegible]

|       |                           |               |   |             |     |
|-------|---------------------------|---------------|---|-------------|-----|
| R278  | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R279  | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R280  | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R281  | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R282  | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R283  | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE | 1 | 435032714R1 | NSP |
| R284  | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE | 1 | 435032714R1 | NSP |
| R287  | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R288  | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R289  | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE | 1 | 435031214R1 | NSP |
| R290  | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE | 1 | 435031214R1 | NSP |
| R2901 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2902 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1 | 435032204R1 | NSP |
| R2903 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1 | 435032204R1 | NSP |
| R2904 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1 | 435032204R1 | NSP |
| R2905 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2906 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2907 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2908 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2909 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R291  | CHIP TYPE CARBON RESISTOR | RN72K1J-101FE | 1 | 435031012R1 | NSP |
| R2910 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2911 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2912 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2913 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |
| R2914 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2915 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R292  | CHIP TYPE CARBON RESISTOR | RN72K1J-101FE | 1 | 435031012R1 | NSP |
| R2925 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R2926 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R2927 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2928 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2929 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R293  | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R2930 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2931 | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R2932 | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R2933 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R2934 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R2935 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R2936 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R294  | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R295  | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R2951 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE | 1 | 435036824R1 | NSP |
| R2952 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE | 1 | 435036824R1 | NSP |
| R2955 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE | 1 | 435033924R1 | NSP |
| R2956 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE | 1 | 435033924R1 | NSP |
| R2957 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2958 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R2959 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE | 1 | 435033922R1 | NSP |
| R296  | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R2960 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE | 1 | 435033922R1 | NSP |
| R2961 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE | 1 | 435033922R1 | NSP |
| R2962 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE | 1 | 435033922R1 | NSP |
| R2963 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1 | 435031004R1 | NSP |

|         |                                  |                |     |             |     |
|---------|----------------------------------|----------------|-----|-------------|-----|
| R2964   | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R2965   | CHIP TYPE CARBON RESISTOR        | RN72K1J-392FE  | 1   | 435033922R1 | NSP |
| R2966   | CHIP TYPE CARBON RESISTOR        | RN72K1J-392FE  | 1   | 435033922R1 | NSP |
| R2969   | CHIP TYPE CARBON RESISTOR        | RN72K1J-392FE  | 1   | 435033922R1 | NSP |
| R297    | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1 | NSP |
| R2970   | CHIP TYPE CARBON RESISTOR        | RN72K1J-392FE  | 1   | 435033922R1 | NSP |
| R2971   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J   | 1   | 373041034R2 | NSP |
| R2971or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J  | (1) | 376641034R2 | NSP |
| R2972   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J   | 1   | 373041034R2 | NSP |
| R2972or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J  | (1) | 376641034R2 | NSP |
| R298    | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1 | NSP |
| R2981   | CHIP TYPE CARBON RESISTOR        | RN72K1J-821JE  | 1   | 435038214R1 | NSP |
| R2982   | CHIP TYPE CARBON RESISTOR        | RN72K1J-821JE  | 1   | 435038214R1 | NSP |
| R299    | CHIP TYPE CARBON RESISTOR        | RN72K1J-224JE  | 1   | 435032244R1 | NSP |
| R2991   | CHIP TYPE CARBON RESISTOR        | RN72K1J-821JE  | 1   | 435038214R1 | NSP |
| R2992   | CHIP TYPE CARBON RESISTOR        | RN72K1J-821JE  | 1   | 435038214R1 | NSP |
| R300    | CHIP TYPE CARBON RESISTOR        | RN72K1J-224JE  | 1   | 435032244R1 | NSP |
| R301    | C-METAL R                        | RN72K2B-105JE2 | 1   | 435111054R1 | NSP |
| R302    | C-METAL R                        | RN72K2B-105JE2 | 1   | 435111054R1 | NSP |
| R303    | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE  | 1   | 435031024R1 | NSP |
| R304    | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE  | 1   | 435031024R1 | NSP |
| R305    | CHIP TYPE CARBON RESISTOR        | RN72K1J-010JE  | 1   | 435030104R1 | NSP |
| R306    | CHIP TYPE CARBON RESISTOR        | RN72K1J-010JE  | 1   | 435030104R1 | NSP |
| R307    | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R311    | CHIP TYPE CARBON RESISTOR        | RN72K1J-270JE  | 1   | 435032704R1 | NSP |
| R312    | CHIP TYPE CARBON RESISTOR        | RN72K1J-270JE  | 1   | 435032704R1 | NSP |
| R313    | CHIP TYPE CARBON RESISTOR        | RN72K1J-121JE  | 1   | 435031214R1 | NSP |
| R314    | CHIP TYPE CARBON RESISTOR        | RN72K1J-121JE  | 1   | 435031214R1 | NSP |
| R315    | CHIP TYPE CARBON RESISTOR        | RN72K1J-101JE  | 1   | 435031014R1 | NSP |
| R316    | CHIP TYPE CARBON RESISTOR        | RN72K1J-101JE  | 1   | 435031014R1 | NSP |
| R321    | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R322    | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R323    | CHIP TYPE CARBON RESISTOR        | RN72K1J-472JE  | 1   | 435034724R1 | NSP |
| R324    | CHIP TYPE CARBON RESISTOR        | RN72K1J-472JE  | 1   | 435034724R1 | NSP |
| R325    | CHIP TYPE CARBON RESISTOR        | RN72K1J-010JE  | 1   | 435030104R1 | NSP |
| R326    | CHIP TYPE CARBON RESISTOR        | RN72K1J-010JE  | 1   | 435030104R1 | NSP |
| R327    | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1 | NSP |
| R328    | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1 | NSP |
| R329    | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE  | 1   | 435031024R1 | NSP |
| R330    | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE  | 1   | 435031024R1 | NSP |
| R331    | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE  | 1   | 435031024R1 | NSP |
| R335    | C-METAL R                        | RN72K2B-000JE2 | 1   | 435110004R1 | NSP |
| R336    | C-METAL R                        | RN72K2B-000JE2 | 1   | 435110004R1 | NSP |
| R337    | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R338    | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE  | 1   | 435031004R1 | NSP |
| R345    | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1 | NSP |
| R351    | CHIP TYPE CARBON RESISTOR        | RN72K1J-822JE  | 1   | 435038224R1 | NSP |
| R352    | CHIP TYPE CARBON RESISTOR        | RN72K1J-822JE  | 1   | 435038224R1 | NSP |
| R353    | CHIP TYPE CARBON RESISTOR        | RN72K1J-152JE  | 1   | 435031524R1 | NSP |
| R354    | CHIP TYPE CARBON RESISTOR        | RN72K1J-152JE  | 1   | 435031524R1 | NSP |
| R355    | CHIP TYPE CARBON RESISTOR        | RN72K1J-123JE  | 1   | 435031234R1 | NSP |
| R356    | CHIP TYPE CARBON RESISTOR        | RN72K1J-123JE  | 1   | 435031234R1 | NSP |
| R357    | CHIP TYPE CARBON RESISTOR        | RN72K1J-822JE  | 1   | 435038224R1 | NSP |
| R358    | CHIP TYPE CARBON RESISTOR        | RN72K1J-822JE  | 1   | 435038224R1 | NSP |
| R359    | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1 | NSP |

|      |                           |                |   |             |     |
|------|---------------------------|----------------|---|-------------|-----|
| R360 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R361 | CHIP TYPE CARBON RESISTOR | RN72K1J-120JE  | 1 | 435031204R1 | NSP |
| R362 | CHIP TYPE CARBON RESISTOR | RN72K1J-120JE  | 1 | 435031204R1 | NSP |
| R365 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R366 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R371 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R372 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R373 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R374 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R375 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R376 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R377 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R378 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R379 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R380 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R381 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R385 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R386 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R387 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R388 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R389 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R390 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R401 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R402 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R405 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R407 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R408 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R411 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R412 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R415 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R416 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R419 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R420 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R423 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R424 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R427 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R428 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R431 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R432 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R433 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R434 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R435 | CHIP TYPE CARBON RESISTOR | RN72K1J-822JE  | 1 | 435038224R1 | NSP |
| R436 | CHIP TYPE CARBON RESISTOR | RN72K1J-822JE  | 1 | 435038224R1 | NSP |
| R437 | CHIP TYPE CARBON RESISTOR | RN72K1J-822JE  | 1 | 435038224R1 | NSP |
| R438 | CHIP TYPE CARBON RESISTOR | RN72K1J-822JE  | 1 | 435038224R1 | NSP |
| R441 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R442 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R445 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R446 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R447 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R448 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R449 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R450 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R451 | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE  | 1 | 435035624R1 | NSP |
| R452 | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE  | 1 | 435035624R1 | NSP |

|      |                           |                |   |             |     |
|------|---------------------------|----------------|---|-------------|-----|
| R453 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R454 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R455 | CHIP TYPE CARBON RESISTOR | RN72K2E-180JE  | 1 | 435221804R1 | NSP |
| R456 | CHIP TYPE CARBON RESISTOR | RN72K2E-180JE  | 1 | 435221804R1 | NSP |
| R459 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R460 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R465 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R466 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R471 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R472 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R475 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R476 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R477 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R478 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R479 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R480 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R481 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R482 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R483 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R484 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R485 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R486 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R489 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R490 | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE  | 1 | 435033922R1 | NSP |
| R496 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R497 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R501 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R502 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R503 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R505 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R506 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R507 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R511 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R512 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R513 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R514 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R515 | C-METAL R                 | RN72K2B-475JE2 | 1 | 435114754R1 | NSP |
| R516 | C-METAL R                 | RN72K2B-182JE2 | 1 | 435111824R1 | NSP |
| R517 | CHIP TYPE CARBON RESISTOR | RN72K1J-512JE  | 1 | 435035124R1 | NSP |
| R518 | CHIP TYPE CARBON RESISTOR | RN72K1J-512JE  | 1 | 435035124R1 | NSP |
| R519 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R520 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R522 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R531 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R532 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R541 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R542 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R543 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R544 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R545 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R546 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R547 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R550 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R551 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R552 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |

[illegible]

[illegible]

|      |                           |                |   |             |     |
|------|---------------------------|----------------|---|-------------|-----|
| R676 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R677 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R678 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R681 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R682 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R683 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R684 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R685 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R686 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R687 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R688 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R699 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R703 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R704 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R801 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R802 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R803 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R804 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R805 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R806 | CHIP TYPE CARBON RESISTOR | RN72K1J-750FE  | 1 | 435037502R1 | NSP |
| R811 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R812 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R821 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R822 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R823 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R824 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R825 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R826 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R827 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R828 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R829 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R830 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R831 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R832 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R833 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R834 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R835 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R836 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R837 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R838 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R841 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R842 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R843 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R844 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R845 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R846 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R847 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R848 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R851 | CHIP TYPE CARBON RESISTOR | RN72K1J-680FE  | 1 | 435036802R1 | NSP |
| R852 | CHIP TYPE CARBON RESISTOR | RN72K1J-680FE  | 1 | 435036802R1 | NSP |
| R853 | CHIP TYPE CARBON RESISTOR | RN72K1J-680FE  | 1 | 435036802R1 | NSP |
| R854 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R855 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R856 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R871 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |

|                                |                           |                           |     |              |       |
|--------------------------------|---------------------------|---------------------------|-----|--------------|-------|
| R872                           | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE             | 1   | 435031044R1  | NSP   |
| R873                           | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE             | 1   | 435031044R1  | NSP   |
| R874                           | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE             | 1   | 435033334R1  | NSP   |
| R875                           | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE             | 1   | 435033334R1  | NSP   |
| R876                           | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE             | 1   | 435033334R1  | NSP   |
| R877                           | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE             | 1   | 435032714R1  | NSP   |
| R878                           | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE             | 1   | 435032714R1  | NSP   |
| R879                           | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE             | 1   | 435032714R1  | NSP   |
| R889                           | C-METAL R                 | RN72K2B-000JE2            | 1   | 435110004R1  | NSP   |
| R894                           | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE             | 1   | 435030004R1  | NSP   |
| R895                           | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE             | 1   | 435030004R1  | NSP   |
| R896                           | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE             | 1   | 435030004R1  | NSP   |
| R901                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R902                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R903                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R904                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R905                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R906                           | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE             | 1   | 435030224R1  | NSP   |
| R951                           | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE             | 1   | 435031214R1  | NSP   |
| R952                           | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE             | 1   | 435031214R1  | NSP   |
| [ Switches, Terminals, Wires ] |                           |                           |     |              |       |
| P100                           | PRINTED WIRING BOARD      | BCASP-2080                | {1} | 25142080     | N NSP |
| P100                           | PRINTED WIRING BOARD      | BCASP-2080                | 1   | 25142080A    | N NSP |
| P100                           | PRINTED WIRING BOARD      | BCVD-2147                 | {1} | 25142147     | N NSP |
| P100                           | PRINTED WIRING BOARD      | BCVD-2148                 | {1} | 25142148     | N NSP |
| P100                           | PRINTED WIRING BOARD      | BCETC-2149                | {1} | 25142149     | N NSP |
| P100                           | PRINTED WIRING BOARD      | BCETC-2150                | {1} | 25142150     | N NSP |
| P101B                          | SOCKET                    | NSCT-7P2100               | 1   | 25052203     | NSP   |
| P111                           | PIN JACK                  | RCA-207A-01               | 1   | 25046059     |       |
| P1304B                         | SOCKET                    | IMSA-9850S-30             | 1   | 25053215     | NSP   |
| P1305B                         | SOCKET                    | IMSA-9850S-30             | 1   | 25053215     | NSP   |
| P131                           | PIN JACK                  | MSD-242V-55-NI-FE-ABS(O13 | 1   | 25046039     |       |
| P141                           | PIN JACK                  | MSD-244V-77-NI-FE-ABS(O13 | 1   | 25046038     |       |
| P1601B                         | SOCKET                    | IMSA-9850S-18             | 1   | 25053209     | NSP   |
| P161                           | PIN JACK                  | MSD-244V-77-NI-FE-ABS(O13 | 1   | 25046038     |       |
| P181                           | PIN JACK                  | MSD-242V-55-NI-FE-ABS(O13 | 1   | 25046039     |       |
| P2001A                         | PLUG                      | IMSA-9111B-30             | 1   | 25056700     | NSP   |
| P2002A                         | PLUG                      | IMSA-9111B-30             | 1   | 25056700     | NSP   |
| P201                           | PIN JACK                  | MSD-242V-55-NI-FE-ABS(O13 | 1   | 25046039     |       |
| P231                           | PIN JACK                  | MSP-2510V-01NILF          | 1   | 25046042     |       |
| P241                           | PIN JACK                  | MSD-242V-02-NI-FE-ABS(O13 | 1   | 25046041     |       |
| P261                           | PIN JACK                  | MSD-244V-77-NI-FE-ABS(O13 | 1   | 25046038     |       |
| P2901B                         | SOCKET                    | IMSA-9111S-22L            | 1   | 25053565     | NSP   |
| P501A                          | SOCKET                    | IMSA-9607S-15F            | 1   | 25053582     | NSP   |
| P511A                          | WIRE HARNESS ASSEMBLY     | NSAS-14P2417              | 1   | 2009991553UL | NSP   |
| P591B                          | SOCKET                    | IMSA-9111S-24L            | 1   | 25053259     | NSP   |
| P592B                          | SOCKET                    | IMSA-9111S-28L            | 1   | 25053567     | NSP   |
| P601                           | PIN JACK                  | MSD-244V-77-NI-FE-ABS(O13 | 1   | 25046038     |       |
| P661B                          | SOCKET                    | IMSA-9111S-28L            | 1   | 25053567     | NSP   |
| P671                           | PIN JACK                  | MSD-244V-77-NI-FE-ABS(O13 | 1   | 25046038     |       |
| P701                           | PIN JACK                  | MSP-2510V-26-NI-FE(O133)  | 1   | 25046037     |       |
| P702                           | PIN JACK                  | MSP-2510V-26-NI-FE(O133)  | 1   | 25046037     |       |
| P761                           | TRM(SCREW)                | TER21-0130V               | 1   | 25060533     | NSP   |
| P801                           | PIN JACK                  | MSD-243V-39-NI-FE-ABS(O13 | 1   | 25046043     |       |
| P802                           | PIN JACK                  | MSD-243V-39-NI-FE-ABS(O13 | 1   | 25046043     |       |

|       |                       |                           |   |              |     |
|-------|-----------------------|---------------------------|---|--------------|-----|
| P803  | PIN JACK              | MSD-243V-39-NI-FE-ABS(O13 | 1 | 25046043     |     |
| P804A | PLUG                  | IMSA-9111B-06             | 1 | 25056733     | NSP |
| P804B | SOCKET                | IMSA-9111S-06L            | 1 | 25053558     | NSP |
| P951  | SOCKET                | MDS-09P-V-01(DSUB9P)      | 1 | 25053363     | NSP |
| P961A | WIRE HARNESS ASSEMBLY | NSAS-4P2421               | 1 | 2009991557UL | NSP |
| RL551 | RELAY                 | NRL-2P2A-DC24-208         | 1 | 25065728     |     |

## BACLD-2095-1G

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME       | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|-----------------|-------------|------|---------------|---------|
| [ Semi-conductors ] |                 |             |      |               |         |
| D4005               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4011               | CHIP TYPE DIODE | DAN202U     | 1    | 223322R2      | NSP     |
| D4012               | CHIP TYPE DIODE | DAN202U     | 1    | 223322R2      | NSP     |
| D4013               | ZENER DIODE     | DZ2J240M0L  | 1    | 224762400R2   | NSP     |
| D4014               | ZENER DIODE     | DZ2J240M0L  | 1    | 224762400R2   | NSP     |
| D4015               | ZENER DIODE     | DZ2J270M0L  | 1    | 224762700R2   | NSP     |
| D4016               | CHIP TYPE DIODE | DAN202U     | 1    | 223322R2      | NSP     |
| D4017               | ZENER DIODE     | DZ2J180M0L  | 1    | 224761800R2   | NSP     |
| D4018               | ZENER DIODE     | DZ2J240M0L  | 1    | 224762400R2   | NSP     |
| D4019               | ZENER DIODE     | DZ2J240M0L  | 1    | 224762400R2   | NSP     |
| D4020               | ZENER DIODE     | DZ2J270M0L  | 1    | 224762700R2   | NSP     |
| D4021               | ZENER DIODE     | DZ2J180M0L  | 1    | 224761800R2   | NSP     |
| D4022               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4023               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4102               | ZENER DIODE     | DZ2J130M0L  | 1    | 224761300R2   | NSP     |
| D4108               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4109               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4116               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4117               | DIODE           | RF071M2S    | 1    | 22380393R2    | NSP     |
| D4118               | DIODE           | CMH07       | 1    | 22380395R2    | NSP     |
| D4119               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4202               | ZENER DIODE     | DZ2J130M0L  | 1    | 224761300R2   | NSP     |
| D4208               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4209               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4216               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4217               | DIODE           | RF071M2S    | 1    | 22380393R2    | NSP     |
| D4218               | DIODE           | CMH07       | 1    | 22380395R2    | NSP     |
| D4219               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4302               | ZENER DIODE     | DZ2J130M0L  | 1    | 224761300R2   | NSP     |
| D4308               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4309               | DIODE           | RF101L2S    | 1    | 22380394R2    | NSP     |
| D4316               | CHIP TYPE DIODE | 1SS355      | 1    | 223269R2      | NSP     |
| D4317               | DIODE           | RF071M2S    | 1    | 22380393R2    | NSP     |
| D4318               | DIODE           | CMH07       | 1    | 22380395R2    | NSP     |

|       |                 |            |   |             |     |
|-------|-----------------|------------|---|-------------|-----|
| D4319 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4402 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D4408 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4409 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4416 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4417 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D4418 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D4419 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4702 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D4708 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4709 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4716 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4717 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D4718 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D4719 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4802 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D4808 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4809 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4816 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4817 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D4818 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D4819 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4902 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D4908 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4909 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D4912 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D4916 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4917 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D4918 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D4919 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D4922 | ZENER DIODE     | DZ2J130M0L | 1 | 224761300R2 | NSP |
| D6508 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D6509 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D6516 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D6517 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D6518 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D6519 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D6608 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D6609 | DIODE           | RF101L2S   | 1 | 22380394R2  | NSP |
| D6616 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| D6617 | DIODE           | RF071M2S   | 1 | 22380393R2  | NSP |
| D6618 | DIODE           | CMH07      | 1 | 22380395R2  | NSP |
| D6619 | CHIP TYPE DIODE | 1SS355     | 1 | 223269R2    | NSP |
| Q4000 | TRANSISTOR      | DTC124EUA  | 1 | 2218510R2   | NSP |
| Q4001 | TRANSISTOR      | 2SA1576A   | 1 | 2218540R2   | NSP |
| Q4002 | TRANSISTOR      | DTC124EUA  | 1 | 2218510R2   | NSP |
| Q4003 | TRANSISTOR      | DTC124EUA  | 1 | 2218510R2   | NSP |
| Q4004 | TRANSISTOR      | DTA124EUA  | 1 | 2218450R2   | NSP |
| Q4005 | TRANSISTOR      | DTC114TUA  | 1 | 2218480R2   | NSP |
| Q4006 | TRANSISTOR      | DTA124EUA  | 1 | 2218450R2   | NSP |
| Q4007 | TRANSISTOR      | DTC114TUA  | 1 | 2218480R2   | NSP |
| Q4008 | TRANSISTOR      | DTA124EUA  | 1 | 2218450R2   | NSP |
| Q4009 | TRANSISTOR      | DTC114TUA  | 1 | 2218480R2   | NSP |
| Q4010 | TRANSISTOR      | DTA124EUA  | 1 | 2218450R2   | NSP |
| Q4011 | TRANSISTOR      | DTC114TUA  | 1 | 2218480R2   | NSP |

|       |            |                         |   |               |     |
|-------|------------|-------------------------|---|---------------|-----|
| Q4012 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4013 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4014 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4015 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4016 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4017 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4018 | TRANSISTOR | DTA124EUA               | 1 | 2218450R2     | NSP |
| Q4019 | TRANSISTOR | DTC114TUA               | 1 | 2218480R2     | NSP |
| Q4020 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4021 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4022 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4023 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4024 | TRANSISTOR | 2SC3906K                | 1 | 2218550R2     | NSP |
| Q4025 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4026 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4027 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4028 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4029 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4030 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4031 | TRANSISTOR | DTA124EUA               | 1 | 2218450R2     | NSP |
| Q4032 | TRANSISTOR | DTC114TUA               | 1 | 2218480R2     | NSP |
| Q4033 | TRANSISTOR | HN1C01FU                | 1 | 2218570R2     | NSP |
| Q4035 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4036 | TRANSISTOR | DTC124EUA               | 1 | 2218510R2     | NSP |
| Q4037 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4038 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4041 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4042 | TRANSISTOR | DTC124EUA               | 1 | 2218510R2     | NSP |
| Q4050 | HYBRID IC  | BU4094BCFV              | 1 | 22242982R2    | NSP |
| Q4051 | HYBRID IC  | TA76L431FB              | 1 | 22242986R2    | NSP |
| Q4052 | HYBRID IC  | BU7262SFVM              | 1 | 22242983R2    | NSP |
| Q4053 | HYBRID IC  | TC74VHCT08AFK           | 1 | 22242987R2    | NSP |
| Q4054 | HYBRID IC  | TC74VHCT08AFK           | 1 | 22242987R2    | NSP |
| Q4055 | HYBRID IC  | 78M05HF(NJM78M05DL1A-TE | 1 | 222780055R2JR | NSP |
| Q4056 | HYBRID IC  | 78M06HF(NJM78M06DL1A)   | 1 | 222780065R2JR | NSP |
| Q4057 | HYBRID IC  | 79M06(NJM79M06DL1A)     | 1 | 222790065R2JR | NSP |
| Q4100 | TRANSISTOR | 2SD2704K                | 1 | 2218130R2     | NSP |
| Q4101 | TRANSISTOR | IRF6775MPBF             | 1 | 2204290AR2    | NSP |
| Q4102 | TRANSISTOR | IRF6775MPBF             | 1 | 2204290AR2    | NSP |
| Q4103 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4104 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4105 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4106 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4107 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4108 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4109 | TRANSISTOR | 2SC2412K-R              | 1 | 2214653R2     | NSP |
| Q4110 | TRANSISTOR | 2SA1514K                | 1 | 2218530R2     | NSP |
| Q4111 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4112 | TRANSISTOR | 2SC2412K-R              | 1 | 2214653R2     | NSP |
| Q4114 | TRANSISTOR | 2SA1576A                | 1 | 2218540R2     | NSP |
| Q4117 | TRANSISTOR | 2SC4081                 | 1 | 2218560R2     | NSP |
| Q4120 | HYBRID IC  | TLC071IDR               | 1 | 22243071R2    | NSP |
| Q4121 | HYBRID IC  | IRS20957STRPBF          | 1 | 22243072R2    | NSP |
| Q4200 | TRANSISTOR | 2SD2704K                | 1 | 2218130R2     | NSP |
| Q4201 | TRANSISTOR | IRF6775MPBF             | 1 | 2204290AR2    | NSP |

|       |            |                |   |            |     |
|-------|------------|----------------|---|------------|-----|
| Q4202 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4203 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4204 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4205 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4206 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4207 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4208 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4209 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4210 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4211 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4214 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4217 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4220 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4221 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q4222 | HYBRID IC  | NJM5532CG      | 1 | 22243204R2 | NSP |
| Q4300 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q4301 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4302 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4303 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4304 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4305 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4306 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4307 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4308 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4309 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4310 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4311 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4312 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q4314 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4317 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4320 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4321 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q4400 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q4401 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4402 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4403 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4404 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4405 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4406 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4407 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4408 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4409 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4410 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4411 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4414 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4417 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4420 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4421 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q4422 | HYBRID IC  | NJM5532CG      | 1 | 22243204R2 | NSP |
| Q4512 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4700 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q4701 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4702 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4703 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4704 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |

|       |            |                |   |            |     |
|-------|------------|----------------|---|------------|-----|
| Q4705 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4706 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4707 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4708 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4709 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4710 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4711 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4712 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4714 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4717 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4720 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4721 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q4722 | HYBRID IC  | NJM5532CG      | 1 | 22243204R2 | NSP |
| Q4800 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q4801 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4802 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4803 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4804 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4805 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4806 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4807 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4808 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4809 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4810 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4811 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4814 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4817 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4820 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4821 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q4822 | HYBRID IC  | NJM5532CG      | 1 | 22243204R2 | NSP |
| Q4900 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q4901 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4902 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q4903 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4904 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4905 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4906 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4907 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4908 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4909 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4910 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q4911 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4912 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q4914 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q4917 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q4921 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4922 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q4940 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q4941 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q6500 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q6501 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q6502 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q6503 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6504 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6505 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |

|       |            |                |   |            |     |
|-------|------------|----------------|---|------------|-----|
| Q6506 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6507 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6508 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6510 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q6511 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6512 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q6514 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6517 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6520 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q6521 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |
| Q6532 | HYBRID IC  | NJM5532CG      | 1 | 22243204R2 | NSP |
| Q6600 | TRANSISTOR | 2SD2704K       | 1 | 2218130R2  | NSP |
| Q6601 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q6602 | TRANSISTOR | IRF6775MPBF    | 1 | 2204290AR2 | NSP |
| Q6603 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6604 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6605 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6606 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6607 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6608 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6610 | TRANSISTOR | 2SA1514K       | 1 | 2218530R2  | NSP |
| Q6611 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6614 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6617 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6618 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q6619 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6620 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6621 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q6622 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6623 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q6624 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6625 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6626 | TRANSISTOR | 2SC2412K-R     | 1 | 2214653R2  | NSP |
| Q6627 | TRANSISTOR | 2SA1576A       | 1 | 2218540R2  | NSP |
| Q6628 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6629 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q6630 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6631 | TRANSISTOR | 2SA1037AK-R    | 1 | 2217043R2  | NSP |
| Q6632 | TRANSISTOR | 2SC4081        | 1 | 2218560R2  | NSP |
| Q6640 | HYBRID IC  | TLC071IDR      | 1 | 22243071R2 | NSP |
| Q6641 | HYBRID IC  | IRS20957STRPBF | 1 | 22243072R2 | NSP |

#### [ Transformers, Coils ]

|         |            |               |     |            |  |
|---------|------------|---------------|-----|------------|--|
| T4101   | CHOKE COIL | NCH-1543      | 1   | 231368K220 |  |
| T4101or | CHOKE COIL | PI-OR002-0395 | (1) | 231480K220 |  |
| T4201   | CHOKE COIL | NCH-1543      | 1   | 231368K220 |  |
| T4201or | CHOKE COIL | PI-OR002-0395 | (1) | 231480K220 |  |
| T4300   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |
| T4400   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |
| T4701   | CHOKE COIL | NCH-1543      | 1   | 231368K220 |  |
| T4701or | CHOKE COIL | PI-OR002-0395 | (1) | 231480K220 |  |
| T4800   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |
| T4900   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |
| T6500   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |
| T6600   | COIL       | 7G23G-200M-R  | 1   | 231519     |  |

#### [ Capacitors ]

|         |                                  |                        |     |             |              |
|---------|----------------------------------|------------------------|-----|-------------|--------------|
| C4006   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-101J           | 1   | 373041014R2 | NSP          |
| C4006or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-101J          | (1) | 376641014R2 | <b>N</b> NSP |
| C4008   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4009   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-150J1        | 1   | 342101504R1 | NSP          |
| C4010   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4013   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU101KY11608         | 1   | 376921015R2 | NSP          |
| C4016   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-120J1        | 1   | 342101204R1 | NSP          |
| C4022   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5            | 1   | 3700115R2   | NSP          |
| C4023   | SMG C                            | CE04W50V-10M(SMG)      | 1   | 395081007T  |              |
| C4024   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4026   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J           | 1   | 373041034R2 | NSP          |
| C4026or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J          | (1) | 376641034R2 | NSP          |
| C4029   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J           | 1   | 373041034R2 | NSP          |
| C4029or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J          | (1) | 376641034R2 | NSP          |
| C4035   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J           | 1   | 373041034R2 | NSP          |
| C4035or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J          | (1) | 376641034R2 | NSP          |
| C4036   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4040   | CAPACITOR                        | NOJA226M006R           | 1   | 3000131R2   | NSP          |
| C4040or | CAPACITOR                        | NMCA0J226MTRF          | (1) | 3000136R2   | <b>N</b> NSP |
| C4044   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU101KY11608         | 1   | 376921015R2 | NSP          |
| C4048   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU101KY11608         | 1   | 376921015R2 | NSP          |
| C4052   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4053   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4057   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4058   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4059   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4060   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4061   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4062   | ELECTROLYTIC CAPACITOR           | CE69W80V-2700M_LGU1K27 | 1   | 3504536     |              |
| C4063   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)      | 1   | 3500245T    |              |
| C4065   | ELECTROLYTIC CAPACITOR           | CE04W16V-56M(LXY)      | 1   | 3500244T    |              |
| C4066   | ELECTROLYTIC CAPACITOR           | CE04W16V-56M(LXY)      | 1   | 3500244T    |              |
| C4069   | ELECTROLYTIC CAPACITOR           | CE04W16V-56M(LXY)      | 1   | 3500244T    |              |
| C4070   | ELECTROLYTIC CAPACITOR           | CE04W16V-56M(LXY)      | 1   | 3500244T    |              |
| C4071   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4073   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J           | 1   | 373041034R2 | NSP          |
| C4073or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J          | (1) | 376641034R2 | NSP          |
| C4074   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J           | 1   | 373041034R2 | NSP          |
| C4074or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J          | (1) | 376641034R2 | NSP          |
| C4077   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU331KY11608         | 1   | 376923315R2 | NSP          |
| C4078   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216        | 1   | 3769B1015R2 | NSP          |
| C4079   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216        | 1   | 3769B1015R2 | NSP          |
| C4081   | SMG C                            | CE04W16V-100M(SMG)     | 1   | 395041017T  |              |
| C4083   | MICA CAPACITOR                   | DM15C201J5             | 1   | 3600032     |              |
| C4084   | MICA CAPACITOR                   | DM15C201J5             | 1   | 3600032     |              |
| C4091   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-101J           | 1   | 373041014R2 | NSP          |
| C4091or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-101J          | (1) | 376641014R2 | <b>N</b> NSP |
| C4097   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1        | 1   | 342101002R1 | NSP          |
| C4098   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J           | 1   | 373021024R2 | NSP          |
| C4098or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J          | (1) | 376621024R2 | NSP          |
| C4099   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J           | 1   | 373021024R2 | NSP          |
| C4099or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J          | (1) | 376621024R2 | NSP          |
| C4100   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J         | 1   | 374731044T  | NSP          |
| C4101   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J         | 1   | 374734744T  | NSP          |
| C4108   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15)  | 1   | 3500274     |              |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C4109   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4109or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4116   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4119   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4120   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4120or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4121   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4121or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4122   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4122or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4123   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4123or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4126   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4126or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4128   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4128or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4130   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4134   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4136   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4149   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4150   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4156   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4159   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4160   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4161   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4166   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4167   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4171   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C4175   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4180   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4182   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4200   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4201   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4208   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4209   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4209or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4216   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4219   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4220   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4220or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4221   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4221or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4222   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4222or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4223   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4223or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4226   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4226or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4228   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4228or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4230   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4234   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4236   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4249   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4250   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C4256   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4259   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4260   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4261   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4266   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4267   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4275   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4280   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4282   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4300   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4301   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4308   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4309   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4309or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4316   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4319   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4320   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4320or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4321   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4321or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4322   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4322or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4323   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4323or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4326   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4326or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4328   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4328or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4330   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4334   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4336   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4349   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4350   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4356   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4359   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4360   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4361   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4366   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4367   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4371   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C4375   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4380   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4382   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4400   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4401   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4408   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4409   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4409or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4416   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4419   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4420   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4420or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4421   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4421or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4422   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C4422or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4423   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4423or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4426   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4426or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4428   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4428or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4430   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4434   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4436   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4449   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4450   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4456   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4459   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4460   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4461   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4466   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4467   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4475   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4480   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4482   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4571   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C4580   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4680   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4700   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4701   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4708   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4709   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4709or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4714   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4714or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4716   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4719   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4720   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4720or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4721   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4721or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4722   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4722or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4723   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4723or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4726   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4726or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4728   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4728or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4730   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4734   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4736   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4738   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4749   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4750   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4756   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4759   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4760   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4761   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C4766   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4767   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4771   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C4775   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4780   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4782   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4800   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4801   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4808   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4809   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4809or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4816   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4819   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4820   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4820or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4821   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4821or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4822   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4822or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4823   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4823or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4826   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C4826or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4828   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4828or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4830   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4834   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4836   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4849   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4850   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4856   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4859   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4860   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4861   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4866   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4867   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4875   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4880   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4882   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4900   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C4901   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C4908   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C4909   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4909or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4916   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C4919   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C4920   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4920or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4921   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4921or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4922   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C4922or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C4923   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C4923or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C4926   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C4926or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C4928   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C4928or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C4930   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4934   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4936   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C4949   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4950   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C4956   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C4959   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4960   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C4961   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4966   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4967   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C4971   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C4975   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C4980   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C4982   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C5000   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C5000or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C5071   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C5072   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C5184   | ELECTROLYTIC CAPACITOR           | CE04W16V-56M(LXY)     | 1   | 3500244T    |       |
| C5185   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C5186   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C5186or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6500   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C6501   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C6508   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C6509   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6509or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6516   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C6519   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C6520   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C6520or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C6521   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6521or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6522   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6522or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6523   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C6523or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C6526   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C6526or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C6528   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C6528or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C6530   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6534   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6536   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6549   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C6550   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C6556   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C6559   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C6560   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C6561   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C6566   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |

|         |                                  |                       |     |             |       |
|---------|----------------------------------|-----------------------|-----|-------------|-------|
| C6567   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C6571   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6575   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C6580   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C6582   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C6600   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-104J        | 1   | 374731044T  | NSP   |
| C6601   | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V100V-474J        | 1   | 374734744T  | NSP   |
| C6608   | ELECTROLYTIC CAPACITOR           | CE04W16V-470M(KY_H15) | 1   | 3500274     |       |
| C6609   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6609or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6616   | ELECTROLYTIC CAPACITOR           | CE04W25V-82M(LXY)     | 1   | 3500245T    |       |
| C6619   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU250MA13216       | 1   | 3769B2507R2 | NSP   |
| C6620   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C6620or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C6621   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6621or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6622   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J          | 1   | 373041034R2 | NSP   |
| C6622or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J         | (1) | 376641034R2 | NSP   |
| C6623   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-102J          | 1   | 373021024R2 | NSP   |
| C6623or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-102J         | (1) | 376621024R2 | NSP   |
| C6626   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J          | 1   | 373021014R2 | NSP   |
| C6626or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J         | (1) | 376621014R2 | NSP   |
| C6628   | CAPACITOR                        | NOJA226M006R          | 1   | 3000131R2   | NSP   |
| C6628or | CAPACITOR                        | NMCA0J226MTRF         | (1) | 3000136R2   | N NSP |
| C6630   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6634   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6636   | ELECTROLYTIC CAPACITOR           | CE04W50V-18M(LXY)     | 1   | 3500246ST   |       |
| C6649   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C6650   | ELECTROLYTIC CAPACITOR           | UKT1K561MHMAPDCV      | 1   | 3500254S    |       |
| C6656   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012        | 1   | 376991035R2 | NSP   |
| C6659   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C6660   | CHIP TYPE PLASTIC FILM CAPACITOR | 200MU101KA13216       | 1   | 3769B1015R2 | NSP   |
| C6661   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C6666   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C6667   | SMG C                            | CE04W16V-100M(SMG)    | 1   | 395041017T  |       |
| C6675   | CHIP TYPE PLASTIC FILM CAPACITOR | 100MU104KB23225       | 1   | 376931045R2 | NSP   |
| C6680   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C6682   | CHIP TYPE PLASTIC FILM CAPACITOR | ECWU1222JX5           | 1   | 3700115R2   | NSP   |
| C6683   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6684   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6685   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6686   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6687   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |
| C6688   | SMG C                            | CE04W50V-10M(SMG)     | 1   | 395081007T  |       |

## [ Resistors ]

|       |                           |               |   |             |     |
|-------|---------------------------|---------------|---|-------------|-----|
| R4000 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE | 1 | 435031832R1 | NSP |
| R4001 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R4002 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R4003 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R4004 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R4006 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R4007 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE | 1 | 435221004R1 | NSP |
| R4008 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R4009 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R4010 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1 | 435031014R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4011 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE  | 1 | 435031832R1 | NSP |
| R4012 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4013 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R4014 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R4015 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R4016 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R4017 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4018 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4020 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4021 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R4022 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4023 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4024 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4025 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4026 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4027 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE  | 1 | 435031832R1 | NSP |
| R4028 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4029 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4030 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4031 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4032 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4033 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4034 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4035 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4036 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4037 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4038 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4039 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4040 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4041 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4042 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R4043 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4044 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R4045 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4046 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4048 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4049 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4050 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4051 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4052 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4053 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4054 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R4055 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4056 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R4057 | C-METAL R                 | RN72K2B-471JE2 | 1 | 435114714R1 | NSP |
| R4058 | CHIP TYPE CARBON RESISTOR | RN72K1J-683JE  | 1 | 435036834R1 | NSP |
| R4059 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4060 | CHIP TYPE CARBON RESISTOR | RN72K1J-563FE  | 1 | 435035632R1 | NSP |
| R4061 | CHIP TYPE CARBON RESISTOR | RN72K1J-333FE  | 1 | 435033332R1 | NSP |
| R4062 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R4064 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4066 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R4068 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R4070 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4072 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4073 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE   | 1 | 435032734R1 | NSP |
| R4075 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE   | 1 | 435031004R1 | NSP |
| R4076 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE   | 1 | 435032734R1 | NSP |
| R4078 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE   | 1 | 435031832R1 | NSP |
| R4079 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE   | 1 | 435031832R1 | NSP |
| R4081 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE   | 1 | 435031004R1 | NSP |
| R4084 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE   | 1 | 435031214R1 | NSP |
| R4085 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE   | 1 | 435031214R1 | NSP |
| R4086 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE   | 1 | 435031214R1 | NSP |
| R4087 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE   | 1 | 435031214R1 | NSP |
| R4088 | CHIP TYPE CARBON RESISTOR | RN72K1J-124JE   | 1 | 435031244R1 | NSP |
| R4089 | CHIP TYPE CARBON RESISTOR | RN72K1J-154JE   | 1 | 435031544R1 | NSP |
| R4090 | CHIP TYPE CARBON RESISTOR | RN72K1J-183FE   | 1 | 435031832R1 | NSP |
| R4091 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4092 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R4093 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4094 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE   | 1 | 435032224R1 | NSP |
| R4096 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R4097 | CHIP TYPE CARBON RESISTOR | RN72K1J-270JE   | 1 | 435032704R1 | NSP |
| R4098 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4100 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4101 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4102 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4103 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4104 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4105 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4106 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4109 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R4110 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R4111 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R4112 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4113 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4114 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4115 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4116 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4117 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4118 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4119 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4120 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4121 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4122 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4123 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4124 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4125 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4126 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4127 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4128 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4129 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4130 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4131 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4132 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4133 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4134 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4135 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4136 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4137 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R4138 | C-METAL R                 | RN72K2B-082JE2 | 1 | 435110824R1 | NSP |
| R4139 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4140 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE  | 1 | 435222704R1 | NSP |
| R4141 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R4142 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4143 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4144 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R4145 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4146 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4148 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP |
| R4150 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE  | 1 | 435039102R1 | NSP |
| R4151 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4152 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE  | 1 | 435036832R1 | NSP |
| R4153 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4154 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R4155 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R4156 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R4157 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R4158 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4159 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4160 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R4162 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R4163 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R4164 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4165 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4166 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R4167 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R4168 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R4169 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R4170 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4171 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4172 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4173 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4174 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4175 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4176 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4177 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4178 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4179 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4180 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4181 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4182 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4183 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE  | 1 | 435223304R1 | NSP |
| R4184 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R4185 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4186 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R4187 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4188 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4189 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R4190 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R4191 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R4192 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4193 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4194 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4195 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4196 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4197 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4198 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4199 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE   | 1 | 435031834R1 | NSP |
| R4200 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4201 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4202 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4203 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4204 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4205 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4206 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4209 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R4210 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R4211 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R4212 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4213 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4214 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4215 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4216 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4217 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4218 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4219 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4220 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4221 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4222 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4223 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4224 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4225 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4226 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4227 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4228 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4229 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4230 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4231 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4232 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4233 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4234 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4235 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4236 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R4237 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4238 | C-METAL R                 | RN72K2B-082JE2  | 1 | 435110824R1 | NSP |
| R4239 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4240 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE   | 1 | 435222704R1 | NSP |
| R4241 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4242 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4243 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4244 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4245 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4246 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4247 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4248 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE   | 1 | 435033022R1 | NSP |
| R4250 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE   | 1 | 435039102R1 | NSP |
| R4251 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4252 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE   | 1 | 435036832R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4253 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4254 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R4255 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R4256 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R4257 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R4258 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4259 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4260 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R4262 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R4263 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R4264 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4265 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4266 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R4267 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R4268 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R4269 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R4270 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4271 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4272 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4273 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4274 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4275 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4276 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4277 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4278 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4279 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4280 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4281 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4282 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4284 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R4285 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4286 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R4287 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4288 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4289 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R4290 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R4291 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R4292 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4293 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4294 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4295 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4296 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4297 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4298 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4299 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE  | 1 | 435031834R1 | NSP |
| R4300 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4301 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4302 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4303 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4304 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4305 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4306 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4309 | C-METAL R                 | RN72K2B-331JE2 | 1 | 435113314R1 | NSP |
| R4310 | C-METAL R                 | RN72K2B-223JE2 | 1 | 435112234R1 | NSP |
| R4311 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE  | 1 | 435034712R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4312 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4313 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4314 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4315 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4316 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4317 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4318 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4319 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4320 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4321 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4322 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4323 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4324 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4325 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4326 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4327 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4328 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4329 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4330 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4331 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4332 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4333 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4334 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4335 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4336 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R4337 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4338 | C-METAL R                 | RN72K2B-082JE2  | 1 | 435110824R1 | NSP |
| R4339 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4340 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE   | 1 | 435222704R1 | NSP |
| R4341 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4342 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4343 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4344 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4345 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4346 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4348 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE   | 1 | 435033022R1 | NSP |
| R4350 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE   | 1 | 435039102R1 | NSP |
| R4351 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4352 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE   | 1 | 435036832R1 | NSP |
| R4353 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4354 | CEMENT RESISTOR           | MNS05N100JW     | 1 | 4800083     |     |
| R4355 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE   | 1 | 435031042R1 | NSP |
| R4356 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE   | 1 | 435032432R1 | NSP |
| R4357 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE   | 1 | 435032242R1 | NSP |
| R4358 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4359 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4360 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R4362 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE   | 1 | 435221234R1 | NSP |
| R4363 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE   | 1 | 435032722R1 | NSP |
| R4364 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4365 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4366 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE   | 1 | 435031032R1 | NSP |
| R4367 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4368 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE   | 1 | 435037532R1 | NSP |
| R4369 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE   | 1 | 435033932R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4370 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4371 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE   | 1 | 435030394R1 | NSP |
| R4372 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE   | 1 | 435030394R1 | NSP |
| R4373 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE   | 1 | 435030154R1 | NSP |
| R4374 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE   | 1 | 435030154R1 | NSP |
| R4375 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R4376 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE   | 1 | 435220244R1 | NSP |
| R4377 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE   | 1 | 435220244R1 | NSP |
| R4378 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE   | 1 | 435220224R1 | NSP |
| R4379 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE   | 1 | 435220224R1 | NSP |
| R4380 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE   | 1 | 435031034R1 | NSP |
| R4381 | THERMISTOR                | NTCG104KF104FT  | 1 | 4000282R1   | NSP |
| R4382 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE   | 1 | 435037514R1 | NSP |
| R4383 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE   | 1 | 435223304R1 | NSP |
| R4384 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE   | 1 | 435030224R1 | NSP |
| R4385 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R4386 | C-METAL R                 | RN72K2B-151JE2  | 1 | 435111514R1 | NSP |
| R4387 | C-METAL R                 | KTR18EZPJ105    | 1 | 435231054R1 | NSP |
| R4388 | C-METAL R                 | KTR18EZPJ105    | 1 | 435231054R1 | NSP |
| R4389 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4390 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4391 | C-METAL R                 | RN72K2B-823JE2  | 1 | 435118234R1 | NSP |
| R4392 | C-METAL R                 | RN72K2B-105JE2  | 1 | 435111054R1 | NSP |
| R4393 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4394 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4395 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4396 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4397 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4398 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4399 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE   | 1 | 435031834R1 | NSP |
| R4400 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4401 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4402 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4403 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4404 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4405 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4406 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4409 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R4410 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R4411 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R4412 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4413 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4414 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4415 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4416 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4417 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4418 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4419 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4420 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4421 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4422 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4423 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4424 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4425 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4426 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4427 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R4428 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE  | 1 | 435222224R1 | NSP |
| R4429 | C-METAL R                 | RN72K2B-222JE2 | 1 | 435112224R1 | NSP |
| R4430 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R4431 | C-METAL R                 | RN72K2B-682JE2 | 1 | 435116824R1 | NSP |
| R4432 | C-METAL R                 | RN72K2B-153JE2 | 1 | 435111534R1 | NSP |
| R4433 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R4434 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R4435 | C-METAL R                 | RN72K2B-752JE2 | 1 | 435117524R1 | NSP |
| R4436 | C-METAL R                 | RN72K2B-242JE2 | 1 | 435112424R1 | NSP |
| R4437 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R4438 | C-METAL R                 | RN72K2B-082JE2 | 1 | 435110824R1 | NSP |
| R4439 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4440 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE  | 1 | 435222704R1 | NSP |
| R4441 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R4442 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4443 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4444 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R4445 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4446 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4447 | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE  | 1 | 435221054R1 | NSP |
| R4448 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP |
| R4450 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE  | 1 | 435039102R1 | NSP |
| R4451 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4452 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE  | 1 | 435036832R1 | NSP |
| R4453 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4454 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R4455 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R4456 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R4457 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R4458 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4459 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4460 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R4462 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R4463 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R4464 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4465 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4466 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R4467 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R4468 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R4469 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R4470 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4471 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4472 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4473 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4474 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4475 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4476 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4477 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4478 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4479 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4480 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4481 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4482 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4484 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4485 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R4486 | C-METAL R                 | RN72K2B-151JE2  | 1 | 435111514R1 | NSP |
| R4487 | C-METAL R                 | KTR18EZPJ105    | 1 | 435231054R1 | NSP |
| R4488 | C-METAL R                 | KTR18EZPJ105    | 1 | 435231054R1 | NSP |
| R4489 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4490 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4491 | C-METAL R                 | RN72K2B-823JE2  | 1 | 435118234R1 | NSP |
| R4492 | C-METAL R                 | RN72K2B-105JE2  | 1 | 435111054R1 | NSP |
| R4493 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4494 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4495 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4496 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4497 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4498 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4499 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE   | 1 | 435031834R1 | NSP |
| R4546 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4575 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R4583 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE   | 1 | 435223304R1 | NSP |
| R4646 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4700 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4701 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4702 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4703 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4704 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4705 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4706 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4709 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R4710 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R4711 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R4712 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4713 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4714 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4715 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4716 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4717 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4718 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4719 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4720 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4721 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4722 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4723 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4724 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4725 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4726 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4727 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4728 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4729 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4730 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4731 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4732 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4733 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4734 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4735 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4736 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R4737 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4738 | C-METAL R                 | RN72K2B-082JE2 | 1 | 435110824R1 | NSP |
| R4739 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4740 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE  | 1 | 435222704R1 | NSP |
| R4741 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R4742 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4743 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R4744 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R4745 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4746 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4748 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP |
| R4750 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE  | 1 | 435039102R1 | NSP |
| R4751 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4752 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE  | 1 | 435036832R1 | NSP |
| R4753 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4754 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R4755 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R4756 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R4757 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R4758 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4759 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4760 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R4762 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R4763 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R4764 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4765 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4766 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R4767 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R4768 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R4769 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R4770 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4771 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4772 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4773 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4774 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4775 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4776 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4777 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4778 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4779 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4780 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4781 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4782 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4783 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4784 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R4785 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4786 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R4787 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4788 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4789 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R4790 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R4791 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R4792 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4793 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4794 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4795 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4796 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R4797 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4798 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R4799 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE   | 1 | 435031834R1 | NSP |
| R4800 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4801 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4802 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4803 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4804 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4805 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4806 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4809 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R4810 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R4811 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R4812 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R4813 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4814 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4815 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4816 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4817 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4818 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4819 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4820 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4821 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4822 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4823 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4824 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4825 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4826 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4827 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4828 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4829 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4830 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4831 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4832 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4833 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4834 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4835 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4836 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R4837 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4838 | C-METAL R                 | RN72K2B-082JE2  | 1 | 435110824R1 | NSP |
| R4839 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4840 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE   | 1 | 435222704R1 | NSP |
| R4841 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4842 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4843 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4844 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4845 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4846 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4848 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE   | 1 | 435033022R1 | NSP |
| R4850 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE   | 1 | 435039102R1 | NSP |
| R4851 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4852 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE   | 1 | 435036832R1 | NSP |
| R4853 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4854 | CEMENT RESISTOR           | MNS05N100JW     | 1 | 4800083     |     |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4855 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R4856 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R4857 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R4858 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4859 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4860 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R4862 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R4863 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R4864 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4865 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4866 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R4867 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R4868 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R4869 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R4870 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R4871 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4872 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4873 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4874 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4875 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4876 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4877 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4878 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4879 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4880 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4881 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4882 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4883 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE  | 1 | 435223304R1 | NSP |
| R4884 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R4885 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4886 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R4887 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4888 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4889 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R4890 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R4891 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R4892 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4893 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4894 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4895 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4896 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4897 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4898 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4899 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE  | 1 | 435031834R1 | NSP |
| R4900 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4901 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4902 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4903 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4904 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4905 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R4906 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R4909 | C-METAL R                 | RN72K2B-331JE2 | 1 | 435113314R1 | NSP |
| R4910 | C-METAL R                 | RN72K2B-223JE2 | 1 | 435112234R1 | NSP |
| R4911 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE  | 1 | 435034712R1 | NSP |
| R4912 | C-METAL R                 | RN72K2B-473JE2 | 1 | 435114734R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R4913 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R4914 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4915 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R4916 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R4917 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4918 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R4919 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4920 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R4921 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R4922 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4923 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4924 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R4925 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4926 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R4927 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R4928 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R4929 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R4930 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4931 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R4932 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R4933 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4934 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R4935 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R4936 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R4937 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4938 | C-METAL R                 | RN72K2B-082JE2  | 1 | 435110824R1 | NSP |
| R4939 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R4940 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE   | 1 | 435222704R1 | NSP |
| R4941 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R4942 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4943 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R4944 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R4945 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R4946 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4948 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE   | 1 | 435033022R1 | NSP |
| R4950 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE   | 1 | 435039102R1 | NSP |
| R4951 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R4952 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE   | 1 | 435036832R1 | NSP |
| R4953 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4954 | CEMENT RESISTOR           | MNS05N100JW     | 1 | 4800083     |     |
| R4955 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE   | 1 | 435031042R1 | NSP |
| R4956 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE   | 1 | 435032432R1 | NSP |
| R4957 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE   | 1 | 435032242R1 | NSP |
| R4958 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4959 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4960 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R4962 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE   | 1 | 435221234R1 | NSP |
| R4963 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE   | 1 | 435032722R1 | NSP |
| R4964 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1 | 435034734R1 | NSP |
| R4965 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R4966 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE   | 1 | 435031032R1 | NSP |
| R4967 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R4968 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE   | 1 | 435037532R1 | NSP |
| R4969 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE   | 1 | 435033932R1 | NSP |
| R4970 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4971 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4972 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R4973 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4974 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R4975 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4976 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4977 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R4978 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4979 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R4980 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4981 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R4982 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R4984 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R4985 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R4986 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R4987 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4988 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R4989 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R4990 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R4991 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R4992 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R4993 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R4994 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R4995 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4996 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R4997 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4998 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R4999 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE  | 1 | 435031834R1 | NSP |
| R5000 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R5001 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R5002 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5003 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R5004 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R5006 | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE  | 1 | 435221054R1 | NSP |
| R5007 | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE  | 1 | 435221054R1 | NSP |
| R5008 | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE  | 1 | 435221054R1 | NSP |
| R5009 | CHIP TYPE CARBON RESISTOR | RN72K2E-751JE  | 1 | 435227514R1 | NSP |
| R5010 | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE  | 1 | 435221054R1 | NSP |
| R5011 | C-METAL R                 | RN72K2B-563JE2 | 1 | 435115634R1 | NSP |
| R5012 | C-METAL R                 | RN72K2B-104JE2 | 1 | 435111044R1 | NSP |
| R5013 | C-METAL R                 | RN72K2B-224JE2 | 1 | 435112244R1 | NSP |
| R5014 | C-METAL R                 | RN72K2B-683JE2 | 1 | 435116834R1 | NSP |
| R5015 | C-METAL R                 | RN72K2B-223JE2 | 1 | 435112234R1 | NSP |
| R5016 | C-METAL R                 | RN72K2B-104JE2 | 1 | 435111044R1 | NSP |
| R5017 | C-METAL R                 | RN72K2B-473JE2 | 1 | 435114734R1 | NSP |
| R5018 | C-METAL R                 | RN72K2B-563JE2 | 1 | 435115634R1 | NSP |
| R5019 | C-METAL R                 | RN72K2B-224JE2 | 1 | 435112244R1 | NSP |
| R5020 | C-METAL R                 | RN72K2B-104JE2 | 1 | 435111044R1 | NSP |
| R5021 | C-METAL R                 | RN72K2B-104JE2 | 1 | 435111044R1 | NSP |
| R5022 | C-METAL R                 | RN72K2B-683JE2 | 1 | 435116834R1 | NSP |
| R5023 | C-METAL R                 | RN72K2B-223JE2 | 1 | 435112234R1 | NSP |
| R5024 | C-METAL R                 | RN72K2B-104JE2 | 1 | 435111044R1 | NSP |
| R5025 | C-METAL R                 | RN72K2B-473JE2 | 1 | 435114734R1 | NSP |
| R5026 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R5027 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R5028 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5029 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R5030 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R5031 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5032 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5033 | CHIP TYPE CARBON RESISTOR | RN72K1J-120JE  | 1 | 435031204R1 | NSP |
| R5034 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5036 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5039 | C-METAL R                 | RN72K2B-222JE2 | 1 | 435112224R1 | NSP |
| R5040 | C-METAL R                 | RN72K2B-222JE2 | 1 | 435112224R1 | NSP |
| R5041 | CHIP TYPE CARBON RESISTOR | RN72K2E-015JE  | 1 | 435220154R1 | NSP |
| R5042 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R5045 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R5048 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5054 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R5056 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5057 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5058 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5064 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5065 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5067 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R5069 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5070 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R5072 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R5073 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5074 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5075 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5076 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5077 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5078 | CHIP TYPE CARBON RESISTOR | RN72K1J-124JE  | 1 | 435031244R1 | NSP |
| R5080 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R5081 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R5082 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5083 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R5084 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R5085 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R5086 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R5087 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R5088 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R5089 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R5091 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5095 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R5096 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5097 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5098 | C-METAL R                 | RN72K2B-331JE2 | 1 | 435113314R1 | NSP |
| R5099 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R5100 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5102 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5104 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5106 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5108 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5110 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5112 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5114 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5124 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R5126 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5128 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5130 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5131 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5132 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5134 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R5135 | CHIP TYPE CARBON RESISTOR | RN72K2E-104JE  | 1 | 435221044R1 | NSP |
| R5138 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5139 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5140 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5141 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5142 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5143 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5144 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5147 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5148 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5149 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE  | 1 | 435221834R1 | NSP |
| R5155 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE  | 1 | 435223304R1 | NSP |
| R5157 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R5159 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5161 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5162 | CHIP TYPE CARBON RESISTOR | RN72K1J-120JE  | 1 | 435031204R1 | NSP |
| R5163 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5164 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5165 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5166 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5167 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5168 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R5171 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5172 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5173 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5174 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5177 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5178 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5179 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R5182 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R5183 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R5184 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R5185 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R5186 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R5187 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R5188 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R5189 | CHIP TYPE CARBON RESISTOR | RN72K1J-181JE  | 1 | 435031814R1 | NSP |
| R5190 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R5201 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5202 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5203 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5204 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5207 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5208 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5209 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5210 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5211 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R5212 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R6401 | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE  | 1 | 435031514R1 | NSP |

[illegible]

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R6471 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6472 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE   | 1 | 435031004R1 | NSP |
| R6473 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6474 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE   | 1 | 435031004R1 | NSP |
| R6475 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6476 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE   | 1 | 435031004R1 | NSP |
| R6477 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6478 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6479 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6480 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6481 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE   | 1 | 435030104R1 | NSP |
| R6482 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R6483 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R6484 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R6485 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE   | 1 | 435221834R1 | NSP |
| R6486 | CHIP TYPE CARBON RESISTOR | RN72K2E-183JE   | 1 | 435221834R1 | NSP |
| R6487 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE   | 1 | 435031214R1 | NSP |
| R6488 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE   | 1 | 435031024R1 | NSP |
| R6489 | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE   | 1 | 435031514R1 | NSP |
| R6490 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R6491 | C-METAL R                 | RN72K2B-105JE2  | 1 | 435111054R1 | NSP |
| R6492 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE   | 1 | 435032734R1 | NSP |
| R6494 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6495 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6496 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R6497 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R6498 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R6499 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R6500 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6501 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6502 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6503 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6504 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6505 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6506 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6509 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R6510 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R6511 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R6512 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R6513 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R6514 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R6515 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R6516 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R6517 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6518 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6519 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6520 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R6521 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R6522 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6523 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6524 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R6525 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R6526 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R6527 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R6528 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R6529 | C-METAL R                 | RN72K2B-222JE2 | 1 | 435112224R1 | NSP |
| R6530 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R6531 | C-METAL R                 | RN72K2B-682JE2 | 1 | 435116824R1 | NSP |
| R6532 | C-METAL R                 | RN72K2B-153JE2 | 1 | 435111534R1 | NSP |
| R6533 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R6534 | C-METAL R                 | RN72K2B-103JE2 | 1 | 435111034R1 | NSP |
| R6535 | C-METAL R                 | RN72K2B-752JE2 | 1 | 435117524R1 | NSP |
| R6536 | C-METAL R                 | RN72K2B-242JE2 | 1 | 435112424R1 | NSP |
| R6537 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R6538 | C-METAL R                 | RN72K2B-082JE2 | 1 | 435110824R1 | NSP |
| R6539 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R6540 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE  | 1 | 435222704R1 | NSP |
| R6541 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE  | 1 | 435221004R1 | NSP |
| R6542 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R6543 | C-METAL R                 | WK73R2HTTE100J | 1 | 4300031R2   | NSP |
| R6544 | C-METAL R                 | LTR18EZPJ104   | 1 | 4300029R1   | NSP |
| R6545 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R6546 | CHIP TYPE CARBON RESISTOR | RN72K2E-330JE  | 1 | 435223304R1 | NSP |
| R6548 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP |
| R6550 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE  | 1 | 435039102R1 | NSP |
| R6551 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R6552 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE  | 1 | 435036832R1 | NSP |
| R6553 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6554 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R6555 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R6556 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R6557 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R6558 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6559 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6560 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R6562 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R6563 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R6564 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6565 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R6566 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R6567 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R6568 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R6569 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R6570 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R6571 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R6572 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R6573 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R6574 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R6575 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R6576 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R6577 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R6578 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R6579 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R6580 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R6581 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R6582 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R6584 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R6585 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R6586 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R6587 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |

|       |                           |                 |   |             |     |
|-------|---------------------------|-----------------|---|-------------|-----|
| R6588 | C-METAL R                 | KTR18EZPJ105    | 1 | 435231054R1 | NSP |
| R6589 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R6590 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R6591 | C-METAL R                 | RN72K2B-823JE2  | 1 | 435118234R1 | NSP |
| R6592 | C-METAL R                 | RN72K2B-105JE2  | 1 | 435111054R1 | NSP |
| R6593 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R6594 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE   | 1 | 435224724R1 | NSP |
| R6595 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R6596 | C-METAL R                 | RN72K2B-022JE2  | 1 | 435110224R1 | NSP |
| R6597 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R6598 | C-METAL R                 | RN72K2B-024JE2  | 1 | 435110244R1 | NSP |
| R6599 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE   | 1 | 435031834R1 | NSP |
| R6600 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6601 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6602 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6603 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6604 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6605 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE   | 1 | 435038222R1 | NSP |
| R6606 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6609 | C-METAL R                 | RN72K2B-331JE2  | 1 | 435113314R1 | NSP |
| R6610 | C-METAL R                 | RN72K2B-223JE2  | 1 | 435112234R1 | NSP |
| R6611 | CHIP TYPE CARBON RESISTOR | RN72K1J-471FE   | 1 | 435034712R1 | NSP |
| R6612 | C-METAL R                 | RN72K2B-473JE2  | 1 | 435114734R1 | NSP |
| R6613 | C-METAL R                 | RN72K2B-000JE2  | 1 | 435110004R1 | NSP |
| R6614 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R6615 | C-METAL R                 | LTR18EZPF4702   | 1 | 4300028R1   | NSP |
| R6616 | C-METAL R                 | ERJB1AJ103U     | 1 | 4300030R2   | NSP |
| R6617 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6618 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R6619 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6620 | CHIP TYPE CARBON RESISTOR | RN72K1J-181FE   | 1 | 435031812R1 | NSP |
| R6621 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE   | 1 | 435031534R1 | NSP |
| R6622 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6623 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE   | 1 | 435031022R1 | NSP |
| R6624 | CHIP TYPE CARBON RESISTOR | RN72K1J-431JE   | 1 | 435034314R1 | NSP |
| R6625 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R6626 | METAL PLATE RESISTOR      | RGC5-0.22-OHM-K | 1 | 4000284     |     |
| R6627 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE   | 1 | 435034744R1 | NSP |
| R6628 | CHIP TYPE CARBON RESISTOR | RN72K2E-222JE   | 1 | 435222224R1 | NSP |
| R6629 | C-METAL R                 | RN72K2B-222JE2  | 1 | 435112224R1 | NSP |
| R6630 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R6631 | C-METAL R                 | RN72K2B-682JE2  | 1 | 435116824R1 | NSP |
| R6632 | C-METAL R                 | RN72K2B-153JE2  | 1 | 435111534R1 | NSP |
| R6633 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |
| R6634 | C-METAL R                 | RN72K2B-103JE2  | 1 | 435111034R1 | NSP |
| R6635 | C-METAL R                 | RN72K2B-752JE2  | 1 | 435117524R1 | NSP |
| R6636 | C-METAL R                 | RN72K2B-242JE2  | 1 | 435112424R1 | NSP |
| R6637 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R6638 | C-METAL R                 | RN72K2B-082JE2  | 1 | 435110824R1 | NSP |
| R6639 | C-METAL R                 | RN72K2B-012JE2  | 1 | 435110124R1 | NSP |
| R6640 | CHIP TYPE CARBON RESISTOR | RN72K2E-270JE   | 1 | 435222704R1 | NSP |
| R6641 | CHIP TYPE CARBON RESISTOR | RN72K2E-100JE   | 1 | 435221004R1 | NSP |
| R6642 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R6643 | C-METAL R                 | WK73R2HTTE100J  | 1 | 4300031R2   | NSP |
| R6644 | C-METAL R                 | LTR18EZPJ104    | 1 | 4300029R1   | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R6645 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R6648 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP |
| R6650 | CHIP TYPE CARBON RESISTOR | RN72K1J-910FE  | 1 | 435039102R1 | NSP |
| R6651 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R6652 | CHIP TYPE CARBON RESISTOR | RN72K1J-683FE  | 1 | 435036832R1 | NSP |
| R6653 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6654 | CEMENT RESISTOR           | MNS05N100JW    | 1 | 4800083     |     |
| R6655 | CHIP TYPE CARBON RESISTOR | RN72K1J-104FE  | 1 | 435031042R1 | NSP |
| R6656 | CHIP TYPE CARBON RESISTOR | RN72K1J-243FE  | 1 | 435032432R1 | NSP |
| R6657 | CHIP TYPE CARBON RESISTOR | RN72K1J-224FE  | 1 | 435032242R1 | NSP |
| R6658 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6659 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6660 | CHIP TYPE CARBON RESISTOR | RN72K1J-563JE  | 1 | 435035634R1 | NSP |
| R6662 | CHIP TYPE CARBON RESISTOR | RN72K2E-123JE  | 1 | 435221234R1 | NSP |
| R6663 | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE  | 1 | 435032722R1 | NSP |
| R6664 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R6665 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R6666 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R6667 | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE  | 1 | 435031022R1 | NSP |
| R6668 | CHIP TYPE CARBON RESISTOR | RN72K1J-753FE  | 1 | 435037532R1 | NSP |
| R6669 | CHIP TYPE CARBON RESISTOR | RN72K1J-393FE  | 1 | 435033932R1 | NSP |
| R6670 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R6671 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R6672 | CHIP TYPE CARBON RESISTOR | RN72K1J-039JE  | 1 | 435030394R1 | NSP |
| R6673 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R6674 | CHIP TYPE CARBON RESISTOR | RN72K1J-015JE  | 1 | 435030154R1 | NSP |
| R6675 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R6676 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R6677 | CHIP TYPE CARBON RESISTOR | RN72K2E-024JE  | 1 | 435220244R1 | NSP |
| R6678 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R6679 | CHIP TYPE CARBON RESISTOR | RN72K2E-022JE  | 1 | 435220224R1 | NSP |
| R6680 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R6681 | THERMISTOR                | NTCG104KF104FT | 1 | 4000282R1   | NSP |
| R6682 | CHIP TYPE CARBON RESISTOR | RN72K1J-751JE  | 1 | 435037514R1 | NSP |
| R6684 | CHIP TYPE CARBON RESISTOR | RN72K1J-022JE  | 1 | 435030224R1 | NSP |
| R6685 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1 | 435030104R1 | NSP |
| R6686 | C-METAL R                 | RN72K2B-151JE2 | 1 | 435111514R1 | NSP |
| R6687 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R6688 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP |
| R6689 | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1 | 435033314R1 | NSP |
| R6690 | C-METAL R                 | ERJB1AJ103U    | 1 | 4300030R2   | NSP |
| R6691 | C-METAL R                 | RN72K2B-823JE2 | 1 | 435118234R1 | NSP |
| R6692 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R6693 | C-METAL R                 | RN72K2B-012JE2 | 1 | 435110124R1 | NSP |
| R6694 | CHIP TYPE CARBON RESISTOR | RN72K2E-472JE  | 1 | 435224724R1 | NSP |
| R6695 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R6696 | C-METAL R                 | RN72K2B-022JE2 | 1 | 435110224R1 | NSP |
| R6697 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R6698 | C-METAL R                 | RN72K2B-024JE2 | 1 | 435110244R1 | NSP |
| R6699 | CHIP TYPE CARBON RESISTOR | RN72K1J-183JE  | 1 | 435031834R1 | NSP |
| R6701 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R6702 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R6705 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R6706 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R7107 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |

|                                |                           |                |     |             |       |
|--------------------------------|---------------------------|----------------|-----|-------------|-------|
| R7129                          | C-METAL R                 | RN72K2B-105JE2 | 1   | 435111054R1 | NSP   |
| R7130                          | C-METAL R                 | RN72K2B-105JE2 | 1   | 435111054R1 | NSP   |
| R7131                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7132                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7134                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7135                          | C-METAL R                 | RN72K2B-331JE2 | 1   | 435113314R1 | NSP   |
| R7136                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7137                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7139                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7140                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7141                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7142                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7143                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7144                          | C-METAL R                 | RN72K2B-331JE2 | 1   | 435113314R1 | NSP   |
| R7145                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7146                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7148                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7149                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7150                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7151                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7152                          | C-METAL R                 | RN72K2B-331JE2 | 1   | 435113314R1 | NSP   |
| R7153                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7154                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7156                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7157                          | C-METAL R                 | RN72K2B-331JE2 | 1   | 435113314R1 | NSP   |
| R7158                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7159                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7161                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7162                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| R7163                          | C-METAL R                 | RN72K2B-331JE2 | 1   | 435113314R1 | NSP   |
| R7164                          | CHIP TYPE CARBON RESISTOR | RN72K2E-103JE  | 1   | 435221034R1 | NSP   |
| R7165                          | CHIP TYPE CARBON RESISTOR | RN72K2E-332JE  | 1   | 435223324R1 | NSP   |
| R7167                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1 | NSP   |
| R7168                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1   | 435032244R1 | NSP   |
| [ Switches, Terminals, Wires ] |                           |                |     |             |       |
| P180                           | PRINTED WIRING BOARD      | BCCLD-2095     | {1} | 25142095    | N NSP |
| P180                           | PRINTED WIRING BOARD      | BCCLD-2095     | 1   | 25142095A   | N NSP |
| P4000A                         | SOCKET                    | NSCT-21P2114   | 1   | 25052217    | NSP   |
| P4001A                         | PLUG                      | NPLG-4P151     | 1   | 25055167    | NSP   |
| P4002A                         | PLUG                      | NPLG-2P130     | 1   | 25055146    | NSP   |
| P4003A                         | PLUG                      | NPLG-5P133     | 1   | 25055149    | NSP   |
| P4004A                         | PLUG                      | NPLG-7P135     | 1   | 25055151    | NSP   |
| P4005                          | TRM(EARTH)                | OG-RM30HF      | 1   | 25060534R2  | NSP   |
| P4100A                         | PLUG                      | IMSA-9115B-05  | 1   | 25056335    | NSP   |
| P4200A                         | PLUG                      | IMSA-9115B-05  | 1   | 25056335    | NSP   |
| P4201                          | TERMINAL                  | LTS3610-1013F  | 1   | 25060541    |       |
| P4202                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533    | NSP   |
| P4300A                         | PLUG                      | IMSA-9115B-05  | 1   | 25056335    | NSP   |
| P4401                          | TERMINAL                  | LTS3410-1022F  | 1   | 25060540    |       |
| P4402                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533    | NSP   |
| P4500A                         | PLUG                      | IMSA-9115B-05  | 1   | 25056335    | NSP   |
| P4550                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533    | NSP   |
| P4551                          | RETAINER                  | (BUS)          | 1   | 27142366    | N NSP |
| P4552                          | RETAINER                  | (BUS)          | 1   | 27142366    | N NSP |
| P4600A                         | PLUG                      | IMSA-9115B-05  | 1   | 25056335    | NSP   |

|        |            |                   |   |          |     |
|--------|------------|-------------------|---|----------|-----|
| P4601  | TERMINAL   | LTS3410-1022F     | 1 | 25060540 |     |
| P4700A | PLUG       | IMSA-9115B-05     | 1 | 25056335 | NSP |
| P4702  | TRM(SCREW) | TER21-0130V       | 1 | 25060533 | NSP |
| P4800A | PLUG       | IMSA-9115B-05     | 1 | 25056335 | NSP |
| P4900A | PLUG       | IMSA-9115B-05     | 1 | 25056335 | NSP |
| P4901  | TERMINAL   | LTS3410-1022F     | 1 | 25060540 |     |
| P4902  | TRM(SCREW) | TER21-0130V       | 1 | 25060533 | NSP |
| P5000A | PLUG       | IMSA-9115B-05     | 1 | 25056335 | NSP |
| P5100A | PLUG       | IMSA-9115B-05     | 1 | 25056335 | NSP |
| P6501  | TERMINAL   | LTS3410-1022F     | 1 | 25060540 |     |
| P6502  | TRM(SCREW) | TER21-0130V       | 1 | 25060533 | NSP |
| RL4100 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |
| RL4300 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |
| RL4500 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |
| RL4700 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |
| RL4900 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |
| RL6500 | RELAY      | NRL-2P5A-DC12-208 | 1 | 25065733 |     |

## BADG-2078-1A

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

2. The ! mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME     | DESCRIPTION          | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|---------------|----------------------|------|---------------|---------|
| [ Semi-conductors ] |               |                      |      |               |         |
| D2004               | PHOTO COUPLER | JSR1165-001recieving | 1    | 24120143      |         |
| D2005               | PHOTO COUPLER | JSR1165-001recieving | 1    | 24120143      |         |
| D2006               | PHOTO COUPLER | JSR1165-001recieving | 1    | 24120143      |         |
| Q2001               | HYBRID IC     | NE5532APSR           | 1    | 22242283R2    | NSP     |
| Q2003               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2004               | HYBRID IC     | AK4458VN             | 1    | 22242927R2    | NSP     |
| Q2005               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2006               | HYBRID IC     | AK4458VN             | 1    | 22242927R2    | NSP     |
| Q2007               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2008               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2016               | HYBRID IC     | AK4490EQ             | 1    | 22242907R2    | NSP     |
| Q2018               | HYBRID IC     | NJM2881F33           | 1    | 22242520R2    | NSP     |
| Q2019               | HYBRID IC     | TC7SH32FU            | 1    | 22243127R2    | NSP     |
| Q2020               | HYBRID IC     | TC74VHC32FK          | 1    | 22243048R2    | NSP     |
| Q2021               | HYBRID IC     | NE5532APSR           | 1    | 22242283R2    | NSP     |
| Q2022               | HYBRID IC     | NE5532APSR           | 1    | 22242283R2    | NSP     |
| Q2023               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2024               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2025               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2026               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2027               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2028               | HYBRID IC     | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q2029               | HYBRID IC     | TC74VHC32FK          | 1    | 22243048R2    | NSP     |

|                         |                                  |                     |   |              |       |
|-------------------------|----------------------------------|---------------------|---|--------------|-------|
| Q2030                   | HYBRID IC                        | TC7SH32FU           | 1 | 22243127R2   | NSP   |
| Q2031                   | HYBRID IC                        | TC7WU04FU(TE12L_F)  | 1 | 22240935R2   | NSP   |
| Q2032                   | HYBRID IC                        | TC7WU04FU(TE12L_F)  | 1 | 22240935R2   | NSP   |
| Q2041                   | HYBRID IC                        | NE5532APSR          | 1 | 22242283R2   | NSP   |
| Q2042                   | HYBRID IC                        | NE5532APSR          | 1 | 22242283R2   | NSP   |
| Q2043                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2044                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2045                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2046                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2047                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2048                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2073                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2093                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2157                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2177                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2178                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2197                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2198                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2200                   | HYBRID IC                        | TC7SH08FU           | 1 | 22241830R2TO | N NSP |
| Q2407                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2428                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2448                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2527                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2547                   | HYBRID IC                        | NJM4580CG           | 1 | 22242922R2   | NSP   |
| Q2751                   | HYBRID IC                        | NJM2845DL1-05       | 1 | 22243042R2   | NSP   |
| Q2752                   | HYBRID IC                        | S-1172B33-E6T1G     | 1 | 22243037R2   | NSP   |
| Q2753                   | HYBRID IC                        | S-1172B33-E6T1G     | 1 | 22243037R2   | NSP   |
| Q2754                   | HYBRID IC                        | NJM2872BF33         | 1 | 22243041R2   | NSP   |
| Q2801                   | HYBRID IC                        | AK4388ET-E2         | 1 | 22242519R2   | NSP   |
| Q2831                   | HYBRID IC                        | NJM4585M            | 1 | 22242981R2   | NSP   |
| Q2851                   | HYBRID IC                        | AK4388ET-E2         | 1 | 22242519R2   | NSP   |
| Q2881                   | HYBRID IC                        | NJM4585M            | 1 | 22242981R2   | NSP   |
| [ Transformers, Coils ] |                                  |                     |   |              |       |
| L2001                   | CHOKE COIL                       | LBC2518T4R7M        | 1 | 231364M047R2 | NSP   |
| L2002                   | CHOKE COIL                       | LBC2518T4R7M        | 1 | 231364M047R2 | NSP   |
| L2003                   | CHOKE COIL                       | LBC2518T4R7M        | 1 | 231364M047R2 | NSP   |
| L2004                   | CHOKE COIL                       | LBC2518T4R7M        | 1 | 231364M047R2 | NSP   |
| L2005                   | CHOKE COIL                       | LBC2518T4R7M        | 1 | 231364M047R2 | NSP   |
| L2011                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2012                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2013                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2014                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2015                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2801                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| L2851                   | CORE                             | BLM11A121S          | 1 | 2350050R1    | NSP   |
| [ Capacitors ]          |                                  |                     |   |              |       |
| C2001                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2002                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2003                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2004                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2005                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2006                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2007                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2008                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T   | NSP   |
| C2009                   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST  | N     |

|       |                                  |                     |   |             |     |
|-------|----------------------------------|---------------------|---|-------------|-----|
| C2010 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST | N   |
| C2011 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2012 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2013 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2014 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2015 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2016 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2017 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2018 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2019 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2020 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1 | 397554707ST | N   |
| C2021 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2022 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2023 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2024 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2025 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2026 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2027 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2028 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1 | 376591224T  | NSP |
| C2029 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2030 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2031 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2032 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2033 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST | N   |
| C2034 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST | N   |
| C2035 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2036 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2037 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2038 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2039 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1 | 397532217ST | N   |
| C2040 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1 | 397532217ST | N   |
| C2041 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2042 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2043 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2044 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2045 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2046 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2047 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2048 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2049 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2050 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2051 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2052 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C2053 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2054 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST | N   |
| C2055 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017ST | N   |
| C2056 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C2057 | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1 | 376991015R2 | NSP |
| C2059 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C2060 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0      | 1 | 332031025R1 | NSP |
| C2061 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2062 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2063 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2064 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C2065 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |

|         |                                  |                    |     |             |     |
|---------|----------------------------------|--------------------|-----|-------------|-----|
| C2066   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE       | 1   | 376336814T  | NSP |
| C2067   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE       | 1   | 376336814T  | NSP |
| C2068   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE       | 1   | 376336814T  | NSP |
| C2069   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0     | 1   | 332031025R1 | NSP |
| C2070   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2071   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2072   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2073   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE      | 1   | 376591224T  | NSP |
| C2074   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2075   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2076   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2077   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012     | 1   | 376993315R2 | NSP |
| C2078   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012     | 1   | 376991035R2 | NSP |
| C2079   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2080   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2081   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2081or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2082   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2082or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2083   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2083or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2084   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2084or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2085   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2085or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2086   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2086or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2087   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2087or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2088   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J       | 1   | 373022224R2 | NSP |
| C2088or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J      | (1) | 376622224R2 | NSP |
| C2089   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2090   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216     | 1   | 376721047R2 | NSP |
| C2092   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU331KY11608     | 1   | 376923315R2 | NSP |
| C2093   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE       | 1   | 376336814T  | NSP |
| C2094   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012     | 1   | 376993315R2 | NSP |
| C2098   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012     | 1   | 376993315R2 | NSP |
| C2101   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2101or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2102   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2102or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2103   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2103or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2104   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2104or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2105   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2105or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2106   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2106or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2107   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2107or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2108   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J       | 1   | 373024714R2 | NSP |
| C2108or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J      | (1) | 376624714R2 | NSP |
| C2109   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707ST | N   |
| C2110   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012     | 1   | 376993315R2 | NSP |

|         |                                  |                     |     |             |     |
|---------|----------------------------------|---------------------|-----|-------------|-----|
| C2111   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2112   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1   | 332071065R2 | NSP |
| C2113   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2114   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216      | 1   | 376721047R2 | NSP |
| C2115   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216      | 1   | 376721047R2 | NSP |
| C2116   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216      | 1   | 376721047R2 | NSP |
| C2117   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2119   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216      | 1   | 376721047R2 | NSP |
| C2120   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |
| C2121   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2121or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2122   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2122or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2123   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2123or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2124   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2124or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2125   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2125or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2126   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2126or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2127   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2127or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2128   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2128or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2129   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |
| C2130   | CHIP TYPE PLASTIC FILM CAPACITOR | 50ST104MA13216      | 1   | 376721047R2 | NSP |
| C2131   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K1      | 1   | 332121045R1 | NSP |
| C2132   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2133   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2133or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2134   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2135   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2136   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2141   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2141or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2142   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2142or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2143   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2143or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2144   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2144or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2145   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2145or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2146   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2146or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2147   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2147or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2148   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2148or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2149   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2150   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K1      | 1   | 332121045R1 | NSP |
| C2151   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2152   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2153   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1   | 373024714R2 | NSP |

|         |                                  |                     |     |             |     |
|---------|----------------------------------|---------------------|-----|-------------|-----|
| C2153or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J       | (1) | 376624714R2 | NSP |
| C2154   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2155   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2156   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2157   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2158   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2159   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2160   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2161   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2162   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2163   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2164   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2165   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2166   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2170   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2171   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2172   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2173   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2173or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2175   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2176   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2177   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1   | 376591224T  | NSP |
| C2178   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1   | 376591224T  | NSP |
| C2179   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU101KZ12012      | 1   | 376991015R2 | NSP |
| C2180   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2181   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2182   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU331KZ12012      | 1   | 376993315R2 | NSP |
| C2193   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2193or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2197   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2198   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2200   | SMG C                            | CE04W16V-1000M(SMG) | 1   | 395041027S  |     |
| C2201   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1   | 332011045R1 | NSP |
| C2205   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |
| C2207   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J      | 1   | 3400037R1   | NSP |
| C2211   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1     | 1   | 342101002R1 | NSP |
| C2213   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1   | 332031035R1 | NSP |
| C2216   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1   | 332031035R1 | NSP |
| C2217   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2218   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2221   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1   | 332031035R1 | NSP |
| C2224   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1   | 332031035R1 | NSP |
| C2226   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012      | 1   | 376991035R2 | NSP |
| C2227   | CHIP TYPE PLASTIC FILM CAPACITOR | 35MU104KZ22012      | 1   | 3769A1045R2 | NSP |
| C2228   | CHIP TYPE PLASTIC FILM CAPACITOR | 63MU103KZ12012      | 1   | 376991035R2 | NSP |
| C2229   | CHIP TYPE PLASTIC FILM CAPACITOR | 35MU104KZ22012      | 1   | 3769A1045R2 | NSP |
| C2230   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2231   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1     | 1   | 342103314R1 | NSP |
| C2234   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2235   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1     | 1   | 342103314R1 | NSP |
| C2237   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2237or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2238   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2238or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2240   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |

|         |                                  |                     |     |             |     |
|---------|----------------------------------|---------------------|-----|-------------|-----|
| C2241   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2242   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1   | 332241035R1 | NSP |
| C2243   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2244   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1   | 332031035R1 | NSP |
| C2245   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2246   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2257   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1   | 373024714R2 | NSP |
| C2257or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J       | (1) | 376624714R2 | NSP |
| C2258   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1   | 373024714R2 | NSP |
| C2258or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J       | (1) | 376624714R2 | NSP |
| C2277   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2277or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2278   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2278or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2297   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2297or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2298   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2298or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2401   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2402   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2403   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2404   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2408   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2428   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1   | 376591224T  | NSP |
| C2448   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2468   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2488   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2488or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2507   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2508   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1   | 373024714R2 | NSP |
| C2508or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J       | (1) | 376624714R2 | NSP |
| C2527   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE       | 1   | 376591224T  | NSP |
| C2528   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2528or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2547   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2548   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2548or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2567   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1   | 376336814T  | NSP |
| C2587   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2587or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2607   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1   | 373024714R2 | NSP |
| C2607or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-471J       | (1) | 376624714R2 | NSP |
| C2627   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1   | 373021014R2 | NSP |
| C2627or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-101J       | (1) | 376621014R2 | NSP |
| C2647   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1   | 373022224R2 | NSP |
| C2647or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-222J       | (1) | 376622224R2 | NSP |
| C2742   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2742or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2743   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2744   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1   | 397551017ST | N   |
| C2745   | CHIP TYPE CARBON RESISTOR        | RN72K1J-223JE       | 1   | 435032234R1 | NSP |
| C2747   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2749   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2749or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2751   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1   | 397532217ST | N   |

|               |                                  |                     |     |             |     |
|---------------|----------------------------------|---------------------|-----|-------------|-----|
| C2755         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2755or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2756         | CAPACITOR                        | NOJA156M010         | 1   | 3000134R2   | NSP |
| C2760         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2764         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2780         | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2782         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2804         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2804or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2806         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2809         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-331J        | 1   | 373023314R2 | NSP |
| C2809or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-331J       | (1) | 376623314R2 | NSP |
| C2811         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2815         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1   | 332241035R1 | NSP |
| C2816         | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2817         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J      | 1   | 3400042R1   | NSP |
| C2831         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C2832         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C2833         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C2834         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C2835         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-391J1     | 1   | 342103914R1 | NSP |
| C2836         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-391J1     | 1   | 342103914R1 | NSP |
| C2837         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2837or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2838         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2838or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2839         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2840         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2849         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1   | 3400036R1   | NSP |
| C2850         | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2854         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2854or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2856         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-100M(UTSP) | 1   | 397531017ST | N   |
| C2859         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-331J        | 1   | 373023314R2 | NSP |
| C2859or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX50V-331J       | (1) | 376623314R2 | NSP |
| C2861         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP)  | 1   | 397554707ST | N   |
| C2865         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1   | 332241035R1 | NSP |
| C2866         | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K      | 1   | 332241045R1 | NSP |
| C2867         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J      | 1   | 3400042R1   | NSP |
| C2881         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C2882         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP)  | 1   | 397582207ST | N   |
| C2883         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C2884         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J1     | 1   | 342104714R1 | NSP |
| C2885         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-391J1     | 1   | 342103914R1 | NSP |
| C2886         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-391J1     | 1   | 342103914R1 | NSP |
| C2887         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2887or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2888         | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-103J        | 1   | 373041034R2 | NSP |
| C2888or       | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-103J       | (1) | 376641034R2 | NSP |
| C2889         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| C2890         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007ST | N   |
| [ Resistors ] |                                  |                     |     |             |     |
| R2001         | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE       | 1   | 435031024R1 | NSP |
| R2002         | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE       | 1   | 435031024R1 | NSP |
| R2003         | CHIP TYPE CARBON RESISTOR        | RN72K1J-102JE       | 1   | 435031024R1 | NSP |

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R2368 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2373 | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE  | 1 | 435036814R1 | NSP |
| R2377 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2378 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2381 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2382 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2383 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2384 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2385 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2386 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2387 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2388 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2397 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2401 | CHIP TYPE CARBON RESISTOR | RN72K2E-220JE  | 1 | 435222204R1 | NSP |
| R2402 | CHIP TYPE CARBON RESISTOR | RN72K2E-220JE  | 1 | 435222204R1 | NSP |
| R2403 | CHIP TYPE CARBON RESISTOR | RN72K2E-220JE  | 1 | 435222204R1 | NSP |
| R2404 | CHIP TYPE CARBON RESISTOR | RN72K2E-220JE  | 1 | 435222204R1 | NSP |
| R2407 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R2408 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2410 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2411 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2412 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2413 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2414 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2415 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2416 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2417 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R2418 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R2419 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2420 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2421 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2422 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2423 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2424 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2425 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2426 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2427 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2428 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2430 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2431 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2432 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2433 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2434 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2435 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2436 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2437 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2438 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2439 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2440 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2441 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2442 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2443 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2444 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R2445 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2446 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |

[illegible]

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R2503 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2504 | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE  | 1 | 435037504R1 | NSP |
| R2505 | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE  | 1 | 435037504R1 | NSP |
| R2506 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R2507 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2508 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R2509 | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE  | 1 | 435031054R1 | NSP |
| R2510 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R2511 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R2512 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2513 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R2514 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2515 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2516 | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE  | 1 | 435031054R1 | NSP |
| R2517 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2518 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2519 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R2520 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R2521 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R2522 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2523 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2524 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R2525 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2526 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2527 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2528 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R2529 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2530 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1 | 435034704R1 | NSP |
| R2531 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R2532 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2537 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2538 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2547 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2548 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R2567 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2568 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R2587 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R2588 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2607 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R2608 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2627 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R2628 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2647 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R2648 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2667 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R2668 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R2687 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2688 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2707 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2708 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2727 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R2728 | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE  | 1 | 435036814R1 | NSP |
| R2741 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |
| R2742 | C-METAL R                 | RN72K2B-242JE2 | 1 | 435112424R1 | NSP |
| R2743 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP |

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R2744 | CHIP TYPE CARBON RESISTOR | RN72K1J-242JE  | 1 | 435032424R1 | NSP |
| R2747 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2752 | CHIP TYPE CARBON RESISTOR | RN72K1J-184JE  | 1 | 435031844R1 | NSP |
| R2753 | CHIP TYPE CARBON RESISTOR | RN72K2E-010JE  | 1 | 435220104R1 | NSP |
| R2754 | C-METAL R                 | RN72K2B-154JE2 | 1 | 435111544R1 | NSP |
| R2755 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2757 | CHIP TYPE CARBON RESISTOR | RN72K2E-010JE  | 1 | 435220104R1 | NSP |
| R2759 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2760 | C-METAL R                 | RN72K2B-184JE2 | 1 | 435111844R1 | NSP |
| R2761 | C-METAL R                 | RN72K1J-100JE0 | 1 | 435011004R1 | NSP |
| R2767 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP |
| R2768 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2771 | C-METAL R                 | RN72K2B-154JE2 | 1 | 435111544R1 | NSP |
| R2787 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R2788 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2801 | C-METAL R                 | RN72K1J-220JE0 | 1 | 435012204R1 | NSP |
| R2802 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2803 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2804 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2805 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2806 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2807 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R2808 | C-METAL R                 | RN72K1J-473JE0 | 1 | 435014734R1 | NSP |
| R2809 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2810 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2827 | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE  | 1 | 435036814R1 | NSP |
| R2831 | C-METAL R                 | RN72K2B-100JE2 | 1 | 435111004R1 | NSP |
| R2832 | C-METAL R                 | RN72K2B-100JE2 | 1 | 435111004R1 | NSP |
| R2833 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R2834 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R2835 | CHIP TYPE CARBON RESISTOR | RN72K1J-302JE  | 1 | 435033024R1 | NSP |
| R2836 | CHIP TYPE CARBON RESISTOR | RN72K1J-302JE  | 1 | 435033024R1 | NSP |
| R2837 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R2838 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R2839 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R2840 | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1 | 435033924R1 | NSP |
| R2841 | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE  | 1 | 435032724R1 | NSP |
| R2842 | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE  | 1 | 435032724R1 | NSP |
| R2843 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R2844 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R2845 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R2846 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R2852 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2853 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2854 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2855 | C-METAL R                 | RN72K1J-221JE0 | 1 | 435012214R1 | NSP |
| R2856 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2857 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R2858 | C-METAL R                 | RN72K1J-473JE0 | 1 | 435014734R1 | NSP |
| R2859 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2860 | C-METAL R                 | RN72K1J-101JE0 | 1 | 435011014R1 | NSP |
| R2862 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP |
| R2867 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R2881 | C-METAL R                 | RN72K2B-100JE2 | 1 | 435111004R1 | NSP |
| R2882 | C-METAL R                 | RN72K2B-100JE2 | 1 | 435111004R1 | NSP |

|                                |                           |                |     |             |              |
|--------------------------------|---------------------------|----------------|-----|-------------|--------------|
| R2883                          | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1   | 435032234R1 | NSP          |
| R2884                          | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1   | 435032234R1 | NSP          |
| R2885                          | CHIP TYPE CARBON RESISTOR | RN72K1J-302JE  | 1   | 435033024R1 | NSP          |
| R2886                          | CHIP TYPE CARBON RESISTOR | RN72K1J-302JE  | 1   | 435033024R1 | NSP          |
| R2887                          | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1   | 435033324R1 | NSP          |
| R2888                          | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1   | 435033324R1 | NSP          |
| R2889                          | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1   | 435033924R1 | NSP          |
| R2890                          | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE  | 1   | 435033924R1 | NSP          |
| R2891                          | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE  | 1   | 435032724R1 | NSP          |
| R2892                          | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE  | 1   | 435032724R1 | NSP          |
| R2893                          | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1 | NSP          |
| R2894                          | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1 | NSP          |
| R2895                          | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1   | 435034744R1 | NSP          |
| R2896                          | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1   | 435034744R1 | NSP          |
| R2902                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1 | NSP          |
| R2903                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1 | NSP          |
| R2911                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2912                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2913                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2914                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2915                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2916                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2917                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2918                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2919                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2920                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2921                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2951                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2952                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2953                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2954                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2955                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2956                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2957                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2958                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2959                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| R2960                          | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1   | 435220004R1 | NSP          |
| [ Switches, Terminals, Wires ] |                           |                |     |             |              |
| P200                           | PRINTED WIRING BOARD      | BCDG-2078      | 1   | 25142078A   | <b>N</b> NSP |
| P2003D                         | SOCKET                    | IMSA-9111S-28L | 1   | 25053567    | NSP          |
| P2004D                         | SOCKET                    | IMSA-9111S-24L | 1   | 25053259    | NSP          |
| P2006                          | SOCKET                    | IMSA-9111S-30L | 1   | 25056701    | NSP          |
| P2007                          | SOCKET                    | IMSA-9111S-30L | 1   | 25056701    | NSP          |
| P2008                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533    | NSP          |
| P2009                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533    | NSP          |
| P200A                          | PRINTED WIRING BOARD      | BCDG-2078      | {1} | 25142078    | <b>N</b> NSP |
| P2201                          | PIN JACK                  | NPJ-2PDO762    | 1   | 25046018    |              |

**BADIS-2075-1A**

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.                       | PART NAME              | DESCRIPTION         | Q'TY | PART NO. (SN) | REMARKS |
|--------------------------------|------------------------|---------------------|------|---------------|---------|
| <b>[ Semi-conductors ]</b>     |                        |                     |      |               |         |
| D5411                          | DIODE                  | D2SB60A             | 1    | 22380366F     |         |
| D5412                          | DIODE                  | SARS01              | 1    | 22380397      |         |
| D5413                          | DIODE                  | SARS01              | 1    | 22380397      |         |
| D5414                          | DIODE                  | SJPL-D2             | 1    | 22380398R2    | NSP     |
| D5415                          | ZENER DIODE            | KDZ36B              | 1    | 224990585R2   | NSP     |
| D5451                          | DIODE                  | FMEN-220A           | 1    | 22380396      |         |
| D5451A                         | HEAT SINK              | ANH7224-A           | 1    | 27160701      | NSP     |
| D5451B                         | SCREW                  | 3TTB+8B(3BC)        | 1    | 838430088GR   | NSP     |
| D5481                          | CHIP TYPE DIODE        | 1SS355              | 1    | 223269R2      | NSP     |
| D5482                          | CHIP TYPE DIODE        | 1SS355              | 1    | 223269R2      | NSP     |
| D7501                          | ZENER DIODE            | DZ2J051M0L          | 1    | 224760510R2   | NSP     |
| D7502                          | ZENER DIODE            | DZ2J051M0L          | 1    | 224760510R2   | NSP     |
| D7503                          | ZENER DIODE            | DZ2J051M0L          | 1    | 224760510R2   | NSP     |
| D7506                          | LED                    | HLMP-Y701           | 1    | 225528        |         |
| D7507                          | ZENER DIODE            | DZ2J075M0L          | 1    | 224760750R2   | NSP     |
| D7508                          | CHIP TYPE DIODE        | 1SS355              | 1    | 223269R2      | NSP     |
| D7751                          | LED                    | SCB3318E-D2         | 1    | 225487        |         |
| D7751A                         | HOLDER                 | (LED-LH5-2)         | 1    | 27191336      | N NSP   |
| Q5411                          | HYBRID IC              | STR2A153            | 1    | 22242995      |         |
| Q5412                          | PHOTO COUPLER          | TLF781(GR)          | 1    | 24120175      |         |
| Q5451                          | HYBRID IC              | NJM1431AF           | 1    | 22242979R2    | NSP     |
| Q5481                          | TRANSISTOR             | 2SD2704K            | 1    | 2218130R2     | NSP     |
| Q7501                          | HYBRID IC              | NJM4580M-D          | 1    | 22241448R2    | NSP     |
| Q7502                          | TRANSISTOR             | DTC124EUA           | 1    | 2218510R2     | NSP     |
| Q7509                          | TRANSISTOR             | DTA124EUA           | 1    | 2218450R2     | NSP     |
| Q7510                          | TRANSISTOR             | DTC124EUA           | 1    | 2218510R2     | NSP     |
| Q7511                          | TRANSISTOR             | DTC143EUA           | 1    | 2218520R2     | NSP     |
| Q7512                          | REMOTE SENSOR          | IRM-3638M3S28       | 1    | 24130026      | N       |
| Q7513                          | TRANSISTOR             | INA5001AP1-T111     | 1    | 2218030R2     | N NSP   |
| Q7514                          | TRANSISTOR             | DTC124EUA           | 1    | 2218510R2     | NSP     |
| Q7515                          | TRANSISTOR             | 2SC2712-GR          | 1    | 2213145R2     | NSP     |
| Q7516                          | TRANSISTOR             | 2SC2712-GR          | 1    | 2213145R2     | NSP     |
| Q7517                          | FLUORESCENT TUBE       | 016MT096GINYK       | 1    | 212285A       |         |
| Q7517A                         | HOLDER                 | (FL)                | 1    | 27191414      | NSP     |
| Q7751                          | TRANSISTOR             | DTC143EUA           | 1    | 2218520R2     | NSP     |
| <b>[ Transformers, Coils ]</b> |                        |                     |      |               |         |
| L5401                          | CHOKE COIL             | PFC2225C            | 1    | 231490        |         |
| L5411                          | LINE FILTER            | HF2318-A213Y0R8-01  | 1    | 231492        |         |
| L5451                          | CHOKE COIL             | RP1315BNP-100M      | 1    | 231466M100    |         |
| L7501                          | CORE                   | BKP2125HS101-T      | 1    | 2350048R1     | NSP     |
| L7502                          | CORE                   | BLM11P300SPT        | 1    | 2350049R1     | NSP     |
| L7503                          | CHOKE COIL             | LBC2518T2R2M        | 1    | 231364M022R2  | NSP     |
| L7504                          | CHOKE COIL             | LBC2518T2R2M        | 1    | 231364M022R2  | NSP     |
| T5411                          | POWER TRANSFORMER      | ATK7006-A           | 1    | 2302140       | !       |
| <b>[ Capacitors ]</b>          |                        |                     |      |               |         |
| C5403                          | CERAMIC CAPACITOR      | DE2F3KY103MA4BM02   | 1    | 3300083       |         |
| C5411                          | IS TYPE CAPACITOR      | LE104-MX-C3.5       | 1    | 3800049S      | !       |
| C5412                          | ELECTROLYTIC CAPACITOR | CE69W400V-100M(KMM) | 1    | 3504524       |         |

|       |                                  |                     |   |             |       |
|-------|----------------------------------|---------------------|---|-------------|-------|
| C5413 | ELECTROLYTIC CAPACITOR           | CE04W50V-22M(LXZ)   | 1 | 3500248T    | N     |
| C5414 | FILM C                           | ECQE6222KF          | 1 | 3700116     |       |
| C5415 | CHIP TYPE CERAMIC CAPACITOR      | GRM188R72A153KAC4D  | 1 | 3300084R1   | NSP   |
| C5421 | IS TYPE CAPACITOR                | DE1E3KX152MB5BA01   | 1 | 3300062S    | !     |
| C5422 | IS TYPE CAPACITOR                | DE1E3KX152MB5BA01   | 1 | 3300062S    | !     |
| C5451 | ELECTROLYTIC CAPACITOR           | CE04W10V-4700M(LXZ) | 1 | 3500247S    |       |
| C5453 | PW TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-470M(PW)   | 1 | 393734717T  |       |
| C5454 | CHIP TYPE CERAMIC CAPACITOR      | GRM31A7U3A470JW31D  | 1 | 3400039R1   | NSP   |
| C5455 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J      | 1 | 3400035R1   | NSP   |
| C5458 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C5459 | CHIP TYPE PLASTIC FILM CAPACITOR | 35MU104KZ22012      | 1 | 3769A1045R2 | NSP   |
| C5701 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K       | 1 | 332242235R1 | NSP   |
| C5704 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1 | 332241035R1 | NSP   |
| C5705 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1     | 1 | 342103314R1 | NSP   |
| C5720 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-102J1     | 1 | 342101024R1 | NSP   |
| C5722 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTE102JE       | 1 | 376591024T  | NSP   |
| C5723 | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTE102JE       | 1 | 376591024T  | NSP   |
| C7501 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP   |
| C7502 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J      | 1 | 3400037R1   | N NSP |
| C7504 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J      | 1 | 3400034R1   | N NSP |
| C7505 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J1     | 1 | 342103304R1 | NSP   |
| C7506 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J1     | 1 | 342103304R1 | NSP   |
| C7507 | ELECTROLYTIC CAPACITOR           | CE04W50V-10M        | 1 | 355781009T  |       |
| C7508 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1 | 342101014R1 | NSP   |
| C7509 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP   |
| C7512 | ELECTROLYTIC CAPACITOR           | CE04W16V-100M       | 1 | 355741019T  |       |
| C7513 | ELECTROLYTIC CAPACITOR           | CE04W16V-100M       | 1 | 355741019T  |       |
| C7514 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-470J1     | 1 | 342104704R1 | NSP   |
| C7520 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1 | 332241035R1 | NSP   |
| C7521 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J      | 1 | 3400036R1   | N NSP |
| C7524 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K       | 1 | 332241035R1 | NSP   |
| C7533 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7534 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7535 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7536 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7537 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7538 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1 | 332101035R1 | NSP   |
| C7539 | ELECTROLYTIC CAPACITOR           | CE04W16V-10M(S)     | 1 | 353741009T  |       |
| C7540 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-102J1     | 1 | 342101024R1 | NSP   |
| C7542 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1      | 1 | 332102235R1 | NSP   |
| C7543 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1      | 1 | 332102235R1 | NSP   |
| C7544 | ELECTROLYTIC CAPACITOR           | CE04W16V-47M(S)     | 1 | 353744709T  |       |
| C7545 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1      | 1 | 332102235R1 | NSP   |
| C7546 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C7547 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C7548 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1 | 342101014R1 | NSP   |
| C7549 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1 | 342101014R1 | NSP   |
| C7550 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1 | 342101014R1 | NSP   |
| C7551 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1     | 1 | 342101014R1 | NSP   |
| C7552 | CHIP TYPE CERAMIC CAPACITOR      | CK725F1E-104Z1      | 1 | 332161040R1 | NSP   |
| C7553 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1      | 1 | 332102235R1 | NSP   |
| C7554 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1      | 1 | 332102235R1 | NSP   |
| C7645 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-822K       | 1 | 332248225R1 | NSP   |
| C7646 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-822K       | 1 | 332248225R1 | NSP   |
| C7740 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K1      | 1 | 332101025R1 | NSP   |

## [ Resistors ]

|       |                           |                |   |             |       |
|-------|---------------------------|----------------|---|-------------|-------|
| R5411 | C-METAL R                 | MCR18EZPJ105   | 1 | 4300040R1   | NSP   |
| R5412 | C-METAL R                 | MCR18EZPJ105   | 1 | 4300040R1   | NSP   |
| R5413 | C-METAL R                 | MCR18EZPJ105   | 1 | 4300040R1   | NSP   |
| R5414 | RESISTOR                  | ERG1DJ154P     | 1 | 4000283F    |       |
| R5415 | METAL OXIDE FILM RESISTOR | ERG1SJ680P     | 1 | 4400045     |       |
| R5416 | METAL RESISTOR            | ERX1SJR68H     | 1 | 4500343     |       |
| R5418 | C-METAL R                 | RN72K2B-120JE2 | 1 | 435111204R1 | NSP   |
| R5419 | C-METAL R                 | RN72K2B-102JE2 | 1 | 435111024R1 | NSP   |
| R5451 | C-METAL R                 | KTR18EZPJ105   | 1 | 435231054R1 | NSP   |
| R5453 | CHIP TYPE CARBON RESISTOR | RN72K1J-390JE  | 1 | 435033904R1 | NSP   |
| R5454 | CHIP TYPE CARBON RESISTOR | RN72K1J-181JE  | 1 | 435031814R1 | NSP   |
| R5457 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R5458 | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE  | 1 | 435031054R1 | NSP   |
| R5459 | CHIP TYPE CARBON RESISTOR | RN72K1J-302FE  | 1 | 435033022R1 | NSP   |
| R5460 | CHIP TYPE CARBON RESISTOR | RN72K1J-752FE  | 1 | 435037522R1 | NSP   |
| R5461 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP   |
| R5462 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP   |
| R5463 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP   |
| R5464 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP   |
| R5465 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R5482 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP   |
| R5483 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP   |
| R5484 | C-METAL R                 | RN72K2B-105JE2 | 1 | 435111054R1 | NSP   |
| R5701 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R5720 | C-METAL R                 | RN72K2B-120JE2 | 1 | 435111204R1 | NSP   |
| R5721 | C-METAL R                 | RN72K2B-120JE2 | 1 | 435111204R1 | NSP   |
| R5722 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R5723 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R5724 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R5725 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7501 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP   |
| R7502 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R7503 | C-METAL R                 | RN72K2B-330JE2 | 1 | 435113304R1 | N NSP |
| R7504 | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE  | 1 | 435036824R1 | NSP   |
| R7505 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP   |
| R7506 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP   |
| R7507 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP   |
| R7508 | CHIP TYPE CARBON RESISTOR | RN72K1J-432JE  | 1 | 435034324R1 | NSP   |
| R7509 | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE  | 1 | 435033334R1 | NSP   |
| R7510 | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE  | 1 | 435035614R1 | NSP   |
| R7511 | CHIP TYPE CARBON RESISTOR | RN72K1J-432JE  | 1 | 435034324R1 | NSP   |
| R7512 | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE  | 1 | 435033334R1 | NSP   |
| R7513 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP   |
| R7515 | CHIP TYPE CARBON RESISTOR | RN72K1J-122JE  | 1 | 435031224R1 | NSP   |
| R7516 | C-METAL R                 | RN72K2B-330JE2 | 1 | 435113304R1 | N NSP |
| R7517 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7518 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7519 | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1 | 435220004R1 | NSP   |
| R7520 | CHIP TYPE CARBON RESISTOR | RN72K2E-000JE  | 1 | 435220004R1 | NSP   |
| R7521 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP   |
| R7522 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP   |
| R7523 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP   |
| R7524 | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE  | 1 | 435031054R1 | NSP   |
| R7529 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP   |

|       |                                            |               |   |             |     |
|-------|--------------------------------------------|---------------|---|-------------|-----|
| R7536 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7537 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7538 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7539 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7543 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R7544 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7545 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7546 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7547 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7548 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-102JE | 1 | 435031024R1 | NSP |
| R7549 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7550 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7551 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7552 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7553 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7554 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7555 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7556 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7557 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7558 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-222JE | 1 | 435032224R1 | NSP |
| R7559 | CHIP TYPE CARBON RESISTOR                  | RN72K2E-221JE | 1 | 435222214R1 | NSP |
| R7560 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R7561 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7562 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7563 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R7564 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10 |               | 1 | 415471004T  |     |
| R7565 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7566 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R7567 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7568 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10 |               | 1 | 415471004T  |     |
| R7569 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7570 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R7571 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7572 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7573 | CHIP TYPE CARBON RESISTOR                  | RN72K2E-221JE | 1 | 435222214R1 | NSP |
| R7574 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R7575 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R7576 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-332JE | 1 | 435033324R1 | NSP |
| R7577 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-332JE | 1 | 435033324R1 | NSP |
| R7578 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R7581 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R7601 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-271JE | 1 | 435032714R1 | NSP |
| R7603 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-471JE | 1 | 435034714R1 | NSP |
| R7604 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-561JE | 1 | 435035614R1 | NSP |
| R7605 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-821JE | 1 | 435038214R1 | NSP |
| R7606 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-122JE | 1 | 435031224R1 | NSP |
| R7607 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-222JE | 1 | 435032224R1 | NSP |
| R7608 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-392JE | 1 | 435033924R1 | NSP |
| R7609 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-123JE | 1 | 435031234R1 | NSP |
| R7611 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-271JE | 1 | 435032714R1 | NSP |
| R7612 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R7613 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-471JE | 1 | 435034714R1 | NSP |
| R7614 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-561JE | 1 | 435035614R1 | NSP |
| R7615 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-821JE | 1 | 435038214R1 | NSP |
| R7616 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-122JE | 1 | 435031224R1 | NSP |

|                                |                           |                  |     |              |       |
|--------------------------------|---------------------------|------------------|-----|--------------|-------|
| R7617                          | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE    | 1   | 435032224R1  | NSP   |
| R7618                          | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE    | 1   | 435033924R1  | NSP   |
| R7619                          | CHIP TYPE CARBON RESISTOR | RN72K1J-123JE    | 1   | 435031234R1  | NSP   |
| R7621                          | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE    | 1   | 435032714R1  | NSP   |
| R7622                          | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE    | 1   | 435033314R1  | NSP   |
| R7623                          | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE    | 1   | 435034714R1  | NSP   |
| R7624                          | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE    | 1   | 435035614R1  | NSP   |
| R7625                          | CHIP TYPE CARBON RESISTOR | RN72K1J-821JE    | 1   | 435038214R1  | NSP   |
| R7626                          | CHIP TYPE CARBON RESISTOR | RN72K1J-122JE    | 1   | 435031224R1  | NSP   |
| R7627                          | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE    | 1   | 435032224R1  | NSP   |
| R7628                          | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE    | 1   | 435033924R1  | NSP   |
| R7629                          | CHIP TYPE CARBON RESISTOR | RN72K1J-123JE    | 1   | 435031234R1  | NSP   |
| R7631                          | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE    | 1   | 435032714R1  | NSP   |
| R7632                          | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE    | 1   | 435033314R1  | NSP   |
| R7633                          | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE    | 1   | 435034714R1  | NSP   |
| R7634                          | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE    | 1   | 435035614R1  | NSP   |
| R7635                          | CHIP TYPE CARBON RESISTOR | RN72K1J-821JE    | 1   | 435038214R1  | NSP   |
| R7645                          | C-METAL R                 | RN72K2B-120JE2   | 1   | 435111204R1  | NSP   |
| R7646                          | C-METAL R                 | RN72K2B-120JE2   | 1   | 435111204R1  | NSP   |
| R7751                          | CHIP TYPE CARBON RESISTOR | RN72K1J-392JE    | 1   | 435033924R1  | NSP   |
| [ Switches, Terminals, Wires ] |                           |                  |     |              |       |
| F5401A                         | FUSE HOLDER               | NSCT-1P2506      | 1   | 25052609T    | ! NSP |
| F5401B                         | FUSE HOLDER               | NSCT-1P2506      | 1   | 25052609T    | ! NSP |
| F5411A                         | FUSE HOLDER               | NSCT-1P2506      | 1   | 25052609T    | ! NSP |
| F5411B                         | FUSE HOLDER               | NSCT-1P2506      | 1   | 25052609T    | ! NSP |
| P190                           | PRINTED WIRING BOARD      | BCDIS-2075       | {1} | 25142075     | NSP   |
| P190                           | PRINTED WIRING BOARD      | BCETC-2123       | {1} | 25142123     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2124       | {1} | 25142124     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCSW-2126        | {1} | 25142126     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCSW-2127        | {1} | 25142127     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCSW-2128        | {1} | 25142128     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2129       | {1} | 25142129     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2130       | {1} | 25142130     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2131       | {1} | 25142131     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2132       | {1} | 25142132     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCPS-2133        | {1} | 25142133     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2134       | {1} | 25142134     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2136       | {1} | 25142136     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2141       | {1} | 25142141     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2143       | {1} | 25142143     | N NSP |
| P190                           | PRINTED WIRING BOARD      | BCETC-2155       | {1} | 25142155     | N NSP |
| P5401                          | WIRE HARNESS ASSEMBLY     | ADX7513-A        | 1   | 2009991520UL | NSP   |
| P5402                          | PLUG                      | NPLG-2P631       | 1   | 25055675     | NSP   |
| P5451A                         | WIRE HARNESS ASSEMBLY     | ADX7812-A        | 1   | 2009991534UL | NSP   |
| P5452                          | TRM(SCREW)                | TER21-0130V      | 1   | 25060533     | NSP   |
| P5453                          | TRM(SCREW)                | TER21-0130V      | 1   | 25060533     | NSP   |
| P5454                          | TRM(EARTH)                | TP00940-21       | 1   | 25065732T    | NSP   |
| P5455                          | TRM(EARTH)                | TP00940-21       | 1   | 25065732T    | NSP   |
| P5701                          | TERMINAL                  | NTM-1P233(M1969) | 1   | 25060302     | NSP   |
| P5701A                         | SOCKET                    | NSCT-13P2143     | 1   | 25052246     | N NSP |
| P5702                          | ST JACK                   | MSJ-035-12APCAG  | 1   | 25046035     |       |
| P5720                          | ST JACK                   | MSJ-064-05A SR   | 1   | 25045783     |       |
| P5721                          | TRM (SCREW)               | TP00370-21       | 1   | 25065668T    | NSP   |
| P5901                          | WS CLAMP                  | CB-71683(L=50)   | 1   | 260261       | NSP   |
| P7552A                         | WIRE HARNESS ASSEMBLY     | NSAS-10P2458     | 1   | 2009991594UL | N NSP |

|        |                       |                   |   |              |              |
|--------|-----------------------|-------------------|---|--------------|--------------|
| P7602A | SOCKET                | 9615S-35C-PP      | 1 | 25053323     | NSP          |
| P7603  | WIRE HARNESS ASSEMBLY | NSAS-3P2095       | 1 | 2009991284UL | NSP          |
| P7603A | WIRE HOL              | CHD-1.5-3         | 1 | 25053535     | <b>N</b> NSP |
| P7603B | PLUG                  | NPLG-3P131        | 1 | 25055147     | NSP          |
| P7604A | SOCKET                | NSCT-5P2396       | 1 | 25052499     | NSP          |
| P7605  | WIRE HARNESS ASSEMBLY | NSAS-7P2125       | 1 | 2009991314UL | NSP          |
| P7605A | WIRE HOL              | CHD-1.5-7         | 1 | 25053537     | <b>N</b> NSP |
| P7605B | PLUG                  | NPLG-7P135        | 1 | 25055151     | NSP          |
| P7610  | WIRE HARNESS ASSEMBLY | NSAS-5P2109       | 1 | 2009991298UL | NSP          |
| P7610A | WIRE HOL              | CHD-1.5-5         | 1 | 25053536     | <b>N</b> NSP |
| P7610B | PLUG                  | NPLG-5P352        | 1 | 25055369     | NSP          |
| P7620  | WIRE HARNESS ASSEMBLY | NSAS-7P2125       | 1 | 2009991314UL | NSP          |
| P7620A | WIRE HOL              | CHD-1.5-7         | 1 | 25053537     | <b>N</b> NSP |
| P7620B | PLUG                  | NPLG-7P354        | 1 | 25055371     | NSP          |
| P7630  | WIRE HARNESS ASSEMBLY | NSAS-5P2109       | 1 | 2009991298UL | NSP          |
| P7630A | WIRE HOL              | CHD-1.5-5         | 1 | 25053536     | NSP          |
| P7630B | PLUG                  | NPLG-5P133        | 1 | 25055149     | NSP          |
| P7653A | SOCKET                | NSCT-11P2429      | 1 | 25052532     | NSP          |
| P7653B | SOCKET                | NSCT-11P2429      | 1 | 25052532     | NSP          |
| P7654  | WIRE HARNESS ASSEMBLY | NSAS-3P2093       | 1 | 2009991282UL | NSP          |
| P7654A | WIRE HOL              | CHD-1.5-3         | 1 | 25053535     | <b>N</b> NSP |
| P7654B | PLUG                  | NPLG-3P131        | 1 | 25055147     | NSP          |
| RL5401 | RELAY                 | NRL-1P10A-DC5-207 | 1 | 25065731     |              |
| S7601  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7602  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7603  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7604  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7605  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7606  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7607  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7608  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7609  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7610  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7611  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7612  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7613  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7614  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7615  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7616  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7617  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7618  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7619  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7620  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7621  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7622  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7623  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7624  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7625  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7626  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7627  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7628  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7629  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7630  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7631  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |
| S7632  | PUSH SWITCH           | NPS-111-S681      | 1 | 25035718T    | NSP          |

|       |                |                           |   |           |     |
|-------|----------------|---------------------------|---|-----------|-----|
| S7634 | PUSH SWITCH    | NPS-111-S681              | 1 | 25035718T | NSP |
| S7635 | PUSH SWITCH    | NPS-111-S681              | 1 | 25035718T | NSP |
| S7636 | PUSH SWITCH    | NPS-111-S681              | 1 | 25035718T | NSP |
| S7740 | ROTARY ENCODER | XREB125(9X11.5)PVB30FINB1 | 1 | 25065737  | N   |
| S7770 | ROTARY ENCODER | EC12E2425WITH WASHER      | 1 | 25065655W |     |
| S7774 | ROTARY ENCODER | XREB125(9X11.5)PVB30FINB1 | 1 | 25065737  | N   |

## BAHDM-2087-1A

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.                | PART NAME                   | DESCRIPTION           | Q'TY | PART NO. (SN)      | REMARKS |
|-------------------------|-----------------------------|-----------------------|------|--------------------|---------|
| [ Semi-conductors ]     |                             |                       |      |                    |         |
| D5561                   | ZENER DIODE                 | DZ2J056M0L            | 1    | 224760560R2        | NSP     |
| Q5501                   | HYBRID IC                   | PCA9517DGKR           | 1    | 22243011R2         | NSP     |
| Q5562                   | TRANSISTOR                  | 2SC4081               | 1    | 2218560R2          | NSP     |
| Q5581                   | HYBRID IC                   | BD9329EFJ             | 1    | 22242985R2         | NSP     |
| [ Transformers, Coils ] |                             |                       |      |                    |         |
| L5581                   | CORE                        | BKP2125HS101-T        | 1    | 2350048R1          | NSP     |
| L5582                   | CORE                        | BKP2125HS101-T        | 1    | 2350048R1          | NSP     |
| L5583                   | CHOKE COIL                  | #B966AS-100M          | 1    | 231493M100R2       | NSP     |
| [ Capacitors ]          |                             |                       |      |                    |         |
| C5501                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J0       | 1    | 342033314R1        | NSP     |
| C5516                   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1        | 1    | 332101045R1        | NSP     |
| C5517                   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K1        | 1    | 332101035R1        | NSP     |
| C5518                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J1       | 1    | 342103314R1        | NSP     |
| C5527                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J0       | 1    | 342033314R1        | NSP     |
| C5529                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J0       | 1    | 342033314R1        | NSP     |
| C5581                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-100D1       | 1    | 342101002R1        | NSP     |
| C5582                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J        | 1    | 3400036R1          | NSP     |
| C5583                   | ELECTROLYTIC CAPACITOR      | CE04W16V-56M(LXY)     | 1    | 3500244T           | NSP     |
| C5584                   | CHIP TYPE CERAMIC CAPACITOR | GMK316BJ106KLMB       | 1    | 3300079R1          | NSP     |
| C5585                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-390J1       | 1    | 342103904R1        | NSP     |
| C5588                   | CHIP TYPE CERAMIC CAPACITOR | GMK316BJ106KLMB       | 1    | 3300079R1          | NSP     |
| C5589                   | CHIP TYPE CERAMIC CAPACITOR | GMK316BJ106KLMB       | 1    | 3300079R1          | NSP     |
| C5590                   | CAPACITOR                   | NOJA226M006R          | 1    | 3000131R2          | NSP     |
| C5590or                 | CAPACITOR                   | NMCA0J226MTRF         | (1)  | 3000136R2          | N NSP   |
| C5591                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J1       | 1    | 342102214R1        | NSP     |
| C5593                   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1        | 1    | 332101045R1        | NSP     |
| C5594                   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1        | 1    | 332101045R1        | NSP     |
| C5597                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-222J1       | 1    | 342102224R1        | NSP     |
| [ Resistors ]           |                             |                       |      |                    |         |
| R5503                   | C-METAL R                   | RN72K2B-000JE2        | 1    | 435110004R1        | NSP     |
| R5504                   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1    | 435010004R1_SIMUKE | NSP     |
| R5506                   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE         | 1    | 435034734R1        | NSP     |
| R5507                   | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE         | 1    | 435030004R1        | NSP     |
| R5512                   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1    | 435010004R1_SIMUKE | NSP     |

|                                |                           |                  |     |              |              |
|--------------------------------|---------------------------|------------------|-----|--------------|--------------|
| R5513                          | C-METAL R                 | RN72K1J-105JE0   | 1   | 435011054R1  | NSP          |
| R5566                          | C-METAL R                 | RN72K1J-100JE0   | 1   | 435011004R1  | NSP          |
| R5567                          | C-METAL R                 | RN72K1J-152JE0   | 1   | 435011524R1  | NSP          |
| R5568                          | C-METAL R                 | RN72K1J-222JE0   | 1   | 435012224R1  | NSP          |
| R5569                          | C-METAL R                 | RN72K1J-104JE0   | 1   | 435011044R1  | NSP          |
| R5570                          | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE    | 1   | 435031004R1  | NSP          |
| R5581                          | C-METAL R                 | KTR18EJPJ105     | 1   | 435231054R1  | NSP          |
| R5582                          | C-METAL R                 | RN72K1J-822FE0   | 1   | 435018222R1  | NSP          |
| R5583                          | C-METAL R                 | RN72K1J-221FE0   | 1   | 435012212R1  | NSP          |
| R5584                          | C-METAL R                 | RN72K1J-182FE0   | 1   | 435011822R1  | NSP          |
| R5589                          | CHIP TYPE CARBON RESISTOR | RN72K1J-113JE    | 1   | 435031134R1  | NSP          |
| R5591                          | C-METAL R                 | RN72K2B-105JE2   | 1   | 435111054R1  | NSP          |
| R5592                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE    | 1   | 435030004R1  | NSP          |
| R5593                          | C-METAL R                 | RN72K1J-102JE0   | 1   | 435011024R1  | NSP          |
| [ Switches, Terminals, Wires ] |                           |                  |     |              |              |
| P2003C                         | PLUG                      | IMSA-9111B-28    | 1   | 25056742     | NSP          |
| P2004C                         | PLUG                      | IMSA-9111B-24    | 1   | 25056625     | NSP          |
| P210                           | PRINTED WIRING BOARD      | BCHDM-2087       | {1} | 25142087     | NSP          |
| P210                           | PRINTED WIRING BOARD      | BCHDM-2087       | 1   | 25142087A    | <b>N</b> NSP |
| P210                           | PRINTED WIRING BOARD      | BCETC-2230       | {1} | 25142230     | <b>N</b> NSP |
| P3652B                         | PLUG                      | NPLG-3P916       | 1   | 25055963R2   | NSP          |
| P5501                          | SOCKET                    | HD043-F19G1BY-A  | 1   | 25053585R3   | NSP          |
| P5503                          | TRM(EARTH)                | TP00940-21       | 1   | 25065732T    | NSP          |
| P5506                          | TRM(EARTH)                | TP00940-21       | 1   | 25065732T    | NSP          |
| P5508                          | WS CLAMP                  | CB-71683(L=50)   | 1   | 260261       | NSP          |
| P5509                          | TERMINAL                  | NTM-1P233(M1969) | 1   | 25060302     | NSP          |
| P5581A                         | WIRE HARNESS ASSEMBLY     | NSAS-4P2415      | 1   | 2009991551UL | NSP          |
| P591C                          | PLUG                      | IMSA-9111B-24    | 1   | 25056625     | NSP          |
| P592C                          | PLUG                      | IMSA-9111B-28    | 1   | 25056742     | NSP          |
| P7604B                         | SOCKET                    | NSCT-5P2468      | 1   | 25052571R2   | NSP          |
| P8601B                         | SOCKET                    | TCX3255-611187   | 1   | 25053413R3   | NSP          |

**BAPRC-2072-1G**

## &lt;Note&gt;

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME       | DESCRIPTION               | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|-----------------|---------------------------|------|---------------|---------|
| [ Semi-conductors ] |                 |                           |      |               |         |
| D1001               | DIODE           | CUS357                    | 1    | 223320R2      | NSP     |
| D1601               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D1602               | ESD             | IMSA-6802-01Y901_1608SIZE | 1    | 4000255AR1    | NSP     |
| D3000               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D3001               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D3002               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D3003               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D3004               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |
| D3005               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP     |

|         |                 |                      |     |                |     |
|---------|-----------------|----------------------|-----|----------------|-----|
| D3006   | CHIP TYPE DIODE | DA2J10100            | 1   | 223303R2       | NSP |
| D3007   | CHIP TYPE DIODE | DA2J10100            | 1   | 223303R2       | NSP |
| D8301   | ZENER DIODE     | DZ2J036M0L           | 1   | 224760360R2    | NSP |
| D8902   | DIODE           | RBR3MM30ATR          | 1   | 22380401R2     | NSP |
| D8903   | DIODE           | RBR3MM30ATR          | 1   | 22380401R2     | NSP |
| Q1001   | HYBRID IC       | S-1333A33-M5T1U3     | 1   | 22242934R2     | NSP |
| Q1002   | HYBRID IC       | S-1333A33-M5T1U3     | 1   | 22242934R2     | NSP |
| Q1003   | HYBRID IC       | PCM9211PTR           | 1   | 22242703R2     | NSP |
| Q1005   | HYBRID IC       | PCM9211PTR           | 1   | 22242703R2     | NSP |
| Q1007   | HYBRID IC       | 74VHC4040FT          | 1   | 22274040E1R2TO | NSP |
| Q1008   | HYBRID IC       | TC7WH241FU(TE12L_F)  | 1   | 22242076R2TO   | NSP |
| Q1090   | HYBRID IC       | MM3464A50NRE         | 1   | 22243073R2     | NSP |
| Q1092   | HYBRID IC       | 74VHC157FT           | 1   | 22274157ER2TO  | NSP |
| Q1097   | HYBRID IC       | 74VHC541FT           | 1   | 22274541E1R2TO | NSP |
| Q1099   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1102   | HYBRID IC       | 74VHC157FT           | 1   | 22274157ER2TO  | NSP |
| Q1103   | HYBRID IC       | 74VHC157FT           | 1   | 22274157ER2TO  | NSP |
| Q1301   | HYBRID IC       | D808K013DPTP456      | 1   | 22243009R3     | NSP |
| Q1302   | HYBRID IC       | S-13A1A13-U5T1U3     | 1   | 22242848R2     | NSP |
| Q1305   | HYBRID IC       | M12L64164A-5TG2Y     | 1   | 22243019R3     | NSP |
| Q1306   | HYBRID IC       | EN25QH16-104HIP      | 1   | 222W0130R2     | NSP |
| Q1306or | HYBRID IC       | EN25QH16A-104HIP     | (1) | 222W0130AR2    | NSP |
| Q1307   | HYBRID IC       | S-13A1A33-U5T1U3     | 1   | 22242844R2     | NSP |
| Q1308   | HYBRID IC       | TC7MBL3245SFT        | 1   | 22242539R2TO   | NSP |
| Q1309   | HYBRID IC       | 74LCX125FT           | 1   | 22274125BR2TO  | NSP |
| Q1310   | TRANSISTOR      | KRC104S              | 1   | 2216210R2      | NSP |
| Q1601   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1602   | HYBRID IC       | M95640-WMN6TP        | 1   | 22242643R2     | NSP |
| Q1603   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1604   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1605   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1606   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1607   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1608   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1609   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1610   | HYBRID IC       | MPD70F3477AGJA-GAE-G | 1   | 222W0117R3     | NSP |
| Q1611   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1612   | HYBRID IC       | TC7WBL3305CFK        | 1   | 22242965R2     | NSP |
| Q1613   | HYBRID IC       | BU7262SFVM           | 1   | 22242983R2     | NSP |
| Q1614   | TRANSISTOR      | 2SC2712-GR           | 1   | 2213145R2      | NSP |
| Q1615   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1616   | HYBRID IC       | PST894A270UR         | 1   | 22243198R2     | NSP |
| Q1617   | TRANSISTOR      | KRA302E              | 1   | 2218360R2      | NSP |
| Q1618   | HYBRID IC       | 74VHCT08AFT          | 1   | 22274008G1R2TO | NSP |
| Q1619   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1620   | HYBRID IC       | 74VHCT541AFT         | 1   | 22274541GR2TO  | NSP |
| Q1621   | HYBRID IC       | ICL3221ECVZ          | 1   | 22242268R2     | NSP |
| Q1622   | HYBRID IC       | TC7WH241FU(TE12L_F)  | 1   | 22242076R2TO   | NSP |
| Q1623   | HYBRID IC       | 74VHC541FT           | 1   | 22274541E1R2TO | NSP |
| Q1624   | HYBRID IC       | BU2090F-E2           | 1   | 22242686R2     | NSP |
| Q1625   | HYBRID IC       | S-80848CNMC-B89T2G   | 1   | 22243004R2     | NSP |
| Q1626   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1627   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1628   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |
| Q1629   | TRANSISTOR      | KRC404E              | 1   | 2216450R2      | NSP |

|         |            |                    |     |               |              |
|---------|------------|--------------------|-----|---------------|--------------|
| Q1630   | TRANSISTOR | KRA302E            | 1   | 2218360R2     | NSP          |
| Q1631   | TRANSISTOR | KRC404E            | 1   | 2216450R2     | NSP          |
| Q1633   | HYBRID IC  | TC7WH157FK         | 1   | 22241836R2    | <b>N</b> NSP |
| Q3001   | HYBRID IC  | AM3354BZCZ80       | 1   | 22243021R3    | NSP          |
| Q3002   | HYBRID IC  | TC58NVG1S3HTA00B4H | 1   | 222W0155R3    | NSP          |
| Q3003   | HYBRID IC  | NT5CC128M16IP-DI   | 1   | 22243076R3    | NSP          |
| Q3006   | HYBRID IC  | PST894A160UR       | 1   | 22243226R2    | NSP          |
| Q3007   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q3041   | HYBRID IC  | W25Q32FVSSIG       | 1   | 222W0135R2    | NSP          |
| Q3044   | HYBRID IC  | ADSP-21489KSWZ-4B  | 1   | 22242846R3    | NSP          |
| Q3046   | HYBRID IC  | A3V56S40GTP-50     | 1   | 22243236R2    | <b>N</b> NSP |
| Q3048   | HYBRID IC  | TC7MBL3245SFT      | 1   | 22242539R2TO  | NSP          |
| Q3050   | TRANSISTOR | KRC104S            | 1   | 2216210R2     | NSP          |
| Q3120   | HYBRID IC  | 74LCX125FT         | 1   | 22274125BR2TO | NSP          |
| Q3121   | HYBRID IC  | 74LCX125FT         | 1   | 22274125BR2TO | NSP          |
| Q3201   | HYBRID IC  | MFI337S3959        | 1   | 22242820R2    | NSP          |
| Q3401   | HYBRID IC  | W25Q32FVSSIG       | 1   | 222W0135R2    | NSP          |
| Q3403   | HYBRID IC  | TC7WHU04FU(TE12L)  | 1   | 22242231R2    | NSP          |
| Q3404   | HYBRID IC  | ADSP-21489KSWZ-4B  | 1   | 22242846R3    | NSP          |
| Q3406   | HYBRID IC  | A3V56S40GTP-50     | 1   | 22243236R2    | <b>N</b> NSP |
| Q3408   | HYBRID IC  | TC7MBL3245SFT      | 1   | 22242539R2TO  | NSP          |
| Q3410   | TRANSISTOR | KRC104S            | 1   | 2216210R2     | NSP          |
| Q3601   | HYBRID IC  | FP6861C-B1AS5CT    | 1   | 22242840R2    | NSP          |
| Q3651   | HYBRID IC  | KSZ8091RNB         | 1   | 22243023R2    | NSP          |
| Q3652   | HYBRID IC  | SN74AUP1T17DCKR    | 1   | 222740170R2   | NSP          |
| Q3653   | HYBRID IC  | SN74AUP1T17DCKR    | 1   | 222740170R2   | NSP          |
| Q3654   | HYBRID IC  | TC74VCX125FT       | 1   | 22274125DR2TO | NSP          |
| Q3667   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q3901   | HYBRID IC  | TPS65910A31A1RSLR  | 1   | 22243022R2    | NSP          |
| Q7017   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q7018   | HYBRID IC  | S-1333A33-M5T1U3   | 1   | 22242934R2    | NSP          |
| Q8000   | HYBRID IC  | MN864788           | 1   | 22242929R3    | NSP          |
| Q8001   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8002   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8003   | HYBRID IC  | 74LCX125FT         | 1   | 22274125BR2TO | NSP          |
| Q8006   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8007   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8008   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8009   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8010   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8011   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |
| Q8114   | HYBRID IC  | 74LCX125FT         | 1   | 22274125BR2TO | NSP          |
| Q8202   | HYBRID IC  | ADV7180KCP32Z-RL   | 1   | 22242763R2    | NSP          |
| Q8202or | HYBRID IC  | ADV7180KCP32Z      | (1) | 22242763R3    | NSP          |
| Q8203   | HYBRID IC  | MM3411A18URE       | 1   | 22243075R2    | NSP          |
| Q8205   | HYBRID IC  | MM3411A18URE       | 1   | 22243075R2    | NSP          |
| Q8300   | HYBRID IC  | S-13A1A13-U5T1U3   | 1   | 22242848R2    | NSP          |
| Q8302   | HYBRID IC  | SI19573CTUC        | 1   | 22242762R3    | NSP          |
| Q8303   | TRANSISTOR | 2SA1162-GR         | 1   | 2214375R2     | NSP          |
| Q8307   | HYBRID IC  | MM3411A13URE       | 1   | 22243074R2    | NSP          |
| Q8401   | HYBRID IC  | MN864787           | 1   | 22242944R3    | NSP          |
| Q8402   | HYBRID IC  | MX25L6433FM2I-08G  | 1   | 222W0156R2    | NSP          |
| Q8402or | HYBRID IC  | IS25LP064A-JBLE    | (1) | 222W0160R2    | NSP          |
| Q8701   | HYBRID IC  | TMPM361F10FG       | 1   | 222W0115R3    | NSP          |
| Q8702   | TRANSISTOR | KRC402E            | 1   | 2218330R2     | NSP          |

|                         |                   |                       |   |                    |     |
|-------------------------|-------------------|-----------------------|---|--------------------|-----|
| Q8703                   | TRANSISTOR        | RE1C001UNTCL          | 1 | 2218160R2          | NSP |
| Q8704                   | TRANSISTOR        | KRA302E               | 1 | 2218360R2          | NSP |
| Q8705                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8706                   | HYBRID IC         | 74LCX125FT            | 1 | 22274125BR2TO      | NSP |
| Q8707                   | TRANSISTOR        | KRA302E               | 1 | 2218360R2          | NSP |
| Q8708                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8709                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8710                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8711                   | TRANSISTOR        | KRA302E               | 1 | 2218360R2          | NSP |
| Q8712                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8713                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8714                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8715                   | TRANSISTOR        | KRA302E               | 1 | 2218360R2          | NSP |
| Q8716                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8725                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8727                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8729                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8730                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8731                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8732                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8733                   | TRANSISTOR        | KRC402E               | 1 | 2218330R2          | NSP |
| Q8901                   | HYBRID IC         | MM3464A50NRE          | 1 | 22243073R2         | NSP |
| Q8902                   | HYBRID IC         | TPS65251RHAR          | 1 | 22243010R2         | NSP |
| Q8903                   | HYBRID IC         | S-13A1A11-U5T1U3      | 1 | 22242847R2         | NSP |
| Q8904                   | HYBRID IC         | S-13A1A11-U5T1U3      | 1 | 22242847R2         | NSP |
| Q8905                   | HYBRID IC         | S-13A1A33-U5T1U3      | 1 | 22242844R2         | NSP |
| Q8921                   | HYBRID IC         | FR9888CSPCTR          | 1 | 22242839R2         | NSP |
| Q8965                   | HYBRID IC         | MM3464A50NRE          | 1 | 22243073R2         | NSP |
| X1001                   | CRYSTAL           | NZ2520SD(22.5792MHz)  | 1 | 3010548R2          | NSP |
| X1002                   | CRYSTAL           | NZ2520SD(24.576MHz)   | 1 | 3010542R2          | NSP |
| X1301                   | CRYSTAL           | HC-49S 9C24.0000M     | 1 | 3010515R2          | NSP |
| X1601                   | CRYSTAL           | CSTCR4M00G53-R0       | 1 | 3010536R2          | NSP |
| X3001                   | CRYSTAL           | HC-49S 9C24.0000M     | 1 | 3010515R2          | NSP |
| X3002                   | CRYSTAL           | FC-135 -32.768K       | 1 | 3010532R2          | NSP |
| X3401                   | CRYSTAL           | HC-49S 9C25.0000M     | 1 | 3010517R2          | NSP |
| X3651                   | CRYSTAL           | HC-49S 9C25.0000M     | 1 | 3010517R2          | NSP |
| X8031                   | CRYSTAL           | HC-49S 9C27.0000M     | 1 | 3010518R2          | NSP |
| X8201                   | CRYSTAL           | HC-49S 9C28.6363M     | 1 | 3010519R2          | NSP |
| X8301                   | CRYSTAL           | HC-49S 9C27.0000M     | 1 | 3010518R2          | NSP |
| X8400                   | CRYSTAL           | HC-49S 9C27.0000M     | 1 | 3010518R2          | NSP |
| X8701                   | CERAMIC RESONATOR | CSTCE8M00G55-R0       | 1 | 3010416R2          | NSP |
| [ Transformers, Coils ] |                   |                       |   |                    |     |
| L1001                   | CORE              | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1002                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1003                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1004                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1005                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1006                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1007                   | C-METAL R         | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1008                   | CHOKE COIL        | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |
| L1009                   | CHOKE COIL        | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |
| L1010                   | CORE              | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1011                   | CHOKE COIL        | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |
| L1012                   | CHOKE COIL        | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |
| L1013                   | CHOKE COIL        | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |

|       |                           |                       |   |                    |     |
|-------|---------------------------|-----------------------|---|--------------------|-----|
| L1014 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1015 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1016 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L1017 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1021 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1022 | CHOKE COIL                | LBC2518T4R7M          | 1 | 231364M047R2       | NSP |
| L1024 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1027 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1029 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L1303 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L1304 | CORE                      | BLM18PG181SN1D        | 1 | 2350005R1          | NSP |
| L1305 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L1306 | CORE                      | BLM18PG181SN1D        | 1 | 2350005R1          | NSP |
| L1307 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1309 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1 | 435030004R1        | NSP |
| L1601 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1602 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1603 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L1604 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L3001 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3042 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1 | 435030004R1        | NSP |
| L3043 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1 | 435030004R1        | NSP |
| L3045 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3046 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3047 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3048 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3049 | CORE                      | BLM18PG181SN1D        | 1 | 2350005R1          | NSP |
| L3121 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L3122 | CORE                      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L3201 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L3202 | CORE                      | BK1005LL241-T         | 1 | 2350032R1          | NSP |
| L3401 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3402 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1 | 435030004R1        | NSP |
| L3403 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1 | 435030004R1        | NSP |
| L3405 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3406 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3407 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3408 | CORE                      | BLM18PG121SN1D        | 1 | 2350006R1          | NSP |
| L3409 | CORE                      | BLM18PG181SN1D        | 1 | 2350005R1          | NSP |
| L3601 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3602 | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L3611 | CORE                      | MCF12102G900-T        | 1 | 2350041R2          | NSP |
| L3613 | CORE                      | MCF20104G900-T        | 1 | 2350040R2          | NSP |
| L3651 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3652 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3655 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3656 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3661 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3901 | CHOKE COIL                | NRS4018T2R2MDGJ       | 1 | 231494R2           | NSP |
| L3902 | CHOKE COIL                | NRS4018T2R2MDGJ       | 1 | 231494R2           | NSP |
| L3903 | CHOKE COIL                | NRS4018T2R2MDGJ       | 1 | 231494R2           | NSP |
| L3904 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3905 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3906 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3907 | CORE                      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |

|       |           |                       |   |                    |     |
|-------|-----------|-----------------------|---|--------------------|-----|
| L3909 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3910 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L3911 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8000 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8001 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8002 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8003 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8004 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8005 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8006 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8007 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8008 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8009 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8010 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8011 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8012 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8013 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8014 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8015 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8016 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8017 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8018 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8021 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8022 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8023 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8024 | CORE      | EXC24CH900U           | 1 | 2350039R2          | NSP |
| L8202 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8205 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8207 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8210 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8300 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8302 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8303 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8304 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8305 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8306 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8307 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8308 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |
| L8400 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8401 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8402 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8403 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8404 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8405 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8406 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8407 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8408 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8409 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8410 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8411 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8412 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8413 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8415 | CORE      | BLM15PX121SN1D        | 1 | 2350034R1          | NSP |
| L8416 | C-METAL R | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| L8417 | CORE      | BLM15PX181SN1D        | 1 | 2350033R1          | NSP |

|                |                             |                     |   |             |     |
|----------------|-----------------------------|---------------------|---|-------------|-----|
| L8418          | CORE                        | BLM15PX181SN1D      | 1 | 2350033R1   | NSP |
| L8702          | CORE                        | BLM15PX181SN1D      | 1 | 2350033R1   | NSP |
| L8703          | CORE                        | BLM15PX181SN1D      | 1 | 2350033R1   | NSP |
| L8901          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8902          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8903          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8904          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8905          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8906          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8909          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8910          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8911          | CORE                        | BKP2125HS101-T      | 1 | 2350048R1   | NSP |
| L8914          | COIL                        | NRS6028T 100MMGK    | 1 | 231488R2    | NSP |
| L8915          | COIL                        | NRS6028T 4R7MMGK    | 1 | 231487R2    | NSP |
| L8916          | COIL                        | NRS6028T 2R2NMGJ    | 1 | 231486R2    | NSP |
| L8921          | CHOKE COIL                  | BLM21PG221SN1       | 1 | 230949R2    | NSP |
| L8922          | COIL                        | NRS6028T 100MMGK    | 1 | 231488R2    | NSP |
| [ Capacitors ] |                             |                     |   |             |     |
| C1000          | CHIP ELECT C                | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C1001          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1002          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1005          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1006          | CHIP ELECT C                | CECS16V-100M        | 1 | 398641017R2 | NSP |
| C1009          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C1011          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1014          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1015          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1018          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1019          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1020          | CHIP ELECT C                | CE32W4V-150M(CS)    | 1 | 3500253R2   | NSP |
| C1021          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-472K0      | 1 | 332034725R1 | NSP |
| C1022          | CHIP ELECT C                | CE32W16V-47M(EC-PC) | 1 | 3500238R2   | NSP |
| C1023          | CHIP ELECT C                | CECS16V-100M        | 1 | 398641017R2 | NSP |
| C1025          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0      | 1 | 332032235R1 | NSP |
| C1026          | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-473K0      | 1 | 332024735R1 | NSP |
| C1027          | CHIP ELECT C                | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C1033          | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C1037          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1040          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-472K0      | 1 | 332034725R1 | NSP |
| C1041          | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C1042          | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C1044          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1062          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0      | 1 | 332032235R1 | NSP |
| C1063          | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-473K0      | 1 | 332024735R1 | NSP |
| C1068          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1069          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1071          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1072          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1073          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1074          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1075          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C1091          | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M       | 1 | 332092267R2 | NSP |
| C1092          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1093          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C1094          | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1 | 332071065R2 | NSP |

[illegible]

|         |                                  |                  |     |             |              |
|---------|----------------------------------|------------------|-----|-------------|--------------|
| C1353   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-180J0  | 1   | 342031804R1 | NSP          |
| C1354   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1355   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1356   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1357   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K   | 1   | 332071065R2 | NSP          |
| C1358   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K   | 1   | 332071065R2 | NSP          |
| C1359   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K   | 1   | 332071065R2 | NSP          |
| C1360   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K   | 1   | 332071065R2 | NSP          |
| C1366   | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K   | 1   | 332071065R2 | NSP          |
| C1367   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1368   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0   | 1   | 332031035R1 | NSP          |
| C1369   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1370   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1371   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1372   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1373   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1374   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1375   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1376   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1377   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1378   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1379   | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J0  | 1   | 342032214R1 | NSP          |
| C1380   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1381   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1382   | CHIP ELECT C                     | CE32W4V-150M(CS) | 1   | 3500253R2   | NSP          |
| C1383   | CHIP ELECT C                     | CECS4V-220M      | 1   | 3986G2217R2 | NSP          |
| C1384   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1385   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1386   | CHIP ELECT C                     | CECS4V-220M      | 1   | 3986G2217R2 | NSP          |
| C1389   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-182J     | 1   | 373041824R2 | NSP          |
| C1389or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-182J    | (1) | 376641824R2 | <b>N</b> NSP |
| C1390   | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU16V-222J     | 1   | 373042224R2 | NSP          |
| C1390or | CHIP TYPE PLASTIC FILM CAPACITOR | ECHUX16V-222J    | (1) | 376642224R2 | <b>N</b> NSP |
| C1601   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1602   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1603   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1604   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0   | 1   | 332031025R1 | NSP          |
| C1605   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1606   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1607   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-224K   | 1   | 332242245R1 | NSP          |
| C1608   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1609   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-224K   | 1   | 332242245R1 | NSP          |
| C1610   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1611   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-224K   | 1   | 332242245R1 | NSP          |
| C1612   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1613   | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-224K   | 1   | 332242245R1 | NSP          |
| C1614   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0   | 1   | 332001055R1 | NSP          |
| C1615   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1616   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1617   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1618   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1619   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1620   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-475K1   | 1   | 332134755R1 | NSP          |
| C1621   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |
| C1623   | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0   | 1   | 332011045R1 | NSP          |

|       |                             |                 |   |             |     |
|-------|-----------------------------|-----------------|---|-------------|-----|
| C1624 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1626 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1627 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1628 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1629 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1630 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C1631 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-470J0 | 1 | 342034704R1 | NSP |
| C1632 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-470J0 | 1 | 342034704R1 | NSP |
| C1633 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1635 | CHIP TYPE CERAMIC CAPACITOR | CK725B50V-224K  | 1 | 332242245R1 | NSP |
| C1636 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1637 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1638 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1641 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1642 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C1643 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1644 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C1645 | CHIP ELECT C                | CECS4V-220M     | 1 | 3986G2217R2 | NSP |
| C1646 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1647 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1648 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-153K0  | 1 | 332021535R1 | NSP |
| C1649 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K1  | 1 | 332101035R1 | NSP |
| C1650 | CHIP ELECT C                | CECS4V-220M     | 1 | 3986G2217R2 | NSP |
| C1651 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1 | 1 | 342101014R1 | NSP |
| C1652 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1 | 1 | 342101014R1 | NSP |
| C1653 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1655 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1656 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1657 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1658 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C1659 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1660 | CHIP TYPE CERAMIC CAPACITOR | CK725B50V-224K  | 1 | 332242245R1 | NSP |
| C1661 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1662 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1663 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1664 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1665 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C1666 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0 | 1 | 342032214R1 | NSP |
| C1667 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C1668 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0 | 1 | 342032214R1 | NSP |
| C1669 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-220J0 | 1 | 342032204R1 | NSP |
| C3001 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3002 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3003 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3004 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3005 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-270J0 | 1 | 342032704R1 | NSP |
| C3006 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-270J0 | 1 | 342032704R1 | NSP |
| C3007 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-270J0 | 1 | 342032704R1 | NSP |
| C3008 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-270J0 | 1 | 342032704R1 | NSP |
| C3009 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3010 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3011 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3012 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3013 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3014 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |

[illegible]

|       |                             |                  |   |             |     |
|-------|-----------------------------|------------------|---|-------------|-----|
| C3085 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3086 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3087 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3088 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0   | 1 | 332031025R1 | NSP |
| C3089 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3090 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0   | 1 | 332031025R1 | NSP |
| C3091 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3092 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0   | 1 | 332031025R1 | NSP |
| C3093 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0   | 1 | 332031025R1 | NSP |
| C3094 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3095 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K   | 1 | 332071065R2 | NSP |
| C3096 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K   | 1 | 332071065R2 | NSP |
| C3097 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K   | 1 | 332071065R2 | NSP |
| C3098 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3099 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3100 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3101 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3102 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3103 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K   | 1 | 332071065R2 | NSP |
| C3104 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3105 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3106 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3107 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3108 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3109 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3110 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3111 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0   | 1 | 332031025R1 | NSP |
| C3112 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3113 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3114 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0   | 1 | 332001055R1 | NSP |
| C3115 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3116 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3117 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K   | 1 | 332071065R2 | NSP |
| C3118 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3125 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-330J0  | 1 | 342033304R1 | NSP |
| C3130 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3131 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3201 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3202 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3218 | CHIP ELECT C                | CE32W4V-150M(CS) | 1 | 3500253R2   | NSP |
| C3219 | CHIP ELECT C                | CECS4V-220M      | 1 | 3986G2217R2 | NSP |
| C3387 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3388 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3389 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3390 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3391 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3392 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3393 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3394 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3395 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3396 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3397 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3398 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3399 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |
| C3400 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0   | 1 | 332011045R1 | NSP |

[illegible]

|       |                             |                       |   |                    |     |
|-------|-----------------------------|-----------------------|---|--------------------|-----|
| C3466 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3471 | CHIP ELECT C                | CECS4V-220M           | 1 | 3986G2217R2        | NSP |
| C3472 | CHIP ELECT C                | CE32W4V-150M(CS)      | 1 | 3500253R2          | NSP |
| C3473 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0       | 1 | 342032214R1        | NSP |
| C3601 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M         | 1 | 332092267R2        | NSP |
| C3602 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M         | 1 | 332092267R2        | NSP |
| C3603 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C3610 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-100J0       | 1 | 342031004R1        | NSP |
| C3651 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-330J0       | 1 | 342033304R1        | NSP |
| C3652 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M         | 1 | 332092267R2        | NSP |
| C3654 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3655 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3656 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3657 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3658 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J        | 1 | 3400042R1          | NSP |
| C3659 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3661 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C3662 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M         | 1 | 332092267R2        | NSP |
| C3663 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3666 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0       | 1 | 342031504R1        | NSP |
| C3667 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-180J0       | 1 | 342031804R1        | NSP |
| C3668 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3669 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3670 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3674 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C3684 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3685 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3686 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C3687 | CHIP ELECT C                | CECS4V-220M           | 1 | 3986G2217R2        | NSP |
| C3689 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0        | 1 | 332032235R1        | NSP |
| C3690 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0       | 1 | 342032214R1        | NSP |
| C3691 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-220J0       | 1 | 342032204R1        | NSP |
| C3800 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3801 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3802 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3803 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3804 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3805 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3806 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3808 | CHIP ELECT C                | CECS4V-220M           | 1 | 3986G2217R2        | NSP |
| C3810 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J1       | 1 | 342102214R1        | NSP |
| C3811 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3901 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1        | 1 | 332134755R1        | NSP |
| C3902 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3903 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3904 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3905 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1        | 1 | 332134755R1        | NSP |
| C3906 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3907 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3908 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3909 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3910 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3911 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1 | 332132255R1        | NSP |
| C3912 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1        | 1 | 332134755R1        | NSP |
| C3913 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1        | 1 | 332134755R1        | NSP |

[illegible]

|       |                             |                       |   |                    |     |
|-------|-----------------------------|-----------------------|---|--------------------|-----|
| C3969 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C3970 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C3971 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3972 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1 | 342031014R1        | NSP |
| C3973 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1 | 342031014R1        | NSP |
| C3974 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1 | 342031014R1        | NSP |
| C3975 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3976 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3977 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3978 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C3979 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3980 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3981 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3982 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3983 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3984 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3985 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3986 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3987 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3988 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3989 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3990 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3991 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3992 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3993 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3994 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1 | 342031014R1        | NSP |
| C3995 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3996 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3997 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C3998 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C3999 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C7038 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C7039 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8000 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8001 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8004 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8005 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8007 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8008 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8009 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8010 | CHIP ELECT C                | CE32W4V-150M(CS)      | 1 | 3500253R2          | NSP |
| C8012 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8013 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8014 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8015 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8016 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8017 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8018 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8021 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8022 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8023 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8024 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8025 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8027 | CHIP ELECT C                | CE32W4V-150M(CS)      | 1 | 3500253R2          | NSP |
| C8028 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |

[illegible]

|       |                             |                       |   |                    |     |
|-------|-----------------------------|-----------------------|---|--------------------|-----|
| C8225 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8229 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8230 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8231 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8232 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C8236 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0       | 1 | 342031504R1        | NSP |
| C8237 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0       | 1 | 342031204R1        | NSP |
| C8239 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C8240 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-683K0        | 1 | 332016835R1        | NSP |
| C8241 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-153K0        | 1 | 332021535R1        | NSP |
| C8255 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8257 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8260 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8261 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8301 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8303 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M         | 1 | 332092267R2        | NSP |
| C8304 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-220J0       | 1 | 342032204R1        | NSP |
| C8305 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0       | 1 | 342032214R1        | NSP |
| C8306 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8307 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8308 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8309 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8310 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8311 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C8312 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8313 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8314 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8315 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1 | 342031014R1        | NSP |
| C8316 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8317 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8318 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8319 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8320 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8321 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-090D0       | 1 | 342030902R1        | NSP |
| C8322 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0       | 1 | 342032214R1        | NSP |
| C8323 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8324 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8325 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-090D0       | 1 | 342030902R1        | NSP |
| C8326 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8327 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-471J0       | 1 | 342034714R1        | NSP |
| C8328 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8329 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8330 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8331 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8332 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8333 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8334 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8335 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-471J0       | 1 | 342034714R1        | NSP |
| C8336 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8338 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8339 | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8340 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8341 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8342 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8343 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1 | 332031025R1        | NSP |

|       |                                  |                       |   |                    |     |
|-------|----------------------------------|-----------------------|---|--------------------|-----|
| C8344 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8345 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8349 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8353 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8354 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8356 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8357 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8358 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8359 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8360 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8361 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8362 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8363 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K0        | 1 | 332031025R1        | NSP |
| C8365 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8366 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8367 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8368 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8369 | C-METAL R                        | RN72K1J-000JE0_SIMUKE | 1 | 435010004R1_SIMUKE | NSP |
| C8384 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8388 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J0       | 1 | 342032214R1        | NSP |
| C8401 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8402 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8403 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0        | 1 | 332001055R1        | NSP |
| C8404 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-471J0       | 1 | 342034714R1        | NSP |
| C8405 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8406 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8407 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8408 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8409 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8410 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8411 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8412 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8413 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8414 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8415 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8416 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8417 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8418 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8419 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C8420 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8421 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8422 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8423 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0        | 1 | 332031035R1        | NSP |
| C8424 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8425 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8426 | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU103KY11608        | 1 | 376921035R2        | NSP |
| C8427 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8428 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K        | 1 | 332071065R2        | NSP |
| C8430 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8431 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8432 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8433 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8434 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8435 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |
| C8436 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0        | 1 | 332011045R1        | NSP |

|         |                             |                       |     |                    |              |
|---------|-----------------------------|-----------------------|-----|--------------------|--------------|
| C8437   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8438   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8439   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8440   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8441   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8442   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8443   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        | NSP          |
| C8444   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        | NSP          |
| C8445   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        | NSP          |
| C8449   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8450   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8451   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8452   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8453   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8454   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8455   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8456   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8457   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8460   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0       | 1   | 342031204R1        | NSP          |
| C8461   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0       | 1   | 342031504R1        | NSP          |
| C8463   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0       | 1   | 342031014R1        | NSP          |
| C8468   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-220J0       | 1   | 342032204R1        | NSP          |
| C8470   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        | NSP          |
| C8472   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8473   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8474   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8475   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8476   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        | NSP          |
| C8477   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        | NSP          |
| C8478   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        | NSP          |
| C8483   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8484   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8485   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8486   | CHIP ELECT C                | CE32W4V-150M(CS)      | 1   | 3500253R2          | NSP          |
| C8487   | CHIP ELECT C                | CE32W4V-150M(CS)      | 1   | 3500253R2          | NSP          |
| C8489   | CAPACITOR                   | NOJA226M006R          | 1   | 3000131R2          | NSP          |
| C8489or | CAPACITOR                   | NMCA0J226MTRF         | (1) | 3000136R2          | <b>N</b> NSP |
| C8611   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8612   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8621   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8622   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8631   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8632   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8661   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8662   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP          |
| C8700   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8701   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8702   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8703   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8704   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8705   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        | NSP          |
| C8706   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8707   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |
| C8709   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        | NSP          |
| C8710   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        | NSP          |

|       |                                  |                     |   |             |     |
|-------|----------------------------------|---------------------|---|-------------|-----|
| C8713 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C8890 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0      | 1 | 332001055R1 | NSP |
| C8891 | CHIP TYPE CERAMIC CAPACITOR      | CK725B0J-226M       | 1 | 332092267R2 | NSP |
| C8901 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8905 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1     | 1 | 342101002R1 | NSP |
| C8906 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-680J0     | 1 | 342036804R1 | NSP |
| C8907 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-473K1      | 1 | 332104735R1 | NSP |
| C8908 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-473K1      | 1 | 332104735R1 | NSP |
| C8909 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-473K1      | 1 | 332104735R1 | NSP |
| C8910 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C8911 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C8912 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-040C0     | 1 | 342030401R1 | NSP |
| C8913 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-050C0     | 1 | 342030501R1 | NSP |
| C8921 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C8922 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K0      | 1 | 332011045R1 | NSP |
| C8923 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1E-106K       | 1 | 332221065R2 | NSP |
| C8924 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1E-106K       | 1 | 332221065R2 | NSP |
| C8925 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C8927 | CHIP TYPE CERAMIC CAPACITOR      | CK725B0J-226M       | 1 | 332092267R2 | NSP |
| C8931 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J0     | 1 | 342033304R1 | NSP |
| C8932 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-270J0     | 1 | 342032704R1 | NSP |
| C8936 | SMG C                            | CE04W16V-1000M(SMG) | 1 | 395041027S  | NSP |
| C8937 | SMG C                            | CE04W16V-1000M(SMG) | 1 | 395041027S  | NSP |
| C8939 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8940 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K0      | 1 | 332032235R1 | NSP |
| C8941 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1E-473K0      | 1 | 332024735R1 | NSP |
| C8942 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K0      | 1 | 332031035R1 | NSP |
| C8943 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-102J1     | 1 | 342101024R1 | NSP |
| C8945 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D0     | 1 | 342031002R1 | NSP |
| C8946 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D0     | 1 | 342031002R1 | NSP |
| C8947 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8949 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8950 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8952 | CHIP TYPE CERAMIC CAPACITOR      | CK732B16V-106K      | 1 | 332071065R2 | NSP |
| C8956 | CHIP TYPE CERAMIC CAPACITOR      | GCJ31CR71A106KA13L  | 1 | 3300094R2   | NSP |
| C8959 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-222J1     | 1 | 342102224R1 | NSP |
| C8960 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-222J1     | 1 | 342102224R1 | NSP |
| C8961 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1E-106K       | 1 | 332221065R2 | NSP |
| C8962 | CHIP ELECT C                     | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C8963 | CHIP ELECT C                     | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C8964 | CHIP ELECT C                     | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C8965 | CHIP ELECT C                     | CECS4V-220M         | 1 | 3986G2217R2 | NSP |
| C8966 | CHIP TYPE CERAMIC CAPACITOR      | GCJ31CR71A106KA13L  | 1 | 3300094R2   | NSP |
| C8967 | CHIP TYPE CERAMIC CAPACITOR      | GCJ31CR71A106KA13L  | 1 | 3300094R2   | NSP |
| C8970 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J0     | 1 | 342033304R1 | NSP |
| C8971 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP |
| C8972 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP |
| C8973 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP |
| C8975 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP |
| C8976 | CHIP TYPE CERAMIC CAPACITOR      | GMK316BJ106KLMB     | 1 | 3300079R1   | NSP |
| C8979 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J      | 1 | 3400035R1   | NSP |
| C8981 | CHIP TYPE PLASTIC FILM CAPACITOR | 35MU104KZ22012      | 1 | 3769A1045R2 | NSP |
| C8983 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J      | 1 | 3400035R1   | NSP |
| C8984 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-470J0     | 1 | 342034704R1 | NSP |
| C8991 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1A-105K0      | 1 | 332001055R1 | NSP |

|               |                             |               |   |               |     |
|---------------|-----------------------------|---------------|---|---------------|-----|
| C8994         | CHIP ELECT C                | CECS16V-100M  | 1 | 398641017R2   | NSP |
| C8995         | CHIP ELECT C                | CECS4V-220M   | 1 | 3986G2217R2   | NSP |
| C8996         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M | 1 | 332092267R2   | NSP |
| C8997         | CHIP ELECT C                | CECS4V-220M   | 1 | 3986G2217R2   | NSP |
| C8999         | CHIP ELECT C                | CECS4V-220M   | 1 | 3986G2217R2   | NSP |
| [ Resistors ] |                             |               |   |               |     |
| R1001         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1002         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1003         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1006         | CHIP TYPE CARBON RESISTOR   | RN72K1J-560JE | 1 | 435035604R1   | NSP |
| R1007         | CHIP TYPE CARBON RESISTOR   | RN72K1J-101JE | 1 | 435031014R1   | NSP |
| R1008         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE | 1 | 435031044R1   | NSP |
| R1010         | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE | 1 | 435031034R1   | NSP |
| R1011         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1012         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1013         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1014         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1015         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1016         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1017         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1019         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1020         | CHIP TYPE CARBON RESISTOR   | RN72K1J-101JE | 1 | 435031014R1   | NSP |
| R1021         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1022         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1023         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1024         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1025         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1026         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1029         | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE | 1 | 435031024R1   | NSP |
| R1031         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1032         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1034         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1035         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1037         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1039         | CHIP TYPE CARBON RESISTOR   | RN72K1J-330JE | 1 | 435033304R1   | NSP |
| R1041         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1042         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1043         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1044         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1046         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1047         | CHIP TYPE CARBON RESISTOR   | RN72K1J-681JE | 1 | 435036814R1   | NSP |
| R1049         | CHIP RESISTOR NETWORK       | YCN104-103-JK | 1 | 43464C10304R1 | NSP |
| R1050         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1051         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1052         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1053         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1054         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE | 1 | 435032204R1   | NSP |
| R1059         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1060         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1061         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1062         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1063         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE | 1 | 435033314R1   | NSP |
| R1064         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |
| R1066         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE | 1 | 435034704R1   | NSP |
| R1067         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE | 1 | 435032214R1   | NSP |

[illegible]

|         |                           |                |     |               |     |
|---------|---------------------------|----------------|-----|---------------|-----|
| R1154   | C-METAL R                 | RN72K2B-000JE2 | 1   | 435110004R1   | NSP |
| R1155   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1156   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1158   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1159   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1   | 435031034R1   | NSP |
| R1160   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1161   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1162   | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1   | 435032234R1   | NSP |
| R1163   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1164   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1165   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1166   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1167   | CHIP RESISTOR NETWORK     | YCN104-470-JK  | 1   | 43464C47004R1 | NSP |
| R1168   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1169   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1170   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1   | 435034734R1   | NSP |
| R1171   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1   | 435031014R1   | NSP |
| R1173   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE  | 1   | 435030104R1   | NSP |
| R1174   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1   | NSP |
| R1176   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE  | 1   | 435031054R1   | NSP |
| R1177   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1   | 435031044R1   | NSP |
| R1179   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1180   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1181   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1182   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1183   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1184   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1   | 435032204R1   | NSP |
| R1186   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1187   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1188   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1189   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1   | 435032204R1   | NSP |
| R1190   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1   | 435032204R1   | NSP |
| R1208   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1   | 435031014R1   | NSP |
| R1210   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1211   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470  | 1   | 43464747004R2 | NSP |
| R1211or | CHIP RESISTOR NETWORK     | YCN104-470-JK  | (1) | 43464C47004R1 | NSP |
| R1212   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1213   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1214   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1218   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1   | NSP |
| R1220   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1   | NSP |
| R1222   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1   | NSP |
| R1224   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1   | NSP |
| R1301   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE  | 1   | 435033314R1   | NSP |
| R1302   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1303   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1   | 435031034R1   | NSP |
| R1304   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1305   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1   | 435032214R1   | NSP |
| R1306   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1307   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1308   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1309   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1310   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1311   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE  | 1   | 435034704R1   | NSP |
| R1312   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1   | 435031034R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R1313   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1314   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1316   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1317   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1317or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1318   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1318or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1319   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1319or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1320   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1320or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1321   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1321or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1322   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1322or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1323   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1323or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1324   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1324or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1325   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1325or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1326   | CHIP RESISTOR NETWORK     | RM7LJ330X04   | 1   | 43484733004R2 | NSP |
| R1326or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R1328   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1329   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1330   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1333   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1334   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1335   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1336   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1337   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1338   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1339   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1340   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1341   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1342   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1343   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1344   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1345   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1346   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1347   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1348   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1349   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1352   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1353   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1354   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1355   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1357   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1358   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1359   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1360   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1361   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1362   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1363   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1364   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |

[illegible]

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R1420   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R1421   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R1422   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R1423   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R1424   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1425   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1426   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1429   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1430   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1431   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1432   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1433   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1434   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1435   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1445   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1447   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1448   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1453   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1454   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1455   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1456   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1601   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R1602   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1602or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1603   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1604   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1605   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R1606   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1607   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1608   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R1609   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R1610   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1611   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1612   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1613   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1614   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1615   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1616   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1617   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1618   | CHIP RESISTOR NETWORK     | MNR04MRAPJ472 | 1   | 43464747204R2 | NSP |
| R1618or | CHIP RESISTOR NETWORK     | YCN104-472-JK | (1) | 43464C47204R1 | NSP |
| R1619   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1620   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1620or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1621   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1622   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1622or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1623   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1624   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1625   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1626   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1627   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1628   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1629   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1629or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R1630   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1631   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1631or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1632   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1632or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1633   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1634   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1635   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1636   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1637   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1638   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1639   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1640   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1640or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1642   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1644   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1646   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1647   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1648   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1649   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1650   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1651   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1652   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1653   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1654   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1657   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP |
| R1658   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1659   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1659or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1661   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1662   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R1663   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1664   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1665   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1665or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1666   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1666or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1667   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1668   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1669   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1670   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1671   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1671or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1672   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1673   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1674   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1675   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1675or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1676   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1677   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1677or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1678   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R1679   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R1680   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1681   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R1682   | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE | 1   | 435032734R1   | NSP |
| R1683   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1684   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1685   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1686   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1687   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1688   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R1689   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R1690   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1690or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1691   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1692   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1693   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1693or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1694   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1694or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1695   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1696   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1697   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1698   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1699   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1700   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1700or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1701   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1702   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1703   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R1703or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R1704   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1705   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1706   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1707   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1708   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1709   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1710   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1711   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1712   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R1716   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1717   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R1718   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R1718or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R1719   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1720   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R1721   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R1722   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R1723   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1724   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1725   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R1727   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1728   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1729   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1730   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1731   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1732   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1733   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1734   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |

[illegible]

[illegible]

|       |                           |                        |   |             |     |
|-------|---------------------------|------------------------|---|-------------|-----|
| R1847 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1848 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1849 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1850 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1851 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R1852 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1853 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE          | 1 | 435030004R1 | NSP |
| R1854 | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE          | 1 | 435030004R1 | NSP |
| R1855 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE          | 1 | 435032224R1 | NSP |
| R1856 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE          | 1 | 435032224R1 | NSP |
| R1857 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE          | 1 | 435032224R1 | NSP |
| R1858 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE          | 1 | 435032224R1 | NSP |
| R1859 | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE          | 1 | 435030104R1 | NSP |
| R1860 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE          | 1 | 435031004R1 | NSP |
| R1861 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE          | 1 | 435031014R1 | NSP |
| R1862 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE          | 1 | 435031004R1 | NSP |
| R1867 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE          | 1 | 435032734R1 | NSP |
| R1868 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE          | 1 | 435034734R1 | NSP |
| R1873 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE          | 1 | 435031044R1 | NSP |
| R1875 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R1876 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R1877 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R1878 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3009 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1 | 435031024R1 | NSP |
| R3010 | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE          | 1 | 435034754R1 | NSP |
| R3011 | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE          | 1 | 435031054R1 | NSP |
| R3012 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3013 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3014 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3015 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3016 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3017 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3018 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1 | 435032204R1 | NSP |
| R3019 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE          | 1 | 435034724R1 | NSP |
| R3020 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1 | 435031034R1 | NSP |
| R3021 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1 | 435031034R1 | NSP |
| R3022 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3023 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3028 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1 | 435031034R1 | NSP |
| R3029 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1 | 435031024R1 | NSP |
| R3030 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE          | 1 | 435032234R1 | NSP |
| R3031 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE          | 1 | 435031044R1 | NSP |
| R3032 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3033 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3034 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3035 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1 | 435031024R1 | NSP |
| R3036 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3037 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3038 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3039 | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1 | 435034704R1 | NSP |
| R3040 | CHIP TYPE CARBON RESISTOR | MCR03EZPF49R9(49.9_1%) | 1 | 4100037R2   | NSP |
| R3041 | CHIP TYPE CARBON RESISTOR | RN72K1J-271FE          | 1 | 435032712R1 | NSP |
| R3042 | CHIP TYPE CARBON RESISTOR | RN72K1J-222FE          | 1 | 435032222R1 | NSP |
| R3043 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE          | 1 | 435031032R1 | NSP |
| R3044 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE          | 1 | 435031032R1 | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3045   | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE | 1   | 435031022R1   | NSP |
| R3046   | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE | 1   | 435031022R1   | NSP |
| R3072   | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE | 1   | 435036824R1   | NSP |
| R3073   | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE | 1   | 435036824R1   | NSP |
| R3074   | CHIP TYPE CARBON RESISTOR | RN72K1J-393JE | 1   | 435033934R1   | NSP |
| R3075   | CHIP TYPE CARBON RESISTOR | RN72K1J-393JE | 1   | 435033934R1   | NSP |
| R3077   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3078   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3079   | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE | 1   | 435034754R1   | NSP |
| R3080   | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE | 1   | 435034754R1   | NSP |
| R3081   | CHIP RESISTOR NETWORK     | YCN104-470-JK | 1   | 43464C47004R1 | NSP |
| R3082   | CHIP RESISTOR NETWORK     | YCN104-470-JK | 1   | 43464C47004R1 | NSP |
| R3083   | CHIP RESISTOR NETWORK     | YCN104-470-JK | 1   | 43464C47004R1 | NSP |
| R3100   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3101   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3102   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3103   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3104   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3105   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3106   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3107   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3108   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3109   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3111   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3112   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3113   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3114   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3115   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3115or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3116   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3116or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3119   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3120   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R3121   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3122   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3123   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3124   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3125   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3126   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3127   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3128   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3129   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R3130   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3131   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3132   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3133   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3134   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3135   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3136   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3137   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3138   | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE | 1   | 435031214R1   | NSP |
| R3139   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3140   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3141   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3142   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3143   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3144   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3145   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3145or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3146   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3146or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3149   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3150   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3152   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3153   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3153or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3154   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3154or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3155   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3155or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3156   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3156or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3157   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3158   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE | 1   | 435031032R1   | NSP |
| R3159   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3160   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3161   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3162   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3163   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3165   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3166   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3167   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3168   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3169   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3170   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3171   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3172   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R3201   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3202   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3203   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3204   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3205   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3206   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3207   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3208   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3209   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3210   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3211   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3212   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3213   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3214   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3215   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3220   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3221   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3222   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3223   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3224   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3225   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3226   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3227   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |

[illegible]

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3335   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3336   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3337   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3338   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3339   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3340   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3341   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3342   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3343   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3344   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3345   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3346   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3347   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3348   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3349   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3350   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3351   | CHIP RESISTOR NETWORK     | YCN104-103-JK | 1   | 43464C10304R1 | NSP |
| R3352   | CHIP RESISTOR NETWORK     | YCN104-103-JK | 1   | 43464C10304R1 | NSP |
| R3353   | CHIP RESISTOR NETWORK     | RM7LJ220X04   | 1   | 43484722004R2 | NSP |
| R3353or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3354   | CHIP RESISTOR NETWORK     | RM7LJ220X04   | 1   | 43484722004R2 | NSP |
| R3354or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3355   | CHIP RESISTOR NETWORK     | RM7LJ220X04   | 1   | 43484722004R2 | NSP |
| R3355or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3356   | CHIP RESISTOR NETWORK     | RM7LJ220X04   | 1   | 43484722004R2 | NSP |
| R3356or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3357   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3358   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3360   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3361   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3366   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3367   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3369   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3373   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3376   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3398   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3399   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3400   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3401   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3402   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3403   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3404   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3405   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3406   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3407   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3408   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3409   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3410   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3413   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3414   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3416   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3417   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3418   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3419   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3420   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3421   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3424   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3425   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3429   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3429or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3430   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3430or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3433   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3435   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R3436   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3437   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3438   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3439   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3440   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3441   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3442   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R3443   | CHIP TYPE CARBON RESISTOR | RN72K1J-821JE | 1   | 435038214R1   | NSP |
| R3444   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R3445   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3446   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3447   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3448   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3450   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R3452   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3453   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3455   | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE | 1   | 435031214R1   | NSP |
| R3456   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3458   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3459   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3460   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3467   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3469   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3476   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R3477   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3477or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3478   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3478or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3484   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3485   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3486   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R3488   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3494   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3494or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3495   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3495or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3496   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3496or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3497   | CHIP RESISTOR NETWORK     | RM7LJ470X04   | 1   | 43484747004R2 | NSP |
| R3497or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3498   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3499   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE | 1   | 435031032R1   | NSP |
| R3500   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3501   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3502   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3503   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |

[illegible]

[illegible]

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8018   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8019   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8020   | CHIP RESISTOR NETWORK     | MNR04MRAPJ222 | 1   | 43464722204R2 | NSP |
| R8020or | CHIP RESISTOR NETWORK     | YCN104-222-JK | (1) | 43464C22204R1 | NSP |
| R8021   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8022   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8023   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8024   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8025   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8026   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8027   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8028   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8029   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8030   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8031   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8032   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8033   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8034   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8035   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8036   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8039   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8040   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8041   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8042   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8043   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8044   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8045   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8046   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8047   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8048   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8049   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8050   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8051   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8052   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8053   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8054   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8055   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8056   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8057   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8058   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8059   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8075   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8204   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8208   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8209   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8215   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8218   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8220   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8221   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8223   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8225   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8226   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8228   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8237   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8238   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8240   | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE | 1   | 435036814R1   | NSP |
| R8243   | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE | 1   | 435036814R1   | NSP |
| R8244   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8300   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8301   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8302   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8303   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8304   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8306   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8307   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8308   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8312   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8317   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8318   | CHIP RESISTOR NETWORK     | MNR04MRAPJ222 | 1   | 43464722204R2 | NSP |
| R8318or | CHIP RESISTOR NETWORK     | YCN104-222-JK | (1) | 43464C22204R1 | NSP |
| R8319   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8320   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8321   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8322   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8323   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8324   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8325   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8327   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8328   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8329   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8330   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8331   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8332   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8333   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8334   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8335   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8336   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8337   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8338   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8339   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8340   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8341   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8342   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R8342or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R8343   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R8343or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R8344   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8345   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8346   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8347   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8348   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8350   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8353   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8354   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8355   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8356   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8357   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8358   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8359   | CHIP TYPE CARBON RESISTOR | RN72K1J-124JE | 1   | 435031244R1   | NSP |
| R8361   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8362   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8363   | CHIP RESISTOR NETWORK     | MNR04MRAPJ330 | 1   | 43464733004R2 | NSP |
| R8363or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R8365   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8372   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8373   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8374   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8386   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8400   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R8400or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R8401   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8402   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R8402or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R8403   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8404   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8405   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8406   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8407   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8408   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8409   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8410   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8411   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8412   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8413   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8414   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8415   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8416   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8417   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8418   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8419   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8420   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8421   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8422   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8423   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8424   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8425   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8426   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8427   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8428   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8429   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8430   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8431   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8432   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8433   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8434   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8435   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8436   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8437   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8438   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8439   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8440   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8441   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8442   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8443   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8444   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8445   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8446   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8447   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8448   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8449   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8450   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8451   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8452   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE | 1   | 435031032R1   | NSP |
| R8453   | CHIP TYPE CARBON RESISTOR | RN72K1J-223FE | 1   | 435032232R1   | NSP |
| R8458   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8459   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8461   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8462   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8463   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8464   | CHIP RESISTOR NETWORK     | MNR04MRAPJ680 | 1   | 43464768004R2 | NSP |
| R8464or | CHIP RESISTOR NETWORK     | YCN104-680-JK | (1) | 43464C68004R1 | NSP |
| R8465   | CHIP RESISTOR NETWORK     | MNR04MRAPJ101 | 1   | 43464710104R2 | NSP |
| R8465or | CHIP RESISTOR NETWORK     | YCN104-101-JK | (1) | 43464C10104R1 | NSP |
| R8466   | CHIP RESISTOR NETWORK     | YCN104-220-JK | 1   | 43464C22004R1 | NSP |
| R8467   | CHIP RESISTOR NETWORK     | YCN104-220-JK | 1   | 43464C22004R1 | NSP |
| R8468   | CHIP RESISTOR NETWORK     | YCN104-220-JK | 1   | 43464C22004R1 | NSP |
| R8469   | CHIP RESISTOR NETWORK     | YCN104-220-JK | 1   | 43464C22004R1 | NSP |
| R8470   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8471   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8472   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8473   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8474   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8475   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8476   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8477   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8478   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8479   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8480   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8481   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8600   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8603   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8604   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8605   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8606   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8613   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8614   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8615   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8623   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8624   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8625   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8633   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8634   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8635   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8645   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8663   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8664   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8665   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8702   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R8702or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R8703   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8704   | CHIP RESISTOR NETWORK     | YCN104-103-JK | 1   | 43464C10304R1 | NSP |
| R8705   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8707   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R8707or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R8709   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8710   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8711   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8712   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8713   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8715   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8716   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8717   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8718   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R8719   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R8720   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8721   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R8721or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R8723   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8724   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8725   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8726   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8727   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R8728   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8729   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R8730   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8731   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R8731or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R8732   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R8733   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8734   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8735   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R8736   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8737   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8738   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8739   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8740   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8741   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8742   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8743   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8744   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8745   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8746   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8747   | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE | 1   | 435030104R1   | NSP |
| R8748   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8749   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8750   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8751   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8752   | CHIP RESISTOR NETWORK     | MNR04MRAPJ101 | 1   | 43464710104R2 | NSP |
| R8752or | CHIP RESISTOR NETWORK     | YCN104-101-JK | (1) | 43464C10104R1 | NSP |
| R8753   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R8753or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R8754   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8755   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8756   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8757   | CHIP RESISTOR NETWORK     | MNR04MRAPJ101 | 1   | 43464710104R2 | NSP |

[illegible]

|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R8853 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8854 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8855 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8856 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8857 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8858 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8859 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8860 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8861 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8862 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8863 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8864 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8865 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8866 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8867 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8868 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8869 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8870 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8871 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8872 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8873 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8874 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8875 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8876 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8877 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8878 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8879 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8880 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8881 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8882 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8883 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8884 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8885 | C-METAL R                 | RN72K2B-000JE2 | 1 | 435110004R1 | NSP |
| R8900 | CHIP TYPE CARBON RESISTOR | RN72K1J-474JE  | 1 | 435034744R1 | NSP |
| R8901 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R8902 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE  | 1 | 435031534R1 | NSP |
| R8903 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R8904 | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE  | 1 | 435031044R1 | NSP |
| R8905 | CHIP TYPE CARBON RESISTOR | RN72K1J-154JE  | 1 | 435031544R1 | NSP |
| R8906 | CHIP TYPE CARBON RESISTOR | RN72K1J-154JE  | 1 | 435031544R1 | NSP |
| R8907 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R8908 | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE  | 1 | 435032734R1 | NSP |
| R8911 | CHIP TYPE CARBON RESISTOR | RN72K1J-823FE  | 1 | 435038232R1 | NSP |
| R8912 | CHIP TYPE CARBON RESISTOR | RN72K1J-153FE  | 1 | 435031532R1 | NSP |
| R8913 | CHIP TYPE CARBON RESISTOR | RN72K1J-473FE  | 1 | 435034732R1 | NSP |
| R8914 | CHIP TYPE CARBON RESISTOR | RN72K1J-273FE  | 1 | 435032732R1 | NSP |
| R8915 | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE  | 1 | 435038222R1 | NSP |
| R8916 | CHIP TYPE CARBON RESISTOR | RN72K1J-473FE  | 1 | 435034732R1 | NSP |
| R8917 | CHIP TYPE CARBON RESISTOR | RN72K1J-473FE  | 1 | 435034732R1 | NSP |
| R8918 | CHIP TYPE CARBON RESISTOR | RN72K1J-332FE  | 1 | 435033322R1 | NSP |
| R8920 | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE  | 1 | 435031032R1 | NSP |
| R8921 | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE  | 1 | 435032234R1 | NSP |
| R8922 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R8923 | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE  | 1 | 435033324R1 | NSP |
| R8924 | CHIP TYPE CARBON RESISTOR | RN72K1J-682FE  | 1 | 435036822R1 | NSP |

|                                |                           |                       |     |                    |       |
|--------------------------------|---------------------------|-----------------------|-----|--------------------|-------|
| R8925                          | CHIP TYPE CARBON RESISTOR | RN72K1J-332FE         | 1   | 435033322R1        | NSP   |
| R8926                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE         | 1   | 435031032R1        | NSP   |
| R8927                          | CHIP TYPE CARBON RESISTOR | RN72K1J-822FE         | 1   | 435038222R1        | NSP   |
| R8928                          | C-METAL R                 | RN72K2B-475JE2        | 1   | 435114754R1        | NSP   |
| R8930                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8931                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8932                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8933                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8934                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8935                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8936                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8938                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8939                          | C-METAL R                 | RN72K2B-105JE2        | 1   | 435111054R1        | NSP   |
| R8941                          | C-METAL R                 | RN72K2B-000JE2        | 1   | 435110004R1        | NSP   |
| R8942                          | C-METAL R                 | RN72K2B-000JE2        | 1   | 435110004R1        | NSP   |
| R8945                          | C-METAL R                 | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | NSP   |
| R8946                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8947                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8950                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8951                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8952                          | CHIP TYPE CARBON RESISTOR | RN72K1J-010JE         | 1   | 435030104R1        | NSP   |
| R8961                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1   | 435030004R1        | NSP   |
| R8962                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE         | 1   | 435030004R1        | NSP   |
| R8982                          | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE         | 1   | 435031024R1        | NSP   |
| R8983                          | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE         | 1   | 435032224R1        | NSP   |
| R8987                          | CHIP TYPE CARBON RESISTOR | RN72K2E-105JE         | 1   | 435221054R1        | NSP   |
| [ Switches, Terminals, Wires ] |                           |                       |     |                    |       |
| P010                           | PRINTED WIRING BOARD      | BCPRC-2072            | {1} | 25142072           | NSP   |
| P080                           | PRINTED WIRING BOARD      | BCPRC-2072            | 1   | 25142072B          | N NSP |
| P1001                          | WS CLAMP                  | CB-71683(L=50)        | 1   | 260261             | NSP   |
| P1001A                         | TRM-423(SCREW)            | NEJITANSI ST3         | 1   | 25060495           | NSP   |
| P1301                          | SOCKET                    | NSCT-8P2471           | 1   | 25052574R2         | NSP   |
| P1303                          | WS CLAMP                  | CB-71683(L=50)        | 1   | 260261             | NSP   |
| P1304A                         | PLUG                      | IMSA-9850B-30Y        | 1   | 25056329R2         | NSP   |
| P1305A                         | PLUG                      | IMSA-9850B-30Y        | 1   | 25056329R2         | NSP   |
| P1306A                         | PLUG(B to B)              | IMSA-9850B-22Y        | 1   | 25056206R2         | NSP   |
| P1601A                         | PLUG(B to B)              | IMSA-9850B-18Y        | 1   | 25056204R2         | NSP   |
| P1602A                         | PLUG                      | IMSA-9850B-30Y        | 1   | 25056329R2         | NSP   |
| P1603A                         | SOCKET                    | 35FMN-SMT-A-TF        | 1   | 25052852R2         | NSP   |
| P1604                          | SOCKET                    | NSCT-9P2472           | 1   | 25052575R2         | NSP   |
| P1605                          | SOCKET                    | NSCT-9P2472           | 1   | 25052575R2         | NSP   |
| P3016A                         | TRM-423(SCREW)            | NEJITANSI ST3         | 1   | 25060495           | NSP   |
| P3042                          | SOCKET                    | NSCT-8P2471           | 1   | 25052574R2         | NSP   |
| P3201                          | SOCKET                    | NSCT-9P2472           | 1   | 25052575R2         | NSP   |
| P3601                          | SOCKET                    | UJA01SB4090-72R       | 1   | 25053533R2         | NSP   |
| P3610                          | SOCKET                    | NSCT-8P2471           | 1   | 25052574R2         | NSP   |
| P3651                          | SOCKET                    | 29-01000PH53-1        | 1   | 25053526R3         | NSP   |
| P3652A                         | PLUG                      | NPLG-5P918            | 1   | 25055965R2         | NSP   |
| P3654                          | SOCKET                    | APCI0085-P012A        | 1   | 25053616R2         | NSP   |
| P3658                          | TERMINAL                  | APCI0213-K001G        | 1   | 25060548R2         | NSP   |
| P5451B                         | PLUG                      | NPLG-7P121            | 1   | 25055137           | NSP   |
| P8001                          | SOCKET                    | 51U019S-3HFDN-BD-SM   | 1   | 25053549R3         | NSP   |
| P8021                          | SOCKET                    | 51U019S-3HFDN-BD-SM   | 1   | 25053549R3         | NSP   |
| P8104                          | SOCKET                    | NSCT-8P2471           | 1   | 25052574R2         | NSP   |
| P8601A                         | SOCKET                    | 51U019S-3HFDN-BD-SM   | 1   | 25053549R3         | NSP   |

|       |        |                     |   |            |     |
|-------|--------|---------------------|---|------------|-----|
| P8611 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8621 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8631 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8641 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8651 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8661 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8671 | SOCKET | 51U019S-3HFDN-BD-SM | 1 | 25053549R3 | NSP |
| P8702 | SOCKET | NSCT-9P2472         | 1 | 25052575R2 | NSP |
| P8900 | PLUG   | NPLG-2P915          | 1 | 25055962R2 | NSP |

## BAPS-2089-1E

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.  
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.            | PART NAME       | DESCRIPTION    | Q'TY | PART NO. (SN) | REMARKS |
|---------------------|-----------------|----------------|------|---------------|---------|
| [ Semi-conductors ] |                 |                |      |               |         |
| D7062               | CHIP TYPE DIODE | DAN202U        | 1    | 223322R2      | N NSP   |
| D7063               | CHIP TYPE DIODE | RB501VM-40     | 1    | 223324R2      | N NSP   |
| D7213               | ZENER DIODE     | DZ2J075M0L     | 1    | 224760750R2   | NSP     |
| D7214               | ZENER DIODE     | DZ2J075M0L     | 1    | 224760750R2   | NSP     |
| D7215               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7216               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7219               | CHIP TYPE DIODE | 1SS355         | 1    | 223269R2      | NSP     |
| D7220               | CHIP TYPE DIODE | 1SS355         | 1    | 223269R2      | NSP     |
| D7241               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7242               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7243               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7244               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7251               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7252               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7253               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7254               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7271               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7272               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7273               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7274               | CHIP TYPE DIODE | 1SR154-400     | 1    | 22380284R2    | NSP     |
| D7401               | DIODE           | LN6SB60        | 1    | 22380399      |         |
| D7401A              | HEAT SINK       | .              | 1    | ANH7250-A     | NSP     |
| D7401B              | SCREW           | 3TTB+8B(3BC)   | 1    | 838430088GR   | NSP     |
| D7402               | DIODE           | LN6SB60        | 1    | 22380399      |         |
| D7402A              | HEAT SINK       | .              | 1    | ANH7250-A     | NSP     |
| D7402B              | SCREW           | 3TTB+8B(3BC)   | 1    | 838430088GR   | NSP     |
| Q1                  | HYBRID IC       | RZ5B801-0001E2 | 1    | 22242835R2    | NSP     |
| Q7063               | TRANSISTOR      | DTA124EUA      | 1    | 2218450R2     | N NSP   |
| Q7064               | TRANSISTOR      | DTC124EUA      | 1    | 2218510R2     | N NSP   |
| Q7081               | TRANSISTOR      | KTA1040D       | 1    | 2218210R2     | NSP     |
| Q7082               | TRANSISTOR      | 2SA1162-GR     | 1    | 2214375R2     | NSP     |

|                         |                                |                     |   |              |       |
|-------------------------|--------------------------------|---------------------|---|--------------|-------|
| Q7083                   | TRANSISTOR                     | 2SA1162-GR          | 1 | 2214375R2    | NSP   |
| Q7084                   | TRANSISTOR                     | 2SC2712-GR          | 1 | 2213145R2    | NSP   |
| Q7203                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7204                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7205                   | TRANSISTOR                     | DTA124EUA           | 1 | 2218450R2    | NSP   |
| Q7206                   | TRANSISTOR                     | DTA124EUA           | 1 | 2218450R2    | NSP   |
| Q7207                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7211                   | TRANSISTOR                     | 2SD2400A-D          | 1 | 2202734      |       |
| Q7212                   | TRANSISTOR                     | 2SB1569A-D          | 1 | 2202724      |       |
| Q7221                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7222                   | TRANSISTOR                     | DTA143EUA           | 1 | 2218460R2    | NSP   |
| Q7223                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7224                   | TRANSISTOR                     | DTA124EUA           | 1 | 2218450R2    | NSP   |
| Q7225                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7226                   | TRANSISTOR                     | DTC124EUA           | 1 | 2218510R2    | NSP   |
| Q7241                   | HYBRID IC                      | 78M15HF(NJM78M15FA) | 1 | 222780155JRC |       |
| Q7251                   | HYBRID IC                      | 78M12HF(NJM78M12FA) | 1 | 222780125JRC |       |
| Q7252                   | HYBRID IC                      | 79M12HF(NJM79M12FA) | 1 | 222790125JRC |       |
| Q7271                   | HYBRID IC                      | 78M08HF(NJM78M08FA) | 1 | 222780085JRC |       |
| Q7272                   | HYBRID IC                      | 79M08HF(NJM79M08FA) | 1 | 222790085JRC |       |
| Q7273                   | HYBRID IC                      | 78M15HF(NJM78M15FA) | 1 | 222780155JRC |       |
| X1                      | CRYSTAL                        | HC-49S 9B12.000MHz  | 1 | 3010533      |       |
| [ Transformers, Coils ] |                                |                     |   |              |       |
| L1                      | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1 | 435030004R1  | NSP   |
| L2                      | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1 | 435030004R1  | NSP   |
| L3                      | RF COIL                        | SDCL1608CR33JTDF    | 1 | 233557R1     | NSP   |
| L4                      | RF COIL                        | SDCL1608CR10JTDF    | 1 | 233556R1     | NSP   |
| L5                      | ANTENNA COIL                   | K7-D                | 1 | 232212       |       |
| [ Capacitors ]          |                                |                     |   |              |       |
| C1                      | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-101J1     | 1 | 342101014R1  | NSP   |
| C12                     | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-090D1     | 1 | 342100902R1  | NSP   |
| C13                     | CHIP TYPE CERAMIC CAPACITOR    | CK725B1C-104K1      | 1 | 332121045R1  | NSP   |
| C2                      | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-220J1     | 1 | 342102204R1  | NSP   |
| C3                      | CHIP TYPE CERAMIC CAPACITOR    | CK725B1H-332K1      | 1 | 332103325R1  | NSP   |
| C4                      | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-100D1     | 1 | 342101002R1  | NSP   |
| C5                      | CHIP TYPE CERAMIC CAPACITOR    | CK725B1H-473K1      | 1 | 332104735R1  | NSP   |
| C6                      | CHIP TYPE CERAMIC CAPACITOR    | CK725B1H-222K1      | 1 | 332102225R1  | NSP   |
| C7                      | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1 | 435030004R1  | NSP   |
| C7006                   | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-101J      | 1 | 3400034R1    | N NSP |
| C7061                   | CHIP TYPE CERAMIC CAPACITOR    | CK725B1H-103K       | 1 | 332241035R1  | N NSP |
| C7062                   | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-331J      | 1 | 3400036R1    | N NSP |
| C7064                   | CHIP TYPE CERAMIC CAPACITOR    | CK725B1H-153K1      | 1 | 332101535R1  | NSP   |
| C7213                   | SMG C                          | CE04W16V-100M(SMG)  | 1 | 395041017T   |       |
| C7214                   | SMG C                          | CE04W16V-100M(SMG)  | 1 | 395041017T   |       |
| C7215                   | SMG C                          | CE04W50V-10M(SMG)   | 1 | 395081007T   |       |
| C7219                   | SMG C                          | CE04W50V-10M(SMG)   | 1 | 395081007T   |       |
| C7221                   | SMG C                          | CE04W25V-47M(SMG)   | 1 | 395054707T   |       |
| C7222                   | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-471J      | 1 | 3400037R1    | NSP   |
| C7225                   | CHIP TYPE CERAMIC CAPACITOR    | CC725CH1H-471J      | 1 | 3400037R1    | NSP   |
| C7240                   | TF TYPE PLASTIC FILM CAPACITOR | ECQ-V50V-394J       | 1 | 374723944T   | NSP   |
| C7241                   | SMG C                          | CE04W25V-2200M(SMG) | 1 | 395052227S   |       |
| C7244                   | SMG C                          | CE04W50V-22M(SMG)   | 1 | 395082207T   |       |
| C7246                   | SMG C                          | CE04W35V-220M(SMG)  | 1 | 395062217T   |       |
| C7250                   | TF TYPE PLASTIC FILM CAPACITOR | ECQ-V50V-394J       | 1 | 374723944T   | NSP   |
| C7251                   | SMG C                          | CE04W25V-2200M(SMG) | 1 | 395052227S   |       |

|               |                                |                     |     |             |       |
|---------------|--------------------------------|---------------------|-----|-------------|-------|
| C7252         | SMG C                          | CE04W25V-2200M(SMG) | 1   | 395052227S  |       |
| C7255         | SMG C                          | CE04W35V-220M(SMG)  | 1   | 395062217T  |       |
| C7256         | SMG C                          | CE04W35V-220M(SMG)  | 1   | 395062217T  |       |
| C7270         | TF TYPE PLASTIC FILM CAPACITOR | ECQ-V100V-474J      | 1   | 374734744T  | NSP   |
| C7271         | SMG C                          | CE04W16V-2200M(SMG) | 1   | 395042227S  |       |
| C7272         | SMG C                          | CE04W16V-2200M(SMG) | 1   | 395042227S  |       |
| C7293         | SMG C                          | CE04W16V-220M(SMG)  | 1   | 395042217T  |       |
| C7294         | SMG C                          | CE04W16V-220M(SMG)  | 1   | 395042217T  |       |
| C7298         | SMG C                          | CE04W35V-220M(SMG)  | 1   | 395062217T  |       |
| C7401         | ELECTROLYTIC CAPACITOR         | CE69W80V-10000MBN   | 1   | 3504543     | N     |
| C7402         | ELECTROLYTIC CAPACITOR         | CE69W80V-10000MBN   | 1   | 3504543     | N     |
| C7405         | FILM C                         | C282A334J20A21A     | 1   | 376833344T  | NSP   |
| C7405or       | TF TYPE PLASTIC FILM CAPACITOR | ECQ-V100V-334J      | (1) | 374733344T  | NSP   |
| C7406         | FILM C                         | C282A334J20A21A     | 1   | 376833344T  | NSP   |
| C7406or       | TF TYPE PLASTIC FILM CAPACITOR | ECQ-V100V-334J      | (1) | 374733344T  | NSP   |
| C8            | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1   | 435030004R1 | NSP   |
| C9            | CHIP TYPE CERAMIC CAPACITOR    | CK732B16V-106K      | 1   | 332071065R2 | NSP   |
| [ Resistors ] |                                |                     |     |             |       |
| R10           | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1   | 435030004R1 | NSP   |
| R11           | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1   | 435030004R1 | NSP   |
| R13           | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1   | 435030004R1 | NSP   |
| R14           | CHIP TYPE CARBON RESISTOR      | RN72K1J-000JE       | 1   | 435030004R1 | NSP   |
| R2            | CHIP TYPE CARBON RESISTOR      | RN72K1J-101JE       | 1   | 435031014R1 | NSP   |
| R21           | CHIP TYPE CARBON RESISTOR      | RN72K2E-000JE       | 1   | 435220004R1 | NSP   |
| R22           | CHIP TYPE CARBON RESISTOR      | RN72K2E-000JE       | 1   | 435220004R1 | NSP   |
| R3            | EMI SUPPRESSION FILTER         | BK1608HS601-T       | 1   | 230984R1    | NSP   |
| R4            | EMI SUPPRESSION FILTER         | BK1608HS601-T       | 1   | 230984R1    | NSP   |
| R5            | CHIP TYPE CARBON RESISTOR      | RN72K1J-103JE       | 1   | 435031034R1 | NSP   |
| R5778         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R5779         | C-METAL R                      | RN72K2B-104JE2      | 1   | 435111044R1 | N NSP |
| R5781         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R6            | CHIP TYPE CARBON RESISTOR      | RN72K1J-472JE       | 1   | 435034724R1 | NSP   |
| R7            | CHIP TYPE CARBON RESISTOR      | RN72K1J-472JE       | 1   | 435034724R1 | NSP   |
| R7001         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7002         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7003         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7004         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7005         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7006         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7007         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7008         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7009         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7010         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7011         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7012         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7013         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7014         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7015         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7016         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7017         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7018         | C-METAL R                      | RN72K2B-105JE2      | 1   | 435111054R1 | N NSP |
| R7019         | CHIP TYPE CARBON RESISTOR      | RN72K1J-100JE       | 1   | 435031004R1 | NSP   |
| R7020         | CHIP TYPE CARBON RESISTOR      | RN72K1J-100JE       | 1   | 435031004R1 | NSP   |
| R7021         | CHIP TYPE CARBON RESISTOR      | RN72K1J-100JE       | 1   | 435031004R1 | NSP   |
| R7022         | CHIP TYPE CARBON RESISTOR      | RN72K1J-100JE       | 1   | 435031004R1 | NSP   |

|                                |                                              |                |   |             |       |
|--------------------------------|----------------------------------------------|----------------|---|-------------|-------|
| R7023                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R7024                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7025                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7026                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7027                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7028                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-105JE  | 1 | 435221054R1 | NSP   |
| R7061                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R7062                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-100JE  | 1 | 435031004R1 | NSP   |
| R7068                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-622JE  | 1 | 435036224R1 | NSP   |
| R7070                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7071                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-104JE  | 1 | 435031044R1 | NSP   |
| R7081                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-180JE  | 1 | 435031804R1 | NSP   |
| R7082                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-180JE  | 1 | 435031804R1 | NSP   |
| R7083                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-180JE  | 1 | 435031804R1 | NSP   |
| R7084                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-180JE  | 1 | 435031804R1 | NSP   |
| R7085                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-333JE  | 1 | 435033334R1 | NSP   |
| R7086                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-103JE  | 1 | 435031034R1 | NSP   |
| R7087                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-103JE  | 1 | 435031034R1 | NSP   |
| R7088                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-103JE  | 1 | 435031034R1 | NSP   |
| R7211                          | NON-FLAMMABLE CARBON FILM RESISTOR R25J-1.0K |                | 1 | 415471024T  |       |
| R7212                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-150JE  | 1 | 435031504R1 | NSP   |
| R7213                          | NON-FLAMMABLE CARBON FILM RESISTOR R25J-1.0K |                | 1 | 415471024T  |       |
| R7214                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-150JE  | 1 | 435031504R1 | NSP   |
| R7215                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-473JE  | 1 | 435034734R1 | NSP   |
| R7221                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-223JE  | 1 | 435032234R1 | NSP   |
| R7222                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-104JE  | 1 | 435031044R1 | NSP   |
| R7245                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-105JE  | 1 | 435221054R1 | NSP   |
| R7251                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7255                          | C-METAL R                                    | RN72K2B-015JE2 | 1 | 435110154R1 | NSP   |
| R7256                          | C-METAL R                                    | RN72K2B-010JE2 | 1 | 435110104R1 | NSP   |
| R7258                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-105JE  | 1 | 435221054R1 | NSP   |
| R7259                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-105JE  | 1 | 435221054R1 | NSP   |
| R7260                          | C-METAL R                                    | RN72K2B-105JE2 | 1 | 435111054R1 | NSP   |
| R7271                          | CHIP TYPE CARBON RESISTOR                    | RN72K1J-000JE  | 1 | 435030004R1 | NSP   |
| R7272                          | C-METAL R                                    | KTR18EZPJ105   | 1 | 435231054R1 | NSP   |
| R7273                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-105JE  | 1 | 435221054R1 | NSP   |
| R7274                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-102JE  | 1 | 435221024R1 | NSP   |
| R7401                          | C-METAL R                                    | KTR18EZPJ105   | 1 | 435231054R1 | NSP   |
| R7402                          | C-METAL R                                    | KTR18EZPJ105   | 1 | 435231054R1 | NSP   |
| R7403                          | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10   |                | 1 | 415471004T  |       |
| R7405                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-154JE  | 1 | 435221544R1 | NSP   |
| R7406                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-154JE  | 1 | 435221544R1 | NSP   |
| R7408                          | CHIP TYPE CARBON RESISTOR                    | RN72K2E-913JE  | 1 | 435229134R1 | NSP   |
| R8                             | CHIP TYPE CARBON RESISTOR                    | RN72K1J-101JE  | 1 | 435031014R1 | NSP   |
| R9                             | CHIP TYPE CARBON RESISTOR                    | RN72K1J-101JE  | 1 | 435031014R1 | NSP   |
| [ Switches, Terminals, Wires ] |                                              |                |   |             |       |
| F7241A                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7241B                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7251A                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7251B                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7252A                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7252B                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7271A                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7271B                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |
| F7272A                         | FUSE HOLDER                                  | NSCT-1P2506    | 1 | 25052609T   | ! NSP |

|        |                       |                |     |              |       |
|--------|-----------------------|----------------|-----|--------------|-------|
| F7272B | FUSE HOLDER           | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| P1     | TERMINAL              | NTM-1PDSC437   | 1   | 25060515     |       |
| P101A  | SOCKET                | NSCT-7P2100    | 1   | 25052203     | NSP   |
| P1306B | SOCKET                | IMSA-9850S-22  | 1   | 25053211     | NSP   |
| P160   | PRINTED WIRING BOARD  | BCPS-2089      | {1} | 25142089     | NSP   |
| P160   | PRINTED WIRING BOARD  | BCPS-2089      | 1   | 25142089A    | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2163     | {1} | 25142163     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCPS-2164      | {1} | 25142164     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2165     | {1} | 25142165     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2166     | {1} | 25142166     | NSP   |
| P160   | PRINTED WIRING BOARD  | BCETC-2167     | {1} | 25142167     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2168     | {1} | 25142168     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2169     | {1} | 25142169     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2170     | {1} | 25142170     | NSP   |
| P160   | PRINTED WIRING BOARD  | BCETC-2171     | {1} | 25142171     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2174     | {1} | 25142174     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCETC-2202     | {1} | 25142202     | N NSP |
| P160   | PRINTED WIRING BOARD  | BCRF-2208      | {1} | 25142208     | NSP   |
| P2     | TERMINAL              | NTM-2PDML439   | 1   | 25060517     |       |
| P2901A | PLUG                  | IMSA-9111B-22  | 1   | 25056740     | N NSP |
| P4000B | SOCKET                | NSCT-21P2114   | 1   | 25052217     | NSP   |
| P4001B | PLUG                  | NPLG-4P151     | 1   | 25055167     | NSP   |
| P4002B | PLUG                  | NPLG-2P130     | 1   | 25055146     | NSP   |
| P4003B | PLUG                  | NPLG-5P133     | 1   | 25055149     | NSP   |
| P4004B | PLUG                  | NPLG-7P135     | 1   | 25055151     | NSP   |
| P511B  | PLUG                  | NPLG-7P135     | 1   | 25055151     | NSP   |
| P5751  | TRM(SCREW)            | TER21-0130V    | 1   | 25060533     | NSP   |
| P5752  | TRM(SCREW)            | TER21-0130V    | 1   | 25060533     | NSP   |
| P5753  | TRM(SCREW)            | TER21-0130V    | 1   | 25060533     | NSP   |
| P5775A | WIRE HARNESS ASSEMBLY | NSAS-14P2420   | 1   | 2009991556UL | N NSP |
| P5777  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P5852B | PLUG                  | NPLG-3P131     | 1   | 25055147     | NSP   |
| P5931  | PLUG                  | NPLG-3P131     | 1   | 25055147     | NSP   |
| P5932  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P5933  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P6071  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P6081  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P661C  | PLUG                  | IMSA-9111B-28  | 1   | 25056742     | N NSP |
| P7001A | PLUG                  | IMSA-9111B-30  | 1   | 25056700     | NSP   |
| P7002  | WIRE HARNESS ASSEMBLY | NSAS-5P2109    | 1   | 2009991298UL | NSP   |
| P7002A | WIRE HOL              | CHD-1.5-5      | 1   | 25053536     | N NSP |
| P7003  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7031  | TRM(EARTH)            | TP00940-21     | 1   | 25065732T    | N NSP |
| P7032  | TRM(EARTH)            | TP00940-21     | 1   | 25065732T    | N NSP |
| P7033  | TRM(EARTH)            | TP00940-21     | 1   | 25065732T    | N NSP |
| P7034  | TRM(EARTH)            | TP00940-21     | 1   | 25065732T    | N NSP |
| P7036  | TRM(SCREW)            | TER21-0130V    | 1   | 25060533     | N NSP |
| P7061A | PLUG                  | NPLG-11P0966   | 1   | 25056016     | NSP   |
| P7201  | PLUG                  | NPLG-9P123     | 1   | 25055139     | NSP   |
| P7201A | PLUG                  | NPLG-3P131     | 1   | 25055147     | NSP   |
| P7201B | PLUG                  | NPLG-3P131     | 1   | 25055147     | NSP   |
| P7251  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7252  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7253  | WS CLAMP              | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7401  | PLUG                  | NPLG-3P150     | 1   | 25055166     | NSP   |

|        |            |               |   |          |       |
|--------|------------|---------------|---|----------|-------|
| P751   | TRM(SCREW) | TER21-0130V   | 1 | 25060533 | N NSP |
| P9001C | PLUG       | IMSA-9111B-28 | 1 | 25056742 | N NSP |

## BAPS-2092-1E

## &lt;Note&gt;

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
  2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

| REF. NO.                | PART NAME                   | DESCRIPTION         | Q'TY | PART NO. (SN) | REMARKS |
|-------------------------|-----------------------------|---------------------|------|---------------|---------|
| [ Semi-conductors ]     |                             |                     |      |               |         |
| D7181                   | CHIP TYPE DIODE             | 1SS355              | 1    | 223269R2      | NSP     |
| D7182                   | CHIP TYPE DIODE             | 1SS355              | 1    | 223269R2      | NSP     |
| D9501                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9502                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9503                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9504                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9505                   | CHIP TYPE DIODE             | 1SS355              | 1    | 223269R2      | NSP     |
| D9506                   | CHIP TYPE DIODE             | 1SS355              | 1    | 223269R2      | NSP     |
| D9521                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9522                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9523                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9524                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9531                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9532                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9533                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9551                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9552                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9561                   | CHIP TYPE DIODE             | 1SS355              | 1    | 223269R2      | NSP     |
| D9562                   | ZENER DIODE                 | DZ2J033M0L          | 1    | 224760330R2   | NSP     |
| D9571                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9572                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9573                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9574                   | CHIP TYPE DIODE             | 1SR154-400          | 1    | 22380284R2    | NSP     |
| D9575                   | ZENER DIODE                 | DZ2J200M0L          | 1    | 224762000R2   | NSP     |
| D9576                   | ZENER DIODE                 | DZ2J180M0L          | 1    | 224761800R2   | NSP     |
| D9751                   | DIODE                       | D3SBA60             | 1    | 22380272F     |         |
| Q7181                   | TRANSISTOR                  | 2SC4081             | 1    | 2218560R2     | NSP     |
| Q9501                   | HYBRID IC                   | 78M12HF(NJM78M12FA) | 1    | 222780125JRC  |         |
| Q9502                   | HYBRID IC                   | 79M12HF(NJM79M12FA) | 1    | 222790125JRC  |         |
| Q9521                   | HYBRID IC                   | 78M06HF(NJM78M06FA) | 1    | 222780065JRC  |         |
| Q9531                   | HYBRID IC                   | 78M12HF(NJM78M12FA) | 1    | 222780125JRC  |         |
| Q9551                   | HYBRID IC                   | 78M05(NJM78M05FA)   | 1    | 222780055JRC  |         |
| Q9571                   | TRANSISTOR                  | INC5001AP1-T111     | 1    | 2218100R2     | N NSP   |
| [ Transformers, Coils ] |                             |                     |      |               |         |
| L5823                   | CORE                        | BLM11A121S          | 1    | 2350050R1     | NSP     |
| [ Capacitors ]          |                             |                     |      |               |         |
| C5823                   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K       | 1    | 332241035R1   | NSP     |
| C5876                   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1     | 1    | 342101014R1   | NSP     |

|               |                                  |                      |   |             |       |
|---------------|----------------------------------|----------------------|---|-------------|-------|
| C5877         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1      | 1 | 342103314R1 | NSP   |
| C7166         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1      | 1 | 342101014R1 | NSP   |
| C7170         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J1      | 1 | 342103304R1 | NSP   |
| C7851         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1      | 1 | 342101002R1 | NSP   |
| C7856         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1      | 1 | 342101002R1 | NSP   |
| C7931         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-100D1      | 1 | 342101002R1 | NSP   |
| C7934         | CHIP TYPE CERAMIC CAPACITOR      | CK725B50V-104K       | 1 | 332241045R1 | NSP   |
| C9501         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9507         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-3300M(UTSP) | 1 | 397553327S  | N     |
| C9508         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-3300M(UTSP) | 1 | 397553327S  | N     |
| C9513         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9514         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9515         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W35V-220M(UTSP)  | 1 | 397562217T  |       |
| C9516         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W35V-220M(UTSP)  | 1 | 397562217T  |       |
| C9521         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9523         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-330J1      | 1 | 342103304R1 | NSP   |
| C9524         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP)  | 1 | 397532217AT | N     |
| C9526         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9527         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-2200M(UTSP) | 1 | 397552227S  | N     |
| C9531         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-394J        | 1 | 374723944T  | NSP   |
| C9533         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-104J        | 1 | 374721044T  | NSP   |
| C9536         | SMG C                            | CE04W35V-1000M(SMG)  | 1 | 395061027S  | N     |
| C9537         | SMG C                            | CE04W35V-470M(SMG)   | 1 | 395064717S  | N     |
| C9539         | SMG C                            | CE04W50V-10M(SMG)    | 1 | 395081007T  |       |
| C9551         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-104K1       | 1 | 332101045R1 | NSP   |
| C9552         | SMG C                            | CE04W16V-1000M(SMG)  | 1 | 395041027S  | N     |
| C9554         | SMG C                            | CE04W16V-100M(SMG)   | 1 | 395041017T  |       |
| C9561         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1      | 1 | 342101014R1 | NSP   |
| C9562         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1       | 1 | 332101035R1 | NSP   |
| C9571         | SMG C                            | CE04W63V-47M(SMG)    | 1 | 395074707T  | N     |
| C9572         | SMG C                            | CE04W50V-47M(SMG)    | 1 | 395084707T  |       |
| C9573         | SMG C                            | CE04W50V-47M(SMG)    | 1 | 395084707T  |       |
| C9581         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-223K1       | 1 | 332102235R1 | NSP   |
| C9589         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-104J        | 1 | 374721044T  | NSP   |
| C9590         | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J       | 1 | 3400036R1   | N NSP |
| C9752         | TF TYPE PLASTIC FILM CAPACITOR   | ECQ-V50V-104J        | 1 | 374721044T  | NSP   |
| C9760         | SMG C                            | CE04W16V-4700M(SMG)  | 1 | 395044727S  | N     |
| [ Resistors ] |                                  |                      |   |             |       |
| R5851         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R5852         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R5853         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R5872         | CHIP TYPE CARBON RESISTOR        | RN72K1J-105JE        | 1 | 435031054R1 | NSP   |
| R7151         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R7152         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R7153         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R7157         | CHIP TYPE CARBON RESISTOR        | RN72K1J-100JE        | 1 | 435031004R1 | NSP   |
| R7158         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R7159         | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE        | 1 | 435030004R1 | NSP   |
| R7163         | CHIP TYPE CARBON RESISTOR        | RN72K2E-105JE        | 1 | 435221054R1 | NSP   |
| R7164         | CHIP TYPE CARBON RESISTOR        | RN72K1J-105JE        | 1 | 435031054R1 | NSP   |
| R7165         | CHIP TYPE CARBON RESISTOR        | RN72K1J-105JE        | 1 | 435031054R1 | NSP   |
| R7168         | CHIP TYPE CARBON RESISTOR        | RN72K1J-560JE        | 1 | 435035604R1 | NSP   |
| R7181         | CHIP TYPE CARBON RESISTOR        | RN72K1J-473JE        | 1 | 435034734R1 | NSP   |
| R7182         | CHIP TYPE CARBON RESISTOR        | RN72K1J-560JE        | 1 | 435035604R1 | NSP   |
| R7183         | CHIP TYPE CARBON RESISTOR        | RN72K1J-473JE        | 1 | 435034734R1 | NSP   |

|       |                                   |                |   |             |              |
|-------|-----------------------------------|----------------|---|-------------|--------------|
| R7185 | CHIP TYPE CARBON RESISTOR         | RN72K1J-121JE  | 1 | 435031214R1 | NSP          |
| R7186 | CHIP TYPE CARBON RESISTOR         | RN72K1J-121JE  | 1 | 435031214R1 | NSP          |
| R7187 | CHIP TYPE CARBON RESISTOR         | RN72K1J-104JE  | 1 | 435031044R1 | NSP          |
| R7190 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7853 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7854 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7855 | CHIP TYPE CARBON RESISTOR         | RN72K1J-330JE  | 1 | 435033304R1 | NSP          |
| R7856 | CHIP TYPE CARBON RESISTOR         | RN72K1J-330JE  | 1 | 435033304R1 | NSP          |
| R7857 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7858 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7859 | CHIP TYPE CARBON RESISTOR         | RN72K1J-330JE  | 1 | 435033304R1 | NSP          |
| R7862 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7863 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7864 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7865 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7866 | CHIP TYPE CARBON RESISTOR         | RN72K1J-220JE  | 1 | 435032204R1 | NSP          |
| R7867 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7868 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7869 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7870 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7871 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7872 | CHIP TYPE CARBON RESISTOR         | RN72K1J-220JE  | 1 | 435032204R1 | NSP          |
| R7873 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7874 | CHIP TYPE CARBON RESISTOR         | RN72K1J-100JE  | 1 | 435031004R1 | NSP          |
| R7875 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R7876 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R7877 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R7878 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R7879 | CHIP TYPE CARBON RESISTOR         | RN72K1J-120JE  | 1 | 435031204R1 | NSP          |
| R7932 | C-METAL R                         | RN72K2B-105JE2 | 1 | 435111054R1 | NSP          |
| R7933 | C-METAL R                         | RN72K2B-105JE2 | 1 | 435111054R1 | NSP          |
| R7941 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R7942 | CHIP TYPE CARBON RESISTOR         | RN72K1J-000JE  | 1 | 435030004R1 | NSP          |
| R9502 | CHIP TYPE CARBON RESISTOR         | RN72K2E-105JE  | 1 | 435221054R1 | NSP          |
| R9505 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE  | 1 | 435030104R1 | NSP          |
| R9506 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE  | 1 | 435030104R1 | NSP          |
| R9507 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE  | 1 | 435030104R1 | NSP          |
| R9508 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE  | 1 | 435030104R1 | NSP          |
| R9509 | CHIP TYPE CARBON RESISTOR         | RN72K2E-105JE  | 1 | 435221054R1 | NSP          |
| R9510 | CHIP TYPE CARBON RESISTOR         | RN72K2E-105JE  | 1 | 435221054R1 | NSP          |
| R9511 | CHIP TYPE CARBON RESISTOR         | RN72K1J-473JE  | 1 | 435034734R1 | NSP          |
| R9522 | C-METAL R                         | RN72K2B-473JE2 | 1 | 435114734R1 | <b>N</b> NSP |
| R9524 | C-METAL R                         | RN72K2B-105JE2 | 1 | 435111054R1 | <b>N</b> NSP |
| R9533 | NON-FLAMMABLE CARBON FILM RESISTO | R25J-4.7       | 1 | 415470474T  |              |
| R9554 | CHIP TYPE CARBON RESISTOR         | RN72K2E-105JE  | 1 | 435221054R1 | NSP          |
| R9561 | CHIP TYPE CARBON RESISTOR         | RN72K1J-392JE  | 1 | 435033924R1 | NSP          |
| R9562 | CHIP TYPE CARBON RESISTOR         | RN72K1J-223JE  | 1 | 435032234R1 | NSP          |
| R9571 | METAL RESISTOR                    | RNU1/2WCJ-8.2  | 1 | 453530824T  | NSP          |
| R9572 | CHIP TYPE CARBON RESISTOR         | RN72K1J-272JE  | 1 | 435032724R1 | NSP          |
| R9573 | CHIP TYPE CARBON RESISTOR         | RN72K1J-272JE  | 1 | 435032724R1 | NSP          |
| R9574 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE  | 1 | 435030104R1 | NSP          |
| R9575 | CHIP TYPE CARBON RESISTOR         | RN72K1J-333JE  | 1 | 435033334R1 | NSP          |
| R9576 | CHIP TYPE CARBON RESISTOR         | RN72K1J-105JE  | 1 | 435031054R1 | NSP          |
| R9752 | CHIP TYPE CARBON RESISTOR         | RN72K2E-105JE  | 1 | 435221054R1 | NSP          |
| R9753 | C-METAL R                         | RN72K2B-105JE2 | 1 | 435111054R1 | <b>N</b> NSP |

|                                |                           |                |     |              |       |
|--------------------------------|---------------------------|----------------|-----|--------------|-------|
| R9771                          | C-METAL R                 | RN72K2B-000JE2 | 1   | 435110004R1  | NSP   |
| R9772                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1  | NSP   |
| R9773                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE  | 1   | 435030004R1  | NSP   |
| [ Switches, Terminals, Wires ] |                           |                |     |              |       |
| F9501A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9501B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9502A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9502B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9521A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9521B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9531A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9531B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9532A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9532B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9751A                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| F9751B                         | FUSE HOLDER               | NSCT-1P2506    | 1   | 25052609T    | ! NSP |
| P1602C                         | SOCKET                    | IMSA-9850S-30  | 1   | 25053215     | NSP   |
| P1603B                         | SOCKET                    | 9615S-35A-PP   | 1   | 25053313     | NSP   |
| P170                           | PRINTED WIRING BOARD      | BCPS-2092      | {1} | 25142092     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCPS-2092      | 1   | 25142092A    | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2200     | {1} | 25142200     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2201     | {1} | 25142201     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2203     | {1} | 25142203     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2204     | {1} | 25142204     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCPS-2205      | {1} | 25142205     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2206     | {1} | 25142206     | N NSP |
| P170                           | PRINTED WIRING BOARD      | BCETC-2207     | {1} | 25142207     | N NSP |
| P501B                          | SOCKET                    | NSCT-15P2108   | 1   | 25052211     | NSP   |
| P5581B                         | PLUG                      | NPLG-2P116     | 1   | 25055132     | NSP   |
| P5701B                         | SOCKET                    | NSCT-13P2106   | 1   | 25052209     | NSP   |
| P5775B                         | PLUG                      | NPLG-7P135     | 1   | 25055151     | NSP   |
| P5822                          | ST JACK                   | HSJ1002-016010 | 1   | 25046044     |       |
| P5851A                         | WIRE HARNESS ASSEMBLY     | ADX7729-A      | 1   | 2009991542UL | NSP   |
| P5851B                         | PLUG                      | NPLG-7P135     | 1   | 25055151     | NSP   |
| P5852A                         | PLUG                      | NPLG-3P131     | 1   | 25055147     | NSP   |
| P5871                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7001C                         | SOCKET                    | IMSA-9111S-30L | 1   | 25056701     | NSP   |
| P7002B                         | PLUG                      | NPLG-5P352     | 1   | 25055369     | NSP   |
| P7061C                         | SOCKET                    | NSCT-11P2191   | 1   | 25052294     | NSP   |
| P7151A                         | PLUG                      | IMSA-9111B-26  | 1   | 25056741     | NSP   |
| P7151B                         | SOCKET                    | IMSA-9111S-26L | 1   | 25053566     | N NSP |
| P7552B                         | PLUG                      | NPLG-5P133     | 1   | 25055149     | NSP   |
| P7602B                         | SOCKET                    | 9615S-35A-PP   | 1   | 25053313     | NSP   |
| P7851                          | TRM(SCREW)                | TER21-0130V    | 1   | 25060533     | NSP   |
| P7941                          | TRM(EARTH)                | TP00940-21     | 1   | 25065732T    | NSP   |
| P7942                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P7943                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P9501                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P9502                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P9511                          | PLUG                      | NPLG-5P119     | 1   | 25055135     | NSP   |
| P9512                          | PLUG                      | NPLG-7P121     | 1   | 25055137     | NSP   |
| P961B                          | PLUG                      | NPLG-2P130     | 1   | 25055146     | NSP   |
| P9751                          | PLUG                      | NPLG-2P116     | 1   | 25055132     | NSP   |
| P9763                          | WS CLAMP                  | CB-71683(L=50) | 1   | 260261       | NSP   |
| P9771                          | TRM(EARTH)                | TP00940-21     | 1   | 25065732T    | NSP   |