

## AV Receiver

# Service Manual

## TX-RZ810

- ✓ Pre Issue (2016-Apr)
- ✓ Final Issue (2016-Jul)

### CONTENTS

- ✓ [Title Page \(This page\)](#)
- ✓ [Note for Parts List](#)
- ✓ [Panel](#)
- ✓ [Reset](#)
- ✓ [Amp Diag Mode after Abnormal Conditions](#)
- ✓ [WiFi 5GHz Setting](#)
- ✓ [Firmware](#)
- ✓ [Adjustment](#)
- ✓ [Hookup and Setting](#)
- ✓ [Trouble Shoot](#)
- ✓ [Disassembly](#)
- ✓ [Schematic Diagram](#)
- ✓ [Exploded View](#)
- ✓ [Appendix](#)



**SAFETY-RELATED COMPONENT WARNING!!** : COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL. MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

# ONKYO®

Published by Onkyo & Pioneer Corporation Global CS Department



This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual. Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.


(FOR USA MODEL ONLY)

## 1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

### LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120 V AC 60 Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5 mA.

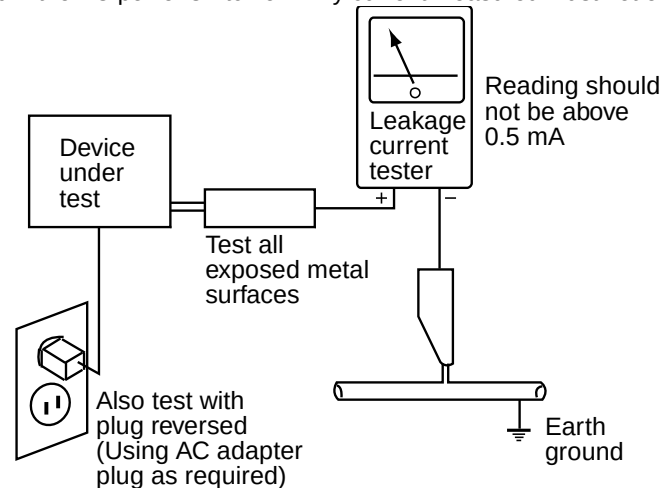

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

## 2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a  on the schematics and on the parts list in this Service Manual.


The use of a substitute replacement component which does not have the same safety characteristics as the ONKYO recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current ONKYO Service Manual. A subscription to, or additional copies of, ONKYO Service Manual may be obtained at a nominal charge from ONKYO.

File Name of Parts List File (EXCEL File)

Note for Parts List

When parts list is EXCEL file, please refer to the following explanation about file name.

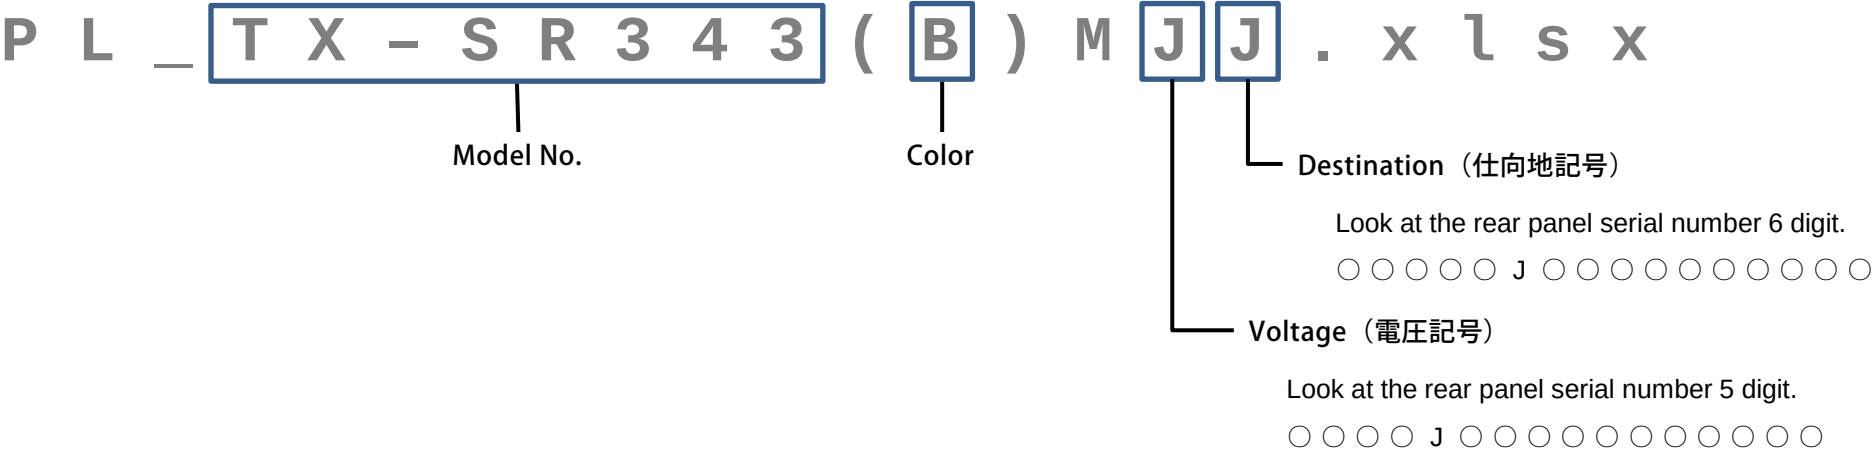


| Color (色記号) |                      |     |        |
|-------------|----------------------|-----|--------|
| (X)         | Not related to color |     |        |
| (B)         | Black                | (M) | Wood   |
| (BR)        | Brown                | (O) | Orange |
| (C)         | Cherry               | (P) | Pink   |
| (G)         | Gold                 | (R) | Red    |
| (GR)        | Green                | (S) | Silver |
| (H)         | Gray                 | (V) | Violet |
| (K)         | Black                | (W) | White  |
| (L)         | Blue                 | (Y) | Yellow |
| (LB)        | Light Blue           |     |        |


| Voltage (電圧記号)                  |                   |
|---------------------------------|-------------------|
| D                               | 120V AC           |
| G                               | 220~230V          |
| H                               | 220~230／240V      |
| J                               | 100V AC           |
| M                               | 220~240V AC       |
| P                               | 230V AC           |
| U                               | 100~240V AC       |
| V                               | 110~240V          |
| W                               | 120V／220~240V     |
| Speaker System (without AMP.) : |                   |
| 0                               | Passive Subwoofer |
| F                               | Front Speaker     |
| C                               | Center Speaker    |
| R                               | Rear Speaker      |
| B                               | Back Speaker      |

| Destination (仕向地記号) |                |                                 |
|---------------------|----------------|---------------------------------|
| A                   | Australia      | Speaker System (without AMP.) : |
| B                   | United Kingdom |                                 |
| C                   | North American |                                 |
| D                   | USA            |                                 |
| F                   | Taiwan         |                                 |
| J                   | Japan          |                                 |
| K                   | Korea          |                                 |
| L                   | Russia         |                                 |
| P                   | Europe         |                                 |
| Q                   | Hong Kong      |                                 |
| R                   | China          | L Left channel                  |
| S                   | Brazil         | R Right channel                 |
| T                   | Thai           | 0 Center channel                |
| U                   | Worldwide      |                                 |

## Front Panel

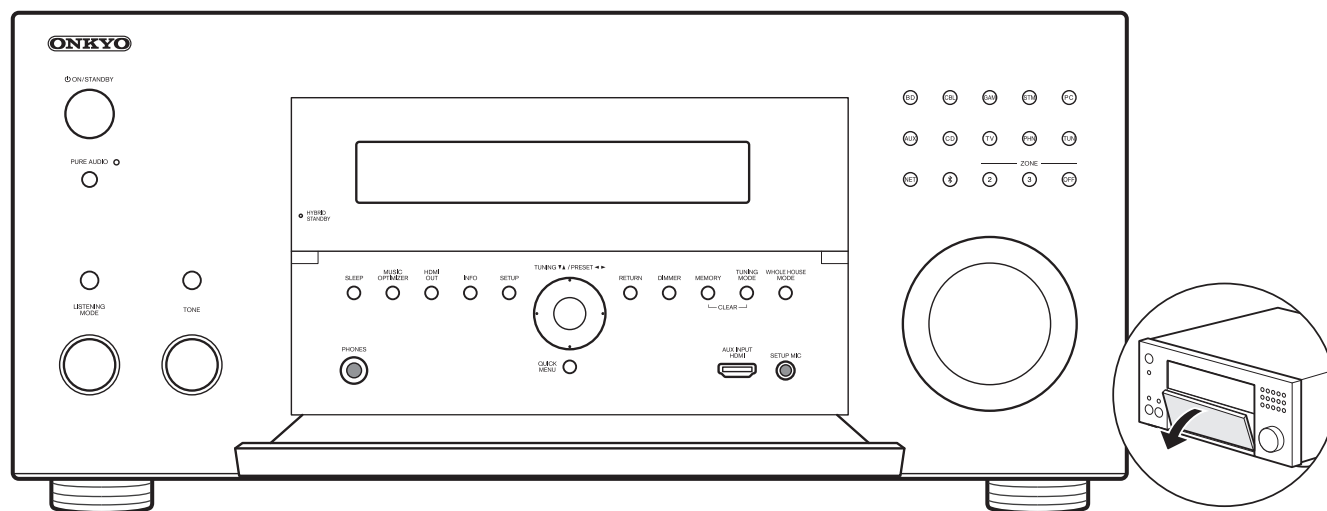


## Rear Panel

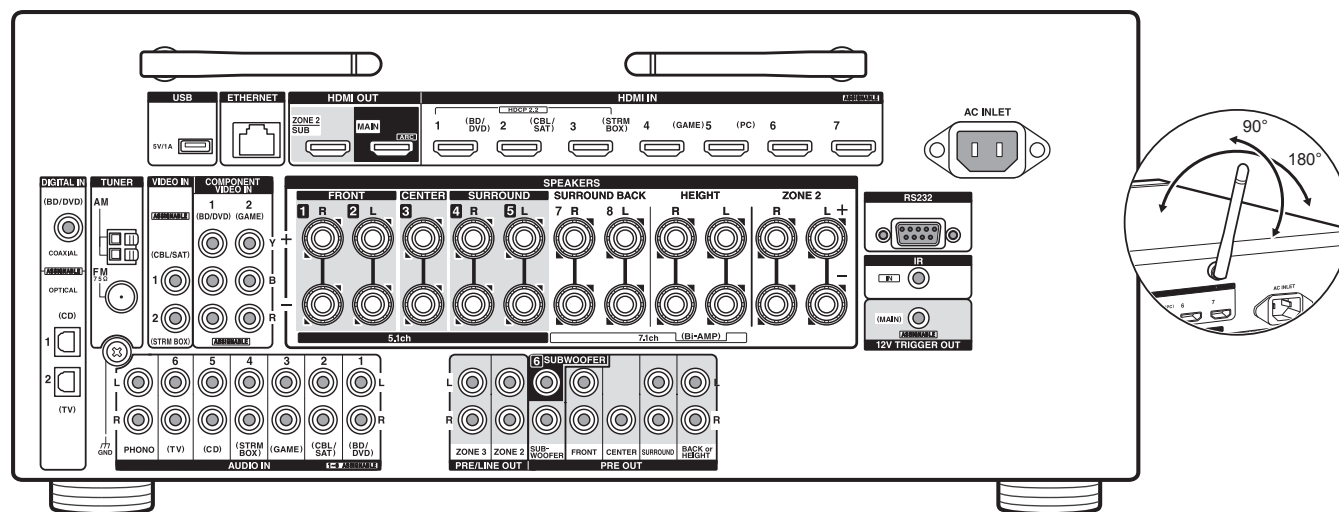

## Panel

### Remote Control Unit RC-911R

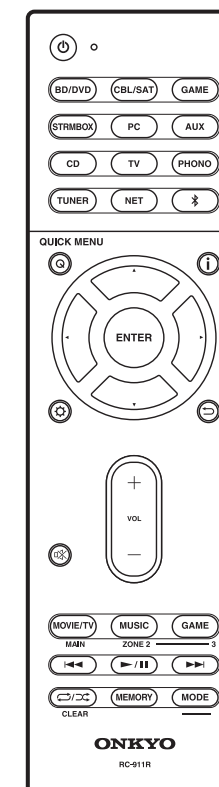

### Accessories

1. Remote controller (RC-911R) ×1
2. Batteries (AAA/R03) ×2
3. AM loop antenna ×1
4. Speaker setup microphone ×1
5. Power cord ×1

Dimensions (W × H × D) : 435 mm × 201.5 mm × 395 mm (17-1/8" × 7-15/16" × 15-9/16")  
Weight : 14 kg (30.9 lbs.)



How to Reset the Unit

Reset

- Step1. STORE (To save user preferences.)
- While pressing [SETUP] button, press [ENTER] button twice.
- Step2. RESET
- While pressing [CBL] or [CBL/SAT] button, press [ON/STANDBY] button.
- ※) "Clear" appears on the display and the unit returns to standby. Do not unplug the power cord until "Clear" disappears from the display.
- Step3. RECALL (To load user preferences.)
- While pressing [SETUP] button, press [RETURN] button twice.


| Standard Knob Position ( S.K.P. ) |               |
|-----------------------------------|---------------|
| Master Volume Control             | 40dB          |
| Input Selector                    | BD/DVD        |
| Muting                            | Off           |
| Listening Mode                    | All Ch Stereo |
| Subwoofer                         | Yes           |
| Front Left Level                  | 0 dB          |
| Front Right Level                 | 0 dB          |
| Center Level                      | 0 dB          |
| Left Surround Level               | 0 dB          |
| Right Surround Level              | 0 dB          |
| Subwoofer Level                   | 0 dB          |

TX-NR555/656/757  
TX-RZ610/710/810  
HT-R695  
DRX-2/3/4/5

Protect Mode

Amp Diag Mode after Abnormal Conditions

The unit goes into standby automatically when detect the abnormal condition of thermal detection, dc voltage detection or current detection. (e.g. TX-NR555 block diagram below)

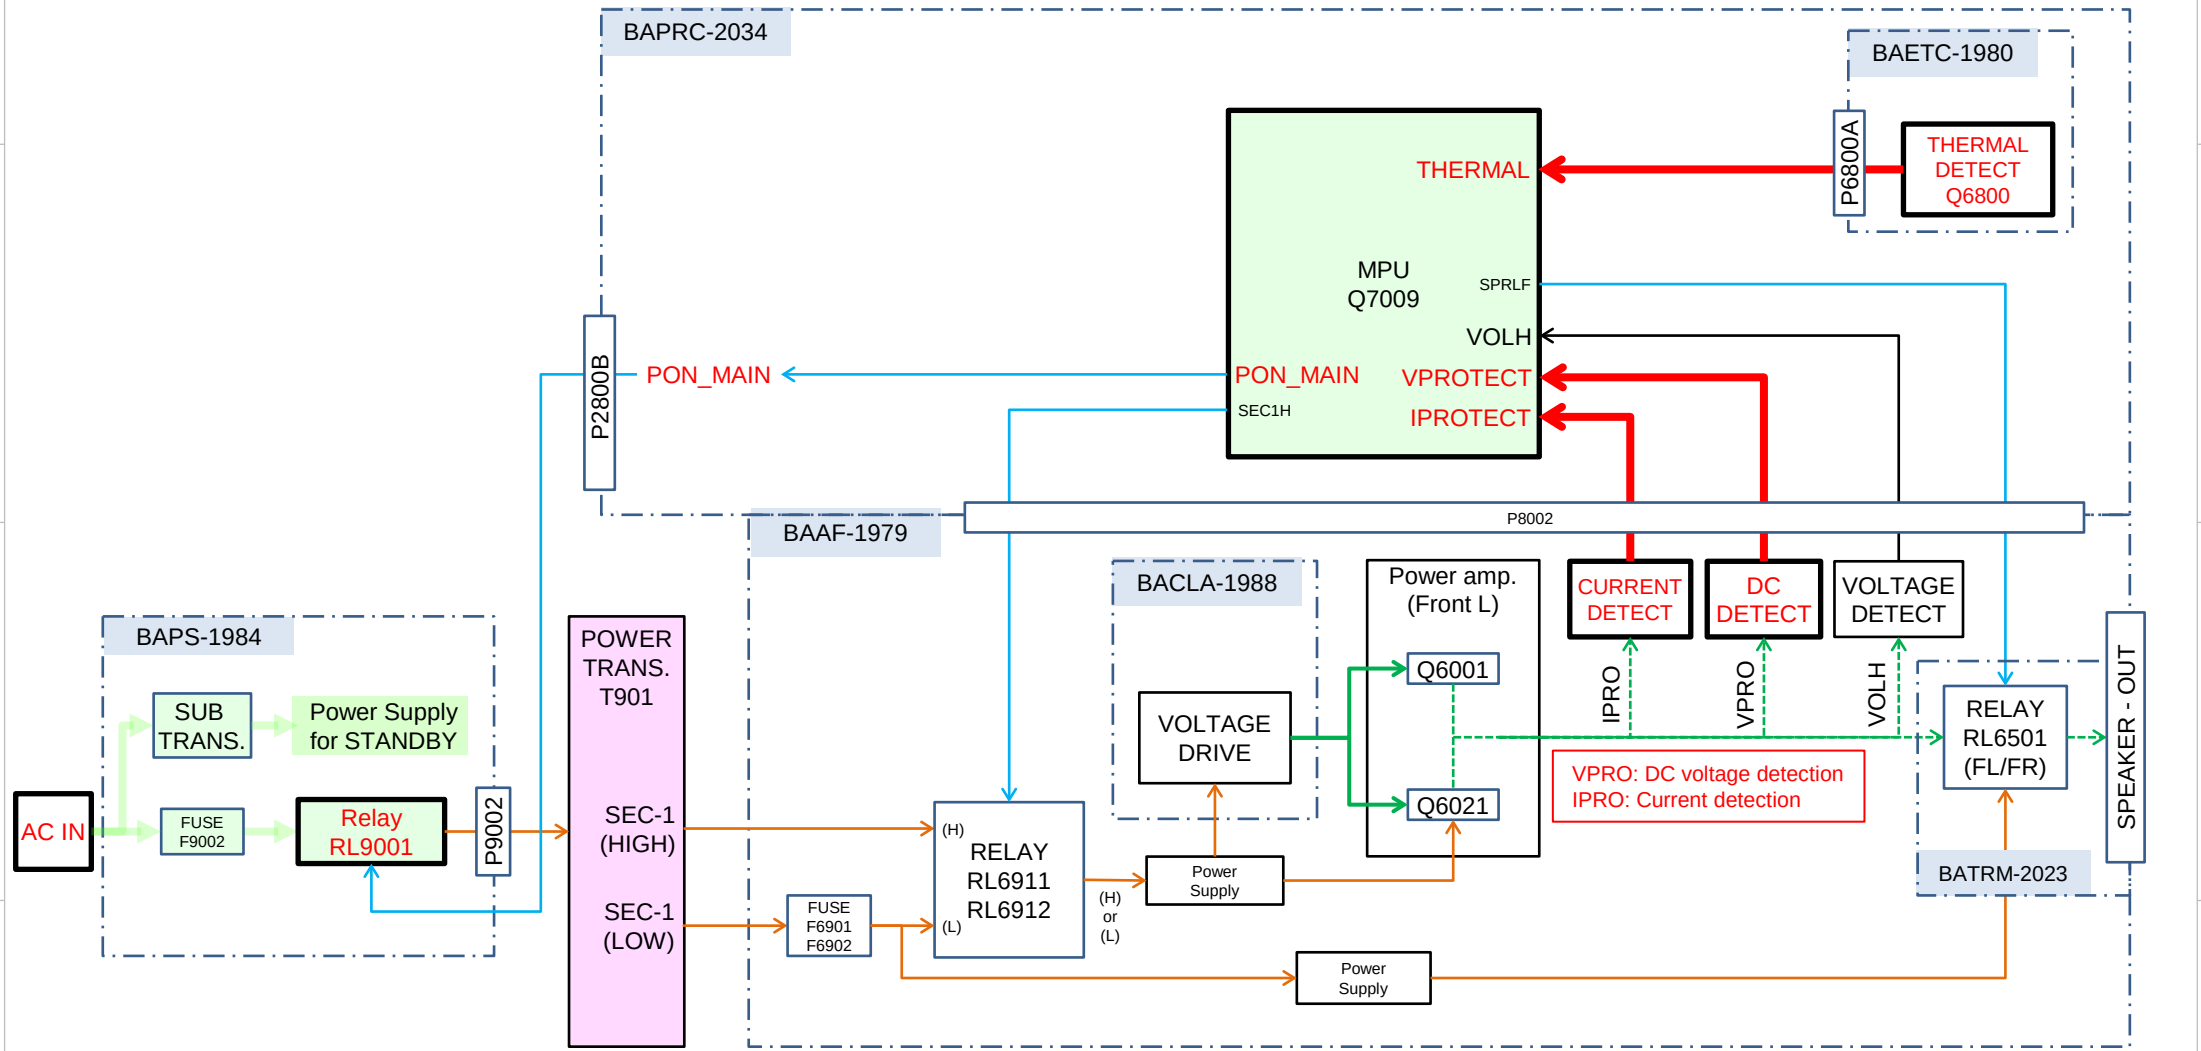

1

2

3

## Self-diagnostics

This function is for avoiding the rupture of electrolytic capacitors with amplifier circuit failure during power-ON.

### Operation of Self-diagnostic

Self-diagnostic will start at the timing of next power on, after goes to the protect mode by Current detection or DC voltage detection.

Only On/Standby key could work in this mode. Also remote control does not work. However, the CLEAR operation is enabled.

During Self-diagnostic, the power supply for amplifier circuit become low voltage state(SEC1-LOW), and the speaker relay will be turned off. Then, MPU will check each amplifier circuits Internally by entering the test signal (20 kHz,-20 dBFS sine wave) to each channel from DSP.

MPU will judge the amplifier circuit is good or not from VOLH value.

The normal range of VOLH value is 0.04 V < VOLH < 0.20 V.

If VOLH value is in the out of this range, it will be judged as NG (No good).

### No problem found

When protected by current detection, and no problem found, "CHECK SP WIRE" will be displayed. In this State, Only the On/Standby key is effective. And if do not anything for 3 minutes, unit goes into standby automatically.

When protected by a DC voltage detection, and no problem found, unit goes into normal operation.

### Problem found

When judged as there is a problem on any channel, the information of channel that has a problem will be displayed as in the right figure.

In this State, Only the On/Standby key is effective. Also remote control does not work. If do not anything for 3 minutes, unit goes into standby automatically. This state will keep also after unit turn on/off, or AC unplugged.

the power supply for amplifier circuit become low voltage state(SEC1-LOW), and the speaker relay will be turned off.

4

5

6

## Amp Diag Mode after Abnormal Conditions

Display of during Self-diagnostics

2 Line FL tube type

|   |   |   |  |   |   |   |   |  |   |   |   |   |  |
|---|---|---|--|---|---|---|---|--|---|---|---|---|--|
| A | M | P |  | D | i | a | g |  | M | o | d | e |  |
|   |   |   |  |   |   |   |   |  |   |   |   |   |  |

1 Line FL tube type

|   |   |   |  |   |   |   |   |  |   |   |   |   |  |
|---|---|---|--|---|---|---|---|--|---|---|---|---|--|
| A | M | P |  | D | i | a | g |  | M | o | d | e |  |
|---|---|---|--|---|---|---|---|--|---|---|---|---|--|

“Mode” This part display the channel which is currently checked. (E.g. "[FL]", etc.)

Display of when problem found

2 Line FL tube type

|   |   |  |   |   |   |   |   |   |   |   |   |   |   |
|---|---|--|---|---|---|---|---|---|---|---|---|---|---|
| N | G |  | C | H | : |   |   |   |   |   |   |   |   |
|   |   |  | L | C | R | S | L | S | R | B | L | B | R |

1 Line FL tube type

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| N | G | : | L | C | R | S | L | S | R | B | L | B | R |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

|   |                   |   |   |                           |
|---|-------------------|---|---|---------------------------|
| L | → Front L channel | S | L | → Surround L channel      |
| C | → Center channel  | S | R | → Surround R channel      |
| R | → Front R channel | B | L | → Surround back L channel |
|   |                   | B | R | → Surround back R channel |

Repair Process and How to Confirm

Confirmation of the protect cause

While NG channel is displayed, You can confirm the protect cause by following the step below.

- 1. Press the Enter button
- 2. The protect cause are displayed for 5 seconds.

Please check the around of those amplifier circuit and repair it.

Clear of NG CH information

After repair, you can clear NG CH information by following the steps below.

- 1. Press the On/Standby key while pressing the Enter key.
- 2. Display as in the right figure appears.
- 3. Unit goes into Standby automatically after 5 seconds.

Self-diagnostic will start again at the timing of next power on.

By this, You can verify whether repair was properly or not.

If problem found after repair, please re-check the around of its circuit.

Cancel of Self-diagnostic

You can cancel this mode by clear operation (press Standby key while pressing CBL/SAT key).

After cancel this mode, receiver will be started as normal operation.

Manual Execution of Self-diagnostic

- 1. [DIMMER] + [ON/STANDBY] x 2  
Main Firmware Version will appear on the main unit's display.
- 2. [SETUP] or [HOME]  
[Service information](#) will appear on the main unit's display
- 3. [ENTER]  
Display as in the right figure appears.
- 4. [STANDBY/ON]  
Unit will go into standby.
- 5. [STANDBY/ON]  
Unit will turn on. Then self-diagnostic will start automatically.

Amp Diag Mode after Abnormal Conditions

Protected by current detection

D E T . P R O T E C T : I

Protected by DC Voltage detection

D E T . P R O T E C T : V

Clear of NG CH information

N G C H C L E A R

Manual Execution of Self-diagnostic

A M P D I A G T E S T O N

IMPORTANT!!

Back Ground:

It is totally different from Radio Law at the each country on 5GHz band.  
It means it is totally different from enabled Channel of 5GHz band at the each country.  
We define the “Country Code” for 5GHz band.  
You must set up the appropriate country code to the product.

Example;

Case1:  
When you use the “P” destination products and bring move to Russia or Israel,  
If you did not setup change country code and use in Russia and Israel,  
You will be on the illegal Radio Law in Russia and Israel.  
Case2;  
When you use “C” or “D” destination product bring move to Japan or Taiwan,  
If you did not setup change country code and use in Japan and Taiwan,  
You will be on the illegal Radio Law in Japan and Taiwan.

Service Parts information:

The default country code is set on “Processing Circuit Board(PRC board)”.  
You must make sure and set up the “Country Code” when you replace the processing circuit pc board.  
Otherwise You and your customer should be on the illegal Radio Law and

IT HAS POSSIBILITY TO HAVE A RISK OF  
PUNISHMENT FROM EACH COUNTRY GOVERNMENT.

If you did not make sure country code and no setup code and face any trouble,  
We does not have any responsibility.

For setting up the Country Code,  
Please ask the procedure of changing country code  
to your distributor or our sales.  
It is no described the procedure of changing Country Code on this Service Manual

If you have any trouble of unclear procedure for update country code,  
Please contact our sales department.

PRC Board Default Value of Country Code

The PRC board is already set default Country Code by the representative destination.  
To confirm the default country code, Please refer to the "How to read PRC Board part  
number and Default value of Country Code" section.

Figure Country List (need to set up)

**IMPOTANT!!****Make sure and Setup Country Code**


You have to make sure country code for using or replacing "Processing Circuit PC Board".

It means that you have to make sure [country code](#) between using Processing Circuit PC board( PRC Board) and your customer's country code.


When it is not match PRC board default country code and customer's country, you have to setup [Country Code](#).

**Case3;**


When you repair the "P" destination products and replace "P" destination PRC Board and the customer live in UK, It is no necessary to setup Country Code  
Because "P" destination PRC board already setup "EU" country code.

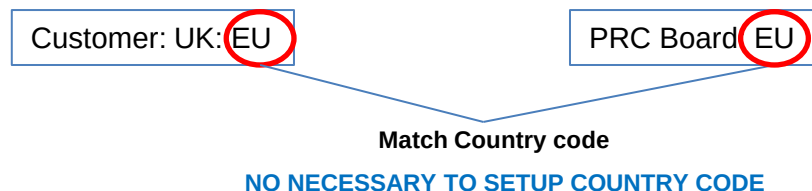**Case4;**


When you repair the "P" destination products and replace "P" destination PRC board and the customer live in Russia, It is necessary to setup Country Code  
Because "P" destination PRC Board already setup "EU" country code.  
However, the customer's country code is "RU". It means no match PRC Board code and Customer's code.

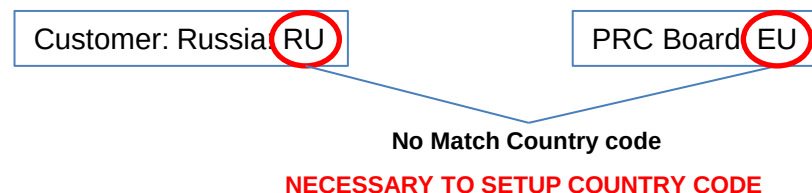**Case5;**

When you repair the "C" destination products and replace "C" destination PRC board and the customer live in US, it is no necessary to setup Country Code  
Because "C" destination PRC board already setup "US" country code.

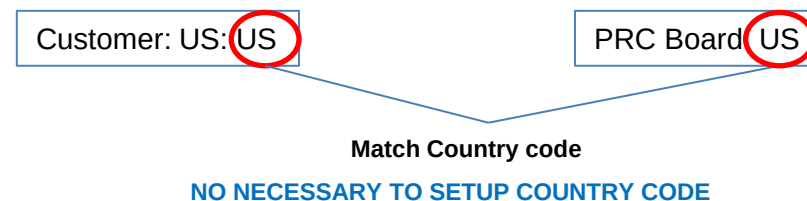**Case6;**

When you repair the "C" destination product and replace "C" destination PRC board and the customer live in Taiwan, It is necessary to setup Country Code.  
Because "C" destination PRC Board already setup "US" country code as default.  
However, the customer's country code is "TW". It means no match PRC Board code and the customer's country code

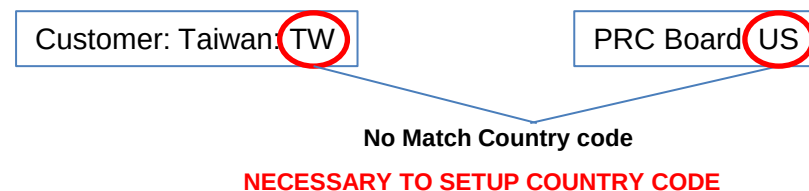

| Region  | Country       | Code |
|---------|---------------|------|
| America | USA           | US   |
|         | Canada        | US   |
|         | Mexico        | US   |
|         | Brazil        | US   |
|         | Chile         | CL   |
|         | Guatemala     | US   |
|         | Puerto Rico   | US   |
|         | Trinidad      | TT   |
|         | Dominican Rep | US   |
|         | Argentina     | AR   |
|         | Ecuador       | US   |
|         | Paraguay      | PY   |
|         | Colombia      | US   |
|         | Guam          | US   |
|         | Panama        | US   |
|         | Costa Rica    | US   |
|         | Uruguay       | UY   |
|         | Peru          | PE   |

| Region         | Country     | Code |
|----------------|-------------|------|
| Asia / Oceania | Japan       | JP   |
|                | China       | CN   |
|                | Hong Kong   | EU   |
|                | Korea       | KR   |
|                | Taiwan      | TW   |
|                | Singapore   | SG   |
|                | Malaysia    | MY   |
|                | Philippines | EU   |
|                | Vietnam     | EU   |
|                | Indonesia   | ID   |
|                | Sri Lanka   | EU   |
|                | Australia   | AU   |
|                | New Zealand | AU   |
|                | Thailand    | EU   |
|                | India       | IN   |
|                | Pakistan    | PK   |

| Region      | Country      | Code |
|-------------|--------------|------|
| Middle East | UAE          | EU   |
|             | Bahrain      | BH   |
|             | Kuwait       | KW   |
|             | Oman         | EU   |
|             | Qatar        | QA   |
|             | Lebanon      | EU   |
|             | Jordan       | JO   |
|             | Saudi Arabia | EU   |

| Region          | Country     | Code |
|-----------------|-------------|------|
| Europe / Africa | Germany     | EU   |
|                 | UK          | EU   |
|                 | France      | EU   |
|                 | Netherlands | EU   |
|                 | Italy       | EU   |
|                 | Switzerland | EU   |
|                 | Denmark     | EU   |
|                 | Sweden      | EU   |
|                 | Austria     | EU   |
|                 | Belgium     | EU   |
|                 | Spain       | EU   |
|                 | Norway      | EU   |
|                 | Finland     | EU   |
|                 | Czech       | EU   |
|                 | Israel      | IL   |
|                 | Ukraine     | EU   |
|                 | Hungary     | EU   |
|                 | Slovakia    | EU   |
|                 | Luxembourg  | EU   |
|                 | Turkey      | EU   |
|                 | Portugal    | EU   |
|                 | Malta       | EU   |
|                 | Latvia      | EU   |
|                 | Poland      | EU   |

| Region          | Country                 | Code |
|-----------------|-------------------------|------|
| Europe / Africa | Cyprus                  | EU   |
|                 | Estonia                 | EU   |
|                 | Slovenia                | EU   |
|                 | Bulgaria                | EU   |
|                 | Greece                  | EU   |
|                 | Romania                 | EU   |
|                 | Lithuania               | EU   |
|                 | Serbia                  | EU   |
|                 | Croatia                 | EU   |
|                 | Ireland                 | EU   |
|                 | Macedonia               | EU   |
|                 | Moldova                 | EU   |
|                 | Russia                  | RU   |
|                 | Andorra                 | EU   |
|                 | Armenia                 | EU   |
|                 | Azerbaijan              | EU   |
|                 | Belarus                 | EU   |
|                 | Bosnia and Herzegovina  | EU   |
|                 | Northern Cyprus(Turkey) | EU   |
|                 | Georgia                 | EU   |
|                 | Iceland                 | EU   |
|                 | Kazakhstan              | EU   |

| Region          | Country               | Code |
|-----------------|-----------------------|------|
| Europe / Africa | Liechtenstein         | EU   |
|                 | Monaco                | EU   |
|                 | Montenegro            | EU   |
|                 | San Marino            | EU   |
|                 | Vatican City          | EU   |
|                 | Kosovo                | EU   |
|                 | Kaliningrad(Russia)   | RU   |
|                 | Gibraltar(UK)         | EU   |
|                 | Canary Islands(Spain) | EU   |
|                 | Ceuta                 | EU   |
|                 | Melilla               | EU   |
|                 | Morocco               | MA   |
|                 | Algeria               | EU   |
|                 | Tunisia               | TN   |
|                 | Egypt                 | EG   |
|                 | Mauritius             | US   |
|                 | South Africa          | EU   |



1B5142034-1A555MDC

Board No.

Suffix No.

Model Number Last 3 Digit

- 555 : TX-NR555
- 656 : TX-NR656
- 757 : TX-NR757
- 695 : HT-R695
- 610 : TX-RZ610
- 710 : TX-RZ710
- 810 : TX-RZ810

Destination

PRC Board Default setting Country Code

| Dst | Code | Main Country            |
|-----|------|-------------------------|
| C   | US   | North America           |
| D   | US   | United State            |
| S   | US   | Brazil                  |
| P   | EU   | Europe                  |
| B   | EU   | United Kingdom          |
| Q   | EU   | Hong Kong               |
| T   | EU   | Thai                    |
| L   | RU   | Russia                  |
| A   | AU   | Australia / New Zealand |
| R   | CN   | China                   |
| F   | TW   | Taiwan                  |
| K   | KR   | Korea                   |
| J   | JP   | Japan                   |

**Step1** : [DIMMER] + [ON/STANDBY] x 2  
Main Firmware Version will appear on the main unit's display.

**Step2** : [TONE +1] ( Rotate "TONE" knob right 1 click)  
NET Firmware Version will appear on the main unit's display.

**Step3** : [TONE +2] ( Rotate "TONE" knob right 2 click)  
DSP Firmware Version will appear on the main unit's display.

**Step4** : [TONE +3 ] ( Rotate "TONE" knob right 3 click)  
Video Firmware Version will appear on the main unit's display.

**Step3** : [TONE +4] ( Rotate "TONE" knob right 4 click)  
OSD Firmware Version will appear on the main unit's display.

**Step4** : [TONE +5 over] ( Rotate "TONE" knob right 5 click over)  
Return to Display Main Firmware Version ( Return Step1)

When It is rotated left ( - ) TONE knob, It is appeared before step.

- [Preparation of Update]**
1. Connect the USB storage device to your PC. If there is any data in the USB storage device, remove it.
  2. Download the firmware file (package file) from the Onkyo FTP-server. However European service partners should download the firmware file (package file) from the ExtraNet.

Onkyo FTP-server: <ftp://manex.onkyo.co.jp/>  
ID and Password are those we informed when changed.  
Filename is as follows: ONKAVR0001\*\*\*\*\*.zip

Unzip the downloaded file. A following file is created.

ONKAVR0001\*\*\*\*\*.of0  
ONKAVR0001\*\*\*\*\*.of1  
ONKAVR0001\*\*\*\*\*.of2  
ONKAVR0001\*\*\*\*\*.of3  
ONKAVR0001\*\*\*\*\*.of4

3. Copy it to the USB storage device. Be careful not to copy the zip file.
4. Remove the USB storage device from your PC.

## How to Update (service mode) 1/2

## Firmware

Overwriting is also possible.

1. Connect the USB strage to the USB port on the unit.



2. Turn on the unit. It takes some time to start after you switch on the unit.  
Press: [DIMMER] + [ON/STANDBY] x 2
3. Press [RETURN] button, Then it is displayed as below



If you need each module of the firmware update, you can select the module by pressing PRESET < and > button.

If you need change source NET or USB, you can select the source by pressing TUNING UP and Down key

It should be updated firmware by selecting USB -> ALL normally.

**Please do NOT choose T-SRV( it is test server)**

- USB -> ALL: ALL firmware update ( default )
- USB -> DSP1: DSP firmware update
- USB -> OSD: OSD firmware update
- USB -> VMPU: VMPU firmware update
- USB -> NET: NET firmware update
- USB -> MMPU: Main MPU firmware update
- USB -> WORK: Compare between AVR and USB, Only update new version firmware

- NET -> ALL: ALL firmware update ( default )
- NET -> DSP1: DSP firmware update
- NET -> OSD: OSD firmware update
- NET -> VMPU: VMPU firmware update
- NET -> NET: NET firmware update
- NET -> MMPU: Main MPU firmware update
- NET -> WORK: Compare between AVR and MMC,  
Only update new version firmware by network

The default setting is “ ALL ”



**CAUTION: When you will update each module firmware,  
you have to keep combination of firmware.**

4. Press [ENTER] button. Start update firmware.



5. Wait until update is completed. When the update ends, “Completed!” is displayed. When “ Completed!” message appeared, you can power off by pressing “ ON/STANDBY” button. (If you leave it, it automatically turns standby mode. )



- 6. Press [ON/STANDBY] button, and the unit turns on.
- 7. Check the new FW version number.


<Note>  
If the procedure might not be successful, please select “USB -> ALL”.

How to Adjust Idling

Adjustment


The Idling current adjustment is unnecessary.  
If did the repair of amplifier circuit, please confirm the idling current after 4 ~ 6 minutes heat running. If the measured value are under 1mV or over 21mV , turn off the power of the AVR and check the parts of defect channel again.

| Chanel | Measurement Points | Permissible Range |
|--------|--------------------|-------------------|
| FL     | P6021              | 1mV ~ 21mV        |
| FR     | P6022              |                   |
| C      | P6023              |                   |
| SL     | P6025              |                   |
| SR     | P6026              |                   |
| SBL    | P6027              |                   |
| SBR    | P6028              |                   |

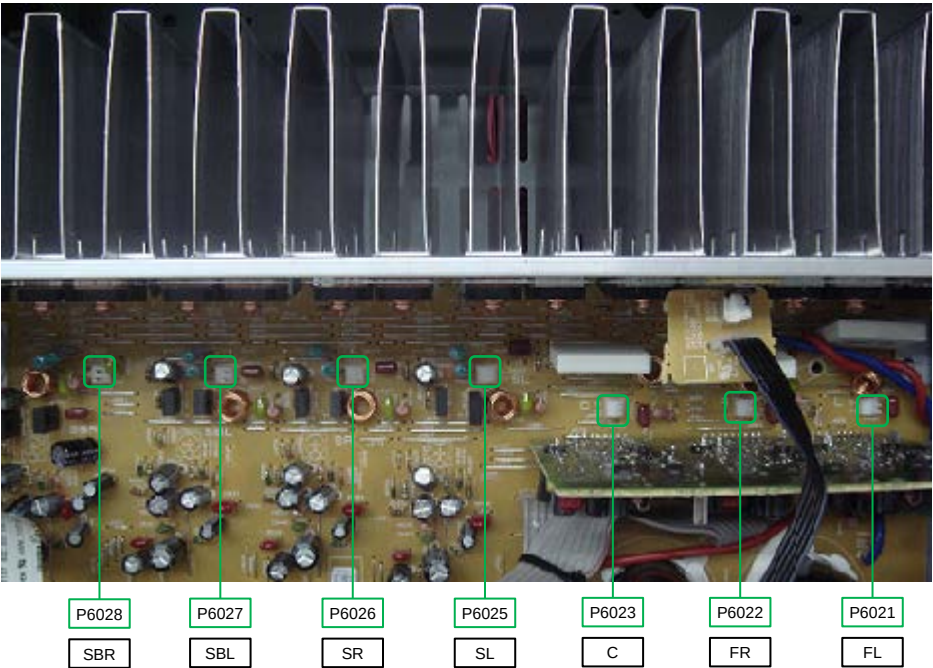

\*Heat sink is different by each model.

Connection



TX-NR555/TX-NR656/TX-RZ610/HT-R695  
TX-NR757/TX-RZ710/TX-RZ810  
DRX-2/DRX-3/DRX-4/DRX-5

No Sound

Hookup and Setting

■ No sound from connected player

- ☐ Chose input selector which is assigned to connected input terminal ?
- ☐ Isn't muting on ?

■ No sound from connected TV

- ☐ Chose wrong input selector ?
- ☐ Connect to this model's HDMI OUT terminal from TV by HDMI cable ?
- ☐ When TV supports ARC function, connect to his model's HDMI OUT terminal from TV's HDMI input terminal for ARC function ?
- ☐ When TV doesn't support ARC function, connect TV to this model with optical cable etc. ?
- ☐ Isn't muting on ?

■ No sound from some connected loudspeaker(s)

- ☐ No sound loudspeaker(s) config is enabled ?

■ No sound from all connected TV or Blu-ray player etc.

- ☐ After chose loudspeaker volume level setting, test tone is OK ?

■ No problem about above items

- ☐ Unplug power cord  
After 10 seconds, connect power cord again
- ☐ Reset this model

No Picture

Hookup and Setting

- In general
  - ☐ Connection cable is bent , twisted or damaged ?
  - ☐ Input is switched on TV ?
- No picture from connected player by HDMI input terminal
  - ☐ Chose input selector which is connected to player ?
  - ☐ Listening mode is not Pure Audio ?
  - ☐ Don't use HDMI-DVI adaptor. From personal computer ?
- No picture from connected player by component video terminal
  - ☐ Output to TV connected to component video out terminal from player's picture connected to the composite video input terminals ?
- No problem about above items
  - ☐ Unplug power cord  
After 10 seconds, connect power cord again
  - ☐ Reset this model

No Power

Hookup and Setting

- In general
  - ☐ Doesn't be connection cable bent, be it twisted and be it damaged?
- There is time when indication on the front panel doesn't just light up.
  - ☐ Please check the connecting cord of a DISPLAY PCB.
- No problem about above items
  - ☐ Unplug power cord
    - After 10 seconds, connect power cord again
  - ☐ Reset this model




No Sound (HDMI in)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                                         | Damaged PCB |
|---------|-----------------------------------------------------|-------------|
| 1       | J6504(BATRM-2023)<br>● +24V                         | BAAF-1979   |
| 2       | P8002A(BADG-2032)<br>5 -15V 7 +15V                  | BAAF-1979   |
| 3       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V                 | BATRM-2023  |
| 4       | P8003A(BADG-2032)<br>28 +3.3V                       | BAPRC-2034  |
| 5       | P8002A(BADG-2032)<br>29 Signal 30 Signal            | BAPRC-2034  |
| 6       | VLSC OUTPUT(BADG-2032)<br>Signal                    | BADG-2032   |
| 7       | ● J4606(BAAF-1979)                                  | BAAF-1979   |
| 8       | Q6001, Q6021(BAAF-1979)<br>● Base                   | BACLA-2030  |
| 9       | P2800B(BAPRC-2034)<br>10 +3V (HIGH)                 | BAAF-1979   |
| 10      | ● P6021(BAAF-1979)<br>The amplified beautiful wave. | BAAF-1979   |
| 11      |                                                     | BATRM-2023  |

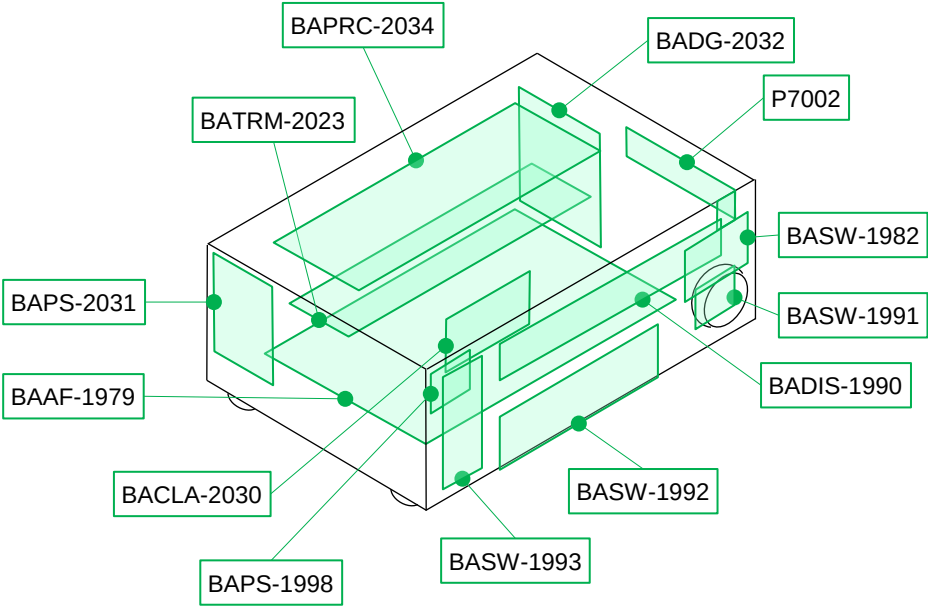


No Sound (Opt in)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                                         | Damaged PCB |
|---------|-----------------------------------------------------|-------------|
| 1       | J6504(BATRM-2023)<br>● +24V                         | BAAF-1979   |
| 2       | P8002A(BADG-2032)<br>5 -15V 7 +15V                  | BAAF-1979   |
| 3       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V                 | BATRM-2023  |
| 4       | P8003A(BADG-2032)<br>28 +3.3V                       | BAPRC-2034  |
| 5       | P8003A(BADG-2032)<br>25 Signal                      | BADG-2032   |
| 6       | P8002A(BADG-2032)<br>29 Signal 30 Signal            | BAPRC-2034  |
| 7       | VLSC OUTPUT(BADG-2032)<br>Signal                    | BADG-2032   |
| 8       | ● J4606(BAAF-1979)                                  | BAAF-1979   |
| 9       | Q6001, Q6021(BAAF-1979)<br>● Base                   | BACLA-2030  |
| 10      | P2800B(BAPRC-2034)<br>10 +3V (HIGH)                 | BAAF-1979   |
| 11      | ● P6021(BAAF-1979)<br>The amplified beautiful wave. | BAAF-1979   |
| 12      |                                                     | BATRM-2023  |

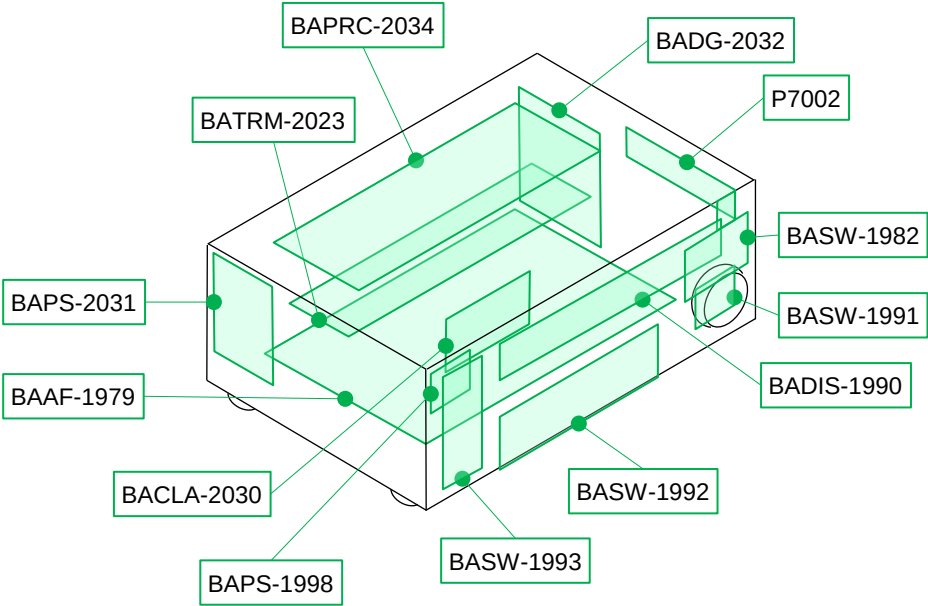


No Sound (Analog in)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                                         | Damaged PCB |
|---------|-----------------------------------------------------|-------------|
| 1       | J6504(BATRM-2023)<br>● +24V                         | BAAF-1979   |
| 2       | P8002A(BADG-2032)<br>5 -15V 7 +15V                  | BAAF-1979   |
| 3       | ● J4606(BAAF-1979)                                  | BAAF-1979   |
| 4       | Q6001, Q6021(BAAF-1979)<br>● Base                   | BACLA-2030  |
| 5       | P2800B(BAPRC-2034)<br>10 +3V (HIGH)                 | BAAF-1979   |
| 6       | ● P6021(BAAF-1979)<br>The amplified beautiful wave. | BAAF-1979   |
| 7       |                                                     | BATRM-2023  |

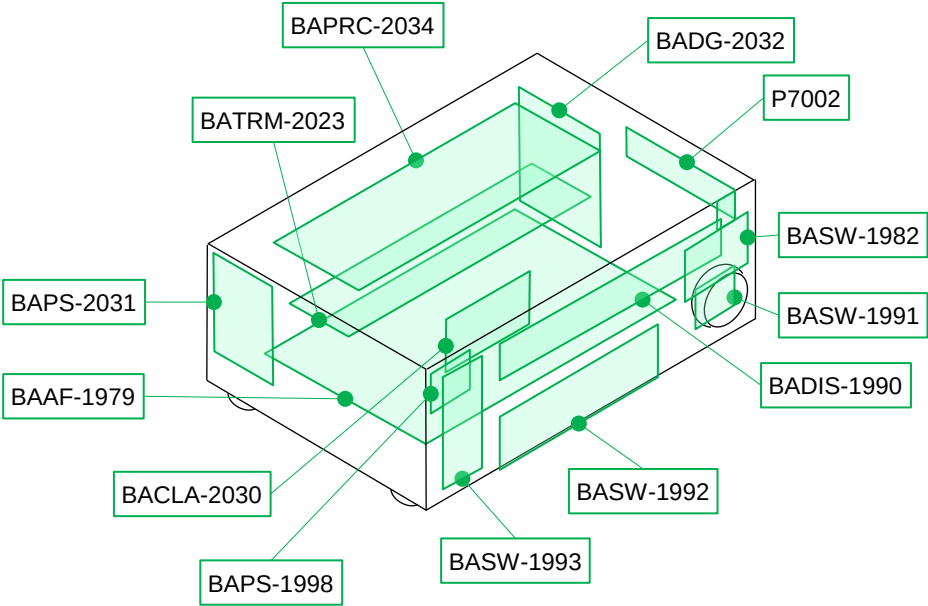


No Picture (HDMI in/ out)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                         | Damaged PCB                                                |
|---------|-------------------------------------|------------------------------------------------------------|
| 1       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V | <div>No Good →</div> <div>OK →</div> <div>BATRM-2023</div> |
| 2       |                                     | <div>→</div> <div>BAPRC-2034</div>                         |

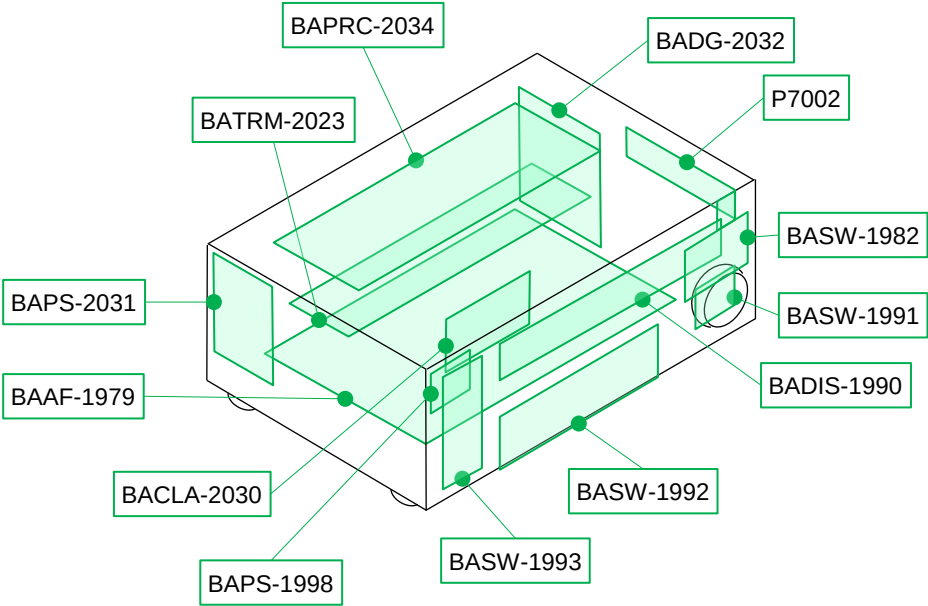


No Picture (Component in/ HDMI out)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                         | Damaged PCB |
|---------|-------------------------------------|-------------|
| 1       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V | BATRM-2023  |
| 2       | P2800B(BAPRC-2034)<br>17 +5V        | BAPRC-2034  |
| 3       | P2800B(BAPRC-2034)<br>19 21 23      | BATRM-2023  |
| 4       |                                     | BAPRC-2034  |

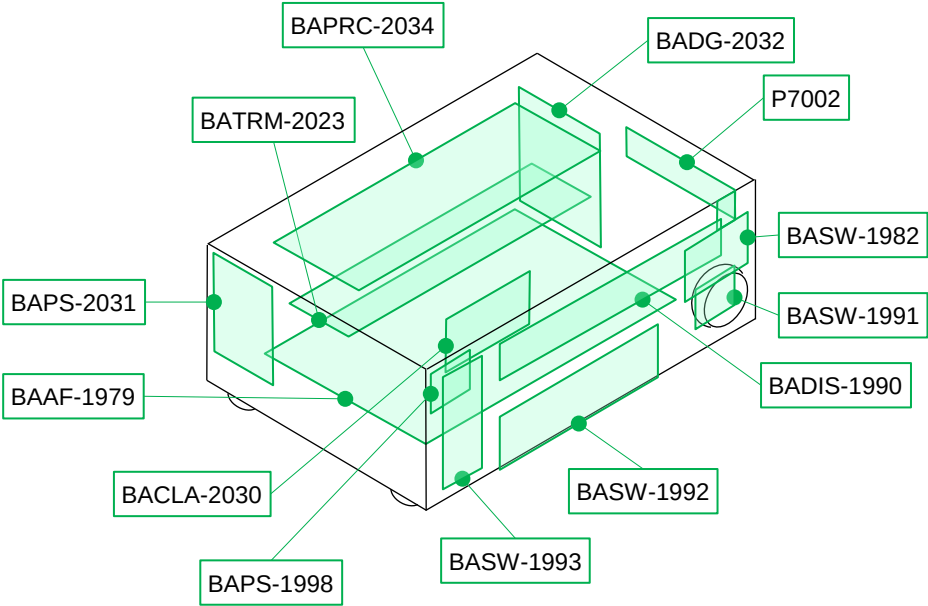


No Picture (Composite in/ HDMI out)

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                         | Damaged PCB |
|---------|-------------------------------------|-------------|
| 1       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V | BATRM-2023  |
| 2       | P2800B(BAPRC-2034)<br>17 +5V        | BAPRC-2034  |
| 3       | P2800B(BAPRC-2034)<br>19            | BATRM-2023  |
| 4       |                                     | BAPRC-2034  |

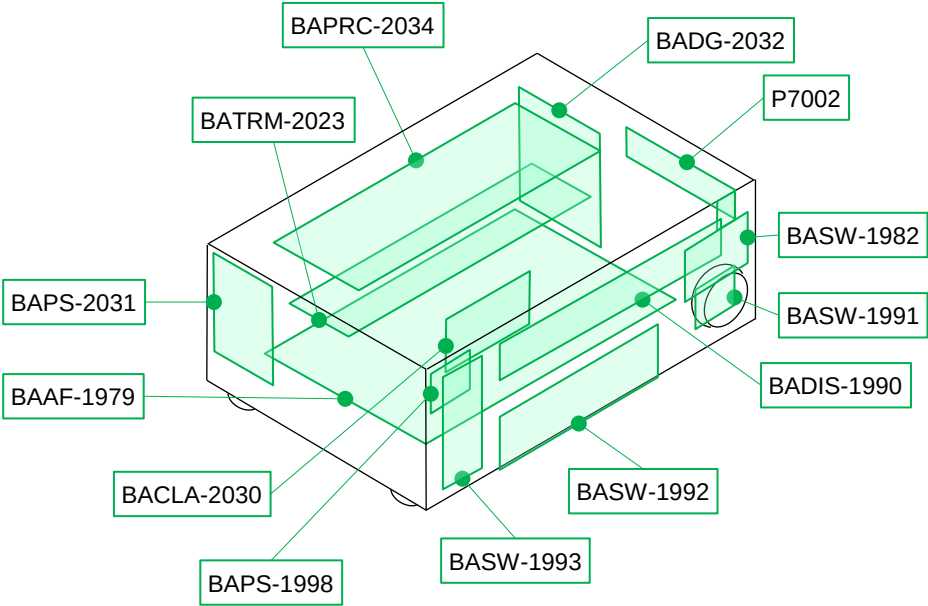


No Power

Trouble Shoot

Here the trouble shoot which focuses on the hardware troubles regarding PCB assembly is explained.  
Of course, with actual repair there are also troubles due to damaged Power Transformer, Wiring, soldering etc. in addition to PCB assembly.

| Process | Check Point                         | Damaged PCB                            |
|---------|-------------------------------------|----------------------------------------|
| 1       | C9001(BAPS-2031)<br>● AC100V~240V   | BAPS-2031                              |
| 2       | ● F9002(BAPS-2031)                  | BAAF-1979<br>BACLA-2030                |
| 3       | ● F6901, F6902(BAAF-1979)           | BAAF-1979<br>BACLA-2030                |
| 4       | ANY PARTS(BAAF-1979)                | BAAF-1979<br>BACLA-2030                |
| 5       | FFC P7001(BAPRC-2034)               | P7001(FFC)                             |
| 6       | P2802B(BAPRC-2034)<br>1 +12V ~ +15V | BAPS-2031                              |
| 7       | P2800B(BAPRC-2034)<br>5 +3V (HIGH)  | BAPRC-2034                             |
| 8       | P7001A(BAPRC-2034)<br>17 +5V        | BAPRC-2034                             |
| 9       | RL9001(BAPS-2031)                   | BAPS-2031                              |
| 10      | P9002(BAPS-2031)<br>● AC100V~240V   | BATRM-2023<br>BAPRC-2034<br>P2800(FFC) |
| 11      | FFC P7001(BADIS-1990)               | P7001(FFC)                             |
| 12      |                                     | BADIS-1990                             |

1. When being not turned on with remote control unit only, BADIS-1990 is abnormal.  
2. When being not turned on with button on the main unit only, BADIS-1990 is abnormal.

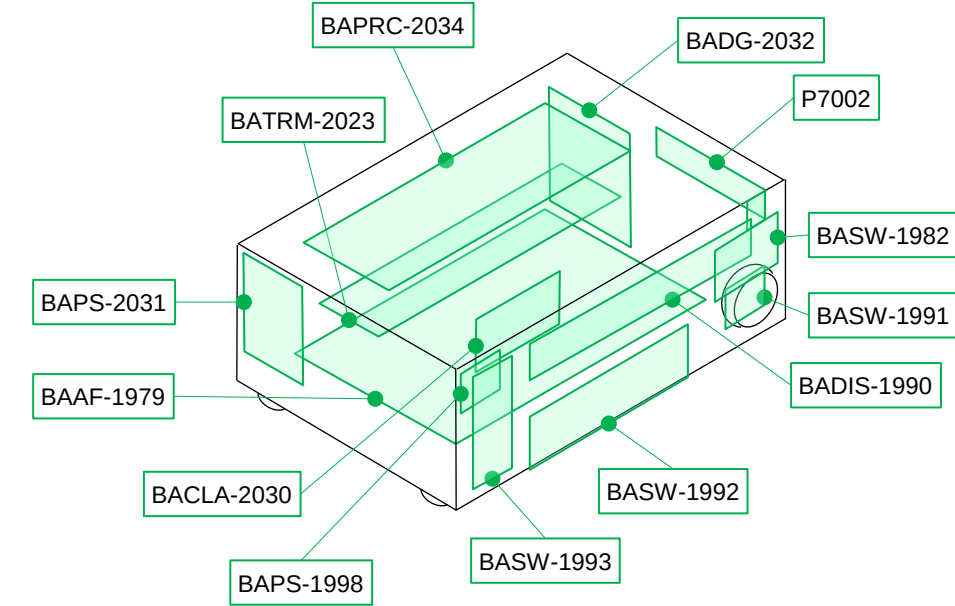






ANY PARTS on BAAF-1979

Check damage parts

Normal(OK) or Damage (No good)

Check the damage in the red framework part as shown with visual inspection.

e.g. Broken, Burnout, Discoloration, etc.

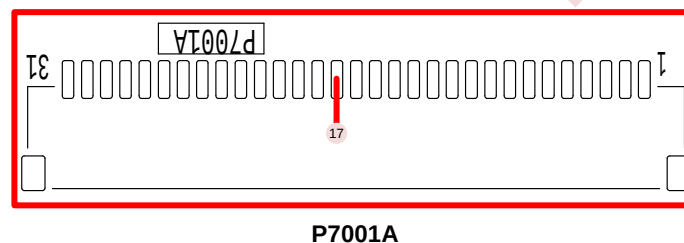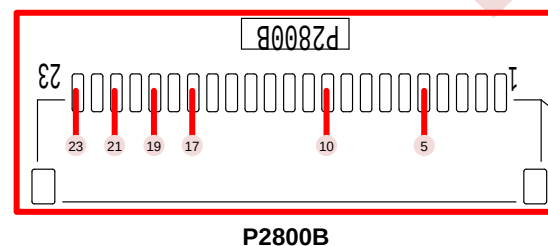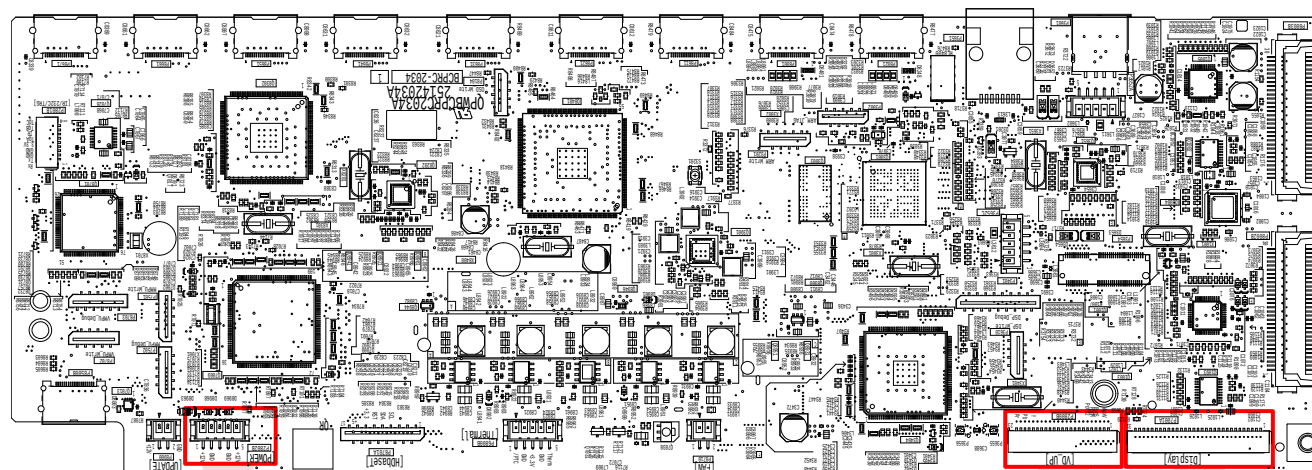

### P2802B

#### Check Voltage


- 1 +12V ~ +15V

### P2800B




#### Check Voltage

- 5 +3V (HIGH)
- 10 +3V (HIGH)
- 17 +5V

#### Check Signal



Input signal : Color bar(NTSC)

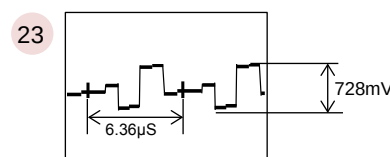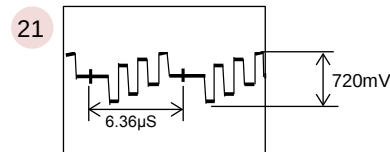

### P7001A

- 17 +5V


### P7001

#### Check damage and connection

- How to check
1. Disconnect the FFC from the socket.
  2. Check the contacts of the FFC.





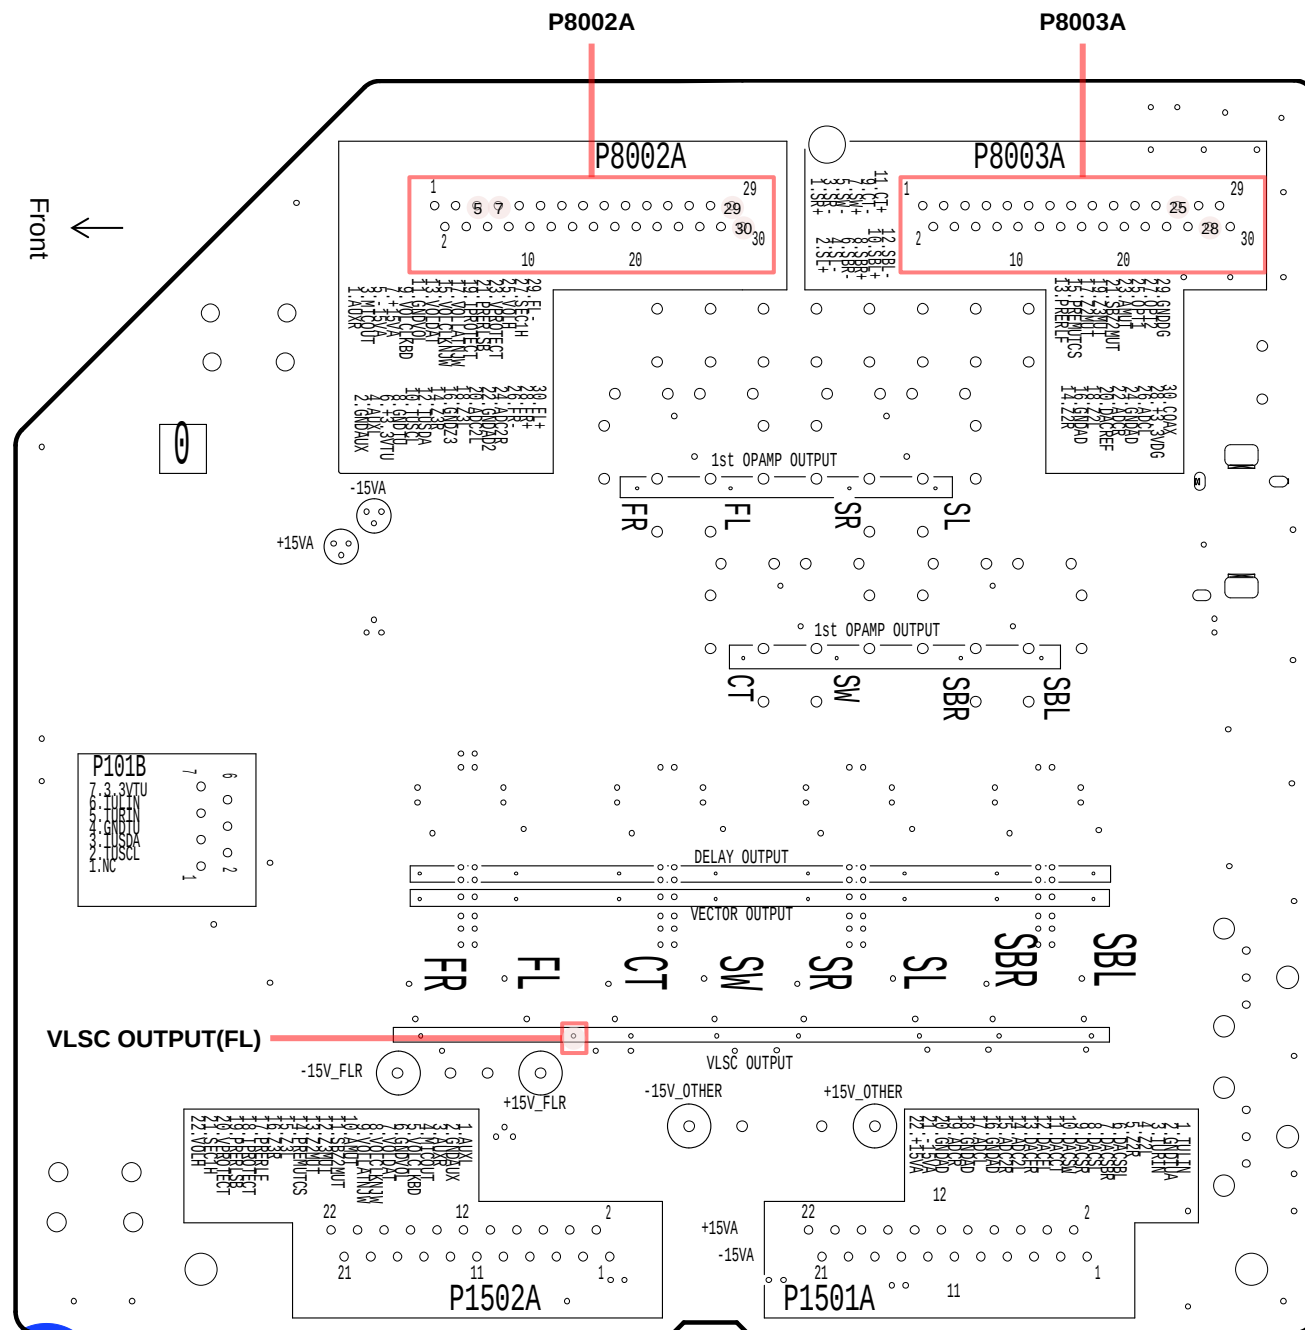


### P8002A

#### Check Voltage

- 5 -15V
- 7 +15V

#### Check Signal


Input terminal : HDMI IN or OPT IN  
 Input signal(HDMI/ OPT IN) : Test disc 1kHz 0dB  
 Audio format : LPCM, Dolby Digital(Otherwise, CD)  
 Speaker Configuration : 2.0

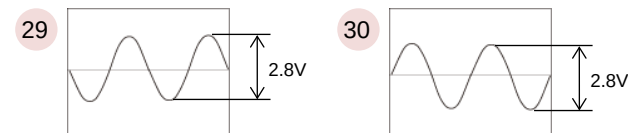

### P8003A

#### check Signal

Input terminal : HDMI IN or OPT IN  
 Input signal(HDMI/ OPT IN) : Test disc 1kHz 0dB  
 Audio format : LPCM, Dolby Digital(Otherwise, CD)

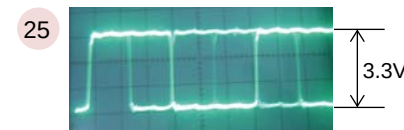


#### Check Voltage

- 28 +3.3V





### VLSC OUTPUT(FL)

#### Check Signal

Input terminal : HDMI IN or OPT IN  
 Input signal(HDMI/ OPT IN) : Test disc 1kHz 0dB  
 Audio format : LPCM, Dolby Digital(Otherwise, CD)





Speaker Configuration : 2.0

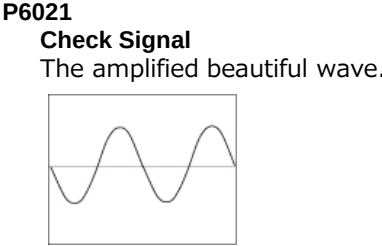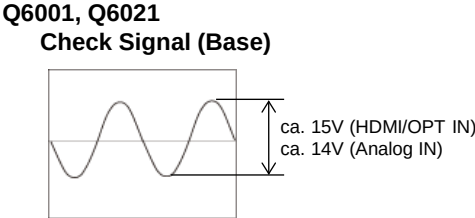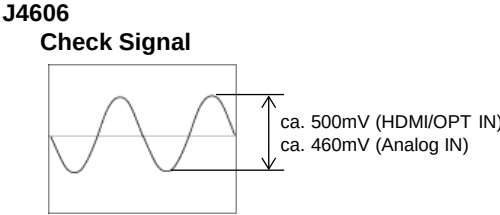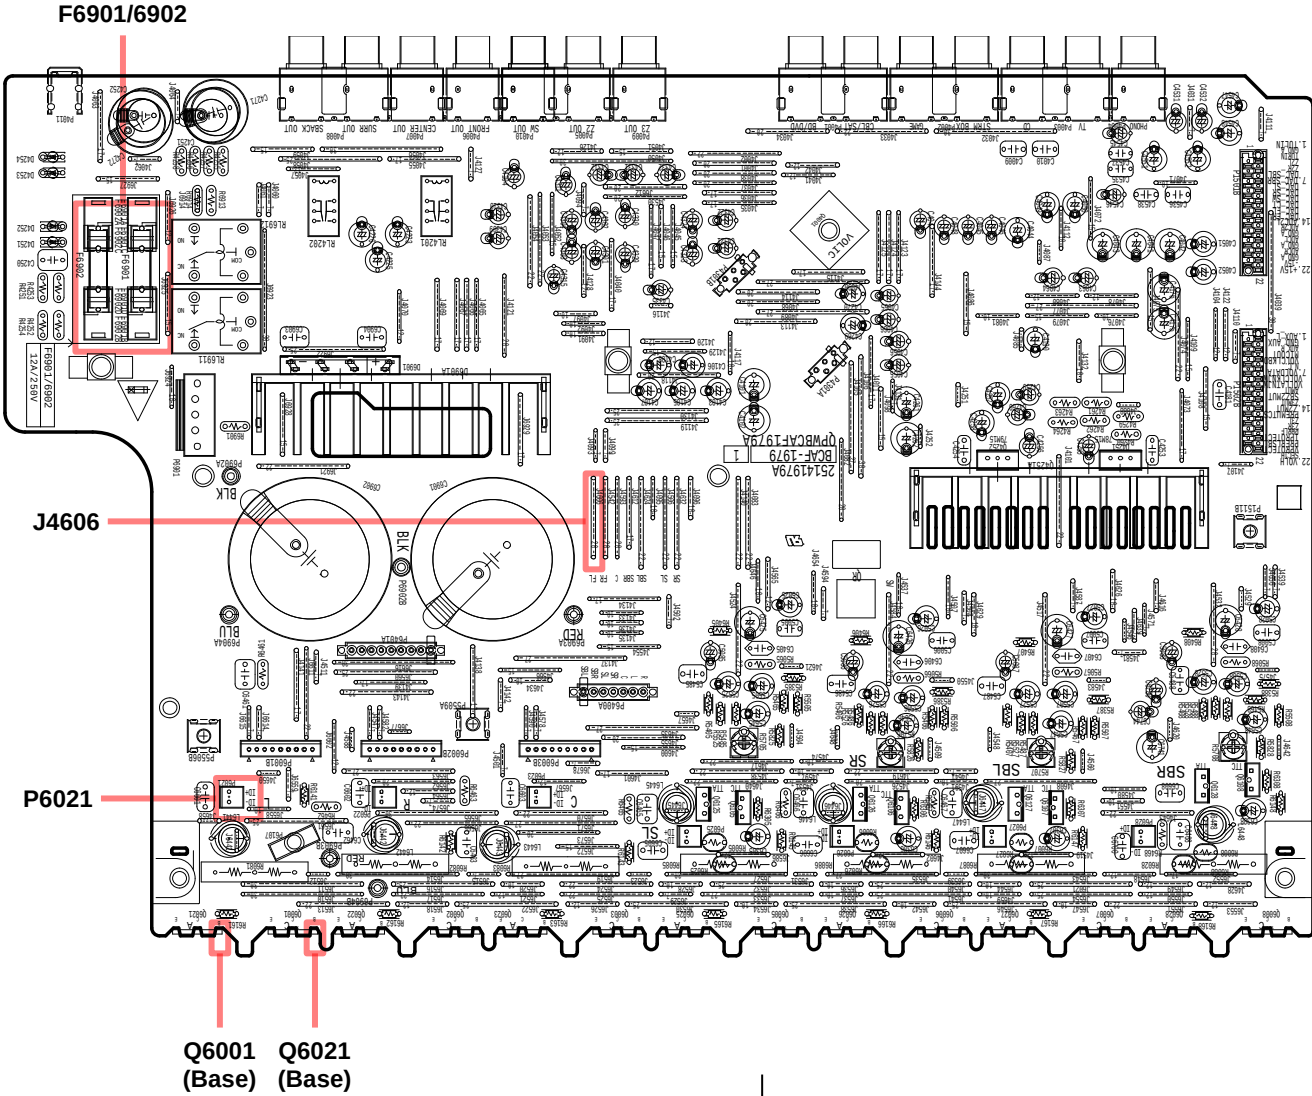

**F6901, F6902**  
Check damage  
● Normal (OK) or blown (No good)

**J4606, Q6001, Q6021, P6021**  
Input terminal : HDMI IN or OPT IN or ANALOG IN  
Input signal(HDMI/OPT IN) : Test disc 1kHz 0dB  
Audio format : LPCM, Dolby Digital(Otherwise, CD)  
Input signal(ANALOG IN) : 1kHz 2Vrms  
Master volume : 66



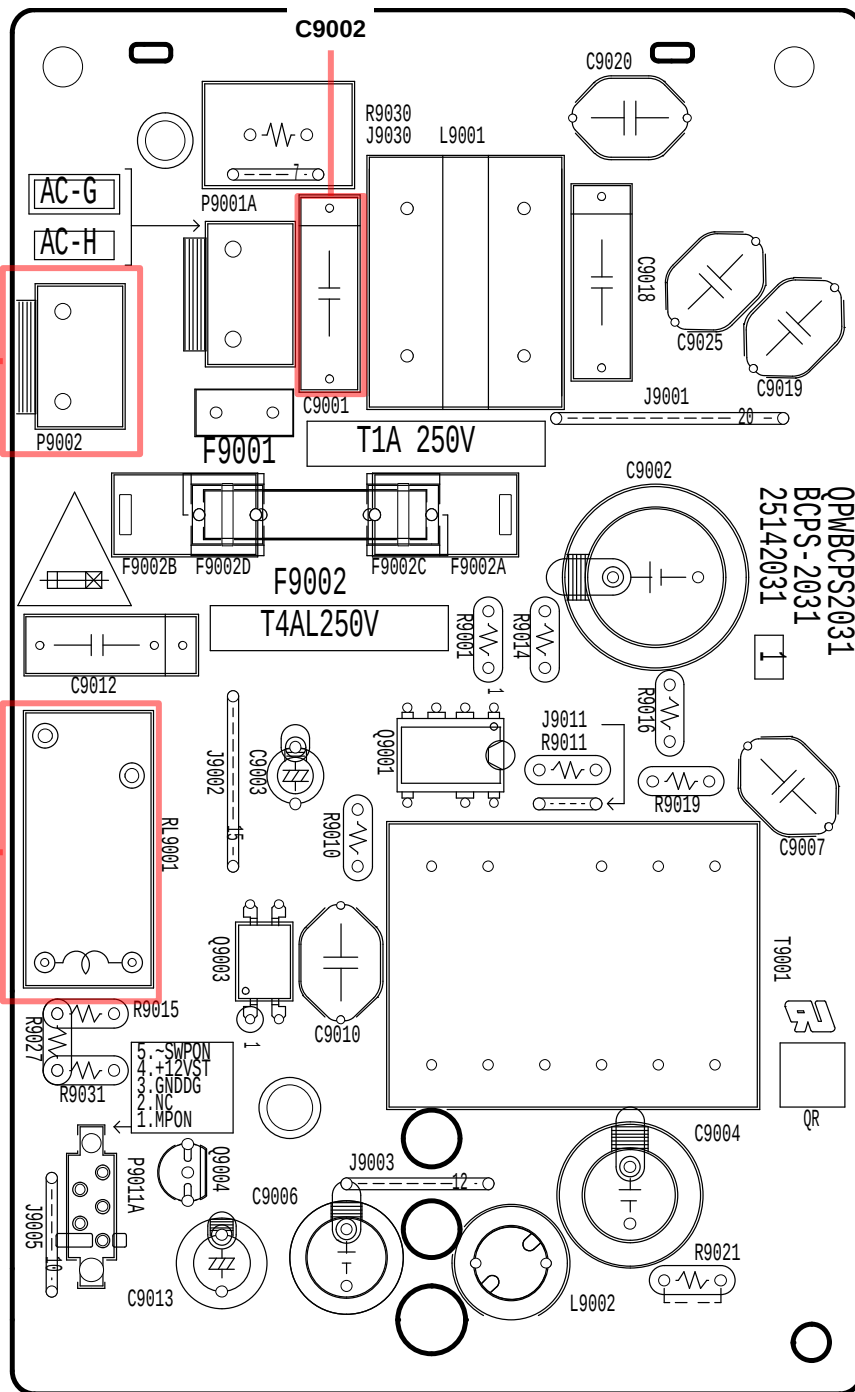

### C9002

#### Check Voltage

AC100 ~ 240V (Power supply voltage)

### RL9001

Check operation of a relay by sound.


No sound at all ----> No good

### P9002


#### Check Voltage

AC100 ~ 240V (Power supply voltage)

BACLA-2030

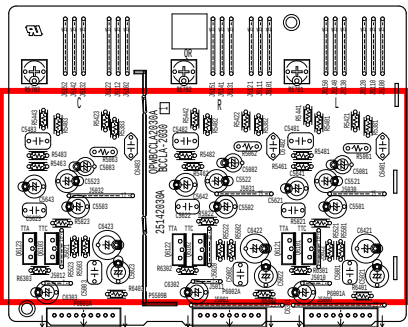

BAAF-1979

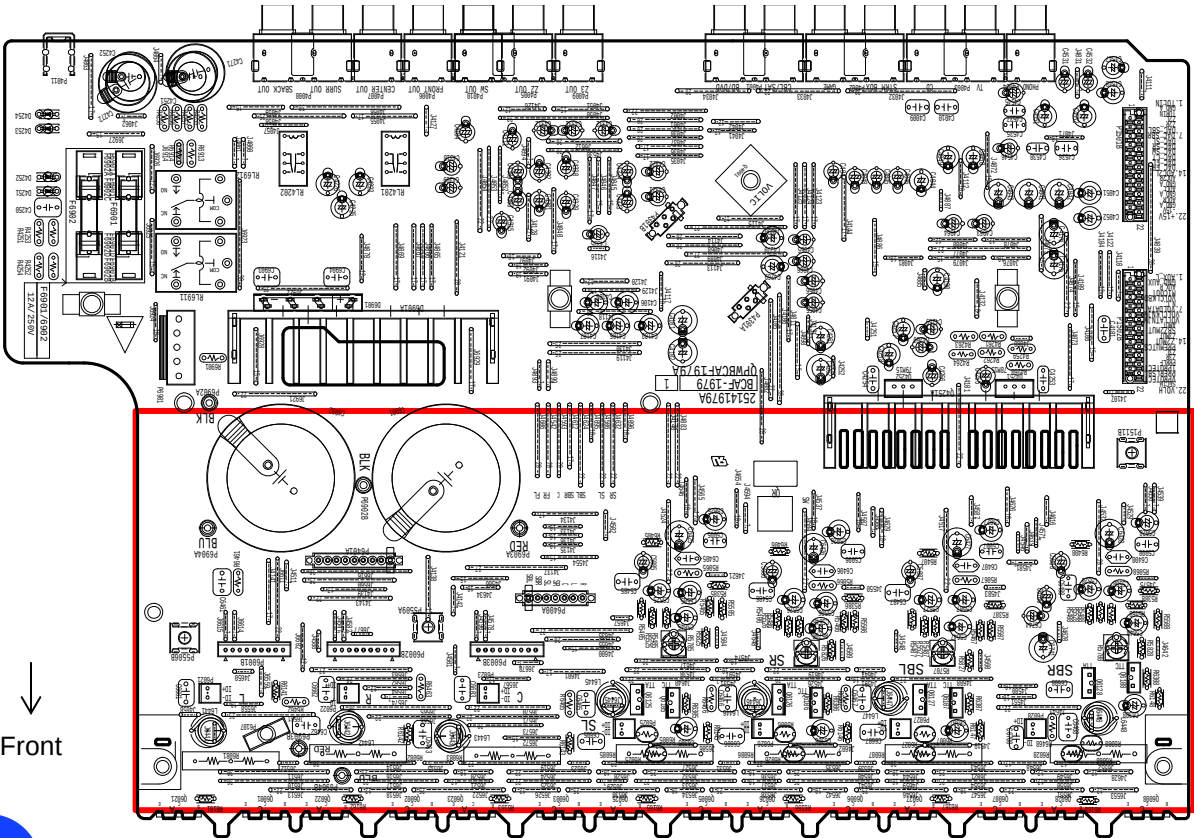


**ANY PARTS**  
Check damage

Normal(OK) or Damage (No good)

Check the damage in the red framework part as shown with visual inspection.

e.g. Broken, Burnout, Discoloration, etc.

● Each voltage is shown as the reference value.

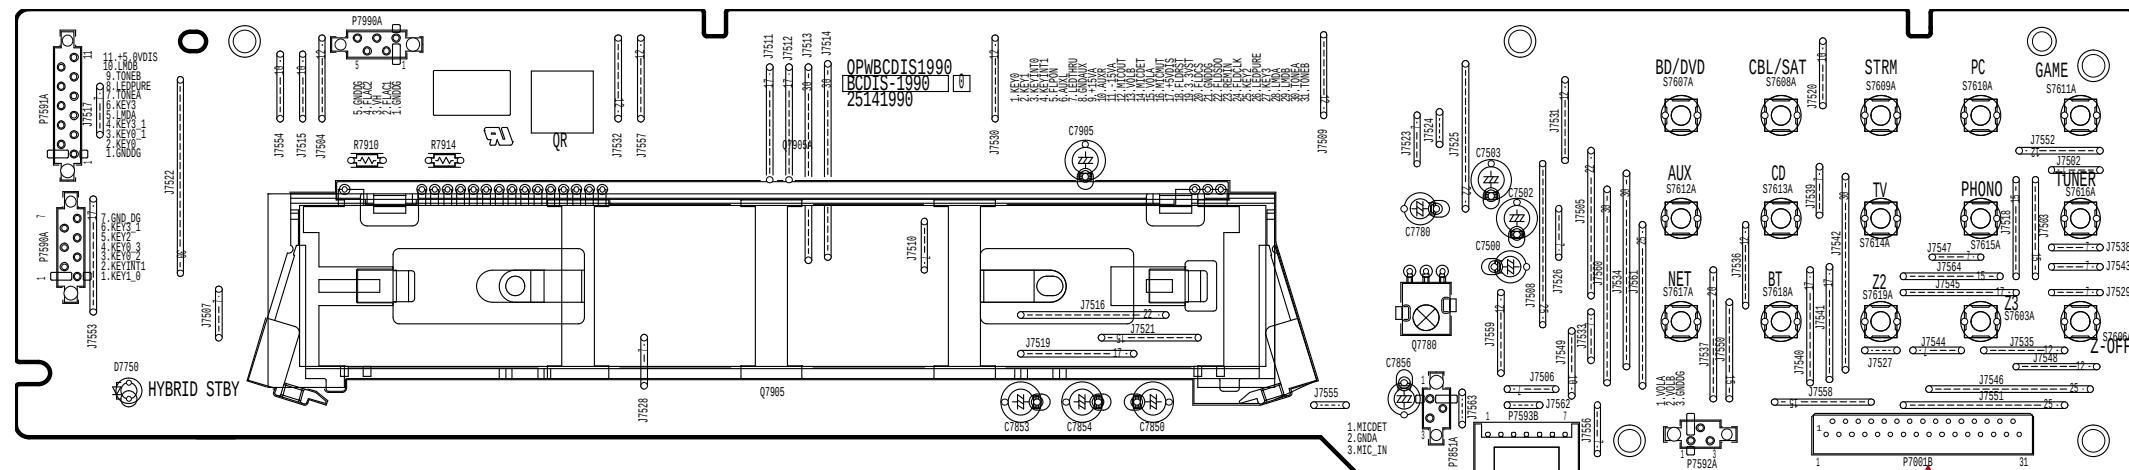**P7001**

- Check damage and connection

How to check

1. Disconnect the FFC from the socket.
2. Check the contacts of the FFC.

FFC  
P7001




Back



Overview

This model can be disassembled in the order shown below.


Disassembly

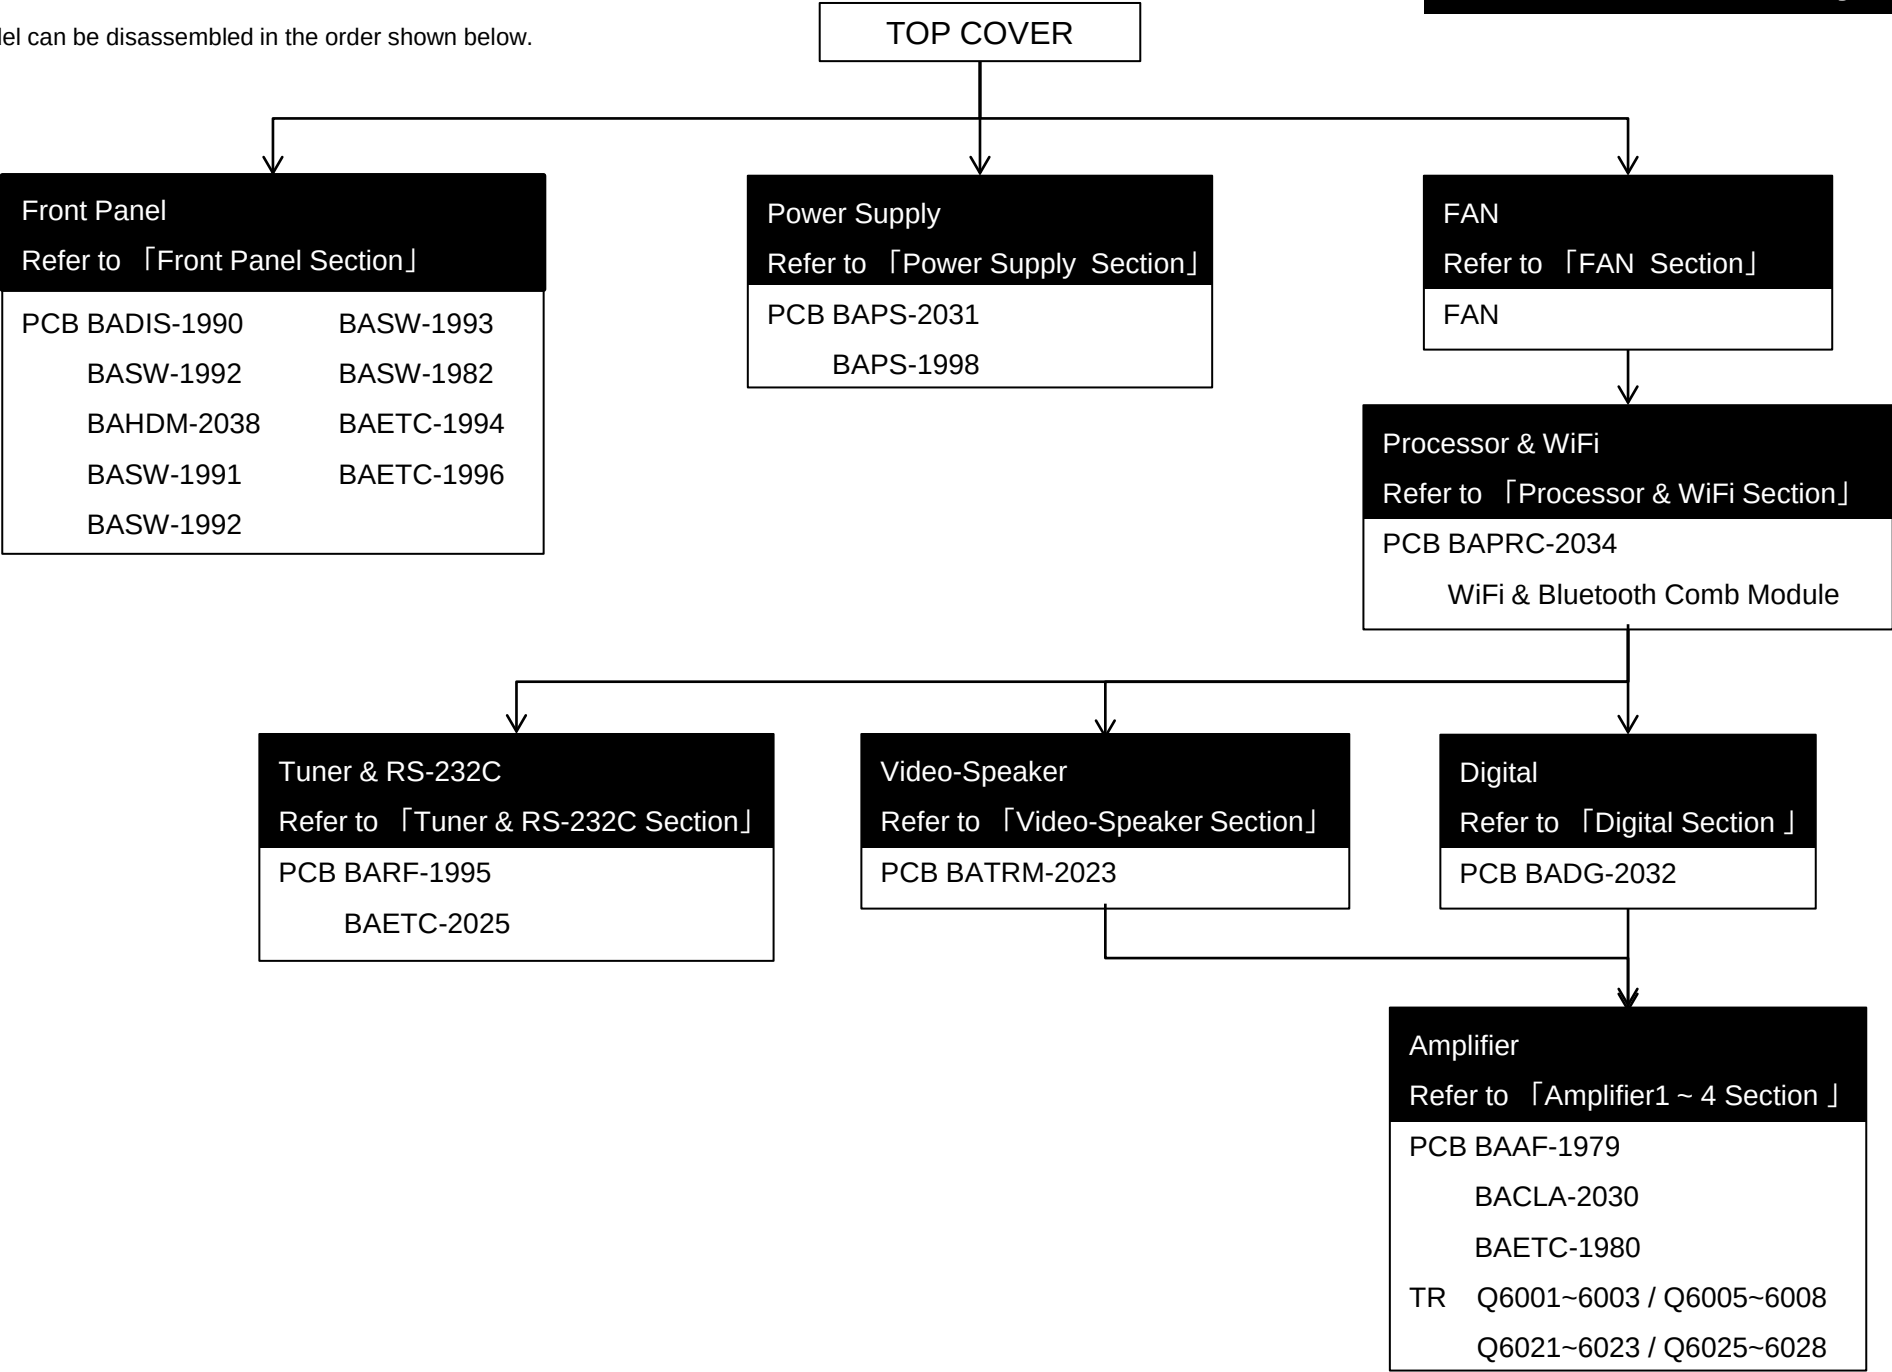

# Front Panel Section


## Disassembly


PCB BADIS-1990  
PCB BASW-1992  
PCB BAHDM-2038  
PCB BASW-1991  
PCB BASW-1992  
PCB BASW-1993  
PCB BASW-1982  
PCB BAETC-1994  
PCB BAETC-1996

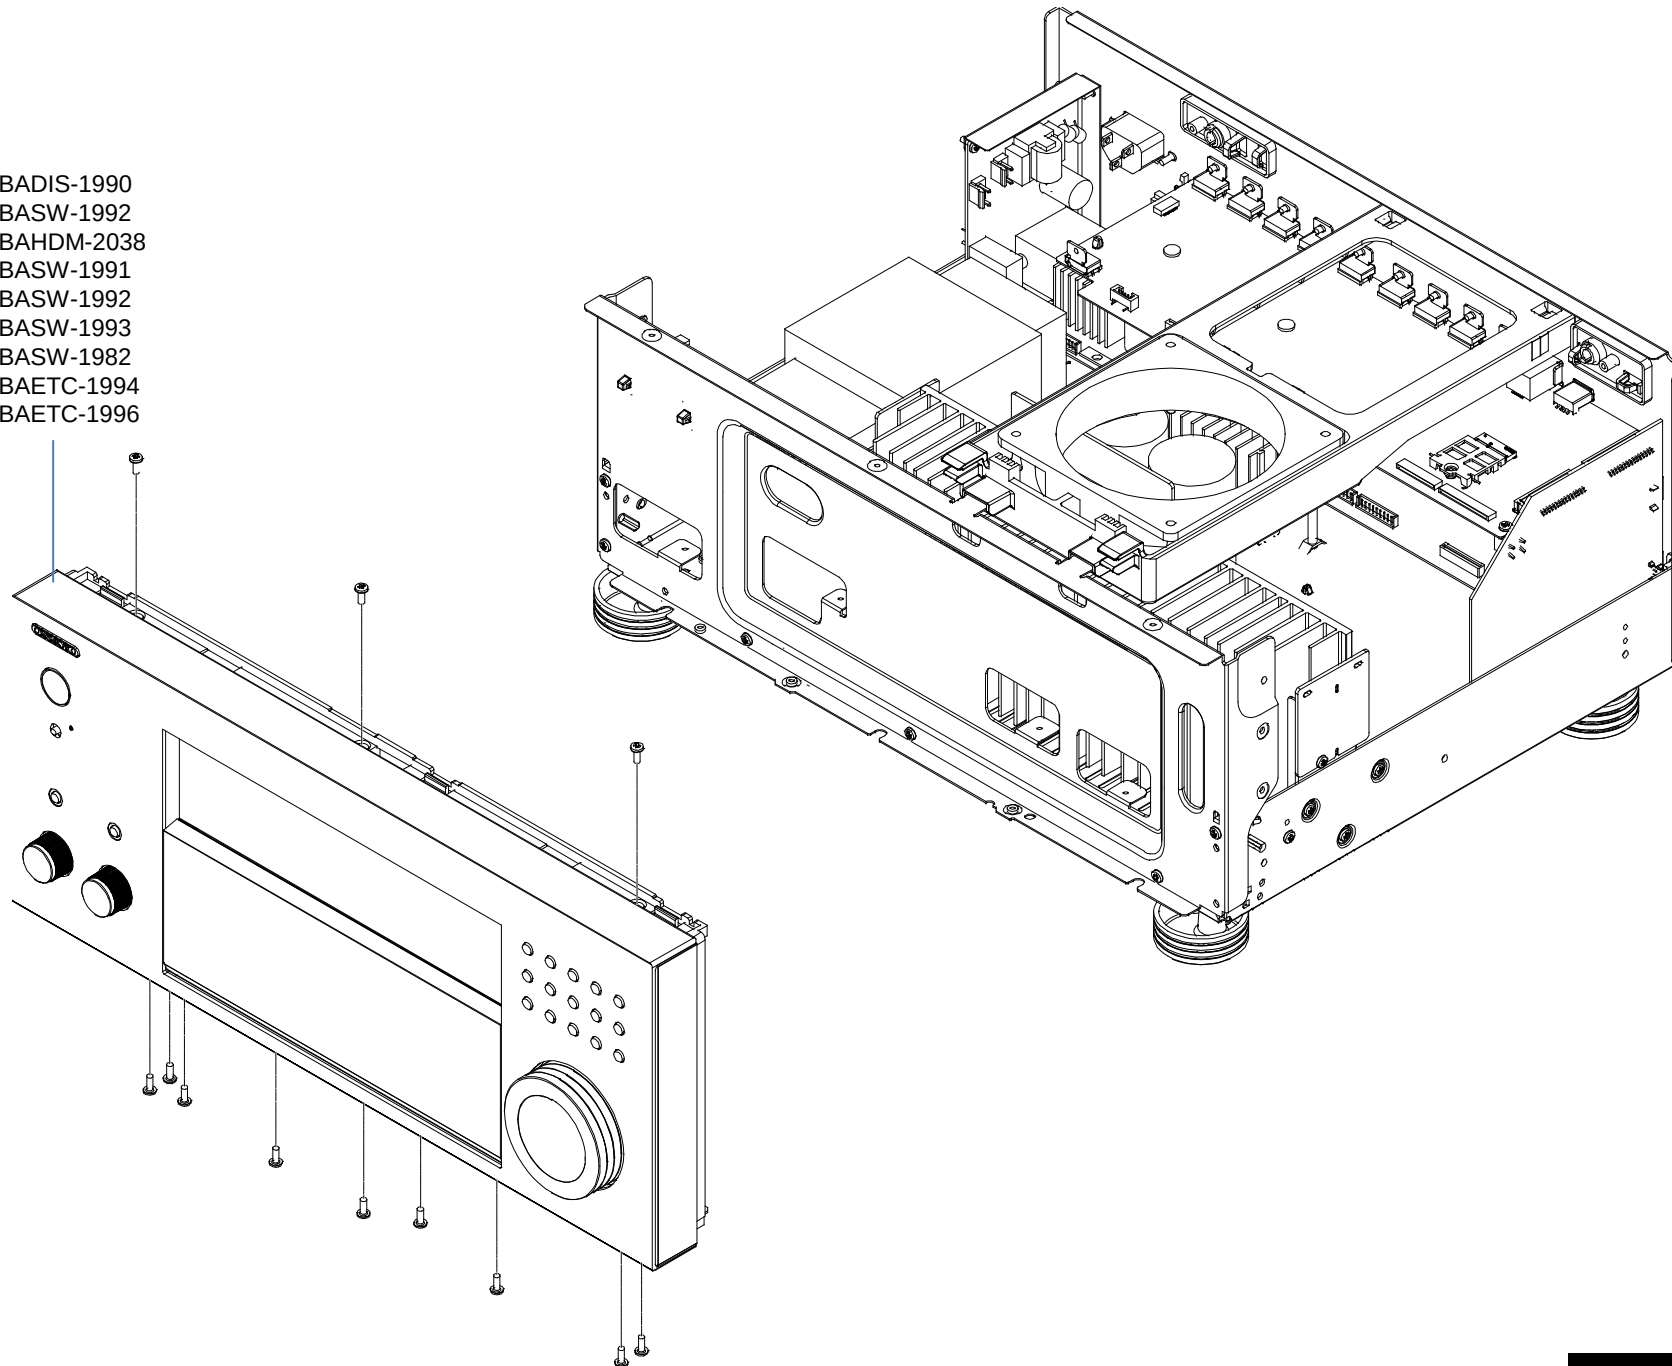



TX-RZ810




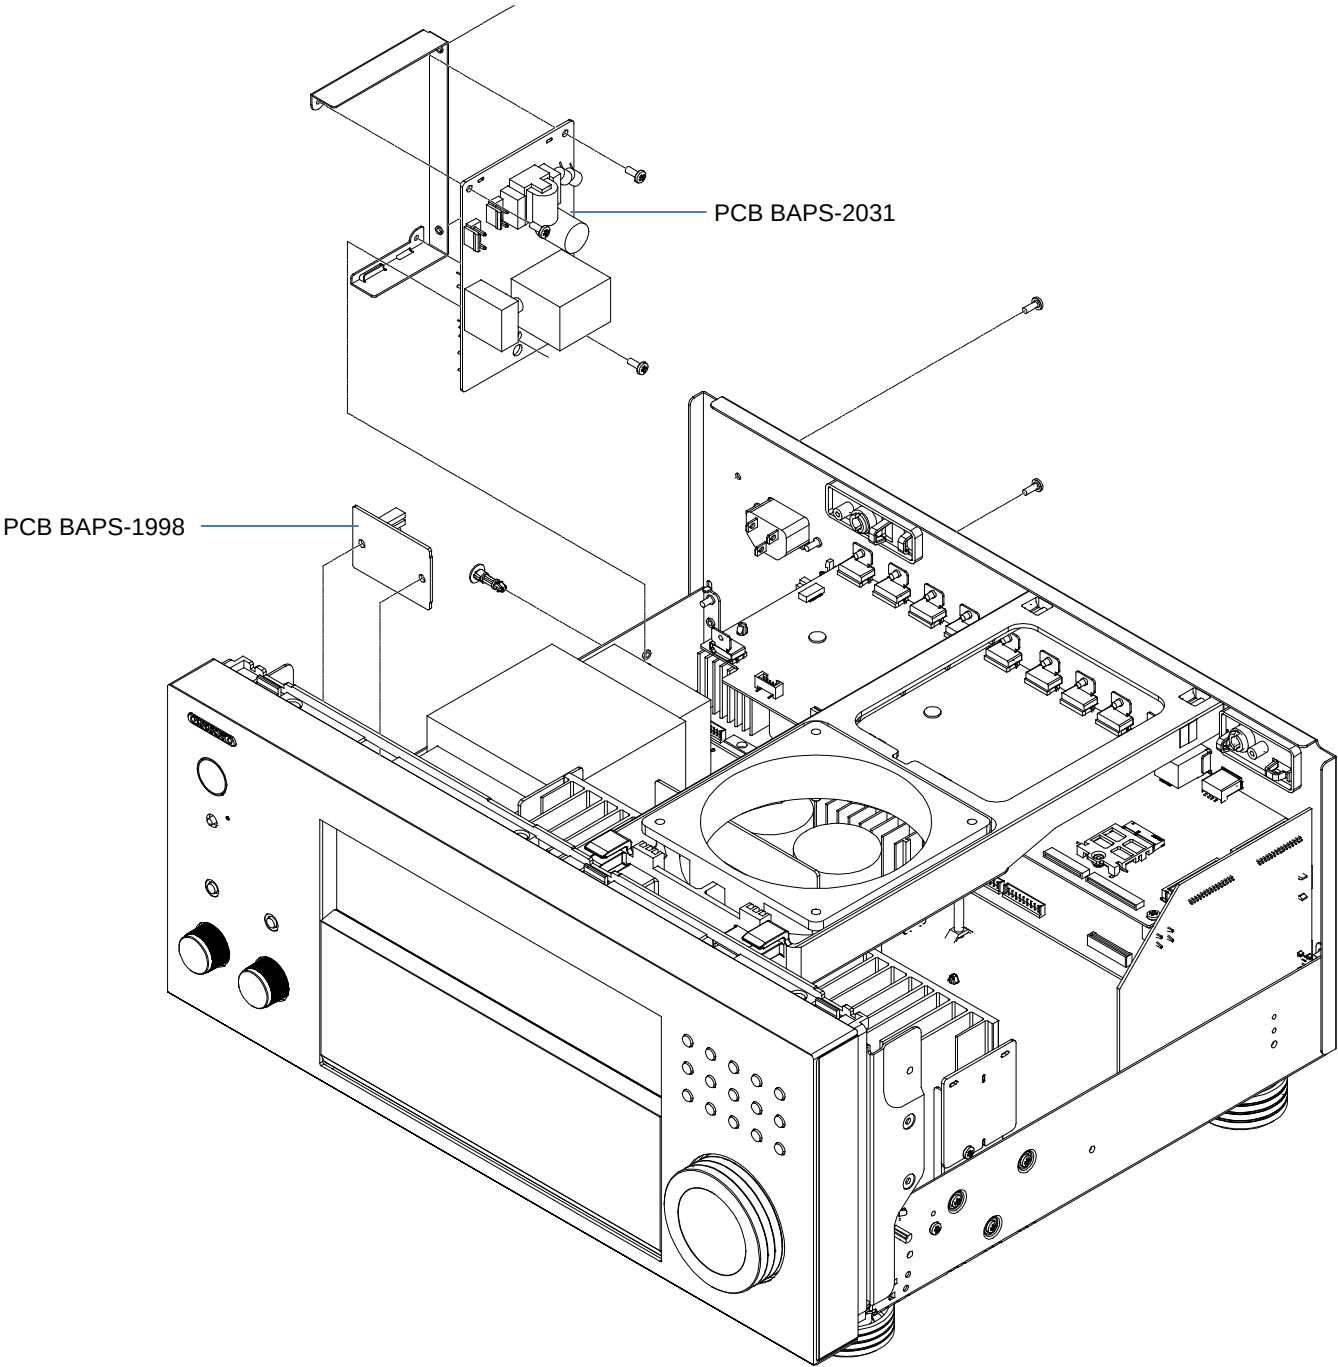


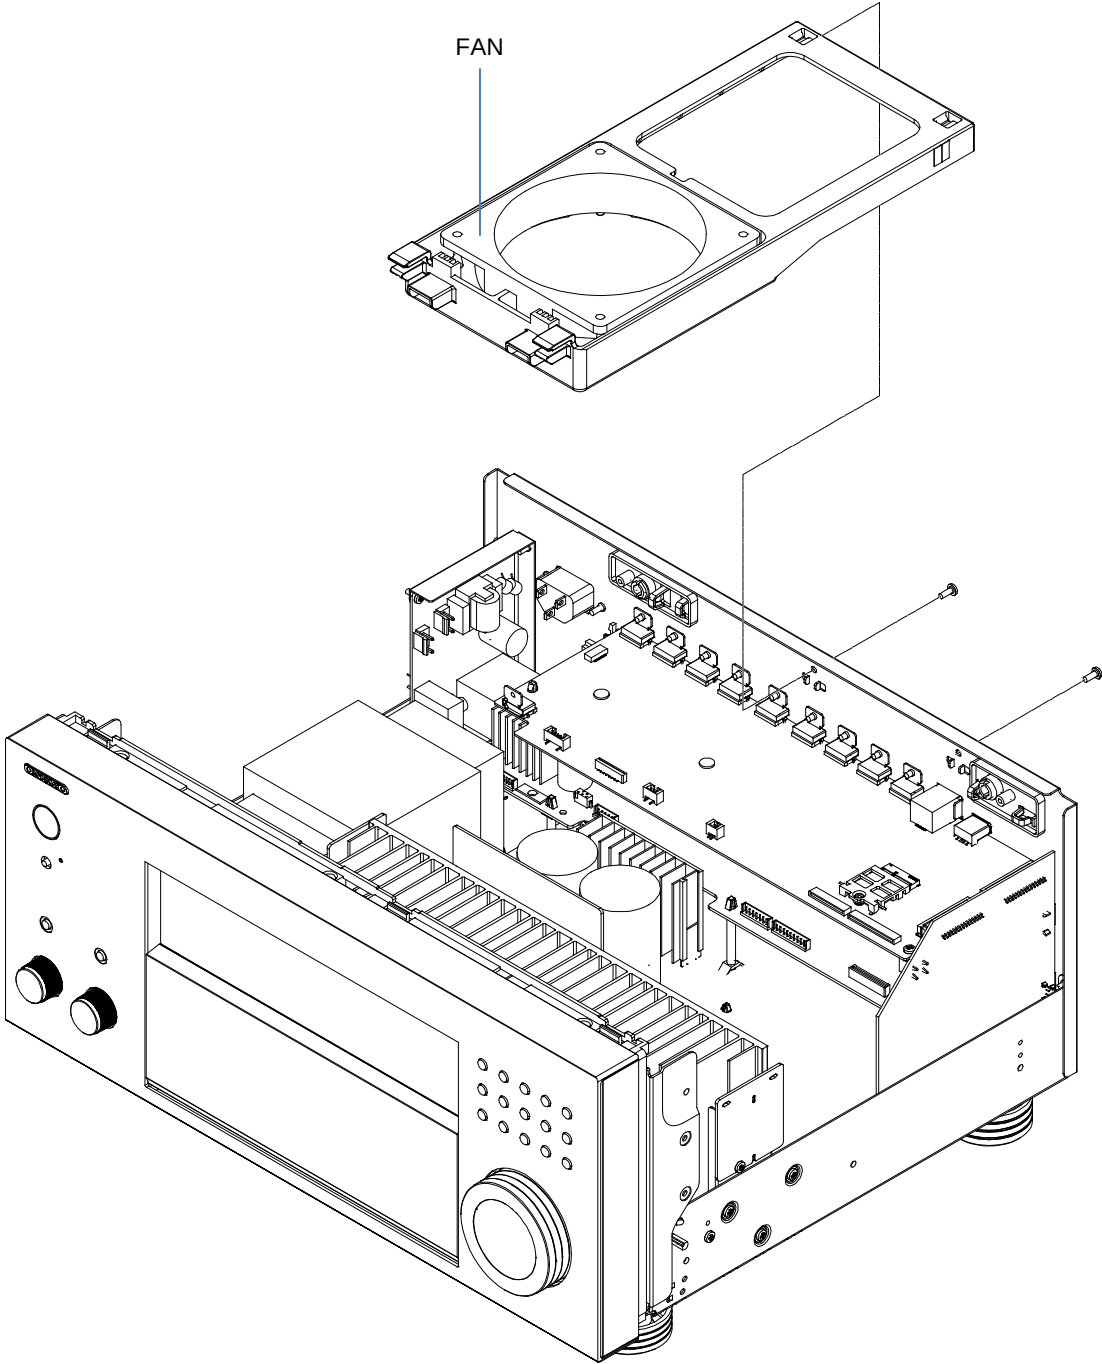


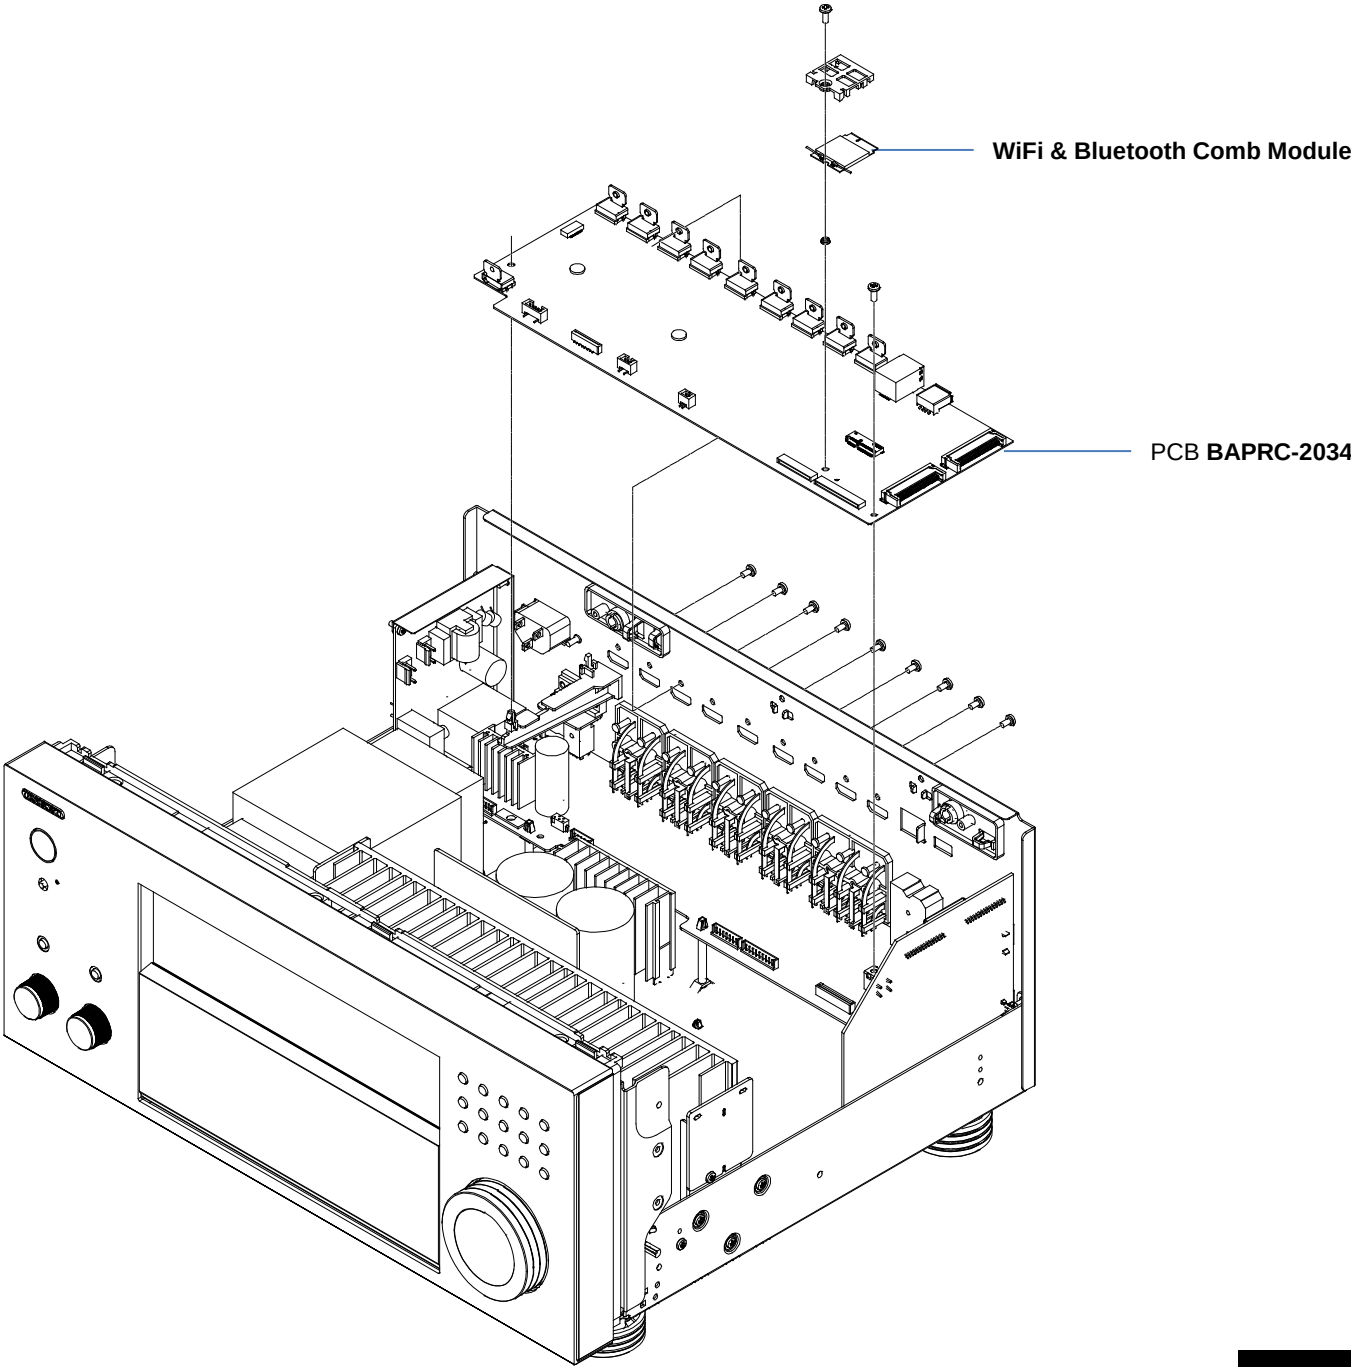


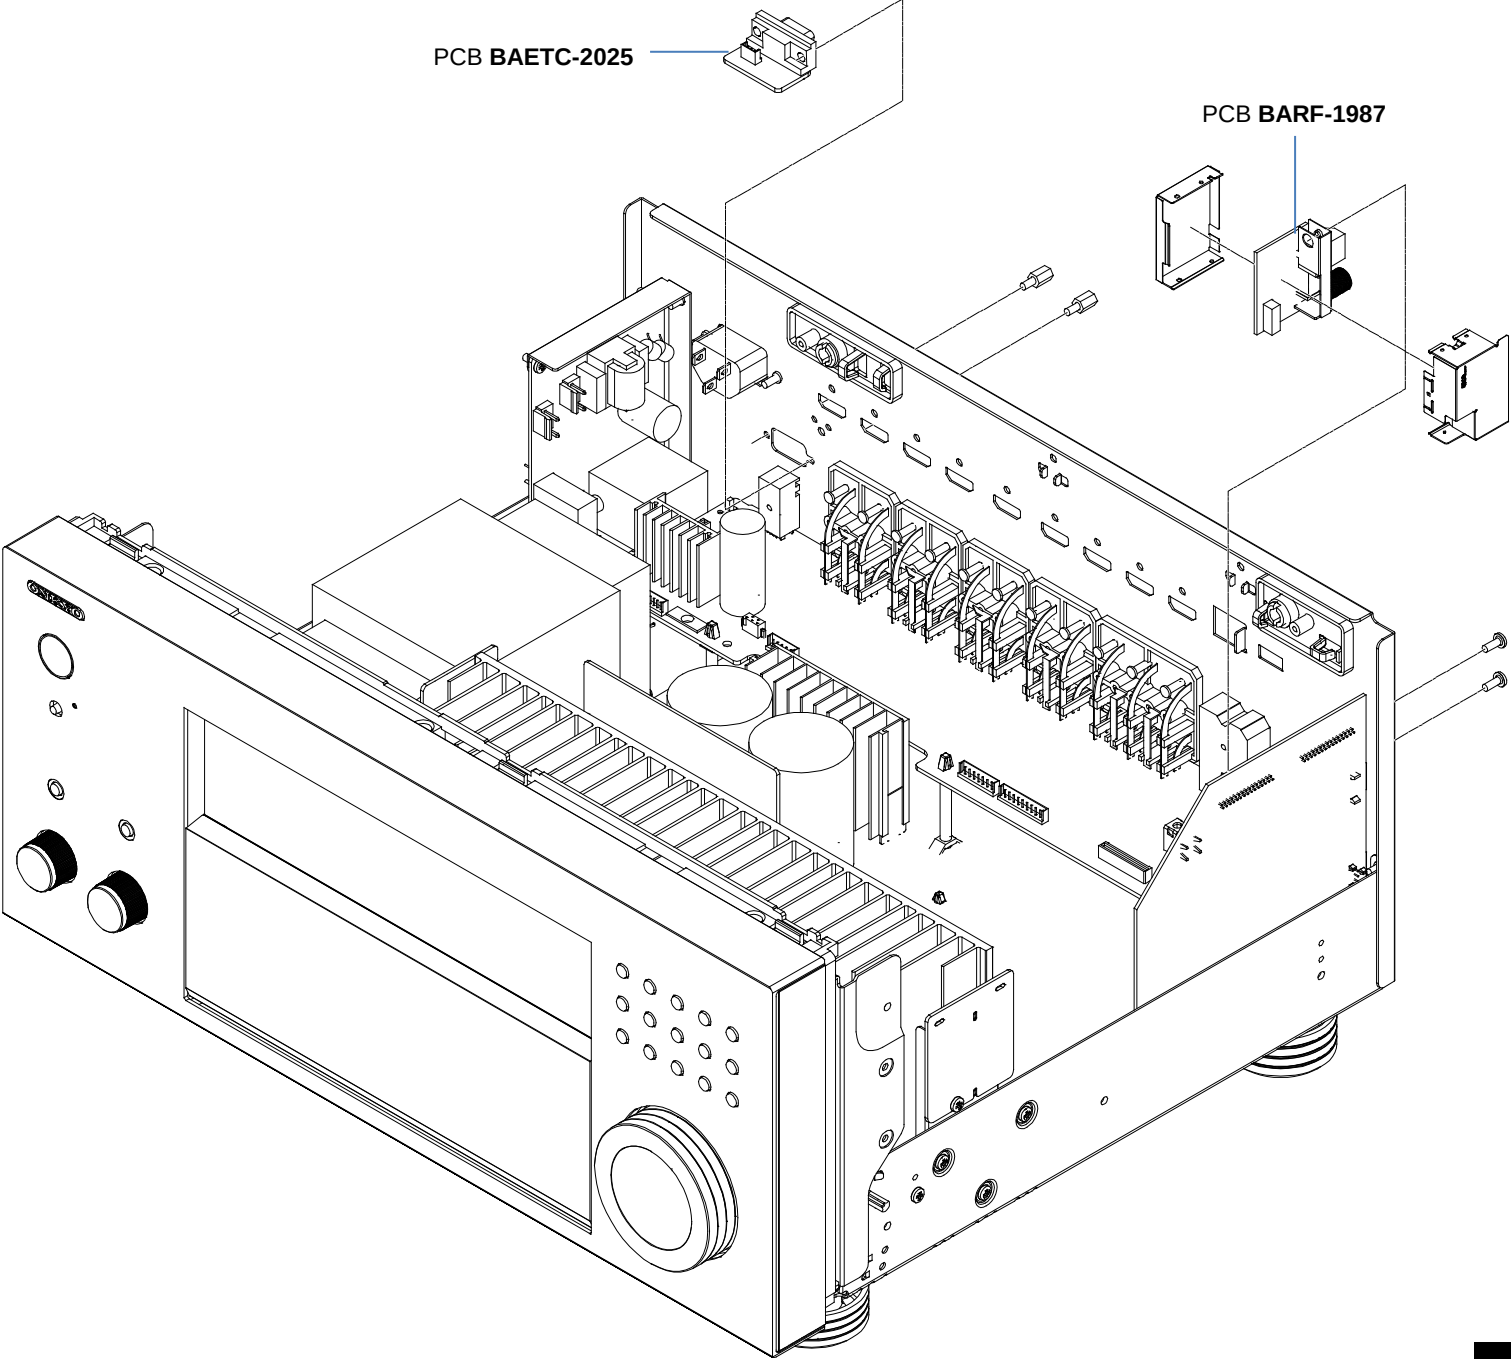

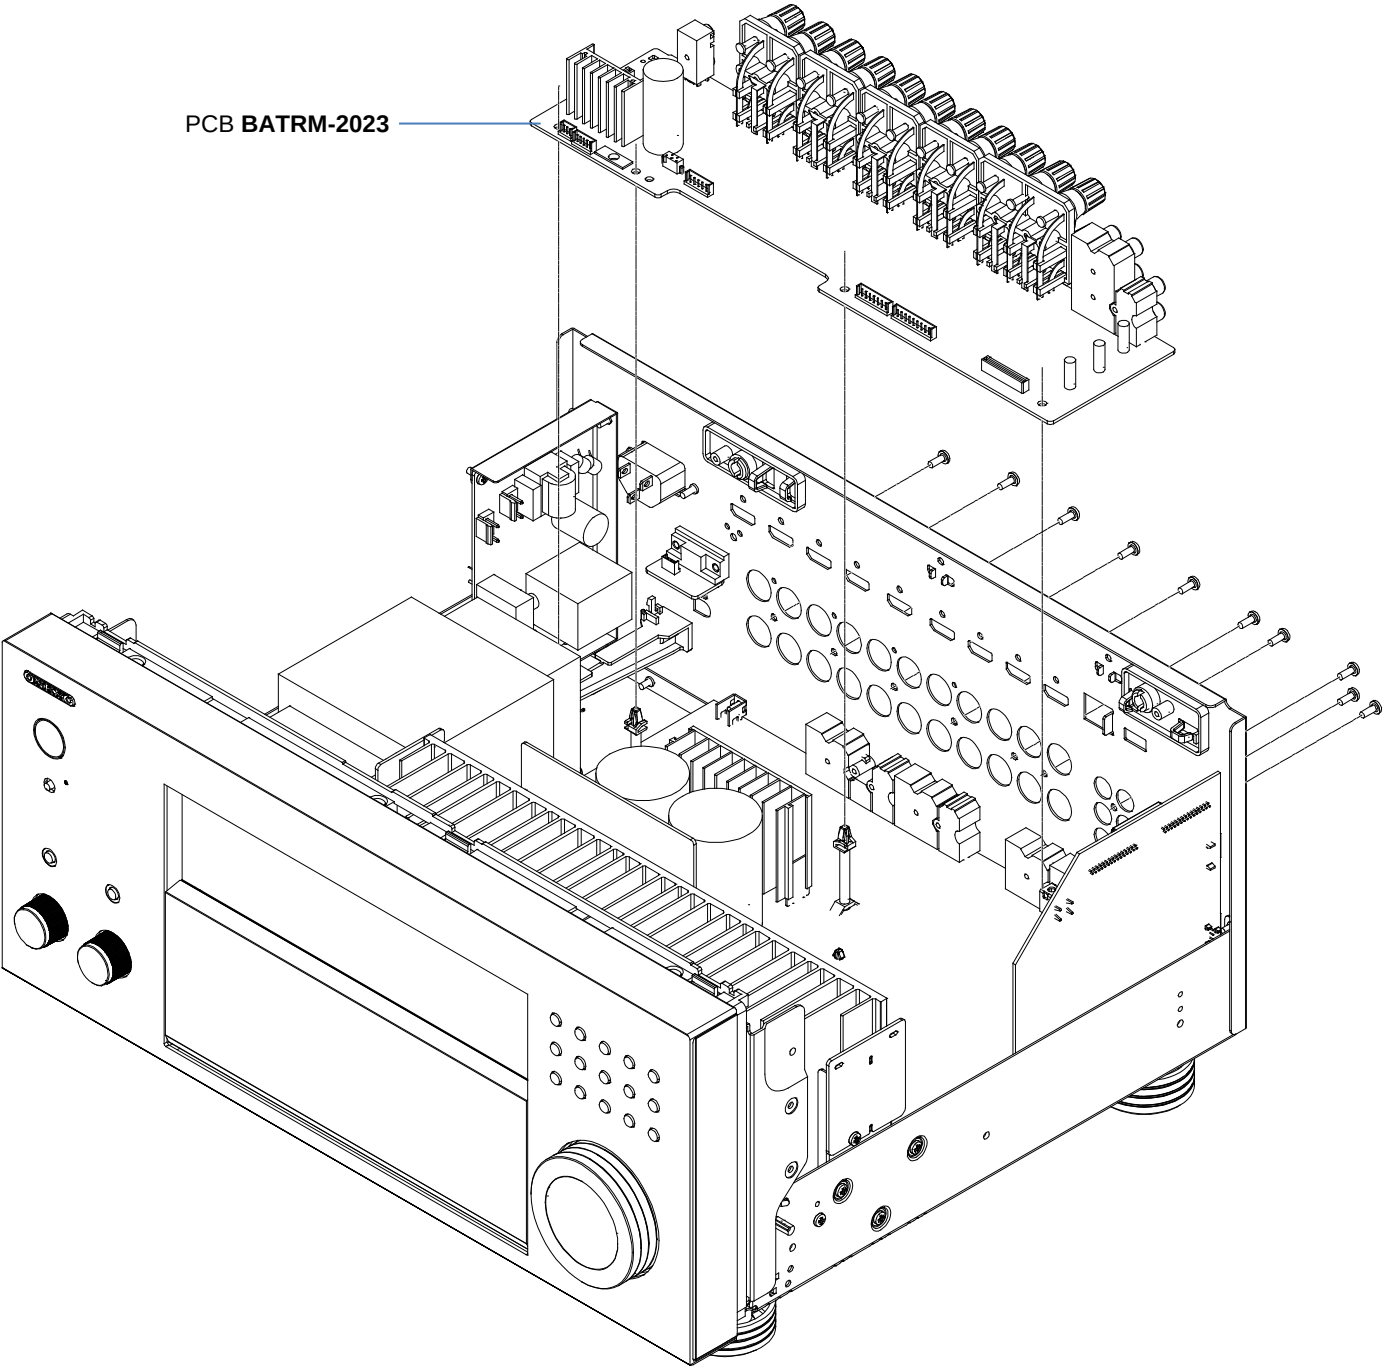

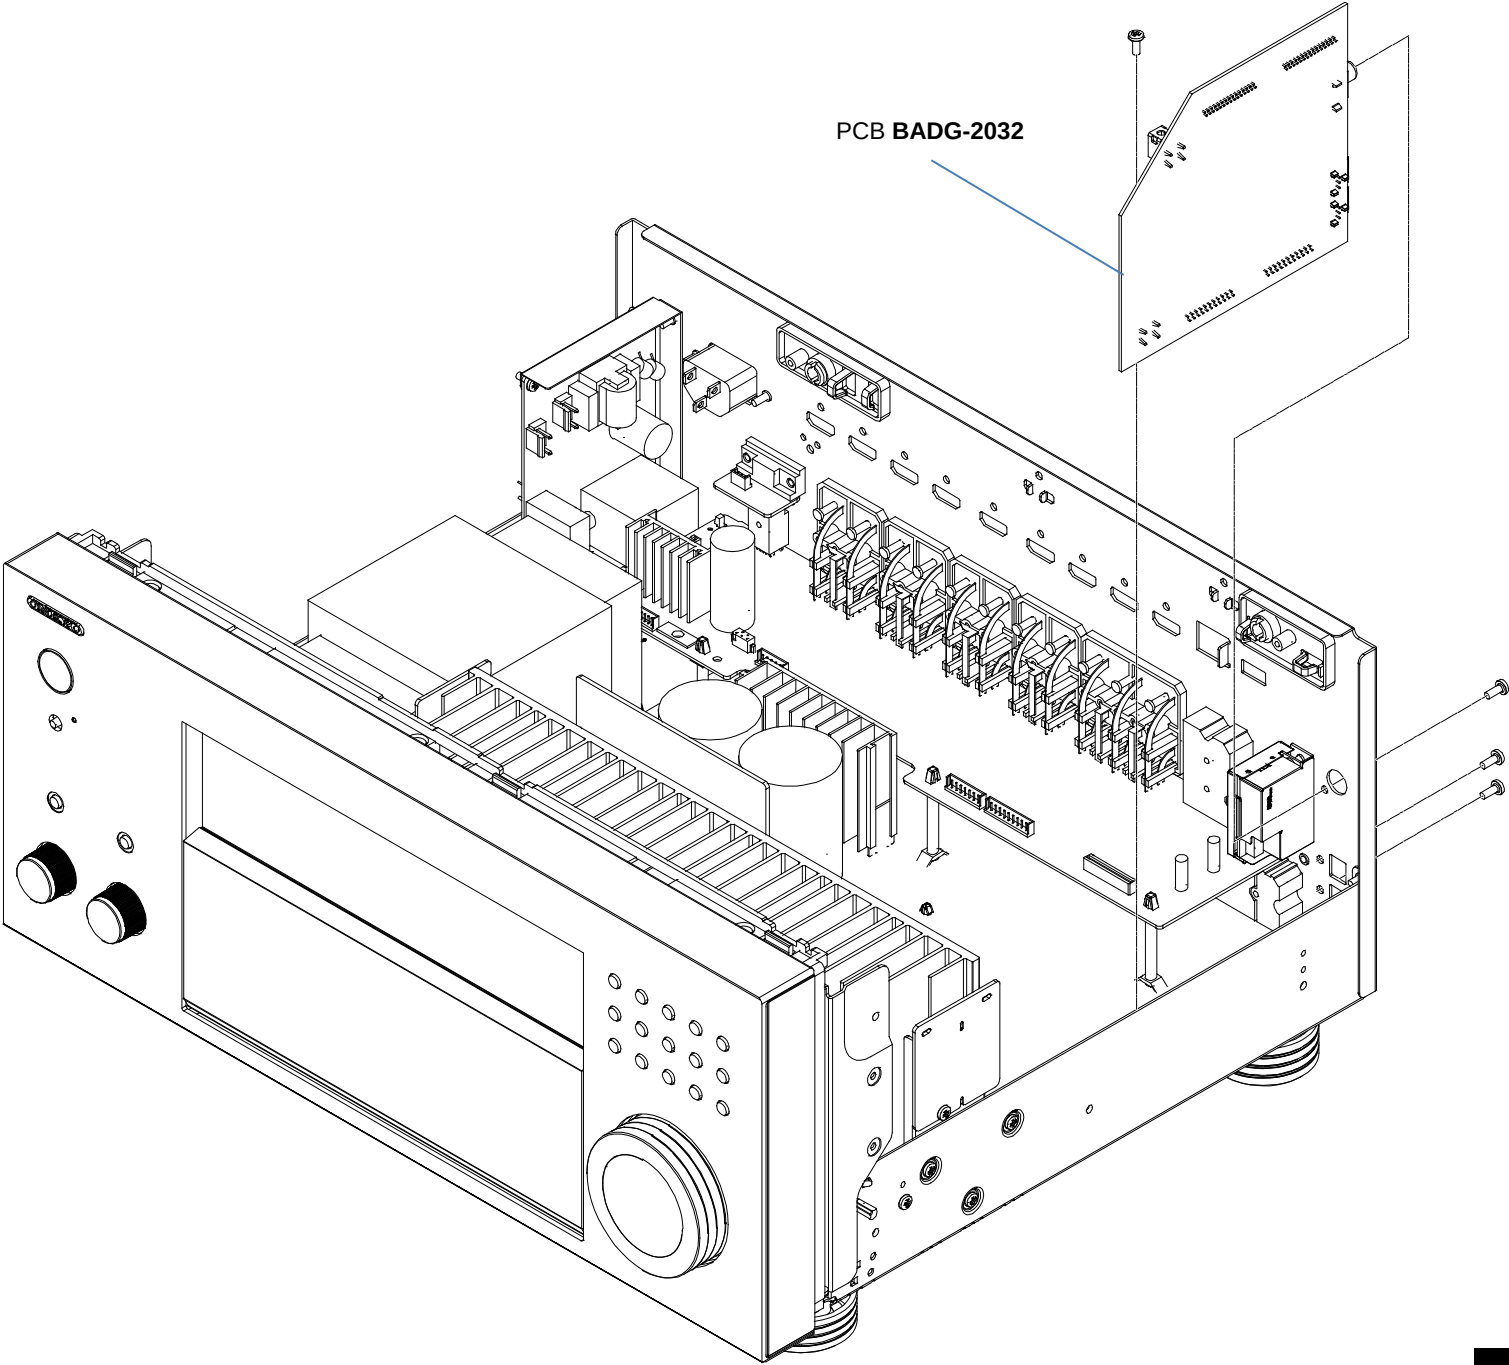


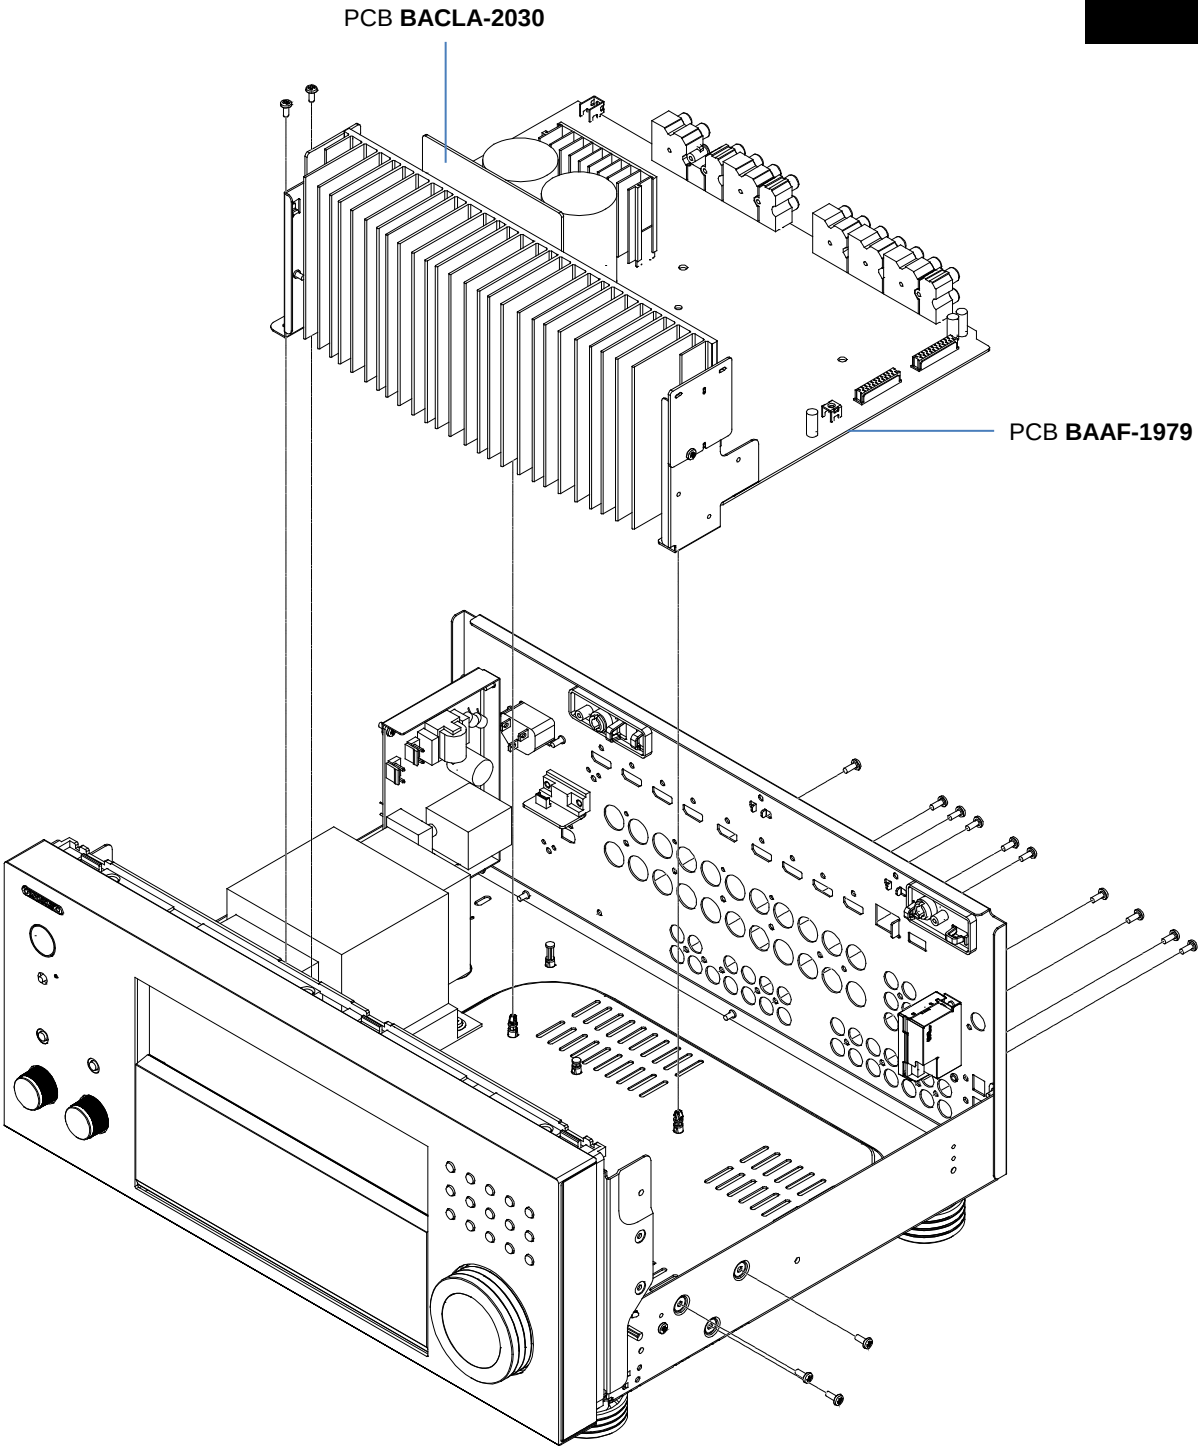


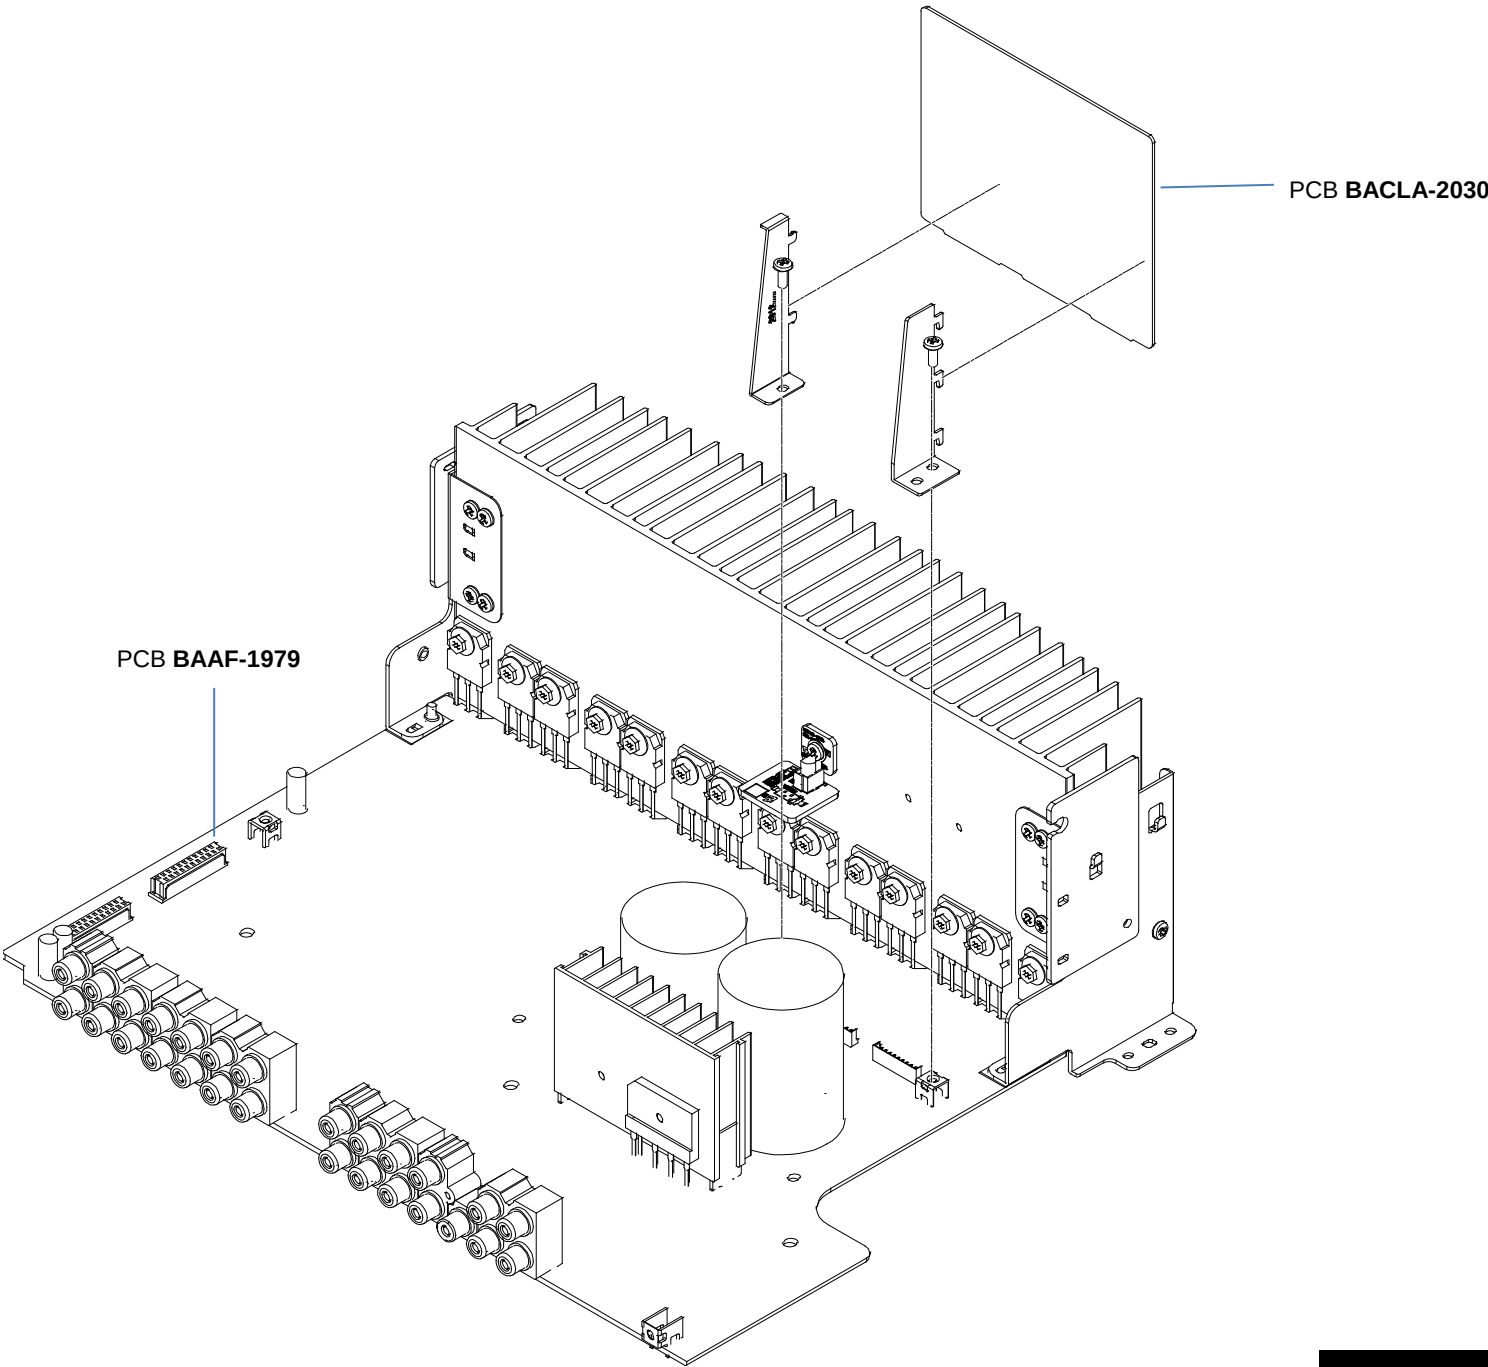



PCB BAAF-1979

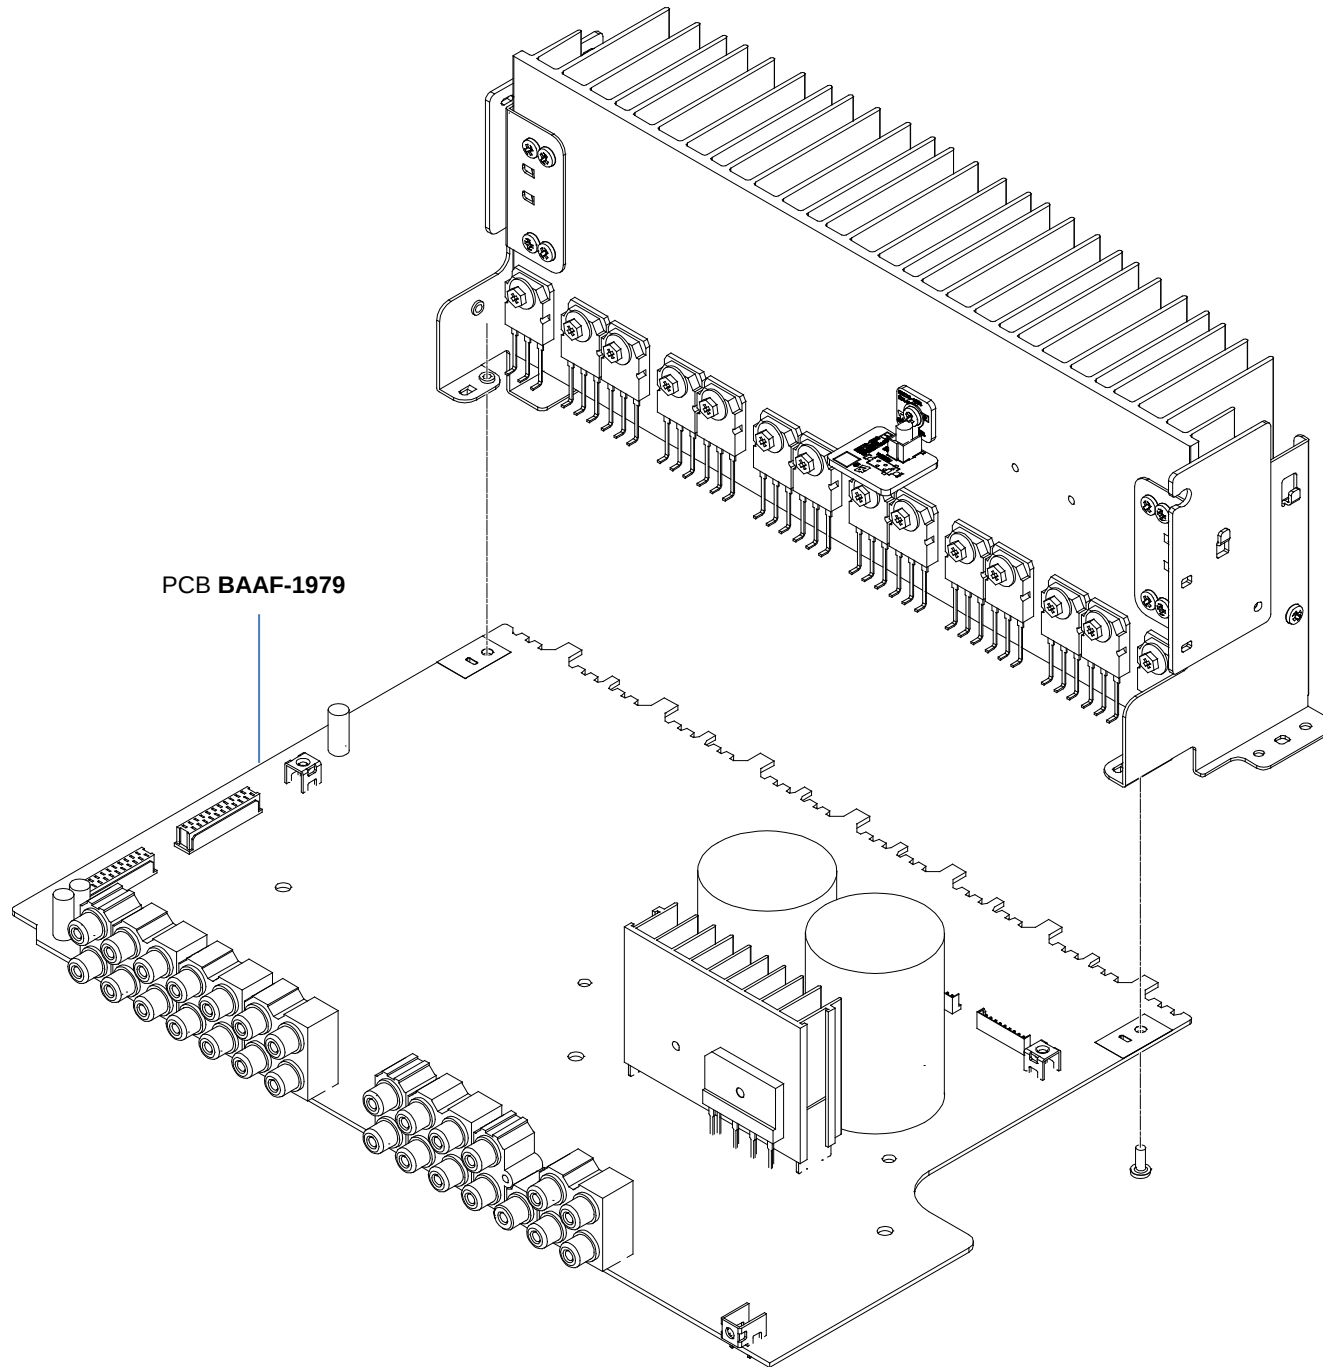

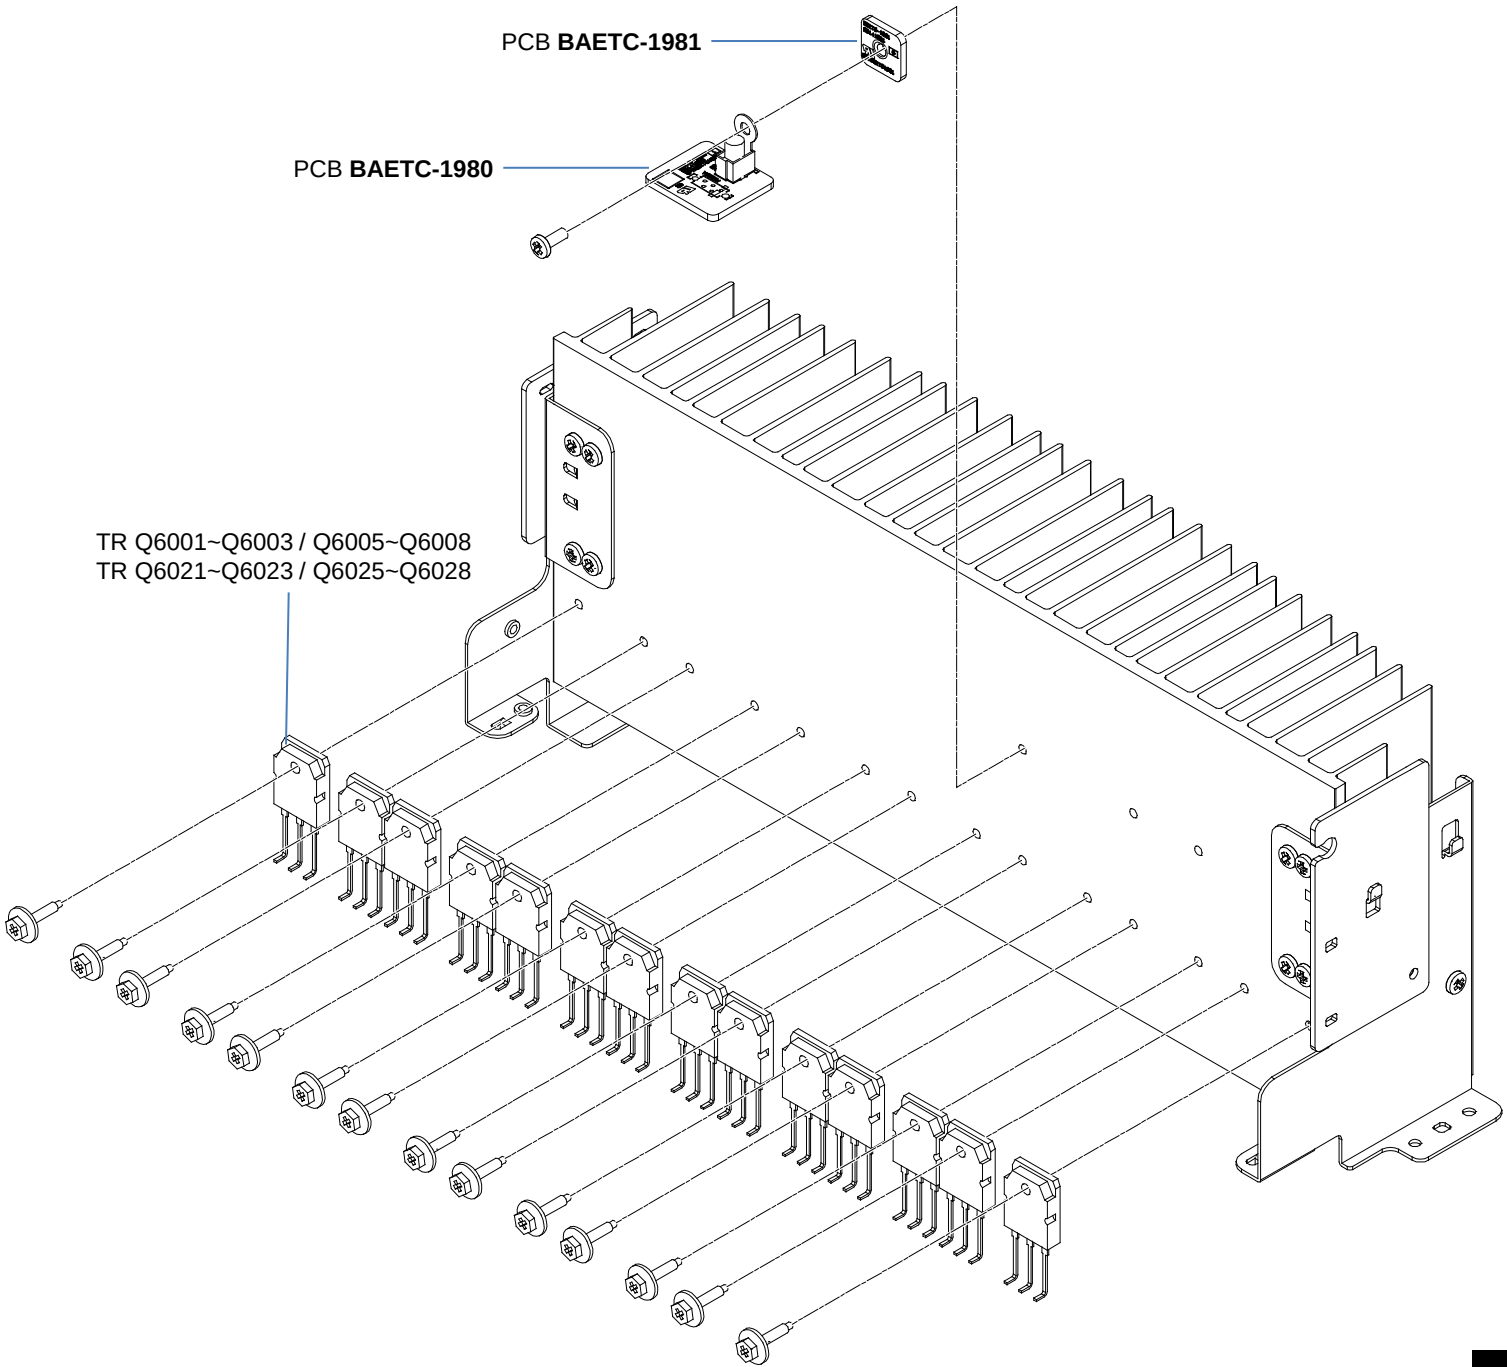


Model No.TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5  
Schematic Diagram List

| MODEL    |                                                    | T5  | D2  | V8  | L1  | T6  | Z6  | D3  | V11 | L3  | T7  | Z7  | D4  | Z8  | D5  |
|----------|----------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| PART-NO. | FUNCTION                                           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|          | SCHEMATIC DIAGRAM LIST                             | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-1   | AUDIO BLOCK                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-2   | VIDEO BLOCK                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-3   | DIGITAL AUDIO BLOCK                                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-4   | ASP                                                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | AMP. POWER                                         | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | THERMAL SENSOR                                     | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DESTINATION LIST OF AF1979                         | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-5   | AMP CLASS-A                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-6   | SWITCHING PS                                       | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-7   | VIDEO+SP. OUT+12VTRG+IR                            | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | RS-232C(D2/Z6/D3/L3/T7/Z7/D4/Z8/D5)                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-8   | DISPLAY(T5/T6/Z6/T7/Z7)                            | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HP(T5/T6/Z6/T7/Z7)                                 | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | TOPE/LISTENING MODE SWITCH(T5/T6/Z6/T7/Z7)         | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DISPLAY(D2/D3/D4)                                  | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HP(D2/D3/D4)                                       | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | FLAC/VH(D2/D3/D4)                                  | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | STANDBY/ZONE SWITCH(D2/D3/D4)                      | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DISPLAY(V8/L1/V11/L3)                              | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HP(V8/L1/V11/L3)                                   | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | INPUT SELECTOR SWITCH(V8/L1/V11/L3)                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DISPLAY(Z8)                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | MASTER VOLUME(Z8)                                  | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | SWITCH IN DOOR(Z8)                                 | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | SWITCH etc.(Z8)                                    | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HP(Z8)                                             | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | MIC(Z8)                                            | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | FLAC/VH(Z8/D5)                                     | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DISPLAY(D5)                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | MASTER VOLUME(D5)                                  | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | SWITCH/MIC(D5)                                     | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HP(D5)                                             | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-9   | DAC FILTER+VLS1(T5/D2/V8/L1/T6/Z6/V11/L3/T7/Z7/D4) | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DAC FILTER+VLS2(Z8/D5)                             | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-10  | MMPU                                               | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | VMPU                                               | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | VSP                                                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | HDMI/DECODER                                       | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DTR/DAC                                            | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | DSP                                                | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | ARM I/O                                            | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | ARM PS                                             | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | ARM MEMORY                                         | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | ARM USB/NET                                        | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | POWER                                              | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-11  | TUNER                                              | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-12  | FRONT HDMI(T6/Z6/D3/V11/L3/T7/Z7/D4)               | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
|          | FRONT HDMI(Z8/D5)                                  | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| PART-13  | HDBaseT(D4/D5)                                     | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |


| Model name        | Abbreviated Model Name |
|-------------------|------------------------|
| TX-NR555          | T5                     |
| DRX-2             | D2                     |
| TX-NR656, HT-R695 | T6                     |
| TX-RZ610          | Z6                     |
| DRX-3             | D3                     |
| TX-NR757          | T7                     |
| TX-RZ710          | Z7                     |
| DRX-4             | D4                     |
| TX-RZ810          | Z8                     |
| DRX-5             | D5                     |

MODEL NO.TX-NR555/656/757,TX-RZ610/710/810,HT-R695,DRX-2/3/4/5 SCHEMATIC DIAGRAM(PART-1) BLOCK DIAGRAM(Analog Audio)

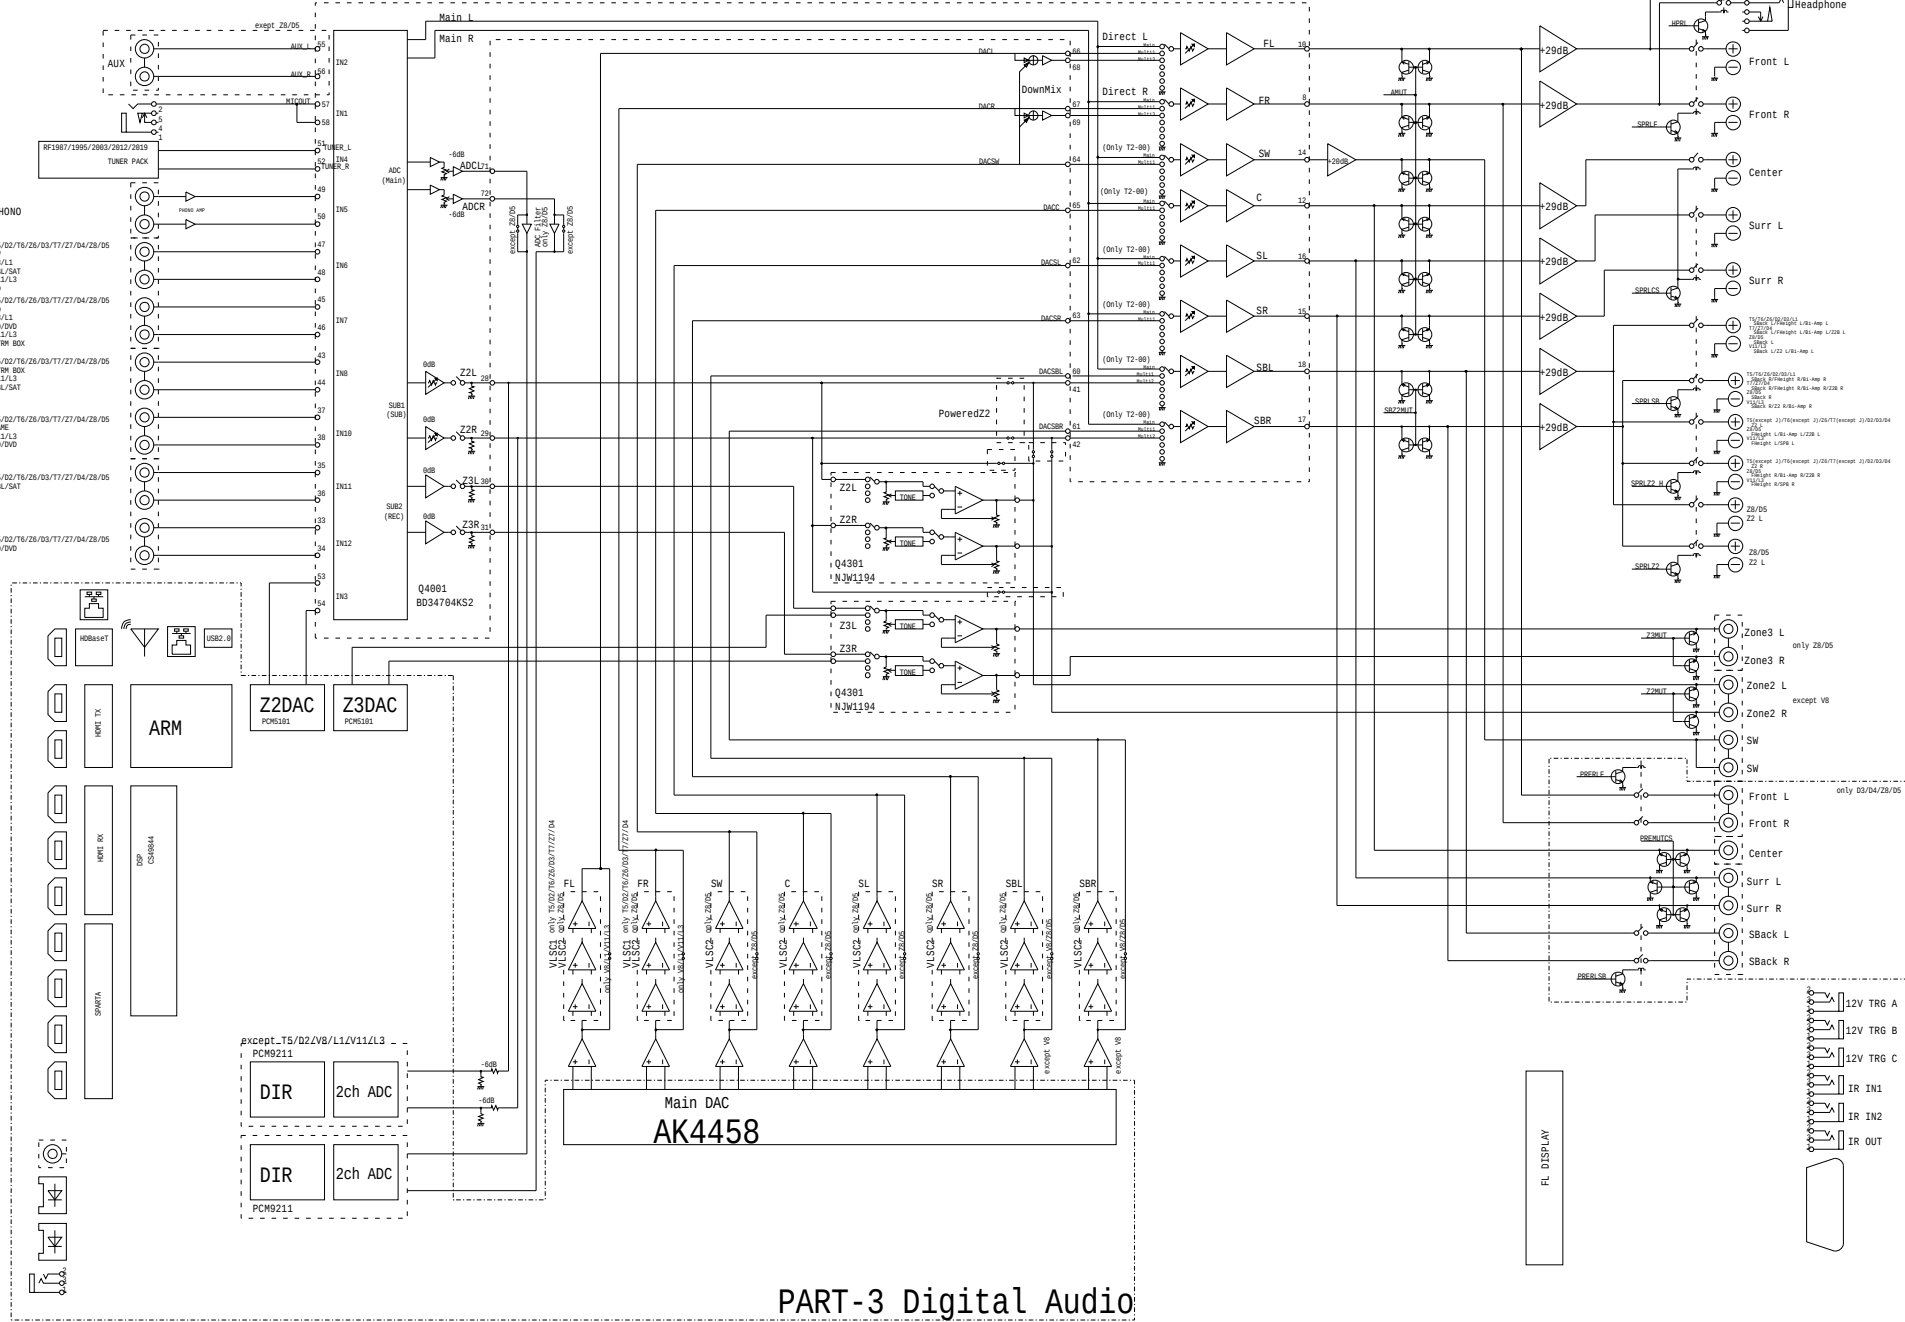


PART-3 Digital Audio

### SCHEMATIC DIAGRAM (PART-2) BLOCK DIAGRAM(Video)

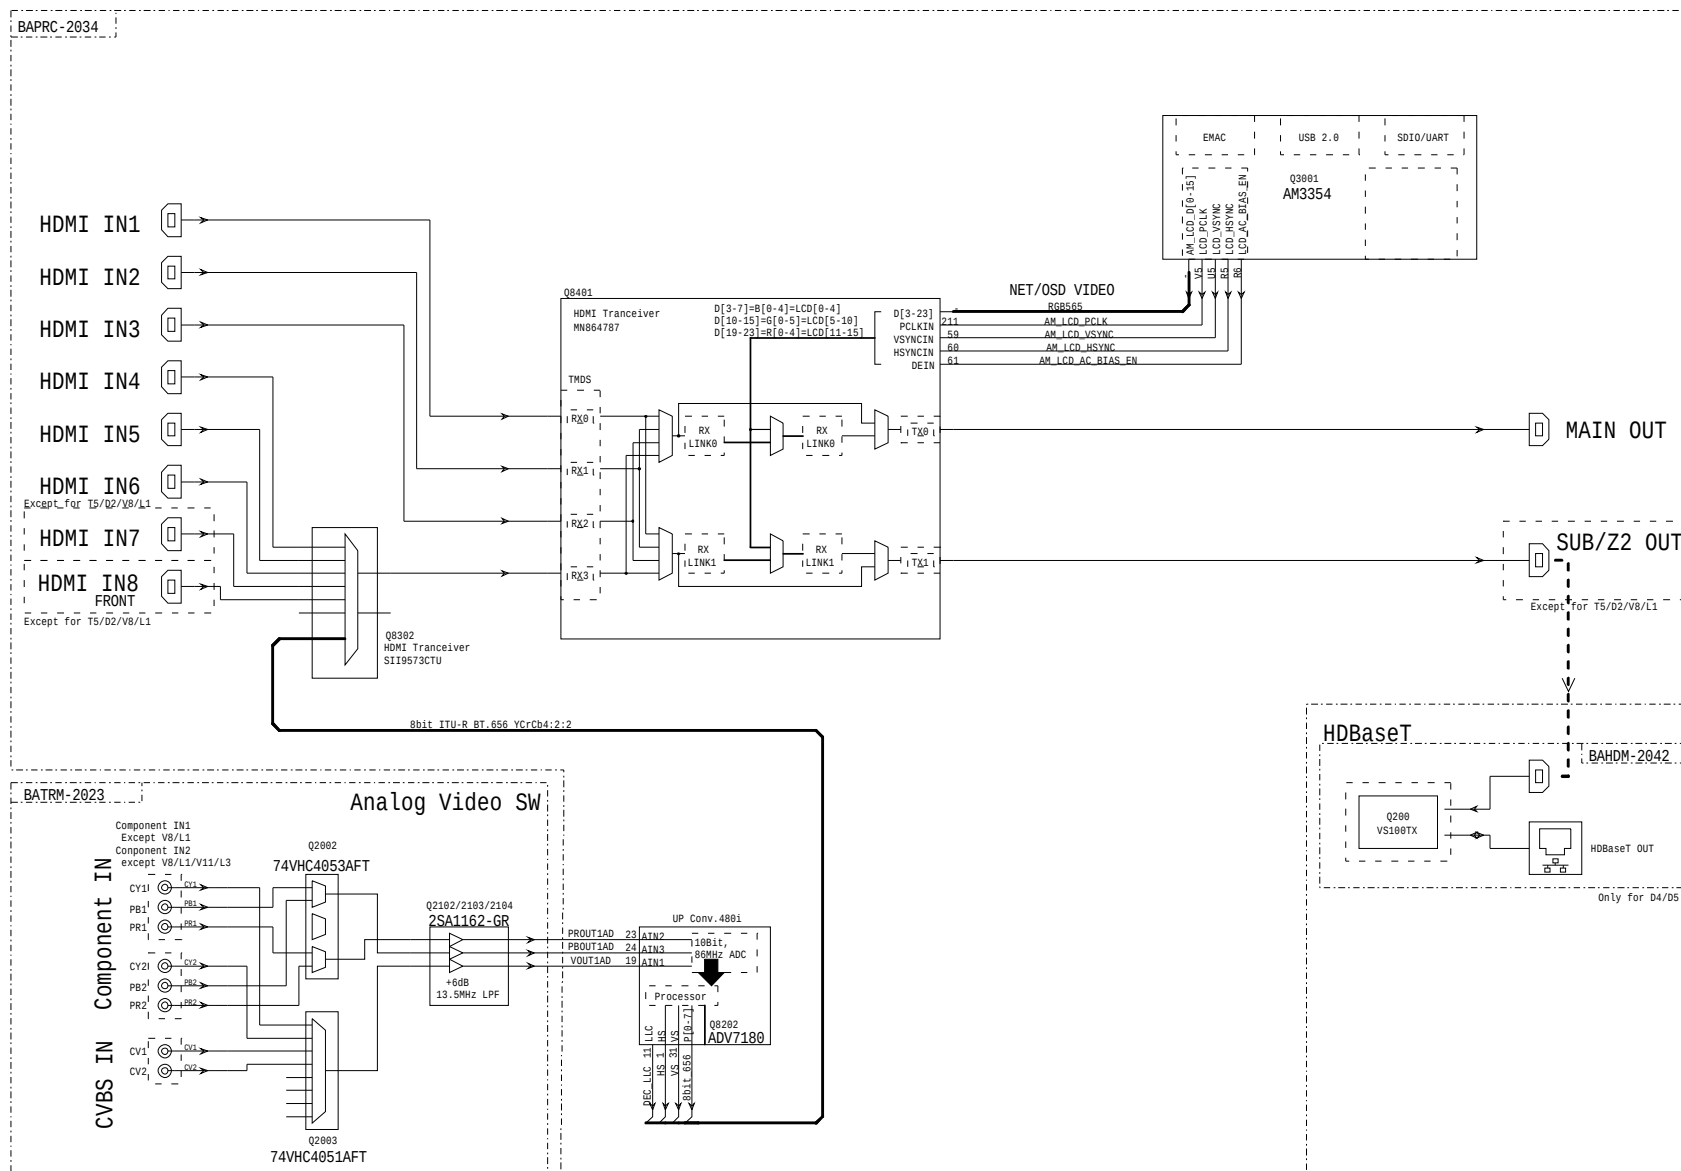


MODEL NO.TX-NR555/656/757,TX-RZ610/710/810,HT-R695 SCHEMATIC DIAGRAM (PART-3) BLOCK DIAGRAM(Digital Audio)

DRX-2/3/4/5

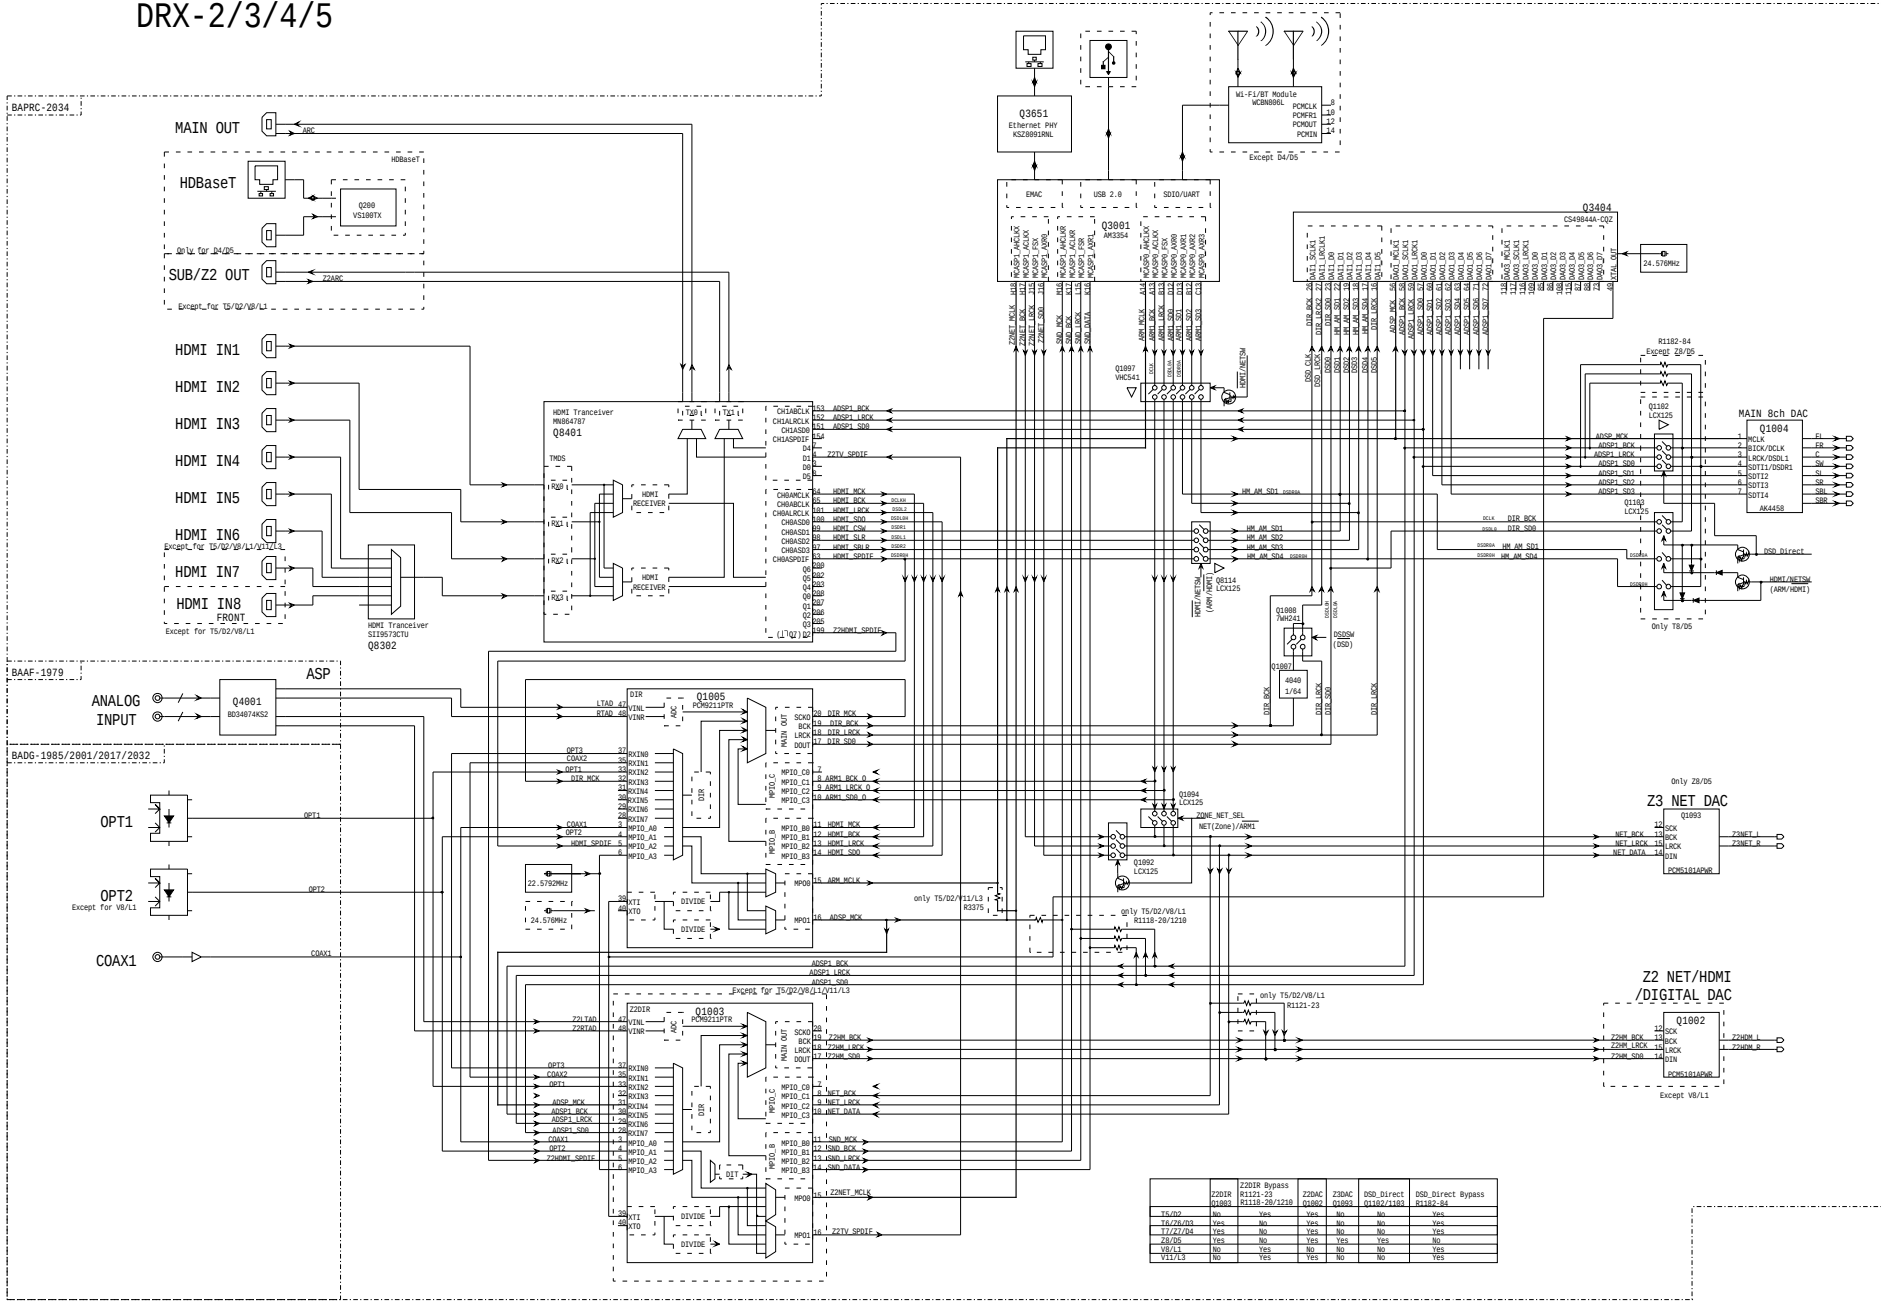


|             |   |   |   |   |                   |  |
|-------------|---|---|---|---|-------------------|--|
| 1           | 2 | 3 | 4 | 5 | 6                 |  |
| ASP section |   |   |   |   | Schematic Diagram |  |

MODELNO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5 SCHEMATIC DIAGRAM (PART-4) ASP SECTION

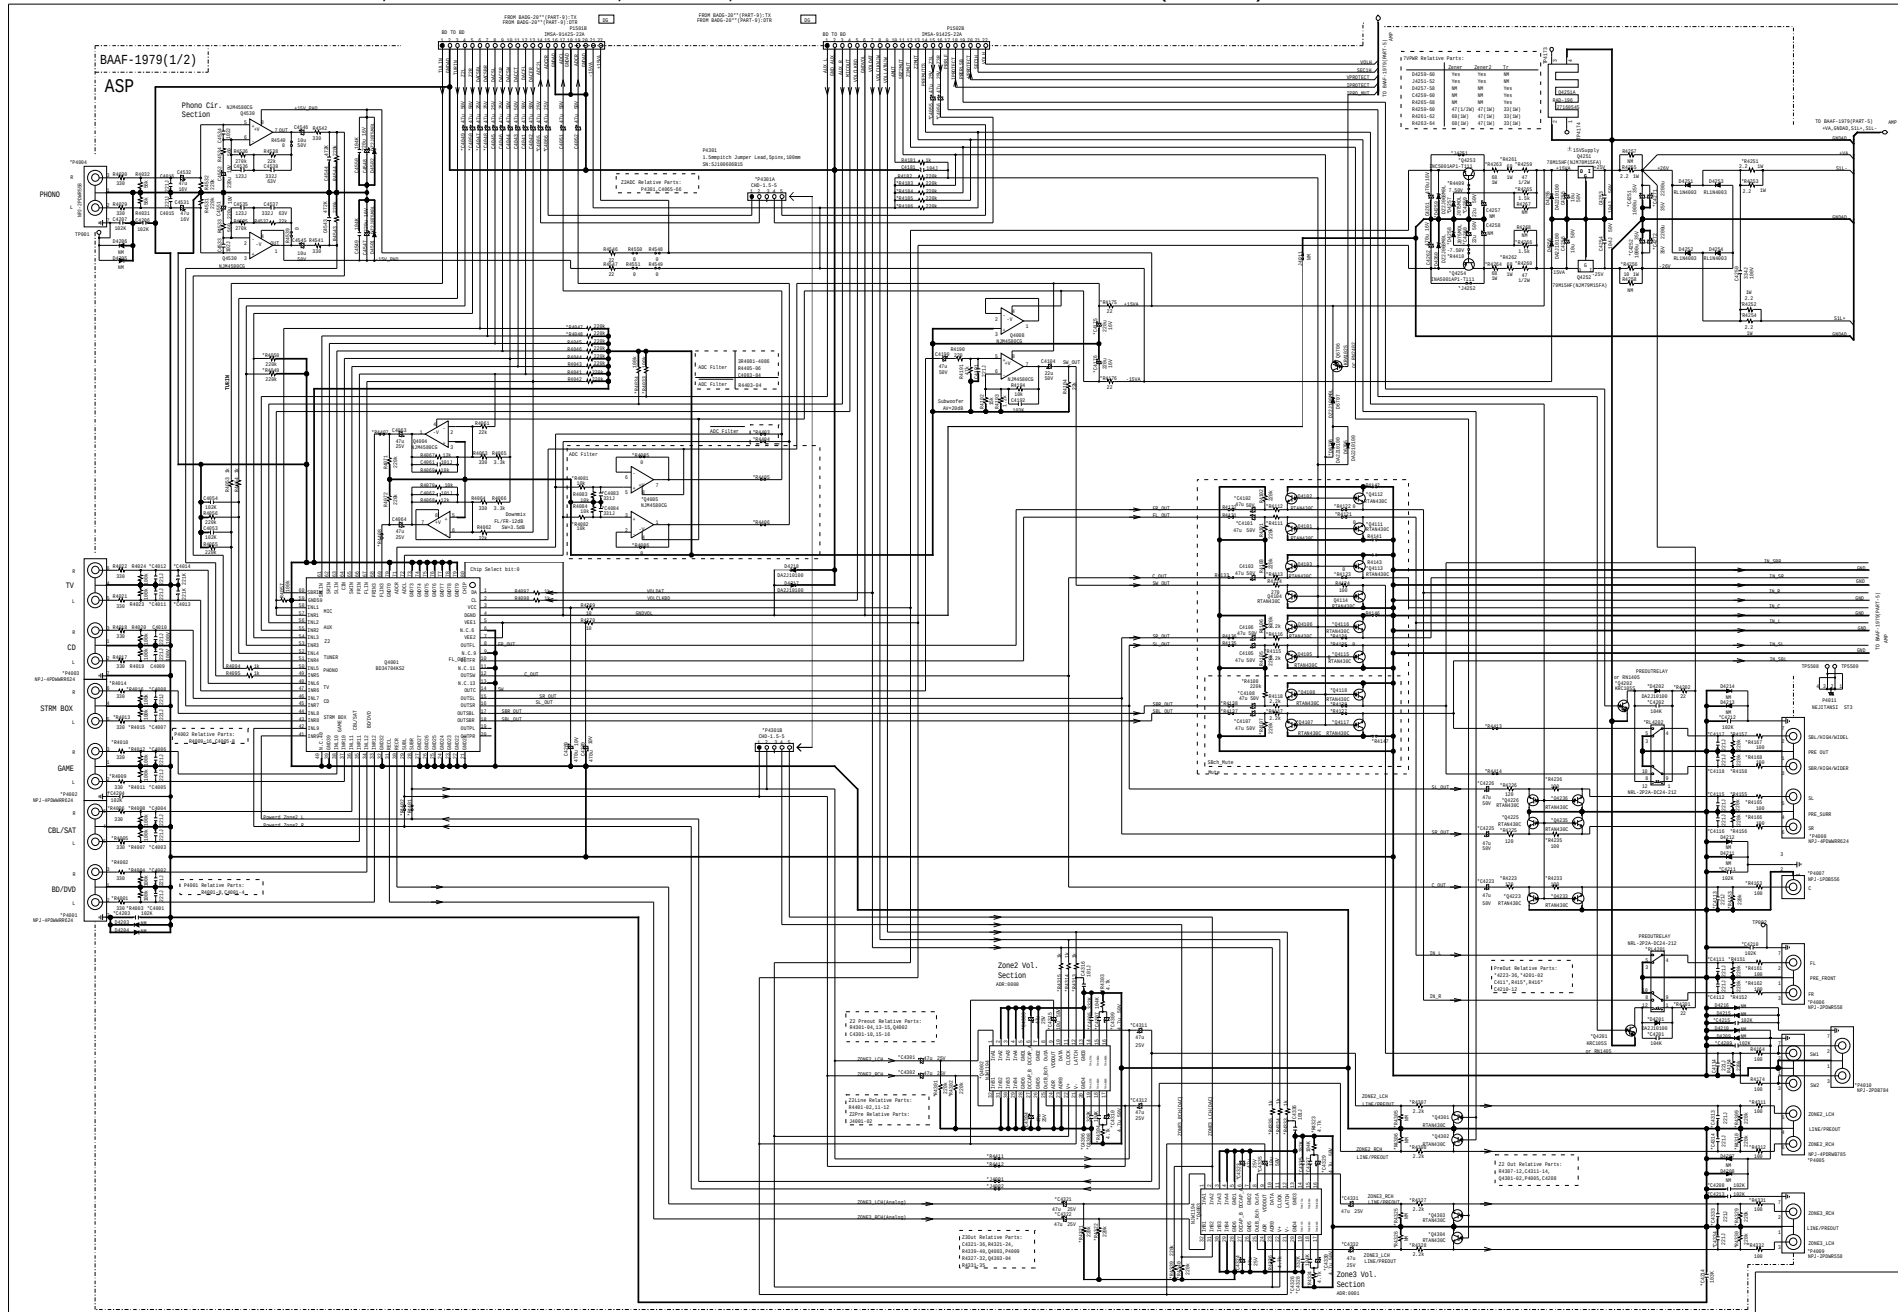


MODELNO.TX-NR555/656/757,TX-RZ610/710/810,HT-R695,DRX-2/3/4/5 SCHEMATIC DIAGRAM (PART-4) AMP SECTION

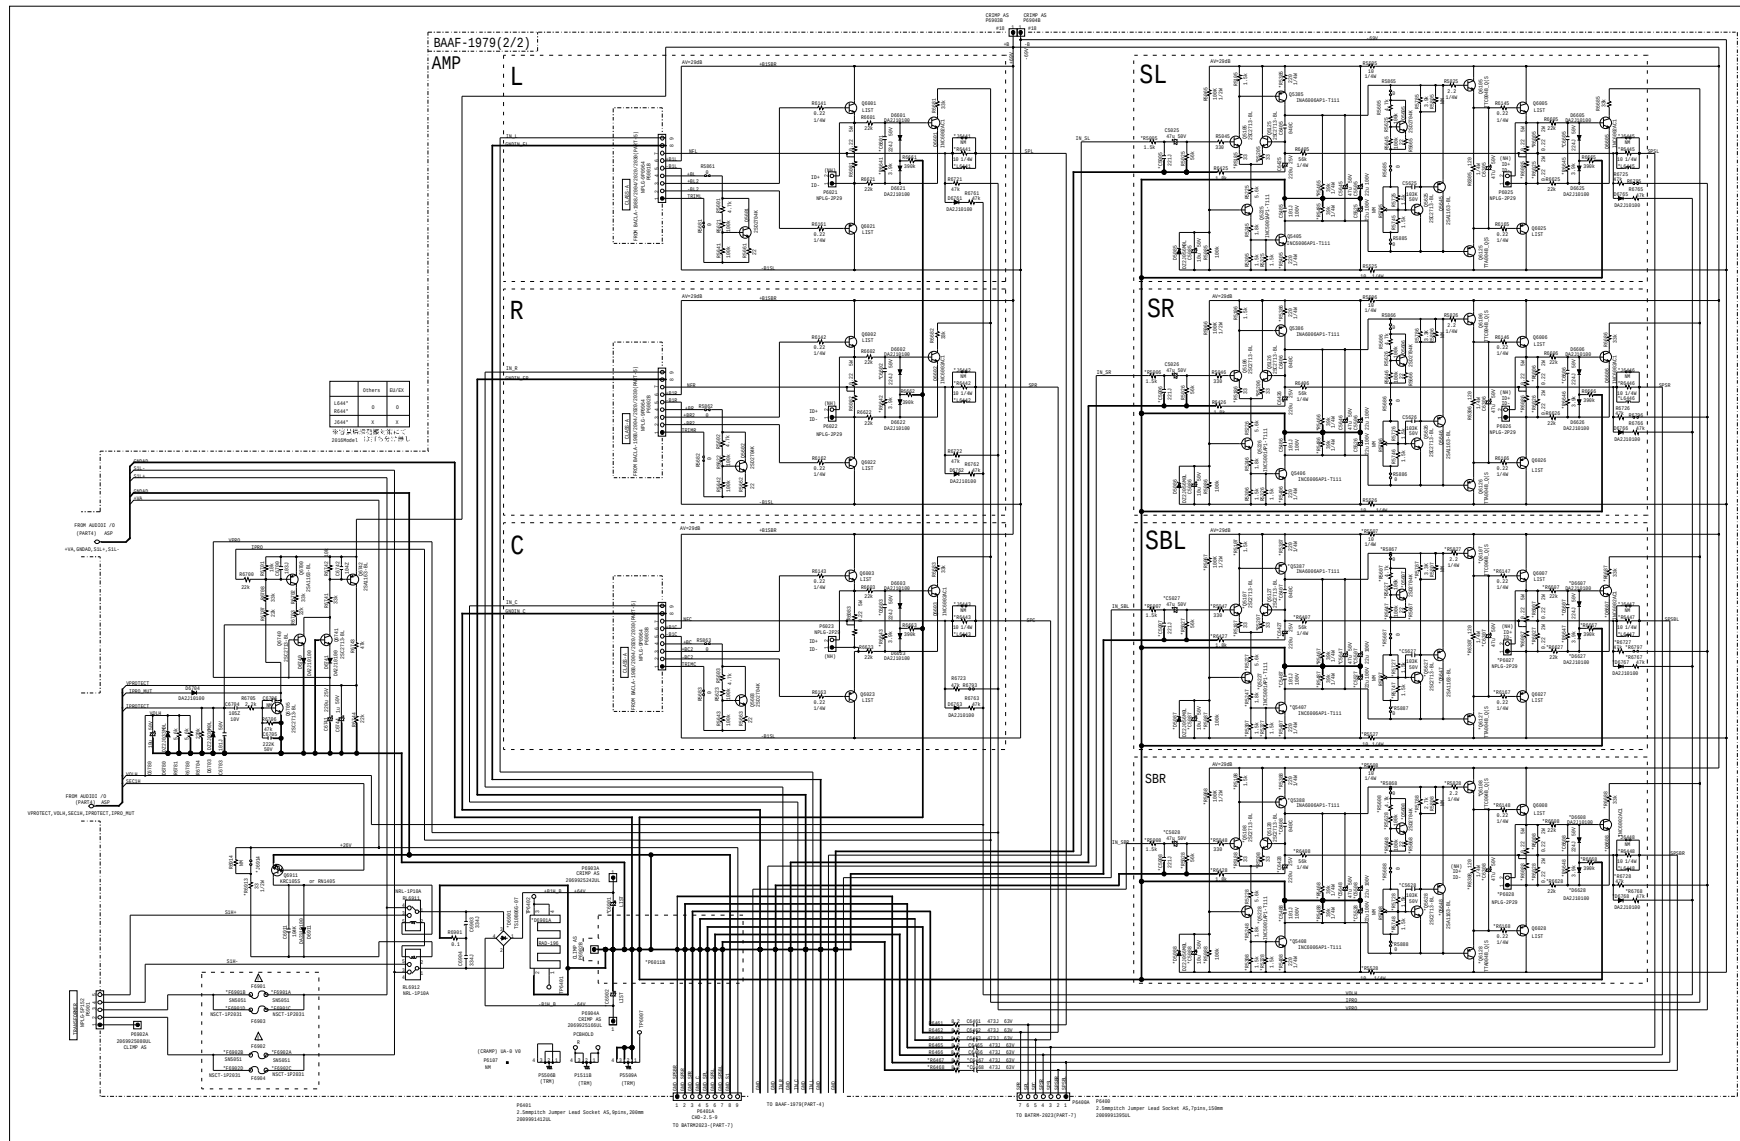



MODEL NO. TX-NR555/656/757, TX-RZ610/710/810,  
HT-R695, DRX-2/3/4/5

SCHEMATIC DIAGRAM (PART-4)  
THERMAL SENSOR SECTION

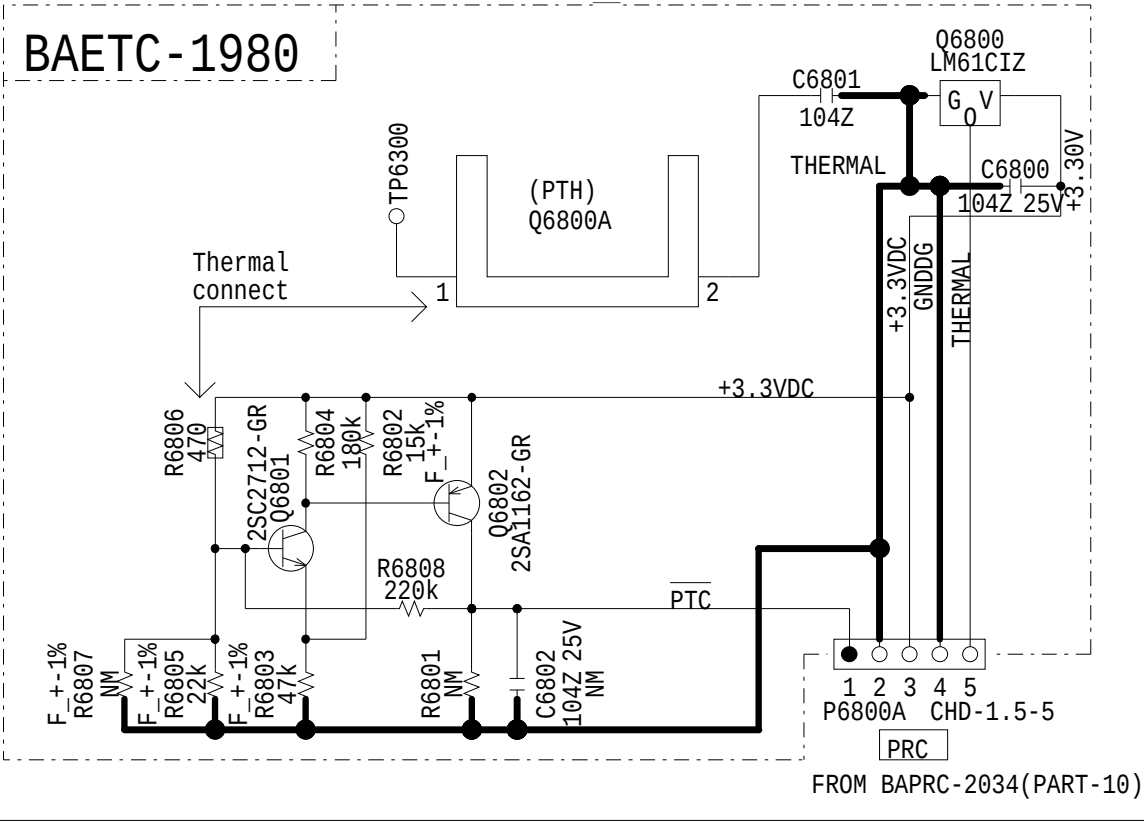

Destination list of BAAR-1979

Schematic Diagram

|                         |                               |                                 |                       |                       |                       |                       |                          |                       |                       |                       |                       |                          |         |                          |          |  |
|-------------------------|-------------------------------|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------------------|---------|--------------------------|----------|--|
| Functions               | Cir.No/Group                  | T5                              | D2                    | T6                    | Z6                    | D3                    | T7                       | Z7                    | D4                    | T8                    | D5                    | V8                       | L1      | V11                      | L3       |  |
| Input Terminal          | Terminal Color                | Silver                          | Gold                  | Silver                |                       | Gold                  | Silver                   |                       | Gold                  | Silver                | Gold                  | Silver                   |         |                          |          |  |
|                         | P4001,P4002<br>Relatives      | Mount P4001 and P4002 Relatives |                       |                       |                       |                       |                          |                       |                       |                       |                       | NM                       |         | Mount P4002<br>Relatives |          |  |
|                         | P4001,P4002                   | 25045845                        | 25045812              | 25045845              |                       | 25045812              | 25045845                 |                       | 25045812              | 25045845              | 25045812              | NM                       |         | 25045845                 |          |  |
|                         | C4011-12,C4013-14             | C4011-12                        |                       |                       |                       |                       |                          |                       |                       |                       |                       | C4011-12                 |         | C4013-14                 |          |  |
| AUX Audio Input         | R4033,R4034                   | Mount                           |                       |                       |                       |                       |                          |                       |                       | NM                    |                       | Mount                    |         |                          |          |  |
| Mute                    | SBch_Mute                     | Mount                           |                       |                       |                       |                       |                          |                       |                       |                       |                       | NM                       | Mount   |                          |          |  |
|                         | R4111-13,15-18                | 2.2k                            |                       |                       |                       | 120                   | 2.2k                     |                       | 120                   |                       |                       | 2.2k                     |         |                          |          |  |
|                         | R4112-23,25-28                | 0                               |                       |                       |                       | 100                   | 0                        |                       | 100                   |                       |                       | 0                        |         |                          |          |  |
|                         | Q4112-23,25-28                | NM                              |                       |                       |                       | Mount                 | NM                       |                       | Mount                 |                       |                       | NM                       |         |                          |          |  |
| Pre Out                 | P4006                         | NM                              |                       |                       |                       | 25045803              | NM                       |                       | 25045803              | 25045776              | 25045803              | NM                       |         |                          |          |  |
|                         | P4007                         | NM                              |                       |                       |                       | 25045998              | NM                       |                       | 25045998              | 25045774              | 25045998              | NM                       |         |                          |          |  |
|                         | P4008                         | NM                              |                       |                       |                       | 25045812              | NM                       |                       | 25045812              | 25045845              | 25045812              | NM                       |         |                          |          |  |
|                         |                               |                                 |                       |                       |                       |                       |                          |                       |                       |                       |                       |                          |         |                          |          |  |
| Z2Pre/Line              | Z2Out Relatives               | Mount                           |                       |                       |                       |                       |                          |                       |                       |                       |                       | NM                       | Mount   |                          |          |  |
|                         | P4010,C4215                   | NM                              |                       |                       |                       |                       |                          |                       |                       |                       |                       | Mount                    | NM      |                          |          |  |
|                         | Z2Line Relatives              | Mount                           | NM                    | Mount                 | NM                    |                       | Mount                    | NM                    |                       |                       | NM                    |                          | Mount   | NM                       |          |  |
|                         | Z2Pre Relatives               | NM                              | Mount                 | NM                    | Mount                 |                       | NM                       | Mount                 |                       |                       | NM                    |                          | NM      | Mount                    |          |  |
|                         | Z3Vol Relatives               | NM                              |                       |                       |                       |                       |                          |                       |                       | Mount                 |                       | NM                       |         |                          |          |  |
| ADC Filter              |                               | ADC Filter                      |                       |                       |                       |                       |                          |                       |                       | ADC Filter            |                       | ADC Filter               |         |                          |          |  |
| Z2ADC                   | Relatives                     | NM                              |                       |                       |                       |                       |                          | Mount                 |                       |                       |                       | NM                       |         |                          |          |  |
| 15VPWR                  | R4251-54                      | 2.2 1W (*Z7/D4M:0.22 1/2W)      |                       |                       |                       |                       |                          |                       |                       | 0.22 1/2W             |                       | 2.2 1W                   |         |                          |          |  |
|                         | R4256                         | 10 1W                           |                       |                       |                       |                       |                          |                       |                       | 2.2 1W                |                       | 10 1W                    |         |                          |          |  |
|                         | C4271-72                      | 1000uF35V                       |                       |                       |                       |                       |                          |                       |                       | 2200uF35V             |                       | 1000uF35V                |         |                          |          |  |
| 7VPWR Relatives         |                               | Zener                           | Zene2                 | Transistor            |                       |                       |                          |                       |                       |                       |                       | Zener                    |         | Transistor               |          |  |
| Amp                     | SBL/SBR<br>C4047-48,R4047-48  | Mount                           |                       |                       |                       |                       |                          |                       |                       |                       |                       | NM                       | Mount   |                          |          |  |
| Block Cap               | C6901-02                      | 3504506<br>6800u 63V            | 3504525A<br>8200u 69V | 3504519A<br>8200u 69V | 3504534<br>10000u 71V | 3504525A<br>8200u 69V | 3504539<br>10000u 75V    | 3504540<br>10000u 75V | 3504539<br>10000u 75V | 3504535<br>15000u 75V | 3504515<br>15000u 75V | 3504506<br>6800u 63V     |         | 3504525A<br>8200u 69V    |          |  |
| Power Tr                | Q6001-03                      | 2SC5198                         |                       |                       | 2SC5242               |                       |                          |                       |                       |                       | TTC0001               |                          | 2SC5198 |                          | 2SC5242  |  |
|                         | Q6021-23                      | 2SA1941                         |                       |                       | 2SA1962               |                       |                          |                       |                       |                       | TTA0001               |                          | 2SA1941 |                          | 2SA1962  |  |
|                         | Q6005-08                      | 2SC5198                         |                       |                       | KTC5242A              |                       |                          | 2SC5242               |                       |                       | TTC0001               |                          | 2SC5198 |                          | KTC5242A |  |
|                         | Q6025-28                      | 2SA1941                         |                       |                       | KTA1962A              |                       |                          | 2SA1962               |                       |                       | TTA0001               |                          | 2SA1941 |                          | KTA1962A |  |
| AMP Emitter<br>Resistor | R6005-08,R6025-28<br>R6085-88 | Mount<br>NM                     |                       |                       |                       |                       | NM<br>Mount              |                       |                       |                       |                       | Mount<br>NM              |         |                          |          |  |
| IPRO                    | R664*                         | 3.9k                            |                       | 2.2k                  |                       |                       |                          |                       |                       | 1.8k                  |                       | 3.9k                     |         | 2.2k                     |          |  |
| Fuse                    | F6901-02<br>Label             | 10A-UL/T-233<br>10A/125V        |                       | 12A-TUL-250V          |                       |                       | 15A-TUL-250V<br>15A/250V |                       |                       |                       |                       | 10A-UL/T-233<br>10A/125V |         | 12A-TUL-250V             |          |  |
| Heatsink                | D6901A                        | 27160545                        |                       |                       |                       |                       | 27160500                 |                       |                       |                       |                       | 27160545                 |         |                          |          |  |
| BUS Plate               | 27142306A                     | NM                              |                       |                       |                       |                       | Mount                    |                       |                       |                       |                       | NM                       |         |                          |          |  |


Destination List of BAAF-1979

MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5

SCHEMATIC DIAGRAM(PART-5) AMP SECTION

BACLA-1988 TX-NR555/656/757, TX-RZ610/710, HT-R695  
BACLA-2004 DRX-2/3/4  
BACLA-2030 TX-RZ810, DRX-5

CLASS A

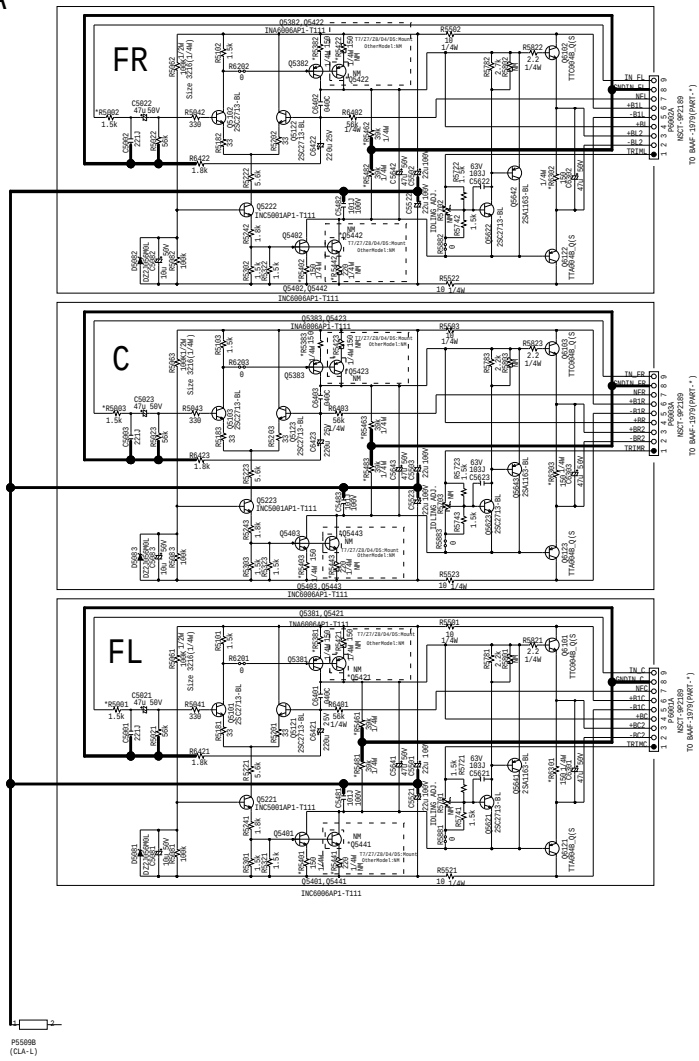

| Reference Model | MODEL                    |       |          |          |
|-----------------|--------------------------|-------|----------|----------|
|                 | T5/02/T6/26/V6/L3/V13/L3 | T7/27 | 03       | 28/04/05 |
| R500*           | 1.5k Ω                   |       |          | 3.3k Ω   |
| R538*           |                          | 220 Ω |          |          |
| R548*           |                          | 220 Ω |          | 220 Ω    |
| Q542*           | No Mount                 | 220 Ω | No Mount | 220 Ω    |
| R546*           | 39k Ω                    | 33k Ω | 39k Ω    | 33k Ω    |
| R548*           |                          | 33k Ω | 39k Ω    | 33k Ω    |
| R538*           |                          | 150 Ω |          |          |
| Q542*           | No Mount                 | Mount | No Mount | Mount    |
| Q544*           |                          |       |          |          |

MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5  
SCHEMATIC DIAGRAM (PART-6)


PS SECTION

THE COMPONENTS IDENTIFIED MARK  ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.  
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)  
ELECTROLYTIC CAPACITORS (  ) ARE IN uF/NV.  
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.  
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF  
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

 例は火災、感電の危険に關する部品の為、必ず指定部品を使用の事。  
電圧表示は無信号時に測定した直流電圧を示す。  
記入なきコンデンサの単位はpF/50WVである。  
記入なきコンデンサの単位はpF/50WVである。  
例) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF  
本配線図は基本配線図につき性能改善等により予告なく変更する事がある。


CAUTION  
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,  
REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.  
ATTENTION  
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,  
REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.  
THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE  
FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE.  
RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.  
CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENT,  
N'UTILISER QUE DES FUSIBLES DE MEME TYPE.  
CE DERNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

|     | MODEL             |
|-----|-------------------|
| T5  | TX-NR555          |
| T6  | TX-NR656, HT-R695 |
| Z6  | TX-RZ610          |
| T7  | TX-NR757          |
| Z7  | TX-RZ710          |
| Z8  | TX-RZ810          |
| D2  | DRX-2             |
| D3  | DRX-3             |
| D4  | DRX-4             |
| D5  | DRX-5             |
| V8  | VSK-831           |
| I1  | VSK-LX101         |
| V11 | VSK-1131          |
| I3  | VSK-LX301         |

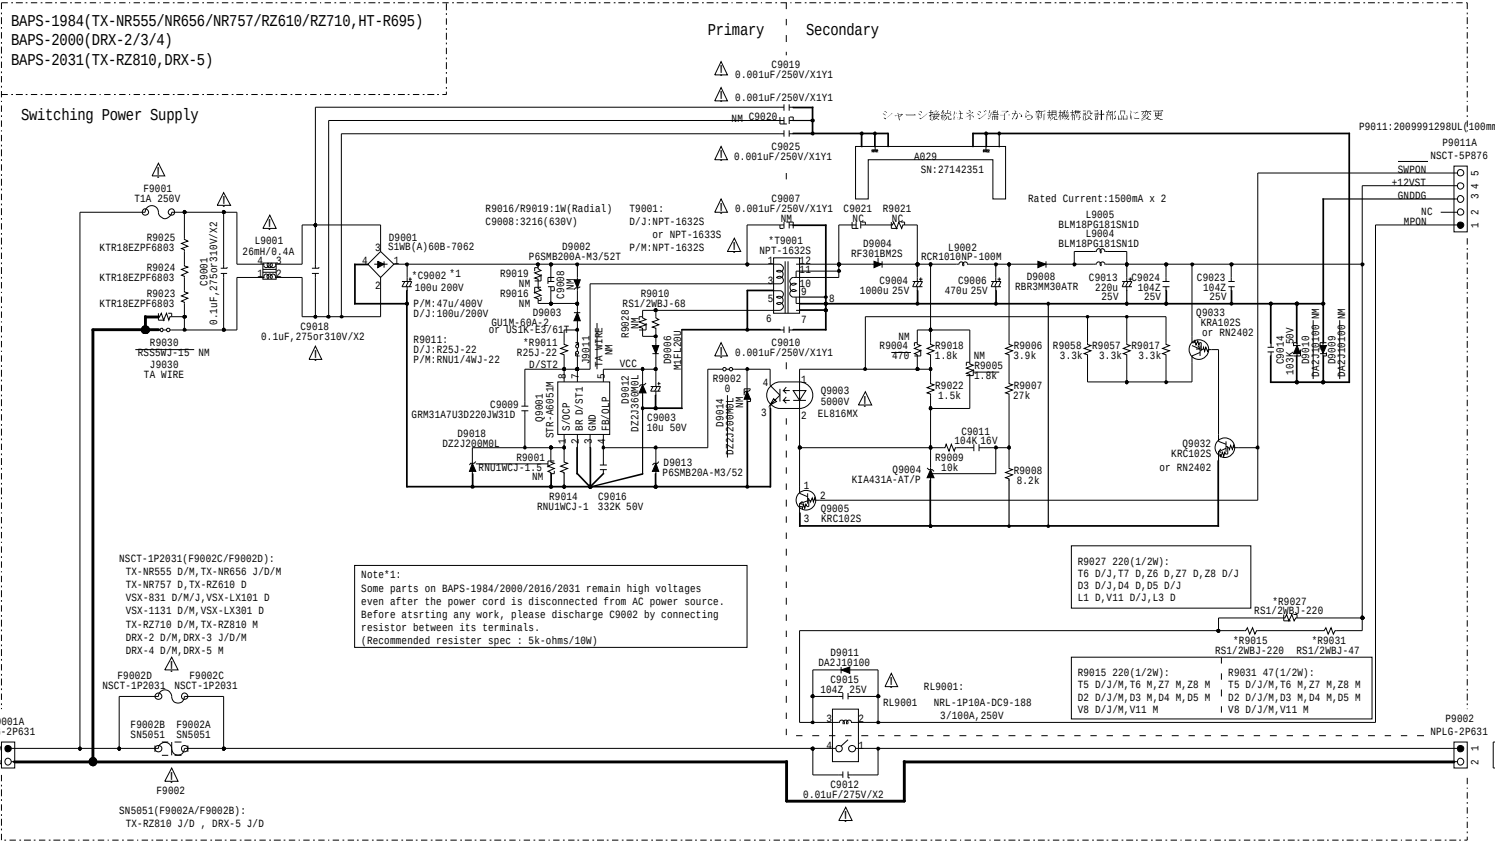

BATRM-2023 (PART-7)

P-TRANS

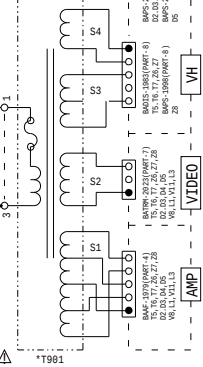


| TYPE | AC POWER            |
|------|---------------------|
| D    | 120Vac, 60Hz        |
| M    | 220-240Vac, 50/60Hz |
| J    | 100Vac, 50/60Hz     |

| MODEL | Destination | AC POWER IN   |
|-------|-------------|---------------|
| T5    | All         | AC CORD INLET |
| T6    | MDF/M11     |               |
| T7    | All         |               |
| Z6    | All         |               |
| Z7    | All         |               |
| Z8    | All         |               |
| D2    | All         |               |
| D3    | All         |               |
| D4    | All         |               |
| D5    | All         |               |
| V8    | All         |               |
| V11   | All         |               |
| I3    | All         |               |


| TYPE | T5/D2                  | V8                     | I1                  | T6/D3                | Z6/T7                | Z7/D4/V11              | I3                   | Z8/D5                |
|------|------------------------|------------------------|---------------------|----------------------|----------------------|------------------------|----------------------|----------------------|
| D    | 8A 125V<br>29360842    | 8A 125V<br>29360842    | 8A 125V<br>29360842 | 18A 125V<br>29362241 | 18A 125V<br>29362241 | 18A 125V<br>29362241   | 18A 125V<br>29362241 | 18A 125V<br>29362241 |
| M    | T2.5AL250V<br>29361747 | T2.5AL250V<br>29361747 | ...                 | T5AL250V<br>29361938 | ...                  | T3.5AL250V<br>29362779 | ...                  | T4AL250V<br>29362779 |
| J    | ...                    | 8A 125V<br>29360842    | ...                 | 12A 125V<br>29392136 | ...                  | ...                    | ...                  | 15A 250V<br>29362252 |

| TYPE | T5/D2     | V8        | I1        | T6/D3     | V11       | Z6/I3     | T7        | Z7/D4     | Z8/D5     |
|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| D    | NPT-1664D | NPT-1664D | NPT-1664D | NPT-1671D | NPT-1671D | NPT-1671D | NPT-1672D | NPT-1672D | NPT-1665D |
| M    | NPT-1664M | NPT-1664M | NPT-1664M | NPT-1671M | NPT-1671M | NPT-1671M | NPT-1672M | NPT-1672M | NPT-1665M |
| J    | ...       | NPT-1664J | ...       | NPT-1671J | ...       | ...       | ...       | ...       | NPT-1665J |

MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5 SCHEMATIC DIAGRAM(PART-7) VIDEO, SPOUT, IR/12VTRG SECTION

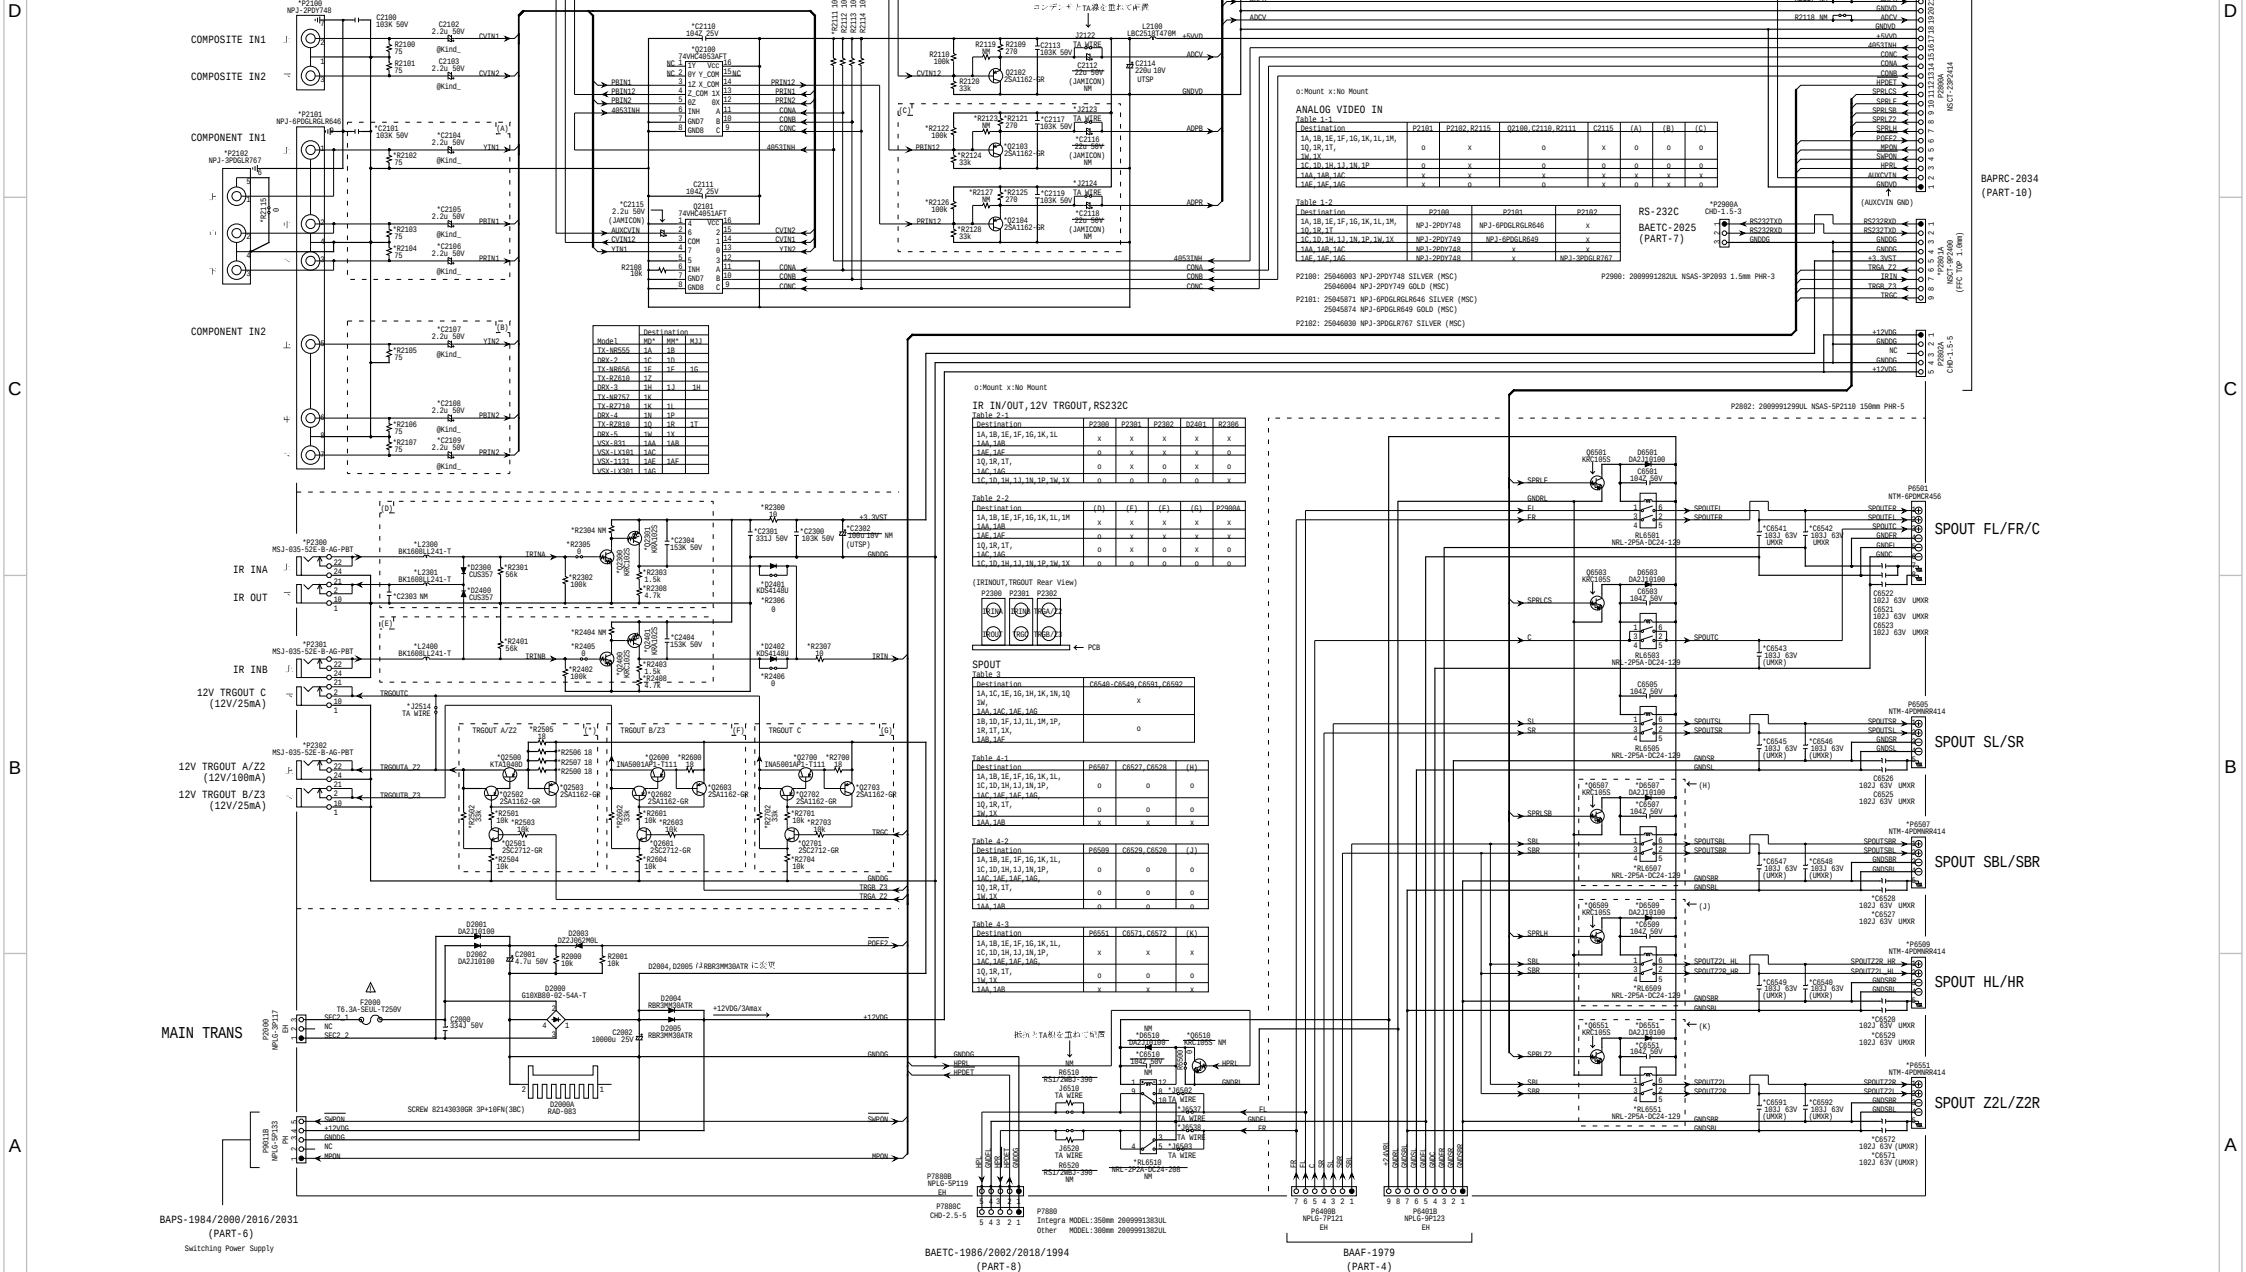


MODEL NO.TX-NR555/656/757, TX-RZ610/710/810, DRX-2/3/4/5, HT-R695,  
SCHEMATIC DIAGRAM(PART-7) RS232C SECTION

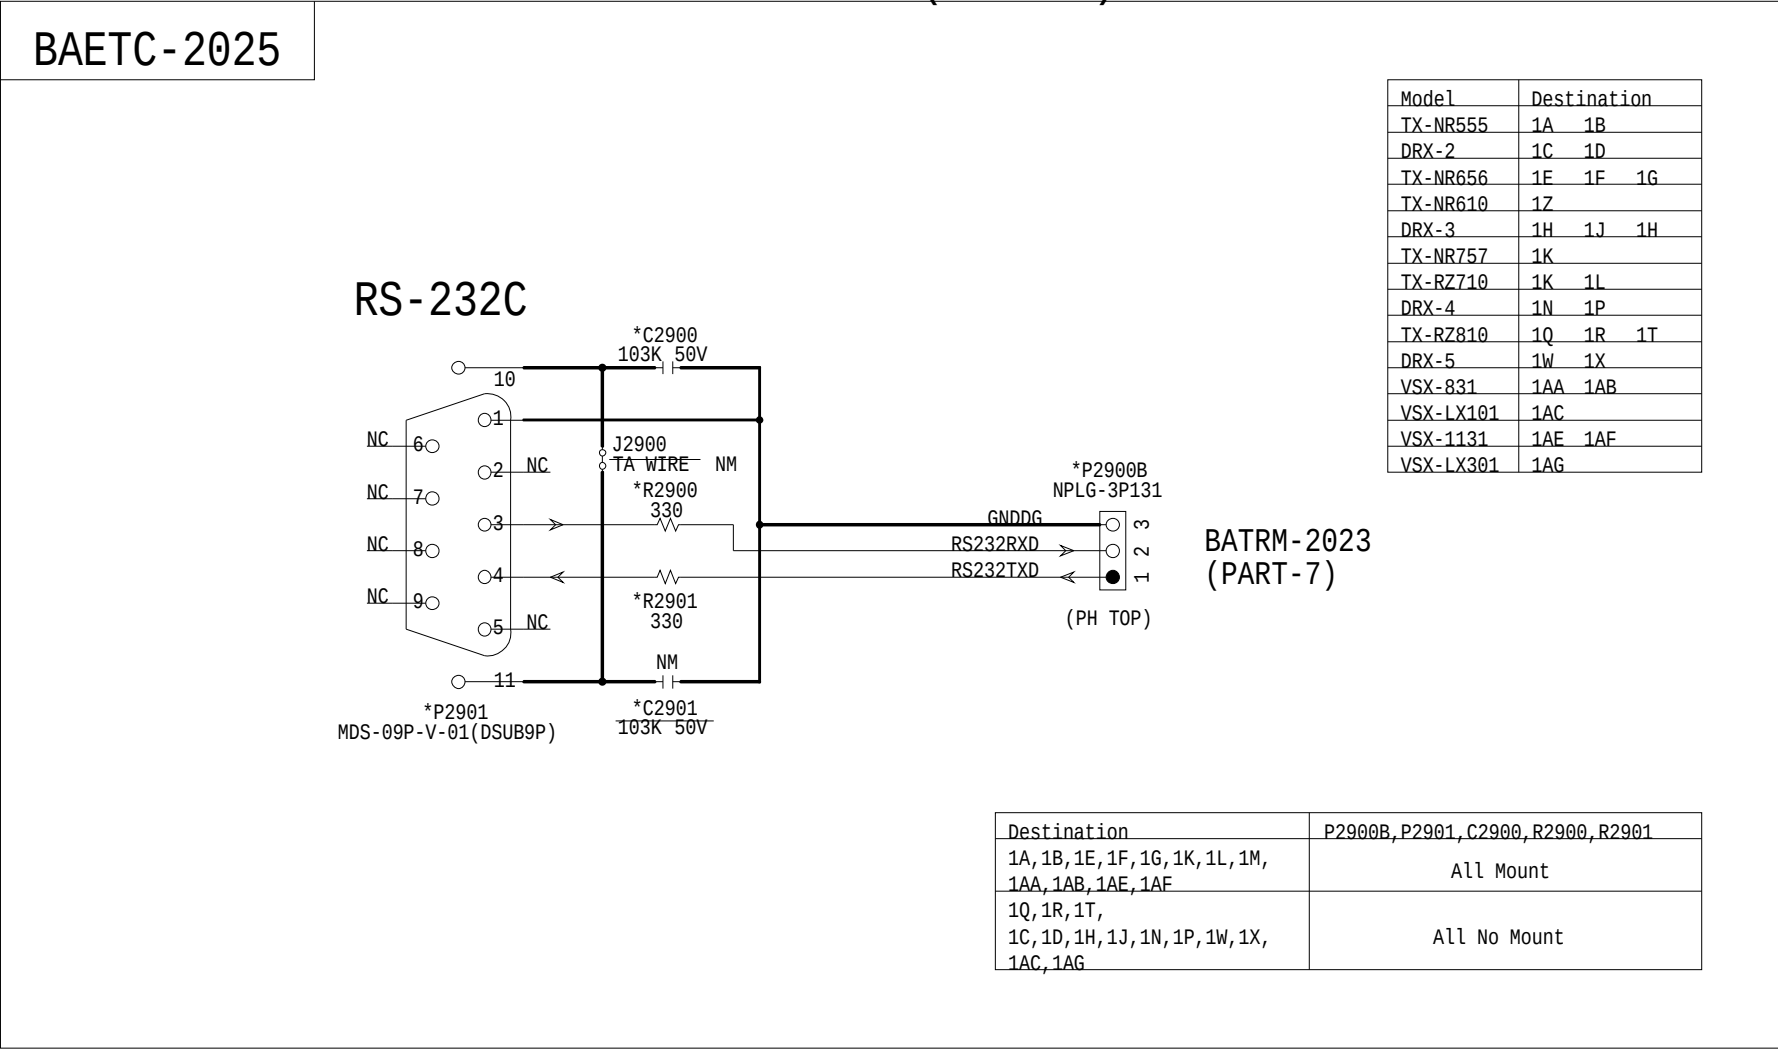

BADIS-1983  
DISPLAY




MODEL NO.TX-NR555/656/757, TX-RZ610/710, HT-R695  
SCHEMATIC DIAGRAM(PART-8) DISPLAY(HEADPHONE)SECTION

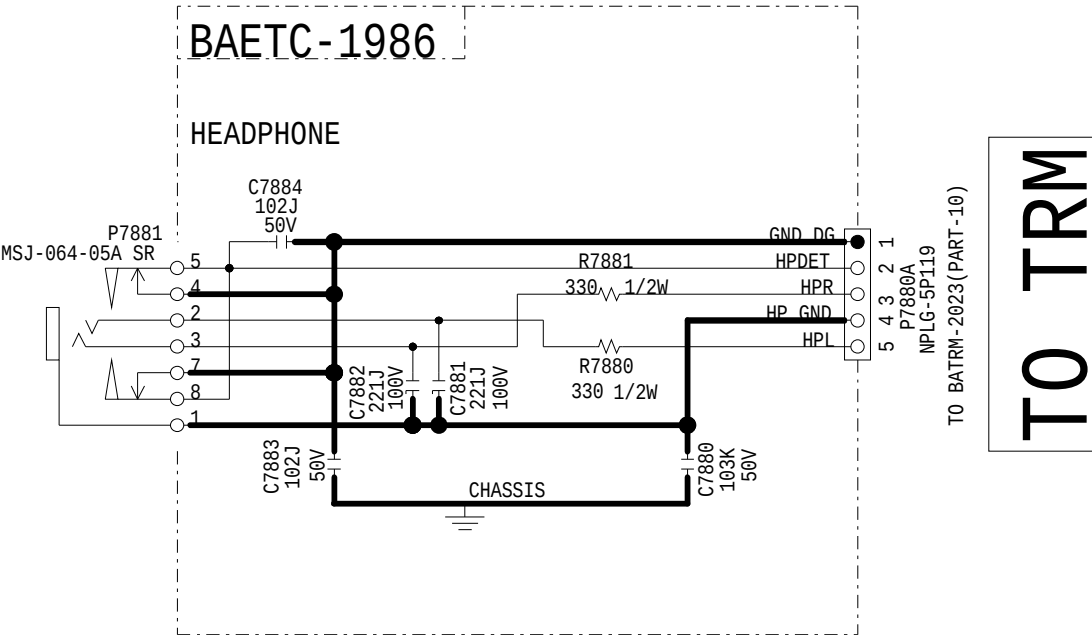




MODEL NO. TX-NR555/656/757, TX-RZ610/710, HT-R695  
SCHEMATIC DIAGRAM(PART-8) DISPLAY(Encoder)SECTION

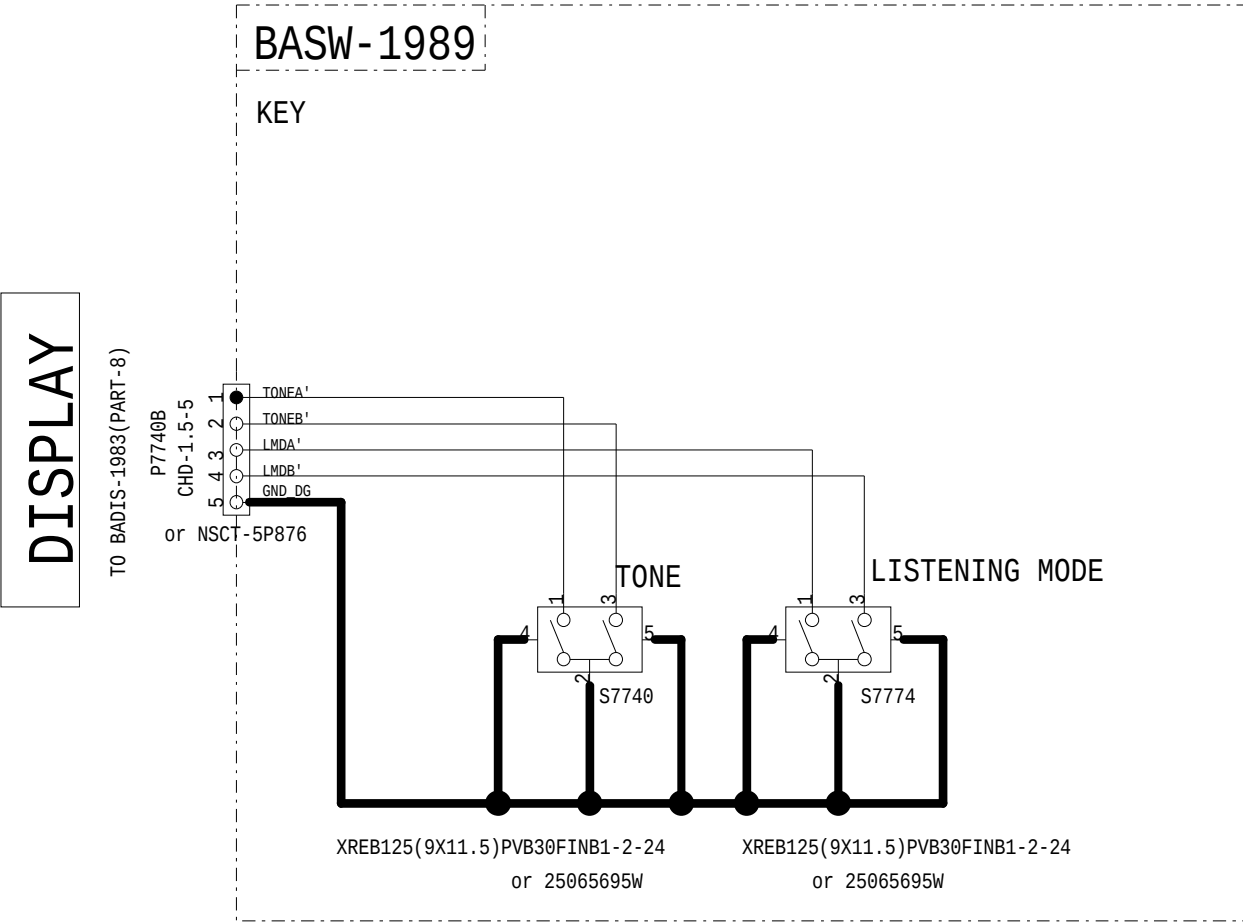





MODEL NO.DRX-2/3/4  
SCHEMATIC DIAGRAM(PART-8)  
DISPLAY(HEADPHONE)SECTION

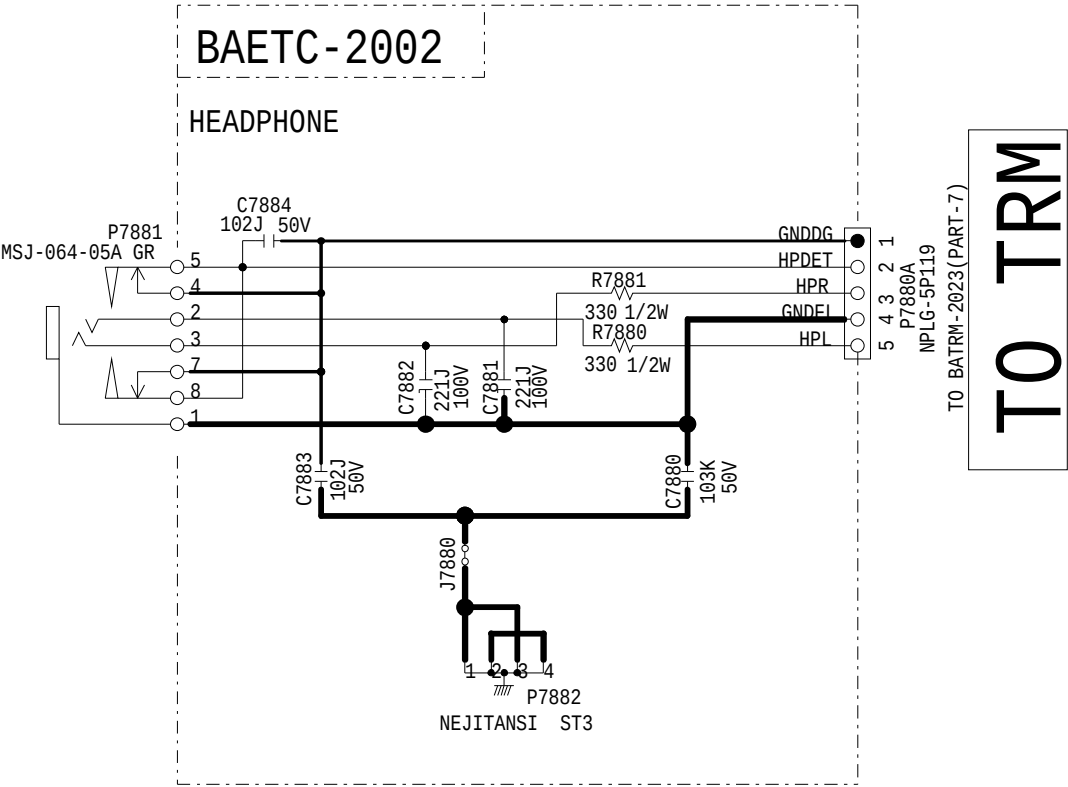


Model No. TX-RZ810, DRX-2/3/4/5 SCHEMATIC DIAGRAM (PART-8)  
DISPLAY(Power supply) SECTION

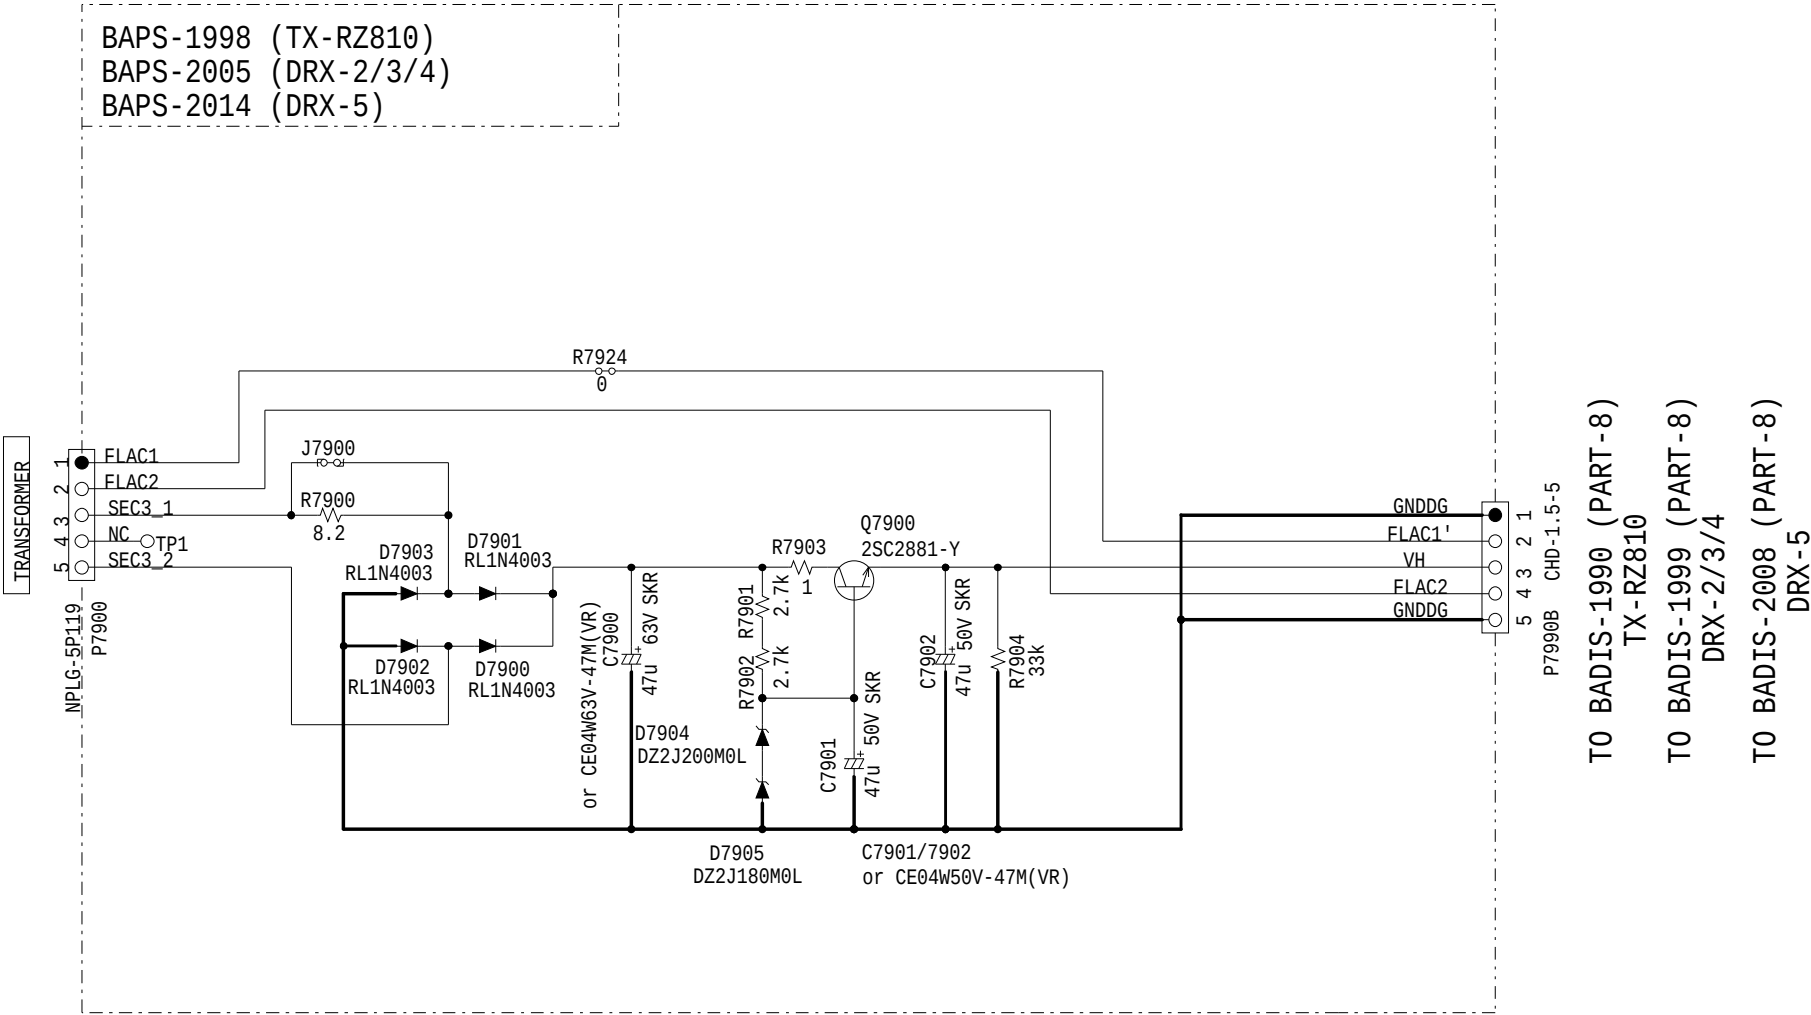


Model No. TX-RZ810, DRX-2/3/4/5 SCHEMATIC DIAGRAM (PART-8)  
DISPLAY(Power supply) SECTION

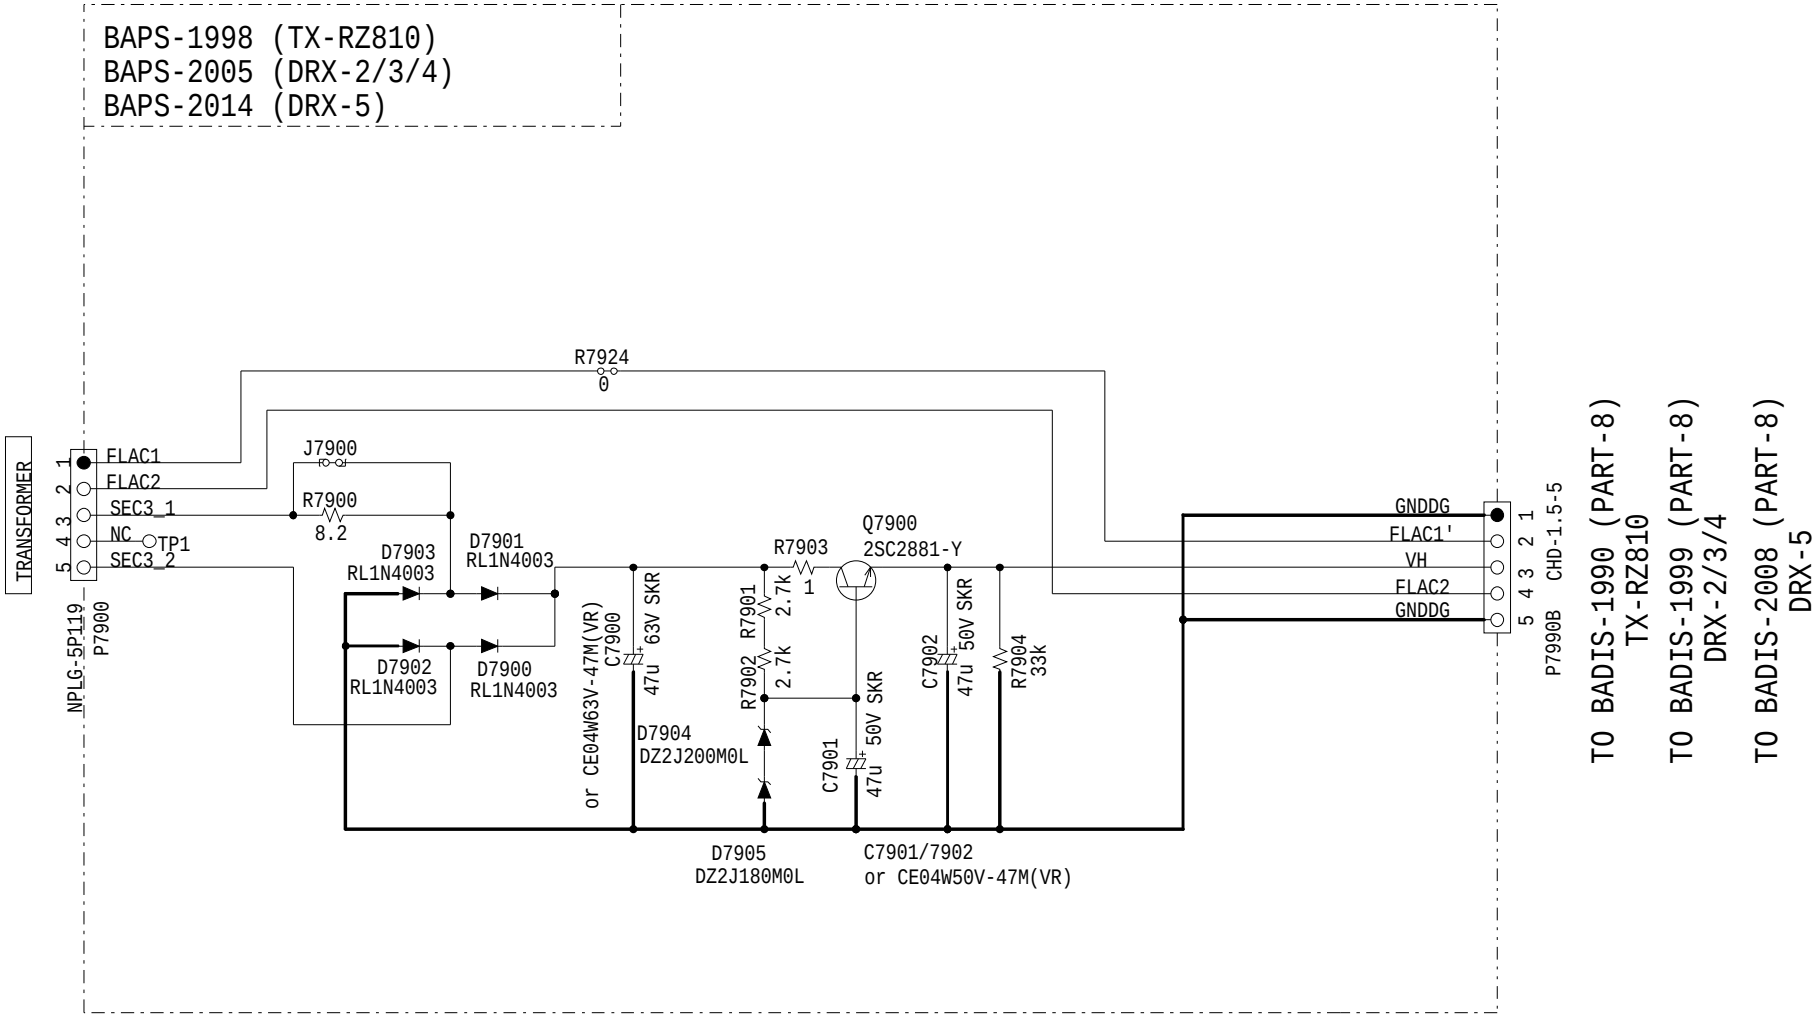

MODEL NO. DRX-2/3/4 SCHEMATIC DIAGRAM(PART-8)  
SW SECTION

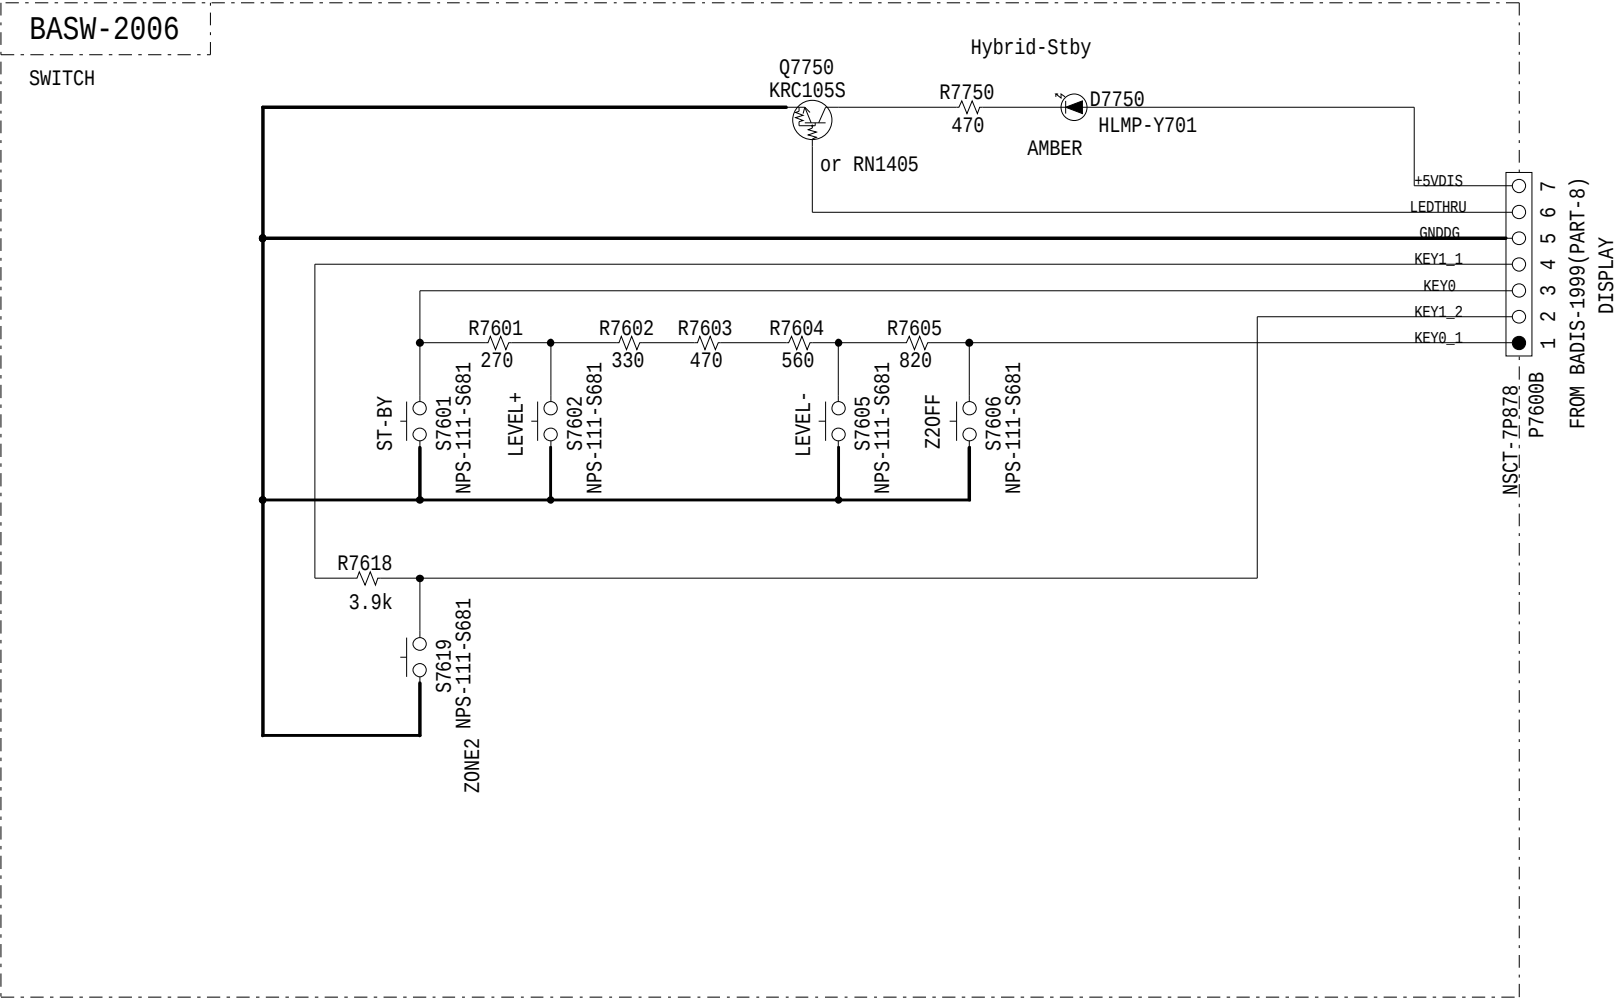


MODEL NO.TX-RZ810 SCHEMATIC DIAGRAM (PART-8) DISPLAY SECTION

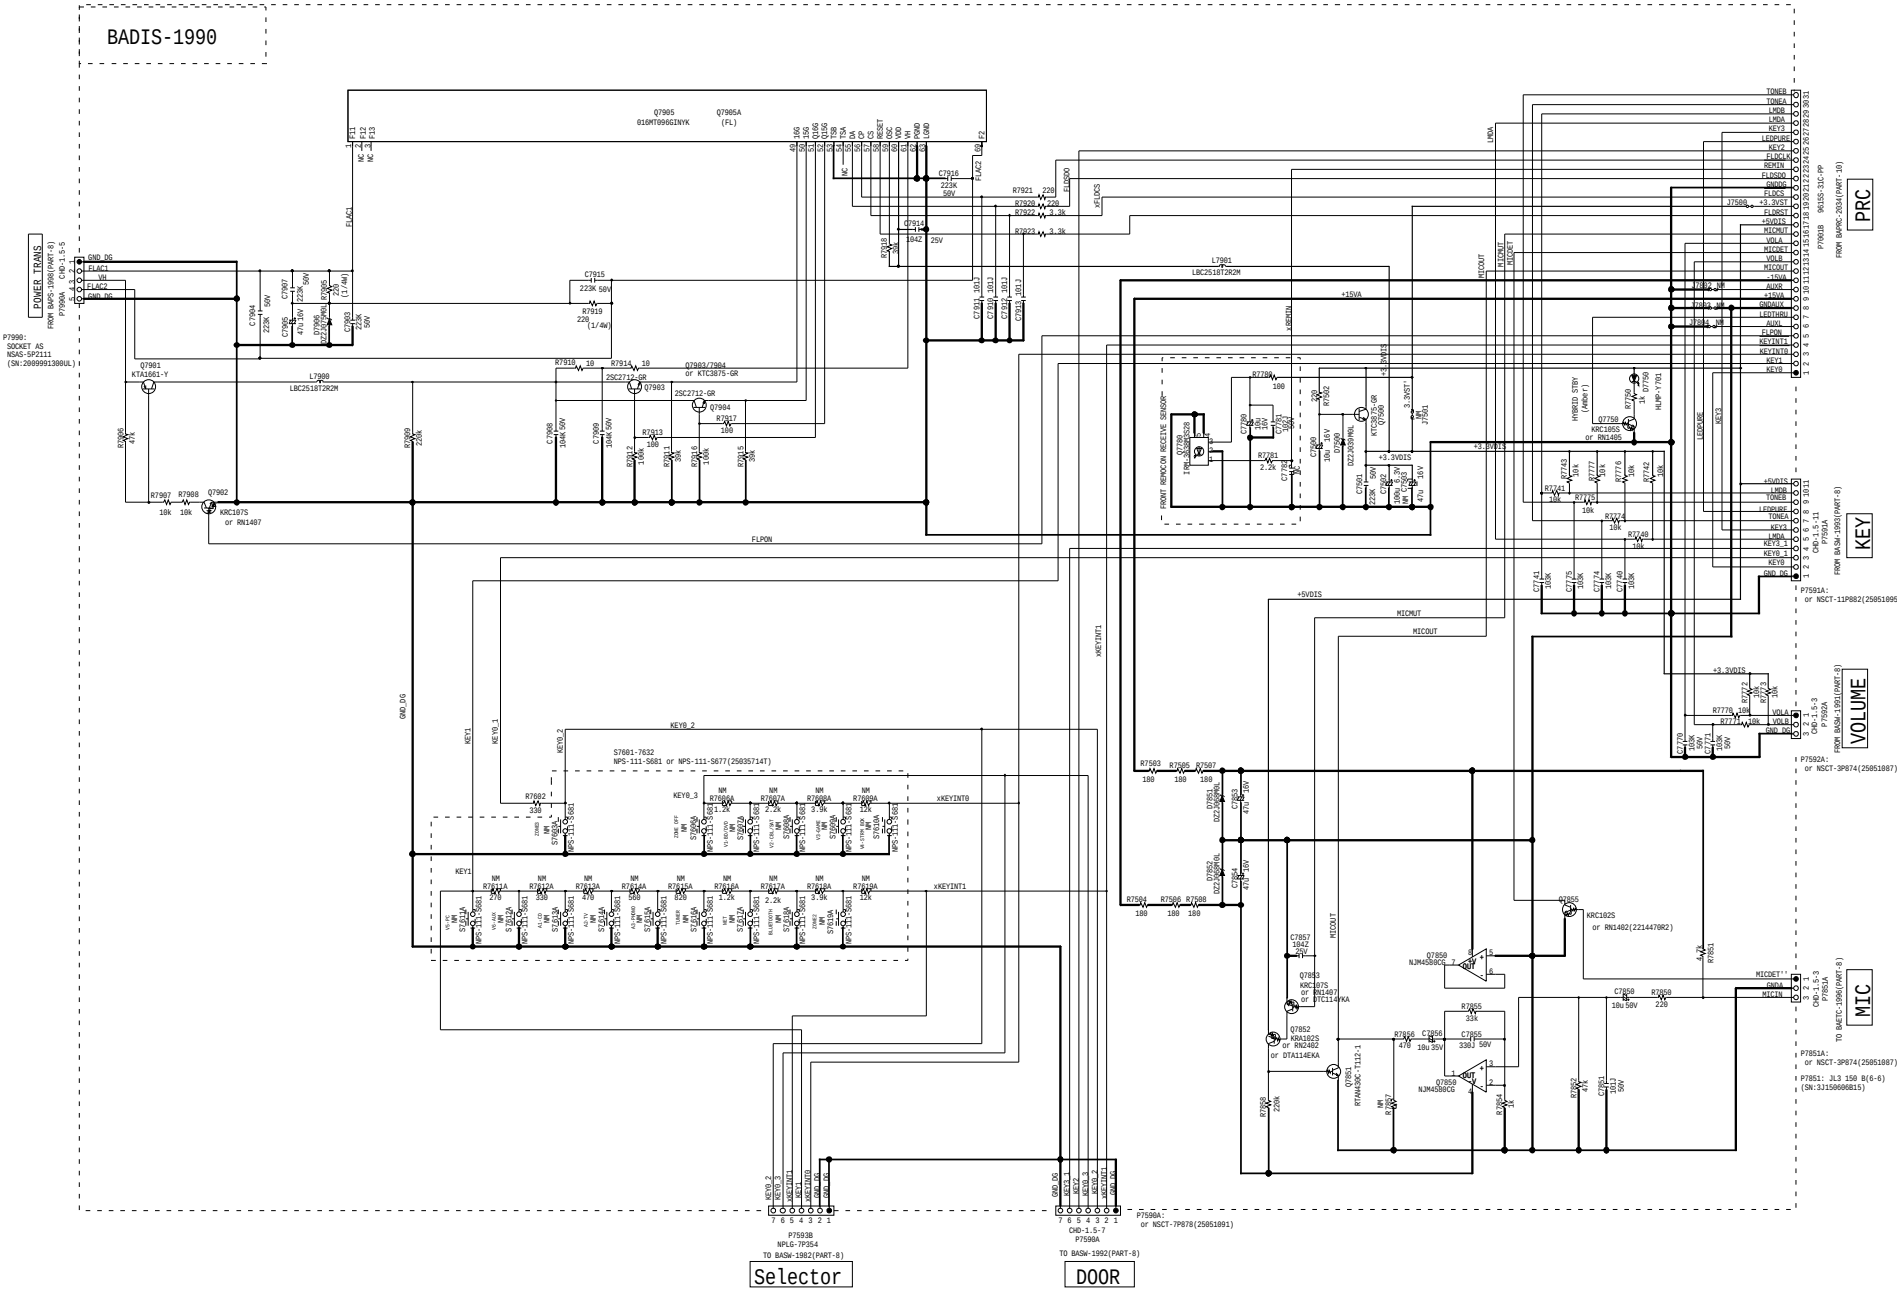

## Display (Volume) section

MODEL NO.TX-RZ810  
SCHEMATIC DIAGRAM(PART-8)  
DISPLAY(VOLUME)SECTION

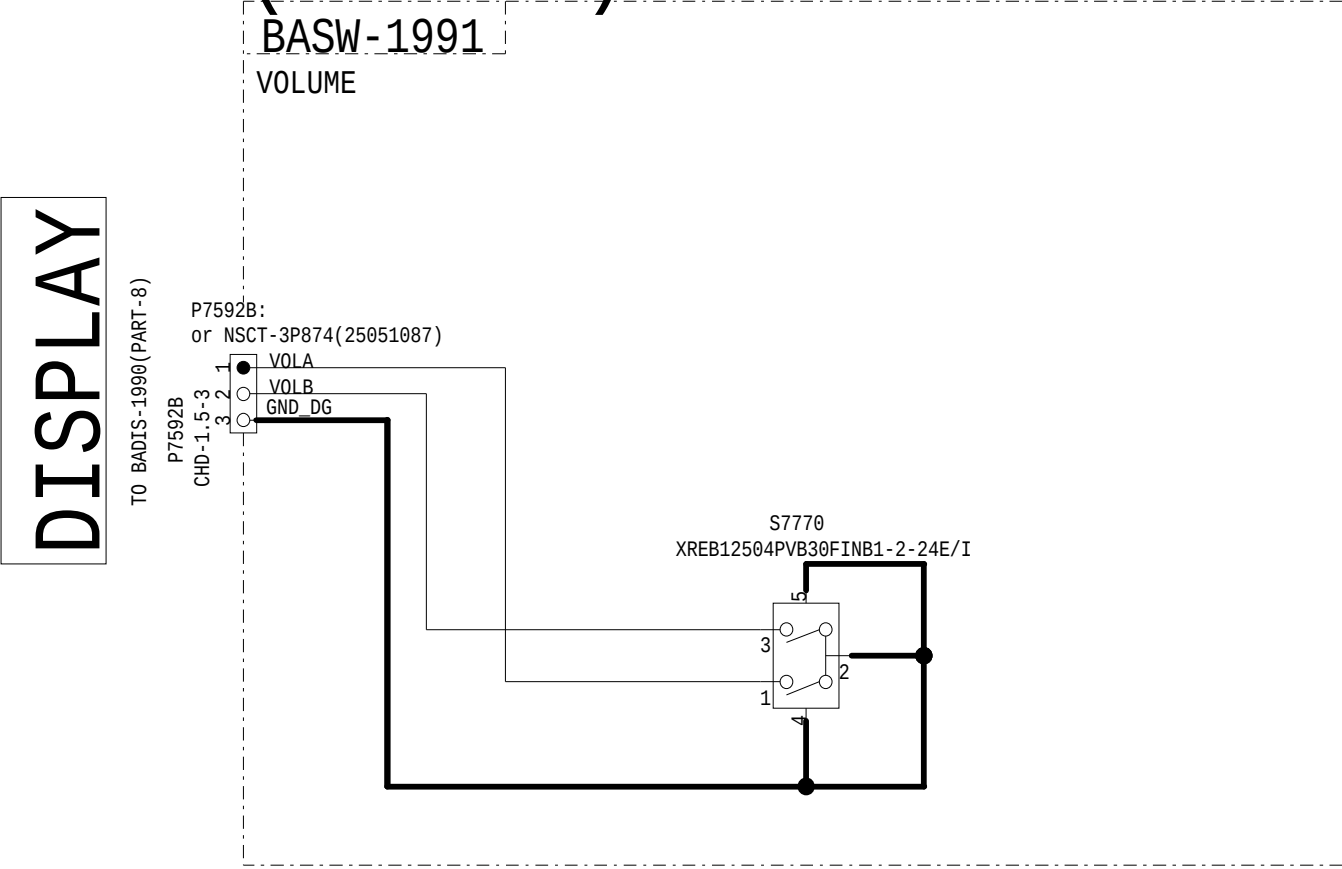





# MODEL NO.TX-RZ810

## SCHEMATIC DIAGRAM(PART-8)


### DISPLAY(DOOR)SECTION

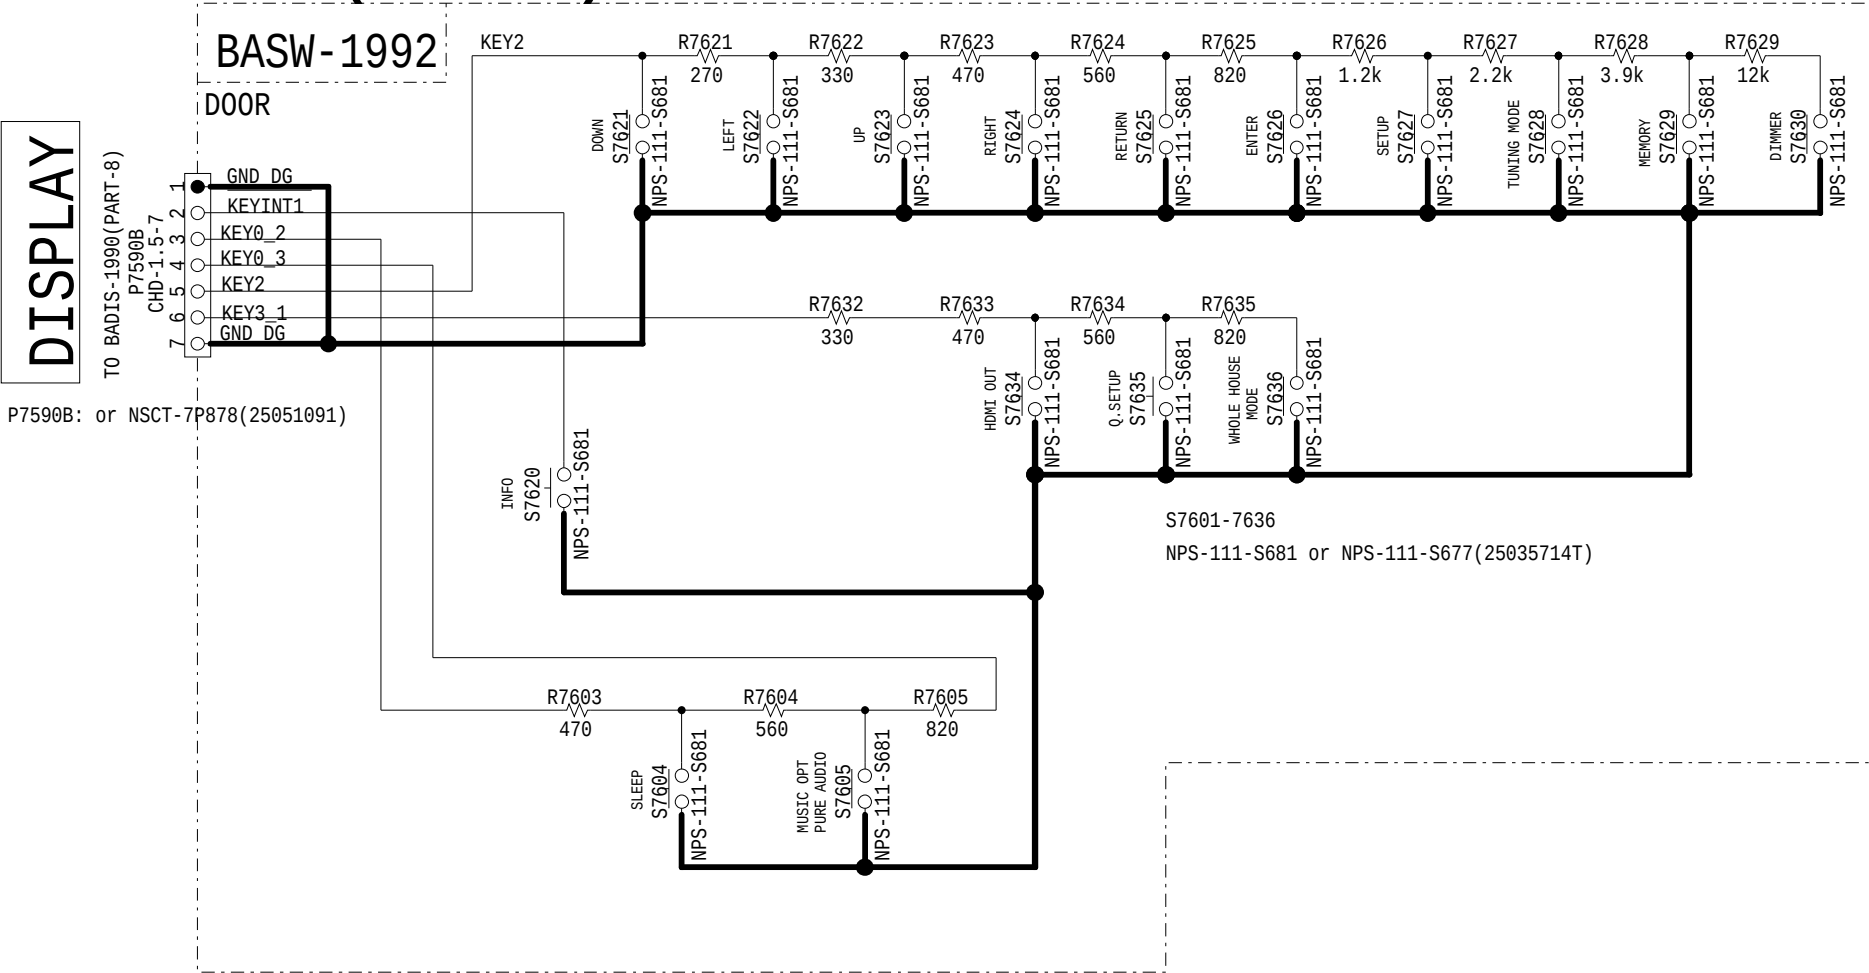

MODEL NO. TX-RZ810  
SCHEMATIC DIAGRAM(PART-8) DISPLAY(KEY)SECTION

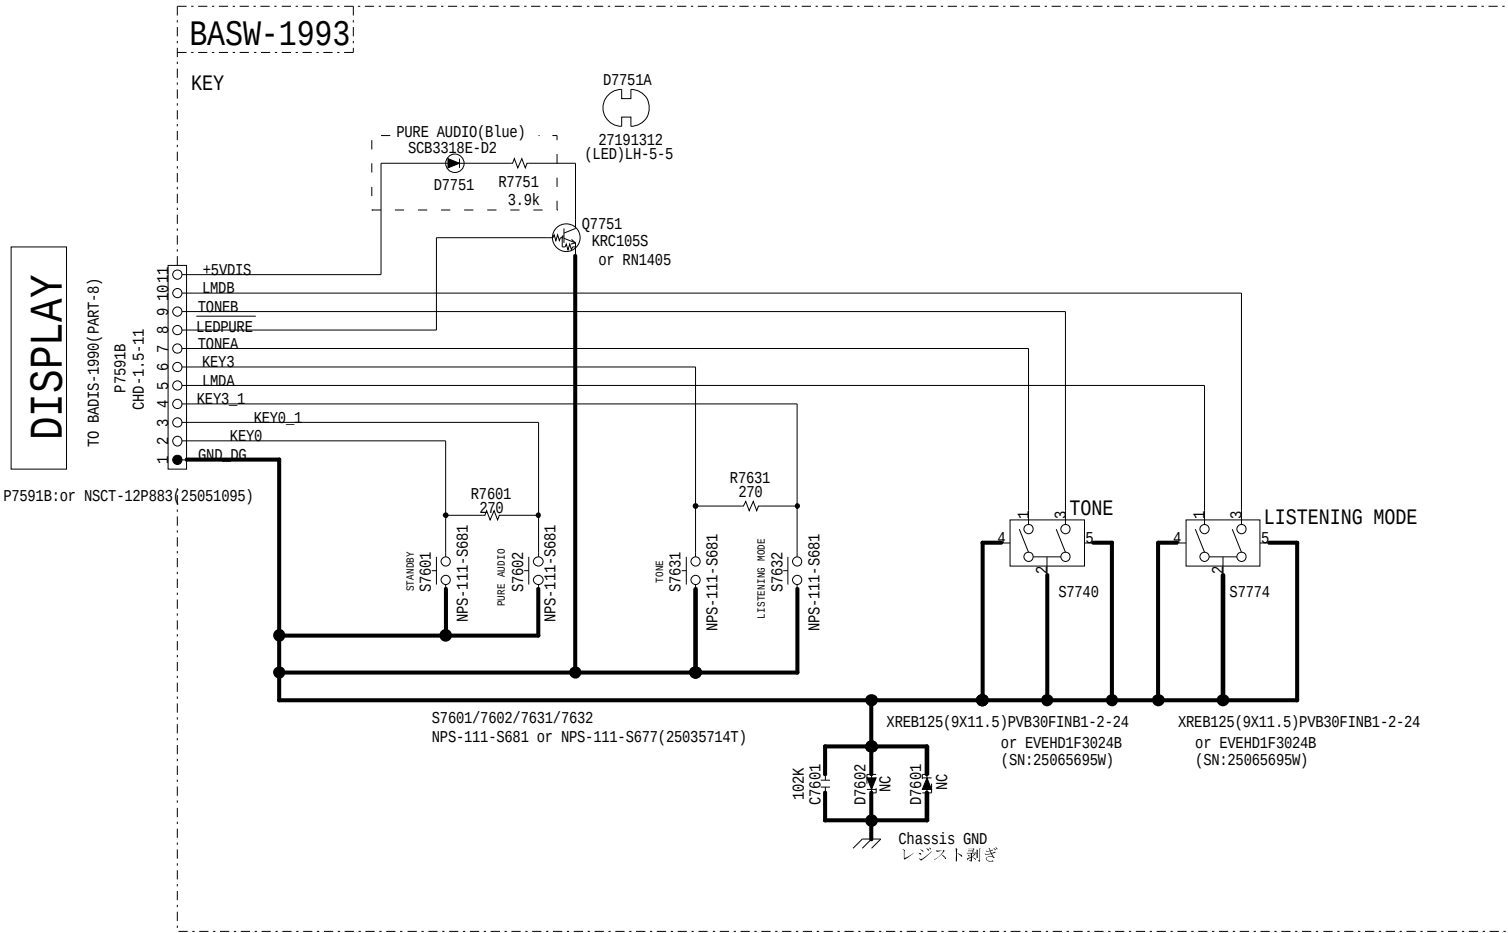


MODEL NO.TX-RZ810  
SCHEMATIC DIAGRAM(PART-26) DISPLAY(HEADPHONE)SECTION

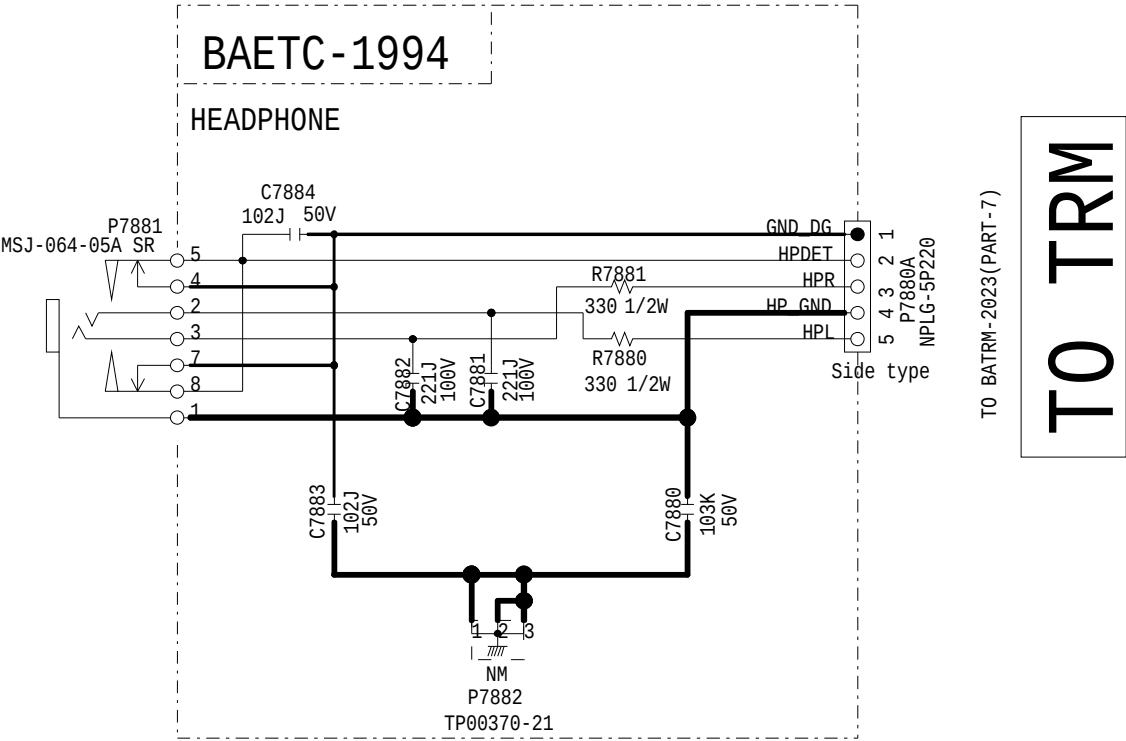

# MODEL NO.TX-RZ810

## SCHEMATIC DIAGRAM(PART-8)


### DISPLAY(MIC)SECTION

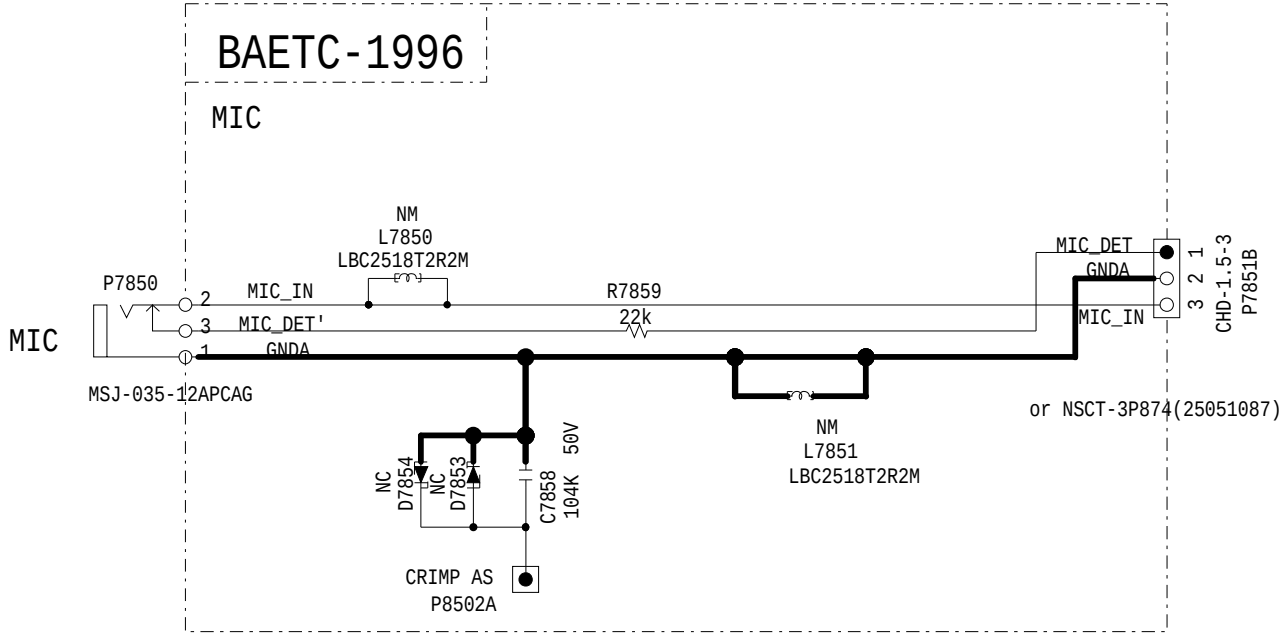

DISPLAY

TO BADIS-1990 (PART-8)


Model No. TX-RZ810, DRX-5 SCHEMATIC DIAGRAM (PART-8)  
DISPLAY(Power supply) SECTION

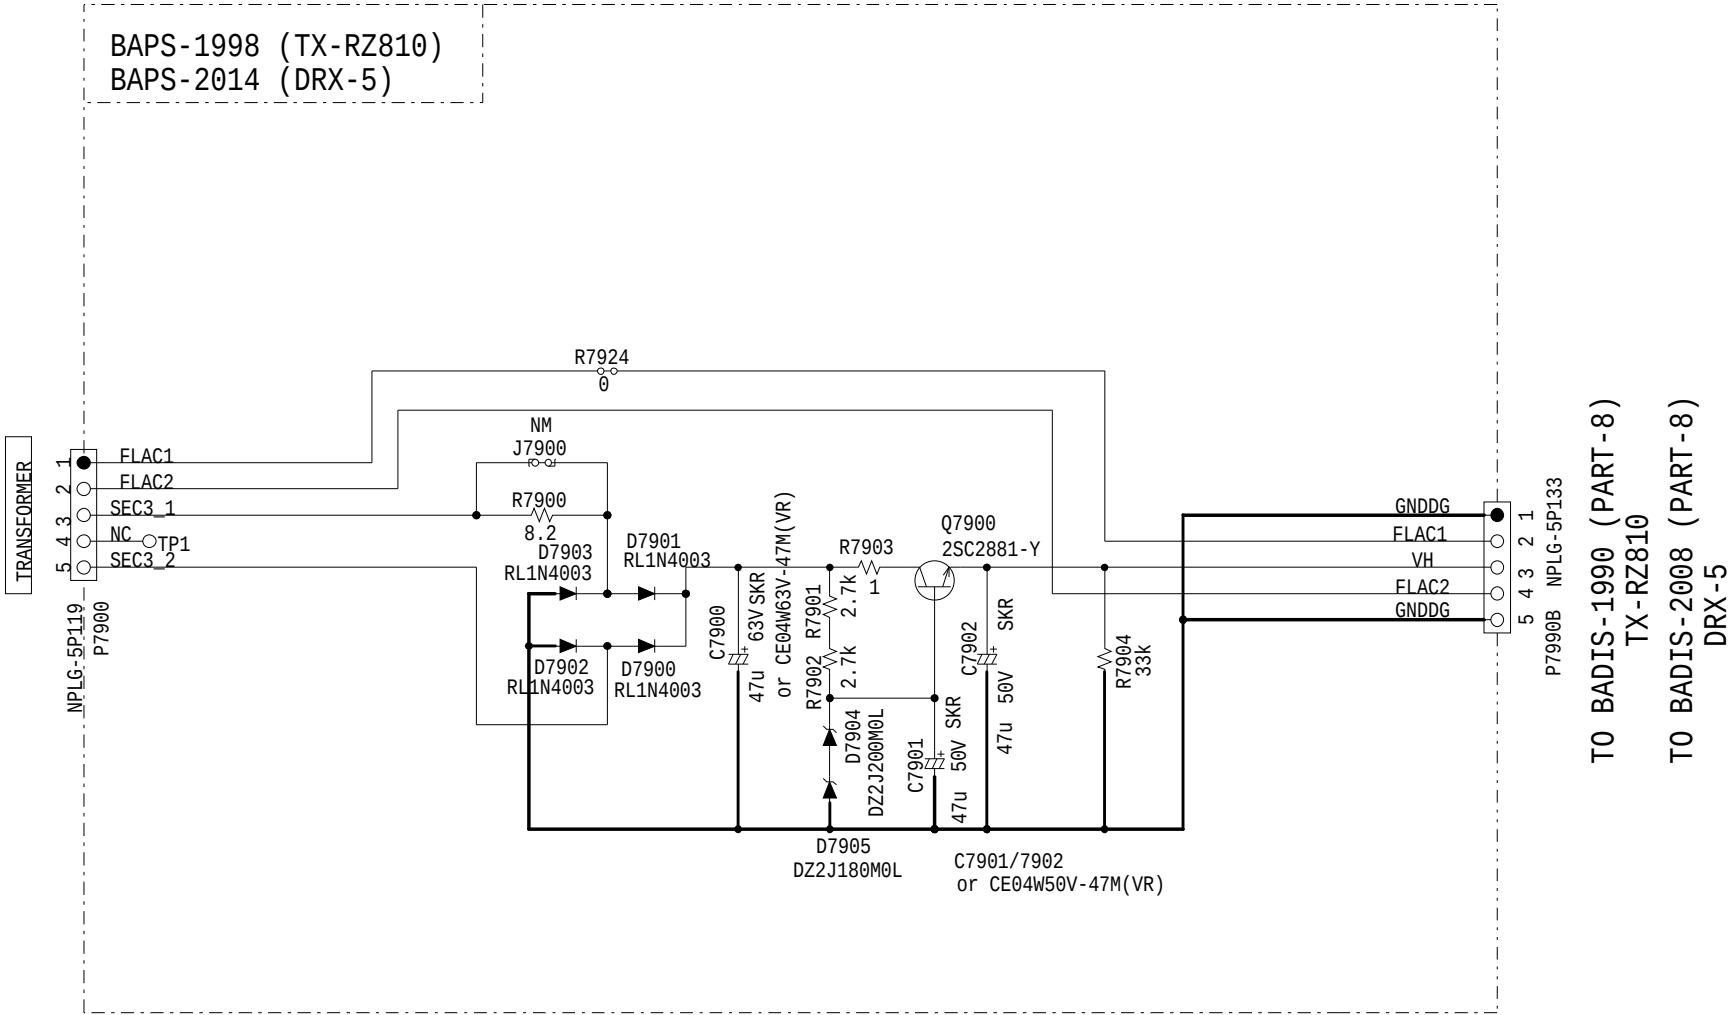

# MODEL NO.TX-RZ810 SCHEMATIC DIAGRAM (PART-8)


## DISPLAY SECTION

BASW-1982

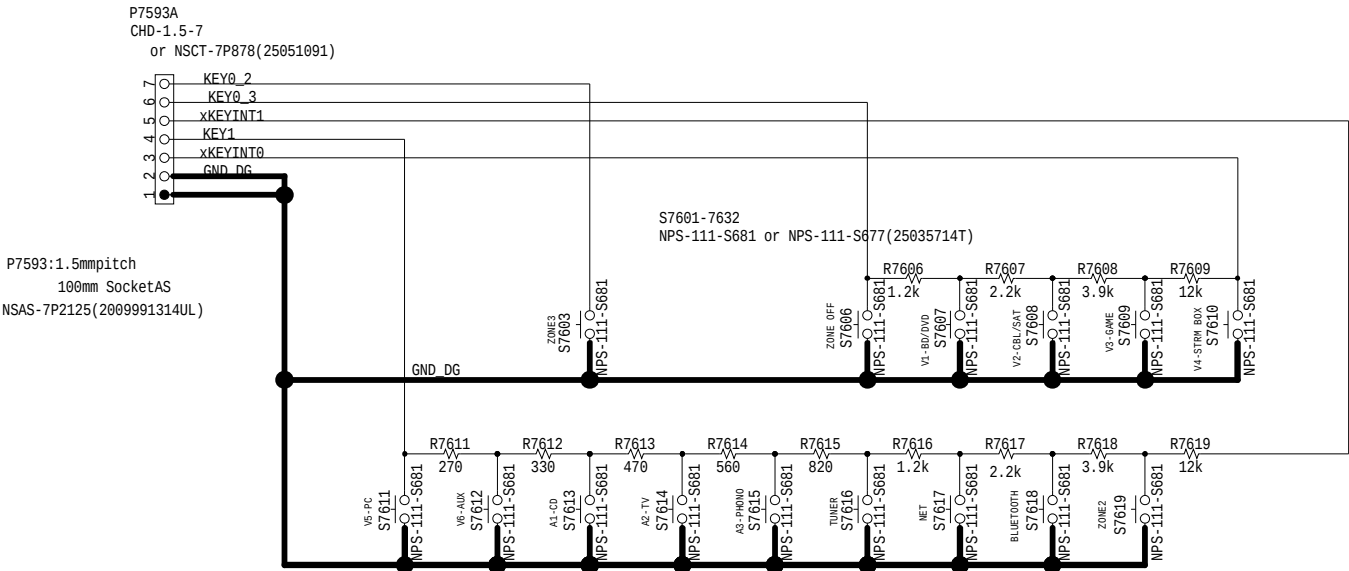




MODEL NO.DRX-5 SCHEMATIC DIAGRAM  
DISPLAY(VOLUME)SECTION (PART-8)

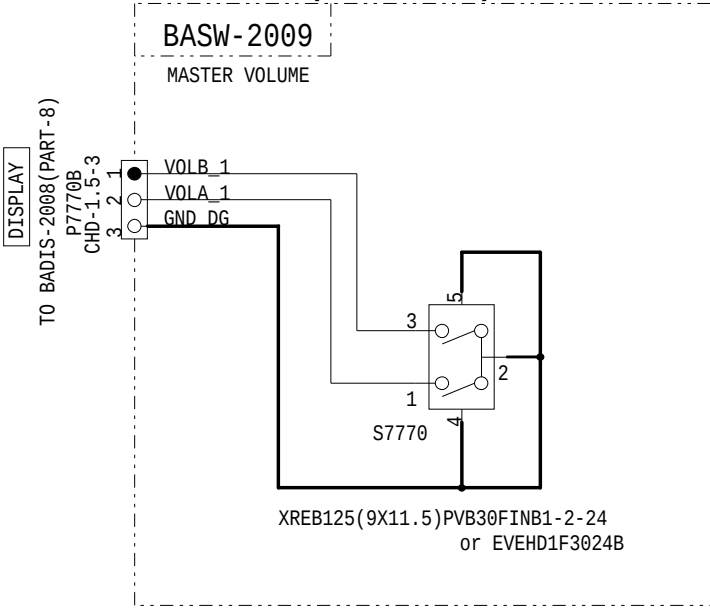




MODEL NO. DRX-5 SCHEMATIC DIAGRAM(PART-8) DISPLAY(KEY)SECTION

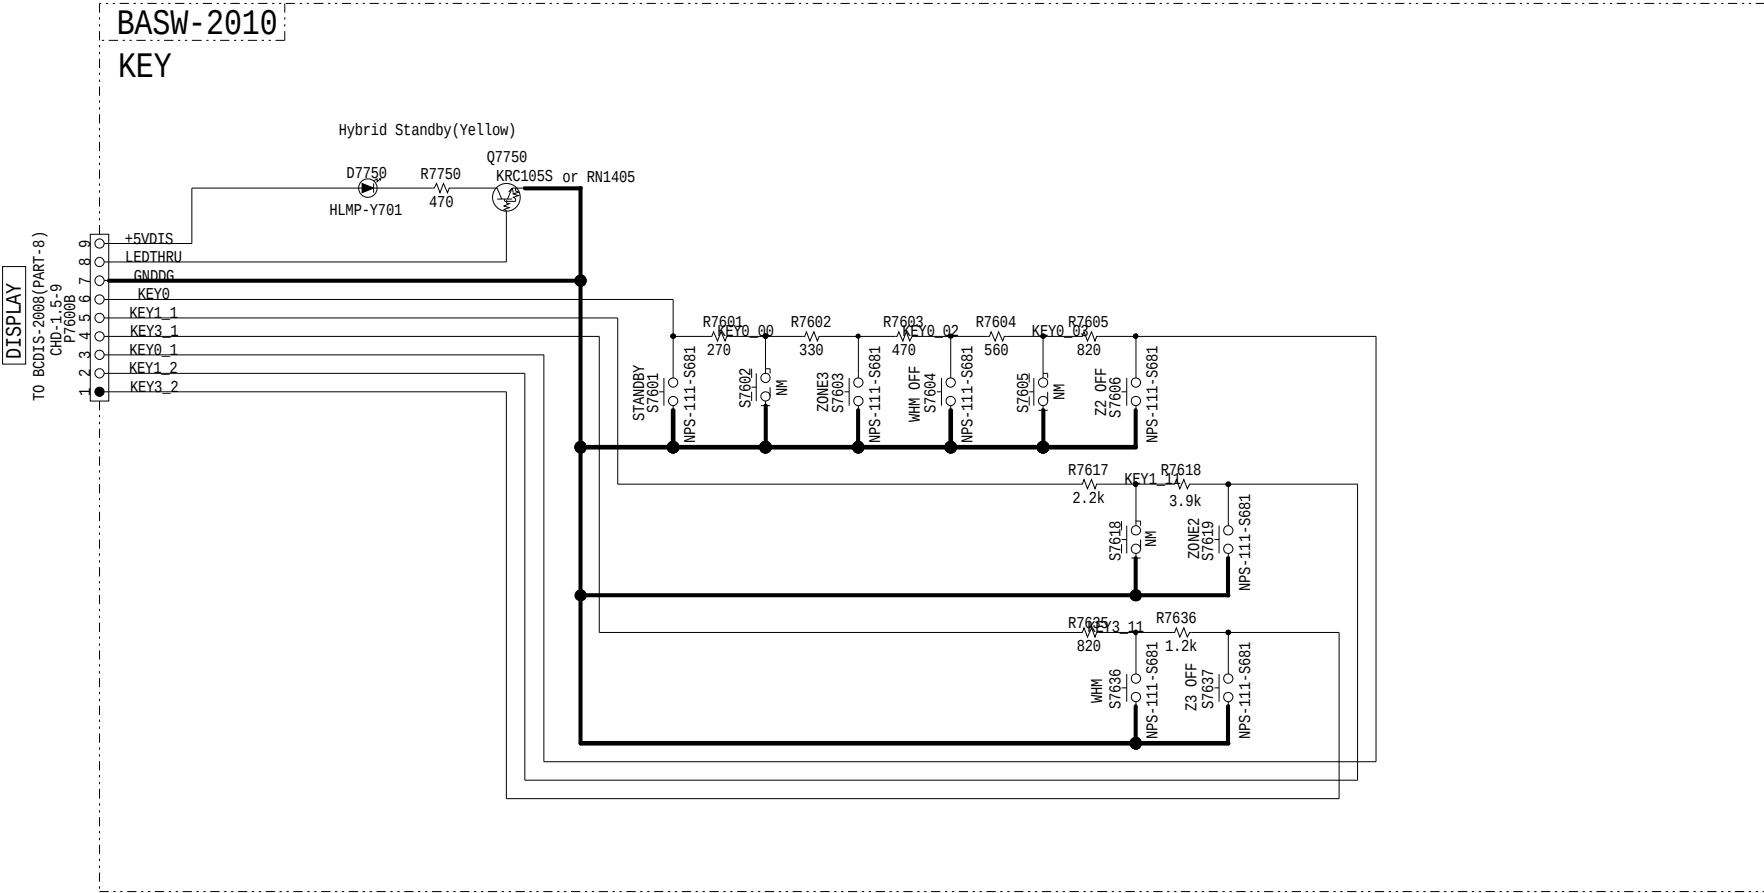


MODEL NO.DRX-5  
SCHEMATIC DIAGRAM(PART-8)  
DISPLAY(HEADPHONE)SECTION

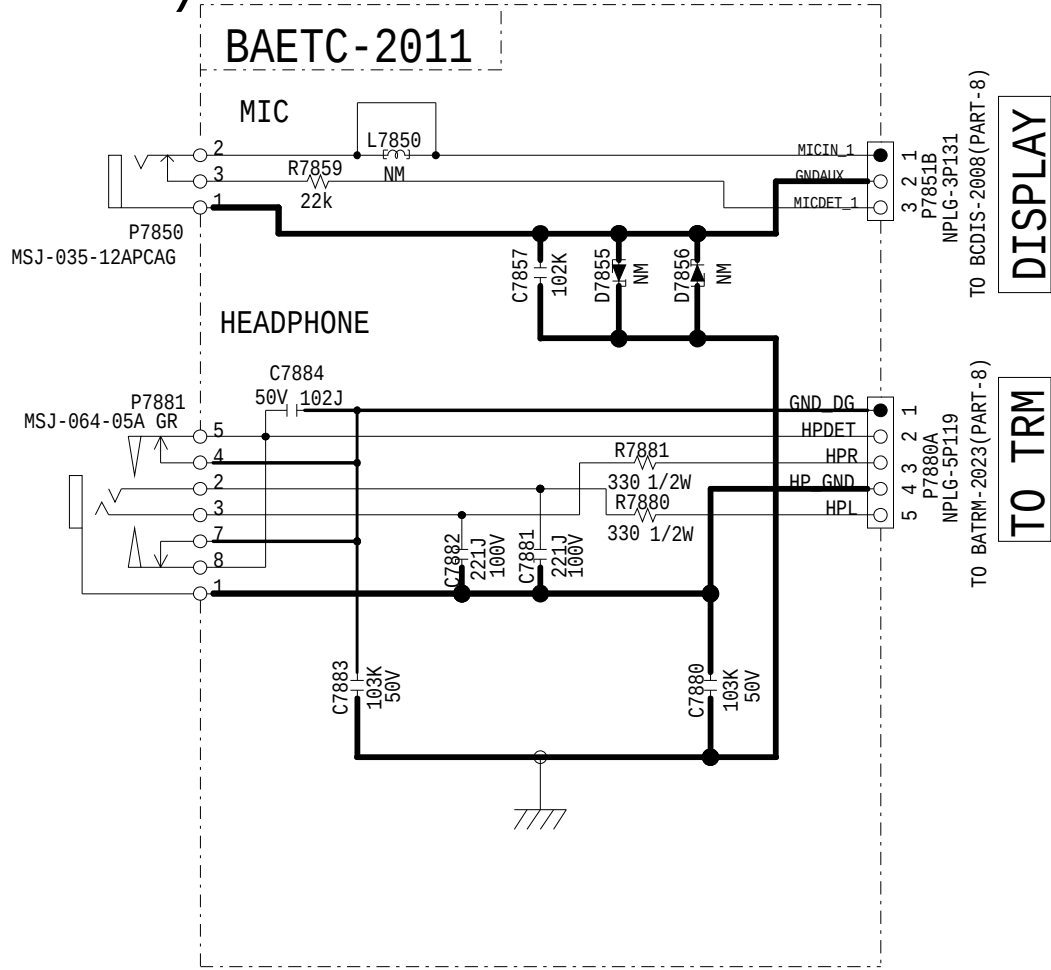

MODEL No. TX-NR555/656/757, TX-RZ610/710, HT-R695, DRX-2/3/4 SCHEMATIC DIAGRAM (PART-9)  
DAC FILTER SECTION

商品仕様表記載のアルミ電解Cは全てLTS P品  
部品定格または定格電力表記無き抵抗は全て1/10Wチップ品

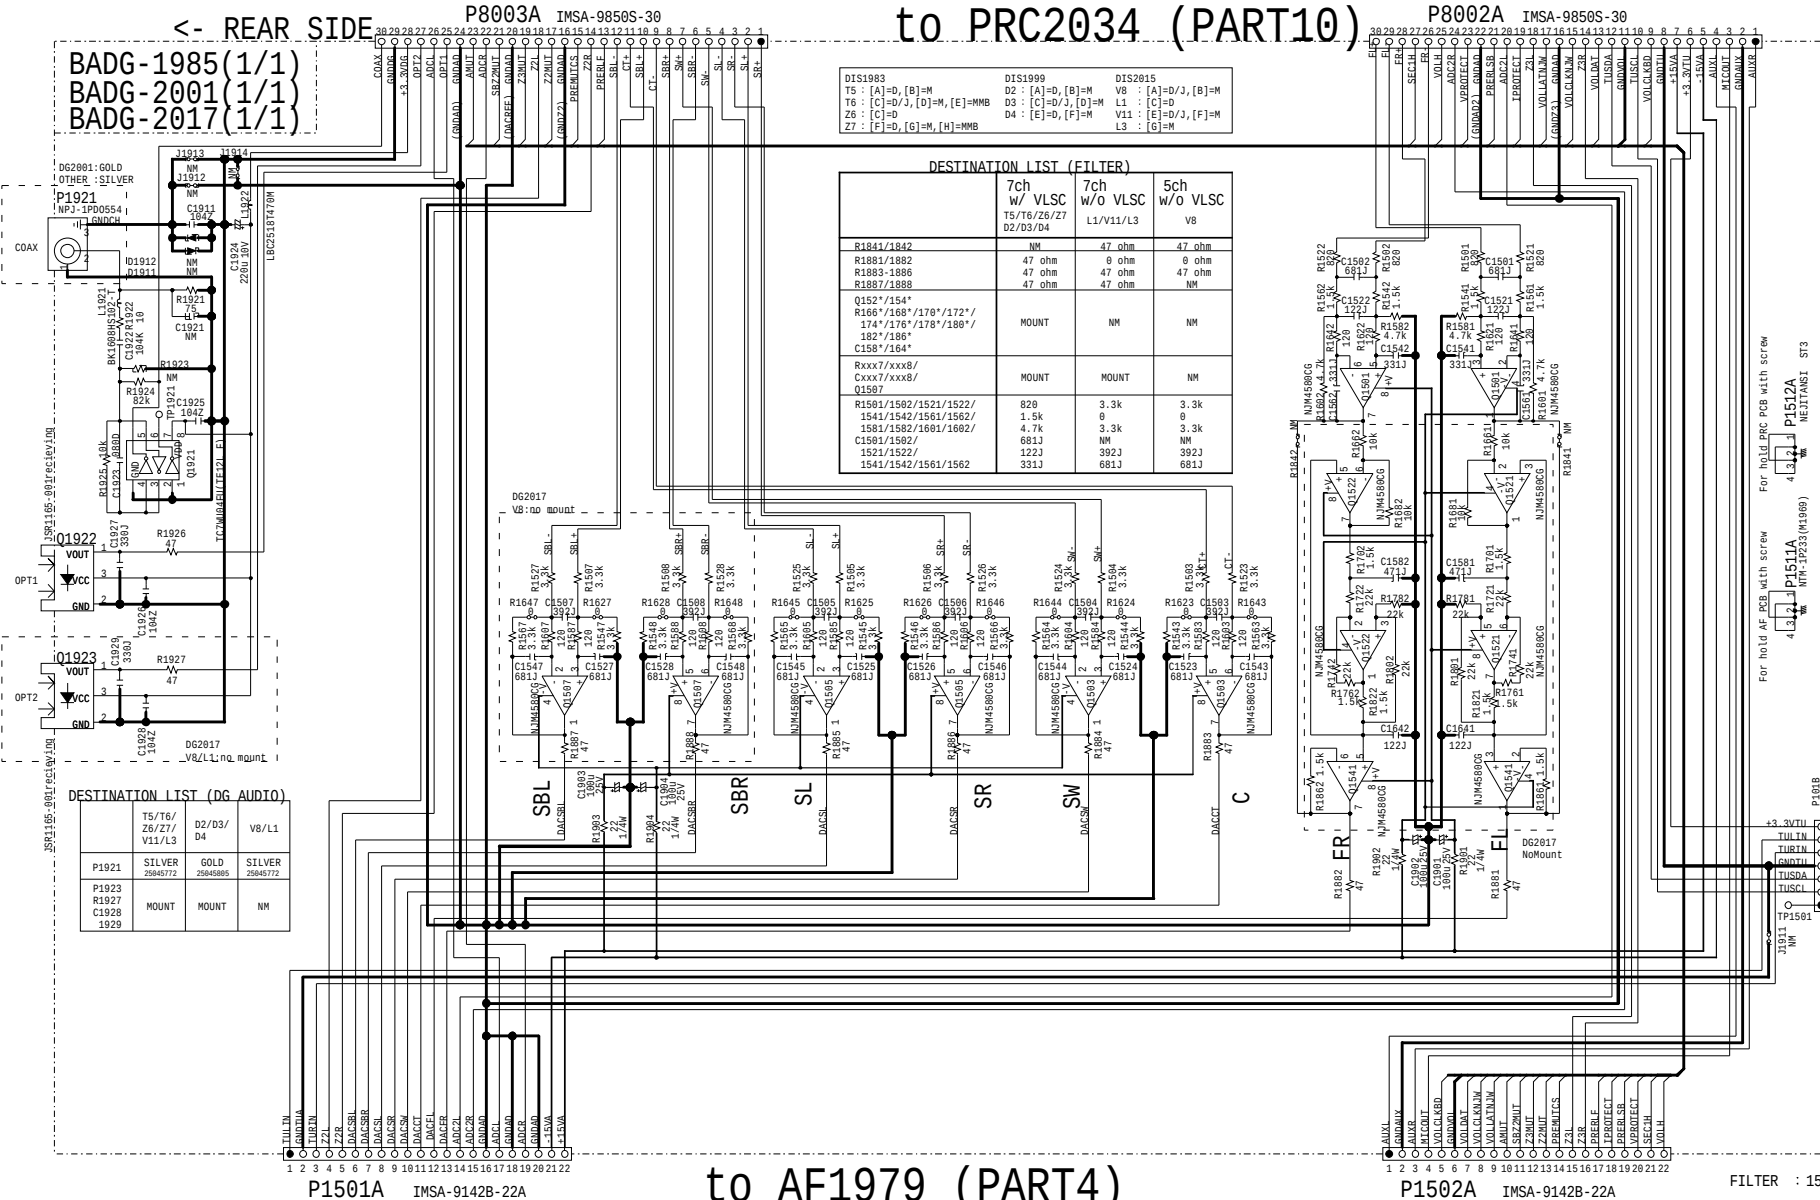

<- REAR SIDE

to AF1979 (PART4)

to RF1987/1995/2003/2012/2019  
(PART11)


FILTER : 1500 - 1999



MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695  
DRX-2/3/4/5,

SCHEMATIC DIAGRAM (PART-10) MPU SECTION

BAPRC-2034 (1/11)

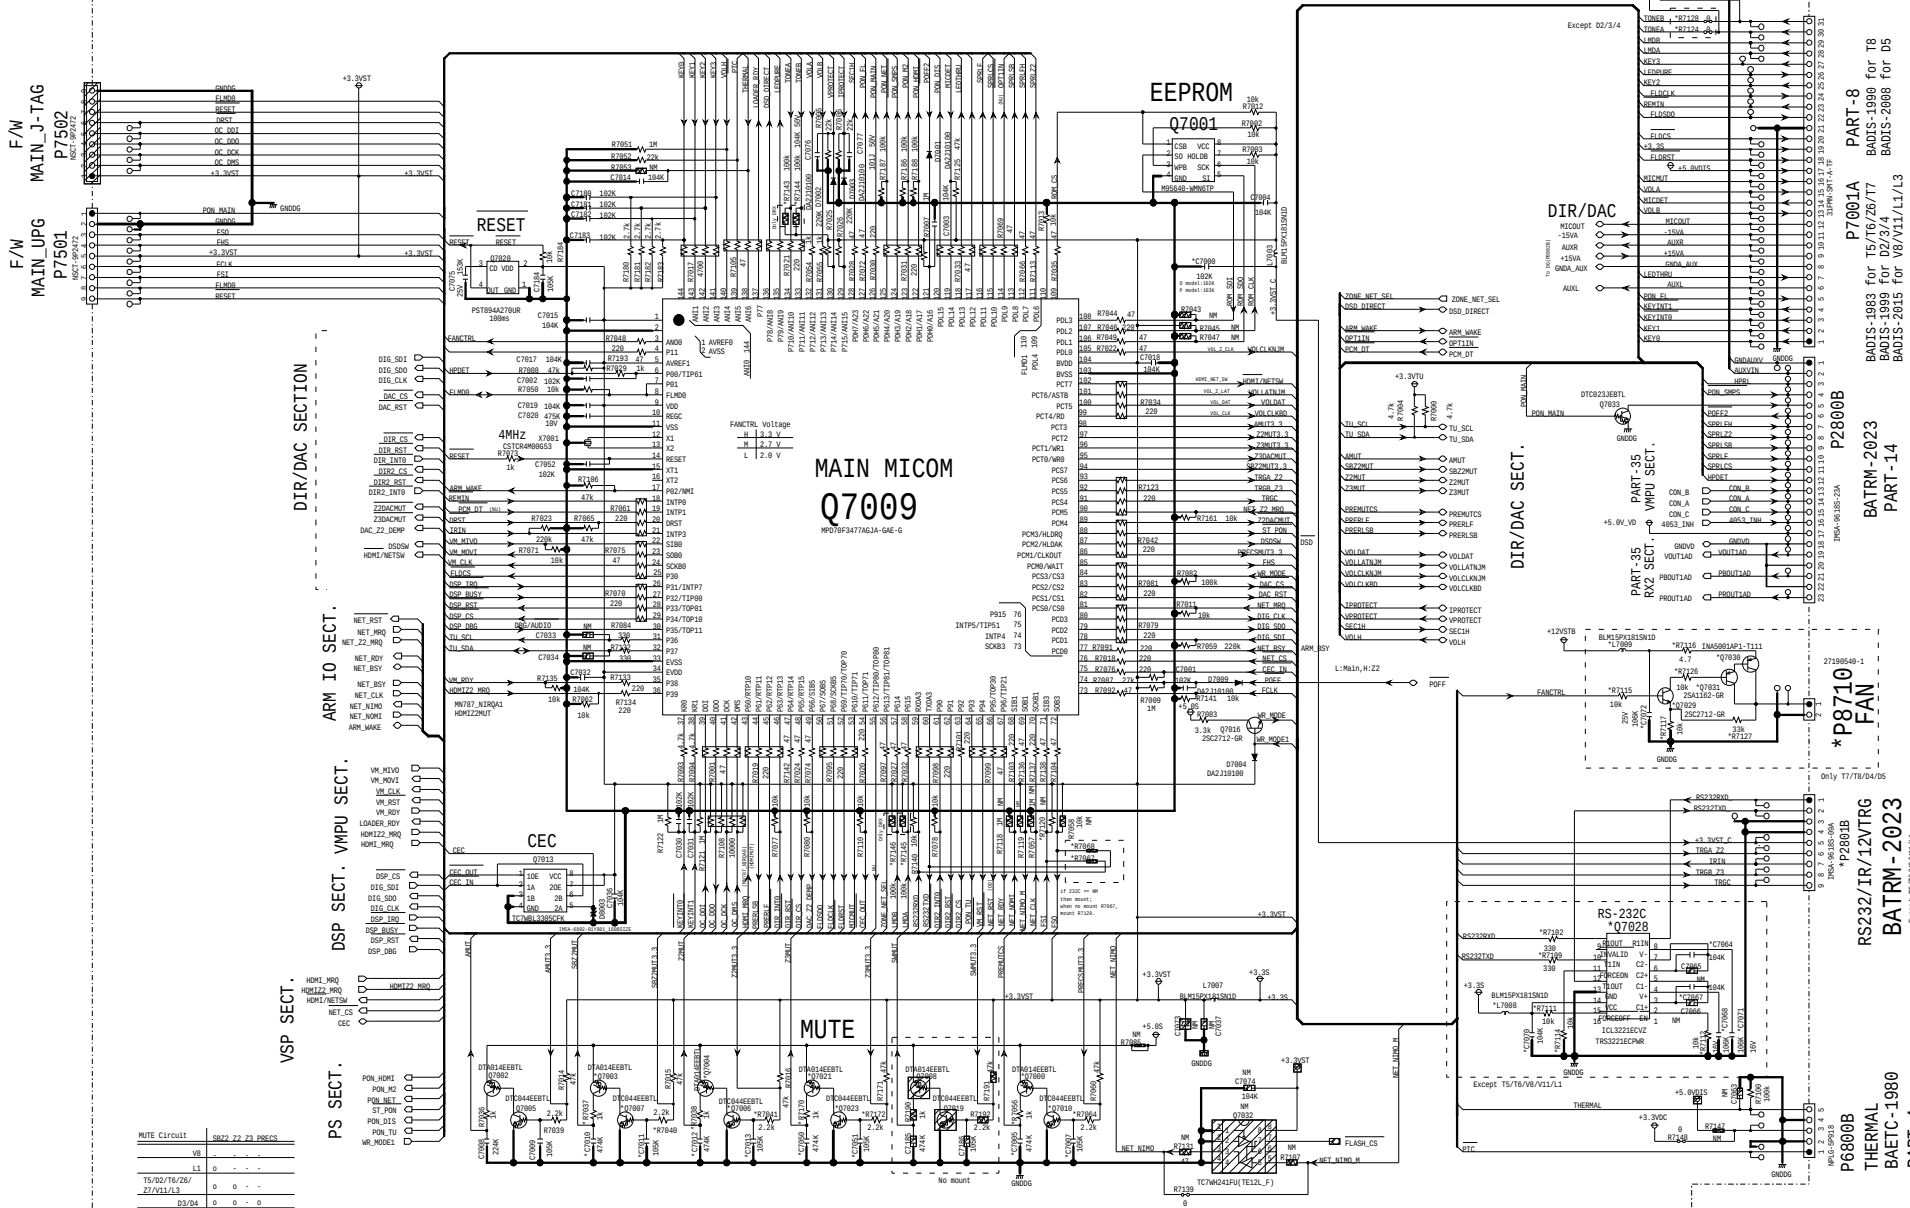


MUTE Circuit

| VR                      | S822 22 73 0R05 |
|-------------------------|-----------------|
| L1                      | 0 - - -         |
| T5/02/T6/26/27/01/11/13 | 0 - - -         |
| 03/04                   | 0 - - -         |
| 28/05                   | 0 0 0 0         |

MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695  
DRX-2/3/4/5

SCHEMATIC DIAGRAM (PART-10) VMPU SECTION

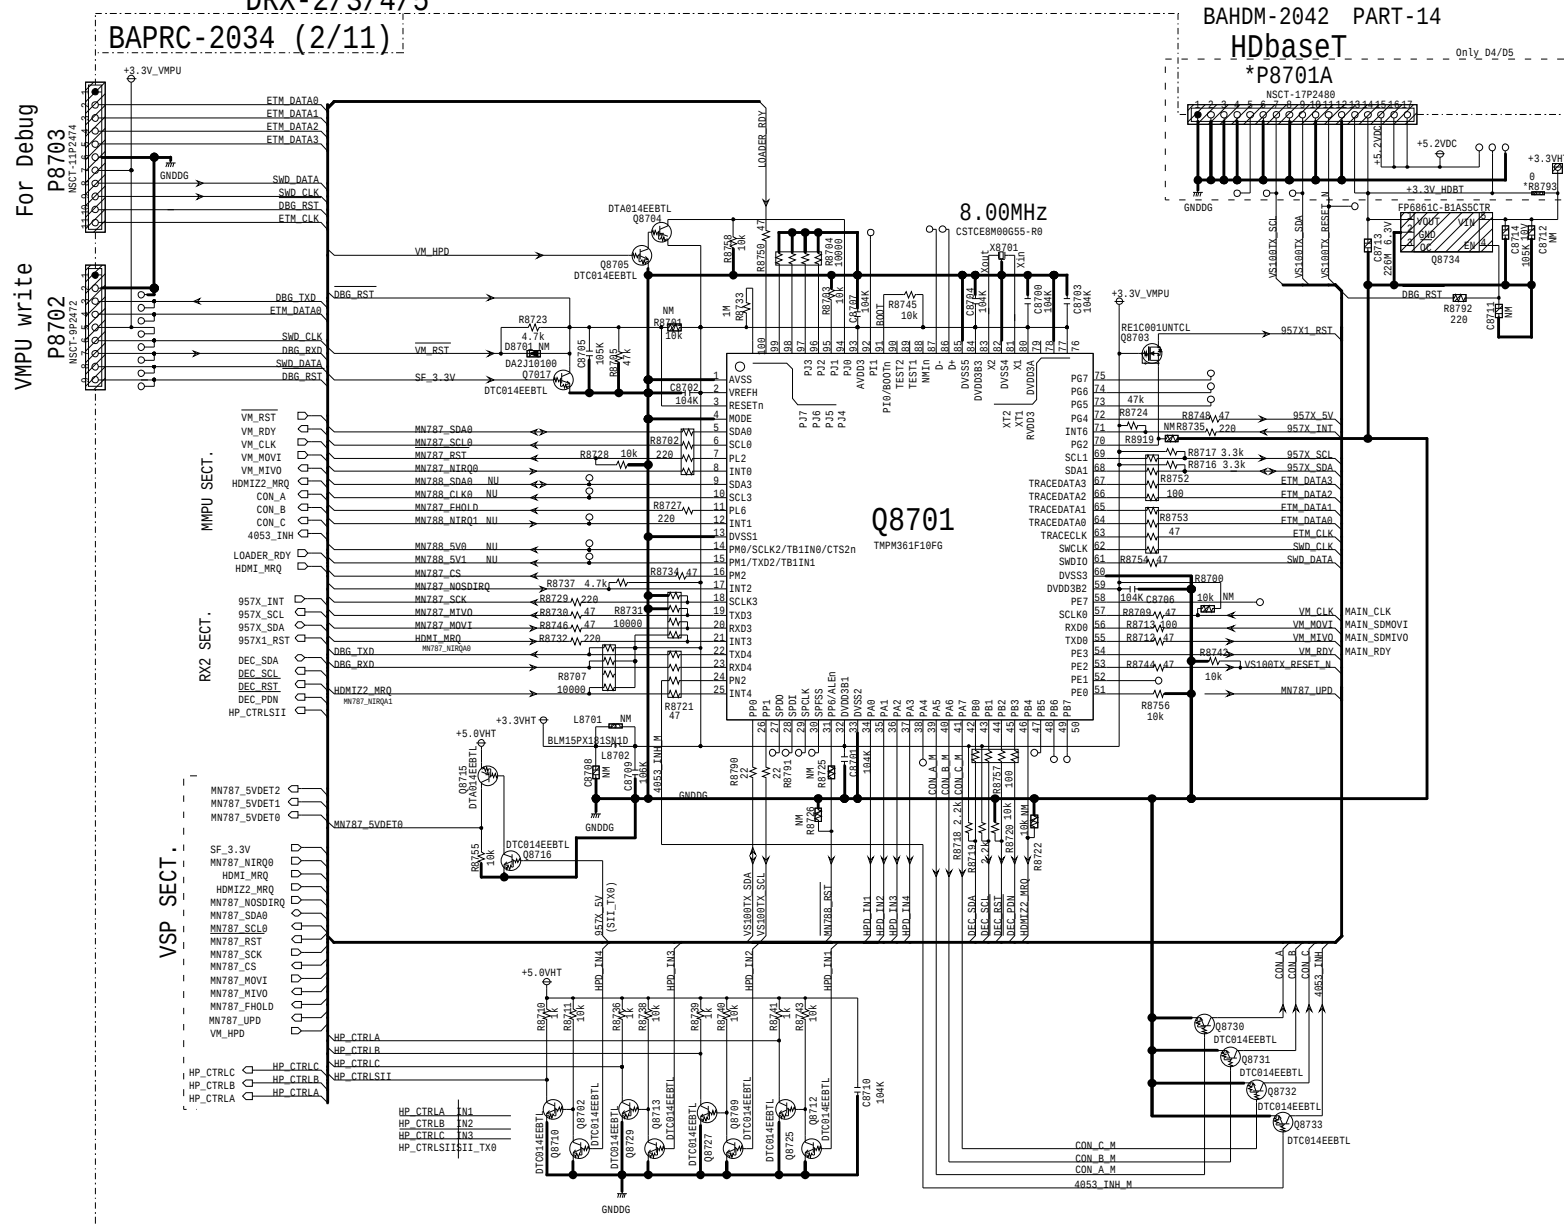




MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695  
DRX-2/3/4/5

SCHEMATIC DIAGRAM (PART-10) HDMI RX2 SECTION


BAPRC-2034 (4/11)

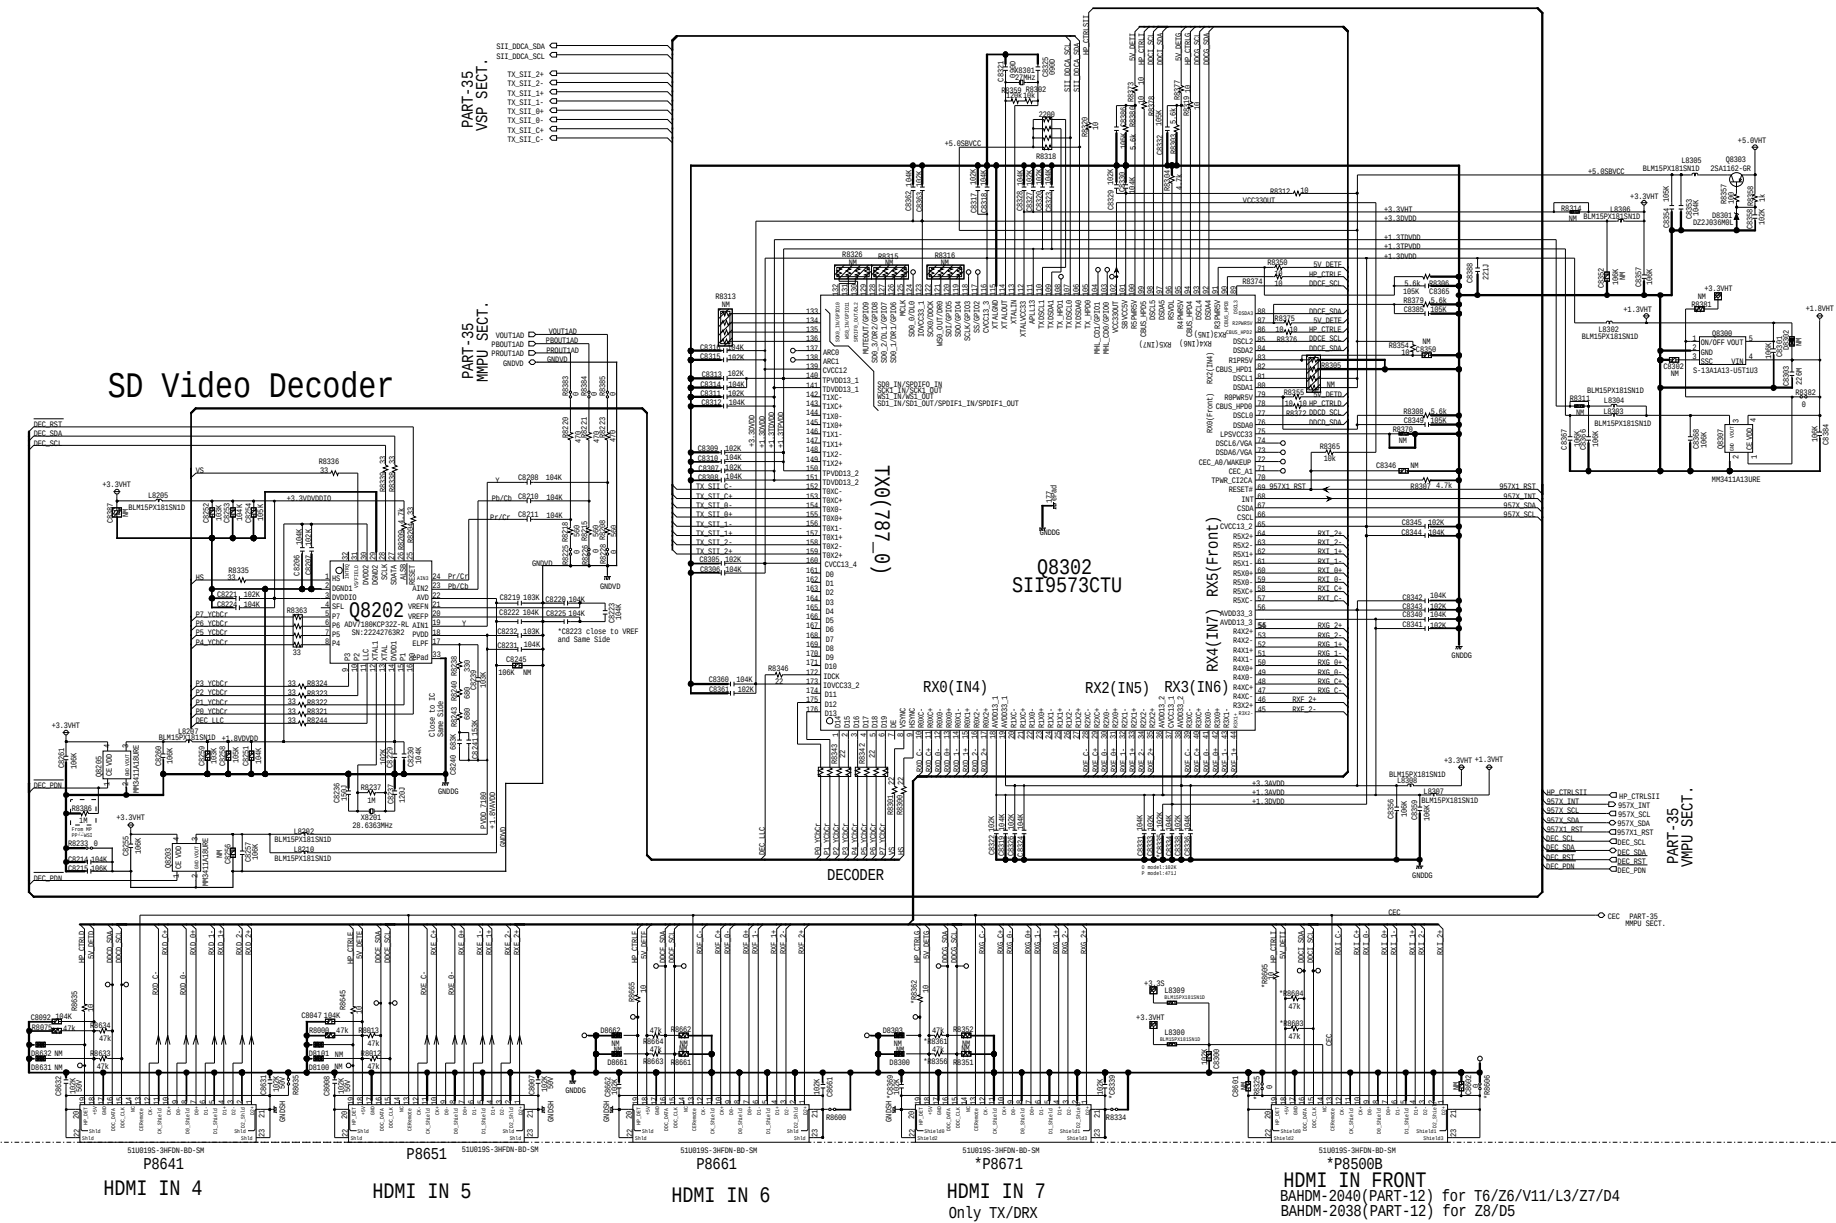



MODEL NO. TX-NR555/656/757, TX-RZ610/710/810, HT-R695  
DRX-2/3/4/5

SCHEMATIC DIAGRAM (PART-10) DIR/DAC SECTION

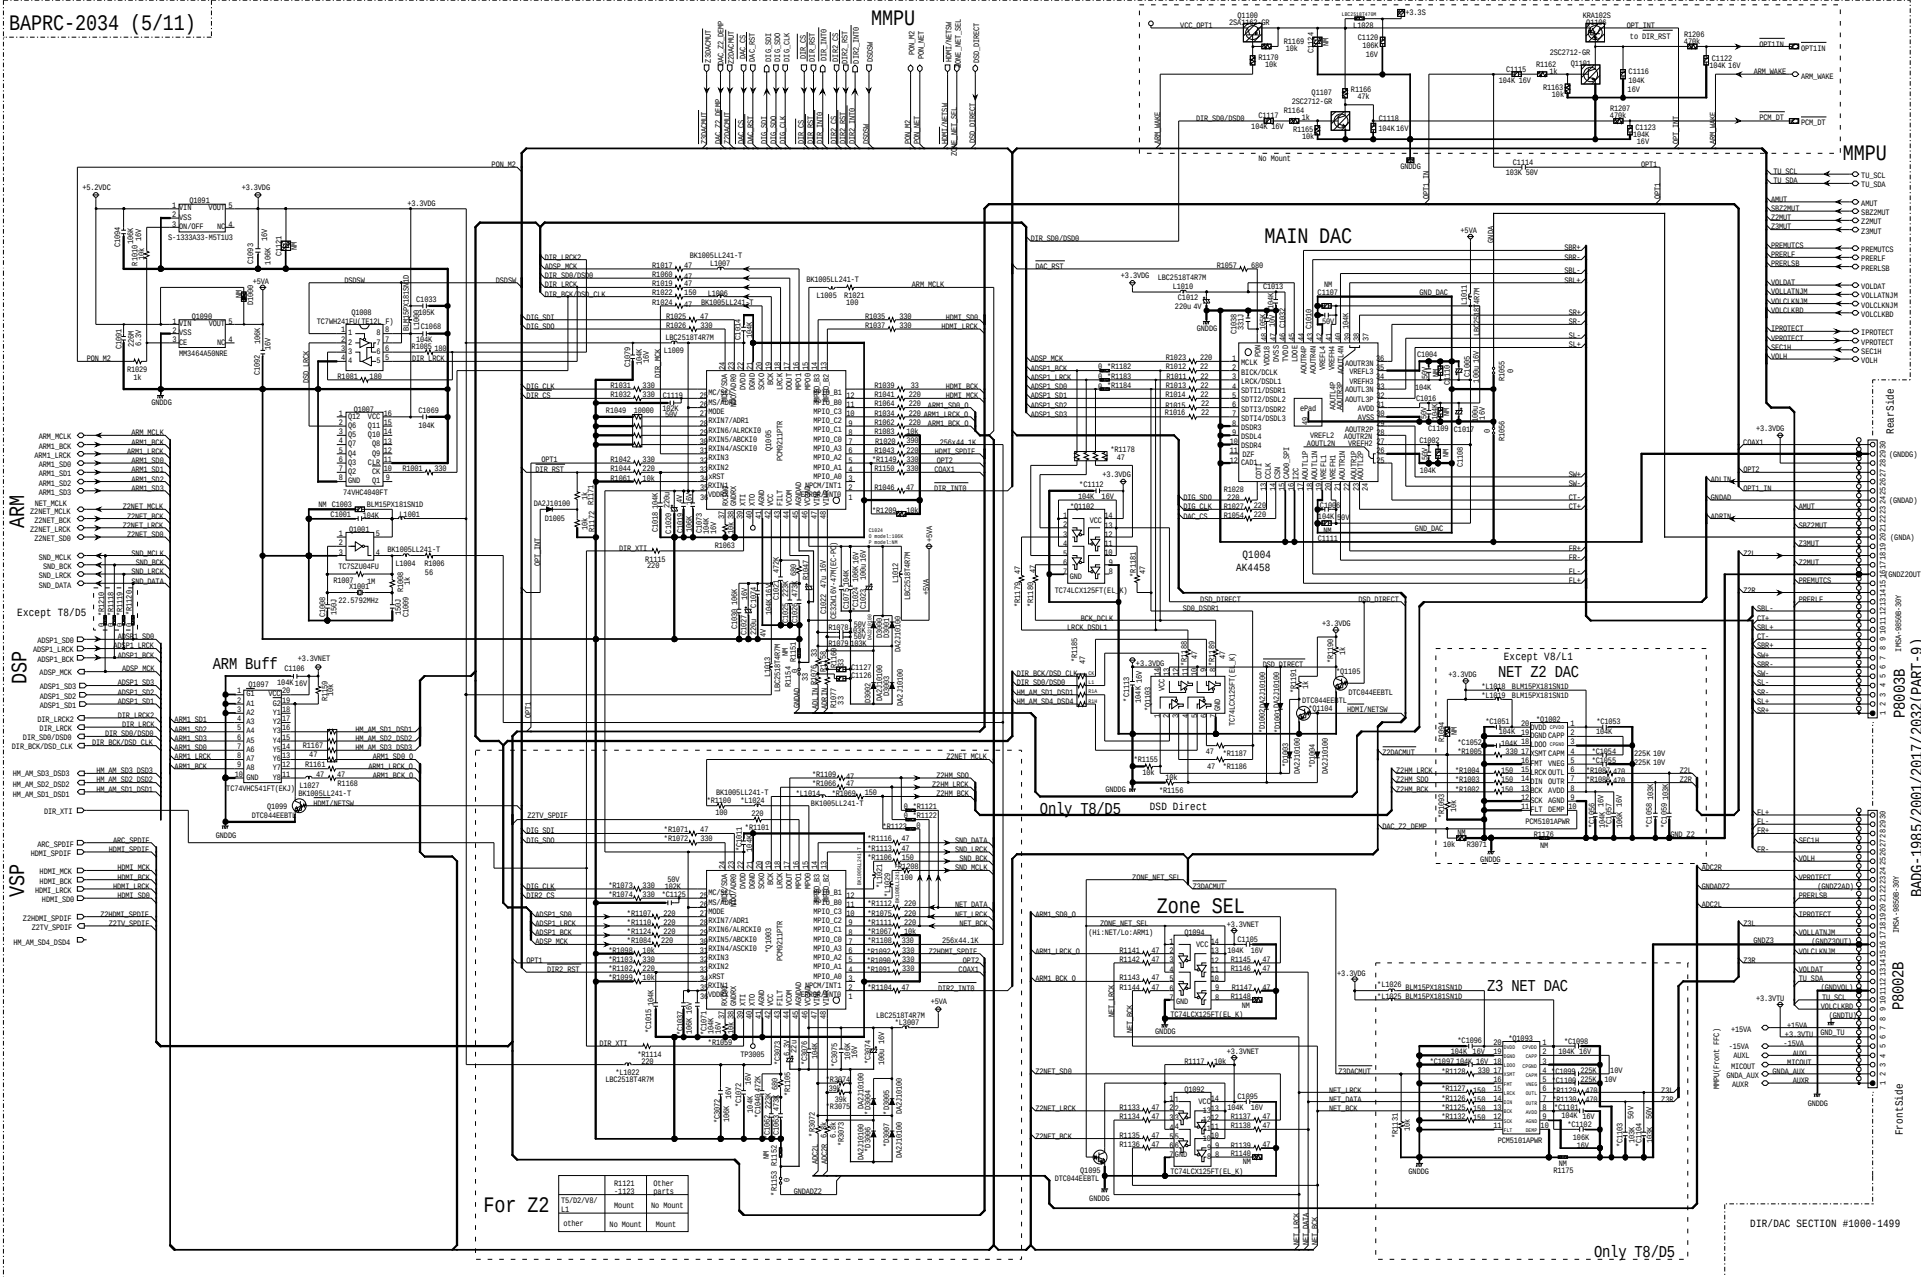











### SCHEMATIC DIAGRAM (PART-10) POWER SECTION


[illegible]

D8900-D8902: To prevent reverse voltage from HDMI TX.

MODEL NO.TX-NR555/656/757, TX-RZ610/710/810, HT-R695, DRX-2/3/4/5

SCHEMATIC DIAGRAM (PART-11) TUNER SECTION

BARF-1987/1995/2003/2012/2019

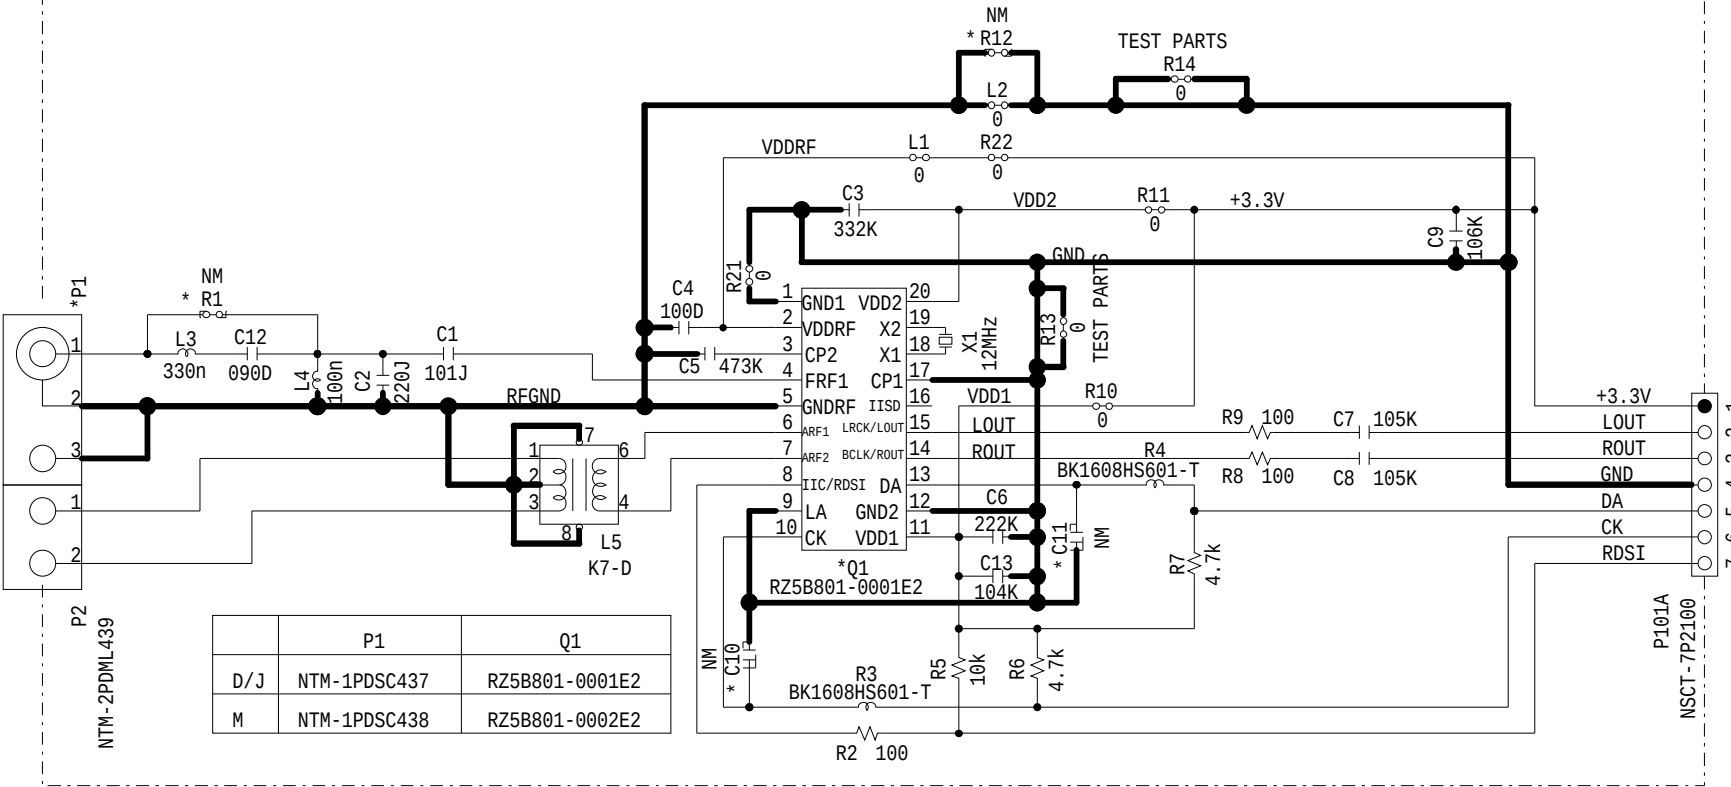


|     | P1           | Q1             |
|-----|--------------|----------------|
| D/J | NTM-1PDSC437 | RZ5B801-0001E2 |
| M   | NTM-1PDSC438 | RZ5B801-0002E2 |

TO BADG-1985/2001/2017/2032(PART-9)




MODEL NO. TX-NR656/757, TX-RZ610/710, HT-R695, DRX-3/4  
SCHEMATIC DIAGRAM (PART-12)

FRONT HDMI SECTION

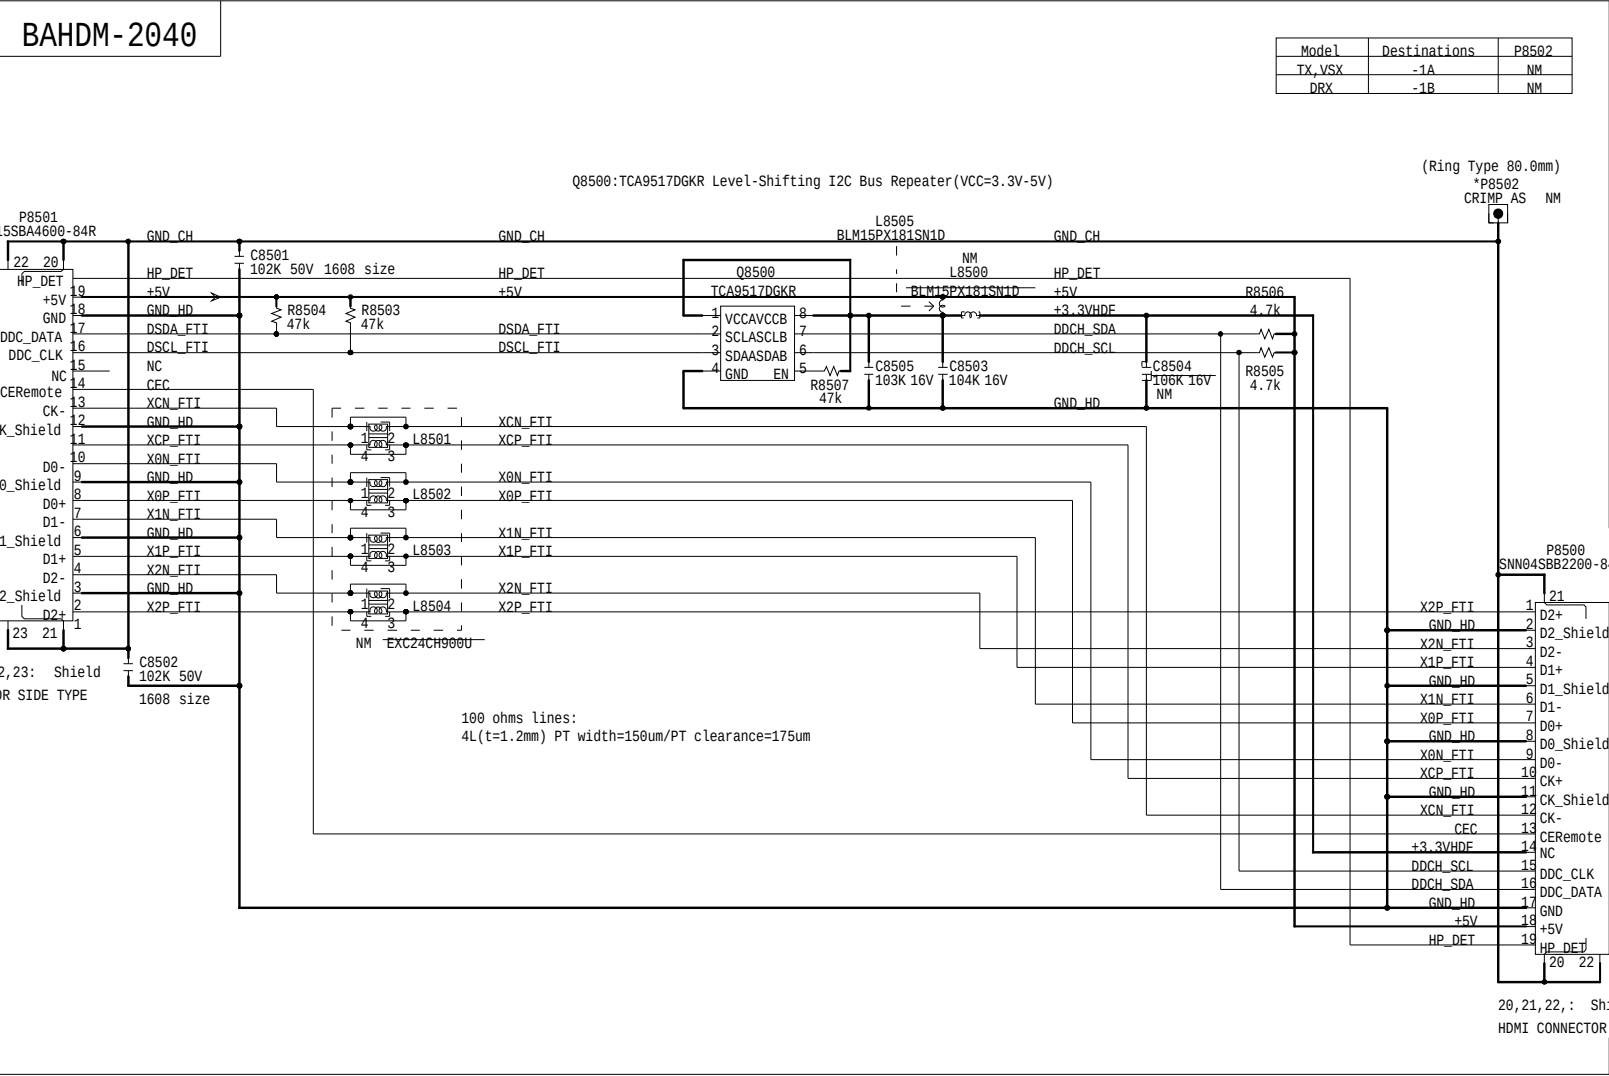

MODEL NO. TX-RZ810,DRX-5 SCHEMATIC DIAGRAM (PART-12)

FRONT HDMI SECTION

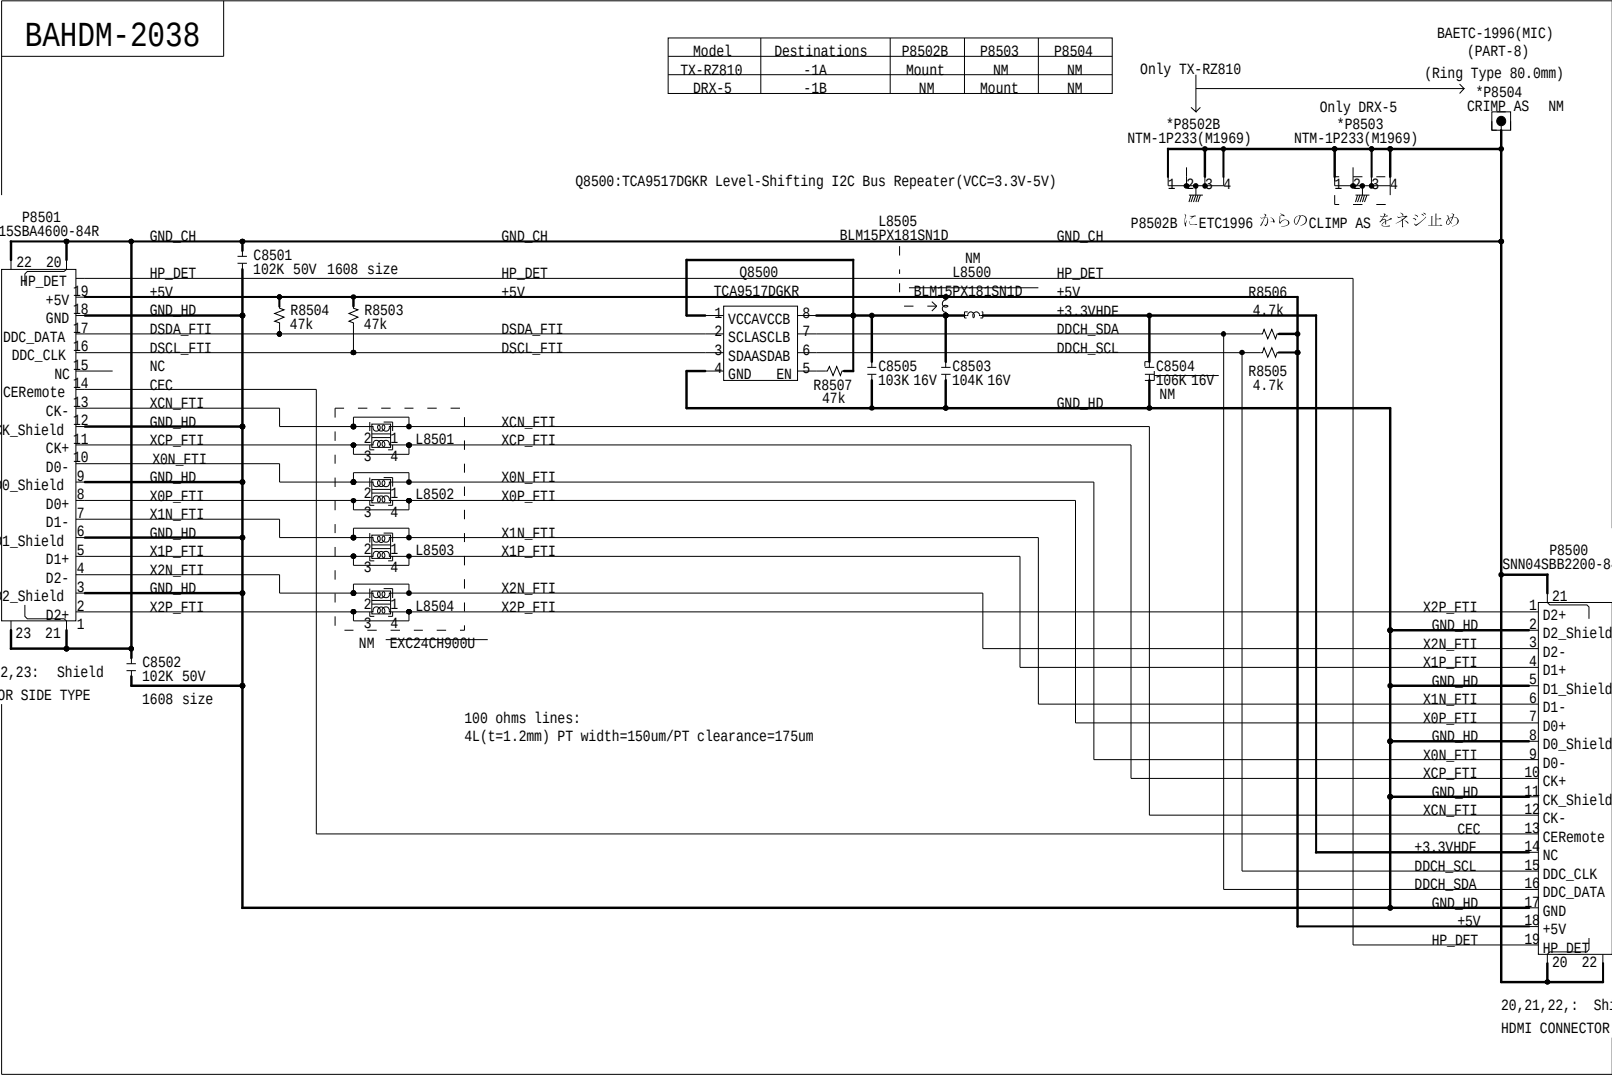

BAPRC-2034  
(Part-10 SHEET 39/51)




## HDBaseT section

## Schematic Diagram


### MODEL NO. DRX-4/5 SCHEMATIC DIAGRAM (PART-13)

BAHDM-2042(2/2)


## HDBaseT HDMI IN

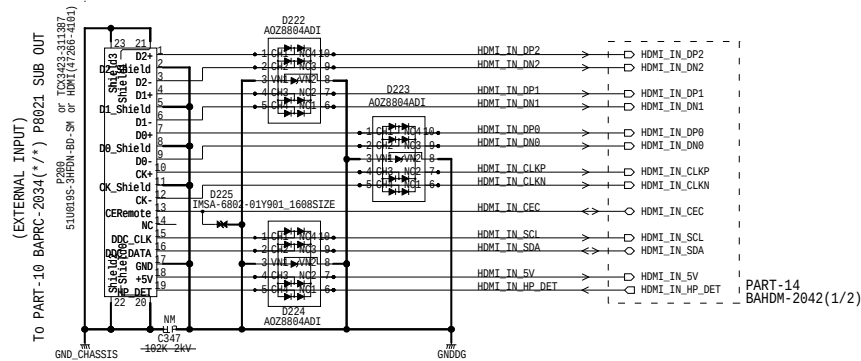

## HDBaseT GPIO

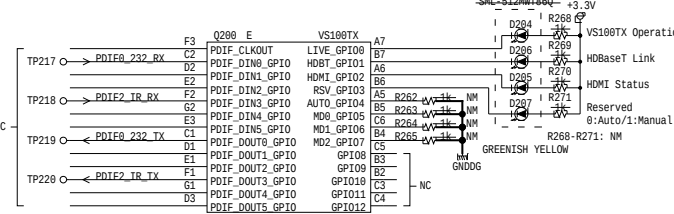


## POWER SUPPLY

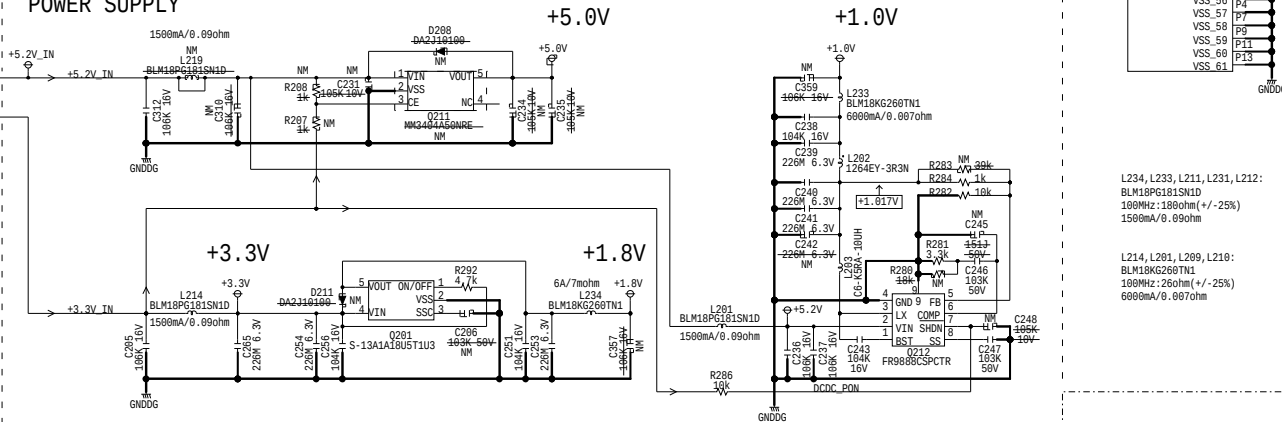

## HDBaseT SECTION

## HDBaseT POWER

※チップタンタルCはニチコン品のみの使用とする

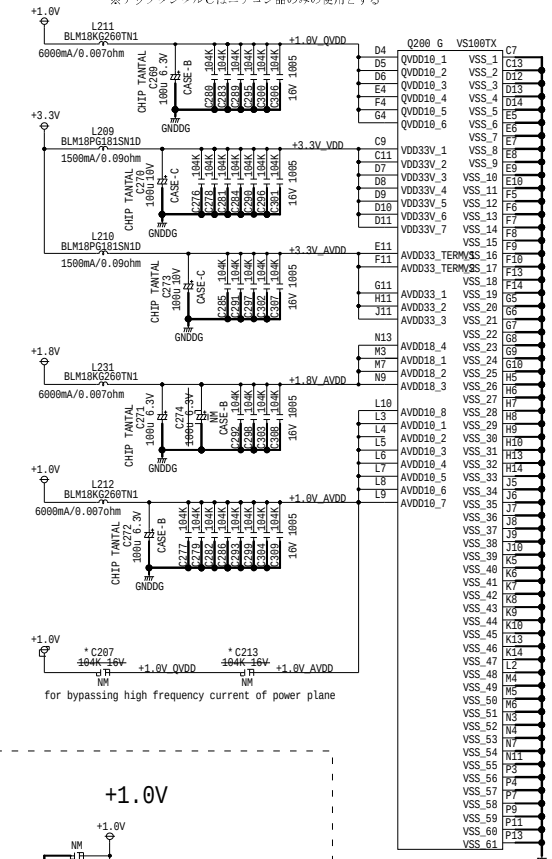



L234, L233, L211, L231, L212:  
BLM18PG181SN1D  
100MHz:180ohm(+/-25%)  
1500mA/0.09ohm

L214, L201, L209, L210:  
BLM18KG260TN1  
100MHz:26ohm(+/-25%)  
6000mA/0.007ohm

静電気対策GND強化用コネクタ

# Overview



(Shape or q'ty of the terminal, knob and button: Please see panel page.)

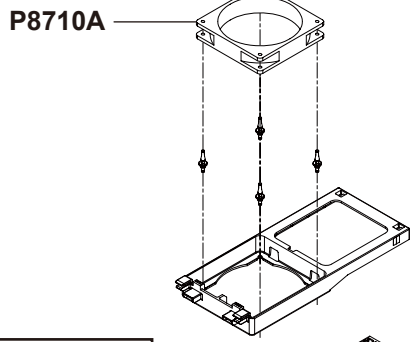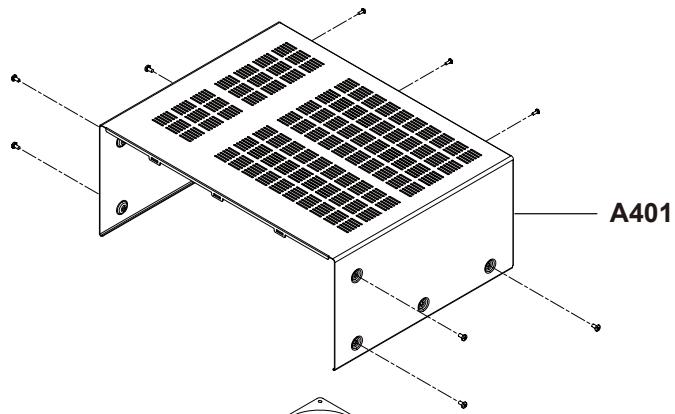

## P3654A : WiFi/Bluetooth Module

\* This module transmitter does not have RF shielding, therefore it will be equipped only the tested Audio system mentioning this document.  
Additional test will be required if it will be equipped to the other devices

Refer to Front Section

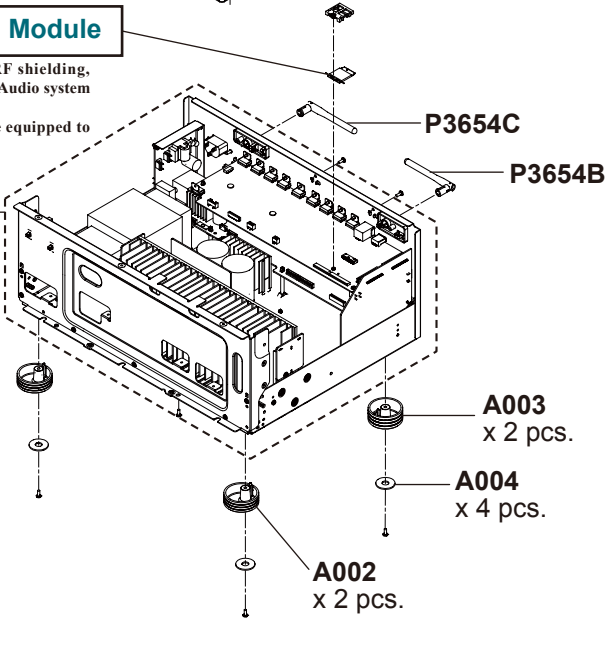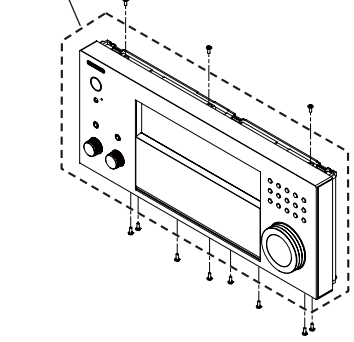

# Exploded View

## \* WiFi & Bluetooth Module has already been certificated by FCC and IC.

Information to the user.  
Indicate "Contains FCC ID: TX2-RTL8821AE", "Contains IC: 6317A-RTL8821AE" and following information to the host device installed.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Describe the following sentence to a user's manual of the host device.

[For FCC]  
FCC CAUTION  
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

[For IC]  
CAN ICES-3 B/NMB-3 B

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts d'licence.  
L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).

(Shape or q'ty of the terminal, knob and button: Please see panel page.)

## TX-RZ810

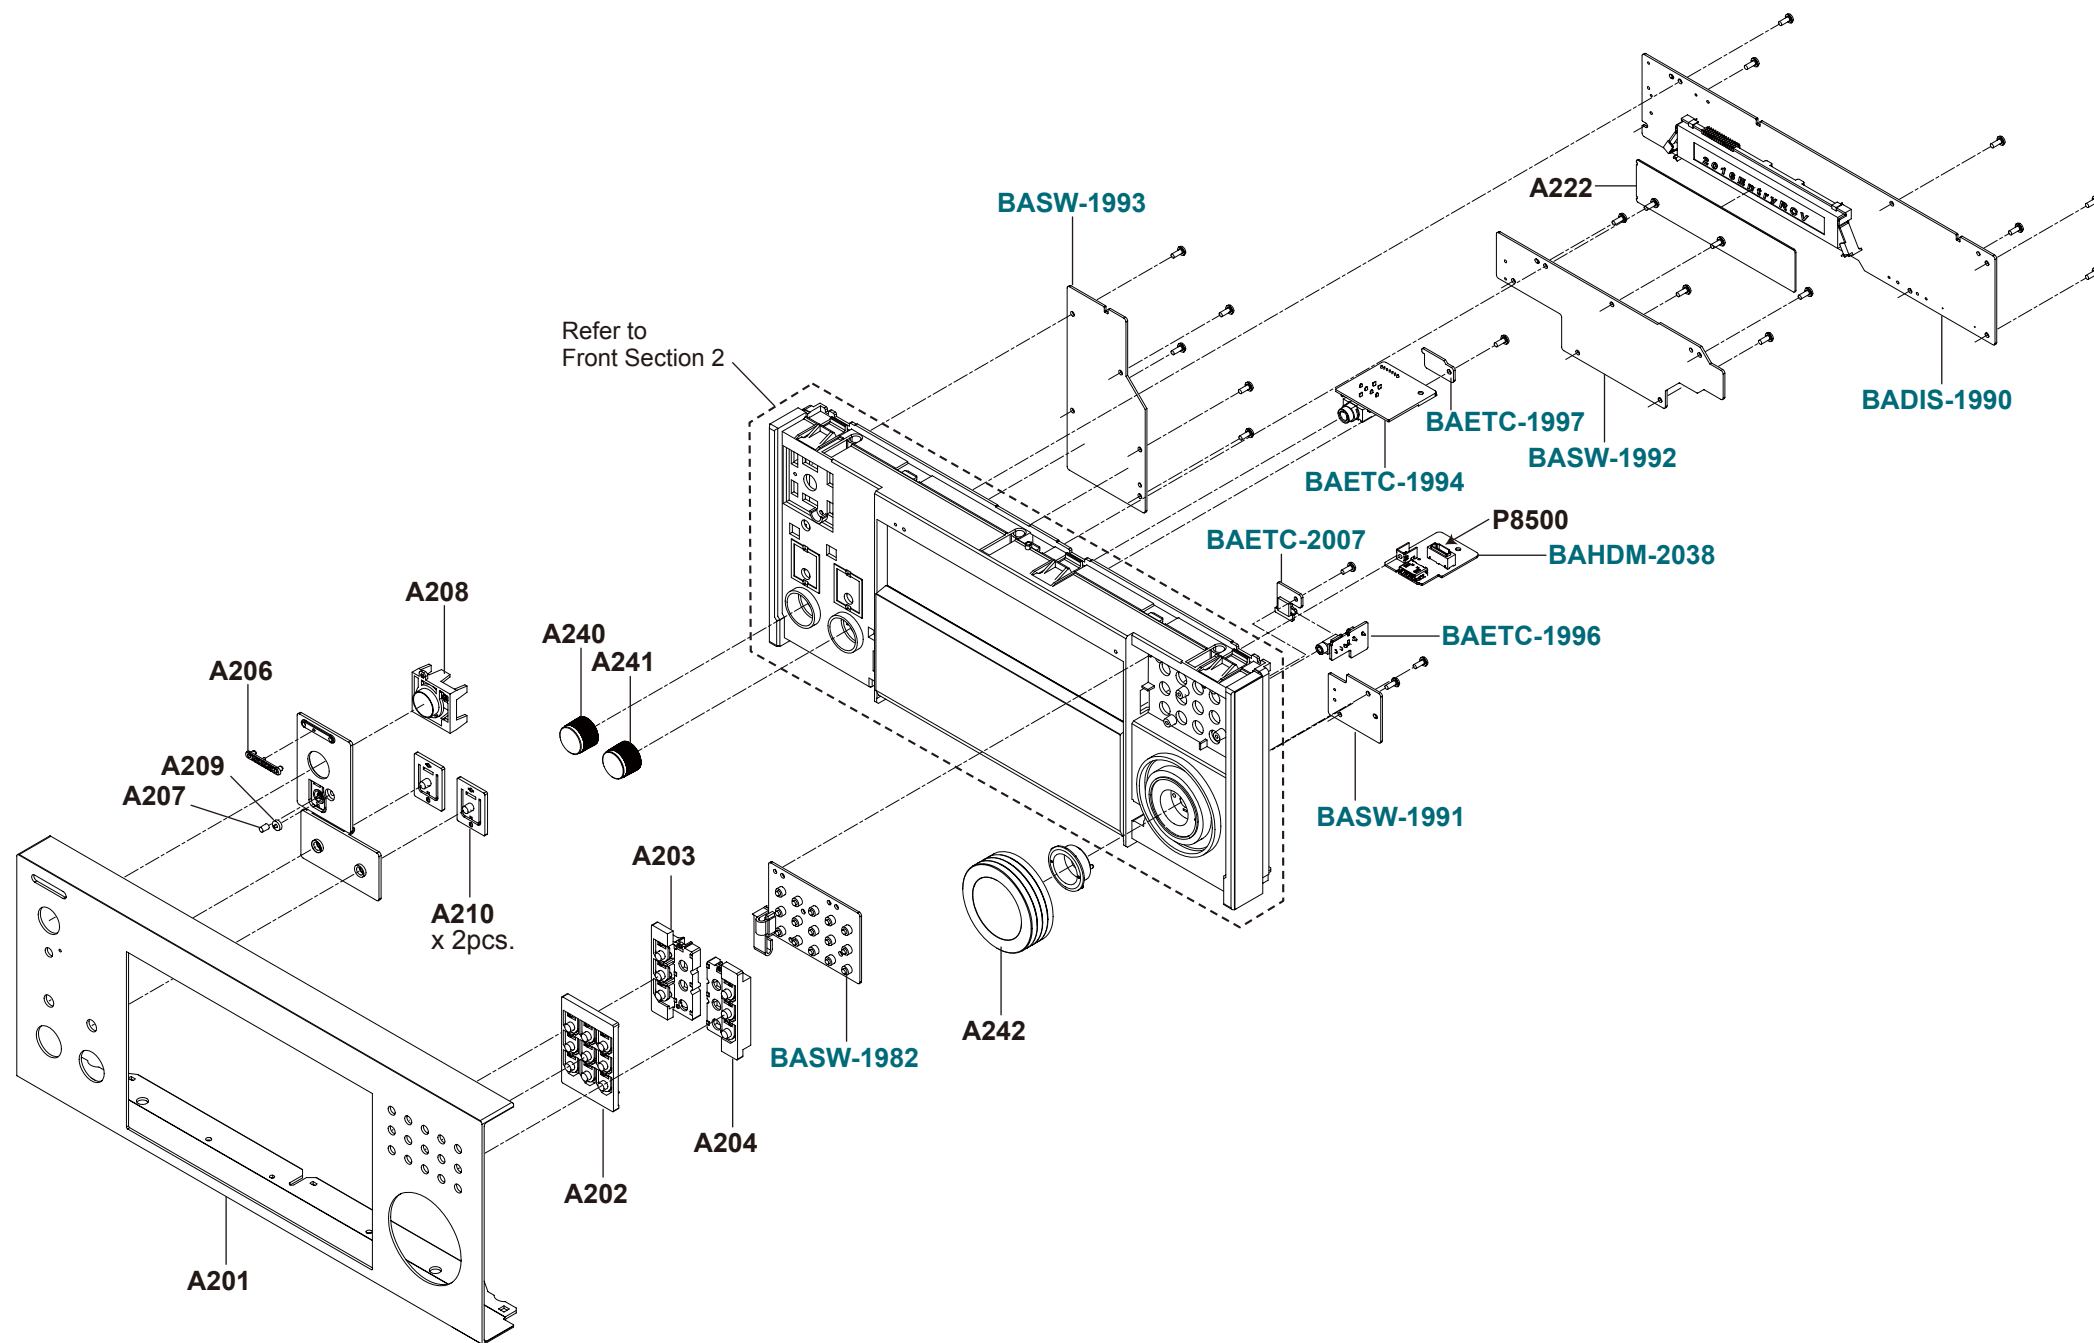


1 2 3 4 5 6

**Front Section 2**


(Shape or q'ty of the terminal, knob and button: Please see panel page.)

**Exploded View**

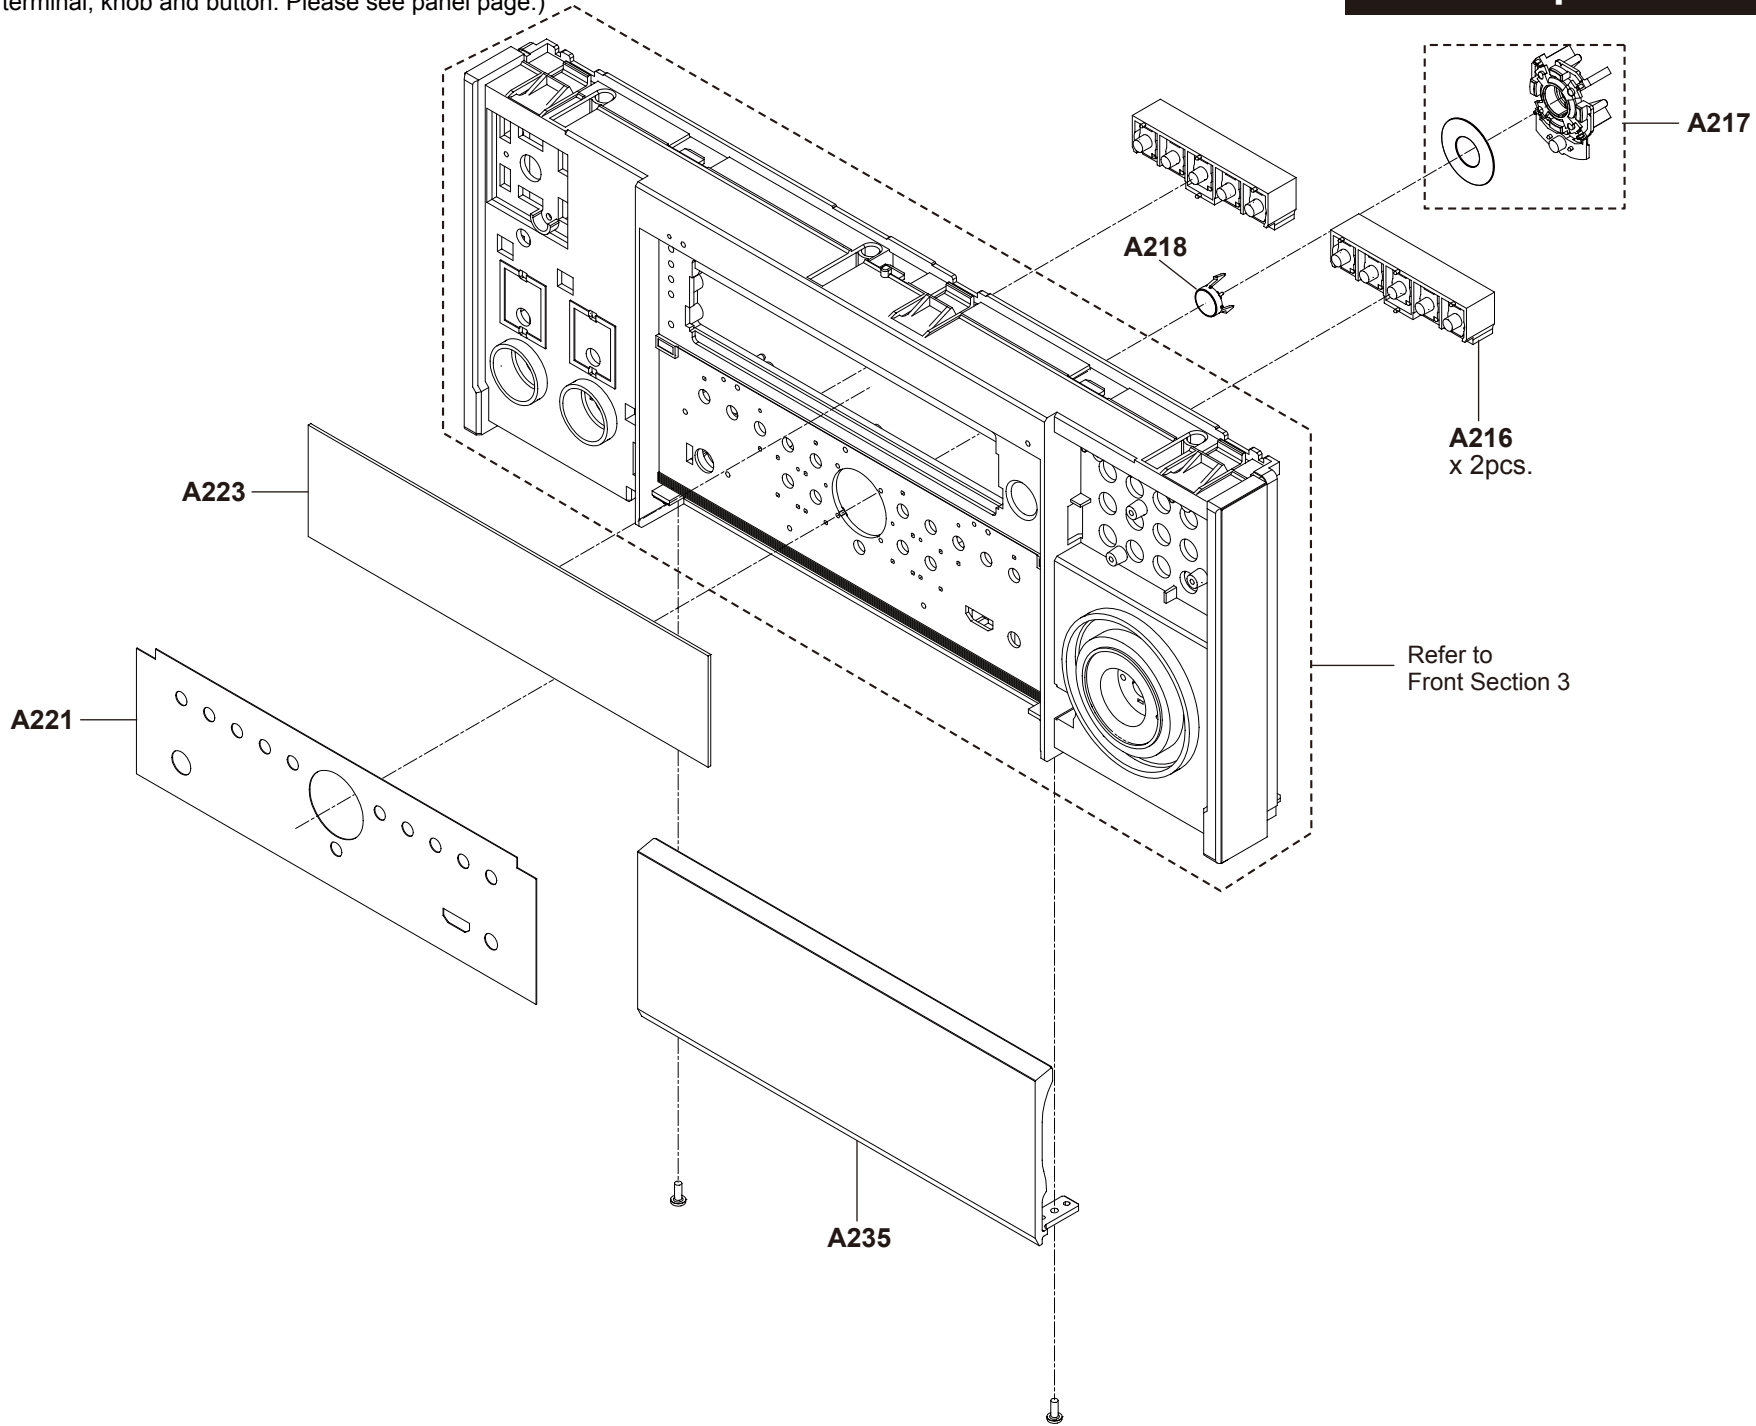

(Shape or q'ty of the terminal, knob and button: Please see panel page.)

TX-RZ810

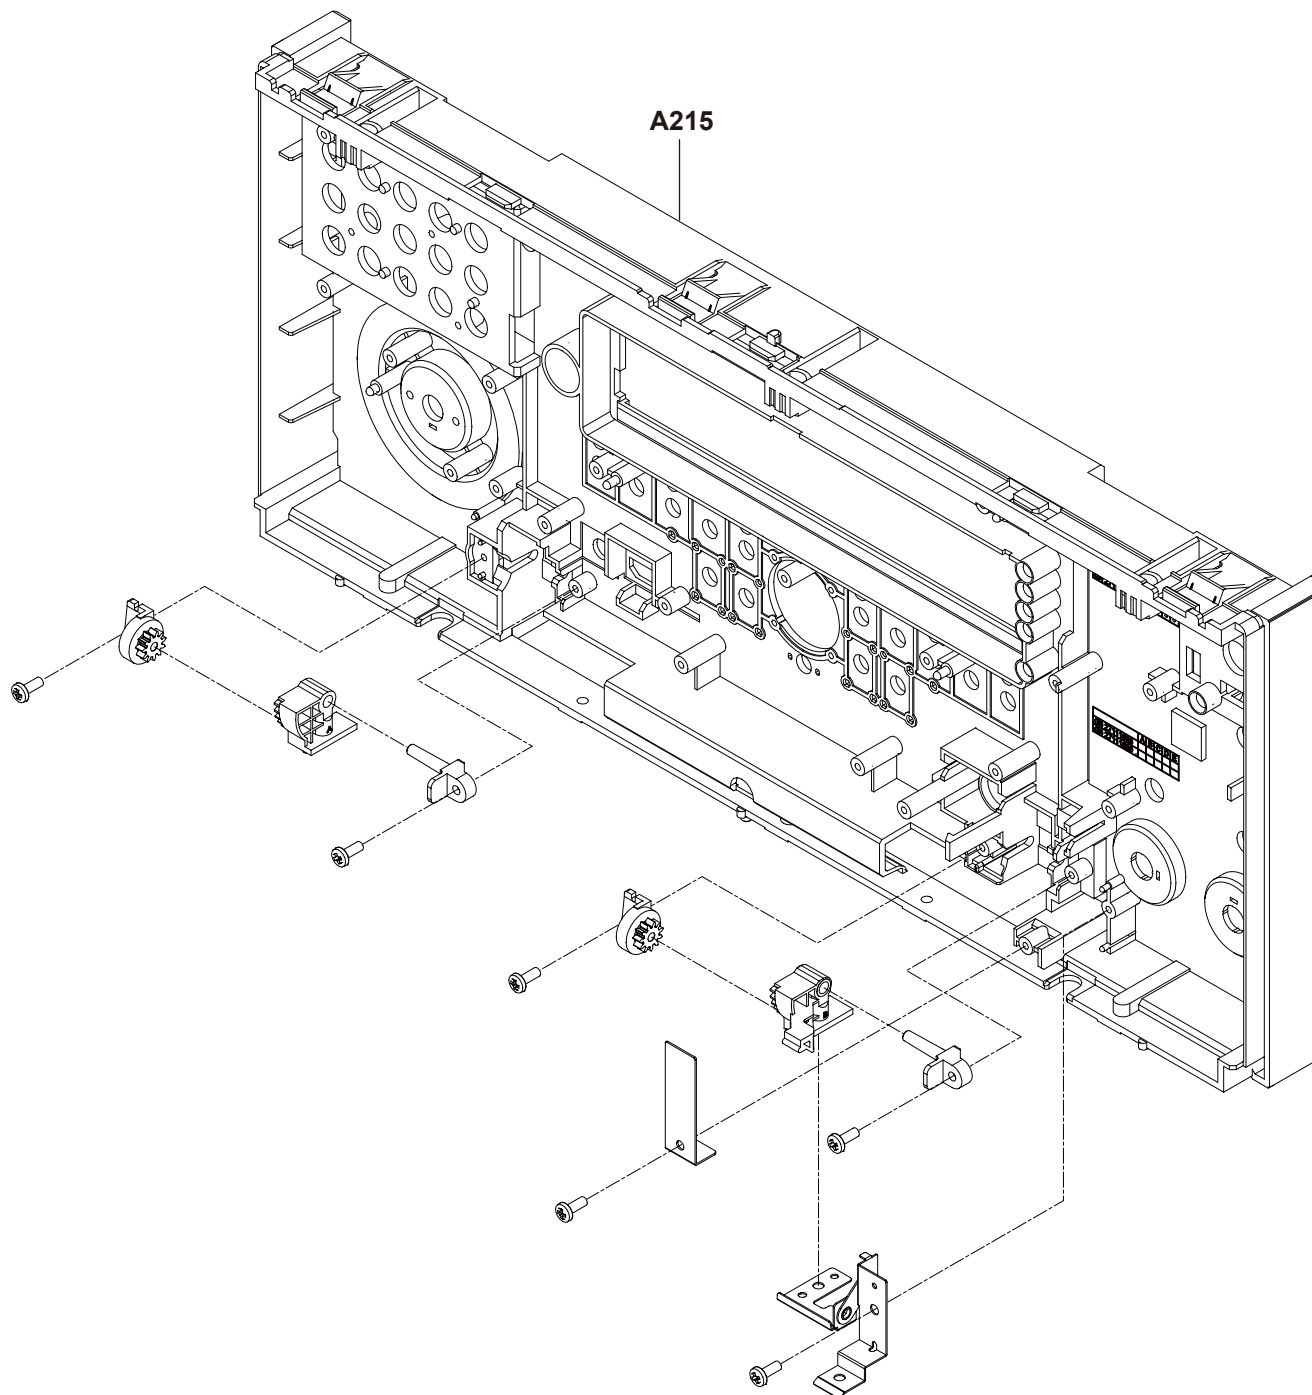




Rear Section 1

(Shape or q'ty of the terminal, knob and button: Please see panel page.)


Exploded View

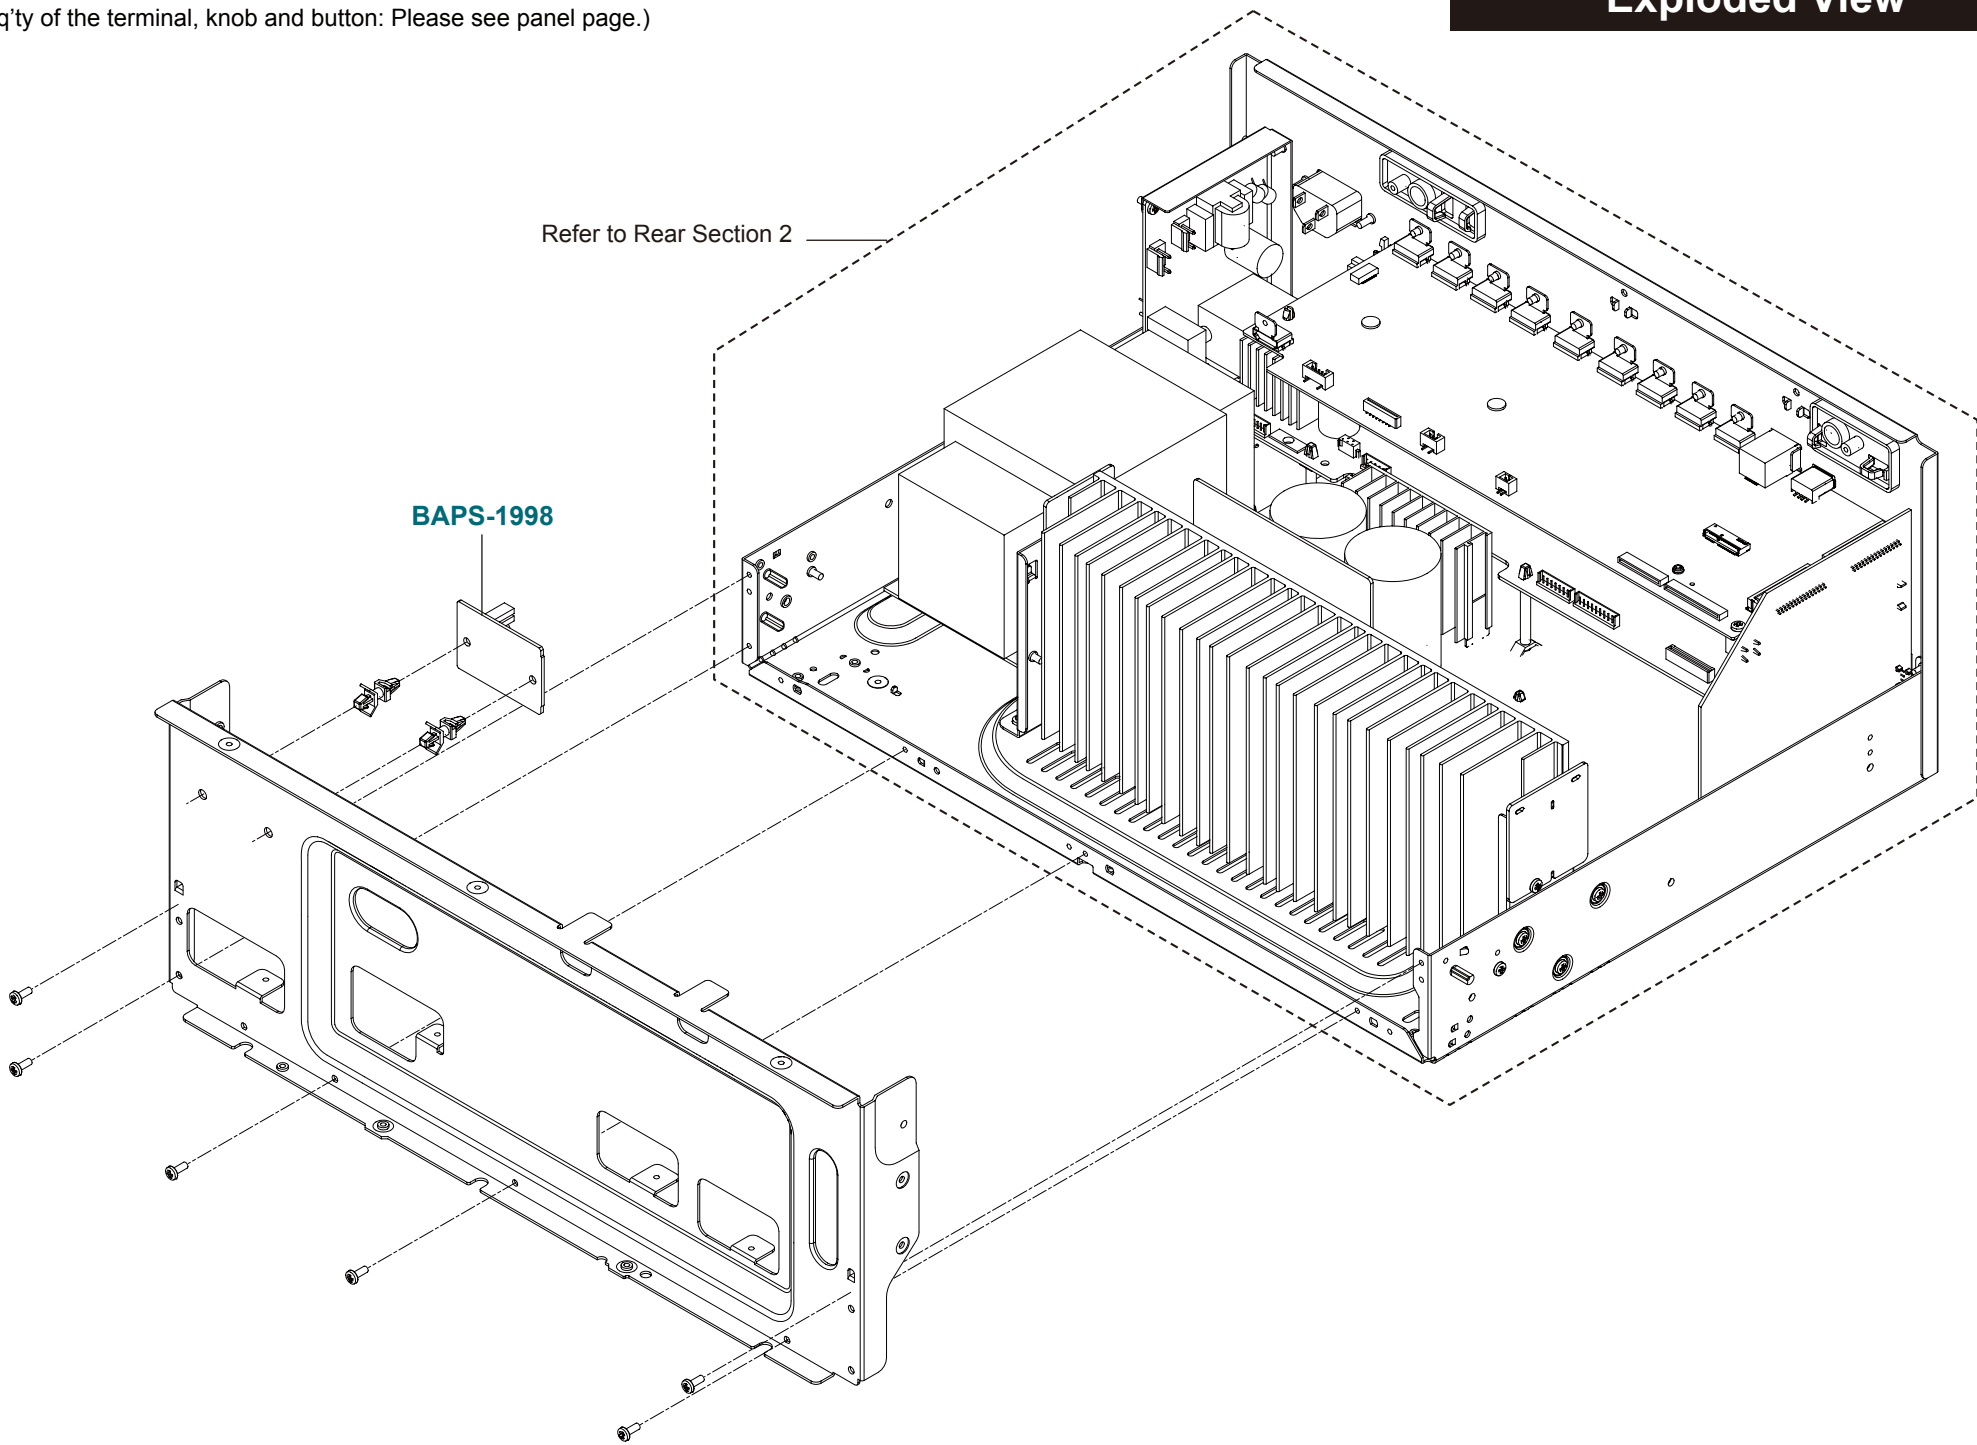

Rear Section 2

(Shape or q'ty of the terminal, knob and button: Please see panel page.)



Exploded View

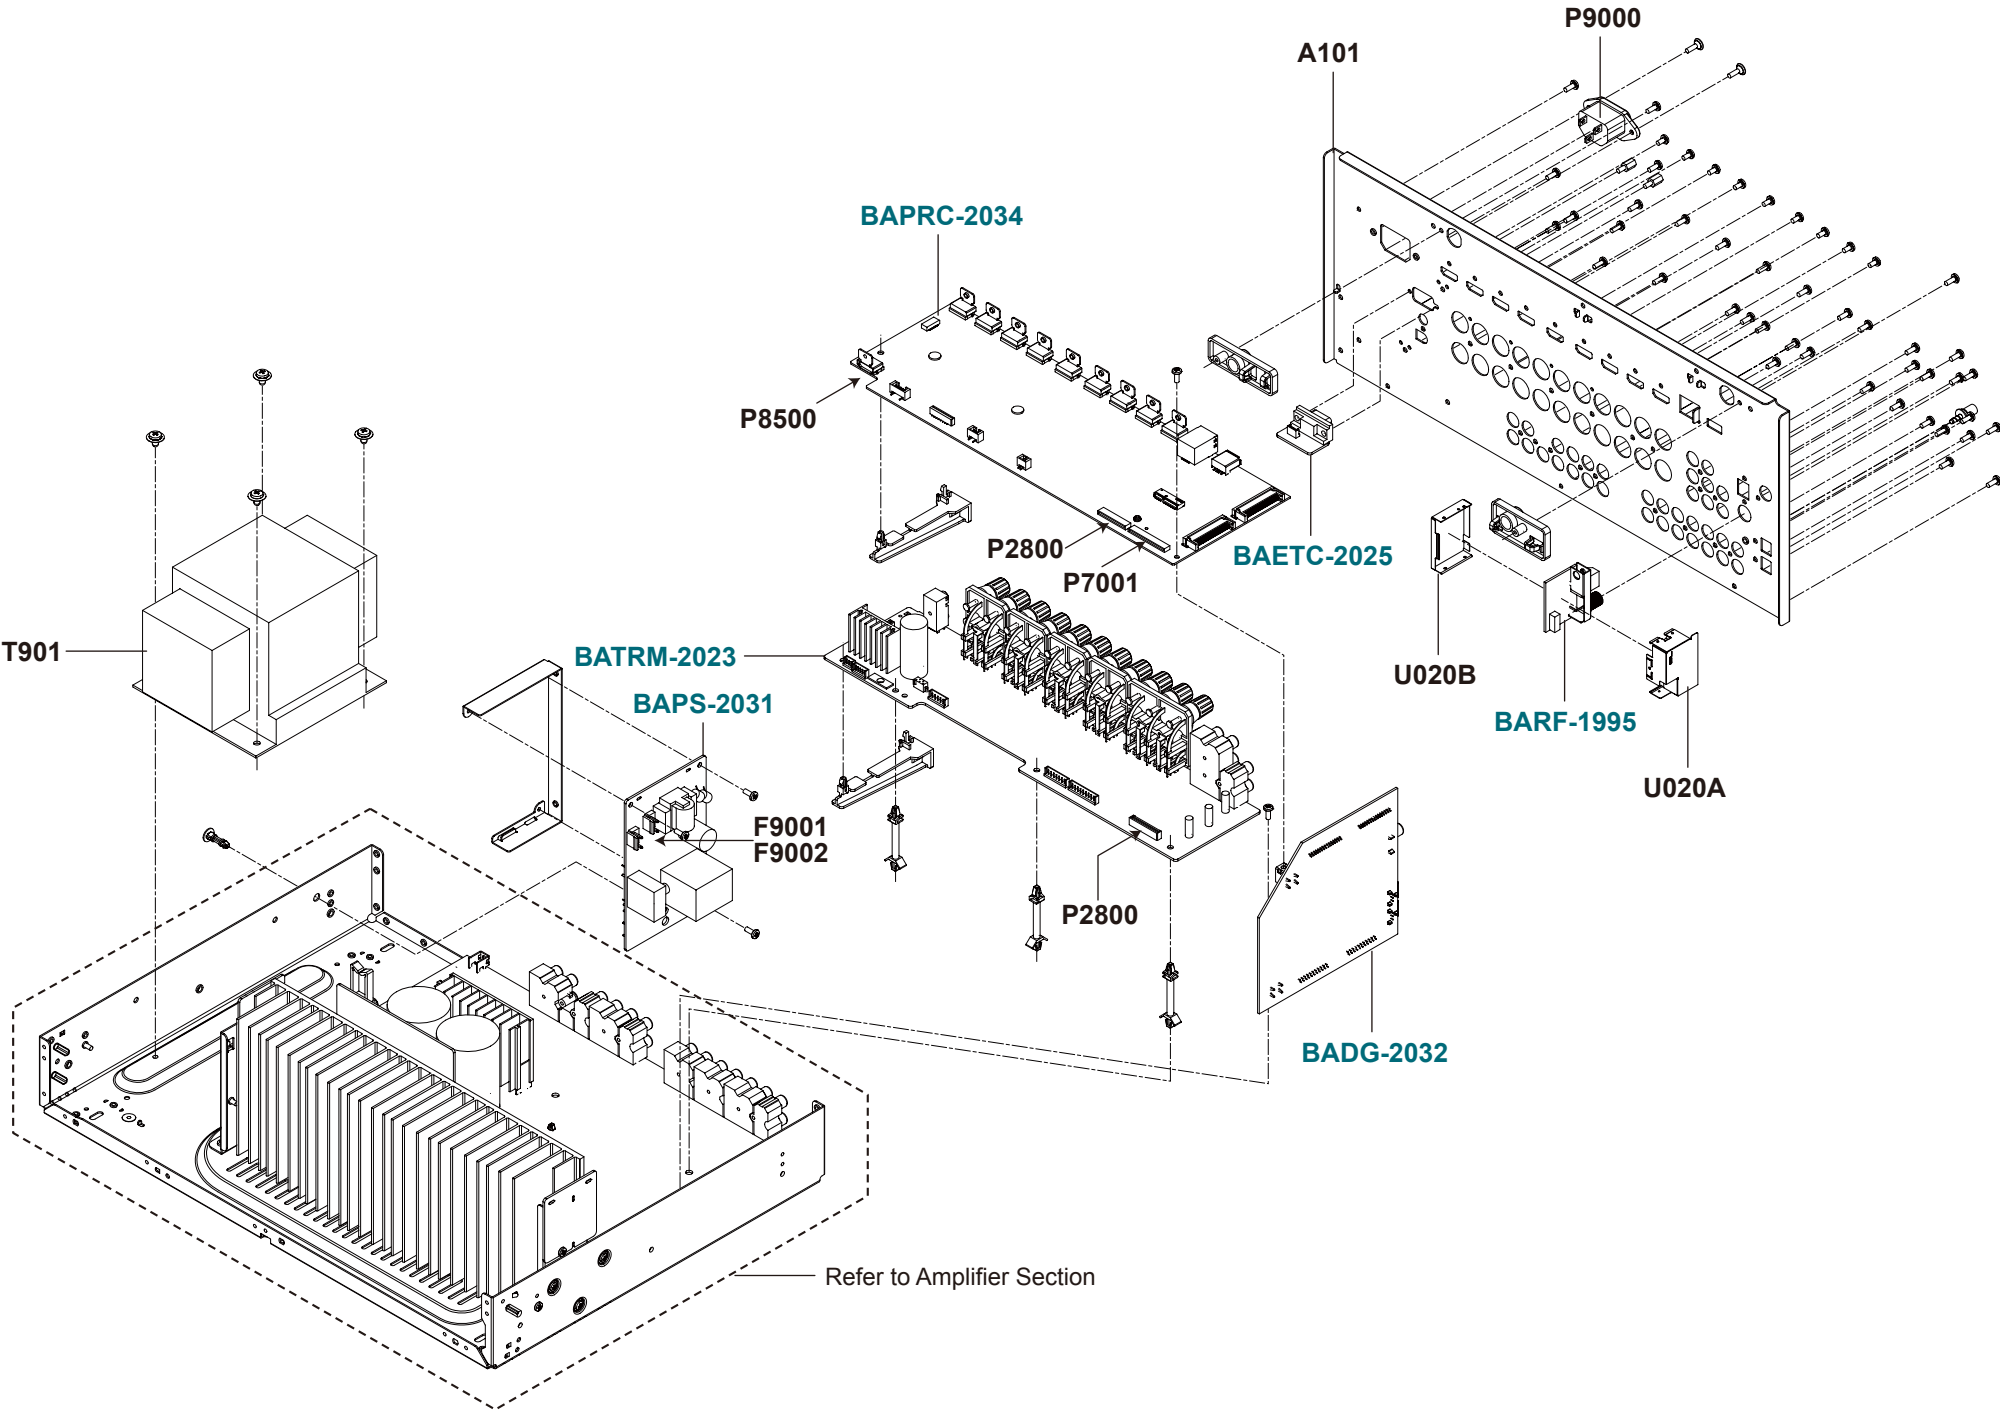

Amplifier Section

(Shape or q'ty of the terminal, knob and button: Please see panel page.)

Exploded View

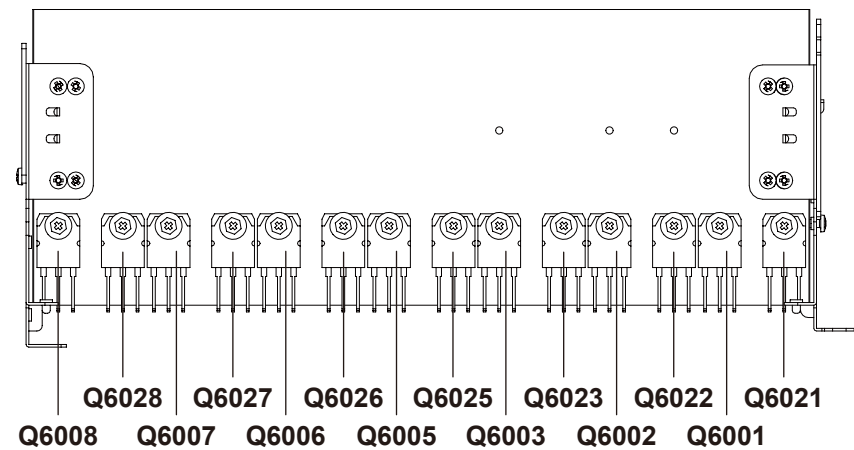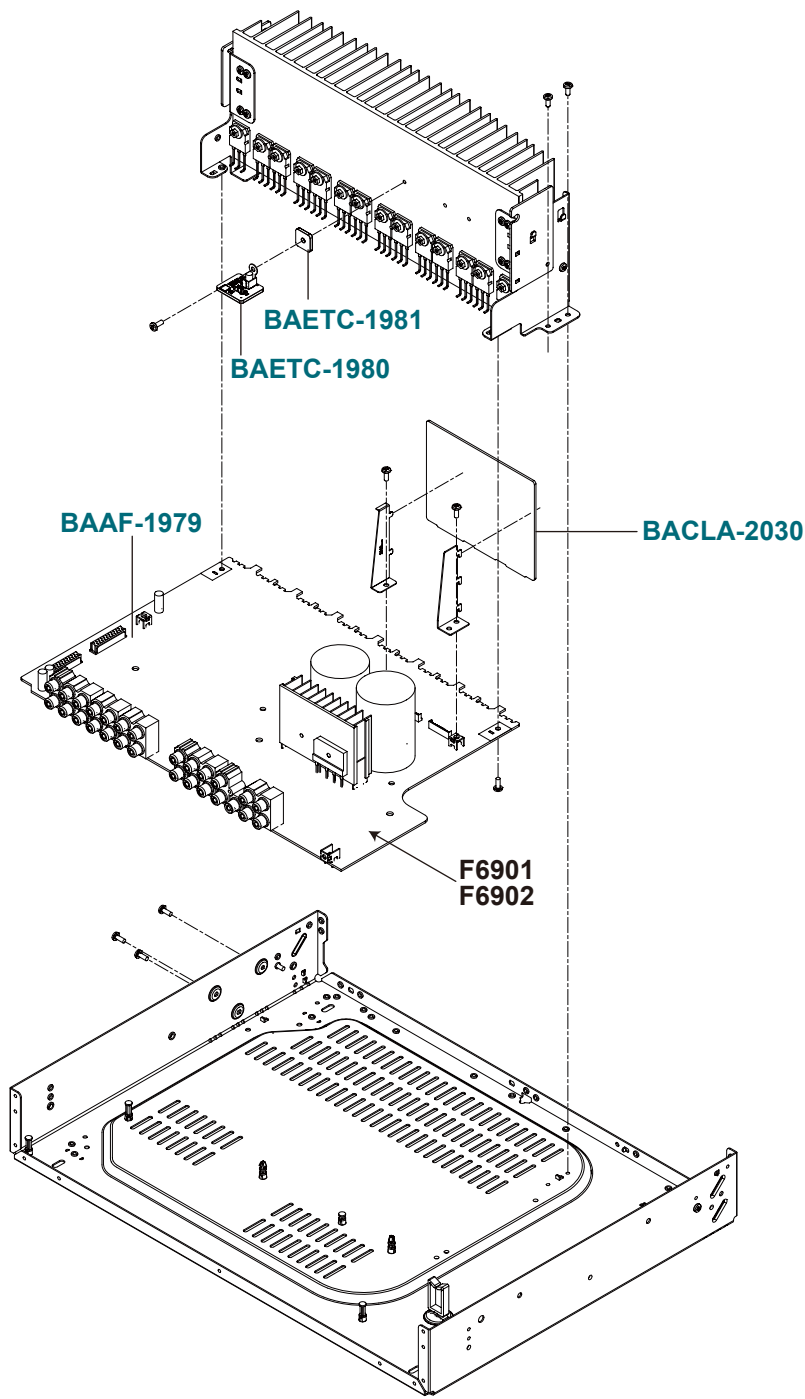

Model List

Appendix

| Abbreviated Model Name | Full Model Name |
|------------------------|-----------------|
| T5                     | TX-NR555        |
| T6                     | TX-NR656        |
| Z6                     | TX-RZ610        |
| H6                     | HT-R695         |
| T7                     | TX-NR757        |
| Z7                     | TX-RZ710        |
| Z8                     | TX-RZ810        |
| D2                     | DRX-2           |
| D3                     | DRX-3           |
| D4                     | DRX-4           |
| D5                     | DRX-5           |

※\*\*J(like T6J) is MJJ of model.

※List

| Abbreviated Model Name | ※List-A                 | ※List-B                       | ※List-C        | ※List-D | ※List-E        |
|------------------------|-------------------------|-------------------------------|----------------|---------|----------------|
| T5/T6/Z6/H6/T7/Z7/Z8   | DIMMER                  | Rotate rotary encoder of TONE | TONE           | TV      | TONE           |
| D2/D3/D4/D5            | DIMMER or INFO or Tone+ | TONE+                         | TONE or MEMORY | TV      | TONE or MEMORY |

TX-NR757  
RZ710/RZ810  
DRX-4/5

# HDMI resolution display

HDMI-related operations can be checked to some extent by displaying HDMI resolution display mode.

## How to enter to this mode

[ENTER] Hold down for 3 seconds



Display of the input signal (for 5 seconds)



Display of the output signal (for 5 seconds)

HDMI resolution display





Normal input signal

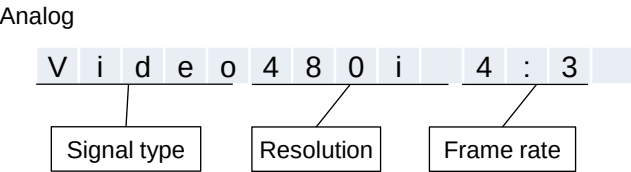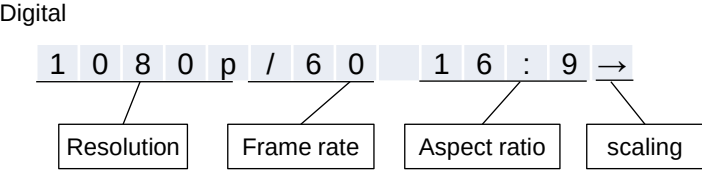

| Input signal                                  | Display                                                                                                                |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| • DVI                                         | <div><div>480i / 60</div><div>D V I</div></div> <div><div>480 P / 60</div><div>D V I</div></div>                       |
| • VGA(DVI)                                    | <div><div>* V G A / 59</div><div>4 : 3</div></div>                                                                     |
| • Pixel Repetition                            | Pixel Rep. 2: D (Except 480i)<br>Pixel Rep. 4: Q <div><div>D 480p / 60</div><div>16 : 9</div></div><br>Pixel Rep. 8: O |
| • CVBS                                        | <div><div>V i d e o 480i</div><div>4 : 3</div></div>                                                                   |
| • Component                                   | <div><div>C M P</div><div>576i 16 : 9</div></div>                                                                      |
| • 21:9 (Pixel AR ≠ 1:1)                       | <div><div>1080p / 60</div><div>21 : 9</div></div>                                                                      |
| • 21:9 (Pixel AR = 1:1)                       | <div><div>1080w / 60</div><div>21 : 9</div></div>                                                                      |
| • LTE TMD5 Clock340MHz<br>( Scrambled input ) | <div><div>1080p / 60</div><div>S 16 : 9</div></div>                                                                    |
| • No input                                    | <div><div>U n k n o w n</div></div>                                                                                    |


HDMI resolution display

Normal output signal

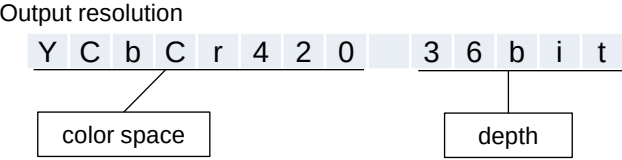

| Onput signal                        | Display                                                                                                                                                                             |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • RSEN OFF                          | <div><div></div><div></div><div></div><div></div><div></div><div>R</div><div>G</div><div>B</div><div></div><div>4</div><div>8</div><div>b</div><div></div><div>*</div></div>        |
| • EDID_READ_NG                      | <div><div></div><div></div><div></div><div></div><div></div><div>D</div><div>V</div><div>I</div><div></div><div>2</div><div>4</div><div>b</div><div></div><div>#</div></div>        |
| • Resolution Error                  | <div><div>Y</div><div>C</div><div>b</div><div>C</div><div>r</div><div>4</div><div>4</div><div>4</div><div></div><div>4</div><div>8</div><div>b</div><div></div><div>E</div></div>   |
| • DVI                               | <div><div></div><div></div><div></div><div></div><div></div><div>D</div><div>V</div><div>I</div><div></div><div>2</div><div>4</div><div>b</div><div>i</div><div>T</div></div>       |
| • No output                         | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div>-</div><div>-</div><div>-</div><div>-</div><div>-</div><div></div><div></div></div>          |
| • 4096 x 2160p sclae                | <div><div>4</div><div>K</div><div>6</div><div>0</div><div>p</div><div>R</div><div>G</div><div>B</div><div>#</div><div>2</div><div>4</div><div>b</div><div>i</div><div>t</div></div> |
| • LTE340MHz<br>( Scrambled output ) | <div><div></div><div></div><div></div><div></div><div></div><div>R</div><div>G</div><div>B</div><div></div><div>2</div><div>4</div><div>b</div><div></div><div>S</div></div>        |
| • Signal generate                   | <div><div></div><div>4</div><div>8</div><div>0</div><div>p</div><div>R</div><div>G</div><div>B</div><div></div><div>G</div><div>e</div><div>n</div><div></div><div></div></div>     |
| • Cannot detect the hot-plug        | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div>O</div><div>F</div><div>F</div><div></div><div></div></div>            |

3D input signal

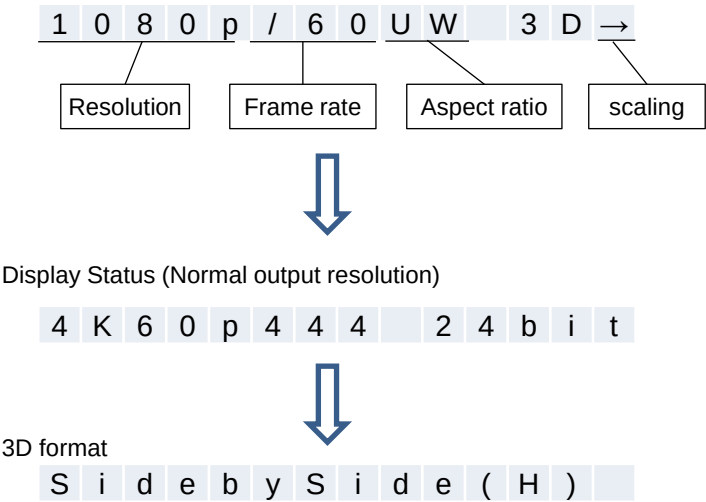


|                      |                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------|
| • 3D aspect ratio    | <div>• 4:3→SD</div> <div>• 16:9→None</div> <div>• 21:9→UW</div> <div>1080P / 60UW3D→</div> |
| 3D format            | Display                                                                                    |
| • Frame Packing      | Frame Packing                                                                              |
| • Field alternative  | Field alternative                                                                          |
| • Line alternative   | Line alternative                                                                           |
| • Side-by-Side(Full) | Side-by-Side(Full)                                                                         |
| • L+depth            | L+depth                                                                                    |
| • L+depth + graphics | L+depth + graphics                                                                         |
| • Side by Side(Harf) | Side by Side(Harf)                                                                         |
| • Top and Bottom     | Top and Bottom                                                                             |
| • unknown            | Unknown                                                                                    |



HDMI resolution display

PC input signal

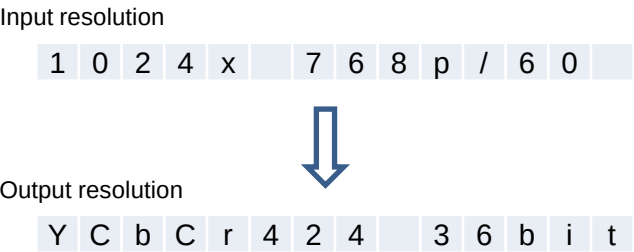

| Input Signal       | Display                                                                                                                                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    | <div><div><div>*</div><div>*</div><div>*</div><div>*</div><div>x</div></div><div><div>*</div><div>*</div><div>*</div><div>*</div></div><div>p</div><div>/</div><div><div>*</div><div>*</div></div><div></div></div> <div>Horizontal</div> <div>Vertical</div> <div>Ref Rate</div> |
| • DVI              | Big 'P' <div><div><div>1</div><div>0</div><div>2</div><div>4</div><div>x</div><div></div><div>7</div><div>6</div><div>8</div><div>P</div><div>/</div><div>6</div><div>0</div><div></div></div></div>                                                                              |
| • HDMI             | Small 'p' <div><div><div>1</div><div>0</div><div>2</div><div>4</div><div>x</div><div></div><div>7</div><div>6</div><div>8</div><div>p</div><div>/</div><div>6</div><div>0</div><div></div></div></div>                                                                            |
| • Ref Rate 3 digit | <div><div><div>1</div><div>0</div><div>2</div><div>4</div><div>x</div><div></div><div>7</div><div>6</div><div>8</div><div>P</div><div>1</div><div>2</div><div>0</div><div></div></div></div>                                                                                      |
| • LTE 340MHz       | <div><div><div>1</div><div>0</div><div>2</div><div>4</div><div>x</div><div></div><div>7</div><div>6</div><div>8</div><div>P</div><div>1</div><div>2</div><div>0</div><div>s</div></div></div>                                                                                     |
| • No input         | <div><div><div>U</div><div>n</div><div>k</div><div>n</div><div>o</div><div>w</div><div>n</div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>                                                                                           |

Cooling fan

Cooling Fan  
E.g. (TX-RZ800)


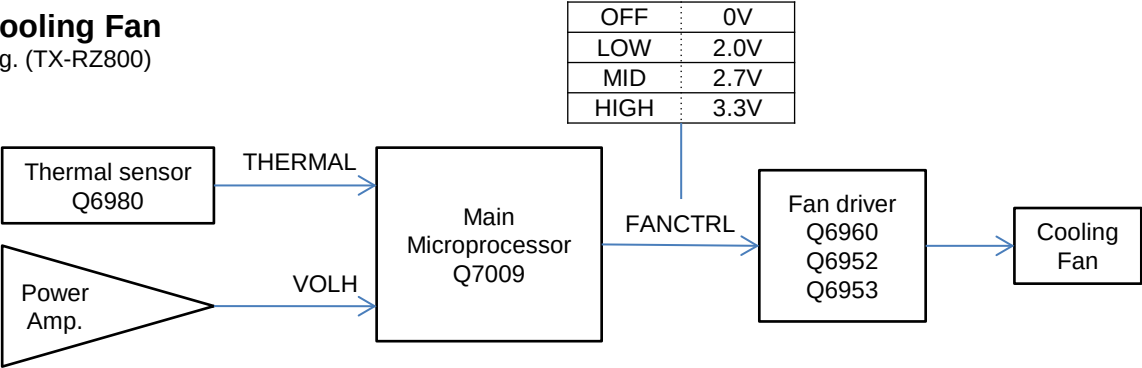



Table of THERMAL and VOLH

|         |      | VOLH             |      |      |      |
|---------|------|------------------|------|------|------|
|         |      | OFF or Headphone | LOW  | MID  | HIGH |
| THERMAL | OFF  | STOP             | STOP | STOP | STOP |
|         | LOW  | LOW              | LOW  | LOW  | LOW  |
|         | MID  | LOW              | MID  | MID  | MID  |
|         | HIGH | HIGH             | HIGH | HIGH | HIGH |

THERMAL (Temperature of thermal sensor)

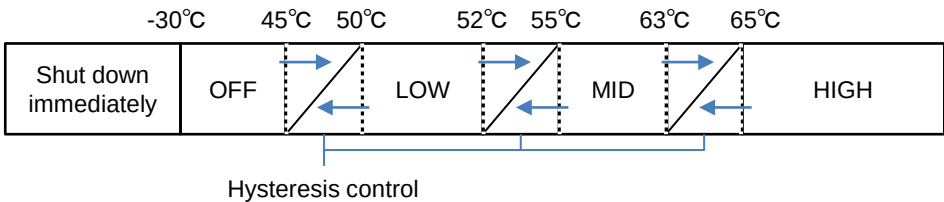


VOLH (Voltage of VOLH port)

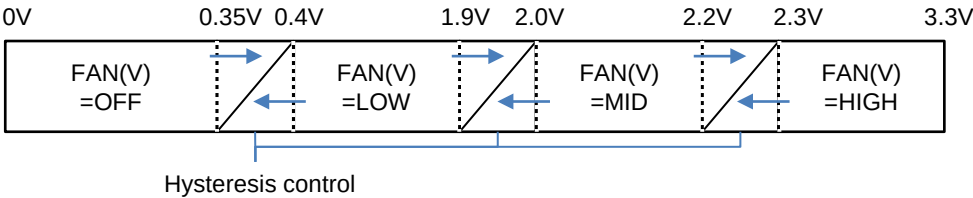

Appendix

How to display Output Sensor & Temperature Sensor

[List-A (※)] + [ON/STANDBY] x 2 → [List-C (※)]

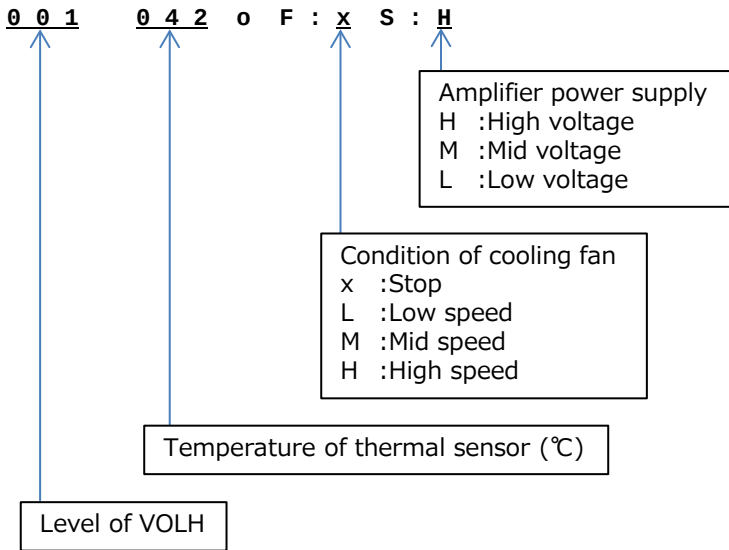

※ : Refer to [Model List](#).


Service information

Displaying Service information


This service information display system is helpful in analyze the status when the unit goes into Protect mode and is powered off. Pay attention that the status will change if a button is pushed.

How to enter to service information mode.


Step1 :  
[DIMMER] + [ON/STANDBY] x 2



Step2 :  
[SETUP] or [HOME]

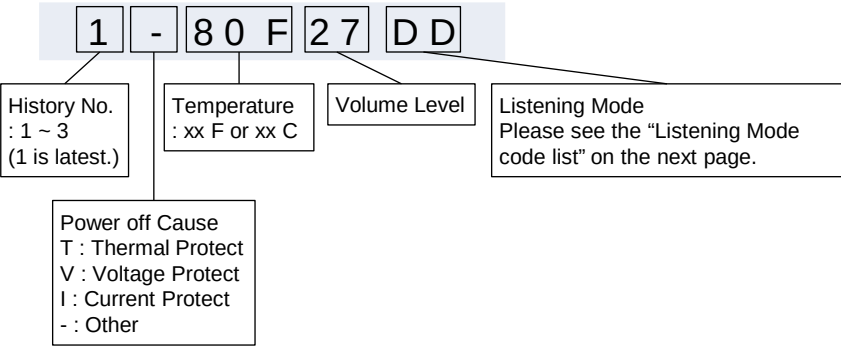

Step3 :  
[SETUP] or [HOME]

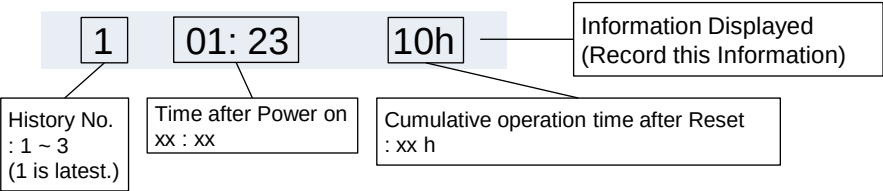


Note)  
If press [ENTER] during service information mode, the following display will appear.  
And Self-diagnostic will start at when next turn on.

A M P D I A G N O S T I C T E S T O N

Appendix


How to change History No. 1 ~ 3.

[CURSOR UP] or [CURSOR DOWN]

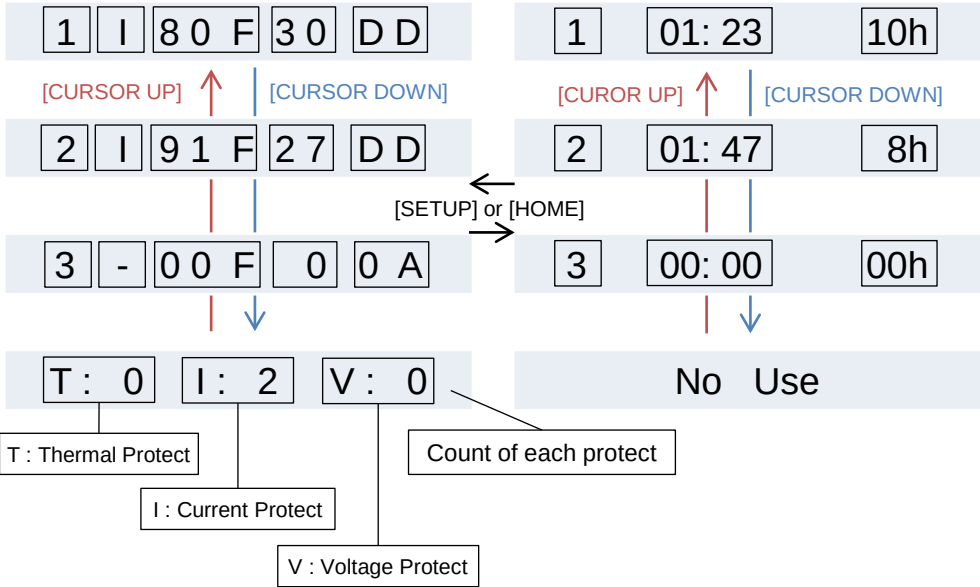

How to exit the service information mode.

[ON/STANDBY]



Service Information

Appendix

Listening Mode Code List

|    |                  |    |                       |    |                         |    |                           |    |                             |
|----|------------------|----|-----------------------|----|-------------------------|----|---------------------------|----|-----------------------------|
| 00 | NORMAL_LMD_BEGIN | 20 | SURR_LMD_BEGIN        | 50 | THX_MUSIC_LMD_BEGIN     | 90 | THX_CINEMA_LMD_BEGIN      | D0 | AUDYSSEY_LMD_BEGIN          |
| 01 | LAST             | 21 | SURR_20_PLII_MOVIE    | 51 | THX_20_PLII_MUSIC       | 91 | THX_20_PLII_MOVIE         | D1 | AUDYSSEY_20_PLII_MUSIC      |
| 02 | PURE             | 22 | SURR_20_PLII_MUSIC    | 52 | THX_20_PLIIX_MUSIC      | 92 | THX_20_PLIIX_MOVIE        | D2 | AUDYSSEY_20_PLIIX_MUSIC     |
| 03 | DIRECT           | 23 | SURR_20_PLII_GAME     | 53 | THX_20_PLIIZ_MUSIC      | 93 | THX_20_PLIIZ_CINEMA       | D3 | AUDYSSEY_20_NEO6_MUSIC      |
| 04 | STEREO           | 24 | SURR_20_PLIIX_MOVIE   | 54 | THX_20_NEO6_MUSIC       | 94 | THX_20_NEO6_MOVIE         | D4 | AUDYSSEY_20_NEURAL_CINEMA   |
| 05 | MONO             | 25 | SURR_20_PLIIX_MUSIC   | 55 | THX_20_NEURAL_MUSIC     | 95 | THX_20_NEURAL_CINEMA      | D5 | AUDYSSEY_20_NEURAL_MUSIC    |
| 06 | ORCHESTRA        | 26 | SURR_20_PLIIX_GAME    | 56 | THX_51_OFF_MUSIC        | 96 | THX_51_OFF_CINEMA         | D6 | AUDYSSEY_20_PLII_MOVIE      |
| 07 | UNPLUGGED        | 27 | SURR_20_PLIIZ         | 57 | THX_51_MTR_MUSIC        | 97 | THX_51_MTR_CINEMA         | D7 | AUDYSSEY_20_PLIIX_MOVIE     |
| 08 | STUDIOMIX        | 28 | SURR_20_NEO6_MOVIE    | 58 | THX_51_DSC_MUSIC        | 98 | THX_51_DSC_CINEMA         | D8 | AUDYSSEY_20_NEO6_MOVIE      |
| 09 | TVLOGIC          | 29 | SURR_20_NEO6_MUSIC    | 5A | THX_51_PLIIX_MUSIC      | 99 | THX_51_NEO6_CINEMA        | D9 | AUDYSSEY_20_PLII_GAME       |
| 0A | ALLCHST          | 2A | SURR_20_NEURAL_MUSIC  | 5B | THX_51_PLIIZ_MUSIC      | 9A | THX_51_PLIIX_MOVIE        | DA | AUDYSSEY_20_PLIIX_GAME      |
| 0B | FULLMONO         | 2B | SURR_20_NEURAL_CINEMA | 5C | THX_51_NEO6_MUSIC       | 9B | THX_51_PLIIZ_CINEMA       | DB | AUDYSSEY_51_OFF             |
| 0C | TD               | 2C | SURR_51_OFF           | 5D | THX_51_NEURAL_MUSIC     | 9C | THX_51_NEURAL_CINEMA      | DC | AUDYSSEY_51_PLIIX_MUSIC     |
| 0D | RPG              | 2D | SURR_51_MTR           | 5E | THX_20_NEOX_MUSIC       | 9D | THX_51_EX                 | DD | AUDYSSEY_51_PLIIX_MOVIE     |
| 0E | ACTION           | 2E | SURR_51_DSC           | 5F | THX_51_NEOX_MUSIC       | 9E | THX_20_NEOX_CINEMA        | DE | AUDYSSEY_51_NEO6            |
| 0F | ROCKBAND         | 2F | SURR_51_NEO6          | 60 | THX_20_DOLBY_SURR_MUSIC | 9F | THX_51_NEOX_CINEMA        | DF | AUDYSSEY_51_NEURAL_CINEMA   |
| 10 | SPORTS           | 30 | SURR_51_EX            | 61 | THX_51_DOLBY_SURR_MUSIC | A0 | THX_20_DOLBY_SURR_CINEMA  | E0 | // AUDYSSEY_51_NEURAL_MUSIC |
| 11 | WHOLEHOUSE       | 31 | SURR_51_PLIIX_MOVIE   | 62 | THX_MUSIC_LMD_END       | A1 | THX_51_DOLBY_SURR_CINEMA  | E1 | AUDYSSEY_51_EX              |
| 12 | RPG_GENRE        | 32 | SURR_51_PLIIX_MUSIC   |    |                         | A2 | THX_CINEMA_LMD_END        | E2 | AUDYSSEY_LMD_END            |
| 13 | ACTION_GENRE     | 33 | SURR_51_PLIIZ         | 70 | THX_GAME_LMD_BEGIN      |    |                           |    |                             |
| 14 | ROCKBAND_GENRE   | 34 | SURR_51_NEURAL_CINEMA | 71 | THX_20_PLII_GAME        | B0 | THX_U2GAME_LMD_BEGIN      | F0 | SPECIAL_LMD_BEGIN           |
| 15 | SPORTS_GENRE     | 35 | SURR_20_NEOX_CINEMA   | 72 | THX_20_PLIIX_GAME       | B1 | THX_20_PLII_SLCT2_GAME    | F1 | TESTTONE                    |
| 12 | NORMAL_LMD_END   | 36 | SURR_20_NEOX_MUSIC    | 73 | THX_20_PLIIZ_GAME       | B2 | THX_20_PLIIZ_SLCT2_GAME   | F2 | TESTTHR                     |
|    |                  | 37 | SURR_20_NEOX_GAME     | 74 | THX_20_NEURAL_GAMES     | B3 | THX_51_SLCT2_GAM          | F3 | TESTAUTO                    |
|    |                  | 38 | SURR_51_NEOX_CINEMA   | 75 | THX_51_OFF_GAMES        | B4 | THX_51_PLIIZ_SLCT2_GAME   | F4 | ASC                         |
|    |                  | 39 | SURR_51_NEOX_MUSIC    | 76 | THX_51_MTR_GAMES        | B5 | THX_U2GAME_LMD_END        | F5 | FLASH                       |
|    |                  | 40 | SURR_51_NEOX_GAME     | 77 | THX_51_DSC_GAMES        | B6 | THX_U2MUSIC_LMD_BEGIN     | F6 | DEBUGMODE                   |
|    |                  | 41 | SURR_20_DOLBY_SURR    | 78 | THX_51_PLIIX_GAME       | B7 | THX_51_SLCT2_MUS          | F7 | FLASH2                      |
|    |                  | 42 | SURR_51_DOLBY_SURR    | 79 | THX_51_PLIIZ_GAMES      | B8 | THX_51_PLIIZ_SLCT2_MUSIC  | F8 | FLASH3                      |
|    |                  | 43 | SURR_LMD_END          | 7A | THX_51_NEO6_GAMES       | B9 | THX_U2MUSIC_LMD_END       | F9 | FLASH4                      |
|    |                  |    |                       | 7B | THX_51_NEURAL_GAMES     |    |                           | FA | FLASH_CHECK                 |
|    |                  | 48 | DTSSS_LMD_BEGIN       | 7C | THX_20_NEOX_GAMES       | BA | THX_U2CINEMA_LMD_BEGIN    | FB | SPECIAL_LMD_END             |
|    |                  | 49 | DTSSS_20_NEO6_MUSIC   | 7D | THX_51_NEOX_GAMES       | BB | THX_51_SLCT2_CIN          |    |                             |
|    |                  | 4A | DTSSS_20_NEO6_CINEMA  | 7E | THX_20_DOLBY_SURR_GAME  | BC | THX_51_PLIIZ_SLCT2_CINEMA |    |                             |
|    |                  | 4B | DTSSS_51              | 7F | THX_51_DOLBY_SURR_GAME  | BD | THX_U2CINEMA_LMD_END      |    |                             |
|    |                  | 4C | DTSSS_LMD_END         | 80 | THX_GAME_LMD_END        |    |                           |    |                             |

**TX-RZ810(B)MDC**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK ! ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART**

## &lt;Notes&gt;

: NSP

<MDC> : 120V

Canadian/USA/(Mexico) model

| REF. NO.                                  | PART NAME  | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|-------------------------------------------|------------|--------------------|------|---------------|---------|
| <b>[ Cabinet, Chassis, Screws, Nuts ]</b> |            |                    |      |               |         |
| A001                                      | CHASSIS    | TX-NR555           | 1    | 27100602      | NSP     |
| A002                                      | BOTTOM LEG | (FRONT)            | 2    | 27175477A     | N       |
| A003                                      | BOTTOM LEG | (REAR)             | 2    | 27175478A     |         |
| A004                                      | CUSHION    | (CORK)D25*9*T2     | 4    | 28141968      | NSP     |
| A005                                      | SCREW      | 3TTB+8B(3BC)       | 4    | 838430088GR   | NSP     |
| A006                                      | HOLDER     | (CPS-8)            | 2    | 27191383      | N NSP   |
| A006or                                    | HOLDER     | KGLS-8RT           | (2)  | 27190503A     | N NSP   |
| A007                                      | HOLDER     | (NPS-8)            | 2    | 27191387      | N NSP   |
| A007or                                    | HOLDER     | KGPS-8RF           | (2)  | 27191044      | N NSP   |
| A010                                      | HOLDER     | (NPS-14)           | 2    | 27191388      | N NSP   |
| A010or                                    | HOLDER     | KGPS-14RF          | (2)  | 27190802      | NSP     |
| A012                                      | HOLDER     | (CPS-12)           | 1    | 27191385      | N NSP   |
| A012or                                    | HOLDER     | KGLS-12RT          | (1)  | 27190266      | NSP     |
| A014                                      | HOLDER     | (PGS-22)           | 3    | 27191382      | N NSP   |
| A014or                                    | HOLDER     | KGLS-22S           | (3)  | 27190369      | N NSP   |
| A016                                      | HEAT SINK  | TX-RZ810           | 1    | 27160705      | N NSP   |
| A017                                      | RETAINER   | (HR)TX-NR656       | 1    | 27142349      | NSP     |
| A018                                      | RETAINER   | (HL)TX-NR656       | 1    | 27142350      | NSP     |
| A019                                      | SCREW      | 3SMH10W.SW+15B(CU) | 14   | 801606        | NSP     |
| A020                                      | SCREW      | 3TTB+8B(3BC)       | 4    | 838430088GR   | NSP     |
| A021                                      | SCREW      | 3TTB+8B(3BC)       | 1    | 838430088GR   | NSP     |
| A022                                      | SCREW      | 3TTB+8B(3BC)       | 2    | 838430088GR   | NSP     |
| A023                                      | SCREW      | 3TTB+8B(3BC)       | 2    | 838430088GR   | NSP     |
| A024                                      | RETAINER   | (B)                | 1    | 27142141A     | N NSP   |
| A025                                      | SCREW      | 3TTB+8B(3BC)       | 2    | 838430088GR   | NSP     |
| A026                                      | SCREW      | 3TTB+8B(3BC)       | 2    | 838430088GR   | NSP     |
| A027                                      | SCREW      | 3TTB+8B(3BC)       | 3    | 838430088GR   | NSP     |
| A028                                      | SCREW      | 3TTB+8B(3CM)SR     | 2    | 801637        | NSP     |
| A029                                      | RETAINER   | (PS)TX-NR656       | 1    | 27142351      | NSP     |
| A030                                      | SCREW      | 3TTB+8B(3BC)       | 3    | 838430088GR   | NSP     |
| A031                                      | SCREW      | 4TTC+8C(3BC)SR     | 4    | 801658        | NSP     |
| A032                                      | HOLDER     | (ANNTENA-1)        | 1    | 27191416      | NSP     |
| A033                                      | HOLDER     | (ANNTENA-2)        | 1    | 27191417      | NSP     |
| A035                                      | HOLDER     | (PRC)              | 2    | 27191419A     | NSP     |
| A036                                      | LABEL      | SHEET(S)           | 1    | 29364983      |         |
| A036A                                     | LABEL      | (E-CON)            | {1}  | 29364978      |         |
| A037                                      | WIRE TIE   | BSK-1              | 8    | 260208        | NSP     |
| A038                                      | TAPE       | TAPE(CLOTH-16U)    | 0.1  | 29110083      | NSP     |
| A041                                      | LABEL      | (PT)ONKYO          | 1    | 29392594      |         |
| A042                                      | BRACKET    | (FAN)727           | 1    | 27131133A     | N NSP   |
| A043                                      | BUSHING    | (FAN-L)            | 4    | 28170091A     | N NSP   |
| A044                                      | CUSHION    | (FELT)t1x20x10     | 2    | 28141859      | NSP     |
| A045                                      | BRACKET    | (F)TX-RZ810        | 1    | 27131161      | N NSP   |
| A046                                      | SCREW      | 3TTB+8B(3BC)       | 6    | 838430088GR   | NSP     |

|        |               |                     |      |             |   |     |
|--------|---------------|---------------------|------|-------------|---|-----|
| A047   | HOLDER        | (PGS-6)             | 2    | 27191402    | N | NSP |
| A047or | HOLDER        | KGLS-6S             | (2)  | 27190011    | N | NSP |
| A048   | CUSHION       | (FELT)t2x13x5       | 2    | 28141858    |   | NSP |
| A050   | HOLDER        | (PLUG)              | 1    | 27191418A   |   | NSP |
| A051   | SCREW         | 2B+5FN(3CM)         | 1    | 82512005    | N | NSP |
| A052   | WS CLAMP      | CLAMP WS-2W         | 1    | 27300243    | N | NSP |
| A053   | TAPE          | TAPE(CLOTH-16U)     | 0.05 | 29110083    |   | NSP |
| A101   | REAR PANEL    | RZ810MDC            | 1    | 27124743A   |   |     |
| A102   | SCREW         | 3TTB+8B(3BC)        | 40   | 838430088GR |   | NSP |
| A103   | SCREW         | 3P+6FN(3BC)         | 9    | 82143006GR  |   | NSP |
| A104   | SCREW         | 3TTF+10B(3BC)       | 2    | 835430108GR | N | NSP |
| A105   | LABEL         | SP(11ch)_onk        | 1    | 29393161    | N |     |
| A106   | TAPE          | TAPE(CLOTH-8U)      | 0.02 | 29110082    |   | NSP |
| A107   | CUSHION       | .                   | 2    | 28141799    |   | NSP |
| A108   | TERMINAL      | Eターミナル              | 1    | 25060151    |   | NSP |
| A109   | WASHER        | W3*10F(3BC)         | 1    | 87643010GR  |   | NSP |
| A201   | FRONT PANEL   | TXRZ810(B)DC/EX     | 1    | 27213838B   |   |     |
| A202   | KNOB          | (INP-C)(B)          | 1    | 28327272A   | N |     |
| A203   | KNOB          | (INP-L)(B)          | 1    | 28327274A   | N |     |
| A204   | KNOB          | (INP-R)(B)          | 1    | 28327276A   | N |     |
| A205   | GUIDE         | (STBY)(B)           | 1    | 27268323    |   | NSP |
| A206   | BADGE         | .                   | 1    | 28135317    |   |     |
| A207   | KNOB          | (PURE)              | 1    | 28327208    | N |     |
| A208   | KNOB          | (STBY)(B)           | 1    | 28327234    |   |     |
| A209   | FACET         | .                   | 1    | 28198905    |   |     |
| A210   | KNOB          | (1)(B)              | 2    | 28327209    | N |     |
| A215   | FRONT BRACKET | 810(B)              | 1    | 27111638    |   |     |
| A216   | KNOB          | (5)(B)              | 2    | 28327225    |   |     |
| A217   | KNOB          | (CUR)AS BLACK       | 1    | 28326994C   |   |     |
| A217A  | KNOB          | (CUR) BLK           | {1}  | 28326988A   |   |     |
| A217B  | KNOB          | (CUR-BASE) BLK      | {1}  | 28326986C   | N |     |
| A218   | KNOB          | (ENTER) BLK         | 1    | 28326990    |   |     |
| A219   | PLATE         | (VOL)               | 1    | 27262931A   | N |     |
| A220   | HOLDER        | (PLT)               | 1    | 27191413A   | N | NSP |
| A221   | PLATE         | (DOOR)(B)US_TXRZ810 | 1    | 27262934A   |   |     |
| A222   | BACK PLATE    | (B)                 | 1    | 28133428    |   |     |
| A223   | CLEAR PLATE   | TX-RZ810            | 1    | 28192475    |   |     |
| A225   | SHAFT         | .                   | 2    | 27260383    |   | NSP |
| A226   | DAMPER        | (11.3)              | 2    | 27301969    |   | NSP |
| A227   | RETAINER      | (SPRING)            | 1    | 27142345A   |   | NSP |
| A228   | RETAINER      | (DOOR)              | 1    | 27142341    |   | NSP |
| A229   | RETAINER      | (LINK)              | 1    | 27142342    |   | NSP |
| A230   | RETAINER      | (ERH-L)             | 1    | 27142343    |   | NSP |
| A231   | SPACER        | (PC)D7*d4*t0.25     | 1    | 27270575    |   | NSP |
| A232   | SCREW         | 3TTB+8B(3BC)        | 26   | 838430088GR |   | NSP |
| A233   | SCREW         | 3TTB+8B(3BC)        | 8    | 838430088GR |   | NSP |
| A234   | PLASTIC RIVET | P3035B              | 2    | 880016      | N |     |
| A235   | DOOR          | (B)                 | 1    | 28148858    |   |     |
| A236   | HOLDER        | (L)                 | 1    | 27191411B   |   | NSP |
| A237   | HOLDER        | (R)                 | 1    | 27191412A   |   | NSP |
| A238   | IB CUSHION    | W15*t3              | 0.01 | 28141943    | N | NSP |
| A240   | KNOB          | (TONE)(B)AS         | 1    | 28327232    | N |     |
| A240A  | KNOB          | (TONE)(B)           | {1}  | 28327211    | N |     |
| A240B  | SPRING        | .                   | {1}  | 27180575    |   |     |
| A241   | KNOB          | (TONE)(B)AS         | 1    | 28327232    | N |     |

|                                |                     |                       |       |             |       |
|--------------------------------|---------------------|-----------------------|-------|-------------|-------|
| A241A                          | KNOB                | (TONE)(B)             | {1}   | 28327211    | N     |
| A241B                          | SPRING              | .                     | {1}   | 27180575    |       |
| A242                           | KNOB                | (VOL)AS(B)            | 1     | 28327219    |       |
| A242A                          | KNOB                | (VOL)CAP(B)           | {1}   | 28327221    | N     |
| A242B                          | KNOB                | (VOL)BASE             | {1}   | 28327223    | N     |
| A242C                          | SPRING              | .                     | {1}   | 27180575    |       |
| A245                           | SCREW               | 3TTB+10B(3BC)         | 2     | 838430108GR | NSP   |
| A246                           | SCREW               | 3TTB+8B(3BC)          | 12    | 838430088GR | NSP   |
| A247                           | CUSHION             | (FELT)t1x20x10        | 2     | 28141859    | NSP   |
| A248                           | CUSHION             | (PORON)8*3*T1.5       | 3     | 28141969    | NSP   |
| A249                           | TAPE                | TAPE(CLOTH-8U)        | 0.1   | 29110082    | NSP   |
| A251                           | CUSHION             | (T3*W35*D10)          | 1     | 28141741    | NSP   |
| A252                           | CUSHION             | (LEG)                 | 1     | 28141797    |       |
| A401                           | COVER               | TXRZ810(B) (Bent)     | 1     | 28210152    |       |
| A401                           | COVER               | TXRZ810(B) (Not Bent) | 1     | 28210152Z   |       |
| A402                           | SCREW               | 3TTB+8B(3BC)          | 3     | 838430088GR | NSP   |
| A403                           | SCREW               | 4TTB+8C(3BC)          | 6     | 838440089GR | NSP   |
| A405                           | LABEL               | (CAUTION)             | 1     | 29392531    |       |
| A409                           | CUSHION             | (EVA)20*40*T7.5       | 2     | 28141973    | N NSP |
| A412                           | LABEL               | (POP_810_DC)          | <<1>> | 29393229    | N     |
| [ Semi-conductors ]            |                     |                       |       |             |       |
| Q6001                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6001A                         | ISO SHEET           | AC238                 | 2     | 223024      |       |
| Q6001B                         | ISO SHEET           | ISO SHEET             | 6     | 223050      | N     |
| Q6002                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6003                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6005                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6006                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6007                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6008                          | TRANSISTOR          | TTC0001(Q_T)TO3PN     | 1     | 2204130     |       |
| Q6021                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6022                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6023                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6025                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6026                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6027                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| Q6028                          | TRANSISTOR          | TTA0001(Q_T)TO3PN     | 1     | 2204120     |       |
| [ Transformers, Coils ]        |                     |                       |       |             |       |
| T901                           | POWER TRANSFORMER   | NPT-1665D             | 1     | 2302145     | !, N  |
| [ Switches, Terminals, Wires ] |                     |                       |       |             |       |
| F6901                          | FUSE                | 12A-TUL-250V          | 1     | 252301GR    | !     |
| F6901or                        | FUSE                | 12A-UL/T-314          | (1)   | 252196GR    | !     |
| F6902                          | FUSE                | 12A-TUL-250V          | 1     | 252301GR    | !     |
| F6902or                        | FUSE                | 12A-UL/T-314          | (1)   | 252196GR    | !     |
| F9002                          | FUSE                | 10A-UL/T-233          | 1     | 252330GR    | !     |
| F9002or                        | FUSE                | 10A-T/UL-ST2          | (1)   | 252333GR    | !     |
| F9002E                         | FUSELABEL           | 10A/125V              | 1     | 29362241    | ! NSP |
| P101                           | FLEXIBLE FLAT CABLE | NCFC7-071012          | 1     | 2047071012  |       |
| P2800                          | FLEXIBLE FLAT CABLE | NCFC5-231012          | 1     | 2045231012  |       |
| P2801                          | FLEXIBLE FLAT CABLE | NCFC5-091012          | 1     | 2045091012  |       |
| P3654A                         | ASSEMBLED PWB       | WCBN806L              | 1     | 24150135    | N     |
| P3654B                         | WIFI BT ANTENNA     | RFDPA870918EMLB302    | 1     | 2050102     | N     |
| P3654C                         | WIFI BT ANTENNA     | RFDPA870940EMLB303    | 1     | 2050103     | N     |
| P7001                          | FLEXIBLE FLAT CABLE | NCFC5-313512          | 1     | 2045313512  |       |
| P8500                          | CORD ASSEMBLY       | HDMI 0.50M            | 1     | 2010521     |       |



|                     |                                      |                      |     |                      |          |
|---------------------|--------------------------------------|----------------------|-----|----------------------|----------|
| P8710A              | FAN                                  | KF1225B1E-33ACFG9RB  | 1   | 24502336             |          |
| P9000               | AC INLET                             | R301X2PSn            | 1   | 25053358             | !        |
| P9000A              | FASTON ASSEMBLY                      | FASTON SOCKET        | 1   | 1F999027             | NSP      |
| [ Frontend, Units ] |                                      |                      |     |                      |          |
| U010                | PARENT PC BOARD AS                   | BAAF-1979-1Q-P       | 1   | 1B5141979-1Q         | N Parent |
| BAAF-1979           | Audio frequency circuit pc board AS  | BAAF-1979-1Q         | 1   | 1B5141979-1Q-C       | Child    |
| BAETC-1980          | Et cetra pc board AS                 | BAETC-1980-1Q        | 1   | 1B5141980-1Q-C       | Child    |
| BAETC-1981          | Et cetra pc board AS                 | BAETC-1981-1Q        | 1   | 1B5141981-1Q-C       | Child    |
| U020                | PARENT PC BOARD AS                   | BADIS-1990-1A-P      | 1   | 1B5141990-1A         | N Parent |
| BADIS-1990          | Display circuit pc board AS          | BADIS-1990-1A        | 1   | 1B5141990-1A-C       | Child    |
| BASW-1991           | Switch circuit pc board AS           | BASW-1991-1A         | 1   | 1B5141991-1A-C       | Child    |
| BASW-1992           | Switch circuit pc board AS           | BASW-1992-1A         | 1   | 1B5141992-1A-C       | Child    |
| BASW-1993           | Switch circuit pc board AS           | BASW-1993-1A         | 1   | 1B5141993-1A-C       | Child    |
| BAETC-1994          | Et cetra pc board AS                 | BAETC-1994-1A        | 1   | 1B5141994-1A-C       | Child    |
| BARF-1995           | Radio frequency circuit pc board AS  | BARF-1995-1A         | 1   | 1B5141995-1A-C       | Child    |
| BAETC-1996          | Et cetra pc board AS                 | BAETC-1996-1A        | 1   | 1B5141996-1A-C       | Child    |
| BAETC-1997          | Et cetra pc board AS                 | BAETC-1997-1A        | 1   | 1B5141997-1A-C       | Child    |
| BAPS-1998           | Power supply circuit pc board AS     | BAPS-1998-1A         | 1   | 1B5141998-1A-C       | Child    |
| BASW-1982           | Switch circuit pc board AS           | BASW-1982-1A         | 1   | 1B5141982-1A-C       | Child    |
| BAETC-2007          | Et cetra pc board AS                 | BAETC-2007-1A        | 1   | 1B5142007-1A-C       | Child    |
| U020A               | SHIELD CASE                          | (UPPER)              | 1   | 27225208             |          |
| U020B               | SHIELD CASE                          | (TUNER-BTM)          | 1   | 27225207A            |          |
| U030                | PARENT PC BOARD AS                   | BATRM-2023-1Q-P      | 1   | 1B5142023-1Q         | N Parent |
| BATRM-2023          | Terminal circuit pc board AS         | BATRM-2023-1Q        | 1   | 1B5142023-1Q-C       | Child    |
| BAETC-2024          | Et cetra pc board AS                 | BAETC-2024-1Q        | 1   | 1B5142024-1Q-C       | Child    |
| BAETC-2025          | Et cetra pc board AS                 | BAETC-2025-1Q        | 1   | 1B5142025-1Q-C       | Child    |
| BAETC-2026          | Et cetra pc board AS                 | BAETC-2026-1Q        | 1   | 1B5142026-1Q-C       | Child    |
| BAETC-2027          | Et cetra pc board AS                 | BAETC-2027-1Q        | 1   | 1B5142027-1Q-C       | Child    |
| U040                | PARENT PC BOARD AS                   | BAPRC-2034-1G-P      | 1   | 1B5142034-1G810MDC   | N Parent |
| BAPRC-2034          | Processing circuit pc board AS       | BAPRC-2034-1G        | 1   | 1B5142034-1G-C810MDC | Child    |
| U050                | PARENT PC BOARD AS                   | BACLA-2030-1A-P      | 1   | 1B5142030-1A         | N Parent |
| BACLA-2030          | ClassA amplifier circuit pc board AS | BACLA-2030-1A        | 1   | 1B5142030-1A-C       | N Child  |
| BAPS-2031           | Power supply circuit pc board AS     | BAPS-2031-1A         | 1   | 1B5142031-1A-C       | N Child  |
| U060                | PARENT PC BOARD AS                   | BADG-2032-1A-P       | 1   | 1B5142032-1A         | N Parent |
| BADG-2032           | Digital circuit pc board AS          | BADG-2032-1A         | 1   | 1B5142032-1A-C       | Child    |
| U070                | PARENT PC BOARD AS                   | BAHDM-2038-1A-P      | 1   | 1B5142038-1A         | N Parent |
| BAHDM-2038          | HDMI circuit pc board AS             | BAHDM-2038-1A        | 1   | 1B5142038-1A-C       | Child    |
| [ Packing ]         |                                      |                      |     |                      |          |
| A501                | PAD                                  | (AS)TXRZ810          | 1   | 29092742A            | N        |
| A501A               | PAD                                  | (F)TXRZ810           | {1} | 29092743A            | N        |
| A501B               | PAD                                  | (R)TXRZ810           | {1} | 29092744A            | N        |
| A503                | SHEET                                | T1.015*1300*800      | 1   | 29096134             | N        |
| A504                | TAPE                                 | (SEROHAN)NITTO NO.29 | 0.3 | 29110149             | N NSP    |
| A505                | CARTON                               | TXRZ810DC            | 1   | 29055596             | N        |
| A506                | POLYPROPYLENE TAPE                   | W50 SBT-70           | 2   | 29110200             | N NSP    |
| A507A               | UPC LABEL                            | TXRZ810MDC           | {1} | 29393041             |          |
| A515                | LABEL                                | (DTSX)               | 1   | 29392958             |          |
| [ Accessories ]     |                                      |                      |     |                      |          |
| P9001               | POWER SUPPLY CORD                    | AS-UC-2              | 1   | 253352ATES           | !        |
| A801                | POLY BAG                             | w250xd350            | 1   | 29100250A            | NSP      |
| A802                | TAPE                                 | (SEROHAN)NITTO NO.29 | 0.2 | 29110149             | N NSP    |
| A803                | REMOTE CONTROL TRANSMITTER           | RC-911R              | 1   | 24140911             |          |
| A804                | BATTERY                              | R03/AAA(UM-4)        | 2   | 3010124              |          |
| A805                | MIC                                  | KHM0028-010020       | 1   | 245048A              |          |
| A806                | ANTENNA COIL                         | AM LOOP-ANTENNA      | 1   | 232207               |          |



|      |                    |                            |   |          |   |
|------|--------------------|----------------------------|---|----------|---|
| A807 | FM ANT AS          | Type W                     | 1 | 292191   |   |
| A815 | WARRANTY CARD      | (ONKYO RZ-SERIES)          | 1 | 29365230 |   |
| A901 | INSTRUCTION MANUAL | En(TXRZ810)_BAS            | 1 | 29402177 | N |
| A902 | INSTRUCTION MANUAL | U2FrEs(TXRZ810)_BAS        | 1 | 29402178 | N |
| A910 | INSTRUCTION MANUAL | SAFETY_ONK_U4(EnFrEsCt)(/i | 1 | 29402334 | N |
| A912 | SHEET              | (FLYER-US AVR 2015)        | 1 | 29380164 | N |
| A913 | INSTRUCTION SHEET  | (Google cast)              | 1 | 29355956 | N |

**BAAF-1979-1Q**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

## &lt;Notes&gt;

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                   | PART NAME       | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|----------------------------|-----------------|-------------|------|---------------|---------|
| <b>[ Semi-conductors ]</b> |                 |             |      |               |         |
| D4201                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4202                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4217                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4218                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4251                      | DIODE           | RL1N4003    | 1    | 22380260T     | NSP     |
| D4252                      | DIODE           | RL1N4003    | 1    | 22380260T     | NSP     |
| D4253                      | DIODE           | RL1N4003    | 1    | 22380260T     | NSP     |
| D4254                      | DIODE           | RL1N4003    | 1    | 22380260T     | NSP     |
| D4255                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4256                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D4257                      | ZENER DIODE     | DZ2J075M0L  | 1    | 224760750R2   | NSP     |
| D4258                      | ZENER DIODE     | DZ2J075M0L  | 1    | 224760750R2   | NSP     |
| D5085                      | ZENER DIODE     | DZ2J056M0L  | 1    | 224760560R2   | NSP     |
| D5085or                    | ZENER DIODE     | UDZS5.6B    | (1)  | 224550560R2   | NSP     |
| D5086                      | ZENER DIODE     | DZ2J056M0L  | 1    | 224760560R2   | NSP     |
| D5086or                    | ZENER DIODE     | UDZS5.6B    | (1)  | 224550560R2   | NSP     |
| D5087                      | ZENER DIODE     | DZ2J056M0L  | 1    | 224760560R2   | NSP     |
| D5087or                    | ZENER DIODE     | UDZS5.6B    | (1)  | 224550560R2   | NSP     |
| D5088                      | ZENER DIODE     | DZ2J056M0L  | 1    | 224760560R2   | NSP     |
| D5088or                    | ZENER DIODE     | UDZS5.6B    | (1)  | 224550560R2   | NSP     |
| D6601                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6601or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6602                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6602or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6603                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6603or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6605                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6605or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6606                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6606or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6607                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6607or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6608                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6608or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6621                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6621or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6622                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6622or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6623                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6623or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6625                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6625or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |
| D6626                      | CHIP TYPE DIODE | DA2J10100   | 1    | 223303R2      | NSP     |
| D6626or                    | CHIP TYPE DIODE | 1SS352      | (1)  | 223234R2      | NSP     |

|         |                 |                 |     |             |     |
|---------|-----------------|-----------------|-----|-------------|-----|
| D6627   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6627or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6628   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6628or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6703   | ZENER DIODE     | DZ2J036M0L      | 1   | 224760360R2 | NSP |
| D6704   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6705   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6706   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6707   | ZENER DIODE     | DZ2J100M0L      | 1   | 224761000R2 | NSP |
| D6740   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6741   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6761   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6761or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6762   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6762or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6763   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6763or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6765   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6765or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6766   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6766or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6767   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6767or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6768   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6768or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| D6780   | ZENER DIODE     | DZ2J033M0L      | 1   | 224760330R2 | NSP |
| D6901   | DIODE           | LN25XB60        | 1   | 22380345    |     |
| D6901A  | HEAT SINK       | 700(20x75x50)   | 1   | 27160693    | NSP |
| D6901B  | SCREW           | 3P+10FN(3BC)    | 1   | 82143010GR  | NSP |
| D6911   | CHIP TYPE DIODE | DA2J10100       | 1   | 223303R2    | NSP |
| D6911or | CHIP TYPE DIODE | 1SS352          | (1) | 223234R2    | NSP |
| Q4001   | HYBRID IC       | BD34704KS2      | 1   | 22242977R3  |     |
| Q4002   | HYBRID IC       | NJW1194         | 1   | 22242893R2  | NSP |
| Q4003   | HYBRID IC       | NJW1194         | 1   | 22242893R2  | NSP |
| Q4004   | HYBRID IC       | NJM4580CG       | 1   | 22242922R2  | NSP |
| Q4005   | HYBRID IC       | NJM4580CG       | 1   | 22242922R2  | NSP |
| Q4008   | HYBRID IC       | NJM4580CG       | 1   | 22242922R2  | NSP |
| Q4101   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4102   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4103   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4104   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4105   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4106   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4107   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4108   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4111   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4112   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4113   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4114   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4115   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4116   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4117   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4118   | TRANSISTOR      | RTAN430C-T112-1 | 1   | 2217780R2   | NSP |
| Q4201   | TRANSISTOR      | KRC105S         | 1   | 2217290R2   | NSP |
| Q4201or | TRANSISTOR      | RN1405          | (1) | 2214500R2   | NSP |

|         |            |                     |     |              |       |
|---------|------------|---------------------|-----|--------------|-------|
| Q4202   | TRANSISTOR | KRC105S             | 1   | 2217290R2    | NSP   |
| Q4202or | TRANSISTOR | RN1405              | (1) | 2214500R2    | NSP   |
| Q4223   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4225   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4226   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4233   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4235   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4236   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4251   | HYBRID IC  | 78M15HF(NJM78M15FA) | 1   | 222780155JRC |       |
| Q4251A  | HEAT SINK  | RAD-196             | 1   | 27160545     | NSP   |
| Q4251B  | SCREW      | 3TTB+8B(3BC)        | 1   | 838430088GR  | NSP   |
| Q4252   | HYBRID IC  | 79M15HF(NJM79M15FA) | 1   | 222790155JRC |       |
| Q4252B  | SCREW      | 3TTB+8B(3BC)        | 1   | 838430088GR  | NSP   |
| Q4253   | TRANSISTOR | INC5001AP1-T111     | 1   | 2218100R2    | N NSP |
| Q4253or | TRANSISTOR | 2SC2881-Y           | (1) | 2217564AR2   | N NSP |
| Q4253or | TRANSISTOR | KTC4373-Y           | (1) | 2218120R2    | NSP   |
| Q4254   | TRANSISTOR | INA5001AP1-T111     | 1   | 2218030R2    | N NSP |
| Q4254or | TRANSISTOR | 2SA1201-Y           | (1) | 2217554AR2   | N NSP |
| Q4254or | TRANSISTOR | KTA1661-Y           | (1) | 2217864R2    | NSP   |
| Q4301   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4302   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4303   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4304   | TRANSISTOR | RTAN430C-T112-1     | 1   | 2217780R2    | NSP   |
| Q4530   | HYBRID IC  | NJM4580CG           | 1   | 22242922R2   | NSP   |
| Q5105   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5106   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5107   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5108   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5125   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5126   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5127   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5128   | TRANSISTOR | 2SC2713-BL          | 1   | 2213136R2    |       |
| Q5225   | TRANSISTOR | INC5001AP1-T111     | 1   | 2218100R2    | N     |
| Q5225or | TRANSISTOR | 2SC2881-Y           | (1) | 2217564AR2   | N     |
| Q5226   | TRANSISTOR | INC5001AP1-T111     | 1   | 2218100R2    | N     |
| Q5226or | TRANSISTOR | 2SC2881-Y           | (1) | 2217564AR2   | N     |
| Q5227   | TRANSISTOR | INC5001AP1-T111     | 1   | 2218100R2    | N     |
| Q5227or | TRANSISTOR | 2SC2881-Y           | (1) | 2217564AR2   | N     |
| Q5228   | TRANSISTOR | INC5001AP1-T111     | 1   | 2218100R2    | N     |
| Q5228or | TRANSISTOR | 2SC2881-Y           | (1) | 2217564AR2   | N     |
| Q5385   | TRANSISTOR | INA6006AP1-T111     | 1   | 2217980R2    | N     |
| Q5385or | TRANSISTOR | 2SA1200-Y(2LONK_ZE) | (1) | 2217584R2    |       |
| Q5386   | TRANSISTOR | INA6006AP1-T111     | 1   | 2217980R2    | N     |
| Q5386or | TRANSISTOR | 2SA1200-Y(2LONK_ZE) | (1) | 2217584R2    |       |
| Q5387   | TRANSISTOR | INA6006AP1-T111     | 1   | 2217980R2    | N     |
| Q5387or | TRANSISTOR | 2SA1200-Y(2LONK_ZE) | (1) | 2217584R2    |       |
| Q5388   | TRANSISTOR | INA6006AP1-T111     | 1   | 2217980R2    | N     |
| Q5388or | TRANSISTOR | 2SA1200-Y(2LONK_ZE) | (1) | 2217584R2    |       |
| Q5405   | TRANSISTOR | INC6006AP1-T111     | 1   | 2217990R2    | N     |
| Q5405or | TRANSISTOR | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2    |       |
| Q5406   | TRANSISTOR | INC6006AP1-T111     | 1   | 2217990R2    | N     |
| Q5406or | TRANSISTOR | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2    |       |
| Q5407   | TRANSISTOR | INC6006AP1-T111     | 1   | 2217990R2    | N     |
| Q5407or | TRANSISTOR | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2    |       |
| Q5408   | TRANSISTOR | INC6006AP1-T111     | 1   | 2217990R2    | N     |

|                         |                            |                     |     |            |     |
|-------------------------|----------------------------|---------------------|-----|------------|-----|
| Q5408or                 | TRANSISTOR                 | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2  |     |
| Q5601                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5602                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5603                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5605                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5606                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5607                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5608                   | TRANSISTOR                 | 2SD2704K            | 1   | 2218130R2  |     |
| Q5625                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  |     |
| Q5626                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  |     |
| Q5627                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  |     |
| Q5628                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  |     |
| Q5645                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  |     |
| Q5646                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  |     |
| Q5647                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  |     |
| Q5648                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  |     |
| Q6105                   | TRANSISTOR                 | TTC004B_Q(S         | 1   | 2218022    |     |
| Q6106                   | TRANSISTOR                 | TTC004B_Q(S         | 1   | 2218022    |     |
| Q6107                   | TRANSISTOR                 | TTC004B_Q(S         | 1   | 2218022    |     |
| Q6108                   | TRANSISTOR                 | TTC004B_Q(S         | 1   | 2218022    |     |
| Q6125                   | TRANSISTOR                 | TTA004B_Q(S         | 1   | 2218012    |     |
| Q6126                   | TRANSISTOR                 | TTA004B_Q(S         | 1   | 2218012    |     |
| Q6127                   | TRANSISTOR                 | TTA004B_Q(S         | 1   | 2218012    |     |
| Q6128                   | TRANSISTOR                 | TTA004B_Q(S         | 1   | 2218012    |     |
| Q6601                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6602                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6603                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6605                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6606                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6607                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6608                   | TRANSISTOR                 | INC6002AC1          | 1   | 2218840R2  | N   |
| Q6700                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  | NSP |
| Q6705                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  | NSP |
| Q6706                   | TRANSISTOR                 | KRA102S             | 1   | 2216220R2  | NSP |
| Q6706or                 | TRANSISTOR                 | RN2402              | (1) | 2214530R2  | NSP |
| Q6740                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  | NSP |
| Q6741                   | TRANSISTOR                 | 2SC2713-BL          | 1   | 2213136R2  | NSP |
| Q6742                   | TRANSISTOR                 | 2SA1163-BL          | 1   | 2216756R2  | NSP |
| Q6800                   | HYBRID IC                  | LM61CIZ             | 1   | 22242212   |     |
| Q6800A                  | RETAINER                   | (PTH)               | 1   | 27141884-1 | NSP |
| Q6801                   | TRANSISTOR                 | 2SC2712-GR          | 1   | 2213145R2  | NSP |
| Q6802                   | TRANSISTOR                 | 2SA1162-GR          | 1   | 2214375R2  | NSP |
| Q6911                   | TRANSISTOR                 | KRC105S             | 1   | 2217290R2  | NSP |
| Q6911or                 | TRANSISTOR                 | RN1405              | (1) | 2214500R2  | NSP |
| [ Transformers, Coils ] |                            |                     |     |            |     |
| L6441                   | SPEAKER OUTPUT FILTER COIL | SC2-0.8X5.5X18.5T   | 1   | 231455S    | N   |
| L6441or                 | SPEAKER OUTPUT FILTER COIL | SC-0.8X5.5X18.5T    | (1) | 231431S    |     |
| L6442                   | SPEAKER OUTPUT FILTER COIL | SC2-0.8X5.5X18.5T   | 1   | 231455S    | N   |
| L6442or                 | SPEAKER OUTPUT FILTER COIL | SC-0.8X5.5X18.5T    | (1) | 231431S    |     |
| L6443                   | SPEAKER OUTPUT FILTER COIL | SC2-0.8X5.5X18.5T   | 1   | 231455S    | N   |
| L6443or                 | SPEAKER OUTPUT FILTER COIL | SC-0.8X5.5X18.5T    | (1) | 231431S    |     |
| L6445                   | SPEAKER OUTPUT FILTER COIL | SC2-0.8X5.5X18.5T   | 1   | 231455S    | N   |
| L6445or                 | SPEAKER OUTPUT FILTER COIL | SC-0.8X5.5X18.5T    | (1) | 231431S    |     |
| L6446                   | SPEAKER OUTPUT FILTER COIL | SC2-0.8X5.5X18.5T   | 1   | 231455S    | N   |
| L6446or                 | SPEAKER OUTPUT FILTER COIL | SC-0.8X5.5X18.5T    | (1) | 231431S    |     |

|                |                                  |                    |     |             |       |
|----------------|----------------------------------|--------------------|-----|-------------|-------|
| L6447          | SPEAKER OUTPUT FILTER COIL       | SC2-0.8X5.5X18.5T  | 1   | 231455S     | N     |
| L6447or        | SPEAKER OUTPUT FILTER COIL       | SC-0.8X5.5X18.5T   | (1) | 231431S     |       |
| L6448          | SPEAKER OUTPUT FILTER COIL       | SC2-0.8X5.5X18.5T  | 1   | 231455S     | N     |
| L6448or        | SPEAKER OUTPUT FILTER COIL       | SC-0.8X5.5X18.5T   | (1) | 231431S     |       |
| [ Capacitors ] |                                  |                    |     |             |       |
| C4001          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4002          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4003          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4004          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4005          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4006          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4007          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4008          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4009          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF221JE       | 1   | 376332214T  | N NSP |
| C4010          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF221JE       | 1   | 376332214T  | N NSP |
| C4011          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4012          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4015          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4016          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4041          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4042          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4043          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4044          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4045          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4046          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4047          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4048          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4049          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4050          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4051          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4052          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4053          | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K1     | 1   | 332101025R1 | NSP   |
| C4054          | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-102K1     | 1   | 332101025R1 | NSP   |
| C4055          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4056          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4061          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1    | 1   | 342101014R1 | NSP   |
| C4062          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-101J1    | 1   | 342101014R1 | NSP   |
| C4063          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4064          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4065          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4066          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-47M(UTSP) | 1   | 397554707AT | N     |
| C4083          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1    | 1   | 342103314R1 | NSP   |
| C4084          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-331J1    | 1   | 342103314R1 | NSP   |
| C4101          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4102          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4103          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4104          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-22M(UTSP) | 1   | 397582207AT | N     |
| C4105          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4106          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4107          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4108          | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP) | 1   | 397584707AT | N     |
| C4111          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4112          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4113          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |
| C4114          | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-221J1    | 1   | 342102214R1 | NSP   |



|         |                                    |                     |     |             |     |
|---------|------------------------------------|---------------------|-----|-------------|-----|
| C4115   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4116   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4117   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4118   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4175   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W16V-220M       | 1   | 398542217T  |     |
| C4176   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W16V-220M       | 1   | 398542217T  |     |
| C4181   | FILM C                             | C281H104J20A21A     | 1   | 376821044T  | NSP |
| C4190   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C4191   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4192   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C4201   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C4202   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C4203   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4204   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4206   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4207   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4208   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4209   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4210   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4211   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4212   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4213   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1   | 332101025R1 | NSP |
| C4214   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C4223   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C4225   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C4226   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C4250   | FILM C                             | C282A334J20A21A     | 1   | 376833344T  | NSP |
| C4253   | FILM C                             | C281H104J20A21A     | 1   | 376821044T  | NSP |
| C4254   | FILM C                             | C281H104J20A21A     | 1   | 376821044T  | NSP |
| C4255   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1   | 397581007AT | N   |
| C4256   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1   | 397581007AT | N   |
| C4259   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-22M(UTSP)  | 1   | 397582207AT | N   |
| C4260   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-22M(UTSP)  | 1   | 397582207AT | N   |
| C4261   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-470M(UTSP) | 1   | 397534717T  | N   |
| C4262   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-470M(UTSP) | 1   | 397534717T  | N   |
| C4269   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-220M(UTSP) | 1   | 397532217AT | N   |
| C4270   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-220M(UTSP) | 1   | 397532217AT | N   |
| C4271   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W35V-2200M      | 1   | 398562227S  |     |
| C4271or | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W35V-2200M(VR)  | (1) | 394662227S  |     |
| C4272   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W35V-2200M      | 1   | 398562227S  |     |
| C4272or | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W35V-2200M(VR)  | (1) | 394662227S  |     |
| C4301   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4302   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4303   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4304   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4305   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C4306   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C4307   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C4308   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1   | 332101045R1 | NSP |
| C4309   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-4.7M(UTSP) | 1   | 397580477AT | N   |
| C4310   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-4.7M(UTSP) | 1   | 397580477AT | N   |
| C4311   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4312   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1   | 397554707AT | N   |
| C4313   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |
| C4314   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1   | 342102214R1 | NSP |

|       |                                    |                     |   |             |       |
|-------|------------------------------------|---------------------|---|-------------|-------|
| C4315 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C4316 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1 | 332101025R1 | NSP   |
| C4321 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4322 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4323 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4324 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4325 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-332K1      | 1 | 332103325R1 | NSP   |
| C4326 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-332K1      | 1 | 332103325R1 | NSP   |
| C4327 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C4328 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C4329 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-4.7M(UTSP) | 1 | 397580477AT | N     |
| C4330 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-4.7M(UTSP) | 1 | 397580477AT | N     |
| C4331 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4332 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-47M(UTSP)  | 1 | 397554707AT | N     |
| C4333 | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1 | 342102214R1 | NSP   |
| C4334 | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-221J1     | 1 | 342102214R1 | NSP   |
| C4335 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C4336 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1      | 1 | 332101025R1 | NSP   |
| C4531 | ELECTROLYTIC CAPACITOR             | CE04W16V-47M(S)     | 1 | 353744709T  |       |
| C4532 | ELECTROLYTIC CAPACITOR             | CE04W16V-47M(S)     | 1 | 353744709T  |       |
| C4533 | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-102J1     | 1 | 342101024R1 | NSP   |
| C4534 | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-102J1     | 1 | 342101024R1 | NSP   |
| C4535 | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF123JE       | 1 | 376591234T  | NSP   |
| C4536 | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF123JE       | 1 | 376591234T  | NSP   |
| C4537 | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF332JE       | 1 | 376593324T  | NSP   |
| C4538 | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF332JE       | 1 | 376593324T  | NSP   |
| C4543 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-472K1      | 1 | 332104725R1 | NSP   |
| C4544 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-472K1      | 1 | 332104725R1 | NSP   |
| C4545 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C4546 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C4547 | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W16V-220M       | 1 | 398542217T  |       |
| C4548 | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W16V-220M       | 1 | 398542217T  |       |
| C4549 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C4550 | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1      | 1 | 332101045R1 | NSP   |
| C4551 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-220M(UTSP) | 1 | 397532217AT | N     |
| C4552 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W10V-220M(UTSP) | 1 | 397532217AT | N     |
| C5005 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE        | 1 | 376332214T  | N NSP |
| C5006 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE        | 1 | 376332214T  | N NSP |
| C5007 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE        | 1 | 376332214T  | N NSP |
| C5008 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE        | 1 | 376332214T  | N NSP |
| C5025 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1 | 397584707AT | N     |
| C5026 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1 | 397584707AT | N     |
| C5027 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1 | 397584707AT | N     |
| C5028 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1 | 397584707AT | N     |
| C5085 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C5086 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C5087 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C5088 | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | 1 | 397581007AT | N     |
| C5485 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF101JE        | 1 | 376331014T  | N NSP |
| C5486 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF101JE        | 1 | 376331014T  | N NSP |
| C5487 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF101JE        | 1 | 376331014T  | N NSP |
| C5488 | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF101JE        | 1 | 376331014T  | N NSP |
| C5505 | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1 | 394692207T  |       |
| C5506 | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1 | 394692207T  |       |
| C5507 | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1 | 394692207T  |       |



|         |                                    |                     |     |             |     |
|---------|------------------------------------|---------------------|-----|-------------|-----|
| C5508   | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5525   | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5526   | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5527   | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5528   | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5625   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C5626   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C5627   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C5628   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C5645   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C5646   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C5647   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C5648   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C6305   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C6306   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C6307   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C6308   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V 47M(UTSP)  | 1   | 397584707AT | N   |
| C6405   | CERAMIC CAPACITOR                  | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6406   | CERAMIC CAPACITOR                  | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6407   | CERAMIC CAPACITOR                  | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6408   | CERAMIC CAPACITOR                  | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6425   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-220M(UTSP) | 1   | 397552217T  | N   |
| C6426   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-220M(UTSP) | 1   | 397552217T  | N   |
| C6427   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-220M(UTSP) | 1   | 397552217T  | N   |
| C6428   | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-220M(UTSP) | 1   | 397552217T  | N   |
| C6461   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6462   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6463   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6465   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6466   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6467   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6468   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF473JE       | 1   | 376594734T  | NSP |
| C6601   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6602   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6603   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6605   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6606   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6607   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6608   | FILM C                             | C281H224J20A21A     | 1   | 376822244T  | NSP |
| C6700   | UMXR TYPE PLASTIC FILM CAPACITOR   | 1JUMXRTF103JE       | 1   | 376591034T  | NSP |
| C6703   | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-101J1     | 1   | 342101014R1 | NSP |
| C6704   | CHIP TYPE CERAMIC CAPACITOR        | CK725F1A-105Z1      | 1   | 332181050R1 | NSP |
| C6705   | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-222K1      | 1   | 332102225R1 | NSP |
| C6741   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W25V-220M       | 1   | 398552217T  |     |
| C6741or | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-220M(UTSP) | (1) | 397552217T  | N   |
| C6742   | CHIP TYPE CERAMIC CAPACITOR        | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C6744   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W50V-1M         | 1   | 398580107T  |     |
| C6744or | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-1M(UTSP)   | (1) | 397580107AT | N   |
| C6780   | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W50V-10M        | 1   | 398581007T  |     |
| C6780or | UTSP TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(UTSP)  | (1) | 397581007AT | N   |
| C6800   | CHIP TYPE CERAMIC CAPACITOR        | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C6801   | CHIP TYPE CERAMIC CAPACITOR        | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C6901   | ELECTROLYTIC CAPACITOR             | CE69W75V-15000MMN   | 1   | 3504535     |     |
| C6902   | ELECTROLYTIC CAPACITOR             | CE69W75V-15000MMN   | 1   | 3504535     |     |
| C6903   | FILM C                             | C282A334J20A21A     | 1   | 376833344T  | NSP |

|               |                             |                 |   |             |     |
|---------------|-----------------------------|-----------------|---|-------------|-----|
| C6904         | FILM C                      | C282A334J20A21A | 1 | 376833344T  | NSP |
| C6911         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1  | 1 | 332101045R1 | NSP |
| [ Resistors ] |                             |                 |   |             |     |
| R4001         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4002         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4003         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4004         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4005         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4006         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4007         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4008         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4009         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4010         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4011         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4012         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4013         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4014         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4015         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4016         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4017         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4018         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4019         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4020         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4021         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4022         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4023         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4024         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4029         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4030         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4031         | CHIP TYPE CARBON RESISTOR   | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R4032         | CHIP TYPE CARBON RESISTOR   | RN72K1J-563JE   | 1 | 435035634R1 | NSP |
| R4041         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4042         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4043         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4044         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4045         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4046         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4047         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4048         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4049         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4050         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4053         | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE   | 1 | 435031024R1 | NSP |
| R4054         | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE   | 1 | 435031024R1 | NSP |
| R4055         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4056         | CHIP TYPE CARBON RESISTOR   | RN72K1J-224JE   | 1 | 435032244R1 | NSP |
| R4057         | CHIP TYPE CARBON RESISTOR   | RN72K1J-104JE   | 1 | 435031044R1 | NSP |
| R4061         | CHIP TYPE CARBON RESISTOR   | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4062         | CHIP TYPE CARBON RESISTOR   | RN72K1J-223JE   | 1 | 435032234R1 | NSP |
| R4063         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4064         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R4065         | CHIP TYPE CARBON RESISTOR   | RN72K1J-332JE   | 1 | 435033324R1 | NSP |
| R4066         | CHIP TYPE CARBON RESISTOR   | RN72K1J-332JE   | 1 | 435033324R1 | NSP |
| R4067         | CHIP TYPE CARBON RESISTOR   | RN72K1J-123JE   | 1 | 435031234R1 | NSP |
| R4068         | CHIP TYPE CARBON RESISTOR   | RN72K1J-123JE   | 1 | 435031234R1 | NSP |
| R4069         | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE   | 1 | 435031034R1 | NSP |



|       |                           |                |   |             |     |
|-------|---------------------------|----------------|---|-------------|-----|
| R4161 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4162 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4163 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4164 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4165 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4166 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4167 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4168 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4174 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4175 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R4176 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R4181 | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE  | 1 | 435031024R1 | NSP |
| R4182 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4183 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4184 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4185 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4186 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4190 | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE  | 1 | 435032214R1 | NSP |
| R4191 | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE  | 1 | 435034734R1 | NSP |
| R4192 | CHIP TYPE CARBON RESISTOR | RN72K1J-153JE  | 1 | 435031534R1 | NSP |
| R4193 | CHIP TYPE CARBON RESISTOR | RN72K1J-122JE  | 1 | 435031224R1 | NSP |
| R4194 | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE  | 1 | 435031034R1 | NSP |
| R4201 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R4202 | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE  | 1 | 435032204R1 | NSP |
| R4223 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4225 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4226 | CHIP TYPE CARBON RESISTOR | RN72K1J-121JE  | 1 | 435031214R1 | NSP |
| R4233 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4235 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4236 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |
| R4251 | METAL RESISTOR            | RNU1/2WCJ-0.22 | 1 | 453532294T  | NSP |
| R4252 | METAL RESISTOR            | RNU1/2WCJ-0.22 | 1 | 453532294T  | NSP |
| R4253 | METAL RESISTOR            | RNU1/2WCJ-0.22 | 1 | 453532294T  | NSP |
| R4254 | METAL RESISTOR            | RNU1/2WCJ-0.22 | 1 | 453532294T  | NSP |
| R4255 | METAL RESISTOR            | RNU1WCJ-2.2    | 1 | 453630224T  | NSP |
| R4256 | METAL RESISTOR            | RNU1WCJ-2.2    | 1 | 453630224T  | NSP |
| R4259 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4260 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4261 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4262 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4263 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4264 | METAL OXIDE FILM RESISTOR | RS1WBJ-33      | 1 | 443623304T  | NSP |
| R4265 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R4266 | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE  | 1 | 435031524R1 | NSP |
| R4269 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4270 | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE  | 1 | 435031004R1 | NSP |
| R4301 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4302 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4303 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R4304 | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE  | 1 | 435034724R1 | NSP |
| R4307 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R4308 | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE  | 1 | 435032224R1 | NSP |
| R4309 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4310 | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE  | 1 | 435032244R1 | NSP |
| R4311 | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE  | 1 | 435031014R1 | NSP |

[illegible]

|       |                                            |               |   |             |     |
|-------|--------------------------------------------|---------------|---|-------------|-----|
| R5026 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R5027 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R5028 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-563JE | 1 | 435035634R1 | NSP |
| R5045 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R5046 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R5047 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R5048 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R5065 | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-100K | 1 | 443521044T  | NSP |
| R5066 | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-100K | 1 | 443521044T  | NSP |
| R5067 | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-100K | 1 | 443521044T  | NSP |
| R5068 | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-100K | 1 | 443521044T  | NSP |
| R5085 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R5086 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R5087 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R5088 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R5105 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5106 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5107 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5108 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5185 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5186 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5187 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5188 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5205 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5206 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5207 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5208 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5225 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5226 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5227 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5228 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5245 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5246 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5247 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5248 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5305 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5306 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5307 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5308 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5325 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5326 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5327 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5328 | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5385 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5386 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5387 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5388 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5405 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5406 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5407 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5408 | NON-FLAMMABLE CARBON FILM RESISTO R25J-220 |               | 1 | 415472214T  |     |
| R5465 | NON-FLAMMABLE CARBON FILM RESISTO R25J-39K |               | 1 | 415473934T  |     |
| R5466 | NON-FLAMMABLE CARBON FILM RESISTO R25J-39K |               | 1 | 415473934T  |     |
| R5467 | NON-FLAMMABLE CARBON FILM RESISTO R25J-39K |               | 1 | 415473934T  |     |
| R5468 | NON-FLAMMABLE CARBON FILM RESISTO R25J-39K |               | 1 | 415473934T  |     |





|       |                                             |               |   |             |     |
|-------|---------------------------------------------|---------------|---|-------------|-----|
| R5785 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-392FE | 1 | 435033922R1 | NSP |
| R5786 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-332FE | 1 | 435033322R1 | NSP |
| R5787 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-332FE | 1 | 435033322R1 | NSP |
| R5788 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-272FE | 1 | 435032722R1 | NSP |
| R5825 | NON-FLAMMABLE CARBON FILM RESISTO R25J-2.2  |               | 1 | 415470224T  |     |
| R5826 | NON-FLAMMABLE CARBON FILM RESISTO R25J-2.2  |               | 1 | 415470224T  |     |
| R5827 | NON-FLAMMABLE CARBON FILM RESISTO R25J-2.2  |               | 1 | 415470224T  |     |
| R5828 | NON-FLAMMABLE CARBON FILM RESISTO R25J-2.2  |               | 1 | 415470224T  |     |
| R5861 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5862 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5863 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5865 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5866 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5867 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5868 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5885 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5886 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5887 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5888 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R6081 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6082 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6083 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6085 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6086 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6087 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6088 | METAL PLATE RESISTOR                        | MPR5W+5W 0R22 | 1 | 4000233     |     |
| R6141 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6142 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6143 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6145 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6146 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6147 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6148 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6161 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6162 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6163 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6165 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6166 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6167 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6168 | NON-FLAMMABLE CARBON FILM RESISTO R25J-0.22 |               | 1 | 415472294T  |     |
| R6305 | NON-FLAMMABLE CARBON FILM RESISTO R25J-120  |               | 1 | 415471214T  |     |
| R6306 | NON-FLAMMABLE CARBON FILM RESISTO R25J-120  |               | 1 | 415471214T  |     |
| R6307 | NON-FLAMMABLE CARBON FILM RESISTO R25J-120  |               | 1 | 415471214T  |     |
| R6308 | NON-FLAMMABLE CARBON FILM RESISTO R25J-120  |               | 1 | 415471214T  |     |
| R6405 | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K  |               | 1 | 415475634T  |     |
| R6406 | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K  |               | 1 | 415475634T  |     |
| R6407 | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K  |               | 1 | 415475634T  |     |
| R6408 | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K  |               | 1 | 415475634T  |     |
| R6425 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R6426 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R6427 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R6428 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R6441 | CHIP TYPE CARBON RESISTOR                   | RN72K2E-100JE | 1 | 435221004R1 | NSP |
| R6442 | CHIP TYPE CARBON RESISTOR                   | RN72K2E-100JE | 1 | 435221004R1 | NSP |
| R6443 | CHIP TYPE CARBON RESISTOR                   | RN72K2E-100JE | 1 | 435221004R1 | NSP |



[illegible]

|                                |                           |                 |     |             |                 |
|--------------------------------|---------------------------|-----------------|-----|-------------|-----------------|
| R6721                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6722                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6723                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6725                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6726                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6727                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6728                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6741                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE   | 1   | 435033334R1 | NSP             |
| R6742                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE   | 1   | 435031034R1 | NSP             |
| R6743                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6744                          | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE   | 1   | 435032234R1 | NSP             |
| R6761                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6762                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6763                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6765                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6766                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6767                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6768                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE   | 1   | 435034734R1 | NSP             |
| R6780                          | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE   | 1   | 435035624R1 | NSP             |
| R6781                          | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE   | 1   | 435035624R1 | NSP             |
| R6793                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1 | NSP             |
| R6795                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1 | NSP             |
| R6796                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1 | NSP             |
| R6797                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1 | NSP             |
| R6802                          | CHIP TYPE CARBON RESISTOR | RN72K1J-153FE   | 1   | 435031532R1 | NSP             |
| R6803                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473FE   | 1   | 435034732R1 | NSP             |
| R6804                          | CHIP TYPE CARBON RESISTOR | RN72K1J-184JE   | 1   | 435031844R1 | NSP             |
| R6805                          | CHIP TYPE CARBON RESISTOR | RN72K1J-223FE   | 1   | 435032232R1 | NSP             |
| R6806                          | THERMISTOR                | PRF18BF471QB5RB | 1   | 4000286R2   | NSP             |
| R6808                          | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE   | 1   | 435032244R1 | NSP             |
| R6901                          | METAL RESISTOR            | RNU1/2WCJ-0.1   | 1   | 453531094T  | <b>N</b> NSP    |
| R6913                          | METAL OXIDE FILM RESISTOR | RS1/2WBJ-33     | 1   | 443523304T  | NSP             |
| [ Switches, Terminals, Wires ] |                           |                 |     |             |                 |
| F6901A                         | FUSE HOLDER               | SN5051          | 1   | 250113      | <b>!</b> , NNSP |
| F6901B                         | FUSE HOLDER               | SN5051          | 1   | 250113      | <b>!</b> , NNSP |
| F6902A                         | FUSE HOLDER               | SN5051          | 1   | 250113      | <b>!</b> , NNSP |
| F6902B                         | FUSE HOLDER               | SN5051          | 1   | 250113      | <b>!</b> , NNSP |
| P0001B                         | PRINTED WIRING BOARD      | BCETC-1980      | {1} | 25141980    | NSP             |
| P0001C                         | PRINTED WIRING BOARD      | BCETC-1981      | {1} | 25141981    | NSP             |
| P010                           | PRINTED WIRING BOARD      | BCAF-1979       | 1   | 25141979    | NSP             |
| P0100                          | PRINTED WIRING BOARD      | BCAF-1979       | {1} | 25141979A   | <b>N</b> NSP    |
| P1501B                         | SOCKET                    | IMSA-9142S-22A  | 1   | 25053233    | NSP             |
| P1502B                         | SOCKET                    | IMSA-9142S-22A  | 1   | 25053233    | NSP             |
| P1511B                         | RETAINER                  | (TRM)           | 1   | 25060507    | NSP             |
| P4001                          | PIN JACK                  | NPJ-4PDWWRR624  | 1   | 25045845    |                 |
| P4002                          | PIN JACK                  | NPJ-4PDWWRR624  | 1   | 25045845    |                 |
| P4003                          | PIN JACK                  | NPJ-4PDWWRR624  | 1   | 25045845    |                 |
| P4004                          | PIN JACK                  | NPJ-2PDWR558    | 1   | 25045776    |                 |
| P4005                          | PIN JACK                  | NPJ-4PDRWB785   | 1   | 25046056    | <b>N</b>        |
| P4006                          | PIN JACK                  | NPJ-2PDWR558    | 1   | 25045776    |                 |
| P4007                          | PIN JACK                  | NPJ-1PDB556     | 1   | 25045774    |                 |
| P4008                          | PIN JACK                  | NPJ-4PDWWRR624  | 1   | 25045845    |                 |
| P4009                          | PIN JACK                  | NPJ-2PDWR558    | 1   | 25045776    |                 |
| P4011                          | TRM-423(SCREW)            | NEJITANSI ST3   | 1   | 25060495    | NSP             |
| P4301A                         | WIRE HOL                  | CHD-1.5-5       | 1   | 25053536    | <b>N</b> NSP    |

|                            |                                     |                    |     |                |              |
|----------------------------|-------------------------------------|--------------------|-----|----------------|--------------|
| P4301Aor                   | WIRE HOL                            | NSCT-5P876         | (1) | 25051089       | NSP          |
| P4301B                     | WIRE HOL                            | CHD-1.5-5          | 1   | 25053536       | <b>N</b> NSP |
| P4301Bor                   | WIRE HOL                            | NSCT-5P876         | (1) | 25051089       | NSP          |
| P5506B                     | RETAINER                            | (TRM)              | 1   | 25060507       | NSP          |
| P5509A                     | RETAINER                            | (TRM)              | 1   | 25060507       | NSP          |
| P6001B                     | PLUG                                | NPLG-9P0964        | 1   | 25056014       | NSP          |
| P6002B                     | PLUG                                | NPLG-9P0964        | 1   | 25056014       | NSP          |
| P6003B                     | PLUG                                | NPLG-9P0964        | 1   | 25056014       | NSP          |
| P6011B                     | RETAINER                            | (BUS)              | 1   | 27142306A      | <b>N</b> NSP |
| P6021                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6022                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6023                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6025                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6026                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6027                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6028                      | PLUG                                | NPLG-2P29          | 1   | 25055038       | NSP          |
| P6400                      | WIRE HARNESS ASSEMBLY               | NSAS-7P2206        | 1   | 2009991395UL   | NSP          |
| P6400A                     | WIRE HOL                            | CHD-2.5-7          | 1   | 25053542       | <b>N</b> NSP |
| P6400Aor                   | WIRE HOL                            | NSCT-7P898         | (1) | 25051111       | NSP          |
| P6401                      | WIRE HARNESS ASSEMBLY               | NSAS-9P2223        | 1   | 2009991412UL   | NSP          |
| P6401A                     | WIRE HOL                            | CHD-2.5-9          | 1   | 25053543       | <b>N</b> NSP |
| P6401Aor                   | WIRE HOL                            | NSCT-9P900         | (1) | 25051113       | NSP          |
| P6800                      | WIRE HARNESS ASSEMBLY               | NSAS-5P2110        | 1   | 2009991299UL   | NSP          |
| P6800A                     | WIRE HOL                            | CHD-1.5-5          | 1   | 25053536       | NSP          |
| P6800Aor                   | WIRE HOL                            | NSCT-3P874         | (1) | 25051087       | <b>N</b> NSP |
| P6901                      | PLUG                                | NPLG-5P152         | 1   | 25055168       | <b>N</b> NSP |
| P6902A                     | CRIMP CORD ASSEMBLY                 | CLIMP AS           | 1   | 2069925080UL   | NSP          |
| P6903A                     | CRIMP CORD ASSEMBLY                 | CRIMP AS           | 1   | 2069925242UL   | <b>N</b> NSP |
| P6904A                     | CRIMP CORD ASSEMBLY                 | CRIMP AS           | 1   | 2069925166UL   | <b>N</b> NSP |
| RL4201                     | RELAY                               | NRL-2P2A-DC24-212  | 1   | 25065741       |              |
| RL4201or                   | RELAY                               | NRL-2P2A-DC24-208  | (1) | 25065728       |              |
| RL4202                     | RELAY                               | NRL-2P2A-DC24-212  | 1   | 25065741       |              |
| RL4202or                   | RELAY                               | NRL-2P2A-DC24-208  | (1) | 25065728       |              |
| RL6911                     | RELAY                               | NRL-1P10A-DC12-196 | 1   | 25065707       |              |
| RL6912                     | RELAY                               | NRL-1P10A-DC12-196 | 1   | 25065707       |              |
| <b>[ Frontend, Units ]</b> |                                     |                    |     |                |              |
| BAAF-1979                  | Audio frequency circuit pc board AS | BAAF-1979-1Q       | 1   | 1B5141979-1Q-C | Child        |
| BAETC-1980                 | Et cetra pc board AS                | BAETC-1980-1Q      | 1   | 1B5141980-1Q-C | Child        |
| BAETC-1981                 | Et cetra pc board AS                | BAETC-1981-1Q      | 1   | 1B5141981-1Q-C | Child        |

**BACLA-2030-1A**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

## &lt;Notes&gt;

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                   | PART NAME       | DESCRIPTION         | Q'TY | PART NO. (SN) | REMARKS      |
|----------------------------|-----------------|---------------------|------|---------------|--------------|
| <b>[ Semi-conductors ]</b> |                 |                     |      |               |              |
| D5081                      | ZENER DIODE     | DZ2J056M0L          | 1    | 224760560R2   | NSP          |
| D5082                      | ZENER DIODE     | DZ2J056M0L          | 1    | 224760560R2   | NSP          |
| D5083                      | ZENER DIODE     | DZ2J056M0L          | 1    | 224760560R2   | NSP          |
| D9001                      | DIODE           | S1WB(A)60B-7062     | 1    | 22380377R2    | <b>N</b> NSP |
| D9002                      | SPECIFIED DIODE | P6SMB200A-M3/52T    | 1    | 225505R2      | <b>N</b> NSP |
| D9003                      | DIODE           | GU1M-60A-2          | 1    | 22380405R2    | NSP          |
| D9003or                    | DIODE           | US1K-E3/61T         | (1)  | 22380376R2    | <b>N</b> NSP |
| D9004                      | DIODE           | RF301BM2STL         | 1    | 22380388R2    | NSP          |
| D9006                      | DIODE           | M1FL20U             | 1    | 223276R2      | NSP          |
| D9008                      | DIODE           | RBR3MM30ATR         | 1    | 22380401R2    | NSP          |
| D9011                      | CHIP TYPE DIODE | DA2J10100           | 1    | 223303R2      | NSP          |
| D9012                      | ZENER DIODE     | DZ2J360M0L          | 1    | 224763600R2   | NSP          |
| D9013                      | SPECIFIED DIODE | P6SMB20A-M3/52      | 1    | 225515R2      | <b>N</b> NSP |
| D9018                      | ZENER DIODE     | DZ2J200M0L          | 1    | 224762000R2   | NSP          |
| Q5101                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5102                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5103                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5121                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5122                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5123                      | TRANSISTOR      | 2SC2713-BL          | 1    | 2213136R2     |              |
| Q5221                      | TRANSISTOR      | INC5001AP1-T111     | 1    | 2218100R2     |              |
| Q5221or                    | TRANSISTOR      | 2SC2881-Y           | (1)  | 2217564R2     | <b>N</b>     |
| Q5222                      | TRANSISTOR      | INC5001AP1-T111     | 1    | 2218100R2     |              |
| Q5222or                    | TRANSISTOR      | 2SC2881-Y           | (1)  | 2217564R2     | <b>N</b>     |
| Q5223                      | TRANSISTOR      | INC5001AP1-T111     | 1    | 2218100R2     |              |
| Q5223or                    | TRANSISTOR      | 2SC2881-Y           | (1)  | 2217564R2     | <b>N</b>     |
| Q5381                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5381or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |
| Q5382                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5382or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |
| Q5383                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5383or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |
| Q5401                      | TRANSISTOR      | INC6006AP1-T111     | 1    | 2217990R2     |              |
| Q5401or                    | TRANSISTOR      | 2SC2880-Y(2LONK_ZE) | (1)  | 2217594R2     |              |
| Q5402                      | TRANSISTOR      | INC6006AP1-T111     | 1    | 2217990R2     |              |
| Q5402or                    | TRANSISTOR      | 2SC2880-Y(2LONK_ZE) | (1)  | 2217594R2     |              |
| Q5403                      | TRANSISTOR      | INC6006AP1-T111     | 1    | 2217990R2     |              |
| Q5403or                    | TRANSISTOR      | 2SC2880-Y(2LONK_ZE) | (1)  | 2217594R2     |              |
| Q5421                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5421or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |
| Q5422                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5422or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |
| Q5423                      | TRANSISTOR      | INA6006AP1-T111     | 1    | 2217980R2     |              |
| Q5423or                    | TRANSISTOR      | 2SA1200-Y(2LONK_ZE) | (1)  | 2217584R2     |              |

|                         |                                  |                     |     |             |     |
|-------------------------|----------------------------------|---------------------|-----|-------------|-----|
| Q5441                   | TRANSISTOR                       | INC6006AP1-T111     | 1   | 2217990R2   |     |
| Q5441or                 | TRANSISTOR                       | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2   |     |
| Q5442                   | TRANSISTOR                       | INC6006AP1-T111     | 1   | 2217990R2   |     |
| Q5442or                 | TRANSISTOR                       | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2   |     |
| Q5443                   | TRANSISTOR                       | INC6006AP1-T111     | 1   | 2217990R2   |     |
| Q5443or                 | TRANSISTOR                       | 2SC2880-Y(2LONK_ZE) | (1) | 2217594R2   |     |
| Q5621                   | TRANSISTOR                       | 2SC2713-BL          | 1   | 2213136R2   |     |
| Q5622                   | TRANSISTOR                       | 2SC2713-BL          | 1   | 2213136R2   |     |
| Q5623                   | TRANSISTOR                       | 2SC2713-BL          | 1   | 2213136R2   |     |
| Q5641                   | TRANSISTOR                       | 2SA1163-BL          | 1   | 2216756R2   |     |
| Q5642                   | TRANSISTOR                       | 2SA1163-BL          | 1   | 2216756R2   |     |
| Q5643                   | TRANSISTOR                       | 2SA1163-BL          | 1   | 2216756R2   |     |
| Q6101                   | TRANSISTOR                       | TTC004B_Q(S         | 1   | 2218022     |     |
| Q6102                   | TRANSISTOR                       | TTC004B_Q(S         | 1   | 2218022     |     |
| Q6103                   | TRANSISTOR                       | TTC004B_Q(S         | 1   | 2218022     |     |
| Q6121                   | TRANSISTOR                       | TTA004B_Q(S         | 1   | 2218012     |     |
| Q6122                   | TRANSISTOR                       | TTA004B_Q(S         | 1   | 2218012     |     |
| Q6123                   | TRANSISTOR                       | TTA004B_Q(S         | 1   | 2218012     |     |
| Q9001                   | HYBRID IC                        | STR-A6051M          | 1   | 222154      |     |
| Q9003                   | HYBRID IC                        | EL816MX             | 1   | 22242845    | N   |
| Q9004                   | HYBRID IC                        | KIA431A-AT/P        | 1   | 22242770T   | NSP |
| Q9005                   | TRANSISTOR                       | KRC102S             | 1   | 2216190R2   | NSP |
| Q9032                   | TRANSISTOR                       | KRC102S             | 1   | 2216190R2   | NSP |
| Q9032or                 | TRANSISTOR                       | RN1402              | (1) | 2214470R2   | NSP |
| Q9033                   | TRANSISTOR                       | KRA102S             | 1   | 2216220R2   | NSP |
| Q9033or                 | TRANSISTOR                       | RN2402              | (1) | 2214530R2   | NSP |
| [ Transformers, Coils ] |                                  |                     |     |             |     |
| L9001                   | CHOKE COIL                       | EM-UT2014-0033      | 1   | 231474      | N   |
| L9002                   | CHOKE COIL                       | RCR1010NP-100M      | 1   | 231449M100  |     |
| L9004                   | CORE                             | BLM18PG181SN1D      | 1   | 2350005R1   | NSP |
| L9005                   | CORE                             | BLM18PG181SN1D      | 1   | 2350005R1   | NSP |
| T9001                   | POWER TRANSFORMER                | NPT-1632S           | 1   | 2302076     | !   |
| T9001or                 | POWER TRANSFORMER                | NPT-1633S           | (1) | 2302077     | !   |
| [ Capacitors ]          |                                  |                     |     |             |     |
| C5001                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF221JE        | 1   | 376332214T  | NSP |
| C5002                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF221JE        | 1   | 376332214T  | NSP |
| C5003                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF221JE        | 1   | 376332214T  | NSP |
| C5021                   | UTSJ C                           | CE04W50V-47M(UTSJ)  | 1   | 398084707BT |     |
| C5022                   | UTSJ C                           | CE04W50V-47M(UTSJ)  | 1   | 398084707BT |     |
| C5023                   | UTSJ C                           | CE04W50V-47M(UTSJ)  | 1   | 398084707BT |     |
| C5081                   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007AT |     |
| C5082                   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007AT |     |
| C5083                   | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V-10M(UTSP)  | 1   | 397581007AT |     |
| C5481                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF101JE        | 1   | 376331014T  | NSP |
| C5482                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF101JE        | 1   | 376331014T  | NSP |
| C5483                   | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF101JE        | 1   | 376331014T  | NSP |
| C5501                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5502                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5503                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5521                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5522                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5523                   | VR TYPE ELECTROLYTIC CAPACITOR   | CE04W100V-22M(VR)   | 1   | 394692207T  |     |
| C5621                   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF103JE       | 1   | 376591034T  | NSP |
| C5622                   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF103JE       | 1   | 376591034T  | NSP |
| C5623                   | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF103JE       | 1   | 376591034T  | NSP |

|               |                                  |                     |     |             |     |
|---------------|----------------------------------|---------------------|-----|-------------|-----|
| C5641         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C5642         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C5643         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C6301         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C6302         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C6303         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W50V 47M(UTSP)  | 1   | 397584707AT |     |
| C6401         | CERAMIC CAPACITOR                | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6402         | CERAMIC CAPACITOR                | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6403         | CERAMIC CAPACITOR                | CC45SL50V-040C      | 1   | 345020401T  | NSP |
| C6421         | UTSJ C                           | CE04W25V-220M(UTSJ) | 1   | 398052217AT |     |
| C6422         | UTSJ C                           | CE04W25V-220M(UTSJ) | 1   | 398052217AT |     |
| C6423         | UTSJ C                           | CE04W25V-220M(UTSJ) | 1   | 398052217AT |     |
| C9001         | IS TYPE CAPACITOR                | LE104-MX-C3.5       | 1   | 3800049S    | !   |
| C9002         | ELECTROLYTIC CAPACITOR           | CE04W200V-100M(KXJ) | 1   | 3500233S    |     |
| C9003         | PW TYPE ELECTROLYTIC CAPACITOR   | CE04W50V-10M(PW)    | 1   | 393781007T  |     |
| C9004         | PW TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-1000M(PW)  | 1   | 393751027S  |     |
| C9006         | PW TYPE ELECTROLYTIC CAPACITOR   | CE04W25V-470M(PW)   | 1   | 393754717T  |     |
| C9009         | CHIP TYPE CERAMIC CAPACITOR      | GRM31A7U3D220JW31D  | 1   | 3300071R1   | NSP |
| C9010         | IS TYPE CAPACITOR                | DE1E3KX102MJ4BN01F  | 1   | 3300100S    | !   |
| C9011         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K1      | 1   | 332121045R1 | NSP |
| C9012         | IS TYPE CAPACITOR                | LE103-C3.5          | 1   | 3800042S    | !   |
| C9012or       | IS TYPE CAPACITOR                | ECQU2A103MLC        | (1) | 3800039S    | !   |
| C9013         | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-220M(UTSP) | 1   | 397552217T  | N   |
| C9014         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-103K1      | 1   | 332101035R1 | NSP |
| C9015         | CHIP TYPE CERAMIC CAPACITOR      | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C9016         | CHIP TYPE CERAMIC CAPACITOR      | CK725B1H-332K1      | 1   | 332103325R1 | NSP |
| C9018         | IS TYPE CAPACITOR                | LE104-MX-C3.5       | 1   | 3800049S    | !   |
| C9019         | IS TYPE CAPACITOR                | DE1E3KX102MJ4BN01F  | 1   | 3300100S    | !   |
| C9023         | CHIP TYPE CERAMIC CAPACITOR      | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C9024         | CHIP TYPE CERAMIC CAPACITOR      | CK725F1E-104Z1      | 1   | 332161040R1 | NSP |
| C9025         | IS TYPE CAPACITOR                | DE1E3KX102MJ4BN01F  | 1   | 3300100S    | !   |
| [ Resistors ] |                                  |                     |     |             |     |
| R5001         | CHIP TYPE CARBON RESISTOR        | RN72K1J-332JE       | 1   | 435033324R1 | NSP |
| R5002         | CHIP TYPE CARBON RESISTOR        | RN72K1J-332JE       | 1   | 435033324R1 | NSP |
| R5003         | CHIP TYPE CARBON RESISTOR        | RN72K1J-332JE       | 1   | 435033324R1 | NSP |
| R5021         | CHIP TYPE CARBON RESISTOR        | RN72K1J-563JE       | 1   | 435035634R1 | NSP |
| R5022         | CHIP TYPE CARBON RESISTOR        | RN72K1J-563JE       | 1   | 435035634R1 | NSP |
| R5023         | CHIP TYPE CARBON RESISTOR        | RN72K1J-563JE       | 1   | 435035634R1 | NSP |
| R5041         | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE       | 1   | 435033314R1 | NSP |
| R5042         | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE       | 1   | 435033314R1 | NSP |
| R5043         | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE       | 1   | 435033314R1 | NSP |
| R5061         | METAL OXIDE FILM RESISTOR        | RS1/2WBJ-100K       | 1   | 443521044T  | NSP |
| R5062         | METAL OXIDE FILM RESISTOR        | RS1/2WBJ-100K       | 1   | 443521044T  | NSP |
| R5063         | METAL OXIDE FILM RESISTOR        | RS1/2WBJ-100K       | 1   | 443521044T  | NSP |
| R5081         | CHIP TYPE CARBON RESISTOR        | RN72K1J-104JE       | 1   | 435031044R1 | NSP |
| R5082         | CHIP TYPE CARBON RESISTOR        | RN72K1J-104JE       | 1   | 435031044R1 | NSP |
| R5083         | CHIP TYPE CARBON RESISTOR        | RN72K1J-104JE       | 1   | 435031044R1 | NSP |
| R5101         | CHIP TYPE CARBON RESISTOR        | RN72K1J-152JE       | 1   | 435031524R1 | NSP |
| R5102         | CHIP TYPE CARBON RESISTOR        | RN72K1J-152JE       | 1   | 435031524R1 | NSP |
| R5103         | CHIP TYPE CARBON RESISTOR        | RN72K1J-152JE       | 1   | 435031524R1 | NSP |
| R5181         | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE       | 1   | 435033304R1 | NSP |
| R5182         | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE       | 1   | 435033304R1 | NSP |
| R5183         | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE       | 1   | 435033304R1 | NSP |
| R5201         | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE       | 1   | 435033304R1 | NSP |
| R5202         | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE       | 1   | 435033304R1 | NSP |



|       |                                             |               |   |             |     |
|-------|---------------------------------------------|---------------|---|-------------|-----|
| R5203 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-330JE | 1 | 435033304R1 | NSP |
| R5221 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5222 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5223 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-562JE | 1 | 435035624R1 | NSP |
| R5241 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5242 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5243 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-182JE | 1 | 435031824R1 | NSP |
| R5301 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5302 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5303 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5321 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5322 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5323 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152JE | 1 | 435031524R1 | NSP |
| R5381 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5382 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5383 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5401 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5402 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5403 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5421 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5422 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5423 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5441 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5442 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5443 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-220 |               | 1 | 415472214T  |     |
| R5461 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5462 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5463 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5481 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5482 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5483 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-33K |               | 1 | 415473334T  |     |
| R5501 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5502 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5503 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5521 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5522 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5523 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-10  |               | 1 | 415471004T  |     |
| R5721 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5722 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5723 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5741 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5742 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5743 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-152FE | 1 | 435031522R1 | NSP |
| R5781 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-222FE | 1 | 435032222R1 | NSP |
| R5782 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-272FE | 1 | 435032722R1 | NSP |
| R5783 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-222FE | 1 | 435032222R1 | NSP |
| R5821 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-2.2 |               | 1 | 415470224T  |     |
| R5822 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-2.2 |               | 1 | 415470224T  |     |
| R5823 | NON-FLAMMABLE CARBON FILM RESISTOR R25J-2.2 |               | 1 | 415470224T  |     |
| R5881 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5882 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R5883 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R6201 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R6202 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |
| R6203 | CHIP TYPE CARBON RESISTOR                   | RN72K1J-000JE | 1 | 435030004R1 | NSP |

|                                |                                            |                   |     |                |         |
|--------------------------------|--------------------------------------------|-------------------|-----|----------------|---------|
| R6301                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-150 |                   | 1   | 415471514T     |         |
| R6302                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-150 |                   | 1   | 415471514T     |         |
| R6303                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-150 |                   | 1   | 415471514T     |         |
| R6401                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K |                   | 1   | 415475634T     |         |
| R6402                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K |                   | 1   | 415475634T     |         |
| R6403                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-56K |                   | 1   | 415475634T     |         |
| R6421                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE     | 1   | 435031824R1    | NSP     |
| R6422                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE     | 1   | 435031824R1    | NSP     |
| R6423                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE     | 1   | 435031824R1    | NSP     |
| R9002                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-000JE     | 1   | 435030004R1    | NSP     |
| R9006                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-392JE     | 1   | 435033924R1    | NSP     |
| R9007                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-273FE     | 1   | 435032732R1    | NSP     |
| R9008                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-822JE     | 1   | 435038224R1    | NSP     |
| R9009                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-103JE     | 1   | 435031034R1    | NSP     |
| R9010                          | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-68       | 1   | 443526804T     | NSP     |
| R9011                          | NON-FLAMMABLE CARBON FILM RESISTO R25J-22  |                   | 1   | 415472204T     |         |
| R9014                          | METAL RESISTOR                             | RNU1WCJ-1         | 1   | 453630104T     | NSP     |
| R9017                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-332JE     | 1   | 435033324R1    | NSP     |
| R9018                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-182JE     | 1   | 435031824R1    | NSP     |
| R9022                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-152JE     | 1   | 435031524R1    | NSP     |
| R9023                          | CHIP TYPE CARBON RESISTOR                  | KTR18EZPF6803     | 1   | 435236842R1    | NSP     |
| R9024                          | CHIP TYPE CARBON RESISTOR                  | KTR18EZPF6803     | 1   | 435236842R1    | NSP     |
| R9025                          | CHIP TYPE CARBON RESISTOR                  | KTR18EZPF6803     | 1   | 435236842R1    | NSP     |
| R9027                          | METAL OXIDE FILM RESISTOR                  | RS1/2WBJ-220      | 1   | 443522214T     | NSP     |
| R9057                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-332JE     | 1   | 435033324R1    | NSP     |
| R9058                          | CHIP TYPE CARBON RESISTOR                  | RN72K1J-332JE     | 1   | 435033324R1    | NSP     |
| [ Switches, Terminals, Wires ] |                                            |                   |     |                |         |
| F9001                          | FUSE                                       | T1A-SEUL-T250V    | 1   | 252397T        | !       |
| F9002C                         | FUSE HOLDER                                | NSCT-1P2031       | 1   | 25052133T      | ! NSP   |
| F9002D                         | FUSE HOLDER                                | NSCT-1P2031       | 1   | 25052133T      | ! NSP   |
| P0006A                         | PRINTED WIRING BOARD                       | BCCLA-2030        | {1} | 25142030       | NSP     |
| P0006B                         | PRINTED WIRING BOARD                       | BCPS-2031         | {1} | 25142031       | N NSP   |
| P100                           | PRINTED WIRING BOARD                       | BCCLA-2030        | 1   | 25142030A      | N NSP   |
| P5509B                         | RETAINER                                   | (CLA-L)           | 1   | 27142312       | NSP     |
| P6001A                         | SOCKET                                     | NSCT-9P2189       | 1   | 25052292       | NSP     |
| P6002A                         | SOCKET                                     | NSCT-9P2189       | 1   | 25052292       | NSP     |
| P6003A                         | SOCKET                                     | NSCT-9P2189       | 1   | 25052292       | NSP     |
| P9001A                         | PLUG                                       | NPLG-2P631        | 1   | 25055675       | NSP     |
| P9002                          | PLUG                                       | NPLG-2P631        | 1   | 25055675       | NSP     |
| P9011                          | WIRE HARNESS ASSEMBLY                      | NSAS-5P2109       | 1   | 2009991298UL   | NSP     |
| P9011A                         | WIRE HOL                                   | CHD-1.5-5         | 1   | 25053536       | N NSP   |
| P9011Aor                       | WIRE HOL                                   | NSCT-5P876        | (1) | 25051089       | NSP     |
| RL9001                         | RELAY                                      | NRL-1P10A-DC9-188 | 1   | 25065693       | !       |
| [ Frontend, Units ]            |                                            |                   |     |                |         |
| BACLA-2030                     | ClassA amplifier circuit pc board AS       | BACLA-2030-1A     | 1   | 1B5142030-1A-C | N Child |
| BAPS-2031                      | Power supply circuit pc board AS           | BAPS-2031-1A      | 1   | 1B5142031-1A-C | N Child |



**BADG-2032-1A**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

## &lt;Notes&gt;

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                       | PART NAME                        | DESCRIPTION          | Q'TY | PART NO. (SN) | REMARKS |
|--------------------------------|----------------------------------|----------------------|------|---------------|---------|
| <b>[ Semi-conductors ]</b>     |                                  |                      |      |               |         |
| Q1501                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1503                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1505                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1507                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1521                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1522                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1523                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1524                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1525                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1526                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1527                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1528                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1541                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1542                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1543                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1544                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1545                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1546                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1547                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1548                          | HYBRID IC                        | NJM4580CG            | 1    | 22242922R2    | NSP     |
| Q1921                          | HYBRID IC                        | TC7WU04FU(TE12L_F)   | 1    | 22240935R2    | NSP     |
| Q1922                          | PHOTO COUPLER                    | JSR1165-001recieving | 1    | 24120143      |         |
| Q1923                          | PHOTO COUPLER                    | JSR1165-001recieving | 1    | 24120143      |         |
| <b>[ Transformers, Coils ]</b> |                                  |                      |      |               |         |
| L1921                          | EMI SUPPRESSION FILTER           | BK1608HS102-T        | 1    | 230955R2      | NSP     |
| L1922                          | CHOKE COIL                       | LBC2518T470M         | 1    | 231364M470R2  | NSP     |
| <b>[ Capacitors ]</b>          |                                  |                      |      |               |         |
| C1501                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1502                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1503                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1504                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1505                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1506                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1507                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1508                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |
| C1521                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1522                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1523                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1524                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1525                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1526                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1527                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1528                          | UMXR TYPE PLASTIC FILM CAPACITOR | 1JUMXRTF122JE        | 1    | 376591224T    | NSP     |
| C1541                          | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE         | 1    | 376336814T    | NSP     |

|       |                                  |                     |   |             |     |
|-------|----------------------------------|---------------------|---|-------------|-----|
| C1542 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1543 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1544 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1545 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1546 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1547 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1548 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1561 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1562 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1563 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1564 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1565 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1566 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1567 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1568 | UPZ TYPE PLASTIC FILM CAPACITOR  | 2AUPZTF681JE        | 1 | 376336814T  | NSP |
| C1581 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1582 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1583 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1584 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1585 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1586 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1587 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1588 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1601 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1602 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1603 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1604 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1605 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1606 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1607 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1608 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-471J        | 1 | 373024714R2 | NSP |
| C1621 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1622 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1623 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1624 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1625 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1626 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1627 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1628 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-101J        | 1 | 373021014R2 | NSP |
| C1641 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1642 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1643 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1644 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1645 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1646 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1647 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1648 | CHIP TYPE PLASTIC FILM CAPACITOR | ECHU50V-222J        | 1 | 373022224R2 | NSP |
| C1901 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017AT |     |
| C1902 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-100M(UTSP) | 1 | 397551017AT |     |
| C1903 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-470M(UTSP) | 1 | 397554717T  |     |
| C1904 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W25V-470M(UTSP) | 1 | 397554717T  |     |
| C1911 | CHIP TYPE CERAMIC CAPACITOR      | CK725F1E-104Z1      | 1 | 332161040R1 | NSP |
| C1922 | CHIP TYPE CERAMIC CAPACITOR      | CK725B1C-104K1      | 1 | 332121045R1 | NSP |
| C1923 | CHIP TYPE CERAMIC CAPACITOR      | CC725CH1H-080D1     | 1 | 342100802R1 | NSP |
| C1924 | UTSP TYPE ELECTROLYTIC CAPACITOR | CE04W10V-220M(UTSP) | 1 | 397532217AT |     |

[illegible]

[illegible]

[illegible]

|                                |                             |                  |     |                |       |
|--------------------------------|-----------------------------|------------------|-----|----------------|-------|
| R1925                          | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE    | 1   | 435031034R1    | NSP   |
| R1926                          | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE    | 1   | 435034704R1    | NSP   |
| R1927                          | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE    | 1   | 435034704R1    | NSP   |
| [ Switches, Terminals, Wires ] |                             |                  |     |                |       |
| P0007A                         | PRINTED WIRING BOARD        | BCDG-2032        | {1} | 25142032       | NSP   |
| P101B                          | SOCKET                      | NSCT-7P2100      | 1   | 25052203       | NSP   |
| P110                           | PRINTED WIRING BOARD        | BCDG-2032        | 1   | 25142032       | NSP   |
| P1501A                         | PLUG                        | IMSA-9142B-22A   | 1   | 25056601       | NSP   |
| P1502A                         | PLUG                        | IMSA-9142B-22A   | 1   | 25056601       | NSP   |
| P1511A                         | TERMINAL                    | NTM-1P233(M1969) | 1   | 25060302       | NSP   |
| P1512A                         | TRM-423(SCREW)              | NEJITANSI ST3    | 1   | 25060495       | NSP   |
| P1921                          | PIN JACK                    | NPJ-1PDO554      | 1   | 25045772       |       |
| P8002A                         | SOCKET                      | IMSA-9850S-30    | 1   | 25053215       | NSP   |
| P8003A                         | SOCKET                      | IMSA-9850S-30    | 1   | 25053215       | NSP   |
| [ Frontend, Units ]            |                             |                  |     |                |       |
| BADG-2032                      | Digital circuit pc board AS | BADG-2032-1A     | 1   | 1B5142032-1A-C | Child |

**BADIS-1990-1A**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

## &lt;Notes&gt;

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                       | PART NAME        | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|--------------------------------|------------------|--------------------|------|---------------|---------|
| <b>[ Semi-conductors ]</b>     |                  |                    |      |               |         |
| D7500                          | ZENER DIODE      | DZ2J039M0L         | 1    | 224760390R2   | NSP     |
| D7750                          | LED              | HLMP-Y701          | 1    | 225528        |         |
| D7751                          | LED              | SCB3318E-D2        | 1    | 225487        |         |
| D7751A                         | HOLDER           | (LED)LH-5-5        | 1    | 27191312      | NSP     |
| D7851                          | ZENER DIODE      | DZ2J068M0L         | 1    | 224760680R2   | NSP     |
| D7852                          | ZENER DIODE      | DZ2J068M0L         | 1    | 224760680R2   | NSP     |
| D7900                          | DIODE            | RL1N4003           | 1    | 22380260T     | NSP     |
| D7901                          | DIODE            | RL1N4003           | 1    | 22380260T     | NSP     |
| D7902                          | DIODE            | RL1N4003           | 1    | 22380260T     | NSP     |
| D7903                          | DIODE            | RL1N4003           | 1    | 22380260T     | NSP     |
| D7904                          | ZENER DIODE      | DZ2J200M0L         | 1    | 224762000R2   | NSP     |
| D7905                          | ZENER DIODE      | DZ2J180M0L         | 1    | 224761800R2   | NSP     |
| D7906                          | ZENER DIODE      | DZ2J075M0L         | 1    | 224760750R2   | NSP     |
| Q1                             | HYBRID IC        | RZ5B801-0001E2     | 1    | 22242835R2    | NSP     |
| Q7500                          | TRANSISTOR       | KTC3875-GR         | 1    | 2216175R2     | NSP     |
| Q7750                          | TRANSISTOR       | KRC105S            | 1    | 2217290R2     | NSP     |
| Q7750or                        | TRANSISTOR       | RN1405             | (1)  | 2214500R2     | NSP     |
| Q7751                          | TRANSISTOR       | KRC105S            | 1    | 2217290R2     | NSP     |
| Q7751or                        | TRANSISTOR       | RN1405             | (1)  | 2214500R2     | NSP     |
| Q7780                          | REMOTE SENSOR    | IRM-3638M3S28      | 1    | 24130026      |         |
| Q7850                          | HYBRID IC        | NJM4580CG          | 1    | 22242922R2    | NSP     |
| Q7851                          | TRANSISTOR       | RTAN430C-T112-1    | 1    | 2217780R2     | NSP     |
| Q7852                          | TRANSISTOR       | KRA102S            | 1    | 2216220R2     | NSP     |
| Q7852or                        | TRANSISTOR       | RN2402             | (1)  | 2214530R2     | NSP     |
| Q7852or                        | TRANSISTOR       | DTA114EKA          | (1)  | 2217050R2     | N NSP   |
| Q7853                          | TRANSISTOR       | KRC107S            | 1    | 2216340R2     | NSP     |
| Q7853or                        | TRANSISTOR       | RN1407             | (1)  | 2216260R2     | NSP     |
| Q7853or                        | TRANSISTOR       | DTC114YKA          | (1)  | 2216470R2     | NSP     |
| Q7855                          | TRANSISTOR       | KRC102S            | 1    | 2216190R2     | NSP     |
| Q7855or                        | TRANSISTOR       | RN1402             | (1)  | 2214470R2     | NSP     |
| Q7900                          | TRANSISTOR       | INC5001AP1-T111    | 1    | 2218100R2     | NSP     |
| Q7900or                        | TRANSISTOR       | 2SC2881-Y          | (1)  | 2217564AR2    | N NSP   |
| Q7901                          | TRANSISTOR       | INA5001AP1-T111    | 1    | 2218030R2     | NSP     |
| Q7901or                        | TRANSISTOR       | 2SA1201-Y          | (1)  | 2217554AR2    | N NSP   |
| Q7902                          | TRANSISTOR       | KRC107S            | 1    | 2216340R2     | NSP     |
| Q7902or                        | TRANSISTOR       | RN1407             | (1)  | 2216260R2     | NSP     |
| Q7903                          | TRANSISTOR       | 2SC2712-GR         | 1    | 2213145R2     | NSP     |
| Q7903or                        | TRANSISTOR       | KTC3875-GR         | (1)  | 2216175R2     | NSP     |
| Q7904                          | TRANSISTOR       | 2SC2712-GR         | 1    | 2213145R2     | NSP     |
| Q7904or                        | TRANSISTOR       | KTC3875-GR         | (1)  | 2216175R2     | NSP     |
| Q7905                          | FLUORESCENT TUBE | 016MT096GINYK      | 1    | 212285A       |         |
| Q7905A                         | HOLDER           | (FL)               | 1    | 27191414      | NSP     |
| X1                             | CRYSTAL          | HC-49S 9B12.000MHz | 1    | 3010533       |         |
| <b>[ Transformers, Coils ]</b> |                  |                    |      |               |         |



|                |                                    |                  |     |              |     |
|----------------|------------------------------------|------------------|-----|--------------|-----|
| L1             | CHIP TYPE CARBON RESISTOR          | RN72K1J-000JE    | 1   | 435030004R1  | NSP |
| L2             | CHIP TYPE CARBON RESISTOR          | RN72K1J-000JE    | 1   | 435030004R1  | NSP |
| L3             | RF COIL                            | SDCL1608CR33JTDF | 1   | 233557R1     | NSP |
| L4             | RF COIL                            | SDCL1608CR10JTDF | 1   | 233556R1     | NSP |
| L5             | ANTENNA COIL                       | K7-D             | 1   | 232212       |     |
| L7900          | CHOKE COIL                         | LBC2518T2R2M     | 1   | 231364M022R2 | NSP |
| L7901          | CHOKE COIL                         | LBC2518T2R2M     | 1   | 231364M022R2 | NSP |
| [ Capacitors ] |                                    |                  |     |              |     |
| C1             | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-101J1  | 1   | 342101014R1  | NSP |
| C12            | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-090D1  | 1   | 342100902R1  | NSP |
| C13            | CHIP TYPE CERAMIC CAPACITOR        | CK725B1C-104K1   | 1   | 332121045R1  | NSP |
| C2             | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-220J1  | 1   | 342102204R1  | NSP |
| C3             | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-332K1   | 1   | 332103325R1  | NSP |
| C4             | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-100D1  | 1   | 342101002R1  | NSP |
| C5             | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-473K1   | 1   | 332104735R1  | NSP |
| C6             | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-222K1   | 1   | 332102225R1  | NSP |
| C7             | CHIP TYPE CERAMIC CAPACITOR        | CK725B1A-105K1   | 1   | 332131055R1  | NSP |
| C7500          | ELECTROLYTIC CAPACITOR             | CE04W16V-10M(S)  | 1   | 353741009T   |     |
| C7501          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-223K1   | 1   | 332102235R1  | NSP |
| C7502          | ELECTROLYTIC CAPACITOR             | CE04W6.3V-100M   | 1   | 355721019T   |     |
| C7601          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-102K1   | 1   | 332101025R1  | NSP |
| C7740          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7741          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7770          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7771          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7774          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7775          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7780          | ELECTROLYTIC CAPACITOR             | CE04W16V-10M(S)  | 1   | 353741009T   |     |
| C7781          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-102J1  | 1   | 342101024R1  | NSP |
| C7850          | ELECTROLYTIC CAPACITOR             | CE04W50V-10M     | 1   | 355781009T   |     |
| C7851          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-101J1  | 1   | 342101014R1  | NSP |
| C7853          | ELECTROLYTIC CAPACITOR             | CE04W16V-47M(S)  | 1   | 353744709T   |     |
| C7854          | ELECTROLYTIC CAPACITOR             | CE04W16V-47M(S)  | 1   | 353744709T   |     |
| C7855          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-330J1  | 1   | 342103304R1  | NSP |
| C7856          | ELECTROLYTIC CAPACITOR             | CE04W35V-10M(S)  | 1   | 353761009T   |     |
| C7857          | CHIP TYPE CERAMIC CAPACITOR        | CK725F1E-104Z1   | 1   | 332161040R1  | NSP |
| C7858          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1   | 1   | 332101045R1  | NSP |
| C7880          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-103K1   | 1   | 332101035R1  | NSP |
| C7881          | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE     | 1   | 376332214T   | NSP |
| C7882          | UPZ TYPE PLASTIC FILM CAPACITOR    | 2AUPZTF221JE     | 1   | 376332214T   | NSP |
| C7883          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-102J1  | 1   | 342101024R1  | NSP |
| C7884          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-102J1  | 1   | 342101024R1  | NSP |
| C7900          | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W63V-47M     | 1   | 398574707T   |     |
| C7900or        | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W63V-47M(VR) | (1) | 394674707T   |     |
| C7901          | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W50V-47M     | 1   | 398584707T   |     |
| C7901or        | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W50V-47M(VR) | (1) | 394684707T   |     |
| C7902          | JAMICON TYPE ELECTROLYTIC CAPACITO | CE04W50V-47M     | 1   | 398584707T   |     |
| C7902or        | VR TYPE ELECTROLYTIC CAPACITOR     | CE04W50V-47M(VR) | (1) | 394684707T   |     |
| C7903          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-223K1   | 1   | 332102235R1  | NSP |
| C7904          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-223K1   | 1   | 332102235R1  | NSP |
| C7905          | ELECTROLYTIC CAPACITOR             | CE04W16V-47M(S)  | 1   | 353744709T   |     |
| C7907          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-223K1   | 1   | 332102235R1  | NSP |
| C7908          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1   | 1   | 332101045R1  | NSP |
| C7909          | CHIP TYPE CERAMIC CAPACITOR        | CK725B1H-104K1   | 1   | 332101045R1  | NSP |
| C7910          | CHIP TYPE CERAMIC CAPACITOR        | CC725CH1H-101J1  | 1   | 342101014R1  | NSP |



|               |                             |                 |   |             |     |
|---------------|-----------------------------|-----------------|---|-------------|-----|
| C7911         | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1 | 1 | 342101014R1 | NSP |
| C7912         | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1 | 1 | 342101014R1 | NSP |
| C7913         | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J1 | 1 | 342101014R1 | NSP |
| C7914         | CHIP TYPE CERAMIC CAPACITOR | CK725F1E-104Z1  | 1 | 332161040R1 | NSP |
| C7915         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K1  | 1 | 332102235R1 | NSP |
| C7916         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K1  | 1 | 332102235R1 | NSP |
| C8            | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K1  | 1 | 332131055R1 | NSP |
| C9            | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| [ Resistors ] |                             |                 |   |             |     |
| R10           | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R11           | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R13           | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R14           | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE   | 1 | 435030004R1 | NSP |
| R2            | CHIP TYPE CARBON RESISTOR   | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R21           | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R22           | CHIP TYPE CARBON RESISTOR   | RN72K2E-000JE   | 1 | 435220004R1 | NSP |
| R3            | EMI SUPPRESSION FILTER      | BK1608HS601-T   | 1 | 230984R1    | NSP |
| R4            | EMI SUPPRESSION FILTER      | BK1608HS601-T   | 1 | 230984R1    | NSP |
| R5            | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE   | 1 | 435031034R1 | NSP |
| R6            | CHIP TYPE CARBON RESISTOR   | RN72K1J-472JE   | 1 | 435034724R1 | NSP |
| R7            | CHIP TYPE CARBON RESISTOR   | RN72K1J-472JE   | 1 | 435034724R1 | NSP |
| R7502         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R7503         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7504         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7505         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7506         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7507         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7508         | CHIP TYPE CARBON RESISTOR   | RN72K1J-181JE   | 1 | 435031814R1 | NSP |
| R7601         | CHIP TYPE CARBON RESISTOR   | RN72K1J-271JE   | 1 | 435032714R1 | NSP |
| R7602         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R7603         | CHIP TYPE CARBON RESISTOR   | RN72K1J-471JE   | 1 | 435034714R1 | NSP |
| R7604         | CHIP TYPE CARBON RESISTOR   | RN72K1J-561JE   | 1 | 435035614R1 | NSP |
| R7605         | CHIP TYPE CARBON RESISTOR   | RN72K1J-821JE   | 1 | 435038214R1 | NSP |
| R7606         | CHIP TYPE CARBON RESISTOR   | RN72K1J-122JE   | 1 | 435031224R1 | NSP |
| R7607         | CHIP TYPE CARBON RESISTOR   | RN72K1J-222JE   | 1 | 435032224R1 | NSP |
| R7608         | CHIP TYPE CARBON RESISTOR   | RN72K1J-392JE   | 1 | 435033924R1 | NSP |
| R7609         | CHIP TYPE CARBON RESISTOR   | RN72K1J-123JE   | 1 | 435031234R1 | NSP |
| R7611         | CHIP TYPE CARBON RESISTOR   | RN72K1J-271JE   | 1 | 435032714R1 | NSP |
| R7612         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R7613         | CHIP TYPE CARBON RESISTOR   | RN72K1J-471JE   | 1 | 435034714R1 | NSP |
| R7614         | CHIP TYPE CARBON RESISTOR   | RN72K1J-561JE   | 1 | 435035614R1 | NSP |
| R7615         | CHIP TYPE CARBON RESISTOR   | RN72K1J-821JE   | 1 | 435038214R1 | NSP |
| R7616         | CHIP TYPE CARBON RESISTOR   | RN72K1J-122JE   | 1 | 435031224R1 | NSP |
| R7617         | CHIP TYPE CARBON RESISTOR   | RN72K1J-222JE   | 1 | 435032224R1 | NSP |
| R7618         | CHIP TYPE CARBON RESISTOR   | RN72K1J-392JE   | 1 | 435033924R1 | NSP |
| R7619         | CHIP TYPE CARBON RESISTOR   | RN72K1J-123JE   | 1 | 435031234R1 | NSP |
| R7621         | CHIP TYPE CARBON RESISTOR   | RN72K1J-271JE   | 1 | 435032714R1 | NSP |
| R7622         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R7623         | CHIP TYPE CARBON RESISTOR   | RN72K1J-471JE   | 1 | 435034714R1 | NSP |
| R7624         | CHIP TYPE CARBON RESISTOR   | RN72K1J-561JE   | 1 | 435035614R1 | NSP |
| R7625         | CHIP TYPE CARBON RESISTOR   | RN72K1J-821JE   | 1 | 435038214R1 | NSP |
| R7626         | CHIP TYPE CARBON RESISTOR   | RN72K1J-122JE   | 1 | 435031224R1 | NSP |
| R7627         | CHIP TYPE CARBON RESISTOR   | RN72K1J-222JE   | 1 | 435032224R1 | NSP |
| R7628         | CHIP TYPE CARBON RESISTOR   | RN72K1J-392JE   | 1 | 435033924R1 | NSP |
| R7629         | CHIP TYPE CARBON RESISTOR   | RN72K1J-123JE   | 1 | 435031234R1 | NSP |

|       |                                   |               |   |             |     |
|-------|-----------------------------------|---------------|---|-------------|-----|
| R7631 | CHIP TYPE CARBON RESISTOR         | RN72K1J-271JE | 1 | 435032714R1 | NSP |
| R7632 | CHIP TYPE CARBON RESISTOR         | RN72K1J-331JE | 1 | 435033314R1 | NSP |
| R7633 | CHIP TYPE CARBON RESISTOR         | RN72K1J-471JE | 1 | 435034714R1 | NSP |
| R7634 | CHIP TYPE CARBON RESISTOR         | RN72K1J-561JE | 1 | 435035614R1 | NSP |
| R7635 | CHIP TYPE CARBON RESISTOR         | RN72K1J-821JE | 1 | 435038214R1 | NSP |
| R7740 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7741 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7742 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7743 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7750 | CHIP TYPE CARBON RESISTOR         | RN72K1J-102JE | 1 | 435031024R1 | NSP |
| R7751 | CHIP TYPE CARBON RESISTOR         | RN72K1J-392JE | 1 | 435033924R1 | NSP |
| R7770 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7771 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7772 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7773 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7774 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7775 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7776 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7777 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7780 | CHIP TYPE CARBON RESISTOR         | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7781 | CHIP TYPE CARBON RESISTOR         | RN72K1J-222JE | 1 | 435032224R1 | NSP |
| R7850 | CHIP TYPE CARBON RESISTOR         | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R7851 | CHIP TYPE CARBON RESISTOR         | RN72K1J-472JE | 1 | 435034724R1 | NSP |
| R7852 | CHIP TYPE CARBON RESISTOR         | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R7854 | CHIP TYPE CARBON RESISTOR         | RN72K1J-102JE | 1 | 435031024R1 | NSP |
| R7855 | CHIP TYPE CARBON RESISTOR         | RN72K1J-333JE | 1 | 435033334R1 | NSP |
| R7856 | CHIP TYPE CARBON RESISTOR         | RN72K1J-471JE | 1 | 435034714R1 | NSP |
| R7858 | CHIP TYPE CARBON RESISTOR         | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R7859 | CHIP TYPE CARBON RESISTOR         | RN72K1J-223JE | 1 | 435032234R1 | NSP |
| R7880 | METAL OXIDE FILM RESISTOR         | RS1/2WBJ-330  | 1 | 443523314T  | NSP |
| R7881 | METAL OXIDE FILM RESISTOR         | RS1/2WBJ-330  | 1 | 443523314T  | NSP |
| R7900 | METAL RESISTOR                    | RNU1/2WCJ-8.2 | 1 | 453530824T  | NSP |
| R7901 | CHIP TYPE CARBON RESISTOR         | RN72K1J-272JE | 1 | 435032724R1 | NSP |
| R7902 | CHIP TYPE CARBON RESISTOR         | RN72K1J-272JE | 1 | 435032724R1 | NSP |
| R7903 | CHIP TYPE CARBON RESISTOR         | RN72K1J-010JE | 1 | 435030104R1 | NSP |
| R7904 | CHIP TYPE CARBON RESISTOR         | RN72K1J-333JE | 1 | 435033334R1 | NSP |
| R7905 | CHIP TYPE CARBON RESISTOR         | RN72K2E-221JE | 1 | 435222214R1 | NSP |
| R7906 | CHIP TYPE CARBON RESISTOR         | RN72K1J-473JE | 1 | 435034734R1 | NSP |
| R7907 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7908 | CHIP TYPE CARBON RESISTOR         | RN72K1J-103JE | 1 | 435031034R1 | NSP |
| R7909 | CHIP TYPE CARBON RESISTOR         | RN72K1J-224JE | 1 | 435032244R1 | NSP |
| R7910 | NON-FLAMMABLE CARBON FILM RESISTO | R25J-10       | 1 | 415471004T  |     |
| R7911 | CHIP TYPE CARBON RESISTOR         | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7912 | CHIP TYPE CARBON RESISTOR         | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R7913 | CHIP TYPE CARBON RESISTOR         | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7914 | NON-FLAMMABLE CARBON FILM RESISTO | R25J-10       | 1 | 415471004T  |     |
| R7915 | CHIP TYPE CARBON RESISTOR         | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7916 | CHIP TYPE CARBON RESISTOR         | RN72K1J-104JE | 1 | 435031044R1 | NSP |
| R7917 | CHIP TYPE CARBON RESISTOR         | RN72K1J-101JE | 1 | 435031014R1 | NSP |
| R7918 | CHIP TYPE CARBON RESISTOR         | RN72K1J-393JE | 1 | 435033934R1 | NSP |
| R7919 | CHIP TYPE CARBON RESISTOR         | RN72K2E-221JE | 1 | 435222214R1 | NSP |
| R7920 | CHIP TYPE CARBON RESISTOR         | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R7921 | CHIP TYPE CARBON RESISTOR         | RN72K1J-221JE | 1 | 435032214R1 | NSP |
| R7922 | CHIP TYPE CARBON RESISTOR         | RN72K1J-332JE | 1 | 435033324R1 | NSP |
| R7923 | CHIP TYPE CARBON RESISTOR         | RN72K1J-332JE | 1 | 435033324R1 | NSP |

|                                |                           |                 |     |              |       |
|--------------------------------|---------------------------|-----------------|-----|--------------|-------|
| R7924                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1  | NSP   |
| R8                             | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1   | 435031014R1  | NSP   |
| R9                             | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE   | 1   | 435031014R1  | NSP   |
| [ Switches, Terminals, Wires ] |                           |                 |     |              |       |
| J7500                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE   | 1   | 435030004R1  | NSP   |
| P0002A                         | PRINTED WIRING BOARD      | BCDIS-1990      | {1} | 25141990     | NSP   |
| P0002B                         | PRINTED WIRING BOARD      | BCSW-1991       | {1} | 25141991     | NSP   |
| P0002C                         | PRINTED WIRING BOARD      | BCSW-1992       | {1} | 25141992     | NSP   |
| P0002D                         | PRINTED WIRING BOARD      | BCSW-1993       | {1} | 25141993     | NSP   |
| P0002E                         | PRINTED WIRING BOARD      | BCETC-1994      | {1} | 25141994     | NSP   |
| P0002F                         | PRINTED WIRING BOARD      | BCRF-1995       | {1} | 25141995     | NSP   |
| P0002G                         | PRINTED WIRING BOARD      | BCETC-1996      | {1} | 25141996     | NSP   |
| P0002H                         | PRINTED WIRING BOARD      | BCETC-1997      | {1} | 25141997     | NSP   |
| P0002I                         | PRINTED WIRING BOARD      | BCPS-1998       | {1} | 25141998     | NSP   |
| P0002J                         | PRINTED WIRING BOARD      | BCSW-1982       | {1} | 25141982     | NSP   |
| P080                           | PRINTED WIRING BOARD      | BCETC-2007      | {1} | 25142007     | NSP   |
| P090                           | PRINTED WIRING BOARD      | BCDIS-1990      | 1   | 25141990     | NSP   |
| P1                             | TERMINAL                  | NTM-1PDSC437    | 1   | 25060515     |       |
| P101A                          | SOCKET                    | NSCT-7P2100     | 1   | 25052203     | NSP   |
| P2                             | TERMINAL                  | NTM-2PDML439    | 1   | 25060517     |       |
| P7001B                         | SOCKET                    | 9615S-31C-PP    | 1   | 25053319     | NSP   |
| P7590A                         | WIRE HOL                  | CHD-1.5-7       | 1   | 25053537     | NSP   |
| P7590Aor                       | WIRE HOL                  | NSCT-7P878      | (1) | 25051091     | N NSP |
| P7590B                         | WIRE HOL                  | CHD-1.5-7       | 1   | 25053537     | NSP   |
| P7590Bor                       | WIRE HOL                  | NSCT-7P878      | (1) | 25051091     | N NSP |
| P7591A                         | WIRE HOL                  | CHD-1.5-11      | 1   | 25053539     | NSP   |
| P7591Aor                       | WIRE HOL                  | NSCT-11P882     | (1) | 25051095     | N NSP |
| P7591B                         | WIRE HOL                  | CHD-1.5-11      | 1   | 25053539     | NSP   |
| P7591Bor                       | WIRE HOL                  | NSCT-11P882     | (1) | 25051095     | N NSP |
| P7592A                         | WIRE HOL                  | CHD-1.5-3       | 1   | 25053535     | NSP   |
| P7592Aor                       | WIRE HOL                  | NSCT-3P874      | (1) | 25051087     | N NSP |
| P7592B                         | WIRE HOL                  | CHD-1.5-3       | 1   | 25053535     | NSP   |
| P7592Bor                       | WIRE HOL                  | NSCT-3P874      | (1) | 25051087     | N NSP |
| P7593                          | WIRE HARNESS ASSEMBLY     | NSAS-7P2125     | 1   | 2009991314UL | NSP   |
| P7593A                         | WIRE HOL                  | CHD-1.5-7       | 1   | 25053537     | NSP   |
| P7593Aor                       | WIRE HOL                  | NSCT-7P878      | (1) | 25051091     | N NSP |
| P7593B                         | PLUG                      | NPLG-7P354      | 1   | 25055371     | NSP   |
| P7850                          | ST JACK                   | MSJ-035-12APCAG | 1   | 25046035     |       |
| P7851A                         | WIRE HOL                  | CHD-1.5-3       | 1   | 25053535     | NSP   |
| P7851B                         | WIRE HOL                  | CHD-1.5-3       | 1   | 25053535     | NSP   |
| P7880A                         | PLUG                      | NPLG-5P220      | 1   | 25055236     | NSP   |
| P7881                          | ST JACK                   | MSJ-064-05A SR  | 1   | 25045783     |       |
| P7900                          | PLUG                      | NPLG-5P119      | 1   | 25055135     | NSP   |
| P7990                          | WIRE HARNESS ASSEMBLY     | NSAS-5P2112     | 1   | 2009991301UL | NSP   |
| P7990A                         | WIRE HOL                  | CHD-1.5-5       | 1   | 25053536     | NSP   |
| P7990Aor                       | WIRE HOL                  | NSCT-5P876      | (1) | 25051089     | NSP   |
| P7990B                         | PLUG                      | NPLG-5P133      | 1   | 25055149     | NSP   |
| P8502A                         | CRIMP CORD ASSEMBLY       | CRIMP AS        | 1   | 2061943081UL | NSP   |
| S7601                          | PUSH SWITCH               | NPS-111-S681    | 1   | 25035718T    | NSP   |
| S7601or                        | PUSH SWITCH               | NPS-111-S677    | (1) | 25035714T    | NSP   |
| S7602                          | PUSH SWITCH               | NPS-111-S681    | 1   | 25035718T    | NSP   |
| S7602or                        | PUSH SWITCH               | NPS-111-S677    | (1) | 25035714T    | NSP   |
| S7603                          | PUSH SWITCH               | NPS-111-S681    | 1   | 25035718T    | NSP   |
| S7603or                        | PUSH SWITCH               | NPS-111-S677    | (1) | 25035714T    | NSP   |
| S7604                          | PUSH SWITCH               | NPS-111-S681    | 1   | 25035718T    | NSP   |

[illegible]

|                     |                                     |                           |     |                |       |
|---------------------|-------------------------------------|---------------------------|-----|----------------|-------|
| S7632               | PUSH SWITCH                         | NPS-111-S681              | 1   | 25035718T      | NSP   |
| S7632or             | PUSH SWITCH                         | NPS-111-S677              | (1) | 25035714T      | NSP   |
| S7634               | PUSH SWITCH                         | NPS-111-S681              | 1   | 25035718T      | NSP   |
| S7634or             | PUSH SWITCH                         | NPS-111-S677              | (1) | 25035714T      | NSP   |
| S7635               | PUSH SWITCH                         | NPS-111-S681              | 1   | 25035718T      | NSP   |
| S7635or             | PUSH SWITCH                         | NPS-111-S677              | (1) | 25035714T      | NSP   |
| S7636               | PUSH SWITCH                         | NPS-111-S681              | 1   | 25035718T      | NSP   |
| S7636or             | PUSH SWITCH                         | NPS-111-S677              | (1) | 25035714T      | NSP   |
| S7740               | ROTARY ENCODER                      | XREB125(9X11.5)PVB30FINB1 | 1   | 25065737       |       |
| S7740or             | ROTARY ENCODER                      | EVEHD1F3024B              | (1) | 25065695W      | N     |
| S7770               | ROTARY ENCODER                      | XREB12504PVB30FINB1-2-24  | 1   | 25065729       |       |
| S7774               | ROTARY ENCODER                      | XREB125(9X11.5)PVB30FINB1 | 1   | 25065737       |       |
| S7774or             | ROTARY ENCODER                      | EVEHD1F3024B              | (1) | 25065695W      | N     |
| [ Frontend, Units ] |                                     |                           |     |                |       |
| BADIS-1990          | Display circuit pc board AS         | BADIS-1990-1A             | 1   | 1B5141990-1A-C | Child |
| BASW-1991           | Switch circuit pc board AS          | BASW-1991-1A              | 1   | 1B5141991-1A-C | Child |
| BASW-1992           | Switch circuit pc board AS          | BASW-1992-1A              | 1   | 1B5141992-1A-C | Child |
| BASW-1993           | Switch circuit pc board AS          | BASW-1993-1A              | 1   | 1B5141993-1A-C | Child |
| BAETC-1994          | Et cetra pc board AS                | BAETC-1994-1A             | 1   | 1B5141994-1A-C | Child |
| BARF-1995           | Radio frequency circuit pc board AS | BARF-1995-1A              | 1   | 1B5141995-1A-C | Child |
| BAETC-1996          | Et cetra pc board AS                | BAETC-1996-1A             | 1   | 1B5141996-1A-C | Child |
| BAETC-1997          | Et cetra pc board AS                | BAETC-1997-1A             | 1   | 1B5141997-1A-C | Child |
| BAPS-1998           | Power supply circuit pc board AS    | BAPS-1998-1A              | 1   | 1B5141998-1A-C | Child |
| BASW-1982           | Switch circuit pc board AS          | BASW-1982-1A              | 1   | 1B5141982-1A-C | Child |
| BAETC-2007          | Et cetra pc board AS                | BAETC-2007-1A             | 1   | 1B5142007-1A-C | Child |

**BAHDM-2038-1A****<Note>**

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

**<Notes>**

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                              | PART NAME                           | DESCRIPTION      | Q'TY | PART NO. (SN)  | REMARKS |
|---------------------------------------|-------------------------------------|------------------|------|----------------|---------|
| <b>[ Semi-conductors ]</b>            |                                     |                  |      |                |         |
| Q8500                                 | HYBRID IC                           | TCA9517DGKR      | 1    | 22243201R2     | NSP     |
| <b>[ Transformers, Coils ]</b>        |                                     |                  |      |                |         |
| L8505                                 | CORE                                | BLM15PX181SN1D   | 1    | 2350033R1      | NSP     |
| <b>[ Capacitors ]</b>                 |                                     |                  |      |                |         |
| C8501                                 | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-102K1   | 1    | 332101025R1    | NSP     |
| C8502                                 | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-102K1   | 1    | 332101025R1    | NSP     |
| C8503                                 | CHIP TYPE CERAMIC CAPACITOR         | CK725B1C-104K0   | 1    | 332011045R1    | NSP     |
| C8505                                 | CHIP TYPE CERAMIC CAPACITOR         | CK725B1C-103K0   | 1    | 332011035R1    | NSP     |
| <b>[ Resistors ]</b>                  |                                     |                  |      |                |         |
| R8503                                 | CHIP TYPE CARBON RESISTOR           | RN72K1J-473JE    | 1    | 435034734R1    | NSP     |
| R8504                                 | CHIP TYPE CARBON RESISTOR           | RN72K1J-473JE    | 1    | 435034734R1    | NSP     |
| R8505                                 | CHIP TYPE CARBON RESISTOR           | RN72K1J-472JE    | 1    | 435034724R1    | NSP     |
| R8506                                 | CHIP TYPE CARBON RESISTOR           | RN72K1J-472JE    | 1    | 435034724R1    | NSP     |
| R8507                                 | CHIP TYPE CARBON RESISTOR           | RN72K1J-473JE    | 1    | 435034734R1    | NSP     |
| <b>[ Switches, Terminals, Wires ]</b> |                                     |                  |      |                |         |
| P0005                                 | PRINTED WIRING BOARD                | BCHDM-2038       | 1    | 25142038       | NSP     |
| P0005A                                | PRINTED WIRING BOARD                | BCHDM-2038       | {1}  | 25142038       | NSP     |
| P8500                                 | SOCKET                              | SNN04SBB2200-84R | 1    | 25053613R2     | NSP     |
| P8501                                 | SOCKET                              | SNN15SBA4600-84R | 1    | 25053587R2     | NSP     |
| P8502B                                | TERMINAL                            | NTM-1P233(M1969) | 1    | 25060302       | NSP     |
| <b>[ Frontend, Units ]</b>            |                                     |                  |      |                |         |
| BAHDM-2038                            | HDMI circuit pc board AS            | BAHDM-2038-1A    | 1    | 1B5142038-1A-C | Child   |
| BARF-2039                             | Radio frequency circuit pc board AS | BARF-2039-1A     | 1    | 1B5142039-1A-C | Child   |

**BAPRC-2034-1G**

**<Note>**

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

**<Notes>**

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.            | PART NAME       | DESCRIPTION               | Q'TY | PART NO. (SN) | REMARKS      |
|---------------------|-----------------|---------------------------|------|---------------|--------------|
| [ Semi-conductors ] |                 |                           |      |               |              |
| D1001               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D1001or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D1002               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D1002or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D1003               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D1003or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D1004               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D1004or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D1005               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D1005or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3000               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3000or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3001               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3001or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3002               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3002or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3003               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3003or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3004               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3004or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3005               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3005or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3006               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3006or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D3007               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D3007or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D7001               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D7001or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D7002               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D7002or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D7003               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D7003or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D7004               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D7004or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D7006               | DIODE           | CUS357                    | 1    | 223320R2      | <b>N</b> NSP |
| D7009               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D7009or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |
| D8003               | ESD             | IMSA-6802-01Y901_1608SIZE | 1    | 4000255AR1    | <b>N</b> NSP |
| D8301               | ZENER DIODE     | DZ2J036M0L                | 1    | 224760360R2   | NSP          |
| D8900               | DIODE           | CUS357                    | 1    | 223320R2      | <b>N</b> NSP |
| D8901               | DIODE           | CUS357                    | 1    | 223320R2      | <b>N</b> NSP |
| D8902               | DIODE           | CUS357                    | 1    | 223320R2      | <b>N</b> NSP |
| D8907               | CHIP TYPE DIODE | DA2J10100                 | 1    | 223303R2      | NSP          |
| D8907or             | CHIP TYPE DIODE | 1SS352                    | (1)  | 223234R2      | NSP          |

|         |                 |                     |     |                |              |
|---------|-----------------|---------------------|-----|----------------|--------------|
| D8909   | CHIP TYPE DIODE | DA2J10100           | 1   | 223303R2       | NSP          |
| D8909or | CHIP TYPE DIODE | 1SS352              | (1) | 223234R2       | NSP          |
| D8942   | CHIP TYPE DIODE | DA2J10100           | 1   | 223303R2       | NSP          |
| D8942or | CHIP TYPE DIODE | 1SS352              | (1) | 223234R2       | NSP          |
| D8943   | CHIP TYPE DIODE | DA2J10100           | 1   | 223303R2       | NSP          |
| D8943or | CHIP TYPE DIODE | 1SS352              | (1) | 223234R2       | NSP          |
| D8963   | DIODE           | RBR3MM30ATR         | 1   | 22380401R2     | NSP          |
| D8968   | CHIP TYPE DIODE | DA2J10100           | 1   | 223303R2       | NSP          |
| D8968or | CHIP TYPE DIODE | 1SS352              | (1) | 223234R2       | NSP          |
| D8969   | ZENER DIODE     | DZ2J062M0L          | 1   | 224760620R2    | NSP          |
| Q1001   | HYBRID IC       | TC7SZU04FU          | 1   | 22242512R2TO   | <b>N</b> NSP |
| Q1002   | HYBRID IC       | PCM5101APWR         | 1   | 22242855R2     | NSP          |
| Q1003   | HYBRID IC       | PCM9211PTR          | 1   | 22242703R2     | NSP          |
| Q1004   | HYBRID IC       | AK4458VN            | 1   | 22242927R2     | NSP          |
| Q1005   | HYBRID IC       | PCM9211PTR          | 1   | 22242703R2     | NSP          |
| Q1007   | HYBRID IC       | 74VHC4040FT         | 1   | 22274040E1R2TO | NSP          |
| Q1008   | HYBRID IC       | TC7WH241FU(TE12L_F) | 1   | 22242076R2TO   | NSP          |
| Q1090   | HYBRID IC       | MM3464A50NRE        | 1   | 22243073R2     | NSP          |
| Q1091   | HYBRID IC       | S-1333A33-M5T1U3    | 1   | 22242934R2     | NSP          |
| Q1092   | HYBRID IC       | 74LCX125FT          | 1   | 22274125BR2TO  | NSP          |
| Q1093   | HYBRID IC       | PCM5101APWR         | 1   | 22242855R2     | NSP          |
| Q1094   | HYBRID IC       | 74LCX125FT          | 1   | 22274125BR2TO  | NSP          |
| Q1095   | TRANSISTOR      | DTC044EEBTL         | 1   | 2218700R2      | NSP          |
| Q1095or | TRANSISTOR      | KRC404E             | (1) | 2216450R2      | NSP          |
| Q1097   | HYBRID IC       | 74VHC541FT          | 1   | 22274541E1R2TO | NSP          |
| Q1099   | TRANSISTOR      | DTC044EEBTL         | 1   | 2218700R2      | NSP          |
| Q1099or | TRANSISTOR      | KRC404E             | (1) | 2216450R2      | NSP          |
| Q1102   | HYBRID IC       | 74LCX125FT          | 1   | 22274125BR2TO  | NSP          |
| Q1103   | HYBRID IC       | 74LCX125FT          | 1   | 22274125BR2TO  | NSP          |
| Q1104   | TRANSISTOR      | DTC044EEBTL         | 1   | 2218700R2      | NSP          |
| Q1104or | TRANSISTOR      | KRC404E             | (1) | 2216450R2      | NSP          |
| Q1105   | TRANSISTOR      | DTC044EEBTL         | 1   | 2218700R2      | NSP          |
| Q1105or | TRANSISTOR      | KRC404E             | (1) | 2216450R2      | NSP          |
| Q3001   | HYBRID IC       | AM3354BZCZ80        | 1   | 22243021R3     | NSP          |
| Q3002   | HYBRID IC       | TC58NVG1S3HTA00B4H  | 1   | 222W0155R3     | <b>N</b> NSP |
| Q3003   | HYBRID IC       | NT5CC128M16IP-DI    | 1   | 22243076R3     | NSP          |
| Q3006   | HYBRID IC       | PST894A160UR        | 1   | 22243226R2     | NSP          |
| Q3007   | TRANSISTOR      | DTC014EEBTL         | 1   | 2218690R2      | <b>N</b> NSP |
| Q3007or | TRANSISTOR      | KRC402E             | (1) | 2218330R2      | NSP          |
| Q3201   | HYBRID IC       | MFI337S3959         | 1   | 22242820R2     | <b>N</b> NSP |
| Q3401   | HYBRID IC       | W25Q32FVSSIG        | 1   | 222W0135R2     | <b>N</b> NSP |
| Q3403   | HYBRID IC       | TC7SZU04FU          | 1   | 22242512R2TO   | <b>N</b> NSP |
| Q3404   | HYBRID IC       | CS49844A-CQZ        | 1   | 22242926R3     | <b>N</b> NSP |
| Q3406   | HYBRID IC       | A3V64S40GTP-60      | 1   | 22242976R2     | <b>N</b> NSP |
| Q3406or | HYBRID IC       | M12L64164A-7TG2Y    | (1) | 22242951R3     | NSP          |
| Q3410   | TRANSISTOR      | DTC014EEBTL         | 1   | 2218690R2      | <b>N</b> NSP |
| Q3410or | TRANSISTOR      | KRC402E             | (1) | 2218330R2      | NSP          |
| Q3601   | HYBRID IC       | FP6861C-B1AS5CT     | 1   | 22242840R2     | <b>N</b> NSP |
| Q3651   | HYBRID IC       | KSZ8091RNB          | 1   | 22243023R2     | NSP          |
| Q3652   | HYBRID IC       | SN74AUP1T17DCKR     | 1   | 222740170R2    | NSP          |
| Q3653   | HYBRID IC       | SN74AUP1T17DCKR     | 1   | 222740170R2    | NSP          |
| Q3654   | HYBRID IC       | TC74VCX125FT        | 1   | 22274125DR2TO  | NSP          |
| Q3667   | TRANSISTOR      | DTC014EEBTL         | 1   | 2218690R2      | <b>N</b> NSP |
| Q3667or | TRANSISTOR      | KRC402E             | (1) | 2218330R2      | NSP          |
| Q3901   | HYBRID IC       | TPS65910A31A1RSLR   | 1   | 22243022R2     | NSP          |



|         |            |                      |     |               |              |
|---------|------------|----------------------|-----|---------------|--------------|
| Q7000   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q7001   | HYBRID IC  | M95640-WMN6TP        | 1   | 22242643R2    | <b>N</b> NSP |
| Q7001or | HYBRID IC  | BR25S640FJ           | (1) | 22242761R2    | NSP          |
| Q7002   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q7002or | TRANSISTOR | KRA302E              | (1) | 2218360R2     | NSP          |
| Q7003   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q7004   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q7005   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q7005or | TRANSISTOR | KRC404E              | (1) | 2216450R2     | NSP          |
| Q7006   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q7007   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q7009   | HYBRID IC  | MPD70F3477AGJA-GAE-G | 1   | 222W0117R3    | NSP          |
| Q7010   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q7013   | HYBRID IC  | TC7WBL3305CFK        | 1   | 22242965R2    | NSP          |
| Q7016   | TRANSISTOR | 2SC2712-GR           | 1   | 2213145R2     | NSP          |
| Q7017   | TRANSISTOR | DTC014EEBTL          | 1   | 2218690R2     | <b>N</b> NSP |
| Q7017or | TRANSISTOR | KRC402E              | (1) | 2218330R2     | NSP          |
| Q7018   | HYBRID IC  | S-1333A33-M5T1U3     | 1   | 22242934R2    | NSP          |
| Q7020   | HYBRID IC  | PST894A270UR         | 1   | 22243198R2    | NSP          |
| Q7021   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q7023   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q7027   | HYBRID IC  | S-1333A33-M5T1U3     | 1   | 22242934R2    | NSP          |
| Q7028   | HYBRID IC  | ICL3221ECVZ          | 1   | 22242268R2    | NSP          |
| Q7029   | TRANSISTOR | 2SC2712-GR           | 1   | 2213145R2     | NSP          |
| Q7030   | TRANSISTOR | INA5001AP1-T111      | 1   | 2218030R2     | <b>N</b> NSP |
| Q7030or | TRANSISTOR | KTA1661-Y            | (1) | 2217864R2     | NSP          |
| Q7031   | TRANSISTOR | 2SA1162-GR           | 1   | 2214375R2     | NSP          |
| Q7033   | TRANSISTOR | DTC023JEBTL          | 1   | 2218710R2     | <b>N</b> NSP |
| Q7033or | TRANSISTOR | KRC405E              | (1) | 2218340R2     | NSP          |
| Q8003   | HYBRID IC  | 74LCX125FT           | 1   | 22274125BR2TO | NSP          |
| Q8004   | TRANSISTOR | 2SA1162-GR           | 1   | 2214375R2     | NSP          |
| Q8005   | TRANSISTOR | DTC044EEBTL          | 1   | 2218700R2     | NSP          |
| Q8005or | TRANSISTOR | KRC404E              | (1) | 2216450R2     | NSP          |
| Q8114   | HYBRID IC  | 74LCX125FT           | 1   | 22274125BR2TO | NSP          |
| Q8202   | HYBRID IC  | ADV7180KCP32Z-RL     | 1   | 22242763R2    | <b>N</b> NSP |
| Q8203   | HYBRID IC  | MM3411A18URE         | 1   | 22243075R2    | NSP          |
| Q8205   | HYBRID IC  | MM3411A18URE         | 1   | 22243075R2    | NSP          |
| Q8300   | HYBRID IC  | S-13A1A13-U5T1U3     | 1   | 22242848R2    | NSP          |
| Q8302   | HYBRID IC  | SI9573CTUC           | 1   | 22242762R3    | NSP          |
| Q8303   | TRANSISTOR | 2SA1162-GR           | 1   | 2214375R2     | NSP          |
| Q8307   | HYBRID IC  | MM3411A13URE         | 1   | 22243074R2    | NSP          |
| Q8401   | HYBRID IC  | MN864787             | 1   | 22242944R3    | NSP          |
| Q8402   | HYBRID IC  | MX25L6433FM2I-08G    | 1   | 222W0156R2    | NSP          |
| Q8402or | HYBRID IC  | IS25LP064A-JBLE      | (1) | 222W0160R2    | NSP          |
| Q8701   | HYBRID IC  | TMPM361F10FG         | 1   | 222W0115R3    | NSP          |
| Q8702   | TRANSISTOR | DTC014EEBTL          | 1   | 2218690R2     | <b>N</b> NSP |
| Q8702or | TRANSISTOR | KRC402E              | (1) | 2218330R2     | NSP          |
| Q8703   | TRANSISTOR | RE1C001UNTCL         | 1   | 2218160R2     | NSP          |
| Q8704   | TRANSISTOR | DTA014EEBTL          | 1   | 2218680R2     | NSP          |
| Q8704or | TRANSISTOR | KRA302E              | (1) | 2218360R2     | NSP          |
| Q8705   | TRANSISTOR | DTC014EEBTL          | 1   | 2218690R2     | <b>N</b> NSP |
| Q8705or | TRANSISTOR | KRC402E              | (1) | 2218330R2     | NSP          |
| Q8709   | TRANSISTOR | DTC014EEBTL          | 1   | 2218690R2     | <b>N</b> NSP |
| Q8709or | TRANSISTOR | KRC402E              | (1) | 2218330R2     | NSP          |
| Q8710   | TRANSISTOR | DTC014EEBTL          | 1   | 2218690R2     | <b>N</b> NSP |

|         |                   |                   |     |            |              |
|---------|-------------------|-------------------|-----|------------|--------------|
| Q8710or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8712   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8712or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8713   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8713or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8715   | TRANSISTOR        | DTA014EEBTL       | 1   | 2218680R2  | NSP          |
| Q8715or | TRANSISTOR        | KRA302E           | (1) | 2218360R2  | NSP          |
| Q8716   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8716or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8725   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8725or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8727   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8727or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8729   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8729or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8730   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8730or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8731   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8731or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8732   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8732or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8733   | TRANSISTOR        | DTC014EEBTL       | 1   | 2218690R2  | <b>N</b> NSP |
| Q8733or | TRANSISTOR        | KRC402E           | (1) | 2218330R2  | NSP          |
| Q8900   | HYBRID IC         | FP6861C-B1AS5CT   | 1   | 22242840R2 | <b>N</b> NSP |
| Q8907   | HYBRID IC         | MM3464A50NRE      | 1   | 22243073R2 | NSP          |
| Q8921   | HYBRID IC         | FR9888CSPCTR      | 1   | 22242839R2 | <b>N</b> NSP |
| Q8931   | HYBRID IC         | FR9888CSPCTR      | 1   | 22242839R2 | <b>N</b> NSP |
| Q8941   | HYBRID IC         | FR9888CSPCTR      | 1   | 22242839R2 | <b>N</b> NSP |
| Q8946   | HYBRID IC         | TPS22924CZPR      | 1   | 22242807R2 | NSP          |
| Q8951   | HYBRID IC         | FR9888CSPCTR      | 1   | 22242839R2 | <b>N</b> NSP |
| Q8952   | TRANSISTOR        | 2SC2712-GR        | 1   | 2213145R2  | NSP          |
| Q8961   | HYBRID IC         | FR9889SPCTR       | 1   | 22243033R2 | <b>N</b> NSP |
| Q8965   | HYBRID IC         | MM3464A50NRE      | 1   | 22243073R2 | NSP          |
| Q8967   | HYBRID IC         | FP6861C-B1AS5CT   | 1   | 22242840R2 | <b>N</b> NSP |
| X1001   | CRYSTAL           | HC-49S 9C22.5792M | 1   | 3010535R2  | <b>N</b> NSP |
| X3001   | CRYSTAL           | HC-49S 9C24.0000M | 1   | 3010515R2  | <b>N</b> NSP |
| X3002   | CRYSTAL           | FC-135 -32.768K   | 1   | 3010532R2  | <b>N</b> NSP |
| X3401   | CRYSTAL           | HC-49S 9C24.5760M | 1   | 3010516R2  | <b>N</b> NSP |
| X3651   | CRYSTAL           | HC-49S 9C25.0000M | 1   | 3010517R2  | <b>N</b> NSP |
| X7001   | CRYSTAL           | CSTCR4M00G53-R0   | 1   | 3010536R2  | NSP          |
| X8201   | CRYSTAL           | HC-49S 9C28.6363M | 1   | 3010519R2  | <b>N</b> NSP |
| X8301   | CRYSTAL           | HC-49S 9C27.0000M | 1   | 3010518R2  | <b>N</b> NSP |
| X8400   | CRYSTAL           | HC-49S 9C27.0000M | 1   | 3010518R2  | <b>N</b> NSP |
| X8701   | CERAMIC RESONATOR | CSTCE8M00G55-R0   | 1   | 3010416R2  | NSP          |

#### [ Transformers, Coils ]

|       |            |                |   |              |              |
|-------|------------|----------------|---|--------------|--------------|
| L1000 | CORE       | BLM15PX181SN1D | 1 | 2350033R1    | <b>N</b> NSP |
| L1001 | CORE       | BLM15PX181SN1D | 1 | 2350033R1    | <b>N</b> NSP |
| L1004 | CORE       | BK1005LL241-T  | 1 | 2350032R1    | <b>N</b> NSP |
| L1005 | CORE       | BK1005LL241-T  | 1 | 2350032R1    | <b>N</b> NSP |
| L1006 | CORE       | BK1005LL241-T  | 1 | 2350032R1    | <b>N</b> NSP |
| L1007 | CORE       | BK1005LL241-T  | 1 | 2350032R1    | <b>N</b> NSP |
| L1009 | CHOKE COIL | LBC2518T4R7M   | 1 | 231364M047R2 | NSP          |
| L1010 | CHOKE COIL | LBC2518T4R7M   | 1 | 231364M047R2 | NSP          |
| L1011 | CHOKE COIL | LBC2518T4R7M   | 1 | 231364M047R2 | NSP          |
| L1012 | CHOKE COIL | LBC2518T4R7M   | 1 | 231364M047R2 | NSP          |

|       |            |                 |   |              |              |
|-------|------------|-----------------|---|--------------|--------------|
| L1013 | CHOKE COIL | LBC2518T4R7M    | 1 | 231364M047R2 | NSP          |
| L1014 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L1018 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L1019 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L1021 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L1022 | CHOKE COIL | LBC2518T4R7M    | 1 | 231364M047R2 | NSP          |
| L1024 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L1025 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L1026 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L1027 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L1029 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L3001 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3007 | CHOKE COIL | LBC2518T4R7M    | 1 | 231364M047R2 | NSP          |
| L3201 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L3202 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L3401 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L3403 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L3405 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3406 | CORE       | BLM15PX330SN1D  | 1 | 2350043R1    | <b>N</b> NSP |
| L3407 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3408 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3409 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L3411 | CORE       | BK1005LL241-T   | 1 | 2350032R1    | <b>N</b> NSP |
| L3601 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3602 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3611 | CORE       | MCF12102G900-T  | 1 | 2350041R2    | NSP          |
| L3613 | CORE       | MCF20104G900-T  | 1 | 2350040R2    | NSP          |
| L3651 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3652 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3655 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3656 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3661 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3901 | CHOKE COIL | NRS4018T2R2MDGJ | 1 | 231494R2     | NSP          |
| L3902 | CHOKE COIL | NRS4018T2R2MDGJ | 1 | 231494R2     | NSP          |
| L3903 | CHOKE COIL | NRS4018T2R2MDGJ | 1 | 231494R2     | NSP          |
| L3904 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3905 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3906 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3907 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3909 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3910 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L3911 | CORE       | BLM15PX121SN1D  | 1 | 2350034R1    | <b>N</b> NSP |
| L7003 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L7007 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L7008 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L7009 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |
| L8001 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8002 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8003 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8004 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8021 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8022 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8023 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8024 | CORE       | EXC24CH900U     | 1 | 2350039R2    | NSP          |
| L8202 | CORE       | BLM15PX181SN1D  | 1 | 2350033R1    | <b>N</b> NSP |

|                |                             |                 |     |              |       |
|----------------|-----------------------------|-----------------|-----|--------------|-------|
| L8205          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8207          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8210          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8302          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8303          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8304          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8305          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8306          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8307          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8308          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8400          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8401          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8402          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8403          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8404          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8405          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8406          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8407          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8408          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8409          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8410          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8411          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8412          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8413          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8414          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8415          | CORE                        | BLM15PX121SN1D  | 1   | 2350034R1    | N NSP |
| L8416          | CORE                        | BK1005LL241-T   | 1   | 2350032R1    | N NSP |
| L8417          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8702          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| L8921          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8922          | CHOKE COIL                  | 1255AS-100M     | 1   | 231482M100R2 | NSP   |
| L8923          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8924          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8931          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8932          | CHOKE COIL                  | 1255AS-100M     | 1   | 231482M100R2 | NSP   |
| L8941          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8942          | CHOKE COIL                  | 1255AS-100M     | 1   | 231482M100R2 | NSP   |
| L8951          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8952          | CHOKE COIL                  | 1255AS-100M     | 1   | 231482M100R2 | NSP   |
| L8953          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8954          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8961          | CHOKE COIL                  | BLM21PG221SN1   | 1   | 230949R2     | NSP   |
| L8962          | CHOKE COIL                  | 1255AS-100M     | 1   | 231482M100R2 | NSP   |
| L8965          | CORE                        | BLM15PX181SN1D  | 1   | 2350033R1    | N NSP |
| [ Capacitors ] |                             |                 |     |              |       |
| C1001          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1   | 332011045R1  | NSP   |
| C1002          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1  | 1   | 332101045R1  | NSP   |
| C1004          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1  | 1   | 332101045R1  | NSP   |
| C1005          | CHIP ELECT C                | CECS16V-100M    | 1   | 398641017R2  | NSP   |
| C1005or        | CHIP ELECT C                | CEWX16V-100M    | (1) | 398141017R2  | NSP   |
| C1006          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1  | 1   | 332101045R1  | NSP   |
| C1008          | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0 | 1   | 342031504R1  | NSP   |
| C1009          | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0 | 1   | 342031504R1  | NSP   |
| C1010          | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1  | 1   | 332101045R1  | NSP   |
| C1011          | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1   | 332011045R1  | NSP   |

|         |                             |                     |     |             |              |
|---------|-----------------------------|---------------------|-----|-------------|--------------|
| C1012   | CHIP ELECT C                | CECS4V-220M         | 1   | 3986G2217R2 | NSP          |
| C1012or | CHIP ELECT C                | CEWX4V-220M         | (1) | 3981G2217R2 | NSP          |
| C1013   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1014   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1015   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1016   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-104K1      | 1   | 332101045R1 | NSP          |
| C1017   | CHIP ELECT C                | CECS16V-100M        | 1   | 398641017R2 | NSP          |
| C1017or | CHIP ELECT C                | CEWX16V-100M        | (1) | 398141017R2 | NSP          |
| C1018   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1019   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1020   | CHIP ELECT C                | CECS4V-220M         | 1   | 3986G2217R2 | NSP          |
| C1020or | CHIP ELECT C                | CEWX4V-220M         | (1) | 3981G2217R2 | NSP          |
| C1021   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-472K0      | 1   | 332034725R1 | NSP          |
| C1022   | CHIP ELECT C                | CE32W16V-47M(EC-PC) | 1   | 3500238R2   | <b>N</b> NSP |
| C1023   | CHIP ELECT C                | CECS16V-100M        | 1   | 398641017R2 | NSP          |
| C1023or | CHIP ELECT C                | CEWX16V-100M        | (1) | 398141017R2 | NSP          |
| C1024   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1025   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0      | 1   | 332032235R1 | NSP          |
| C1026   | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-473K0      | 1   | 332024735R1 | NSP          |
| C1027   | CHIP ELECT C                | CECS4V-220M         | 1   | 3986G2217R2 | NSP          |
| C1027or | CHIP ELECT C                | CEWX4V-220M         | (1) | 3981G2217R2 | NSP          |
| C1030   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1032   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0      | 1   | 332001055R1 | NSP          |
| C1033   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0      | 1   | 332001055R1 | NSP          |
| C1037   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1038   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J0     | 1   | 342033314R1 | NSP          |
| C1040   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-472K0      | 1   | 332034725R1 | NSP          |
| C1051   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1052   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1053   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1054   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1      | 1   | 332132255R1 | <b>N</b> NSP |
| C1055   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1      | 1   | 332132255R1 | <b>N</b> NSP |
| C1056   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1057   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1058   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0      | 1   | 332031035R1 | NSP          |
| C1059   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0      | 1   | 332031035R1 | NSP          |
| C1062   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0      | 1   | 332032235R1 | NSP          |
| C1063   | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-473K0      | 1   | 332024735R1 | NSP          |
| C1068   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1069   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1071   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1072   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1073   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1074   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1075   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1079   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1091   | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M       | 1   | 332092267R2 | NSP          |
| C1092   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1093   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1094   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K      | 1   | 332071065R2 | NSP          |
| C1095   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1096   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1097   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1098   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0      | 1   | 332011045R1 | NSP          |
| C1099   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1      | 1   | 332132255R1 | <b>N</b> NSP |

|         |                             |                       |     |                    |   |     |
|---------|-----------------------------|-----------------------|-----|--------------------|---|-----|
| C1100   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1        | 1   | 332132255R1        | N | NSP |
| C1101   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C1102   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C1103   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1   | 332031035R1        |   | NSP |
| C1104   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0        | 1   | 332031035R1        |   | NSP |
| C1105   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C1106   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C1112   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C1113   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C1114   | C-METAL R                   | RN72K1J-000JE0_SIMUKE | 1   | 435010004R1_SIMUKE | N | NSP |
| C1119   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C1125   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3001   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |
| C3002   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C3003   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |
| C3004   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3005   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-180J0       | 1   | 342031804R1        |   | NSP |
| C3006   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-180J0       | 1   | 342031804R1        |   | NSP |
| C3007   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0       | 1   | 342031204R1        |   | NSP |
| C3008   | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0       | 1   | 342031204R1        |   | NSP |
| C3009   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3010   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |
| C3011   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3012   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |
| C3013   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3014   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0        | 1   | 332031025R1        |   | NSP |
| C3015   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3016   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C3017   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C3018   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3019   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3020   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3021   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3022   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3023   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3024   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3025   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3026   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3027   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3028   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3029   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3030   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3031   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3032   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3072   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C3073   | CHIP ELECT C                | CECS6.3V-22M          | 1   | 398622207R2        |   | NSP |
| C3073or | CHIP ELECT C                | CEWX6.3V-22M          | (1) | 398122207R2        |   | NSP |
| C3074   | CHIP ELECT C                | CECS16V-100M          | 1   | 398641017R2        |   | NSP |
| C3074or | CHIP ELECT C                | CEWX16V-100M          | (1) | 398141017R2        |   | NSP |
| C3075   | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K        | 1   | 332071065R2        |   | NSP |
| C3076   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3077   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |
| C3201   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3202   | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0        | 1   | 332011045R1        |   | NSP |
| C3325   | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0        | 1   | 332001055R1        |   | NSP |

|       |                             |                 |   |             |     |
|-------|-----------------------------|-----------------|---|-------------|-----|
| C3401 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-331J0 | 1 | 342033314R1 | NSP |
| C3402 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3403 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3404 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3405 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3406 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3407 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3408 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3410 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3411 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3412 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3413 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0 | 1 | 342031204R1 | NSP |
| C3414 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0 | 1 | 342031204R1 | NSP |
| C3415 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3416 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3418 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3419 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3420 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3422 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3423 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3424 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3425 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3426 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3427 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3428 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C3429 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C3431 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3432 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3433 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3434 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3435 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3436 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3437 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3438 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3439 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3440 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3441 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3442 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3443 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3444 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3445 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3446 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3457 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3458 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3459 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3462 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C3472 | CHIP ELECT C                | CECS4V-220M     | 1 | 3986G2217R2 | NSP |
| C3601 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C3602 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C3603 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C3651 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C3652 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C3654 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3655 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C3656 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |

|       |                             |                 |   |             |              |
|-------|-----------------------------|-----------------|---|-------------|--------------|
| C3657 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3659 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3660 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP          |
| C3661 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP          |
| C3662 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP          |
| C3663 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3664 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP          |
| C3665 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP          |
| C3666 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0 | 1 | 342031504R1 | NSP          |
| C3667 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0 | 1 | 342031504R1 | NSP          |
| C3668 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3669 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3670 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3674 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3685 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3686 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP          |
| C3689 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-223K0  | 1 | 332032235R1 | NSP          |
| C3690 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0 | 1 | 342032214R1 | NSP          |
| C3691 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-220J0 | 1 | 342032204R1 | NSP          |
| C3800 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3801 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3802 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3803 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3804 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3805 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3806 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3810 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0 | 1 | 342032214R1 | NSP          |
| C3811 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-221J0 | 1 | 342032214R1 | NSP          |
| C3901 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1  | 1 | 332134755R1 | <b>N</b> NSP |
| C3902 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3903 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3904 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3905 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1  | 1 | 332134755R1 | <b>N</b> NSP |
| C3906 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3907 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3908 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3909 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP          |
| C3910 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3911 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3912 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1  | 1 | 332134755R1 | <b>N</b> NSP |
| C3913 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1  | 1 | 332134755R1 | <b>N</b> NSP |
| C3914 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3915 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3916 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3917 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3918 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3919 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-475K1  | 1 | 332134755R1 | <b>N</b> NSP |
| C3920 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3921 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1  | 1 | 332132255R1 | <b>N</b> NSP |
| C3922 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP          |
| C3923 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3924 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3925 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3926 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |
| C3927 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP          |



[illegible]

[illegible]

|       |                             |                 |   |             |     |
|-------|-----------------------------|-----------------|---|-------------|-----|
| C7077 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-101J0 | 1 | 342031014R1 | NSP |
| C7180 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C7181 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C7182 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C7183 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C7184 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C8007 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8008 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8023 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C8024 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C8025 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C8038 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8091 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8113 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8206 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8207 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8208 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8210 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8211 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8214 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8215 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8219 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8220 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8221 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8222 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8223 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8224 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8225 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8229 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8230 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8231 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8232 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8236 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-150J0 | 1 | 342031504R1 | NSP |
| C8237 | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-120J0 | 1 | 342031204R1 | NSP |
| C8239 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8240 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-683K0  | 1 | 332016835R1 | NSP |
| C8241 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-153K0  | 1 | 332021535R1 | NSP |
| C8255 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8257 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8260 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8261 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8301 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8303 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8305 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8306 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8307 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8308 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8309 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8310 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8311 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8312 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8313 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8314 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8315 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0  | 1 | 332031025R1 | NSP |
| C8316 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |

[illegible]

[illegible]

|       |                             |                |   |             |              |
|-------|-----------------------------|----------------|---|-------------|--------------|
| C8475 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8476 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8477 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8478 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8484 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8485 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8611 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8612 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8621 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8631 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8632 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8661 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8662 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1 | 332031025R1 | NSP          |
| C8700 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8701 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8702 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8703 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8704 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8705 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8706 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8707 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8709 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K | 1 | 332071065R2 | NSP          |
| C8710 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8894 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8895 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8907 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8908 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K | 1 | 332071065R2 | NSP          |
| C8909 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0 | 1 | 332001055R1 | NSP          |
| C8910 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8911 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K | 1 | 332071065R2 | NSP          |
| C8912 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8913 | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-225K1 | 1 | 332132255R1 | <b>N</b> NSP |
| C8917 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8918 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8921 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |
| C8922 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8923 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8924 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8925 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |
| C8926 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8927 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8929 | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K | 1 | 332071065R2 | NSP          |
| C8930 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8931 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |
| C8932 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8933 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8934 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8935 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |
| C8936 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8937 | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M  | 1 | 332092267R2 | NSP          |
| C8941 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |
| C8942 | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0 | 1 | 332011045R1 | NSP          |
| C8943 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8944 | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K  | 1 | 332221065R2 | NSP          |
| C8945 | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0 | 1 | 332031035R1 | NSP          |

|               |                             |                 |   |             |     |
|---------------|-----------------------------|-----------------|---|-------------|-----|
| C8946         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8947         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8951         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8952         | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8953         | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K   | 1 | 332221065R2 | NSP |
| C8954         | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K   | 1 | 332221065R2 | NSP |
| C8955         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8956         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8957         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8961         | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-103K0  | 1 | 332031035R1 | NSP |
| C8962         | CHIP TYPE CERAMIC CAPACITOR | CK725B1C-104K0  | 1 | 332011045R1 | NSP |
| C8963         | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K   | 1 | 332221065R2 | NSP |
| C8964         | CHIP TYPE CERAMIC CAPACITOR | CK725B1E-106K   | 1 | 332221065R2 | NSP |
| C8966         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8967         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8980         | CHIP TYPE CERAMIC CAPACITOR | CK725B1A-105K0  | 1 | 332001055R1 | NSP |
| C8981         | CHIP TYPE CERAMIC CAPACITOR | CK732B16V-106K  | 1 | 332071065R2 | NSP |
| C8984         | CHIP TYPE CERAMIC CAPACITOR | CC725CH1H-102J1 | 1 | 342101024R1 | NSP |
| C8985         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8986         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| C8987         | CHIP TYPE CERAMIC CAPACITOR | CK725B0J-226M   | 1 | 332092267R2 | NSP |
| [ Resistors ] |                             |                 |   |             |     |
| R1001         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1002         | CHIP TYPE CARBON RESISTOR   | RN72K1J-151JE   | 1 | 435031514R1 | NSP |
| R1003         | CHIP TYPE CARBON RESISTOR   | RN72K1J-151JE   | 1 | 435031514R1 | NSP |
| R1004         | CHIP TYPE CARBON RESISTOR   | RN72K1J-151JE   | 1 | 435031514R1 | NSP |
| R1005         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1006         | CHIP TYPE CARBON RESISTOR   | RN72K1J-560JE   | 1 | 435035604R1 | NSP |
| R1007         | CHIP TYPE CARBON RESISTOR   | RN72K1J-105JE   | 1 | 435031054R1 | NSP |
| R1008         | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE   | 1 | 435031024R1 | NSP |
| R1010         | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE   | 1 | 435031034R1 | NSP |
| R1011         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1012         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1013         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1014         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1015         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1016         | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE   | 1 | 435032204R1 | NSP |
| R1017         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE   | 1 | 435034704R1 | NSP |
| R1019         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE   | 1 | 435034704R1 | NSP |
| R1020         | CHIP TYPE CARBON RESISTOR   | RN72K1J-391JE   | 1 | 435033914R1 | NSP |
| R1021         | CHIP TYPE CARBON RESISTOR   | RN72K1J-101JE   | 1 | 435031014R1 | NSP |
| R1022         | CHIP TYPE CARBON RESISTOR   | RN72K1J-151JE   | 1 | 435031514R1 | NSP |
| R1023         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R1024         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE   | 1 | 435034704R1 | NSP |
| R1025         | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE   | 1 | 435034704R1 | NSP |
| R1026         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1027         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R1028         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R1029         | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE   | 1 | 435031024R1 | NSP |
| R1031         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1032         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1034         | CHIP TYPE CARBON RESISTOR   | RN72K1J-221JE   | 1 | 435032214R1 | NSP |
| R1035         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1037         | CHIP TYPE CARBON RESISTOR   | RN72K1J-331JE   | 1 | 435033314R1 | NSP |
| R1039         | CHIP TYPE CARBON RESISTOR   | RN72K1J-330JE   | 1 | 435033304R1 | NSP |

|         |                                  |                |     |               |              |
|---------|----------------------------------|----------------|-----|---------------|--------------|
| R1041   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1042   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1043   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1044   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1046   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1047   | CHIP TYPE CARBON RESISTOR        | RN72K1J-681JE  | 1   | 435036814R1   | NSP          |
| R1049   | CHIP RESISTOR NETWORK            | MNR04MRAPJ103  | 1   | 43464710304R2 | NSP          |
| R1049or | CHIP RESISTOR NETWORK            | YCN104-103-JK  | (1) | 43464C10304R1 | NSP          |
| R1054   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1055   | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1   | NSP          |
| R1056   | CHIP TYPE CARBON RESISTOR        | RN72K1J-000JE  | 1   | 435030004R1   | NSP          |
| R1057   | CHIP TYPE CARBON RESISTOR        | RN72K1J-681JE  | 1   | 435036814R1   | NSP          |
| R1059   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1060   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1061   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1062   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1063   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1064   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1066   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1067   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1069   | CHIP TYPE CARBON RESISTOR        | RN72K1J-151JE  | 1   | 435031514R1   | NSP          |
| R1071   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1072   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1073   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1074   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1075   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1076   | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE  | 1   | 435033304R1   | NSP          |
| R1077   | CHIP TYPE CARBON RESISTOR        | RN72K1J-330JE  | 1   | 435033304R1   | NSP          |
| R1078   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU103KY11608 | 1   | 376921035R2   | <b>N</b> NSP |
| R1079   | CHIP TYPE PLASTIC FILM CAPACITOR | 50MU103KY11608 | 1   | 376921035R2   | <b>N</b> NSP |
| R1081   | CHIP TYPE CARBON RESISTOR        | RN72K1J-181JE  | 1   | 435031814R1   | NSP          |
| R1083   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1084   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1085   | CHIP TYPE CARBON RESISTOR        | RN72K1J-181JE  | 1   | 435031814R1   | NSP          |
| R1087   | CHIP TYPE CARBON RESISTOR        | RN72K1J-471JE  | 1   | 435034714R1   | NSP          |
| R1088   | CHIP TYPE CARBON RESISTOR        | RN72K1J-471JE  | 1   | 435034714R1   | NSP          |
| R1090   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1091   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1092   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1093   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1098   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1099   | CHIP TYPE CARBON RESISTOR        | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R1100   | CHIP TYPE CARBON RESISTOR        | RN72K1J-101JE  | 1   | 435031014R1   | NSP          |
| R1101   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1102   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1103   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1104   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1105   | CHIP TYPE CARBON RESISTOR        | RN72K1J-681JE  | 1   | 435036814R1   | NSP          |
| R1106   | CHIP TYPE CARBON RESISTOR        | RN72K1J-151JE  | 1   | 435031514R1   | NSP          |
| R1107   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1108   | CHIP TYPE CARBON RESISTOR        | RN72K1J-331JE  | 1   | 435033314R1   | NSP          |
| R1109   | CHIP TYPE CARBON RESISTOR        | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R1110   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1111   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |
| R1112   | CHIP TYPE CARBON RESISTOR        | RN72K1J-221JE  | 1   | 435032214R1   | NSP          |



|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R1113   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1114   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1115   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1116   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1117   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1124   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R1125   | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE | 1   | 435031514R1   | NSP |
| R1126   | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE | 1   | 435031514R1   | NSP |
| R1127   | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE | 1   | 435031514R1   | NSP |
| R1128   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1129   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R1130   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R1131   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1132   | CHIP TYPE CARBON RESISTOR | RN72K1J-151JE | 1   | 435031514R1   | NSP |
| R1133   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1134   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1135   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1136   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1137   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1138   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1139   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1141   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1142   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1143   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1144   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1145   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1146   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1147   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1149   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1150   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R1153   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1154   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1155   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1156   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1158   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R1159   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1160   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R1161   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1167   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1167or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1168   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1171   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R1172   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R1174   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1176   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R1178   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1178or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1179   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1180   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1181   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1185   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R1185or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R1186   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1187   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R1188   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |

|         |                           |                        |     |               |     |
|---------|---------------------------|------------------------|-----|---------------|-----|
| R1189   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R1190   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1   | 435031024R1   | NSP |
| R1191   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1   | 435031024R1   | NSP |
| R1208   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE          | 1   | 435031014R1   | NSP |
| R3009   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1   | 435031024R1   | NSP |
| R3010   | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE          | 1   | 435034754R1   | NSP |
| R3011   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE          | 1   | 435031054R1   | NSP |
| R3012   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3013   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3014   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3015   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3016   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3017   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3018   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE          | 1   | 435032204R1   | NSP |
| R3019   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE          | 1   | 435034724R1   | NSP |
| R3020   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1   | 435031034R1   | NSP |
| R3021   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1   | 435031034R1   | NSP |
| R3022   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3023   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3028   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE          | 1   | 435031034R1   | NSP |
| R3029   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1   | 435031024R1   | NSP |
| R3030   | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE          | 1   | 435032234R1   | NSP |
| R3031   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE          | 1   | 435031044R1   | NSP |
| R3032   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3033   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3034   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3035   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE          | 1   | 435031024R1   | NSP |
| R3036   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3037   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3038   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3039   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3040   | CHIP TYPE CARBON RESISTOR | MCR03EZPF49R9(49.9_1%) | 1   | 4100037R2     | NSP |
| R3041   | CHIP TYPE CARBON RESISTOR | RN72K1J-271FE          | 1   | 435032712R1   | NSP |
| R3042   | CHIP TYPE CARBON RESISTOR | RN72K1J-222FE          | 1   | 435032222R1   | NSP |
| R3043   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE          | 1   | 435031032R1   | NSP |
| R3044   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE          | 1   | 435031032R1   | NSP |
| R3045   | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE          | 1   | 435031022R1   | NSP |
| R3046   | CHIP TYPE CARBON RESISTOR | RN72K1J-102FE          | 1   | 435031022R1   | NSP |
| R3072   | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE          | 1   | 435036824R1   | NSP |
| R3073   | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE          | 1   | 435036824R1   | NSP |
| R3074   | CHIP TYPE CARBON RESISTOR | RN72K1J-393JE          | 1   | 435033934R1   | NSP |
| R3075   | CHIP TYPE CARBON RESISTOR | RN72K1J-393JE          | 1   | 435033934R1   | NSP |
| R3077   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE          | 1   | 435030004R1   | NSP |
| R3078   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE          | 1   | 435030004R1   | NSP |
| R3079   | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE          | 1   | 435034754R1   | NSP |
| R3080   | CHIP TYPE CARBON RESISTOR | RN72K1J-475JE          | 1   | 435034754R1   | NSP |
| R3081   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470          | 1   | 43464747004R2 | NSP |
| R3081or | CHIP RESISTOR NETWORK     | YCN104-470-JK          | (1) | 43464C47004R1 | NSP |
| R3082   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470          | 1   | 43464747004R2 | NSP |
| R3082or | CHIP RESISTOR NETWORK     | YCN104-470-JK          | (1) | 43464C47004R1 | NSP |
| R3083   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470          | 1   | 43464747004R2 | NSP |
| R3083or | CHIP RESISTOR NETWORK     | YCN104-470-JK          | (1) | 43464C47004R1 | NSP |
| R3201   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3202   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |
| R3203   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE          | 1   | 435034704R1   | NSP |

[illegible]

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3325or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3326   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3327   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3328   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3329   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3330   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3331   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3332   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3333   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3334   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3335   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3336   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3337   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3338   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3339   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3340   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3341   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3342   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3343   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3344   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3345   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3346   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3347   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3348   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3349   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3350   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3351   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R3351or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R3352   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R3352or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R3353   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R3353or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3354   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R3354or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3355   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R3355or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3356   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R3356or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R3357   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3358   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3360   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3361   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3366   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3367   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3369   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3373   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3377   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3400   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3401   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3403   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R3404   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3405   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3406   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3407   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R3408   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |

|         |                           |               |     |               |              |
|---------|---------------------------|---------------|-----|---------------|--------------|
| R3408or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP          |
| R3409   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP          |
| R3409or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP          |
| R3411   | CHIP RESISTOR NETWORK     | MNR04MRAPJ000 | 1   | 43464700004R2 | <b>N</b> NSP |
| R3411or | CHIP RESISTOR NETWORK     | YCN104-000-ZK | (1) | 43484C00004R1 | <b>N</b> NSP |
| R3412   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP          |
| R3414   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R3415   | CHIP RESISTOR NETWORK     | MNR04MRAPJ000 | 1   | 43464700004R2 | <b>N</b> NSP |
| R3415or | CHIP RESISTOR NETWORK     | YCN104-000-ZK | (1) | 43484C00004R1 | <b>N</b> NSP |
| R3421   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3424   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3425   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3428   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP          |
| R3429   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R3429or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R3430   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R3430or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R3433   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R3434   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R3435   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP          |
| R3436   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP          |
| R3437   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3438   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3439   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R3440   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R3441   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R3441or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R3442   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP          |
| R3443   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP          |
| R3444   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3445   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R3445or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R3446   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R3447   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3448   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3450   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3452   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3453   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP          |
| R3454   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3455   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP          |
| R3456   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3457   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R3457or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R3462   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R3464   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R3465   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R3466   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R3469   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP          |
| R3470   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP          |
| R3473   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R3474   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R3481   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R3484   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3485   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R3488   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3491   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R3494   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R3494or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3495   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R3495or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3496   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R3496or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3497   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R3497or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R3500   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3501   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3502   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3503   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3504   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3505   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3601   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3603   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3604   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3605   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3652   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3653   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3654   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3657   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3658   | CHIP TYPE CARBON RESISTOR | RN72K1J-391FE | 1   | 435033912R1   | NSP |
| R3659   | CHIP TYPE CARBON RESISTOR | RN72K1J-222FE | 1   | 435032222R1   | NSP |
| R3660   | CHIP TYPE CARBON RESISTOR | RN72K1J-392FE | 1   | 435033922R1   | NSP |
| R3661   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3662   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3663   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3664   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3666   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3667   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3668   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3669   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3670   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3671   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3674   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP |
| R3675   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3676   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R3678   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3679   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3692   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3693   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3694   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3695   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3696   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3697   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3699   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3700   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3701   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3702   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3703   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3709   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3710   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3711   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R3712   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3713   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3715   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R3719   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3724   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3728   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3729   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R3731   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3732   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3733   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3734   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3735   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3737   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3739   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3741   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3743   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3744   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3745   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3746   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3747   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3748   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3749   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3750   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3751   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3752   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R3753   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3754   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3756   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R3758   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3902   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3903   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3904   | CHIP TYPE CARBON RESISTOR | RN72K1J-122JE | 1   | 435031224R1   | NSP |
| R3905   | CHIP TYPE CARBON RESISTOR | RN72K1J-122JE | 1   | 435031224R1   | NSP |
| R3906   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3908   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R3911   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3912   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3915   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3916   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3917   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3918   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R3920   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7000   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R7001   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R7001or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R7002   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7003   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7004   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R7005   | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE | 1   | 435032234R1   | NSP |
| R7006   | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE | 1   | 435032234R1   | NSP |
| R7007   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R7008   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R7009   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R7011   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7012   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |

|         |                           |               |     |               |       |
|---------|---------------------------|---------------|-----|---------------|-------|
| R7013   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP   |
| R7014   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP   |
| R7015   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP   |
| R7016   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP   |
| R7017   | CHIP RESISTOR NETWORK     | MNR04MRAPJ472 | 1   | 43464747204R2 | NSP   |
| R7017or | CHIP RESISTOR NETWORK     | YCN104-472-JK | (1) | 43464C47204R1 | N NSP |
| R7018   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP   |
| R7019   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7019or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7020   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP   |
| R7021   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7021or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7022   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7023   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP   |
| R7024   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7025   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP   |
| R7026   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP   |
| R7027   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7028   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7029   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7030   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP   |
| R7031   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7031or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7032   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7033   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP   |
| R7033or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP   |
| R7034   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7034or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7035   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7036   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7037   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7038   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7039   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP   |
| R7040   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP   |
| R7041   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP   |
| R7042   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7042or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7044   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7046   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP   |
| R7048   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP   |
| R7049   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |
| R7050   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP   |
| R7051   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP   |
| R7052   | CHIP TYPE CARBON RESISTOR | RN72K1J-223JE | 1   | 435032234R1   | NSP   |
| R7054   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7055   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7056   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP   |
| R7059   | CHIP TYPE CARBON RESISTOR | RN72K1J-224JE | 1   | 435032244R1   | NSP   |
| R7060   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP   |
| R7061   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP   |
| R7061or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP   |
| R7062   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP   |
| R7064   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP   |
| R7065   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP   |
| R7066   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP   |



|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R7069   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R7069or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R7070   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7070or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7071   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7072   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7073   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R7074   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7075   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R7075or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R7076   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7077   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7078   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7079   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7079or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7080   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7081   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7081or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7082   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R7083   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R7084   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R7087   | CHIP TYPE CARBON RESISTOR | RN72K1J-273JE | 1   | 435032734R1   | NSP |
| R7091   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7092   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7093   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R7094   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R7095   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7095or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7097   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7098   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7098or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7099   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R7099or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R7100   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R7101   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7102   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R7103   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7104   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7105   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R7105or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R7106   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R7108   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R7108or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R7109   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R7110   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7111   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7112   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7113   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7114   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7115   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7116   | CHIP TYPE CARBON RESISTOR | RN72K1J-047JE | 1   | 435030474R1   | NSP |
| R7117   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7120   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7121   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R7122   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R7123   | CHIP RESISTOR NETWORK     | MNR04MRAPJ221 | 1   | 43464722104R2 | NSP |
| R7123or | CHIP RESISTOR NETWORK     | YCN104-221-JK | (1) | 43464C22104R1 | NSP |
| R7124   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R7125   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R7126   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7127   | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE | 1   | 435033334R1   | NSP |
| R7128   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R7132   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R7133   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7134   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7135   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7136   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7137   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP |
| R7138   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7139   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R7140   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7141   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7142   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R7148   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R7161   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7170   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R7171   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R7172   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP |
| R7180   | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE | 1   | 435032724R1   | NSP |
| R7181   | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE | 1   | 435032724R1   | NSP |
| R7182   | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE | 1   | 435032724R1   | NSP |
| R7183   | CHIP TYPE CARBON RESISTOR | RN72K1J-272JE | 1   | 435032724R1   | NSP |
| R7184   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R7186   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R7187   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R7188   | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE | 1   | 435031044R1   | NSP |
| R7193   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8011   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8012   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8013   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8021   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8022   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8023   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8024   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8025   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8026   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8030   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8033   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8035   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8037   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8038   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8204   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8208   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8209   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8215   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8218   | CHIP TYPE CARBON RESISTOR | RN72K1J-561JE | 1   | 435035614R1   | NSP |
| R8220   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8221   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8223   | CHIP TYPE CARBON RESISTOR | RN72K1J-471JE | 1   | 435034714R1   | NSP |
| R8225   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8226   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8228   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8233   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8237   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8238   | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE | 1   | 435033314R1   | NSP |
| R8240   | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE | 1   | 435036814R1   | NSP |
| R8243   | CHIP TYPE CARBON RESISTOR | RN72K1J-681JE | 1   | 435036814R1   | NSP |
| R8244   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8300   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8301   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8302   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8303   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8304   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8306   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8307   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8308   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8312   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8318   | CHIP RESISTOR NETWORK     | MNR04MRAPJ222 | 1   | 43464722204R2 | NSP |
| R8318or | CHIP RESISTOR NETWORK     | YCN104-222-JK | (1) | 43464C22204R1 | NSP |
| R8319   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8320   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8321   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8322   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8323   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8324   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8325   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8334   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8335   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8336   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8338   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8339   | CHIP TYPE CARBON RESISTOR | RN72K1J-330JE | 1   | 435033304R1   | NSP |
| R8342   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R8342or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R8343   | CHIP RESISTOR NETWORK     | MNR04MRAPJ220 | 1   | 43464722004R2 | NSP |
| R8343or | CHIP RESISTOR NETWORK     | YCN104-220-JK | (1) | 43464C22004R1 | NSP |
| R8346   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8350   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8354   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8355   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8356   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8357   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8358   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8359   | CHIP TYPE CARBON RESISTOR | RN72K1J-124JE | 1   | 435031244R1   | NSP |
| R8361   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8362   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8363   | CHIP RESISTOR NETWORK     | MNR04MRAPJ330 | 1   | 43464733004R2 | NSP |
| R8363or | CHIP RESISTOR NETWORK     | YCN104-330-JK | (1) | 43464C33004R1 | NSP |
| R8365   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8372   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8373   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8374   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8375   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8376   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8377   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8378   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |

|         |                           |               |     |               |     |
|---------|---------------------------|---------------|-----|---------------|-----|
| R8379   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8380   | CHIP TYPE CARBON RESISTOR | RN72K1J-562JE | 1   | 435035624R1   | NSP |
| R8382   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8383   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8384   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8385   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8386   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8400   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP |
| R8400or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP |
| R8401   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8402   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP |
| R8402or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP |
| R8403   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8405   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8406   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8407   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8408   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8414   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8415   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8416   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8417   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP |
| R8418   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8419   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8420   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8421   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8422   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8423   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8424   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP |
| R8425   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8426   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8427   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8429   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8430   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8431   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8432   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP |
| R8437   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP |
| R8438   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8439   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8440   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8441   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8442   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8443   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP |
| R8444   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8445   | CHIP TYPE CARBON RESISTOR | RN72K1J-101JE | 1   | 435031014R1   | NSP |
| R8446   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP |
| R8447   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP |
| R8448   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP |
| R8449   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8450   | CHIP TYPE CARBON RESISTOR | RN72K1J-182JE | 1   | 435031824R1   | NSP |
| R8451   | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE | 1   | 435030004R1   | NSP |
| R8452   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE | 1   | 435031032R1   | NSP |
| R8453   | CHIP TYPE CARBON RESISTOR | RN72K1J-223FE | 1   | 435032232R1   | NSP |
| R8458   | CHIP TYPE CARBON RESISTOR | RN72K1J-100JE | 1   | 435031004R1   | NSP |
| R8459   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |
| R8461   | CHIP TYPE CARBON RESISTOR | RN72K1J-560JE | 1   | 435035604R1   | NSP |

|         |                             |                |     |               |              |
|---------|-----------------------------|----------------|-----|---------------|--------------|
| R8462   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8464   | CHIP RESISTOR NETWORK       | MNR04MRAPJ470  | 1   | 43464747004R2 | NSP          |
| R8464or | CHIP RESISTOR NETWORK       | YCN104-470-JK  | (1) | 43464C47004R1 | NSP          |
| R8465   | CHIP RESISTOR NETWORK       | MNR04MRAPJ101  | 1   | 43464710104R2 | NSP          |
| R8465or | CHIP RESISTOR NETWORK       | YCN104-101-JK  | (1) | 43464C10104R1 | <b>N</b> NSP |
| R8466   | CHIP RESISTOR NETWORK       | MNR04MRAPJ220  | 1   | 43464722004R2 | NSP          |
| R8466or | CHIP RESISTOR NETWORK       | YCN104-220-JK  | (1) | 43464C22004R1 | NSP          |
| R8467   | CHIP RESISTOR NETWORK       | MNR04MRAPJ220  | 1   | 43464722004R2 | NSP          |
| R8467or | CHIP RESISTOR NETWORK       | YCN104-220-JK  | (1) | 43464C22004R1 | NSP          |
| R8468   | CHIP RESISTOR NETWORK       | MNR04MRAPJ220  | 1   | 43464722004R2 | NSP          |
| R8468or | CHIP RESISTOR NETWORK       | YCN104-220-JK  | (1) | 43464C22004R1 | NSP          |
| R8469   | CHIP RESISTOR NETWORK       | MNR04MRAPJ220  | 1   | 43464722004R2 | NSP          |
| R8469or | CHIP RESISTOR NETWORK       | YCN104-220-JK  | (1) | 43464C22004R1 | NSP          |
| R8471   | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE  | 1   | 435032204R1   | NSP          |
| R8472   | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE  | 1   | 435032204R1   | NSP          |
| R8473   | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE  | 1   | 435032204R1   | NSP          |
| R8474   | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE  | 1   | 435032204R1   | NSP          |
| R8475   | CHIP TYPE CARBON RESISTOR   | RN72K1J-220JE  | 1   | 435032204R1   | NSP          |
| R8476   | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE  | 1   | 435030004R1   | NSP          |
| R8477   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1   | 332031025R1   | NSP          |
| R8478   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1   | 332031025R1   | NSP          |
| R8479   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1   | 332031025R1   | NSP          |
| R8480   | CHIP TYPE CERAMIC CAPACITOR | CK725B1H-102K0 | 1   | 332031025R1   | NSP          |
| R8600   | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE  | 1   | 435030004R1   | NSP          |
| R8603   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8604   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8605   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8606   | CHIP TYPE CARBON RESISTOR   | RN72K1J-000JE  | 1   | 435030004R1   | NSP          |
| R8613   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8614   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8615   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8623   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8624   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8625   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8633   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8634   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8635   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8645   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8663   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8664   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8665   | CHIP TYPE CARBON RESISTOR   | RN72K1J-100JE  | 1   | 435031004R1   | NSP          |
| R8702   | CHIP RESISTOR NETWORK       | MNR04MRAPJ221  | 1   | 43464722104R2 | NSP          |
| R8702or | CHIP RESISTOR NETWORK       | YCN104-221-JK  | (1) | 43464C22104R1 | NSP          |
| R8703   | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R8704   | CHIP RESISTOR NETWORK       | MNR04MRAPJ103  | 1   | 43464710304R2 | NSP          |
| R8704or | CHIP RESISTOR NETWORK       | YCN104-103-JK  | (1) | 43464C10304R1 | NSP          |
| R8705   | CHIP TYPE CARBON RESISTOR   | RN72K1J-473JE  | 1   | 435034734R1   | NSP          |
| R8707   | CHIP RESISTOR NETWORK       | MNR04MRAPJ103  | 1   | 43464710304R2 | NSP          |
| R8707or | CHIP RESISTOR NETWORK       | YCN104-103-JK  | (1) | 43464C10304R1 | NSP          |
| R8709   | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R8710   | CHIP TYPE CARBON RESISTOR   | RN72K1J-102JE  | 1   | 435031024R1   | NSP          |
| R8711   | CHIP TYPE CARBON RESISTOR   | RN72K1J-103JE  | 1   | 435031034R1   | NSP          |
| R8712   | CHIP TYPE CARBON RESISTOR   | RN72K1J-470JE  | 1   | 435034704R1   | NSP          |
| R8713   | CHIP TYPE CARBON RESISTOR   | RN72K1J-101JE  | 1   | 435031014R1   | NSP          |
| R8716   | CHIP TYPE CARBON RESISTOR   | RN72K1J-332JE  | 1   | 435033324R1   | NSP          |

|         |                           |               |     |               |              |
|---------|---------------------------|---------------|-----|---------------|--------------|
| R8717   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R8718   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP          |
| R8719   | CHIP TYPE CARBON RESISTOR | RN72K1J-222JE | 1   | 435032224R1   | NSP          |
| R8720   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8721   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R8721or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R8723   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP          |
| R8724   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP          |
| R8727   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP          |
| R8728   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8729   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP          |
| R8730   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8731   | CHIP RESISTOR NETWORK     | MNR04MRAPJ103 | 1   | 43464710304R2 | NSP          |
| R8731or | CHIP RESISTOR NETWORK     | YCN104-103-JK | (1) | 43464C10304R1 | NSP          |
| R8732   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP          |
| R8733   | CHIP TYPE CARBON RESISTOR | RN72K1J-105JE | 1   | 435031054R1   | NSP          |
| R8734   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8735   | CHIP TYPE CARBON RESISTOR | RN72K1J-221JE | 1   | 435032214R1   | NSP          |
| R8736   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R8737   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP          |
| R8738   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8739   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R8740   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8741   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R8742   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8743   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8744   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8745   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8746   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8748   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8750   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8752   | CHIP RESISTOR NETWORK     | MNR04MRAPJ101 | 1   | 43464710104R2 | NSP          |
| R8752or | CHIP RESISTOR NETWORK     | YCN104-101-JK | (1) | 43464C10104R1 | <b>N</b> NSP |
| R8753   | CHIP RESISTOR NETWORK     | MNR04MRAPJ470 | 1   | 43464747004R2 | NSP          |
| R8753or | CHIP RESISTOR NETWORK     | YCN104-470-JK | (1) | 43464C47004R1 | NSP          |
| R8754   | CHIP TYPE CARBON RESISTOR | RN72K1J-470JE | 1   | 435034704R1   | NSP          |
| R8755   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8756   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8757   | CHIP RESISTOR NETWORK     | MNR04MRAPJ101 | 1   | 43464710104R2 | NSP          |
| R8757or | CHIP RESISTOR NETWORK     | YCN104-101-JK | (1) | 43464C10104R1 | <b>N</b> NSP |
| R8758   | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE | 1   | 435031034R1   | NSP          |
| R8790   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP          |
| R8791   | CHIP TYPE CARBON RESISTOR | RN72K1J-220JE | 1   | 435032204R1   | NSP          |
| R8900   | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE | 1   | 435034724R1   | NSP          |
| R8901   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R8904   | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE | 1   | 435031024R1   | NSP          |
| R8922   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP          |
| R8923   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R8924   | CHIP TYPE CARBON RESISTOR | RN72K1J-682FE | 1   | 435036822R1   | NSP          |
| R8925   | CHIP TYPE CARBON RESISTOR | RN72K1J-332FE | 1   | 435033322R1   | NSP          |
| R8926   | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE | 1   | 435031032R1   | NSP          |
| R8932   | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE | 1   | 435034734R1   | NSP          |
| R8933   | CHIP TYPE CARBON RESISTOR | RN72K1J-332JE | 1   | 435033324R1   | NSP          |
| R8934   | CHIP TYPE CARBON RESISTOR | RN72K1J-272FE | 1   | 435032722R1   | NSP          |
| R8935   | CHIP TYPE CARBON RESISTOR | RN72K1J-222FE | 1   | 435032222R1   | NSP          |

|                                |                           |                     |     |             |              |
|--------------------------------|---------------------------|---------------------|-----|-------------|--------------|
| R8936                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE       | 1   | 435031032R1 | NSP          |
| R8939                          | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE       | 1   | 435031024R1 | NSP          |
| R8943                          | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE       | 1   | 435034724R1 | NSP          |
| R8944                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE       | 1   | 435031032R1 | NSP          |
| R8946                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE       | 1   | 435031032R1 | NSP          |
| R8949                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE       | 1   | 435031044R1 | NSP          |
| R8952                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE       | 1   | 435034734R1 | NSP          |
| R8953                          | CHIP TYPE CARBON RESISTOR | RN72K1J-682JE       | 1   | 435036824R1 | NSP          |
| R8954                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333FE       | 1   | 435033332R1 | NSP          |
| R8955                          | CHIP TYPE CARBON RESISTOR | RN72K1J-124FE       | 1   | 435031242R1 | NSP          |
| R8956                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE       | 1   | 435031032R1 | NSP          |
| R8958                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE       | 1   | 435034734R1 | NSP          |
| R8962                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE       | 1   | 435034734R1 | NSP          |
| R8964                          | CHIP TYPE CARBON RESISTOR | RN72K1J-563FE       | 1   | 435035632R1 | NSP          |
| R8965                          | CHIP TYPE CARBON RESISTOR | RN72K1J-274JE       | 1   | 435032744R1 | NSP          |
| R8966                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103FE       | 1   | 435031032R1 | NSP          |
| R8982                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE       | 1   | 435031044R1 | NSP          |
| R8983                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE       | 1   | 435034734R1 | NSP          |
| R8984                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE       | 1   | 435031034R1 | NSP          |
| R8985                          | CHIP TYPE CARBON RESISTOR | RN72K1J-473JE       | 1   | 435034734R1 | NSP          |
| R8987                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE       | 1   | 435030004R1 | NSP          |
| R8988                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE       | 1   | 435030004R1 | NSP          |
| R8989                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE       | 1   | 435031034R1 | NSP          |
| R8990                          | CHIP TYPE CARBON RESISTOR | RN72K1J-102JE       | 1   | 435031024R1 | NSP          |
| [ Switches, Terminals, Wires ] |                           |                     |     |             |              |
| P0004A                         | PRINTED WIRING BOARD      | BCPRC-2034          | {1} | 25142034    | NSP          |
| P040                           | PRINTED WIRING BOARD      | BCPRC-2034          | 1   | 25142034A   | NSP          |
| P2800B                         | SOCKET                    | IMSA-9618S-23A      | 1   | 25053348R2  | NSP          |
| P2801B                         | SOCKET                    | IMSA-9618S-09A      | 1   | 25053334R2  | NSP          |
| P2802B                         | PLUG                      | NPLG-5P918          | 1   | 25055965R2  | NSP          |
| P3201                          | SOCKET                    | NSCT-9P2472         | 1   | 25052575R2  | NSP          |
| P3601                          | SOCKET                    | UJA01SB4090-72R     | 1   | 25053533R2  | <b>N</b> NSP |
| P3651                          | SOCKET                    | MP04B1S2AM0-07T     | 1   | 25053617R3  | NSP          |
| P3654                          | SOCKET                    | APCI0085-P002A      | 1   | 25053616R2  | NSP          |
| P3658                          | TERMINAL                  | APCI0213-K001G      | 1   | 25060548R2  | <b>N</b> NSP |
| P6800B                         | PLUG                      | NPLG-5P918          | 1   | 25055965R2  | NSP          |
| P7001A                         | SOCKET                    | 31FMN-SMT-A-TF      | 1   | 25052848R2  | NSP          |
| P7501                          | SOCKET                    | NSCT-9P2472         | 1   | 25052575R2  | NSP          |
| P8001                          | SOCKET                    | 51U019S-3HFDN-BD-SM | 1   | 25053549R3  | <b>N</b> NSP |
| P8001or                        | SOCKET                    | TCX3423-311387      | (1) | 25060513R3  | <b>N</b> NSP |
| P8001or                        | SOCKET                    | HDMI(47266-4101)    | (1) | 25053389R3  | NSP          |
| P8002B                         | PLUG                      | IMSA-9850B-30Y      | 1   | 25056329R2  | NSP          |
| P8003B                         | PLUG                      | IMSA-9850B-30Y      | 1   | 25056329R2  | NSP          |
| P8021                          | SOCKET                    | 51U019S-3HFDN-BD-SM | 1   | 25053549R3  | <b>N</b> NSP |
| P8021or                        | SOCKET                    | TCX3423-311387      | (1) | 25060513R3  | <b>N</b> NSP |
| P8021or                        | SOCKET                    | HDMI(47266-4101)    | (1) | 25053389R3  | NSP          |
| P8500B                         | SOCKET                    | 51U019S-3HFDN-BD-SM | 1   | 25053549R3  | <b>N</b> NSP |
| P8500Bor                       | SOCKET                    | TCX3423-311387      | (1) | 25060513R3  | <b>N</b> NSP |
| P8500Bor                       | SOCKET                    | HDMI(47266-4101)    | (1) | 25053389R3  | NSP          |
| P8611                          | SOCKET                    | 51U019S-3HFDN-BD-SM | 1   | 25053549R3  | <b>N</b> NSP |
| P8611or                        | SOCKET                    | TCX3423-311387      | (1) | 25060513R3  | <b>N</b> NSP |
| P8611or                        | SOCKET                    | HDMI(47266-4101)    | (1) | 25053389R3  | NSP          |
| P8621                          | SOCKET                    | 51U019S-3HFDN-BD-SM | 1   | 25053549R3  | <b>N</b> NSP |
| P8621or                        | SOCKET                    | TCX3423-311387      | (1) | 25060513R3  | <b>N</b> NSP |
| P8621or                        | SOCKET                    | HDMI(47266-4101)    | (1) | 25053389R3  | NSP          |

|                            |                                |                     |     |                |              |
|----------------------------|--------------------------------|---------------------|-----|----------------|--------------|
| P8631                      | SOCKET                         | 51U019S-3HFDN-BD-SM | 1   | 25053549R3     | <b>N</b> NSP |
| P8631or                    | SOCKET                         | TCX3423-311387      | (1) | 25060513R3     | <b>N</b> NSP |
| P8631or                    | SOCKET                         | HDMI(47266-4101)    | (1) | 25053389R3     | NSP          |
| P8641                      | SOCKET                         | 51U019S-3HFDN-BD-SM | 1   | 25053549R3     | <b>N</b> NSP |
| P8641or                    | SOCKET                         | TCX3423-311387      | (1) | 25060513R3     | <b>N</b> NSP |
| P8641or                    | SOCKET                         | HDMI(47266-4101)    | (1) | 25053389R3     | NSP          |
| P8651                      | SOCKET                         | 51U019S-3HFDN-BD-SM | 1   | 25053549R3     | <b>N</b> NSP |
| P8651or                    | SOCKET                         | TCX3423-311387      | (1) | 25060513R3     | <b>N</b> NSP |
| P8651or                    | SOCKET                         | HDMI(47266-4101)    | (1) | 25053389R3     | NSP          |
| P8661                      | SOCKET                         | 51U019S-3HFDN-BD-SM | 1   | 25053549R3     | <b>N</b> NSP |
| P8661or                    | SOCKET                         | TCX3423-311387      | (1) | 25060513R3     | <b>N</b> NSP |
| P8661or                    | SOCKET                         | HDMI(47266-4101)    | (1) | 25053389R3     | NSP          |
| P8671                      | SOCKET                         | 51U019S-3HFDN-BD-SM | 1   | 25053549R3     | <b>N</b> NSP |
| P8671or                    | SOCKET                         | TCX3423-311387      | (1) | 25060513R3     | <b>N</b> NSP |
| P8671or                    | SOCKET                         | HDMI(47266-4101)    | (1) | 25053389R3     | NSP          |
| P8710                      | PLUG                           | NPLG-2P915          | 1   | 25055962R2     | <b>N</b> NSP |
| <b>[ Frontend, Units ]</b> |                                |                     |     |                |              |
| BAPRC-2034                 | Processing circuit pc board AS | BAPRC-2034-1G       | 1   | 1B5142034-1G-C | Child        |



**BATRM-2023-1Q**

## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

## &lt;Notes&gt;

: NSP

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH  
PART**

| REF. NO.                   | PART NAME       | DESCRIPTION      | Q'TY | PART NO. (SN) | REMARKS |
|----------------------------|-----------------|------------------|------|---------------|---------|
| <b>[ Semi-conductors ]</b> |                 |                  |      |               |         |
| D2000                      | DIODE           | G10XB80-02-54A-T | 1    | 22380378      |         |
| D2000A                     | HEAT SINK       | RAD-083          | 1    | 27160271      | NSP     |
| D2000B                     | SCREW           | 3P+10FN(3BC)     | 1    | 82143010GR    | NSP     |
| D2001                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D2001or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D2002                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D2002or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D2003                      | ZENER DIODE     | DZ2J062M0L       | 1    | 224760620R2   | NSP     |
| D2003or                    | ZENER DIODE     | UDZS6.2B         | (1)  | 224550620R2   | NSP     |
| D2004                      | DIODE           | RBR3MM30ATR      | 1    | 22380401R2    | NSP     |
| D2005                      | DIODE           | RBR3MM30ATR      | 1    | 22380401R2    | NSP     |
| D6501                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D6501or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D6503                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D6503or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D6507                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D6507or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D6509                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D6509or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| D6551                      | CHIP TYPE DIODE | DA2J10100        | 1    | 223303R2      | NSP     |
| D6551or                    | CHIP TYPE DIODE | 1SS352           | (1)  | 223234R2      | NSP     |
| Q2100                      | HYBRID IC       | 74VHC4053AFT     | 1    | 22274053ER2TO | NSP     |
| Q2101                      | HYBRID IC       | 74VHC4051AFT     | 1    | 22274051ER2TO | NSP     |
| Q2102                      | TRANSISTOR      | 2SA1162-GR       | 1    | 2214375R2     | NSP     |
| Q2103                      | TRANSISTOR      | 2SA1162-GR       | 1    | 2214375R2     | NSP     |
| Q2104                      | TRANSISTOR      | 2SA1162-GR       | 1    | 2214375R2     | NSP     |
| Q2400                      | TRANSISTOR      | KRC102S          | 1    | 2216190R2     | NSP     |
| Q2400or                    | TRANSISTOR      | RN1402           | (1)  | 2214470R2     | NSP     |
| Q2401                      | TRANSISTOR      | KRA102S          | 1    | 2216220R2     | NSP     |
| Q2401or                    | TRANSISTOR      | RN2402           | (1)  | 2214530R2     | NSP     |
| Q2500                      | TRANSISTOR      | KTA1040D         | 1    | 2218210R2     | NSP     |
| Q2500or                    | TRANSISTOR      | 2SAR574D         | (1)  | 2218220R2     | NSP     |
| Q2501                      | TRANSISTOR      | 2SC2712-GR       | 1    | 2213145R2     | NSP     |
| Q2502                      | TRANSISTOR      | 2SA1162-GR       | 1    | 2214375R2     | NSP     |
| Q2503                      | TRANSISTOR      | 2SA1162-GR       | 1    | 2214375R2     | NSP     |
| Q6501                      | TRANSISTOR      | KRC105S          | 1    | 2217290R2     | NSP     |
| Q6501or                    | TRANSISTOR      | RN1405           | (1)  | 2214500R2     | NSP     |
| Q6503                      | TRANSISTOR      | KRC105S          | 1    | 2217290R2     | NSP     |
| Q6503or                    | TRANSISTOR      | RN1405           | (1)  | 2214500R2     | NSP     |
| Q6507                      | TRANSISTOR      | KRC105S          | 1    | 2217290R2     | NSP     |
| Q6507or                    | TRANSISTOR      | RN1405           | (1)  | 2214500R2     | NSP     |
| Q6509                      | TRANSISTOR      | KRC105S          | 1    | 2217290R2     | NSP     |
| Q6509or                    | TRANSISTOR      | RN1405           | (1)  | 2214500R2     | NSP     |
| Q6551                      | TRANSISTOR      | KRC105S          | 1    | 2217290R2     | NSP     |

|                         |                                     |                     |     |              |     |
|-------------------------|-------------------------------------|---------------------|-----|--------------|-----|
| Q6551or                 | TRANSISTOR                          | RN1405              | (1) | 2214500R2    | NSP |
| [ Transformers, Coils ] |                                     |                     |     |              |     |
| L2100                   | CHOKE COIL                          | LBC2518T470M        | 1   | 231364M470R2 | NSP |
| L2400                   | EMI SUPPRESSION FILTER              | BK1608LL241-T       | 1   | 230959R1     | NSP |
| [ Capacitors ]          |                                     |                     |     |              |     |
| C2000                   | FILM C                              | C281H334J20A21A     | 1   | 376823344T   | NSP |
| C2001                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-4.7M       | 1   | 398580477T   | N   |
| C2001or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-4.7M(VR)   | (1) | 394680477T   |     |
| C2002                   | ELECTROLYTIC CAPACITOR              | CE69W25V-10000M     | 1   | 3504512      | N   |
| C2002or                 | ELECTROLYTIC CAPACITOR              | CE69W25V-10000M     | (1) | 3504502      |     |
| C2100                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2101                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2102                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2102or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2103                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2103or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2104                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2104or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2105                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2105or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2106                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2106or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2107                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2107or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2108                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2108or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2109                   | JAMICON TYPE ELECTROLYTIC CAPACITOR | CE04W50V-2.2M       | 1   | 398580227T   |     |
| C2109or                 | VR TYPE ELECTROLYTIC CAPACITOR      | CE04W50V-2.2M(VR)   | (1) | 394680227T   |     |
| C2110                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1E-104Z1      | 1   | 332161040R1  | NSP |
| C2111                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1E-104Z1      | 1   | 332161040R1  | NSP |
| C2113                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2114                   | UTSP TYPE ELECTROLYTIC CAPACITOR    | CE04W10V-220M(UTSP) | 1   | 397532217AT  |     |
| C2117                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2119                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2300                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C2404                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-153K1      | 1   | 332101535R1  | NSP |
| C2900                   | CHIP TYPE CERAMIC CAPACITOR         | CK725B1H-103K1      | 1   | 332101035R1  | NSP |
| C6501                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6503                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6505                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6507                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6509                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6520                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6521                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6522                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6523                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6525                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6526                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6527                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6528                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6529                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6551                   | CHIP TYPE CERAMIC CAPACITOR         | CK725F1H-104Z1      | 1   | 332151040R1  | NSP |
| C6571                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| C6572                   | UMXR TYPE PLASTIC FILM CAPACITOR    | 1JUMXRTF102JE       | 1   | 376591024T   | NSP |
| [ Resistors ]           |                                     |                     |     |              |     |

|                                |                           |                      |     |             |     |
|--------------------------------|---------------------------|----------------------|-----|-------------|-----|
| R2000                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2001                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2100                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2101                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2102                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2103                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2104                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2105                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2106                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2107                          | CHIP TYPE CARBON RESISTOR | RN72K1J-750JE        | 1   | 435037504R1 | NSP |
| R2108                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2109                          | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE        | 1   | 435032714R1 | NSP |
| R2110                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE        | 1   | 435031044R1 | NSP |
| R2111                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2112                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2113                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2114                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2120                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE        | 1   | 435033334R1 | NSP |
| R2121                          | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE        | 1   | 435032714R1 | NSP |
| R2122                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE        | 1   | 435031044R1 | NSP |
| R2124                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE        | 1   | 435033334R1 | NSP |
| R2125                          | CHIP TYPE CARBON RESISTOR | RN72K1J-271JE        | 1   | 435032714R1 | NSP |
| R2126                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE        | 1   | 435031044R1 | NSP |
| R2128                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE        | 1   | 435033334R1 | NSP |
| R2300                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE        | 1   | 435030004R1 | NSP |
| R2307                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE        | 1   | 435030004R1 | NSP |
| R2402                          | CHIP TYPE CARBON RESISTOR | RN72K1J-104JE        | 1   | 435031044R1 | NSP |
| R2403                          | CHIP TYPE CARBON RESISTOR | RN72K1J-152JE        | 1   | 435031524R1 | NSP |
| R2405                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE        | 1   | 435030004R1 | NSP |
| R2406                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE        | 1   | 435030004R1 | NSP |
| R2408                          | CHIP TYPE CARBON RESISTOR | RN72K1J-472JE        | 1   | 435034724R1 | NSP |
| R2500                          | CHIP TYPE CARBON RESISTOR | RN72K1J-180JE        | 1   | 435031804R1 | NSP |
| R2501                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2502                          | CHIP TYPE CARBON RESISTOR | RN72K1J-333JE        | 1   | 435033334R1 | NSP |
| R2503                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2504                          | CHIP TYPE CARBON RESISTOR | RN72K1J-103JE        | 1   | 435031034R1 | NSP |
| R2505                          | CHIP TYPE CARBON RESISTOR | RN72K1J-180JE        | 1   | 435031804R1 | NSP |
| R2506                          | CHIP TYPE CARBON RESISTOR | RN72K1J-180JE        | 1   | 435031804R1 | NSP |
| R2507                          | CHIP TYPE CARBON RESISTOR | RN72K1J-180JE        | 1   | 435031804R1 | NSP |
| R2900                          | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE        | 1   | 435033314R1 | NSP |
| R2901                          | CHIP TYPE CARBON RESISTOR | RN72K1J-331JE        | 1   | 435033314R1 | NSP |
| R6500                          | CHIP TYPE CARBON RESISTOR | RN72K1J-000JE        | 1   | 435030004R1 | NSP |
| [ Switches, Terminals, Wires ] |                           |                      |     |             |     |
| F2000                          | FUSE                      | T6.3A-SEUL-T250V     | 1   | 252399T     | !   |
| P0003A                         | PRINTED WIRING BOARD      | BCTRM-2023           | {1} | 25142023A   | NSP |
| P0003B                         | PRINTED WIRING BOARD      | BCETC-2024           | {1} | 25142024    | NSP |
| P0003C                         | PRINTED WIRING BOARD      | BCETC-2025           | {1} | 25142025    | NSP |
| P0003D                         | PRINTED WIRING BOARD      | BCETC-2026           | {1} | 25142026    | NSP |
| P0003E                         | PRINTED WIRING BOARD      | BCETC-2027           | {1} | 25142027    | NSP |
| P030                           | PRINTED WIRING BOARD      | BCTRM-2023           | 1   | 25142023    | NSP |
| P2000                          | PLUG                      | NPLG-3P117           | 1   | 25055133    | NSP |
| P2100                          | PIN JACK                  | NPJ-2PDY748          | 1   | 25046003    |     |
| P2101                          | PIN JACK                  | NPJ-6PDGLRGLR646     | 1   | 25045871    |     |
| P2301                          | ST JACK                   | MSJ-035-52E-B-AG-PBT | 1   | 25045947    |     |
| P2800A                         | SOCKET                    | NSCT-23P2414         | 1   | 25052517    | NSP |

|                     |                              |                      |     |                |       |
|---------------------|------------------------------|----------------------|-----|----------------|-------|
| P2801A              | SOCKET                       | NSCT-9P2400          | 1   | 25052503       | NSP   |
| P2802               | WIRE HARNESS ASSEMBLY        | NSAS-5P2110          | 1   | 2009991299UL   | NSP   |
| P2802A              | WIRE HOL                     | CHD-1.5-5            | 1   | 25053536       | NSP   |
| P2802Aor            | WIRE HOL                     | NSCT-5P876           | (1) | 25051089       | NSP   |
| P2900               | WIRE HARNESS ASSEMBLY        | NSAS-3P2093          | 1   | 2009991282UL   | NSP   |
| P2900A              | WIRE HOL                     | CHD-1.5-3            | 1   | 25053535       | NSP   |
| P2900Aor            | WIRE HOL                     | NSCT-3P874           | (1) | 25051087       | N NSP |
| P2900B              | PLUG                         | NPLG-3P131           | 1   | 25055147       | NSP   |
| P2901               | SOCKET                       | MDS-09P-V-01(DSUB9P) | 1   | 25053363       | NSP   |
| P6400B              | PLUG                         | NPLG-7P121           | 1   | 25055137       | NSP   |
| P6401B              | PLUG                         | NPLG-9P123           | 1   | 25055139       | NSP   |
| P6501               | TERMINAL                     | NTM-6PDMCR456        | 1   | 25060535       |       |
| P6505               | TERMINAL                     | NTM-4PDMNRR414       | 1   | 25060486       |       |
| P6507               | TERMINAL                     | NTM-4PDMNRR414       | 1   | 25060486       |       |
| P6509               | TERMINAL                     | NTM-4PDMNRR414       | 1   | 25060486       |       |
| P6551               | TERMINAL                     | NTM-4PDMNRR414       | 1   | 25060486       |       |
| P7880               | WIRE HARNESS ASSEMBLY        | NSAS-5P2193          | 1   | 2009991382UL   | NSP   |
| P7880C              | WIRE HOL                     | CHD-2.5-5            | 1   | 25053541       | NSP   |
| P7880Cor            | WIRE HOL                     | NSCT-5P896           | (1) | 25051109       | NSP   |
| P9011B              | PLUG                         | NPLG-5P133           | 1   | 25055149       | NSP   |
| RL6501              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6501or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| RL6503              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6503or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| RL6505              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6505or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| RL6507              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6507or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| RL6509              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6509or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| RL6551              | RELAY                        | NRL-2P5A-DC24-129    | 1   | 25065563A      |       |
| RL6551or            | RELAY                        | NRL-2P5A-DC24-193    | (1) | 25065703       |       |
| [ Frontend, Units ] |                              |                      |     |                |       |
| BATRM-2024          | Terminal circuit pc board AS | BATRM-2023-1Q        | 1   | 1B5142023-1Q-C | Child |
| BAETC-2024          | Et cetra pc board AS         | BAETC-2024-1Q        | 1   | 1B5142024-1Q-C | Child |
| BAETC-2025          | Et cetra pc board AS         | BAETC-2025-1Q        | 1   | 1B5142025-1Q-C | Child |
| BAETC-2026          | Et cetra pc board AS         | BAETC-2026-1Q        | 1   | 1B5142026-1Q-C | Child |
| BAETC-2027          | Et cetra pc board AS         | BAETC-2027-1Q        | 1   | 1B5142027-1Q-C | Child |