


ONKYO SERVICE MANUAL

AV RECEIVER MODEL TX-SR804 MODEL TX-SR804E

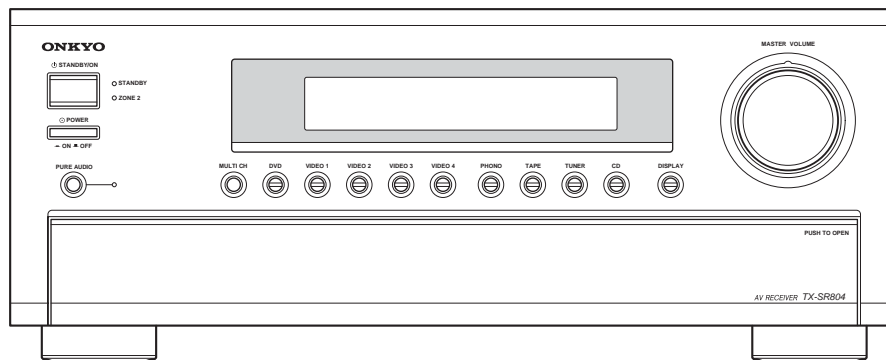

RC-620M

TX-SR804 Black, Golden and Silver models

B MDC, S MDC	120V AC, 60Hz
B MPA, S MPA	230-240V AC, 50Hz
G MWT	120/220-240V AC, 50/60Hz
G MGK, G MGR, G MGQ	220-230V AC, 50Hz

TX-SR804E Black and Silver models

B MPP, S MPP	230-240V AC, 50Hz
--------------	-------------------


SAFETY-RELATED COMPONENT WARNING!!


COMPONENTS IDENTIFIED BY MARK \triangle ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

SERVICE PROCEDURE

1. Replacing the fuses

 This symbol located near the fuse indicates that the fuse used is show operating type, For continued protection against fire hazard, replace with same type fuse, For fuse rating, refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilise est e lent. Pour une protection permanente, n'utiliser que des fusibles de meme type. Ce demier est indique la qu le present symbol est apposre.

<Notes>

<DC> : TX-SR804 Canadian model <GK> : TX-SR804 Korean model
 <PA> : TX-SR804 Australian model <GQ> : TX-SR804 Hong kong model
 <PP> : TX-SR804E European model <GR> : TX-SR804 Chinese model
 <WT> : TX-SR804 World wide model

REF NO.	PART NAME	DESCRIPTION	PART NO.	REMARKS
F901	FUSE	10A-UL/T-233	252330GR	!, <DC>
F901	FUSE	6.3A-SE-EAK	252079GR	!, <WT,GQ,GR,GK,PA,PP>
F902	FUSE	6.3A-SE-EAK	252079GR	!, <WT>
F903	FUSE	5A-UL/T-233	252326GR	!, <DC>
F903	FUSE	2.5A-SE-EAK	252075GR	!, <WT,GQ,GR,GK,PA,PP>
F931	FUSE	1.6A-SE-EAK	252073GR	!
F932	FUSE	1.6A-SE-EAK	252073GR	!
F951	FUSE	6.3A-SE-EAK	252079GR	!
F952	FUSE	6.3A-SE-EAK	252079GR	!
F6901	FUSE	12A-TUL-250V	252301GR	!
F6902	FUSE	12A-TUL-250V	252301GR	!

2. To initialize the unit

1. Press and hold down VIDEO 1 button, then press STANDBY/ON button when the unit is Power on.
2. After " *Clear* " is displayed, the preset memory and each mode stored in the memory are initialized and will return to the factory settings, and turn to Standby mode.

3. Safety check out

(U.S.A. model only)

After correcting the original service problem, perform the following safety check before releasing the unit to the customer.

Leakage current Check

Measure the leakage current to a known earth ground (water pipe or conduct etc.) by connecting a leakage current tester between the earth ground and exposed metal parts of the unit (input/output ground terminals, screw heads or metal overlays etc.).

Plug the power supply cord directly into a 120Vac 60Hz wall socket and turn STANDBY button on.

Any current measured must not exceed 0.5mA.

4. Memory Backup

This model uses a battery-less memory backup system in order to retain radio presets and other settings when it's unplugged or in the case of a power failure.

Although no batteries are required, the unit must be plugged into an AC outlet in order to charge the backup system. Once it has been charged, the unit will retain the settings for several weeks, although this depends on the environment and will be shorter in humid climates.

OPERATION CHECK-1

SPEAKER PROTECT-1 (DC VOLTAGE DETECTION)

[When]

1. Exchange power transistors (Q6050 - Q6056, Q6060 - Q6066).
2. Exchange amplifier PC board ass'y (NAAF-8678, NAAF-8682).

[Procedure]

<Note> No load. No input signal.

1. Press and hold down CD button, then press STANDBY/ON button while the unit is Power ON.
"Test - _" is displayed only for 5 seconds.

Test - Blinks


2. Press VIDEO 3 button, while the characters of "Test - _" are displayed.
The unit will be in the state of "Test-4-00".

Test - 4-00

3. Repeatedly press TONE+ button until the characters of "Test-4-21" are displayed.

Test - 4-21

Check whether the operation starts and continues automatically as follows.

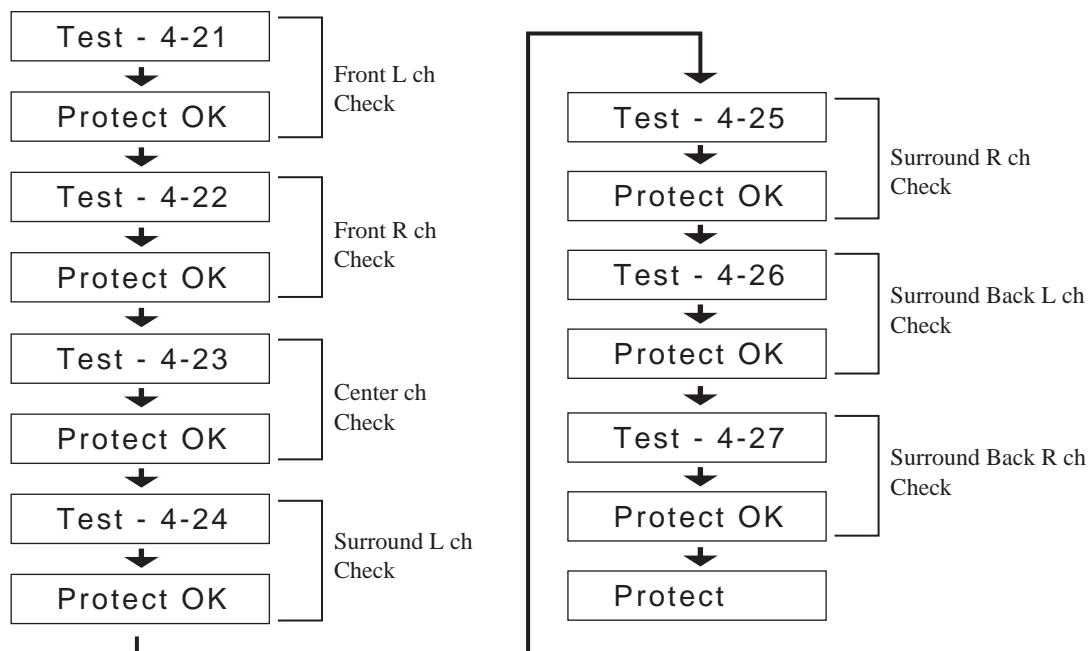

If all channels are OK, the characters of "Test - 4 - 35" are finally displayed.

Test - 4-35

4. Press STANDBY/ON button.



OPERATION CHECK-2

SPEAKER PROTECT-2 (CURRENT DETECTION)

[When]


1. Exchange power transistors (Q6050 - Q6056, Q6060 - Q6066).
2. Exchange amplifier PC board ass'y (NAAF-8678, NAAF-8682).

[Procedure]

<Note>

- No input signal.
- Do not check two or more channels at the same time.
- Do not connect a dummy load to speaker terminals longer than 2 seconds.

1. Press and hold down CD button, then press STANDBY/ON button while the unit is Power ON.
" Test - _ " is displayed only for 5 seconds.

Test - _  Blinks

2. Press VIDEO 3 button, while " Test - _ " is displayed.
The unit will be in the state of " Test-4-00 ".

Test - 4-00

3. Repeatedly press TONE + button until " Test-4-35 " is displayed.

Test - 4-35

4. Connect a dummy load of 3 ohms to the Front L ch speaker terminals.
At this time, confirm that the speaker relay is not turned off.

Test - 4-35

5. Connect a dummy load of 1 ohm to the Front L ch speaker terminals.
At this time, confirm that the speaker relay is turned off and " Protect " will be displayed.

Protect

Disconnect the dummy load immediately after checking the display of " Protect ".

Test - 4-35

6. Check other channels according to the same procedure as 4 and 5.

FL → FR → C → SL → SR → SBL → SBR

7. Press STANDBY/ON button.

Clear  

OPERATION CHECK-3

CONTROL OF POWER SUPPLY (SPEAKER OUTPUT SENSOR AND THERMAL DETECTOR)

[When]

1. Exchange power transistors (Q6050 - Q6056, Q6060 - Q6066).
2. Exchange power amplifier PC board ass'y (NAAF-8678, NAAF-8682).
3. Exchange thermal sensor PC board ass'y (NAETC-8680).

[Procedure]

<Note> No output. No input.

Output Sensor

1. Press and hold down CD button, then press STANDBY/ON button while the unit is Power ON.
" Test - _ " will be displayed only for 5 seconds.

Test - _ Blinks

2. Press VIDEO 3 button while " Test - _ " is displayed.
The unit will be in the state of " Test-4-00 ".

Test - 4-00

3. Repeatedly press TONE+ button until " Test-4-36 " is displayed.

Test - 4-36

4. At this time, confirm that the red characters of " FM STEREO " is displayed.
And, confirm that the relays (RL6901 and RL6902) are turned off in 2 or 3 seconds. (FL+FR+C+SL check)

Test - 4-36 FM STEREO

5. Press TONE+ button and confirm that the red characters of " FM STEREO " is displayed and the relays (RL6901 and RL6902) are turned off in 2 or 3 seconds as well as 4. (C+SR+SBL+SBR check)

Test - 4-37 FM STEREO

6. Press STANDBY/ON button.

Clear → Turn off

Thermal Detector

1. Press and hold down DISPLAY button, then press STANDBY button when the unit is power ON.
The main microprocessor version will be displayed only for 3 seconds.

<Ex.> Ver. 1.01/06920a

2. Press TONE button while the version is displayed, then the temperature will be displayed.

<Ex.> T: 25°C/ 77°F

3. Confirm that the displayed temperature is within +/-20°C from the ambient temperatures.

4. Press STANDBY/ON button.

Clear → Turn off

OPERATION CHECK-4

CONTROL OF COOLING FAN

[When]

1. Exchange power transistors (Q6050 - Q6056, Q6060 - Q6066).
2. Exchange power amplifier PC board ass'y (NAAF-8678, NAAF-8682).
3. Exchange thermal sensor PC board ass'y (NAETC-8680).
4. Exchange cooling fan.

[Procedure]

1. Confirm that the cooling fan does not rotate at no audio input signals.
2. Press and hold down CD button, then press STANDBY/ON button while the unit is Power ON.
" Test - _ " will be displayed.

Test - _ — Blinks

3. Press VIDEO 3 button while " Test - _ " is displayed. The unit will be in the state of " Test-4-00 ".

Test - 4-00

4. Repeatedly press TONE+ button until " Test-4-36 " is displayed. Then confirm that the cooling fan rotates in low speed.

Test - 4-36

5. Press TONE+ button and confirm that the cooling fan rotates in low speed.

Test - 4-37

6. Press TONE+ button two times and confirm that the cooling fan rotates in fast speed.

Test - 4-39

7. Press the STANDBY/ON button.

Clear → Turn off

DEBUG MODE -1

How to Check Versions of Main, DSP and Video(HDMI) Microprocessor

1. Press and hold down DISPLAY button, then press STANDBY/ON button when the unit is power ON.
The main microprocessor version will be displayed on FL for 3 seconds.

<Ex.> Ver. 1.01/06920a

2. Press SETUP button while the version is displayed, then " DSP Ver: " will be displayed.


DSP Ver:

3. Press ENTER button while " DSP Ver: " is displayed, then " DSP F/W Update " will be displayed.

DSP F/W Update

4. Again, press and hold down DISPLAY button, then press STANDBY/ON button in order to get DSP version.
5. Press SETUP button a few times.

The versions of DSP ROM ---> Video(HDMI) microprocessor ---> Main microprocessor will be displayed in turn.

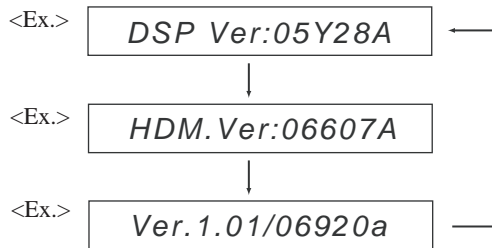

6. To check DSP version next time, the procedures of 2-4 are not necessary until the power cord is off.

How to Set in Debug Mode

1. Press and hold down DISPLAY button, then press STANDBY button while the unit is power ON.
The version number of microprocessor is displayed only for 3 seconds.

<Ex.> Ver. 1.01/06920a

2. Press DISPLAY button while the version is displayed, then the status of DSP and DIR etc will be displayed.


<Ex.> E6A48K017FF00x0

Refer to next page to see the information displayed for detail.

3. To exit, press STANDBY/ON button.

DEBUG MODE -2

Content of Display

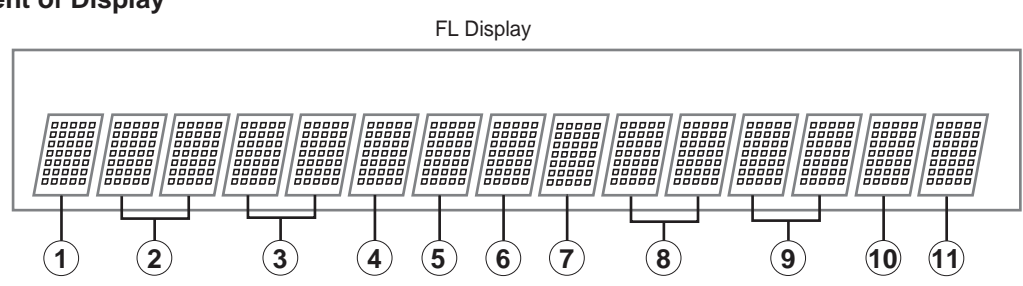

----- DIR -----

- ① **UNLOCK**
E = UNLOCK
_ = LOCK
- ② **Digital Selector**
D = DIGITAL
A = ANALOG
1 = Coax 1
2 = Coax 2
3 = Opt 1
4 = Opt 2
5 = Opt 3
7 = Front Opt
- ③ **Sampling Frequency**
96 = 96kHz
48 = 48kHz
44 = 44.1kHz
32 = 32kHz
--- = Not Detected
- ④ **PreEmphasis**
K = OFF
e = ON
- ⑤ **DIR STATUS**
0 = ANALOG
1 = PCM
2 = NOT_PCM
3 = DATA
4 = DTS CD
5 = MCH
6 = NOT DECIDED

----- MEMORY / DOWNLOAD -----

- ⑥ **AUTOBOOT DSP AB CODE**
0 = FLASH
1 = AB_AC3_PL2
2 = AB_dts_PL2
3 = AB_NEO6
4 = sgen_AB
5 = AB_PL2fs
6 = AB_dts_6dol
7 = AB_dts9624
8 = AAC
- ⑦ **AUTOBOOT DSP C CODE**
0 = C_dts9624
1 = C_neo6
2 = C_OOS_no_sd
3 = C_OOS
4 = C_oob
5 = C_PL2
6 = C_PL2xTHX
7 = C_THX
8 = c_spsetup
9 = vers

----- DSP -----

- ⑧ **DSP Status**
00 = POWER OFF
01 = POWER ON WAIT
10 = DSP RESET
11 = DSP RESET WAIT
12 = DSP AB BOOT Ready
13 = DSP AB BOOT start
14 = DSP AB BOOT
15 = DSP C BOOT Ready
16 = DSP C BOOT start
17 = DSP C BOOT
18 = DSP SOFT RESET
20 = DSP C APP_START
21 = DSP C HW CONFIG SET
22 = DSP C SW CONFIG SET
23 = DSP C SW CONFIG SET
24 = DSP C SW CONFIG SET
25 = DSP C SW CONFIG SET
26 = DSP C SW CONFIG SET
27 = DSP C SW CONFIG SET
28 = DSP C SW CONFIG SET
29 = DSP C SW CONFIG SET
2A = DSP C SW CONFIG SET
3F = DSP C KICK START
40 = DSP AB APP_START
41 = DSP AB HW CONFIG SET
42 = DSP AB SW CONFIG SET
43 = DSP AB SW CONFIG SET
44 = DSP AB SW CONFIG SET
45 = DSP AB SW CONFIG SET
46 = DSP AB SW CONFIG SET
47 = DSP AB SW CONFIG SET
48 = DSP AB SW CONFIG SET
49 = DSP AB SW CONFIG SET
4A = DSP AB SW CONFIG SET
4B = DSP AB SW CONFIG SET
4F = DSP AB KICK START
FF = FREE

⑨ **DSP Detect Format**

- | | |
|---|---|
| <p><u>IEC61937 Format</u></p> <ul style="list-style-type: none"> 00 = Null 01 = Dolby Digital 03 = Pause 04 = MPEG1 L1 05 = MPEG1 L23
/ MPEG2 w/o 06 = MPEG2 w/e 07 = MPEG2 AAC 08 = MPEG2 L1 09 = MPEG2 L2/3 0B = DTS1 0C = DTS2 0D = DTS3 1B = MPEG2 AAC1 1C = MPEG2 AAC2 | <p><u>NOT IEC61937 Format</u></p> <ul style="list-style-type: none"> 20 = Silent 21 = DTS LD 22 = DTS CD 23 = PCM |
|---|---|

- ⑩ **DSP Decode**
O = Decode OK
X = Decode NG
- = ANALOG In

----- Main Microprocessor -----

- ⑪ **Mute Condition**
0 = mute off
1 = mute during input selector's switching
2 = mute during parameter's switching
4 = DSP Mute
8 = DIR Mute
3 = 1 + 2
5 = 1 + 4
6 = 2 + 4
7 = 1 + 2 + 4
9 = 1 + 8
A = 2 + 8
B = 1 + 2 + 8
C = 4 + 8
D = 1 + 4 + 8
E = 2 + 4 + 8
F = 1 + 2 + 4 + 8

DEBUG MODE -3


Trouble Cause Analysis by Debug Mode

This debug mode will help in analysing digital audio no sound trouble.

Check information on FL display and the related devices or circuits below.

Digit No. on FL	Symptom on Display	Cause	Check
①	"E" is displayed	No input signal to DIR	Related devices and circuits from digital input to Q361
③	Displayed freq. is different from input signal freq.	No input signal to DIR	Related devices and circuits from digital input to Q361
⑤	Displayed format is different from input signal format	No input signal to DIR	Related devices and circuits from digital input to Q361
⑨	Displayed format is different from input signal format	Input signal to DSP is no good	Related devices and circuits from Q361 to Q201
⑩	"x" is displayed	Interface between DSP and main micro processor is no good	Related devices and circuits from Q701 to Q201
⑪	"4" is displayed	DSP outputs error to main micro processor, which outputs mute	Q701, Q201, Q301 & related devices and circuits
⑪	"8" is displayed	DIR outputs error to main micro processor, which outputs mute	Q5701, Q201, Q361 & related devices and circuits

EXPLODED VIEW

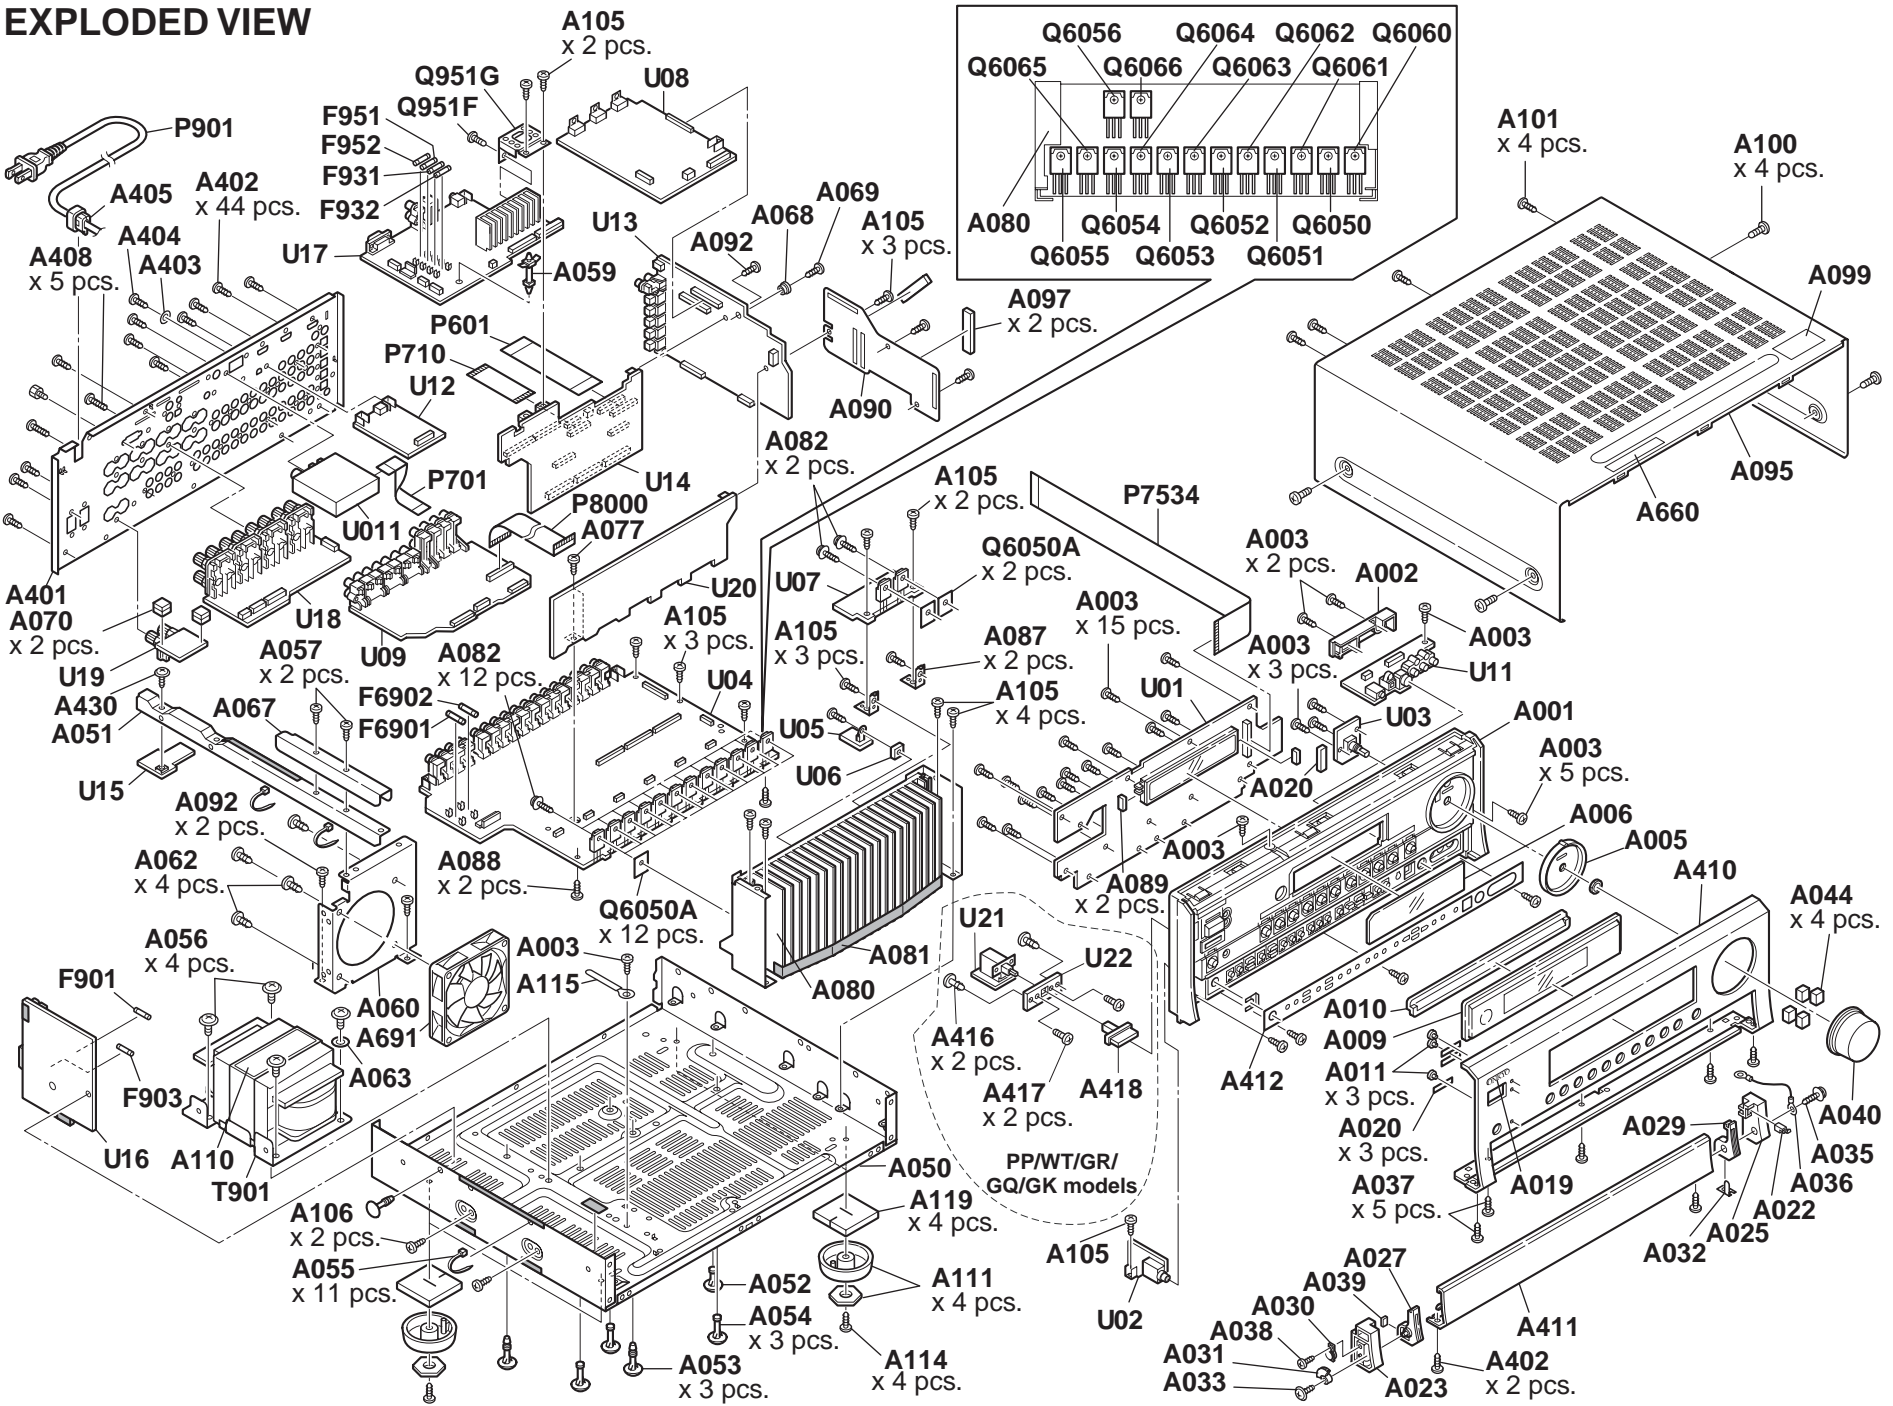

BLOCK DIAGRAM-1
AUDIO SECTION


1

2

3

4

5

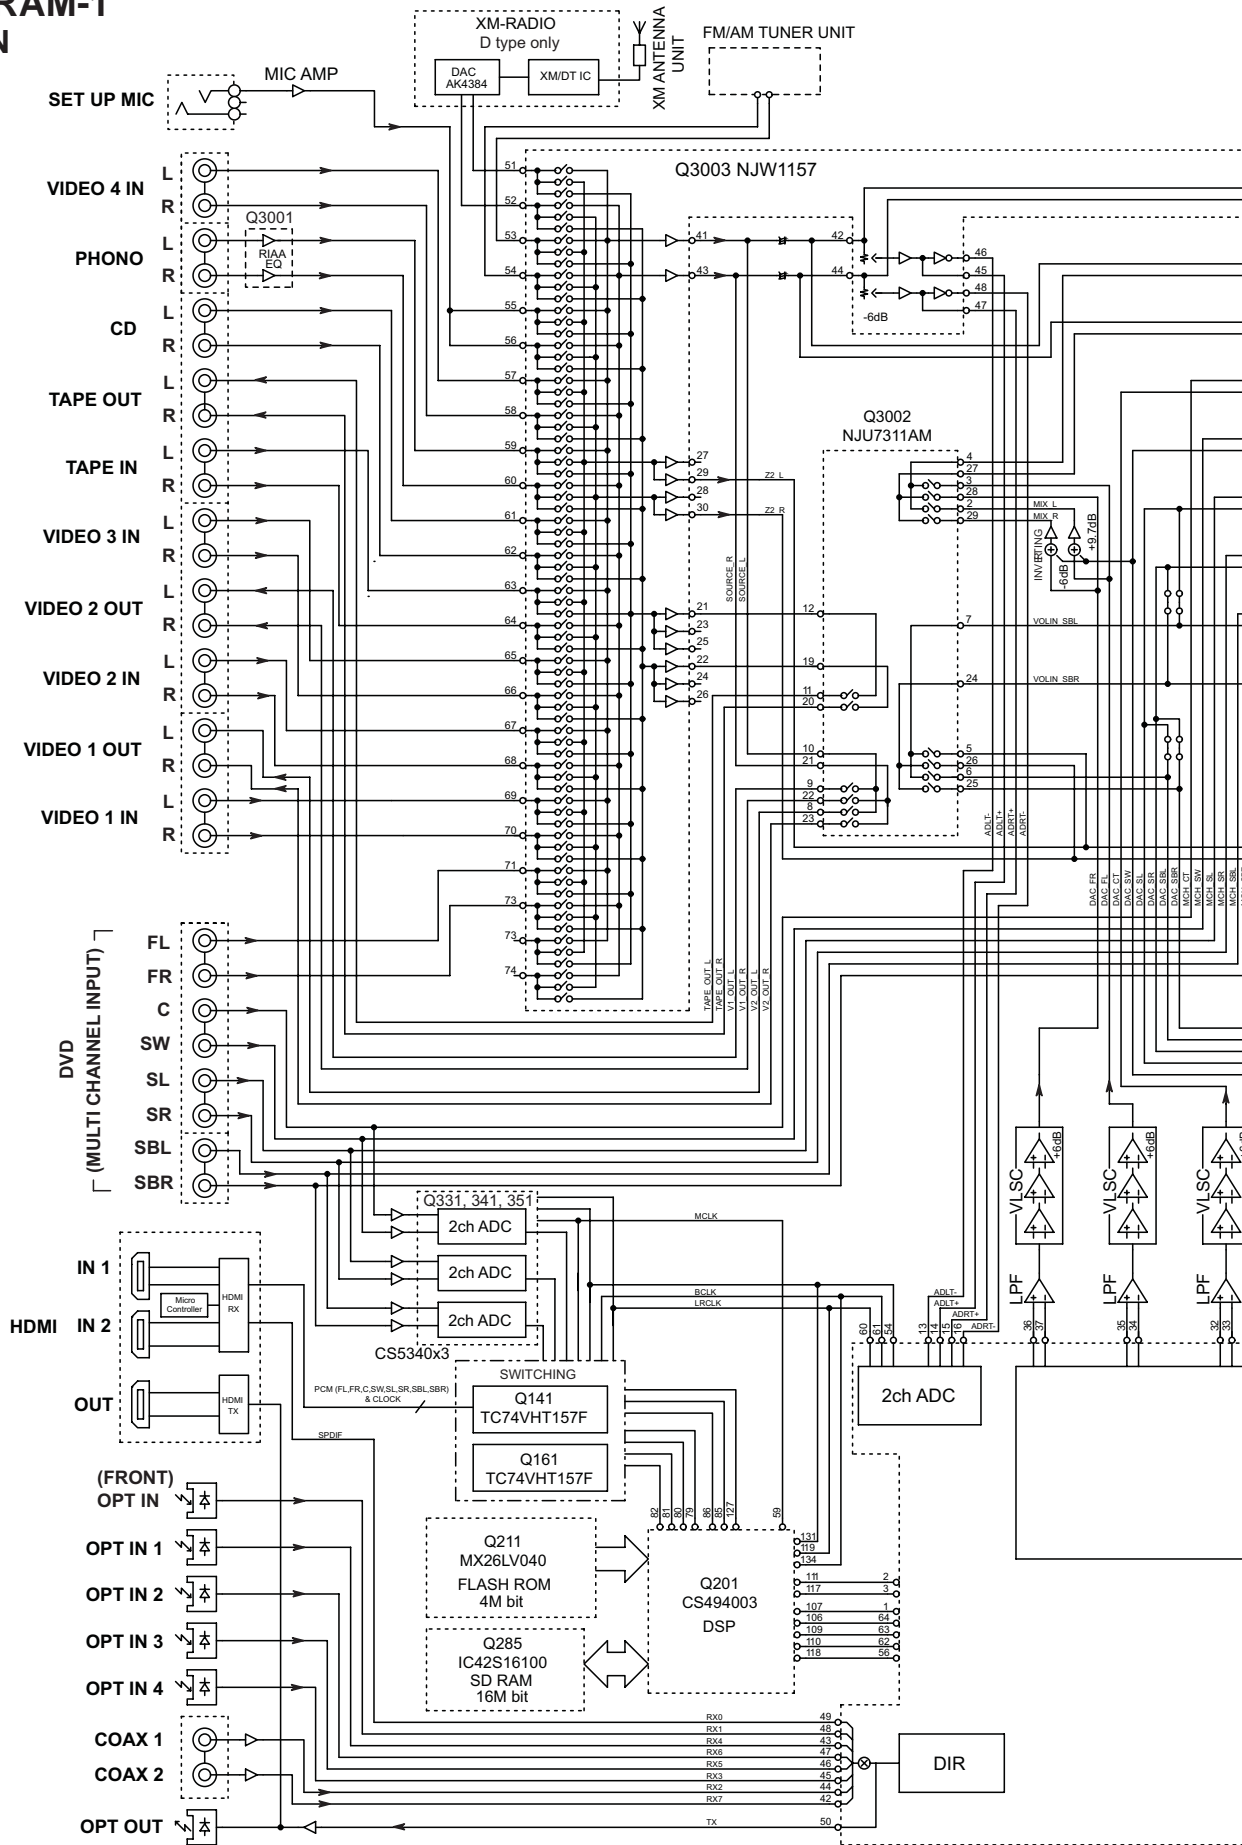


E

F


G

H

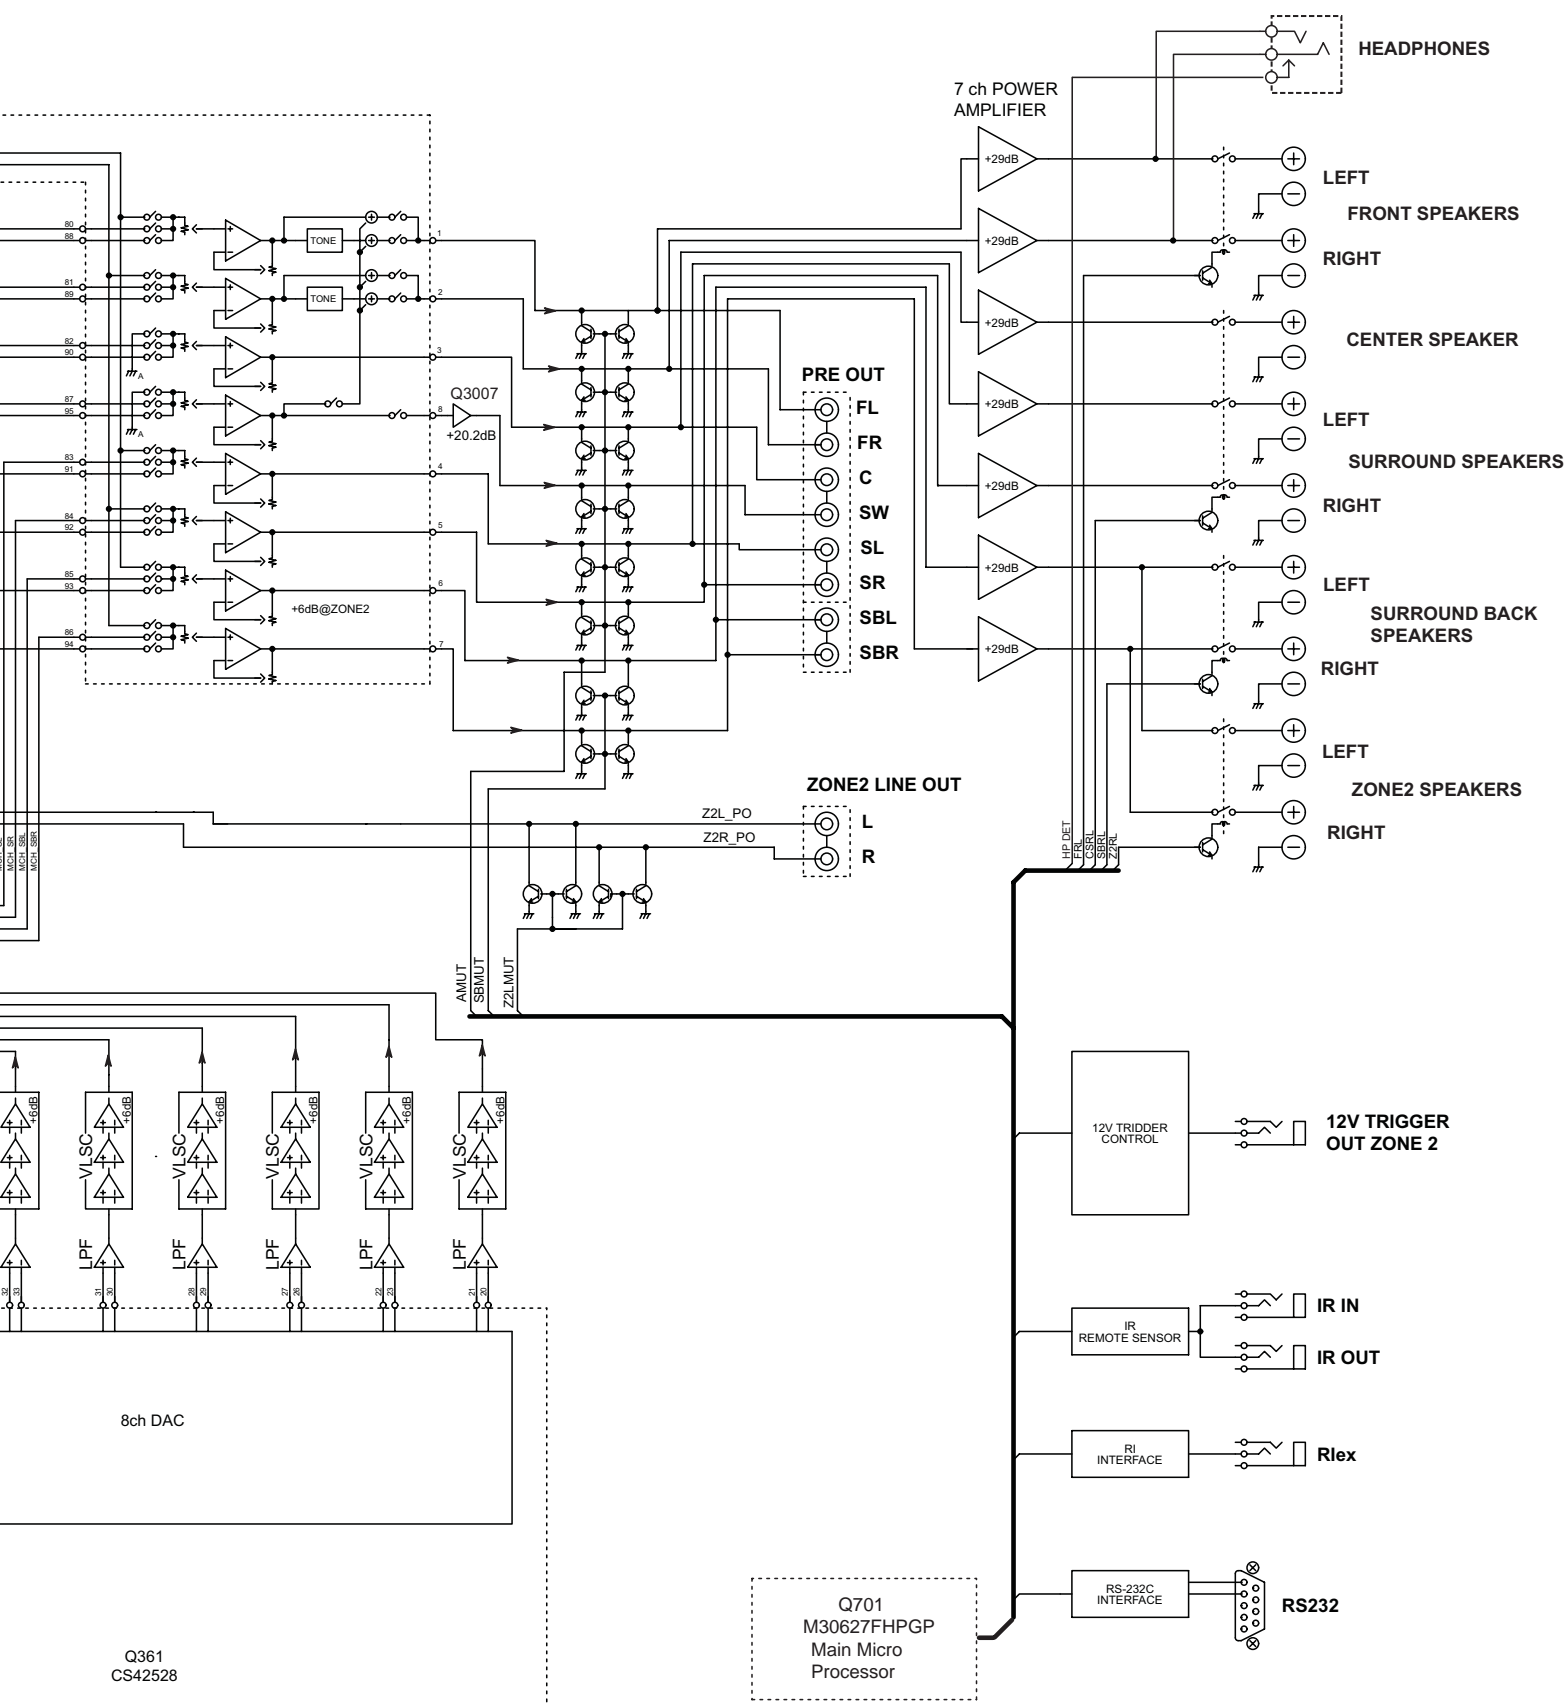

<Note>
Refer to SCHEMATIC DIAGRAM-13(SD-13) for the digital audio signal flow and wave forms.

BLOCK DIAGRAM-1 AUDIO SECTION

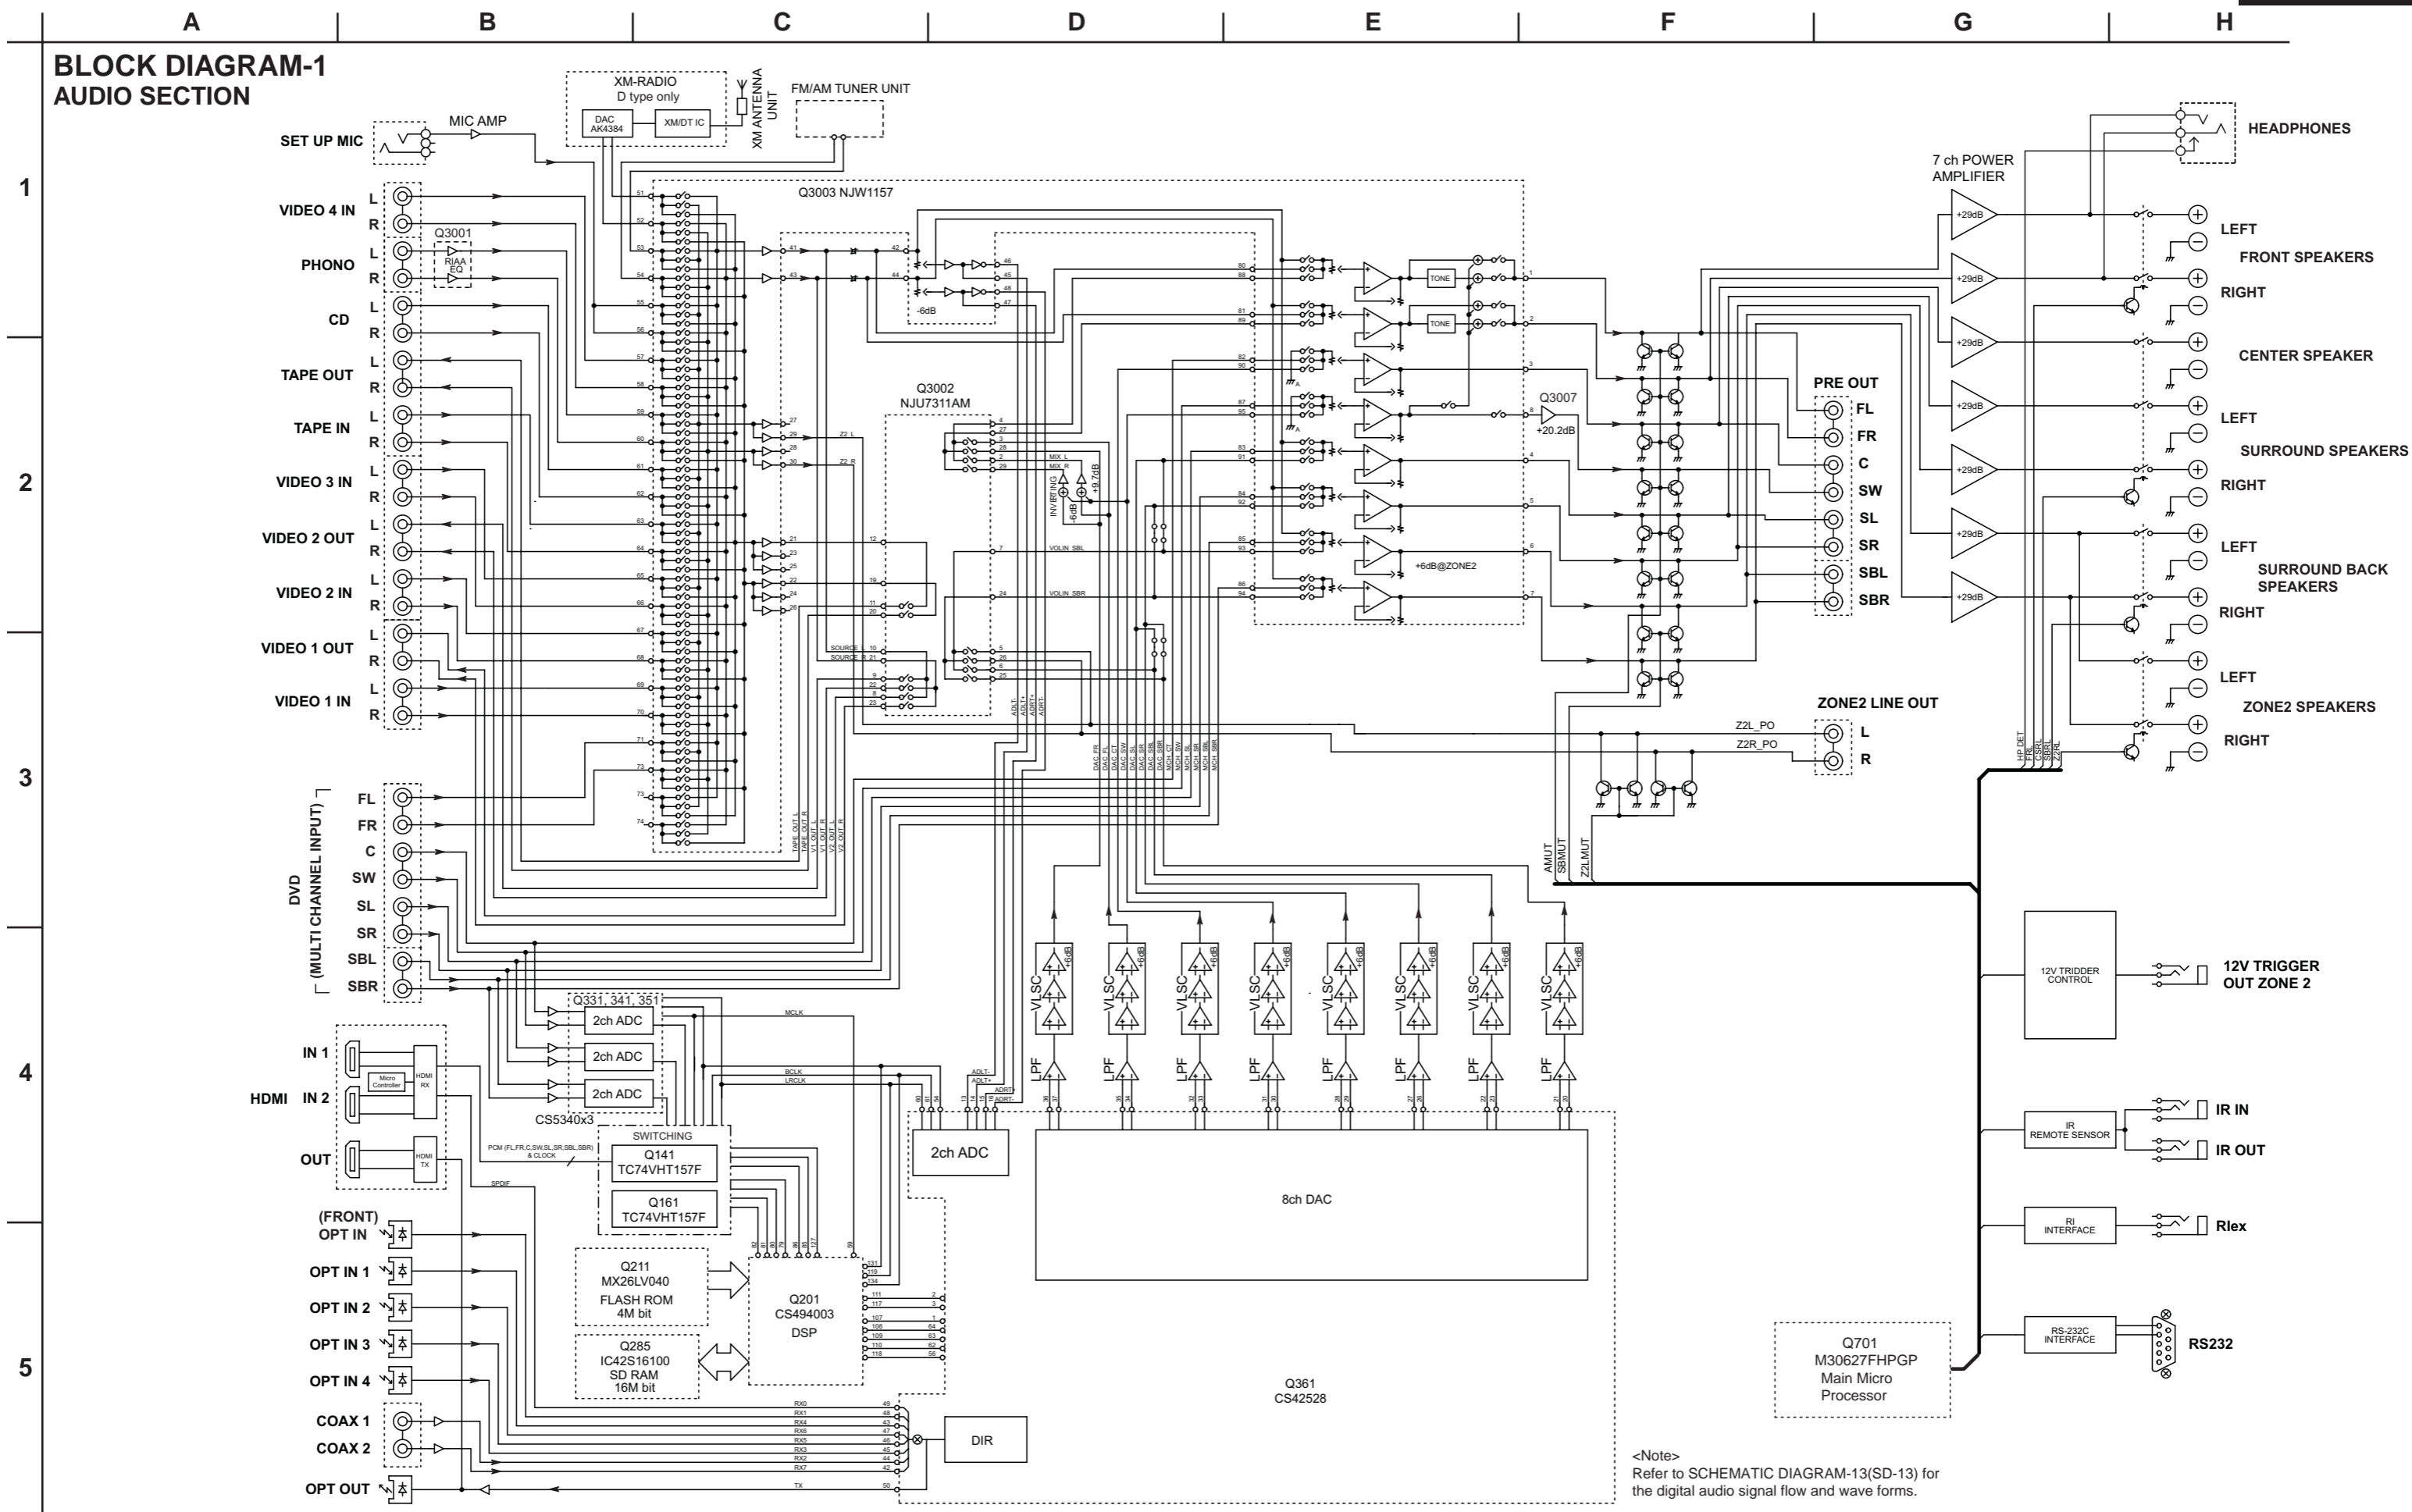

<Note>
Refer to SCHEMATIC DIAGRAM-13(SD-13) for the digital audio signal flow and wave forms.

A

B

C

D

BLOCK DIAGRAM-2 VIDEO SECTION-1


1

2

3

4

5

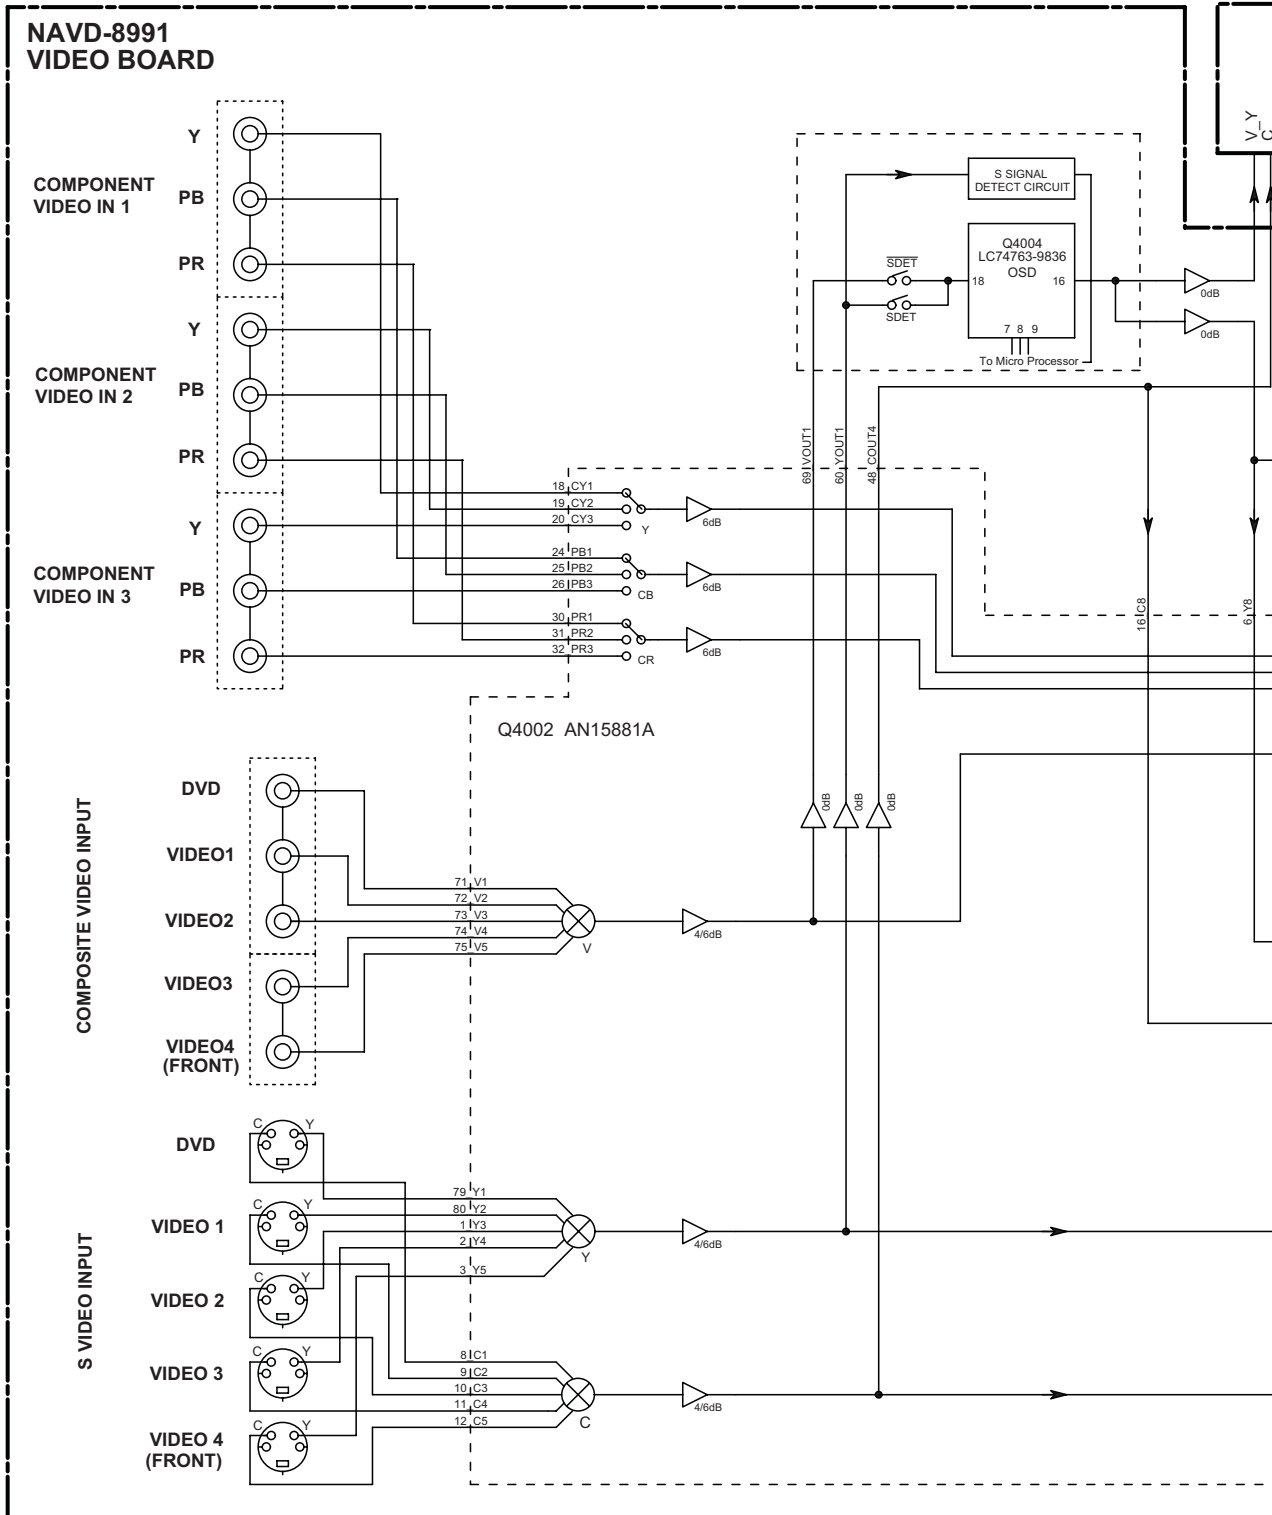


E

F


G

H

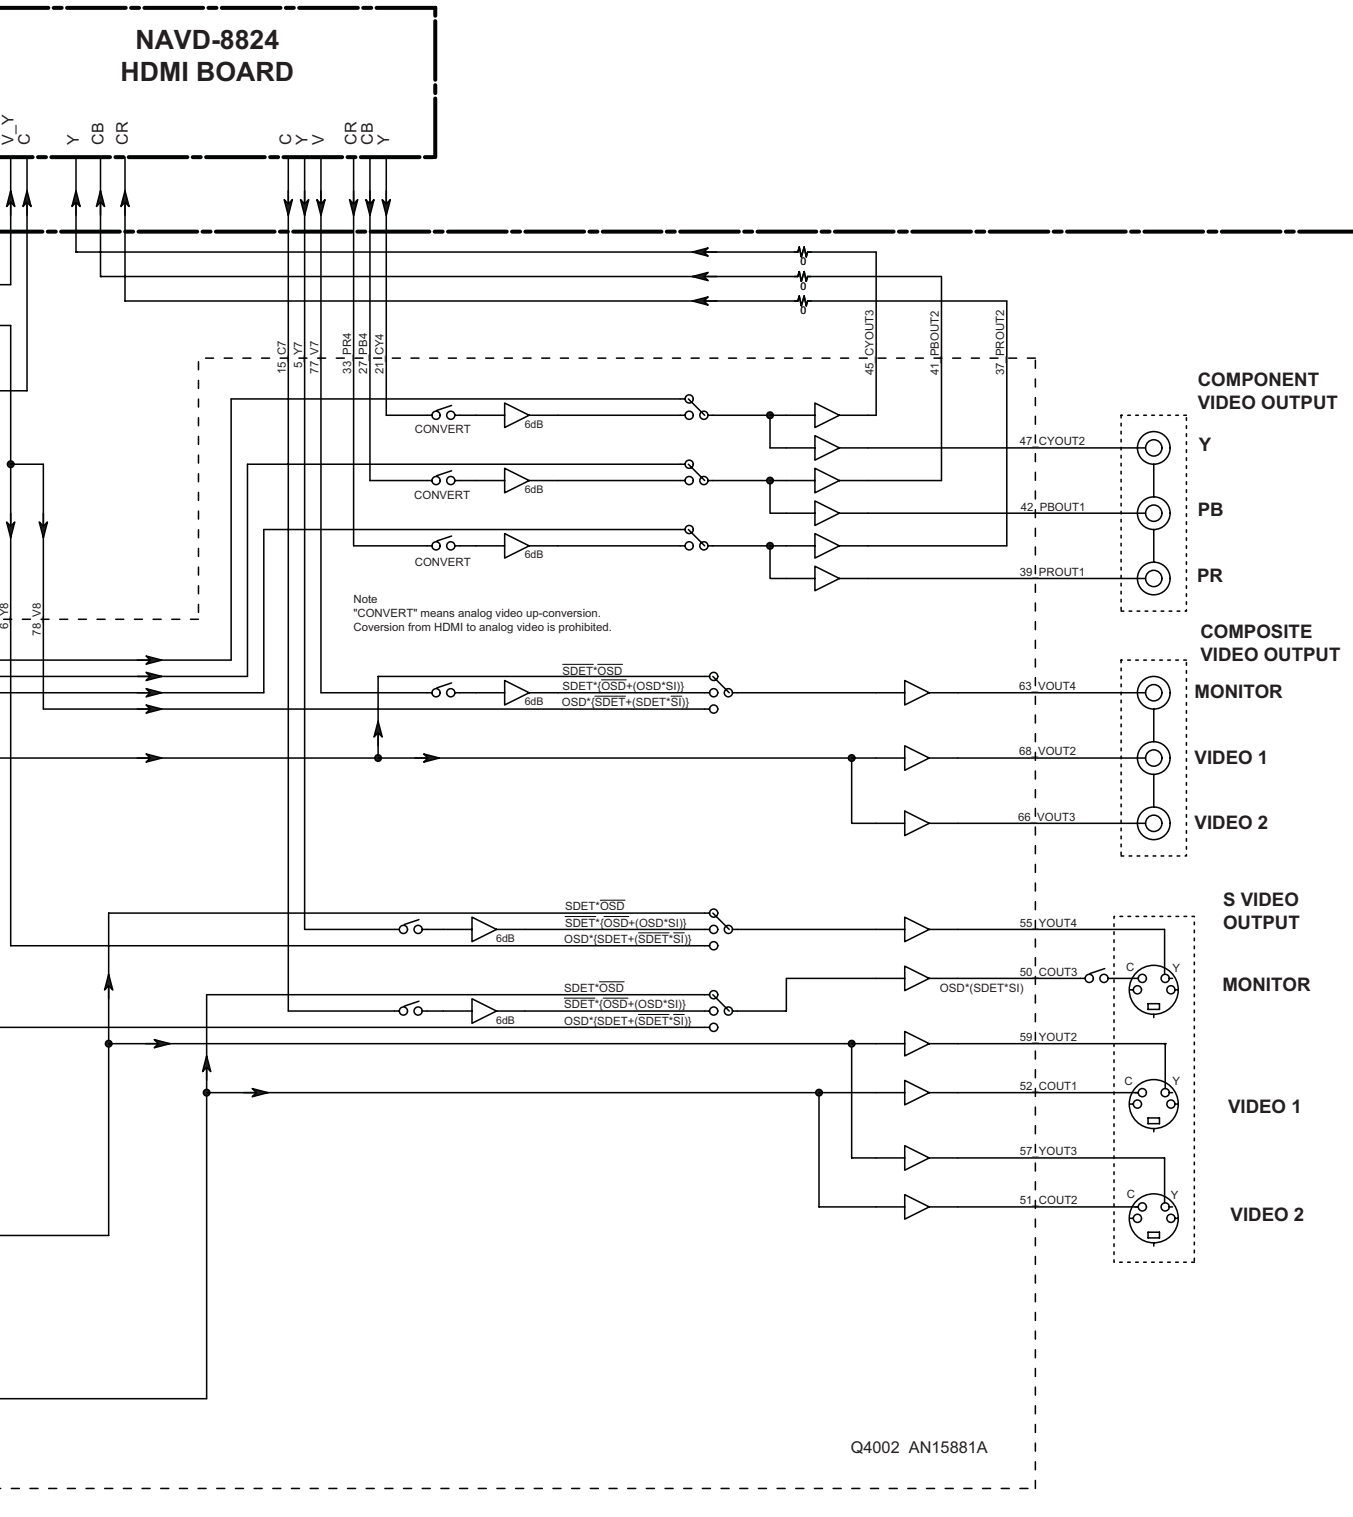

BLOCK DIAGRAM-2
VIDEO SECTION-1

1
2
3
4
5

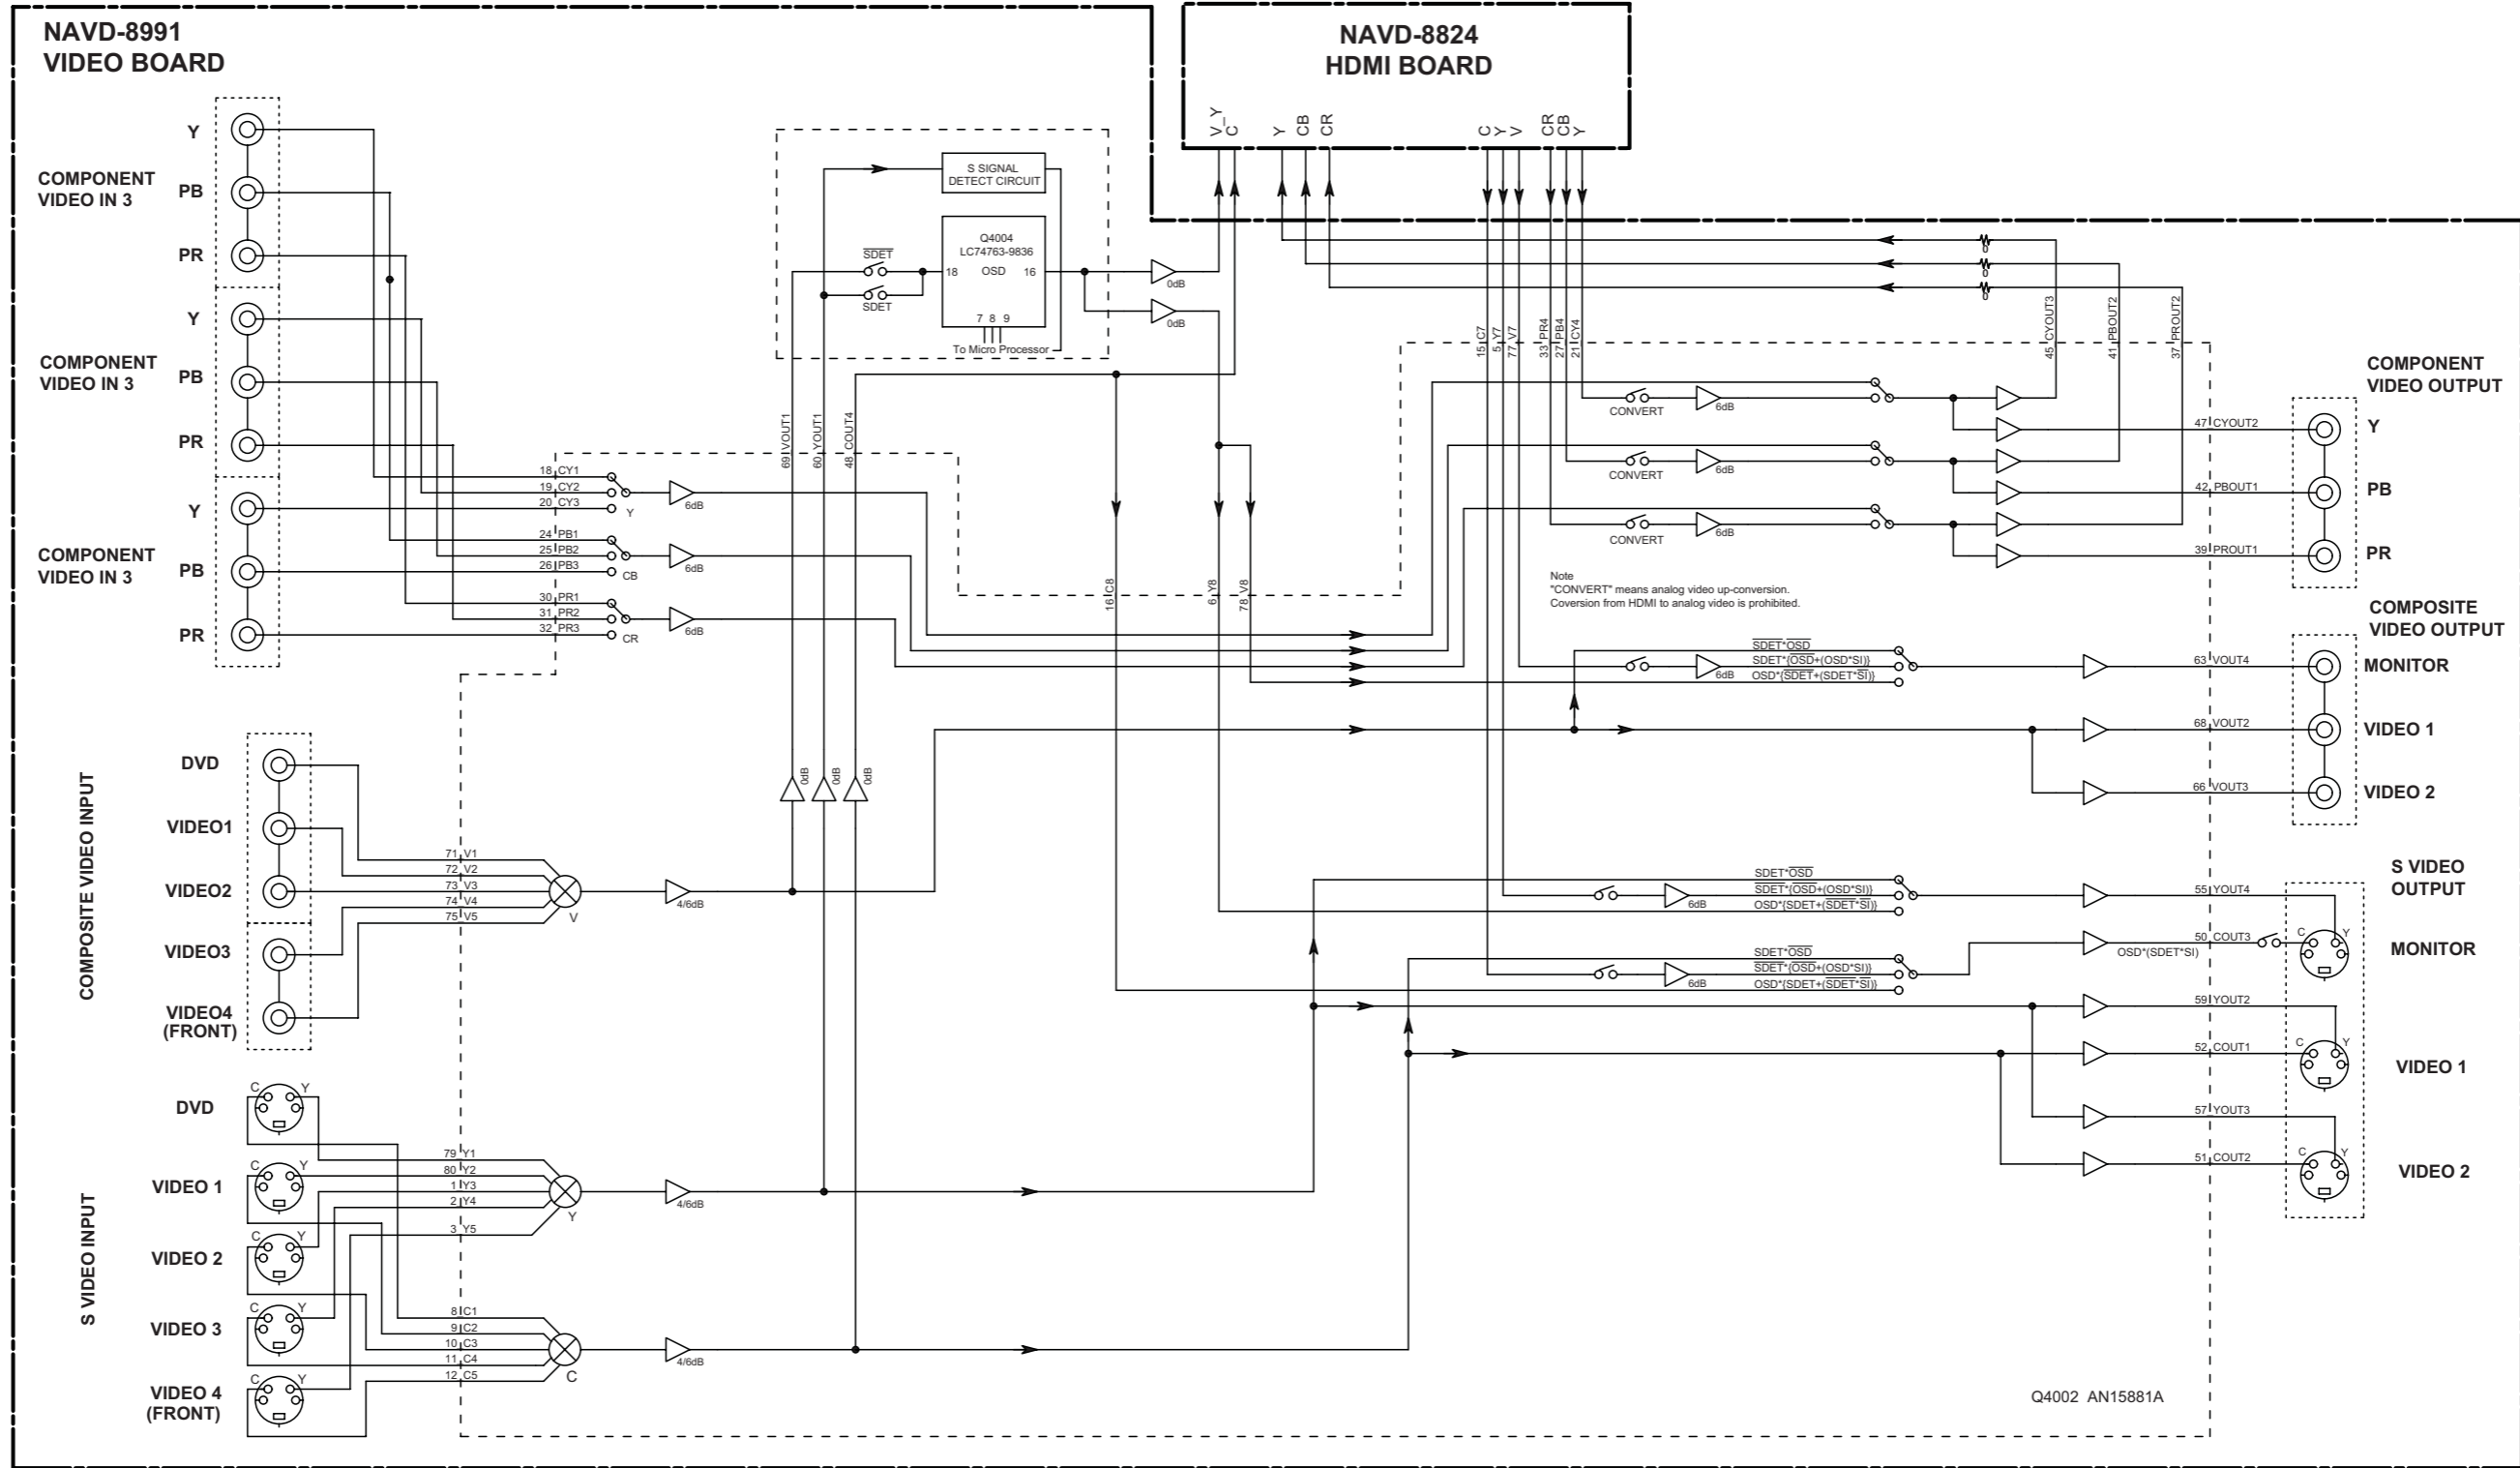

A

B

C

D

BLOCK DIAGRAM-3
VIDEO SECTION-2


1


2

3

4

5

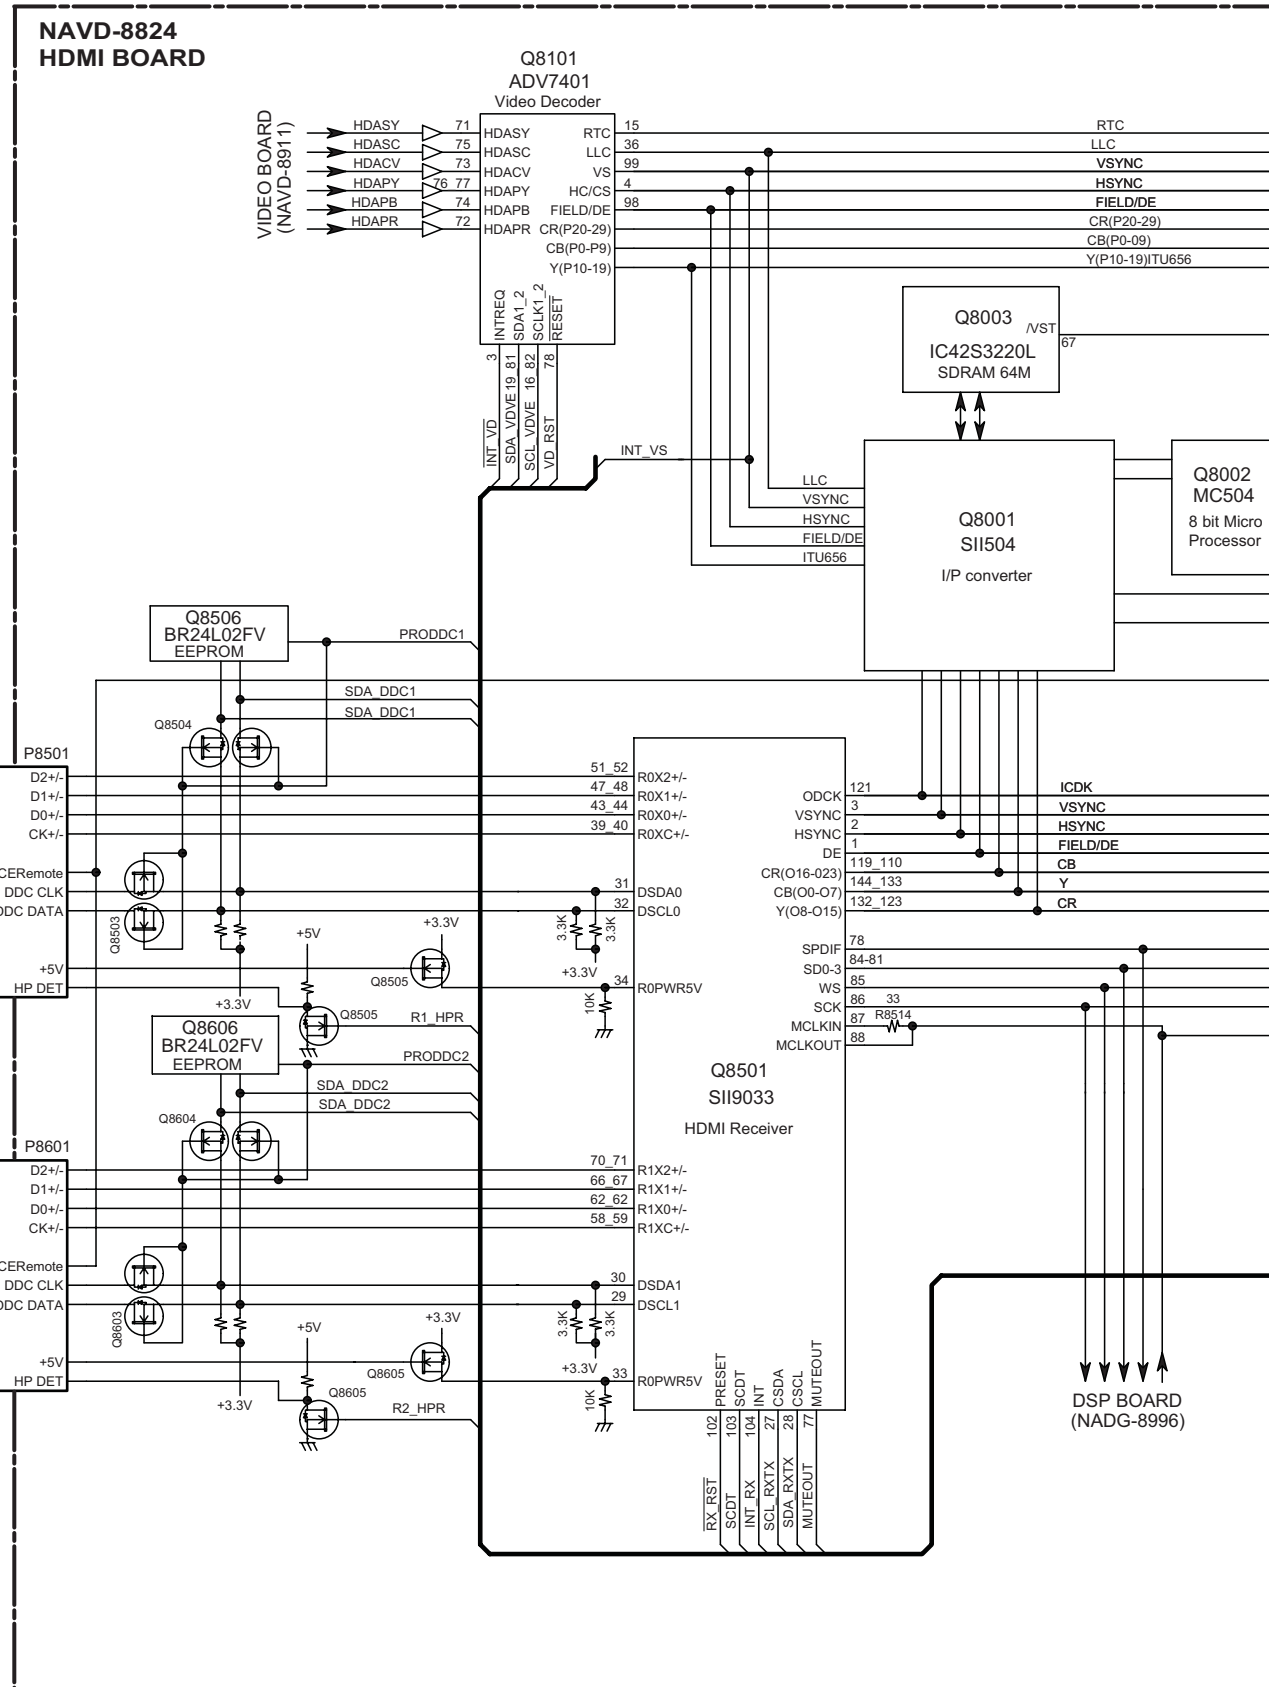

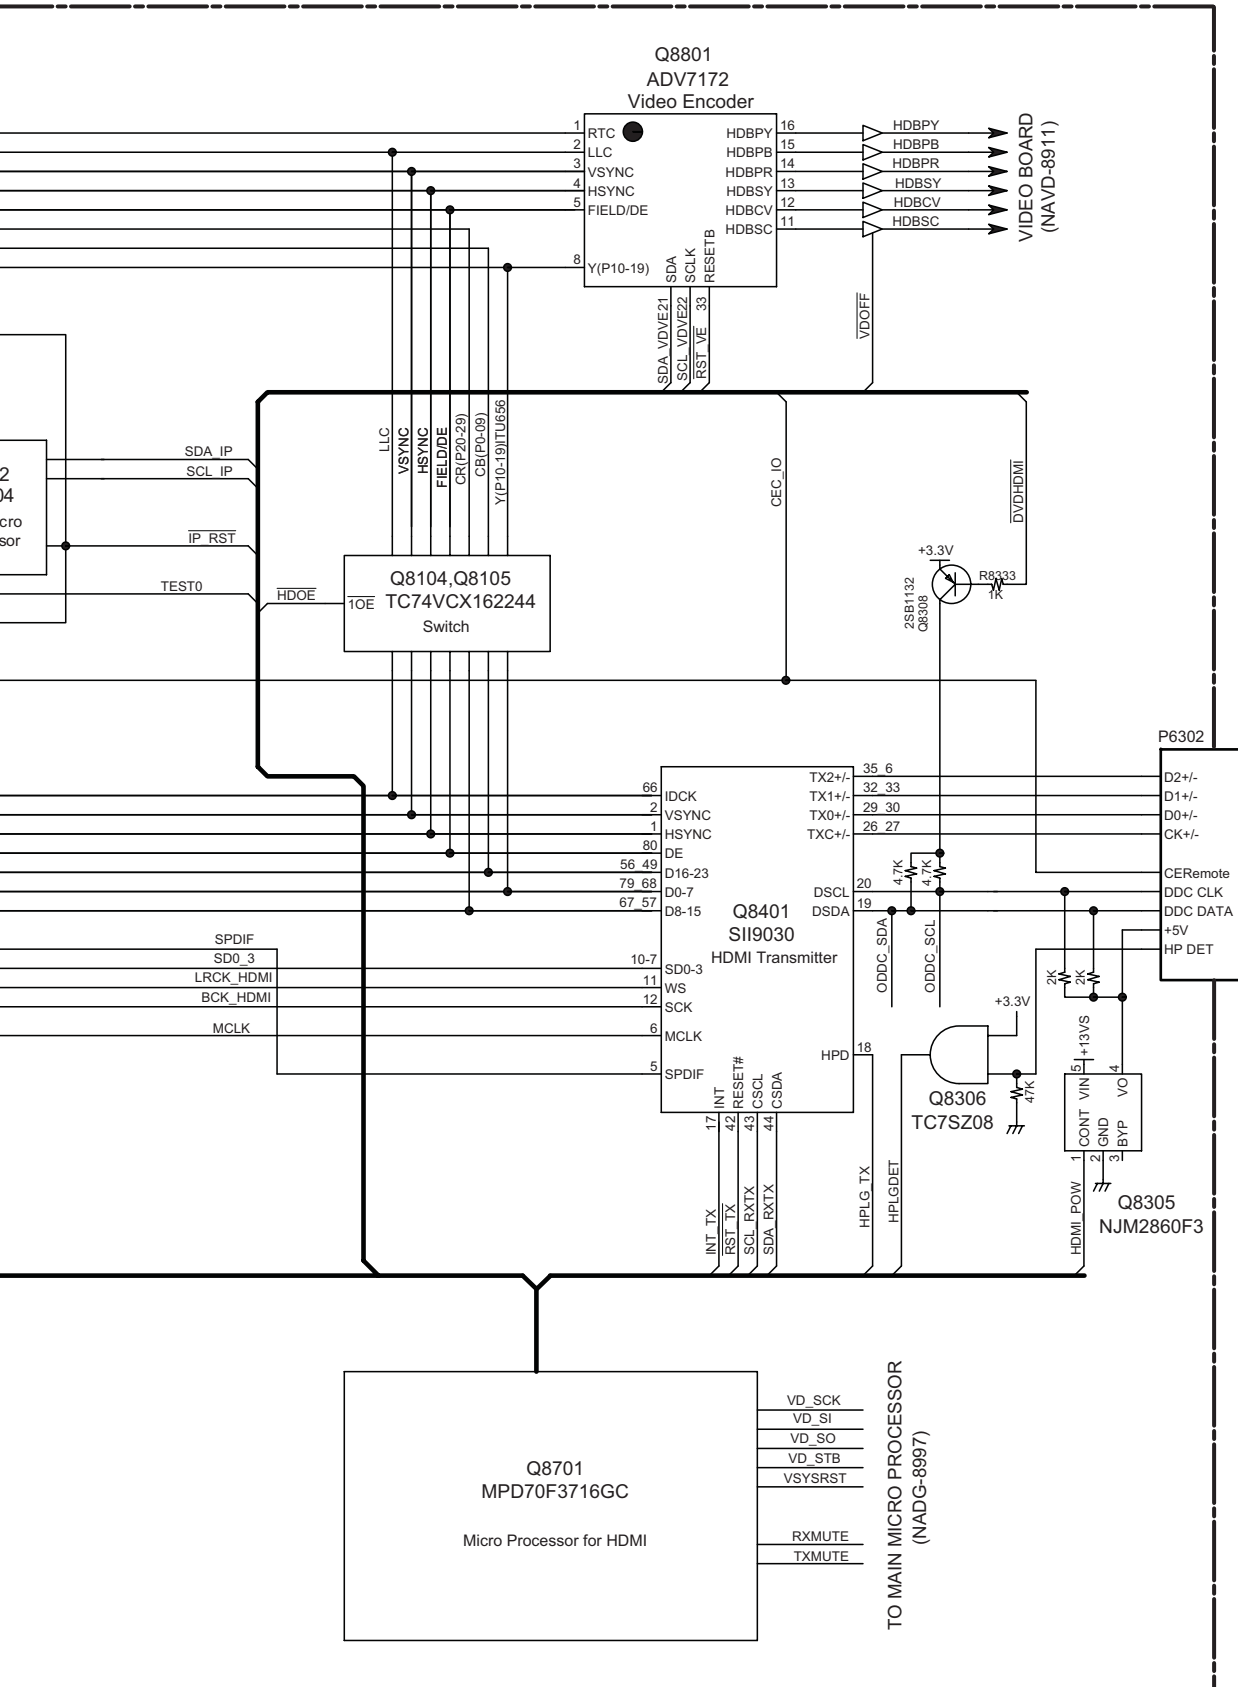


HDMI OUT

TO MAIN MICRO PROCESSOR (NADG-8997)

BLOCK DIAGRAM-3
VIDEO SECTION-2

1
2
3
4
5

A B C D E F G H

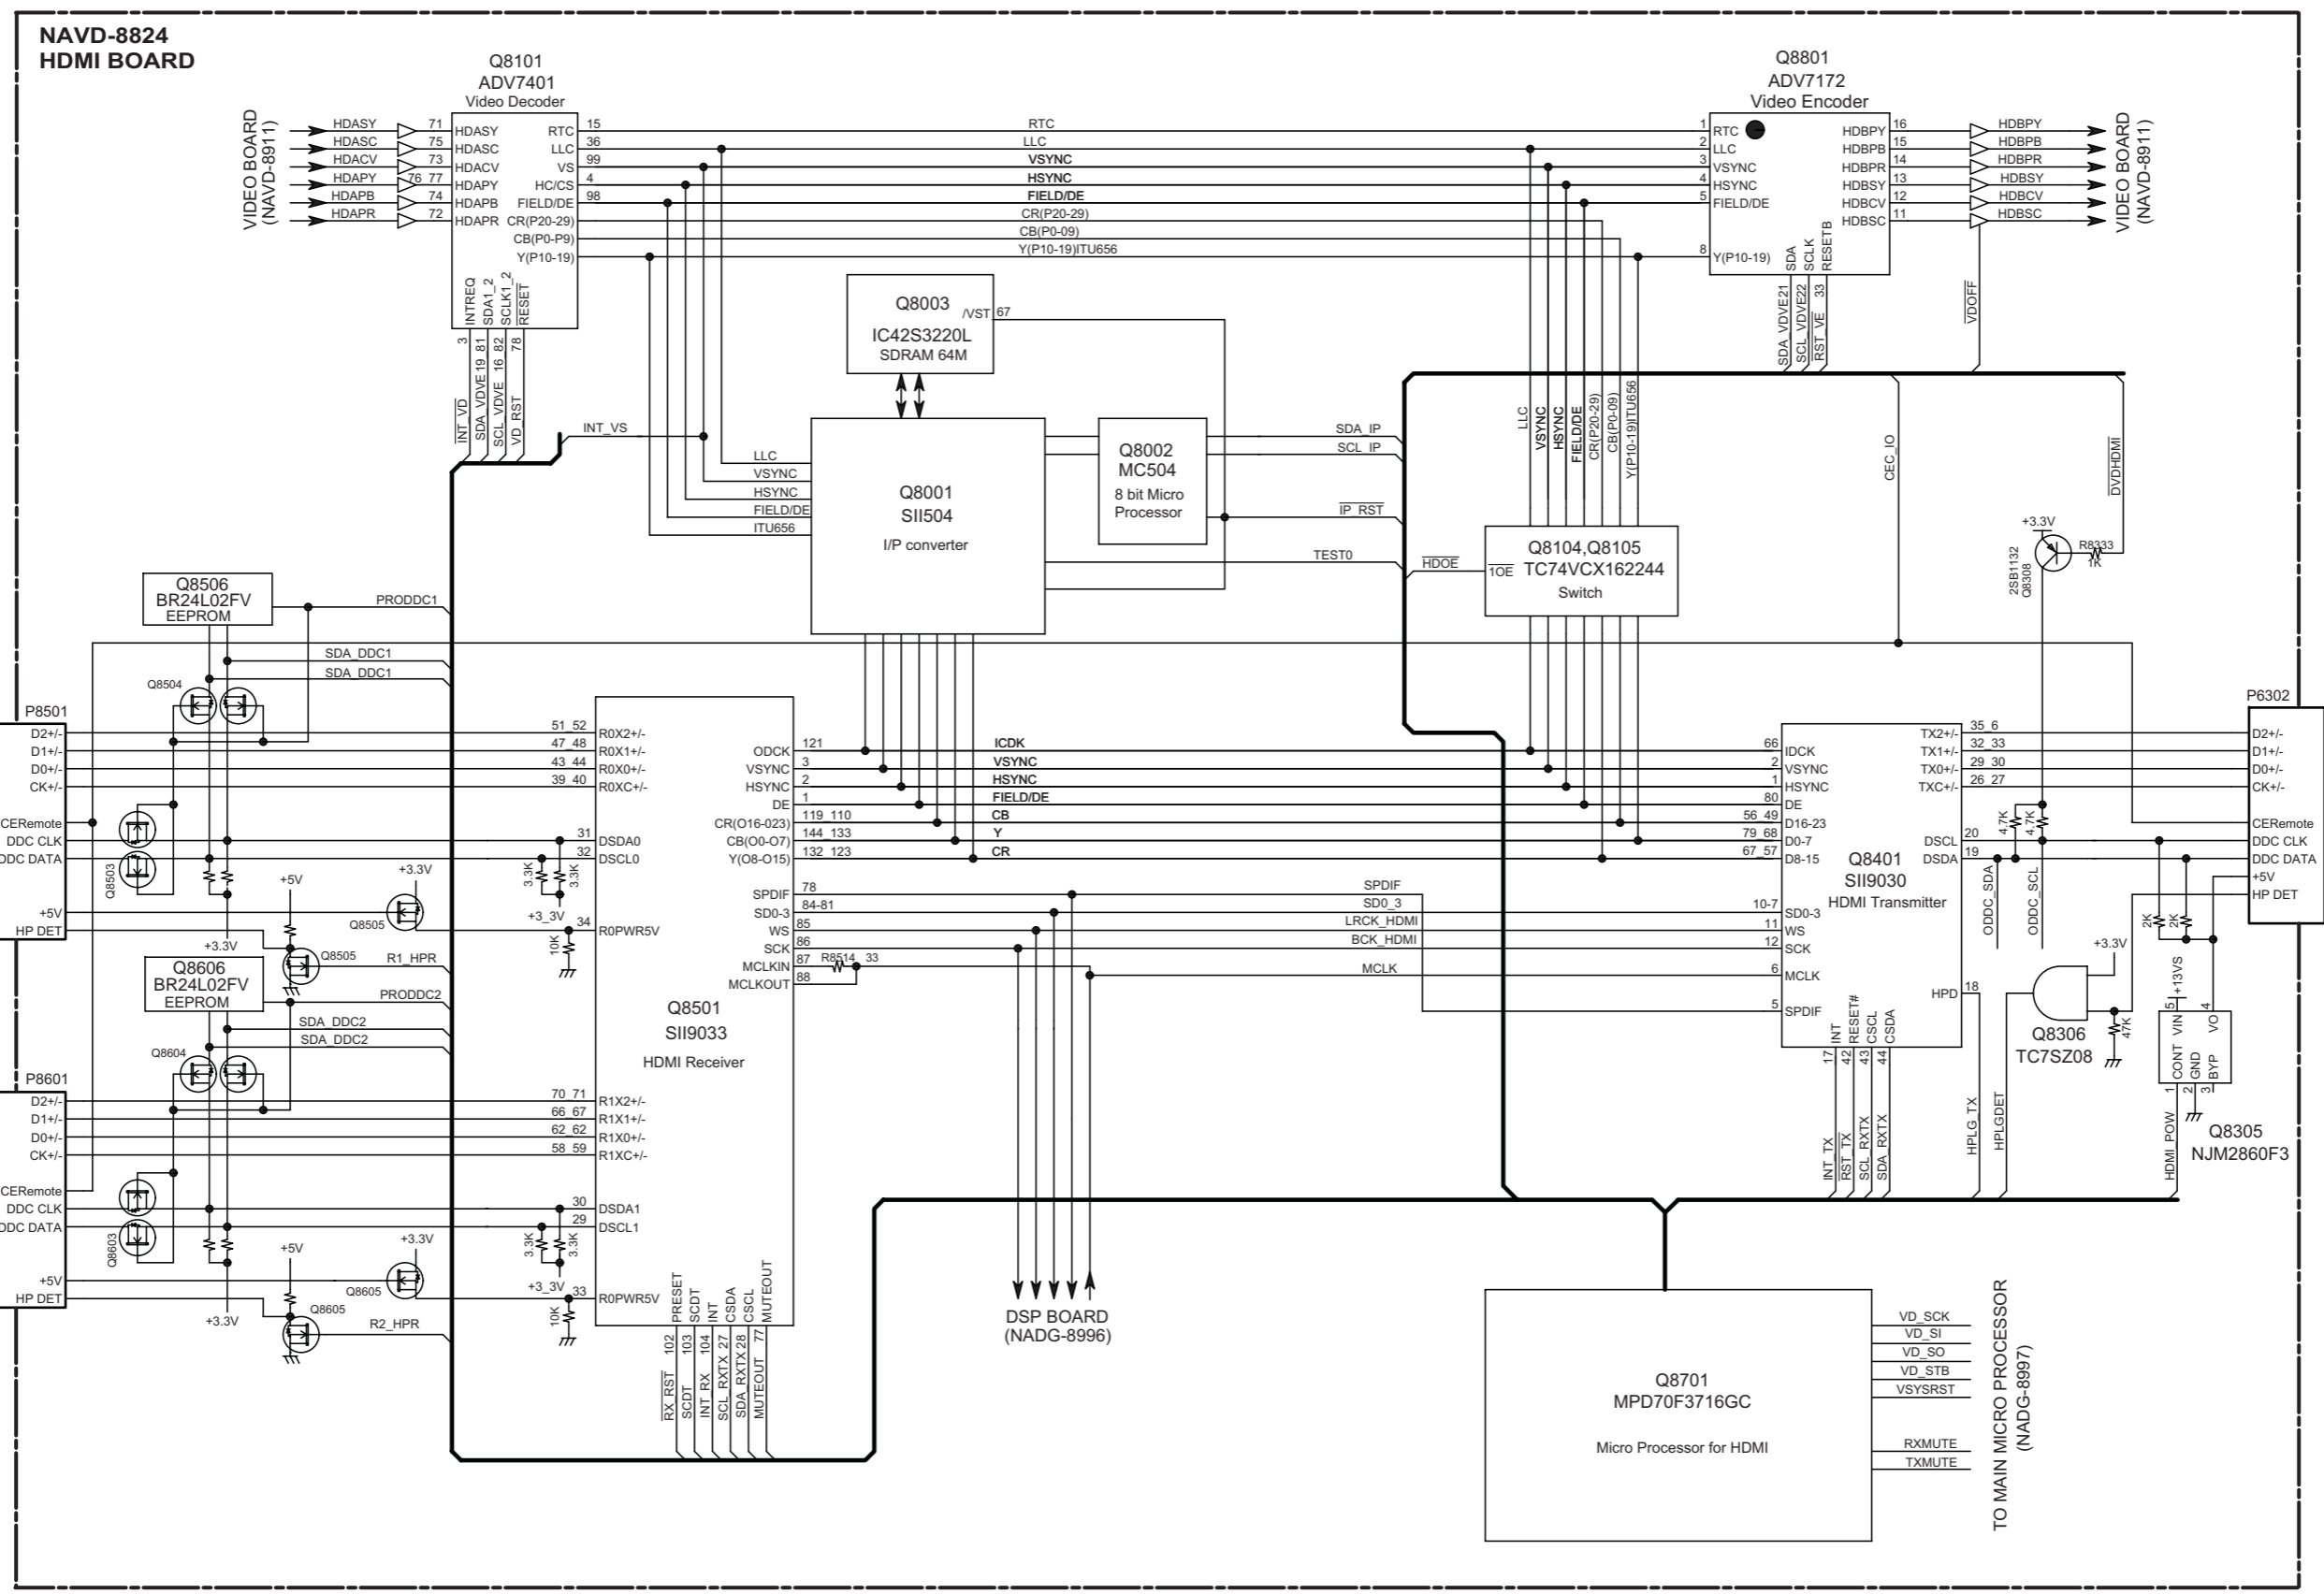

A

B

C

D

SCHEMATIC DIAGRAM-1 (SD-1)
AUDIO SECTION

1

2

3

4

5

NAAF-8678 (1/2) U04 AMPLIFIER PC BOARD

TO NADG-899
SD-6:B5

P310

PHONO

CD

TAPE OUT

TAPE

VIDEO 3

VIDEO 2 OUT

VIDEO 2

VIDEO 1 OUT

VIDEO 1

FR

FL

SR

SL

SW

C

SBR

SBL

FR

FL

SR

SL


SW

C

SBR

SBL

PRE OUT

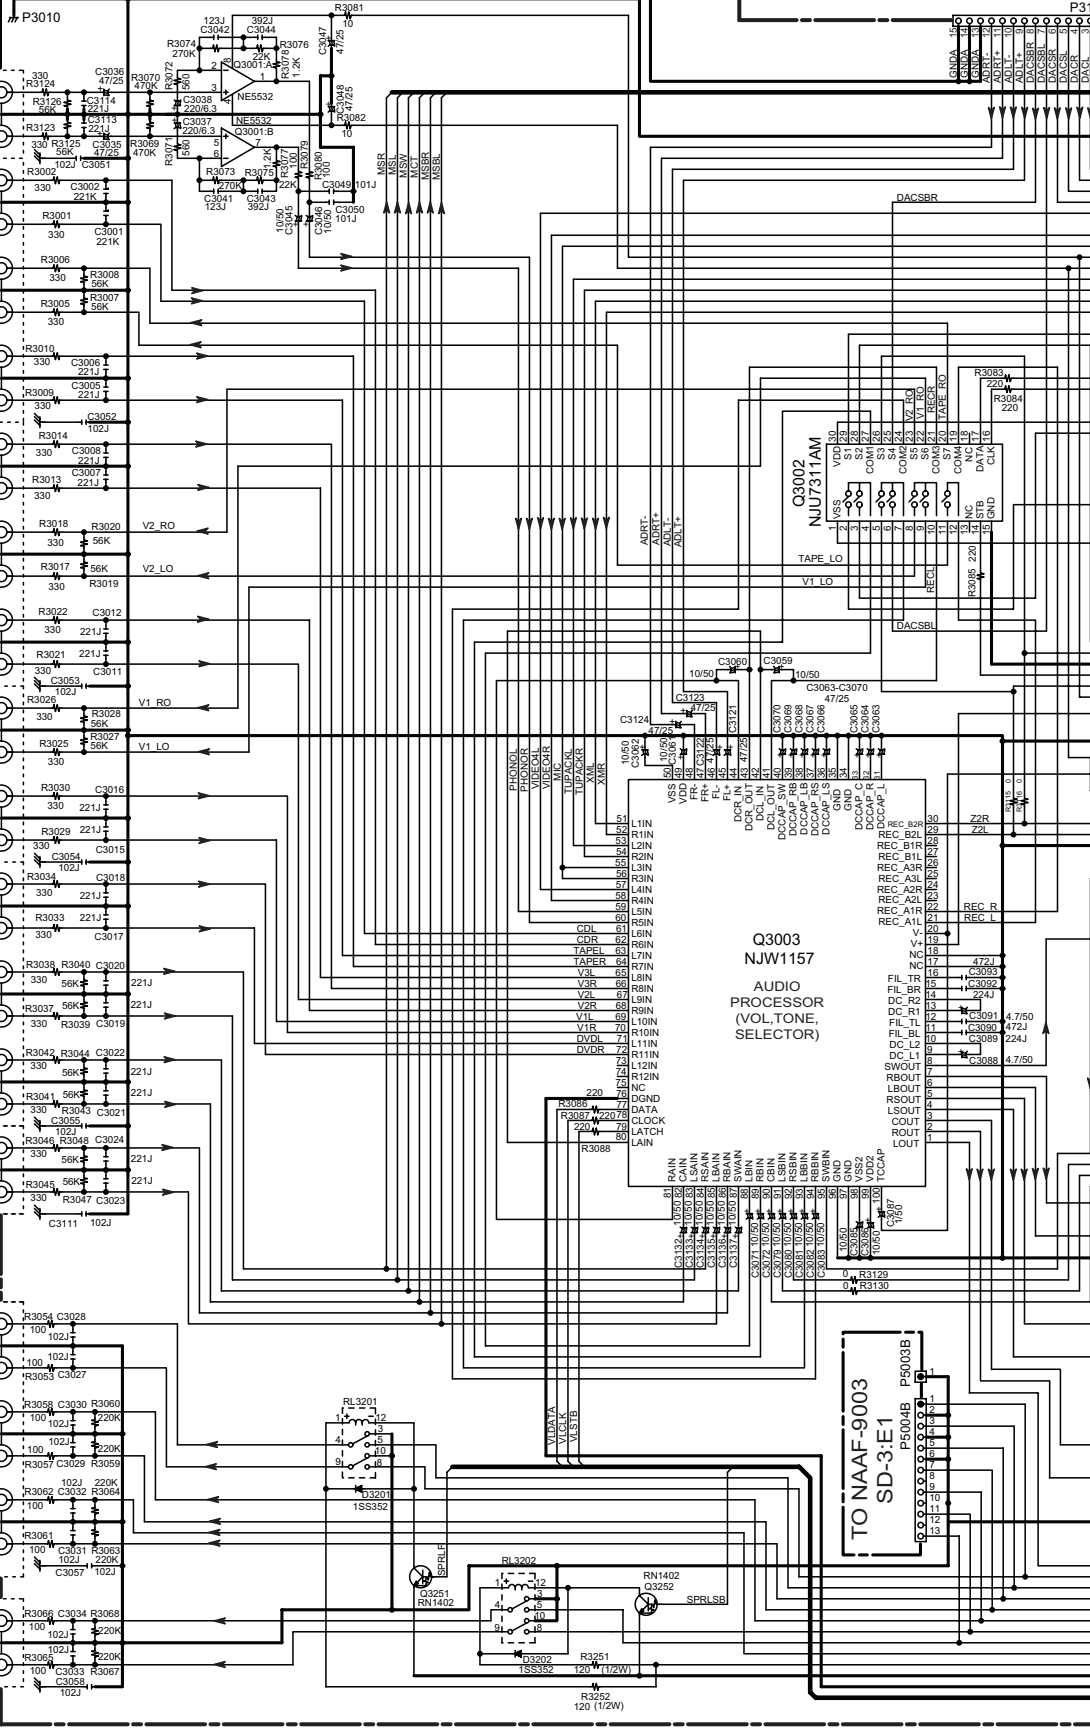

SCHEMATIC DIAGRAM-1 (SD-1) AUDIO SECTION

<Note>
SD-x:XY is short for Shcematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR SAFETY
 - REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) \leftarrow IS DC VOLTAGE.(NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS (---) ARE IN $\mu\text{F/WV}$.
 - ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
 - EX) 030-3pF 330-33pF 331-330pF 333-0.033uF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
 - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
 - EX) \square PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


1

2

3

4

5

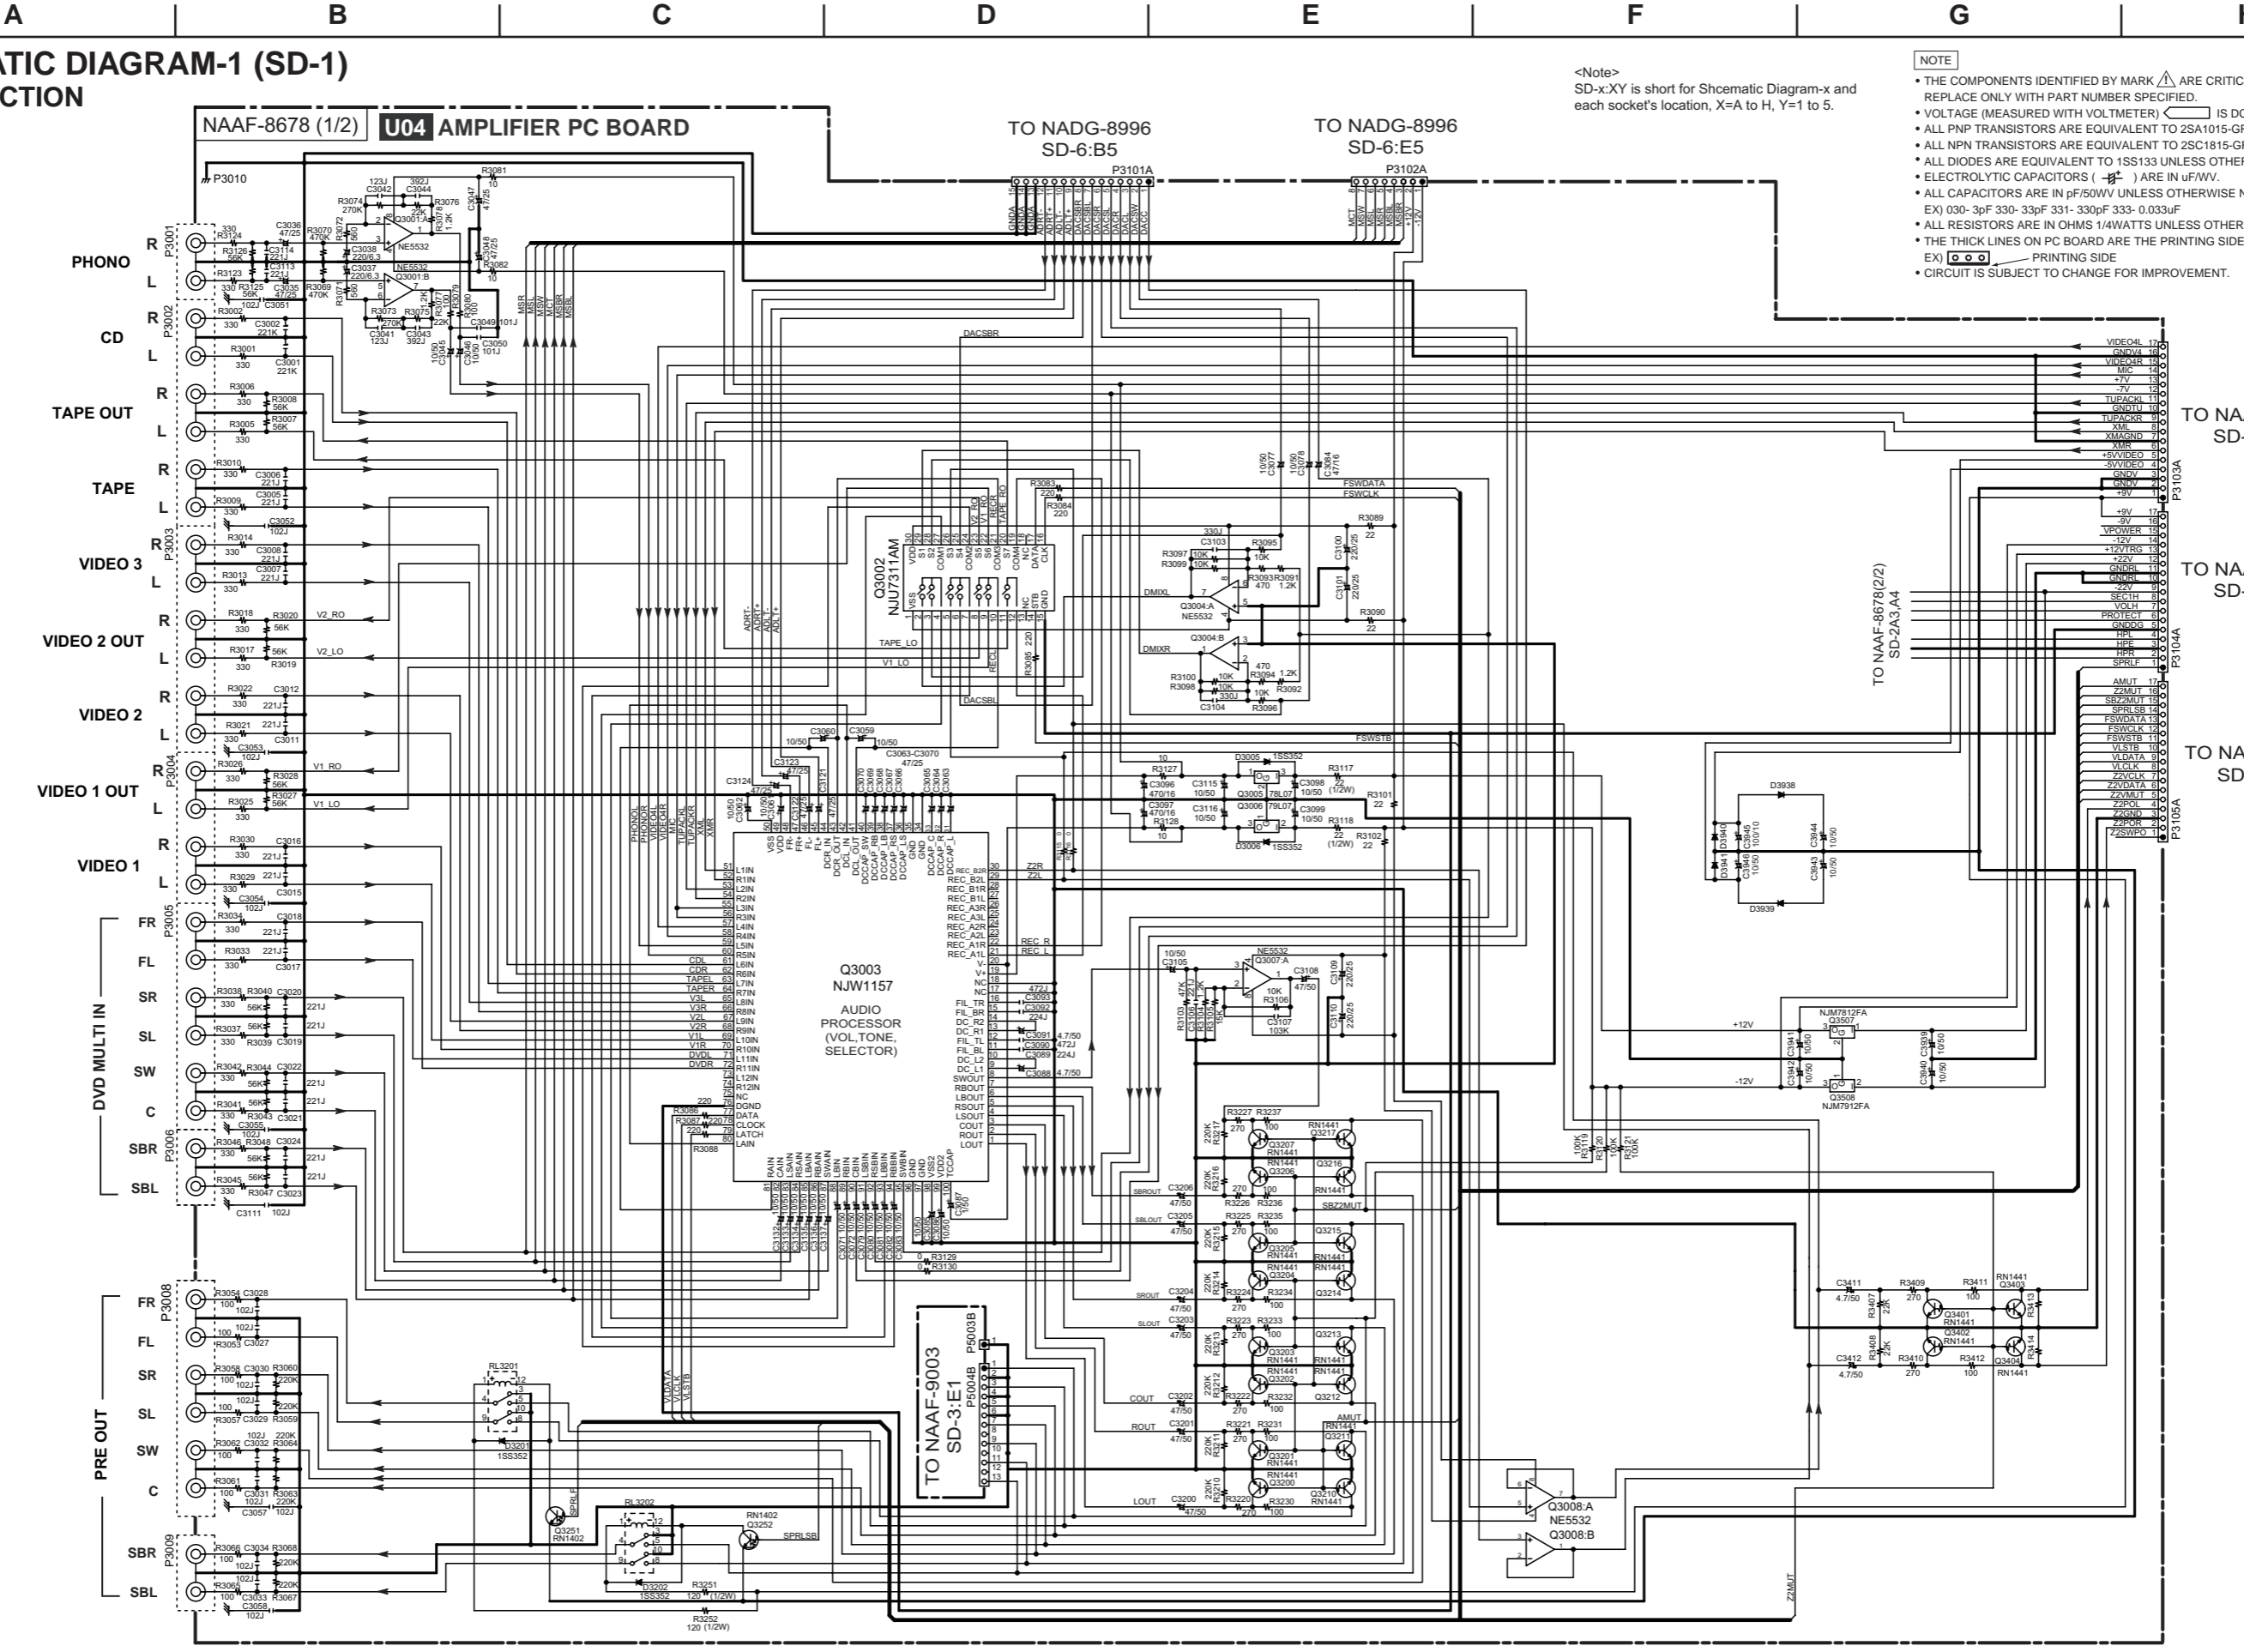

A

B

C

D


SCHEMATIC DIAGRAM-2 (SD-2) POWER AMP SECTION-1

NOTE

- THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) \leftarrow IS DC VOLTAGE. (NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (---) ARE IN $\mu\text{F}/\text{V.V.}$
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
- EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033 μF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
- EX) $\left[\text{---} \right]$ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>


SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.




NAAF-8678 (2/2)

U04 AMPLIFIER PC BOARD


Front L ch

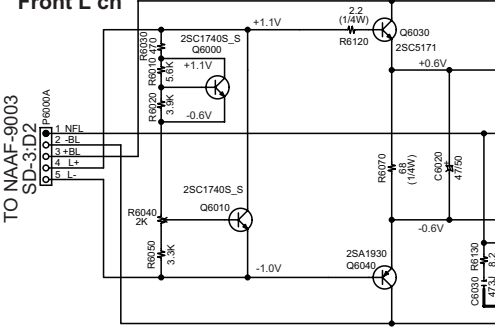

Front R ch

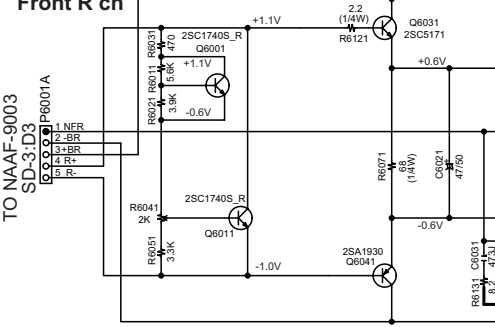

Center ch

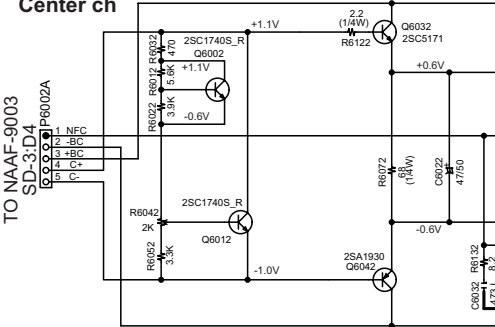


TO NAAF8678(1/2)
(SD-1:G2)

TO NAAF8678(1/2)
(SD-1:G2)

TO TRANSFORMER
P6952A

TO NAETC-9001
SD-7:E2

TO NAETC-9001
SD-7:E2

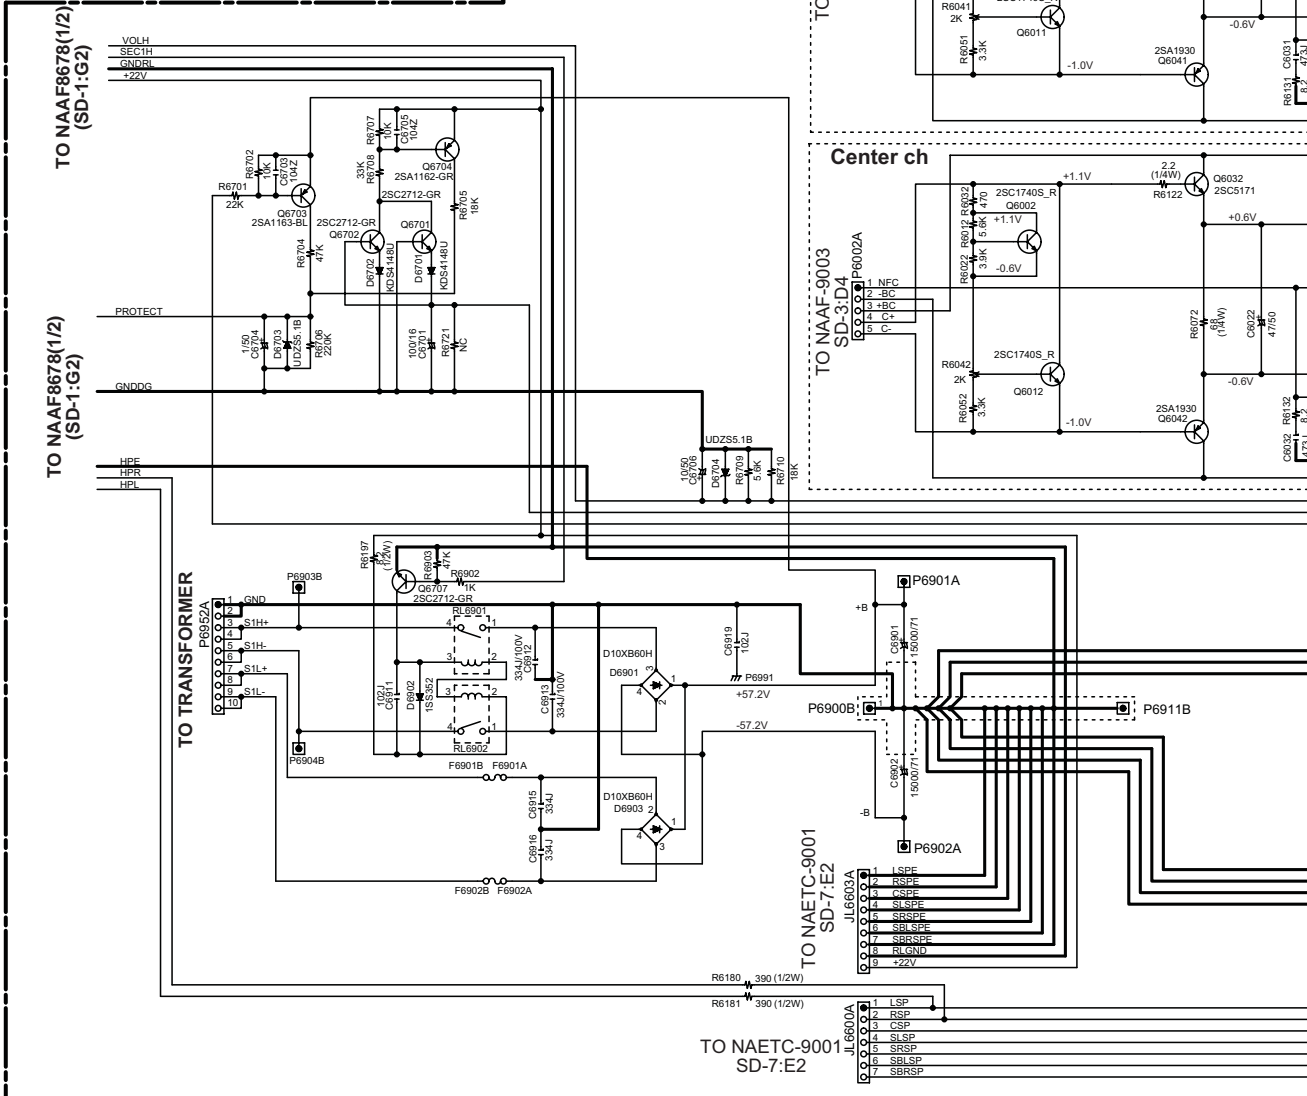


1

2

3

4





5

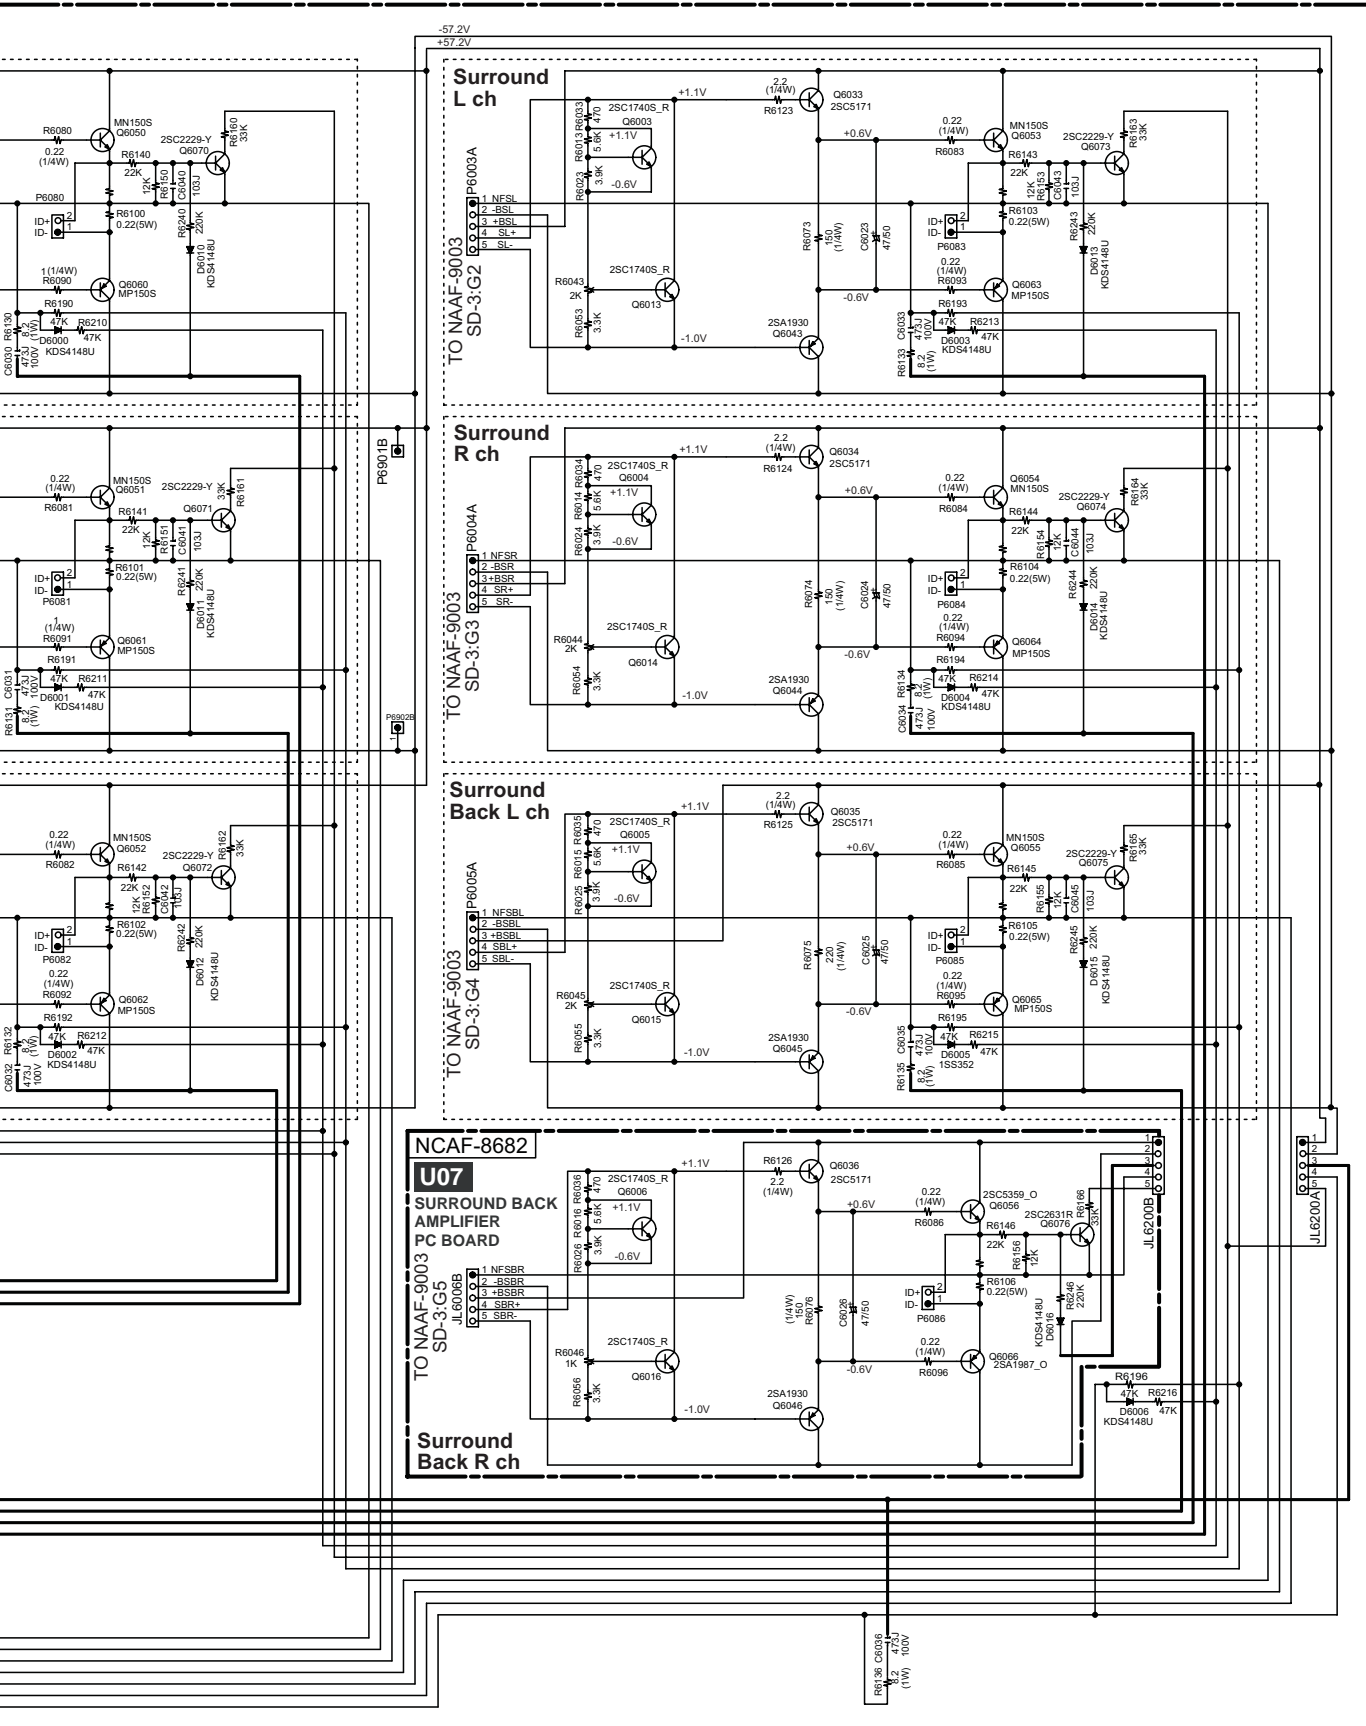

SCHEMATIC DIAGRAM-2 (SD-2)
POWER AMP SECTION-1

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) \square IS DC VOLTAGE (NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS ($\text{---} \text{||} \text{---}$) ARE IN $\mu\text{F/WV}$.
 - ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
EX) 030-3pF 330-33pF 331-330pF 333-0.033 μF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
 - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) \square PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

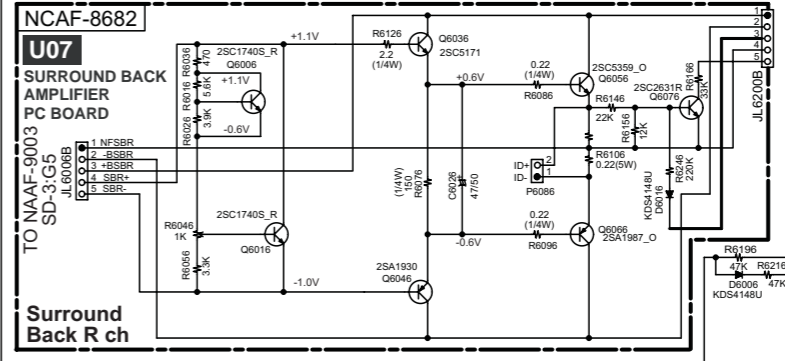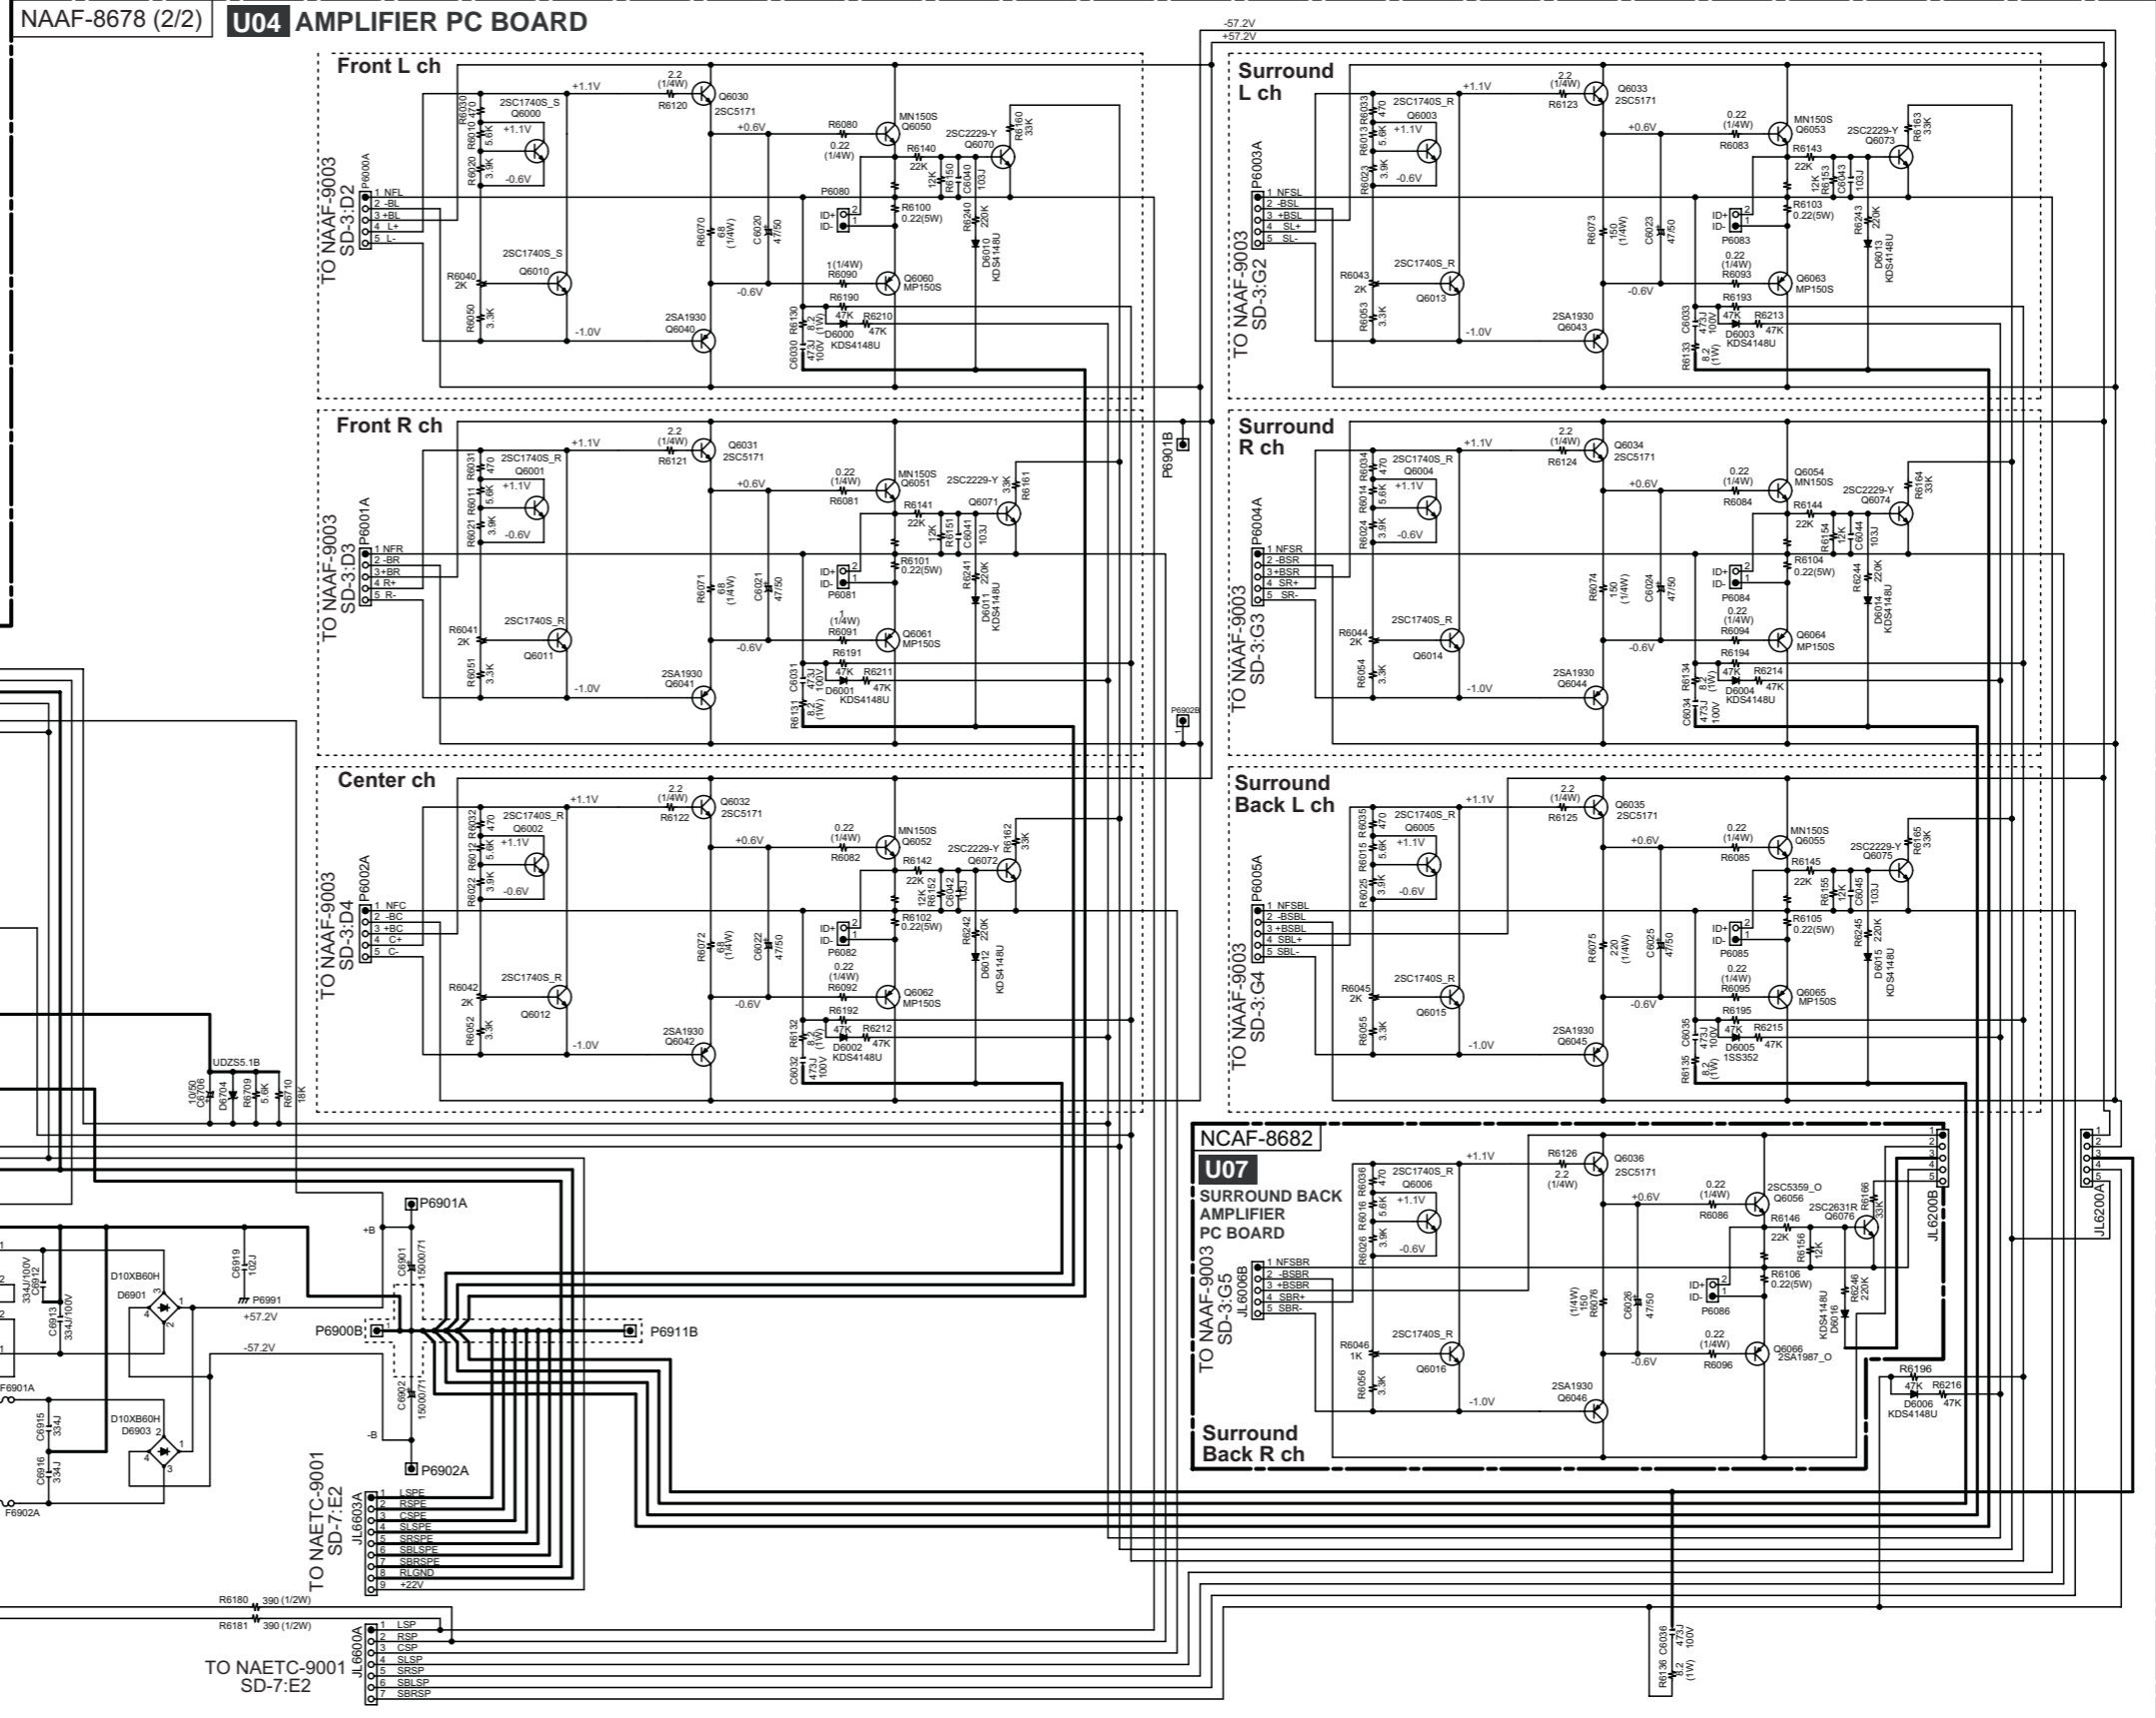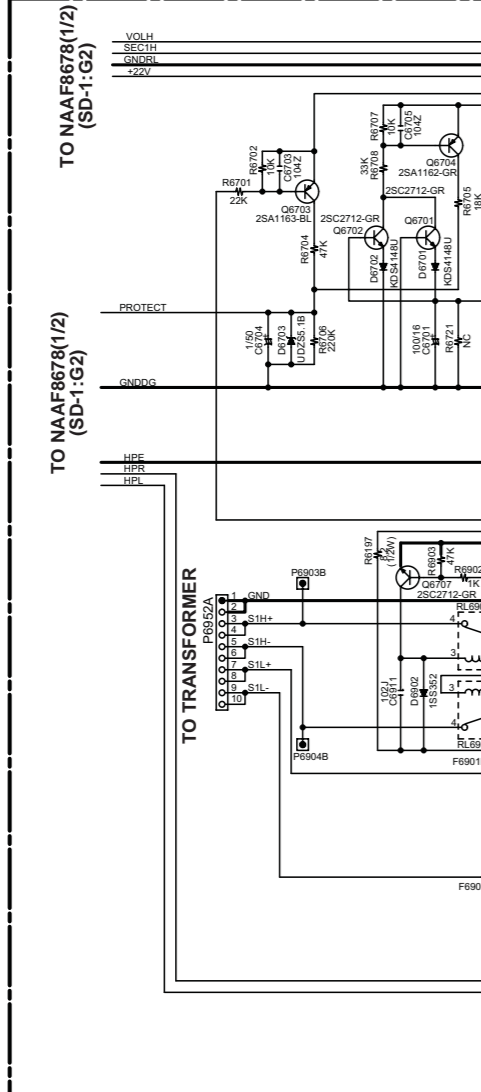

A B C D
SCHEMATIC DIAGRAM-3 (SD-3)
POWER AMP SECTION-2

NAAF-9003

U20 DRIVER AMPLIFIER PC BOARD

1

2

3

4

5

Front L ch


Front R ch

Center ch


<Note>
 SD-x:XY is short for Shcematic Diagram-x and
 each socket's location, X=A to H, Y=1 to 5.

NOTE


- THE COMPONENTS IDENTIFIED BY MARK \triangle ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) \square IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS ($\text{---} \text{---} \text{---}$) ARE IN $\mu\text{F}/\text{V}$.
- ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
 EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033 μF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
 EX) $\text{---} \text{---} \text{---}$ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

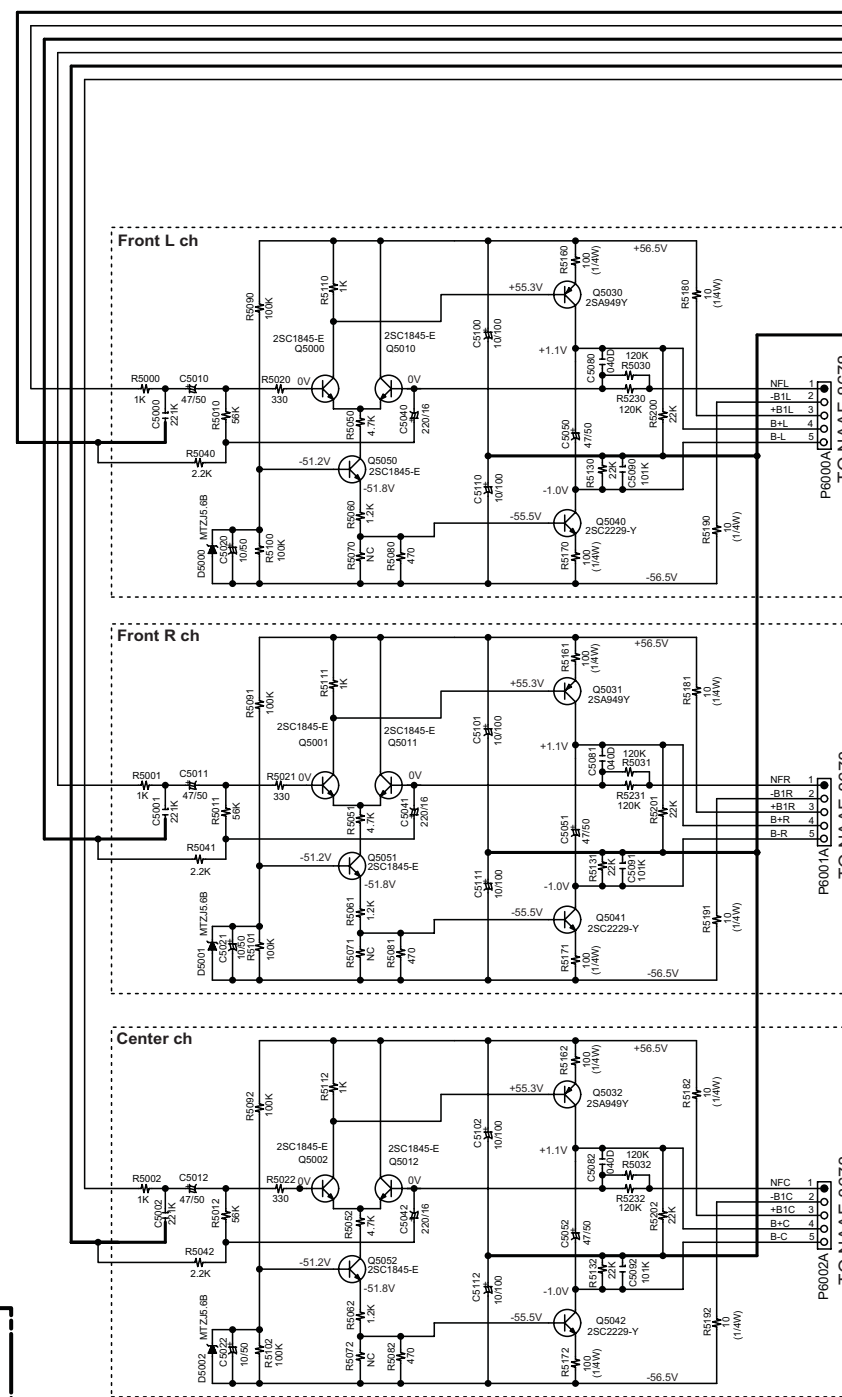

TO NAAF-8678
SD-1:D5




Surround L ch

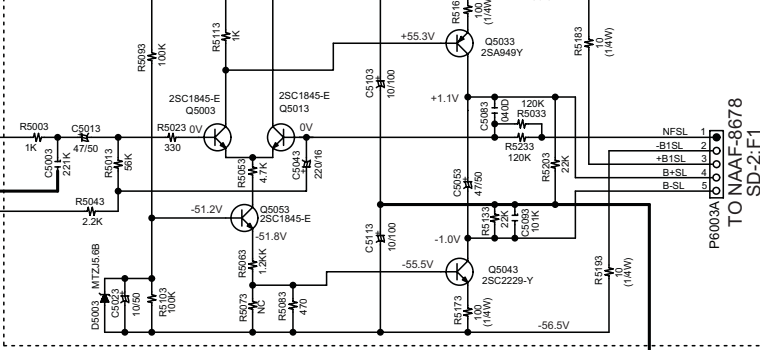


TO NAAF-8678
SD-2:F1

Surround R ch

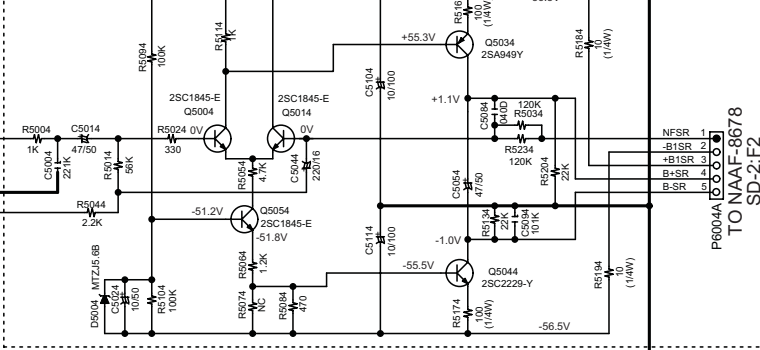


TO NAAF-8678
SD-2:F2

Surround Back L ch

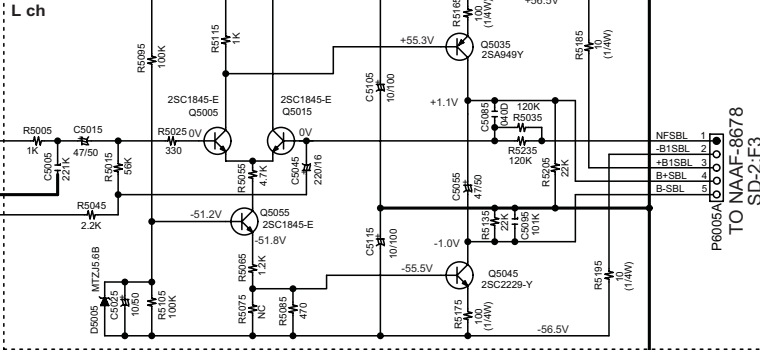

TO NAAF-8678
SD-2:F3

Surround Back R ch

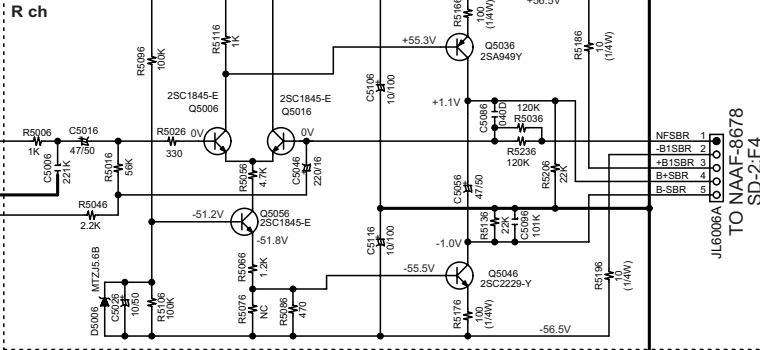

TO NAAF-8678
SD-2:F4

P6001A TO NAAF-8678 SD-2:C1

P6001A TO NAAF-8678 SD-2:C2

P6002A TO NAAF-8678 SD-2:C3

P5503A

P5004A

L
R
S1
S2
S3
S4
S5
S6

P6003A

NFSL
B1SL
+B1SL
B-SL
B-SL

NFSR
B1SR
+B1SR
B-SR
B-SR

NFSL
B1SBL
+B1SBL
B-SBL
B-SBL

NFSBR
B1SBR
+B1SBR
B-SBR
B-SBR

JL6006A

SCHEMATIC DIAGRAM-3 (SD-3)
POWER AMP SECTION-2


1

2

3

4

5

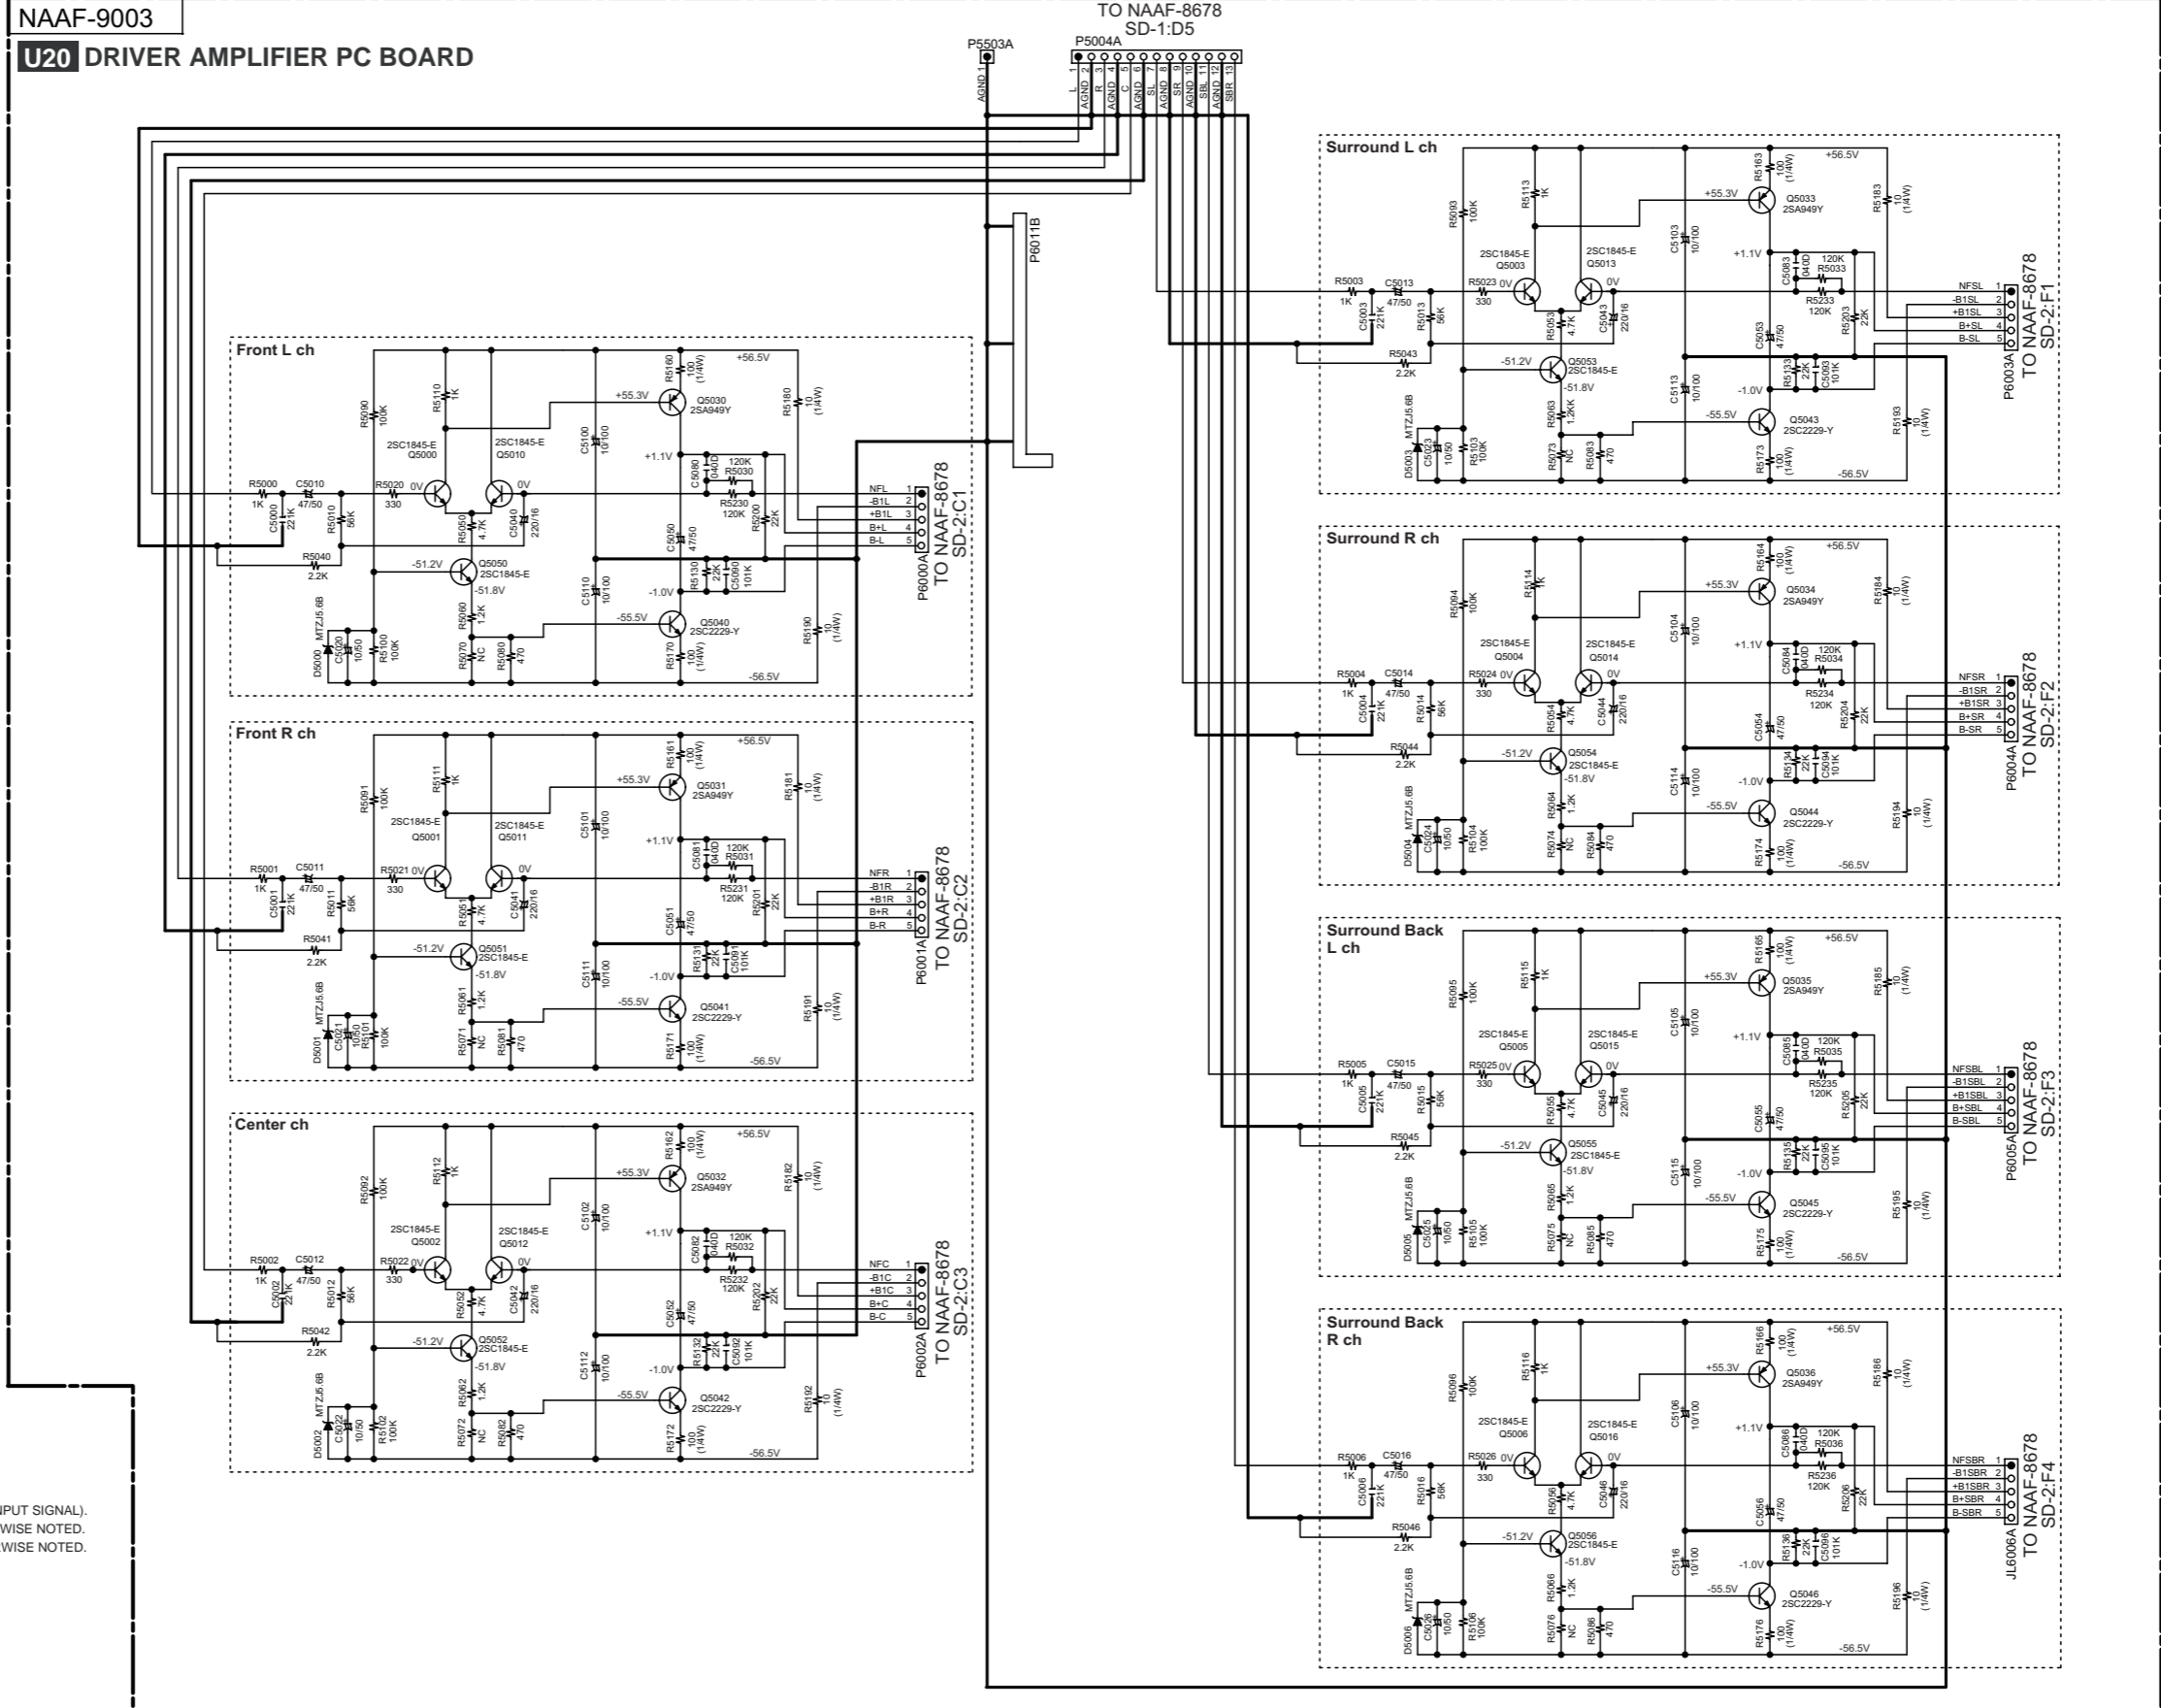

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK \triangle ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) \square IS DC VOLTAGE.(NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS (---) ARE IN $\mu\text{F/WV}$.
 - ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
 - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) \square PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

SCHEMATIC DIAGRAM-4 (SD-4) MICROPROCESSOR SECTION

A

B

C

D

1

2

3

4

5

NAAR-8997
U14 MICROPROCESSOR
PC BOARD


TO NADIS-8675
SD-5:G2

TO NAVD-8991
SD-9:F1

TO NADG-8996
SD-6:H2

TO NADG-8996
SD-6:H3

TO NADG-8996
SD-6:H3

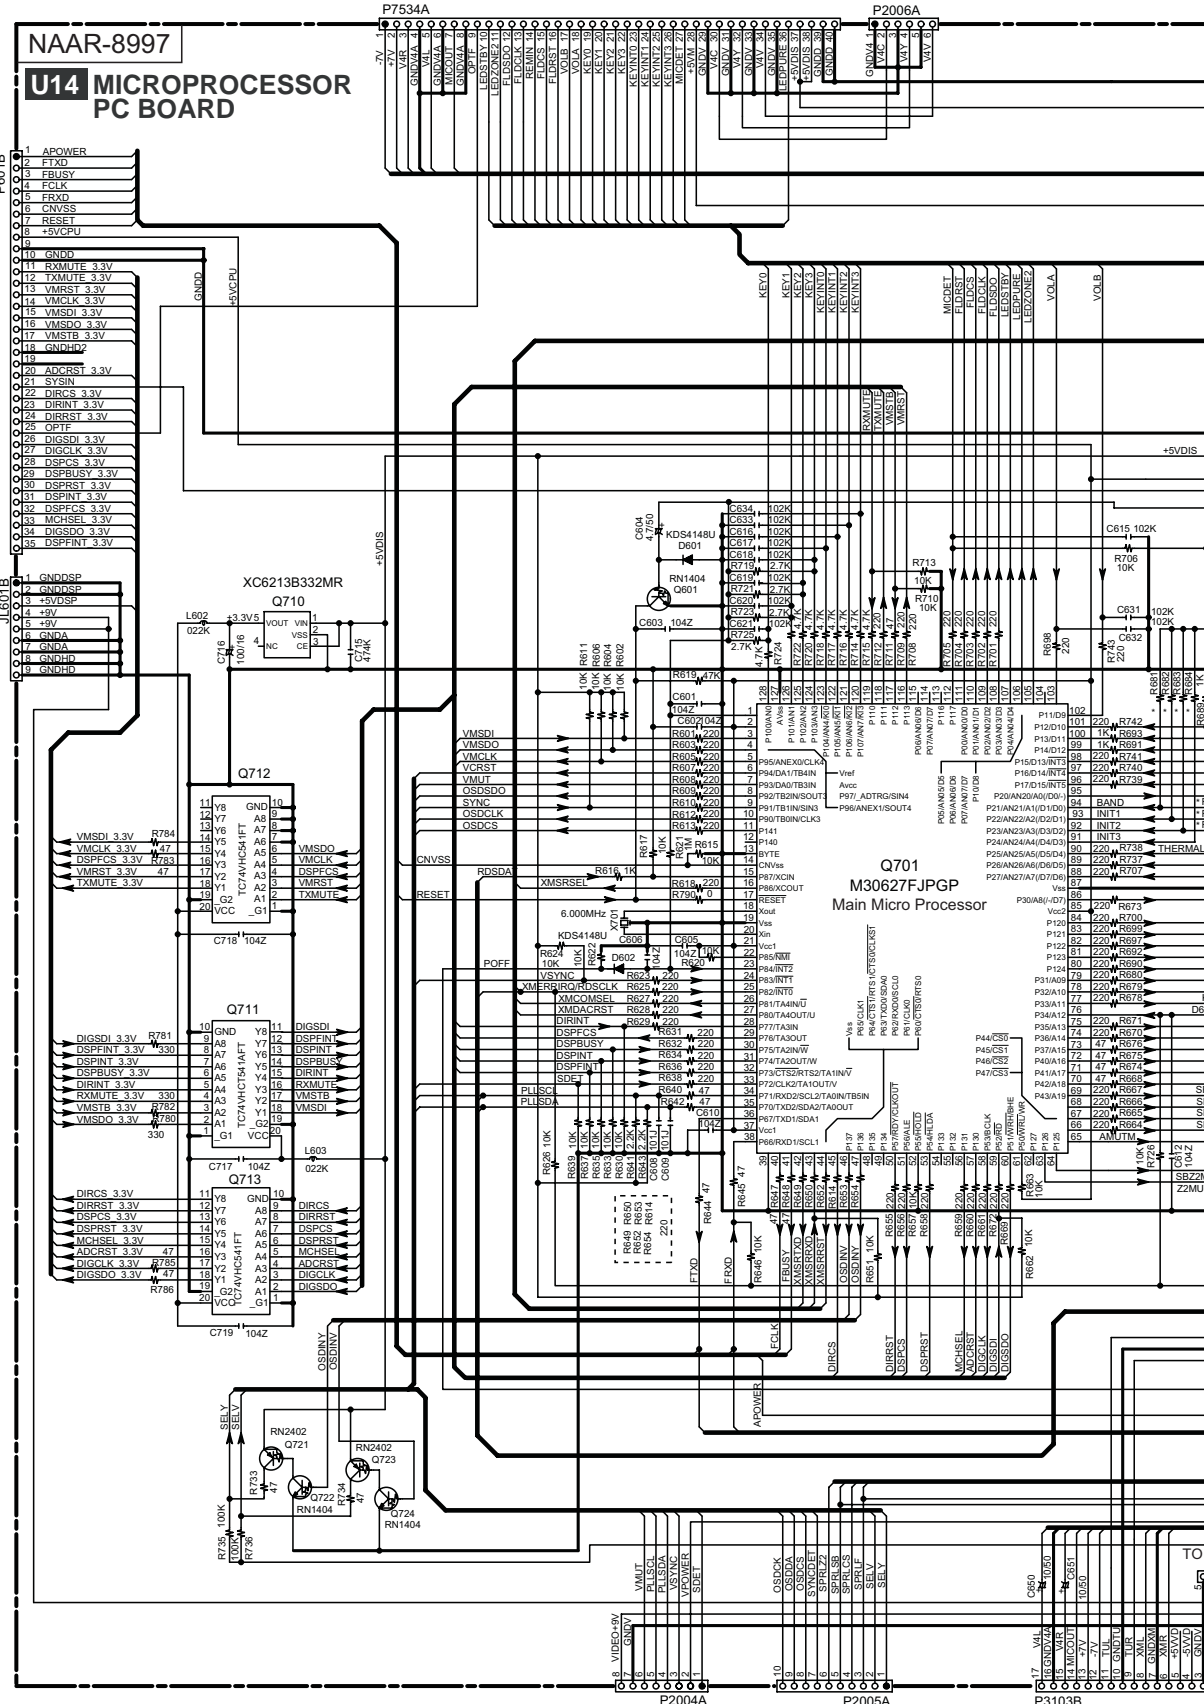

<Note>
SD-x:XY is short for Shcematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.

TO NAVD-8991
SD-9:E1

TO NAVD-8991
SD-9:F1


TO NAAF-8675
SD-1:H2

P2004A P2005A P3103B

TO NAETC-8680
SD-2:A2

TO NARF-8994
SD-12:H4

TO NAETC-8676(JL7542B)
SD-5:E5

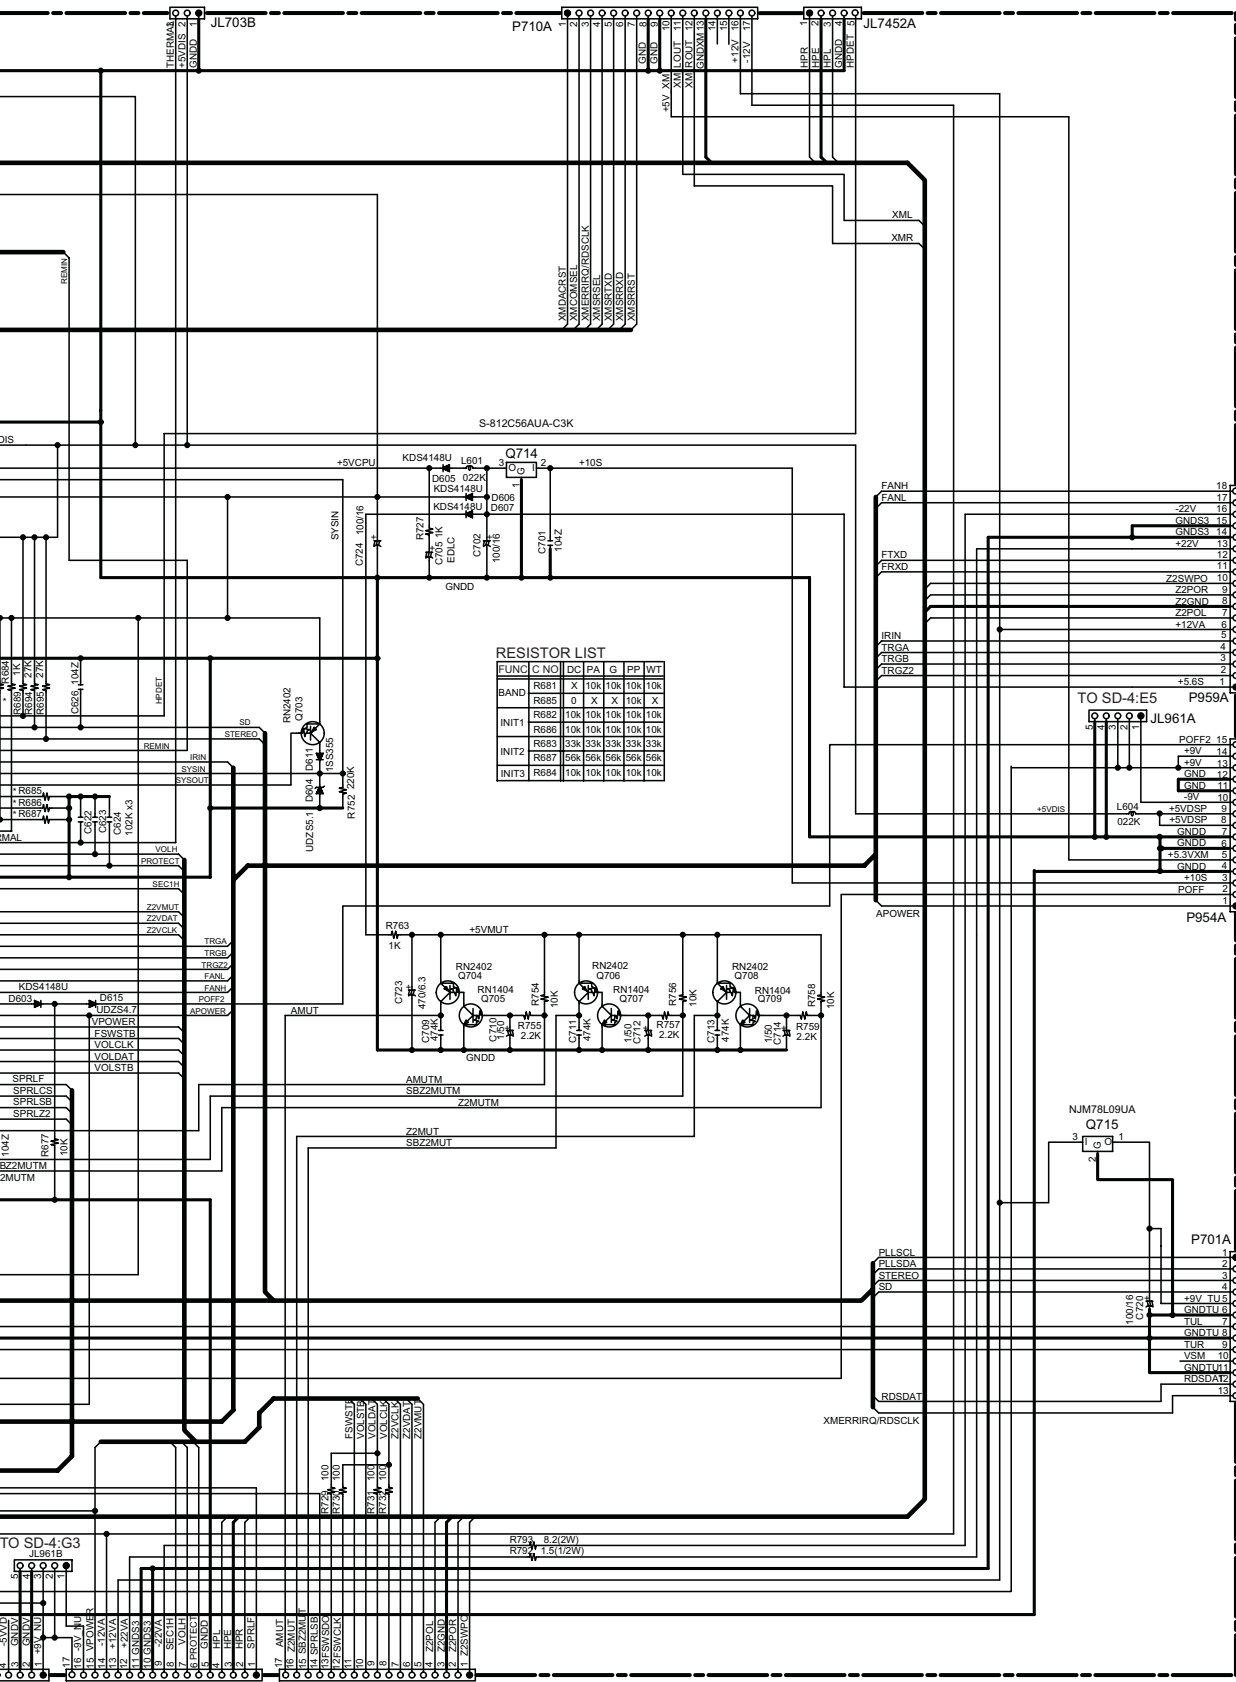

RESISTOR LIST

FUNC	C NO	DC	PA	G	PP	WT
BAND	R681	X	10k	10k	10k	10k
	R685	0	X	X	10k	X
INIT1	R682	10k	10k	10k	10k	10k
	R686	10k	10k	10k	10k	10k
INIT2	R683	33k	33k	33k	33k	33k
	R687	56k	56k	56k	56k	56k
INIT3	R684	10k	10k	10k	10k	10k

TO NAPS-9000
SD-8:E5


TO NAPS-9000
SD-8:D2

TO TUNER UNIT

TO NAAF-8678
SD-1:H2

TO NAAF-8678
SD-1:H3

**SCHEMATIC DIAGRAM-4 (SD-4)
MICROPROCESSOR SECTION**

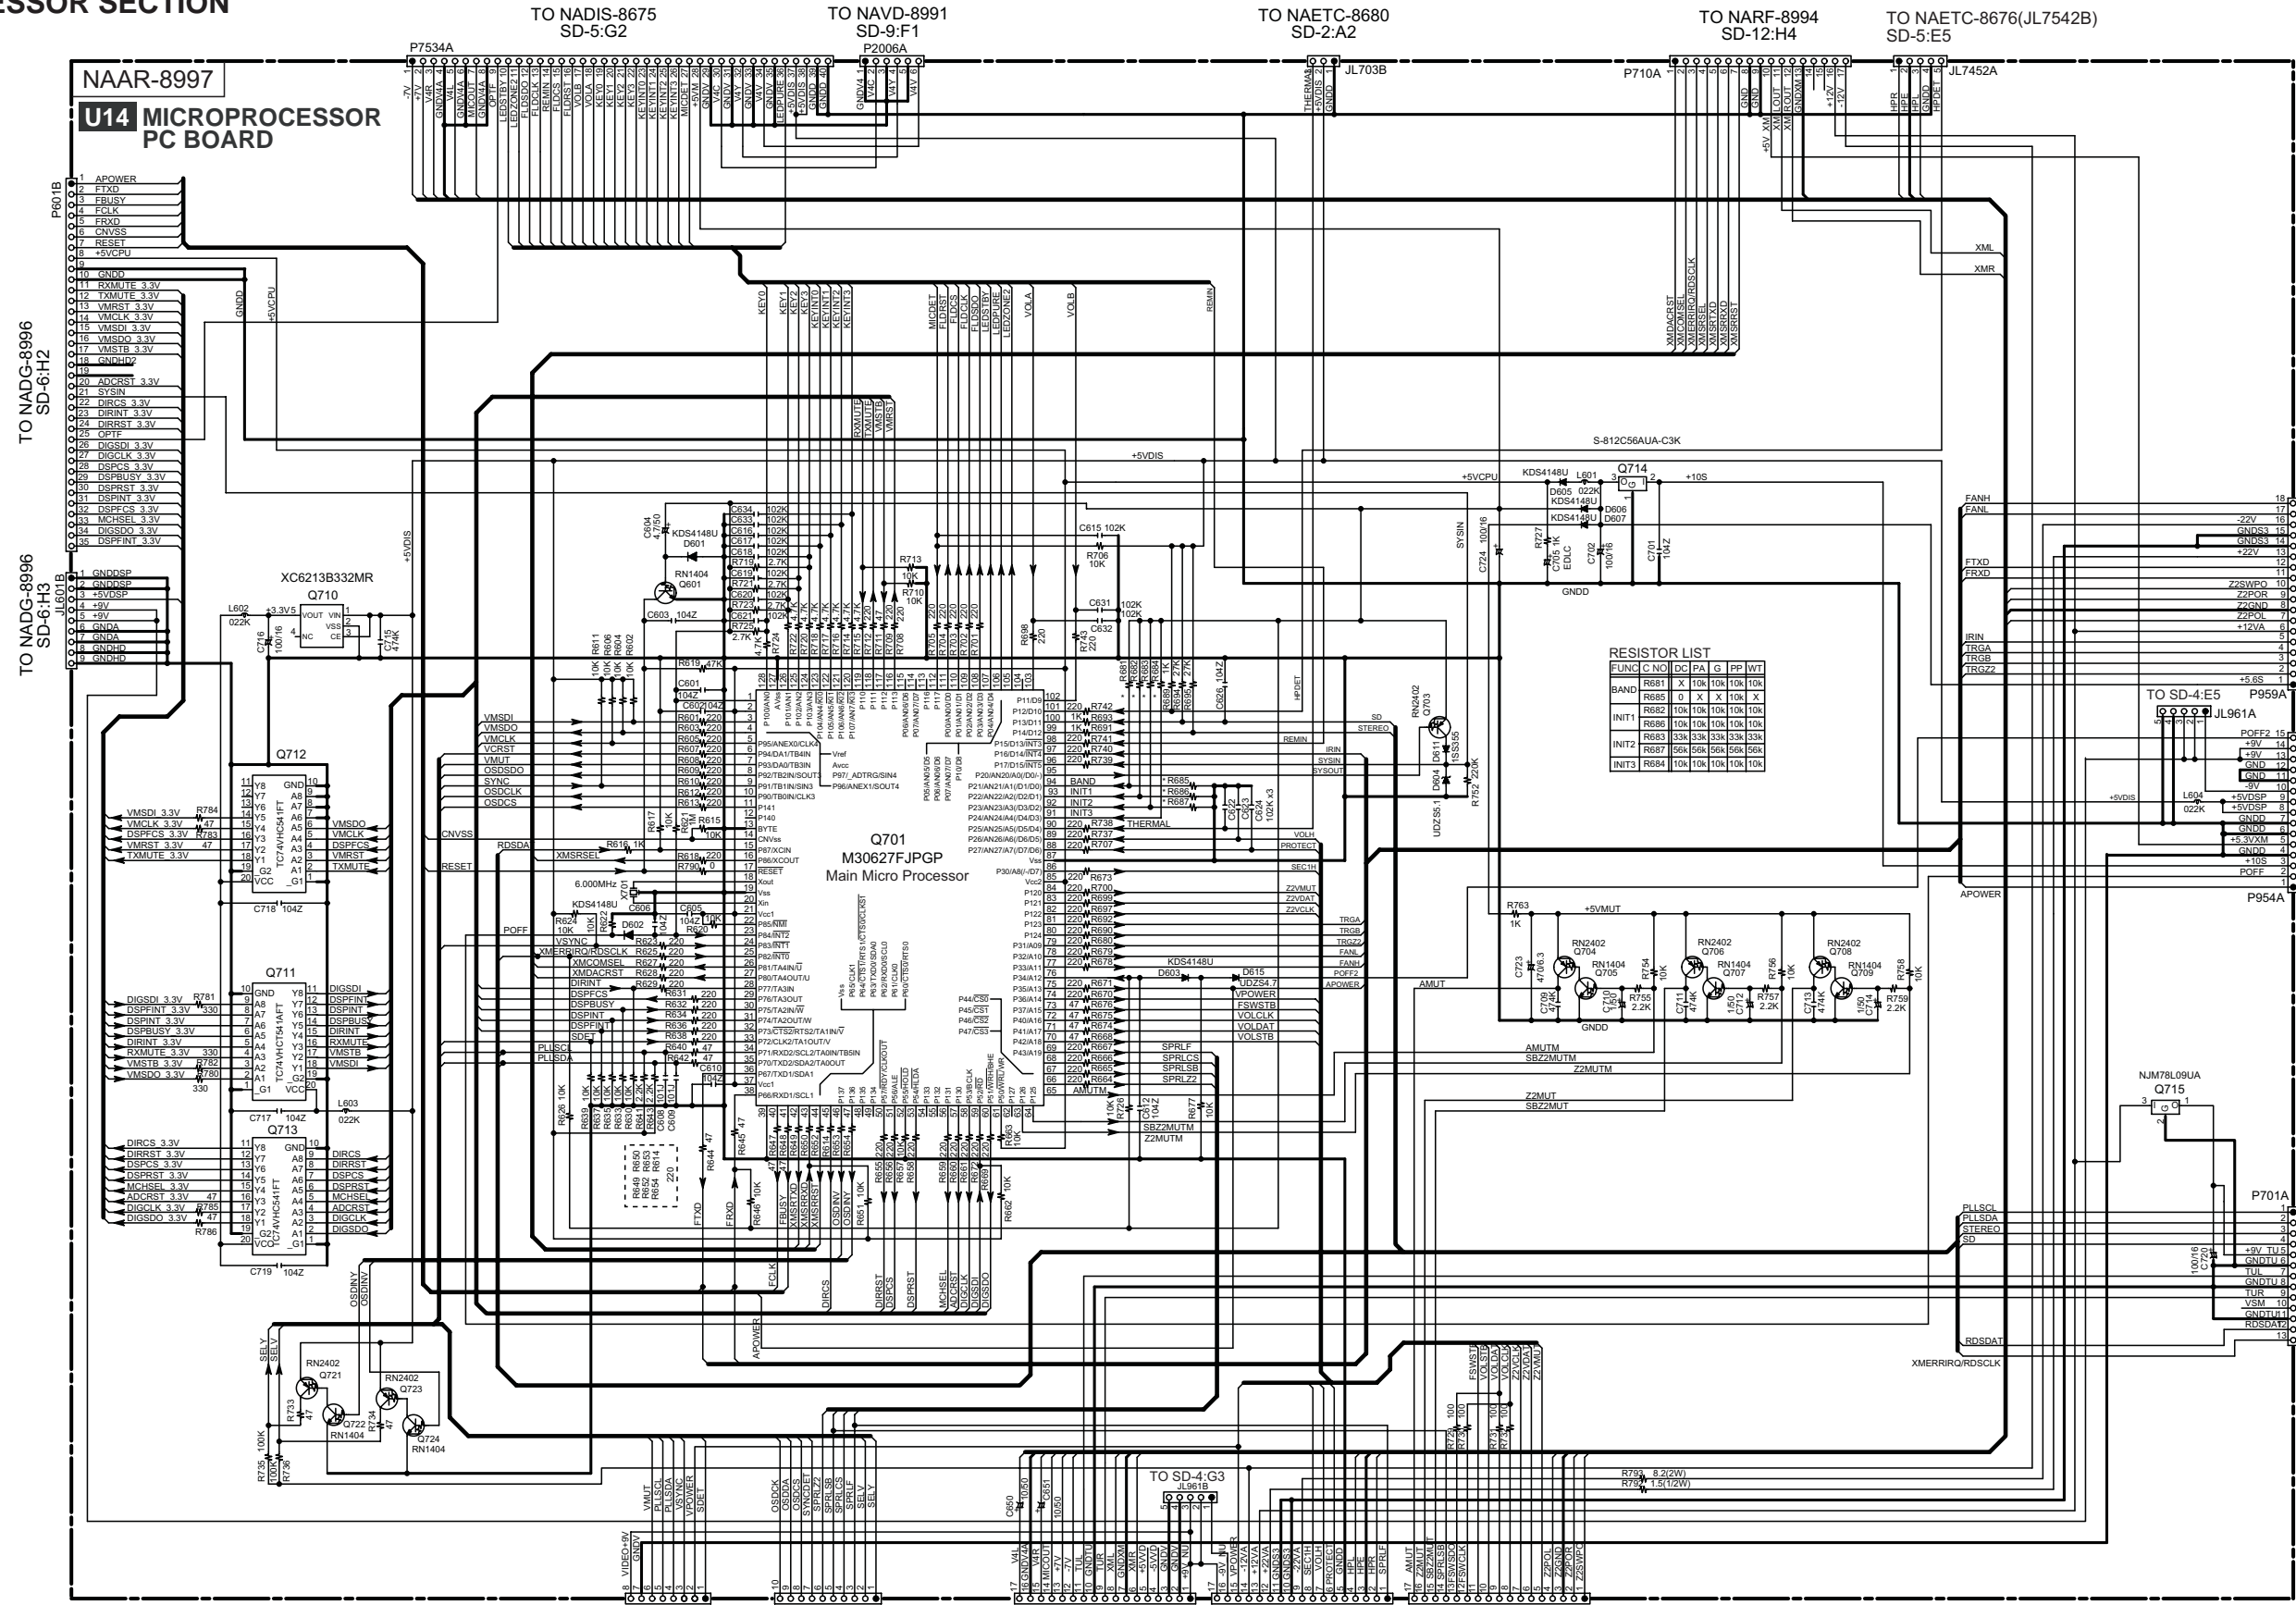

<Note>
SD-x:Y is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

A B C D

SCHEMATIC DIAGRAM-5 (SD-5)
DISPLAY SECTION

1

NADIS-8675

U01 DISPLAY PC BOARD

2

3

4

5

Q7501
NHA-16SM10T
FL TUBE

Q7502
M66005

LEDSBY

STBY

PURE AUDIO


ZONE2

LEDZONE2

NAETC-8677

U03 VOLUME PC BOARD

MASTER VOLUME

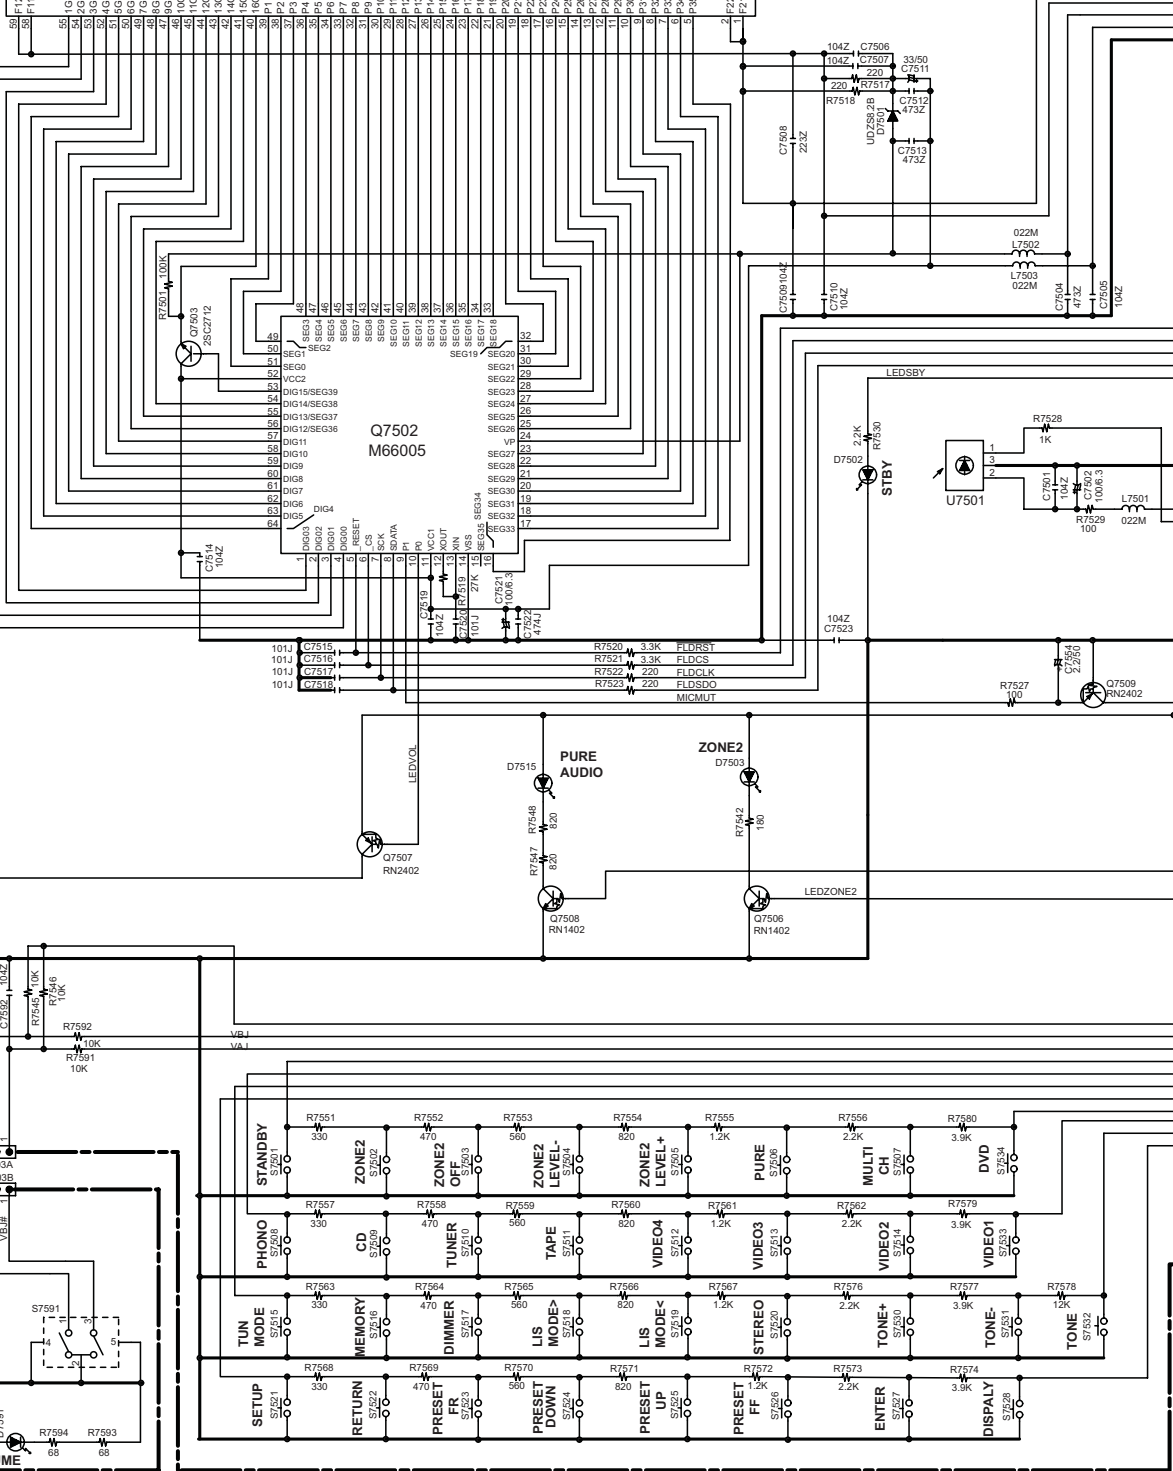


E

F


G

H

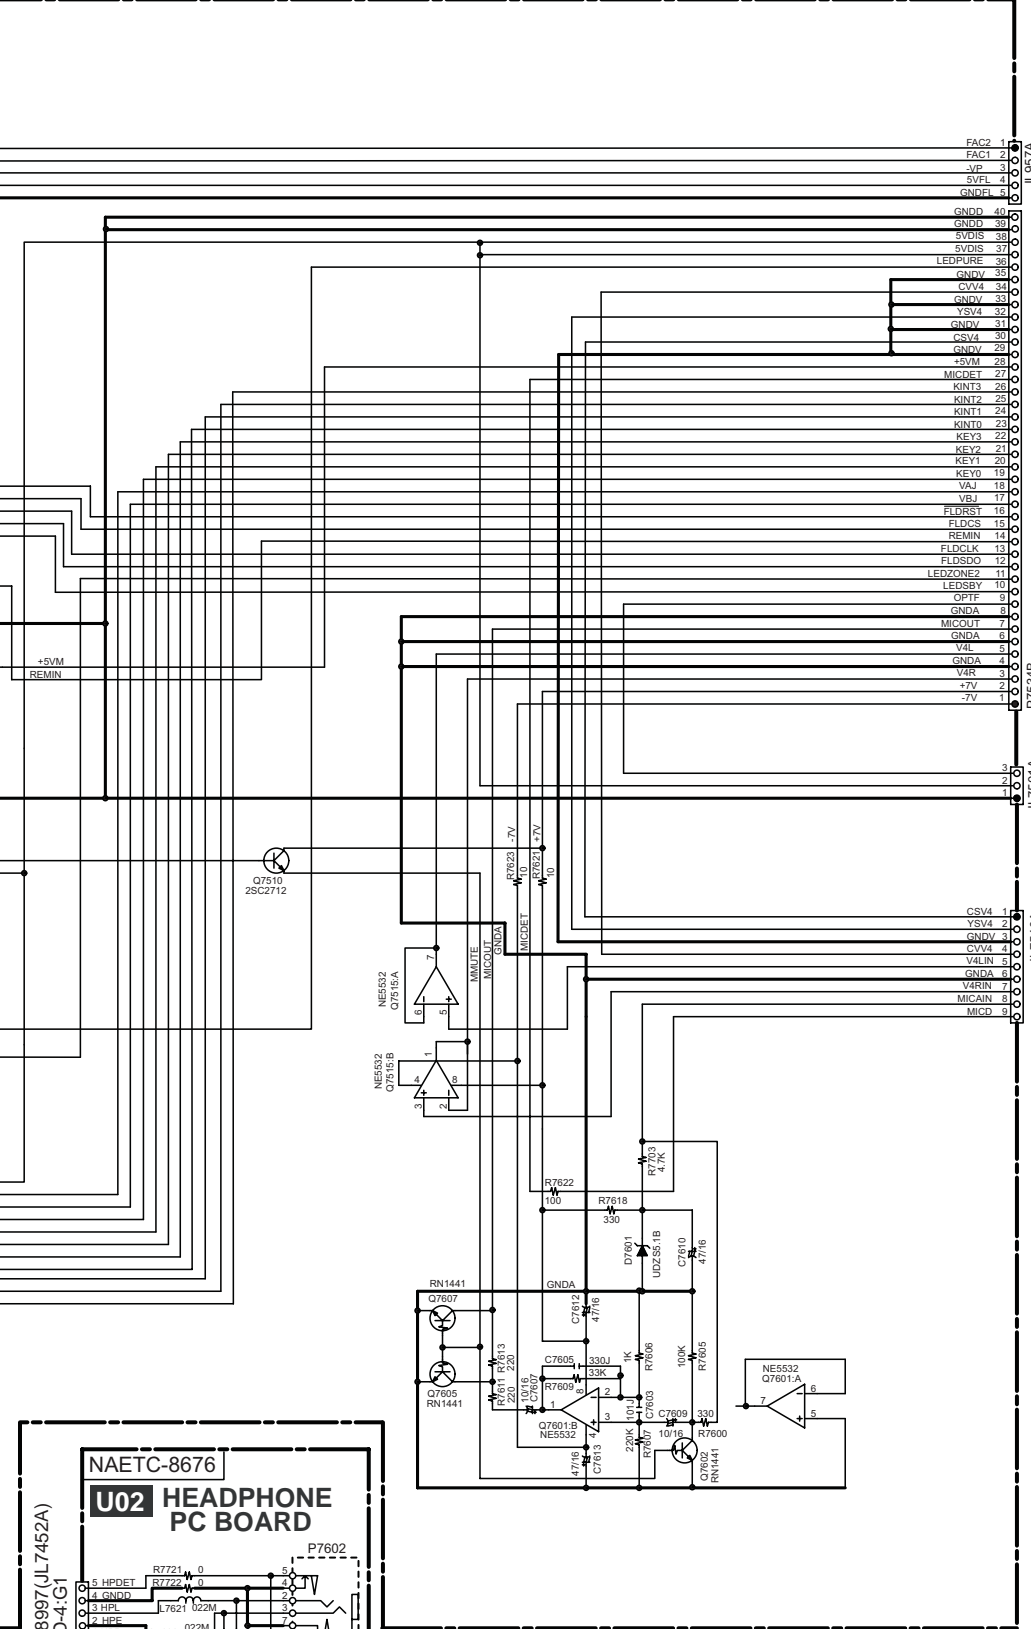

TO NAPS-9000
SD-8:D4

TO NAAR-8997
SD-4:C1

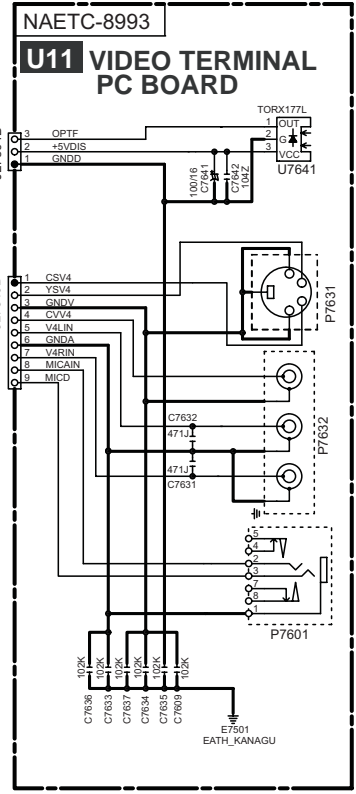

VIDEO 4
INPUT
(FRONT)

DIGITAL


S VIDEO

COMPOSITE
VIDEO

R
AUDIO

L


SETUP
MIC

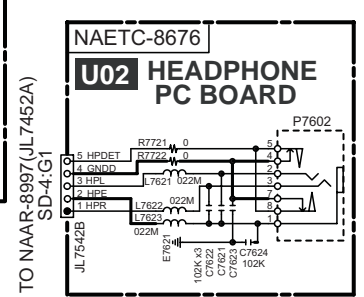

TO NAAR-8997 (JL7452A)
SD-4:G1

HEADPHONE

SCHEMATIC DIAGRAM-5 (SD-5) DISPLAY SECTION

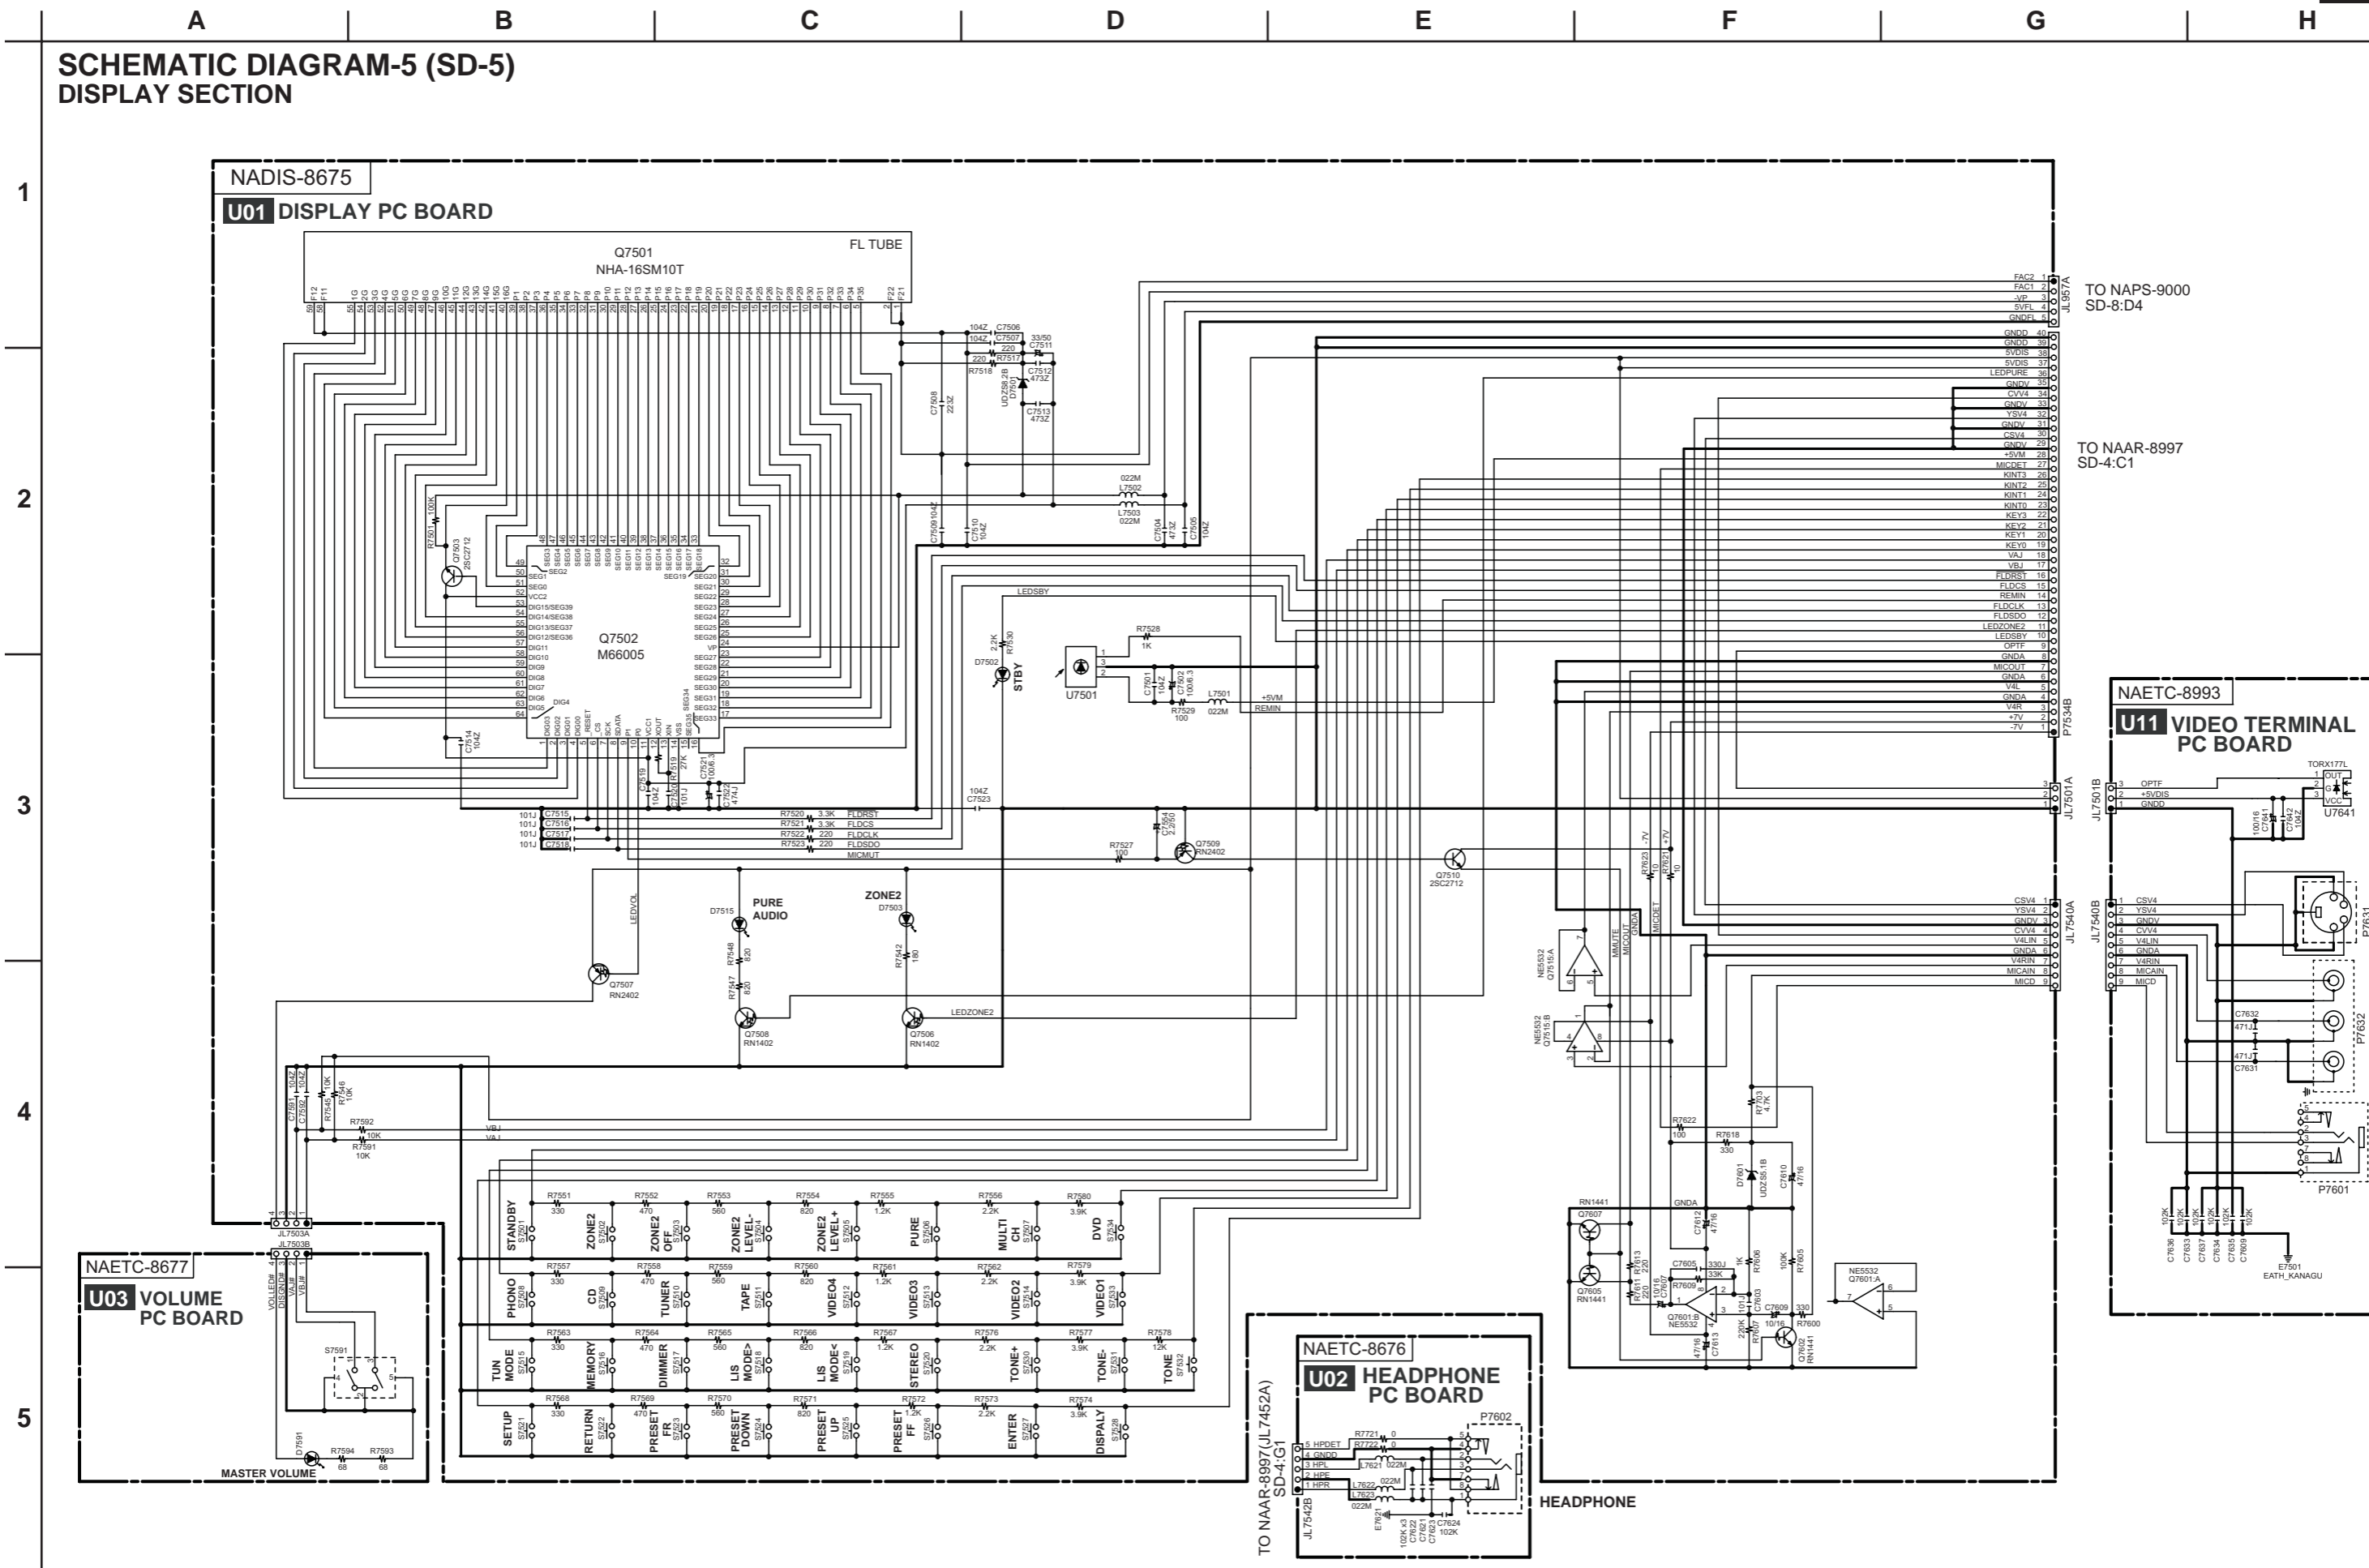

TO NAPS-9000 SD-8:D4

TO NAAR-8997 SD-4:C1

VIDEO 4 INPUT (FRONT)

DIGITAL

S VIDEO

COMPOSITE VIDEO

R AUDIO

L AUDIO


SETUP MIC

TO NAAR-8997 (JL7452A) SD-4:G1

HEADPHONE

TO NAVD-8824(1/2)
SD-10:B1

TO FLASH WRITER

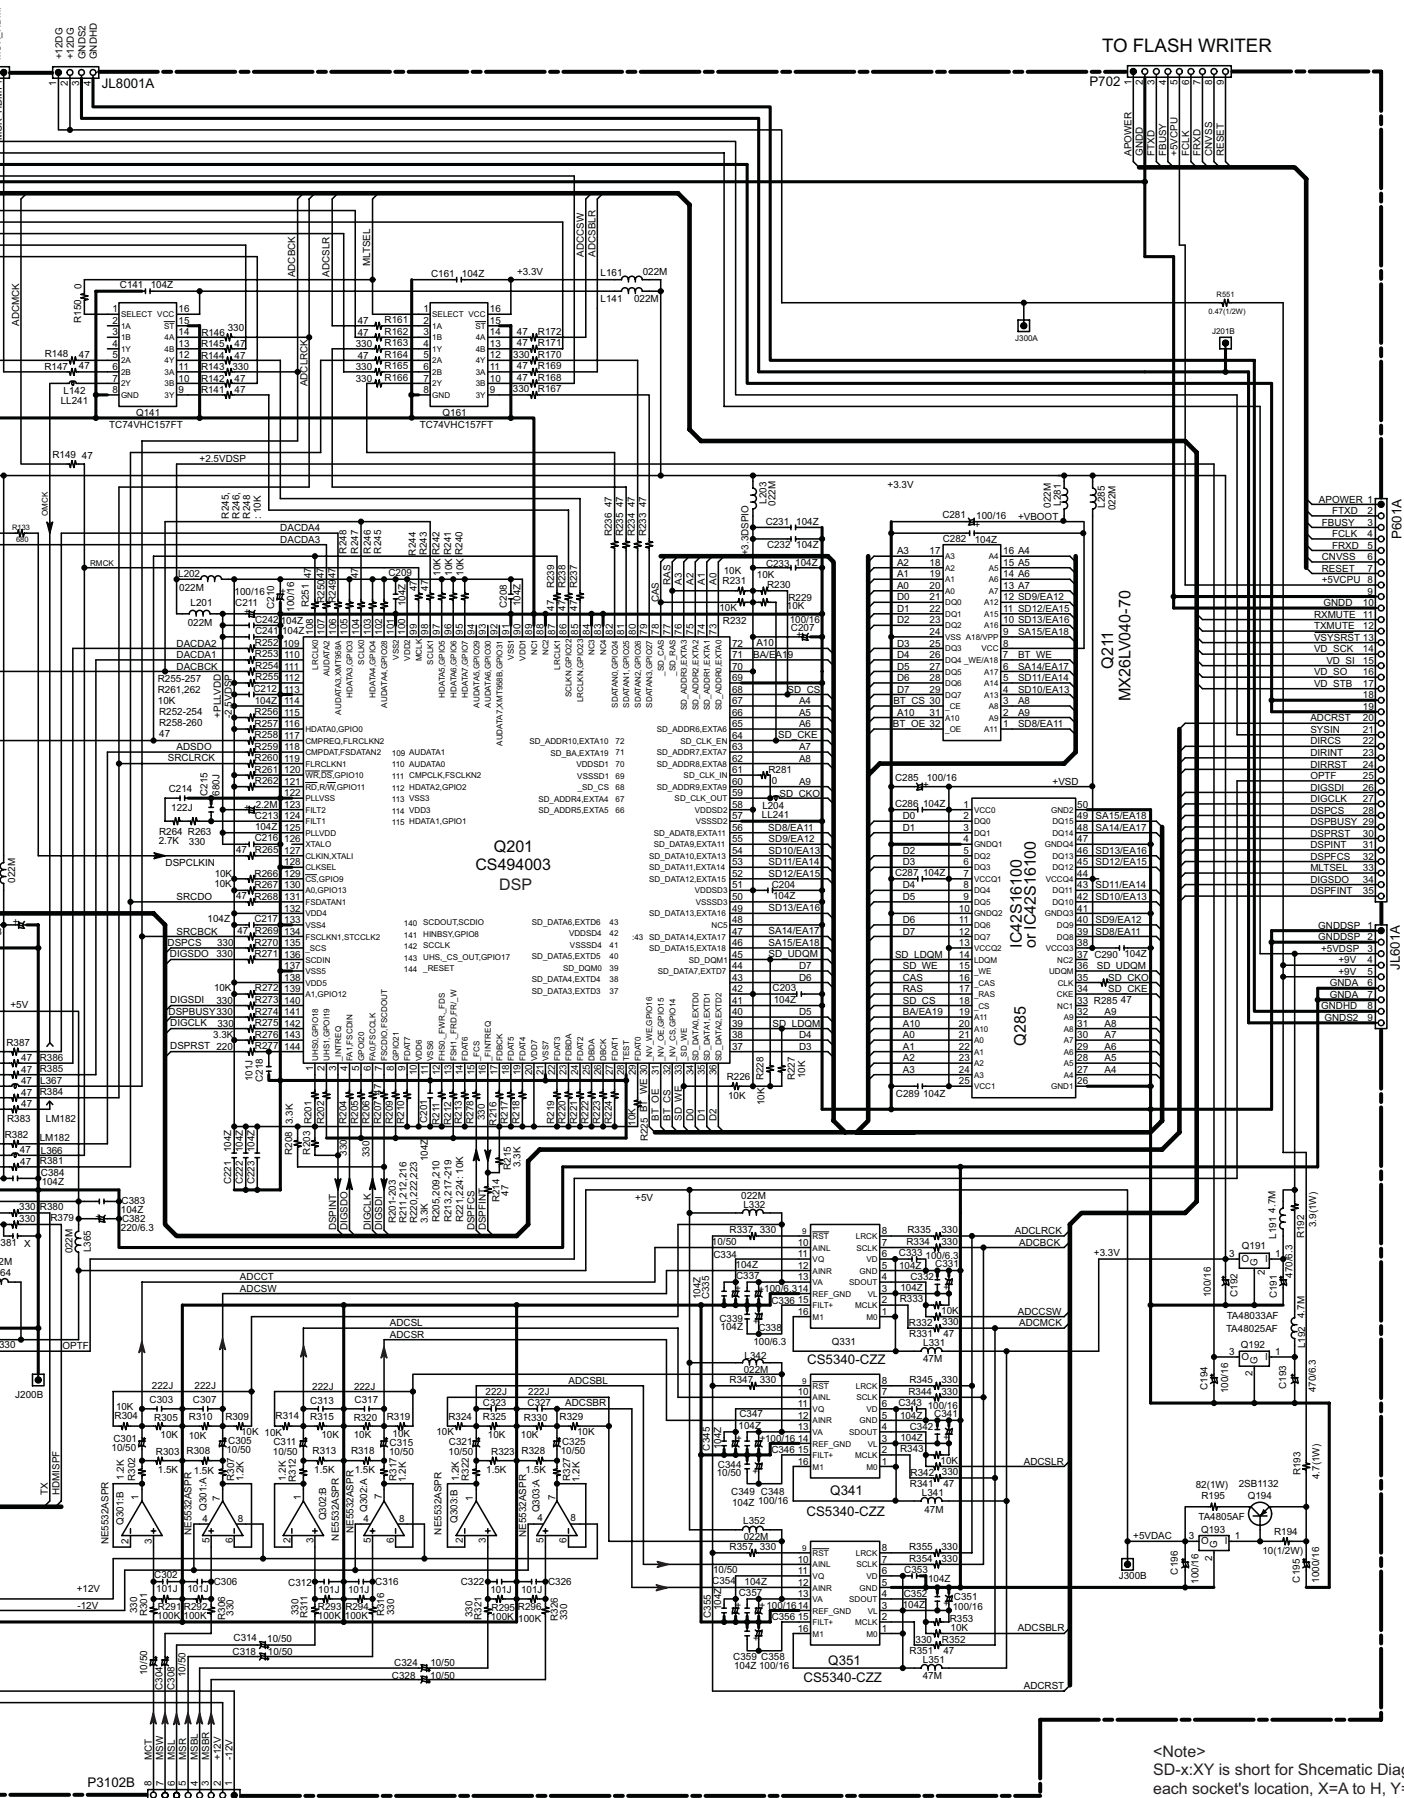


TO NAAR-8997
SD-4:A2

TO NAAR-8997
SD-4:A2

<Note>
SD-x:Y is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

TO NAAF-8678
SD-1:D1


SCHEMATIC DIAGRAM-6 (SD-6) DSP SECTION

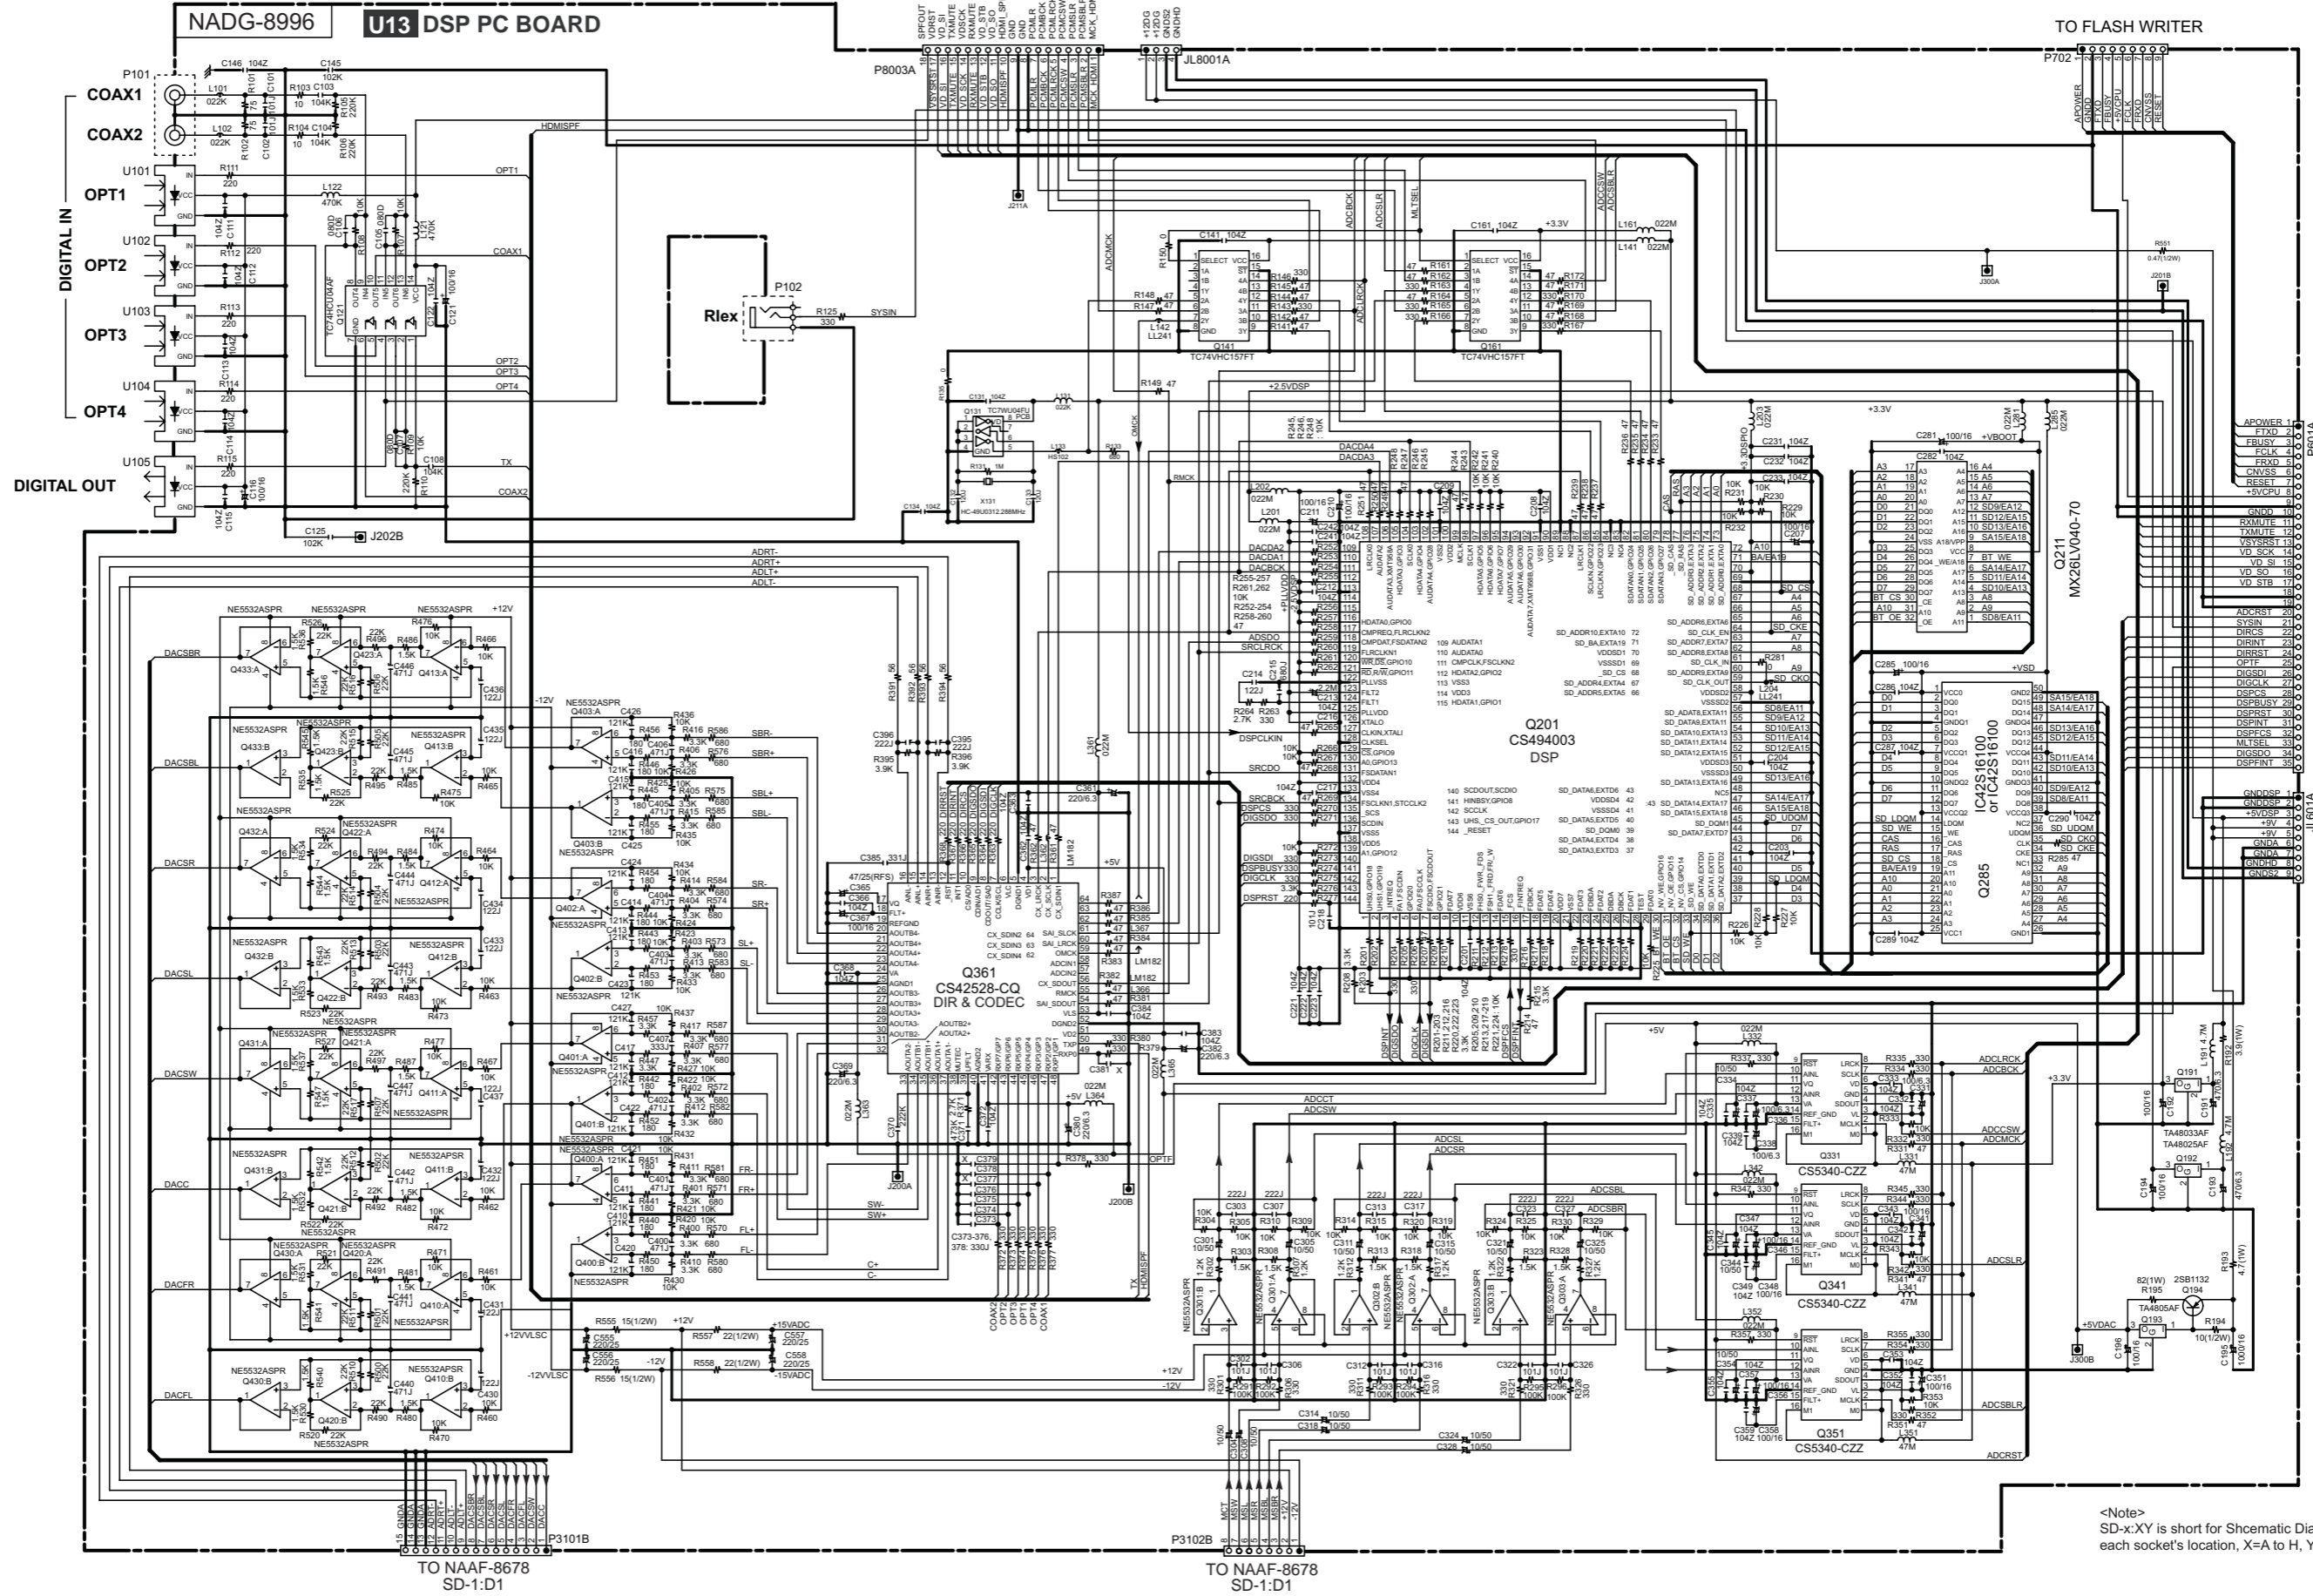

<Note>
SD-x:Y is short for Schematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.

SCHEMATIC DIAGRAM-7 (SD-7)
POWER SUPPLY SECTION

1

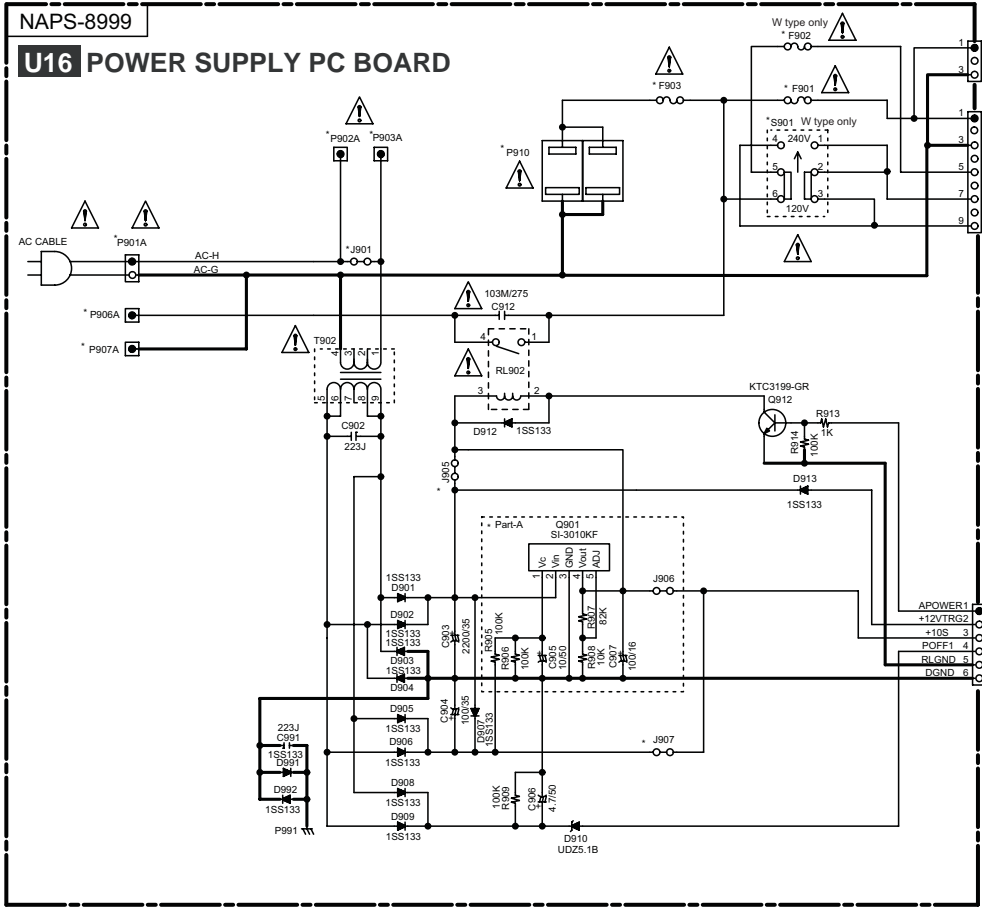

POWER SUPPLY VOLTAGE AND FREQ.

TYPE	AC
DC	AC120V-60Hz
PP_PA	AC230-240V-50/60Hz
G	AC220-230V-50/60Hz
WT	AC120V/220-230V

2

3

4




CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.





ATTENTION
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.



THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD. REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.



CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT. E POUR UNE PROTECTION PERMANENTE. N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

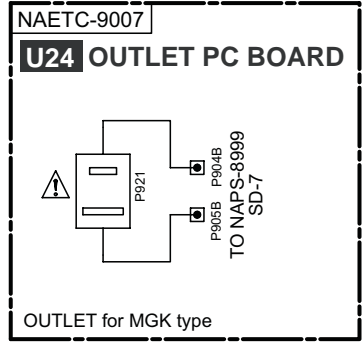



5

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN $\mu F/WV$.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033 μF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Destination table(1/2)

		P901A	NASW-9004 P902A P903A	J901	J905	Part_A S901 F902	J907	P910	F901	F902	F903	POWER TRANS T902
A	TX-SR804	MDC	o	x	o	x	o	2out	12A/250V	x	5A/125V	NPT-1520JQ
B	TX-SR804	MPA	o	x	o	x	o	1out	T5AL250V	x	T2.5AL250V	NPT-1519GQ
C	TX-SR804	MWT	o	o	x	x	o	2out	T5AL250V	T5AL250V	T2.5AL250V	NPT-1519JQ
D	TX-SR804	MGR	o	o	x	x	o	x	T5AL250V	x	T2.5AL250V	NPT-1519GQ
E	TX-SR804	MGR	o	o	x	x	o	1out	T5AL250V	x	T2.5AL250V	NPT-1519GQ
F	TX-SR804E	MPP	o	o	x	x	o	2out	T5AL250V	x	T2.5AL250V	NPT-1519GQ
J	TX-SR804	MGQ	o	o	x	x	o	2out	T5AL250V	x	T2.5AL250V	NPT-1519GQ

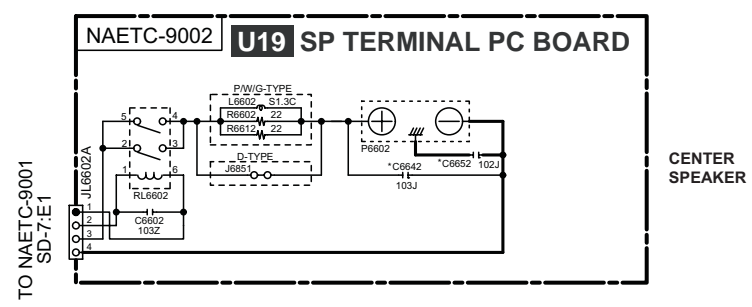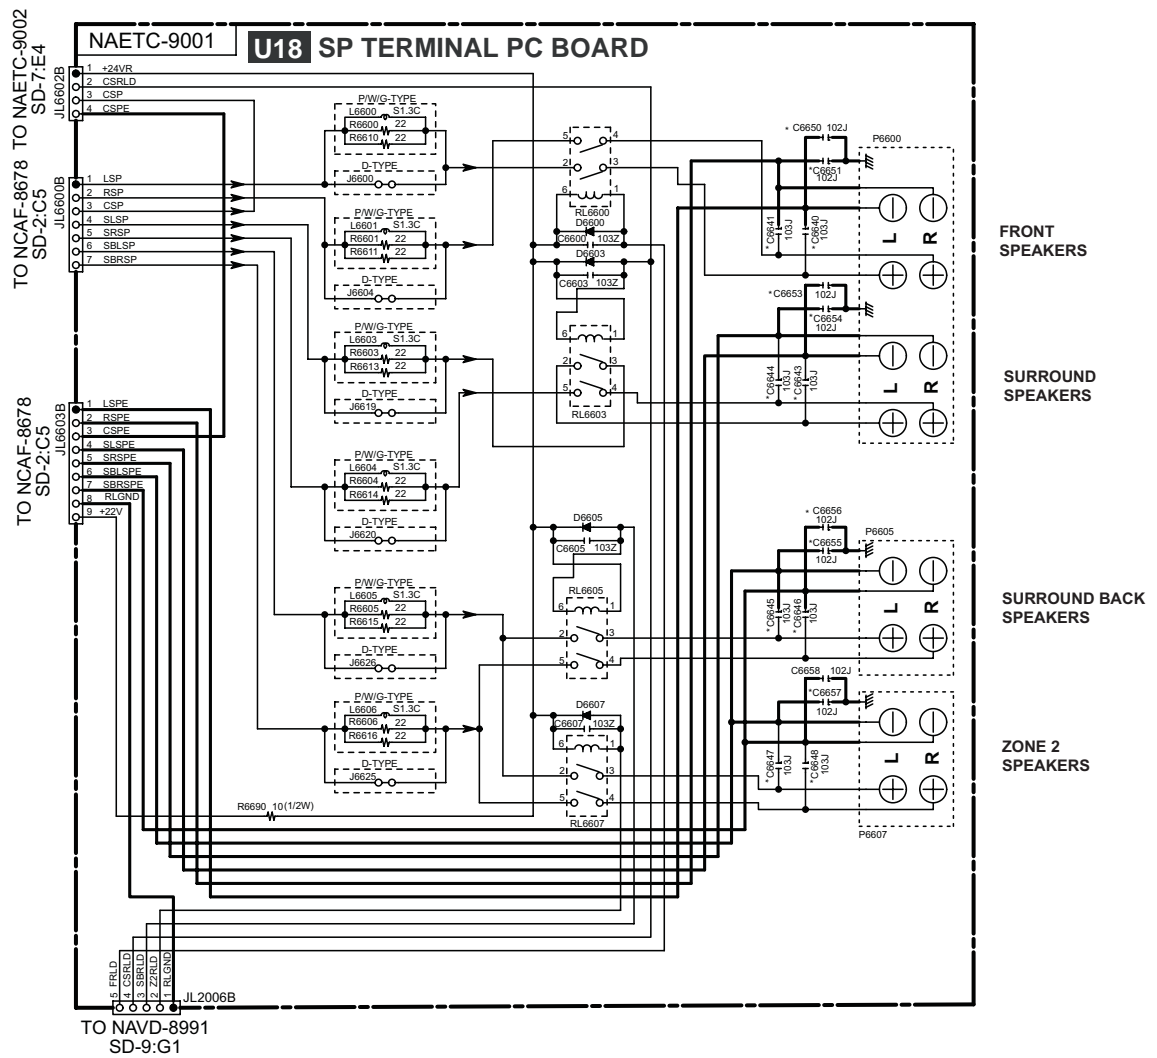


Destination table(2/2)

		L6600-6606 R6600-6606 R6610-6616	J6600 J6626 J6604 J6625 J6619 J6651 J6620	C6650 C6655 C6651 C6656 C6653 C6657 C6654 C6658 C6652	C6640 C6645 C6641 C6646 C6643 C6647 C6644 C6648 C6642
A	TX-SR804	MDC	X	O	X
B		MPA	O	X	102J 103J
C		MWT	O	X	102J 103J
D		MGK	O	X	102J 103J
E		MGR	O	X	102J 103J
F	TX-SR804E	MPP	O	X	102J 103J
J	TX-SR804	MGQ	O	X	102J 103J

**SCHEMATIC DIAGRAM-7 (SD-7)
POWER SUPPLY SECTION**



POWER SUPPLY VOLTAGE AND FREQ.

TYPE	AC
DC	AC120V-60Hz
PP,PA	AC230-240V-50/60Hz
G	AC220-230V-50/60Hz
WT	AC120V/220-230V

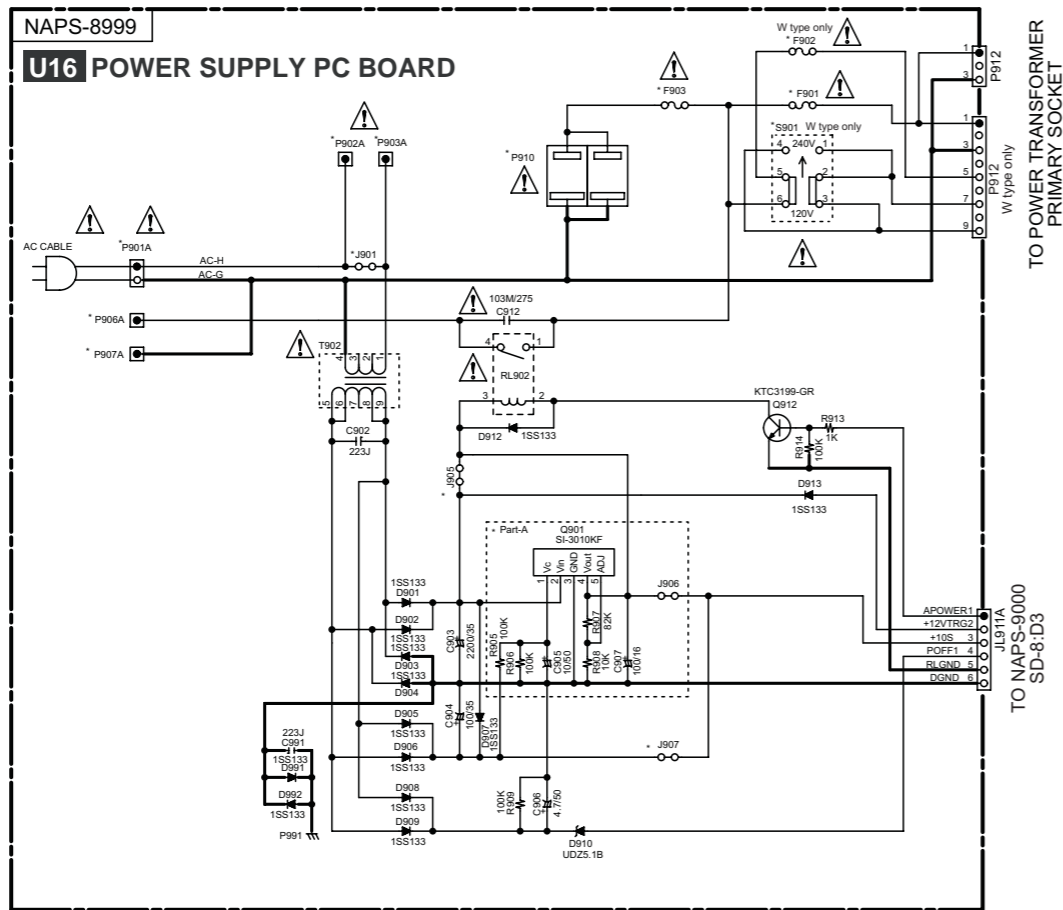

TO POWER TRANSFORMER
PRIMARY SOCKET

TO NAPS-9000
SD-8:D3

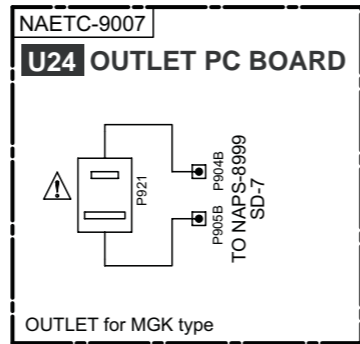

CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

ATTENTION
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.


THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD. REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT. E POUR UNE PROTECTION PERMANENTE, UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DERNIER EST INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
 - ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
 - EX) 030-3pF 330-33pF 331-330pF 333-0.033uF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
 - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
 - EX) PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Destination table(1/2)

		P901A	NASW-9004 P902A P903A	J901	J905	Part_A S901 F902	J907	P910	F901	F902	F903	POWER TRANS T902	
A	TX-SR804	MDC	X	O	O	X	O	2out	12A/250V	X	5A/125V	NPT-1520JQ	
B		MPA	X	O	O	X	O	1out	T5AL250V	X	T2.5AL250V	NPT-1519GQ	
C		MWT	O	O	X	X	O	X	2out	T5AL250V	T5AL250V	T2.5AL250V	NPT-1519JQ
D		MGK	O	O	X	O	X	O	1out	T5AL250V	X	T2.5AL250V	NPT-1519GQ
E		MGR	O	O	X	O	X	O	1out	T5AL250V	X	T2.5AL250V	NPT-1519GQ
F	TX-SR804E	MPP	O	O	X	O	X	2out	T5AL250V	X	T2.5AL250V	NPT-1519GQ	
J		MGQ	O	O	X	O	X	2out	T5AL250V	X	T2.5AL250V	NPT-1519GQ	

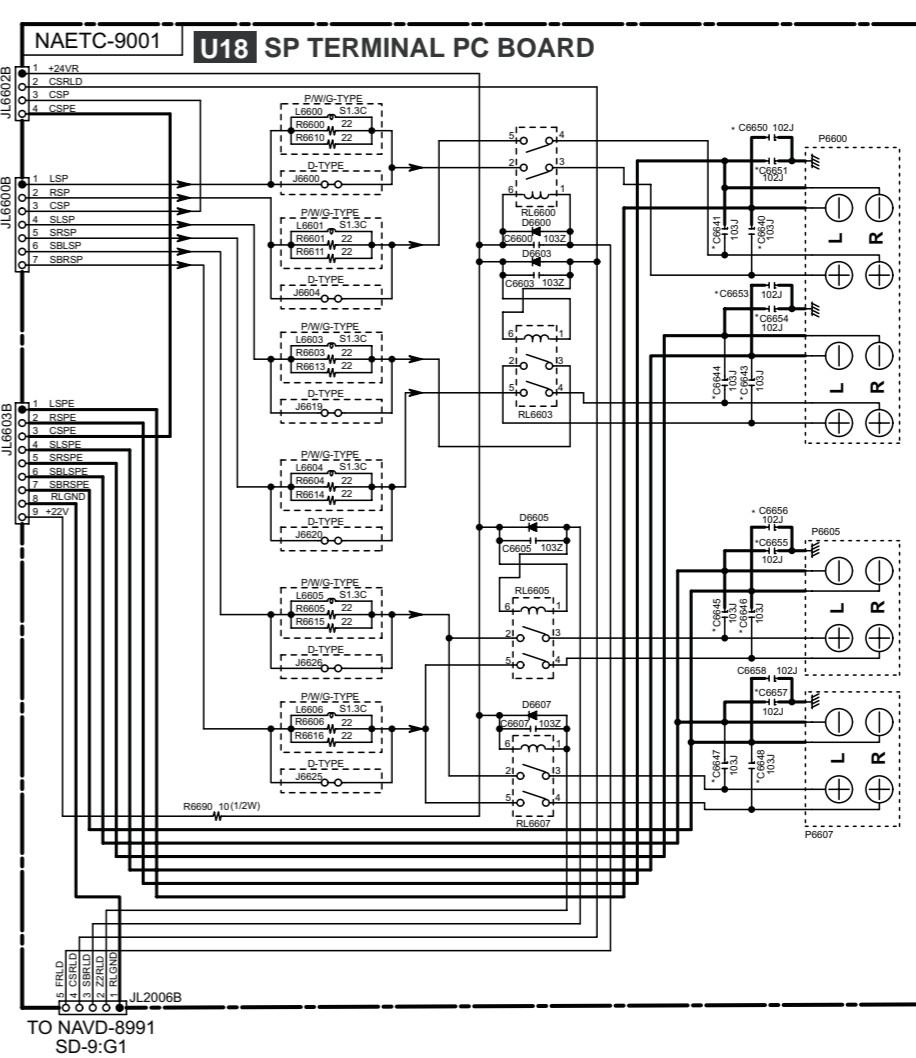


FRONT SPEAKERS

SURROUND SPEAKERS

SURROUND BACK SPEAKERS

ZONE 2 SPEAKERS

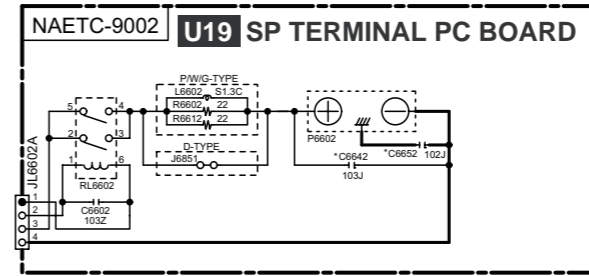

CENTER SPEAKER

Destination table(2/2)

		L6600-6606 R6600-6606 R6610-6616	J6600 J6604 J6619 J6620	J6626 J6625 J6651	C6650 C6651 C6653 C6654	C6655 C6656 C6657 C6658	C6640 C6641 C6643 C6644	C6645 C6646 C6647 C6648
A	TX-SR804	MDC	X	O	X	X	X	X
B		MPA	O	X	102J	103J		
C		MWT	O	X	102J	103J		
D		MGK	O	X	102J	103J		
E		MGR	O	X	102J	103J		
F		TX-SR804E	MPP	O	X	102J	103J	
J	MGQ		O	X	102J	103J		

SCHEMATIC DIAGRAM-8 (SD-8) POWER SUPPLY SECTION


1

2

3

4

5

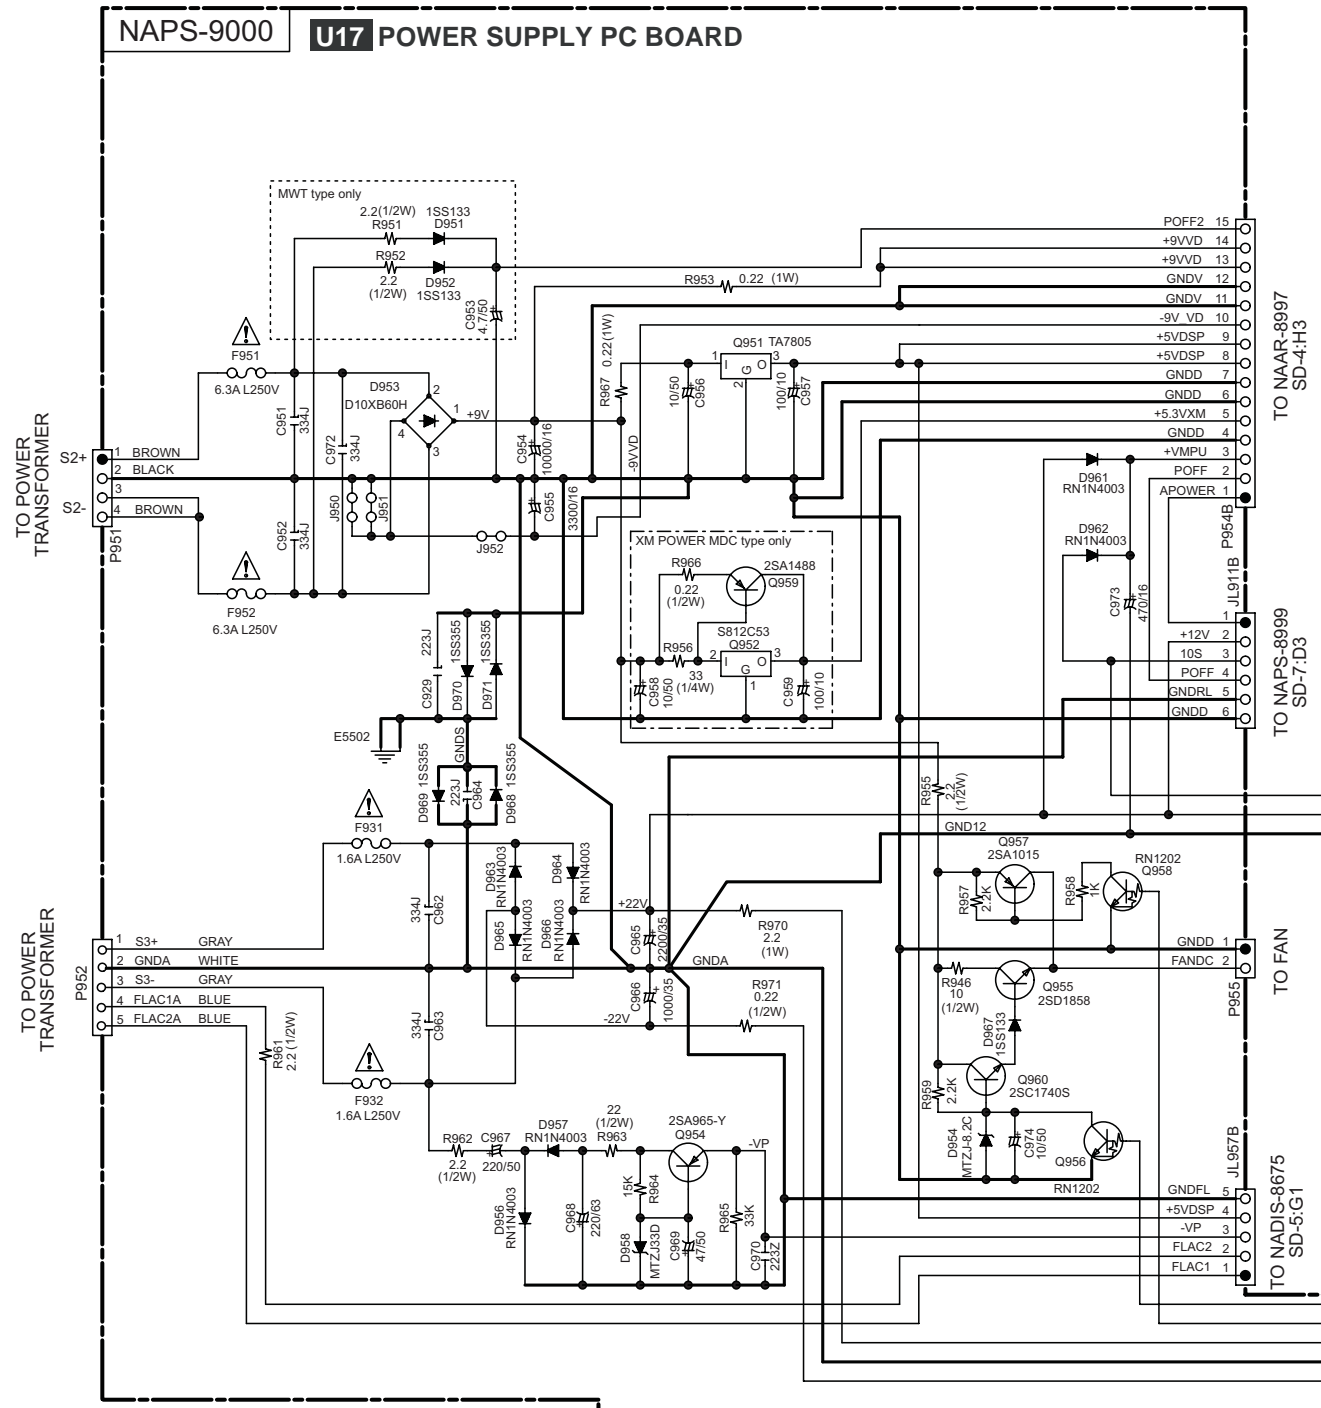

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030-3pF 330-33pF 331-330pF 333-0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

E

F

G


H

SD-4:H3

SD-7:L3

SD-3:J1

SD-3:J1

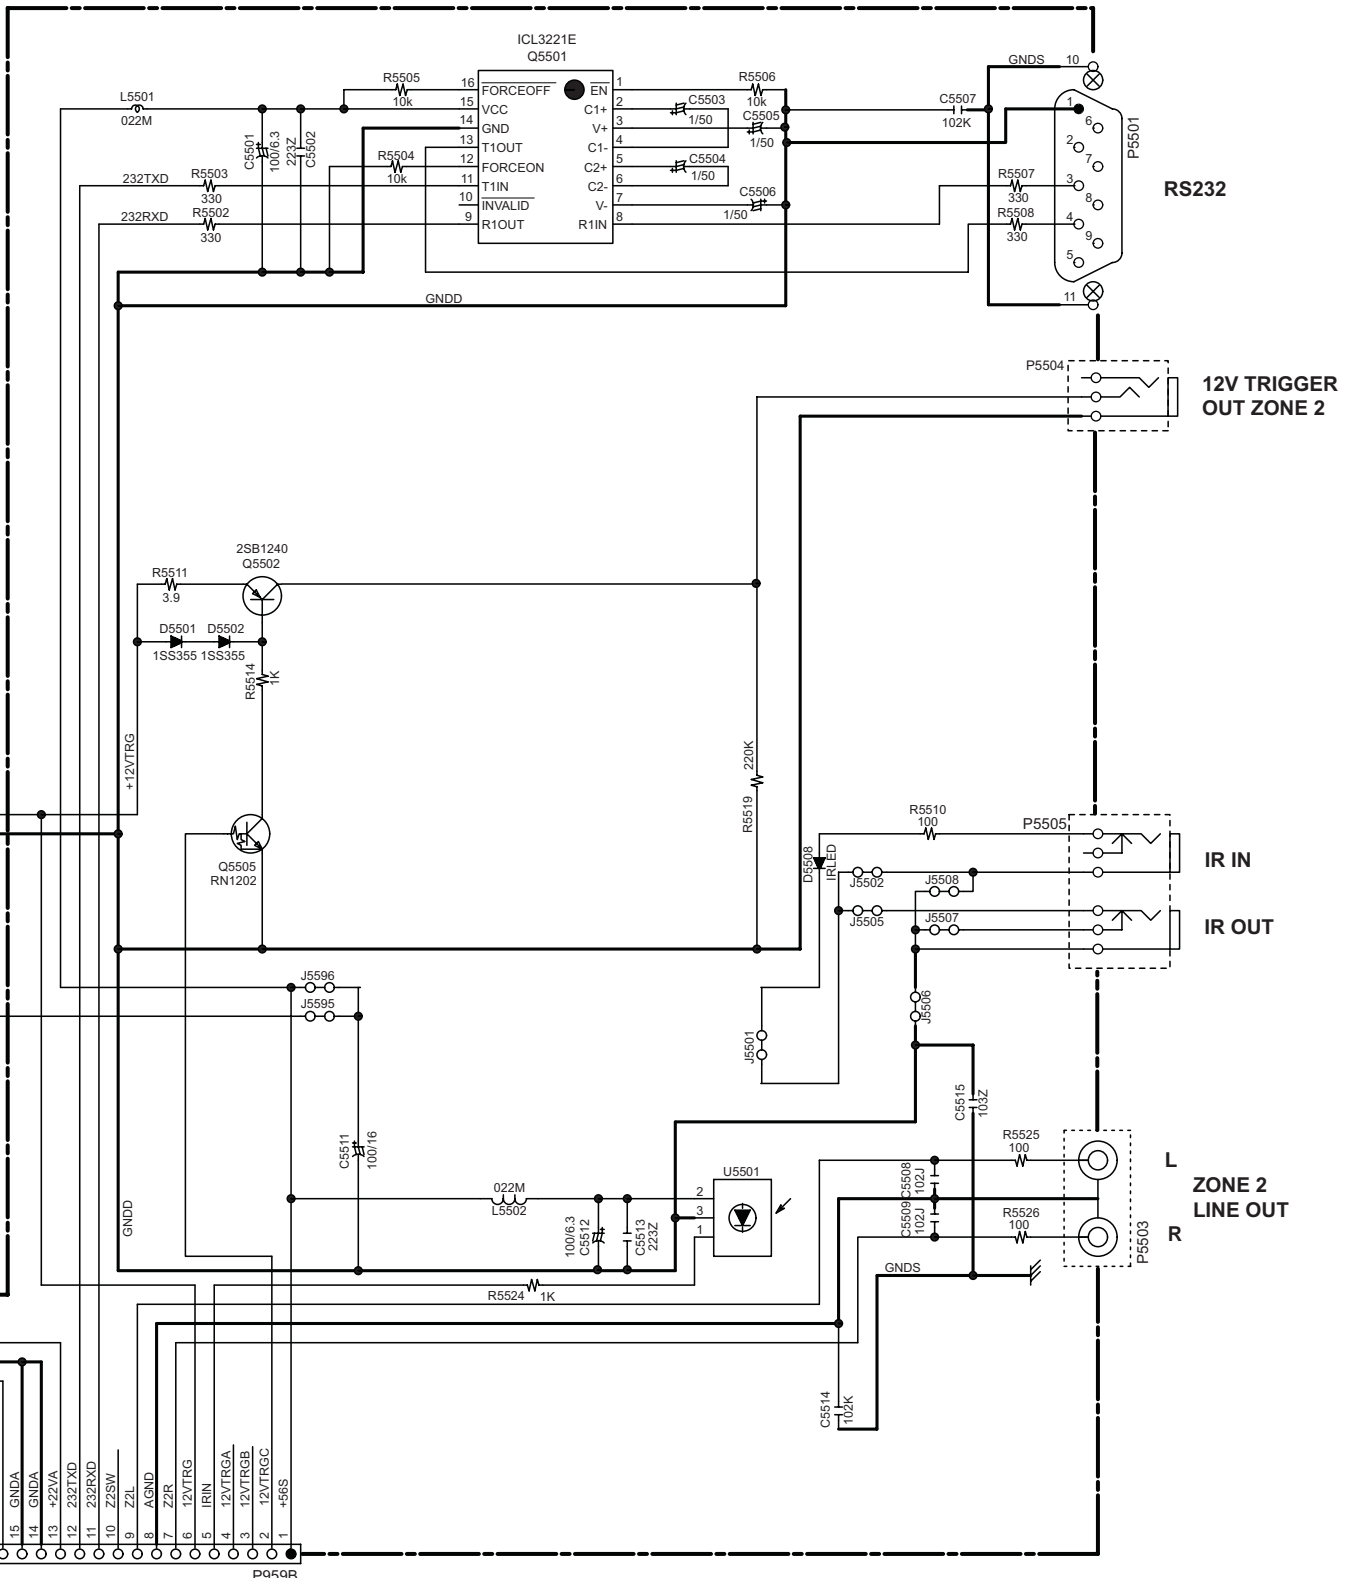

TO NAAR-8997
SD-4:H2

RS232


12V TRIGGER
OUT ZONE 2

IR IN

IR OUT

L
ZONE 2
LINE OUT
R

SCHEMATIC DIAGRAM-8 (SD-8)
POWER SUPPLY SECTION

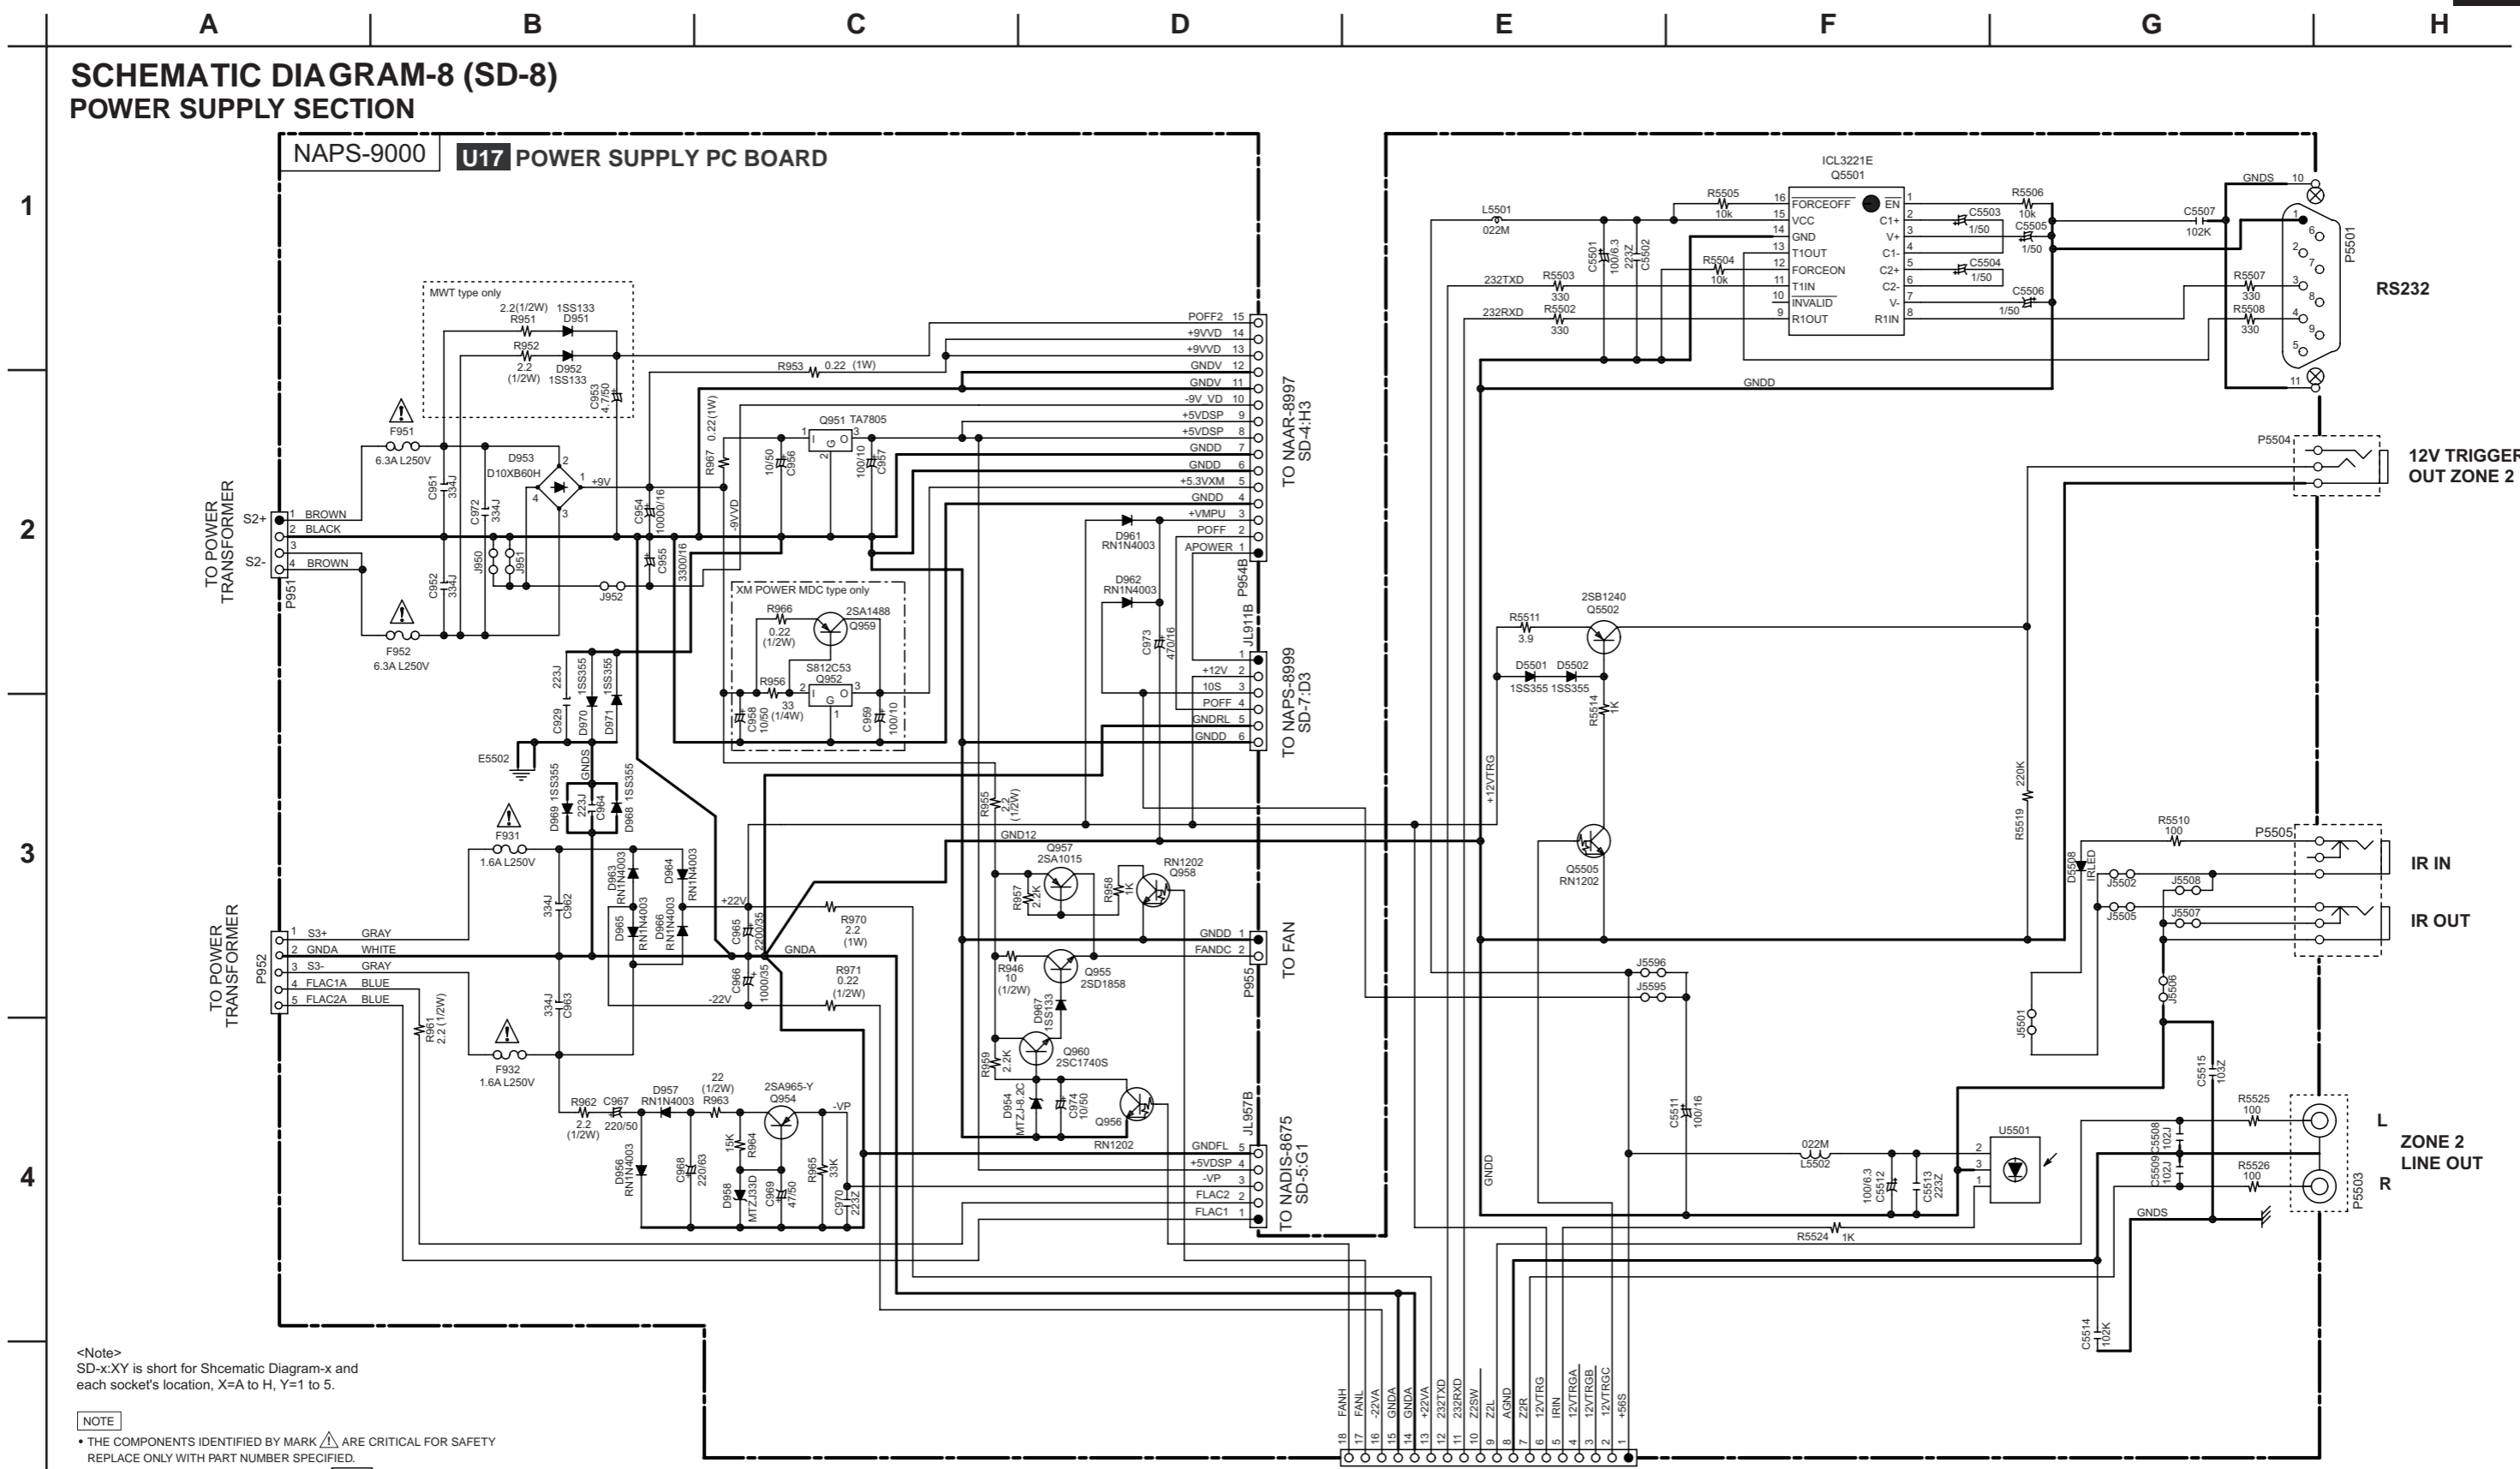

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNA)
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030-3pF 330-33pF 331-330pF 333-0.033uF
- ALL RESISTORS ARE IN OHMS 1/4Watts UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

1


2

3

4

5

A B C D E F G H

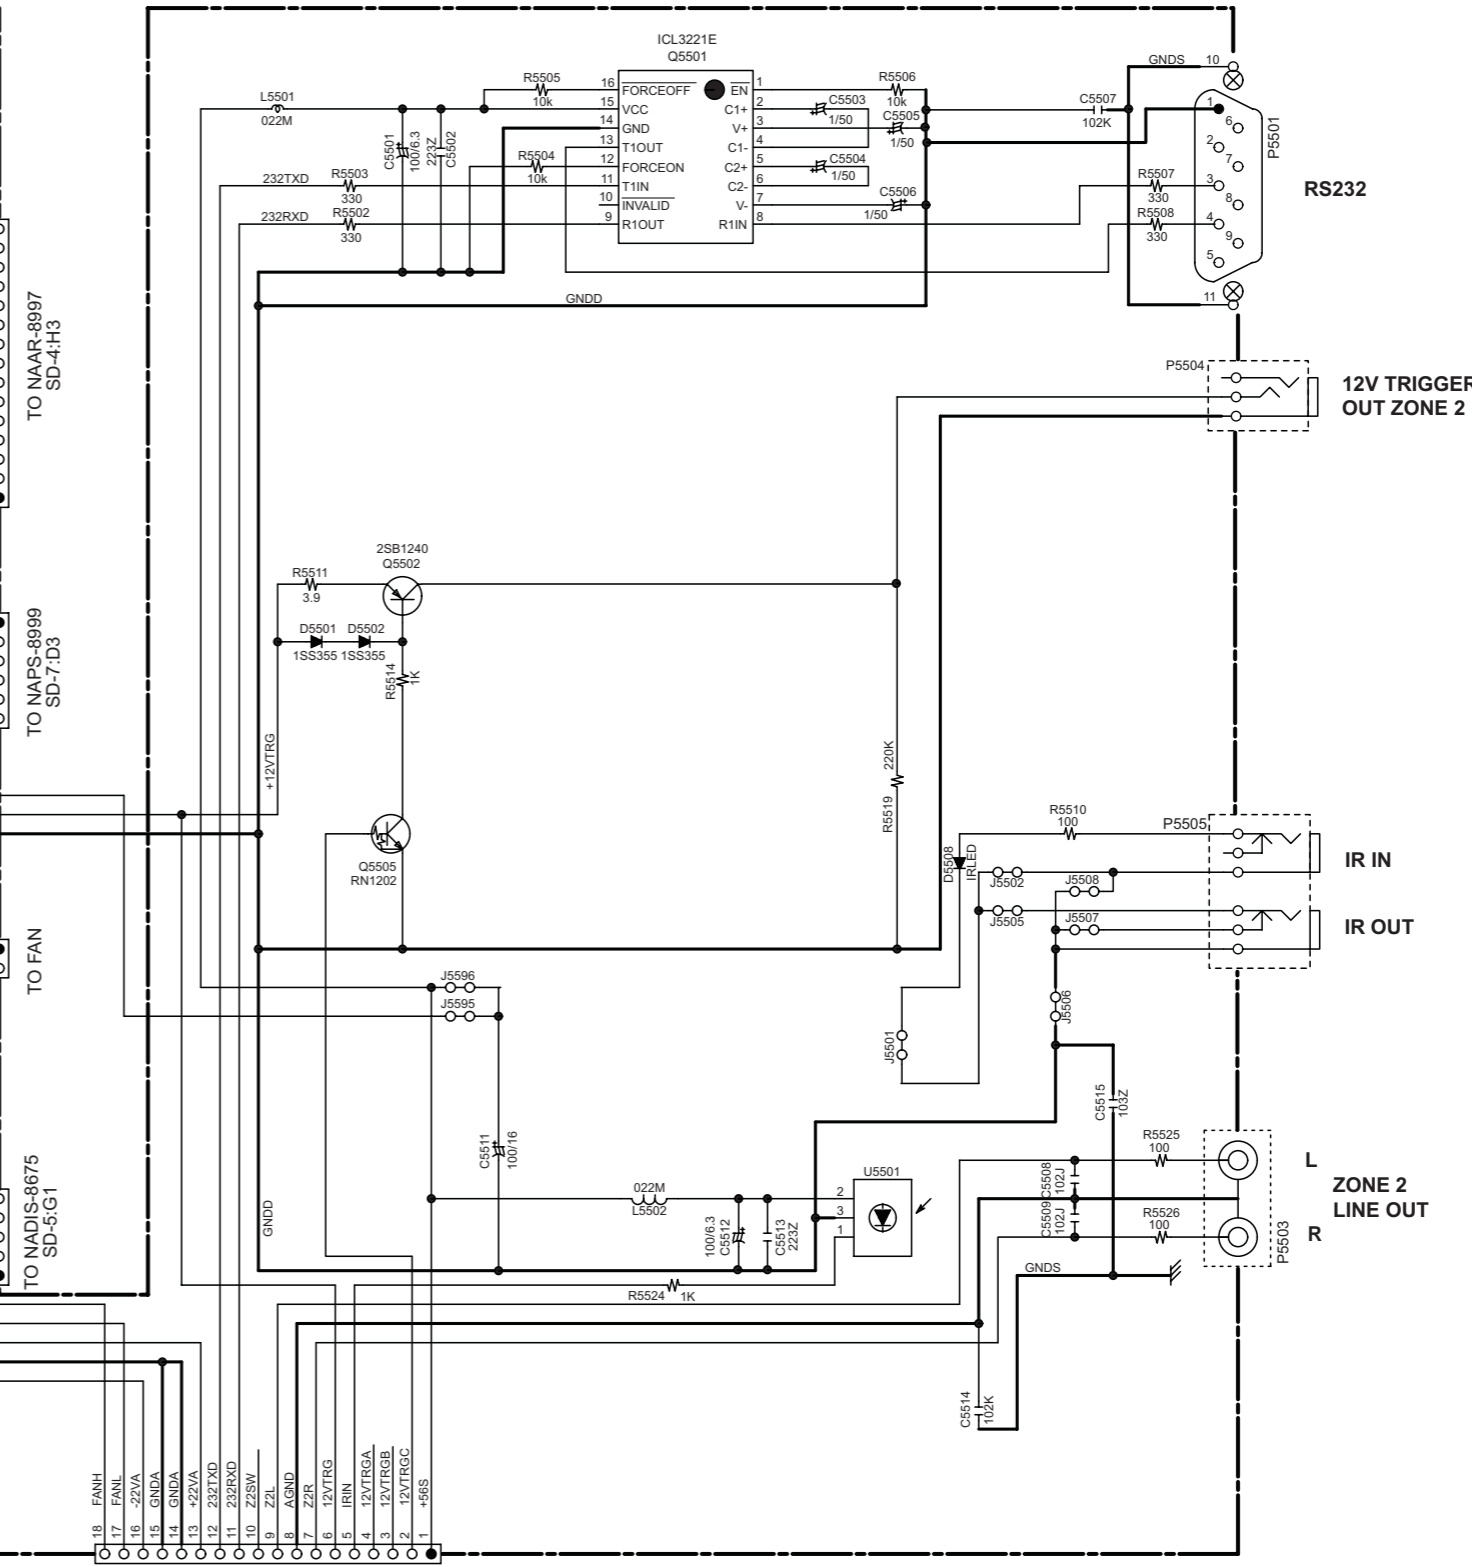

TO NAAR-8997 SD-4:H3

TO NAAR-8997 SD-4:H2

TO NAPS-8999 SD-7:D3

TO NAPS-8999 SD-7:D3

TO FAN FANDC 2

TO NADIS-8675 SD-5:G1

TO NAAR-8997 SD-4:H2

ZONE 2 LINE OUT

A

B

C


D

SCHEMATIC DIAGRAM-9 (SD-9) VIDEO SECTION

NAVD-8991 U09 VIDEO PC BOARD


1

COMPONENT
VIDEO IN 3

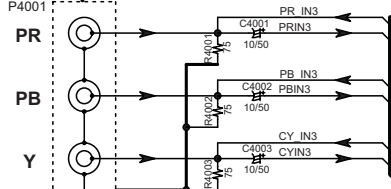


2

COMPONENT
VIDEO IN 2

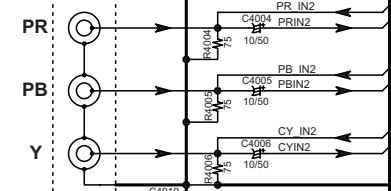


3

COMPONENT
VIDEO IN 1

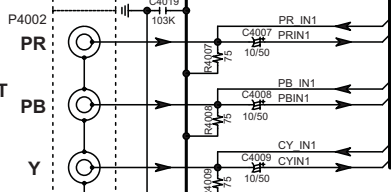


COMPONENT
VIDEO OUT

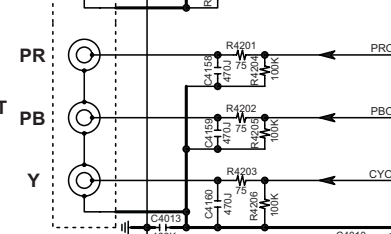


4


VIDEO 3 IN

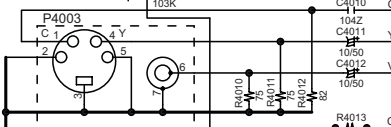


VIDEO 2 OUT




VIDEO 2 IN

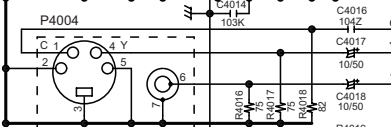


VIDEO 1 OUT

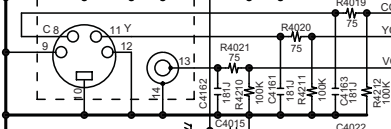

VIDEO 1 IN


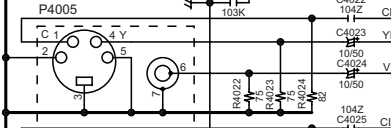


DVD IN

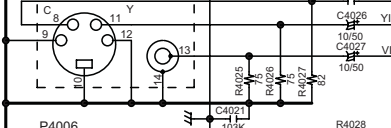


5

MONITOR
OUT

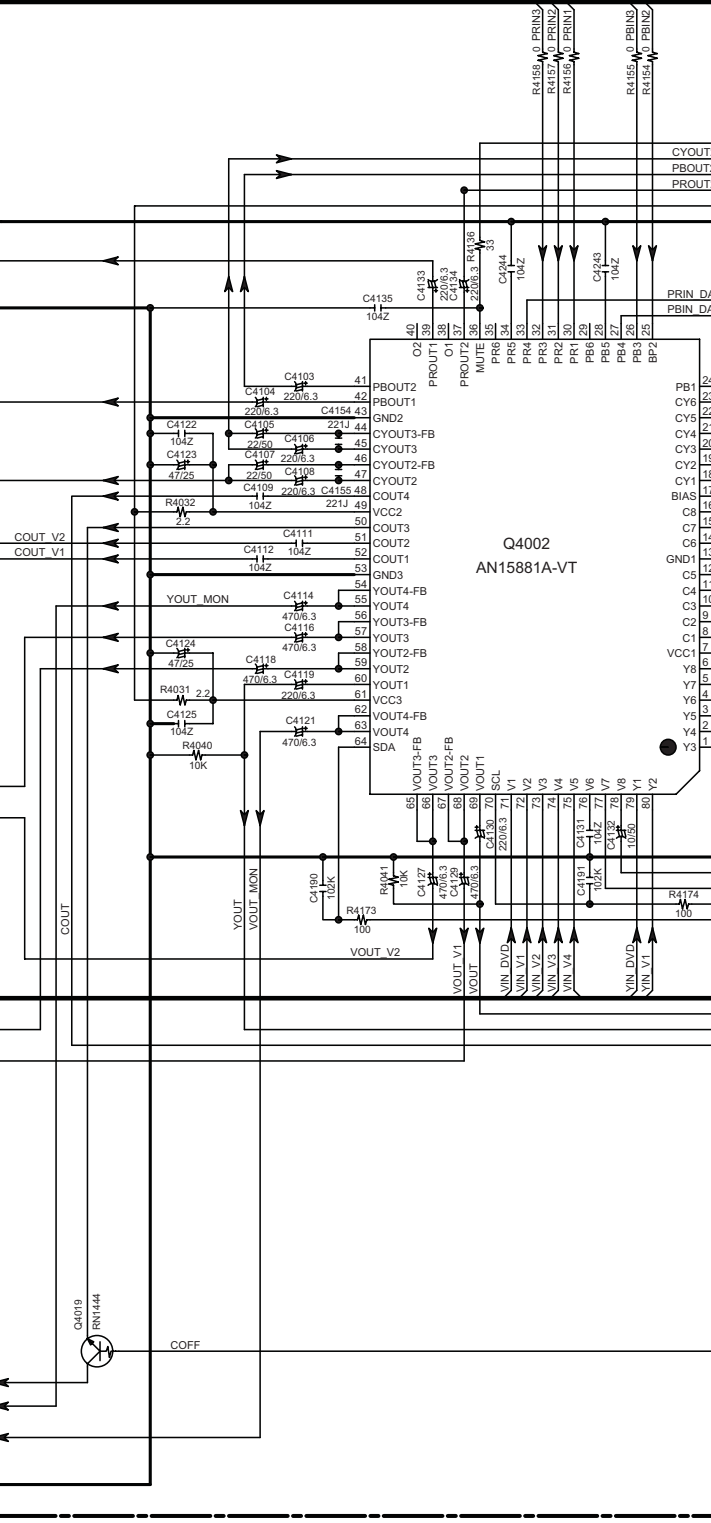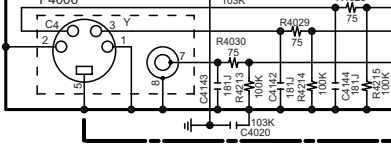

SCHEMATIC DIAGRAM-9 (SD-9)
VIDEO SECTION

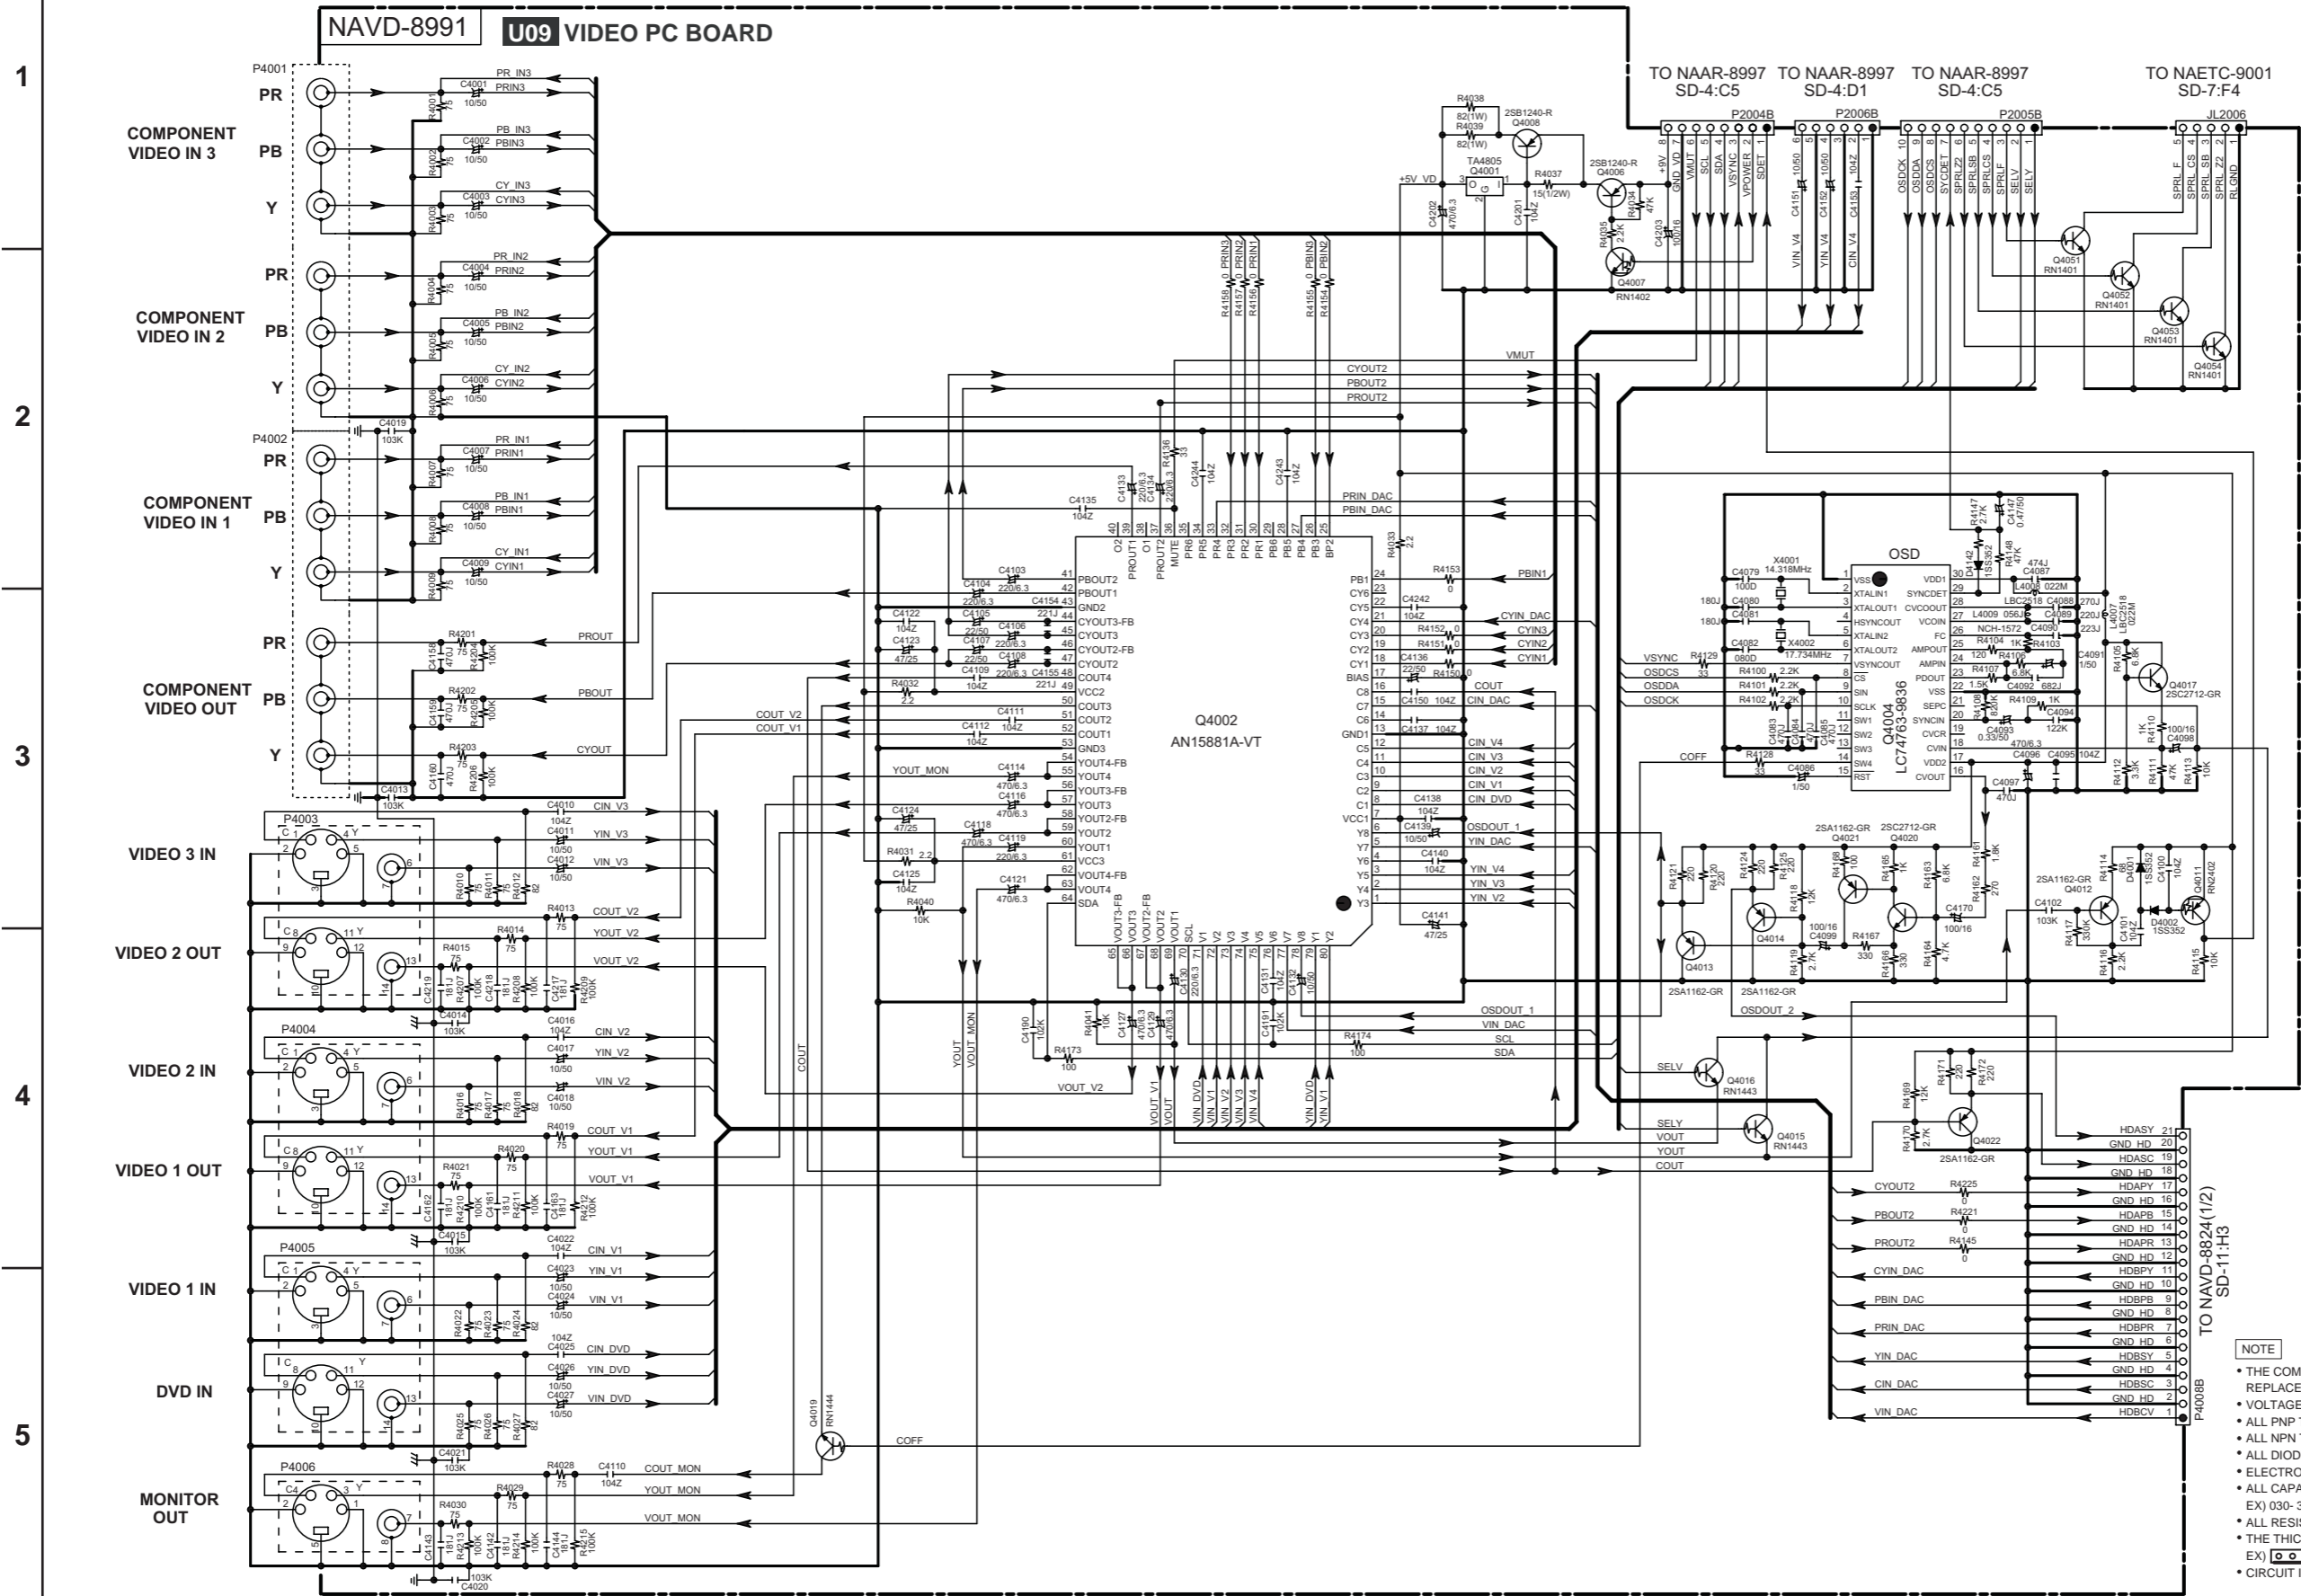

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
 - ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030-3pF 330-33pF 331-330pF 333-0.033uF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
EX) PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

A

B

C

D

SCHEMATIC DIAGRAM-10(SD-10)
HDMI SECTION-1

<Note>
SD-x:XY is short for Shcematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.

NAVD-8824(1/2)

U08 HDMI PC BOARD

TO NADG-8996 SD-6:E1

TO NADG-8996 SD-6:D1


TO HDMI SECTION-2
SD-11:H4

Q8593
SI-8008TM

HDMI IN1

HDMI IN2

Q8501
SII9033
HDMI Receiver

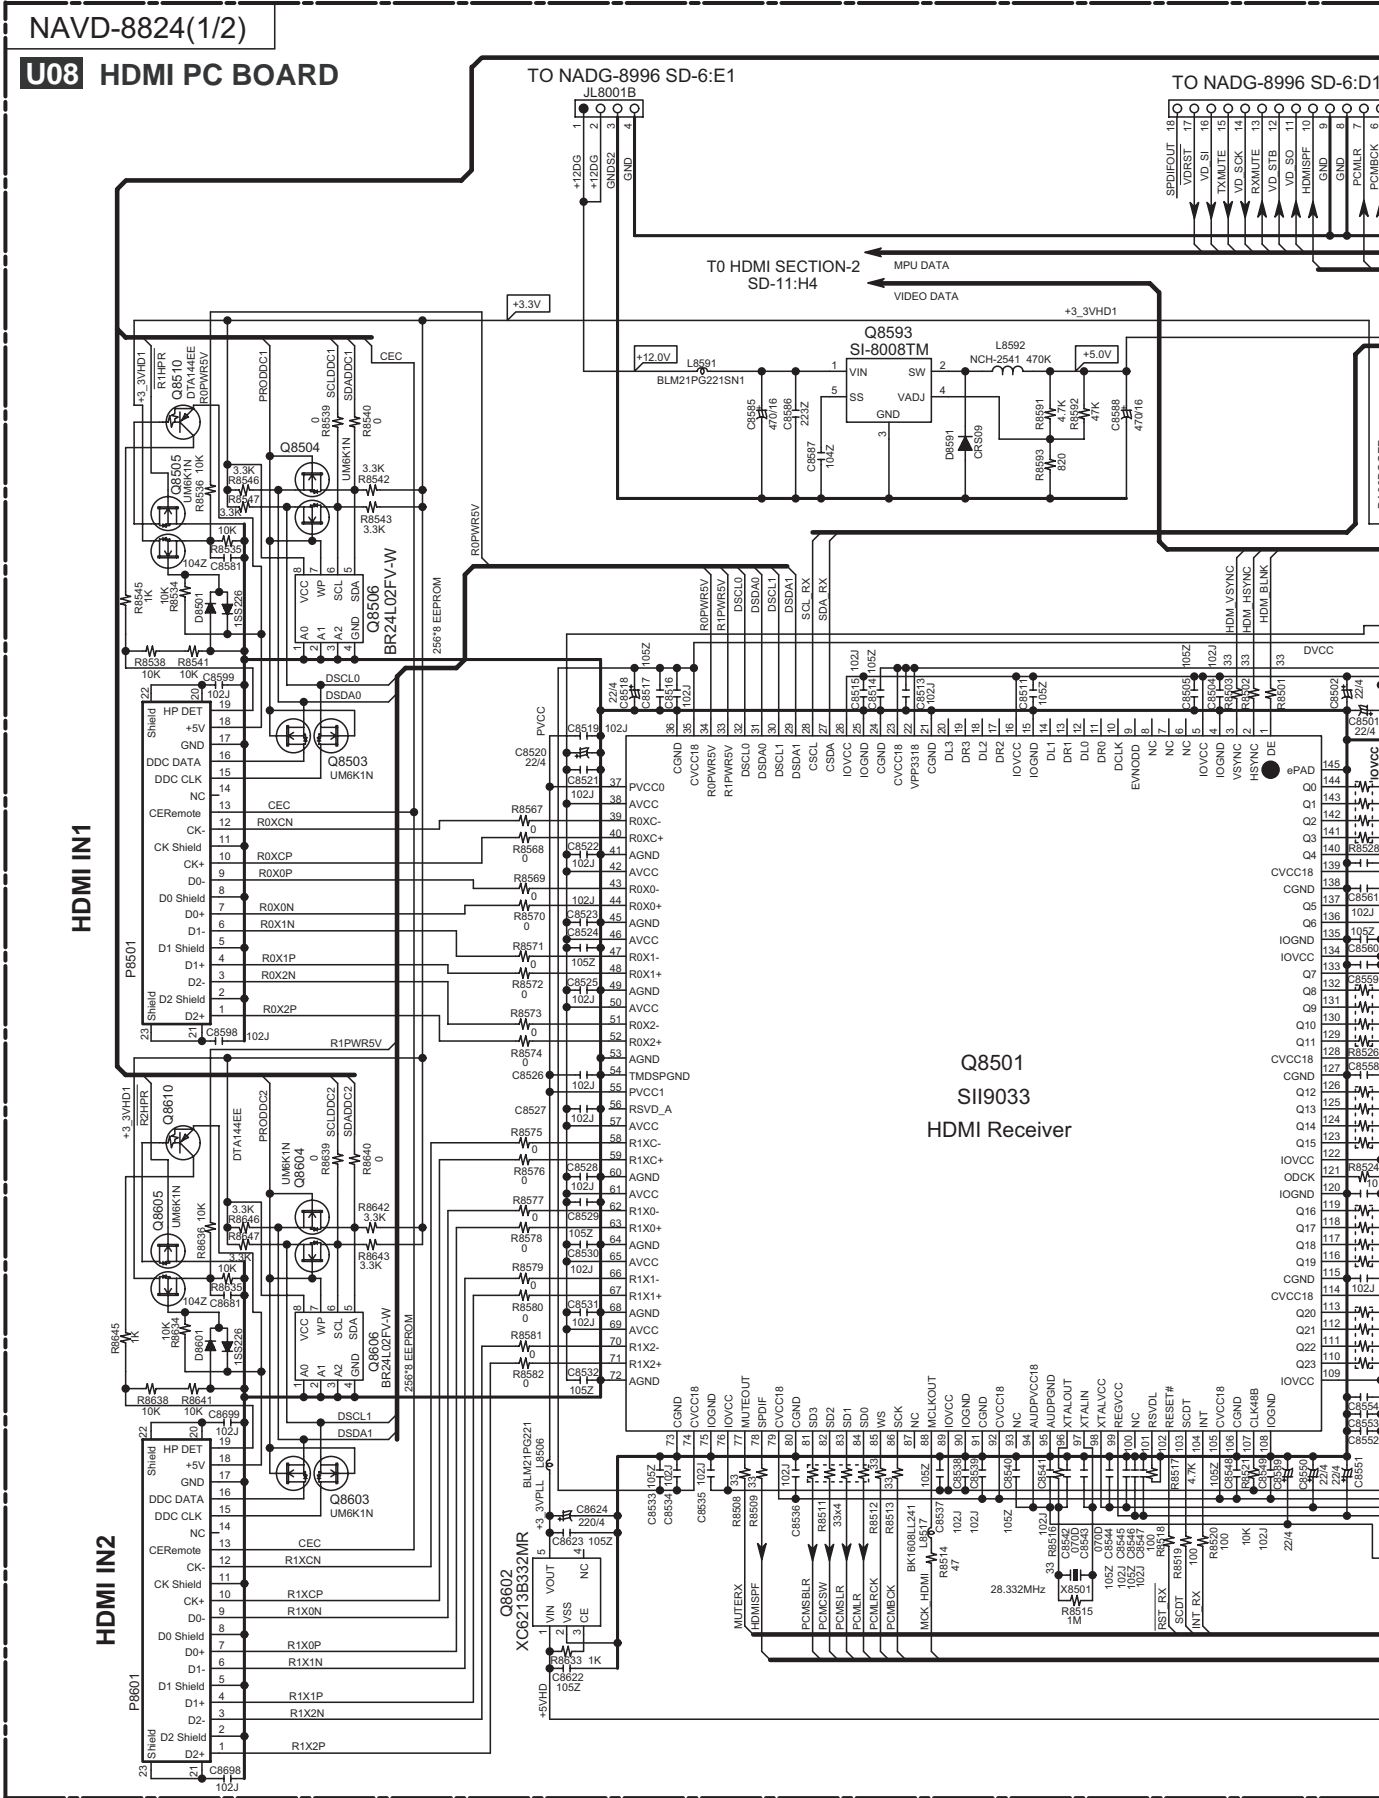

1

2

3

4

5

SCHEMATIC DIAGRAM-10(SD-10) HDMI SECTION-1

<Note>
SD-x:XY is short for Schematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.


1

2

3

4

5

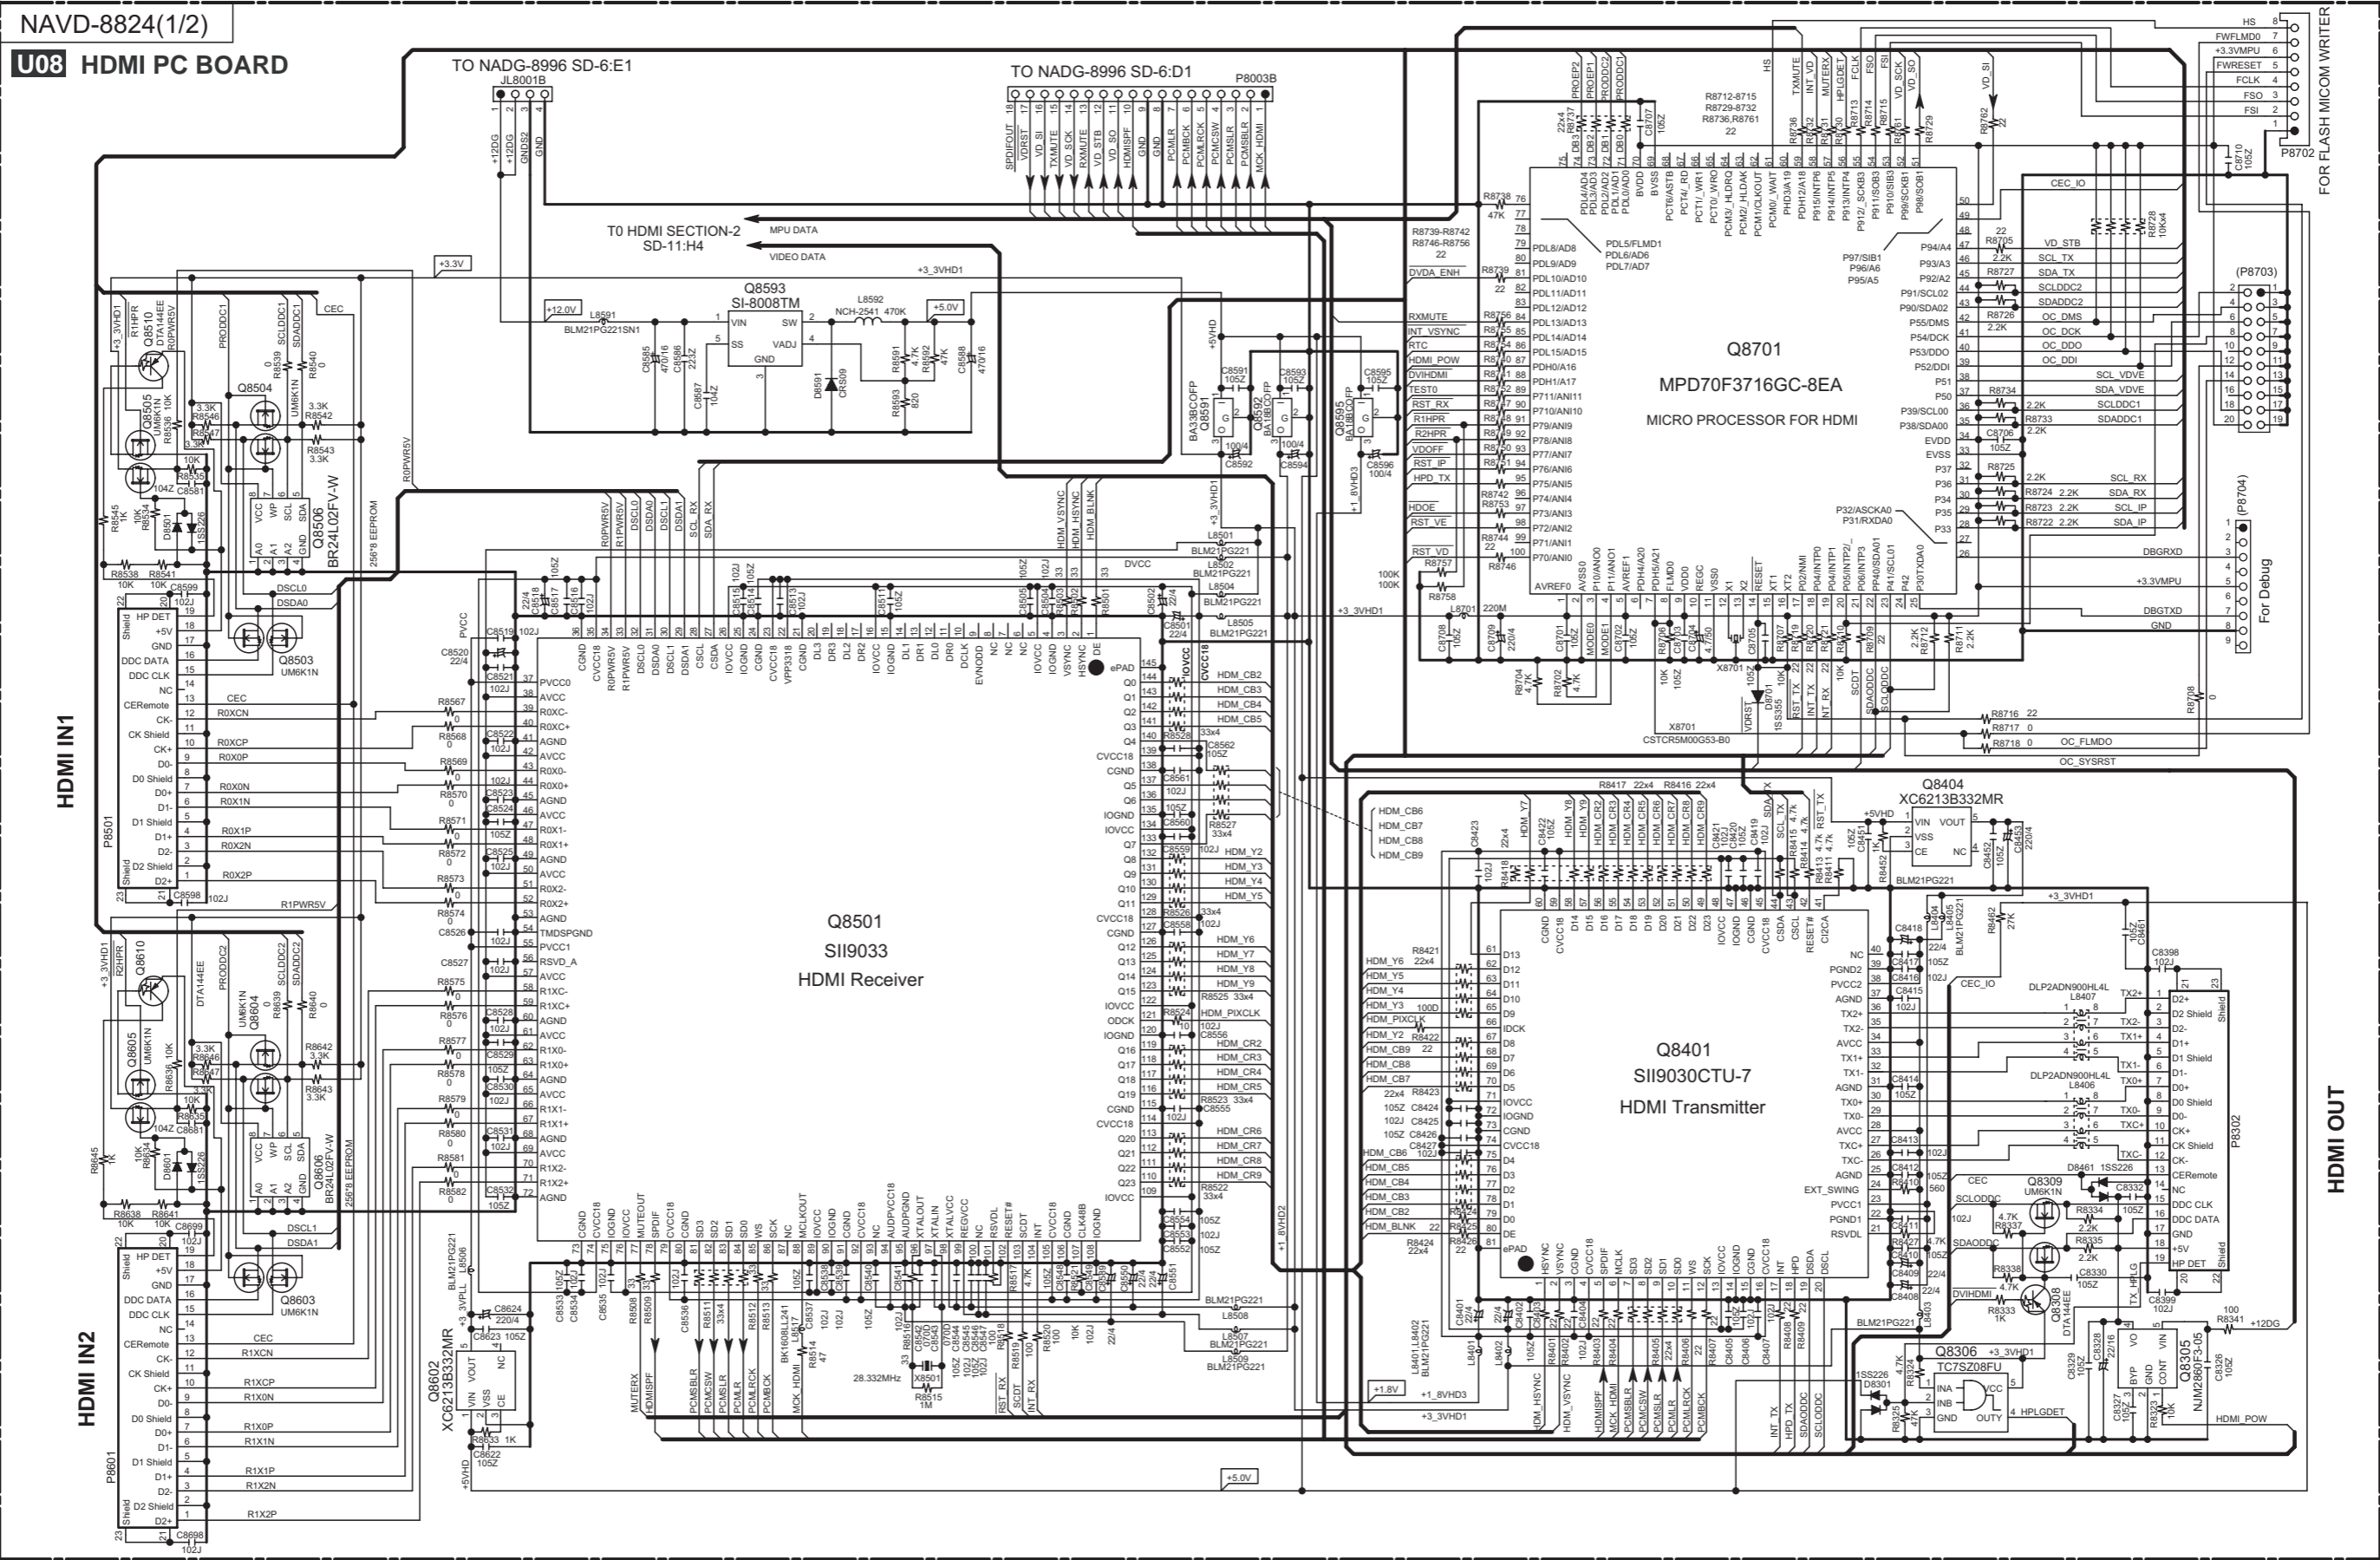


SCHEMATIC DIAGRAM-11(SD-11) HDMI SECTION-2

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

NAVD-8824(2/2)

U03 HDMI PC BOARD

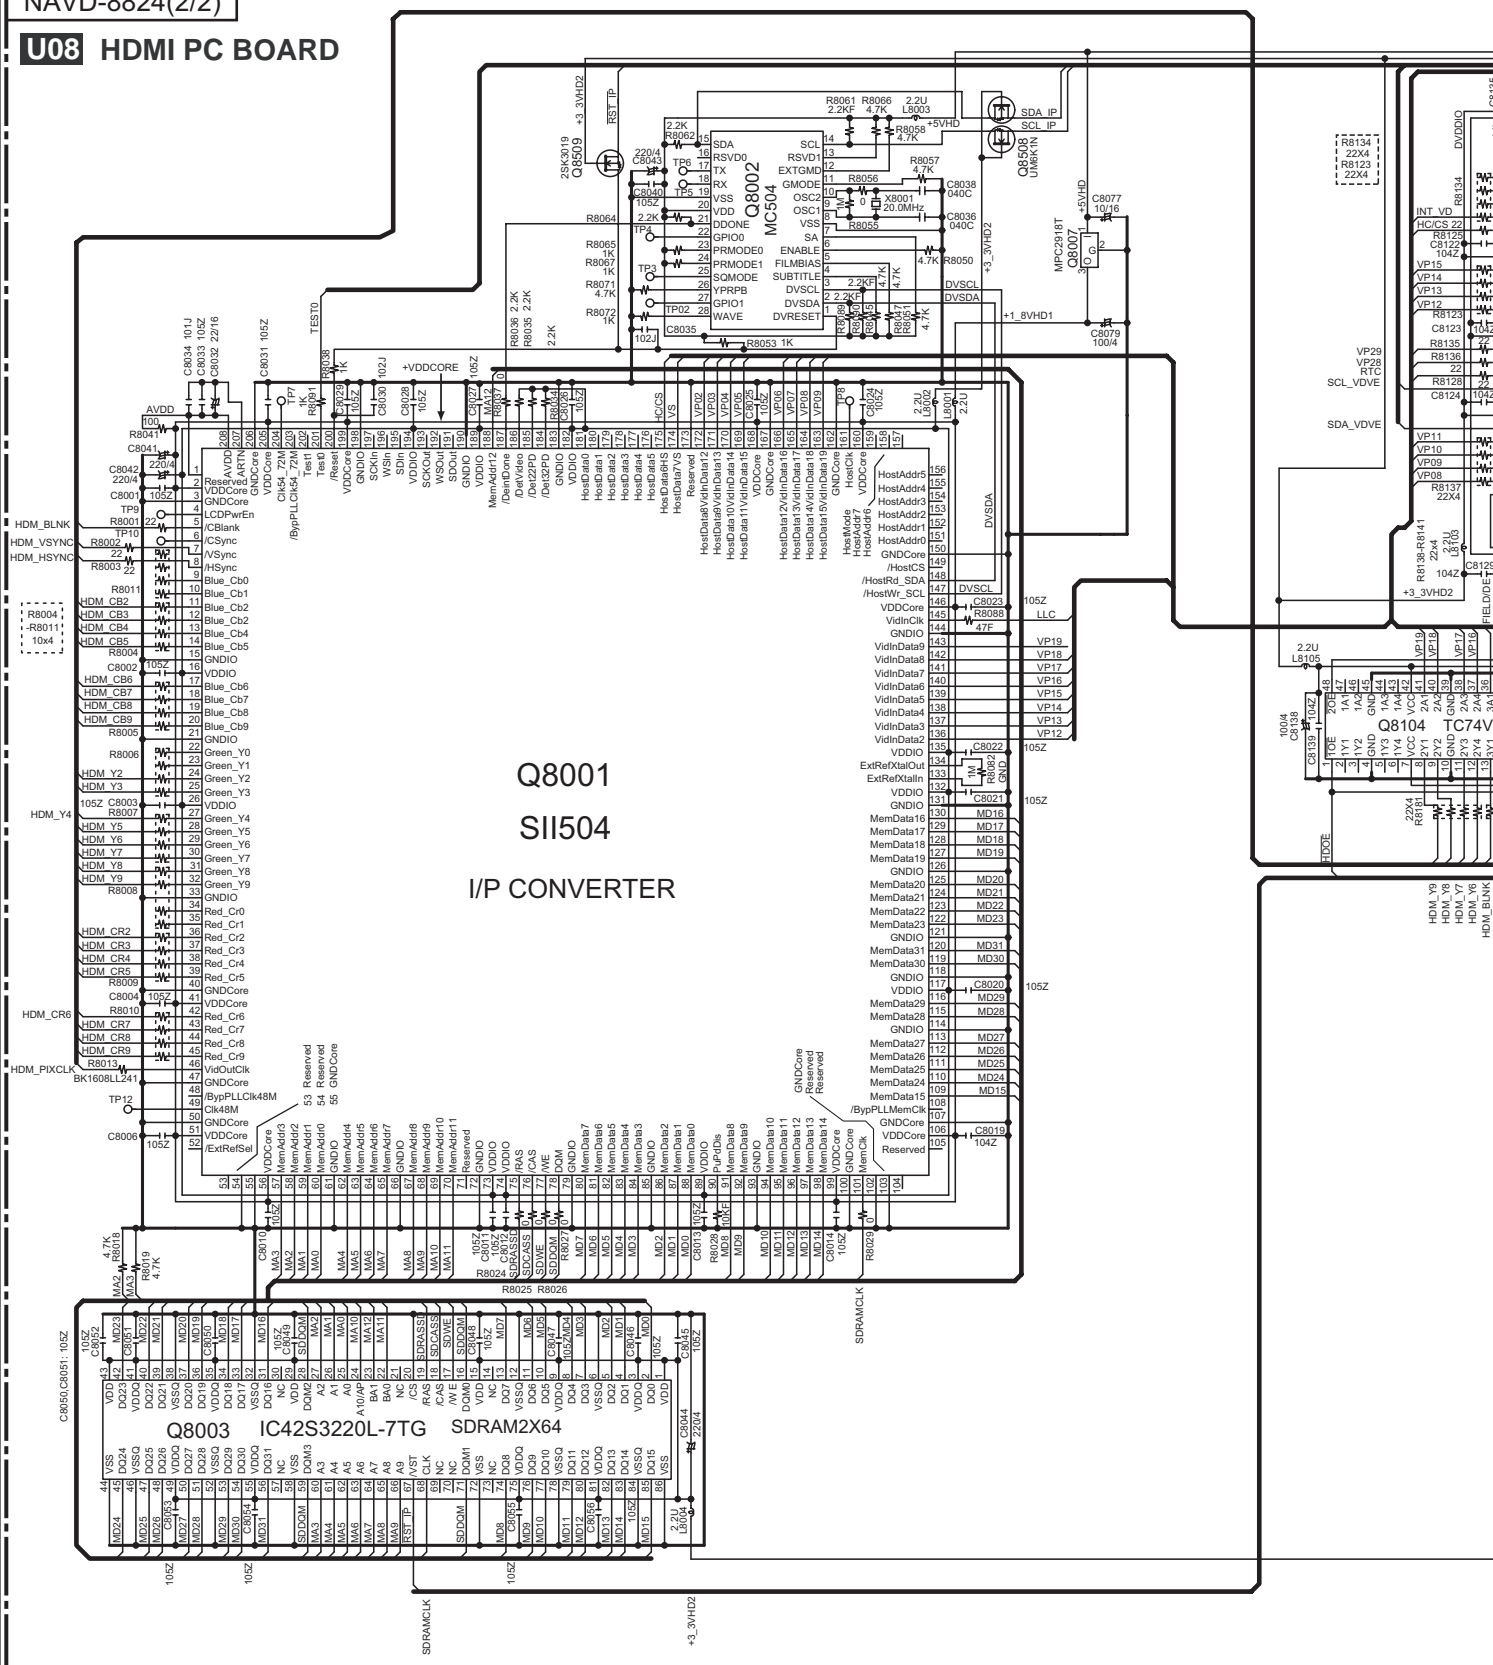

1
2
3
4
5


SCHEMATIC DIAGRAM-11(SD-11)

HDMI SECTION-2

<Note>
SD-x:XY is short for Schematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

NAVD-8824(2/2)

U08 HDMI PC BOARD

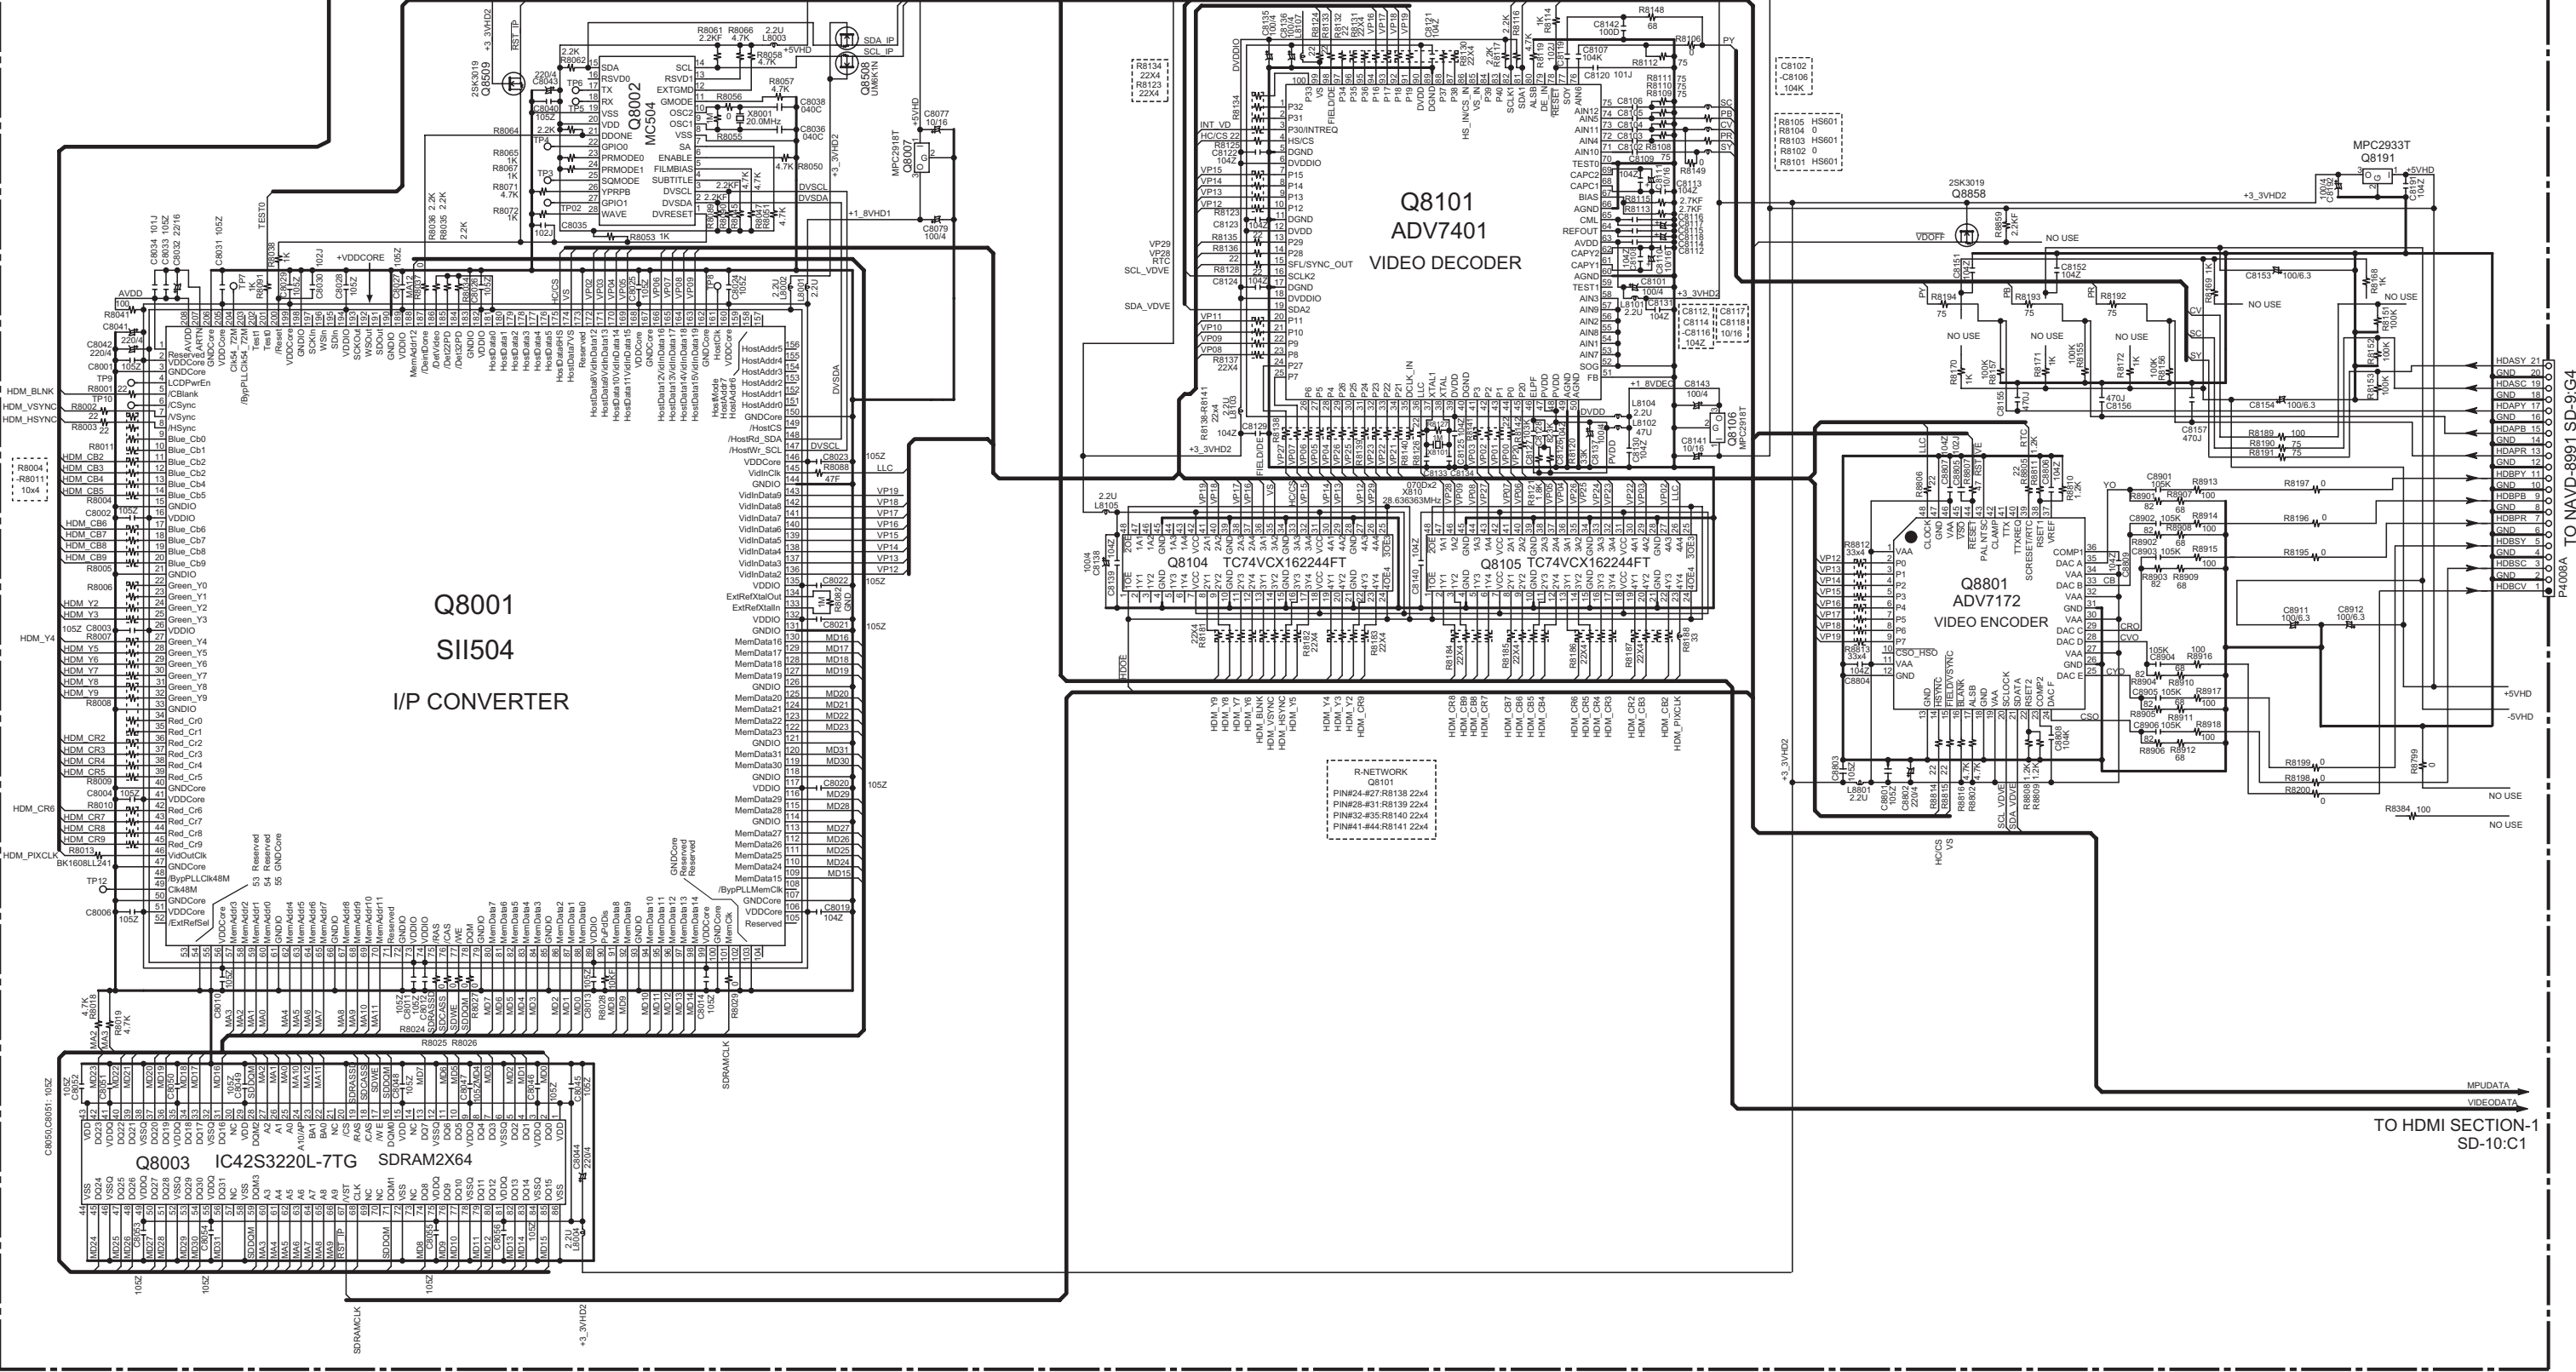

TO HDMI SECTION-1
SD-10:C1

TO NAVD-891 SD-9:G4

A

B


C

D

SCHEMATIC DIAGRAM-12 (SD-12)
XM SECTION

NARF-8994

U12 XM PC BOARD

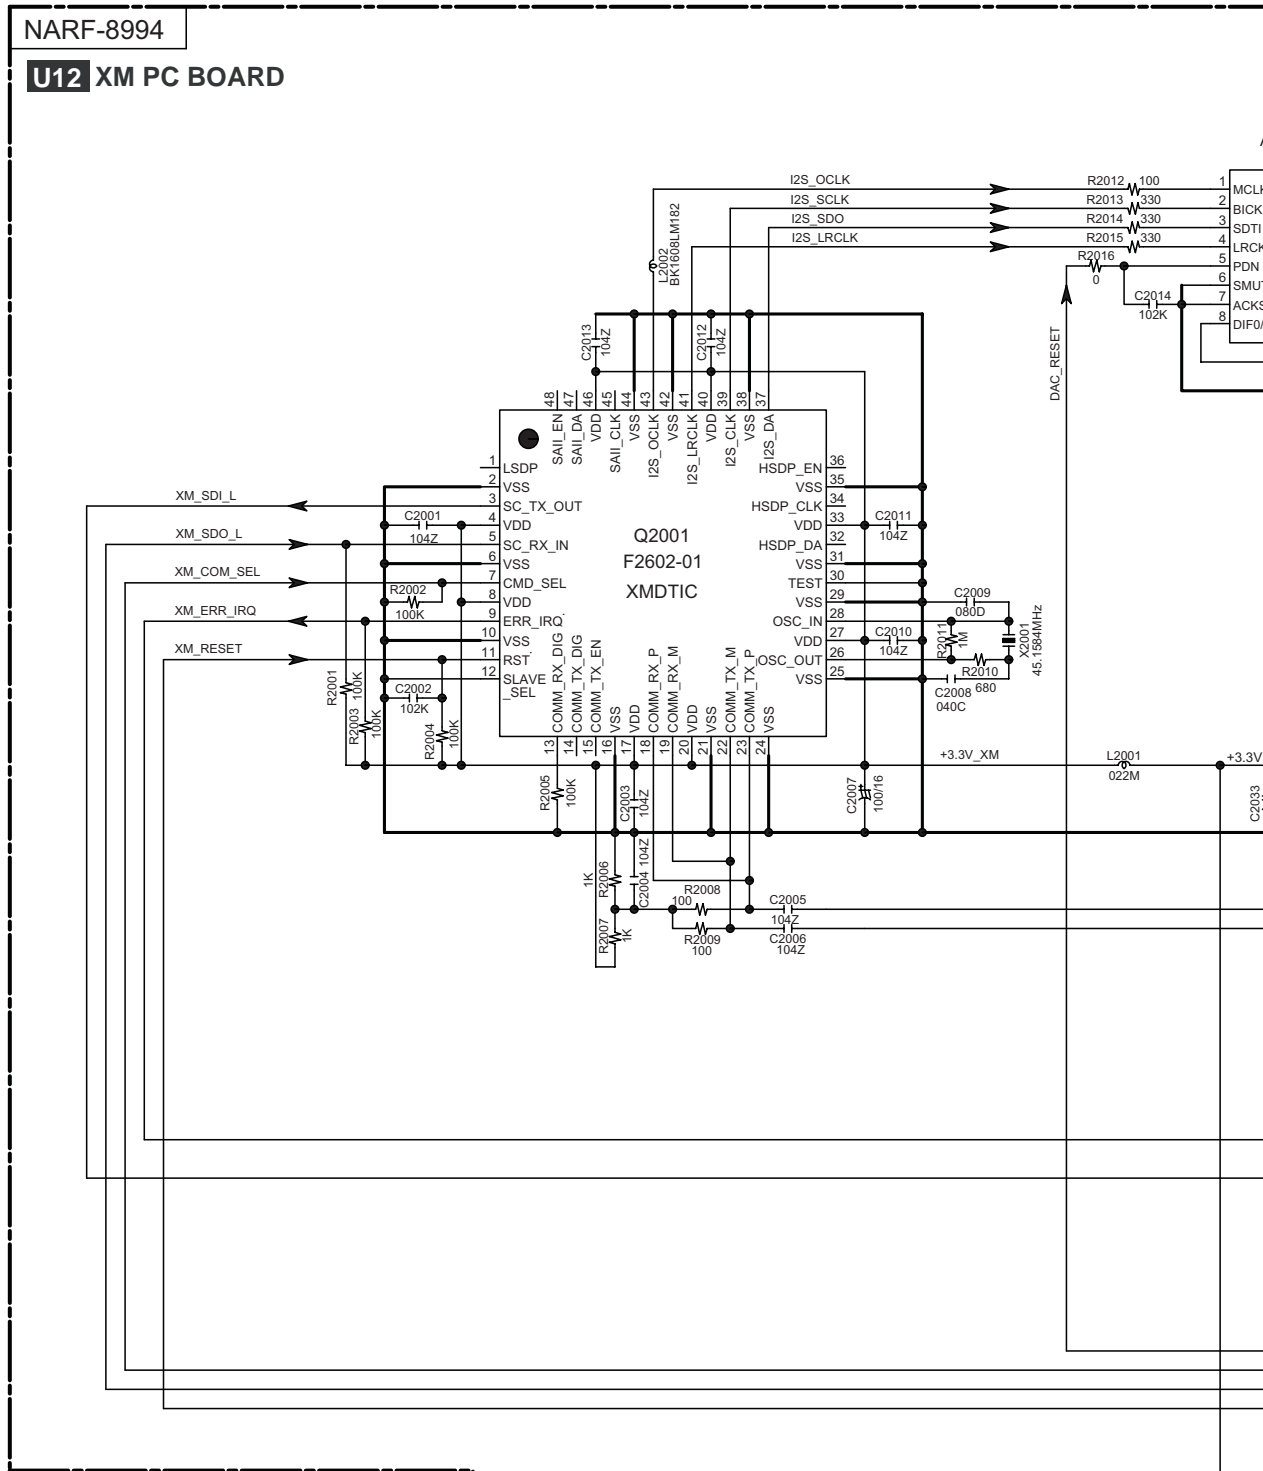

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

1

2

3

4

5


E

F

G

H

<Note>
SD-x:XY is short for Shcematic Diagram-x and each socket's location, X=A to H, Y=1 to 5.

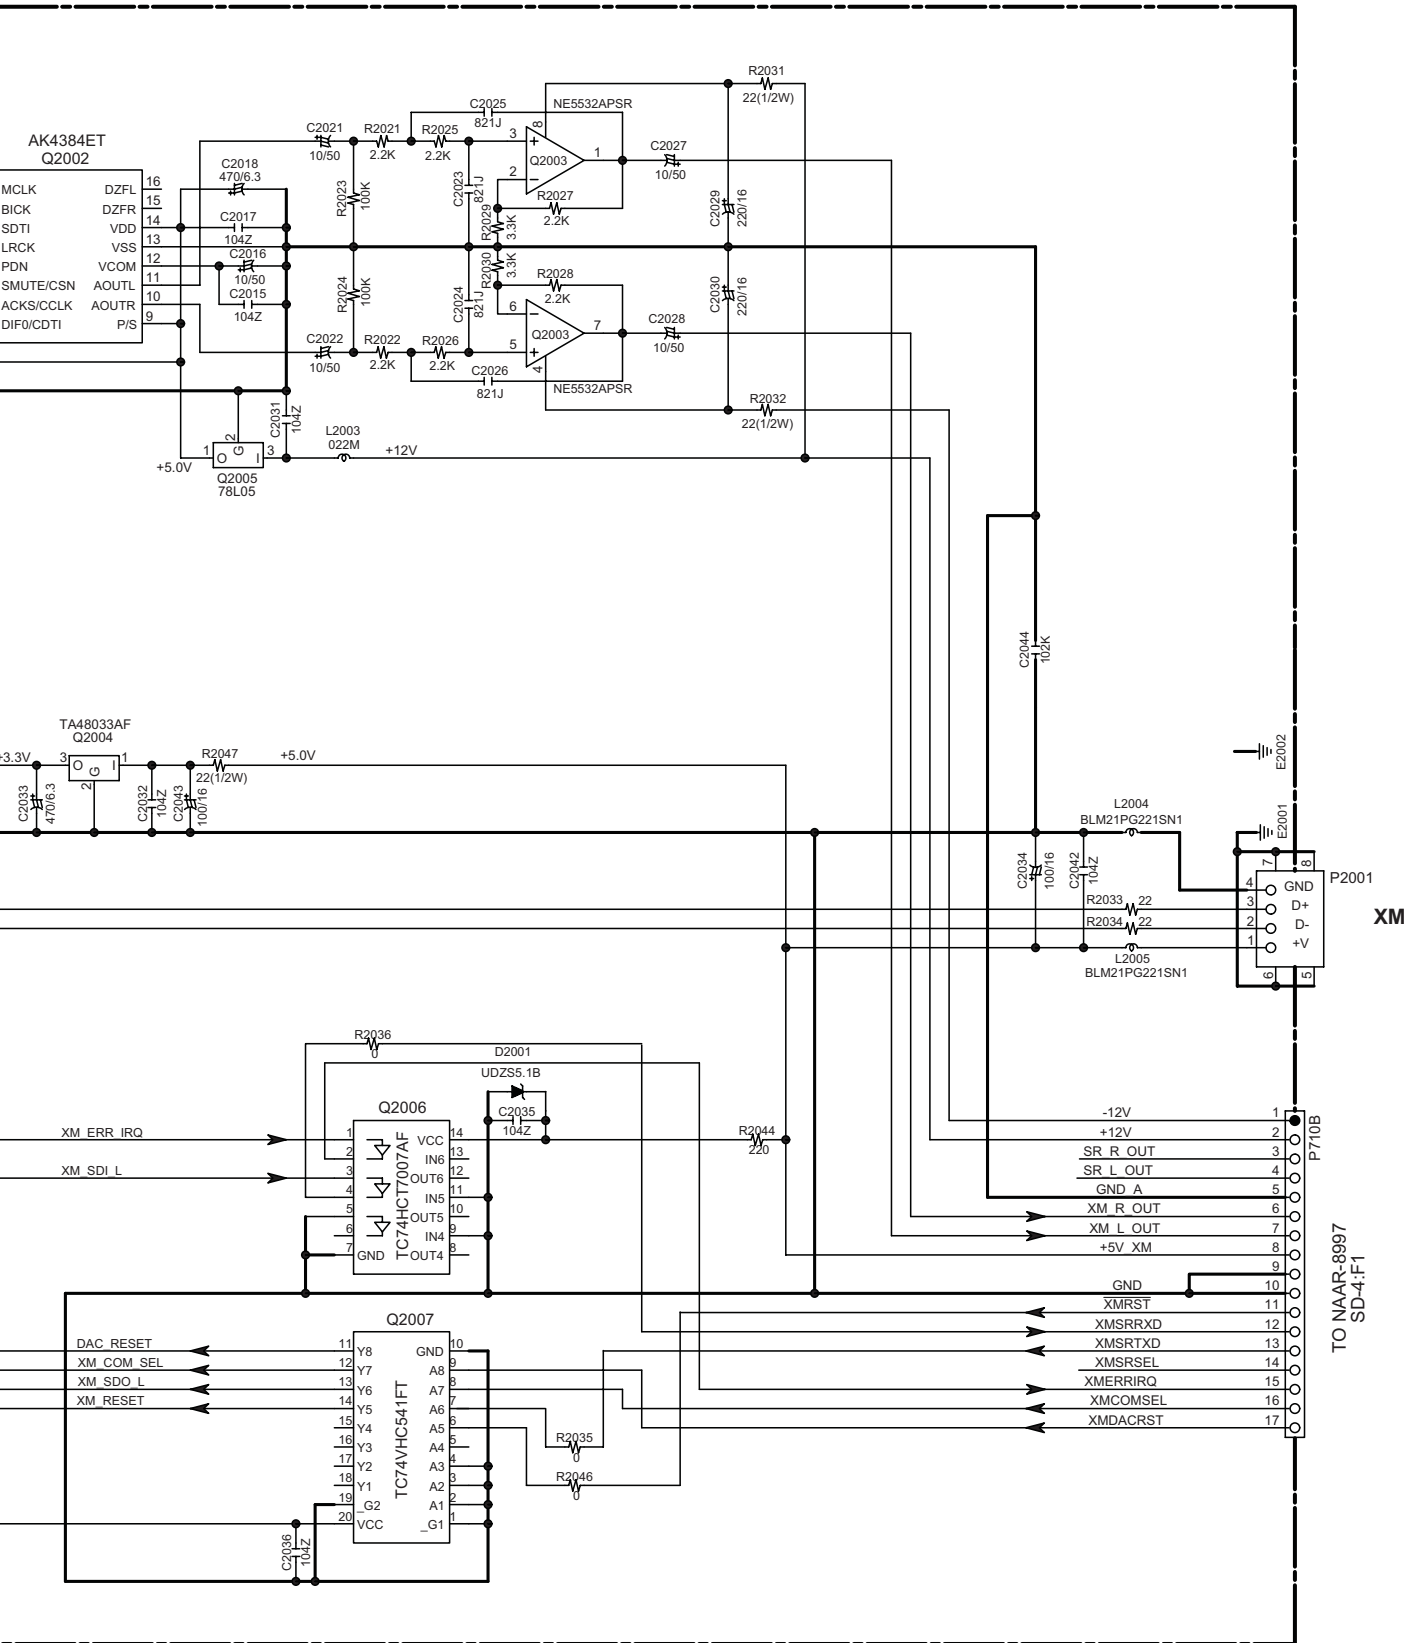

TO NAAR-8997
SD-4:F1

**SCHEMATIC DIAGRAM-12 (SD-12)
XM SECTION**

<Note>
SD-x:XY is short for Schematic Diagram-x and
each socket's location, X=A to H, Y=1 to 5.


1

2

3

4

5

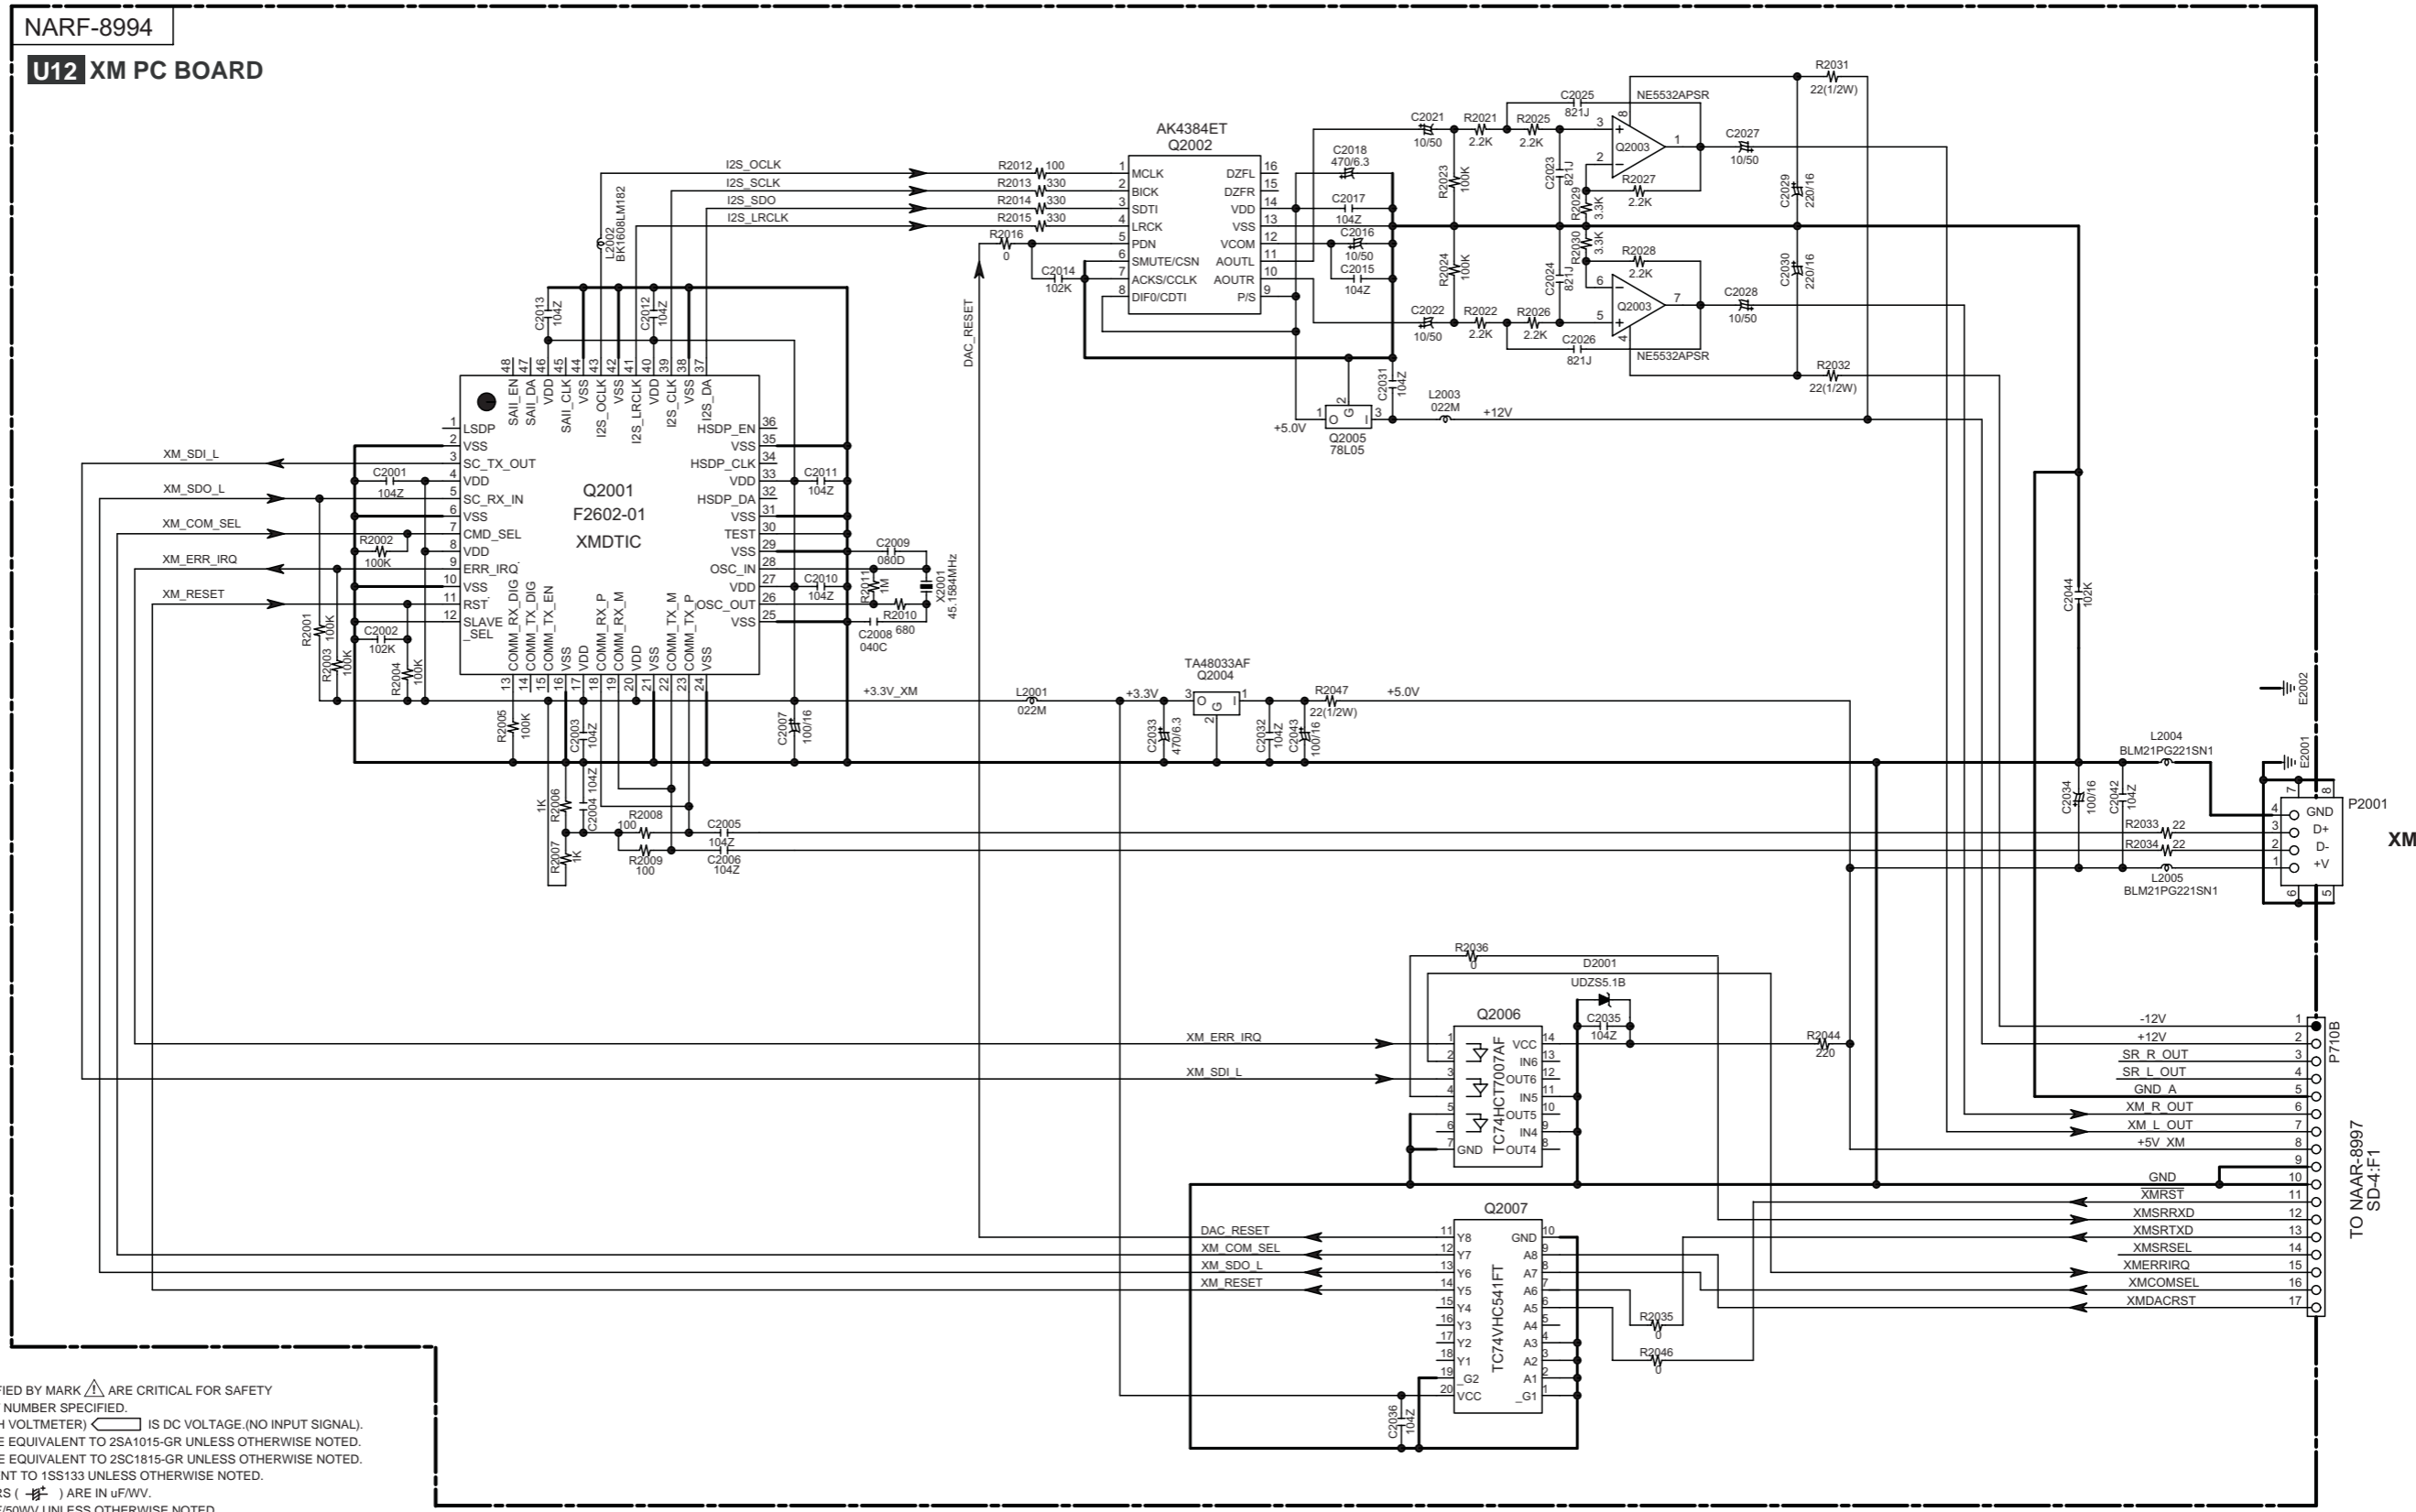

- NOTE**
- THE COMPONENTS IDENTIFIED BY MARK ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL).
 - ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
 - ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
 - ELECTROLYTIC CAPACITORS () ARE IN uF/WV.
 - ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
 - ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
 - THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) PRINTING SIDE
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

TO NAAR-8997
SD-4:F1

A

B

C


D

SCHEMATIC DIAGRAM-13 (SD-13) DIGITAL AUDIO WAVE FORM SECTION

NOTE:

- (WF01) is short for (WaveForm01).
- Refer to SD-6(SCHEMATIC DIAGRAM-6) for details.

1

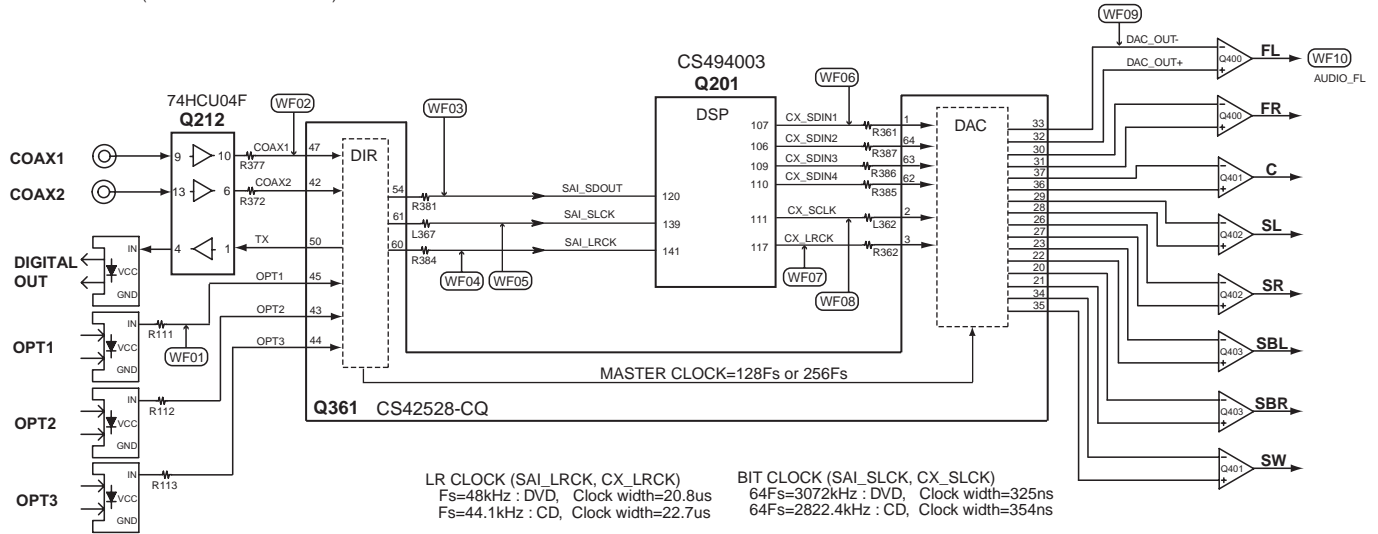

LR CLOCK (SAI_LRCK, CX_LRCK)
 Fs=48kHz : DVD, Clock width=20.8us
 Fs=44.1kHz : CD, Clock width=22.7us

BIT CLOCK (SAI_SLCK, CX_SLCK)
 64Fs=3072kHz : DVD, Clock width=325ns
 64Fs=2822.4kHz : CD, Clock width=354ns


2

3


4

5


(WF01) OPT1




(WF02) COAX1




(WF03) SAI_SDOUT




(WF04) SAI_LRCK




(WF05) SAI_SLCK




(WF06) CX_SDIN1




(WF07) CX_LRCK




(WF08) CX_SCLK




(WF09) DAC_OUT-



(WF10) AUDIO_FL



(WF10) AUDIO_FL



A

B

C

D


PRINTED CIRCUIT BOARD VIEWS-1

1

U01 DISPLAY PC BOARD (NADIS-8675)

Side-A


2

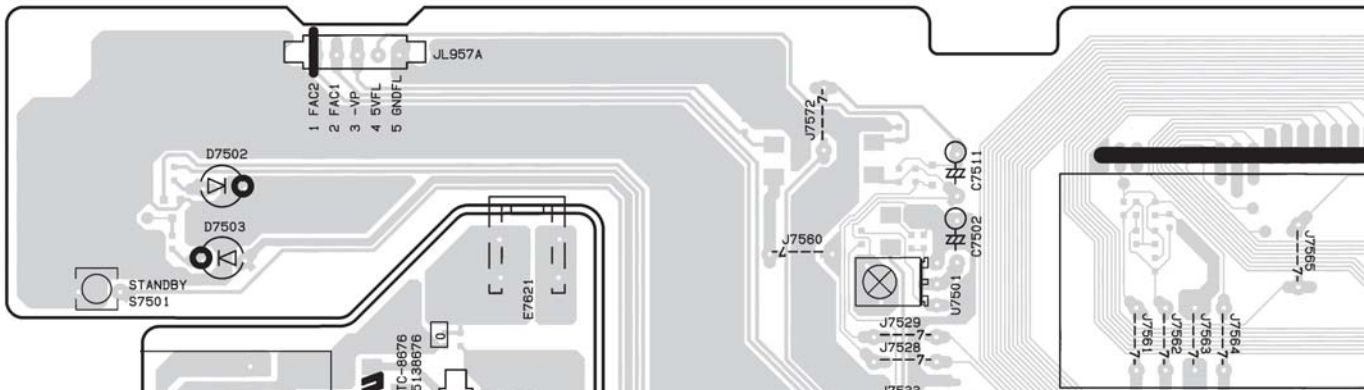

3

U02 HEADPHONE PC BOARD (NAETC-8676)

Side-A

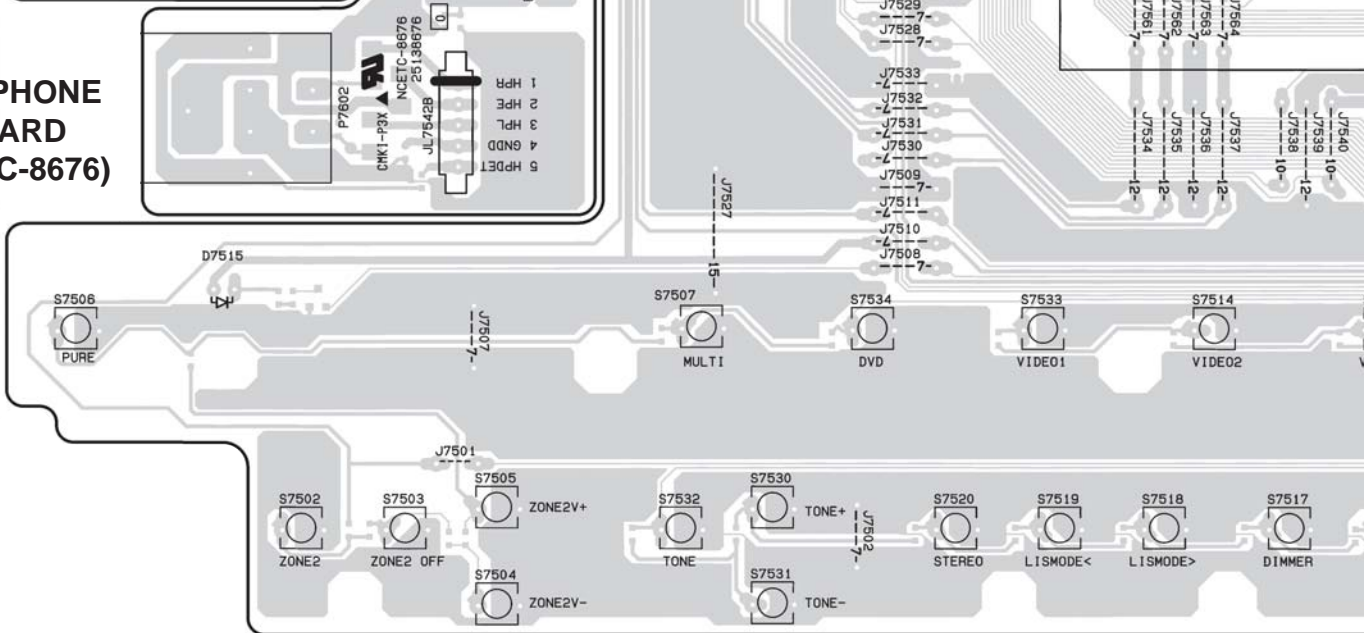


4

5

U03

**VOLUME PC BOARD
(NAETC-8677)**

Side-A

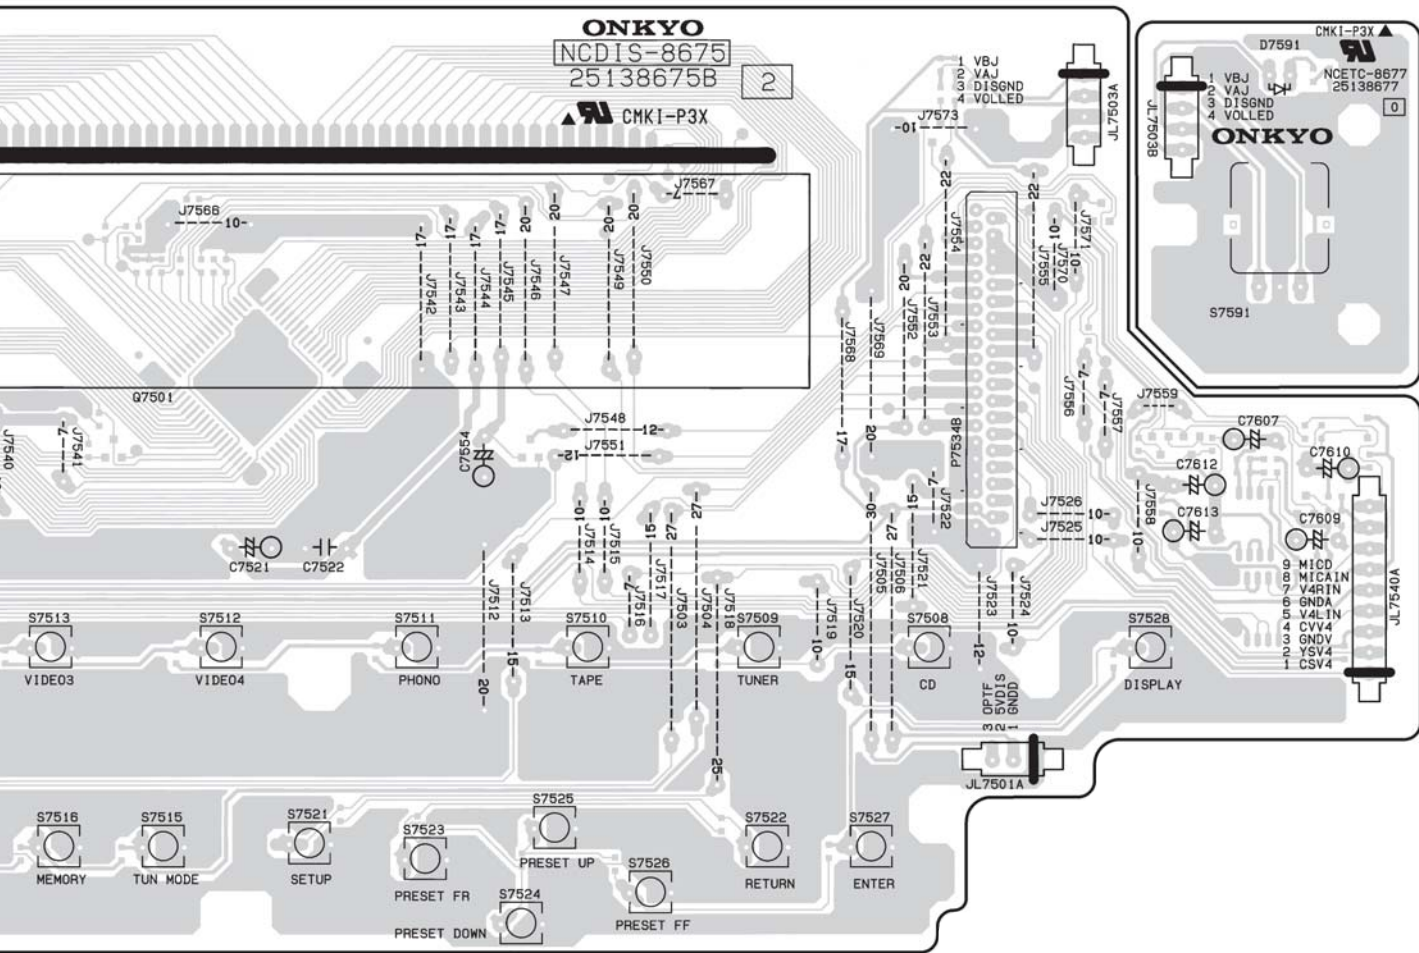


PRINTED CIRCUIT BOARD VIEWS-1

1


U01 DISPLAY PC BOARD (NADIS-8675)

Side-A

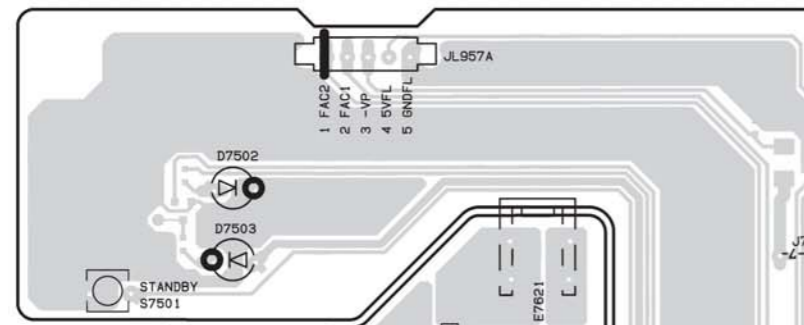


U03 VOLUME PC BOARD (NAETC-8677)

Side-A

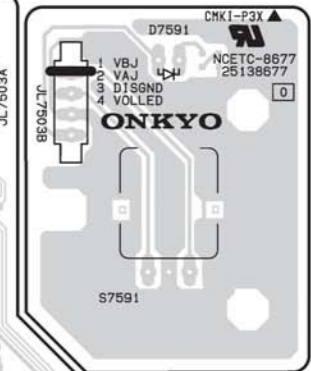

U02 HEADPHONE PC BOARD (NAETC-8676)

Side-A

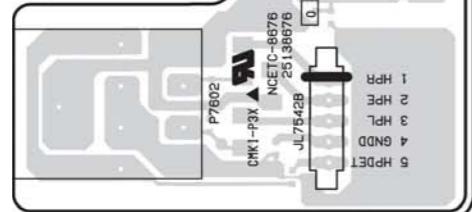



2

3

4

5

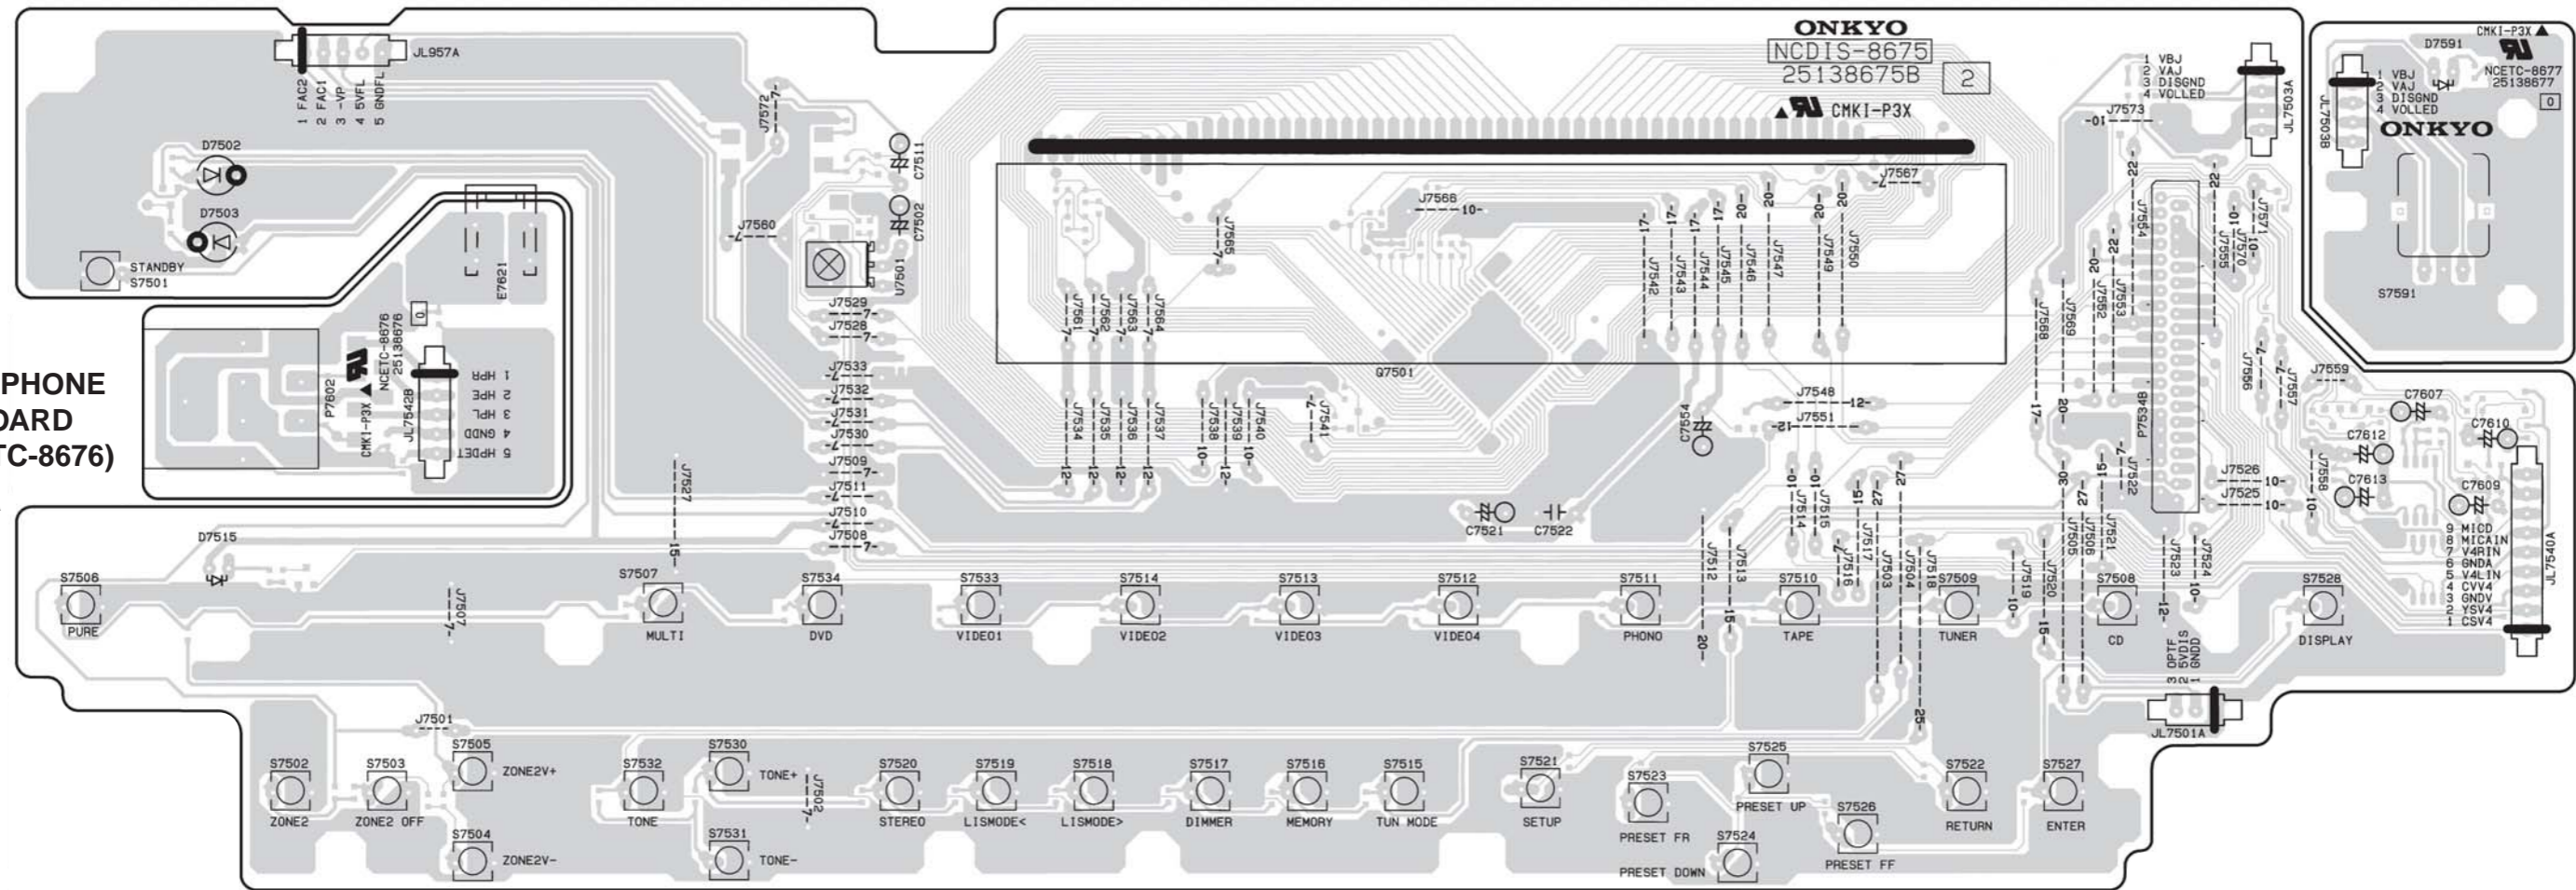

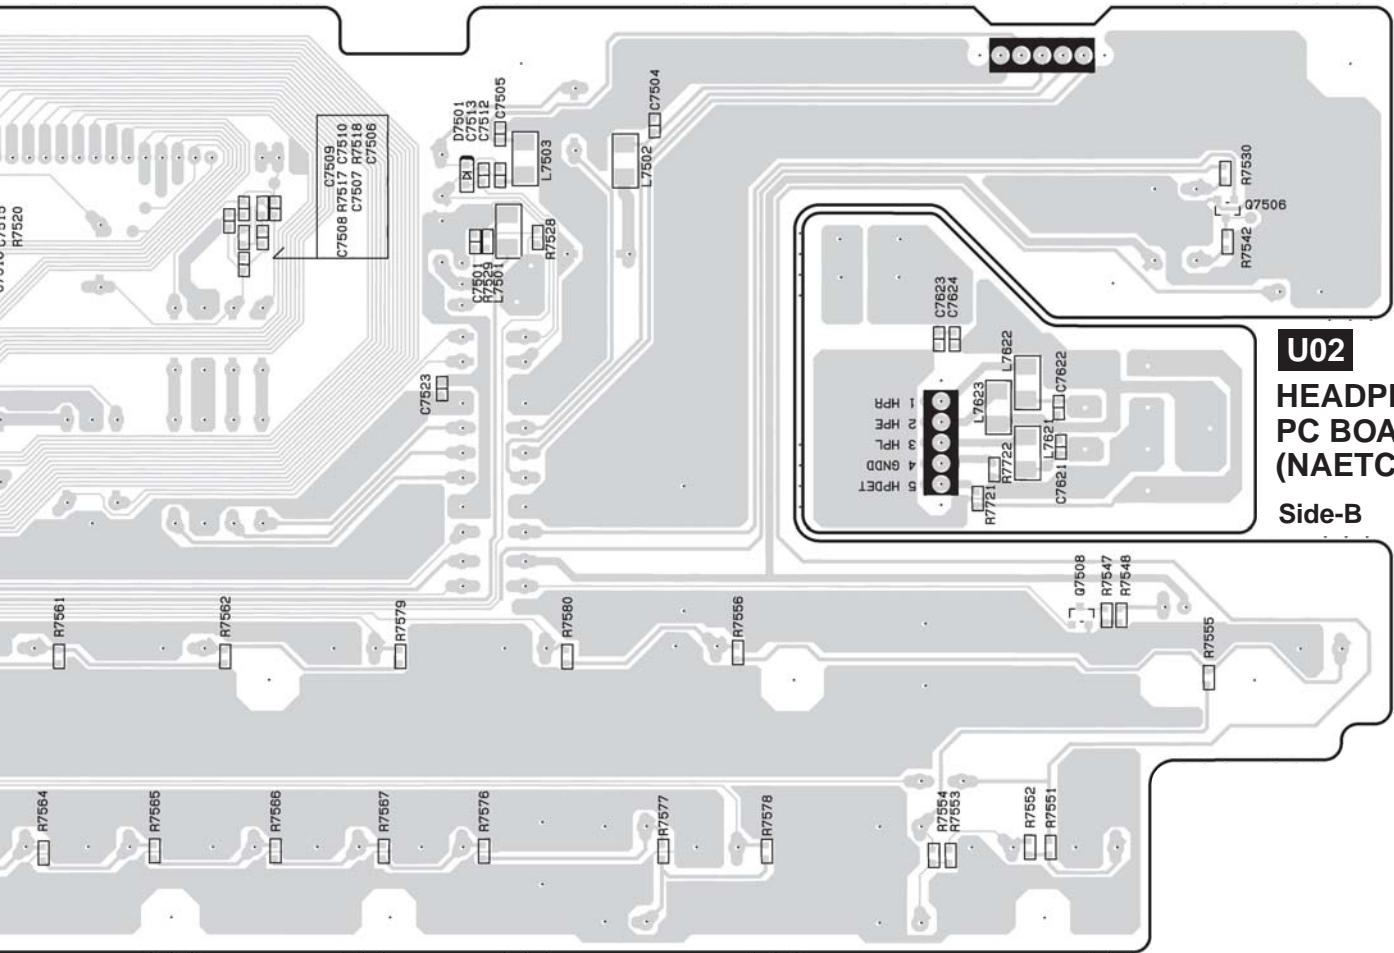

U02
HEADPHONE
PC BOARD
(NAETC-8676)
Side-B

PRINTED CIRCUIT BOARD VIEWS-2

1

U03

VOLUME PC BOARD
(NAETC-8677)

Side-B

U01

DISPLAY PC BOARD (NADIS-8675)


Side-B

2

3

4

5

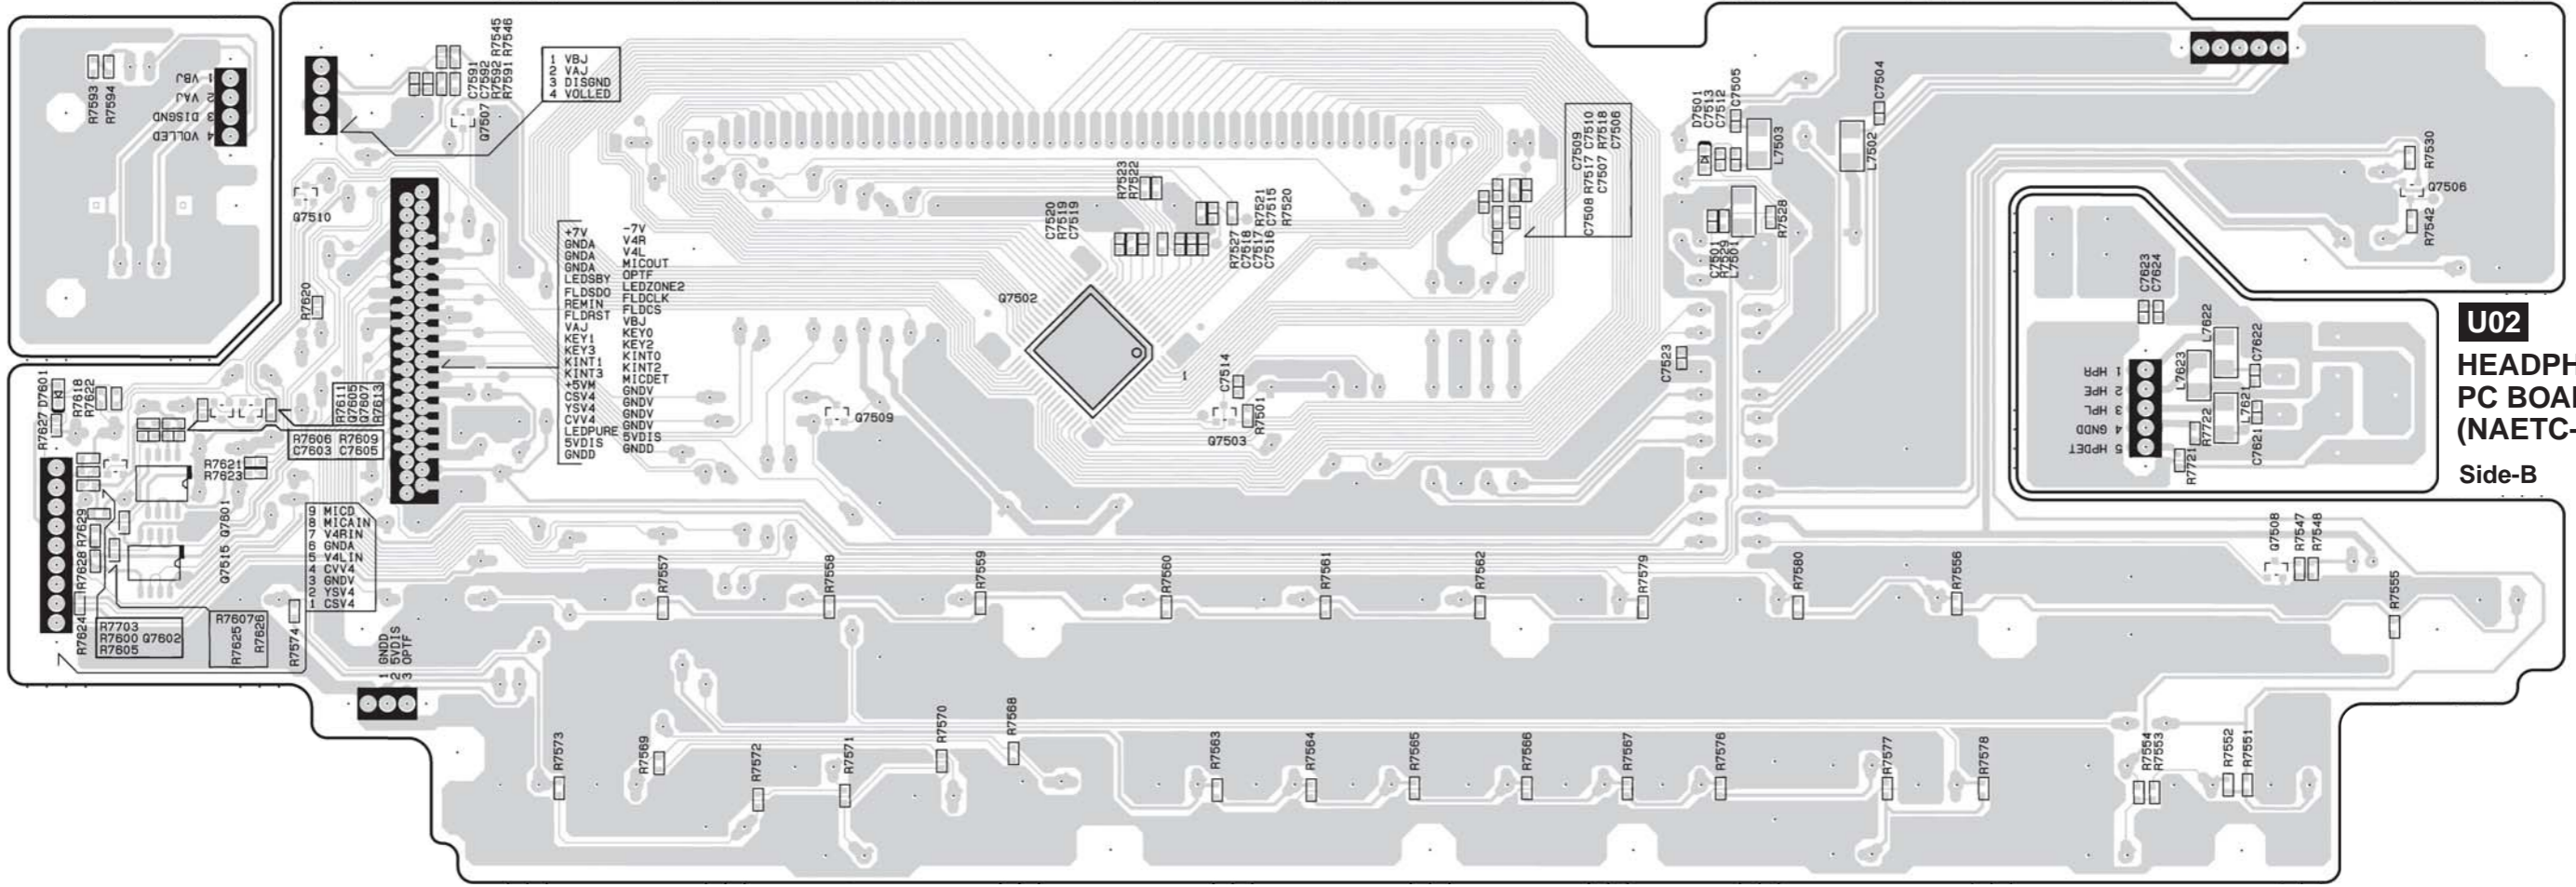

U02

HEADPHONE
PC BOARD
(NAETC-8676)

Side-B

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-3

U04 AMPLIFIER PC BOARD (NAAF-8678)

Side-A


1

2

3

4

5

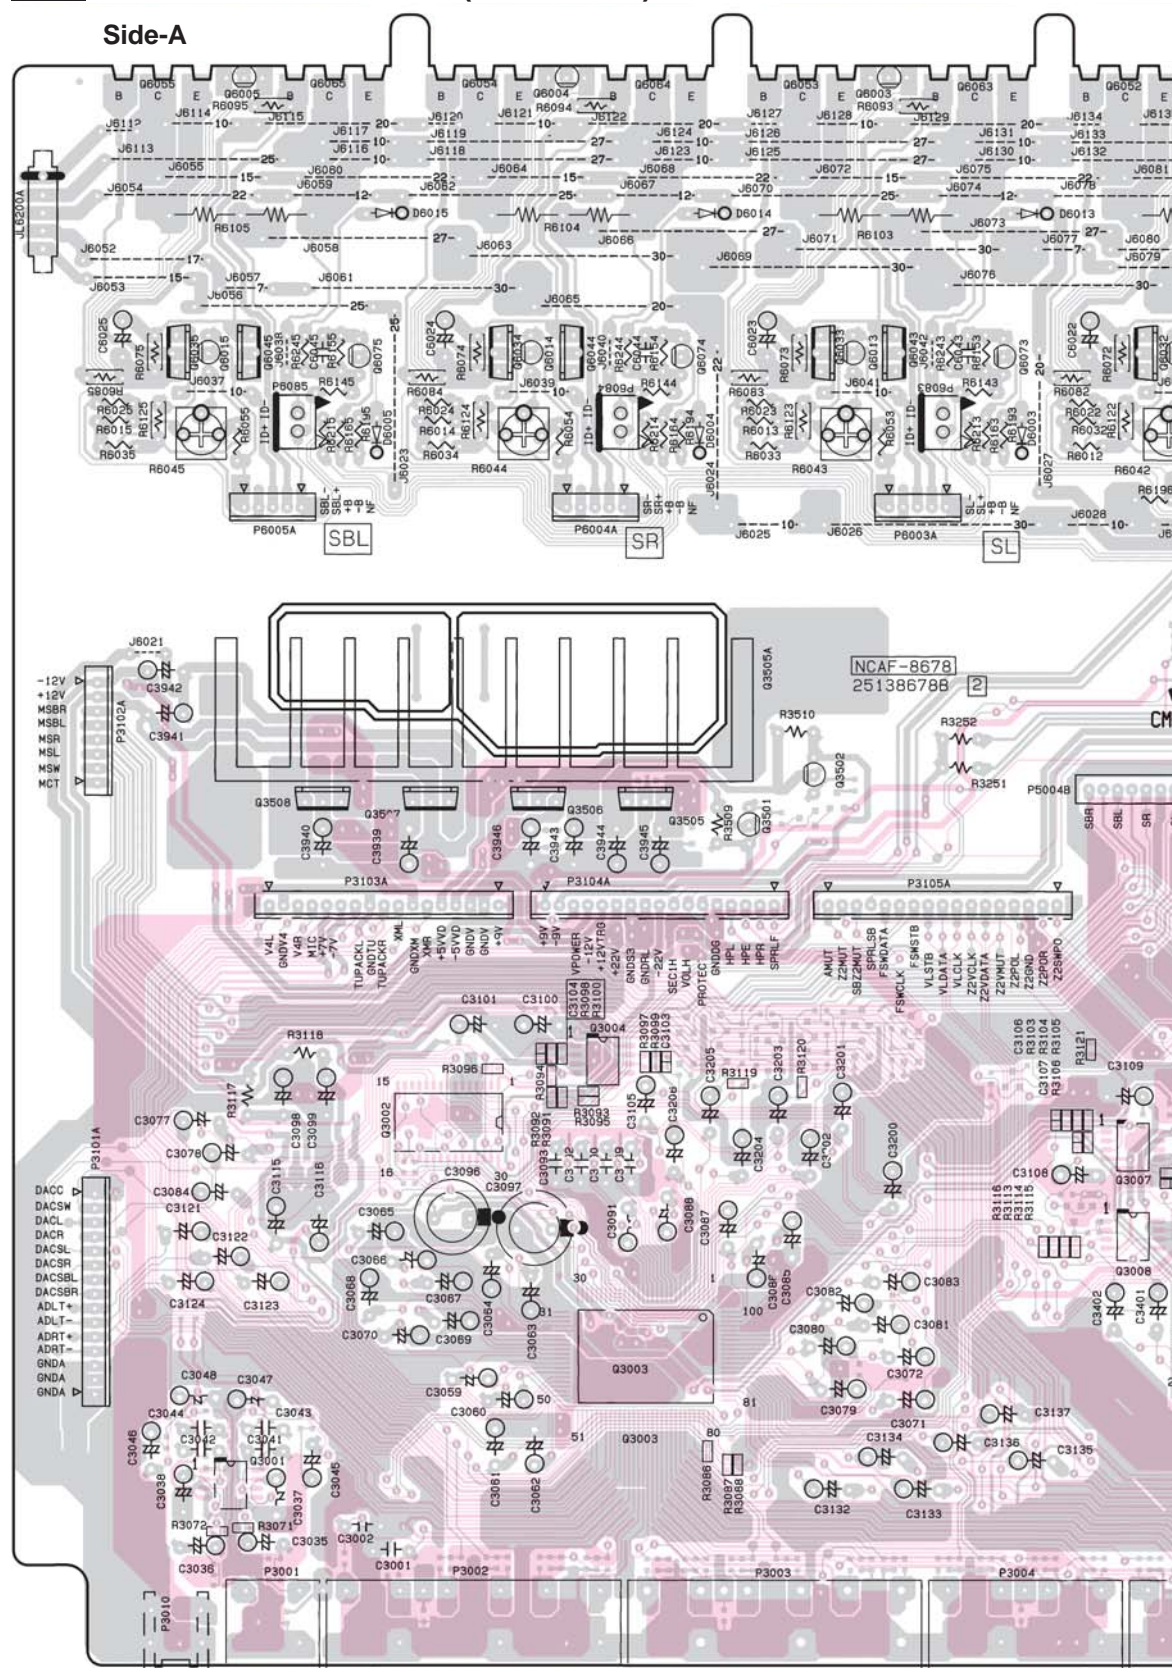

E

F

G

H


U06 HOLDER PC BOARD (NAETC-8681)

Side-A




U07 SURROUND BACK AMPLIFIER PC BOARD (NAAF-8682)

Side-A

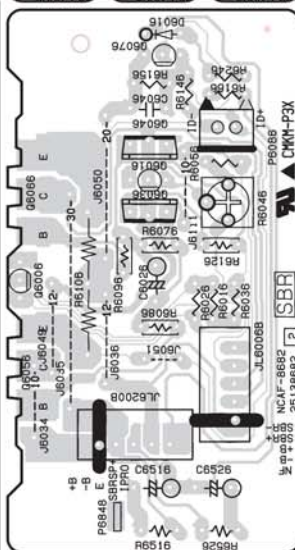


U05 THERMAL DETECTOR PC BOARD (NAETC-8680)

Side-A

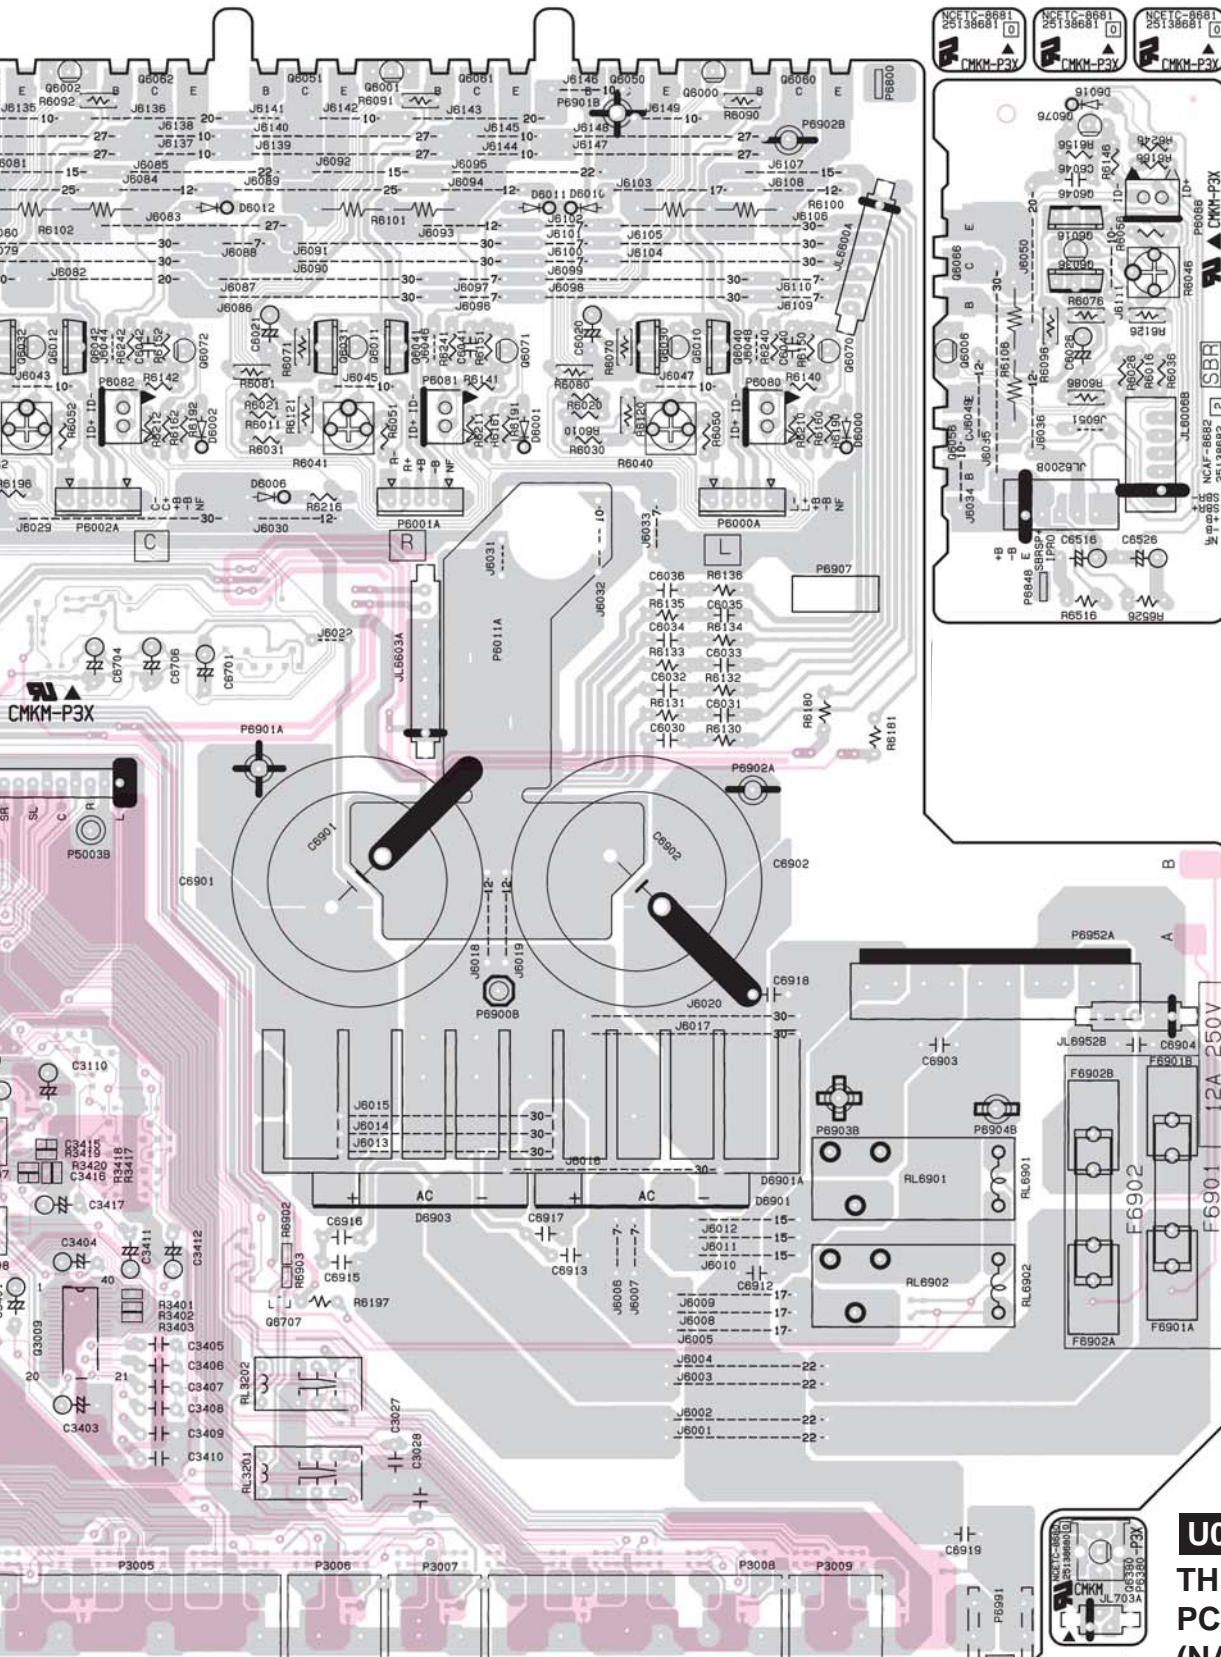


PRINTED CIRCUIT BOARD VIEWS-3


U04 AMPLIFIER PC BOARD (NAAF-8678)

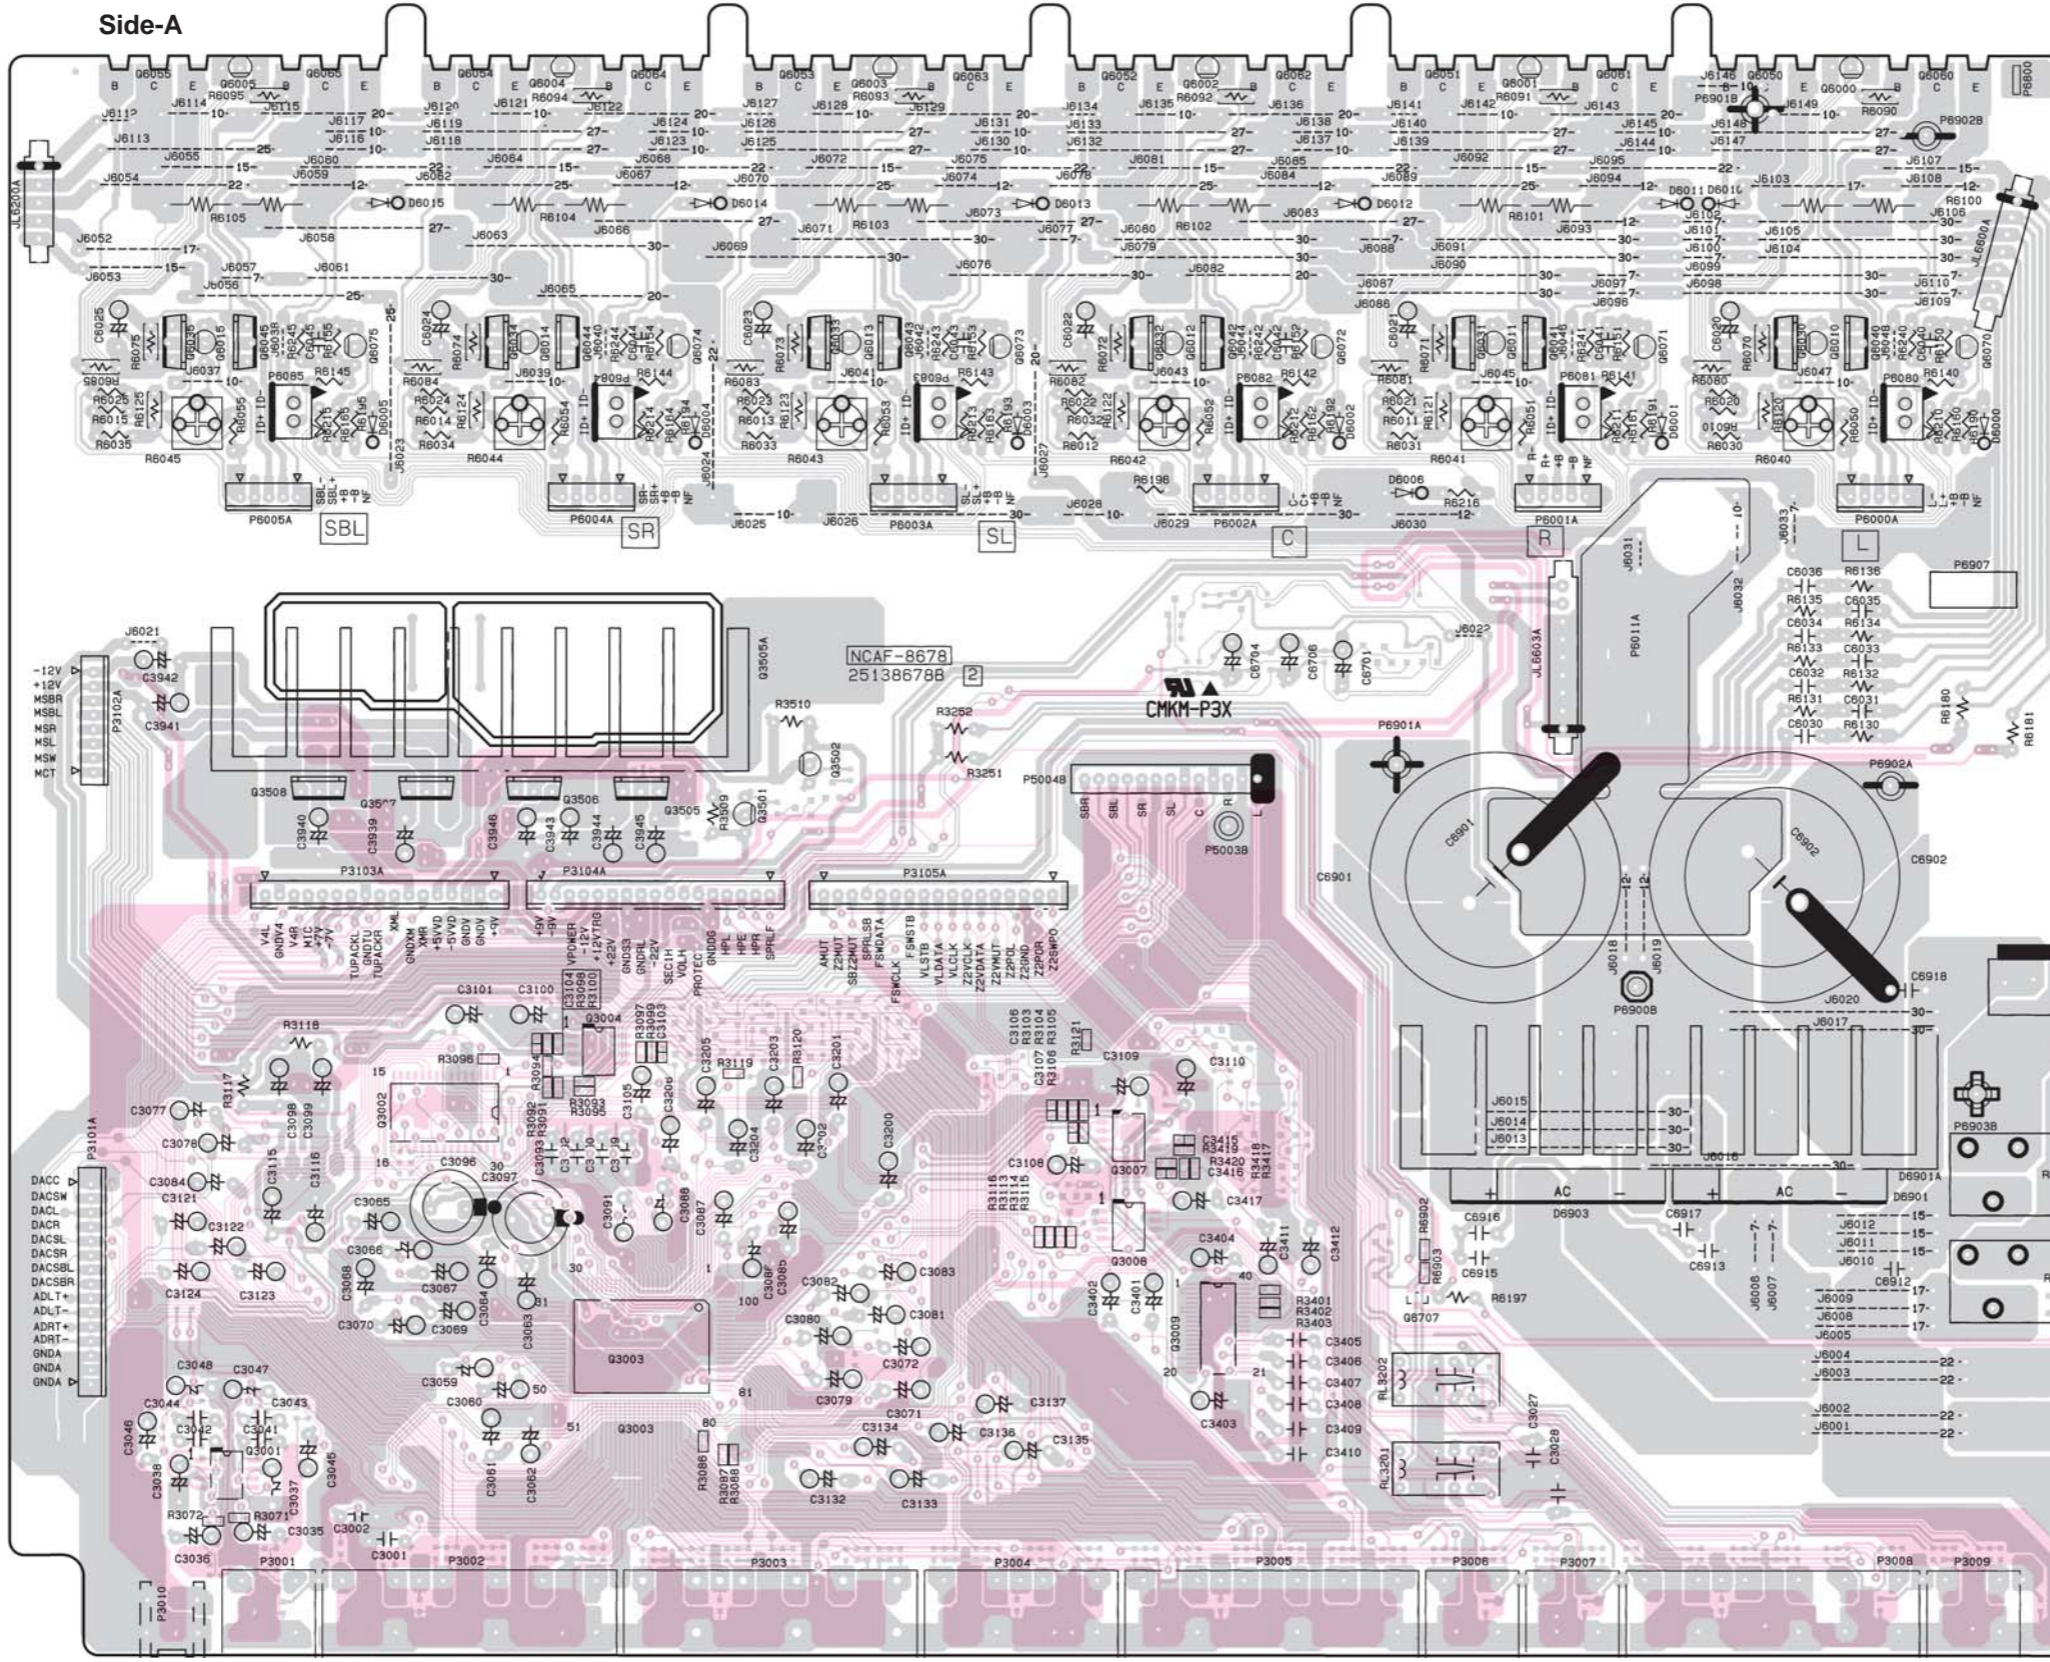


U06 HOLDER PC BOARD (NAETC-8681) Side-A

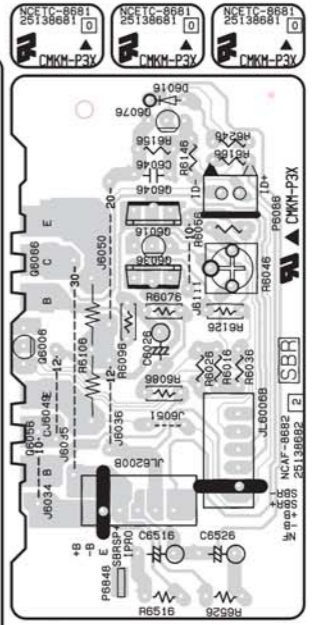

U07 SURROUND BACK AMPLIFIER PC BOARD (NAAF-8682) Side-A

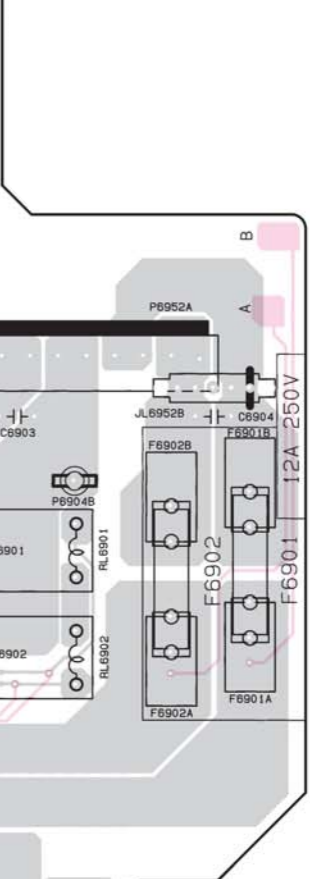

U05 THERMAL DETECTOR PC BOARD (NAETC-8680) Side-A



1
2
3
4
5

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-5

U08 HDMI PC BOARD (NAVD-8824)

Side-A


1

2

3

4

5

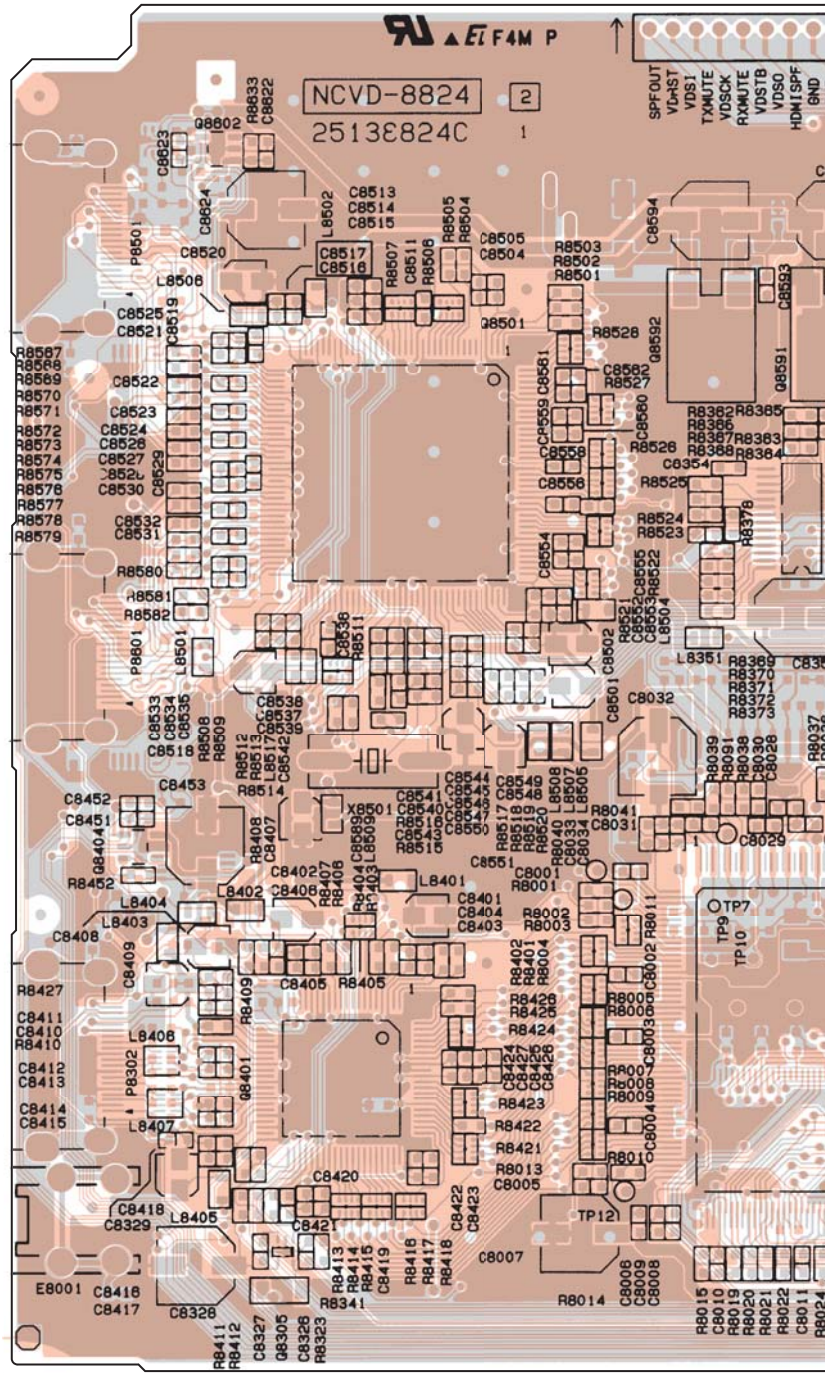


E

F

G

H

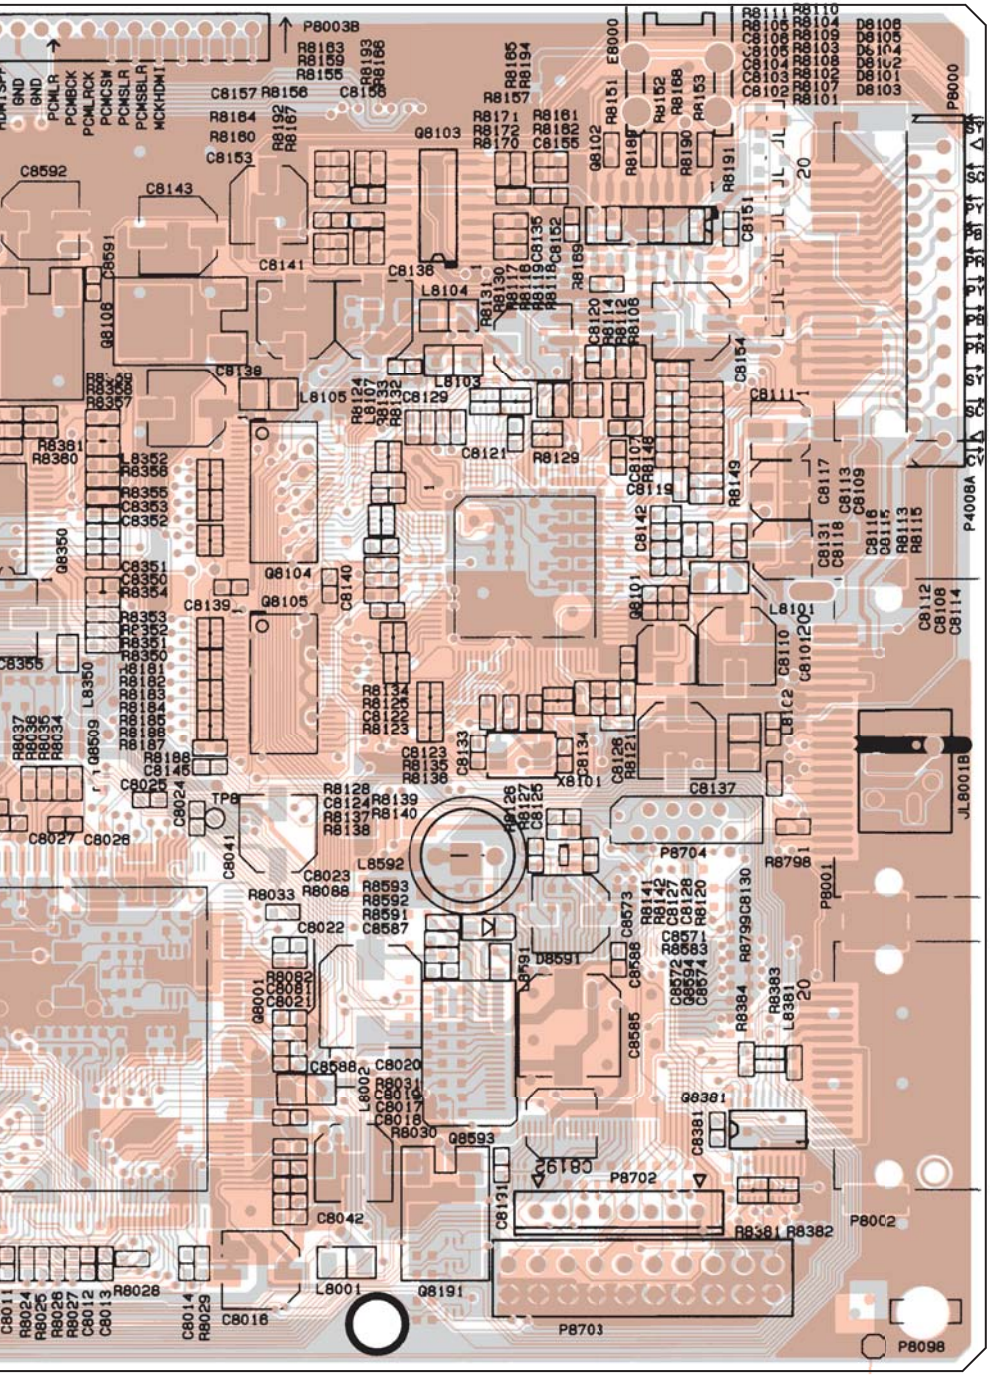

A

B

C

D

E

F

G

H

PRINTED CIRCUIT BOARD VIEWS-5

U08 HDMI PC BOARD (NAVD-8824)

Side-A


1

2

3

4

5

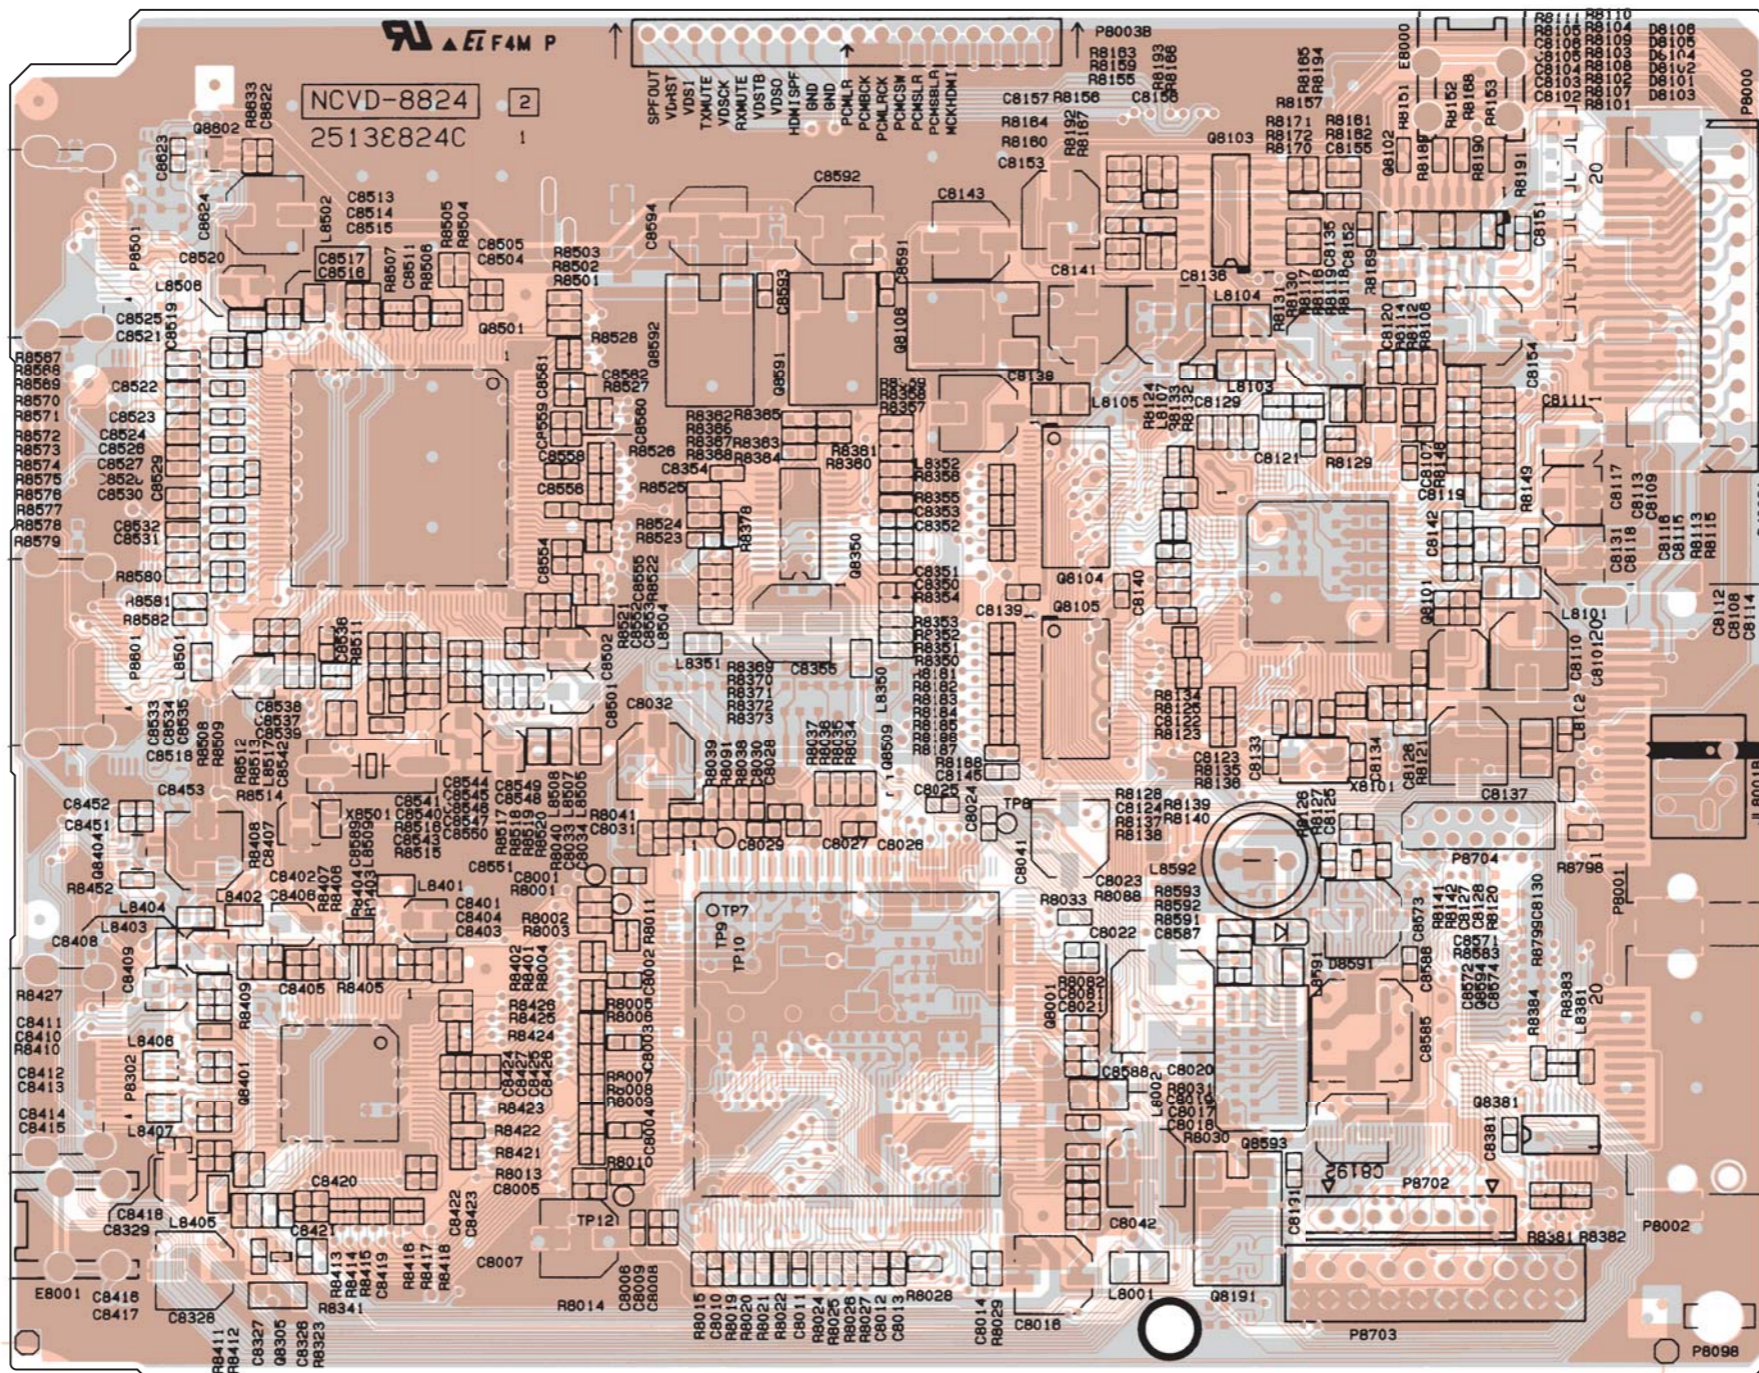

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-6

U08 HDMI PC BOARD (NAVD-8824)

Side-B


1

2

3

4

5

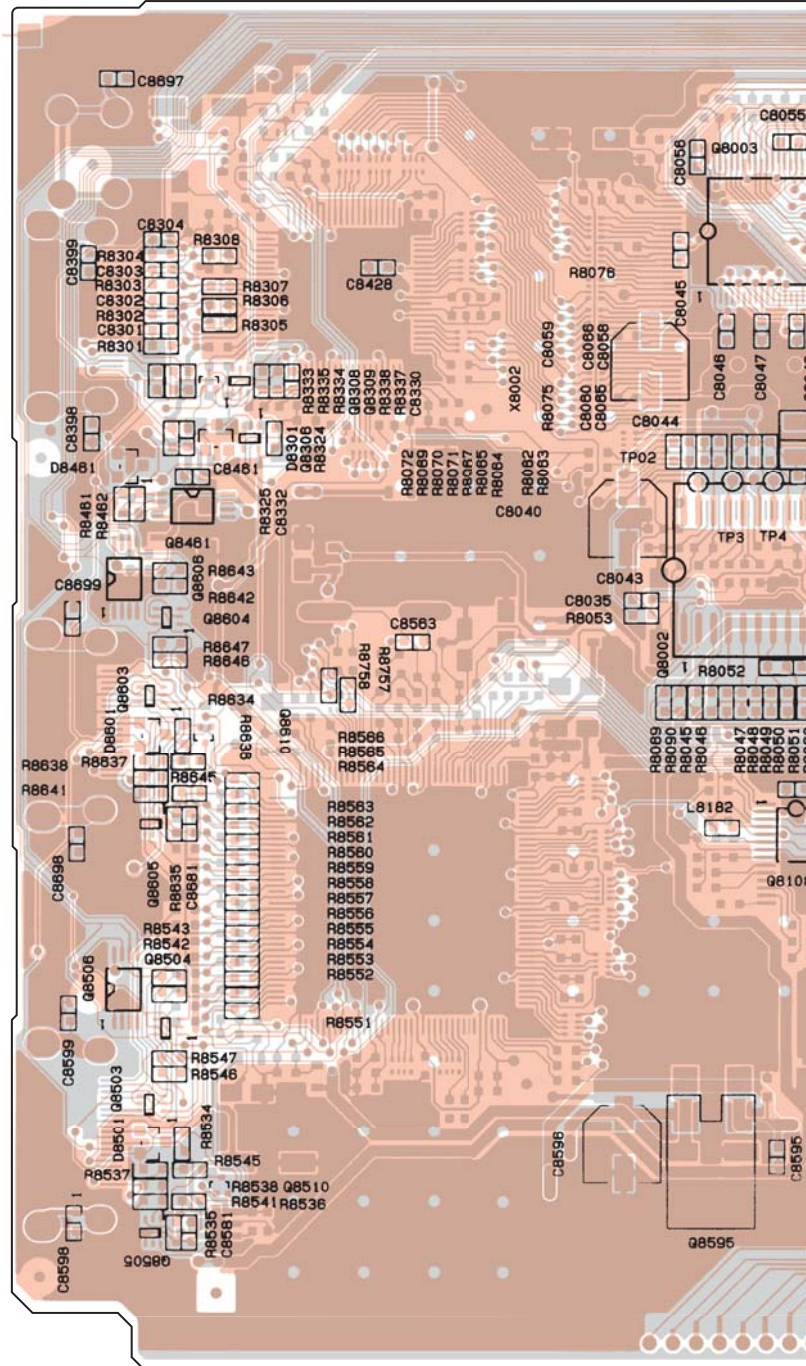

A

B

C

D

E

F

G

H

PRINTED CIRCUIT BOARD VIEWS-6

U08 HDMI PC BOARD (NAVD-8824)

Side-B


1

2

3

4

5

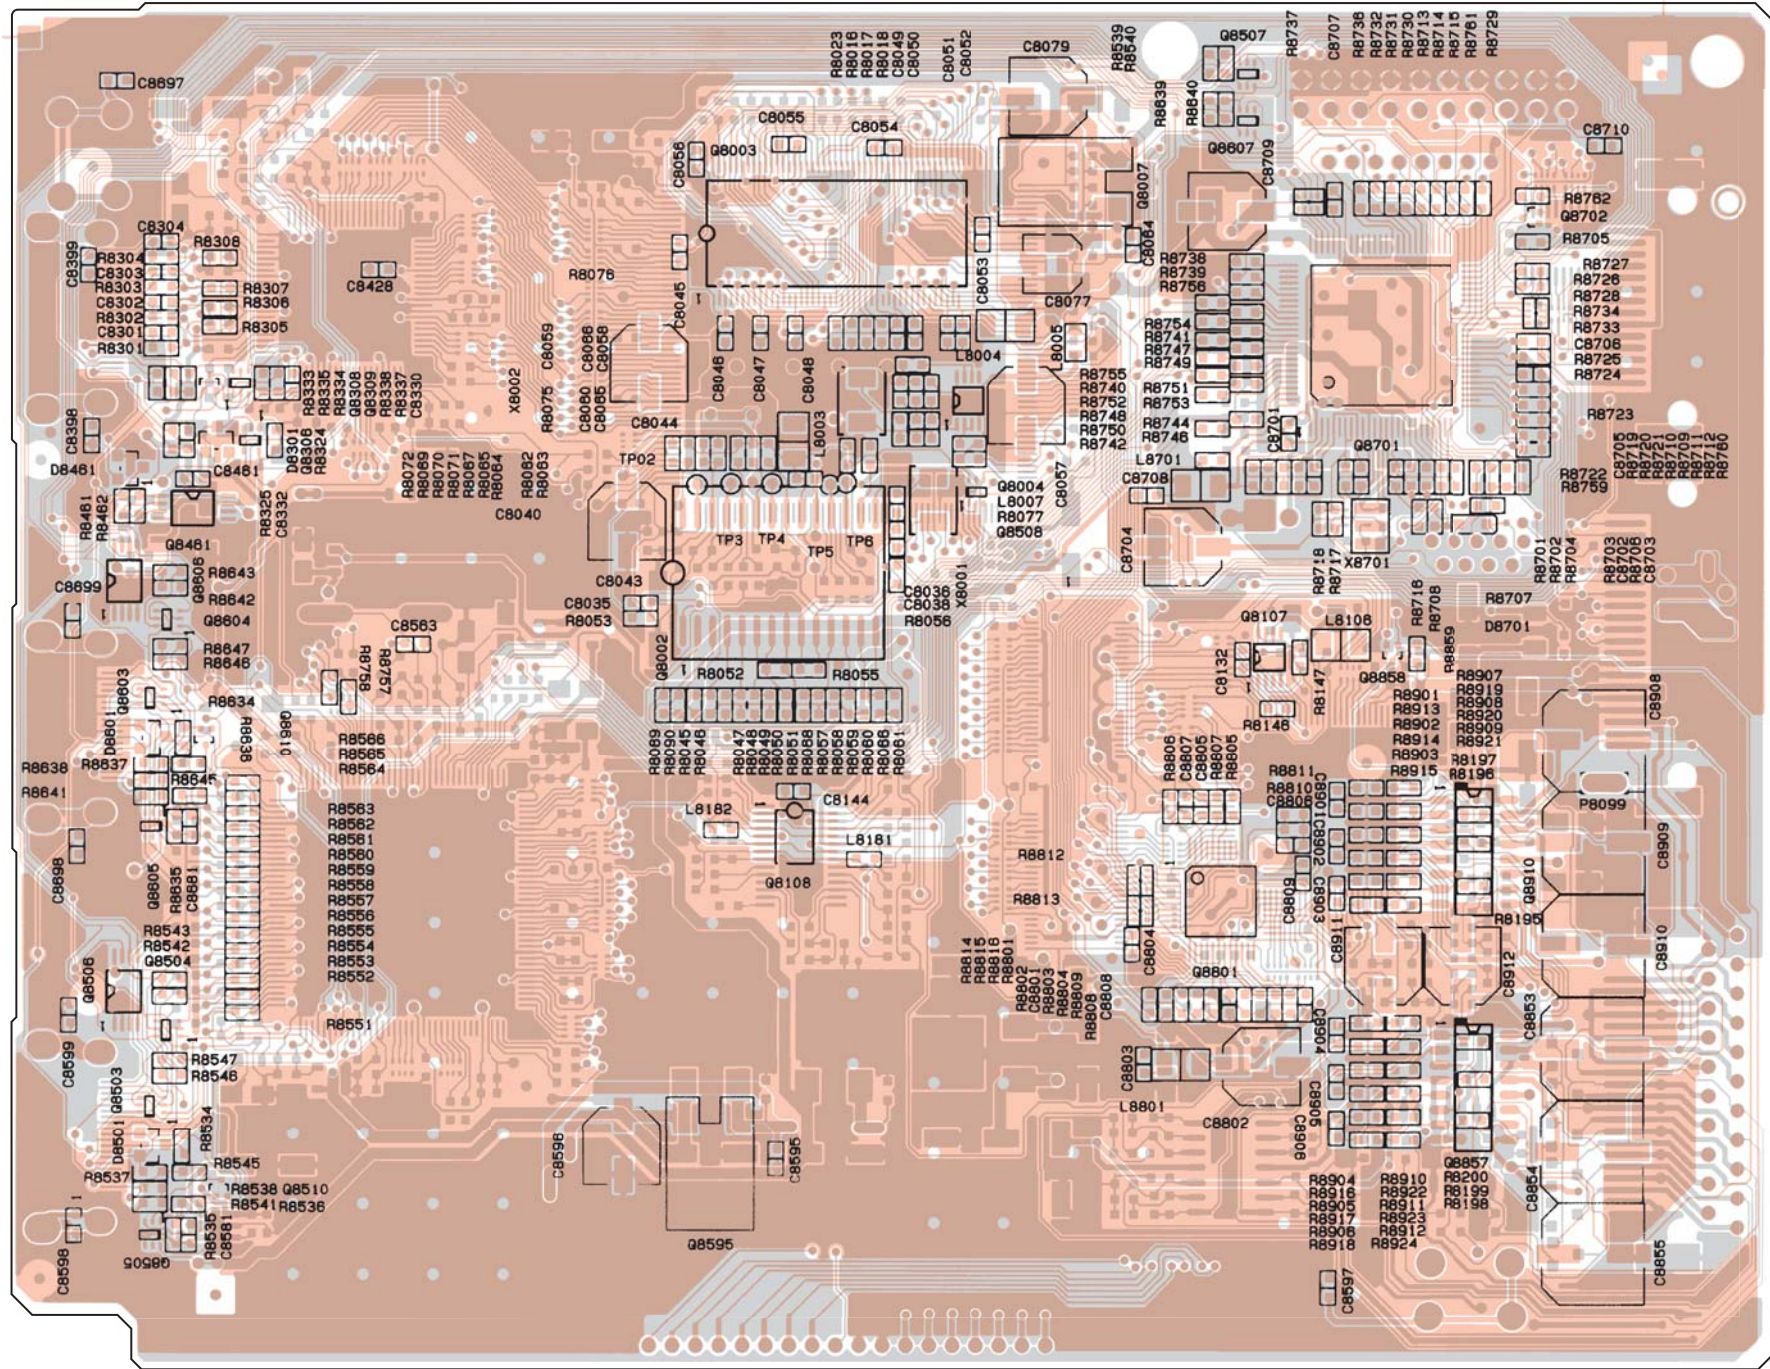


A B C D

PRINTED CIRCUIT BOARD VIEWS-7

U09 VIDEO PC BOARD (NAVD-8991)

Side-A

1
2
3
4
5

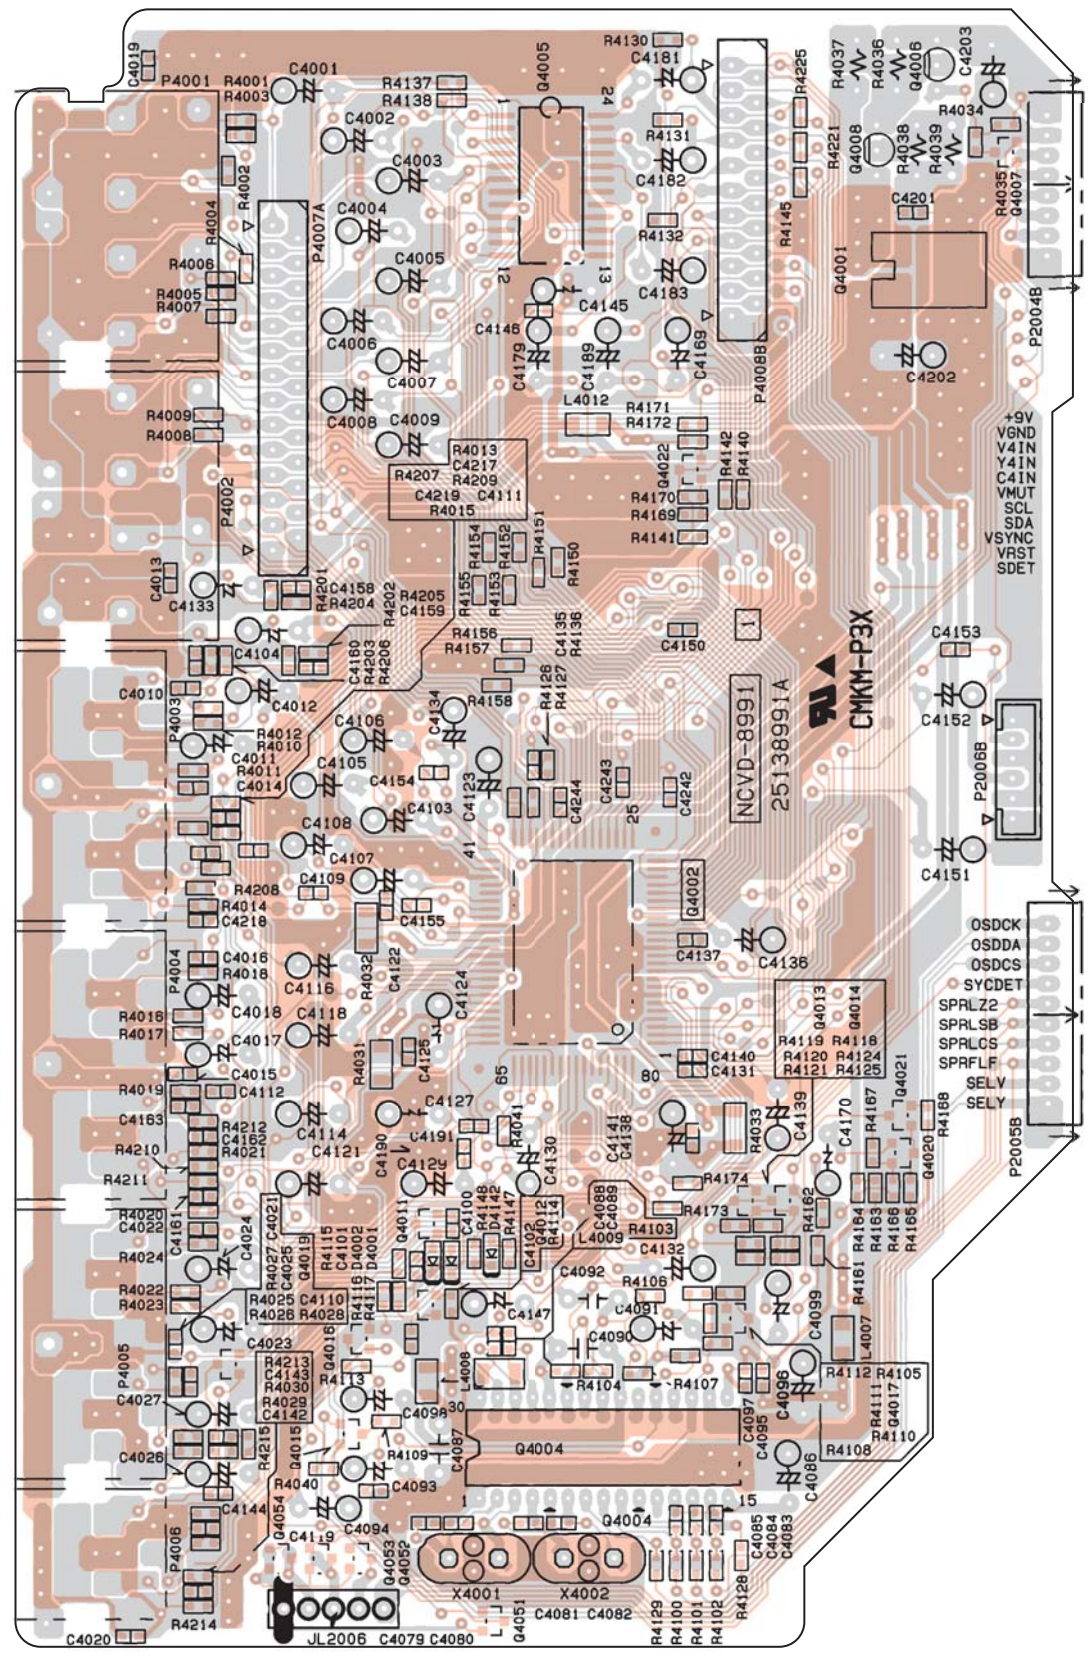

A

B

C


D

PRINTED CIRCUIT BOARD VIEWS-8

U11 VIDEO TERMINAL PC BOARD (NAETC-8993)

Side-A

1

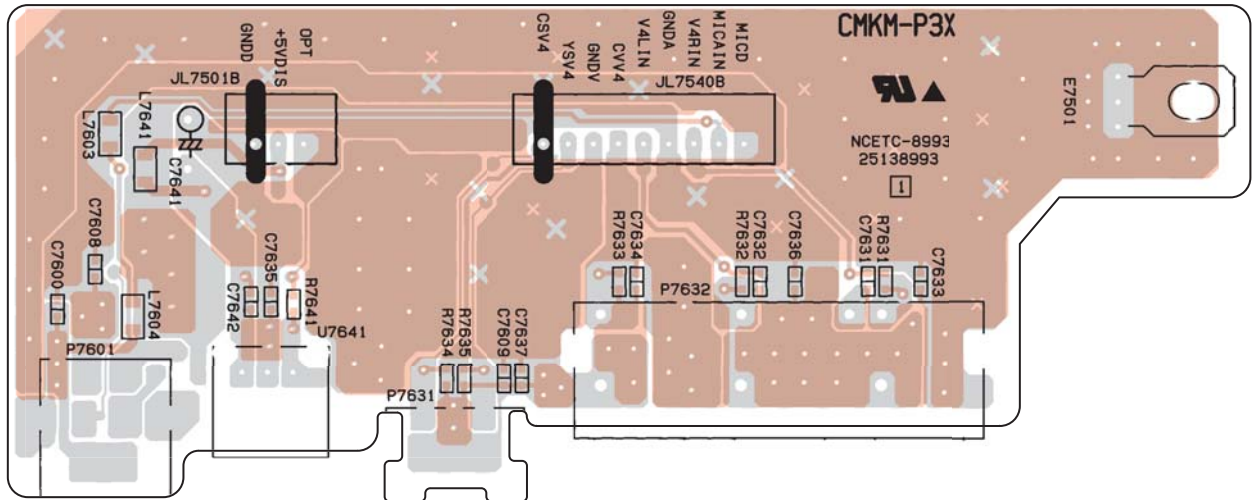


2

3


U12 XM PC BOARD (NARF-8994)

Side-A

4

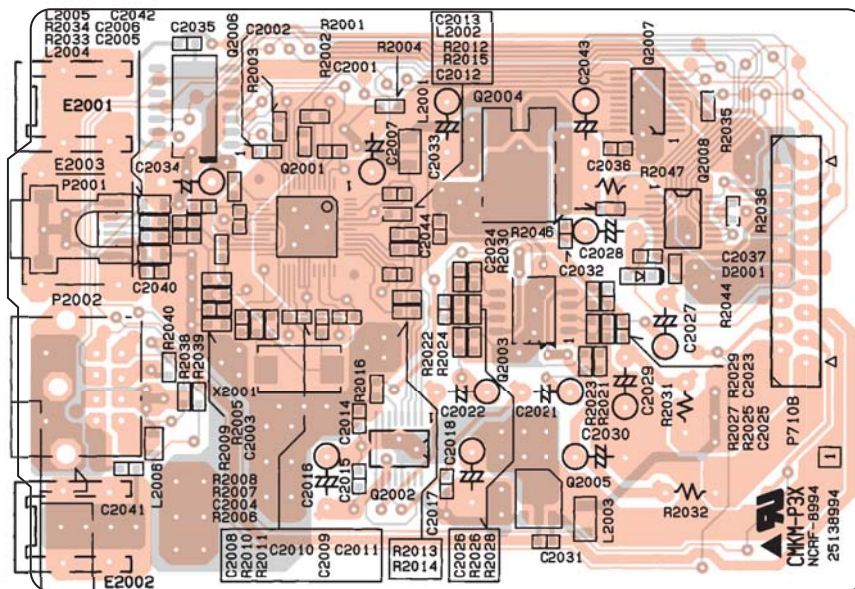

5

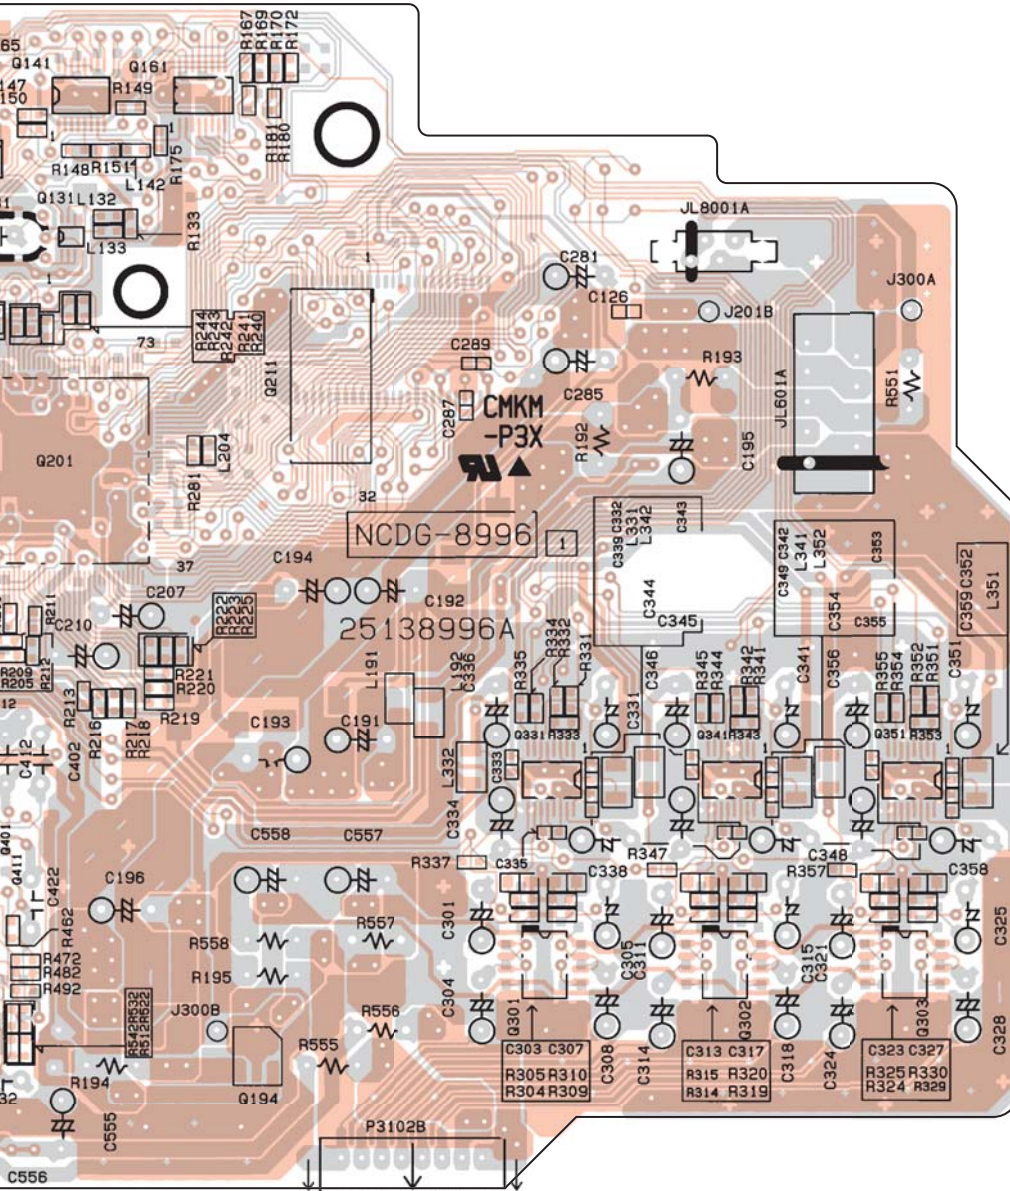

A B C D E F G H

PRINTED CIRCUIT BOARD VIEWS-9

U13 DSP PC BOARD (NADG-8996)

Side-A


1

2

3

4

5

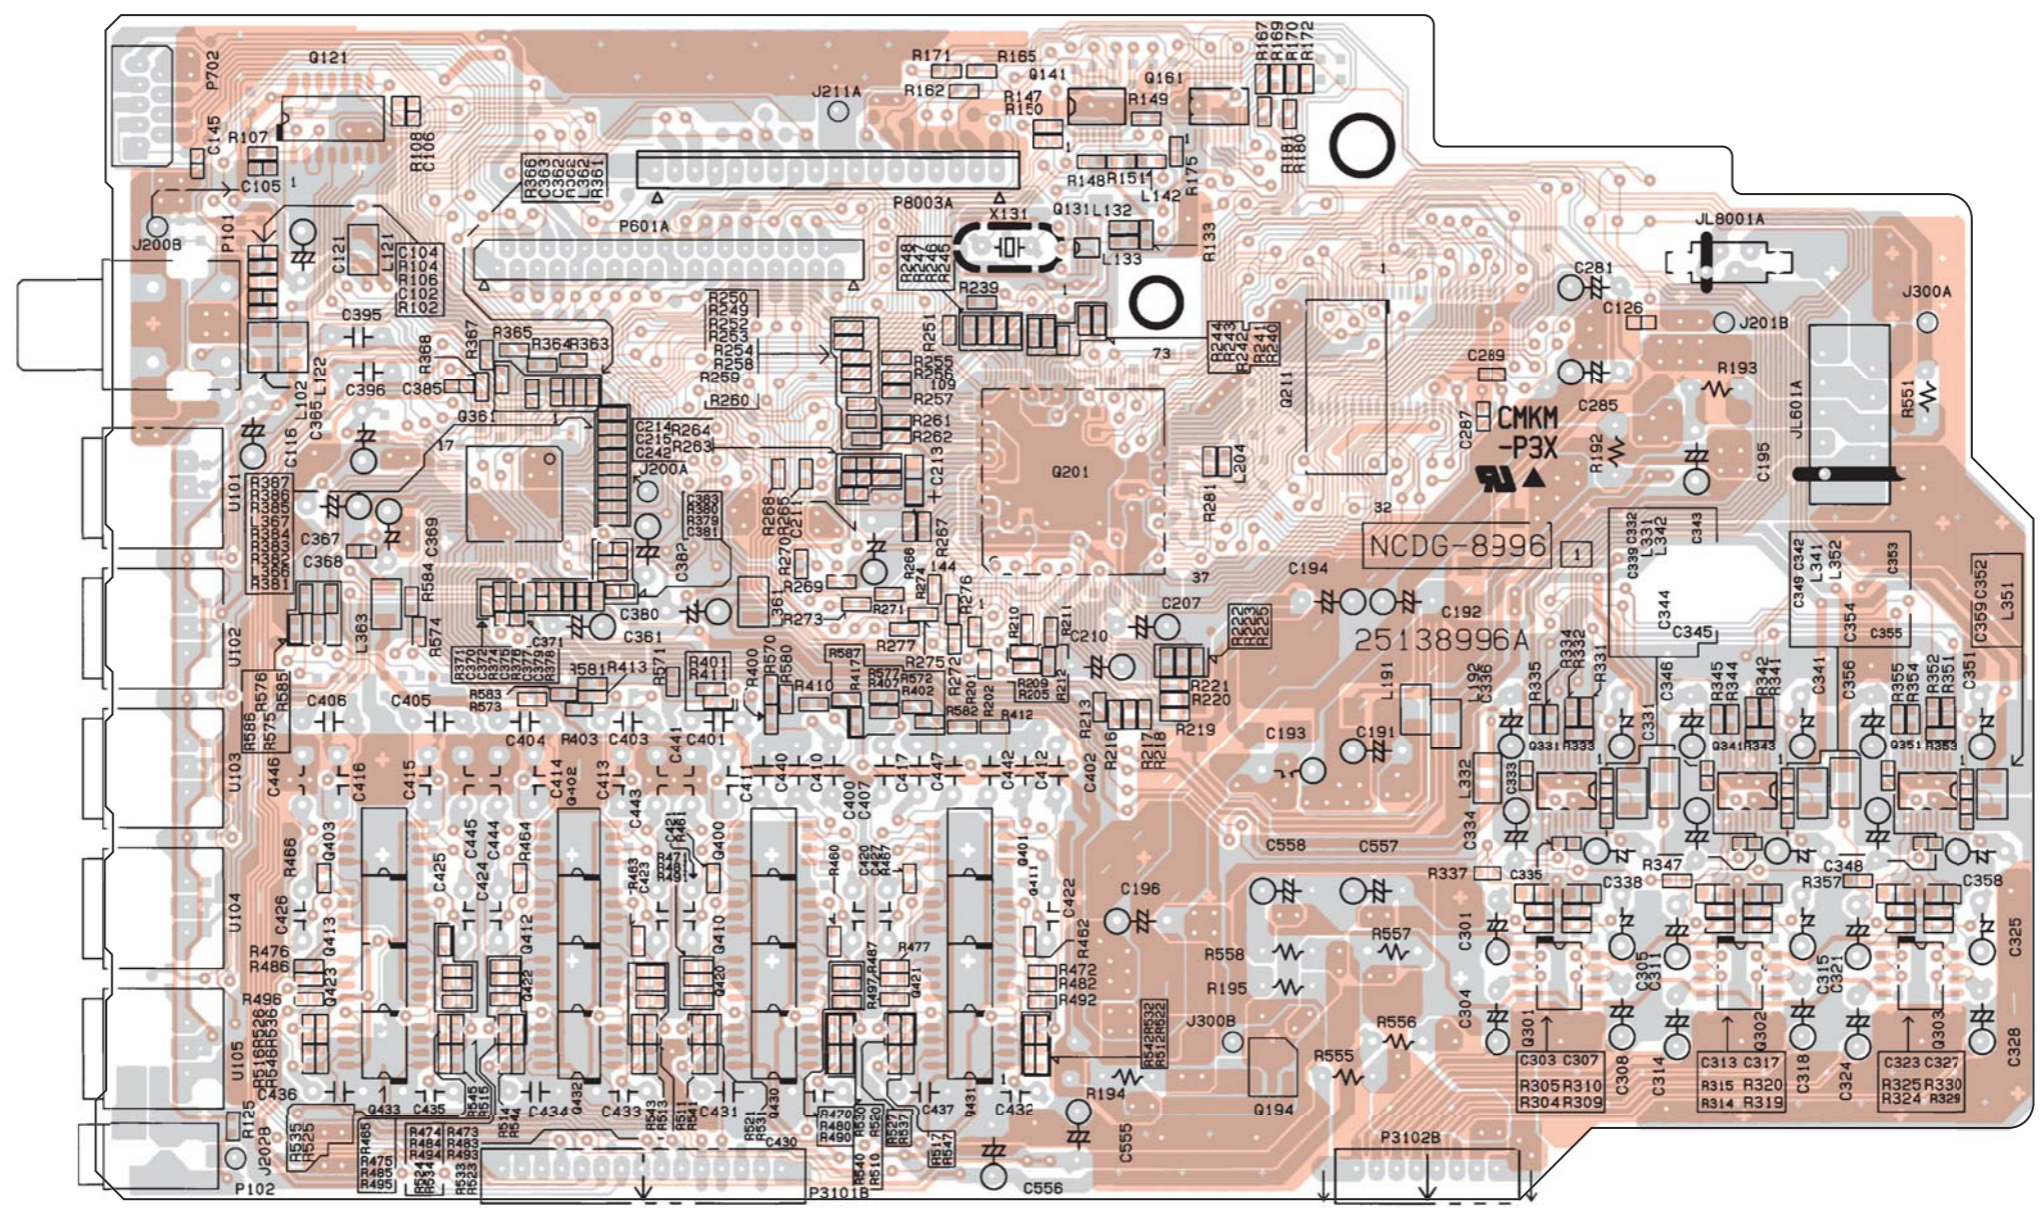

PRINTED CIRCUIT BOARD VIEWS-10

U13 DSP PC BOARD (NADG-8996)

Side-B


1

2

3

4

5

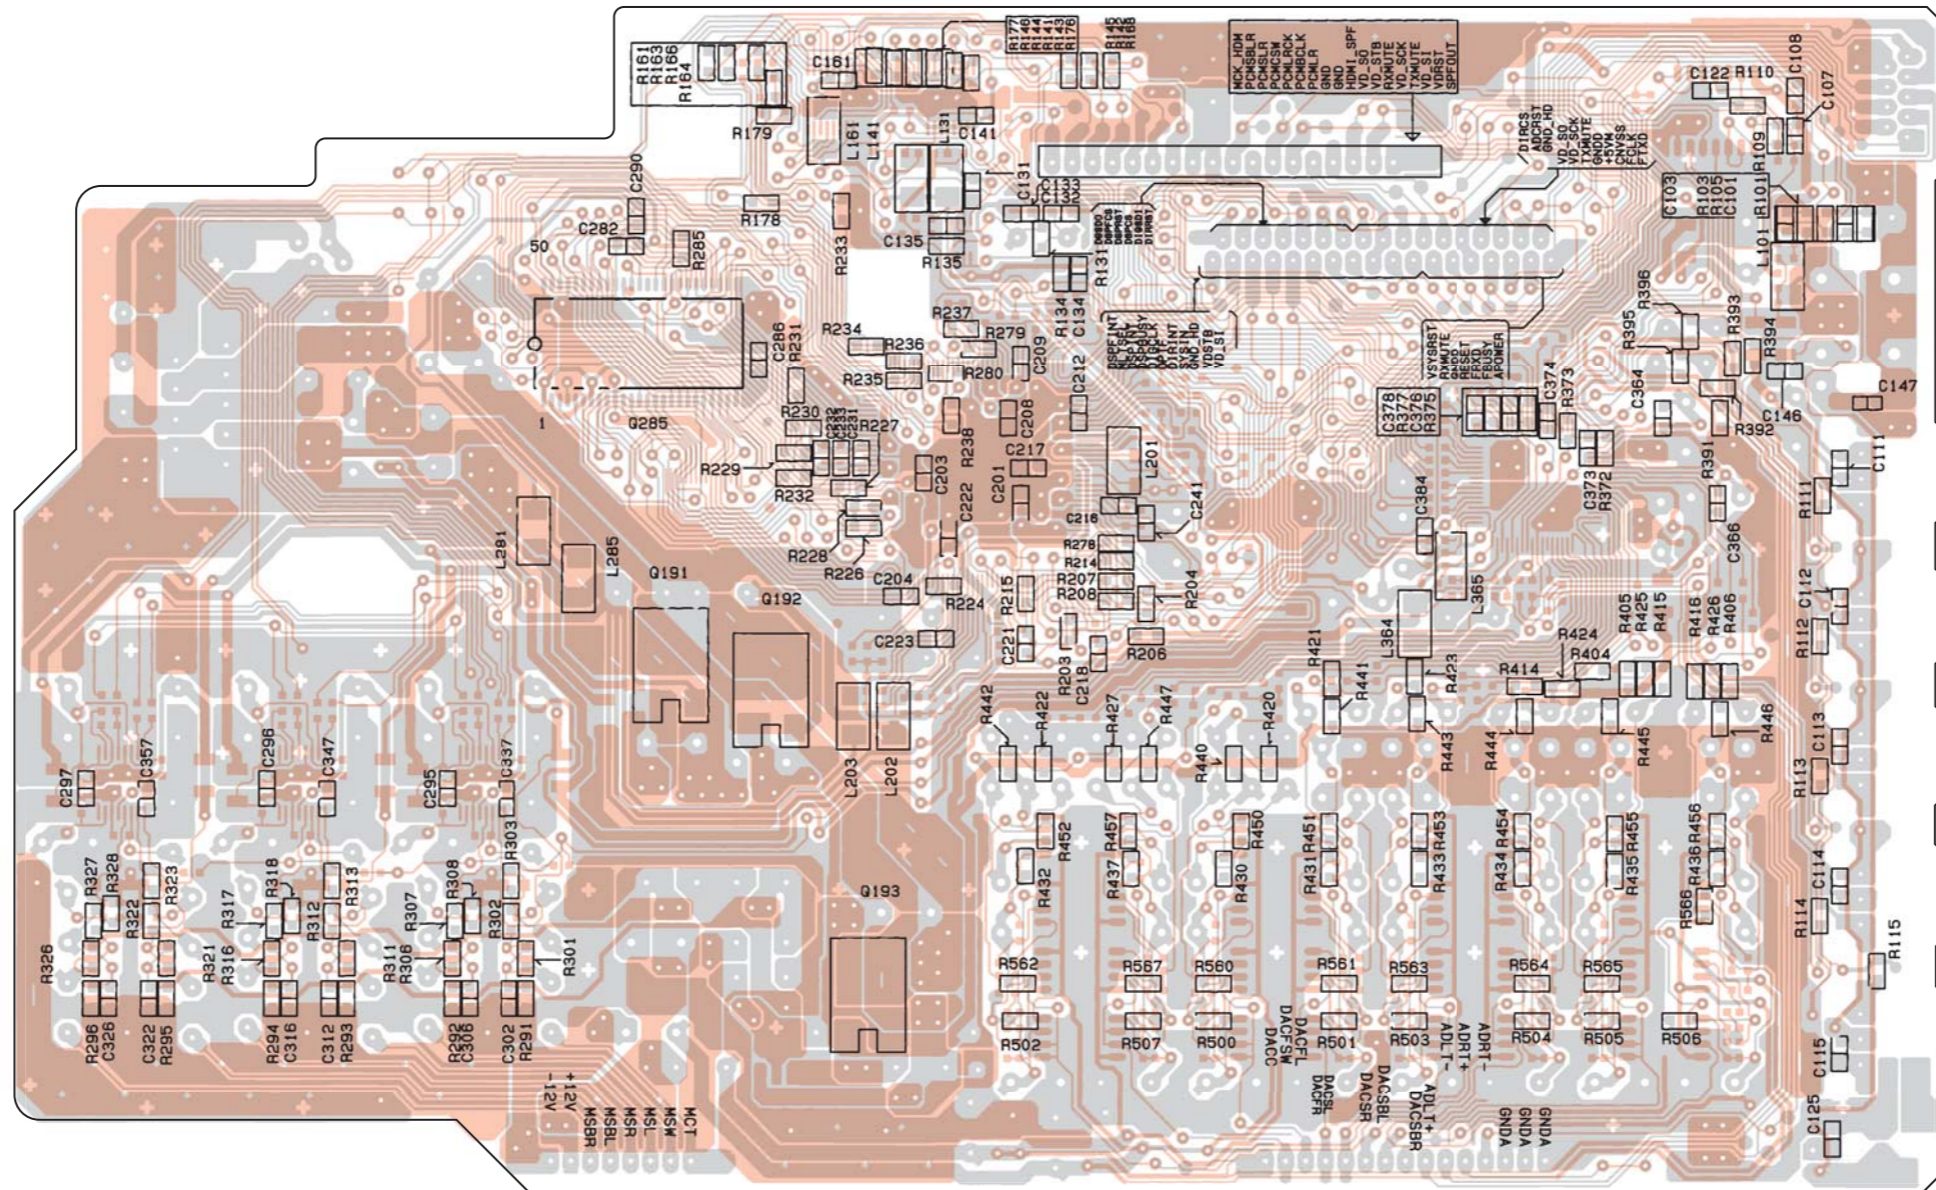

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-11

U14 MICROPROCESSOR PC BOARD (NAAR-8997)

Side-A


1


2

3

4

5

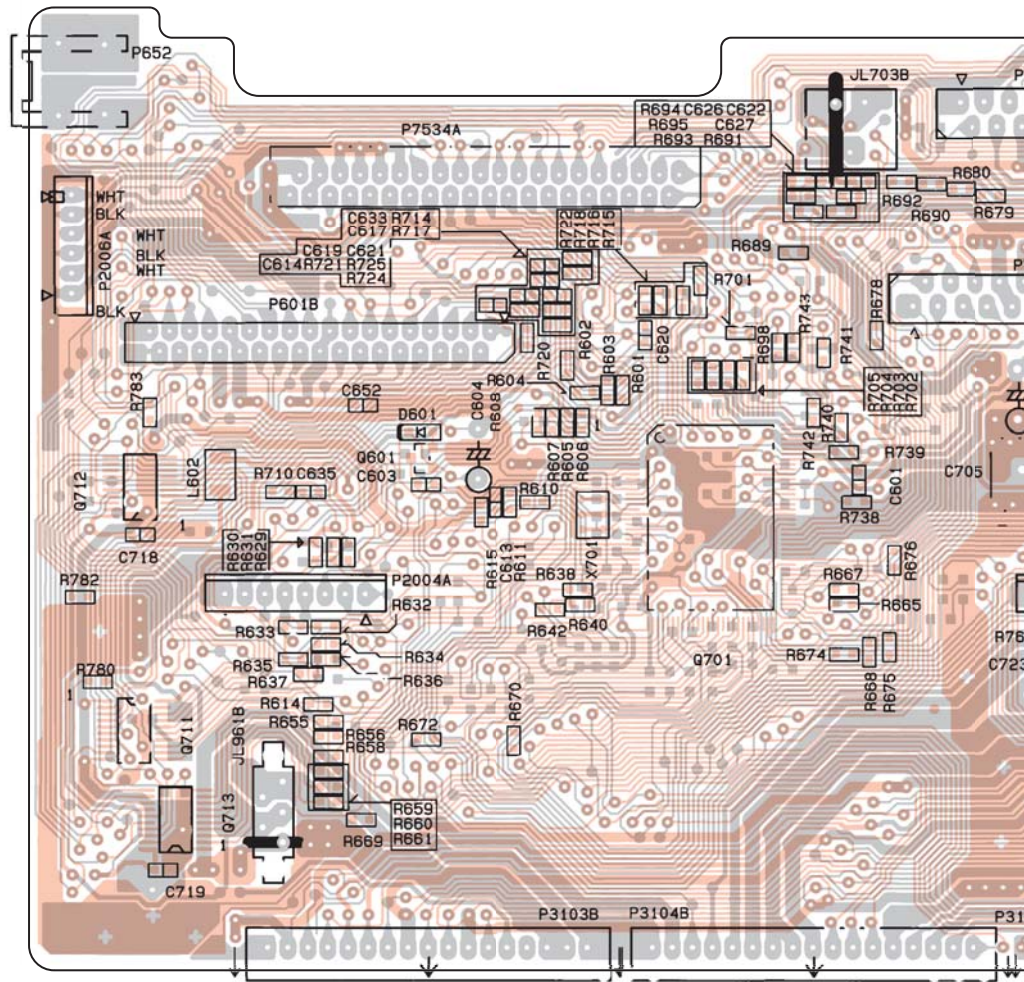

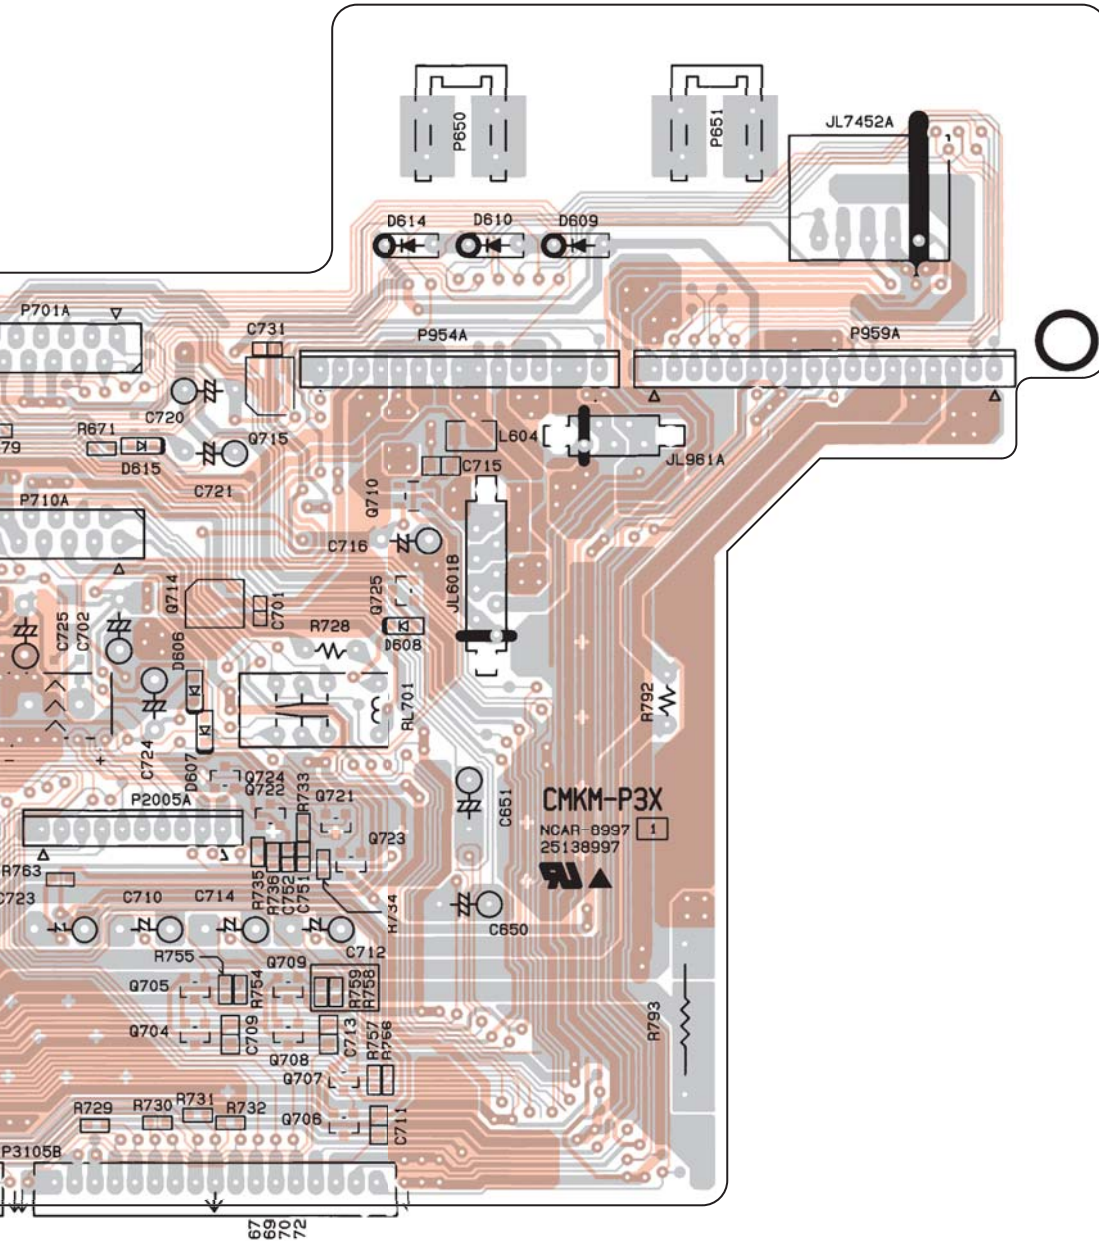

PRINTED CIRCUIT BOARD VIEWS-11

U14 MICROPROCESSOR PC BOARD (NAAR-8997)

Side-A


1

2

3

4

5

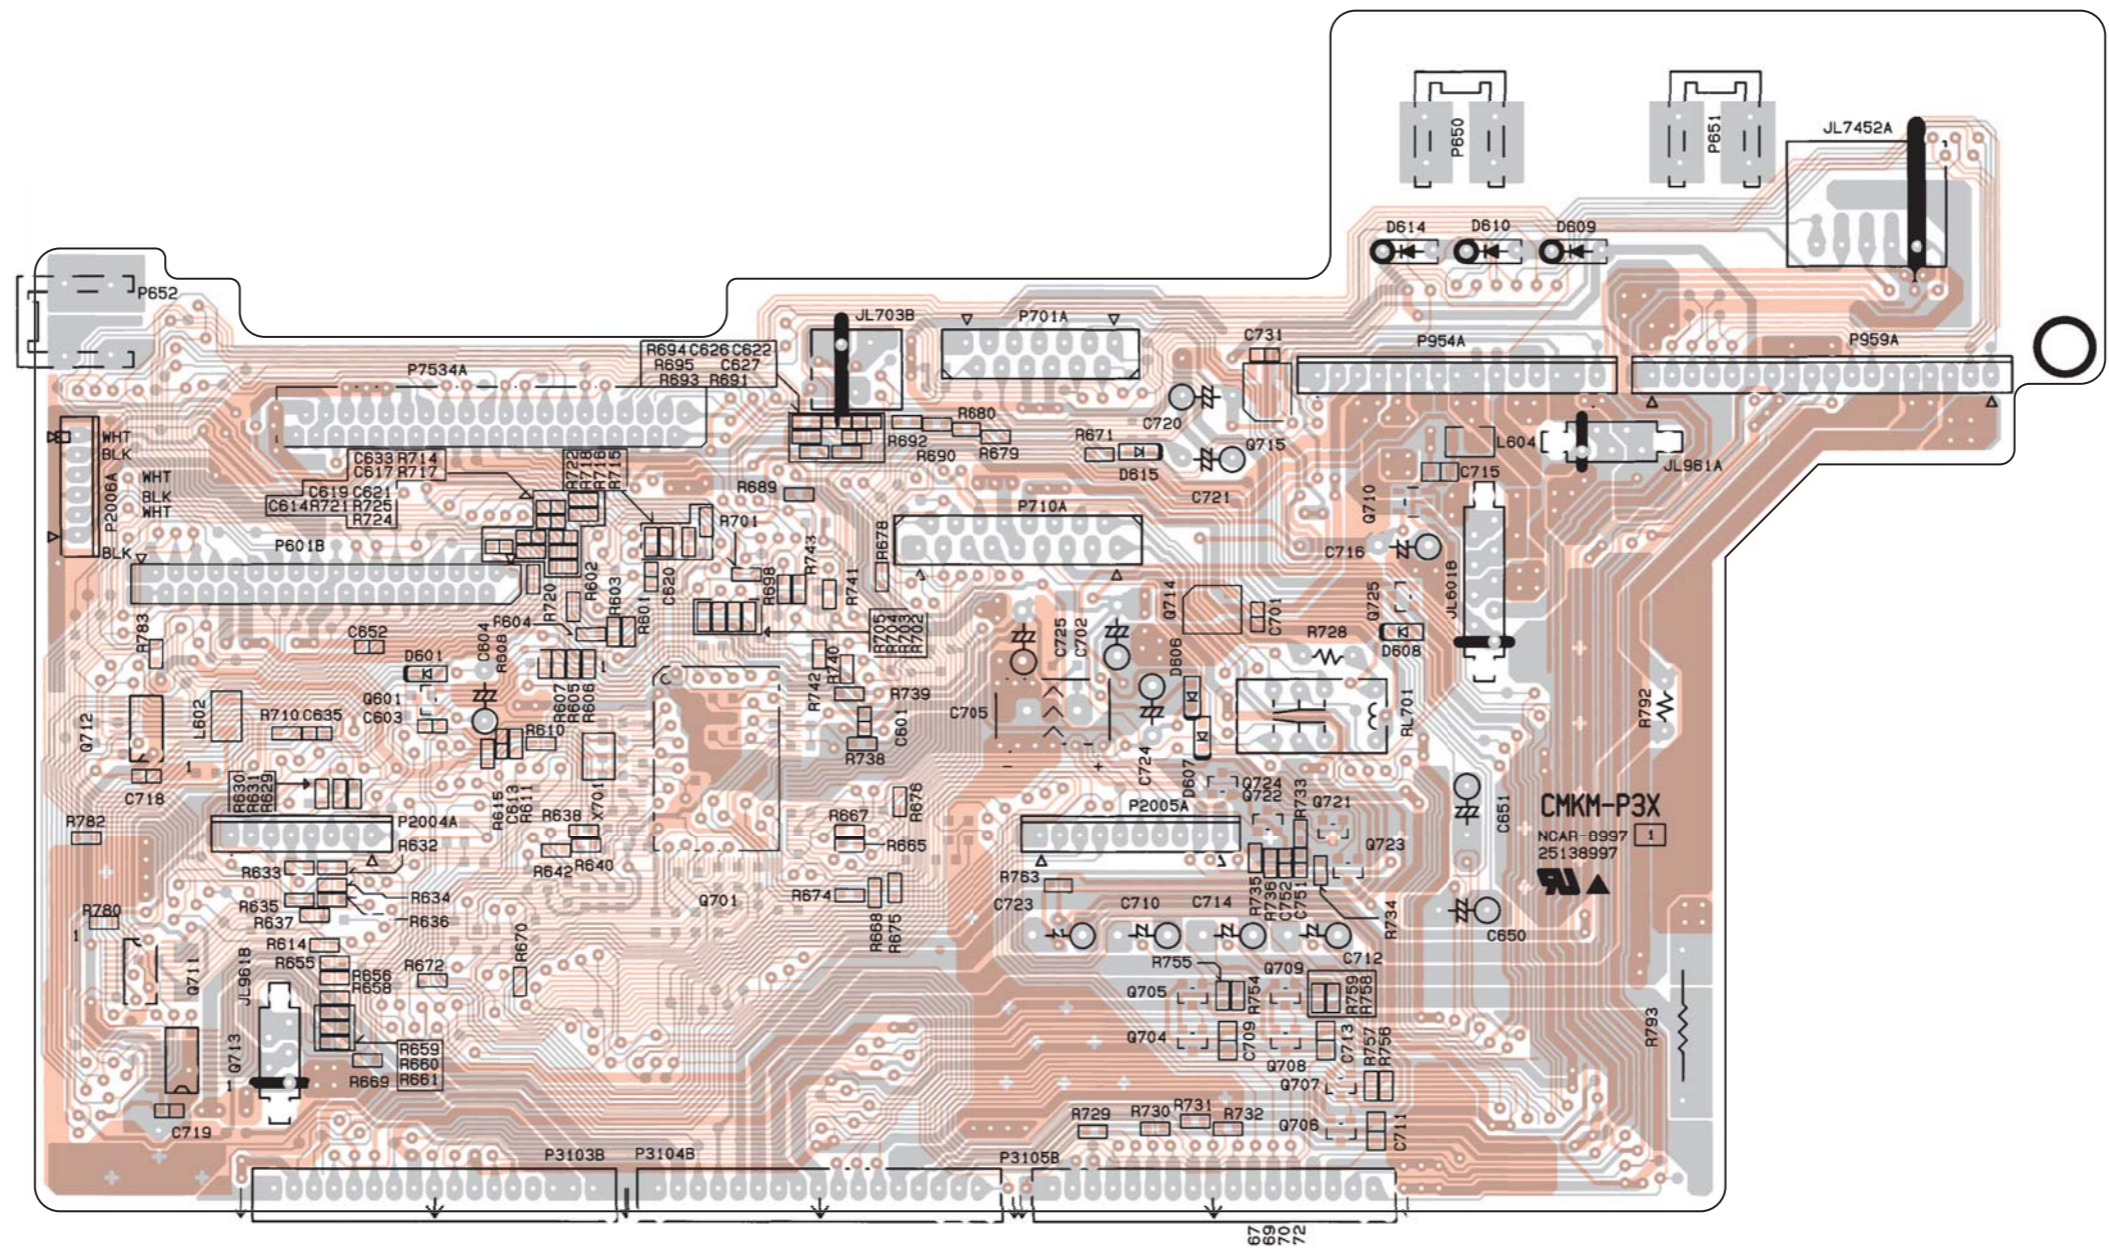

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-12

U14 MICROPROCESSOR PC BOARD (NAAR-8997)

Side-B


1


2

3

4

5

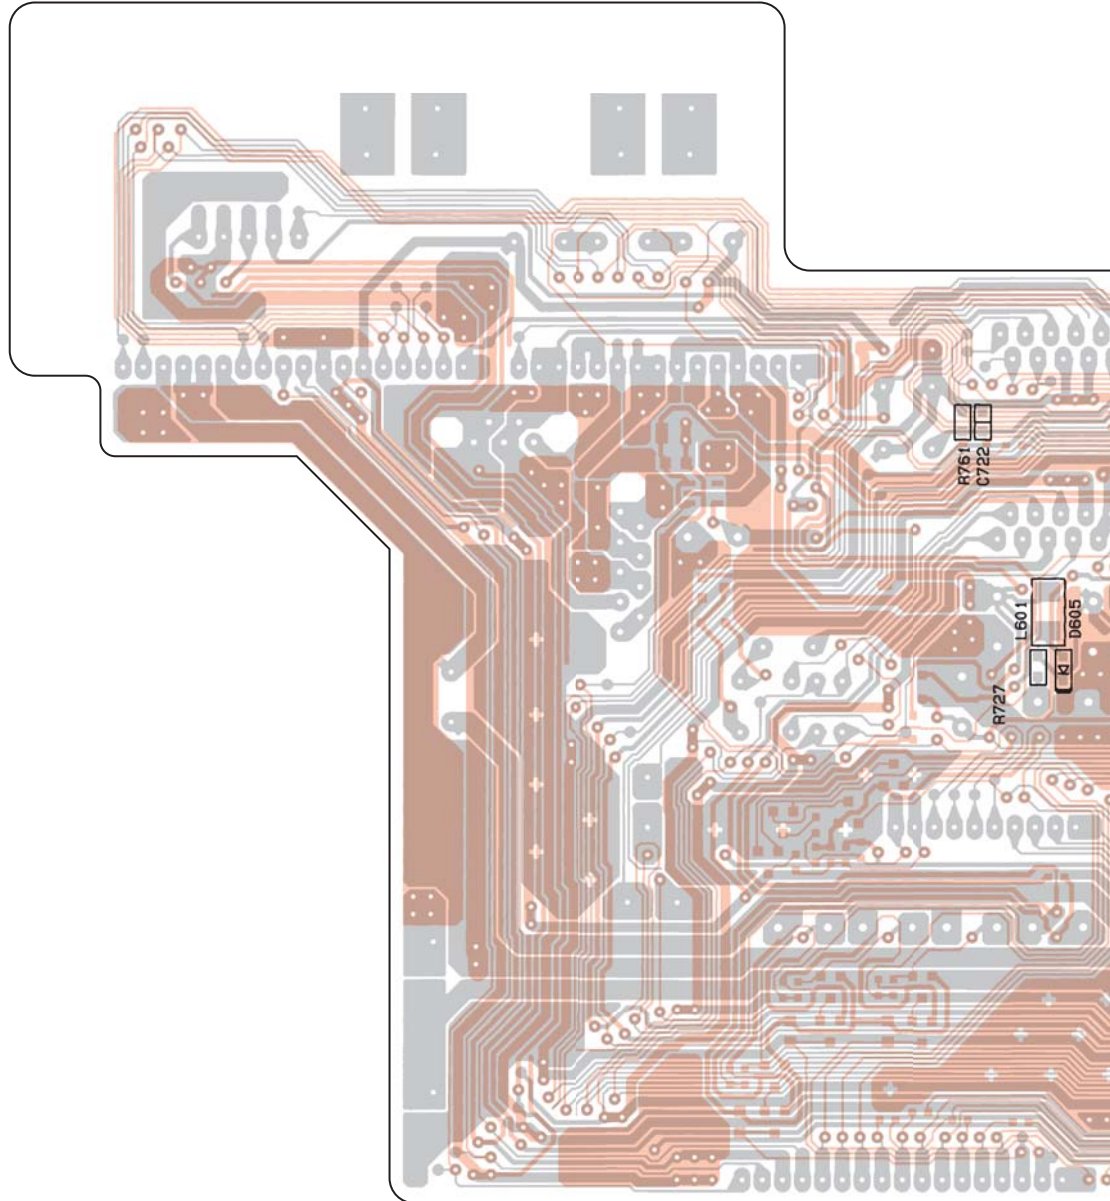

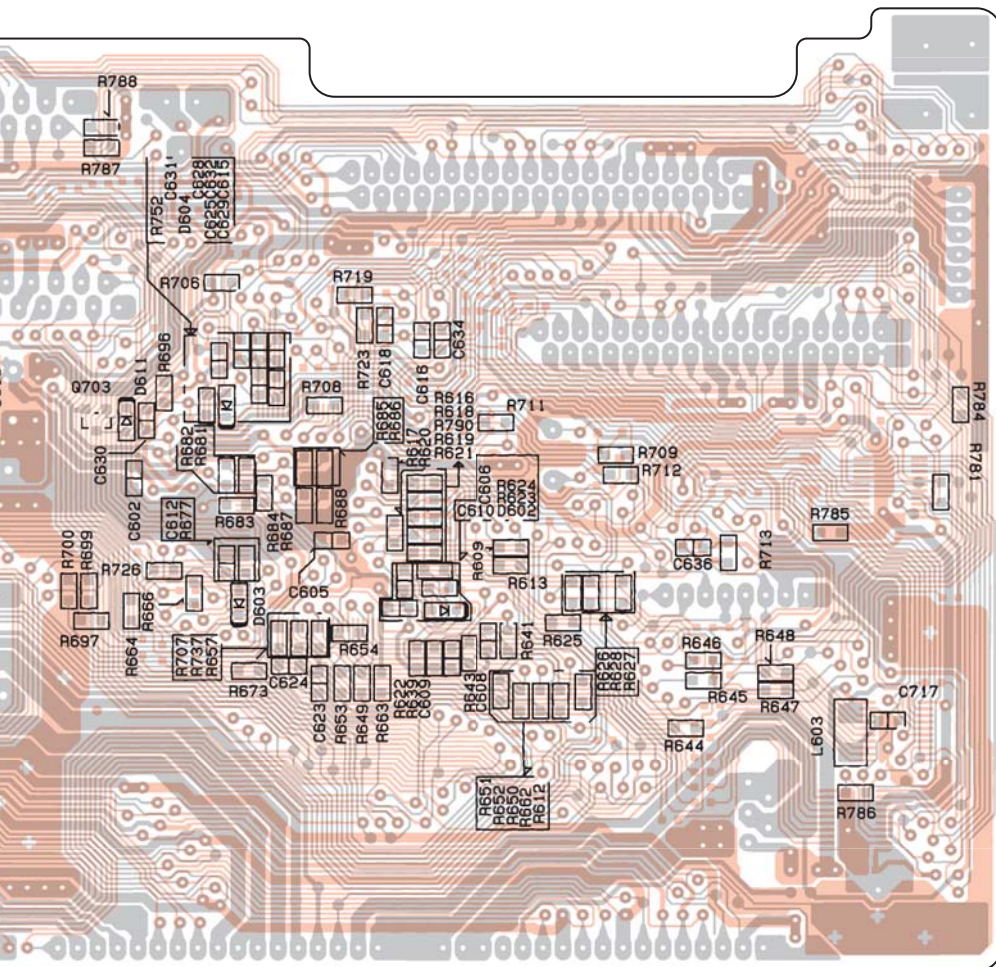

A B C D E F G H

PRINTED CIRCUIT BOARD VIEWS-12

U14 MICROPROCESSOR PC BOARD (NAAR-8997)

Side-B


1

2

3

4

5

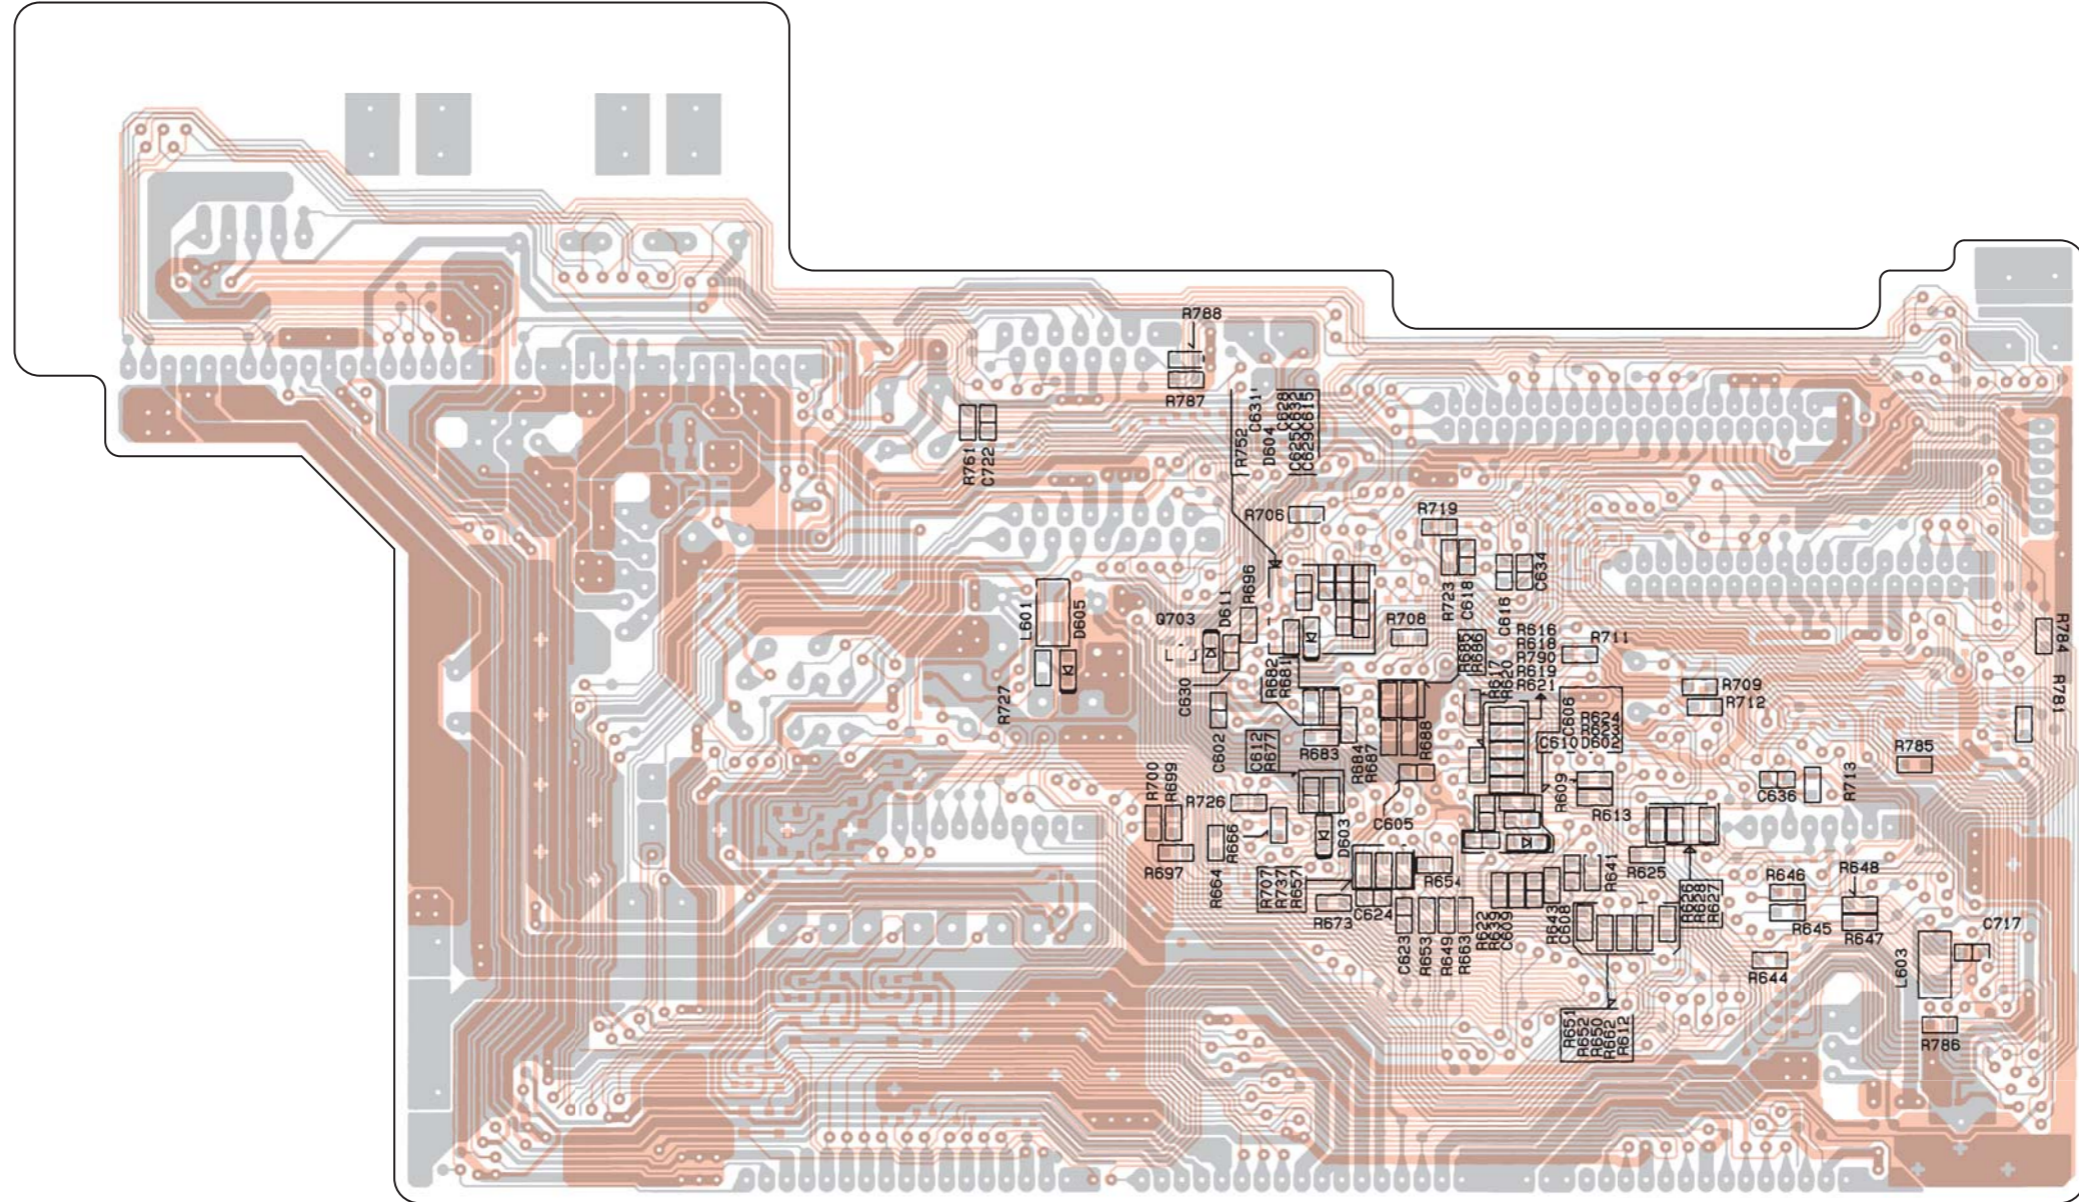

A

B

C

D

PRINTED CIRCUIT BOARD VIEWS-14

U17 POWER SUPPLY PC BOARD (NAPS-9000)

Side-A


1

2

3

4

5

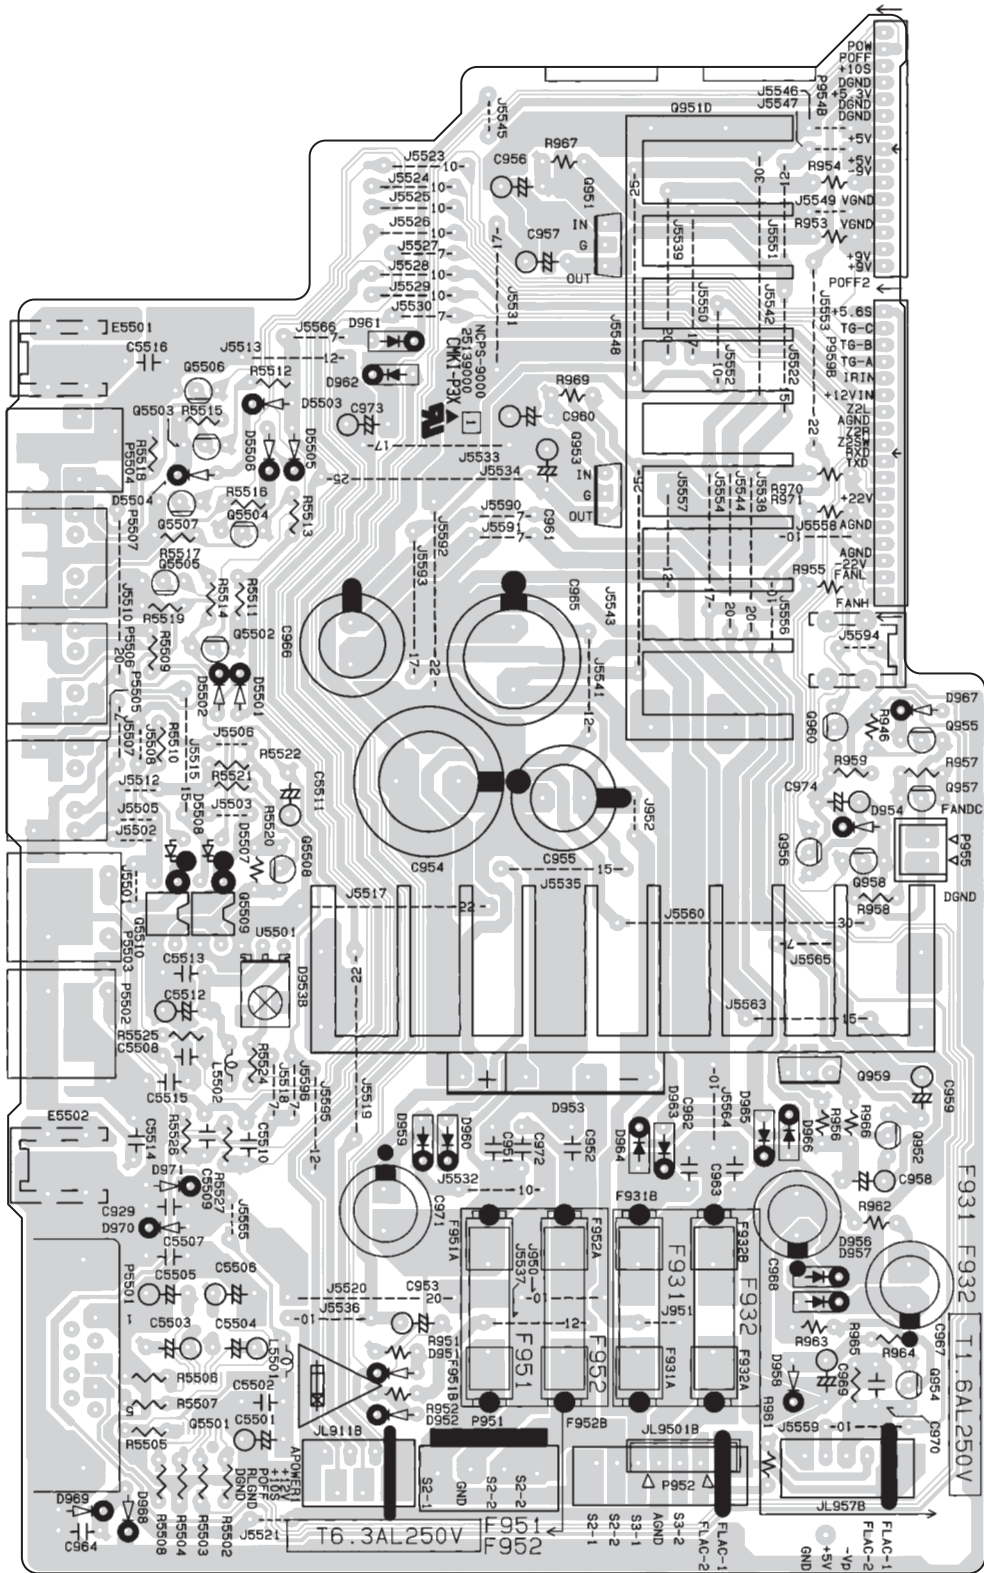

A

B


C

D

PRINTED CIRCUIT BOARD VIEWS-15


U18 SP TERMINAL PC BOARD (NAETC-9001)

Side-A

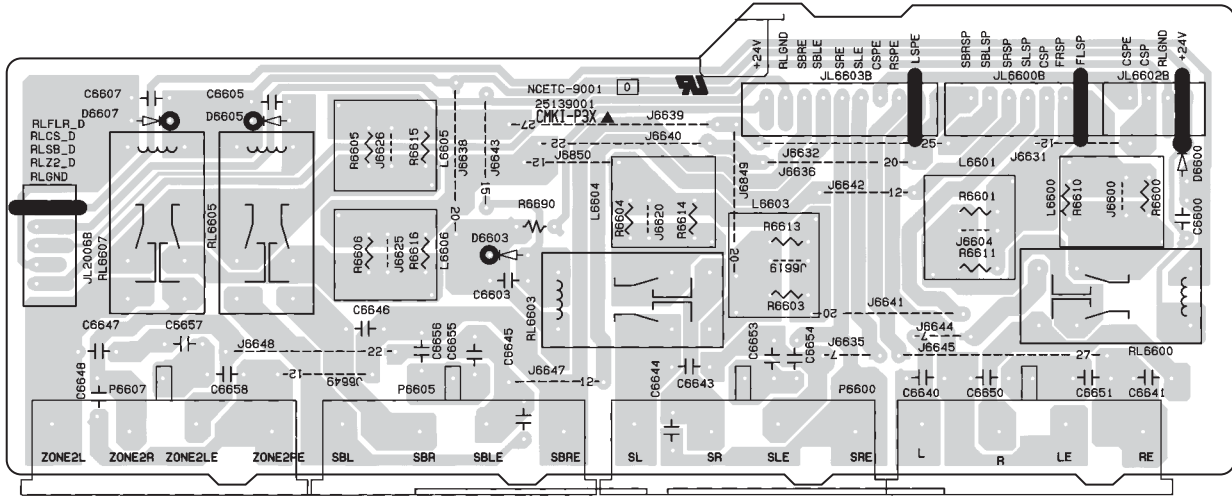


U19 SP TERMINAL PC BOARD (NAETC-9002)

Side-A

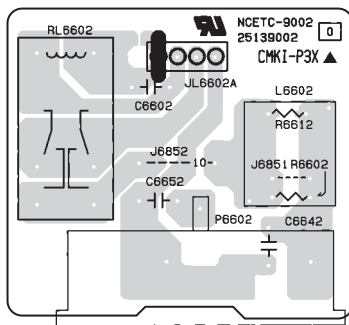

U21 POWER SW PC BOARD (NASW-9004)


Side-A



U24 OUTLET PC BOARD (NAETC-9007)

Side-A

GK Type only

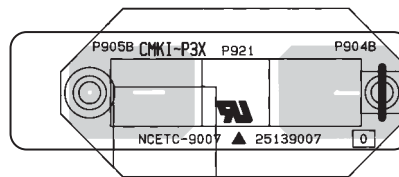

A B C D E F G H
PRINTED CIRCUIT BOARD VIEWS-16

U20 DRIVER AMPLIFIER PC BOARD (NAAF-9003)

Side-A


1

2

3

4


5

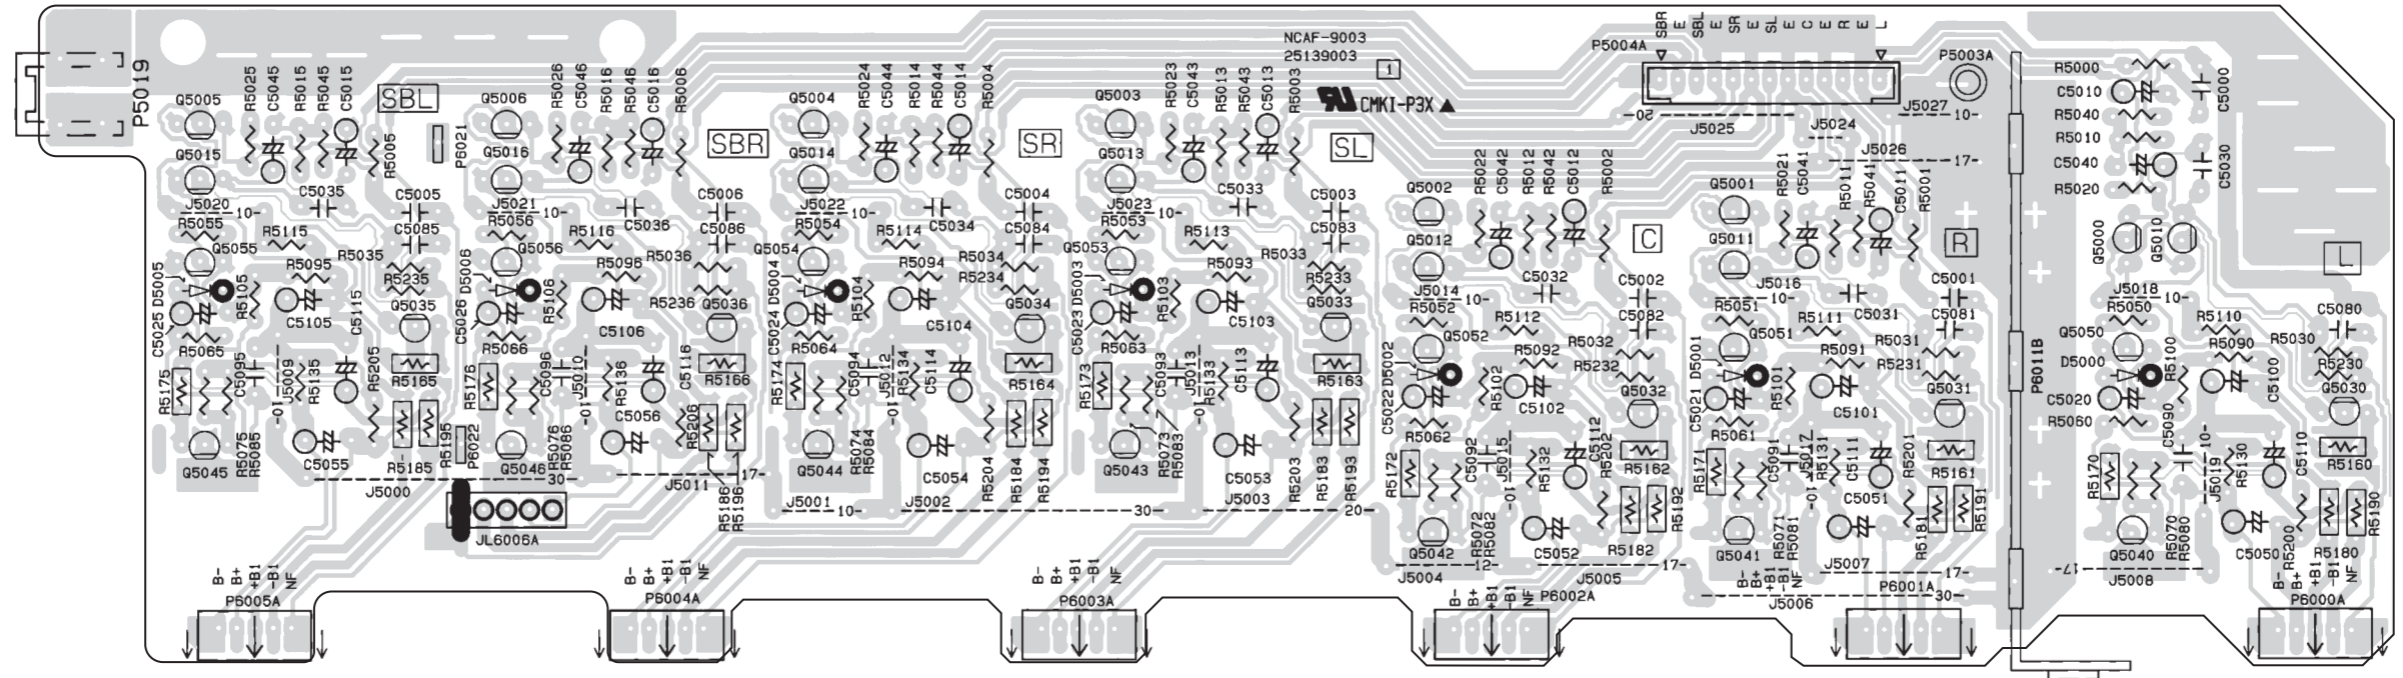


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -1

Q2001 : F2602E (XM Digital Transceiver)

BLOCK DIAGRAM

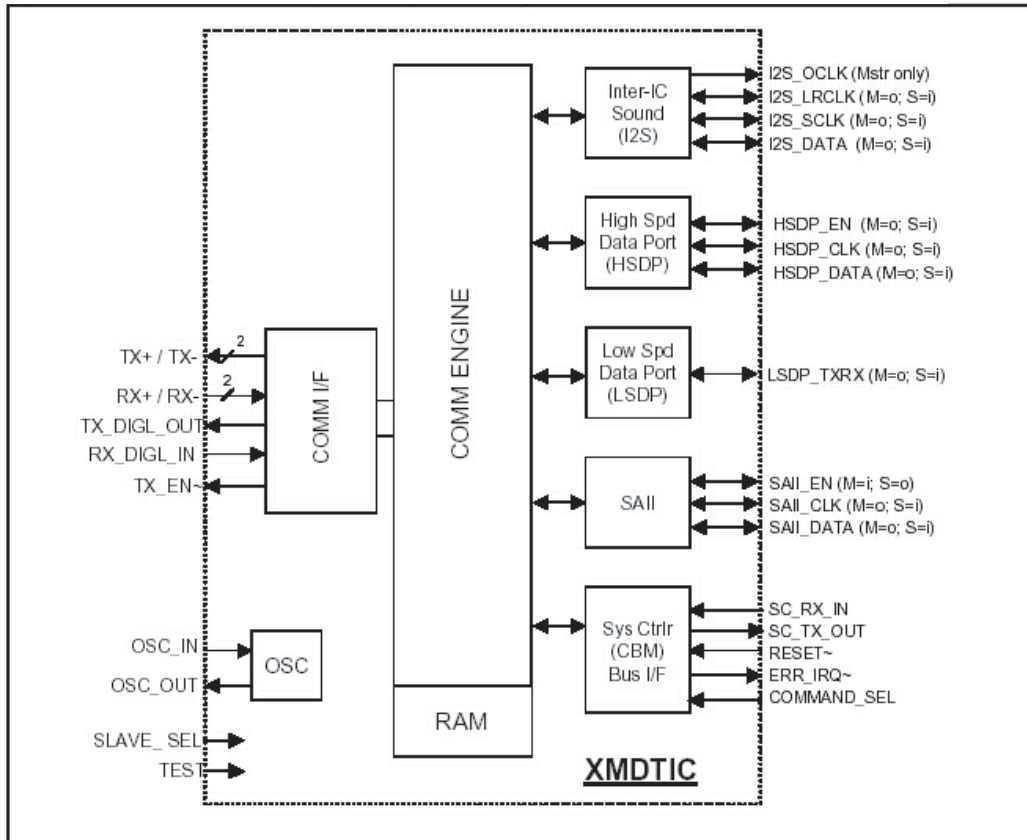

PIN CONFIGURATION

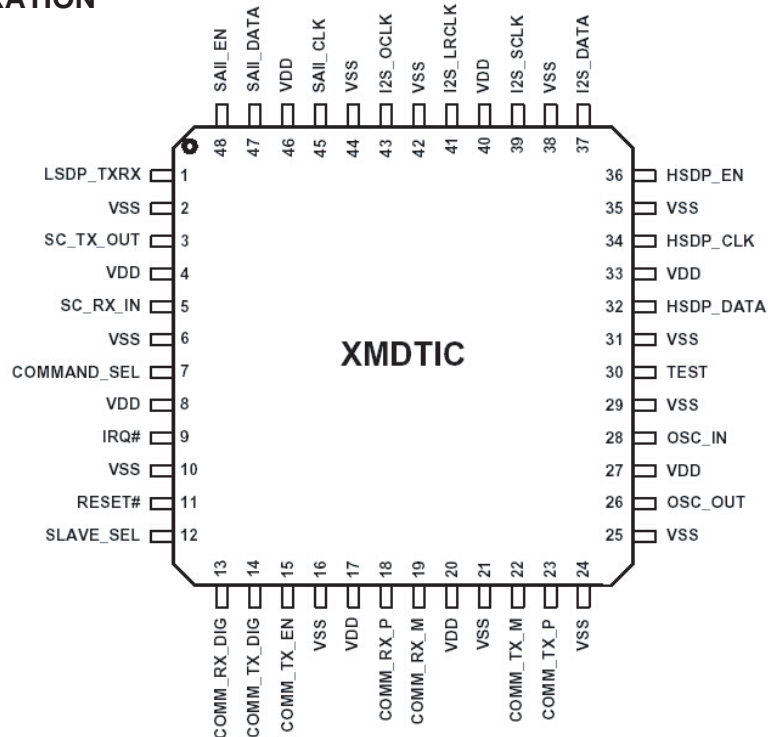

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -2

Q2001 : F2602E (XM Digital Transceiver)

TERMINAL DESCRIPTION (1/2)

Pin #	Pin Name	Type	Function in Slave Mode	Function in Master Mode	Notes
1	LSDP_TXRX	S=In M=Out	Low Speed Data Port Output	Low Speed Data Port Input	LVTTL S/T
3	SC_TX_OUT	S=Out M=Out	System Controller Bus (CBM) Transmit Data Out	System Controller Bus (CBM) Transmit Data Out	4mA, SLC
5	SC_RX_IN	S=In M=In	System Controller Bus (CBM) Receive Data In	System Controller Bus (CBM) Receive Data In	LVTTL S/T
7	COMMAND_SEL	S=In M=In	Command Mode Select In (1= Command Mode, 0=Normal Mode)	Command Mode Select In (1= Command Mode, 0=Normal Mode)	LVTTL S/T
9	IRQ#	S=Out M=Out	Interrupt Request Out (Active Low)	Interrupt Request Out (Active Low)	4mA Open Drain
11	RESET#	S=In M=In	Asynchronous Reset In, (Active Low)	Asynchronous Reset In, (Active Low)	LVTTL S/T
12	SLAVE_SEL	S=In M=In	M/S Mode Select In (High = Slave Mode)	M/S Mode Select In (Low = Master Mode)	LVTTL S/T
13	COMM_RX_DIG	S=In M=In	DT Comm Bus External Transceiver Receive Data In	DT Comm Bus External Transceiver Receive Data In	LVTTL S/T
14	COMM_TX_DIG	Output	DT Comm Bus External Transceiver Transmit Data Out	DT Comm Bus External Transceiver Transmit Data Out	LVTTL S/T
15	COMM_TX_EN	Output	DT Comm Bus External Transceiver Direction Out (1=Transmit, 0=Receive)	DT Comm Bus External Transceiver Direction Out (1=Transmit, 0=Receive)	LVTTL S/T
18	COMM_RX_P	S=In M=In	DT Comm Bus Internal Receiver Differential Positive In	DT Comm Bus Internal Receiver Differential Positive In	LVDS in+
19	COMM_RX_M	S=In M=In	DT Comm Bus Internal Receiver Differential Negative In	DT Comm Bus Internal Receiver Differential Negative In	LVDS in-
22	COMM_TX_M	Output	DT Comm Bus Internal Transmitter Differential Negative Out	DT Comm Bus Internal Transmitter Differential Negative Out	LVDS out-
23	COMM_TX_P	Output	DT Comm Bus Internal Transmitter Differential Positive Out	DT Comm Bus Internal Transmitter Differential Positive Out	LVDS out+
26	OSC_OUT	Output	Crystal Output	Crystal Output	Crystal Buffer
28	OSC_IN	S=In M=In	Crystal Input	Crystal Input	Crystal Buffer
30	TEST	S=In M=In	Factory Test Mode Select (1=Test, 0= Normal Oper.)	Factory Test Mode Select (1=Test, 0= Normal Oper.)	LVTTL S/T
32	HSDP_DATA	S=In M=Out	High Speed Data Port Data Input	High Speed Data Port Data Output	Out= 4mA, SLC In=LVTTL S/T
34	HSDP_CLK	S=In M=Out	High Speed Data Port Clock Input	High Speed Data Port Clock Output	Out= 4mA, SLC In=LVTTL S/T
36	HSDP_EN	S=Out M=In	High Speed Data Port Enable Output	High Speed Data Port Enable Input	Out= 4mA, SLC In=LVTTL S/T
37	I2S_DATA	S=In M=Out	I2S Digital Port Data In	I2S Digital Audio Port Data Out	Out= 4mA, SLC In=LVTTL S/T

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -3

Q2001 : F2602E (XM Digital Transceiver)

TERMINAL DESCRIPTION (2/2)


Pin #	Pin Name	Type	Function in Slave Mode	Function in Master Mode	Notes
39	I2S_SCLK	S=In M=Out	I2S Digital Audio Port Bit Clock In	I2S Digital Audio Port Bit Clock Out	Out= 4mA, SLC In=LVTTL S/T
41	I2S_LRCLK	S=In M=Out	I2S Digital Audio Port Left/Right Clock In	I2S Digital Audio Port Left/Right Clock Out	Out= 4mA, SLC In=LVTTL S/T
43	I2S_OCLK	S=In M=Out	I2S Digital Audio Port Oversample Clock (not used - connect to Gnd???)	I2S Digital Audio Port Oversample Clock Out	Out= 4mA, SLC
45	SAII_CLK	S=Out M=In	SAII Port Clock Output	SAII Port Clock Input	Out= 4mA, SLC 3.3V S/T
47	SAII_DATA	S=Out M=In	SAII Port Data Output	SAII Port Data Input	Out= 4mA, SLC In=LVTTL S/T
48	SAII_REQ	S=In M=Out	SAII Port Request Input	SAII Port Request Output	Out= 4mA, SLC In=LVTTL S/T

Pin#	Pin Name	Type	Function in Slave Mode	Function in Master Mode	Notes
4, 8, 17, 20, 27, 33, 40, 46	VDD	PWR	+3.3V Supply Voltage	+3.3V Supply Voltage	
2, 6, 10, 16, 21, 24, 25, 29, 31, 25, 38, 42, 44	VSS	GND	Digital Ground	Digital Ground	


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -4

Q2002: AK4384ET (192kHz 24-Bit 2ch DAC)

BLOCK DIAGRAM

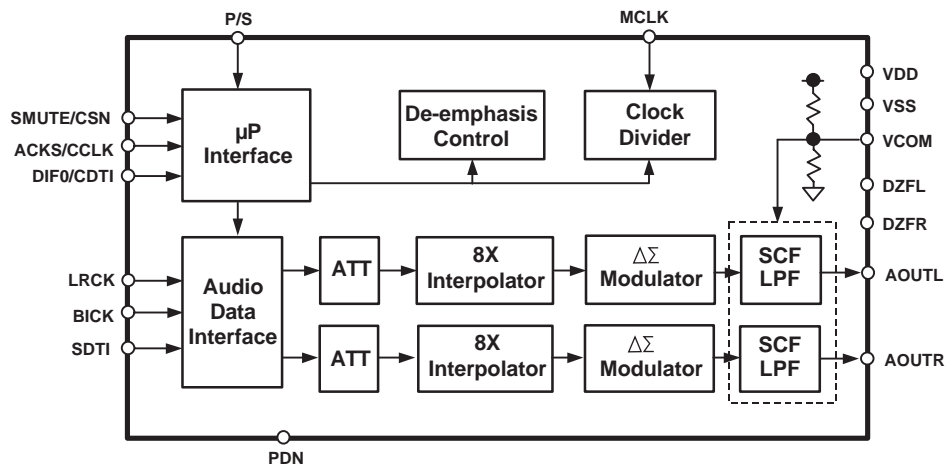

PIN CONFIGURATION

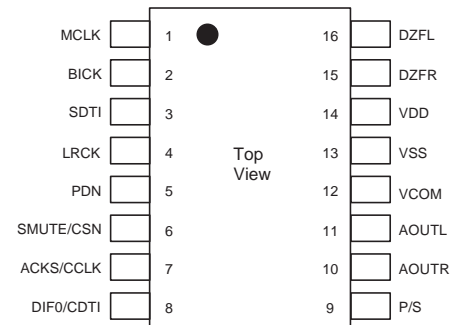


TERMINAL DESCRIPTION

No.	Pin Name	I/O	Function
1	MCLK	I	Master Clock Input Pin An external TTL clock should be input on this pin.
2	BICK	I	Audio Serial Data Clock Pin
3	SDTI	I	Audio Serial Data Input Pin
4	LRCK	I	L/R Clock Pin
5	PDN	I	Power -Down Mode Pin When at "L", the AK4384 is in the power-down mode and is held in reset. The AK4384 should always be reset upon power-up.
6	SMUTE	I	Soft Mute Pin in parallel mode "H": Enable, "L": Disable
	CSN	I	Chip Select Pin in serial mode
7	ACKS	I	Auto Setting Mode Pin in parallel mode "L": Manual Setting Mode, "H": Auto Setting Mode
	CCLK	I	Control Data Clock Pin in serial mode
8	DIF0	I	Audio Data Interface Format Pin in parallel mode
	CDTI	I	Control Data Input Pin in serial mode
9	P/S	I	Parallel/Serail Select Pin (Internal pull-up pin) "L": Serial control mode, "H": Parallel control mode
10	AOUTR	O	Rch Analog Output Pin
11	AOUTL	O	Lch Analog Output Pin
12	VCOM	O	Common Voltage Pin, VDD/2 Normally connected to VSS with a 0.1mF ceramic capacitor in parallel with a 10 m F electrolytic cap.
13	VSS	-	Ground Pin
14	VDD	-	Power Supply Pin
15	DZFR	O	Rch Data Zero Input Detect Pin
16	DZFL	O	Lch Data Zero Input Detect Pin


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -5

Q201: CS494003 (DSP)

BLOCK DIAGRAM

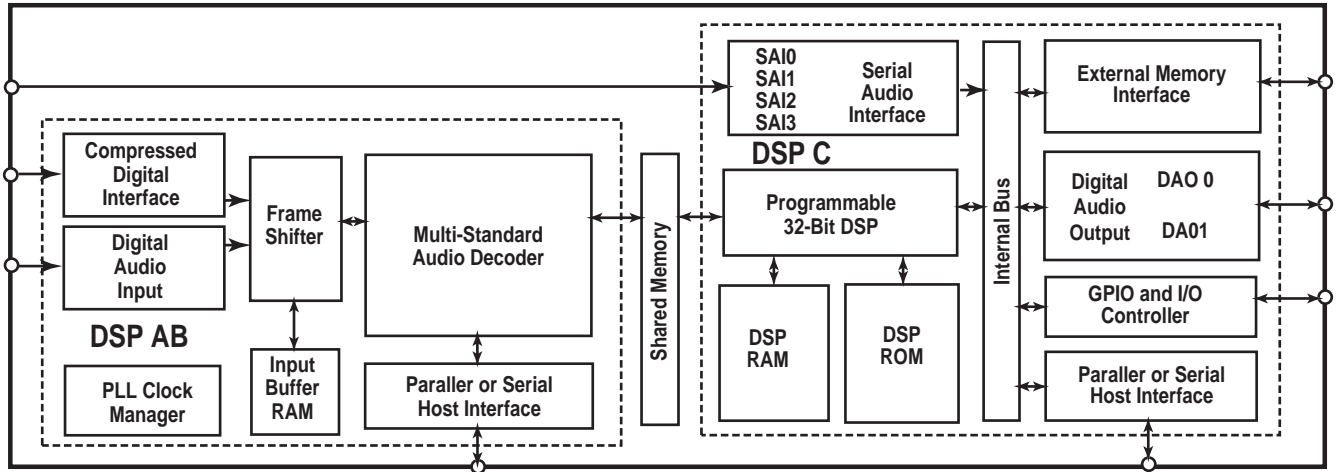

PIN CONFIGURATION

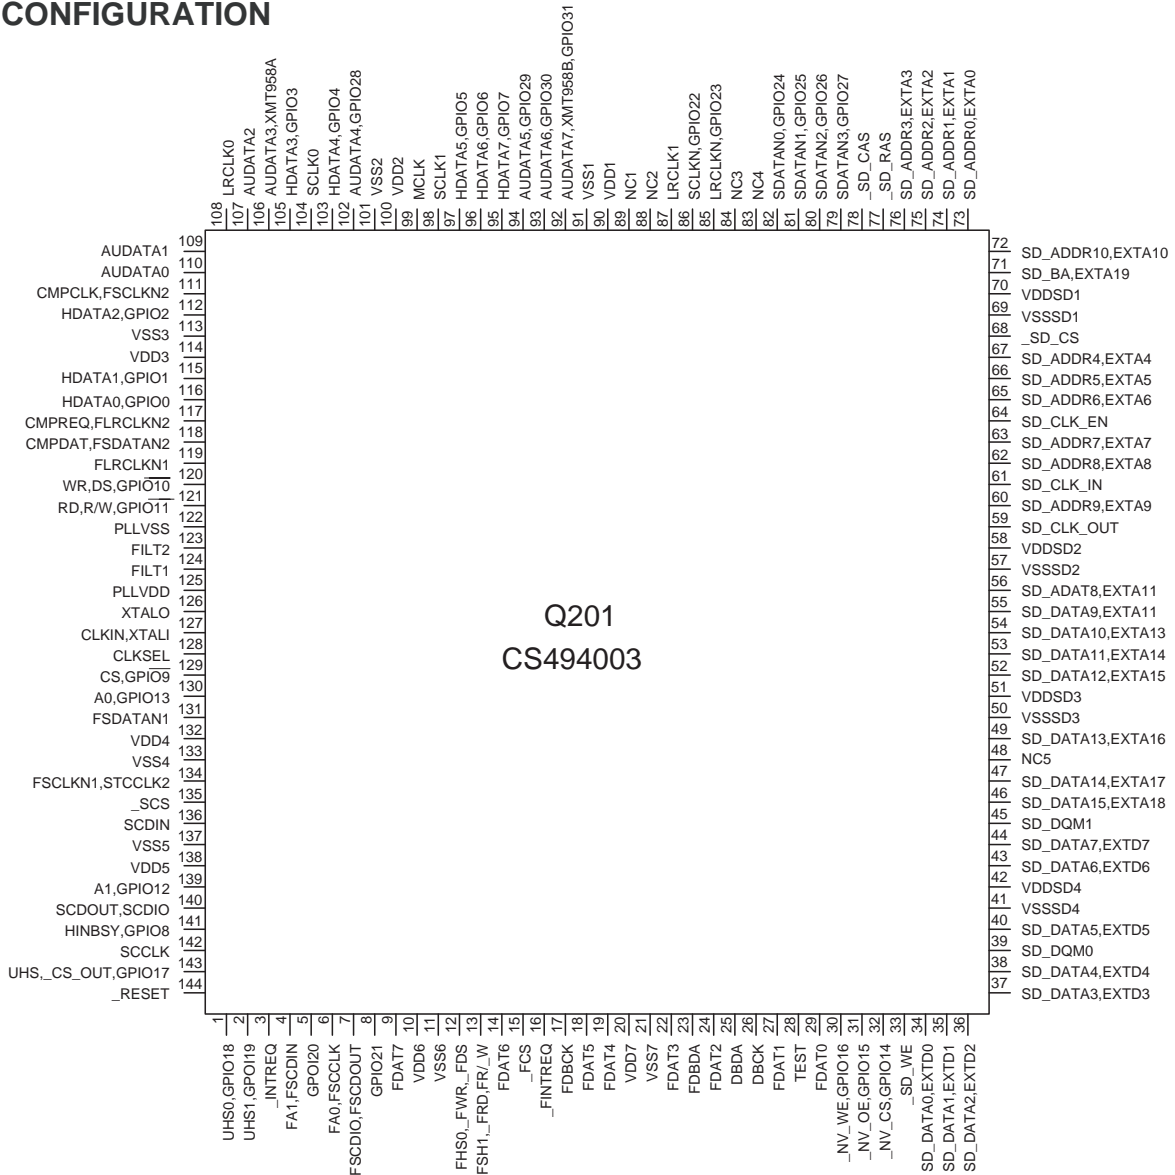

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -6

Q201: CS494003 (DSP)

TERMINAL DESCRIPTION (1/3)

PIN NO.	TERMINAL NAME : DESCRIPTION
1	UHS0, GPIO18: DSPC control mode select Bit 0, General Purpose I/O
2	UHS1, GPIO19: DSPC control mode select Bit 1, General Purpose I/O
3	INTREQ: Control Port Interrupt Request
4	FA1, FSCDIN: Host parallel address bit zero or SPI serial control data input
5	GPIO20: General Purpose I/O can be individually configured and controlled by DSPC.
6	FA0, FSCCLK: Host Parallel Address Bit Zero or Serial Control Port Clock
7	FHS2, FSCDIO, FSCDOUT: Mode select bit 2 or serial control port data input and output, parallel port type select
8	GPIO21: General Purpose I/O can be individually configured and controlled by DSPC.
9	FDAT7: DSPAB Bidirectional Data Bus input
10	VDD6: 2.5V supply voltage.
11	VSS6: 2.5V ground.
12	FHS0, FWR, FDS: Mode select bit 0 or host write strobe or host data strobe
13	FHS1, FRD, FR/W: Mode select bit 1 or host parallel output enable or host parallel R/W
14	FDAT6: DSPAB Bidirectional Data Bus input
15	FCS: Host parallel chip select, Host serial SPI chip select
16	FINTREQ: Control port interrupt request
17	FDBCK: Reversed input: This pin is reversed and is pulled up with an external resistor.
18	FDAT5: DSPAB Bidirectional Data Bus input
19	FDAT4: DSPAB Bidirectional Data Bus input
20	VDD7: 2.5V supply voltage.
21	VSS7: 2.5V ground.
22	FDAT3: DSPAB Bidirectional Data Bus input
23	FDBDA Reversed input: This pin is reversed and is pulled up with an external resistor.
24	FDAT2: DSPAB Bidirectional Data Bus input
25	DBDA: Debug data
26	DBCK: Debug clock
27	FDAT1: DSPAB Bidirectional Data Bus input
28	TEST: This pin is connected low for normal operation.
29	FDAT0: DSPAB Bidirectional Data Bus input
30	NV_WE, GPIO16: SRAM write enable output, General Purpose I/O
31	NV_OE, GPIO15: SRAM output Enable output, General Purpose I/O
32	NV_CS, GPIO14: SRAM Chip Select output, General Purpose I/O
33	SD_WE : SDRAM write enable output.
34	SD_DATA0, EXT0: SDRAM data bus. SRAM external data bus input.
35	SD_DATA1, EXT1: SDRAM data bus. SRAM external data bus input.
36	SD_DATA2, EXT2: SDRAM data bus. SRAM external data bus input.
37	SD_DATA3, EXT3: SDRAM data bus. SRAM external data bus input.
38	SD_DATA4, EXT4: SDRAM data bus. SRAM external data bus input.
39	SD_DQM0: SDRAM data mask 0 output.
40	SD_DATA5, EXT5: SDRAM data bus. SRAM external data bus input.
41	VSSSD4: 3.3V SDRAM / SRAM / EPROM Interface ground.
42	VDDSD4: 3.3V SDRAM / SRAM / EPROM Interface supply
43	SD_DATA6, EXT6: SDRAM data bus. SRAM external data bus input.
44	SD_DATA7, EXT7: SDRAM data bus. SRAM external data bus input.
45	SD_DQM1: SDRAM data mask 1 output.
46	SD_DATA15, EXT18: SDRAM data bus output, SRAM external address bus output
47	SD_DATA14, EXT17: SDRAM data bus output, SRAM external address bus output
48	NC5: No connect. Connect to ground.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -7

Q201: CS494003 (DSP)

TERMINAL DESCRIPTION (2/3)

PIN NO.	TERMINAL NAME/DESCRIPTION
49	SD_DATA13, EXTA16: SDRAM data bus output, SRAM external address bus output
50	VSSSD3: 3.3V SDRAM / SRAM / EPROM Interface ground.
51	VDDSD3: 3.3V SDRAM / SRAM / EPROM Interface supply
52	SD_DATA12, EXTA15: SDRAM data bus output, SRAM external address bus output
53	SD_DATA11, EXTA14: SDRAM data bus output, SRAM external address bus output
54	SD_DATA10, EXTA13: SDRAM data bus output, SRAM external address bus output
55	SD_DATA9, EXTA12: SDRAM data bus output, SRAM external address bus output
56	SD_DATA8, EXTA11: SDRAM data bus output, SRAM external address bus output
57	VSSSD2: 3.3V SDRAM / SRAM / EPROM Interface ground.
58	VDDSD2: 3.3V SDRAM / SRAM / EPROM Interface supply
59	SD_CLK_OUT: SDRAM clock output.
60	SD_ADDR9, EXTA9: SDRAM address bus output. SRAM external address output.
61	SD_CLK_IN: SDRAM re-timing clock input.
62	SD_ADDR8, EXTA8: SDRAM address bus output. SRAM external address output.
63	SD_ADDR7, EXTA7: SDRAM address bus output. SRAM external address output.
64	SD_CLK_EN: SDRAM clock enable output.
65	SD_ADDR6, EXTA6: SDRAM address bus output. SRAM external address output.
66	SD_ADDR5, EXTA5: SDRAM address bus output. SRAM external address output.
67	SD_ADDR4, EXTA4: SDRAM address bus output. SRAM external address output.
68	SD_CS: SDRAM Chip select
69	VSSSD1: 3.3V SDRAM / SRAM / EPROM Interface ground.
70	VDDSD1: 3.3V SDRAM / SRAM / EPROM Interface supply
71	SD_BA, EXTA19: SDRAM bank address select, SRAM external address bus 19.
72	SD_ADDR10, EXTA10: SDRAM address bus output. SRAM external address output.
73	SD_ADDR0, EXTA0: SDRAM address bus output. SRAM external address output.
74	SD_ADDR1, EXTA1: SDRAM address bus output. SRAM external address output.
75	SD_ADDR2, EXTA2: SDRAM address bus output. SRAM external address output.
76	SD_ADDR3, EXTA3: SDRAM address bus output. SRAM external address output.
77	SD_RAS: SDRAM row address strobe output.
78	SD_CAS: DRAM column address strobe output.
79	SDATAN3, GPIO27: Digital-audio PCM data input. General purpose I/O
80	SDATAN2, GPIO26: Digital-audio PCM data input. General purpose I/O
81	SDATAN1, GPIO25: Digital-audio PCM data input. General purpose I/O
82	SDATAN0, GPIO24: Digital-audio PCM data input. General purpose I/O
83	NC4: No connect. Connect to ground.
84	NC3: No connect. Connect to ground.
85	LRCLKN, GPIO23: PCM Audio Input Sample Rate Clock, General Purpose I/O
86	SCLKN, GPIO22: PCM Audio Input Bit Clock, General Purpose I/O
87	LRCLK1: Audio Output Sample Rate Clock
88	NC2: No connect. Connect to ground.
89	NC1: No connect. Connect to ground.
90	VDD1: 2.5V supply voltage.
91	VSS1: 2.5V ground
92	AUDATA7, XMT958B, GPIO31: PCM digital-audio data output 7, S/PDIF Transmitter, General Purpose I/O
93	AUDATA6, GPIO30: PCM digital-audio data output 6, General Purpose I/O
94	AUDATA5, GPIO29: PCM digital-audio data output 5, General Purpose I/O
95	HDATA7, GPIO7: DSPC Bidirectional Data Bus, General Purpose I/O
96	HDATA6, GPIO6: DSPC Bidirectional Data Bus, General Purpose I/O

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -8

Q201: CS494003 (DSP)


TERMINAL DESCRIPTION (3/3)

PIN NO.	TERMINAL NAME/DESCRIPTION
97	HDATA5, GPIO5: DSPC Bidirectional Data Bus, General Purpose I/O
98	SCLK1: Audio Output Bit Clock:Bidirectional digital-audio output bit clock for AUDATA4, to AUDATA7. As an output, SCLK1 can provide 32 fs, 64 fs, 128 fs, 256 fs, or 512 fs frequencies and is synchronous to MCLK.
99	MCLK: Bidirectional master audio clock. As an output, MCLK provides a low jitter oversampling clock.
100	VDD2: 2.5V supply voltage.
101	VSS2: 2.5V ground.
102	AUDATA4, GPIO28: Digital Audio Output 4, General Purpose I/O.PCM digital-audio data output.
103	HDATA4, GPIO4: DSPC Bidirectional Data Bus, General Purpose I/O
104	SCLK0: Audio Output Bit Clock:Bidirectional digital-audio output bit clock for AUDATA0, to AUDATA3.
105	HDATA3, GPIO3: DSPC Bidirectional Data Bus, General Purpose I/O
106	AUDATA3, XMT958A: Digital Audio Output 3, S/PDIF Transmitter
107	AUDATA2: PCM digital-audio data output.
108	LRCLK0: Audio Output Sample Rate Clock
109	AUDATA1: PCM digital-audio data output.
110	AUDATA0: PCM digital-audio data output.
111	CMPCLK, FSCLKN2: PCM Audio Input Bit Clock:Digital- audio bit clock input.
112	HDATA2, GPIO2: DSPC Bidirectional Data Bus, General Purpose I/O
113	VSS3: 2.5V ground.
114	VDD3: 2.5V supply voltage.
115	HDATA1, GPIO1: DSPC Bidirectional Data Bus, General Purpose I/O
116	HDATA0, GPIO0: DSPC Bidirectional Data Bus, General Purpose I/O
117	CMPREQ, FLRCLKN2: PCM audio input request
118	CMPDAT, FSDATAN2: Digital-audio data input that can accept either 1 compressed line or 2 channels of PCM data.
119	FLRCLKN1: Digital-audio frame clock input.
120	WR, DS, GPIO10: Host Write Strobe, Host Data Strobe, General Purpose I/O
121	RD, R/W, GPIO11: Host Parallel Output Enable, Host Parallel R/W, General Purpose I/O
122	PLLVSS : PLL Ground Voltage
123	FILT2: Phase-Locked Loop Filter.Connects to an external filter for the phase-locked loop.
124	FILT1: Phase-Locked Loop Filter.Connects to an external filter for the phase-locked loop.
125	PLLVDD: 2.5V PLL supply voltage.
126	XTALO: Crystal oscillator output.
127	CLKIN, XTALI: External Clock input / Crystal Oscillator input:12MHz crystal oscillator is connected.
128	CLKSEL: DSP Clock select input
129	CS, GPIO9: Host Parallel Chip Select, General Purpose I/O
130	A0, GPIO13: Host Address Bit 0, General Purpose I/O
131	FSDATAN1: Digital-audio data input can accept from one compressed line or 2 channels of PCM data.
132	VDD4: 2.5V supply voltage.
133	VSS4: 2.5V ground.
134	FSCLKN1, STCCLK2: Digital audio bit clock input.
135	SCS: Host Serial SPI Chip Select:SPI mode active-low chip-select input signal.
136	SCDIN: SPI Serial Control Data Input:In SPI mode this pin serves as the data input pin.
137	VSS5: 2.5V ground.
138	VDD5: 2.5V supply voltage.
139	A1, GPIO12: Host Address Bit 1, General Purpose I/O
140	SCDOUT, SCDIO: Serial Control Port Data Input and Output:In SPI mode this pin serves as the data output pin.
141	HINBSY, GPIO8: Input host Message Status, General Purpose I/O. This pin is indicates that serial or parallel communication data written to the DSP has not been read yet.
142	SCCLK: This pin serves as the serial SPI clock input.
143	UHS2, CS_OUT, GPIO17: Mode Select Bit 2, External Serial Memory Chip Select,General Purpose I/O
144	RESET: Master Reset Input:Asynchronous active-low master reset input.


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -9

Q211: MX26LV040 (4M-bit CMOS Single Voltage 3V High Speed Flash Memory)

BLOCK DIAGRAM

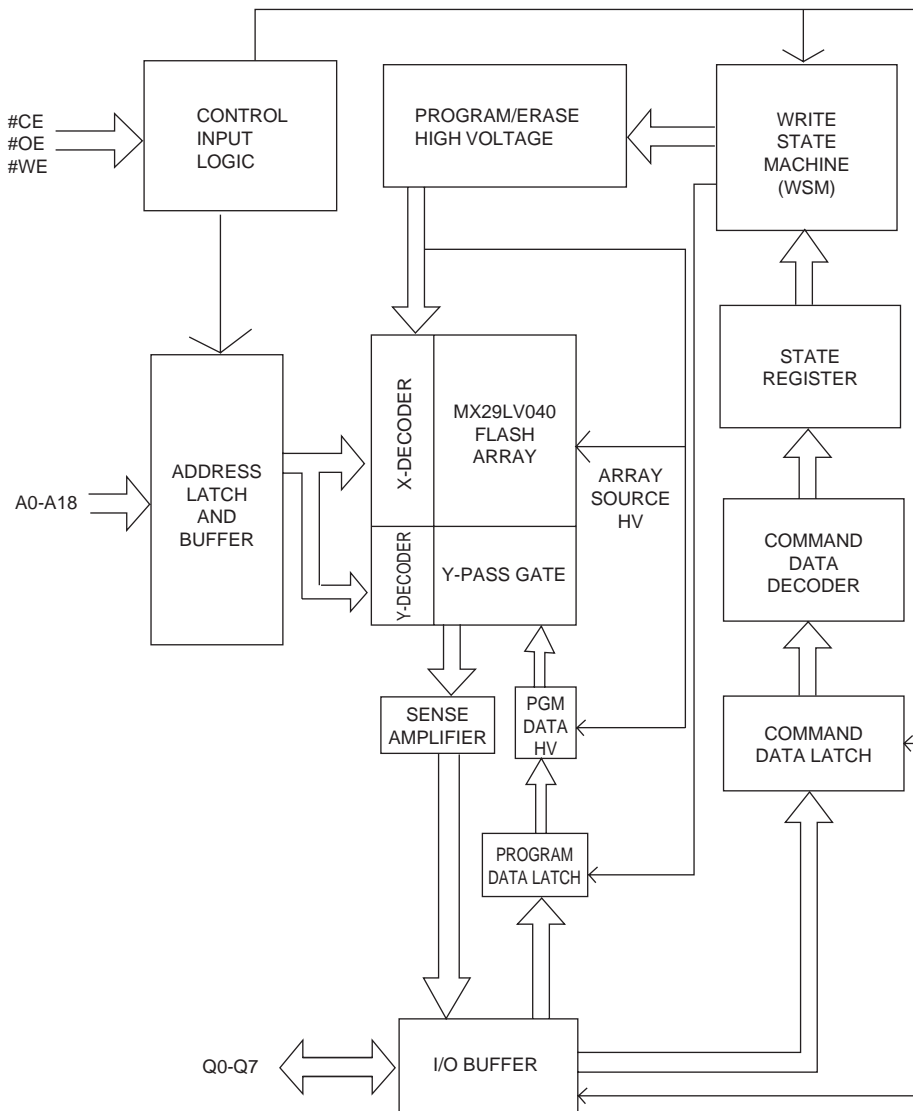

PIN CONFIGURATION

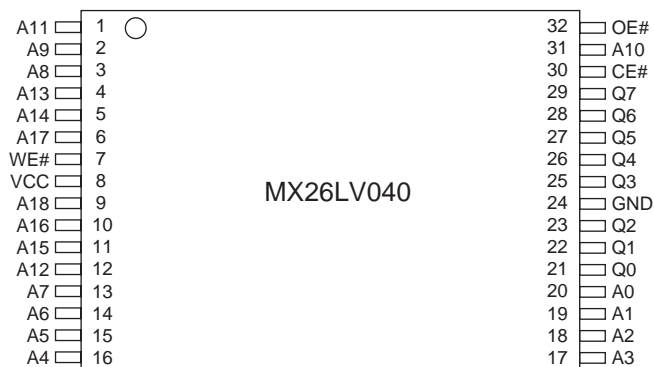


TERMINAL DESCRIPTION

Pin Name	Description
A0~A18	Address Input
Q0~Q7	Data Input/Output
CE#	Chip Enable Input
WE#	Write Enable Input
OE#	Output Enable Input
GND	Ground Pin
VCC	+3.0V single power supply


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -10

Q285: IC42S16100 (16-Mbit Synchronous Dynamic RAM)

BLOCK DIAGRAM

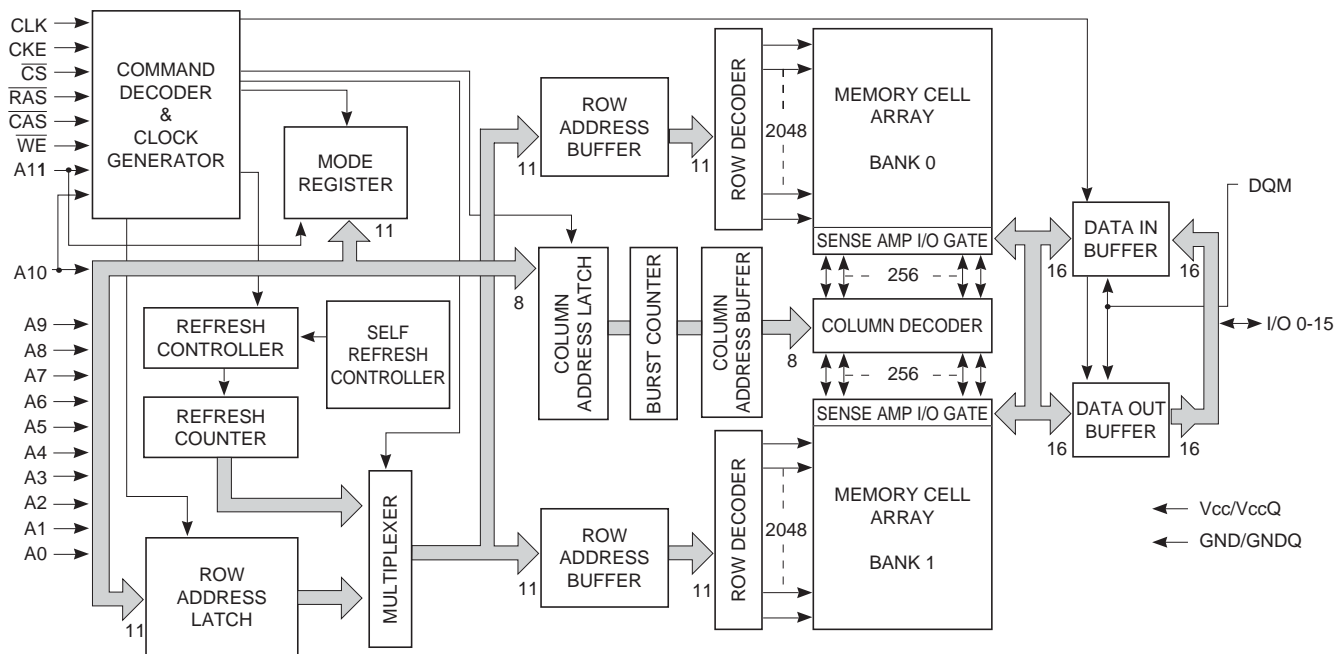

PIN CONFIGURATION

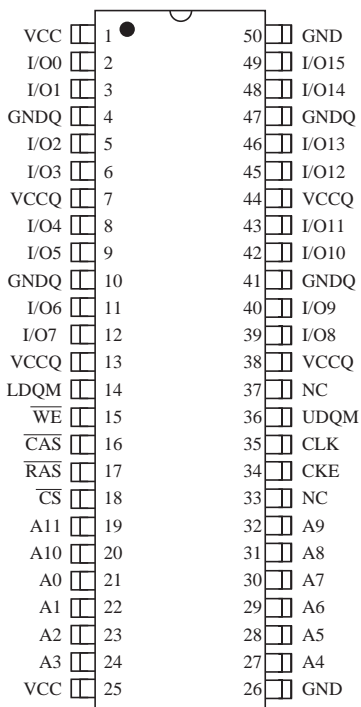

IC BLOCK DIAGRAM AND TERMINAL DESCRIPTIONS -11

Q285: IC42S16100 (16-Mbit Synchronous Dynamic RAM)


TERMINAL DESCRIPTION

Pin No.	Pin name	Function
20 to 24 27 to 32	A0-A10	A0 to A10 are address inputs. A0-A10 are used as row address inputs during active command input and A0-A7 as column address inputs during read or write command input. A10 is also used to determine the precharge mode during other commands. If A10 is LOW during precharge command, the bank selected by A11 is precharged, but if A10 is HIGH, both banks will be precharged. When A10 is HIGH in read or write command cycle, the precharge starts automatically after the burst access. These signals become part of the OP CODE during mode register set command input.
19	A11	A11 is the bank selection signal. When A11 is LOW, bank 0 is selected and when high, bank 1 is selected. This signal becomes part of the OP CODE during mode register set command input.
16	$\overline{\text{CAS}}$	$\overline{\text{CAS}}$, in conjunction with the $\overline{\text{RAS}}$ and $\overline{\text{WE}}$, forms the device command. See the "Command Truth Table" item for details on device commands.
34	CKE	The CKE input determines whether the CLK input is enabled within the device. When is CKE HIGH, the next rising edge of the CLK signal will be valid, and when LOW, invalid. When CKE is LOW, the device will be in either the power-down mode, the clock suspend mode, or the self refresh mode. The CKE is an asynchronous input.
35	CLK	CLK is the master clock input for this device. Except for CKE, all inputs to this device are acquired in synchronization with the rising edge of this pin.
18	$\overline{\text{CS}}$	The $\overline{\text{CS}}$ input determines whether command input is enabled within the device. Command input is enabled when $\overline{\text{CS}}$ is LOW, and disabled with $\overline{\text{CS}}$ is HIGH. The device remains in the previous state when $\overline{\text{CS}}$ is HIGH.
2, 3, 5, 6, 8, 9, 11, 12, 39, 40, 42, 43, 45, 46, 48, 49	I/O0 to I/O15	I/O0 to I/O15 are I/O pins. I/O through these pins can be controlled in byte units using the LDQM and UDQM pins.
14, 36	LDQM, UDQM	LDQM and UDQM control the lower and upper bytes of the I/O buffers. In read mode, LDQM and UDQM control the output buffer. When LDQM or UDQM is LOW, the corresponding buffer byte is enabled, and when HIGH, disabled. The outputs go to the HIGH impedance state when LDQM/UDQM is HIGH. This function corresponds to $\overline{\text{OE}}$ in conventional DRAMs. In write mode, LDQM and UDQM control the input buffer. When LDQM or UDQM is LOW, the corresponding buffer byte is enabled, and data can be written to the device. When LDQM or UDQM is HIGH, input data is masked and cannot be written to the device.
17	$\overline{\text{RAS}}$	$\overline{\text{RAS}}$, in conjunction with $\overline{\text{CAS}}$ and $\overline{\text{WE}}$, forms the device command. See the "Command Truth Table" item for details on device commands.
15	$\overline{\text{WE}}$	$\overline{\text{WE}}$, in conjunction with $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$, forms the device command. See the "Command Truth Table" item for details on device commands.
7, 13, 38, 44	VccQ	VccQ is the output buffer power supply.
1, 25	Vcc	Vcc is the device internal power supply.
4, 10, 41, 47	GNDQ	GNDQ is the output buffer ground.
26, 50	GND	GND is the device internal ground.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -12

Q3002: NJU7311AM (Analog Function Switch)

BLOCK DIAGRAM

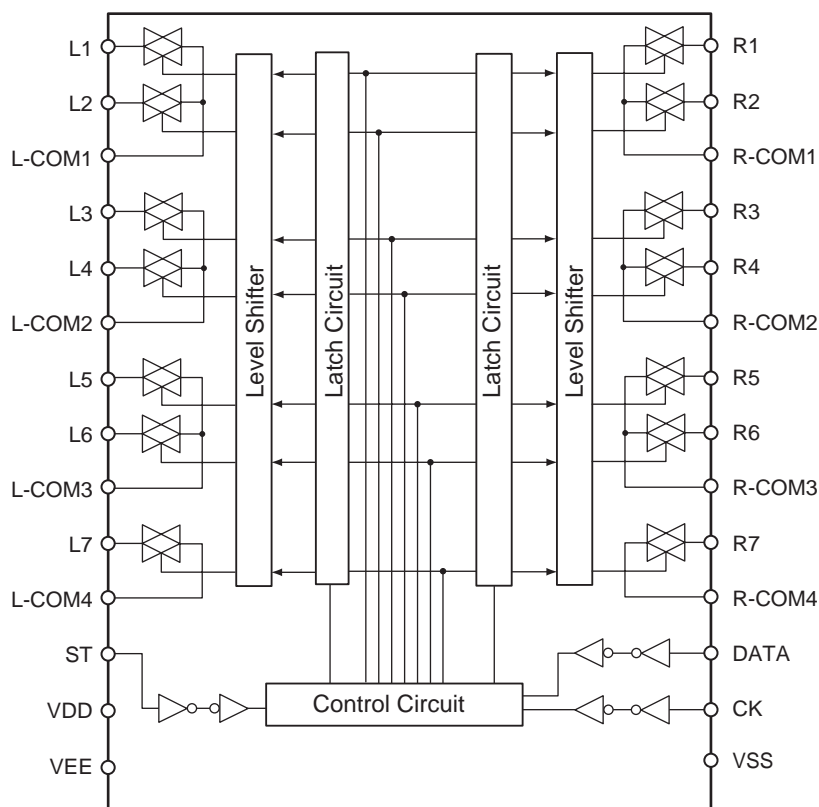

TERMINAL DESCRIPTION


Pin No.	Pin Name	Description
1	VEE	Negative Voltage Supply
2	L1	Analog switch input/output
3	L2	Analog switch input/output
4	L-COM1	L1, L2, Common
5	L3	Analog switch input/output
6	L4	Analog switch input/output
7	L-COM2	L3, L4 common
8	L5	Analog switch input/output
9	L6	Analog switch input/output
10	L-COM3	L5, L6 Common
11	L7	Analog switch input/output
12	L-COM4	L7 Common
14	ST	Chip enable
15	VSS	GND

Pin No.	Pin Name	Description
16	CK	Clock input
17	DATA	Data input
19	R-COM4	R7 Common
20	R7	Analog switch input/output
21	R-COM3	R5, R6 Common
22	R6	Analog switch input/output
23	R5	Analog switch input/output
24	R-COM2	R3, R4 Common
25	R4	Analog switch input/output
26	R3	Analog switch input/output
27	R-COM1	R1, R2, Common
28	R2	Analog switch input/output
29	R1	Analog switch input/output
30	VDD	Positive voltage supply


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -13

Q3003: NJW1157(8-CHANNEL ELECTRONIC VOLUME WITH INPUT SELECTOR)

BLOCK DIAGRAM

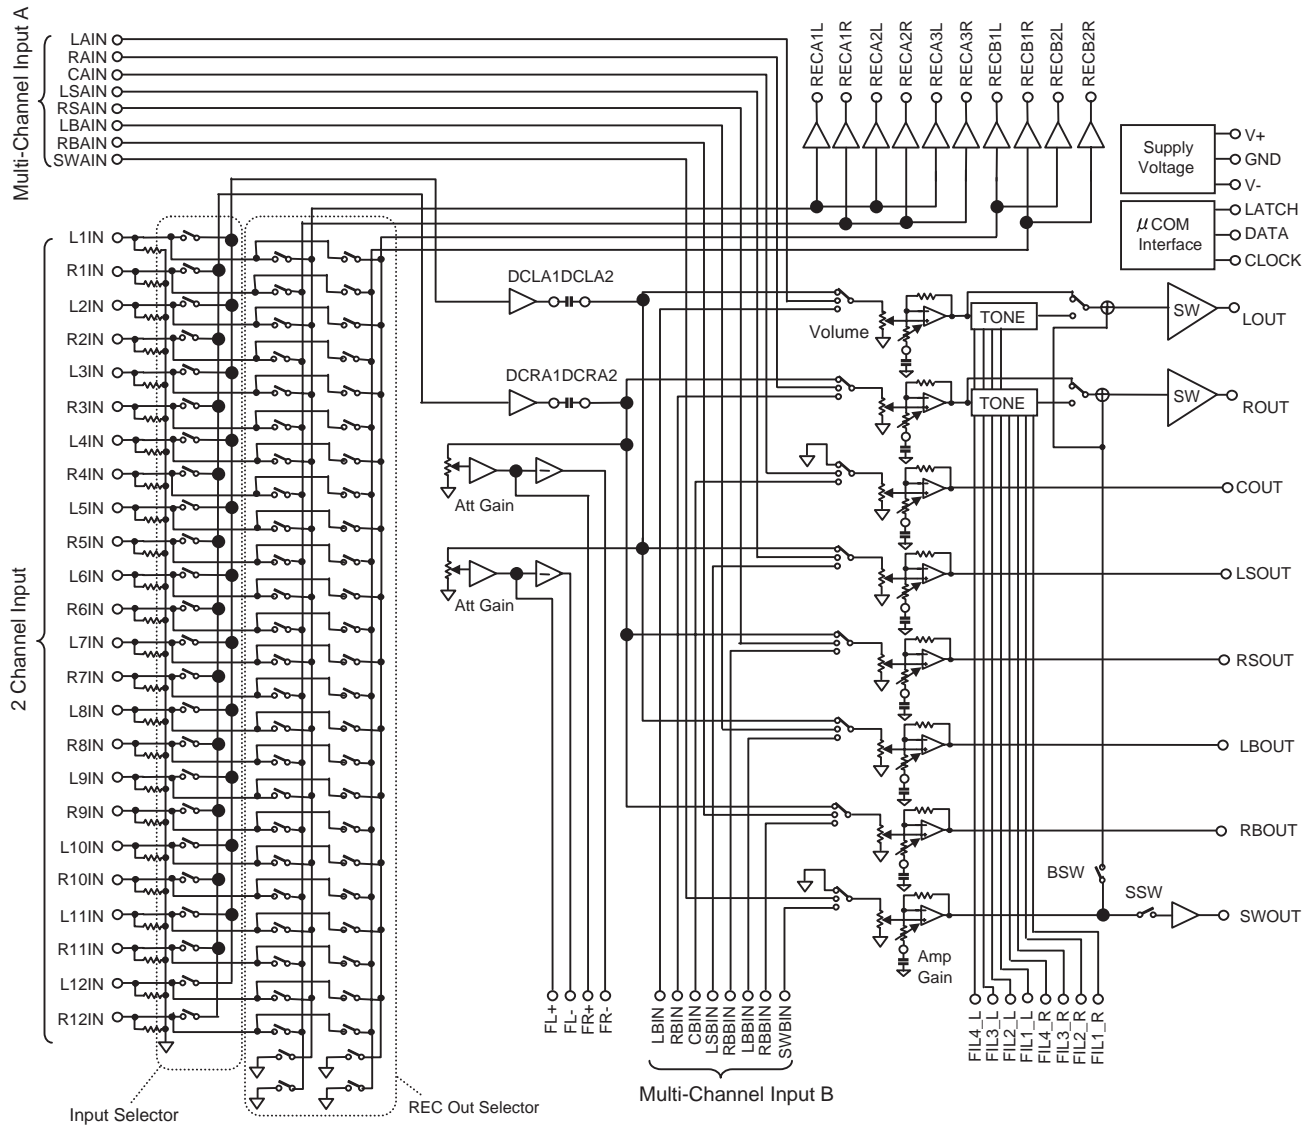

PIN CONFIGURATION

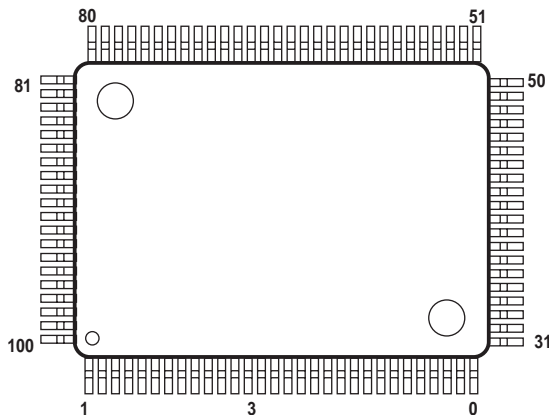

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -14

Q3003: NJW1157(8-CHANNEL ELECTRONIC VOLUME WITH INPUT SELECTOR)


TERMINAL DESCRIPTION

No.	SYMBOL	FUNCTION	No.	SYMBOL	FUNCTION
1	LOUT	Lch output	51	L1IN	"Input selector" Lch input 1
2	ROUT	Rch output	52	R1IN	"Input selector" Rch input 1
3	COUT	Cch output	53	L2IN	"Input selector" Lch input 2
4	LSOUT	LSch output	54	R2IN	"Input selector" Rch input 2
5	RSOUT	RSch output	55	L3IN	"Input selector" Lch input 3
6	LBOUT	LBch output	56	R3IN	"Input selector" Rch input 3
7	RBOUT	RBch output	57	L4IN	"Input selector" Lch input 4
8	SWOUT	SWch output	58	R4IN	"Input selector" Rch input 4
9	DC_L1	Lch Bass filter DC cut capacitor output terminal	59	L5IN	"Input selector" Lch input 5
10	DC_L2	Lch Bass filter DC cut capacitor input terminal	60	R5IN	"Input selector" Rch input 5
11	FIL_BL	Lch Bass filter terminal	61	L6IN	"Input selector" Lch input 6
12	FIL_TL	Lch Treble filter terminal	62	R6IN	"Input selector" Rch input 6
13	DC_R1	Rch Bass filter DC cut capacitor output terminal	63	L7IN	"Input selector" Lch input 7
14	DC_R2	Rch Bass filter DC cut capacitor input terminal	64	R7IN	"Input selector" Rch input 7
15	FIL_BR	Rch Bass filter terminal	65	L8IN	"Input selector" Lch input 8
16	FIL_TR	Rch Treble filter terminal	66	R8IN	"Input selector" Rch input 8
17	N.C.	No Connect	67	L9IN	"Input selector" Lch input 9
18	N.C.	No Connect	68	R9IN	"Input selector" Rch input 9
19	V+	+ Power supply voltage input	69	L10IN	"Input selector" Lch input 10
20	V-	- Power supply voltage input	70	R10IN	"Input selector" Rch input 10
21	REC_A1L	"Input selector" Lch REC output A1	71	L11IN	"Input selector" Lch input 11
22	REC_A1R	"Input selector" Rch REC output A1	72	R11IN	"Input selector" Rch input 11
23	REC_A2L	"Input selector" Lch REC output A2	73	L12IN	"Input selector" Lch input 12
24	REC_A2R	"Input selector" Rch REC output A2	74	R12IN	"Input selector" Rch input 12
25	REC_A3L	"Input selector" Lch REC output A3	75	N.C.	No Connect
26	REC_A3R	"Input selector" Rch REC output A3	76	DGND	Digital Ground
27	REC_B1L	"Input selector" Lch REC output B1	77	DATA	Control data signal input
28	REC_B1R	"Input selector" Rch REC output B1	78	CLOCK	Clock signal input
29	REC_B2L	"Input selector" Lch REC output B2	79	LATCH	Latch signal input
30	REC_B2R	"Input selector" Rch REC output B2	80	LAIN	Multi-channel Lch input A
31	DCCAP_L	Switching noise rejection capacitor	81	RAIN	Multi-channel Rch input A
32	DCCAP_R	Switching noise rejection capacitor	82	CAIN	Multi-channel Cch input A
33	DCCAP_C	Switching noise rejection capacitor	83	LSAIN	Multi-channel LSch input A
34	GND	Ground	84	RSAIN	Multi-channel RSch input A
35	GND	Ground	85	LBAIN	Multi-channel LBch input A
36	DCCAP_LS	Switching noise rejection capacitor	86	RBAIN	Multi-channel RBch input A
37	DCCAP_RS	Switching noise rejection capacitor	87	SWAIN	Multi-channel SWch input A
38	DCCAP_LB	Switching noise rejection capacitor	88	LBIN	Multi-channel Lch input B
39	DCCAP_RB	Switching noise rejection capacitor	89	RBIN	Multi-channel Rch input B
40	DCCAP_SW	Switching noise rejection capacitor	90	CBIN	Multi-channel Cch input B
41	DCL_OUT	"Input selector" Lch output	91	LSBIN	Multi-channel LSch input B
42	DCL_IN	"Multi-channel selector" Lch input	92	RSBIN	Multi-channel RSch input B
43	DCR_OUT	"Input selector" Rch output	93	LBBIN	Multi-channel LBch input B
44	DCR_IN	"Multi-channel selector" Rch input	94	RBBIN	Multi-channel RBch input B
45	FL+	"Input selector gain control" Lch no-inverted output	95	SWBIN	Multi-channel SWch input B
46	FL-	"Input selector gain control" Lch inverted output	96	GND	Ground
47	FR+	"Input selector gain control" Rch no-inverted output	97	GND	Ground
48	FR-	"Input selector gain control" Rch inverted output	98	VSSOUT2	Internal Digital -Power Supply Output 2
49	VDDOUT	Internal Digital +Power Supply Output	99	VDDOUT2	Internal Digital +Power Supply Output 2
50	VSSOUT	Internal Digital -Power Supply Output	100	TCCAP	Switching noise rejection capacitor

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -15

Q331,341,351: CS5340-CZ (192kHz, Multi-Bit Audio A/D Converter)

BLOCK DIAGRAM

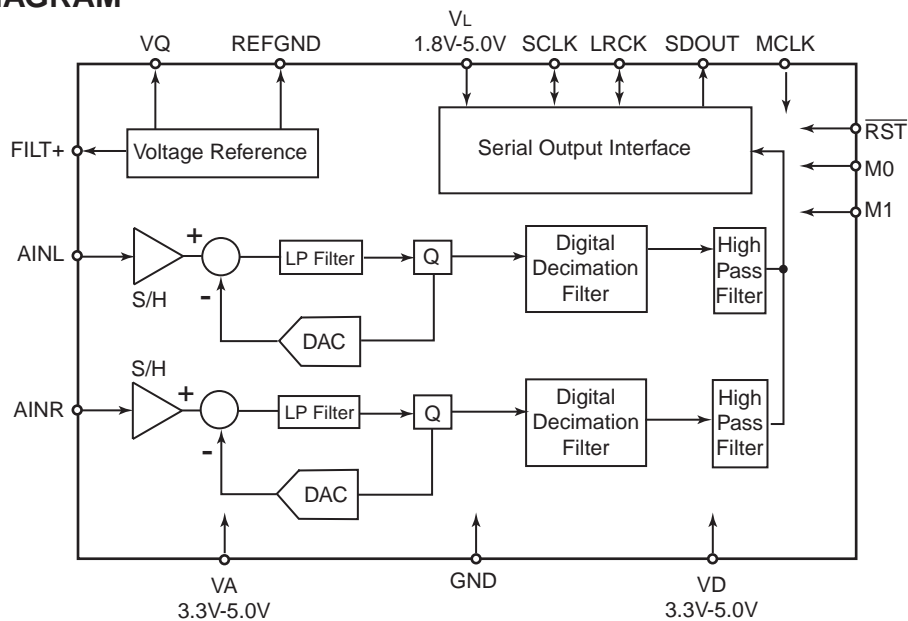


TERMINAL DESCRIPTION

Pin	Pin Name	I/O	Description
1	M0	I	Mode Selection-Determines the operational mode of the device.
16	M1	I	
2	MCLK	I	Master Clock-Clock source for the delta-sigma modulator and digital filters.
3	VL		Logic Power-Positive power supply for digital input/output.
4	SDOUT	O	Serial Audio Data Output-Output for two's complement serial audio data.
5,14	GND		Ground-Connect to the analog ground.
6	VD	I	Digital Power-Positive power supply for the digital section.
7	SCLK	I/O	Serial Clock-Serial clock for the serial audio interface.
8	LRCK	I/O	Left Right Clock-Determines which channel, Left and Right, is currently active on the serial audio data line.
9	RST	I	Reset-The device enters a low power mode when low.
10	AINL	I	Analog Input-The full scale analog input level is 0.56Vp-p.
12	AINR	I	
11	VQ	O	Quiescent Voltage-Filter connection for the internal quiescent reference voltage.
13	VA		Analog Power-Positive power supply for the analog section.
15	FILT+	O	Positive Voltage Reference-Positive reference voltage for the internal sampling circuits.


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -16

Q361: CS42528 (8-Ch CODEC with S/PDIF Receiver)

BLOCK DIAGRAM

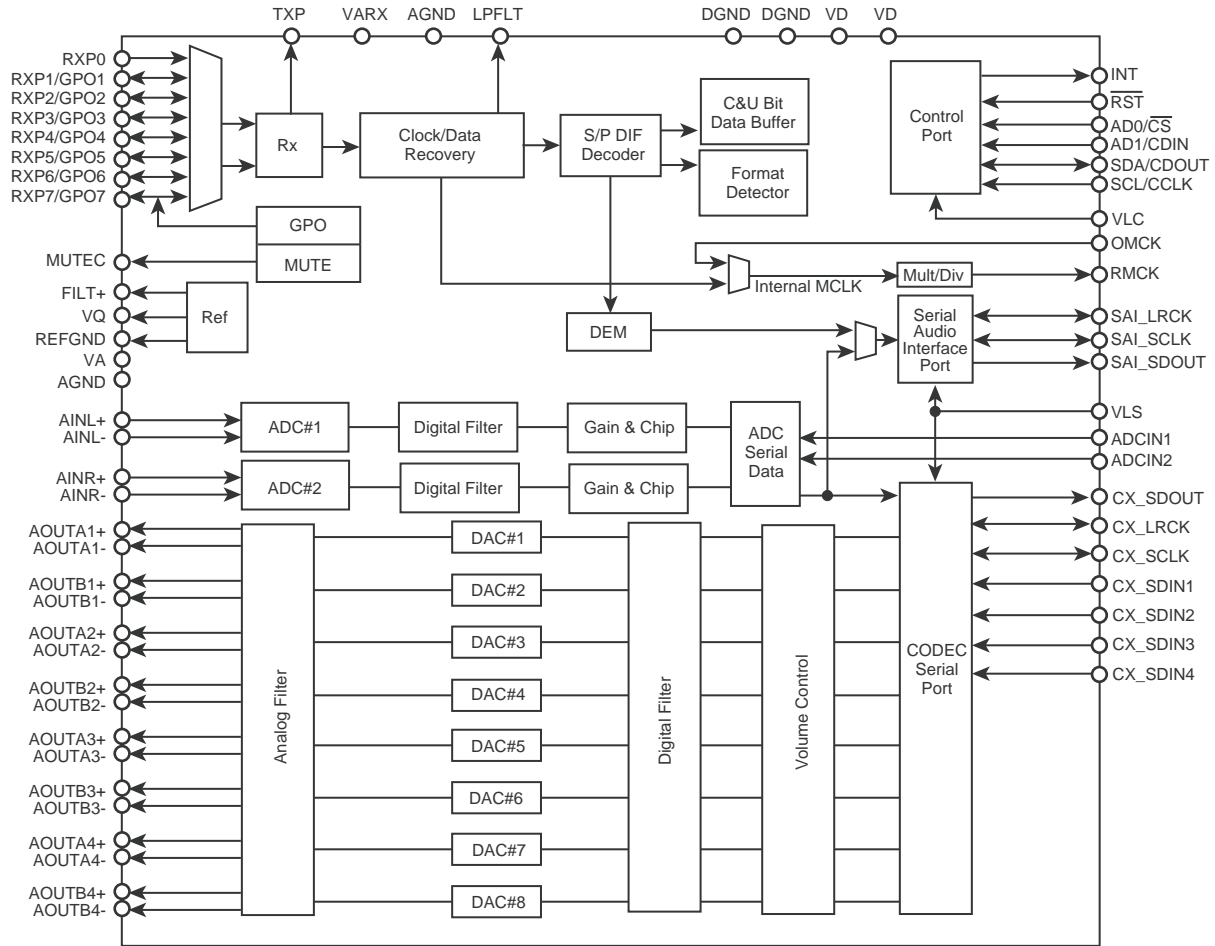

PIN CONFIGURATION

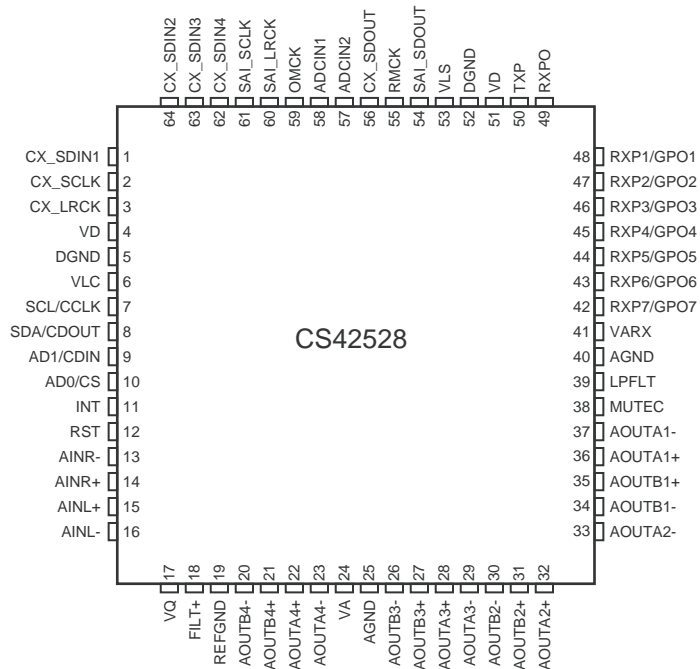

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -17

Q361: CS42528 (8-Ch CODEC with S/PDIF Receiver)

TERMINAL DESCRIPTION (1/2)

Pin Name	#	Pin Description
CX_SDIN1	1	Codec Serial Audio Data Input (Input) - Input for two's complement serial audio data.
CX_SDIN2	64	
CX_SDIN3	63	
CX_SDIN4	62	
CX_SCLK	2	CODEC Serial Clock (Input/Output) - Serial clock for the CODEC serial audio interface
CX_LRCK	3	CODEC Left Right Clock (Input/ Output) - Determines which channel, Left or Right, is currently active on the CODEC serial audio data line.
VD	4 51	Digital Power (Input) - Positive power supply for the digital section.
DGND	5 52	Digital Ground (Input) - Ground reference. Connects to digital ground.
VLC	6	Control Port Power (Input) - Determines the required signal level for the control port.
SCL/CCLK	7	Serial Control Port Clock (Input) - Serial clock for the serial control port.
SDA/CDOUT	8	Serial Control Data (Input/Output) - SDA is a data I/O line in IC mode and requires an external pull-up resistor to the logic interface voltage. CDOUT is the output data line for the control port interface in SPI mode.
AD1/CDIN	9	Address Bit 1 (I ² C)/Serial Control Data (SPI) (Input) - AD1 a chip address pin in I ² C mode; CDIN is the input data line for control port interface in SPI mode.
AD0/ $\overline{\text{CS}}$	10	Address Bit 0 (I ² C)/Control Port Chip Select (SPI) (Input) - AD0 is a chip address pin in I ² C mode; CS is the chip select signal in SPI mode.
INT	11	Interrupt (Output) - The CS42528 will generate an interrupt condition as per the Interrupt Mask register.
$\overline{\text{RST}}$	12	Reset (Input) - The device enters a low power mode and all internal registers are reset to their default settings when low.
AINR-	13	Differential right Channel Analog Input (Input) - Signals are presented differentially to the delta-sigma modulators via the AINR+/- pins.
AINR+	14	
AINL-	15	Differential right Channel Analog Input (Input) - Signals are presented differentially to the delta-sigma modulators via the AINR+/- pins.
AINL+	16	
VQ	17	Quiescent Voltage (Output) - Filter connection for internal quiescent reference voltage.
FILT+	18	Positive Voltage Reference (Output) - Positive reference voltage for the internal sampling circuits.
REFGND	19	Reference Ground (Input) - Ground reference for the internal sampling circuits.
AOUTA1 +, -	36, 37	Differential Analog Output (Output) - The full-scale differential analog output level is specified in the Analog Characteristics specification table.
AOUTB1 +, -	35, 34	
AOUTA2 +, -	32, 33	
AOUTB2 +, -	31, 30	
AOUTA3 +, -	28, 29	
AOUTB3 +, -	27, 26	
AOUTA4 +, -	22, 23	
AOUTB4 +, -	21, 20	
VA	24	Analog Power (Input) - Positive power supply for the analog section.
VARX	41	
AGND	25 40	Analog Ground (Input) - Ground reference. Connectes to analog ground.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -18

Q361: CS42528 (8-Ch CODEC with S/PDIF Receiver)


TERMINAL DESCRIPTION (2/2)

Pin Name	#	Pin Description
VA	24	Analog Power (Input) - Positive power supply for the analog section.
VARX	41	
AGND	25 40	Analog Ground (Input) - Ground reference. Connects to analog ground.
MUTE_C	38	Mute Control (Output) - The Mute Control pin outputs high impedance following an initial power -on condition or whenever the PDN bit is set to a "1", forcing the codec into power -down mode. The signal will remain in a high impedance state as long as the part is in power-down mode. The Mute Control pin goes to the selected "active" state during reset, muting, or if the master clock to left/right clock frequency ratio is incorrect. This pin is intended to be used as a control for external mute circuits to prevent the clicks and pops that can occur in any single supply system. The use of external mute circuits are not mandatory but may be desired for designs requiring the absolute minimum in extraneous clicks and pops.
LPFLT	39	PLL Loop Filter (Output) - An RC network should be connected between this pin and ground.
RXP7/GPO7	42	S/PDIF Receiver Input/ General Purpose Output (Input/ Output) - Receiver inputs for S/PDIF encoded data. The CS42528 has an internal 8:2 multiplexer to select the active receiver port, according to the Receiver Mode Control 2 register. These pins can also be configured as general purpose output pins, ADC Overflow indicators or Mute Control outputs according to the RXP/General Purpose Pin Control registers.
RXP6/GPO6	43	
RXP5/GPO5	44	
RXP4/GPO4	45	
RXP3/GPO3	46	
RXP2/GPO2	47	
RXP1/GPO1	48	
RXP0	49	S/PDIF Receiver Input (Input) - Dedicated receiver input for S/PDIF encoded data.
TXP	50	S/PDIF Transmitter Output (Output) - S/PDIF encoded data output, mapped directly from one of the receiver inputs as indicated by the Receiver Mode Control 2 register.
VLP	53	Serial Port Interface Power (Input) - Determines the required signal level for the serial port interfaces.
SAI_SDOUT	54	Serial Audio Interface Serial Data Output (Output) - Output for two's complement serial audio PCM data from the S/PDIF incoming stream. This pin can also be configured to transmit the output of the internal and external ADCs.
RMCK	55	Recovered Master Clock (Output) - Recovered master clock output from the External Clock Reference
CX_SDOUT	56	CODEC Serial Data Output (Output) - Output for two's complement serial audio data the internal and external ADCs.
ADCIN1	58	External ADC Serial Input (Input) - The CS42528 provides for up two external stereo analog to digital converter inputs to provide a maximum of six channels on serial data output line when the CS42528 is placed in One Line mode.
ADCIN2	57	
OMCK	59	External Reference Clock (Input) - External clock reference that must be within the ranges specified in currently active on the serial audio data line.
SAI_LRCK	60	Serial Audio Interface Left/Right Clock (Input/Output) - Determines which channel, Left of Right, is currently active on the serial audio data line.
SAI_SCLK	61	Serial Audio Interface Serial Clock (Input/Output) - Serial clock for the Serial Audio Interface

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -19

Q4002: AN15881A (Video SW for TV with Multi-signal 14 Inputs and 4 Outputs)

BLOCK DIAGRAM

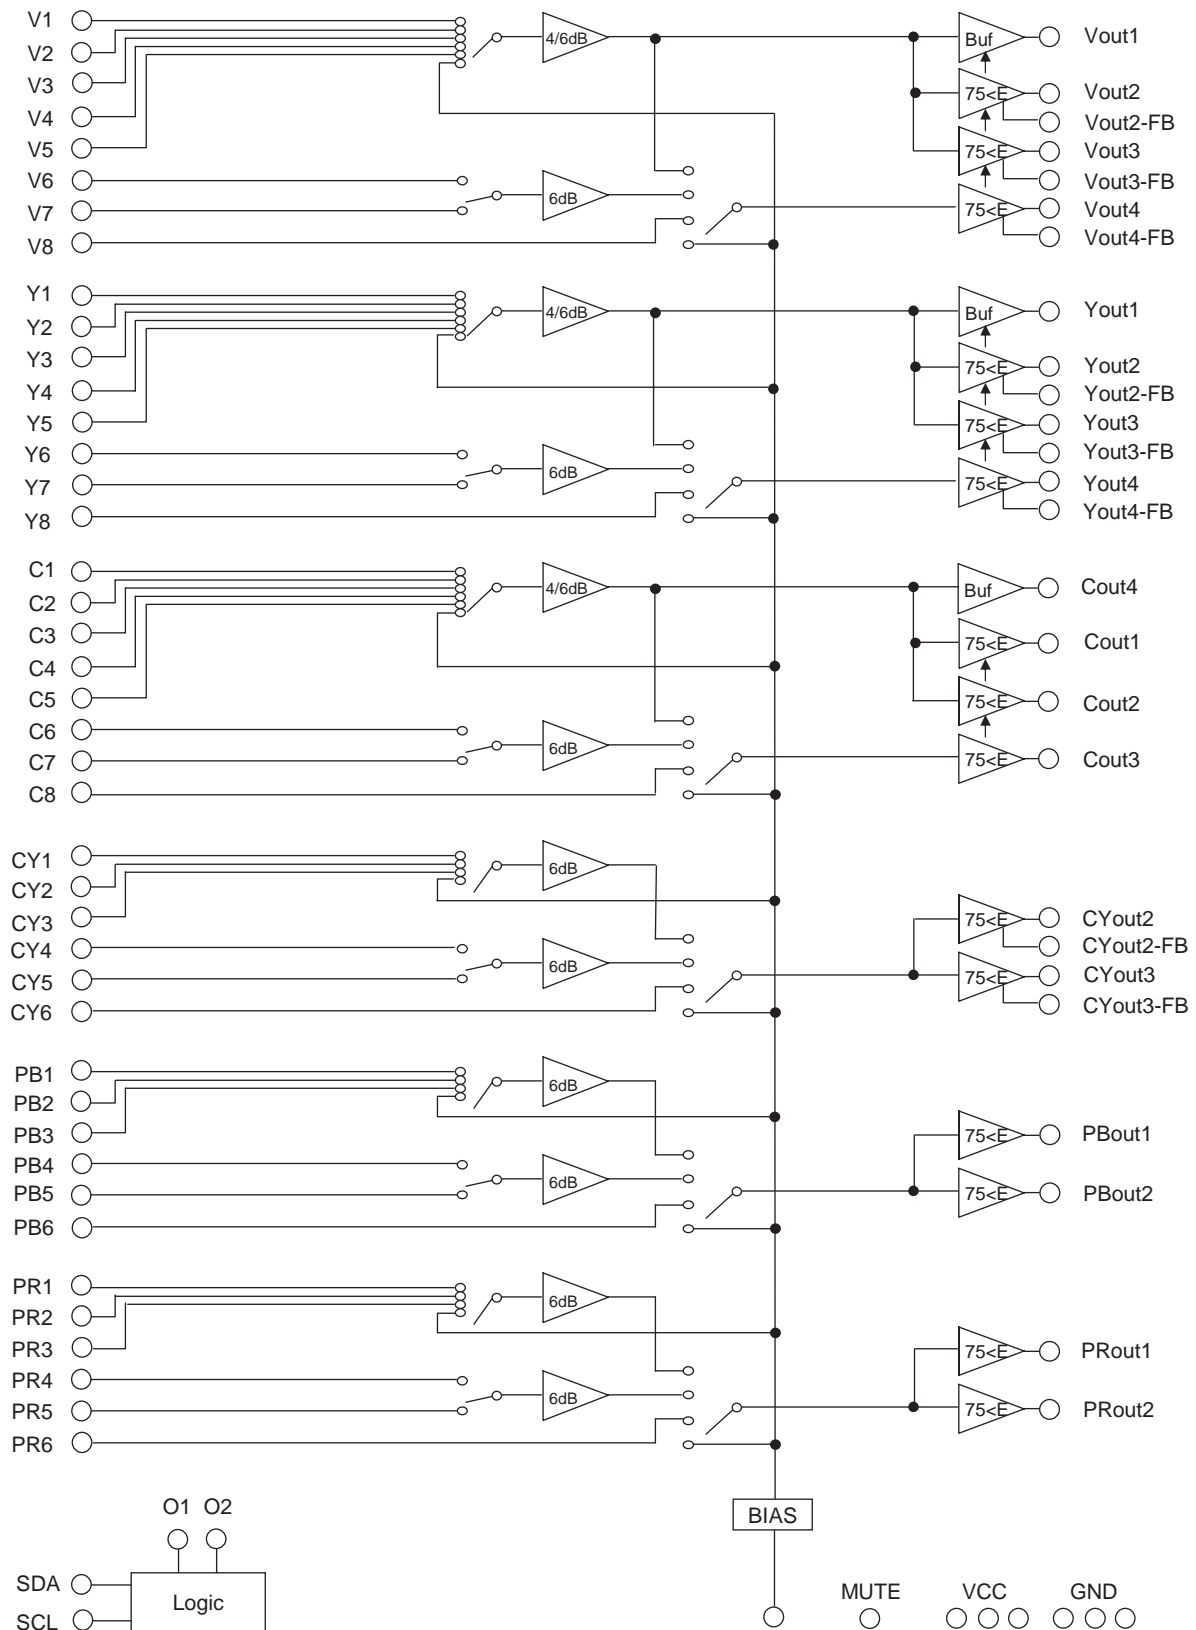

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -20

Q4002: AN15881A (Video SW for TV with Multi-signal 14 Inputs and 4 Outputs)

TERMINAL DESCRIPTION (1/3)

Pin No.	Pin name	Type	Description
1	Y3	In	Luminance signal input 3
2	Y4	In	Luminance signal input 4
3	Y5	In	Luminance signal input 5
4	Y6	In	Luminance signal input 6
5	Y7	In	Luminance signal input 7
6	Y8	In	Luminance signal input 8
7	VCC1	Power supply	5.0V power supply
8	C1	In	Chrominance signal input 1
9	C2	In	Chrominance signal input 2
10	C3	In	Chrominance signal input 3
11	C4	In	Chrominance signal input 4
12	C5	In	Chrominance signal input 5
13	GND1	Ground	Ground
14	C6	In	Chrominance signal input 6
15	C7	In	Chrominance signal input 7
16	C8	In	Chrominance signal input 8
17	BIAS	Output	Bias voltage
18	CY1	In	CY1 signal input
19	CY2	In	CY2 signal input
20	CY3	In	CY3 signal input
21	CY4	In	CY4 signal input
22	CY5	In	CY5 signal input
23	CY6	In	CY6 signal input
24	PB1	In	PB1 signal input
25	PB2	In	PB2 signal input
26	PB3	In	PB3 signal input
27	PB4	In	PB4 signal input
28	PB5	In	PB5 signal input
29	PB6	In	PB6 signal input
30	PR1	In	PR1 signal input
31	PR2	In	PR2 signal input
32	PR3	In	PR3 signal input
33	PR4	In	PR4 signal input
34	PR5	In	PR5 signal input
35	PR6	In	PR6 signal input

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -21

Q4002: AN15881A (Video SW for TV with Multi-signal 14 Inputs and 4 Outputs)

TERMINAL DESCRIPTION (2/3)

Pin No.	Pin name	Type	Description
36	MUTE	In	Mute control pin
37	PROUT2	Out	PROUT2 signal output
38	O1	Out	General output 1
39	PROUT1	Out	PROUT1 signal output
40	O2	Out	General output 2
41	PBOUT2	Out	PBOUT2 signal output
42	PBOUT1	Out	PBOUT1 signal output
43	GND2	Ground	Ground
44	CYOUT3-FB	In	CYOUT3 feedback input
45	CYOUT3	Out	CYOUT3 signal output
46	CYOUT2-FB	In	CYOUT2 feedback input
47	CYOUT2	Out	CYOUT2 signal output
48	COUT4	Out	COUT4 signal output
49	VCC2	Power supply	5.0V power supply
50	COUT3	Out	COUT3 signal output
51	COUT2	Out	COUT2 signal output
52	COUT1	Out	COUT1 signal output
53	GND3	Ground	Ground
54	YOUT4-FB	In	YOUT4 feedback input
55	YOUT4	Out	YOUT4 signal output
56	YOUT3-FB	In	YOUT3 feedback input
57	YOUT3	Out	YOUT3 signal output
58	YOUT2-FB	In	YOUT2 feedback input
59	YOUT2	Out	YOUT2 signal output
60	YOUT1	Out	YOUT1 signal output
61	VCC3	Power supply	5.0V power supply
62	VOUT4-FB	In	VOUT4 feedback input
63	VOUT4	Out	VOUT4 signal output
64	SDA	In	I ² C bus data input
65	VOUT3-FB	In	VOUT3 feedback input
66	VOUT3	Out	VOUT3 signal output
67	VOUT2-FB	In	VOUT2 feedback input
68	VOUT2	Out	VOUT2 signal output
69	VOUT1	Out	VOUT1 signal output
70	SCL	In	I ² C bus clock input


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -22

Q4002: AN15881A (Video SW for TV with Multi-signal 14 Inputs and 4 Outputs)

TERMINAL DESCRIPTION (3/3)

Pin No.	Pin name	Type	Description
71	V1	In	Video composite signal input 1
72	V2	In	Video composite signal input 2
73	V3	In	Video composite signal input 3
74	V4	In	Video composite signal input 4
75	V5	In	Video composite signal input 5
76	V6	In	Video composite signal input 6
77	V7	In	Video composite signal input 7
78	V8	In	Video composite signal input 8
79	Y1	In	Luminance signal input 1
80	Y2	In	Luminance signal input 2


PIN CONFIGURATION

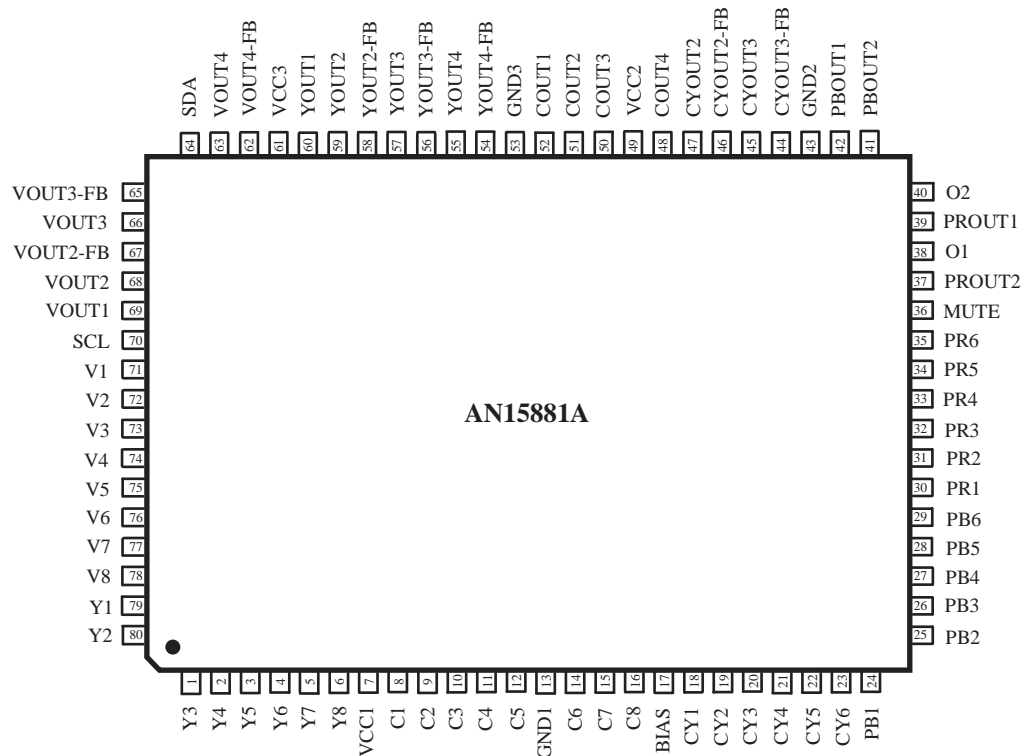


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -23

Q4004: LC74763-9836 (On-Screen Display IC)

BLOCK DIAGRAM

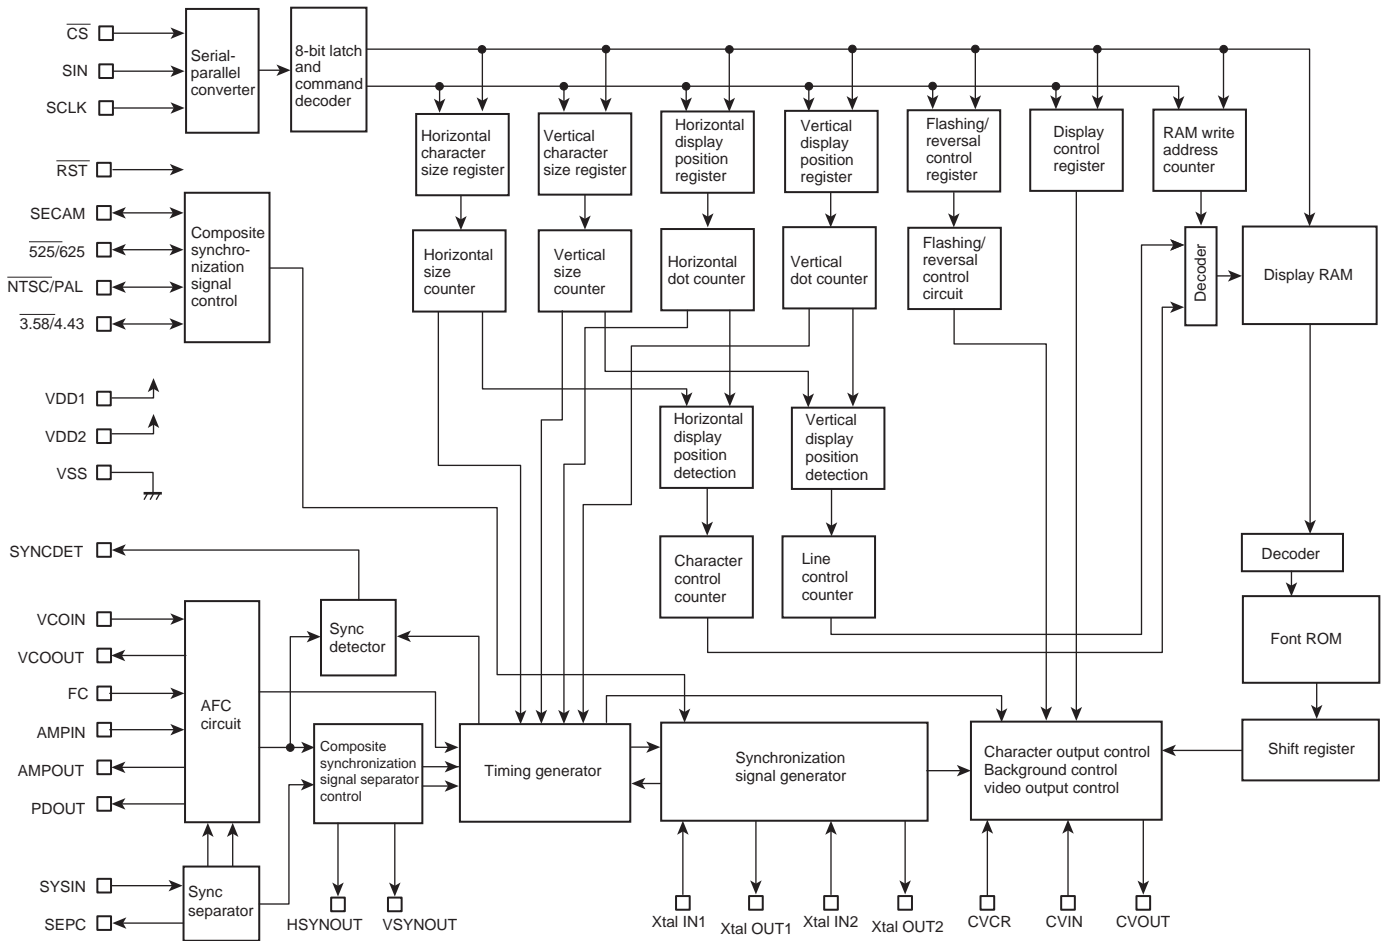

PIN CONFIGURATION

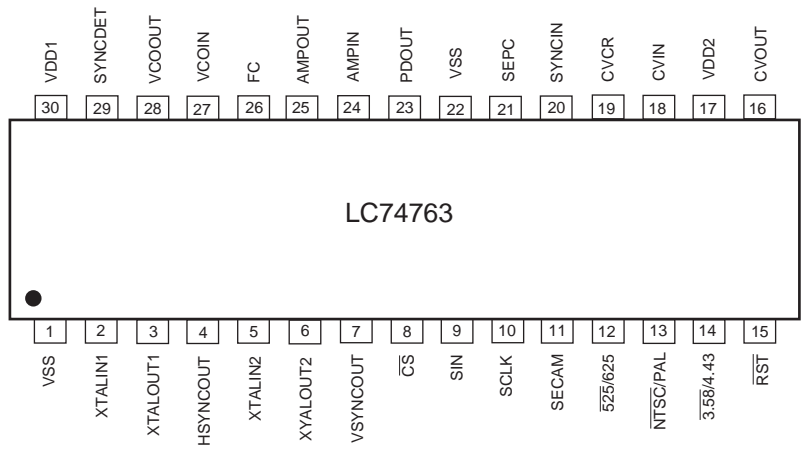

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -24

Q4004: LC74763-9836 (On-Screen Display IC)


TERMINAL DESCRIPTION

Pin No.	Symbol	Function	Description
1	V _{SS}	Ground	Ground connection
2	Xtal _{IN1}	Crystal oscillator connection	Connection for the crystal and capacitor used to form the crystal oscillator that generates the internal synchronization signal. The oscillator can be selected with a command switch.
3	Xtal _{OUT1}		
4	HSYNC _{OUT}	Horizontal synchronization output	Outputs the horizontal synchronization signal (AFC). The output polarity can be selected (metal option). Also functions as general output port (command switch).
5	Xtal _{IN2}	Crystal oscillator connection	Connection for the crystal and capacitor used to form the crystal oscillator that generates the internal synchronization signal.
6	Xtal _{OUT2}		
7	VSYNC _{OUT}	Vertical synchronization output	Outputs the vertical synchronization signal. The output polarity can be selected (metal option). Also functions as general output port (command switch).
8	$\overline{\text{CS}}$	Enable input	Enables/disables serial data input. Serial data is enabled when this pin is low (hysteresis input). Pull-up resistor built in (metal option).
9	SIN	Data input	Serial data input (hysteresis input). Pull-up resistor built in (metal option).
10	SCLK	Clock input	Clock input for serial data input (hysteresis input). Pull-up resistor built in (metal option).
11	SECAM	SECAM mode switch input/output (command switch)	During input, switches between SECAM and other modes. During output, functions as general output port or internal V output (command switch). Low = other modes, high = SECAM mode
12	$\overline{525/625}$	525/625 switch input/output (command switch)	During input, switches between 525 scan lines and 625 scan lines. During output, functions as general output port or character data output (command switch). Low = 525 lines, high = 625 lines
13	$\overline{\text{NTSC/PAL}}$	NTSC/PAL switch input/output (command switch)	Switches the color mode between NTSC and PAL. During output, functions as general output port or frame data output (command switch). Low = NTSC, high = PAL
14	$\overline{3.58/4.43}$	3.58/4.43 switch input/output (command switch)	Switch FSC between 3.58 MHz and 4.43 MHz. During output, functions as general output port or halftone output (command switch). Low = 3.58, high = 4.43
15	$\overline{\text{RST}}$	Reset input	System reset input pin, low is active (hysteresis input). Pull-up resistor built in (metal option).
16	CV _{OUT}	Video signal output	Composite video output
17	V _{DD2}	Power supply connection	Power supply connection for composite video signal level generation
18	CV _{IN}	Video signal input	Composite video input
19	CV _{CR}	Video signal input	SECAM chroma signal input
20	SYNC _{IN}	Sync separator circuit input	Built-in sync separator circuit video signal input
21	SEP _C	Sync separator circuit	Built-in sync separator circuit
22	V _{SS}	Ground	Ground connection
23	PD _{OUT}	Control voltage output	AFC control voltage output
24	AMP _{IN}	AFC filter connection	Filter connection
25	AMP _{OUT}		
26	FC	Control voltage input	AFC control voltage input
27	VCO _{IN}	LC oscillator connection	VCO LC oscillator circuit coil and capacitor connection
28	VCO _{OUT}		
29	SYNCD _{ET}	External synchronization signal detection output	Outputs the exclusive NOR of the horizontal synchronization signal (AFC) and CSYNC (sync separator). The output polarity can be selected (metal option). Also functions as general output port (command switch).
30	V _{DD1}	Power supply connection	Power supply connection (+5 V: digital system power supply)

IC BLOCK DIAGRAM AND TERMINAL DESCRIPTIONS -25

Q7502: M66005 (FL Tube Driver)

BLOCK DIAGRAM

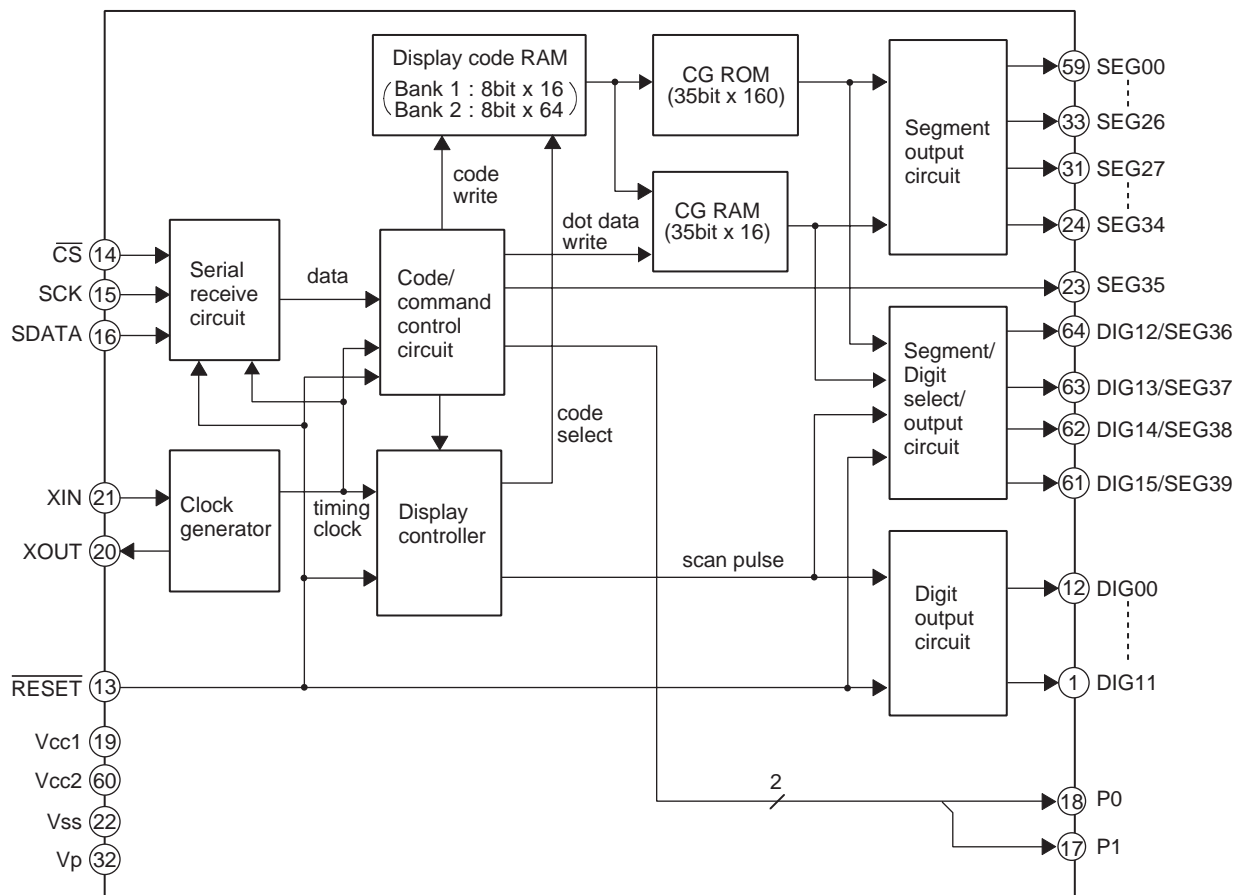


TERMINAL DESCRIPTION

PIN NO.	SYMBOL	PIN NAME	DESCRIPTION
13	$\overline{\text{RESET}}$	Reset input	This pin is used to initialize the internal state of the M66004.
14	$\overline{\text{CS}}$	Chip select input	"L" : Communication with the MCU is possible. "H" : Any instruction from the MCU is neglected.
15	SCK	Shift clock input	At the rising edge from "L" to "H", input data is shifted.
16	SDATA	Serial data input	Character code or command data to display is input from MSB.
21, 20	XIN, XOUT	Clock input Clock output	This pin is used to connect a resistor and a capacitor externally to set oscillation frequency.
1~12 61~64	DIG00 ~ DIG15	Digit output	These pins are used to connect to digit pins of VFD.
23~31 33~59	SEG00 ~ SEG39	Segment output	These pins are used to connect to segment pins of VFD.
17, 18	P0, P1		Output port (static operation)
19	VCC1		Positive power supply for internal logic.
60	VCC2		Positive power supply for high-pressure-resistant output port.
22	VSS		GND
32	VP		Negative power supply for VFD drive.


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -26

Q8001 : SII504 (I/P Video Converter)

BLOCK DIAGRAM

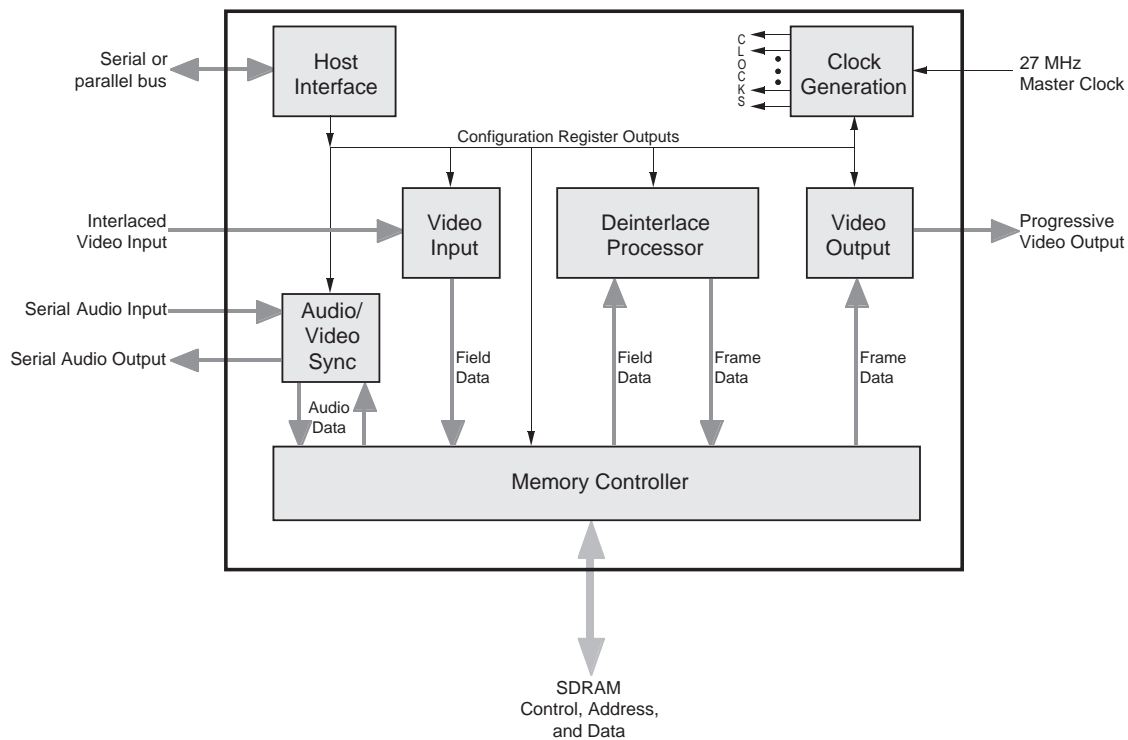

Video Output Section BLOCK DIAGRAM

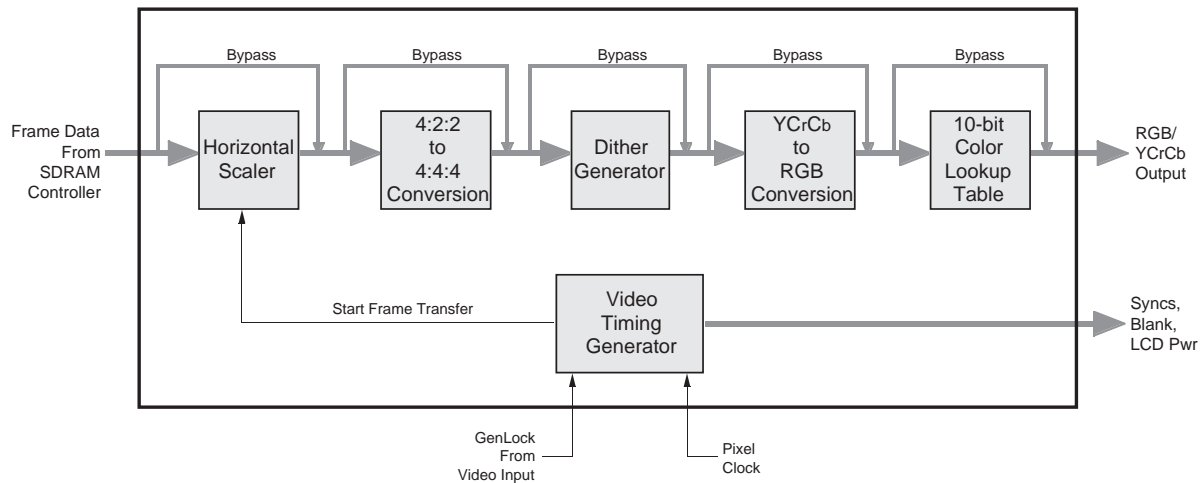

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -27

Q8001 : SII504 (I/P Video Converter)

TERMINAL DESCRIPTION (1/4)

Signal Group	Signal Name	Notes	Type	Description
Video Input	VidInData[9:2]	5V	In	Multiplexed Video Input Data (ITU-R BT.656, 8-bit & H/V syncs formats); Y (luma) Video Input Data (16-bit & H/V syncs format).
	VidInData[19:12] (HostData[15:8])	5V/PD	In	Chroma Video Input Data (16-bit & H/V syncs format only). See Host Interface pin list for pin functions when not used for video input.
	VS (HostData[7])	5V/PD	In	Vertical Sync input (8/16-bit & H/V syncs format only). See Host Interface pin list for pin function when not used for video input.
	HS (HostData[6])	5V/PD	In	Horizontal Sync input (8/16-bit & H/V syncs format only). See Host Interface pin list for pin function when not used for video input.
	VidInClk	5V	In	Video Input Clock, 27.0 MHz
Video Output	Red_Cr[9:0]		Out	Red Data (RGB output mode); Cr Data (YCrCb output mode)
	Green_Y[9:0]		Out	Green Data (RGB output mode); Y Data (YCrCb output mode)
	Blue_Cb[9:0]		Out	Blue Data (RGB output mode); Cb Data (YCrCb output mode)
	/HSync		Out	Horizontal Sync
	/VSync		Out	Vertical Sync
	/CSync		Out	Composite Sync
	/CBlank		Out	Composite Blank
	LCDPwrEn		Out	LCD Power Enable
	VidOutClk		Out	Video Output Clock, 36, 27 or 24 MHz
	Clk48M	5V	InOut	48 MHz Clock. Normally, this pin is a no-connect, outputting an internal PLL-generated 48.0 MHz clock and receiving that same clock through its input buffer. To bypass the PLL, set /ByPLLClk48M = 0, and supply a 48.0 MHz clock to the Clk48M pin.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -28

Q8001 : SII504 (I/P Video Converter)

TERMINAL DESCRIPTION (2/4)

Signal Group	Signal Name	Notes	Type	Description
Video Output (continued)	/ByPLLClk48M	PU	In	Bypass PLL for Clk48M. Normally, this pin is a no-connect, and the internal pullup ensures that the PLL is enabled. To bypass the PLL, set /ByPLLClk48M = 0, and supply a 48.0 MHz clock to the Clk48M pin.
	Clk54_72M	5V	InOut	54 or 72 MHz Clock. Normally, this pin is a no-connect, outputting an internal PLL-generated 54.0 MHz or 72.0 MHz clock and receiving that same clock through its input buffer. To bypass the PLL, set /ByPLLClk54_72M = 0, and supply a 54.0 or 72.0 MHz clock to the Clk54_72M pin. -
	/ByPLLClk54_72M	5V/PU	In	Bypass PLL for Clk54_72M. Normally, this pin is a no-connect, and the internal pullup ensures that the PLL is enabled. To bypass the PLL, set /ByPLLClk54_72M = 0, and supply a 54.0 MHz or 72.0 MHz clock to the Clk54_72M pin.
Audio/Video Synchronization	SDIn	5V/PD	In	Serial Digital Audio Input Data. See Audio/Video Synchronization section of Functional Description for audio formats supported.
	WSIn	5V/PD	In	Serial Digital Audio Input Word Select. See Audio/Video Synchronization section for audio formats supported.
	SCKIn	5V/PD	In	Serial Digital Audio Input Clock. Frequency range of clock is 1.411 to 6.144 MHz. See Audio/Video Synchronization section for audio formats supported.
	SDOut		Out	Serial Digital Audio Output Data. Audio output follows audio input, with a delay equal to that of the video processing pipeline.
	WSOut		Out	Serial Digital Audio Output Word Select. Audio output follows audio input, with a delay equal to that of the video processing pipeline.
	SCKOut	5V/PD	In	Serial Digital Audio Output Clock. Same frequency as SCKIn. SDOut and WSOut are generated from SCKOut. See Audio/Video Synchronization section for more details on on audio clocking.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -29

Q8001 : SII504 (I/P Video Converter)

TERMINAL DESCRIPTION (3/4)

Signal Group	Signal Name	Notes	Type	Description
Memory	/RAS		Out	SDRAM Row Address Strobe.
	/CAS		Out	SDRAM Column Address Strobe.
	/WE		Out	SDRAM Write Enable.
	DQM		Out	SDRAM Data Mask.
	MemData[31:0]	5V	InOut	SDRAM Data.
	MemAddr[12:0]	5V/PU/PD	InOut	SDRAM Address when an output. Configuration at reset when and input. See Memory Subsystem an Hardware Configuration sections of Functional Description for details. (Note: MemAddr12 is an output-only pin, does not have an internal pullup or pulldown, and is not part of the startup configuration.)
	MemClk	5V	InOut	SDRAM Clock. Normally, this pin is an InOut, outputting an internal PLL-generated 66.0 MHz or 72.0 MHz clock to the SDRAM and receiving that same clock through its input buffer. To bypass the PLL, set /ByPLLMemClk = 0, and supply a 66.0 MHz or 72.0 MHz clock to MemClk.
	/ByPLLMemClk	5V/PU	In	Bypass PLL for MemClk. Normally, this pin is a no-connect, and the internal pullup ensures that the PLL is enabled. To bypass the PLL, set /ByPLLMemClk = 0, and supply a 66.0 MHz or 72.0 MHz clock to the MemClk pin
Host Interface	/HostWr_SCL	5V/H	In	186-Compatible Write when HostMode = 0. Serial Clock when HostMode = 1.
	/HostRd_SDA	5V/H	InOut	186-Compatible Read when HostMode = 0. Serial Data (InOut, open drain output) when HostMode = 1.
	/HostCS	5V/PU	In	186-Compatible Chip Select when HostMode=0. When HostMode=1, must be tied to VDD or pulled up to VDD.
	HostAddr[7:0]	5V/PD	In	186-Compatible Address when HostMode = 0. No connect when HostMode = 1.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -30

Q8001 : SII504 (I/P Video Converter)


TERMINAL DESCRIPTION (4/4)

Signal Group	Signal Name	Notes	Type	Description
Host Interface (continued)	HostData[15:8] (VidInData[19:2])	5V/PD	InOut	186-Compatible Data when HostMode = 0. Chroma video input data (16-bit & H/V syncs format) when HostMode = 1.
	HostData[7] (VS)	5V/PD	InOut	186-Compatible Data when HostMode = 0. Vertical sync input (8/16-bit & H/V syncs format) when HostMode = 1.
	HostData[6] (HS)	5V/PD	InOut	186-Compatible Data when HostMode = 0. Horizontal sync input (8/16-bit & H/V syncs format) when HostMode = 1.
	HostData[5:0]	5V/PD	InOut	186-Compatible Data when HostMode = 0. No connect when HostMode = 1.
	HostClk	5V	InOut	186-Compatible Clock (33.33 MHz max) when HostMode = 0. No Connect (27.0 MHz, InOut) when HostMode = 1. Note that when HostMode= 1, the clock output on HostClk is also received and used internally.
	HostMode	5V/PU	In	Serial Host Interface when HostMode = 1 (internal pullup defaults to this mode). 186-compatible host interface when HostMode = 0.
Video Processing Status	/Det32PD		Out	3:2 Pulldown Sequence Detected.
	/Det22PD		Out	2:2 Pulldown Sequence Detected.
	/DetVideo		Out	Interlaced Video Sequence Detected.
	/DeintDone		Out	Deinterlace processing complete for current field period. Opendrain output.
External APLL Reference Clock	/ExtRefSel	5V/PU	In	External APLL Reference Select. Internal pullup defaults pin to a 1, selecting VidInClk as the APLL reference clock. To select ExtRefXtalIn as the APLL reference clock, set /ExtRefSel to a 0.
	ExtRefXtalIn		In	External APLL Reference Crystal/oscillator Input.
	ExtRefXtalOut		Out	External APLL Reference Crystal Output.
Reset	/Reset	5V/H	In	Hardware Reset.
Test	Test[1:0]	5V/PD	In	Production hardware test support.
	PuPdDis	5V	In	Internal pullup and pulldown disable test function. Connect to ground for normal operation.
Power	AVDD		Pwr	1.8V Analog Power for PLL. (Qty: 1)
	ARTN		Pwr	Analog Return for PLLs. (Qty: 1)
	VDDCore		Pwr	1.8V Core Power. (Qty: 11)
	GNDCore		Pwr	Digital Ground for Core Power. (Qty: 12)
	VDDIO		Pwr	3.3V I/O Power. (Qty: 11)
	GNDIO		Pwr	Digital Ground for I/O Power. (Qty: 18)

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -31

Q8001 : SII504 (I/P Video Converter)


PIN CONFIGURATION

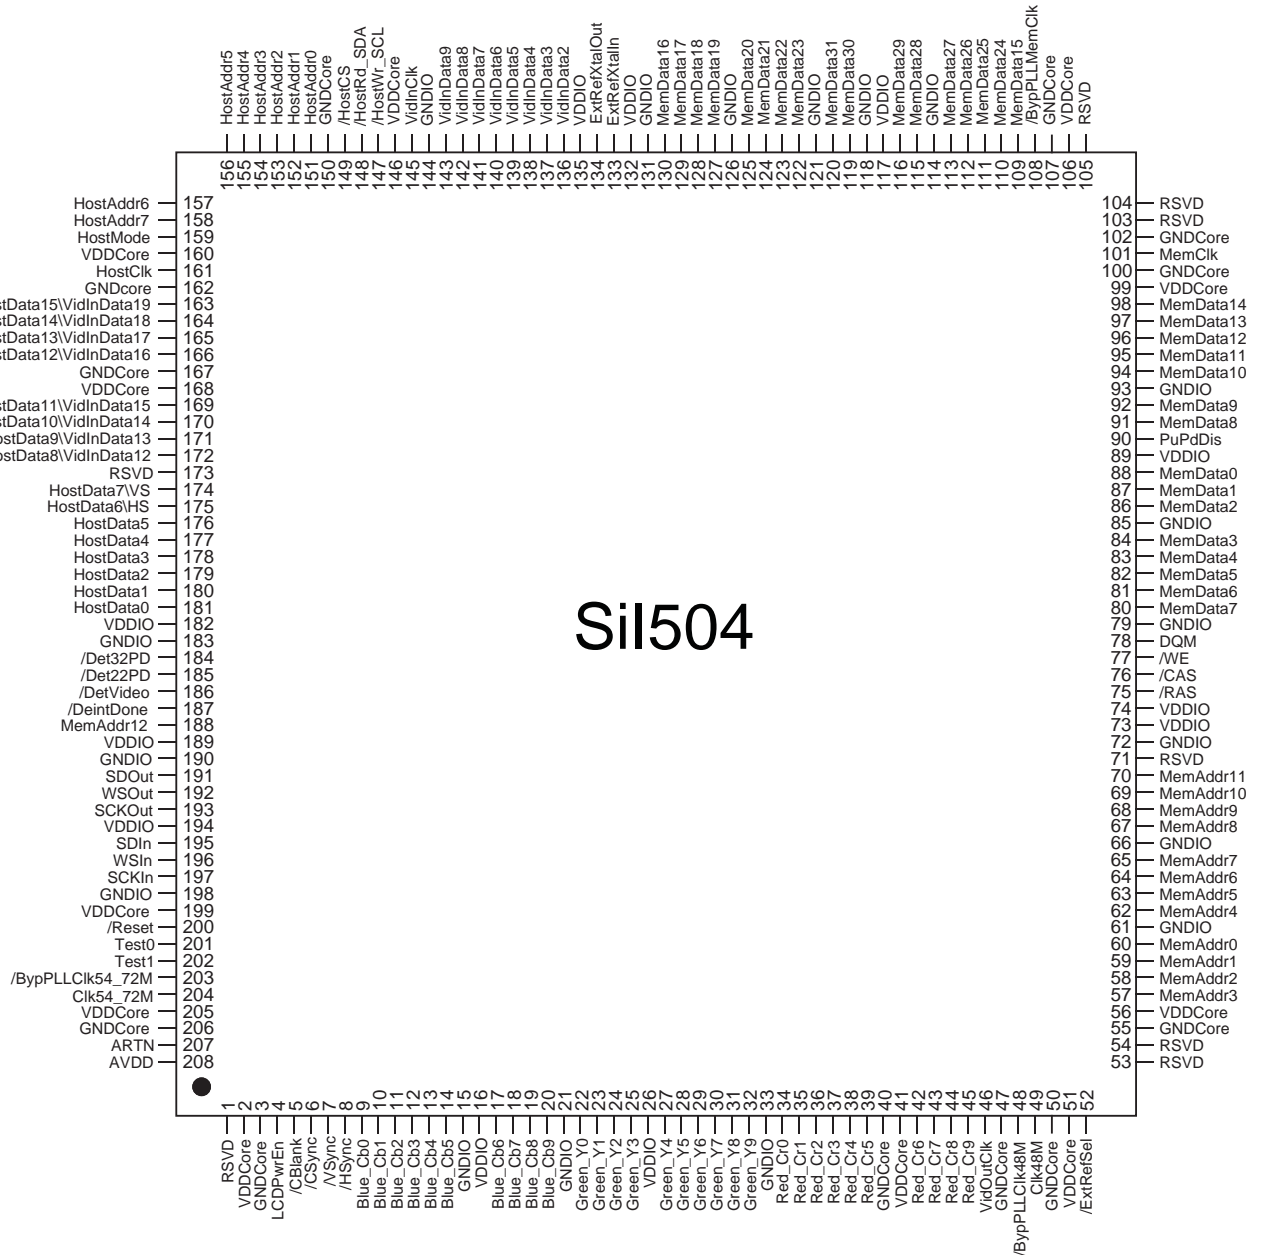

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -32

Q8003: IC42S32200L (64-Mbit Synchronous Dynamic RAM)

BLOCK DIAGRAM

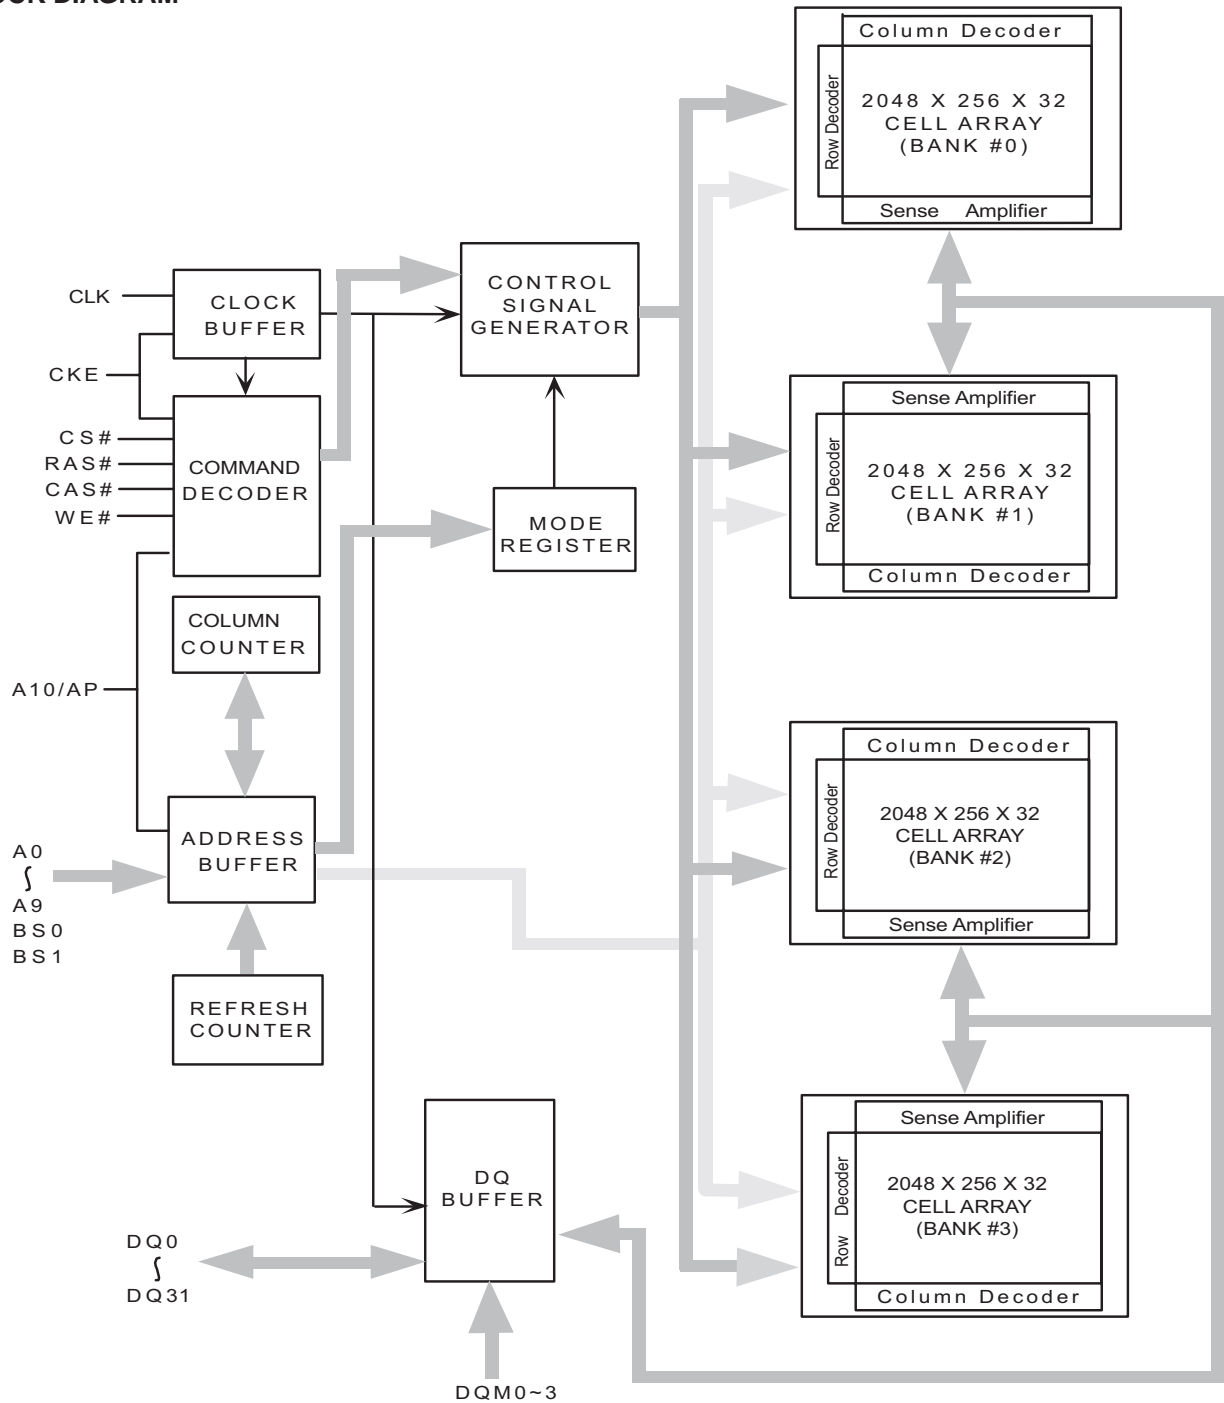

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -33

Q8003: IC42S32200L (64-Mbit Synchronous Dynamic RAM)

TERMINAL DESCRIPTION (1/2)

Symbol	Type	Description
CLK	Input	Clock: CLK is driven by the system clock.All SDRAM input signals are sampled on the positive edge of CLK.CLK also increments the internal burst counter and controls the output registers.
CKE	Input	Clock Enable: CKE activates(HIGH)and deactivates(LOW)the CLK signal.If CKE goes low synchronously with clock(set-up and hold time same as other inputs),the internal clock is suspended from the next clock cycle and the state of output and burst address is frozen as long as the CKE remains low.When all banks are in the idle state,deactivating the clock controls the entry to the Power Down and Self Refresh modes.CKE is synchronous except after the device enters Power Down and Self Refresh modes,where CKE becomes asynchronous until exiting the same mode. The input buffers,including CLK,are disabled during Power Down and Self Refresh modes,providing low standby power.
BS0,BS1	Input	Bank Select: BS0 and BS1 defines to which bank the BankActivate,Read,Write,or BankPrecharge command is being applied.
A0-A10	Input	Address Inputs: A0-A10 are sampled during the BankActivate command (row address A0-A10)and Read/Write command (column address A0-A7 with A10 defining Auto Precharge) to select one location out of the 256K available in the respective bank.During a Precharge command,A10 is sampled to determine if all banks are to be precharged (A10 =HIGH). The address inputs also provide the op-code during a Mode Register Set .
CS#	Input	Chip Select: CS#enables (sampled LOW)and disables (sampled HIGH)the command decoder.All commands are masked when CS#is sampled HIGH.CS#provides for external bank selection on systems with multiple banks.It is considered part of the command code.
RAS#	Input	Row Address Strobe: The RAS#signal defines the operation commands in conjunction with the CAS#and WE#signals and is latched at the positive edges of CLK.When RAS# and CS#are asserted "LOW"and CAS#is asserted "HIGH,"either the BankActivate command or the Precharge command is selected by the WE#signal.When the WE#is asserted "HIGH,"the BankActivate command is selected and the bank designated by BS is turned on to the active state.When the WE#is asserted "LOW,"the Precharge command is selected and the bank designated by BS is switched to the idle state after the precharge operation.
CAS#	Input	Column Address Strobe: The CAS#signal defines the operation commands in conjunction with the RAS#and WE#signals and is latched at the positive edges of CLK. When RAS#is held "HIGH"and CS#is asserted "LOW,"the column access is started by asserting CAS#"LOW."Then,the Read or Write command is selected by asserting WE# "LOW"or "HIGH."
WE#	Input	Write Enable: The WE#signal defines the operation commands in conjunction with the RAS#and CAS#signals and is latched at the positive edges of CLK.The WE#input is used to select the BankActivate or Precharge command and Read or Write command.
DQM0-3	Input	Data Input/Output Mask: DQM0-DQM3 are byte specific,nonpersistent I/O buffer controls. The I/O buffers are placed in a high-z state when DQM is sampled HIGH.Input data is masked when DQM is sampled HIGH during a write cycle.Output data is masked (two-clock latency)when DQM is sampled HIGH during a read cycle.DQM3 masks DQ31-DQ24,DQM2 masks DQ23-DQ16,DQM1 masks DQ15-DQ8,and DQM0 masks DQ7-DQ0.
DQ0-31	Input/Output	Data I/O: The DQ0-31 input and output data are synchronized with the positive edges of CLK.The I/Os are byte-maskable during Reads and Writes.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -34


Q8003: IC42S32200L (64-Mbit Synchronous Dynamic RAM)

TERMINAL DESCRIPTION (2/2)

NC	-	No Connect: These pins should be left unconnected.
VDDQ	Supply	DQ Power: Provide isolated power to DQs for improved noise immunity.
VSSQ	Supply	DQ Ground: Provide isolated ground to DQs for improved noise immunity.
VDD	Supply	Power Supply: +3.3V \pm 0.3V
VSS	Supply	Ground

PIN CONFIGURATION


(Top View)

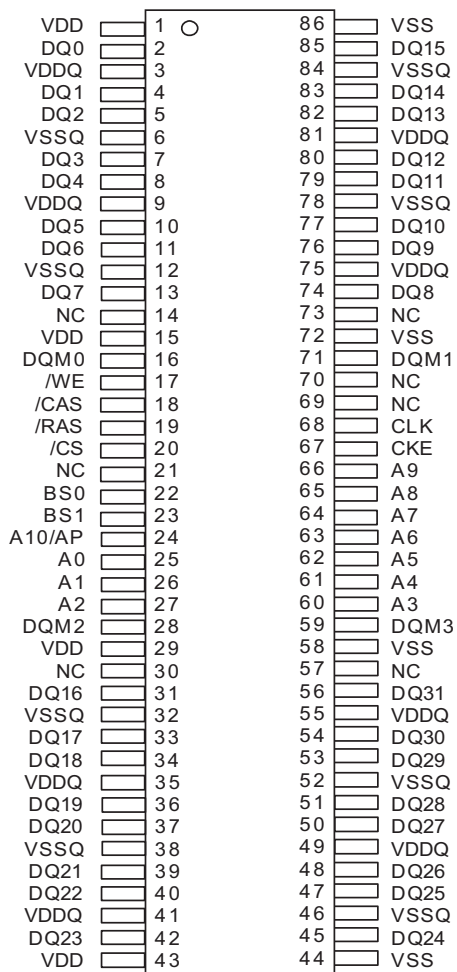

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -35

Q8101: ADV7401 (Multi-Format SDTV/HDTV Video Decoder)


BLOCK DIAGRAM

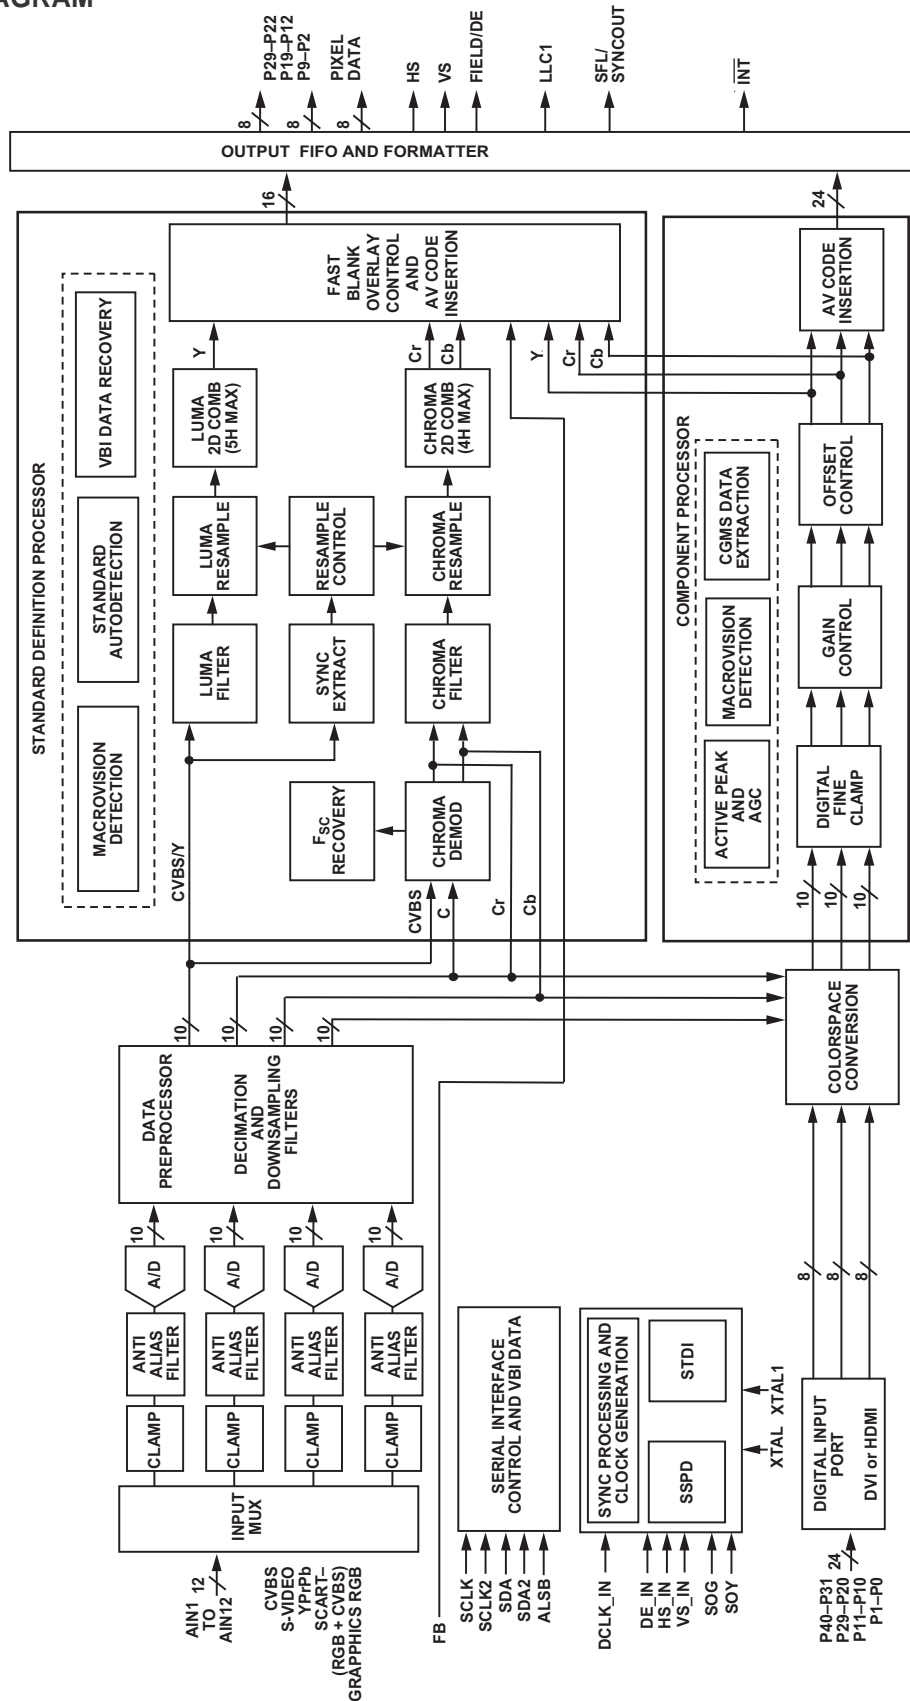

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -36

Q8101: ADV7401 (Multi-Format SDTV/HDTV Video Decoder)

PIN CONFIGURATION

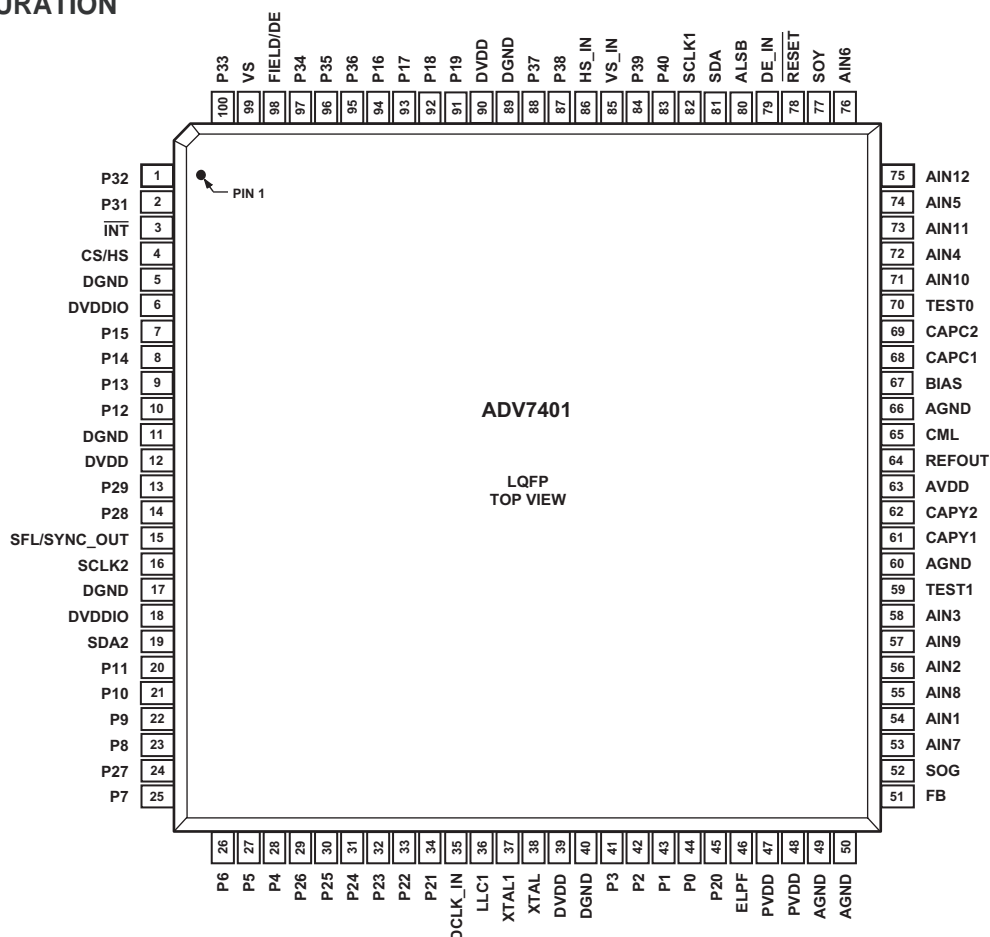

TERMINAL DESCRIPTION(1/3)

Pin No.	Mnemonic	Type	Function
5, 11, 17, 40, 89	DGND	G	Digital ground
49, 50, 60, 66	AGND	G	Analog ground
6, 18	DVDDIO	P	Digital I/O supply voltage (3.3 V).
12, 39, 90	DVDD	P	Digital core supply voltage (1.8 V).
63	AVDD	P	Analog supply voltage (3.3 V).
47, 48	PVDD	P	PLL supply voltage (1.8 V).
51	FB	I	FB is a fast switch overlay input that switches between CVBS and RGB analog signals.
54, 56, 58, 72, 74, 76, 53, 55, 57, 71, 73, 75	AIN1–AIN12	I	Analog video input channels.
42, 41, 28, 27, 26, 25, 23, 22, 10, 9, 8, 7, 94, 93, 92, 91	P2–P9, P12– P19	O	Video pixel output port.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -37

Q8101: ADV7401 (Multi-Format SDTV/HDTV Video Decoder)

TERMINAL DESCRIPTION (2/3)

Pin No.	Mnemonic	Type	Function
33, 32, 31, 30, 29, 24, 14, 13	P22-P29	I/O	Video input/output port
44, 43, 21, 20, 45, 34, 2, 1, 100, 97, 96, 95, 88, 87, 84, 83	P0-P1, P10- P11, P20-P21, P31-P40	I	Video pixel input port.
3	INT	O	Interrupt pin, can be active low or active high. When SDP/CP status bits change this pin will trigger. The set of events which will trigger an interrupt are under user control.
4	HS/CS	O	HS is a horizontal synchronization output signal in SDP and CP modes. CS is a digital composite synchronization signal that can be selected while in CP mode.
99	VS	O	VS is a vertical synchronization output signal in SDP and CP modes.
98	FIELD/DE	O	FIELD is a field synchronization output signal in all interlaced video modes. This pin also can be enabled as a DE (Data Enable) signal in CP mode to allow direct connection to a HDMI/DVI Tx IC.
81, 19	SDA1, SDA2	I/O	I ² C port serial data input/output pin, SDA1 is the data line for the Control port and SDA2 is the data line for the VBI readback port.
82, 16	SCLK1, SCLK2	I I	I ² C port serial clock input (max clock rate of 400 kHz). SCLK1 is the clock line for the Control port and SCLK2 is the clock line for the VBI data readback port.
80	ALSB	I	This pin selects the I ² C address for the ADV7401 Control and VBI readback ports. ALSB set to a logic 0 sets the address for a write to control port of 0x40 and the readback address for the VBI port of 0x21. ALSB set to a logic high sets the address for a write to control port of 0x42 and the readback address for the VBI port of 0x23.
78	RESET	I	System reset input, active low. A minimum low reset pulse width of 5 ms is required to reset the ADV7401 circuitry.
36	LLC1	O	LLC1 is a line locked output clock for the pixel data (range is 12.825MHz to 140MHz for ADV7401KSTZ-140; 12.825MHz to 110MHz for ADV7401BSTZ-110; 12.825MHz to 80MHz for ADV7401BSTZ-80).
38	XTAL	I	Input pin for 28.63636 MHz crystal, or can be overdriven by an external 3.3 V 28.63636 MHz clock oscillator source to clock the ADV7401.
37	XTAL1	O	This pin should be connected to the 28.63636 MHz crystal or left as a no connect if an external 3.3 V 28.63636 MHz clock oscillator source is used to clock the ADV7401. In crystal mode the crystal must be a fundamental crystal.
46	ELPF	O	The recommend external loop filter must be connected to this ELPF pin.
70	TEST0		These pins should be left unconnected or alternatively tie to AGND
59	TEST1	O	These pins should be left unconnected

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -38

Q8101: ADV7401 (Multi-Format SDTV/HDTV Video Decoder)


TERMINAL DESCRIPTION (3/3)

Pin No.	Mnemonic	Type	Function
15	SFL/SYNC_OUT	O	SFL (Subcarrier Frequency Lock); this pin contains a serial output stream which can be used to lock the subcarrier frequency when this decoder is connected to any Analog Devices digital video encoder. SYNC_OUT is the sliced sync output signal only available in CP mode.
64	REFOUT	O	Internal voltage reference output.
65	CML	O	The CML pin is a common-mode level for the internal ADCs.
61, 62	CAPY1– CAPY2	I	ADC capacitor network.
68, 69	CAPC1– CAPC2	I	ADC capacitor network.
67	BIAS	O	BIAS is an external bias setting pin. Connect the recommended resistor (1.35k Ω) between pin and ground.
86	HS_IN/CS_IN	I	Can be configured in CP mode to be either a digital HS input signal or a digital CS input signal used to extract timing in a 5-wire or 4-wire RGB mode.
85	VS_IN	I	VS input signal used in CP mode for 5-wire timing mode.
79	DE_IN	I	DE_IN is a data enable input signal used in 24-bit digital input port mode, for example, 24-bit RGB data from a DVI Rx IC.
35	DCLK_IN	I	DCLK_IN is a clock input signal used in 24-bit digital input mode (e.g. 24-bit RGB data from a DVI Rx IC) and also in digital CVBS input mode.
52	SOG	I	SOG is a sync on green input used in embedded sync mode.
77	SOY	I	SOY is a sync on luma input used in embedded sync mode.


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -39

Q8401 : SiI9030CTU (HDMI Transmitter)

BLOCK DIAGRAM

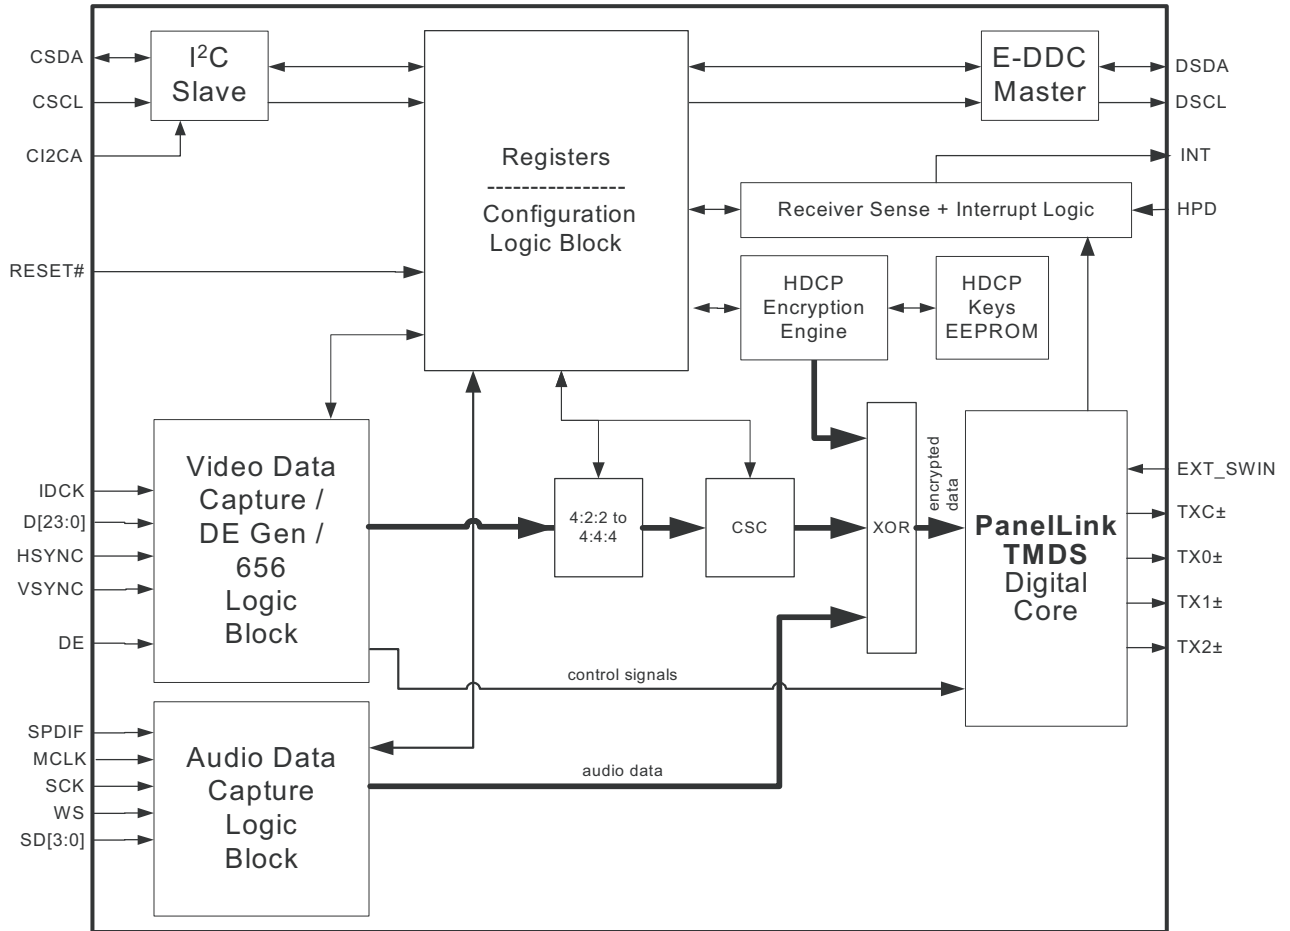


SYSTEM APPLICATION

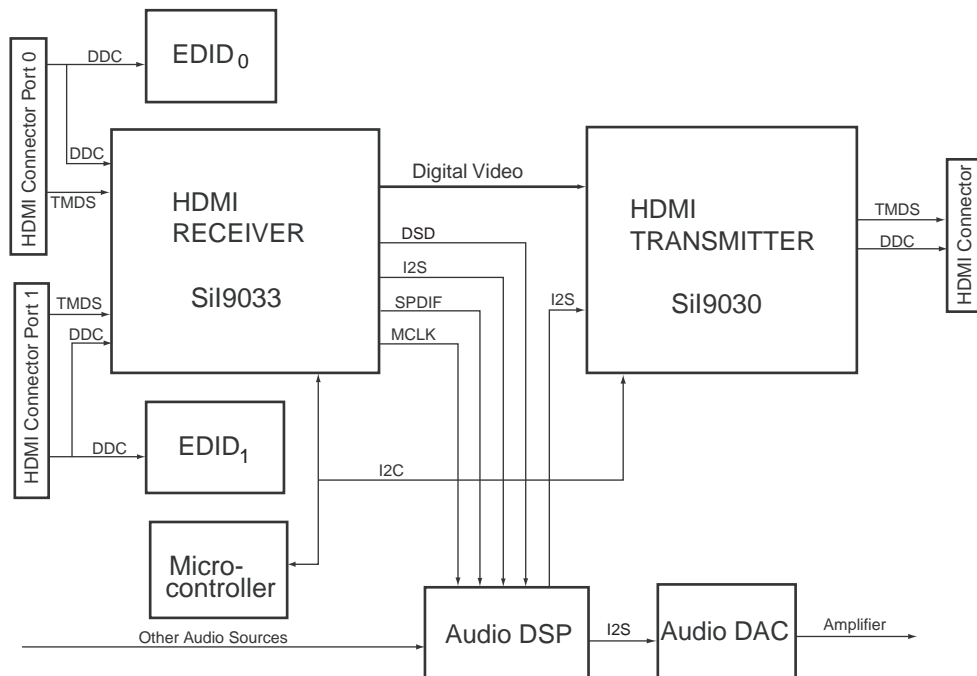

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -40

Q8401 : SiI9030CTU (HDMI Transmitter)

PIN CONFIGURATION

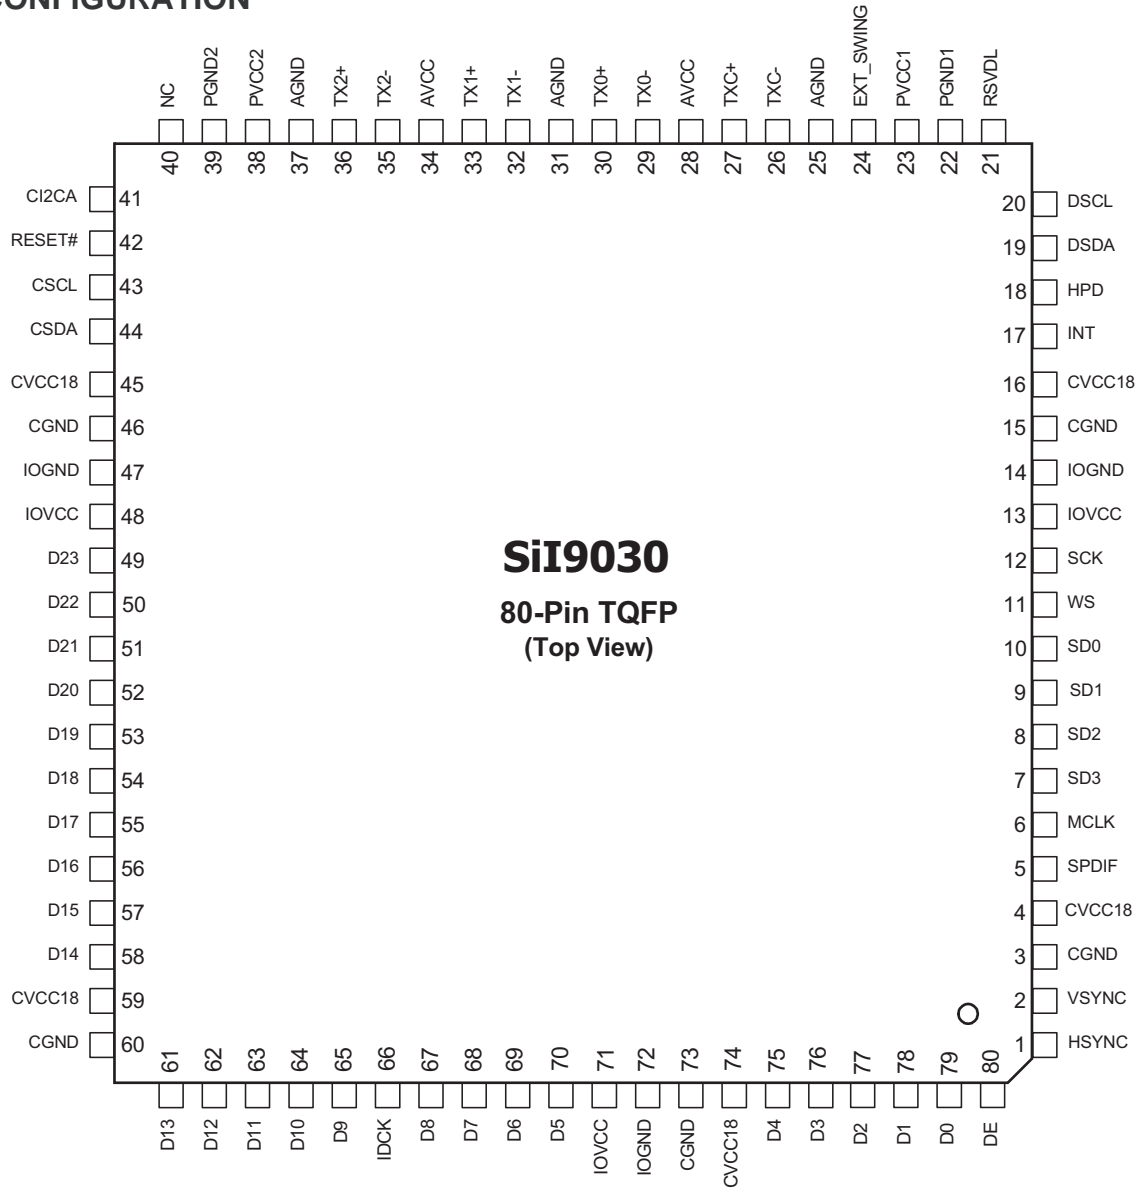

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -41

Q8401 : SiI9030CTU (HDMI Transmitter)


TERMINAL DESCRIPTION

Pin #	Pin Name	I/O	Description	Use
1	HSYNC	I	Horizontal Sync input control signal	Video and Audio
2	VSYNC	I	Vertical Sync input control signal	Video and Audio
3	CGND		Digital core GND.	Ground
4	CVCC18		Digital core VCC. Connect to 1.8V supply.	Power
5	SPDIF	I	S/PDIF Audio input	Video and Audio
6	MCLK	I	Audio Input Master Clock	Video and Audio
7	SD3	I	I2S Serial Data	Video and Audio
8	SD2	I	I2S Serial Data	Video and Audio
9	SD1	I	I2S Serial Data	Video and Audio
10	SD0	I	I2S Serial Data	Video and Audio
11	WS	I	I2S Word Select	Video and Audio
12	SCK	I	I2S Serial Clock	Video and Audio
13	IOVCC		IO Pin VCC. Connect to 3.3V supply.	Power
14	IOGND		IO Pin GND.	Ground
15	CGND		Digital core GND.	Ground
16	CVCC18		Digital core VCC. Connect to 1.8V supply.	Power
17	INT	O	Interrupt Output.	Confirration/Programming
18	HPD	I	Hot Plug Detect Input.	Confirration/Programming
19	DSDA	I/O	DDC data	Control
20	DSCL	I/O	DDC Clock	Control
21	RSVDL	I	Reserved for use by Silicon image, and must be tied LOW.	Confirration/Programming
22	PGND1		TMDS Core PLL Ground.	Ground
23	PVCC1		TMDS Core PLL Power. Connect to 3.3V supply.	Power
24	EXT_SWING	I	Voltage Swing Adjustment. The resistor between AVCC and this pin determines the amplitude of the voltage swing.	Differential signal data
25	AGND		Analog GND.	Ground
26	TXC-	O	TMDS output clock.	Differential signal data
27	TXC+	O		
28	AVCC		Analog VCC. Connect to 3.3Vsupply.	Power
29	TX0-	O	TMDS output data.	Differential signal data
30	TX0+	O		
31	AGND		Analog GND.	Ground
32	TX1-	O	TMDS output data.	Differential signal data
33	TX1+	O		
34	AVCC		Analog VCC. Connect to 3.3Vsupply.	Power
35	TX2-	O	TMDS output data.	Differential signal data
36	TX2+	O		
37	AGND		Analog GND.	Ground
38	PVCC2		Filter PLL Power. Connect to 3.3V supply	Power
39	PGND2		Filter PLL Ground.	Ground
40	NC		Not connected.	
41	CI2CA	I	I2C device address select	Control
42	RESET	I	Reset Pin. Active LOW	Control
43	CSCL	I	I2C Clock	Control
44	CSDA	I/O	I2C Data	Control
45	CVCC18		Digital core VCC. Connect to 1.8V supply.	Power
46	CGND		Digital core GND.	Ground
47	IOGND		IO Pin GND.	Ground
48	IOVCC		IO Pin VCC. Connect to 3.3V supply.	Power
49	D23	I	12-bit Input Pixel Data Bus. These pins are used in 24-bit mode, single-edge mode.	Video and Audio
50	D22	I		
51	D21	I		
52	D20	I		
53	D19	I		
54	D18	I		
55	D17	I		
56	D16	I		
57	D15	I		
58	D14	I		
59	CVCC18		Digital core VCC. Connect to 1.8V supply.	Power
60	CGND		Digital core GND.	Ground
61	D13	I	12-bit Input Pixel Data Bus. These pins are used in 24-bit mode, single-edge mode.	Video and Audio
62	D12	I		
63	D11	I		
64	D10	I		
65	D9	I		
66	IDCK	I	Input Data Clock	Video and Audio
67	D8	I	12-bit Input Pixel Data Bus. These pins are used in 24-bit mode, single-edge mode.	Video and Audio
68	D7	I		
69	D6	I		
70	D5	I		
71	IOVCC		IO Pin VCC. Connect to 3.3V supply.	Power
72	IOGND		IO Pin GND.	Ground
73	CGND		Digital core GND.	Ground
74	CVCC18		Digital core VCC. Connect to 1.8V supply.	Power
75	D4	I	12-bit Input Pixel Data Bus. These pins are used in 24-bit mode, single-edge mode.	Video and Audio
76	D3	I		
77	D2	I		
78	D1	I		
79	D0	I		
80	DE	I	Data enable	Video and Audio

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -42

Q8501 : Sil9033 (HDMI Receiver)


BLOCK DIAGRAM

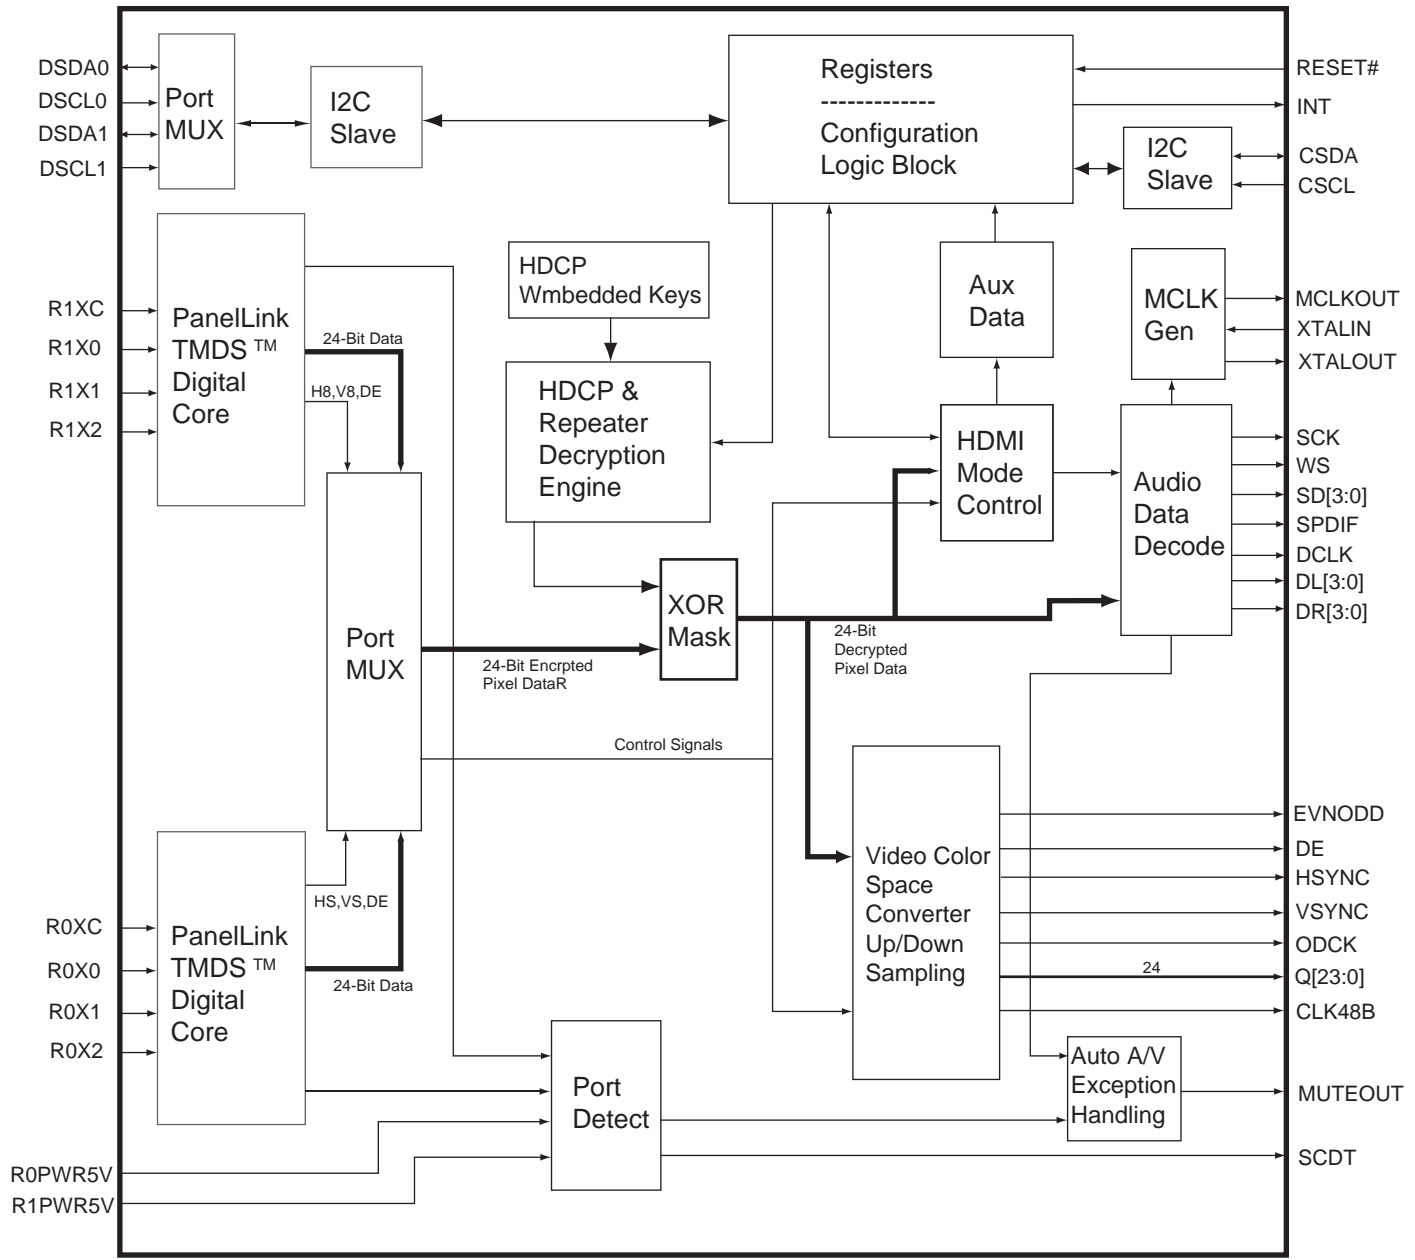

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -43

Q8501 : SiI9033 (HDMI Receiver)


SYSTEM APPLICATION

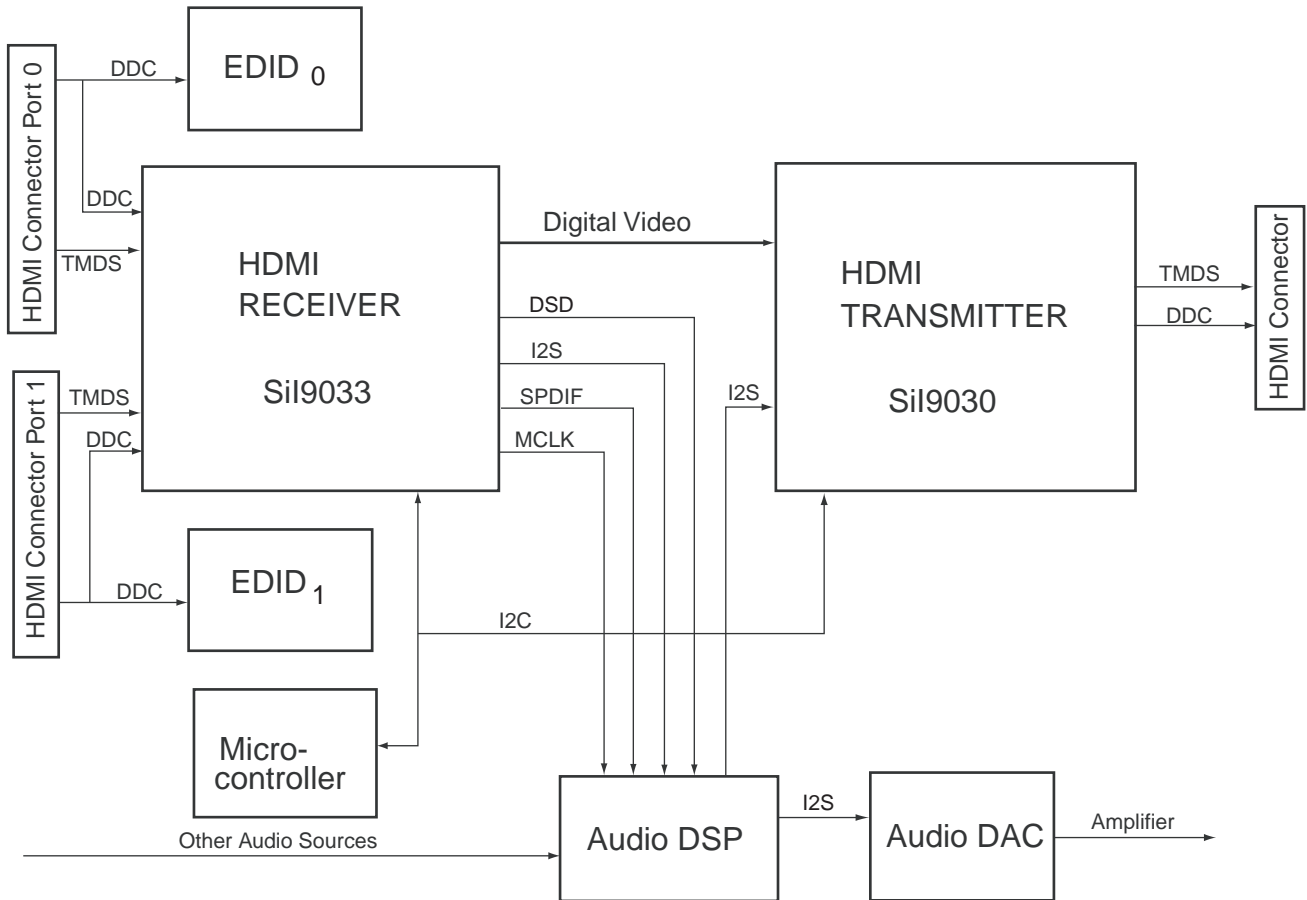

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -44

Q8501 : Sil9033 (HDMI Receiver)

PIN CONFIGURATION

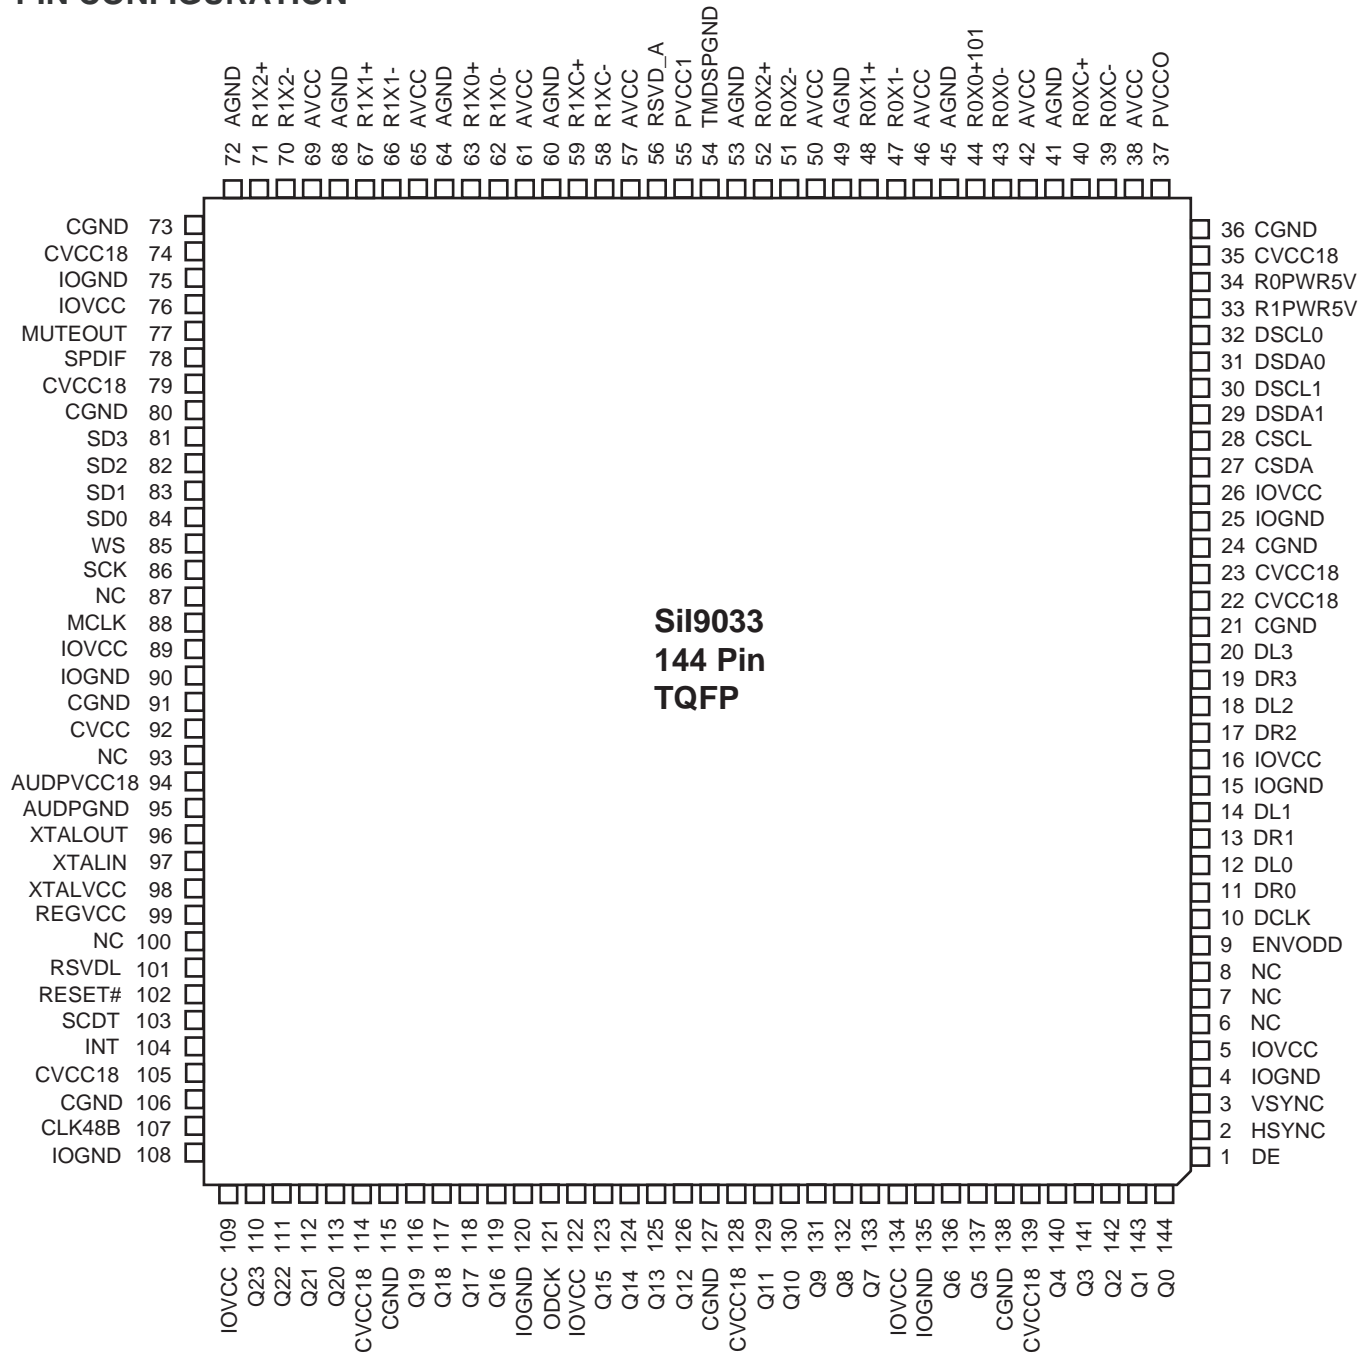

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -45

Q8501 : Sil9033 (HDMI Receiver)

TERMINAL DESCRIPTION (1/5)

Digital Video Output Pins

Pin Name	Pin #	Strength	Type	Dir	Description
Q0	144	8 mA	LVTTTL	Output	24-bit Output Pixel Data Bus.
Q1	143		LVTTTL	Output	
Q2	142		LVTTTL	Output	
Q3	141		LVTTTL	Output	
Q4	140		LVTTTL	Output	
Q5	137		LVTTTL	Output	
Q6	136		LVTTTL	Output	
Q7	133		LVTTTL	Output	
Q8	132		LVTTTL	Output	
Q9	131		LVTTTL	Output	
Q10	130		LVTTTL	Output	
Q11	129		LVTTTL	Output	
Q12	126		LVTTTL	Output	
Q13	125		LVTTTL	Output	
Q14	124		LVTTTL	Output	
Q15	123		LVTTTL	Output	
Q16	119		LVTTTL	Output	
Q17	118		LVTTTL	Output	
Q18	117		LVTTTL	Output	
Q19	116		LVTTTL	Output	
Q20	113		LVTTTL	Output	
Q21	112		LVTTTL	Output	
Q22	111		LVTTTL	Output	
Q23	110		LVTTTL	Output	
DE	1		LVTTTL	Output	Data enable.
HSYNC	2		LVTTTL	Output	Horizontal Sync Output control signal.
VSYNC	3		LVTTTL	Output	Vertical Sync Output control signal.
ODCK	121	12 mA	LVTTTL	Output	Output Data Clock.

NOTE

1. HSYNC and VSYNC outputs carry sync signals for both embedded and explicit sync configurations.
2. When transporting video data which uses fewer than 24 bits, the unused bits on the Q[] bus may still carry switching pixel data signals. Unused Q[] bus pins should be unconnected, masked or ignored by downstream devices. For example, carrying YCbCr 4:2:2 data with 16-bit width (see page 50), the bits Q[0] through Q[7] will output switching signals.
3. The output data bus, Q0 to Q23, may be wire-ORed to another device such that one device is always tri-stated. However, the Q0-Q23 pins do not have bus hold internal pull-ups or pull-downs, and so cannot pull the bus when all connected devices are tri-stated.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -46

Q8501 : Sil9033 (HDMI Receiver)

TERMINAL DESCRIPTION (2/5) Digital Audio Output Pins

Pin Name	Pin #	Strength	Type	Dir	Description
XTALIN	97	—	LVTTTL	In	Crystal Clock Input.
XTALOUT	96	—	LVTTTL	Out	Crystal Clock Output.
MCLK	88	8 mA	LVTTTL	Out	Audio Master Clock Output.
SCK	86	4 mA	LVTTTL	Out	I ² S Serial Clock Output.
WS	85	4 mA	LVTTTL	Out	I ² S Word Select Output.
SD0	84	4 mA	LVTTTL	Out	I ² S Serial Data Output.
SD1	83	4 mA	LVTTTL	Out	
SD2	82	4 mA	LVTTTL	Out	
SD3	81	4 mA	LVTTTL	Out	
DCLK	10	4 mA	LVTTTL	Out	DSD Clock Output
DR0	11	4 mA	LVTTTL	Out	DSD Serial Right Channel Data Output
DR1	13	4 mA	LVTTTL	Out	
DR2	17	4 mA	LVTTTL	Out	
DR3	19	4 mA	LVTTTL	Out	
DL0	12	4 mA	LVTTTL	Out	DSD Serial Left Channel Data Output
DL1	14	4 mA	LVTTTL	Out	
DL2	18	4 mA	LVTTTL	Out	
DL3	20	4 mA	LVTTTL	Out	
SPDIF	78	4 mA	LVTTTL	Out	S/PDIF Audio Output.
MUTEOUT	77	4 mA	LVTTTL	Out	Mute Audio Output

NOTE

XTALIN may be driven at LVTTTL levels by a clock (leaving XTALOUT unconnected), or connected through a crystal to XTALOUT. Refer to schematic on page 68.

TERMINAL DESCRIPTION (3/5) Configuration/Programming Pins

Pin Name	Pin #	Strength	Type	Dir	Description
INT	104	4 mA	LVTTTL ¹	Out	Interrupt Output
RESET#	102	—	Schmitt	In	Reset Pin. Active LOW. 5V Tolerant.
DSCL0	32	—	Schmitt	In	DDC I ² C Clock for Port 0. 5V Tolerant.
DSDA0	31	4 mA	Schmitt	Bi-Di	DDC I ² C Data for Port 0. 5V Tolerant.
DSCL1	30	—	Schmitt	In	DDC I ² C Clock for Port 1. 5V Tolerant.
DSDA1	29	4 mA	Schmitt	Bi-Di	DDC I ² C Data for Port 1. 5V Tolerant.
CSCL	28	—	Schmitt	In	Configuration I ² C Clock. 5V Tolerant.
CSDA	27	4 mA	Schmitt	Bi-Di	Configuration I ² C Data. 5V Tolerant.
SCDT	103	12 mA	LVTTTL	Out	Indicates active video at HDMI input port.
CLK48B	107	12 mA	LVTTTL	Bi-Di	Data Bus Latch Enable. ²
R0PWR5V	34	—	Schmitt	In	Port 0 Transmitter Detect. 5V Tolerant.
R1PWR5V	33	—	Schmitt	In	Port 1 Transmitter Detect. 5V Tolerant.
RSVDL	101	—	LVTTTL	In	Reserved, must be tied LOW.
RSVD_A	56				Reserved Pin, leave unconnected.
NC	6,7,8,87, 93,100		—	—	No internal connection.
EVNODD	9	8 mA	LVTTTL	Out	Indicates Even or Odd field for interfaced formats. Polarity programmable in register.

NOTE

The INT pin is programmable as either a push-pull LVTTTL output, or as an open-drain output.

CLK48B is used to clock external 24-to-48 bit latches. CLK48B is also latched on the rising edge of RESET# to set the I²C device addresses for CSCL/CSDA. Refer to Table 11. CLK48B has a weak internal pull-down, and so will be latched as a LOW if not otherwise connected.

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -47

Q8501 : Sil9033 (HDMI Receiver)

TERMINAL DESCRIPTION (4/5) Differential Signal Data Pins

Pin Name	Pin #	Type	Description	
R0XC+	40	Analog	TMDS input clock pair.	HDMI Port 0
R0XC-	39	Analog		
R0X0+	44	Analog	TMDS input data pair.	
R0X0-	43	Analog		
R0X1+	48	Analog	TMDS input data pair.	
R0X1-	47	Analog		
R0X2+	52	Analog	TMDS input data pair.	
R0X2-	51	Analog		
R1XC+	59	Analog	TMDS input clock pair.	HDMI Port 1
R1XC-	58	Analog		
R1X0+	63	Analog	TMDS input data pair.	
R1X0-	62	Analog		
R1X1+	67	Analog	TMDS input data pair.	
R1X1-	66	Analog		
R1X2+	71	Analog	TMDS input data pair.	
R1X2-	70	Analog		


TERMINAL DESCRIPTION (5/5) Power and Ground Pins

Pin Name	Pin #	Type	Description	Supply
CVCC18	22, 23, 35, 74, 79, 92, 105, 114, 128, 139	Power	Digital Logic VCC	1.8V
CGND	21, 24, 36, 73, 80, 91, 106, 115, 127, 138	Ground	Digital Logic GND	
IOVCC	5, 16, 26, 76, 89, 109, 122, 134	Power	Input/Output Pin VCC	3.3V
IOGND	4, 15, 25, 75, 90, 108, 120, 135	Ground	Input/Output Pin GND	
AVCC	38, 42, 46, 50, 57, 61, 65, 69	Power	TMDS Analog VCC	3.3V
AGND	41, 45, 49, 53, 60, 64, 68, 72	Ground	TMDS Analog GND	
PVCC0	37	Power	TMDS Port 0 PLL VCC	3.3V
PVCC1	55	Power	TMDS Port 1 PLL VCC	3.3V
TMDSPGND	54	Ground	TMDS PLL GND	
AUDPVCC18	94	Power	ACR PLL VCC	1.8V
AUDPGND	95	Ground	ACR PLL GND	
XTALVCC	98	Power	ACR PLL Crystal Input VCC	3.3V
REGVCC	99	Power	ACR PLL Regulator VCC	3.3V

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -48

Q8506,Q8606: BR24L02FV-W(256x8 bit EEPROM)

BLOCK DIAGRAM AND PIN CONFIGURATION

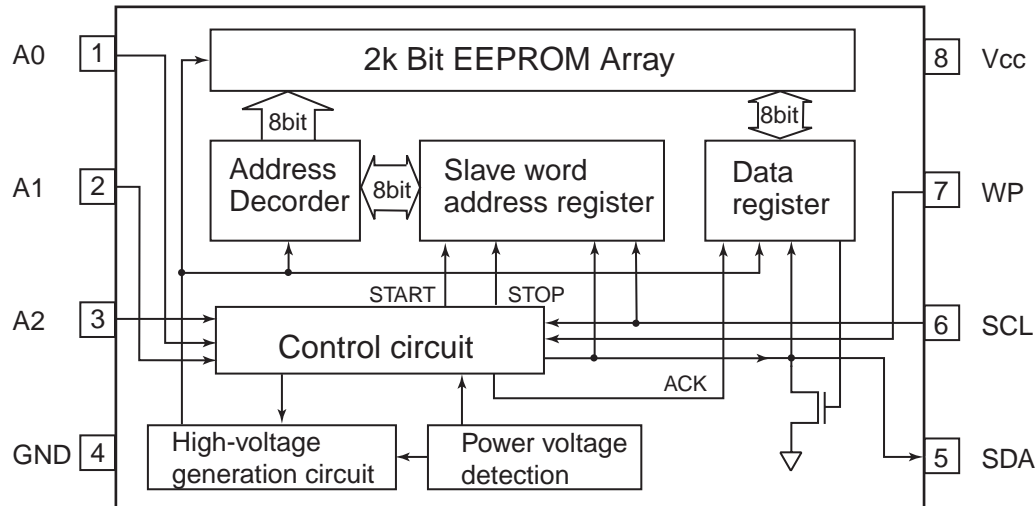


TERMINAL DESCRIPTION

Terminal	I/O	Function
Vcc	-	Apply a power source.
GND	-	Ground terminal
A0,A1,A2	I	Slave address setting terminal
SCL	I	Serial clock input
SDA	I/O	Slave and word address. Serial data input and output
WP	I	Write protect terminal


IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -49

Q8801: ADV7172 (Digital PAL/NTSC Video Encoder with six DACs)

BLOCK DIAGRAM

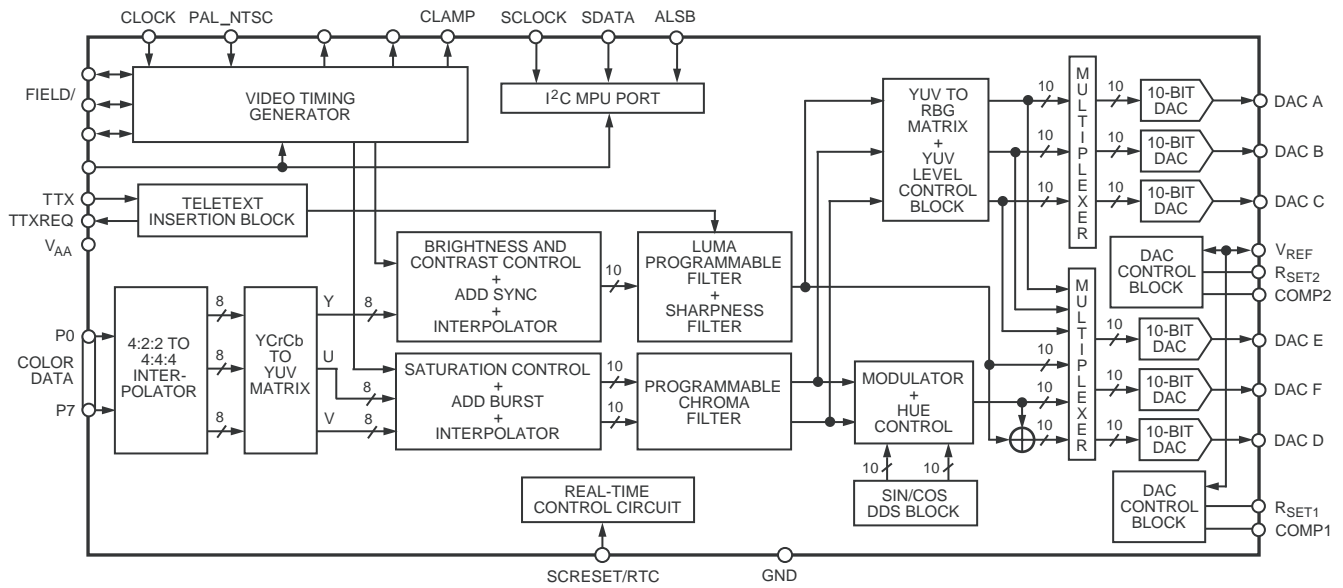

PIN CONFIGURATION

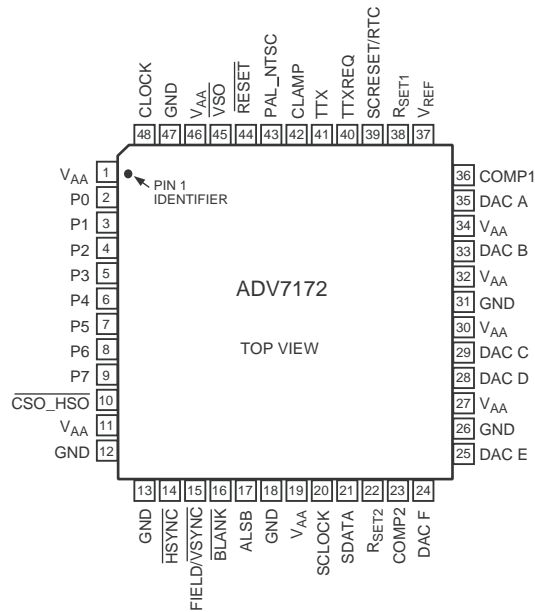

IC BLOCK DIAGRAMS AND TERMINAL DESCRIPTIONS -50


Q8801: ADV7172 (Digital PAL/NTSC Video Encoder with six DACs)

TERMINAL DESCRIPTION


Mnemonic	Input/Output	Function
P7-P0	I	8-Bit 4:2:2 Multiplexed YCrCb Pixel Port (P7DP0) P0 represents the LSB.
CLOCK	I	TTL Clock Input. Requires a stable 27 MHz reference clock for standard operation. Alternatively, a 24.5454 MHz (NTSC) or 29.5 MHz (PAL) can be used for square pixel operation.
$\overline{\text{HSYNC}}$	I/O	$\overline{\text{HSYNC}}$ (Modes 1 and 2) Control Signal. This pin may be configured to output (Master Mode) or as an input and accept (Slave Mode) Sync signals.
$\overline{\text{FIELD/VSYNC}}$	I/O	Dual Function FIELD (Mode 1) and $\overline{\text{VSYNC}}$ (Mode 2) Control Signal. This pin may be configured to output (Master Mode) or as an input (Slave Mode) and accept these control signals.
$\overline{\text{BLANK}}$	I/O	Video Blanking Control Signal. The pixel inputs are ignored when this is Logic Level "0." This signal is optional.
SCRESET/RTC	I	This pin can be configured as an input by setting MR42 and MR41 of Mode Register 4. It can be configured as a subcarrier reset pin, in which case a low-to-high transition on this pin will reset the subcarrier phase to Field 0. Alternatively it may be configured as a Real-Time Control (RTC) Input.
V_{REF}	I/O	Voltage Reference Input for DACs or Voltage Reference Output (1.235 V).
R_{SET1}	I	A 150 Ω resistor connected from this pin to GND is used to control full-scale amplitudes of the Video Signals from DACs A, B, and C (the "large" DACs).
R_{SET2}	I	A 600 Ω resistor connected from this pin to GND is used to control full-scale amplitudes of the Video Signals from DACs D, E, and F (the "small" DACs).
COMP1	O	Compensation Pin for DACs A, B, and C. Connect a 0.1 μF Capacitor from COMP to V_{AA} . For Optimum Dynamic Performance in Low Power Mode, the value of the COMP1 capacitor can be lowered to as low as 2.2 nF.
COMP2	O	Compensation Pin for DACs D, E, and F. Connect a 0.1 μF Capacitor from COMP to V_{AA} .
DAC A	O	GREEN/Composite/Y Analog Output. This DAC is capable of providing 34.66 mA output.
DAC B	O	BLUE/S-Video Y/U Analog Output. This DAC is capable of providing 34.66 mA output.
DAC C	O	RED/S-Video C/V Analog Output. This DAC is capable of providing 34.66 mA output.
DAC D	O	GREEN/Composite/Y Analog Output. This DAC is capable of providing 8.66 mA output.
DAC E	O	BLUE/S-Video Y/U Analog Output. This DAC is capable of providing 8.66 mA output.
DAC F	O	RED/S-Video C/V Analog Output. This DAC is capable of providing 8.66 mA output.
SCLOCK	I	MPU Port Serial Interface Clock Input.
SDATA	I/O	MPU Port Serial Data Input/Output.
CLAMP	O	TTL Output Signal to external circuitry to enable clamping of all video signals.
PAL_NTSC	I	Input signal to select PAL or NTSC mode of operation, pin set to Logic "1" selects PAL.
$\overline{\text{VSO}}$	O	$\overline{\text{VSO}}$ TTL Output Sync Signal.
$\overline{\text{CSO_HSO}}$	O	Dual Function $\overline{\text{CSO}}$ or $\overline{\text{HSO}}$ TTL Output Sync Signal.
$\overline{\text{ALSB}}$	I	TTL Address Input. This signal sets up the LSB of the MPU address.
RESET	I	The input resets the on-chip timing generator and sets the ADV7172/ADV7173 into default mode. This is NTSC operation, Timing Slave Mode 0, DACs A, B, and C powered OFF, DACs D, E, and F powered ON, Composite and S-Video out.
TTX	I	Teletext Data Input Pin.
TTXREQ	O	Teletext Data Request output signal used to control teletext data transfer.
V_{AA}	P	Power Supply (3 V to 5 V).
GND	G	Ground Pin.

FL TUBE VIEW

Q7501: HNA-16SM10T

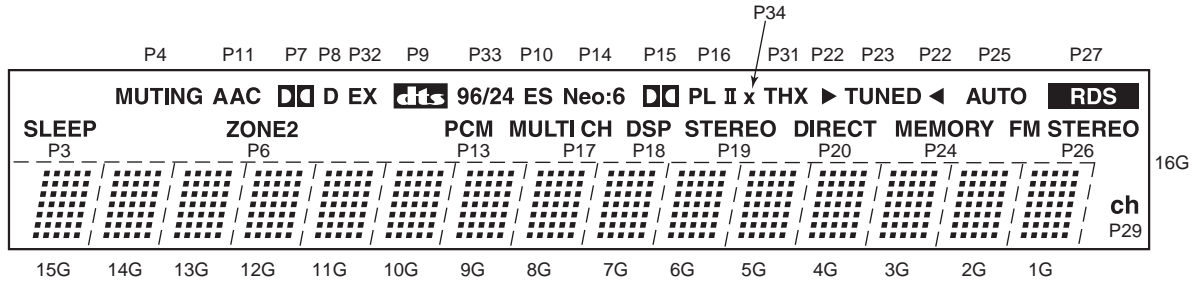

1G-15G

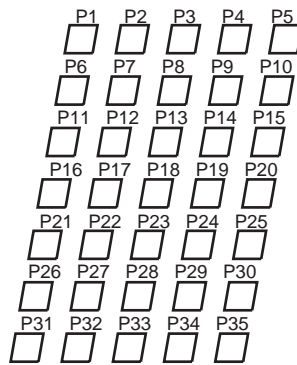

	16G	15G-1G
P1	A	1-1
P2	B	2-1
P3	SLEEP	3-1
P4	MUTING	4-1
P5	REC OUT	5-1
P6	ZONE2	1-2
P7	D	2-2
P8	D	3-2
P9	dts	4-2
P10	ES	5-2
P11	AAC	1-3
P12	MP3	2-3
P13	PCM	3-3
P14	Neo:6	4-3
P15	D	5-3
P16	II	1-4
P17	MULTI CH	2-4
P18	DSP	3-4

	16G	15G-1G
P19	STEREO	4-4
P20	DIRECT	5-4
P21		1-5
P22	▷ ◁	2-5
P23	TUNED	3-5
P24	MEMORY	4-5
P25	AUTO	5-5
P26	FM STEREO	1-6
P27	RDS	2-6
P28	ft	3-6
P29	ch	4-6
P30	dB	5-6
P31	THX	1-7
P32	EX	2-7
P33	96/24	3-7
P34	X	4-7
P35	WMA	5-7

MICROPROCESSOR TERMINAL DESCRIPTIONS -1

Q701: M30627FJPGP

No.	Pin Name	Function	I/O	Act.	Description
1	Vref	Vref	---	---	A/D Reference Voltage
2	AVcc	AVcc	---	---	A/D Power supply
3	P97/-ADTRG/SIN4	VMSDI	I	H	Data input pin from HDMI micro processor
4	P96/ANEX1/SOUT4	VMSDO	O	H	Data output pin to HDMI micro processor
5	P95/ANEX0/CLK4	VMCLK	O	CLK	Clock output pin to HDMI micro processor
6	P94/DA1/TB4IN	VCRST	O	H	Reset control pin to Video Encoder/Decoder
7	P93/DA0/TB3IN	~VMUT	O	L	VIDEO MUTE control pin
8	P92/TB2IN/SOUT3	OSDSO	O	H	Data output pin to OSD
9	P91/TB1IN/SIN3	SYNC	I	H	VIDEO SYNC detect pin
10	P90/TB0IN/CLK3	OSDCLK	O	CLK	Clock output pin to OSD
11	P141	~OSDCS	O	L	OSD chip select pin
12	P140		O	H	No use
13	BYTE	BYTE	---	---	External bus width select pin. Connect to Ground.
14	CNVSS	CNVss	---	---	Processor mode select pin. Connect to the ground via resistor.
15	P87/XCIN	RDSDATA	I	H	RDS data input from LA72725 in tuner pack
16	P86/XCOUT	XMSRSEL	O	H	XM/SIRIUS select pin
17	~RESET	~RESET	I	L	Reset input
18	XOUT	Xout	---	---	Ceramic oscillator connection pin.
19	VSS	Vss	---	---	Power supply Ground pin
20	XIN	Xin	---	---	Ceramic oscillator connection pin.
21	VCC1	Vcc1	---	---	Power supply pin
22	P85/~NMI	~NMI	I	L	No use
23	P84/~INT2	POFF	I	L	Power failure detection input
24	P83/~INT1	VSYNC	I	L	Vertical sync signal detection input.
25	P82/~INT0	~XMERRIRQ/~RDSCLK	I	L	(D-type)XM IC interrupt input / (P-type)RDS clock input / (Other type)No use
26	P81/TA4IN/~U	XMCOMSEL	O	H	Control output to XM IC
27	P80/TA4OUT/U	~XMDACRST	O	L	XM DAC reset pin
28	P77/TA3IN	~DIRINT0	I	H	DIR/Codec unlock detect pin
29	P76/TA3OUT	DSPFCS	O	L	DSP AB chip select pin
30	P75/TA2IN/~W	DSPBUSY	I	H	DSP C BUSY detect pin
31	P74/TA2OUT/W	~DSPINT	I	L	DSP C interrupt detect pin
32	P73/~CTS2/~RTS2/TA1IN/~V	~DSPFINT	I	L	DSP AB interrupt detect pin
33	P72/CLK2/TA1OUT/V	~SDET	I	L	S-VIDEO detect pin
34	P71/RXD2/SCL2/TA0IN/TB5IN	PLLSCL	O	CLK	I2C clock output to tuner pack
35	P70/TXD2/SDA2/TA0OUT	PLLSDA	I/O	H	I2C data input/output from/to tuner pack
36	P67/TXD1/SDA1	FTXD	O	H	Flash micro processor rewrite port
37	Vcc1		---	H	Power supply
38	P66/RXD1/SCL1	FRXD	I	H	Flash micro processor rewrite port
39	Vss		---	H	Power supply Ground
40	P65/CLK1	FCLK	O	CLK	Flash micro processor rewrite port
41	P64/~CTS1/~RTS1/~CTS0/CLKS1	FBUSY	O	H	Flash micro processor rewrite port
42	P63/TXD0/SDA0	XMSRTXD	O	H	XM/SIRIUS data output pin
43	P62/RXD0/SCL0	XMSRRXD	I	H	XM/SIRIUS data input pin
44	P61/CLK0	~XMRST	O	L	XM IC reset pin
45	P60/~CTS0/~RTS0	~DIRCS	O	L	DIR/Codec chip select pin
46	P137	OSDINV	O	H	OSD IC input select pin(Video)
47	P136	OSDINY	O	H	OSD IC input select pin(S Video)
48	P135		O	H	No use
49	P134		O	H	No use
50	P57/~RDY/CLKOUT	~DIRRST	O	L	DIR/Codec reset control pin
51	P56/ALE	~DSPCS	O	L	DSP chip select pin
52	P55/~HOLD	~FEPM	O	H	Flash micro processor rewrite port
53	P54/~HLDA	~DSPRST	O	L	DSP reset pin
54	P133		O	H	No use
55	P132		O	H	No use
56	P131	MCHSEL	O	H	ANALOG/HDMI MCLK select pin
57	P130	~ADCRST	O	L	Multi-ch AD Reset output
58	P53/BCLK	DIGCLK	O	CLK	DIR/Codec/DSP clock output pin
59	P52/~RD	DIGSDI	I	H	DIR/Codec/DSP data input pin
60	P51/~WRH/~BHE	DIGSDO	O	H	DIR/Codec/DSP data output pin
61	P50/~WRL/~WR	~FCE	I	H	Flash micro processor rewrite port
62	P127		O	H	No use
63	P126	Z2MUT	O	H	Mute output for ZONE2
64	P125	SBZ2MUT	O	H	Mute output for SB/ZONE2

MICROPROCESSOR TERMINAL DESCRIPTIONS -2

Q701: M30627FJPGP

No.	Pin Name	Function	I/O	Act.	Description
65	P47/~CS3	AMUT	O	H	Audio mute control pin
66	P46/~CS2	SPRLZ2	O	H	ZONE2 speaker relay control pin
67	P45/~CS1	SPRLSB	O	H	Surround Back speaker relay control pin
68	P44/~CS0	SPRLCS	O	H	Center/Surround Back speaker relay control pin
69	P43/A19	SPRLF	O	H	Front speaker relay control pin
70	P42/A18	VOLSTB	O	H	Volume Strobe output pin
71	P41/A17	VOLDATA/FSWSDO	O	H	Data output to R2S15211/Data output to NJU7311
72	P40/A16	VOLCLK/FSWCLK	O	CLK	Clock output to R2S15211/Clock output to NJU7311
73	P37/A15	FSWSTB	O	H	Strobe output to NJU7311
74	P36/A14	VPOWER	O	H	Power control output to video section
75	P35/A13	APOWER	O	H	Power source control output
76	P34/A12	~POFF2	I	L	POFF2 detect pin
77	P33/A11	~FANH	O	L	Fan control pin
78	P32/A10	~FANCTRL	O	L	Fan control pin
79	P31/A09	TRGZ2	O	H	ZONE2 12V trigger output
80	P124	TRGB	O	H	No use
81	P123	TRGA	O	H	No use
82	P122	Z2VOLCLK	O	H	No use
83	P121	Z2VOLDAT	O	H	No use
84	P120	Z2VOLMUT	O	H	No use
85	VCC2	Vcc2	---	---	Power supply
86	P30/A8(/-/D7)	SEC1H	O	H	Voltage-select control pin
87	VSS	Vss	---	---	Power supply Ground
88	P27/AN27/A7(/D7/D6)	PROTECT	I	H	Protection detect pin
89	P26/AN26/A6(/D6/D5)	VOLH	I	A/D	Signal level protection detect pin
90	P25/AN25/A5(/D5/D4)	THERMAL	I	A/D	Thermal protection detect pin
91	P24/AN24/A4(/D4/D3)	INIT3	I	A/D	Initializing pin 3
92	P23/AN23/A3(/D3/D2)	INIT2	I	A/D	Initializing pin 2
93	P22/AN22/A2(/D2/D1)	INIT1	I	A/D	Initializing pin 1
94	P21/AN21/A1(/D1/D0)	BAND	I	A/D	Initializing pin for tuner frequency
95	P20/AN20/A0(/D0/-)	~SYSOUT	O	L	RI output pin
96	P17/D15/~INT5	SYSIN	I	H	RI input pin
97	P16/D14/~INT4	~IRIN	I	L	IRIN remote control input pin
98	P15/D13/~INT3	~REMIN	I	L	Remote controller signal input pin
99	P14/D12	~STEREO	I	H	FM Stereo detect pin
100	P13/D11	~SD	I	H	FM/AM TUNED detect pin
101	P12/D10	HPDET	I	H	Headphone detection input
102	P11/D9	VOLB	I	H	Master volume rotary encoder input
103	P10/D8	VOLA	I	H	Master volume rotary encoder input
104	P07/AN07/D7	---	O	H	No use
105	P06/AN06/D6	LEDZONE2	O	H	Zone2 LED control pin
106	P05/AN05/D5	LEDPURE	O	H	PURE AUDIO LED control pin
107	P04/AN04/D4	~LEDSTBY	O	H	STANDBY LED control pin
108	P03/AN03/D3	FLDSDO	O	H	Serial data output for FL driver M66005
109	P02/AN02/D2	FLDCLK	O	CLK	Clock output for FL driver M66005
110	P01/AN01/D1	~FLDCS	O	L	Chip select output for FL driver M66005
111	P00/AN00/D0	~FLDRST	O	L	Reset output for FL driver M66005
112	P117	~MICDET	I	L	Microphone detect input
113	P116	---	O	H	No use
114	P115	---	O	H	No use
115	P114	---	O	H	No use
116	P113	~VMRST	O	L	HDMI micro processor reset pin
117	P112	VMSTB	I	H	HDMI micro processor strobe input
118	P111	TXMUTE	O	H	HDMI micro processor mute pin
119	P110	RXMUTE	I	H	HDMI micro processor RXMUTE detect pin
120	P107/AN7/~KI3	~KEYINT3	I	L	Key input interrupt 3
121	P106/AN6/~KI2	~KEYINT2	I	L	Key input interrupt 2
122	P105/AN5/~KI1	~KEYINT1	I	L	Key input interrupt 1
123	P104/AN4/~KI0	~KEYINT0	I	L	Key input interrupt 0
124	P103/AN3	KEY3	I	A/D	Key input 3
125	P102/AN2	KEY2	I	A/D	Key input 2
126	P101/AN1	KEY1	I	A/D	Key input 1
127	AVIS	AVss	---	---	Ground for A/D
128	P100/AN0	KEY	I	A/D	Key input 0

ADJUSTMENT PROCEDURE-1

IDLING CURRENT ADJUSTMENT

[When]


Exchanging the power transistor (Q6050 - Q6056, Q6060 - Q6066) and Amplifier PC board (NAAF-8678, NAAF-8682).

[Procedure]

<Note> **No load and No signal**

Refer to <Fig-1> in " ADJUSTMENT PROCEDURE-2 " for the adjustment points and the test points.

1. Before idling current adjustment, turn the trimming resistors to counter clockwise.
2. Connect the dc voltmeter to the test points, using two 100 ohm resistors between the poles of the jig terminal and the dc voltmeter terminals.



3. Connect the ac power cord to a wall outlet.
4. Press the STANDBY/ON button to turn the power on.
5. Adjust the trimming resistors as the following procedure immediately after power on.

Channel	Mark	Adjustment point (Trimming resistor)	Measuring point (Test point)	Adjustment value
Center	<input type="text" value="C"/>	R6040	P6080	2.5 mV
Front Left	<input type="text" value="L"/>	R6041	P6081	2.5 mV
Front Right	<input type="text" value="R"/>	R6042	P6082	2.5 mV
Surround Left	<input type="text" value="SL"/>	R6043	P6083	1.5 mV
Surround Right	<input type="text" value="SR"/>	R6044	P6084	1.5 mV
Surround Back Left	<input type="text" value="SBL"/>	R6045	P6085	1.5 mV
Surround Back Right	<input type="text" value="SBR"/>	R6046	P6086	1.5 mV

6. Wait for 4 - 6 minutes. (Heat running)
7. Re-adjust the trimming resistors as the following procedure.

Channel	Adjustment point	Measured value	Adjustment value	Specifications (* In a stable state)
Front Left, Right and Center	R6041, R6042 and R6040	In case below 9 mV	→ 9 mV	12 +/- 3 mV
		In case 9 - 11 mV	→ No re-adjustment	
		In case over 11 mV	→ 11 mV	
Surround Left Surround Right Surround Back Left Surround Back Right	R6043, R6044, R6045 and R6046	In case below 6 mV	→ 6 mV	9 +/- 3 mV
		In case 6 - 8 mV	→ No re-adjustment	
		In case over 8 mV	→ 8 mV	



8. Disconnect the dc voltmeter.
9. Press the STANDBY/ON button to turn the power off.
10. Disconnect the ac power cord of the unit.

* Idling currents are stabilized in about 10 minutes after power on.

ADJUSTMENT PROCEDURE-2

IDLING CURRENT ADJUSTMENT

<Fig-1>

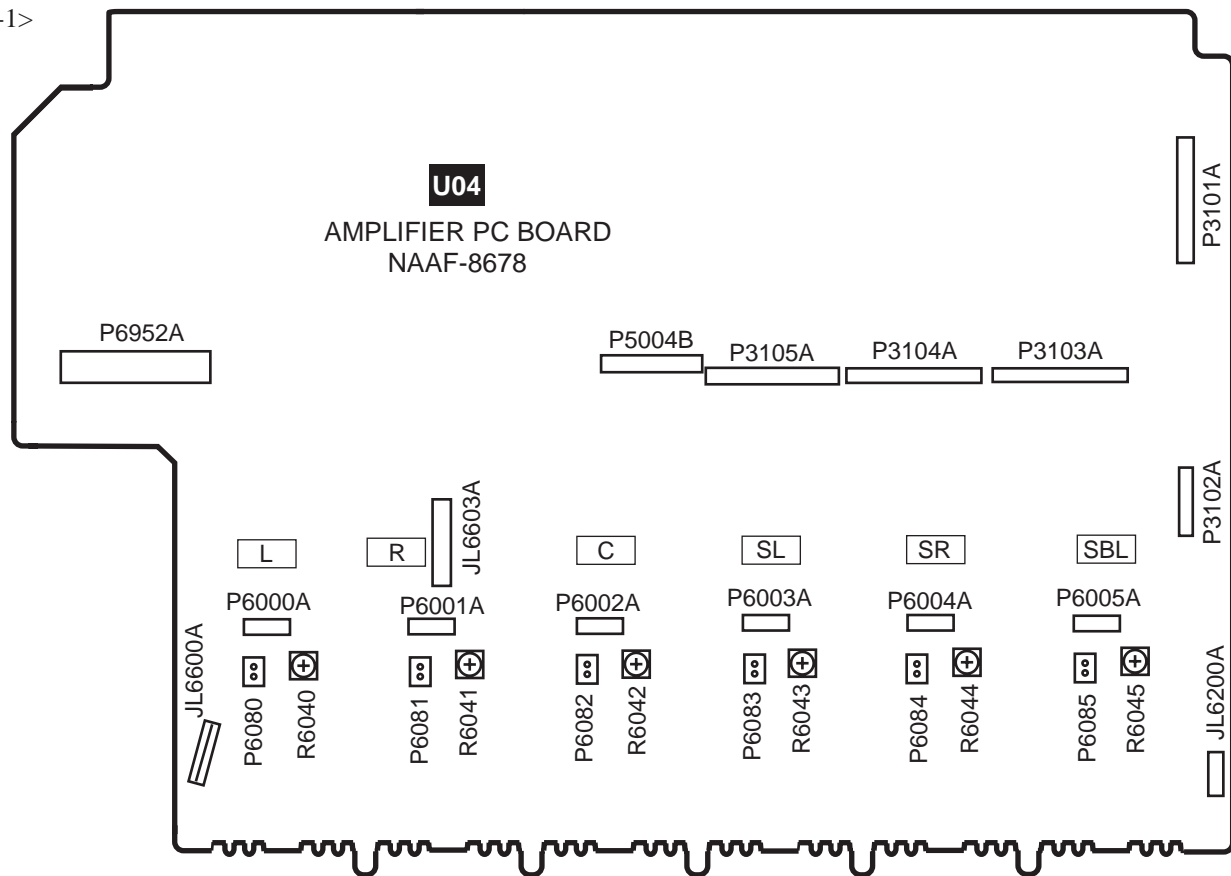

U07
SURROUND
BACK
AMPLIFIER
PC BOARD
NAAF-8682

FIRMWARE UPDATE -1

How to Check Versions of Main, DSP and Video(HDMI) microprocessor

1. Press and hold down DISPLAY button, then press STANDBY/ON button when the unit is power on.
The main microprocessor version will be displayed on FL for 3 seconds.

<Ex.> Ver. 1.01/06920a

2. Press SETUP button while the version is displayed, then "DSP Ver: " will be displayed.

DSP Ver:

3. Press ENTER button while "DSP Ver: " is displayed, then "DSP F/W Update" will be displayed.

DSP F/W Update

4. Again, press and hold down DISPLAY button, then press STANDBY/ON button in order to get DSP version.
5. Press SETUP button a few times.

The versions of DSP ROM ---> HDMI micom ---> Main micom will be displayed in turn.

<Ex.> DSP Ver:05Y28A

<Ex.> HDM. Ver:06607A

<Ex.> Ver. 1.01/06920a

6. To check DSP version next time, the procedures of 2-4 are not necessary until the power cord is off.


Preparation for Update

Hardware and Software

1. Personal computer(PC) with Windows XP or 2000
2. Flashwriter jig: 0JFLASH and 0JFLASHEX
3. Writing soft: "flasta_exe.zip" and Manual: "Flash Writer M16 Manual.pdf" for Main microprocessor
4. Writing soft: "firmware.zip" and "Update.exe" for DSP and Video(HDMI) microprocessors

First Procure

1. Press STANDBY/ON button to power off the target unit.
Power off the PC and connect 0JFLASH and 0JFLASHEX to RS232C port of the PC.
2. Connect the FFC of the jig to the connector slot on the rear panel of TX-SR804.
3. Power on the PC.

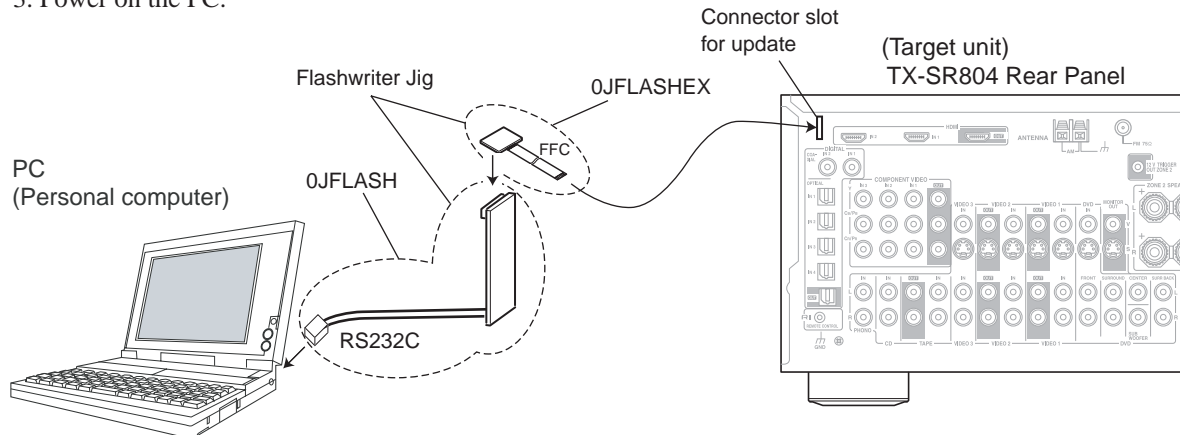

FIRMWARE UPDATE -2

Main Microprocessor Update Procedure


1. Download "flasta_exe.zip" to the PC and unzip. "FlashSta.exe" will be created.
2. Download the latest ".mot" and ".id" files for TX-SR804 to the same folder as the unzipped file of 1.
3. Download "Flash Writer M16 Manual.pdf" to the PC and open it.
4. Power on the unit and confirm that the jig is connected between PC and the unit.
5. According to the Manual, start "FlashSta.exe" to update the unit. MCU Type is M16C/20 62.
It takes about 5 minutes.
6. After it ends, click "Exit" button to end "FlastSta.exe".
7. Turn off the main power switch or pull the power cord off the wall socket.
Pay attention that pushing STANDBY/ON button to power off is not perfect.
8. Remove the jig from the unit and power on the unit again. Confirm the new version number.

DSP and Vide(HDMI) Update Procedure

1. Make a folder in the PC or on desktop, which name is "Updater_SR804" for example.
2. Save the latest files "Update.exe" and "firmware.zip" in the folder above or on desktop.
3. Unzip "firmware.zip" and confirm that "firmware" folder is created in "Updater_SR804" folder.
And confirm that the following 4 programs are created in "SR804" folder under "firmware" folder.
fdist.fdf
FW804.dcf
DSP7803_05Y28A.s28
674HDMI6X03A.mot
4. Power on the unit and confirm the jig is connected between the PC and the unit.
5. According to the procedure of previous page, display DSP version on FL, and press ENTER button to display "DSP F/W Update", which is DSP firmware update mode.



DSP F/W Update

6. Double click "Update.exe" on the PC. The following window will appear.

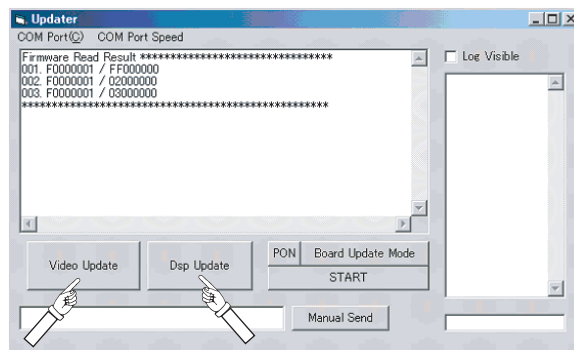



7. Click "Video Update" button for Video(HDMI) microprocessor update, or click "Dsp Update" button for DSP microprocessor update. The update takes about 5 minutes each.
8. After the update ends, turn off the unit's main power switch or pull the power cord off the wall socket.
9. Remove the jig from the unit and power on the unit again. Confirm the new version number.

PACKING PROCEDURE-1

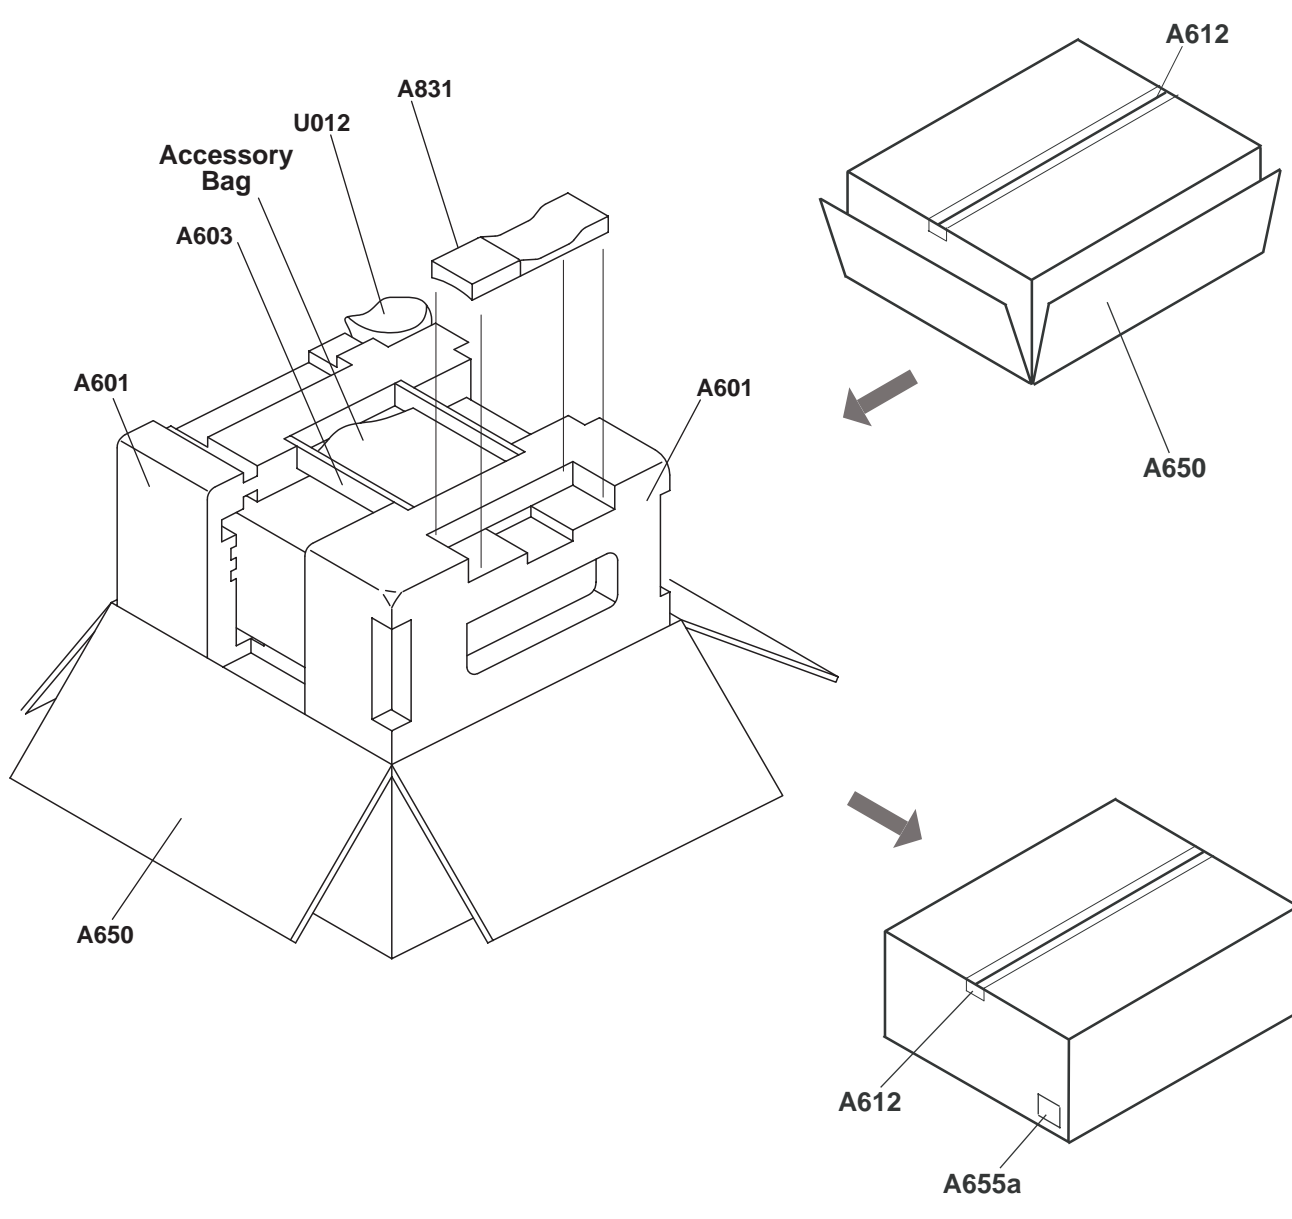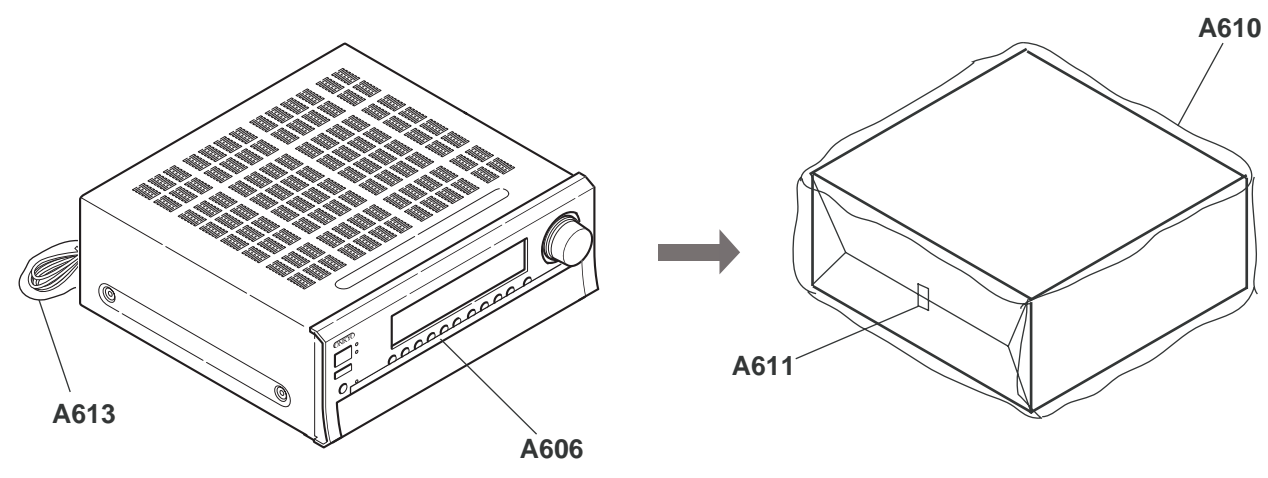


PACKING PROCEDURE-2


Accessory bag (DC, PA, WT, GK, GR, GQ types)

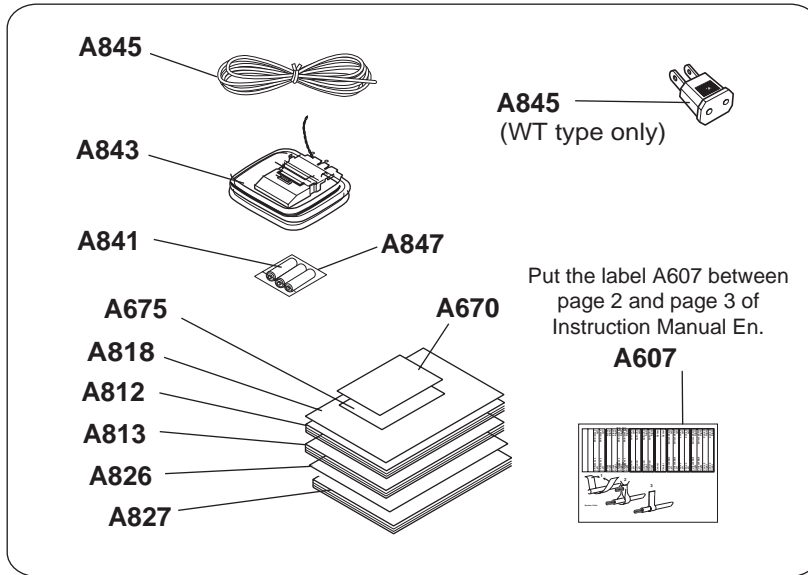

Accessory bag (PP type)

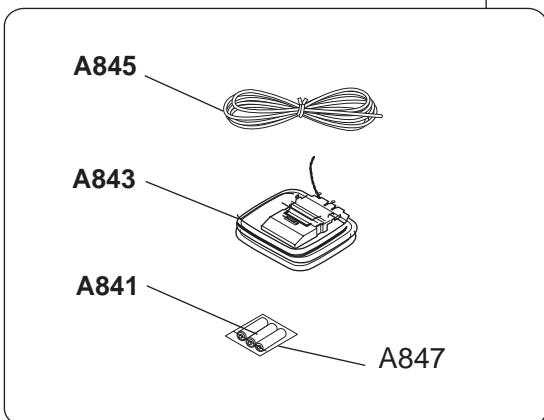

Printed matters (PP type)

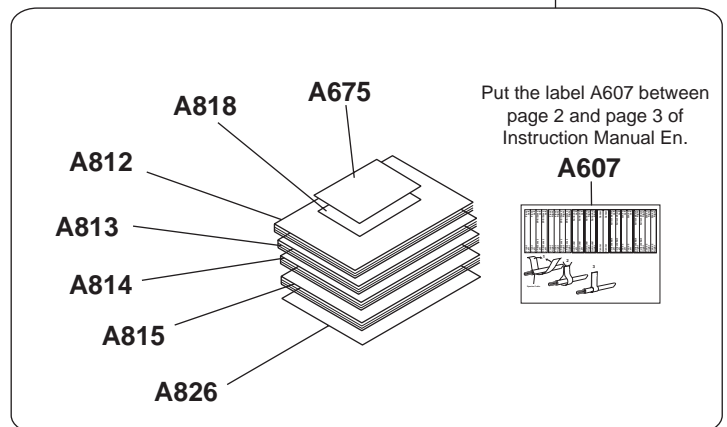

TX-SR804/E**<Note>**

Parts marked by 'NSP' are generally unavailable because they are not in our Master Spare Parts List.

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK
! ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH PART
NUMBER SPECIFIED.

<Notes>

(B) : Black model <DC> : TX-SR804 USA & Canadian model
(G) : Golden model <PP> :TX-SR804E European model
(S) : Silver model <PA> : TX-SR804 Australian model
<WT> : TX-SR804 World wide model
<GR> : TX-SR804 Chinese model
<GQ> : TX-SR804 Hong kong model
<GK> : TX-SR804 Korean model

EXPLODED VIEW PARTS LIST

REF. NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
A001	F BRACKET	.	1	27111421B	(B),<DC,PA>
A001	F BRACKET	.	1	27111422B	(S),<DC,PA>
A001	F BRACKET	.	1	27111423B	(G),<GK,GQ,GR,WT>
A001	F BRACKET	.	1	27111421B	(B),<PP>
A001	F BRACKET	.	1	27111422B	(S),<PP>
A002	HOLDER	(JACK)	1	27191153B	
A003	SCREW	3TTB+8B(CU)SR	28	801618	
A005	FACET	(VOL)	1	28200006	
A006	B PLATE	(B)	1	28133420	(B),<DC,PA>
A006	B PLATE	(S)	1	28133421	(S),<DC,PA>
A006	B PLATE	(S)	1	28133421	(G),<GK,GQ,GR,WT>
A006	B PLATE	(B)	1	28133420	(B),<PP>
A006	B PLATE	(S)	1	28133421	(S),<PP>
A009	CLEAR PLT	803(B)	1	28192081	
A010	DECO FRM	.	1	27215374	(B),<DC,PA>
A010	DECO FRM	.	1	27215375	(S),<DC,PA>
A010	DECO FRM	.	1	27215376	(G),<GK,GQ,GR,WT>
A010	DECO FRM	.	1	27215374	(B),<PP>
A010	DECO FRM	.	1	27215375	(S),<PP>
A011	FACET	.	3	28198905	
A019	BADGE	BADGE	1	28135244	(B),<DC,PA>
A019	BADGE	.	1	28135298	(S),<DC,PA>
A019	BADGE	BADGE	1	28135245	(G),<GK,GQ,GR,WT>
A019	BADGE	BADGE	1	28135244	(B),<PP>
A019	BADGE	.	1	28135298	(S),<PP>
A020	CUSHION	t5*30*5	3	28141562	
A022	PUSH LATCH	091Y	1	27230047	
A023	HOLDER	(L)	1	27191173	(B),<DC,PA>
A023	HOLDER	(L)	1	27191287	(S),<DC,PA>

A023	HOLDER	(L)	1	27191288	(G),<GK,GQ,GR,WT>
A023	HOLDER	(L)	1	27191173	(B),<PP>
A023	HOLDER	(L)	1	27191287	(S),<PP>
A025	HOLDER	(R)	1	27191175	(B),<DC,PA>
A025	HOLDER	(R)	1	27191289	(S),<DC,PA>
A025	HOLDER	(R)	1	27191290	(G),<GK,GQ,GR,WT>
A025	HOLDER	(R)	1	27191175	(B),<PP>
A025	HOLDER	(R)	1	27191289	(S),<PP>
A027	HINGE	(L)	1	28180156	(B),<DC,PA>
A027	HINGE	(L)	1	28180180	(S),<DC,PA>
A027	HINGE	(L)	1	28180181	(G),<GK,GQ,GR,WT>
A027	HINGE	(L)	1	28180156	(B),<PP>
A027	HINGE	(L)	1	28180180	(S),<PP>
A029	HINGE	(R)	1	28180158	(B),<DC,PA>
A029	HINGE	(R)	1	28180182	(S),<DC,PA>
A029	HINGE	(R)	1	28180183	(G),<GK,GQ,GR,WT>
A029	HINGE	(R)	1	28180158	(B),<PP>
A029	HINGE	(R)	1	28180182	(S),<PP>
A030	DAMPER	B20B	1	27301947	
A031	GEAR	.	1	27301946	
A032	RETAINER	(B)	1	27141828A	
A033	SCREW	3TTW+8B(3BC)	1	831430088GR	
A035	SCREW	3SMS8W.SW+14B(CU)	1	801634	
A036	CRIMP AS	CRIMP AS TCW21	1	2061112100UL	
A037	SCREW	3TTB+8B(3BC)	7	838430088GR	
A038	SCREW	2TTB+8B(3CM)	1	838120088GR	
A039	CUSHION	t1.0*5*5	1	28141511	
A040	KNOB	(VOL)AS	1	28326232	(B),<DC,PA>
A040	KNOB	(VOL)AS	1	28326436	(S),<DC,PA>
A040	KNOB	(VOL)AS	1	28326234	(G),<GK,GQ,GR,WT>
A040	KNOB	(VOL)AS	1	28326232	(B),<PP>
A040	KNOB	(VOL)AS	1	28326436	(S),<PP>
A044	CUSHION	.	4	28141637	
A050	CHASSIS	.	1	---	NSP
A051	BRACKET	(FR)	1	27130991A	
A052	HOLDER	HOLDER KGLS-18S	1	27190470	
A053	HOLDER	KGLS-14RT	3	27190524	
A054	HOLDER	KGPS-16RF	3	27190991	
A055	WIRE TIE	BSK-1	11	260208	
A056	SCREW	4TTC+8C(3BC)	4	830440089GR	
A057	SCREW	3TTB+8B(CU)SR	2	801618	
A059	HOLDER	KGPS-14RF	1	27190802	
A060	BRACKET	(FAN)	1	27130990	
A062	SCREW	5TTB+10B(3BC)	4	838450108GR	
A063	SPACER	.	1	27270439	
A064	HOLDER	(CRAMP) UA-0 V0	1	27190608-1	
A065	SPACER	SPACER 8X3X0.188ホヰカ	1	27270147	
A067	BRACKET(U)	.	1	27131004	
A068	HOLDER	.	1	27191279	
A069	SCREW	3TTB+10B(3CM)	1	838130108GR	

A070	CUSHION	.	2	28141707	
A077	SCREW	3TTB+8B(CU)	1	801612	
A080	HEAT SINK	AS.	1	27160565A	
A081	TAPE	TAPE(CLOTH-16U)	1	29110083	
A082	SCREW	3SMH10W.SW+15B(CU)	14	801606	
A087	BRACKET	BRACKET	2	27130745	
A088	SCREW	3TTB+8B(CU)SR	2	801618	
A089	IB CUSHION	W15*3t TAPE	1	28141585	
A090	SHLD PLT	(FFC)	1	27150514	
A092	SCREW	3TTB+8B(CU)	2	801612	
A095	COVER	(B)	1	28184952	(B),<DC,PA>
A095	COVER	(S)	1	28184953	(S),<DC,PA>
A095	COVER	(G)	1	28184954	(G),<GK,GQ,GR,WT>
A095	COVER	(B)	1	28184952	(B),<PP>
A095	COVER	(S)	1	28184953	(S),<PP>
A097	CUSHION	t3*50*10	2	28141563	
A099	LABEL	(COVER)	1	29364123	
A100	SCREW	4TTB+8C(3BC)	4	838440089GR	(B),<DC,PA>
A100	ST SCREW	4TTB+8C(NI)	4	838240089	(S),<DC,PA>
A100	ST SCREW	4TTB+8C(NI)	4	838240089	(G),<GK,GQ,GR,WT>
A100	SCREW	4TTB+8C(3BC)	4	838440089GR	(B),<PP>
A100	ST SCREW	4TTB+8C(NI)	4	838240089	(S),<PP>
A101	SCREW	3TTB+8B(3BC)	4	838430088GR	(B),<DC,PA>
A101	SCREW	3TTB+8B(3CM)	4	838130088GR	(S),<DC,PA>
A101	SCREW	3TTB+8B(3CM)	4	838130088GR	(G),<GK,GQ,GR,WT>
A101	SCREW	3TTB+8B(3BC)	4	838430088GR	(B),<PP>
A101	SCREW	3TTB+8B(3CM)	4	838130088GR	(S),<PP>
A102	TAPE	TAPE(CLOTH-16U)	1	29110083	
A103	TAPE	TAPE(CLOTH-8U)	1	29110082	
A105	SCREW	3TTB+8B(CU)SR	18	801618	
A106	SCREW	3TTB+8B(3BC)	2	838430088GR	
A110	LABEL	(PT)	1	29363379-1	
A111	LEG	AS	4	27175418	
A114	SCREW	3TTB+8B(3BC)	4	838430088GR	
A115	CLIP	CS-1U	1	27255004	
A119	CUSHION	.	4	28141647	
A401	REAR PANEL		1	27123637A	<DC>
A401	REAR PANEL		1	27123638A	<PP>
A401	REAR PANEL		1	27123639A	<GK>
A401	REAR PANEL		1	27123640A	<WT>
A401	REAR PANEL		1	27123641A	<GR>
A401	REAR PANEL		1	27123642A	<PA>
A401	REAR PANEL		1	27123643A	<GQ>
A402	SCREW	3TTB+8B(3BC)	44	838430088GR	<DC>
A402	SCREW	3TTB+8B(3BC)	40	838430088GR	<GK>
A402	SCREW	3TTB+8B(3BC)	42	838430088GR	<GQ,GR>
A402	SCREW	3TTB+8B(3BC)	42	838430088GR	<PA,PP>
A402	SCREW	3TTB+8B(3BC)	43	838430088GR	<WT>
A403	WASHER	W3*10F(3BC)	1	87643010GR	
A404	SCREW	3TTB+8B(3CM)	1	838130088GR	

A405	BUSHING	S-RELIEF #2271	1	27300750	!,<DC>
A405	BUSHING	S-RELIEF #2271	1	27300750	!,<GK,GQ>
A405	BUSHING	S-RELIEF #2271	1	27300750	!,<PA>
A405	STRAIN RELIEF	.	1	27301927	!,<GR,WT>
A405	STRAIN RELIEF	.	1	27301927	!,<PP>
A406	HOLDER	(OUTLET)	1	27191130	<GR>
A407	SCREW	3TTB+8B(CU)SR	2	801618	
A408	SCREW	3TTB+10B(3BC)	5	838430108GR	
A410	F PANEL		1	27212956	(B),<DC,PA>
A410	F PANEL		1	27212960	(G),<GK,GQ,GR,WT>
A410	F PANEL		1	27212958	(S),<DC,PA>
A410	F PANEL		1	27212957	(B),<PP>
A410	F PANEL		1	27212959	(S),<PP>
A411	DOOR		1	28148663	(B),<DC>
A411	DOOR		1	28148665	(B),<PA>
A411	DOOR		1	28148669	(G),<GK,GQ,GR,WT>
A411	DOOR		1	28148666	(S),<DC>
A411	DOOR		1	28148668	(S),<PA>
A411	DOOR		1	28148664	(B),<PP>
A411	DOOR		1	28148667	(S),<PP>
A412	PLATE	(DOOR)	1	27262749A	(B),<DC,PA>
A412	PLATE	(DOOR)	1	27262751A	(G),<GK,GQ,GR,WT>
A412	PLATE	(DOOR)	1	27262750A	(S),<DC,PA>
A412	PLATE	(DOOR)	1	27262753A	(B),<PP>
A412	PLATE	(DOOR)	1	27262754A	(S),<PP>
A416	SCREW	3TTB+8B(CU)SR	2	801618	<PP,GK,GQ,GR,WT>
A417	SCREW	3P+10FN(3BC)	2	82143010GR	<PP,GK,GQ,GR,WT>
A418	KNOB	(POW)	1	28325499A	(G),<GK,GQ,GR,WT>
A418	KNOB	(POW)	1	28325497A	(B),<PP>
A418	KNOB	(POW)	1	28326340	(S),<PP>
A430	SCREW	3TTW+8B(3BC)	1	831430088GR	
F6901	FUSE	12A-TUL-250V	1	252301GR	!
F6902	FUSE	12A-TUL-250V	1	252301GR	!
F901	FUSE	10A-UL/T-233	1	252330GR	!,<DC>
F901	FUSE	6.3A-SE-EAK FUSE	1	252079GR	!,<PA,PP,GK,GQ,GR,WT>
F902	FUSE	6.3A-SE-EAK FUSE	1	252079GR	!,(G),<WT>
F903	FUSE	5A-UL/T-233	1	252326GR	!,<DC>
F903	FUSE	2.5A-SE-EAK FUSE	1	252075GR	!,<PA,PP,GK,GQ,GR,WT>
F931	FUSE	1.6A-SE-EAK IECFUSE	1	252073GR	!
F932	FUSE	1.6A-SE-EAK IECFUSE	1	252073GR	!
F951	FUSE	6.3A-SE-EAK FUSE	1	252079GR	!
F952	FUSE	6.3A-SE-EAK FUSE	1	252079GR	!
P601	FFC	NCFC5-351012	1	2045351012	
P691	FAN	D09A-12TG08(EX)	1	24502319	
P701	FFC	NCFC7-131012	1	2047131012	
P710	FFC	NCFC7-170512	1	2047170512	<DC>
P7534	FFC	NCFC5-405012	1	2045405012	
P8000	FFC	NCFC7-212012	1	2047212012	
P901	AC CORD	AS-UC-2	1	253368LTK	!,<DC>
P901 or	AC CORD	AS-UC-2	(1)	253333VOL	!,<DC>

P901 or	AC CORD	AS-UC-2	(1)	253368YUN	!,<DC>
P901	AC CORD	AS-SAA	1	253388LTK	!,<PA>
P901 or	AC CORD	AS-SAA	(1)	253388LON	!,<PA>
P901	AC CORD	AS-CEE-3	1	253348VOL	!,<WT>
P901	AC CORD	AS-CEE-3	1	253348VOL	!,<PP>
P901	AC CORD	AS-KS	1	253406VOL	!,<GK>
P901	AC CORD	AS-CCC	1	253357VOL	!,<GR>
P901	AC CORD	AS-BS	1	253198LTK	!,<GQ>
P901 or	AC CORD	AS-BS	(1)	253198VOL	!,<GQ>
Q6050	TR	2SC5242-R	1	2202842	
Q6050 or	TR	2SC5242-O	(1)	2202843	
Q6050 or	TR	MN150S-O	(1)	2203683	
Q6050 or	TR	MN150S-P	(1)	2203686	
Q6050 or	TR	MN150S-Y	(1)	2203684	
Q6050A	ISO SHEET	AC238	14	223024	
Q6051	TR	2SC5242-R	1	2202842	
Q6051 or	TR	2SC5242-O	(1)	2202843	
Q6051 or	TR	MN150S-O	(1)	2203683	
Q6051 or	TR	MN150S-P	(1)	2203686	
Q6051 or	TR	MN150S-Y	(1)	2203684	
Q6052	TR	2SC5242-R	1	2202842	
Q6052 or	TR	2SC5242-O	(1)	2202843	
Q6052 or	TR	MN150S-O	(1)	2203683	
Q6052 or	TR	MN150S-P	(1)	2203686	
Q6052 or	TR	MN150S-Y	(1)	2203684	
Q6053	TR	2SC5242-R	1	2202842	
Q6053 or	TR	2SC5242-O	(1)	2202843	
Q6053 or	TR	MN150S-O	(1)	2203683	
Q6053 or	TR	MN150S-P	(1)	2203686	
Q6053 or	TR	MN150S-Y	(1)	2203684	
Q6054	TR	2SC5242-R	1	2202842	
Q6054 or	TR	2SC5242-O	(1)	2202843	
Q6054 or	TR	MN150S-O	(1)	2203683	
Q6054 or	TR	MN150S-P	(1)	2203686	
Q6054 or	TR	MN150S-Y	(1)	2203684	
Q6055	TR	2SC5242-R	1	2202842	
Q6055 or	TR	2SC5242-O	(1)	2202843	
Q6055 or	TR	MN150S-O	(1)	2203683	
Q6055 or	TR	MN150S-P	(1)	2203686	
Q6055 or	TR	MN150S-Y	(1)	2203684	
Q6056	TR	2SC5242-R	1	2202842	
Q6056 or	TR	2SC5242-O	(1)	2202843	
Q6056 or	TR	MN150S-O	(1)	2203683	
Q6056 or	TR	MN150S-P	(1)	2203686	
Q6056 or	TR	MN150S-Y	(1)	2203684	
Q6060	TR	2SA1962-R	1	2202832	
Q6060 or	TR	2SA1962-O	(1)	2202833	
Q6060 or	TR	MP150S-O	(1)	2203693	
Q6060 or	TR	MP150S-P	(1)	2203696	
Q6060 or	TR	MP150S-Y	(1)	2203694	

Q6061	TR	2SA1962-R	1	2202832	
Q6061 or	TR	2SA1962-O	(1)	2202833	
Q6061 or	TR	MP150S-O	(1)	2203693	
Q6061 or	TR	MP150S-P	(1)	2203696	
Q6061 or	TR	MP150S-Y	(1)	2203694	
Q6062	TR	2SA1962-R	1	2202832	
Q6062 or	TR	2SA1962-O	(1)	2202833	
Q6062 or	TR	MP150S-O	(1)	2203693	
Q6062 or	TR	MP150S-P	(1)	2203696	
Q6062 or	TR	MP150S-Y	(1)	2203694	
Q6063	TR	2SA1962-R	1	2202832	
Q6063 or	TR	2SA1962-O	(1)	2202833	
Q6063 or	TR	MP150S-O	(1)	2203693	
Q6063 or	TR	MP150S-P	(1)	2203696	
Q6063 or	TR	MP150S-Y	(1)	2203694	
Q6064	TR	2SA1962-R	1	2202832	
Q6064 or	TR	2SA1962-O	(1)	2202833	
Q6064 or	TR	MP150S-O	(1)	2203693	
Q6064 or	TR	MP150S-P	(1)	2203696	
Q6064 or	TR	MP150S-Y	(1)	2203694	
Q6065	TR	2SA1962-R	1	2202832	
Q6065 or	TR	2SA1962-O	(1)	2202833	
Q6065 or	TR	MP150S-O	(1)	2203693	
Q6065 or	TR	MP150S-P	(1)	2203696	
Q6065 or	TR	MP150S-Y	(1)	2203694	
Q6066	TR	2SA1962-R	1	2202832	
Q6066 or	TR	2SA1962-O	(1)	2202833	
Q6066 or	TR	MP150S-O	(1)	2203693	
Q6066 or	TR	MP150S-P	(1)	2203696	
Q6066 or	TR	MP150S-Y	(1)	2203694	

<Notes>

When replacing the following transistors, use ones of the same Hfe rank as the original type.

Ref. No. : Q6050 - 6060, Q6051 - 6061, Q6052 - 6062, Q6053 - 6063, Q6054 - 6064, Q6055 - 6065, Q6056 - 6066

T901	P TRANS	NPT-1526D	1	2301830	!,<DC>
T901	P TRANS	NPT-1526P	1	2301831	!,<PA,PP>
T901	P TRANS	NPT-1526DQ	1	2301832	!,<WT>
T901	P TRANS	NPT-1526G	1	2301833	!,<GK,GQ,GR>
U01	DISPLAY PC board ass'y	NADIS-8675-2A	1	1B162575-2A	<DC,PA,PP,GK,GQ,GR,WT>
U02	HEADPHONE PC board ass'y	NAETC-8676-2A	1	1B162576-2A	<DC,PA,PP,GK,GQ,GR,WT>
U03	VOLUME PC board ass'y	NAETC-8677-2A	1	1B162577-2A	<DC,PA,PP,GK,GQ,GR,WT>
U04	AMPLIFIER PC board ass'y	NAAF-8678-2A	1	1B162578-2A	<DC,PA,PP,GK,GQ,GR,WT>
U05	THERMAL DETECTOR PC board ass'y	NAETC-8680-2A	1	1B162580-2A	<DC,PA,PP,GK,GQ,GR,WT>
U06	HOLDER PC board ass'y	NAETC-8681-2A	1	1B162581-2A	<DC,PA,PP,GK,GQ,GR,WT>
U07	SURROUND BACK AMPLIFIER PC board ass'y	NAAF-8682-2A	1	1B162582-2A	<DC,PA,PP,GK,GQ,GR,WT>
U08	HDMI PC board ass'y	NAVD-8824-1A	1	1B126524-1A	<DC,PA,PP,GK,GQ,GR,WT>
U09	VIDEO PC board ass'y	NAVD-8991-1A	1	1B162591-1A	<DC>
		NAVD-8991-1B	1	1B162591-1B	<PA,PP,GK,GQ,GR,WT>
U11	VIDEO TERMINAL PC board ass'y	NAETC-8993-1A	1	1B162593-1A	<DC>
		NAETC-8993-1B	1	1B162593-1B	<PA,PP,GK,GQ,GR,WT>
U12	XM PC board ass'y	NARF-8994-1A	1	1B162594-1A	<DC>

U13	DSP PC board ass'y	NADG-8996-1A	1	1B162596-1A	<DC>
		NADG-8996-1B	1	1B162596-1B	<PA>
		NADG-8996-1C	1	1B162596-1C	<GK,GQ,GR>
		NADG-8996-1D	1	1B162596-1D	<PP>
		NADG-8996-1E	1	1B162596-1E	<WT>
U14	MICROPROCESSOR PC board ass'y	NAAR-8997-1A	1	1B162597-1A	<DC>
		NAAR-8997-1B	1	1B162597-1B	<PA>
		NAAR-8997-1C	1	1B162597-1C	<GK,GQ,GR>
		NAAR-8997-1D	1	1B162597-1D	<PP>
		NAAR-8997-1E	1	1B162597-1E	<WT>
U15	COVER PC board ass'y	NAETC-8998-1A	1	1B162598-1A	<DC>
		NAETC-8998-1B	1	1B162598-1B	<PA>
		NAETC-8998-1C	1	1B162598-1C	<GK,GQ,GR>
		NAETC-8998-1D	1	1B162598-1D	<PP>
		NAETC-8998-1E	1	1B162598-1E	<WT>
U16	POWER SUPPLY PC board ass'y	NAPS-8999-1A	1	1B162599-1A	<DC>
		NAPS-8999-1B	1	1B162599-1B	<PA>
		NAPS-8999-1C	1	1B162599-1C	<WT>
		NAPS-8999-1D	1	1B162599-1D	<GK>
		NAPS-8999-1E	1	1B162599-1E	<GR>
		NAPS-8999-1F	1	1B162599-1F	<PP>
		NAPS-8999-1J	1	1B162599-1J	<GQ>
U17	POWER SUPPLY PC board ass'y	NAPS-9000-1A	1	1B162500-1A	<DC>
		NAPS-9000-1B	1	1B162500-1B	<PA>
		NAPS-9000-1C	1	1B162500-1C	<WT>
		NAPS-9000-1D	1	1B162500-1D	<GK>
		NAPS-9000-1E	1	1B162500-1E	<GR>
		NAPS-9000-1F	1	1B162500-1F	<PP>
		NAPS-9000-1J	1	1B162500-1J	<GQ>
U18	SP TERMINAL PC board ass'y	NAETC-9001-1A	1	1B162501-1A	<DC>
		NAETC-9001-1B	1	1B162501-1B	<PA>
		NAETC-9001-1C	1	1B162501-1C	<WT>
		NAETC-9001-1D	1	1B162501-1D	<GK>
		NAETC-9001-1E	1	1B162501-1E	<GR>
		NAETC-9001-1F	1	1B162501-1F	<PP>
U19	SP TERMINAL PC board ass'y	NAETC-9001-1J	1	1B162501-1J	<GQ>
		NAETC-9002-1A	1	1B162502-1A	<DC>
		NAETC-9002-1B	1	1B162502-1B	<PA>
		NAETC-9002-1C	1	1B162502-1C	<WT>
		NAETC-9002-1D	1	1B162502-1D	<GK>
		NAETC-9002-1E	1	1B162502-1E	<GR>
		NAETC-9002-1F	1	1B162502-1F	<PP>
U20	DRIVER AMPLIFIER PC board ass'y	NAETC-9002-1J	1	1B162502-1J	<GQ>
		NAAF-9003-1A	1	1B162503-1A	<DC>
		NAAF-9003-1B	1	1B162503-1B	<PA>
		NAAF-9003-1C	1	1B162503-1C	<WT>
		NAAF-9003-1D	1	1B162503-1D	<GK>
		NAAF-9003-1E	1	1B162503-1E	<GR>
		NAAF-9003-1F	1	1B162503-1F	<PP>
NAAF-9003-1J	1	1B162503-1J	<GQ>		

U21	POWER SW PC board ass'y	NASW-9004-1B	1	1B162504-1B	<PA>
		NASW-9004-1C	1	1B162504-1C	<WT>
		NASW-9004-1D	1	1B162504-1D	<GK>
		NASW-9004-1E	1	1B162504-1E	<GR>
		NASW-9004-1F	1	1B162504-1F	<PP>
		NASW-9004-1J	1	1B162504-1J	<GQ>
U22	POWER SW PC board ass'y	NAETC-9005-1B	1	1B162505-1B	<PA>
		NAETC-9005-1C	1	1B162505-1C	<WT>
		NAETC-9005-1D	1	1B162505-1D	<GK>
		NAETC-9005-1E	1	1B162505-1E	<GR>
		NAETC-9005-1F	1	1B162505-1F	<PP>
		NAETC-9005-1J	1	1B162505-1J	<GQ>
U24	OUTLET PC board ass'y	NAETC-9007-1D	1	1B162507-1D	<GK>
U011	TUNER UNIT	FAE385-A11US	1	240152	<DC>
U011 or	TUNER UNIT	ENG06507QFUS	(1)	240156	<DC>
U011	TUNER UNIT	FAE485-E11EU	1	240154	<PP>
U011	TUNER UNIT	FAE485-E12EX	1	240155	<PA,GK,GQ,GR,WT>

TX-SR804/E

PC BOARD PARTS LIST

- U01** DISPLAY PC BOARD (NADIS-8675-2A)
- U02** HEADPHONE PC BOARD (NAETC-8676-2A)
- U03** VOLUME PC BOARD (NAETC-8677-2A)

CIRCUIT NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
U7501	REMO SENS	GPIUM281XKVFH=16MM	1	241361	
Q7501	FL TUBE	HNA-16SM10T	1	212249GRA	
Q7501A	HOLDER	(FL)	1	27191222B	
Q7502	IC	M66005-0001AHP	1	22242208R3	
Q7503	TR	KTC3875-GR	1	2216175R2	
Q7503 or	TR	2SC2712-GR	(1)	2213145R2	
Q7506	TR	KRC102S	1	2216190R2	
Q7506 or	TR	RN1402	(1)	2214470R2	
Q7507	TR	KRA102S	1	2216220R2	
Q7507 or	TR	RN2402	(1)	2214530R2	
Q7508	TR	KRC102S	1	2216190R2	
Q7508 or	TR	RN1402	(1)	2214470R2	
Q7509	TR	KRA102S	1	2216220R2	
Q7509 or	TR	RN2402	(1)	2214530R2	
Q7510	TR	KTC3875-GR	1	2216175R2	
Q7510 or	TR	2SC2712-GR	(1)	2213145R2	
Q7515	IC	NE5532APSR	1	22242283R2	
Q7601	IC	NE5532APSR	1	22242283R2	
Q7602	TR	RN1441	1	2215410R2	
Q7605	TR	RN1441	1	2215410R2	
Q7607	TR	RN1441	1	2215410R2	
D7501	ZENER D	UDZS8.2B	1	224550820R2	
D7501 or	ZENER D	MAZ8082	(1)	224750820R2	
D7502	LED	SLI-343URC-TE7	1	225449T	

D7503	LED	SEL4310G-D	1	225292DT
D7503 or	LED	SEL4410G	(1)	225454T
D7503 or	LED	SLR-342MGTE7P	(1)	225455T
D7515	LED	SDPB3DD0C	1	225464T
D7591	LED	SDPB3DD0C	1	225464T
D7601	ZENER D	UDZS5.1B	1	224550510R2
D7601 or	ZENER D	MAZ8051	(1)	224750510R2
L7501	CHOKO COIL	NCH-1471	1	231237K022R2
L7501 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
L7502	CHOKO COIL	NCH-1471	1	231237K022R2
L7502 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
L7503	CHOKO COIL	NCH-1471	1	231237K022R2
L7503 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
L7621	CHOKO COIL	NCH-1471	1	231237K022R2
L7621 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
L7622	CHOKO COIL	NCH-1471	1	231237K022R2
L7622 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
L7623	CHOKO COIL	NCH-1471	1	231237K022R2
L7623 or	CHOKO COIL	NCH-1587-022M	(1)	233533M022R2
C7501	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7502	ELECT C	CE04W6.3V-100M(S)	1	353721019T
C7504	C-CERA C	CK725F1H-473Z1	1	332154730R1
C7505	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7506	C-CERA C	CK725F1H-104Z1	1	332151040R1
C7507	C-CERA C	CK725F1H-104Z1	1	332151040R1
C7508	C-CERA C	CK725F1H-223Z1	1	332152230R1
C7509	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7510	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7511	ELECT C	CE04W50V-33M	1	355783309T
C7512	C-CERA C	CK725F1H-473Z1	1	332154730R1
C7513	C-CERA C	CK725F1H-473Z1	1	332154730R1
C7514	C-CERA C	CK725F1H-104Z1	1	332151040R1
C7515	C-CERA C	CC725CH1H-122J1	1	342101224R1
C7516	C-CERA C	CC725CH1H-101J1	1	342101014R1
C7517	C-CERA C	CC725CH1H-101J1	1	342101014R1
C7518	C-CERA C	CC725CH1H-101J1	1	342101014R1
C7519	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7520	C-CERA C	CC725CH1H-101J1	1	342101014R1
C7521	ELECT C	CE04W6.3V-100M(S)	1	353721019T
C7522	MMT C	MMT50V-474J	1	375524744T
C7523	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7554	ELECT C	CE04W50V-2.2M(S)	1	353780229T
C7591	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7592	C-CERA C	CK725F1E-104Z1	1	332161040R1
C7603	C-CERA C	CC725CH1H-101J1	1	342101014R1
C7605	C-CERA C	CC725CH1H-330J1	1	342103304R1
C7607	ELECT C	CE04W16V-10M(S)	1	353741009T
C7609	ELECT C	CE04W16V-10M(S)	1	353741009T
C7610	ELECT C	CE04W16V-47M(S)	1	353744709T
C7612	ELECT C	CE04W16V-47M(S)	1	353744709T

C7613	ELECT C	CE04W16V-47M(S)	1	353744709T
C7621	C-CERA C	CK725B1H-102K1	1	332101025R1
C7622	C-CERA C	CK725B1H-102K1	1	332101025R1
C7623	C-CERA C	CK725B1H-102K1	1	332101025R1
C7624	C-CERA C	CK725B1H-102K1	1	332101025R1
R7501	C-CARBON R	RN72K1J-104JE	1	435031044R1
R7517	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7518	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7519	C-CARBON R	RN72K1J-273JE	1	435032734R1
R7520	C-CARBON R	RN72K1J-332JE	1	435033324R1
R7521	C-CARBON R	RN72K1J-332JE	1	435033324R1
R7522	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7523	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7527	C-CARBON R	RN72K1J-101JE	1	435031014R1
R7528	C-CARBON R	RN72K1J-102JE	1	435031024R1
R7529	C-CARBON R	RN72K1J-101JE	1	435031014R1
R7530	C-CARBON R	RN72K1J-222JE	1	435032224R1
R7542	C-CARBON R	RN72K1J-181JE	1	435031814R1
R7545	C-CARBON R	RN72K1J-102JE	1	435031024R1
R7546	C-CARBON R	RN72K1J-102JE	1	435031024R1
R7547	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7548	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7551	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7552	C-CARBON R	RN72K1J-471JE	1	435034714R1
R7553	C-CARBON R	RN72K1J-561JE	1	435035614R1
R7554	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7555	C-CARBON R	RN72K1J-122JE	1	435031224R1
R7556	C-CARBON R	RN72K1J-222JE	1	435032224R1
R7557	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7558	C-CARBON R	RN72K1J-471JE	1	435034714R1
R7559	C-CARBON R	RN72K1J-561JE	1	435035614R1
R7560	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7561	C-CARBON R	RN72K1J-122JE	1	435031224R1
R7562	C-CARBON R	RN72K1J-222JE	1	435032224R1
R7563	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7564	C-CARBON R	RN72K1J-471JE	1	435034714R1
R7565	C-CARBON R	RN72K1J-561JE	1	435035614R1
R7566	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7567	C-CARBON R	RN72K1J-122JE	1	435031224R1
R7568	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7569	C-CARBON R	RN72K1J-471JE	1	435034714R1
R7570	C-CARBON R	RN72K1J-561JE	1	435035614R1
R7571	C-CARBON R	RN72K1J-821JE	1	435038214R1
R7572	C-CARBON R	RN72K1J-122JE	1	435031224R1
R7573	C-CARBON R	RN72K1J-222JE	1	435032224R1
R7574	C-CARBON R	RN72K1J-392JE	1	435033924R1
R7576	C-CARBON R	RN72K1J-222JE	1	435032224R1
R7577	C-CARBON R	RN72K1J-392JE	1	435033924R1
R7578	C-CARBON R	RN72K1J-123JE	1	435031234R1
R7579	C-CARBON R	RN72K1J-392JE	1	435033924R1

R7580	C-CARBON R	RN72K1J-392JE	1	435033924R1
R7591	C-CARBON R	RN72K1J-103JE	1	435031034R1
R7592	C-CARBON R	RN72K1J-103JE	1	435031034R1
R7593	C-CARBON R	RN72K1J-680JE	1	435036804R1
R7594	C-CARBON R	RN72K1J-680JE	1	435036804R1
R7600	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7605	C-CARBON R	RN72K1J-104JE	1	435031044R1
R7606	C-CARBON R	RN72K1J-102JE	1	435031024R1
R7607	C-CARBON R	RN72K1J-224JE	1	435032244R1
R7609	C-CARBON R	RN72K1J-333JE	1	435033334R1
R7611	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7613	C-CARBON R	RN72K1J-221JE	1	435032214R1
R7618	C-CARBON R	RN72K1J-331JE	1	435033314R1
R7620	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7621	C-CARBON R	RN72K1J-100JE	1	435031004R1
R7622	C-CARBON R	RN72K1J-101JE	1	435031014R1
R7623	C-CARBON R	RN72K1J-100JE	1	435031004R1
R7624	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7625	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7626	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7627	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7628	C-CARBON R	RN72K1J-563JE	1	435035634R1
R7629	C-CARBON R	RN72K1J-563JE	1	435035634R1
R7703	C-CARBON R	RN72K1J-472JE	1	435034724R1
R7721	C-CARBON R	RN72K1J-000JE	1	435030004R1
R7722	C-CARBON R	RN72K1J-000JE	1	435030004R1
JL7501A	WIRE HOL	NSCT-3P894	1	25051107
JL7503A	WIRE HOL	NSCT-4P895	1	25051108
JL7503B	WIRE HOL	NSCT-4P895	1	25051108
JL7540A	WIRE HOL	NSCT-9P900	1	25051113
JL7542B	WIRE HOL	NSCT-5P896	1	25051109
JL957A	WIRE HOL	NSCT-5P896	1	25051109
P7534B	SOCKET	NSCT-40P2274	1	25052377
P7602	JACK	YKB26-5153	1	25045385
S7501	PUSH SW	NPS-111-S681	1	25035718T
S7501 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7502	PUSH SW	NPS-111-S681	1	25035718T
S7502 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7503	PUSH SW	NPS-111-S681	1	25035718T
S7503 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7504	PUSH SW	NPS-111-S681	1	25035718T
S7504 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7505	PUSH SW	NPS-111-S681	1	25035718T
S7505 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7506	PUSH SW	NPS-111-S681	1	25035718T
S7506 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7507	PUSH SW	NPS-111-S681	1	25035718T
S7507 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7508	PUSH SW	NPS-111-S681	1	25035718T
S7508 or	PUSH SW	NPS-111-S677	(1)	25035714T

S7509	PUSH SW	NPS-111-S681	1	25035718T
S7509 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7510	PUSH SW	NPS-111-S681	1	25035718T
S7510 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7511	PUSH SW	NPS-111-S681	1	25035718T
S7511 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7512	PUSH SW	NPS-111-S681	1	25035718T
S7512 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7513	PUSH SW	NPS-111-S681	1	25035718T
S7513 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7514	PUSH SW	NPS-111-S681	1	25035718T
S7514 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7515	PUSH SW	NPS-111-S681	1	25035718T
S7515 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7516	PUSH SW	NPS-111-S681	1	25035718T
S7516 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7517	PUSH SW	NPS-111-S681	1	25035718T
S7517 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7518	PUSH SW	NPS-111-S681	1	25035718T
S7518 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7519	PUSH SW	NPS-111-S681	1	25035718T
S7519 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7520	PUSH SW	NPS-111-S681	1	25035718T
S7520 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7521	PUSH SW	NPS-111-S681	1	25035718T
S7521 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7522	PUSH SW	NPS-111-S681	1	25035718T
S7522 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7523	PUSH SW	NPS-111-S681	1	25035718T
S7523 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7524	PUSH SW	NPS-111-S681	1	25035718T
S7524 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7525	PUSH SW	NPS-111-S681	1	25035718T
S7525 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7526	PUSH SW	NPS-111-S681	1	25035718T
S7526 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7527	PUSH SW	NPS-111-S681	1	25035718T
S7527 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7528	PUSH SW	NPS-111-S681	1	25035718T
S7528 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7530	PUSH SW	NPS-111-S681	1	25035718T
S7530 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7531	PUSH SW	NPS-111-S681	1	25035718T
S7531 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7532	PUSH SW	NPS-111-S681	1	25035718T
S7532 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7533	PUSH SW	NPS-111-S681	1	25035718T
S7533 or	PUSH SW	NPS-111-S677	(1)	25035714T
S7534	PUSH SW	NPS-111-S681	1	25035718T
S7534 or	PUSH SW	NPS-111-S677	(1)	25035714T

S7591	R ENCODE	EC12E2425	1	25065655
E7621	TRM	NTM-1P233(M1969)	1	25060302

U04	AMPLIFIER PC BOARD (NAAF-8678-2A)
U05	THERMAL DETECTOR PC BOARD (NAETC-8680-2A)
U06	HOLDER PC BOARD (NAETC-8681-2A)
U07	SURROUND BACK AMPLIFIER PC BOARD (NAAF-8682-2A)

CIRCUIT NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
Q3001	IC	NE5532APSR	1	22242283R2	
Q3002	IC	NJU731IAM	1	22242209R2	
Q3003	IC	NJW1157B	1	22242193R3	
Q3004	IC	NE5532APSR	1	22242283R2	
Q3005	IC	78L07(SMT)	1	222780073R2	
Q3005 or	IC	NJM78L07UA	(1)	222780073R2JR	
Q3005 or	IC	TA78L07F	(1)	222780073R2TO	
Q3006	IC	79L07(SMT)	1	222790073R2	
Q3007	IC	NE5532APSR	1	22242283R2	
Q3008	IC	NE5532APSR	1	22242283R2	
Q3200	TR	RN1443	1	2215510R2	
Q3201	TR	RN1443	1	2215510R2	
Q3202	TR	RN1443	1	2215510R2	
Q3203	TR	RN1443	1	2215510R2	
Q3204	TR	RN1443	1	2215510R2	
Q3205	TR	RN1443	1	2215510R2	
Q3206	TR	RN1443	1	2215510R2	
Q3207	TR	RN1443	1	2215510R2	
Q3210	TR	RN1443	1	2215510R2	
Q3211	TR	RN1443	1	2215510R2	
Q3212	TR	RN1443	1	2215510R2	
Q3213	TR	RN1443	1	2215510R2	
Q3214	TR	RN1443	1	2215510R2	
Q3215	TR	RN1443	1	2215510R2	
Q3216	TR	RN1443	1	2215510R2	
Q3217	TR	RN1443	1	2215510R2	
Q3251	TR	KRC102S	1	2216190R2	
Q3251 or	TR	RN1402	(1)	2214470R2	
Q3252	TR	KRC102S	1	2216190R2	
Q3252 or	TR	RN1402	(1)	2214470R2	
Q3401	TR	RN1443	1	2215510R2	
Q3402	TR	RN1443	1	2215510R2	
Q3403	TR	RN1443	1	2215510R2	
Q3404	TR	RN1443	1	2215510R2	
Q3505A	HEAT SINK	RAD-165	1	27160500	
Q3505E	TAPE	TAPE(CLOTH-8U)	1	29110082	
Q3507	IC	7812HF(TA7812S)	1	222780124TOS	
Q3507 or	IC	7812	(1)	222780124	
Q3507 or	IC	7812PI(S7812PI)	(1)	222780124AUK	
Q3507B	SCREW	3P+10FN(3BC)	1	82143010GR	
Q3508	IC	79012HF(TA79012S)	1	222790124TOS	
Q3508 or	IC	7912FA(NJM7912FA)	(1)	222790124JRC	
Q3508 or	IC	7912PI(S7912PI)	(1)	222790124AUK	

Q3508B	SCREW	3P+10FN(3BC)	1	82143010GR
Q6000	TR	2SC1740S-S	1	2213285T
Q6001	TR	2SC1740S-S	1	2213285T
Q6002	TR	2SC1740S-S	1	2213285T
Q6003	TR	2SC1740S-S	1	2213285T
Q6004	TR	2SC1740S-S	1	2213285T
Q6005	TR	2SC1740S-S	1	2213285T
Q6006	TR	2SC1740S-S	1	2213285T
Q6010	TR	2SC1740S-S	1	2213285T
Q6011	TR	2SC1740S-S	1	2213285T
Q6012	TR	2SC1740S-S	1	2213285T
Q6013	TR	2SC1740S-S	1	2213285T
Q6014	TR	2SC1740S-S	1	2213285T
Q6015	TR	2SC1740S-S	1	2213285T
Q6016	TR	2SC1740S-S	1	2213285T
Q6030	TR	2SC5171(ONK_Q)	1	2203010
Q6030 or	TR	2SC5993-Q_P	(1)	2217161
Q6031	TR	2SC5171(ONK_Q)	1	2203010
Q6031 or	TR	2SC5993-Q_P	(1)	2217161
Q6032	TR	2SC5171(ONK_Q)	1	2203010
Q6032 or	TR	2SC5993-Q_P	(1)	2217161
Q6033	TR	2SC5171(ONK_Q)	1	2203010
Q6033 or	TR	2SC5993-Q_P	(1)	2217161
Q6034	TR	2SC5171(ONK_Q)	1	2203010
Q6034 or	TR	2SC5993-Q_P	(1)	2217161
Q6035	TR	2SC5171(ONK_Q)	1	2203010
Q6035 or	TR	2SC5993-Q_P	(1)	2217161
Q6036	TR	2SC5171(ONK_Q)	1	2203010
Q6036 or	TR	2SC5993-Q_P	(1)	2217161
Q6040	TR	2SA1930(ONK_Q)	1	2203000
Q6040 or	TR	2SA2140-Q_P	(1)	2217151
Q6041	TR	2SA1930(ONK_Q)	1	2203000
Q6041 or	TR	2SA2140-Q_P	(1)	2217151
Q6042	TR	2SA1930(ONK_Q)	1	2203000
Q6042 or	TR	2SA2140-Q_P	(1)	2217151
Q6043	TR	2SA1930(ONK_Q)	1	2203000
Q6043 or	TR	2SA2140-Q_P	(1)	2217151
Q6044	TR	2SA1930(ONK_Q)	1	2203000
Q6044 or	TR	2SA2140-Q_P	(1)	2217151
Q6045	TR	2SA1930(ONK_Q)	1	2203000
Q6045 or	TR	2SA2140-Q_P	(1)	2217151
Q6046	TR	2SA1930(ONK_Q)	1	2203000
Q6046 or	TR	2SA2140-Q_P	(1)	2217151
Q6070	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6070 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6071	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6071 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6072	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6072 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6073	TR	2SC2229-Y(TPE6_F)	1	2211634T

Q6073 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6074	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6074 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6075	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6075 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6076	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q6076 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
Q6380	IC	LM61CIZ	1	22242212
Q6701	TR	KTC3875-GR	1	2216175R2
Q6701 or	TR	2SC2712-GR	(1)	2213145R2
Q6702	TR	KTC3875-GR	1	2216175R2
Q6702 or	TR	2SC2712-GR	(1)	2213145R2
Q6703	TR	2SA1163-BL(TE85L_F)	1	2216756R2
Q6704	TR	KTA1504-GR	1	2216185R2
Q6704 or	TR	2SA1162-GR	(1)	2214375R2
Q6707	TR	KTC3875-GR	1	2216175R2
Q6707 or	TR	2SC2712-GR	(1)	2213145R2
D3005	C-DIODE	KDS4148U	1	223283R2
D3005 or	C-DIODE	1SS352	(1)	223234R2
D3005 or	C-DIODE	1SS355	(1)	223269R2
D3005 or	C-DIODE	MA2J111	(1)	223279R2
D3006	C-DIODE	KDS4148U	1	223283R2
D3006 or	C-DIODE	1SS352	(1)	223234R2
D3006 or	C-DIODE	1SS355	(1)	223269R2
D3006 or	C-DIODE	MA2J111	(1)	223279R2
D3201	C-DIODE	KDS4148U	1	223283R2
D3201 or	C-DIODE	1SS352	(1)	223234R2
D3201 or	C-DIODE	1SS355	(1)	223269R2
D3201 or	C-DIODE	MA2J111	(1)	223279R2
D3202	C-DIODE	KDS4148U	1	223283R2
D3202 or	C-DIODE	1SS352	(1)	223234R2
D3202 or	C-DIODE	1SS355	(1)	223269R2
D3202 or	C-DIODE	MA2J111	(1)	223279R2
D3938	C-DIODE	KDS4148U	1	223283R2
D3938 or	C-DIODE	1SS352	(1)	223234R2
D3938 or	C-DIODE	1SS355	(1)	223269R2
D3938 or	C-DIODE	MA2J111	(1)	223279R2
D3939	C-DIODE	KDS4148U	1	223283R2
D3939 or	C-DIODE	1SS352	(1)	223234R2
D3939 or	C-DIODE	1SS355	(1)	223269R2
D3939 or	C-DIODE	MA2J111	(1)	223279R2
D3940	C-DIODE	KDS4148U	1	223283R2
D3940 or	C-DIODE	1SS352	(1)	223234R2
D3940 or	C-DIODE	1SS355	(1)	223269R2
D3940 or	C-DIODE	MA2J111	(1)	223279R2
D3941	C-DIODE	KDS4148U	1	223283R2
D3941 or	C-DIODE	1SS352	(1)	223234R2
D3941 or	C-DIODE	1SS355	(1)	223269R2
D3941 or	C-DIODE	MA2J111	(1)	223279R2
D6000	DIODE	ISS133(DS)	1	223280T

D6000 or	DIODE	ISS133	(1)	223163T
D6001	DIODE	ISS133(DS)	1	223280T
D6001 or	DIODE	ISS133	(1)	223163T
D6002	DIODE	ISS133(DS)	1	223280T
D6002 or	DIODE	ISS133	(1)	223163T
D6003	DIODE	ISS133(DS)	1	223280T
D6003 or	DIODE	ISS133	(1)	223163T
D6004	DIODE	ISS133(DS)	1	223280T
D6004 or	DIODE	ISS133	(1)	223163T
D6005	DIODE	ISS133(DS)	1	223280T
D6005 or	DIODE	ISS133	(1)	223163T
D6006	DIODE	ISS133(DS)	1	223280T
D6006 or	DIODE	ISS133	(1)	223163T
D6010	DIODE	ISS133(DS)	1	223280T
D6010 or	DIODE	ISS133	(1)	223163T
D6011	DIODE	ISS133(DS)	1	223280T
D6011 or	DIODE	ISS133	(1)	223163T
D6012	DIODE	ISS133(DS)	1	223280T
D6012 or	DIODE	ISS133	(1)	223163T
D6013	DIODE	ISS133(DS)	1	223280T
D6013 or	DIODE	ISS133	(1)	223163T
D6014	DIODE	ISS133(DS)	1	223280T
D6014 or	DIODE	ISS133	(1)	223163T
D6015	DIODE	ISS133(DS)	1	223280T
D6015 or	DIODE	ISS133	(1)	223163T
D6016	DIODE	ISS133(DS)	1	223280T
D6016 or	DIODE	ISS133	(1)	223163T
D6701	C-DIODE	KDS4148U	1	223283R2
D6701 or	C-DIODE	ISS352	(1)	223234R2
D6701 or	C-DIODE	ISS355	(1)	223269R2
D6701 or	C-DIODE	MA2J111	(1)	223279R2
D6702	C-DIODE	KDS4148U	1	223283R2
D6702 or	C-DIODE	ISS352	(1)	223234R2
D6702 or	C-DIODE	ISS355	(1)	223269R2
D6702 or	C-DIODE	MA2J111	(1)	223279R2
D6703	ZENER D	UDZS5.1B	1	224550510R2
D6703 or	ZENER D	MAZ8051	(1)	224750510R2
D6704	ZENER D	UDZS5.1B	1	224550510R2
D6704 or	ZENER D	MAZ8051	(1)	224750510R2
D6901	DIODE	D10XB60H	1	22380337
D6901A	HEAT SINK	RAD-164	1	27160499
D6901B	SCREW	3P+10FN(3BC)	1	82143010GR
D6901C	TAPE	TAPE(CLOTH-8U)	1	29110082
D6902	C-DIODE	KDS4148U	1	223283R2
D6902 or	C-DIODE	ISS352	(1)	223234R2
D6902 or	C-DIODE	ISS355	(1)	223269R2
D6902 or	C-DIODE	MA2J111	(1)	223279R2
D6903	DIODE	D10XB60H	1	22380337
D6903B	SCREW	3P+10FN(3BC)	1	82143010GR
C3001	TF C	ECQ-B50V-221K	1	374722215T

C3002	TF C	ECQ-B50V-221K	1	374722215T
C3005	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3006	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3007	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3008	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3011	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3012	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3015	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3016	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3017	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3018	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3019	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3020	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3021	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3022	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3023	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3024	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3027	TF C	ECQ-B50V-102J	1	374721024T
C3028	TF C	ECQ-B50V-102J	1	374721024T
C3029	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3030	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3031	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3032	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3033	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3034	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3035	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3036	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3037	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C3038	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C3041	TF C	ECQ-B50V-123J	1	374721234T
C3042	TF C	ECQ-B50V-123J	1	374721234T
C3043	TF C	ECQ-B50V-392J	1	374723924T
C3044	TF C	ECQ-B50V-392J	1	374723924T
C3045	ELECT C	CE04W50V-10M(S)	1	353781009T
C3046	ELECT C	CE04W50V-10M(S)	1	353781009T
C3047	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3048	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3049	C-CERA C	CC725CH1H-101J1	1	342101014R1
C3050	C-CERA C	CC725CH1H-101J1	1	342101014R1
C3051	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3052	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3053	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3054	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3055	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3057	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3058	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3059	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3060	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3061	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3062	UTSP C	CE04W50V-10M(UTSP)	1	397581007T

C3063	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3064	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3065	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3066	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3067	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3068	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3069	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3070	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3071	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3072	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3077	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3078	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3079	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3080	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3081	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3082	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3083	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3084	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3085	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3086	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3087	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
C3088	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
C3089	TF C	ECQ-V50V-224J	1	374722244T
C3090	TF C	ECQ-B50V-472J	1	374724724T
C3091	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
C3092	TF C	ECQ-V50V-224J	1	374722244T
C3093	TF C	ECQ-B50V-472J	1	374724724T
C3096	UTSP C	CE04W16V-470M(UTSP)	1	397544717T
C3097	UTSP C	CE04W16V-470M(UTSP)	1	397544717T
C3098	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3099	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3100	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C3101	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C3103	C-CERA C	CC725CH1H-330J1	1	342103304R1
C3104	C-CERA C	CC725CH1H-330J1	1	342103304R1
C3105	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3106	C-CERA C	CC725CH1H-221J1	1	342102214R1
C3107	C-CERA C	CK725B1H-103K1	1	332101035R1
C3108	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3109	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C3110	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C3111	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3113	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3114	C-CERA C	CC725CH1H-102J1	1	342101024R1
C3115	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C3116	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C3121	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3122	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3123	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
C3124	UTSP C	CE04W25V-47M(UTSP)	1	397554707T

C3132	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3133	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3134	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3135	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3136	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3137	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3200	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3201	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3202	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3203	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3204	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3205	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3206	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C3411	UTSP C	CE04W50V-22M(UTSP)	1	397582207T
C3412	UTSP C	CE04W50V-22M(UTSP)	1	397582207T
C3939	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3940	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3941	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3942	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3943	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3944	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C3945	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
C3946	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C6020	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6021	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6022	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6023	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6024	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6025	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6026	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
C6030	TF C	ECQ-V100-473J	1	374734734T
C6031	TF C	ECQ-V100-473J	1	374734734T
C6032	TF C	ECQ-V100-473J	1	374734734T
C6033	TF C	ECQ-V100-473J	1	374734734T
C6034	TF C	ECQ-V100-473J	1	374734734T
C6035	TF C	ECQ-V100-473J	1	374734734T
C6036	TF C	ECQ-V100-473J	1	374734734T
C6701	VR C	CE04W16V-220M(VR)	1	394642217T
C6703	C-CERA C	CK725F1H-223Z1	1	332152230R1
C6704	VR C	CE04W50V-1M(VR)	1	394680107T
C6705	C-CERA C	CK725F1H-223Z1	1	332152230R1
C6706	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C6901	ELECT C	CE69W71V-15000M	1	3504433
C6901A	TAPE	TAPE(CLOTH-16U)	1	29110083
C6902	ELECT C	CE69W71V-15000M	1	3504433
C6902A	TAPE	TAPE(CLOTH-16U)	1	29110083
C6911	C-CERA C	CC725CH1H-102J1	1	342101024R1
C6912	TF C	ECQ-V100-334J	1	374733344T
C6913	TF C	ECQ-V100-334J	1	374733344T
C6915	TF C	ECQ-V50V-334J	1	374723344T

C6916	TF C	ECQ-V50V-334J	1	374723344T
C6919	TF C	ECQ-B50V-102J	1	374721024T
R3001	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3002	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3005	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3006	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3007	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3008	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3009	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3010	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3013	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3014	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3017	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3018	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3019	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3020	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3021	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3022	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3025	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3026	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3027	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3028	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3029	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3030	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3033	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3034	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3037	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3038	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3039	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3040	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3041	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3042	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3043	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3044	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3045	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3046	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3047	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3048	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3053	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3054	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3057	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3058	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3059	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3060	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3061	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3062	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3063	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3064	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3065	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3066	C-CARBON R	RN72K1J-101JE	1	435031014R1

R3067	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3068	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3069	C-CARBON R	RN72K1J-474JE	1	435034744R1
R3070	C-CARBON R	RN72K1J-474JE	1	435034744R1
R3071	C-CARBON R	RN72K1J-561JE	1	435035614R1
R3072	C-CARBON R	RN72K1J-561JE	1	435035614R1
R3073	C-CARBON R	RN72K1J-274JE	1	435032744R1
R3074	C-CARBON R	RN72K1J-274JE	1	435032744R1
R3075	C-CARBON R	RN72K1J-223JE	1	435032234R1
R3076	C-CARBON R	RN72K1J-223JE	1	435032234R1
R3077	C-CARBON R	RN72K1J-122JE	1	435031224R1
R3078	C-CARBON R	RN72K1J-122JE	1	435031224R1
R3079	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3080	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3081	C-CARBON R	RN72K1J-100JE	1	435031004R1
R3082	C-CARBON R	RN72K1J-100JE	1	435031004R1
R3083	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3084	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3085	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3086	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3087	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3088	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3089	C-CARBON R	RN72K1J-220JE	1	435032204R1
R3090	C-CARBON R	RN72K1J-220JE	1	435032204R1
R3091	C-CARBON R	RN72K1J-122JE	1	435031224R1
R3092	C-CARBON R	RN72K1J-122JE	1	435031224R1
R3093	C-CARBON R	RN72K1J-471JE	1	435034714R1
R3094	C-CARBON R	RN72K1J-471JE	1	435034714R1
R3095	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3096	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3097	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3098	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3099	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3100	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3101	C-CARBON R	RN72K1J-220JE	1	435032204R1
R3102	C-CARBON R	RN72K1J-220JE	1	435032204R1
R3103	C-CARBON R	RN72K1J-473JE	1	435034734R1
R3104	C-CARBON R	RN72K1J-122JE	1	435031224R1
R3105	C-CARBON R	RN72K1J-153JE	1	435031534R1
R3106	C-CARBON R	RN72K1J-103JE	1	435031034R1
R3112	C-CARBON R	RN72K1J-000JE	1	435030004R1
R3115	C-CARBON R	RN72K1J-000JE	1	435030004R1
R3116	C-CARBON R	RN72K1J-000JE	1	435030004R1
R3117	METAL O R	RS1/2WBJ-22	1	443522204T
R3118	METAL O R	RS1/2WBJ-22	1	443522204T
R3119	C-CARBON R	RN72K1J-104JE	1	435031044R1
R3120	C-CARBON R	RN72K1J-104JE	1	435031044R1
R3121	C-CARBON R	RN72K1J-104JE	1	435031044R1
R3123	C-CARBON R	RN72K1J-331JE	1	435033314R1
R3124	C-CARBON R	RN72K1J-331JE	1	435033314R1

R3125	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3126	C-CARBON R	RN72K1J-563JE	1	435035634R1
R3127	C-CARBON R	RN72K1J-100JE	1	435031004R1
R3128	C-CARBON R	RN72K1J-100JE	1	435031004R1
R3129	C-CARBON R	RN72K1J-000JE	1	435030004R1
R3130	C-CARBON R	RN72K1J-000JE	1	435030004R1
R3210	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3211	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3212	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3213	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3214	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3215	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3216	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3217	C-CARBON R	RN72K1J-224JE	1	435032244R1
R3220	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3221	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3222	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3223	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3224	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3225	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3226	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3227	C-CARBON R	RN72K1J-271JE	1	435032714R1
R3230	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3231	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3232	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3233	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3234	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3235	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3236	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3237	C-CARBON R	RN72K1J-101JE	1	435031014R1
R3251	METAL O R	RS1WBJ-120	1	443621214T
R3252	METAL O R	RS1WBJ-120	1	443621214T
R3407	C-CARBON R	RN72K1J-223JE	1	435032234R1
R3408	C-CARBON R	RN72K1J-223JE	1	435032234R1
R3409	C-CARBON R	RN72K1J-471JE	1	435034714R1
R3410	C-CARBON R	RN72K1J-471JE	1	435034714R1
R3411	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3412	C-CARBON R	RN72K1J-221JE	1	435032214R1
R3413	C-CARBON R	RN72K1J-681JE	1	435036814R1
R3414	C-CARBON R	RN72K1J-681JE	1	435036814R1
R6010	CARBON R	R16J-5.6K	1	417345624T
R6011	CARBON R	R16J-5.6K	1	417345624T
R6012	CARBON R	R16J-5.6K	1	417345624T
R6013	CARBON R	R16J-5.6K	1	417345624T
R6014	CARBON R	R16J-5.6K	1	417345624T
R6015	CARBON R	R16J-5.6K	1	417345624T
R6016	CARBON R	R16J-5.6K	1	417345624T
R6020	CARBON R	R16J-3.9K	1	417343924T
R6021	CARBON R	R16J-3.9K	1	417343924T
R6022	CARBON R	R16J-3.9K	1	417343924T

R6023	CARBON R	R16J-3.9K	1	417343924T
R6024	CARBON R	R16J-3.9K	1	417343924T
R6025	CARBON R	R16J-3.9K	1	417343924T
R6026	CARBON R	R16J-3.9K	1	417343924T
R6030	CARBON R	R16J-470	1	417344714T
R6031	CARBON R	R16J-470	1	417344714T
R6032	CARBON R	R16J-470	1	417344714T
R6033	CARBON R	R16J-470	1	417344714T
R6034	CARBON R	R16J-470	1	417344714T
R6035	CARBON R	R16J-470	1	417344714T
R6036	CARBON R	R16J-470	1	417344714T
R6040	TRIM R	N06HR2KBC	1	5210390T
R6041	TRIM R	N06HR2KBC	1	5210390T
R6042	TRIM R	N06HR2KBC	1	5210390T
R6043	TRIM R	N06HR2KBC	1	5210390T
R6044	TRIM R	N06HR2KBC	1	5210390T
R6045	TRIM R	N06HR2KBC	1	5210390T
R6046	TRIM R	N06HR2KBC	1	5210390T
R6050	CARBON R	R16J-3.3K	1	417343324T
R6051	CARBON R	R16J-3.3K	1	417343324T
R6052	CARBON R	R16J-3.3K	1	417343324T
R6053	CARBON R	R16J-3.3K	1	417343324T
R6054	CARBON R	R16J-3.3K	1	417343324T
R6055	CARBON R	R16J-3.3K	1	417343324T
R6056	CARBON R	R16J-3.3K	1	417343324T
R6070	NF CARBON R	R25J-82	1	415478204T
R6071	NF CARBON R	R25J-82	1	415478204T
R6072	NF CARBON R	R25J-82	1	415478204T
R6073	NF CARBON R	R25J-150	1	415471514T
R6074	NF CARBON R	R25J-150	1	415471514T
R6075	NF CARBON R	R25J-220	1	415472214T
R6076	NF CARBON R	R25J-220	1	415472214T
R6080	NF CARBON R	R25J-0.22	1	415472294T
R6081	NF CARBON R	R25J-0.22	1	415472294T
R6082	NF CARBON R	R25J-0.22	1	415472294T
R6083	NF CARBON R	R25J-0.22	1	415472294T
R6084	NF CARBON R	R25J-0.22	1	415472294T
R6085	NF CARBON R	R25J-0.22	1	415472294T
R6086	NF CARBON R	R25J-0.22	1	415472294T
R6090	NF CARBON R	R25J-0.22	1	415472294T
R6091	NF CARBON R	R25J-0.22	1	415472294T
R6092	NF CARBON R	R25J-0.22	1	415472294T
R6093	NF CARBON R	R25J-0.22	1	415472294T
R6094	NF CARBON R	R25J-0.22	1	415472294T
R6095	NF CARBON R	R25J-0.22	1	415472294T
R6096	NF CARBON R	R25J-0.22	1	415472294T
R6100	METAL PR	MPR5W+5W 0R22	1	4000233
R6100 or	METAL PR	RF-5EGKR22	(1)	4000201
R6100 or	METAL PR	RGCS5 0.22	(1)	4000132
R6101	METAL PR	MPR5W+5W 0R22	1	4000233

R6101 or	METAL PR	RF-5EGKR22	(1)	4000201
R6101 or	METAL PR	RGC55 0.22	(1)	4000132
R6102	METAL PR	MPR5W+5W 0R22	1	4000233
R6102 or	METAL PR	RF-5EGKR22	(1)	4000201
R6102 or	METAL PR	RGC55 0.22	(1)	4000132
R6103	METAL PR	MPR5W+5W 0R22	1	4000233
R6103 or	METAL PR	RF-5EGKR22	(1)	4000201
R6103 or	METAL PR	RGC55 0.22	(1)	4000132
R6104	METAL PR	MPR5W+5W 0R22	1	4000233
R6104 or	METAL PR	RF-5EGKR22	(1)	4000201
R6104 or	METAL PR	RGC55 0.22	(1)	4000132
R6105	METAL PR	MPR5W+5W 0R22	1	4000233
R6105 or	METAL PR	RF-5EGKR22	(1)	4000201
R6105 or	METAL PR	RGC55 0.22	(1)	4000132
R6106	METAL PR	MPR5W+5W 0R22	1	4000233
R6106 or	METAL PR	RF-5EGKR22	(1)	4000201
R6106 or	METAL PR	RGC55 0.22	(1)	4000132
R6120	NF CARBON R	R25J-2.2	1	415470224T
R6121	NF CARBON R	R25J-2.2	1	415470224T
R6122	NF CARBON R	R25J-2.2	1	415470224T
R6123	NF CARBON R	R25J-2.2	1	415470224T
R6124	NF CARBON R	R25J-2.2	1	415470224T
R6125	NF CARBON R	R25J-2.2	1	415470224T
R6126	NF CARBON R	R25J-2.2	1	415470224T
R6130	METAL R	RNU1WCJ-8.2	1	453630824T
R6131	METAL R	RNU1WCJ-8.2	1	453630824T
R6132	METAL R	RNU1WCJ-8.2	1	453630824T
R6133	METAL R	RNU1WCJ-8.2	1	453630824T
R6134	METAL R	RNU1WCJ-8.2	1	453630824T
R6135	METAL R	RNU1WCJ-8.2	1	453630824T
R6136	METAL R	RNU1WCJ-8.2	1	453630824T
R6140	CARBON R	R16J-22K	1	417342234T
R6141	CARBON R	R16J-22K	1	417342234T
R6142	CARBON R	R16J-22K	1	417342234T
R6143	CARBON R	R16J-22K	1	417342234T
R6144	CARBON R	R16J-22K	1	417342234T
R6145	CARBON R	R16J-22K	1	417342234T
R6146	CARBON R	R16J-22K	1	417342234T
R6150	CARBON R	R16J-12K	1	417341234T
R6151	CARBON R	R16J-12K	1	417341234T
R6152	CARBON R	R16J-12K	1	417341234T
R6153	CARBON R	R16J-12K	1	417341234T
R6154	CARBON R	R16J-12K	1	417341234T
R6155	CARBON R	R16J-12K	1	417341234T
R6156	CARBON R	R16J-12K	1	417341234T
R6160	CARBON R	R16J-33K	1	417343334T
R6161	CARBON R	R16J-33K	1	417343334T
R6162	CARBON R	R16J-33K	1	417343334T
R6163	CARBON R	R16J-33K	1	417343334T
R6164	CARBON R	R16J-33K	1	417343334T

R6165	CARBON R	R16J-33K	1	417343334T
R6166	CARBON R	R16J-33K	1	417343334T
R6180	METAL O R	RS1/2WBJ-390	1	443523914T
R6181	METAL O R	RS1/2WBJ-390	1	443523914T
R6190	CARBON R	R16J-47K	1	417344734T
R6191	CARBON R	R16J-47K	1	417344734T
R6192	CARBON R	R16J-47K	1	417344734T
R6193	CARBON R	R16J-47K	1	417344734T
R6194	CARBON R	R16J-47K	1	417344734T
R6195	CARBON R	R16J-47K	1	417344734T
R6196	CARBON R	R16J-47K	1	417344734T
R6197	METAL R	RNU1/2WCJ-0.22	1	453532294T
R6210	CARBON R	R16J-47K	1	417344734T
R6211	CARBON R	R16J-47K	1	417344734T
R6212	CARBON R	R16J-47K	1	417344734T
R6213	CARBON R	R16J-47K	1	417344734T
R6214	CARBON R	R16J-47K	1	417344734T
R6215	CARBON R	R16J-47K	1	417344734T
R6216	CARBON R	R16J-47K	1	417344734T
R6240	CARBON R	R16J-220K	1	417342244T
R6241	CARBON R	R16J-220K	1	417342244T
R6242	CARBON R	R16J-220K	1	417342244T
R6243	CARBON R	R16J-220K	1	417342244T
R6244	CARBON R	R16J-220K	1	417342244T
R6245	CARBON R	R16J-220K	1	417342244T
R6246	CARBON R	R16J-220K	1	417342244T
R6701	C-CARBON R	RN72K1J-223JE	1	435032234R1
R6702	C-CARBON R	RN72K1J-103JE	1	435031034R1
R6704	C-CARBON R	RN72K1J-473JE	1	435034734R1
R6705	C-CARBON R	RN72K1J-183JE	1	435031834R1
R6706	C-CARBON R	RN72K1J-224JE	1	435032244R1
R6707	C-CARBON R	RN72K1J-103JE	1	435031034R1
R6708	C-CARBON R	RN72K1J-333JE	1	435033334R1
R6709	C-CARBON R	RN72K1J-562JE	1	435035624R1
R6710	C-CARBON R	RN72K1J-183JE	1	435031834R1
R6902	C-CARBON R	RN72K1J-102JE	1	435031024R1
R6903	C-CARBON R	RN72K1J-473JE	1	435034734R1
F6901A	FUSE HOLDER	SN5051	1	250113
F6901B	FUSE HOLDER	SN5051	1	250113
F6902A	FUSE HOLDER	SN5051	1	250113
F6902B	FUSE HOLDER	SN5051	1	250113
JL6006B	SOCKET	NSCT-5P97	1	25050269
JL6200A	WIRE HOL	NSCT-5P896	1	25051109
JL6200B	SOCKET	NSCT-5P97	1	25050269
JL6600A	WIRE HOL	NSCT-7P898	1	25051111
JL6603A	WIRE HOL	NSCT-9P900	1	25051113
JL703A	WIRE HOL	NSCT-3P874	1	25051087
P3001	PIN JACK	NPJ-2PDWR558	1	25045776
P3001 or	PIN JACK	NPJ-2PDBL185	(1)	25045333
P3002	PIN JACK	NPJ-6PDWWRRR561	1	25045779

P3002 or	PIN JACK	NPJ-6PDBL159	(1)	25045300
P3003	PIN JACK	NPJ-6PDWWRRR561	1	25045779
P3003 or	PIN JACK	NPJ-6PDBL159	(1)	25045300
P3004	PIN JACK	NPJ-4PDWWRR624	1	25045845
P3004 or	PIN JACK	NPJ-4PDBL162	(1)	25045303
P3005	PIN JACK	NPJ-6PDWLGREP562	1	25045780
P3005 or	PIN JACK	NPJ-6PDWRLEGP590	(1)	25045810
P3005 or	PIN JACK	NPJ-6PWRLGGP493	(1)	25045697
P3006	PIN JACK	NPJ-2PDNT521	1	25045733
P3006 or	PIN JACK	NPJ-2PDNT627	(1)	25045848
P3008	PIN JACK	NPJ-6PDWLGREP562	1	25045780
P3008 or	PIN JACK	NPJ-6PDWRLEGP590	(1)	25045810
P3008 or	PIN JACK	NPJ-6PWRLGGP493	(1)	25045697
P3009	PIN JACK	NPJ-2PDNT521	1	25045733
P3009 or	PIN JACK	NPJ-2PDNT627	(1)	25045848
P3010	TRM(SCREW)	NEJITANSI M3	1	25065425
P3101A	PLUG	NPLG-15P0970	1	25056020
P3102A	PLUG	NPLG-8P0963	1	25056013
P3103A	PLUG	NPLG-17P0972	1	25056022
P3104A	PLUG	NPLG-17P0972	1	25056022
P3105A	PLUG	NPLG-17P0972	1	25056022
P5003B	CRIMP AS	CRIMP AS	1	2069955150UL
P5004B	SOCKET AS	NSAS-26P1494	1	2009990954UL
P6000A	PLUG	NPLG-5P0960	1	25056010
P6001A	PLUG	NPLG-5P0960	1	25056010
P6002A	PLUG	NPLG-5P0960	1	25056010
P6003A	PLUG	NPLG-5P0960	1	25056010
P6004A	PLUG	NPLG-5P0960	1	25056010
P6005A	PLUG	NPLG-5P0960	1	25056010
P6080	PLUG	NPLG-2P29	1	25055038
P6081	PLUG	NPLG-2P29	1	25055038
P6082	PLUG	NPLG-2P29	1	25055038
P6083	PLUG	NPLG-2P29	1	25055038
P6084	PLUG	NPLG-2P29	1	25055038
P6085	PLUG	NPLG-2P29	1	25055038
P6086	PLUG	NPLG-2P29	1	25055038
P6380	RETAINER	(PTH)	1	27141884-1
P6380 or	RETAINER	(PTH)	(1)	27141884
P6800	WS CLAMP	CB-71683(L=50)	1	260261
P6901	CRIMP AS	CRIMP AS	1	2069925226UL
P6902	CRIMP AS	CRIMP AS	1	2069925153UL
P6911A	RETAINER	(BUS-D)	1	27141860
P6952A	PLUG	NPLG-10P157	1	25055173
P6991	TRM(SCREW)	NEJITANSI M3	1	25065425
RL3201	RELAY	NRL-2P2A-DC4.5-173	1	25065658
RL3201 or	RELAY	NPL-2P1A-DC4.5-169	(1)	25065645
RL3202	RELAY	NRL-2P2A-DC4.5-173	1	25065658
RL3202 or	RELAY	NPL-2P1A-DC4.5-169	(1)	25065645
RL6901	RELAY	NRL-1P10A-DC12-140	1	25065584
RL6901 or	RELAY	NRL-1P10A-DC12-143	(1)	25065588

RL6901A	TAPE	TAPE(CLOTH-16U)	1	29110083	
RL6902	RELAY	NRL-1P10A-DC12-140	1	25065584	
RL6902 or	RELAY	NRL-1P10A-DC12-143	(1)	25065588	
RL6902A	TAPE	TAPE(CLOTH-16U)	1	29110083	

U08 HDMI PC BOARD (NAVD-8824-1A)

REF. NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
Q8001	IC	SII504	1	22242049R3	
Q8002	IC	MC504	1	22242050R9	
Q8003	IC	IC42S32200L-7TG	1	22242056R2	
Q8003 or	IC	K4S643232H-UC60	(1)	22242169R3	
Q8007	IC	BA18BC0FP	1	22278018DR2RH	
Q8007 or	IC	MPC2918T	(1)	22278018ER2NE	
Q8007 or	IC	TA48018AF(TE16L_NQ)	(1)	22278018DR2TO	
Q8101	IC	ADV7401	1	22242254R3	
Q8104	IC	TC74VCX162244FT(EL_F)	1	2227C244DR2TO	
Q8105	IC	TC74VCX162244FT(EL_F)	1	2227C244DR2TO	
Q8106	IC	BA18BC0FP	1	22278018DR2RH	
Q8106 or	IC	MPC2918T	(1)	22278018ER2NE	
Q8106 or	IC	TA48018AF(TE16L_NQ)	(1)	22278018DR2TO	
Q8191	IC	NJM2391DL1-33	1	22278033DR2JR	
Q8191 or	IC	BA33BC0FP	(1)	22278033DR2RH	
Q8191 or	IC	MPC2933T	(1)	22278033DR2NE	
Q8191 or	IC	TA48033AF(TE16L_NQ)	(1)	22278033DR2TO	
Q8305	IC	NJM2860F3-05	1	22242105R2	
Q8306	IC	TC7SZ08FU(TE85L_F)	1	22242071R2TO	
Q8308	TR	DTA144EE	1	2216380R2	
Q8309	TR ARRAY	UM6K1N	1	226066R2	
Q8309 or	TR ARRAY	UPA672T	(1)	226067R2	
Q8401	IC	SII9030CTU-7	1	22242325R3	
Q8404	IC	XC6213B332MR	1	22242277R2	
Q8501	IC	SII9033	1	22242324R3	
Q8503	TR ARRAY	UM6K1N	1	226066R2	
Q8503 or	TR ARRAY	UPA672T	(1)	226067R2	
Q8504	TR ARRAY	UM6K1N	1	226066R2	
Q8504 or	TR ARRAY	UPA672T	(1)	226067R2	
Q8505	TR ARRAY	UM6K1N	1	226066R2	
Q8505 or	TR ARRAY	UPA672T	(1)	226067R2	
Q8506	IC	BR24L02FV-W	1	22242069R2	
Q8506 or	IC	S-24CS02AFT-V-G	(1)	22242360R2	
Q8508	TR ARRAY	UM6K1N	1	226066R2	
Q8508 or	TR ARRAY	UPA672T	(1)	226067R2	
Q8509	TR	2SK3019	1	2216520R2	
Q8510	TR	DTA144EE	1	2216380R2	
Q8591	IC	NJM2391DL1-33	1	22278033DR2JR	
Q8591 or	IC	BA33BC0FP	(1)	22278033DR2RH	
Q8591 or	IC	MPC2933T	(1)	22278033DR2NE	
Q8591 or	IC	TA48033AF(TE16L_NQ)	(1)	22278033DR2TO	
Q8592	IC	BA18BC0FP	1	22278018DR2RH	

Q8592 or	IC	MPC2918T	(1)	22278018ER2NE
Q8592 or	IC	TA48018AF(TE16L_NQ)	(1)	22278018DR2TO
Q8593	IC	SI8008TM	1	22242323R2
Q8595	IC	BA18BC0FP	1	22278018DR2RH
Q8595 or	IC	MPC2918T	(1)	22278018ER2NE
Q8595 or	IC	TA48018AF(TE16L_NQ)	(1)	22278018DR2TO
Q8602	IC	XC6213B332MR	1	22242277R2
Q8603	TR ARRAY	UM6K1N	1	226066R2
Q8603 or	TR ARRAY	UPA672T	(1)	226067R2
Q8604	TR ARRAY	UM6K1N	1	226066R2
Q8604 or	TR ARRAY	UPA672T	(1)	226067R2
Q8605	TR ARRAY	UM6K1N	1	226066R2
Q8605 or	TR ARRAY	UPA672T	(1)	226067R2
Q8606	IC	BR24L02FV-W	1	22242069R2
Q8606 or	IC	S-24CS02AFT-V-G	(1)	22242360R2
Q8610	TR	DTA144EE	1	2216380R2
Q8701	IC(SUB MICROPROCESSOR)	MPD70F3716GC-8EA(0190)	1	222W0054R301901
Q8801	IC	ADV7172	1	22242155R3
Q8858	TR	2SK3019	1	2216520R2
D8301	C-DIODE	1SS226(TE85L_F)	1	223266R2
D8301 or	DIODE	DAN217T146	(1)	223285R2
D8461	C-DIODE	1SS226(TE85L_F)	1	223266R2
D8461 or	DIODE	DAN217T146	(1)	223285R2
D8501	C-DIODE	1SS226(TE85L_F)	1	223266R2
D8501 or	DIODE	DAN217T146	(1)	223285R2
D8591	C-DIODE	CRS09(TE85L_Q)	1	223274R2
D8601	C-DIODE	1SS226(TE85L_F)	1	223266R2
D8601 or	DIODE	DAN217T146	(1)	223285R2
D8701	C-DIODE	KDS4148U	1	223283R2
D8701 or	C-DIODE	1SS352	(1)	223234R2
L8001	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8002	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8003	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8004	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8101	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8102	CHOKE COIL	LBC2518T470M	1	231364M470R2
L8103	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8104	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8105	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
L8107	EMIFIL	BK1608HS601-T	1	230984R1
L8401	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8402	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8403	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8404	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8405	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8406	CORE	DLP2ADN900HL4L	1	230990R2
L8407	CORE	DLP2ADN900HL4L	1	230990R2
L8501	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8502	CHOKE COIL	BLM21PG221SN1	1	230949R2
L8504	CHOKE COIL	BLM21PG221SN1	1	230949R2

L8505	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8506	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8507	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8508	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8509	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8517	EMIFIL	BK1608LL241-T	1	230959R1
L8591	CHOKO COIL	BLM21PG221SN1	1	230949R2
L8592	CHOKO COIL	NCH-2541	1	231363K470
L8701	CHOKO COIL	LBC2518T4R7M	1	231364M047R2
L8801	CHOKO COIL	LBC2518T2R2M	1	231364M022R2
X8001	CRYSTAL	FCX03-20.000MHz	1	3010389R2
X8101	CRYSTAL	FCX-03-28.6363MHz	1	3010408R2
X8501	CRYSTAL	HC-49-28.332MHz	1	3010417R2
X8701	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2
C8001	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8002	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8003	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8004	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8006	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8010	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8011	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8012	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8013	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8014	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8019	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8020	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8021	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8022	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8023	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8024	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8025	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8026	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8027	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8028	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8029	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8030	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8031	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8032	CHIP ELECT C	CEWX16V-22M	1	356742209R2
C8033	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8034	C-CERA C	CC725CH1H-101J1	1	342101014R1
C8035	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8036	C-CERA C	CC725CH1H-040C1	1	342100401R1
C8038	C-CERA C	CC725CH1H-040C1	1	342100401R1
C8040	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8041	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8042	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8043	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8044	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8045	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8046	C-CERA C	CK725F1A-105Z1	1	332181050R1

C8047	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8048	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8049	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8050	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8051	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8052	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8053	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8054	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8055	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8056	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8077	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8079	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8101	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8102	C-CERA C	CK725B1C-104K1	1	332121045R1
C8103	C-CERA C	CK725B1C-104K1	1	332121045R1
C8104	C-CERA C	CK725B1C-104K1	1	332121045R1
C8105	C-CERA C	CK725B1C-104K1	1	332121045R1
C8106	C-CERA C	CK725B1C-104K1	1	332121045R1
C8107	C-CERA C	CK725B1C-104K1	1	332121045R1
C8108	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8109	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8110	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8111	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8112	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8113	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8114	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8115	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8116	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8117	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8118	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8119	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8120	C-CERA C	CC725CH1H-101J1	1	342101014R1
C8121	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8122	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8123	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8124	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8125	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8126	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8127	C-CERA C	CK725B1H-223K1	1	332102235R1
C8128	C-CERA C	CK725B1C-823K1	1	332128235R1
C8129	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8130	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8131	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8133	C-CERA C	CC725CH1H-070D1	1	342100702R1
C8134	C-CERA C	CC725CH1H-070D1	1	342100702R1
C8135	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8136	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8137	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8138	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8139	C-CERA C	CK725F1H-104Z1	1	332151040R1

C8140	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8141	CHIP ELECT C	CEWX16V-10M	1	356741009R2
C8142	C-CERA C	CC725CH1H-100D1	1	342101002R1
C8143	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8151	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8152	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8153	CHIP ELECT C	CEWX6.3V-100M	1	356721019R2
C8154	CHIP ELECT C	CEWX6.3V-100M	1	356721019R2
C8155	C-CERA C	CC725CH1H-470J1	1	342104704R1
C8156	C-CERA C	CC725CH1H-470J1	1	342104704R1
C8157	C-CERA C	CC725CH1H-470J1	1	342104704R1
C8191	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8192	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8326	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8327	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8328	CHIP ELECT C	CEWX16V-22M	1	356742209R2
C8329	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8330	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8332	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8398	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8399	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8401	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8402	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8403	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8404	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8405	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8406	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8407	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8408	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8409	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8410	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8411	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8412	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8413	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8414	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8415	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8416	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8417	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8418	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8419	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8420	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8421	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8422	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8423	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8424	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8425	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8426	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8427	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8451	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8452	C-CERA C	CK725F1A-105Z1	1	332181050R1

C8453	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8461	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8501	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8502	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8504	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8505	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8511	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8513	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8514	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8515	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8516	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8517	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8518	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8519	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8520	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8521	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8522	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8523	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8524	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8525	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8526	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8527	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8528	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8529	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8530	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8531	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8532	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8533	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8534	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8535	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8536	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8537	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8538	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8539	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8540	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8541	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8542	C-CERA C	CC725CH1H-070D1	1	342100702R1
C8543	C-CERA C	CC725CH1H-070D1	1	342100702R1
C8544	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8545	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8546	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8547	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8548	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8549	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8550	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8551	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8552	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8553	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8554	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8555	C-CERA C	CC725CH1H-102J1	1	342101024R1

C8556	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8558	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8559	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8560	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8561	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8562	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8581	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8585	CHIP ELECT C	CEWT16V-470M	1	395744717R2
C8586	C-CERA C	CK725F1H-223Z1	1	332152230R1
C8587	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8588	CHIP ELECT C	CEWT16V-470M	1	395744717R2
C8589	CHIP ELECT C	CEWX4V-22M	1	3567A2209R2
C8591	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8592	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8593	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8594	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8595	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8596	CHIP ELECT C	CEWX4V-100M	1	3567A1019R2
C8598	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8599	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8622	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8623	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8624	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8681	C-CERA C	CK725F1E-104Z1	1	332161040R1
C8698	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8699	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8701	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8702	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8703	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8704	CHIP ELECT C	CEWX50V-4.7M	1	356780479R2
C8705	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8706	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8707	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8708	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8709	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8710	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8801	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8802	CHIP ELECT C	CEWX4V-220M	1	3567A2219R2
C8803	C-CERA C	CK725F1A-105Z1	1	332181050R1
C8804	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8805	C-CERA C	CC725CH1H-102J1	1	342101024R1
C8806	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8807	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8808	C-CERA C	CK725B1C-104K1	1	332121045R1
C8809	C-CERA C	CK725F1H-104Z1	1	332151040R1
C8901	C-CERA C	CK725B1A-105K1	1	332131055R1
C8902	C-CERA C	CK725B1A-105K1	1	332131055R1
C8903	C-CERA C	CK725B1A-105K1	1	332131055R1
C8904	C-CERA C	CK725B1A-105K1	1	332131055R1
C8905	C-CERA C	CK725B1A-105K1	1	332131055R1

C8906	C-CERA C	CK725B1A-105K1	1	332131055R1
C8911	CHIP ELECT C	CEWX6.3V-100M	1	356721019R2
C8912	CHIP ELECT C	CEWX6.3V-100M	1	356721019R2
R8001	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8002	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8003	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8004	C-R NET	RM7LJ100X04	1	43484710004R2
R8005	C-R NET	RM7LJ100X04	1	43484710004R2
R8006	C-R NET	RM7LJ100X04	1	43484710004R2
R8007	C-R NET	RM7LJ100X04	1	43484710004R2
R8008	C-R NET	RM7LJ100X04	1	43484710004R2
R8009	C-R NET	RM7LJ100X04	1	43484710004R2
R8010	C-R NET	RM7LJ100X04	1	43484710004R2
R8011	C-R NET	RM7LJ100X04	1	43484710004R2
R8013	EMIFIL	BK1608LL241-T	1	230959R1
R8018	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8019	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8024	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8025	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8026	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8027	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8028	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8029	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8034	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8035	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8036	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8037	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8038	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8041	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8045	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8047	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8050	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8051	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8053	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8055	C-CARBON R	RN72K1J-105JE	1	435031054R1
R8056	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8057	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8058	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8061	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8062	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8064	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8065	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8066	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8067	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8071	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8072	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8082	C-CARBON R	RN72K1J-105JE	1	435031054R1
R8088	C-CARBON R	RN72K1J-470JE	1	435034704R1
R8089	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8090	C-CARBON R	RN72K1J-222JE	1	435032224R1

R8091	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8101	EMIFIL	BK1608HS601-T	1	230984R1
R8102	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8103	EMIFIL	BK1608HS601-T	1	230984R1
R8104	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8105	EMIFIL	BK1608HS601-T	1	230984R1
R8106	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8108	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8109	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8110	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8111	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8112	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8113	C-CARBON R	RN72K1J-272JE	1	435032724R1
R8114	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8115	C-CARBON R	RN72K1J-272JE	1	435032724R1
R8116	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8117	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8119	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8120	C-CARBON R	RN72K1J-333JE	1	435033334R1
R8121	C-CARBON R	RN72K1J-182JE	1	435031824R1
R8123	C-R NET	RM7LJ220X04	1	43484722004R2
R8124	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8125	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8126	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8127	C-CARBON R	RN72K1J-105JE	1	435031054R1
R8128	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8130	C-R NET	RM7LJ220X04	1	43484722004R2
R8131	C-R NET	RM7LJ220X04	1	43484722004R2
R8132	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8133	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8134	C-R NET	RM7LJ220X04	1	43484722004R2
R8135	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8136	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8137	C-R NET	RM7LJ220X04	1	43484722004R2
R8138	C-R NET	RM7LJ220X04	1	43484722004R2
R8139	C-R NET	RM7LJ220X04	1	43484722004R2
R8140	C-R NET	RM7LJ220X04	1	43484722004R2
R8141	C-R NET	RM7LJ220X04	1	43484722004R2
R8142	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8148	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8149	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8151	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8152	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8153	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8155	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8156	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8157	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8168	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8169	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8170	C-CARBON R	RN72K1J-102JE	1	435031024R1

R8171	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8172	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8181	C-R NET	RM7LJ220X04	1	43484722004R2
R8182	C-R NET	RM7LJ220X04	1	43484722004R2
R8183	C-R NET	RM7LJ220X04	1	43484722004R2
R8184	C-R NET	RM7LJ220X04	1	43484722004R2
R8185	C-R NET	RM7LJ220X04	1	43484722004R2
R8186	C-R NET	RM7LJ220X04	1	43484722004R2
R8187	C-R NET	RM7LJ220X04	1	43484722004R2
R8188	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8189	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8190	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8191	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8192	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8193	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8194	C-CARBON R	RN72K1J-750JE	1	435037504R1
R8195	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8196	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8197	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8198	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8199	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8200	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8323	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8324	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8325	C-CARBON R	RN72K1J-473JE	1	435034734R1
R8333	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8334	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8335	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8337	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8338	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8341	C-CARBON R	RN72K2E-100JE	1	435221004R1
R8384	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8401	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8402	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8403	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8404	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8405	C-R NET	RM7LJ220X04	1	43484722004R2
R8406	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8407	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8408	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8409	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8410	C-CARBON R	RN72K1J-561JE	1	435035614R1
R8411	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8413	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8414	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8415	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8416	C-R NET	RM7LJ220X04	1	43484722004R2
R8417	C-R NET	RM7LJ220X04	1	43484722004R2
R8418	C-R NET	RM7LJ220X04	1	43484722004R2
R8421	C-R NET	RM7LJ220X04	1	43484722004R2

R8422	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8423	C-R NET	RM7LJ220X04	1	43484722004R2
R8424	C-R NET	RM7LJ220X04	1	43484722004R2
R8425	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8426	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8427	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8452	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8461	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8462	C-CARBON R	RN72K1J-273JE	1	435032734R1
R8501	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8502	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8503	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8508	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8509	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8511	C-R NET	RM7LJ330X04	1	43484733004R2
R8512	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8513	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8514	C-CARBON R	RN72K1J-470JE	1	435034704R1
R8515	C-CARBON R	RN72K1J-105JE	1	435031054R1
R8516	C-CARBON R	RN72K1J-330JE	1	435033304R1
R8517	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8518	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8519	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8520	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8521	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8522	C-R NET	RM7LJ330X04	1	43484733004R2
R8523	C-R NET	RM7LJ330X04	1	43484733004R2
R8524	C-CARBON R	RN72K1J-100JE	1	435031004R1
R8525	C-R NET	RM7LJ330X04	1	43484733004R2
R8526	C-R NET	RM7LJ330X04	1	43484733004R2
R8527	C-R NET	RM7LJ330X04	1	43484733004R2
R8528	C-R NET	RM7LJ330X04	1	43484733004R2
R8534	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8535	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8536	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8538	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8539	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8540	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8541	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8542	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8543	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8545	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8546	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8547	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8567	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8568	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8569	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8570	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8571	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8572	C-CARBON R	RN72K1J-000JE	1	435030004R1

R8573	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8574	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8575	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8576	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8577	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8578	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8579	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8580	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8581	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8582	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8591	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8592	C-CARBON R	RN72K1J-473JE	1	435034734R1
R8593	C-CARBON R	RN72K1J-821JE	1	435038214R1
R8633	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8634	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8635	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8636	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8638	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8639	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8640	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8641	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8642	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8643	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8645	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8646	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8647	C-CARBON R	RN72K1J-332JE	1	435033324R1
R8702	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8704	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8705	C-CARBON R	RN72K1J-102JE	1	435031024R1
R8706	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8707	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8708	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8709	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8710	C-CARBON R	RN72K1J-103JE	1	435031034R1
R8711	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8712	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8713	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8714	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8715	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8716	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8717	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8718	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8719	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8720	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8721	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8722	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8723	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8724	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8725	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8726	C-CARBON R	RN72K1J-222JE	1	435032224R1

R8727	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8728	C-R NET	RM7LJ103X04	1	43484710304R2
R8729	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8730	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8731	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8732	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8733	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8734	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8736	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8737	C-R NET	RM7LJ220X04	1	43484722004R2
R8738	C-CARBON R	RN72K1J-473JE	1	435034734R1
R8739	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8740	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8741	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8742	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8744	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8746	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8747	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8748	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8749	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8750	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8751	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8752	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8753	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8754	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8755	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8756	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8757	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8758	C-CARBON R	RN72K1J-104JE	1	435031044R1
R8761	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8762	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8799	C-CARBON R	RN72K1J-000JE	1	435030004R1
R8802	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8805	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8806	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8807	C-CARBON R	RN72K1J-470JE	1	435034704R1
R8808	C-CARBON R	RN72K1J-122JE	1	435031224R1
R8809	C-CARBON R	RN72K1J-122JE	1	435031224R1
R8810	C-CARBON R	RN72K1J-122JE	1	435031224R1
R8811	C-CARBON R	RN72K1J-122JE	1	435031224R1
R8812	C-R NET	RM7LJ330X04	1	43484733004R2
R8813	C-R NET	RM7LJ330X04	1	43484733004R2
R8814	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8815	C-CARBON R	RN72K1J-220JE	1	435032204R1
R8816	C-CARBON R	RN72K1J-472JE	1	435034724R1
R8859	C-CARBON R	RN72K1J-222JE	1	435032224R1
R8901	C-CARBON R	RN72K1J-820JE	1	435038204R1
R8902	C-CARBON R	RN72K1J-820JE	1	435038204R1
R8903	C-CARBON R	RN72K1J-820JE	1	435038204R1
R8904	C-CARBON R	RN72K1J-820JE	1	435038204R1

R8905	C-CARBON R	RN72K1J-820JE	1	435038204R1
R8906	C-CARBON R	RN72K1J-820JE	1	435038204R1
R8907	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8908	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8909	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8910	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8911	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8912	C-CARBON R	RN72K1J-680JE	1	435036804R1
R8913	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8914	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8915	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8916	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8917	C-CARBON R	RN72K1J-101JE	1	435031014R1
R8918	C-CARBON R	RN72K1J-101JE	1	435031014R1
JL8001B	WIRE TRAP	NPLG-4P587	1	25055625
P4008A	SOCKET	NSCT-21P2114	1	25052217
P8003B	SOCKET	NSCT-18P1316	1	25051529
P8098	HOLDER	(CRAMP) UA-0 V0	1	27190608-1
P8099	WS CLAMP	CB-71683(L=50)	1	260261
P8302	SOCKET	CSS5019-0311F	1	25053198R2
P8501	SOCKET	CSS5019-0311F	1	25053198R2
P8601	SOCKET	CSS5019-0311F	1	25053198R2
P8702	PLUG	NPLG-8P660	1	25055704
E8000	TRM(SCREW)	NEJITANSI M3	1	25065425

U09	VIDEO PC BOARD (NAVD-8991-1A/1B)
U10	VIDEO TERMINAL PC BOARD (NAVD-8992-1A/1B)
U11	VIDEO TERMINAL PC BOARD (NAVD-8993-1A/1B)
U12	XM PC BOARD (NARF-8994-1A)

CIRCUIT NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
U7641	PHT CP	TORX177L	1	24120127	<DC>
U7641	PHT CP	TORX177L	1	24120127	<PA,PP,GK,GQ,GR,WT>
Q2001	IC	F2621E-01	1	22242384R3	<DC>
Q2001 or	IC	F2602E-01	(1)	22242266R2	<DC>
Q2002	IC	AK4384ET	1	22242280R2	<DC>
Q2003	IC	NE5532APSR	1	22242283R2	<DC>
Q2004	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO	<DC>
Q2004 or	IC	BA33BC0FP	(1)	22278033DR2RH	<DC>
Q2004 or	IC	NJM2391DL1-33	(1)	22278033DR2JR	<DC>
Q2005	IC	78L05(NJM78L05UA)	1	222780053R2JR	<DC>
Q2006	IC	TC74HCT7007AF(EL_F)	1	222740077R2TO	<DC>
Q2007	IC	TC74VHC541FT(EKJ)	1	22274541E1R2TO	<DC>
Q2007 or	IC	SN74AHC541PWR	(1)	22274541IR2TI	<DC>
Q2007 or	IC	TC74VHC541FT	(1)	22274541ER2TO	<DC>
Q4001	IC	TA4805AF(TE16L_NQ)	1	22278005DR2TO	
Q4001 or	IC	MPC2905AT	(1)	22278005DR2NE	
Q4002	IC	AN15881A-VT	1	22242318R3	
Q4004	IC	LC74763-9836	1	22241779	
Q4006	TR	2SB1240-R	1	2213794T	<DC>

Q4006	TR	2SB1240-R	1	2213794T	<PA,PP,GK,GQ,GR,WT>
Q4007	TR	KRC102S	1	2216190R2	<DC>
Q4007 or	TR	RN1402	(1)	2214470R2	<DC>
Q4007	TR	KRC102S	1	2216190R2	<PA,PP,GK,GQ,GR,WT>
Q4007 or	TR	RN1402	(1)	2214470R2	<PA,PP,GK,GQ,GR,WT>
Q4008	TR	2SB1240-R	1	2213794T	
Q4011	TR	KRA102S	1	2216220R2	
Q4011 or	TR	RN2402	(1)	2214530R2	
Q4011 or	TR	UNR2111	(1)	2217110R2	
Q4012	TR	KTA1504-GR	1	2216185R2	
Q4012 or	TR	2SA1162-GR	(1)	2214375R2	
Q4013	TR	KTA1504-GR	1	2216185R2	
Q4013 or	TR	2SA1162-GR	(1)	2214375R2	
Q4014	TR	KTA1504-GR	1	2216185R2	
Q4014 or	TR	2SA1162-GR	(1)	2214375R2	
Q4015	TR	RN1443	1	2215510R2	
Q4015 or	TR	KRC286S	(1)	2217250R2	
Q4016	TR	RN1443	1	2215510R2	
Q4016 or	TR	KRC286S	(1)	2217250R2	
Q4017	TR	KTC3875-GR	1	2216175R2	
Q4017 or	TR	2SC2712-GR	(1)	2213145R2	
Q4019	TR	RN1444-A	1	2216031R2	
Q4019 or	TR	KRC281S	(1)	2217200R2	
Q4019 or	TR	RN1444-B	(1)	2216032R2	
Q4020	TR	KTC3875-GR	1	2216175R2	
Q4020 or	TR	2SC2712-GR	(1)	2213145R2	
Q4021	TR	KTA1504-GR	1	2216185R2	
Q4021 or	TR	2SA1162-GR	(1)	2214375R2	
Q4022	TR	KTA1504-GR	1	2216185R2	
Q4022 or	TR	2SA1162-GR	(1)	2214375R2	
Q4051	TR	KRC101S	1	2216330R2	
Q4051 or	TR	RN1401(TE85L_F)	(1)	2214460R2	
Q4052	TR	KRC101S	1	2216330R2	
Q4052 or	TR	RN1401(TE85L_F)	(1)	2214460R2	
Q4053	TR	KRC101S	1	2216330R2	
Q4053 or	TR	RN1401(TE85L_F)	(1)	2214460R2	
Q4054	TR	KRC101S	1	2216330R2	
Q4054 or	TR	RN1401(TE85L_F)	(1)	2214460R2	
D2001	ZENER D	UDZS5.1B	1	224550510R2	<DC>
D2001 or	ZENER D	MAZ8051-M	(1)	224750512R2	<DC>
D4001	C-DIODE	1SS352	1	223234R2	
D4001 or	C-DIODE	1SS355	(1)	223269R2	
D4001 or	C-DIODE	KDS4148U	(1)	223283R2	
D4001 or	C-DIODE	MA2J111	(1)	223279R2	
D4002	C-DIODE	1SS352	1	223234R2	
D4002 or	C-DIODE	1SS355	(1)	223269R2	
D4002 or	C-DIODE	KDS4148U	(1)	223283R2	
D4002 or	C-DIODE	MA2J111	(1)	223279R2	
D4142	C-DIODE	1SS352	1	223234R2	
D4142 or	C-DIODE	1SS355	(1)	223269R2	

D4142 or	C-DIODE	KDS4148U	(1)	223283R2	
D4142 or	C-DIODE	MA2J111	(1)	223279R2	
L2001	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<DC>
L2002	EMIFIL	BK1608LM182-T	1	230958R1	<DC>
L2003	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<DC>
L2004	CHOKO COIL	BLM21PG221SN1	1	230949R2	<DC>
L2005	CHOKO COIL	BLM21PG221SN1	1	230949R2	<DC>
L4007	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	
L4008	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	
L4009	CHOKO COIL	NCH-1572	1	231292J056R2	
L7603	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<DC>
L7603	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<PA,PP,GK,GQ,GR,WT>
L7604	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<DC>
L7604	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<PA,PP,GK,GQ,GR,WT>
L7641	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<DC>
L7641	CHOKO COIL	LBC2518T2R2M	1	231364M022R2	<PA,PP,GK,GQ,GR,WT>
X2001	CRYSTAL	DSX840GA 45.1584MHZ	1	3010420R2	<DC>
X4001	CRYSTAL	HC-49/U0314.318M	1	3010363T	
X4002	CRYSTAL	HC-49/U0317.734M	1	3010364T	<PA,PP,GK,GQ,GR,WT>
C2001	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2002	C-CERA C	CK725B1H-102K1	1	332101025R1	<DC>
C2003	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2004	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2005	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2006	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2007	VR C	CE04W16V-100M(VR)	1	394641017T	<DC>
C2008	C-CERA C	CC725CH1H-040C1	1	342100401R1	<DC>
C2009	C-CERA C	CC725CH1H-080D1	1	342100802R1	<DC>
C2010	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2011	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2012	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2013	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2014	C-CERA C	CK725B1H-102K1	1	332101025R1	<DC>
C2015	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2016	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<DC>
C2017	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2018	VR C	CE04W6.3V-470M(VR)	1	394624717T	<DC>
C2021	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<DC>
C2022	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<DC>
C2023	C-CERA C	CC725CH1H-821J1	1	342108214R1	<DC>
C2024	C-CERA C	CC725CH1H-821J1	1	342108214R1	<DC>
C2025	C-CERA C	CC725CH1H-821J1	1	342108214R1	<DC>
C2026	C-CERA C	CC725CH1H-821J1	1	342108214R1	<DC>
C2027	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<DC>
C2028	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<DC>
C2029	VR C	CE04W16V-220M(VR)	1	394642217T	<DC>
C2030	VR C	CE04W16V-220M(VR)	1	394642217T	<DC>
C2031	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2032	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2033	VR C	CE04W6.3V-470M(VR)	1	394624717T	<DC>

C2034	VR C	CE04W16V-100M(VR)	1	394641017T	<DC>
C2035	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2036	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2042	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C2043	VR C	CE04W16V-100M(VR)	1	394641017T	<DC>
C2044	C-CERA C	CK725B1H-102K1	1	332101025R1	<DC>
C4001	VR C	CE04W50V-10M(VR)	1	394681007T	
C4002	VR C	CE04W50V-10M(VR)	1	394681007T	
C4003	VR C	CE04W50V-10M(VR)	1	394681007T	
C4004	VR C	CE04W50V-10M(VR)	1	394681007T	
C4005	VR C	CE04W50V-10M(VR)	1	394681007T	
C4006	VR C	CE04W50V-10M(VR)	1	394681007T	
C4007	VR C	CE04W50V-10M(VR)	1	394681007T	
C4008	VR C	CE04W50V-10M(VR)	1	394681007T	
C4009	VR C	CE04W50V-10M(VR)	1	394681007T	
C4010	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4011	VR C	CE04W50V-10M(VR)	1	394681007T	
C4012	VR C	CE04W50V-10M(VR)	1	394681007T	
C4013	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4014	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4015	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4016	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4017	VR C	CE04W50V-10M(VR)	1	394681007T	
C4018	VR C	CE04W50V-10M(VR)	1	394681007T	
C4019	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4020	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4021	C-CERA C	CK725B1H-103K1	1	332101035R1	
C4022	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4023	VR C	CE04W50V-10M(VR)	1	394681007T	
C4024	VR C	CE04W50V-10M(VR)	1	394681007T	
C4025	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4026	VR C	CE04W50V-10M(VR)	1	394681007T	
C4027	VR C	CE04W50V-10M(VR)	1	394681007T	
C4079	C-CERA C	CC725CH1H-100D1	1	342101002R1	
C4080	C-CERA C	CC725CH1H-180J1	1	342101804R1	
C4081	C-CERA C	CC725CH1H-180J1	1	342101804R1	<PA,PP,GK,GQ,GR,WT>
C4082	C-CERA C	CC725CH1H-080D1	1	342100802R1	<PA,PP,GK,GQ,GR,WT>
C4083	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4084	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4085	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4086	VR C	CE04W50V-1M(VR)	1	394680107T	
C4087	TF C	ECQ-V50V-474J	1	374724744T	
C4088	C-CERA C	CC725CH1H-270J1	1	342102704R1	
C4089	C-CERA C	CC725CH1H-220J1	1	342102204R1	
C4090	TF C	ECQ-B50V-223J	1	374722234T	
C4091	VR C	CE04W50V-1M(VR)	1	394680107T	
C4092	TF C	ECQ-B50V-682J	1	374726824T	
C4093	VR C	CE04W50V-0.33M(VR)	1	394683397T	
C4094	C-CERA C	CK725B1H-122K1	1	332101225R1	
C4095	C-CERA C	CK725F1E-104Z1	1	332161040R1	

C4096	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4097	C-CERA C	CC725CH1H-470J1	1	342104704R1
C4098	VR C	CE04W16V-100M(VR)	1	394641017T
C4099	VR C	CE04W16V-100M(VR)	1	394641017T
C4100	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4101	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4102	C-CERA C	CK725B1H-103K1	1	332101035R1
C4103	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4104	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4105	VR C	CE04W50V-22M(VR)	1	394682207T
C4106	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4107	VR C	CE04W50V-22M(VR)	1	394682207T
C4108	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4109	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4110	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4111	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4112	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4114	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4116	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4118	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4119	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4121	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4122	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4123	VR C	CE04W25V-47M(VR)	1	394654707T
C4124	VR C	CE04W25V-47M(VR)	1	394654707T
C4125	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4127	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4129	VR C	CE04W6.3V-470M(VR)	1	394624717T
C4130	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4131	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4132	VR C	CE04W50V-10M(VR)	1	394681007T
C4133	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4134	VR C	CE04W6.3V-220M(VR)	1	394622217T
C4135	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4136	VR C	CE04W50V-22M(VR)	1	394682207T
C4137	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4138	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4139	VR C	CE04W50V-10M(VR)	1	394681007T
C4140	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4141	VR C	CE04W25V-47M(VR)	1	394654707T
C4142	C-CERA C	CC725CH1H-181J1	1	342101814R1
C4143	C-CERA C	CC725CH1H-181J1	1	342101814R1
C4144	C-CERA C	CC725CH1H-181J1	1	342101814R1
C4147	VR C	CE04W50V-0.47M(VR)	1	394684797T
C4150	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4151	VR C	CE04W50V-10M(VR)	1	394681007T
C4152	VR C	CE04W50V-10M(VR)	1	394681007T
C4153	C-CERA C	CK725F1E-104Z1	1	332161040R1
C4154	C-CERA C	CC725CH1H-221J1	1	342102214R1
C4155	C-CERA C	CC725CH1H-221J1	1	342102214R1

C4158	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4159	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4160	C-CERA C	CC725CH1H-470J1	1	342104704R1	
C4161	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4162	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4163	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4170	VR C	CE04W16V-100M(VR)	1	394641017T	
C4190	C-CERA C	CK725B1H-102K1	1	332101025R1	
C4191	C-CERA C	CK725B1H-102K1	1	332101025R1	
C4201	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4202	VR C	CE04W6.3V-470M(VR)	1	394624717T	
C4203	VR C	CE04W16V-100M(VR)	1	394641017T	
C4217	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4218	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4219	C-CERA C	CC725CH1H-181J1	1	342101814R1	
C4242	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4243	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C4244	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C7600	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C7600	C-CERA C	CK725F1E-104Z1	1	332161040R1	<PA,PP,GK,GQ,GR,WT>
C7631	C-CERA C	CC725CH1H-471J1	1	342104714R1	<DC>
C7631	C-CERA C	CC725CH1H-471J1	1	342104714R1	<PA,PP,GK,GQ,GR,WT>
C7632	C-CERA C	CC725CH1H-471J1	1	342104714R1	<DC>
C7632	C-CERA C	CC725CH1H-471J1	1	342104714R1	<PA,PP,GK,GQ,GR,WT>
C7633	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C7633	C-CERA C	CK725F1E-104Z1	1	332161040R1	<PA,PP,GK,GQ,GR,WT>
C7634	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C7634	C-CERA C	CK725F1E-104Z1	1	332161040R1	<PA,PP,GK,GQ,GR,WT>
C7637	C-CERA C	CK725B1H-102K1	1	332101025R1	<DC>
C7637	C-CERA C	CK725B1H-102K1	1	332101025R1	<PA,PP,GK,GQ,GR,WT>
C7641	VR C	CE04W16V-100M(VR)	1	394641017T	<DC>
C7641	VR C	CE04W16V-100M(VR)	1	394641017T	<PA,PP,GK,GQ,GR,WT>
C7642	C-CERA C	CK725F1E-104Z1	1	332161040R1	<DC>
C7642	C-CERA C	CK725F1E-104Z1	1	332161040R1	<PA,PP,GK,GQ,GR,WT>
R2001	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2002	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2003	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2004	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2005	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2006	C-CARBON R	RN72K1J-102JE	1	435031024R1	<DC>
R2007	C-CARBON R	RN72K1J-102JE	1	435031024R1	<DC>
R2008	C-CARBON R	RN72K1J-101JE	1	435031014R1	<DC>
R2009	C-CARBON R	RN72K1J-101JE	1	435031014R1	<DC>
R2010	C-CARBON R	RN72K1J-681JE	1	435036814R1	<DC>
R2011	C-CARBON R	RN72K1J-105JE	1	435031054R1	<DC>
R2012	C-CARBON R	RN72K1J-101JE	1	435031014R1	<DC>
R2013	C-CARBON R	RN72K1J-331JE	1	435033314R1	<DC>
R2014	C-CARBON R	RN72K1J-331JE	1	435033314R1	<DC>
R2015	C-CARBON R	RN72K1J-331JE	1	435033314R1	<DC>
R2016	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>

R2021	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2022	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2023	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2024	C-CARBON R	RN72K1J-104JE	1	435031044R1	<DC>
R2025	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2026	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2027	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2028	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R2029	C-CARBON R	RN72K1J-332JE	1	435033324R1	<DC>
R2030	C-CARBON R	RN72K1J-332JE	1	435033324R1	<DC>
R2031	METAL O R	RS1/2WBJ-22	1	443522204T	<DC>
R2032	METAL O R	RS1/2WBJ-22	1	443522204T	<DC>
R2033	C-CARBON R	RN72K1J-220JE	1	435032204R1	<DC>
R2034	C-CARBON R	RN72K1J-220JE	1	435032204R1	<DC>
R2035	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R2036	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R2044	C-CARBON R	RN72K1J-221JE	1	435032214R1	<DC>
R2046	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R2047	METAL O R	RS1/2WBJ-22	1	443522204T	<DC>
R4001	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4002	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4003	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4004	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4005	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4006	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4007	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4008	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4009	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4010	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4011	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4012	C-CARBON R	RN72K1J-820JE	1	435038204R1	
R4013	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4014	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4015	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4016	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4017	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4018	C-CARBON R	RN72K1J-820JE	1	435038204R1	
R4019	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4020	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4021	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4022	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4023	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4024	C-CARBON R	RN72K1J-820JE	1	435038204R1	
R4025	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4026	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4027	C-CARBON R	RN72K1J-820JE	1	435038204R1	
R4028	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4029	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4030	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4031	C-CARBON R	RN72K2E-022JE	1	435220224R1	

R4032	C-CARBON R	RN72K2E-022JE	1	435220224R1	
R4033	C-CARBON R	RN72K2E-022JE	1	435220224R1	
R4034	C-CARBON R	RN72K1J-473JE	1	435034734R1	<DC>
R4034	C-CARBON R	RN72K1J-473JE	1	435034734R1	<PA,PP,GK,GQ,GR,WT>
R4035	C-CARBON R	RN72K1J-222JE	1	435032224R1	<DC>
R4035	C-CARBON R	RN72K1J-222JE	1	435032224R1	<PA,PP,GK,GQ,GR,WT>
R4037	METAL O R	RS1/2WBJ-15	1	443521504T	
R4038	METAL O R	RS1WBJ-82	1	443628204T	
R4039	METAL O R	RS1WBJ-82	1	443628204T	
R4040	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R4041	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R4100	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R4101	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R4102	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R4103	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R4104	C-CARBON R	RN72K1J-121JE	1	435031214R1	
R4105	C-CARBON R	RN72K1J-682JE	1	435036824R1	
R4106	C-CARBON R	RN72K1J-682JE	1	435036824R1	
R4107	C-CARBON R	RN72K1J-152JE	1	435031524R1	
R4108	C-CARBON R	RN72K1J-824JE	1	435038244R1	
R4109	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R4110	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R4111	C-CARBON R	RN72K1J-473JE	1	435034734R1	
R4112	C-CARBON R	RN72K1J-332JE	1	435033324R1	
R4113	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R4114	C-CARBON R	RN72K1J-680JE	1	435036804R1	
R4115	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R4116	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R4117	C-CARBON R	RN72K1J-334JE	1	435033344R1	
R4118	C-CARBON R	RN72K1J-123JE	1	435031234R1	
R4119	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R4120	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4121	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4124	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4125	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4128	C-CARBON R	RN72K1J-330JE	1	435033304R1	
R4129	C-CARBON R	RN72K1J-330JE	1	435033304R1	
R4136	C-CARBON R	RN72K1J-330JE	1	435033304R1	
R4145	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4145	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4147	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R4148	C-CARBON R	RN72K1J-473JE	1	435034734R1	
R4150	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4150	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4151	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4151	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4152	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4152	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4153	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4153	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>

R4154	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4154	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4155	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4155	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4156	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4156	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4157	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4157	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4158	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4158	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4161	C-CARBON R	RN72K1J-182JE	1	435031824R1	
R4162	C-CARBON R	RN72K1J-271JE	1	435032714R1	
R4163	C-CARBON R	RN72K1J-682JE	1	435036824R1	
R4164	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R4165	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R4166	C-CARBON R	RN72K1J-331JE	1	435033314R1	
R4167	C-CARBON R	RN72K1J-331JE	1	435033314R1	
R4168	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R4169	C-CARBON R	RN72K1J-123JE	1	435031234R1	
R4170	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R4171	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4172	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R4173	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R4174	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R4201	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4202	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4203	C-CARBON R	RN72K1J-750JE	1	435037504R1	
R4204	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4205	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4206	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4207	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4208	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4209	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4210	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4211	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4212	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4213	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4214	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4215	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R4221	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4221	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R4225	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R4225	C-CARBON R	RN72K1J-000JE	1	435030004R1	<PA,PP,GK,GQ,GR,WT>
R7631	C-CARBON R	RN72K1J-331JE	1	435033314R1	<DC>
R7631	C-CARBON R	RN72K1J-331JE	1	435033314R1	<PA,PP,GK,GQ,GR,WT>
R7632	C-CARBON R	RN72K1J-331JE	1	435033314R1	<DC>
R7632	C-CARBON R	RN72K1J-331JE	1	435033314R1	<PA,PP,GK,GQ,GR,WT>
R7633	C-CARBON R	RN72K1J-750JE	1	435037504R1	<DC>
R7633	C-CARBON R	RN72K1J-750JE	1	435037504R1	<PA,PP,GK,GQ,GR,WT>
R7634	C-CARBON R	RN72K1J-820JE	1	435038204R1	<DC>

R7634	C-CARBON R	RN72K1J-820JE	1	435038204R1	<PA,PP,GK,GQ,GR,WT>
R7635	C-CARBON R	RN72K1J-750JE	1	435037504R1	<DC>
R7635	C-CARBON R	RN72K1J-750JE	1	435037504R1	<PA,PP,GK,GQ,GR,WT>
R7641	C-CARBON R	RN72K1J-221JE	1	435032214R1	<DC>
R7641	C-CARBON R	RN72K1J-221JE	1	435032214R1	<PA,PP,GK,GQ,GR,WT>
JL2006A	WIRE HOL	NSCT-5P896	1	25051109	
JL7501B	SOCKET	NSCT-3P95	1	25050267	<DC>
JL7501B	SOCKET	NSCT-3P95	1	25050267	<PA,PP,GK,GQ,GR,WT>
JL7540B	SOCKET	NSCT-9P101	1	25050273	<DC>
JL7540B	SOCKET	NSCT-9P101	1	25050273	<PA,PP,GK,GQ,GR,WT>
P2001	SOCKET	CAM-C16	1	25053104R2	<DC>
P2004B	SOCKET	NSCT-8P2188	1	25052291	
P2005B	SOCKET	NSCT-10P2190	1	25052293	
P2006B	PLUG	NPLG-6P134	1	25055150	
P4001	PIN JACK	NPJ-6PDGLRGLR646	1	25045871	<DC>
P4001	PIN JACK	NPJ-6PDGLRGLR646	1	25045871	<PA,PP,GK,GQ,GR,WT>
P4002	PIN JACK	NPJ-6PDGLRGLR646	1	25045871	<DC>
P4002	PIN JACK	NPJ-6PDGLRGLR646	1	25045871	<PA,PP,GK,GQ,GR,WT>
P4003	PIN JACK	NPJ-10PDBY621	1	25045842	<DC>
P4003 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<DC>
P4003	PIN JACK	NPJ-10PDBY621	1	25045842	<PA,PP,GK,GQ,GR,WT>
P4003 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<PA,PP,GK,GQ,GR,WT>
P4004	PIN JACK	NPJ-10PDBY621	1	25045842	<DC>
P4004 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<DC>
P4004	PIN JACK	NPJ-10PDBY621	1	25045842	<PA,PP,GK,GQ,GR,WT>
P4004 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<PA,PP,GK,GQ,GR,WT>
P4005	PIN JACK	NPJ-10PDBY621	1	25045842	<DC>
P4005 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<DC>
P4005	PIN JACK	NPJ-10PDBY621	1	25045842	<PA,PP,GK,GQ,GR,WT>
P4005 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	<PA,PP,GK,GQ,GR,WT>
P4006	PIN JACK	NPJ-5PDBY622	1	25045843	<DC>
P4006 or	PIN JACK	NPJ-5PDBY479	(1)	25045682	<DC>
P4006	PIN JACK	NPJ-5PDBY622	1	25045843	<PA,PP,GK,GQ,GR,WT>
P4006 or	PIN JACK	NPJ-5PDBY479	(1)	25045682	<PA,PP,GK,GQ,GR,WT>
P4008B	SOCKET	NSCT-21P2114	1	25052217	
P710B	SOCKET	NSCT-17P2110	1	25052213	<DC>
P7601	ST JACK	YKB21-5144	1	25045853	<DC>
P7601	ST JACK	YKB21-5144	1	25045853	<PA,PP,GK,GQ,GR,WT>
P7631	SOCKET	NSCT-4P1356	1	25051569	<DC>
P7631	SOCKET	NSCT-4P1356	1	25051569	<PA,PP,GK,GQ,GR,WT>
P7632	PIN JACK	NPJ-3PDB475	1	25045678	<DC>
P7632	PIN JACK	NPJ-3PDB475	1	25045678	<PA,PP,GK,GQ,GR,WT>
E2001	TRM(SCREW)	NEJITANSI M3	1	25065425	<DC>
E2002	TRM(SCREW)	NEJITANSI M3	1	25065425	<DC>
E2003	RETAINER	(XM)	1	27142048	<DC>
E7501	RETAINER	MET37-0002	1	27142009T	<DC>
E7501	RETAINER	MET37-0002	1	27142009T	<PA,PP,GK,GQ,GR,WT>

U13 DSP PC BOARD (NADG-8996-1A/1B/1C/1D/1E)**U14** MICROPROCESSOR PC BOARD (NAAR-8997-1A/1B/1C/1D/1E)

U15 COVER PC BOARD (NAETC-8998-1A/1B/1C/1D/1E)

CIRCUIT NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
U101	PHT CP	GP1FAV51RKF5	1	24120129	
U101 or	PHT CP	JSR1165-001recieving	(1)	24120143	
U102	PHT CP	GP1FAV51RKF5	1	24120129	
U102 or	PHT CP	JSR1165-001recieving	(1)	24120143	
U103	PHT CP	GP1FAV51RKF5	1	24120129	
U103 or	PHT CP	JSR1165-001recieving	(1)	24120143	
U104	PHT CP	GP1FAV51RKF5	1	24120129	
U104 or	PHT CP	JSR1165-001recieving	(1)	24120143	
U105	PHT CP	GP1FAV51TKBF	1	24120132	
U105 or	PHT CP	JST1165-001transmitting	(1)	24120142	
Q121	IC	74HCU04F	1	222740046R2	
Q121 or	IC	SN74HCU04NSR	(1)	222740046R2TI	
Q131	IC	TC7WU04FU(TE12L_F)	1	22240935R2	
Q141	IC	TC74VHC157FT	1	22274157ER2TO	
Q141 or	IC	SN74AHC157PWR	(1)	22274157IR2TI	
Q161	IC	TC74VHC157FT	1	22274157ER2TO	
Q161 or	IC	SN74AHC157PWR	(1)	22274157IR2TI	
Q191	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO	
Q191 or	IC	BA33BC0FP	(1)	22278033DR2RH	
Q192	IC	TA48025AF(TE16L_NQ)	1	22278025DR2TO	
Q192 or	IC	BA25BC0FP	(1)	22241835R2	
Q193	IC	TA4805AF(TE16L_NQ)	1	22278005DR2TO	
Q193 or	IC	MPC2905AT	(1)	22278005DR2NE	
Q194	TR	2SB1132	1	2216400R2	
Q201	IC	CS494003CQZ	1	22242039R3	
Q211	IC(DSP ROM)	MX26LV040-70(0156)	1	222W0037R301566	
Q211 or	IC(DSP ROM)	EN29LV040A-70TCP(0156)	(1)	222W0043R301566	
Q285	IC	IC42S16100	1	22242123R2	
Q285 or	IC	M12L16161A-7TG	(1)	22242278R3	
Q301	IC	NE5532APSR	1	22242283R2	
Q302	IC	NE5532APSR	1	22242283R2	
Q303	IC	NE5532APSR	1	22242283R2	
Q331	IC	CS5340-CZ(SE-U33GX)	1	22242187R2	
Q341	IC	CS5340-CZ(SE-U33GX)	1	22242187R2	
Q351	IC	CS5340-CZ(SE-U33GX)	1	22242187R2	
Q361	IC	CS42528-CQZR-D	1	22242275R2	
Q400	IC	NE5532APSR	1	22242283R2	
Q401	IC	NE5532APSR	1	22242283R2	
Q402	IC	NE5532APSR	1	22242283R2	
Q403	IC	NE5532APSR	1	22242283R2	
Q410	IC	NE5532APSR	1	22242283R2	
Q411	IC	NE5532APSR	1	22242283R2	
Q412	IC	NE5532APSR	1	22242283R2	
Q413	IC	NE5532APSR	1	22242283R2	
Q420	IC	NE5532APSR	1	22242283R2	
Q421	IC	NE5532APSR	1	22242283R2	
Q422	IC	NE5532APSR	1	22242283R2	

Q423	IC	NE5532APSR	1	22242283R2	
Q430	IC	NE5532APSR	1	22242283R2	
Q431	IC	NE5532APSR	1	22242283R2	
Q432	IC	NE5532APSR	1	22242283R2	
Q433	IC	NE5532APSR	1	22242283R2	
Q601	TR	KRC104S	1	2216210R2	
Q601 or	TR	RN1404	(1)	2214490R2	
Q701	IC(MAIN MICROPROCESSOR)	M30627FJPGP U5C(0205)	1	222W0055R302050	
Q703	TR	KRA102S	1	2216220R2	
Q703 or	TR	RN2402	(1)	2214530R2	
Q704	TR	KRA102S	1	2216220R2	
Q704 or	TR	RN2402	(1)	2214530R2	
Q705	TR	KRC104S	1	2216210R2	
Q705 or	TR	RN1404	(1)	2214490R2	
Q706	TR	KRA102S	1	2216220R2	
Q706 or	TR	RN2402	(1)	2214530R2	
Q707	TR	KRC104S	1	2216210R2	
Q707 or	TR	RN1404	(1)	2214490R2	
Q708	TR	KRA102S	1	2216220R2	
Q708 or	TR	RN2402	(1)	2214530R2	
Q709	TR	KRC104S	1	2216210R2	
Q709 or	TR	RN1404	(1)	2214490R2	
Q710	IC	XC6213B332MR	1	22242277R2	
Q711	IC	TC74VHCT541AFT	1	22274541GR2TO	
Q711 or	IC	SN74AHCT541PWR	(1)	22274541GR2TI	
Q712	IC	TC74VHC541FT(EKJ)	1	22274541E1R2TO	
Q712 or	IC	SN74AHC541PWR	(1)	22274541IR2TI	
Q712 or	IC	TC74VHC541FT	(1)	22274541ER2TO	
Q713	IC	TC74VHC541FT(EKJ)	1	22274541E1R2TO	
Q713 or	IC	SN74AHC541PWR	(1)	22274541IR2TI	
Q713 or	IC	TC74VHC541FT	(1)	22274541ER2TO	
Q714	IC	S-812C56AUA-C3K	1	22242207R2	
Q715	IC	78L09(NJM78L09UA)	1	222780093R2JR	<WT>
Q715	IC	78L09(NJM78L09UA)	1	222780093R2JR	<PP>
Q715	IC	78L09(NJM78L09UA)	1	222780093R2JR	<GK,GQ,GR>
Q715	IC	78L09(NJM78L09UA)	1	222780093R2JR	<PA>
Q715	IC	78L09(NJM78L09UA)	1	222780093R2JR	<DC>
Q721	TR	KRA102S	1	2216220R2	
Q721 or	TR	RN2402	(1)	2214530R2	
Q722	TR	KRC104S	1	2216210R2	
Q722 or	TR	RN1404	(1)	2214490R2	
Q723	TR	KRA102S	1	2216220R2	
Q723 or	TR	RN2402	(1)	2214530R2	
Q724	TR	KRC104S	1	2216210R2	
Q724 or	TR	RN1404	(1)	2214490R2	
D601	C-DIODE	KDS4148U	1	223283R2	
D601 or	C-DIODE	1SS352	(1)	223234R2	
D601 or	C-DIODE	MA2J111	(1)	223279R2	
D601 or	C-DIODE	1SS355	(1)	223269R2	
D602	C-DIODE	KDS4148U	1	223283R2	

D602 or	C-DIODE	ISS352	(1)	223234R2	
D602 or	C-DIODE	MA2J111	(1)	223279R2	
D602 or	C-DIODE	ISS355	(1)	223269R2	
D603	C-DIODE	KDS4148U	1	223283R2	<WT>
D603 or	C-DIODE	ISS352	(1)	223234R2	<WT>
D603 or	C-DIODE	MA2J111	(1)	223279R2	<WT>
D603 or	C-DIODE	ISS355	(1)	223269R2	<WT>
D604	ZENER D	UDZS5.1B	1	224550510R2	
D604 or	ZENER D	MAZ8051	(1)	224750510R2	
D605	C-DIODE	KDS4148U	1	223283R2	
D605 or	C-DIODE	ISS352	(1)	223234R2	
D605 or	C-DIODE	MA2J111	(1)	223279R2	
D605 or	C-DIODE	ISS355	(1)	223269R2	
D606	C-DIODE	KDS4148U	1	223283R2	
D606 or	C-DIODE	ISS352	(1)	223234R2	
D606 or	C-DIODE	MA2J111	(1)	223279R2	
D606 or	C-DIODE	ISS355	(1)	223269R2	
D607	C-DIODE	KDS4148U	1	223283R2	
D607 or	C-DIODE	ISS352	(1)	223234R2	
D607 or	C-DIODE	MA2J111	(1)	223279R2	
D607 or	C-DIODE	ISS355	(1)	223269R2	
D611	C-DIODE	KDS4148U	1	223283R2	
D611 or	C-DIODE	ISS352	(1)	223234R2	
D611 or	C-DIODE	MA2J111	(1)	223279R2	
D611 or	C-DIODE	ISS355	(1)	223269R2	
D615	ZENER D	UDZS5.6B	1	224550560R2	<WT>
D615 or	ZENER D	MAZ8056	(1)	224750560R2	<WT>
L101	CHOKE COIL	NCH-1471	1	231237K022R2	
L102	CHOKE COIL	NCH-1471	1	231237K022R2	
L121	CHOKE COIL	NCH-1479	1	231237K470R2	
L122	CHOKE COIL	NCH-1479	1	231237K470R2	
L131	CHOKE COIL	NCH-1471	1	231237K022R2	
L133	EMIFIL	BK1608HS102-T	1	230955R2	
L141	CHOKE COIL	NCH-1471	1	231237K022R2	
L142	EMIFIL	BK1608LL241-T	1	230959R1	
L161	CHOKE COIL	NCH-1471	1	231237K022R2	
L191	CHOKE COIL	NCH-1473	1	231237M047R2	
L192	CHOKE COIL	NCH-1473	1	231237M047R2	
L201	CHOKE COIL	NCH-1471	1	231237K022R2	
L202	CHOKE COIL	NCH-1471	1	231237K022R2	
L203	CHOKE COIL	NCH-1471	1	231237K022R2	
L204	EMIFIL	BK1608LL241-T	1	230959R1	
L281	CHOKE COIL	NCH-1471	1	231237K022R2	
L285	CHOKE COIL	NCH-1471	1	231237K022R2	
L331	CHOKE COIL	NCH-1479	1	231237K470R2	
L332	CHOKE COIL	NCH-1471	1	231237K022R2	
L341	CHOKE COIL	NCH-1479	1	231237K470R2	
L342	CHOKE COIL	NCH-1471	1	231237K022R2	
L351	CHOKE COIL	NCH-1479	1	231237K470R2	
L352	CHOKE COIL	NCH-1471	1	231237K022R2	

L361	CHOKE COIL	NCH-1471	1	231237K022R2
L362	EMIFIL	BK1608LM182-T	1	230958R1
L363	CHOKE COIL	NCH-1471	1	231237K022R2
L364	CHOKE COIL	NCH-1471	1	231237K022R2
L365	CHOKE COIL	NCH-1471	1	231237K022R2
L366	EMIFIL	BK1608LM182-T	1	230958R1
L367	EMIFIL	BK1608LM182-T	1	230958R1
L601	CHOKE COIL	NCH-1471	1	231237K022R2
L602	CHOKE COIL	NCH-1471	1	231237K022R2
L603	CHOKE COIL	NCH-1471	1	231237K022R2
L604	CHOKE COIL	NCH-1471	1	231237K022R2
X131	CRYSTAL	HC-49U0312.288MHz	1	3010414T
X701	CERA LOCK	CSTCR6M0055-R0	1	3010397R2
C101	C-CERA C	CC725CH1H-101J1	1	342101014R1
C102	C-CERA C	CC725CH1H-101J1	1	342101014R1
C103	C-CERA C	CK725B1C-104K1	1	332121045R1
C104	C-CERA C	CK725B1C-104K1	1	332121045R1
C105	C-CERA C	CC725CH1H-080D1	1	342100802R1
C106	C-CERA C	CC725CH1H-080D1	1	342100802R1
C107	C-CERA C	CC725CH1H-080D1	1	342100802R1
C108	C-CERA C	CK725B1C-104K1	1	332121045R1
C111	C-CERA C	CK725F1E-104Z1	1	332161040R1
C112	C-CERA C	CK725F1E-104Z1	1	332161040R1
C113	C-CERA C	CK725F1E-104Z1	1	332161040R1
C114	C-CERA C	CK725F1E-104Z1	1	332161040R1
C115	C-CERA C	CK725F1E-104Z1	1	332161040R1
C116	VR C	CE04W16V-100M(VR)	1	394641017T
C121	VR C	CE04W16V-100M(VR)	1	394641017T
C122	C-CERA C	CK725F1E-104Z1	1	332161040R1
C125	C-CERA C	CK725B1H-102K1	1	332101025R1
C131	C-CERA C	CK725F1E-104Z1	1	332161040R1
C132	C-CERA C	CC725CH1H-120J1	1	342101204R1
C133	C-CERA C	CC725CH1H-120J1	1	342101204R1
C134	C-CERA C	CK725F1E-104Z1	1	332161040R1
C141	C-CERA C	CK725F1E-104Z1	1	332161040R1
C145	C-CERA C	CK725B1H-102K1	1	332101025R1
C146	C-CERA C	CK725F1E-104Z1	1	332161040R1
C161	C-CERA C	CK725F1E-104Z1	1	332161040R1
C191	VR C	CE04W6.3V-470M(VR)	1	394624717T
C192	VR C	CE04W16V-100M(VR)	1	394641017T
C193	VR C	CE04W6.3V-470M(VR)	1	394624717T
C194	VR C	CE04W16V-100M(VR)	1	394641017T
C195	VR C	CE04W16V-100M(VR)	1	394641027T
C196	VR C	CE04W16V-100M(VR)	1	394641017T
C201	C-CERA C	CK725F1E-104Z1	1	332161040R1
C203	C-CERA C	CK725F1E-104Z1	1	332161040R1
C204	C-CERA C	CK725F1E-104Z1	1	332161040R1
C207	VR C	CE04W16V-100M(VR)	1	394641017T
C208	C-CERA C	CK725F1E-104Z1	1	332161040R1
C209	C-CERA C	CK725F1E-104Z1	1	332161040R1

C210	VR C	CE04W16V-100M(VR)	1	394641017T
C211	VR C	CE04W16V-100M(VR)	1	394641017T
C212	C-CERA C	CK725F1E-104Z1	1	332161040R1
C213	CHIP TANTAL	CS772SB1C-2.2M	1	395640227R2
C214	C-CERA C	CC725CH1H-122J1	1	342101224R1
C215	C-CERA C	CC725CH1H-680J1	1	342106804R1
C216	C-CERA C	CK725F1E-104Z1	1	332161040R1
C217	C-CERA C	CK725F1E-104Z1	1	332161040R1
C218	C-CERA C	CC725CH1H-331J1	1	342103314R1
C221	C-CERA C	CK725F1E-104Z1	1	332161040R1
C222	C-CERA C	CK725F1E-104Z1	1	332161040R1
C223	C-CERA C	CK725F1E-104Z1	1	332161040R1
C231	C-CERA C	CK725F1E-104Z1	1	332161040R1
C232	C-CERA C	CK725F1E-104Z1	1	332161040R1
C233	C-CERA C	CK725F1E-104Z1	1	332161040R1
C241	C-CERA C	CK725F1E-104Z1	1	332161040R1
C242	C-CERA C	CK725F1E-104Z1	1	332161040R1
C281	VR C	CE04W16V-100M(VR)	1	394641017T
C282	C-CERA C	CK725F1E-104Z1	1	332161040R1
C285	VR C	CE04W16V-100M(VR)	1	394641017T
C286	C-CERA C	CK725F1E-104Z1	1	332161040R1
C287	C-CERA C	CK725F1E-104Z1	1	332161040R1
C289	C-CERA C	CK725F1E-104Z1	1	332161040R1
C290	C-CERA C	CK725F1E-104Z1	1	332161040R1
C301	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C302	C-CERA C	CC725CH1H-101J1	1	342101014R1
C303	C-CERA C	CC732CH1H-222J	1	347342224R2
C304	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C305	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C306	C-CERA C	CC725CH1H-101J1	1	342101014R1
C307	C-CERA C	CC732CH1H-222J	1	347342224R2
C308	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C311	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C312	C-CERA C	CC725CH1H-101J1	1	342101014R1
C313	C-CERA C	CC732CH1H-222J	1	347342224R2
C314	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C315	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C316	C-CERA C	CC725CH1H-101J1	1	342101014R1
C317	C-CERA C	CC732CH1H-222J	1	347342224R2
C318	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C321	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C322	C-CERA C	CC725CH1H-101J1	1	342101014R1
C323	C-CERA C	CC732CH1H-222J	1	347342224R2
C324	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C325	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C326	C-CERA C	CC725CH1H-101J1	1	342101014R1
C327	C-CERA C	CC732CH1H-222J	1	347342224R2
C328	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C331	VR C	CE04W6.3V-100M(VR)	1	394621017T
C332	C-CERA C	CK725F1E-104Z1	1	332161040R1

C333	C-CERA C	CK725F1E-104Z1	1	332161040R1
C334	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C335	C-CERA C	CK725F1E-104Z1	1	332161040R1
C336	VR C	CE04W6.3V-100M(VR)	1	394621017T
C337	C-CERA C	CK725F1E-104Z1	1	332161040R1
C338	VR C	CE04W6.3V-100M(VR)	1	394621017T
C339	C-CERA C	CK725F1E-104Z1	1	332161040R1
C341	VR C	CE04W16V-100M(VR)	1	394641017T
C342	C-CERA C	CK725F1E-104Z1	1	332161040R1
C343	C-CERA C	CK725F1E-104Z1	1	332161040R1
C344	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C345	C-CERA C	CK725F1E-104Z1	1	332161040R1
C346	VR C	CE04W16V-100M(VR)	1	394641017T
C347	C-CERA C	CK725F1E-104Z1	1	332161040R1
C348	VR C	CE04W16V-100M(VR)	1	394641017T
C349	C-CERA C	CK725F1E-104Z1	1	332161040R1
C351	VR C	CE04W16V-100M(VR)	1	394641017T
C352	C-CERA C	CK725F1E-104Z1	1	332161040R1
C353	C-CERA C	CK725F1E-104Z1	1	332161040R1
C354	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C355	C-CERA C	CK725F1E-104Z1	1	332161040R1
C356	VR C	CE04W16V-100M(VR)	1	394641017T
C357	C-CERA C	CK725F1E-104Z1	1	332161040R1
C358	VR C	CE04W16V-100M(VR)	1	394641017T
C359	C-CERA C	CK725F1E-104Z1	1	332161040R1
C361	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C362	C-CERA C	CK725F1E-104Z1	1	332161040R1
C363	C-CERA C	CK725F1E-104Z1	1	332161040R1
C365	RFS C	CE04W25V-47M(RFS)	1	395954707T
C366	C-CERA C	CK725F1E-104Z1	1	332161040R1
C367	VR C	CE04W16V-100M(VR)	1	394641017T
C368	C-CERA C	CK725F1E-104Z1	1	332161040R1
C369	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C370	C-CERA C	CK725B1H-222K1	1	332102225R1
C371	C-CERA C	CK725B1H-473K1	1	332104735R1
C372	C-CERA C	CK725F1E-104Z1	1	332161040R1
C373	C-CERA C	CC725CH1H-330J1	1	342103304R1
C374	C-CERA C	CC725CH1H-330J1	1	342103304R1
C375	C-CERA C	CC725CH1H-330J1	1	342103304R1
C376	C-CERA C	CC725CH1H-330J1	1	342103304R1
C377	C-CERA C	CC725CH1H-330J1	1	342103304R1
C378	C-CERA C	CC725CH1H-330J1	1	342103304R1
C379	C-CERA C	CC725CH1H-330J1	1	342103304R1
C380	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C381	C-CERA C	CC725CH1H-330J1	1	342103304R1
C382	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
C383	C-CERA C	CK725F1E-104Z1	1	332161040R1
C384	C-CERA C	CK725F1E-104Z1	1	332161040R1
C385	C-CERA C	CC725CH1H-331J1	1	342103314R1
C395	TF C	ECQ-B50V-222J	1	374722224T

C396	TF C	ECQ-B50V-222J	1	374722224T
C400	TF C	ECQ-B50V-471J	1	374724714T
C401	TF C	ECQ-B50V-471J	1	374724714T
C402	TF C	ECQ-B50V-471J	1	374724714T
C403	TF C	ECQ-B50V-471J	1	374724714T
C404	TF C	ECQ-B50V-471J	1	374724714T
C405	TF C	ECQ-B50V-471J	1	374724714T
C406	TF C	ECQ-B50V-471J	1	374724714T
C407	TF C	ECQ-V50V-333J	1	374723334T
C410	TF C	ECQ-B50V-121K	1	374721215T
C411	TF C	ECQ-B50V-121K	1	374721215T
C412	TF C	ECQ-B50V-121K	1	374721215T
C413	TF C	ECQ-B50V-121K	1	374721215T
C414	TF C	ECQ-B50V-121K	1	374721215T
C415	TF C	ECQ-B50V-121K	1	374721215T
C416	TF C	ECQ-B50V-121K	1	374721215T
C417	TF C	ECQ-B50V-153J	1	374721534T
C420	TF C	ECQ-B50V-121K	1	374721215T
C421	TF C	ECQ-B50V-121K	1	374721215T
C422	TF C	ECQ-B50V-121K	1	374721215T
C423	TF C	ECQ-B50V-121K	1	374721215T
C424	TF C	ECQ-B50V-121K	1	374721215T
C425	TF C	ECQ-B50V-121K	1	374721215T
C426	TF C	ECQ-B50V-121K	1	374721215T
C427	TF C	ECQ-B50V-153J	1	374721534T
C430	TF C	ECQ-B50V-122J	1	374721224T
C431	TF C	ECQ-B50V-122J	1	374721224T
C432	TF C	ECQ-B50V-122J	1	374721224T
C433	TF C	ECQ-B50V-122J	1	374721224T
C434	TF C	ECQ-B50V-122J	1	374721224T
C435	TF C	ECQ-B50V-122J	1	374721224T
C436	TF C	ECQ-B50V-122J	1	374721224T
C437	TF C	ECQ-B50V-122J	1	374721224T
C440	TF C	ECQ-B50V-471J	1	374724714T
C441	TF C	ECQ-B50V-471J	1	374724714T
C442	TF C	ECQ-B50V-471J	1	374724714T
C443	TF C	ECQ-B50V-471J	1	374724714T
C444	TF C	ECQ-B50V-471J	1	374724714T
C445	TF C	ECQ-B50V-471J	1	374724714T
C446	TF C	ECQ-B50V-471J	1	374724714T
C447	TF C	ECQ-B50V-471J	1	374724714T
C555	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C556	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C557	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C558	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
C601	C-CERA C	CK725F1E-104Z1	1	332161040R1
C602	C-CERA C	CK725F1E-104Z1	1	332161040R1
C603	C-CERA C	CK725F1E-104Z1	1	332161040R1
C604	VR C	CE04W50V-4.7M(VR)	1	394680477T
C605	C-CERA C	CK725F1E-104Z1	1	332161040R1

C606	C-CERA C	CK725F1E-104Z1	1	332161040R1
C608	C-CERA C	CC725CH1H-101J1	1	342101014R1
C609	C-CERA C	CC725CH1H-101J1	1	342101014R1
C610	C-CERA C	CK725F1E-104Z1	1	332161040R1
C612	C-CERA C	CC725CH1H-102J1	1	342101024R1
C615	C-CERA C	CC725CH1H-102J1	1	342101024R1
C616	C-CERA C	CC725CH1H-102J1	1	342101024R1
C617	C-CERA C	CC725CH1H-102J1	1	342101024R1
C618	C-CERA C	CC725CH1H-102J1	1	342101024R1
C619	C-CERA C	CC725CH1H-102J1	1	342101024R1
C620	C-CERA C	CC725CH1H-102J1	1	342101024R1
C621	C-CERA C	CC725CH1H-102J1	1	342101024R1
C622	C-CERA C	CC725CH1H-102J1	1	342101024R1
C623	C-CERA C	CC725CH1H-102J1	1	342101024R1
C624	C-CERA C	CC725CH1H-102J1	1	342101024R1
C626	C-CERA C	CK725F1E-104Z1	1	332161040R1
C631	C-CERA C	CC725CH1H-102J1	1	342101024R1
C632	C-CERA C	CC725CH1H-102J1	1	342101024R1
C633	C-CERA C	CC725CH1H-102J1	1	342101024R1
C634	C-CERA C	CC725CH1H-102J1	1	342101024R1
C650	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C651	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
C701	C-CERA C	CK725F1E-104Z1	1	332161040R1
C702	VR C	CE04W16V-100M(VR)	1	394641017T
C705	EDL C	DX-5R5L224	1	3000079
C709	C-CERA C	CK732B1C-474K	1	337394745R1
C710	VR C	CE04W50V-1M(VR)	1	394680107T
C711	C-CERA C	CK732B1C-474K	1	337394745R1
C712	VR C	CE04W50V-1M(VR)	1	394680107T
C713	C-CERA C	CK732B1C-474K	1	337394745R1
C714	VR C	CE04W50V-1M(VR)	1	394680107T
C715	C-CERA C	CK732B1C-474K	1	337394745R1
C716	VR C	CE04W16V-100M(VR)	1	394641017T
C717	C-CERA C	CK725F1E-104Z1	1	332161040R1
C718	C-CERA C	CK725F1E-104Z1	1	332161040R1
C719	C-CERA C	CK725F1E-104Z1	1	332161040R1
C720	VR C	CE04W16V-100M(VR)	1	394641017T
C723	VR C	CE04W6.3V-470M(VR)	1	394624717T
C724	VR C	CE04W16V-100M(VR)	1	394641017T
R101	C-CARBON R	RN72K1J-750JE	1	435037504R1
R102	C-CARBON R	RN72K1J-750JE	1	435037504R1
R103	C-CARBON R	RN72K1J-100JE	1	435031004R1
R104	C-CARBON R	RN72K1J-100JE	1	435031004R1
R105	C-CARBON R	RN72K1J-224JE	1	435032244R1
R106	C-CARBON R	RN72K1J-224JE	1	435032244R1
R107	C-CARBON R	RN72K1J-103JE	1	435031034R1
R108	C-CARBON R	RN72K1J-103JE	1	435031034R1
R109	C-CARBON R	RN72K1J-103JE	1	435031034R1
R110	C-CARBON R	RN72K1J-224JE	1	435032244R1
R111	C-CARBON R	RN72K1J-221JE	1	435032214R1

R112	C-CARBON R	RN72K1J-221JE	1	435032214R1
R113	C-CARBON R	RN72K1J-221JE	1	435032214R1
R114	C-CARBON R	RN72K1J-221JE	1	435032214R1
R115	C-CARBON R	RN72K1J-221JE	1	435032214R1
R125	C-CARBON R	RN72K1J-331JE	1	435033314R1
R131	C-CARBON R	RN72K1J-105JE	1	435031054R1
R133	C-CARBON R	RN72K1J-681JE	1	435036814R1
R135	C-CARBON R	RN72K1J-000JE	1	435030004R1
R141	C-CARBON R	RN72K1J-470JE	1	435034704R1
R142	C-CARBON R	RN72K1J-470JE	1	435034704R1
R143	C-CARBON R	RN72K1J-331JE	1	435033314R1
R144	C-CARBON R	RN72K1J-470JE	1	435034704R1
R145	C-CARBON R	RN72K1J-470JE	1	435034704R1
R146	C-CARBON R	RN72K1J-331JE	1	435033314R1
R147	C-CARBON R	RN72K1J-470JE	1	435034704R1
R148	C-CARBON R	RN72K1J-470JE	1	435034704R1
R149	C-CARBON R	RN72K1J-470JE	1	435034704R1
R150	C-CARBON R	RN72K1J-000JE	1	435030004R1
R161	C-CARBON R	RN72K1J-470JE	1	435034704R1
R162	C-CARBON R	RN72K1J-470JE	1	435034704R1
R163	C-CARBON R	RN72K1J-331JE	1	435033314R1
R164	C-CARBON R	RN72K1J-470JE	1	435034704R1
R165	C-CARBON R	RN72K1J-331JE	1	435033314R1
R166	C-CARBON R	RN72K1J-331JE	1	435033314R1
R167	C-CARBON R	RN72K1J-331JE	1	435033314R1
R168	C-CARBON R	RN72K1J-470JE	1	435034704R1
R169	C-CARBON R	RN72K1J-470JE	1	435034704R1
R170	C-CARBON R	RN72K1J-331JE	1	435033314R1
R171	C-CARBON R	RN72K1J-470JE	1	435034704R1
R172	C-CARBON R	RN72K1J-470JE	1	435034704R1
R192	METAL R	RNU1WCJ-3.9	1	453630394T
R193	METAL R	RNU1WCJ-4.7	1	453630474T
R194	METAL O R	RS1/2WBJ-10	1	443521004T
R195	METAL O R	RS1WBJ-82	1	443628204T
R201	C-CARBON R	RN72K1J-332JE	1	435033324R1
R202	C-CARBON R	RN72K1J-332JE	1	435033324R1
R203	C-CARBON R	RN72K1J-332JE	1	435033324R1
R204	C-CARBON R	RN72K1J-331JE	1	435033314R1
R205	C-CARBON R	RN72K1J-103JE	1	435031034R1
R206	C-CARBON R	RN72K1J-331JE	1	435033314R1
R207	C-CARBON R	RN72K1J-470JE	1	435034704R1
R208	C-CARBON R	RN72K1J-332JE	1	435033324R1
R209	C-CARBON R	RN72K1J-103JE	1	435031034R1
R210	C-CARBON R	RN72K1J-103JE	1	435031034R1
R211	C-CARBON R	RN72K1J-332JE	1	435033324R1
R212	C-CARBON R	RN72K1J-332JE	1	435033324R1
R213	C-CARBON R	RN72K1J-103JE	1	435031034R1
R214	C-CARBON R	RN72K1J-470JE	1	435034704R1
R215	C-CARBON R	RN72K1J-332JE	1	435033324R1
R216	C-CARBON R	RN72K1J-332JE	1	435033324R1

R217	C-CARBON R	RN72K1J-103JE	1	435031034R1
R218	C-CARBON R	RN72K1J-103JE	1	435031034R1
R219	C-CARBON R	RN72K1J-103JE	1	435031034R1
R220	C-CARBON R	RN72K1J-332JE	1	435033324R1
R221	C-CARBON R	RN72K1J-103JE	1	435031034R1
R222	C-CARBON R	RN72K1J-332JE	1	435033324R1
R223	C-CARBON R	RN72K1J-332JE	1	435033324R1
R224	C-CARBON R	RN72K1J-103JE	1	435031034R1
R225	C-CARBON R	RN72K1J-103JE	1	435031034R1
R226	C-CARBON R	RN72K1J-103JE	1	435031034R1
R227	C-CARBON R	RN72K1J-103JE	1	435031034R1
R228	C-CARBON R	RN72K1J-103JE	1	435031034R1
R229	C-CARBON R	RN72K1J-103JE	1	435031034R1
R230	C-CARBON R	RN72K1J-103JE	1	435031034R1
R231	C-CARBON R	RN72K1J-103JE	1	435031034R1
R232	C-CARBON R	RN72K1J-103JE	1	435031034R1
R233	C-CARBON R	RN72K1J-470JE	1	435034704R1
R234	C-CARBON R	RN72K1J-470JE	1	435034704R1
R235	C-CARBON R	RN72K1J-470JE	1	435034704R1
R236	C-CARBON R	RN72K1J-470JE	1	435034704R1
R237	C-CARBON R	RN72K1J-470JE	1	435034704R1
R238	C-CARBON R	RN72K1J-470JE	1	435034704R1
R239	C-CARBON R	RN72K1J-470JE	1	435034704R1
R240	C-CARBON R	RN72K1J-103JE	1	435031034R1
R241	C-CARBON R	RN72K1J-103JE	1	435031034R1
R242	C-CARBON R	RN72K1J-103JE	1	435031034R1
R243	C-CARBON R	RN72K1J-470JE	1	435034704R1
R244	C-CARBON R	RN72K1J-470JE	1	435034704R1
R245	C-CARBON R	RN72K1J-103JE	1	435031034R1
R246	C-CARBON R	RN72K1J-103JE	1	435031034R1
R247	C-CARBON R	RN72K1J-470JE	1	435034704R1
R248	C-CARBON R	RN72K1J-103JE	1	435031034R1
R249	C-CARBON R	RN72K1J-470JE	1	435034704R1
R250	C-CARBON R	RN72K1J-470JE	1	435034704R1
R251	C-CARBON R	RN72K1J-470JE	1	435034704R1
R252	C-CARBON R	RN72K1J-470JE	1	435034704R1
R253	C-CARBON R	RN72K1J-470JE	1	435034704R1
R254	C-CARBON R	RN72K1J-470JE	1	435034704R1
R255	C-CARBON R	RN72K1J-103JE	1	435031034R1
R256	C-CARBON R	RN72K1J-103JE	1	435031034R1
R257	C-CARBON R	RN72K1J-103JE	1	435031034R1
R258	C-CARBON R	RN72K1J-470JE	1	435034704R1
R259	C-CARBON R	RN72K1J-470JE	1	435034704R1
R260	C-CARBON R	RN72K1J-470JE	1	435034704R1
R261	C-CARBON R	RN72K1J-103JE	1	435031034R1
R262	C-CARBON R	RN72K1J-103JE	1	435031034R1
R263	C-CARBON R	RN72K1J-331JE	1	435033314R1
R264	C-CARBON R	RN72K1J-272JE	1	435032724R1
R265	C-CARBON R	RN72K1J-470JE	1	435034704R1
R266	C-CARBON R	RN72K1J-103JE	1	435031034R1

R267	C-CARBON R	RN72K1J-103JE	1	435031034R1
R268	C-CARBON R	RN72K1J-470JE	1	435034704R1
R269	C-CARBON R	RN72K1J-470JE	1	435034704R1
R270	C-CARBON R	RN72K1J-331JE	1	435033314R1
R271	C-CARBON R	RN72K1J-331JE	1	435033314R1
R272	C-CARBON R	RN72K1J-103JE	1	435031034R1
R273	C-CARBON R	RN72K1J-331JE	1	435033314R1
R274	C-CARBON R	RN72K1J-331JE	1	435033314R1
R275	C-CARBON R	RN72K1J-331JE	1	435033314R1
R276	C-CARBON R	RN72K1J-332JE	1	435033324R1
R277	C-CARBON R	RN72K1J-221JE	1	435032214R1
R278	C-CARBON R	RN72K1J-331JE	1	435033314R1
R281	C-CARBON R	RN72K1J-000JE	1	435030004R1
R285	C-CARBON R	RN72K1J-470JE	1	435034704R1
R291	C-CARBON R	RN72K1J-104JE	1	435031044R1
R292	C-CARBON R	RN72K1J-104JE	1	435031044R1
R293	C-CARBON R	RN72K1J-104JE	1	435031044R1
R294	C-CARBON R	RN72K1J-104JE	1	435031044R1
R295	C-CARBON R	RN72K1J-104JE	1	435031044R1
R296	C-CARBON R	RN72K1J-104JE	1	435031044R1
R301	C-CARBON R	RN72K1J-331JE	1	435033314R1
R302	C-CARBON R	RN72K1J-122JE	1	435031224R1
R303	C-CARBON R	RN72K1J-152JE	1	435031524R1
R304	C-CARBON R	RN72K1J-103JE	1	435031034R1
R305	C-CARBON R	RN72K1J-103JE	1	435031034R1
R306	C-CARBON R	RN72K1J-331JE	1	435033314R1
R307	C-CARBON R	RN72K1J-122JE	1	435031224R1
R308	C-CARBON R	RN72K1J-152JE	1	435031524R1
R309	C-CARBON R	RN72K1J-103JE	1	435031034R1
R310	C-CARBON R	RN72K1J-103JE	1	435031034R1
R311	C-CARBON R	RN72K1J-331JE	1	435033314R1
R312	C-CARBON R	RN72K1J-122JE	1	435031224R1
R313	C-CARBON R	RN72K1J-152JE	1	435031524R1
R314	C-CARBON R	RN72K1J-103JE	1	435031034R1
R315	C-CARBON R	RN72K1J-103JE	1	435031034R1
R316	C-CARBON R	RN72K1J-331JE	1	435033314R1
R317	C-CARBON R	RN72K1J-122JE	1	435031224R1
R318	C-CARBON R	RN72K1J-152JE	1	435031524R1
R319	C-CARBON R	RN72K1J-103JE	1	435031034R1
R320	C-CARBON R	RN72K1J-103JE	1	435031034R1
R321	C-CARBON R	RN72K1J-331JE	1	435033314R1
R322	C-CARBON R	RN72K1J-122JE	1	435031224R1
R323	C-CARBON R	RN72K1J-152JE	1	435031524R1
R324	C-CARBON R	RN72K1J-103JE	1	435031034R1
R325	C-CARBON R	RN72K1J-103JE	1	435031034R1
R326	C-CARBON R	RN72K1J-331JE	1	435033314R1
R327	C-CARBON R	RN72K1J-122JE	1	435031224R1
R328	C-CARBON R	RN72K1J-152JE	1	435031524R1
R329	C-CARBON R	RN72K1J-103JE	1	435031034R1
R330	C-CARBON R	RN72K1J-103JE	1	435031034R1

R331	C-CARBON R	RN72K1J-470JE	1	435034704R1
R332	C-CARBON R	RN72K1J-331JE	1	435033314R1
R333	C-CARBON R	RN72K1J-103JE	1	435031034R1
R334	C-CARBON R	RN72K1J-331JE	1	435033314R1
R335	C-CARBON R	RN72K1J-331JE	1	435033314R1
R337	C-CARBON R	RN72K1J-331JE	1	435033314R1
R341	C-CARBON R	RN72K1J-470JE	1	435034704R1
R342	C-CARBON R	RN72K1J-331JE	1	435033314R1
R343	C-CARBON R	RN72K1J-103JE	1	435031034R1
R344	C-CARBON R	RN72K1J-331JE	1	435033314R1
R345	C-CARBON R	RN72K1J-331JE	1	435033314R1
R347	C-CARBON R	RN72K1J-331JE	1	435033314R1
R351	C-CARBON R	RN72K1J-470JE	1	435034704R1
R352	C-CARBON R	RN72K1J-331JE	1	435033314R1
R353	C-CARBON R	RN72K1J-103JE	1	435031034R1
R354	C-CARBON R	RN72K1J-331JE	1	435033314R1
R355	C-CARBON R	RN72K1J-331JE	1	435033314R1
R357	C-CARBON R	RN72K1J-331JE	1	435033314R1
R361	C-CARBON R	RN72K1J-470JE	1	435034704R1
R362	C-CARBON R	RN72K1J-470JE	1	435034704R1
R363	C-CARBON R	RN72K1J-221JE	1	435032214R1
R364	C-CARBON R	RN72K1J-221JE	1	435032214R1
R365	C-CARBON R	RN72K1J-221JE	1	435032214R1
R366	C-CARBON R	RN72K1J-221JE	1	435032214R1
R367	C-CARBON R	RN72K1J-221JE	1	435032214R1
R368	C-CARBON R	RN72K1J-221JE	1	435032214R1
R371	C-CARBON R	RN72K1J-272JE	1	435032724R1
R372	C-CARBON R	RN72K1J-331JE	1	435033314R1
R373	C-CARBON R	RN72K1J-331JE	1	435033314R1
R374	C-CARBON R	RN72K1J-331JE	1	435033314R1
R375	C-CARBON R	RN72K1J-331JE	1	435033314R1
R376	C-CARBON R	RN72K1J-331JE	1	435033314R1
R377	C-CARBON R	RN72K1J-331JE	1	435033314R1
R378	C-CARBON R	RN72K1J-331JE	1	435033314R1
R379	C-CARBON R	RN72K1J-331JE	1	435033314R1
R380	C-CARBON R	RN72K1J-331JE	1	435033314R1
R381	C-CARBON R	RN72K1J-470JE	1	435034704R1
R382	C-CARBON R	RN72K1J-470JE	1	435034704R1
R383	C-CARBON R	RN72K1J-470JE	1	435034704R1
R384	C-CARBON R	RN72K1J-470JE	1	435034704R1
R385	C-CARBON R	RN72K1J-470JE	1	435034704R1
R386	C-CARBON R	RN72K1J-470JE	1	435034704R1
R387	C-CARBON R	RN72K1J-470JE	1	435034704R1
R391	C-CARBON R	RN72K1J-560JE	1	435035604R1
R392	C-CARBON R	RN72K1J-560JE	1	435035604R1
R393	C-CARBON R	RN72K1J-560JE	1	435035604R1
R394	C-CARBON R	RN72K1J-560JE	1	435035604R1
R395	C-CARBON R	RN72K1J-392JE	1	435033924R1
R396	C-CARBON R	RN72K1J-392JE	1	435033924R1
R400	C-CARBON R	RN72K1J-332JE	1	435033324R1

R401	C-CARBON R	RN72K1J-332JE	1	435033324R1
R402	C-CARBON R	RN72K1J-332JE	1	435033324R1
R403	C-CARBON R	RN72K1J-332JE	1	435033324R1
R404	C-CARBON R	RN72K1J-332JE	1	435033324R1
R405	C-CARBON R	RN72K1J-332JE	1	435033324R1
R406	C-CARBON R	RN72K1J-332JE	1	435033324R1
R407	C-CARBON R	RN72K1J-332JE	1	435033324R1
R410	C-CARBON R	RN72K1J-332JE	1	435033324R1
R411	C-CARBON R	RN72K1J-332JE	1	435033324R1
R412	C-CARBON R	RN72K1J-332JE	1	435033324R1
R413	C-CARBON R	RN72K1J-332JE	1	435033324R1
R414	C-CARBON R	RN72K1J-332JE	1	435033324R1
R415	C-CARBON R	RN72K1J-332JE	1	435033324R1
R416	C-CARBON R	RN72K1J-332JE	1	435033324R1
R417	C-CARBON R	RN72K1J-332JE	1	435033324R1
R420	C-CARBON R	RN72K1J-103JE	1	435031034R1
R421	C-CARBON R	RN72K1J-103JE	1	435031034R1
R422	C-CARBON R	RN72K1J-103JE	1	435031034R1
R423	C-CARBON R	RN72K1J-103JE	1	435031034R1
R424	C-CARBON R	RN72K1J-103JE	1	435031034R1
R425	C-CARBON R	RN72K1J-103JE	1	435031034R1
R426	C-CARBON R	RN72K1J-103JE	1	435031034R1
R427	C-CARBON R	RN72K1J-103JE	1	435031034R1
R430	C-CARBON R	RN72K1J-103JE	1	435031034R1
R431	C-CARBON R	RN72K1J-103JE	1	435031034R1
R432	C-CARBON R	RN72K1J-103JE	1	435031034R1
R433	C-CARBON R	RN72K1J-103JE	1	435031034R1
R434	C-CARBON R	RN72K1J-103JE	1	435031034R1
R435	C-CARBON R	RN72K1J-103JE	1	435031034R1
R436	C-CARBON R	RN72K1J-103JE	1	435031034R1
R437	C-CARBON R	RN72K1J-103JE	1	435031034R1
R440	C-CARBON R	RN72K1J-181JE	1	435031814R1
R441	C-CARBON R	RN72K1J-181JE	1	435031814R1
R442	C-CARBON R	RN72K1J-181JE	1	435031814R1
R443	C-CARBON R	RN72K1J-181JE	1	435031814R1
R444	C-CARBON R	RN72K1J-181JE	1	435031814R1
R445	C-CARBON R	RN72K1J-181JE	1	435031814R1
R446	C-CARBON R	RN72K1J-181JE	1	435031814R1
R447	C-CARBON R	RN72K1J-332JE	1	435033324R1
R450	C-CARBON R	RN72K1J-181JE	1	435031814R1
R451	C-CARBON R	RN72K1J-181JE	1	435031814R1
R452	C-CARBON R	RN72K1J-181JE	1	435031814R1
R453	C-CARBON R	RN72K1J-181JE	1	435031814R1
R454	C-CARBON R	RN72K1J-181JE	1	435031814R1
R455	C-CARBON R	RN72K1J-181JE	1	435031814R1
R456	C-CARBON R	RN72K1J-181JE	1	435031814R1
R457	C-CARBON R	RN72K1J-332JE	1	435033324R1
R460	C-CARBON R	RN72K1J-103JE	1	435031034R1
R461	C-CARBON R	RN72K1J-103JE	1	435031034R1
R462	C-CARBON R	RN72K1J-103JE	1	435031034R1

R525	C-CARBON R	RN72K1J-223JE	1	435032234R1
R526	C-CARBON R	RN72K1J-223JE	1	435032234R1
R527	C-CARBON R	RN72K1J-223JE	1	435032234R1
R530	C-CARBON R	RN72K1J-152JE	1	435031524R1
R531	C-CARBON R	RN72K1J-152JE	1	435031524R1
R532	C-CARBON R	RN72K1J-152JE	1	435031524R1
R533	C-CARBON R	RN72K1J-152JE	1	435031524R1
R534	C-CARBON R	RN72K1J-152JE	1	435031524R1
R535	C-CARBON R	RN72K1J-152JE	1	435031524R1
R536	C-CARBON R	RN72K1J-152JE	1	435031524R1
R537	C-CARBON R	RN72K1J-152JE	1	435031524R1
R540	C-CARBON R	RN72K1J-152JE	1	435031524R1
R541	C-CARBON R	RN72K1J-152JE	1	435031524R1
R542	C-CARBON R	RN72K1J-152JE	1	435031524R1
R543	C-CARBON R	RN72K1J-152JE	1	435031524R1
R544	C-CARBON R	RN72K1J-152JE	1	435031524R1
R545	C-CARBON R	RN72K1J-152JE	1	435031524R1
R546	C-CARBON R	RN72K1J-152JE	1	435031524R1
R547	C-CARBON R	RN72K1J-152JE	1	435031524R1
R551	METAL R	RNU1/2WCJ-0.47	1	453534794T
R555	METAL O R	RS1/2WBJ-15	1	443521504T
R556	METAL O R	RS1/2WBJ-15	1	443521504T
R557	METAL O R	RS1/2WBJ-22	1	443522204T
R558	METAL O R	RS1/2WBJ-22	1	443522204T
R570	C-CARBON R	RN72K1J-681JE	1	435036814R1
R571	C-CARBON R	RN72K1J-681JE	1	435036814R1
R572	C-CARBON R	RN72K1J-681JE	1	435036814R1
R573	C-CARBON R	RN72K1J-681JE	1	435036814R1
R574	C-CARBON R	RN72K1J-681JE	1	435036814R1
R575	C-CARBON R	RN72K1J-681JE	1	435036814R1
R576	C-CARBON R	RN72K1J-681JE	1	435036814R1
R577	C-CARBON R	RN72K1J-681JE	1	435036814R1
R580	C-CARBON R	RN72K1J-681JE	1	435036814R1
R581	C-CARBON R	RN72K1J-681JE	1	435036814R1
R582	C-CARBON R	RN72K1J-681JE	1	435036814R1
R583	C-CARBON R	RN72K1J-681JE	1	435036814R1
R584	C-CARBON R	RN72K1J-681JE	1	435036814R1
R585	C-CARBON R	RN72K1J-681JE	1	435036814R1
R586	C-CARBON R	RN72K1J-681JE	1	435036814R1
R587	C-CARBON R	RN72K1J-681JE	1	435036814R1
R601	C-CARBON R	RN72K1J-221JE	1	435032214R1
R602	C-CARBON R	RN72K1J-103JE	1	435031034R1
R603	C-CARBON R	RN72K1J-221JE	1	435032214R1
R604	C-CARBON R	RN72K1J-103JE	1	435031034R1
R605	C-CARBON R	RN72K1J-221JE	1	435032214R1
R606	C-CARBON R	RN72K1J-103JE	1	435031034R1
R607	C-CARBON R	RN72K1J-221JE	1	435032214R1
R608	C-CARBON R	RN72K1J-221JE	1	435032214R1
R609	C-CARBON R	RN72K1J-221JE	1	435032214R1
R610	C-CARBON R	RN72K1J-221JE	1	435032214R1

R611	C-CARBON R	RN72K1J-103JE	1	435031034R1
R612	C-CARBON R	RN72K1J-221JE	1	435032214R1
R613	C-CARBON R	RN72K1J-221JE	1	435032214R1
R614	C-CARBON R	RN72K1J-221JE	1	435032214R1
R615	C-CARBON R	RN72K1J-103JE	1	435031034R1
R616	C-CARBON R	RN72K1J-102JE	1	435031024R1
R617	C-CARBON R	RN72K1J-103JE	1	435031034R1
R618	C-CARBON R	RN72K1J-221JE	1	435032214R1
R619	C-CARBON R	RN72K1J-473JE	1	435034734R1
R620	C-CARBON R	RN72K1J-103JE	1	435031034R1
R621	C-CARBON R	RN72K1J-105JE	1	435031054R1
R622	C-CARBON R	RN72K1J-103JE	1	435031034R1
R623	C-CARBON R	RN72K1J-221JE	1	435032214R1
R624	C-CARBON R	RN72K1J-103JE	1	435031034R1
R625	C-CARBON R	RN72K1J-221JE	1	435032214R1
R626	C-CARBON R	RN72K1J-103JE	1	435031034R1
R627	C-CARBON R	RN72K1J-221JE	1	435032214R1
R628	C-CARBON R	RN72K1J-221JE	1	435032214R1
R629	C-CARBON R	RN72K1J-221JE	1	435032214R1
R630	C-CARBON R	RN72K1J-103JE	1	435031034R1
R631	C-CARBON R	RN72K1J-221JE	1	435032214R1
R632	C-CARBON R	RN72K1J-221JE	1	435032214R1
R633	C-CARBON R	RN72K1J-103JE	1	435031034R1
R634	C-CARBON R	RN72K1J-221JE	1	435032214R1
R635	C-CARBON R	RN72K1J-103JE	1	435031034R1
R636	C-CARBON R	RN72K1J-221JE	1	435032214R1
R637	C-CARBON R	RN72K1J-103JE	1	435031034R1
R638	C-CARBON R	RN72K1J-221JE	1	435032214R1
R639	C-CARBON R	RN72K1J-103JE	1	435031034R1
R640	C-CARBON R	RN72K1J-470JE	1	435034704R1
R641	C-CARBON R	RN72K1J-222JE	1	435032224R1
R642	C-CARBON R	RN72K1J-470JE	1	435034704R1
R643	C-CARBON R	RN72K1J-222JE	1	435032224R1
R644	C-CARBON R	RN72K1J-470JE	1	435034704R1
R645	C-CARBON R	RN72K1J-470JE	1	435034704R1
R646	C-CARBON R	RN72K1J-103JE	1	435031034R1
R647	C-CARBON R	RN72K1J-470JE	1	435034704R1
R648	C-CARBON R	RN72K1J-470JE	1	435034704R1
R649	C-CARBON R	RN72K1J-221JE	1	435032214R1
R650	C-CARBON R	RN72K1J-221JE	1	435032214R1
R651	C-CARBON R	RN72K1J-103JE	1	435031034R1
R652	C-CARBON R	RN72K1J-221JE	1	435032214R1
R653	C-CARBON R	RN72K1J-221JE	1	435032214R1
R654	C-CARBON R	RN72K1J-221JE	1	435032214R1
R655	C-CARBON R	RN72K1J-221JE	1	435032214R1
R656	C-CARBON R	RN72K1J-221JE	1	435032214R1
R657	C-CARBON R	RN72K1J-103JE	1	435031034R1
R658	C-CARBON R	RN72K1J-221JE	1	435032214R1
R659	C-CARBON R	RN72K1J-221JE	1	435032214R1
R660	C-CARBON R	RN72K1J-221JE	1	435032214R1

R661	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R662	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R663	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R664	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R665	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R666	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R667	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R668	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R669	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R670	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R671	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R672	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R673	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R674	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R675	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R676	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R677	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R678	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R679	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R680	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R681	C-CARBON R	RN72K1J-103JE	1	435031034R1	<WT>
R681	C-CARBON R	RN72K1J-103JE	1	435031034R1	<PP>
R681	C-CARBON R	RN72K1J-103JE	1	435031034R1	<GK,GQ,GR>
R681	C-CARBON R	RN72K1J-103JE	1	435031034R1	<PA>
R682	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R683	C-CARBON R	RN72K1J-333JE	1	435033334R1	
R684	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R685	C-CARBON R	RN72K1J-103JE	1	435031034R1	<PP>
R685	C-CARBON R	RN72K1J-000JE	1	435030004R1	<DC>
R686	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R687	C-CARBON R	RN72K1J-563JE	1	435035634R1	
R689	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R690	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R691	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R692	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R693	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R694	C-CARBON R	RN72K1J-273JE	1	435032734R1	
R695	C-CARBON R	RN72K1J-273JE	1	435032734R1	
R697	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R698	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R699	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R700	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R701	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R702	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R703	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R704	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R705	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R706	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R707	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R708	C-CARBON R	RN72K1J-221JE	1	435032214R1	

R709	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R710	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R711	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R712	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R713	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R714	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R715	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R716	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R717	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R718	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R719	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R720	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R721	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R722	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R723	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R724	C-CARBON R	RN72K1J-472JE	1	435034724R1	
R725	C-CARBON R	RN72K1J-272JE	1	435032724R1	
R726	C-CARBON R	RN72K1J-105JE	1	435031054R1	<WT>
R726	C-CARBON R	RN72K1J-103JE	1	435031034R1	<DC,PA,PPGK,GQ,GR>
R727	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R729	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R730	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R731	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R732	C-CARBON R	RN72K1J-101JE	1	435031014R1	
R733	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R734	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R735	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R736	C-CARBON R	RN72K1J-104JE	1	435031044R1	
R737	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R738	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R739	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R740	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R741	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R742	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R743	C-CARBON R	RN72K1J-221JE	1	435032214R1	
R752	C-CARBON R	RN72K1J-224JE	1	435032244R1	
R754	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R755	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R756	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R757	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R758	C-CARBON R	RN72K1J-103JE	1	435031034R1	
R759	C-CARBON R	RN72K1J-222JE	1	435032224R1	
R763	C-CARBON R	RN72K1J-102JE	1	435031024R1	
R780	C-CARBON R	RN72K1J-331JE	1	435033314R1	
R781	C-CARBON R	RN72K1J-331JE	1	435033314R1	
R782	C-CARBON R	RN72K1J-331JE	1	435033314R1	
R783	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R784	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R785	C-CARBON R	RN72K1J-470JE	1	435034704R1	
R786	C-CARBON R	RN72K1J-470JE	1	435034704R1	

R790	C-CARBON R	RN72K1J-000JE	1	435030004R1	
R792	METAL R	RNU1/2WCJ-1.5	1	453530154T	
R793	METAL R	RNU2WCJ-8.2	1	452730824F	
J200	PVC	1007#24 .2/7HAND B	1	72120080505	
J205	PVC	1007#24 .2/7HAND B	1	72120030303	
J206	PVC	1007#24 .2/7HAND B	1	72120030303	
JL601A	WIRE TRAP	NPLG-9P592	1	25055630	
JL601B	WIRE HOL	NSCT-9P880	1	25051093	
JL703B	WIRE TRAP	NPLG-3P586	1	25055624	
JL7452A	SOCKET	NSCT-5P110	1	25050282	
JL8001A	WIRE HOL	NSCT-4P875	1	25051088	
JL961A	WIRE HOL	NSCT-5P876	1	25051089	
JL961B	WIRE HOL	NSCT-5P876	1	25051089	
P101	PIN JACK	NPJ-2PDO485	1	25045688	
P102	ST JACK	LGY2502-0200FC	1	25045696	
P2004A	PLUG	NPLG-8P0963	1	25056013	
P2005A	PLUG	NPLG-10P0965	1	25056015	
P2006A	SOCKET AS	NSAS-12P1641	1	200C4391210UL	
P3101B	SOCKET	NSCT-15P2195	1	25052298	
P3102B	SOCKET	NSCT-8P2188	1	25052291	
P3103B	SOCKET	NSCT-17P2197	1	25052300	
P3104B	SOCKET	NSCT-17P2197	1	25052300	
P3105B	SOCKET	NSCT-17P2197	1	25052300	
P601A	SOCKET	NSCT-35P2232	1	25052335	
P601B	SOCKET	NSCT-35P2232	1	25052335	
P650	TRM(SCREW)	NEJITANSI M3	1	25065425	
P651	TRM(SCREW)	NEJITANSI M3	1	25065425	
P652	TRM(SCREW)	NEJITANSI M3	1	25065425	
P655	TRM	NTM-1P232(M1700)	1	25060301	
P701A	SOCKET	NSCT-13P2106	1	25052209	
P702	SOCKET	NSCT-9P2427	1	25052530	
P710A	SOCKET	NSCT-17P2110	1	25052213	<DC>
P7534A	SOCKET	NSCT-40P2274	1	25052377	
P8003A	PLUG	NPLG-18P763	1	25055807	
P954A	PLUG	IMSA-9115B-15	1	25056345	
P959A	PLUG	IMSA-9115B-18	1	25056348	

U16	POWER SUPPLY PC BOARD (NAPS-8999-1A/1B/1C/1D/1E/1F/1J)
U17	POWER SUPPLY PC BOARD (NAPS-9000-1A/1B/1C/1D/1E/1F/1J)
U18	SP TERMINAL PC BOARD (NAETC-9001-1A/1B/1C/1D/1E/1F/1J)
U19	SP TERMINAL PC BOARD (NAETC-9002-1A/1B/1C/1D/1E/1F/1J)
U20	DRIVER AMPLIFIER PC BOARD (NAAF-9003-1A/1B/1C/1D/1E/1F/1J)
U21	POWER SW PC BOARD (NAETC-9004-1B/1C/1D/1E/1F/1J)
U22	POWER SW PC BOARD (NAETC-9005-1B/1C/1D/1E/1F/1J)
U24	OUTLET PC BOARD (NAETC-9007-1D)

CIRCUIT NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
U5501	REMO SENS	GP1UM281XKVFH=16MM	1	241361	
Q5000	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5000 or	TR	2SC1845-E	(1)	2211733T	

Q5001	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5001 or	TR	2SC1845-E	(1)	2211733T
Q5002	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5002 or	TR	2SC1845-E	(1)	2211733T
Q5003	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5003 or	TR	2SC1845-E	(1)	2211733T
Q5004	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5004 or	TR	2SC1845-E	(1)	2211733T
Q5005	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5005 or	TR	2SC1845-E	(1)	2211733T
Q5006	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5006 or	TR	2SC1845-E	(1)	2211733T
Q5010	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5010 or	TR	2SC1845-E	(1)	2211733T
Q5011	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5011 or	TR	2SC1845-E	(1)	2211733T
Q5012	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5012 or	TR	2SC1845-E	(1)	2211733T
Q5013	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5013 or	TR	2SC1845-E	(1)	2211733T
Q5014	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5014 or	TR	2SC1845-E	(1)	2211733T
Q5015	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5015 or	TR	2SC1845-E	(1)	2211733T
Q5016	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5016 or	TR	2SC1845-E	(1)	2211733T
Q5030	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5031	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5032	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5033	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5034	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5035	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5036	TR	2SA949-Y(TPE6_F)	1	2211354T
Q5040	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5041	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5042	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5043	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5044	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5045	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5046	TR	2SC2229-Y(TPE6_F)	1	2211634T
Q5050	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5050 or	TR	2SC1845-E	(1)	2211733T
Q5051	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5051 or	TR	2SC1845-E	(1)	2211733T
Q5052	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5052 or	TR	2SC1845-E	(1)	2211733T
Q5053	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5053 or	TR	2SC1845-E	(1)	2211733T
Q5054	TR	2SC2240-BL(TPE2_F)	1	2211406T
Q5054 or	TR	2SC1845-E	(1)	2211733T

Q5055	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5055 or	TR	2SC1845-E	(1)	2211733T	
Q5056	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5056 or	TR	2SC1845-E	(1)	2211733T	
Q5501	IC	ICL3221ECVZ	1	22242268R2	
Q5502	TR	2SB1240-R	1	2213794T	
Q5505	TR	KRC102M	1	2215960T	
Q5505 or	TR	DTC114ES	(1)	2213290T	
Q901	IC	SI-3010KF	1	22242203	<WT>
Q912	TR	2SC1740S-R	1	2213284T	
Q912 or	TR	2SC1740S-S	(1)	2213285T	
Q912 or	TR	2SC2458-GR	(1)	2212115T	
Q912 or	TR	KTC3199-GR	(1)	2215864T	
Q951	IC	7805FA(NJM7805FA)	1	222780054JRC	
Q951 or	IC	7805HF(MPC7805HF)	(1)	222780054NEC	
Q951A	SCREW	3P+10FN(3BC)	1	82143010GR	
Q951D	HEAT SINK	RAD-183	1	27160526	
Q951F	RETAINER	(U)	1	27142012	
Q951G	SCREW	3P+10FN(3BC)	1	82143010GR	
Q952	IC	S-812C53AY-Z-G	1	22242271T	<DC>
Q954	TR	2SA965-Y(TPE6_F)	1	2211644T	
Q955	TR	2SD1858-R	1	2213214T	
Q956	TR	KRC102M	1	2215960T	
Q956 or	TR	DTC114ES	(1)	2213290T	
Q957	TR	2SA1015-GR	1	2211455T	
Q958	TR	KRC102M	1	2215960T	
Q958 or	TR	DTC114ES	(1)	2213290T	
Q959	TR	2SA1930(ONK_Q)	1	2203000	<DC>
Q959A	SCREW	3P+10FN(3BC)	1	82143010GR	<DC>
Q960	TR	2SC1740S-R	1	2213284T	
Q960 or	TR	2SC1740S-S	(1)	2213285T	
Q960 or	TR	2SC2458-GR	(1)	2212115T	
Q960 or	TR	KTC3199-GR	(1)	2215864T	
D5000	ZENER D	DZ-5.6BSB	1	224850562T	
D5000 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5001	ZENER D	DZ-5.6BSB	1	224850562T	
D5001 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5002	ZENER D	DZ-5.6BSB	1	224850562T	
D5002 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5003	ZENER D	DZ-5.6BSB	1	224850562T	
D5003 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5004	ZENER D	DZ-5.6BSB	1	224850562T	
D5004 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5005	ZENER D	DZ-5.6BSB	1	224850562T	
D5005 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5006	ZENER D	DZ-5.6BSB	1	224850562T	
D5006 or	ZENER D	MTZJ5.6B	(1)	224470562T	
D5501	DIODE	ISS133(DS)	1	223280T	
D5501 or	DIODE	ISS133	(1)	223163T	
D5502	DIODE	ISS133(DS)	1	223280T	

D5502 or	DIODE	ISS133	(1)	223163T	
D5508	SPCF D	SIR-34ST3F	1	225456	
D6600	DIODE	ISS133(DS)	1	223280T	
D6600 or	DIODE	ISS133	(1)	223163T	
D6603	DIODE	ISS133(DS)	1	223280T	
D6603 or	DIODE	ISS133	(1)	223163T	
D6605	DIODE	ISS133(DS)	1	223280T	
D6605 or	DIODE	ISS133	(1)	223163T	
D6607	DIODE	ISS133(DS)	1	223280T	
D6607 or	DIODE	ISS133	(1)	223163T	
D901	DIODE	ISS133(DS)	1	223280T	
D901 or	DIODE	ISS133	(1)	223163T	
D902	DIODE	ISS133(DS)	1	223280T	
D902 or	DIODE	ISS133	(1)	223163T	
D903	DIODE	ISS133(DS)	1	223280T	
D903 or	DIODE	ISS133	(1)	223163T	
D904	DIODE	ISS133(DS)	1	223280T	
D904 or	DIODE	ISS133	(1)	223163T	
D905	DIODE	ISS133(DS)	1	223280T	
D905 or	DIODE	ISS133	(1)	223163T	
D906	DIODE	ISS133(DS)	1	223280T	
D906 or	DIODE	ISS133	(1)	223163T	
D907	DIODE	ISS133(DS)	1	223280T	
D907 or	DIODE	ISS133	(1)	223163T	
D908	DIODE	ISS133(DS)	1	223280T	
D908 or	DIODE	ISS133	(1)	223163T	
D909	DIODE	ISS133(DS)	1	223280T	
D909 or	DIODE	ISS133	(1)	223163T	
D910	ZENER D	DZ-5.6BSB	1	224850562T	<DC>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<PA>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<WT>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<GK>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<GR>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<PP>
D910	ZENER D	DZ-5.6BSB	1	224850562T	<GQ>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<DC>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<PA>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<WT>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<GK>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<GR>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<PP>
D910 or	ZENER D	MTZJ5.6B	(1)	224470562T	<GQ>
D912	DIODE	ISS133(DS)	1	223280T	
D912 or	DIODE	ISS133	(1)	223163T	
D913	DIODE	ISS133(DS)	1	223280T	
D913 or	DIODE	ISS133	(1)	223163T	
D951	DIODE	ISS133(DS)	1	223280T	<WT>
D951 or	DIODE	ISS133	(1)	223163T	<WT>
D952	DIODE	ISS133(DS)	1	223280T	<WT>
D952 or	DIODE	ISS133	(1)	223163T	<WT>

D953	DIODE	D10XB60H	1	22380337	
D953A	SCREW	3P+10FN(3BC)	1	82143010GR	
D953B	HEAT SINK	RAD-183	1	27160526	
D954	ZENER D	MTZJ8.2C	1	224470823T	
D954 or	ZENER D	MTZ8.2C	(1)	224450823T	
D956	DIODE	RL1N4003	1	22380260T	
D956 or	DIODE	GP104003E	(1)	22380035T	
D957	DIODE	RL1N4003	1	22380260T	
D957 or	DIODE	GP104003E	(1)	22380035T	
D958	ZENER D	DZ-33BSD	1	224853304T	
D958 or	ZENER D	MTZJ33D	(1)	224473304T	
D961	DIODE	RL1N4003	1	22380260T	
D961 or	DIODE	GP104003E	(1)	22380035T	
D962	DIODE	RL1N4003	1	22380260T	
D962 or	DIODE	GP104003E	(1)	22380035T	
D963	DIODE	RL1N4003	1	22380260T	
D963 or	DIODE	GP104003E	(1)	22380035T	
D964	DIODE	RL1N4003	1	22380260T	
D964 or	DIODE	GP104003E	(1)	22380035T	
D965	DIODE	RL1N4003	1	22380260T	
D965 or	DIODE	GP104003E	(1)	22380035T	
D966	DIODE	RL1N4003	1	22380260T	
D966 or	DIODE	GP104003E	(1)	22380035T	
D967	DIODE	ISS133(DS)	1	223280T	
D967 or	DIODE	ISS133	(1)	223163T	
D968	DIODE	ISS133(DS)	1	223280T	
D968 or	DIODE	ISS133	(1)	223163T	
D969	DIODE	ISS133(DS)	1	223280T	
D969 or	DIODE	ISS133	(1)	223163T	
D970	DIODE	ISS133(DS)	1	223280T	
D970 or	DIODE	ISS133	(1)	223163T	
D971	DIODE	ISS133(DS)	1	223280T	
D971 or	DIODE	ISS133	(1)	223163T	
D991	DIODE	ISS133(DS)	1	223280T	
D991 or	DIODE	ISS133	(1)	223163T	
D992	DIODE	ISS133(DS)	1	223280T	
D992 or	DIODE	ISS133	(1)	223163T	
L5501	CHOKE COIL	NCH-1452 022M	1	233454M022T	
L5501 or	CHOKE COIL	NCH-1561 022K	(1)	233526K022T	
L5502	CHOKE COIL	NCH-1452 022M	1	233454M022T	
L5502 or	CHOKE COIL	NCH-1561 022K	(1)	233526K022T	
L6600	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6601	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6602	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6603	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6604	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6605	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
L6606	S COIL	S-1.3C	1	231176S	<PA,PP,GK,GQ,GR,WT>
T902	P TRANS	NPT-1519GQ	1	2301811	!,<GK,GQ,GR>
T902	P TRANS	NPT-1520GQ	1	2301813	!,<PA,PP>

T902	P TRANS	NPT-1520JQ	1	2301812	!,<DC,WT>
C5000	TF C	ECQ-B50V-221K	1	374722215T	
C5001	TF C	ECQ-B50V-221K	1	374722215T	
C5002	TF C	ECQ-B50V-221K	1	374722215T	
C5003	TF C	ECQ-B50V-221K	1	374722215T	
C5004	TF C	ECQ-B50V-221K	1	374722215T	
C5005	TF C	ECQ-B50V-221K	1	374722215T	
C5006	TF C	ECQ-B50V-221K	1	374722215T	
C5010	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5011	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5012	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5013	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5014	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5015	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5016	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5020	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5021	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5022	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5023	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5024	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5025	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5026	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
C5040	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5041	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5042	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5043	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5044	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5045	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5046	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
C5050	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5051	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5052	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5053	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5054	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5055	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5056	UTSP C	CE04W50V-47M(UTSP)	1	397584707T	
C5080	CERA C	CC45SL50V-040C	1	345020401T	
C5081	CERA C	CC45SL50V-040C	1	345020401T	
C5082	CERA C	CC45SL50V-040C	1	345020401T	
C5083	CERA C	CC45SL50V-040C	1	345020401T	
C5084	CERA C	CC45SL50V-040C	1	345020401T	
C5085	CERA C	CC45SL50V-040C	1	345020401T	
C5086	CERA C	CC45SL50V-040C	1	345020401T	
C5090	TF C	ECQ-B50V-101K	1	374721015T	
C5091	TF C	ECQ-B50V-101K	1	374721015T	
C5092	TF C	ECQ-B50V-101K	1	374721015T	
C5093	TF C	ECQ-B50V-101K	1	374721015T	
C5094	TF C	ECQ-B50V-101K	1	374721015T	
C5095	TF C	ECQ-B50V-101K	1	374721015T	
C5096	TF C	ECQ-B50V-101K	1	374721015T	

C5100	VR C	CE04W100V-10M(VR)	1	394691007T	
C5101	VR C	CE04W100V-10M(VR)	1	394691007T	
C5102	VR C	CE04W100V-10M(VR)	1	394691007T	
C5103	VR C	CE04W100V-10M(VR)	1	394691007T	
C5104	VR C	CE04W100V-10M(VR)	1	394691007T	
C5105	VR C	CE04W100V-10M(VR)	1	394691007T	
C5106	VR C	CE04W100V-10M(VR)	1	394691007T	
C5110	VR C	CE04W100V-10M(VR)	1	394691007T	
C5111	VR C	CE04W100V-10M(VR)	1	394691007T	
C5112	VR C	CE04W100V-10M(VR)	1	394691007T	
C5113	VR C	CE04W100V-10M(VR)	1	394691007T	
C5114	VR C	CE04W100V-10M(VR)	1	394691007T	
C5115	VR C	CE04W100V-10M(VR)	1	394691007T	
C5116	VR C	CE04W100V-10M(VR)	1	394691007T	
C5501	VR C	CE04W16V-100M(VR)	1	394641017T	
C5502	CERA C	CK45F50V-223Z	1	335622230T	
C5503	VR C	CE04W50V-1M(VR)	1	394680107T	
C5504	VR C	CE04W50V-1M(VR)	1	394680107T	
C5505	VR C	CE04W50V-1M(VR)	1	394680107T	
C5506	VR C	CE04W50V-1M(VR)	1	394680107T	
C5507	CERA C	CK45F50V-223Z	1	335622230T	
C5508	TF C	ECQ-B50V-102J	1	374721024T	
C5509	TF C	ECQ-B50V-102J	1	374721024T	
C5511	VR C	CE04W16V-100M(VR)	1	394641017T	
C5512	VR C	CE04W16V-100M(VR)	1	394641017T	
C5513	CERA C	CK45F50V-223Z	1	335622230T	
C5514	CERA C	CK45B50V-102K	1	335321025T	
C5515	CERA C	CK45F50V-103Z	1	335621030T	
C5516	CERA C	CK45F50V-103Z	1	335621030T	
C6600	CERA C	CK45F50V-103Z	1	335621030T	
C6602	CERA C	CK45F50V-103Z	1	335621030T	
C6603	CERA C	CK45F50V-103Z	1	335621030T	
C6605	CERA C	CK45F50V-103Z	1	335621030T	
C6607	CERA C	CK45F50V-103Z	1	335621030T	
C6640	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6641	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6642	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6643	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6644	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6645	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6646	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6647	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6648	TF C	ECQ-B50V-103J	1	374721034T	<PA,PP,GK,GQ,GR,WT>
C6650	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6651	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6652	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6653	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6654	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6655	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6656	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>

C6657	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C6658	TF C	ECQ-B50V-102J	1	374721024T	<PA,PP,GK,GQ,GR,WT>
C902	TF C	ECQ-B50V-223J	1	374722234T	
C903	VR C	CE04W35V-2200M(VR)	1	394662227S	
C904	VR C	CE04W50V-100M(VR)	1	394681017T	
C905	VR C	CE04W50V-10M(VR)	1	394681007T	<WT>
C906	VR C	CE04W50V-3.3M(VR)	1	394680337T	
C907	VR C	CE04W50V-100M(VR)	1	394681017T	<WT>
C912	IS C	RE275V-103M	1	3500196S	
C912 or	IS C	LE103-C3.5	(1)	3800042S	
C929	TF C	ECQ-B50V-102J	1	374721024T	
C932	TF C	ECQ-B50V-103J	1	374721034T	
C951	TF C	ECQ-V50V-104J	1	374721044T	
C952	TF C	ECQ-V50V-104J	1	374721044T	
C953	VR C	CE04W50V-3.3M(VR)	1	394680337T	<WT>
C954	VR C	CE04W16V-10000M(VR)	1	394641037S	
C955	VR C	CE04W16V-3300M(VR)	1	394643327S	
C956	VR C	CE04W50V-10M(VR)	1	394681007T	
C957	VR C	CE04W16V-100M(VR)	1	394641017T	
C958	VR C	CE04W50V-10M(VR)	1	394681007T	<DC>
C959	VR C	CE04W16V-100M(VR)	1	394641017T	<DC>
C962	TF C	ECQ-V50V-334J	1	374723344T	
C963	TF C	ECQ-V50V-334J	1	374723344T	
C964	TF C	ECQ-V50V-104J	1	374721044T	
C965	VR C	CE04W35V-3300M(VR)	1	394663327S	
C966	VR C	CE04W35V-1000M(VR)	1	394661027S	
C967	VR C	CE04W50V-220M(VR)	1	394682217T	
C968	VR C	CE04W63V-220M(VR)	1	394672217T	
C969	VR C	CE04W50V-47M(VR)	1	394684707T	
C970	CERA C	CK45F50V-223Z	1	335622230T	
C972	TF C	ECQ-V50V-334J	1	374723344T	
C973	VR C	CE04W16V-470M(VR)	1	394644717T	
C974	VR C	CE04W50V-10M(VR)	1	394681007T	
C991	TF C	ECQ-B50V-222J	1	374722224T	
R5000	CARBON R	R16J-1K	1	417341024T	
R5001	CARBON R	R16J-1K	1	417341024T	
R5002	CARBON R	R16J-1K	1	417341024T	
R5003	CARBON R	R16J-1K	1	417341024T	
R5004	CARBON R	R16J-1K	1	417341024T	
R5005	CARBON R	R16J-1K	1	417341024T	
R5006	CARBON R	R16J-1K	1	417341024T	
R5010	CARBON R	R16J-56K	1	417345634T	
R5011	CARBON R	R16J-56K	1	417345634T	
R5012	CARBON R	R16J-56K	1	417345634T	
R5013	CARBON R	R16J-56K	1	417345634T	
R5014	CARBON R	R16J-56K	1	417345634T	
R5015	CARBON R	R16J-56K	1	417345634T	
R5016	CARBON R	R16J-56K	1	417345634T	
R5020	CARBON R	R16J-330	1	417343314T	
R5021	CARBON R	R16J-330	1	417343314T	

R5022	CARBON R	R16J-330	1	417343314T
R5023	CARBON R	R16J-330	1	417343314T
R5024	CARBON R	R16J-330	1	417343314T
R5025	CARBON R	R16J-330	1	417343314T
R5026	CARBON R	R16J-330	1	417343314T
R5030	CARBON R	R16J-120K	1	417341244T
R5031	CARBON R	R16J-120K	1	417341244T
R5032	CARBON R	R16J-120K	1	417341244T
R5033	CARBON R	R16J-120K	1	417341244T
R5034	CARBON R	R16J-120K	1	417341244T
R5035	CARBON R	R16J-120K	1	417341244T
R5036	CARBON R	R16J-120K	1	417341244T
R5040	CARBON R	R16J-2.2K	1	417342224T
R5041	CARBON R	R16J-2.2K	1	417342224T
R5042	CARBON R	R16J-2.2K	1	417342224T
R5043	CARBON R	R16J-2.2K	1	417342224T
R5044	CARBON R	R16J-2.2K	1	417342224T
R5045	CARBON R	R16J-2.2K	1	417342224T
R5046	CARBON R	R16J-2.2K	1	417342224T
R5050	CARBON R	R16J-4.7K	1	417344724T
R5051	CARBON R	R16J-4.7K	1	417344724T
R5052	CARBON R	R16J-4.7K	1	417344724T
R5053	CARBON R	R16J-4.7K	1	417344724T
R5054	CARBON R	R16J-4.7K	1	417344724T
R5055	CARBON R	R16J-4.7K	1	417344724T
R5056	CARBON R	R16J-4.7K	1	417344724T
R5060	CARBON R	R16J-1.2K	1	417341224T
R5061	CARBON R	R16J-1.2K	1	417341224T
R5062	CARBON R	R16J-1.2K	1	417341224T
R5063	CARBON R	R16J-1.2K	1	417341224T
R5064	CARBON R	R16J-1.2K	1	417341224T
R5065	CARBON R	R16J-1.2K	1	417341224T
R5066	CARBON R	R16J-1.2K	1	417341224T
R5080	CARBON R	R16J-470	1	417344714T
R5081	CARBON R	R16J-470	1	417344714T
R5082	CARBON R	R16J-470	1	417344714T
R5083	CARBON R	R16J-470	1	417344714T
R5084	CARBON R	R16J-470	1	417344714T
R5085	CARBON R	R16J-470	1	417344714T
R5086	CARBON R	R16J-470	1	417344714T
R5090	CARBON R	R16J-100K	1	417341044T
R5091	CARBON R	R16J-100K	1	417341044T
R5092	CARBON R	R16J-100K	1	417341044T
R5093	CARBON R	R16J-100K	1	417341044T
R5094	CARBON R	R16J-100K	1	417341044T
R5095	CARBON R	R16J-100K	1	417341044T
R5096	CARBON R	R16J-100K	1	417341044T
R5100	CARBON R	R16J-100K	1	417341044T
R5101	CARBON R	R16J-100K	1	417341044T
R5102	CARBON R	R16J-100K	1	417341044T

R5103	CARBON R	R16J-100K	1	417341044T
R5104	CARBON R	R16J-100K	1	417341044T
R5105	CARBON R	R16J-100K	1	417341044T
R5106	CARBON R	R16J-100K	1	417341044T
R5110	CARBON R	R16J-1K	1	417341024T
R5111	CARBON R	R16J-1K	1	417341024T
R5112	CARBON R	R16J-1K	1	417341024T
R5113	CARBON R	R16J-1K	1	417341024T
R5114	CARBON R	R16J-1K	1	417341024T
R5115	CARBON R	R16J-1K	1	417341024T
R5116	CARBON R	R16J-1K	1	417341024T
R5130	CARBON R	R16J-22K	1	417342234T
R5131	CARBON R	R16J-22K	1	417342234T
R5132	CARBON R	R16J-22K	1	417342234T
R5133	CARBON R	R16J-22K	1	417342234T
R5134	CARBON R	R16J-22K	1	417342234T
R5135	CARBON R	R16J-22K	1	417342234T
R5136	CARBON R	R16J-22K	1	417342234T
R5160	NF CARBON R	R25J-100	1	415471014T
R5161	NF CARBON R	R25J-100	1	415471014T
R5162	NF CARBON R	R25J-100	1	415471014T
R5163	NF CARBON R	R25J-120	1	415471214T
R5164	NF CARBON R	R25J-120	1	415471214T
R5165	NF CARBON R	R25J-120	1	415471214T
R5166	NF CARBON R	R25J-120	1	415471214T
R5170	NF CARBON R	R25J-100	1	415471014T
R5171	NF CARBON R	R25J-100	1	415471014T
R5172	NF CARBON R	R25J-100	1	415471014T
R5173	NF CARBON R	R25J-120	1	415471214T
R5174	NF CARBON R	R25J-120	1	415471214T
R5175	NF CARBON R	R25J-120	1	415471214T
R5176	NF CARBON R	R25J-120	1	415471214T
R5180	NF CARBON R	R25J-10	1	415471004T
R5181	NF CARBON R	R25J-10	1	415471004T
R5182	NF CARBON R	R25J-10	1	415471004T
R5183	NF CARBON R	R25J-10	1	415471004T
R5184	NF CARBON R	R25J-10	1	415471004T
R5185	NF CARBON R	R25J-10	1	415471004T
R5186	NF CARBON R	R25J-10	1	415471004T
R5190	NF CARBON R	R25J-10	1	415471004T
R5191	NF CARBON R	R25J-10	1	415471004T
R5192	NF CARBON R	R25J-10	1	415471004T
R5193	NF CARBON R	R25J-10	1	415471004T
R5194	NF CARBON R	R25J-10	1	415471004T
R5195	NF CARBON R	R25J-10	1	415471004T
R5196	NF CARBON R	R25J-10	1	415471004T
R5200	CARBON R	R16J-22K	1	417342234T
R5201	CARBON R	R16J-22K	1	417342234T
R5202	CARBON R	R16J-22K	1	417342234T
R5203	CARBON R	R16J-22K	1	417342234T

R5204	CARBON R	R16J-22K	1	417342234T	
R5205	CARBON R	R16J-22K	1	417342234T	
R5206	CARBON R	R16J-22K	1	417342234T	
R5230	CARBON R	R16J-120K	1	417341244T	
R5231	CARBON R	R16J-120K	1	417341244T	
R5232	CARBON R	R16J-120K	1	417341244T	
R5233	CARBON R	R16J-120K	1	417341244T	
R5234	CARBON R	R16J-120K	1	417341244T	
R5235	CARBON R	R16J-120K	1	417341244T	
R5236	CARBON R	R16J-120K	1	417341244T	
R5502	CARBON R	R16J-330	1	417343314T	
R5503	CARBON R	R16J-330	1	417343314T	
R5504	CARBON R	R16J-10K	1	417341034T	
R5505	CARBON R	R16J-10K	1	417341034T	
R5506	CARBON R	R16J-10K	1	417341034T	
R5507	CARBON R	R16J-330	1	417343314T	
R5508	CARBON R	R16J-330	1	417343314T	
R5510	CARBON R	R16J-100	1	417341014T	
R5511	CARBON R	R16J-3.9	1	417340394T	
R5514	CARBON R	R16J-1K	1	417341024T	
R5519	CARBON R	R16J-220K	1	417342244T	
R5524	CARBON R	R16J-1K	1	417341024T	
R5525	CARBON R	R16J-100	1	417341014T	
R5526	CARBON R	R16J-100	1	417341014T	
R6600	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6601	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6602	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6603	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6604	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6605	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6606	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6610	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6611	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6612	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6613	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6614	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6615	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6616	CARBON R	R16J-22	1	417342204T	<PA,PP,GK,GQ,GR,WT>
R6690	METAL R	RNU1/2WCJ-0.22	1	453532294T	
R905	CARBON R	R16J-100K	1	417341044T	<WT>
R906	CARBON R	R16J-100K	1	417341044T	<WT>
R907	CARBON R	R16J-82K	1	417348234T	<WT>
R908	CARBON R	R16J-10K	1	417341034T	<WT>
R909	CARBON R	R16J-100K	1	417341044T	
R913	CARBON R	R16J-1K	1	417341024T	
R914	CARBON R	R16J-100K	1	417341044T	
R946	METAL O R	RS1/2WBJ-10	1	443521004T	
R951	METAL R	RNU1/2WCJ-2.2	1	453530224T	<WT>
R952	METAL R	RNU1/2WCJ-2.2	1	453530224T	<WT>
R953	METAL R	RNU1WCJ-0.22	1	453632294T	

R955	METAL R	RNU1/2WCJ-2.2	1	453530224T	
R956	METAL R	RNU1/4WJ-33	1	4500185T	<DC>
R957	CARBON R	R16J-2.2K	1	417342224T	
R958	CARBON R	R16J-1K	1	417341024T	
R959	CARBON R	R16J-2.2K	1	417342224T	
R961	METAL R	RNU1/2WCJ-2.2	1	453530224T	<PA,PP,GK,GR>
R961	METAL R	RNU1/2WCJ-4.7	1	453530474T	<DC,GQ>
R961	METAL R	RNU1/2WCJ-6.8	1	453530684T	<WT>
R962	METAL R	RNU1/2WCJ-2.2	1	453530224T	
R963	METAL O R	RS1/2WBJ-22	1	443522204T	
R964	CARBON R	R16J-15K	1	417341534T	
R965	CARBON R	R16J-33K	1	417343334T	
R966	METAL R	RNU1/2WCJ-0.22	1	453532294T	<DC>
R967	METAL R	RNU1WCJ-1.5	1	453630154T	
R970	METAL R	RNU1WCJ-2.2	1	453630224T	
R971	METAL R	RNU1/2WCJ-2.2	1	453530224T	
F901A	FUSE HOL	NSCT-1P2031	1	25052133T	
F901B	FUSE HOL	NSCT-1P2031	1	25052133T	
F901C	LABEL	T6.3AL/250V	1	29361681	<PA,PP,GK,GQ,GR,WT>
F902A	FUSE HOL	NSCT-1P2031	1	25052133T	<WT>
F902B	FUSE HOL	NSCT-1P2031	1	25052133T	<WT>
F903A	FUSE HOL	NSCT-1P2031	1	25052133T	<DC,PA,PP,GQ,GR,WT>
F903B	FUSE HOL	NSCT-1P2031	1	25052133T	<DC,PA,PP,GQ,GR,WT>
F903C	LABEL	T2.5AL250V	1	29361747	<PA,PP,GR,WT>
F931A	FUSE HOL	NSCT-1P2031	1	25052133T	
F931B	FUSE HOL	NSCT-1P2031	1	25052133T	
F932A	FUSE HOL	NSCT-1P2031	1	25052133T	
F932B	FUSE HOL	NSCT-1P2031	1	25052133T	
F951A	FUSE HOL	NSCT-1P2031	1	25052133T	
F951B	FUSE HOL	NSCT-1P2031	1	25052133T	
F952A	FUSE HOL	NSCT-1P2031	1	25052133T	
F952B	FUSE HOL	NSCT-1P2031	1	25052133T	
J901	PVC	1007#24 .2/7HAND B	1	72120030303	
JL2006B	SOCKET	NSCT-5P97	1	25050269	
JL6006A	WIRE HOL	NSCT-5P896	1	25051109	
JL6600B	SOCKET	NSCT-7P99	1	25050271	
JL6602A	WIRE HOL	NSCT-4P895	1	25051108	
JL6602B	SOCKET	NSCT-4P96	1	25050268	
JL6603B	SOCKET	NSCT-9P101	1	25050273	
JL911A	WIRE HOL	NSCT-6P877	1	25051090	
JL911B	WIRE TRAP	NPLG-6P589	1	25055627	
JL957B	SOCKET	NSCT-5P97	1	25050269	
P5004A	PLUG	NPLG-13P141	1	25055157	
P5019	TRM(SCREW)	NEJITANSI M3	1	25065425	
P5501	SOCKET	7906-09FHA	1	25053103	
P5501 or	SOCKET	NSCT-9P2277	(1)	25052379	
P5503	PIN JACK	NPJ-2PDBL185	1	25045333	
P5504	JACK	YKB21-5130	1	25045387	
P5505	ST JACK	HSJ1002-01-1020	1	25045647	
P6000A	SOCKET	NSCT-5P2185	1	25052288	

P6001A	SOCKET	NSCT-5P2185	1	25052288	
P6002A	SOCKET	NSCT-5P2185	1	25052288	
P6003A	SOCKET	NSCT-5P2185	1	25052288	
P6004A	SOCKET	NSCT-5P2185	1	25052288	
P6005A	SOCKET	NSCT-5P2185	1	25052288	
P6011B	RETAINER	(BUS-U)	1	27141859	
P6600	TRM	NTM-8PDMN341	1	25060412	<DC>
P6600	TRM	NTM-8PDMN342	1	25060413	<PA,PP,GK,GQ,GR,WT>
P6602	TRM	NTM-2PDMN318	1	25060387	<DC>
P6602	TRM	NTM-2PDMN319	1	25060388	<PA,PP,GK,GQ,GR,WT>
P6605	TRM	NTM-4PDMN345	1	25060416	<DC>
P6605	TRM	NTM-4PDMN355	1	25060426	<PA,PP,GK,GQ,GR,WT>
P6607	TRM	NTM-4PDMN308	1	25060377	<DC>
P6607	TRM	NTM-4PDMN332	1	25060402	<PA,PP,GK,GQ,GR,WT>
P901A	PLUG	NPLG-2P631	1	25055675	
P902	CRIMP AS	CRIMP AS	1	2069943353UL	<PP,GK,GQ,GR,WT>
P903	CRIMP AS	CRIMP AS	1	2069943353UL	<PP,GK,GQ,GR,WT>
P910	AC OUTLET	AC-181-GB-11VGY5311	1	25053032	!,<GR>
P910	AC OUTLET	NSCT-2P2013	1	25052115	!,<PA>
P910	AC OUTLET	NSCT-4P913	1	25051126	!,<DC>
P910	SOCKET	NSCT-4P912	1	25051125	!,<PP,GQ,WT>
P912	PLUG	B5P9-VH	1	25056568	<WT>
P912	PLUG	NPLG-2P631	1	25055675	<DC,PA,PP,GK,GQ,GR>
P951	PLUG	NPLG-4P151	1	25055167	
P952	PLUG	NPLG-5P119	1	25055135	
P954B	SOCKET	IMSA-9I15S-15L	1	25052995	
P955	PLUG	NPLG-2P83	1	25055099	
P959B	SOCKET	IMSA-9I15S-18L	1	25052998	
P991	TRM(SCREW)	NEJITANSI M3	1	25065425	
RL6600	RELAY	NRL-2P5A-DC24-158	1	25065618	
RL6600 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563	
RL6602	RELAY	NRL-2P5A-DC24-158	1	25065618	
RL6602 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563	
RL6603	RELAY	NRL-2P5A-DC24-158	1	25065618	
RL6603 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563	
RL6605	RELAY	NRL-2P5A-DC24-158	1	25065618	
RL6605 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563	
RL6607	RELAY	NRL-2P5A-DC24-158	1	25065618	
RL6607 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563	
RL902	RELAY	NRL-1P10A-DC9-188	1	25065693	
RL902 or	RELAY	NRL-1P10A-DC9-186	(1)	25065683	
S901	SLIDE SW	NSS-22157P	1	25065437	<WT>
S910	P SW	NPS-111-L590P	1	25035636	<PP,GK,GQ,GR,WT>
E5501	TRM(SCREW)	NEJITANSI M3	1	25065425	

TX-SR804/E

PACKING PROCEDURE PARTS LIST

REF. NO.	NAME	DESCRIPTION	Q'TY	PART NO(SN)	REMARKS
A601	PAD	AS	1	29092286A	
A603	CARTON	(ACC)	1	29054470	
A606	SHEET	.	1	29095906	
A607	LABEL	(SP CABLE)	1	29363059A	
A610	BAG	1020x770	1	29100153	
A611	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
A612	PP TAPE	W48 OPP TAPE	1	29110148	
A613	BAG	T0.05*650*100	1	29100238	
A630	POLY BAG	350*250	1	29100097-1B	
A650	CARTON	804(B)MDC	1	29054615	(B),<DC>
A650	CARTON	804(S)MDC	1	29054616	(S),<DC>
A650	CARTON	804(B)MPA	1	29054617	(B),<PA>
A650	CARTON	804(S)MPA	1	29054618	(S),<PA>
A650	CARTON	804(G)	1	29054619	(G),<GK,GQ,WT>
A650	CARTON	804E(B)MPP	1	29054620	(B),<PP>
A650	CARTON	804E(S)MPP	1	29054621	(S),<PP>
A650	CARTON	804(G)MGR	1	29054628A	(G),<GR>
A655a	UPC LABEL	804(B)UPC	1	29364691	(B),<DC>
A655a	UPC LABEL	804(S)UPC	1	29364692	(S),<DC>
A655a	EAN LABEL	804(B)EAN	1	29364686	(B),<PA>
A655a	EAN LABEL	804(S)EAN	1	29364687	(S),<PA>
A655a	EAN LABEL	804(G)EAN	1	29364688	(G),<GK,GQ,GR,WT>
A655a	EAN LABEL	804E(B)EAN	1	29364689	(B),<PP>
A655a	EAN LABEL	804E(S)EAN	1	29364690	(S),<PP>
A656	POLY BAG	350*250	1	29100097-1B	<GQ>
A660	LABEL	HOOKUP-ONKYO	1	29363194	<DC>
A670	WRNTY CARD	(ONKYO)	1	29365102A	<DC>
A671	WRNTY CARD	MGQ	1	29365099A	<GQ>
A672	WRNTY CARD	(ONKYO-CH)	1	29365098B	<GR>
A675	HANDBILL	(DS-A2)US	1	29380145	<DC>
A675	HANDBILL	(DS-A2)AUS	1	29380147	<PA>
A675	HANDBILL	(DS-A2)EU	1	29380146	<PP>
A812	INS MANUAL	En(TX-SR804)	1	29344329A	
A813	INS MANUAL	U2FrEs(TX-SR804)	1	29344331A	<DC>
A813	INS MANUAL	U2FrEs(TX-SR804)	1	29344331A	<PP>
A814	INS MANUAL	U2ItDe(TX-SR804)	1	29344332A	<PP>
A815	INS MANUAL	U2NlSv(TX-SR804)	1	29344333A	<PP>
A816	INS MANUAL	Cs(TX-SR804)	1	29344335	<GR>
A817	INS MANUAL	Ct(TX-SR804)	1	29344334A	<GQ>
A817	INS MANUAL	Ct(TX-SR804)	1	29344334A	<WT>
A817	INST SHEET	WEEE	1	29355537	<PP>
A818	INS MANUAL	En-DIG(TX-SR804)	1	29344330	<DC>
A826	INS MANUAL	U9(RC620-623/630-632)	1	29344100	
A827	INST SHEET	En(XM RADIO)	1	29355602	<DC>
A831	REMO CON	RC-620M	1	24140620A	

A841	BATTERY	R6/AA(UM-3)	3	3010194	
A841 or	BATTERY	R6/AA(UM-3)	(3)	3010054	
A842	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
A843	ANT COIL	NMA-3057	1	232140	
A844	POLY BAG	350*250	1	29100097-1B	<PP>
A845	FM ANT AS	Type W	1	292191	
A846	CV PLUG	CV-K-1	1	25056005	<WT>
A847	POLY BAG	t0.1*70*100	1	29100217	
U012	MIC AS	MIC-5000	1	1B068MIC	

ONKYO CORPORATION

Sales & Product Planning Div. : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8124

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 <http://www.us.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY
Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 <http://www.eu.onkyo.com/>

ONKYO EUROPE UK Office

Suite 1, Gregories Court, Gregories Road, Beaconsfield, Buckinghamshire, HP9 1HQ
UNITED KINGDOM Tel: +44-(0)1494-681515 Fax: +44(0)-1494-680452

ONKYO CHINA LIMITED

Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung,
N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039
<http://www.ch.onkyo.com/>

