

Service Manual

COMPACT
disc
DIGITAL AUDIO

DIGITAL

MASH
multi-stage noise shaping

Portable CD Player

SL-S341C

※ • MASH is a trademark of NTT.

Colour

(K)...Black Type



Area

Suffix for Model No.	Area	Colour
(P)	U.S.A.	(K)
(PC)	Canada.	

Please file and use this manual together with the service manual for Model No. SL-S240, Order No. AD9602038C1.

Note: • This simplified service manual is provided to indicate the main differences between the original model No. SL-S240 (P) and the subsequent model No. SL-S341C (P, PC).

CHANGES

LOCATION OF CONTROLS (SL-S240 Service Manual of page 2.)


SL-S240 (P)

⑭ Anti-shock switch (ANTI-SHOCK)

SL-S341C (P, PC)

⑭ Extra anti-shock switch (EXTRA ANTI-SHOCK)

PACKAGING (SL-S240 Service Manual of page 34.)

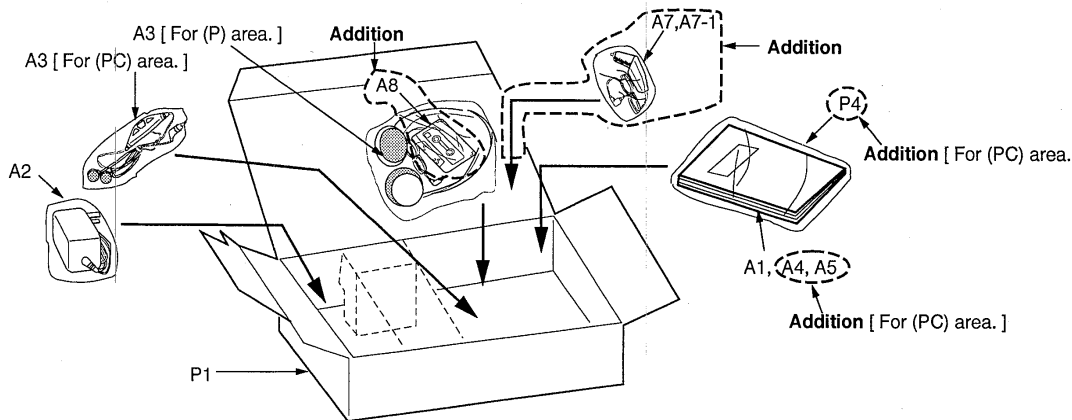

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Panasonic®

© 1996 Matsushita Electric Industrial Co., Ltd.
All rights reserved. Unauthorized copying and distribution is a violation of law.

CHANGE IN REPLACEMENT PARTS LIST (SL-S240 Service Manual of pages 33~35.)

Notes: • Mentioned in this parts list is only those different from Model No. SL-S240 (P).
All other parts are the same as for SL-S240 (P).

• Important safety notice:

Components identified by Δ mark have special characteristics important for safety. Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

Ref. No.	Change of Part No.		Part Name & Description	Remarks
	SL-S240 (P)	SL-S341C (P, PC)		
INTEGRATED CIRCUIT (S)				
IC503	LH6456K2	MN41440CSJ7T	4M DRAM	
TRANSISTOR (S)				
Q81	—	2SD1819QRSTX	TRANSISTOR	Addition
DIODE (S)				
D81—83	—	SLC505MCA47H	DIODE	Addition
D701	—	MA8051MTX	DIODE	Addition
LCD(S)				
LCD301	RSL5156-L	RSL5157-L	LCD	
CHIP JUMPERS				
RJ502	—	ERJ6GEY0R00V	CHIP JUMPER	Addition
CABINET AND CHASSIS				
5	RFKJLS240P-K	RFKJLS341CPK	BOTTOM CABINET ASS'Y	
7	RYF0402A-K	RYF0402C-K	CD COVER ASS'Y	
12	RFKKLS240P-K	RFKKLS340P-K	INTERMEDIATE CABINET ASS'Y	
PACKING MATERIAL				
P1	RPK0745	RPK0750	PACKING CASE	(P)
		RPK0784	PACKING CASE	(PC)
P4	—	—	—	(P)
		RPF0046	PROTECTION BAG (F.B.)	(PC) Addition
ACCESSORIES				
A1	RQT3374-P	RFKSLS241CPK	INSTRUCTION MANUAL ASS'Y	(P) ※1
		RFKSLS241CPC	INSTRUCTION MANUAL ASS'Y	(PC) Addition
A3	RPHT103DPYS1	RPHT103DPYS1	STEREO HEADPHONES	(P)
		RFEV317P-KS	STEREO EARPHONES	(PC)
A4	—	—	—	(P)
		SQX7185	WARRANTY CARD	(PC) Addition
A5	—	—	—	(P)
		SQX9131	SERVICENTER LIST	(PC) Addition
A6	—	—	—	(P)
		RKB205ZA-0	EAR PADS	(PC) Addition ※2
A7	—	SH-CDC2PPY	CAR ADAPTOR	△ Addition
A7-1	—	XBA2C05TB0	FUSE, 500mA (IN CAR ADAPTOR)	△ Addition
A8	—	SH-CDM8ASY-K	CAR STEREO CASSETTE ADAPTOR	△ Addition

※1: The servicenter list and the warranty card are included in the instruction manual.

※2: This item is not attached merchandise, but it is supplied as a replacement part.

SCHEMATIC DIAGRAM (SL-S240 Service Manual of pages 22, 23.)

