


SIGNAL GENERATOR MODULATED 30% AT 400 C.P.S.

ALIGNMENT & SENSITIVITY

STEP	APPLY SIGNAL		THROUGH SERIES DUMMY	SET GANG AT	ADJUST FOR MAX OUTPUT	NOM. SENS. FOR 50 mw OUTPUT	NOM. SENS. FOR 100mw AT DIODE L'D
	KC	TO					
1	455	PIN NO.1 V2	.05 ufd.	MAX. "C"	T 2	1100 uV	1700 uV
2	455	PIN NO.7 V1	.05 ufd.	MAX. "C"	T 1 & T 2	48 uV	72 uV
3	1460	-	RADIATE	1460 KCS	C2A & C2B TRIMMERS	210 uV/M	350 uV/M
4	600	-	"	600 KCS	CHECK ONLY	225 uV/M	370 uV/M
5	535	-	"	MAX. "C"	" "	-	-
6	1650	-	"	MIN. "C"	" "	-	-

FASHION LOOP CONSISTING OF SEVERAL TURNS OF WIRE AND RADIATE SIGNAL, F FROM GENERATOR TO LOOP OF RECEIVER.

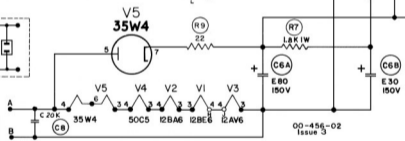

VIKING RM-718, RM-718R, RMK-720, RMK-720R