

Wharfedale

SERVICE MANUAL

Hi-Fi LOUDSPEAKER

MODEL PC8+DX SUROUND

PC8+DX



TABLE OF CONTENTS

PECIFICATIONS-----	2
SCHEMATIC DIAGRAM-----	3
ASSEMBLY PART LIST-----	4
ELECTRONICS PARTS LIST-----	5

★ SPECIFICATION


Amplifier Power	100 watts
Input Sensitivity	250mv
Crossover Range	35-85Hz
Frequency Response	40-95Hz
LF Response(Fb)	50Hz
Maximun SPL(ref 1m)	107db
Weight	10.3Kg
Dimensions Overall(H*W*D)	345*295*325(mm)

PC8+DX

SCHEMATIC DIAGRAM

C-293A05.SCH-1 - Sat Aug 07 09:46:16 2004

PC8+DX

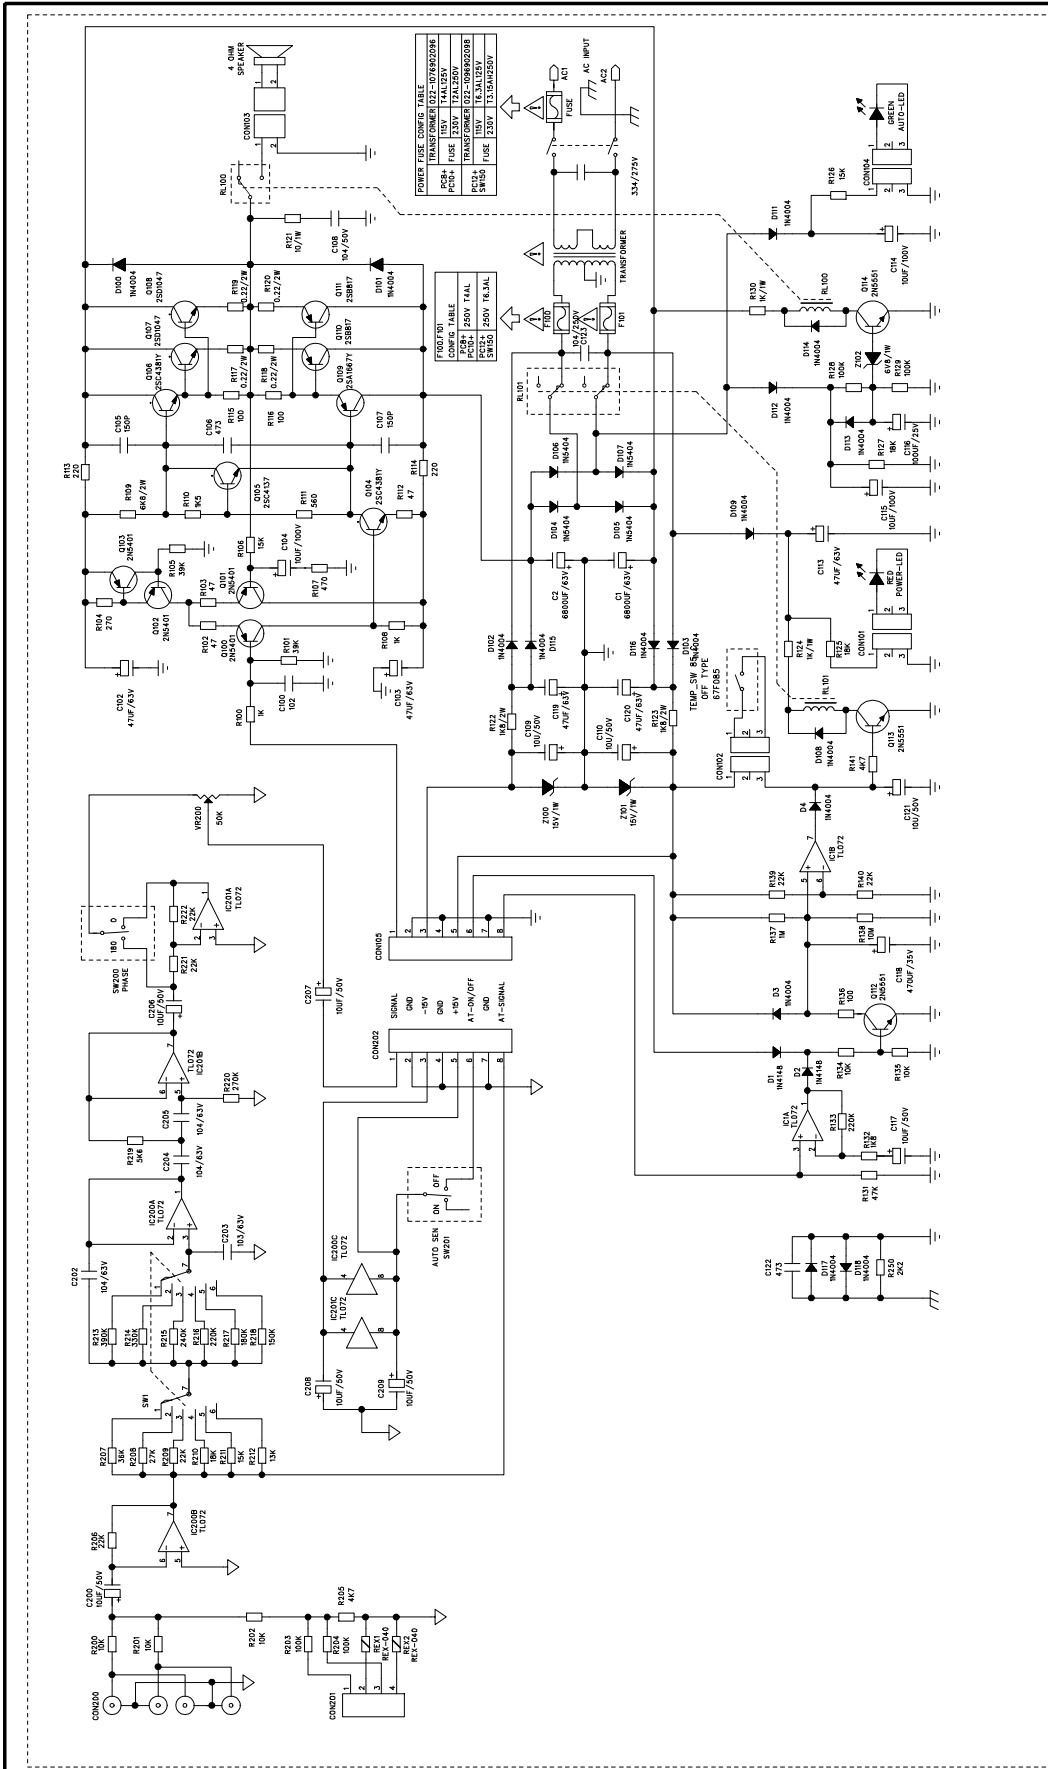

SANECORE MUSIC INSTR CO., LTD	
TITLE: PC8+10+12+SW150 SCHEMATIC	MODEL: C-293A05
DWG: Y.Q.J	DATE: 04.5.21
CHK:	DATE:
APR:	

△ Adjacent to the relevant component denoting specific component shall be replaced only by the component specified in the circuit for safety reasons.

Note: Damage requiring service, using this product form the wall outlet and refer servicing to qualified service personnel. This product is not intended for use in hazardous locations. Repairs should be made by qualified personnel. Unauthorized substitutions may result in fire, electric shock or other hazards. Upon completion of any service or repairs, this product must be returned to the manufacturer in proper operating condition. Perform safety checks to determine that the product is in proper operating condition.

★ ASSEMBLY PARTS LIST

R/N	P/N	PART NAME	DESCRIPTION	QUA
1	409-2105200000	CARTON BOX		1
2	406-1701641311	BUBBLE CORNER		8
3	401-2035000003	BUBBLE CUSHION		2
4	344-2105205001	PC8+DX CABINET		1
5	ZD-22700-01	WOOFER		1
6	ZC-34600-05	AMPLIFIER		1
7	226-0360154811	PLASTIC FEET		4
8	233-1311000701	PLASTIC CUBE		1
9	240-0213182900	PLASTIC PANEL		1
10	217-2336000001	LOGO PANEL		1
11	215-1158000001	PLASTIC KNOB		2
12	557-4001258061A	SCREWS	4.0*25PA HOB	8
13	557-4001208061A	SCREWS	4.0*20 DA HOB	10

PC8+DX

★ ELECTRONICS PARTS LIST

PC8+DX

R/N	P/N	PART NAME	DESCRIPTION	QUA	PLACE
	088-1292001300	INPUT PCB		1	
1	053-1293002113	PCB BOARD		1	
2	001-4702203010	RESISTOR	4.7K 1/8W F	1	R205
3	001-1003203010	RESISTOR	10K 1/8W F	3	R200.201.202
4	001-3603103050	RESISTOR	36K 1/8W 5%	1	R207
5	001-2703203010	RESISTOR	27K 1/8W F	1	R208
6	001-2203203010	RESISTOR	22K 1/8W F	4	R206.209.221.222
7	001-1803203010	RESISTOR	18K 1/8W F	1	R210
8	001-1503203010	RESISTOR	15K 1/8W F	1	R211
9	001-1303203010	RESISTOR	13K 1/8W F	1	R212
10	001-5602203010	RESISTOR	5.6Kohm 1/8W F	1	R219
11	001-1004203010	RESISTOR	100K 1/8W F	2	R203.204
12	001-3904203010	RESISTOR	390Kohm 1/8W F	1	R213
13	001-3304203010	RESISTOR	330K 1/8W F	1	R214
14	001-2404203010	RESISTOR	240K1/8W	1	R215
15	001-2204203010	RESISTOR	220K 1/8W 1%	1	R216
16	001-1804203010	RESISTOR	180K 1/8W F	1	R217
17	001-1504203010	RESISTOR	150K 1/8W F	1	R218
18	001-2704103050	RESISTOR	270K 1/8W J	1	R220
19	006-1004051163	CAPACITOR	SM10uF 50V 20	5	C200.206.207.208.209
20	013-1040210801	CAPACITOR	104/63V	3	C202.204.205
21	013-1030210501	CAPACITOR	103 63V 5%	1	C203
22	017-0650000000	IC	TL072(CN)	2	IC200A/B/C.201A/B/C
23	020-5052120425	POTENTIOMETERS	RK 16K 12D0025-50KA	1	VR200
24	089-0500000012	SWITCH	SS-22F20-G12	2	SW200.201
25	051-3300000000	JACK	4PIN PCB JK040	1	CON200
26	079-0401000000	FUSE	PTC RXE040	2	REX1.REX2
27	097-0701200000	SWITCH	SR2512-0206-26F1A-C	1	SW102
28	056-4108220000	JACK	JS-1135-08	1	CON202
29	056-4104220000	JACK	JS-1135-04	1	CON201

★ ELECTRONICS PARTS LIST

PC8+DX

	088-1292001000	AMP PCB		1	
1	053-1293002110	PCB BOARD		1	
2	001-0229308050	RESISTOR	0.22ohm 2	4	R117.118.119.120
3	001-1000307050	RESISTOR	10ohm 1W	1	R121
4	001-2701205010	RESISTOR	270ohm 1/4W F	2	R113.114
5	001-4700205010	RESISTOR	47ohm 1/4W F	3	R102.103.112
6	001-1802205010	RESISTOR	1.8K 1/4W F	4	R115.116.132.136.
7	001-4701205010	RESISTOR	470ohm 1/4W F	2	R104.107
8	001-5601205010	RESISTOR	560ohm 1/4W F	1	R111
9	001-1002205010	RESISTOR	1K 1/4W F	2	R100.108
10	001-1002307050	RESISTOR	1K 1W J	2	R124.130
11	001-1502205010	RESISTOR	1.5K 1/4W F	1	R110
12	001-1802308050	RESISTOR	1.8K 2W	2	R122.123
13	001-4702205010	RESISTOR	4.7K 1/4W F	1	R141
14	001-6802308050	RESISTOR	6.8K 2W	1	R109
15	001-1003205010	RESISTOR	10K 1/4W F	2	R134.135
16	001-1503205010	RESISTOR	15K 1/4W F	2	R106.126
17	001-1803205010	RESISTOR	18K 1/4W F	2	R125.127
18	001-2203205010	RESISTOR	22K 1/4W F	2	R139.140
19	001-3903205010	RESISTOR	39K 1/4W F	2	R101.105
20	001-4703205010	RESISTOR	47K 1/4W F	1	R131
21	001-1004205010	RESISTOR	100K 1/4W F	2	R128.129
22	001-2204205010	RESISTOR	220K 1/4W F	1	R133
23	001-1005205010	RESISTOR	1M 1/4W F	1	R137
24	001-1006205010	RESISTOR	10M 1/4W F	1	R138
25	008-1512050004	CAPACITOR	151/500V 10%	2	C105.107
26	008-1002005015	CAPACITOR	1NF-50V-10%	1	C100
27	006-1014051144	CAPACITOR	100uF 25V 2	1	C116
28	014-1040100001	CAPACITOR	CL11 100NF/50V	1	C108.
29	014-1040400004	CAPACITOR	CL21 0.1UF/250V	1	C123
30	013-4730210801	CAPACITOR	47NF/63V	2	C106 .122



ELECTRONICS PARTS LIST

PC8+DX

31	006-1004051163	CAPACITOR	SM10uF 50V 20	4	C109.110.117.121
32	006-1004061193	CAPACITOR	10uF 100V UL	3	C104.114.115
33	006-4701081573	CAPACITOR	47uF 63V 10%	5	C102.103.113.119.120
34	006-4714102154	CAPACITOR	470uF 35V 2	1	C118
35	067-2204004000	DIODE	IN4004	16	D3.4.100-103.108.109.111-116 117.118
36	067-1104148000	DIODE	IN4148	2	D1.D2
37	067-2205404000	DIODE	IN5404	4	D104.105.106.107
38	067-3304744000	DIODE	IN4744A 15V-1W	2	Z100.101
39	067-3304736000	DIODE	IN4736 6V8	1	Z102
40	018-0302690113	AUDION	2SC2690	1	Q105
41	018-0304381111	AUDION	2SC4381Y	2	Q104.106
42	018-2905401115	AUDION	2N5401 TO-92	4	Q100.101.102.103
43	018-0200817116	AUDION	2SB817 TO-3P	2	Q107.108
44	018-0101667111	AUDION	2SA1667Y TO-220	1	Q109
45	018-0401047116	AUDION	2SD1047 TO-3P	2	Q110.111
46	018-1400546115	AUDION	BC546B TO-92	3	Q112.113.114
47	017-0650000000	IC	TL072(CN)	1	IC1A.IC1B
48	024-2240101012	RELAY	JH32F-024-HS 24V	1	RL100
49	024-2240501006	RELAY	OMI-SS-224 24V	1	RL101
50	031-2200512121	FUSE	50T040H	2	F100.101
51	050-0100070211	BRACKET	FUC-2	4	F100.101
52	056-4108220000	JACK	JS-1135-08	1	CON100
53	056-4103220000	JACK	JS-1135-03	3	CON101.104. 102
54	056-0102224400	JACK	JS3962-2P-WAFER	1	CON103
55	001-2202205010	RESISTOR	2.2K 1/4W F	1	R250
56	019-0311022001	LED	234HD	1	POWER-LED
57	019-0522122000	LED	333GD/E-A	1	AUTD-LED
58	031-2200507122	FUSE	TSD 2A/250V	1	
59	050-0111070111	JACK	R3-11 5*20 UL	1	
60	022-1076902096	TRANSFORMER	SMY-010047(DB7	1	
61	055-1308160133	LINE		1	
62	055-1304120333	LINE		1	



ELECTRONICS PARTS LIST

63	055-1303600333	LINE		1	
64	055-1303180533	LINE		1	
65	060-0180151004	LINE		2	
66	060-0200120000	LEAD		1	
67	060-0180120300	LINE		1	
68	060-0180150000	LEAD		1	
69	044-0500000000	JACK		1	
70	041-2043000000	SWITCH		1	

PC8+DX