


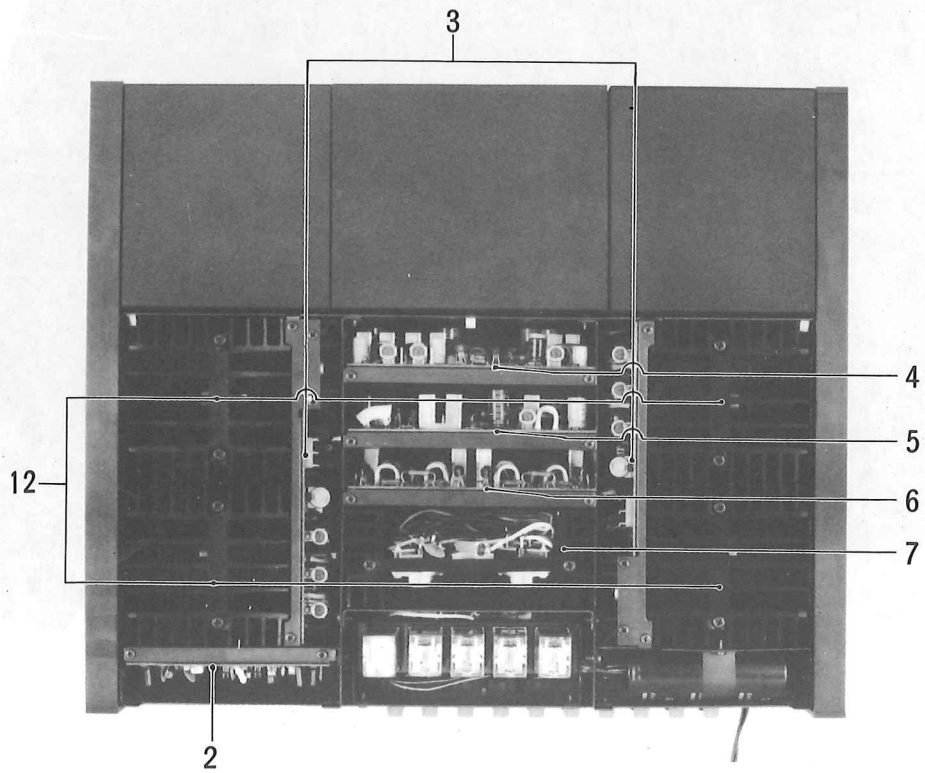
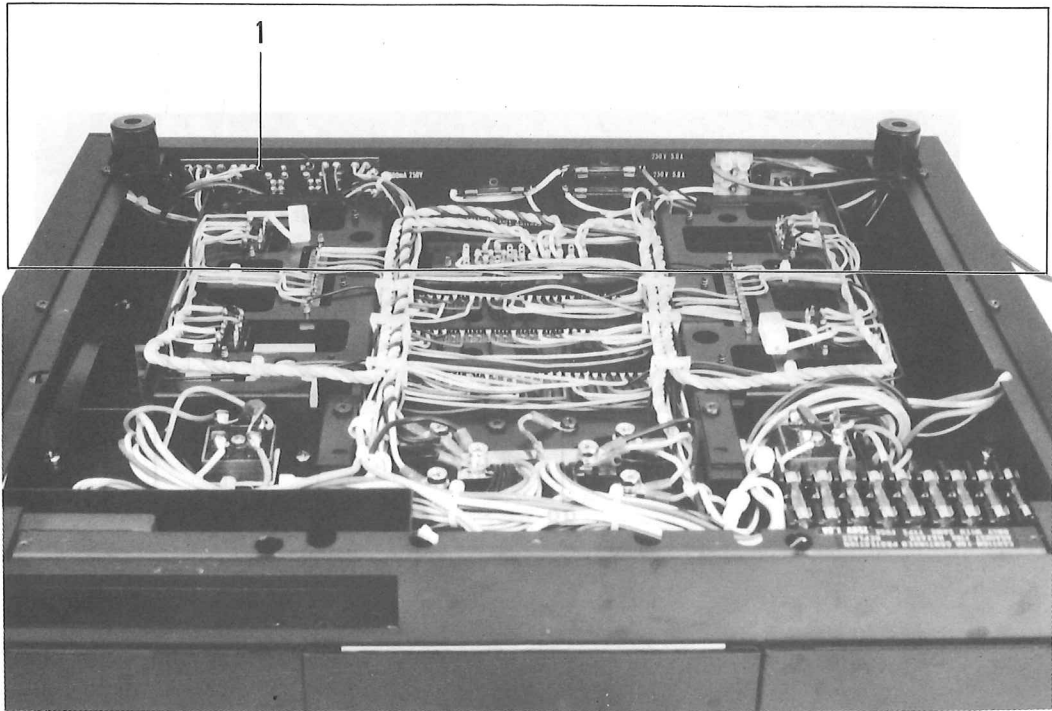
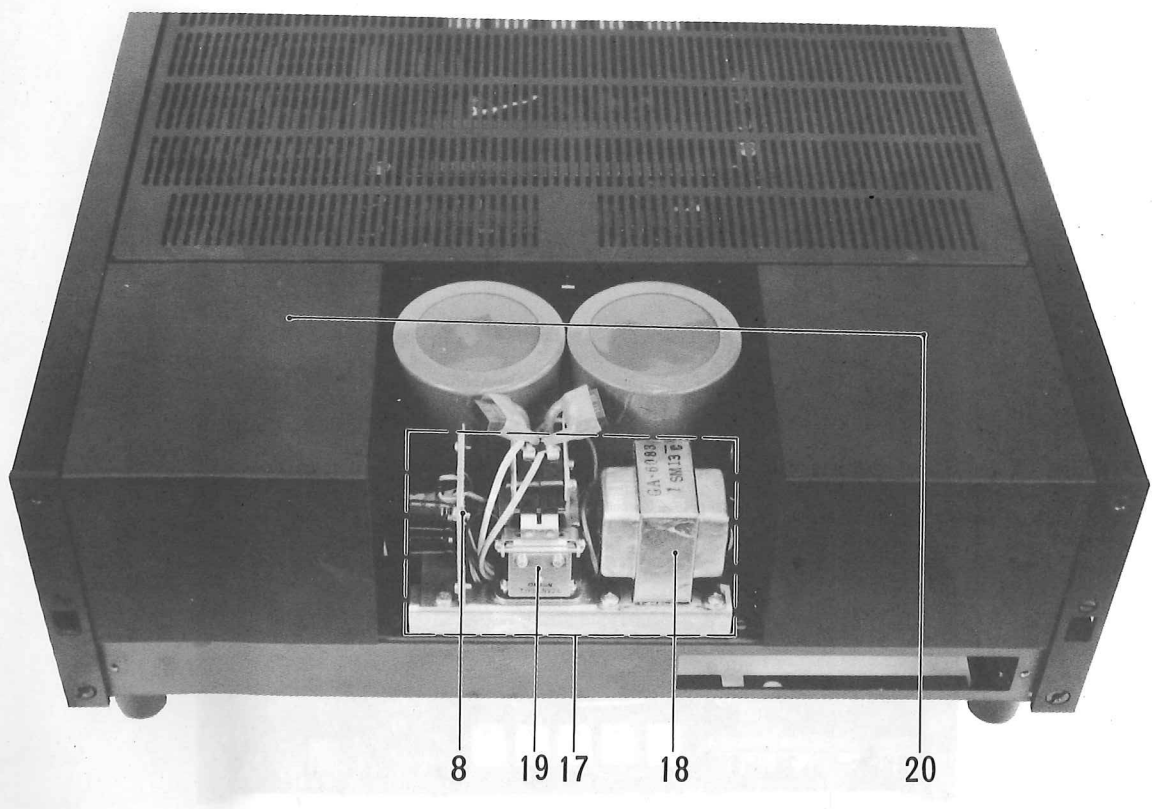




PARTS LIST

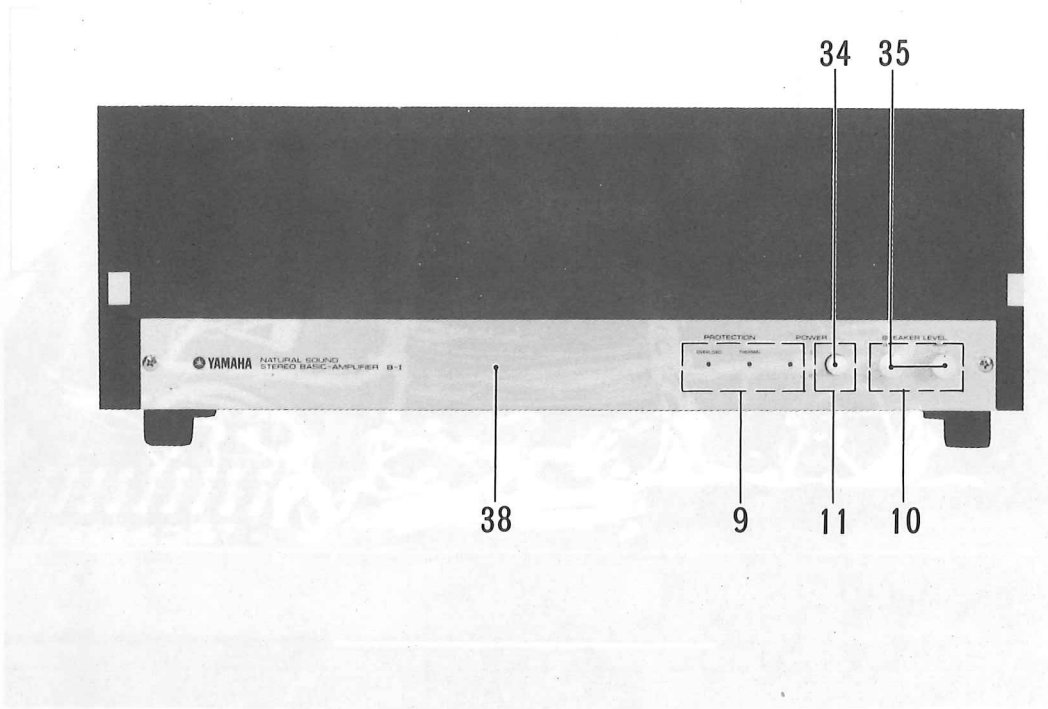

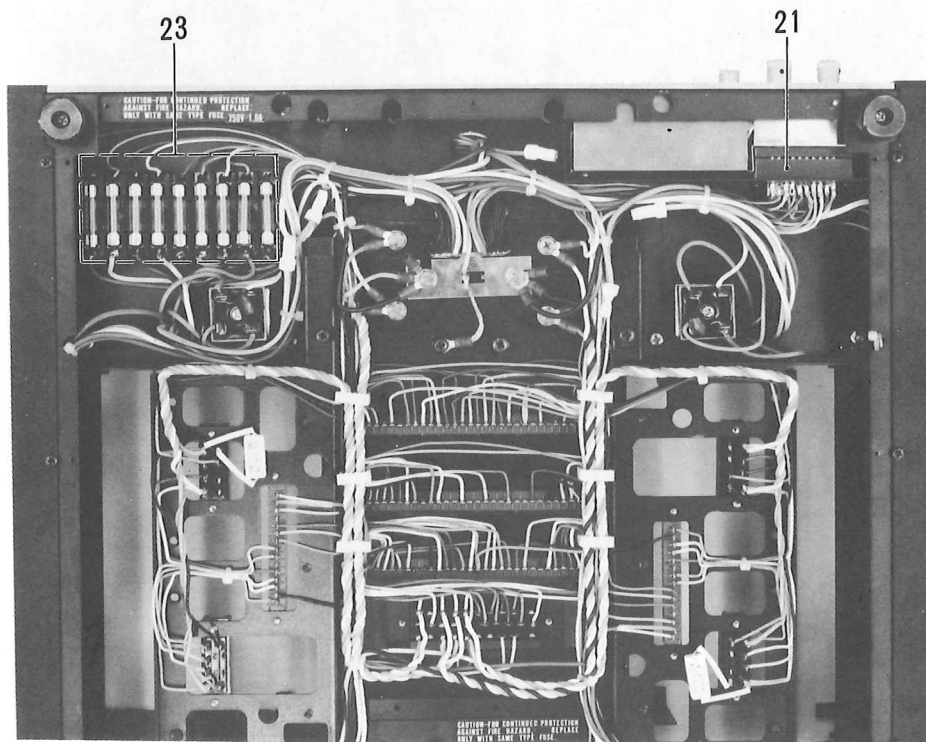

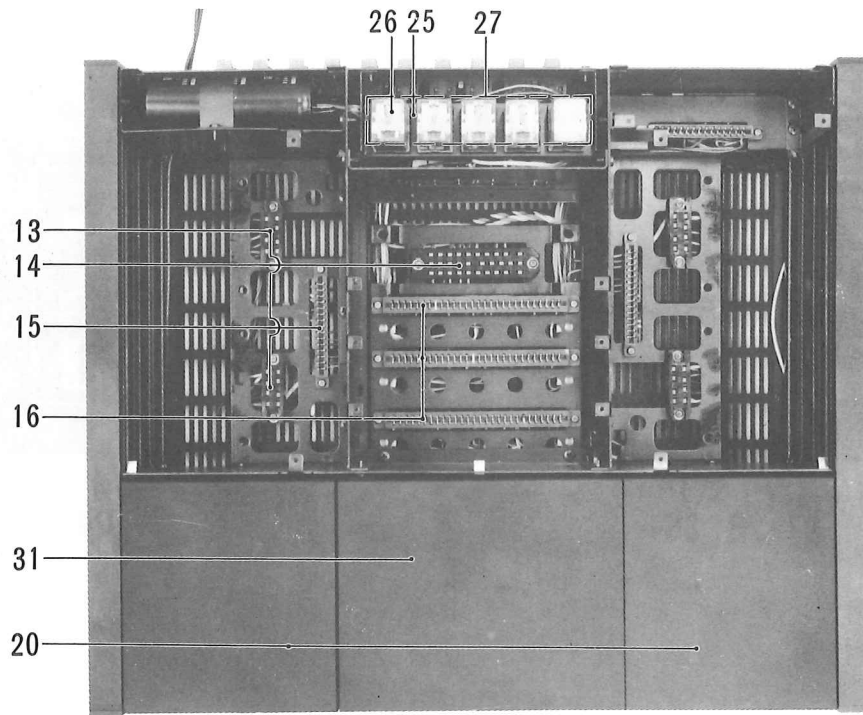

31

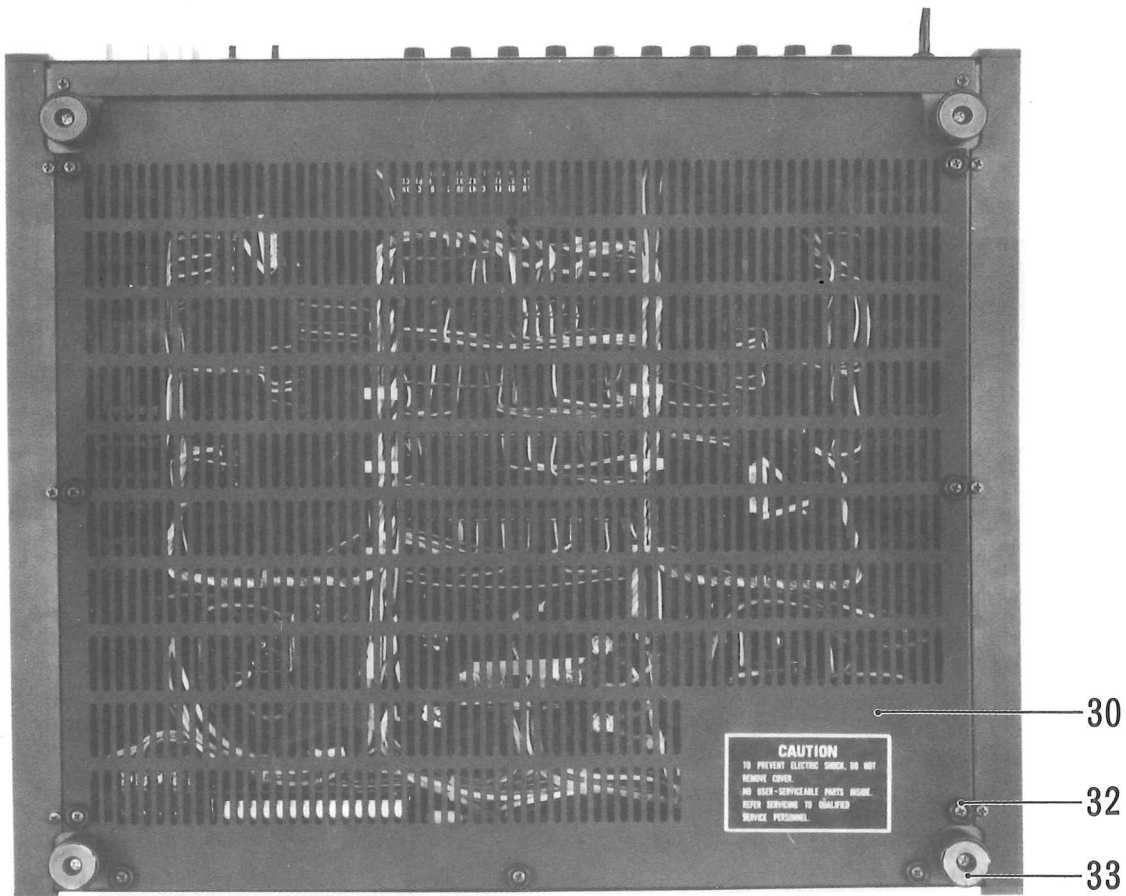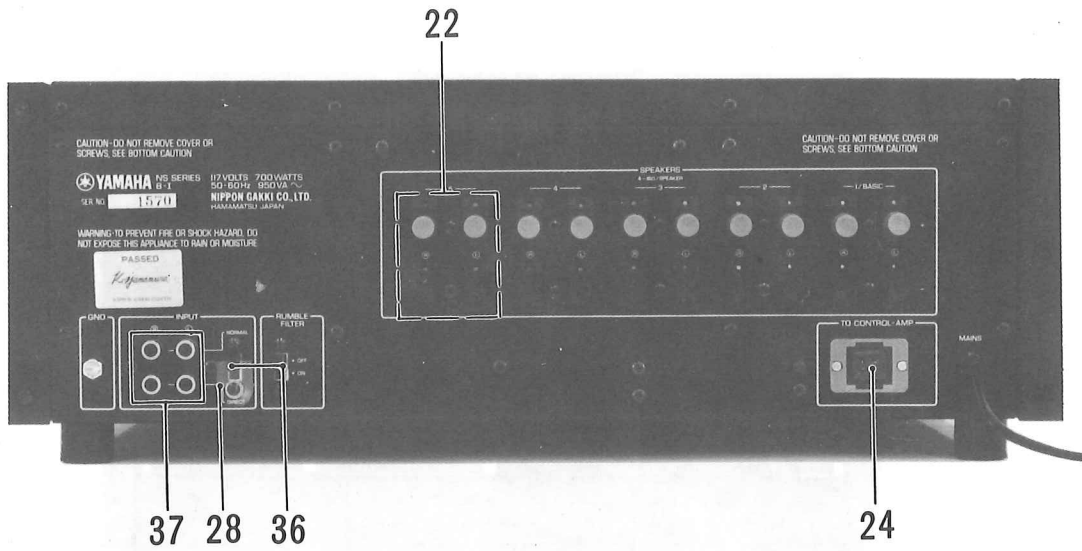

Ref. No.	Part No.	Description	Remarks	Common Models
Circuit Boards & Ckt. B. Component-parts				
1	32:00:00:NA:06:66:30	Input Circuit Board #64361	入カシート	
	42:00:00:FM:11:62:20	Bi-polar Electrolytic Capacitor 2.2 μ F/50V	バイポーラケシコン	
36	42:00:00:KA:40:02:10	Slide Switch SSB-02242	スライドスイッチ	Input & Filter Ckt. B.
37	42:00:00:LB:40:02:10	4P Pin Jack SMK for P.Ckt.	4Pピンジャック	
2	32:00:00:NA:06:66:50	Filter Circuit Board #64381	フィルターシート	
	42:00:00:HL:32:61:00	Metal Oxide Resistor 1K Ω 2W	酸金抵抗	
	42:00:00:HU:47:53:00	Metal Film Resistor 300 Ω \pm 1%	金属被膜抵抗 (F)	
	42:00:00:IA:07:63:00	Transistor 2SA763	トランジスター	
	42:00:00:IC:04:58:90	-do.- 2SC458	"	
	32:00:00:IE:20:01:00	FET LJ-13	F E T	
	32:00:00:IE:10:02:10	-do.- YJ-1200B	F E T 選別品	
	32:00:00:IE:30:02:10	-do.- 2SK-75C	"	
	42:00:00:IF:00:00:40	Diode IS1555	ダイオード	
	42:00:00:IH:00:00:60	-do.- IS1885	"	Substitution part 10D-4
	42:00:00:KC:00:01:90	Relay NF-4 DC-12V	リレー	Filter
	32:00:00:AA:07:84:30	Filter Circuit Board Holder	フィルターシートホルダー	
	42:00:00:FM:10:81:00	Bi-polar Electrolytic Capacitor 100 μ F/63V	バイポーラケミコン	
	42:00:00:FM:11:62:20	-do.- 2.2 μ F/50V	"	
3	32:00:00:NA:06:66:60	Drive Circuit Board #64391	ドライブシート	
	42:00:00:FH:61:05:00	Ceramic Capacitor 5pF 500V	セラコン	
	42:00:00:FH:62:11:00	-do.- 10pF 500V	"	
	42:00:00:FH:61:21:00	-do.- 100pF 500V	"	
	42:00:00:HL:41:76:80	Metal Oxide Resistor 68K Ω 1W	酸金抵抗	
	42:00:00:HL:41:71:80	-do.- 18K Ω 1W	"	
	42:00:00:HL:41:78:20	-do.- 82K Ω 1W	"	
	42:00:00:HL:42:63:90	-do.- 3.9K Ω 2W	"	
	42:00:00:HL:42:73:90	-do.- 39K Ω 2W	"	
	42:00:00:HU:47:53:60	Metal Film Resistor 360 Ω \pm 1%	金属被膜抵抗 (F)	
	42:00:00:HU:47:64:70	-do.- 4.7K Ω \pm 1%	"	
	42:00:00:HU:47:71:50	-do.- 15K Ω \pm 1%	"	
	42:00:00:HU:47:73:30	-do.- 33K Ω \pm 1%	"	
	42:00:00:HY:00:02:60	Variable Resistor λ -13S 1K Ω	ポテンショメーター	
	42:00:00:HY:00:02:20	-do.- CR-31R B-4.7K Ω	メタルグレース VR	
	42:00:00:HY:00:02:30	-do.- 22K Ω	"	

Ref. No.	Part No.	Description	Remarks	Common Models
	42:00:00:Z:00:00:70	Transistor MPS A92	トランジスター	
	42:00:00:Z:00:00:80	-do.- MPS A42	"	
	42:00:00:Z:00:00:90	-do.- MPS U60	"	= 2SJ-24A (FET)
	42:00:00:A:07:63:00	-do.- 2SA763	"	
	42:00:00:A:08:10:00	-do.- 2SA810	"	
	42:00:00:C:11:68:00	-do.- 2SC1168	"	
	42:00:00:C:14:52:00	-do.- 2SC1452	"	
	32:00:00:E:40:01:00	FET 2SJ-24A	F E T	
	32:00:00:E:10:02:10	Dual FET YJ-1200B	デュアル F E T	
	32:00:00:E:10:01:00	FET LK-15	F E T	
	32:00:00:E:20:01:10	-do.- LJ-13	"	
	32:00:00:E:30:02:00	-do.- 2SK-75B	"	
	32:00:00:E:30:02:20	-do.- 2SK-75A	"	
	42:00:00:F:00:03:20	Zener Diode WZ-061	ツェナーダイオード	
	42:00:00:F:00:00:40	Diode IS1555	ダイオード	
	32:00:00:BA:06:63:30	Heat Sink on Drive C.B.	ドライブラジエター	
	32:00:00:AA:07:84:20	Drive Circuit Board Holder	ドライブシートホルダー	
	42:00:00:LB:30:03:00	Connector 5036-A6	コネクタコンウェハー	
	42:00:00:IL:00:03:40	Insulation Spacer for Transistor YD-20C	絶縁ブッシュ	
	42:00:00:IL:00:00:70	Insulation Base for Transistor AC203	ベース	
	32:00:00:BA:00:68:60	Head Sink for FET 2SJ-24A	放熱器	
	32:00:00:NA:06:66:40	Output Circuit Board #64372	出力シート	
	42:00:00:FZ:00:02:20	Ceramic Capacitor 0.22 μ F/500V	セラコン	
	42:00:00:GD:90:01:20	Air Core Coil 3 μ H	空芯コイル	
	42:00:00:HM:55:42:20	Cement Resistor 22 Ω 5W	セメント抵抗	
4	32:00:00:NA:06:66:70	Power Supply No. 1 Circuit Board #66060	電源シート No. 1	
	42:00:00:EM:10:81:00	Bi-Polar Electrolytic Capacitor 100 μ F/63V	バイポーラケシコン	
	42:00:00:EM:11:61:00	-do.- 1 μ F/50V	"	
	42:00:00:HL:41:41:00	Metal Oxide Resistor 10 Ω 1W	酸化金抵抗	
	42:00:00:HL:31:62:20	-do.- 2.2K Ω 1W	"	
	42:00:00:HU:47:64:70	Metal Film Resistor 4.7K Ω \pm 1%	金属被膜抵抗	
	42:00:00:HU:47:65:60	-do.- 5.6K Ω \pm 1%	"	
	42:00:00:HU:47:66:80	-do.- 6.8K Ω \pm 1%	"	
	42:00:00:HU:47:73:00	-do.- 30K Ω \pm 1%	"	
	42:00:00:HY:00:02:40	Variable Resistor CR-31R B-470 Ω	メタルグレースVR	
	42:00:00:HY:00:02:50	-do.- B-1K Ω	"	
	42:00:00:A:05:89:10	Transistor 2SA489	トランジスター	
	42:00:00:A:05:61:20	-do.- 2SA561	"	
	42:00:00:A:07:63:00	-do.- 2SA763	"	
	42:00:00:A:07:77:30	-do.- 2SA777	"	
	42:00:00:C:04:90:90	-do.- 2SC458	"	

Ref. No.	Part No.	Description	Remarks	Common Models
	42:00:00 i C 07:34:20	Transistor 2SC734	"	
	42:00:00 i C 07:89:10	-do.- 2SC789	"	
	42:00:00 i E 00:00:10	FET 2SK30AY	F E T	
	42:00:00 i H 00:00:60	Diode IS1885	ダイオード	Substitution part 10D-4
	42:00:00 i F 00:00:40	-do.- IS1555	"	
	42:00:00 i F 00:03:30	-do.- IS188FM	"	
	42:00:00 i H 00:01:40	-do.- 10DC-1	"	Substitution part 10DC-4
	42:00:00 i H 00:01:50	-do.- 10DC-1R	"	-do.- 10DC-4R
	42:00:00 i F 00:03:20	Zener Diode WZ-061	ツェナーダイオード	
	32:00:00 BA 06:27:60	Heat Sink for Transistor	放 熱 板	
	32:00:00 AA 07:84:10	Power Supply No. 1 C.B. Holder	電源シートホルダー	
5	32:00:00 NA 06:66:80	Power Supply No. 2 Circuit Board #66070	電源シート No. 2	
	42:00:00 FZ 00:06:50	Metalized Film Capacitor 0.01 μ F 630V	メタライズドフィルムコンデンサ	
	42:00:00 FZ 00:06:60	-do.- 0.0047 μ F/1KV	"	
	42:00:00 FH 61:14:70	Ceramic Capacitor 47pF/500V	セラコン	
	42:00:00 FH 61:21:00	-do.- 100pF/500V	"	
	42:00:00 FH 23:41:00	-do.- 0.01 μ F/500V	"	
	42:00:00 FM 26:71:00	Electrolytic Capacitor 10 μ F/250V	ケミコンタテ	
	42:00:00 FK 29:82:20	-do.- 220 μ F/100V	" ヨコ	
	42:00:00 FM 21:74:70	-do.- 47 μ F/350V	" "	
	42:00:00 HL 41:72:20	Metal Oxide Resistor 22K Ω 1W	酸金抵抗	
	42:00:00 HL 41:76:80	-do.- 68K Ω 1W	"	
	42:00:00 HL 41:78:20	-do.- 82K Ω 1W	"	
	42:00:00 HL 41:81:00	-do.- 100K Ω 1W	"	
	42:00:00 HL 42:52:20	-do.- 220 Ω 2W	"	
	42:00:00 HL 42:74:70	-do.- 47K Ω 2W	"	
	42:00:00 HL 42:73:30	-do.- 33K Ω 2W	"	
	42:00:00 HU 47:71:50	Metal Film Resistor 15K Ω \pm 1%	金属被膜抵抗	
	42:00:00 HU 47:73:00	-do.- 30K Ω \pm 1%	"	
	42:00:00 HU 47:74:70	-do.- 47K Ω \pm 1%	"	
	42:00:00 HZ 00:06:70	Metal Oxide Resistor 47K Ω (\pm 100 PPM/ $^{\circ}$ C)	酸金特殊温度抵抗	
	42:00:00 HY 00:02:10	Variable Resistor CR-31R B-2.2K Ω	メタルグレースVR	
	42:00:00 i Z 00:00:90	Transistor MPSU-60	トランジスター	
	42:00:00 i Z 00:00:70	-do.- MPSA-92	"	
	42:00:00 i Z 00:00:80	-do.- MPSA-42	"	
	42:00:00 i C 14:47:00	-do.- 2SC1447	"	
	42:00:00 i C 14:48:00	-do.- 2SC1448	"	
	42:00:00 i E 00:00:10	FET 2SK30AY	F E T	
	42:00:00 i H 00:00:60	Diode IS1885	ダイオード	Substitution part 10D-4
	42:00:00 i H 00:00:60	-do.- IS1886	"	-do.-
	42:00:00 i H 00:00:60	-do.- IS1887	"	-do.-
	42:00:00 i H 00:04:00	-do.- IS1830	"	10D-10

Ref. No.	Part No.	Description	Remarks	Common Models
	42:00:00:iF:00:00:40	Diode IS1555	ダイオード	
	42:00:00:iF:00:03:20	Zener Diode WZ-061	ツェナーダイオード	
	42:00:00:iF:00:05:00	-do.- EQB-01-30	"	
	32:00:00:BA:06:27:60	Heat Sink for Transistor		
	32:00:00:AA:07:84:10	Power Supply No. 2 C.B. Holder	電源シートNo.2ホルダー	
	42:00:00:LB:30:03:00	Connector 5036-A6	コネクタコンウェハー	
6	32:00:00:NA:06:66:90	Power Supply No. 3 Circuit Board #64421	電源シート No. 3	
	42:00:00:HL:41:72:20	Metal Oxide Resistor 22KΩ 1W	酸金抵抗	
	42:00:00:HL:41:76:80	-do.- 68KΩ 1W	"	
	42:00:00:HL:41:78:20	-do.- 82KΩ 1W	"	
	42:00:00:HL:42:71:00	-do.- 10KΩ 2W	"	
	42:00:00:FH:61:11:00	Ceramic Capacitor 10pF 500V	セラコン	
	42:00:00:FH:11:52:70	Mylar Capacitor 0.27μF 50V		
	42:00:00:iH:00:00:60	Diode IS1885	ダイオード	Substitution part 10D-4
	42:00:00:iF:00:03:30	-do.- IS188FM	ダイオード	
	42:00:00:iF:00:00:40	-do.- IS1555	"	
	42:00:00:iC:04:58:90	Transistor 2SC458	トランジスター	
	42:00:00:iC:14:39:00	-do.- 2SC1439	"	
	42:00:00:iC:14:48:00	-do.- 2SC1448	"	
	42:00:00:iA:08:58:00	-do.- 2SA858	"	
	42:00:00:iA:07:40:00	-do.- 2SA740	"	
7	32:00:00:BA:06:27:60	Heat Sink for Transistor	放熱板	
	32:00:00:AA:07:84:10	Power Supply No. 3 C. B. Holder	電源シートNo.3ホルダー	
8	32:00:00:NA:06:67:00	A.C. Power Supply (Relay) Circuit Board #64430	リレー用電源シート	
	42:00:00:iA:04:89:10	Transistor 2SA489	トランジスター	
	iH:00:02:40	Diode IS1885	ダイオード	Servicing 401000iH000060
9	32:00:00:NA:06:67:10	LED Circuit Board #65330	LEDシート	
	42:00:00:iF:00:04:90	Light Emitting Diode SLP-119B	LED	
10	32:00:00:NA:06:65:80	Basic VR Circuit Board #64130	ベーシックVRシート	
	42:00:00:HT:31:00:60	Variable Resistor EVS-00AS15E13 B-1KΩ	ソリッドVR	

Ref. No.	Part No.	Description	Remarks	Common Models
11	32:00:00:NA:06:65:90	Power Switch Circuit Board # 64140	パワースイッチシート	
	32:00:00:IE:30:01:00	V-FET 2SK-77	V-F E T	
	42:00:00:IL:00:03:00	Insulation Base for FET MD-18/M	マイカベース	
	42:00:00:IL:00:03:10	Insulation Bushing for FET	絶縁ブッシュ	
	42:00:00:KA:00:00:10	Thermostat kilicon 20702 100°C	サーモスタット	
	42:00:00:HM:55:22:20	Cement Resistor 0.22Ω ± 10% 5W	セメント抵抗	
	42:00:00:LB:60:08:50	Multi-Connector Plug P-8	10型マルチコネクタ・プラグ	
	42:00:00:FZ:00:02:20	Ceramic Capacitor 0.022μF/500V	セラコン	
	42:00:00:HM:55:64:70	Cement Resistor 4.7KΩ ± 10% 5W	セメント抵抗	
12	42:00:00:BA:06:62:40	Main Heat Sink for V-FET	メインラジエター	
	42:00:00:IC:11:16:10	Transistor 2SC1116A	トランジスター	
	42:00:00:IA:07:47:10	-do.- 2SA747	"	
	42:00:00:IC:15:77:00	-do.- 2SC1577	"	
	42:00:00:LB:30:02:70	Transistor Socket T0-3	トランジスターソケット	
	42:00:00:IL:00:03:20	Insulation Base for Transistor 4A01205	マイカーベース	
	42:00:00:HZ:00:06:60	Metal Clad Resistor 0.2Ω ± 10% RE65G	メタルクラッド抵抗	
	42:00:00:LB:60:08:70	Multi-Connector Plug P-30	10型マルチコネクタ・プラグ	
	42:00:00:FZ:00:02:00	Electrolytic Capacitor 15,000μF/100WV x 2	ラゲ型電界コン	
	42:00:00:FZ:00:02:10	-do.- 470μF/350WV	"	
	42:00:00:IH:00:03:90	Rectification Diode (Bridge Connection)	ダイオードスタック	
	42:00:00:FZ:00:06:50	Metalized Film Capacitor 0.01μF/630V	メタライズドコンデンサ	
13	42:00:00:LB:60:08:40	Multi-Connector Socket 8P	マルチコネクタソケット	
14	42:00:00:LB:60:08:60	-do.- 30P	"	
15	42:00:00:LB:60:12:10	P.C.B. Connector 15P	P C Bコネクタ	
16	42:00:00:LB:60:12:20	-do.- 28P	"	Attached Prohibition Pin
	42:00:00:LB:60:11:30	Fuse Holder	フューズホルダー	U.S. and Canadian models
	42:00:00:LB:60:11:40	-do.-	"	European model
	42:00:00:KB:00:10:20	UL Listed Fuse SS-2 1A 250V	U L ヒューズ	U.S. and Canadian models
	42:00:00:KB:00:07:30	Miniature Fuse 1AT 250V	㊟ヒューズタイムラプ	European model
	42:00:00:HM:55:54:70	Cement Resistor 470 5W	セメント抵抗	
17	32:00:00:NB:07:22:55	Sub-Transformer Unit	サブトランスユニット	U.S. and Canadian models
	32:00:00:NB:07:22:60	-do.-	"	European model
18	42:00:00:GA:60:83:10	Power Transformer	電源トランス	U.S. and Canadian models
	42:00:00:GA:60:83:20	-do.-	"	European model

Ref. No.	Part No.	Description	Remarks	Common Model
19	42:00:00:KC:00:02:10	Micro Switch (2V 2A) and Relay (DC12V 320mA)	マイクロスイッチリレー	
	42:00:00:FZ:00:01:10	Spark Killer 0.033 μ F + 120 Ω	スパークキラー	U.S. and Canadian models
20	42:00:00:GA:60:66:10	Power Transformer	電源トランス	U.S. and Canadian models
	42:00:00:GA:60:66:20	-do.-	"	European model
21	42:00:00:LB:60:08:30	Connector Socket 28P	コネクタソケット	
22	42:00:00:LA:00:14:10	Speaker Terminal	スピーカー端子	
	42:00:00:CB:06:86:30	Cord Stopper SR-3P-4	コードストッパー	U.S. and Canadian models
	42:00:00:CB:07:06:90	-do.- EA-5	"	European model
	42:00:00:LA:00:10:40	3P Connection Terminal	3P中継端子台	
	42:00:00:LB:20:08:40	Fuse Holder 1P	ヒューズホルダー	U.S. and Canadian models
23	42:00:00:LB:20:05:90	-do.- H. Shurter FEB031-1401	"	European model
	42:00:00:KB:00:11:00	UL Listed Fuse SS-2 5A 250V	ULヒューズ	U.S. and Canadian models
	42:00:00:KB:00:06:90	Miniature Fuse 2.5AT 250V	タイムラグ [®] ヒューズ	European model
24	42:00:00:LB:40:02:00	4P Connector Socket S1304-DB	4Pコネクタソケット	4P Plug LB400210
	42:00:00:LA:00:07:90	Ground Terminal B	アース端子	
25	42:00:00:LB:60:09:10	Socket for Relay PT-08	リレー用ソケット	
26	42:00:00:KC:00:02:20	Relay LY-2-US DC-12V	リレー	
	42:00:00:KH:00:00:60	Diode IS1885	ダイオード	Substitution part 10D-4
	42:00:00:KB:00:10:10	UL Listed Fuse SS-2 0.5A 250V	ULヒューズ	U.S. and Canadian models
	42:00:00:KB:00:06:40	Miniature Fuse 250mA 250V	タイムラグ [®] ヒューズ	European model
27	32:00:00:AA:07:83:30	Relay Holder	リレーホルダー	
28	32:00:00:CB:06:86:80	Coupler Stopper	カプラーストッパー	
29	32:00:00:AA:07:83:80	Top Cover	上面カバー	
30	32:00:00:AA:08:04:20	Bottom Cover	底カバー	
31	32:00:00:AA:07:84:00	Cover for Electrolytic Capacitor	ケミコンカバー	
32	42:00:00:CB:07:21:00	Sub-Leg	副脚 (ボルトスペーサー)	
33	42:00:00:CB:07:25:10	Main Leg (A)	脚	
34	32:00:00:BA:06:62:20	Button for Push Switch (Power Switch)	プッシュスイッチボタン	
35	32:00:00:BA:06:62:30	Knob for Variable Resistor	V R ツ マ ミ	
	42:00:00:TX:90:09:30	Hexagonal Wrench 1.5 mm	六角レンチ	
	42:00:00:MZ:06:18:90	Connection Cord Pin-Pin	接続コード	
11	42:00:00:KA:90:00:60	Switch	ミニキースイッチ	
38	32:00:00:BA:06:62:10	Basic-Amp. Panel	パネル	