


Power Amp Assembly (717-0045-00)

パワーアンプAss'y

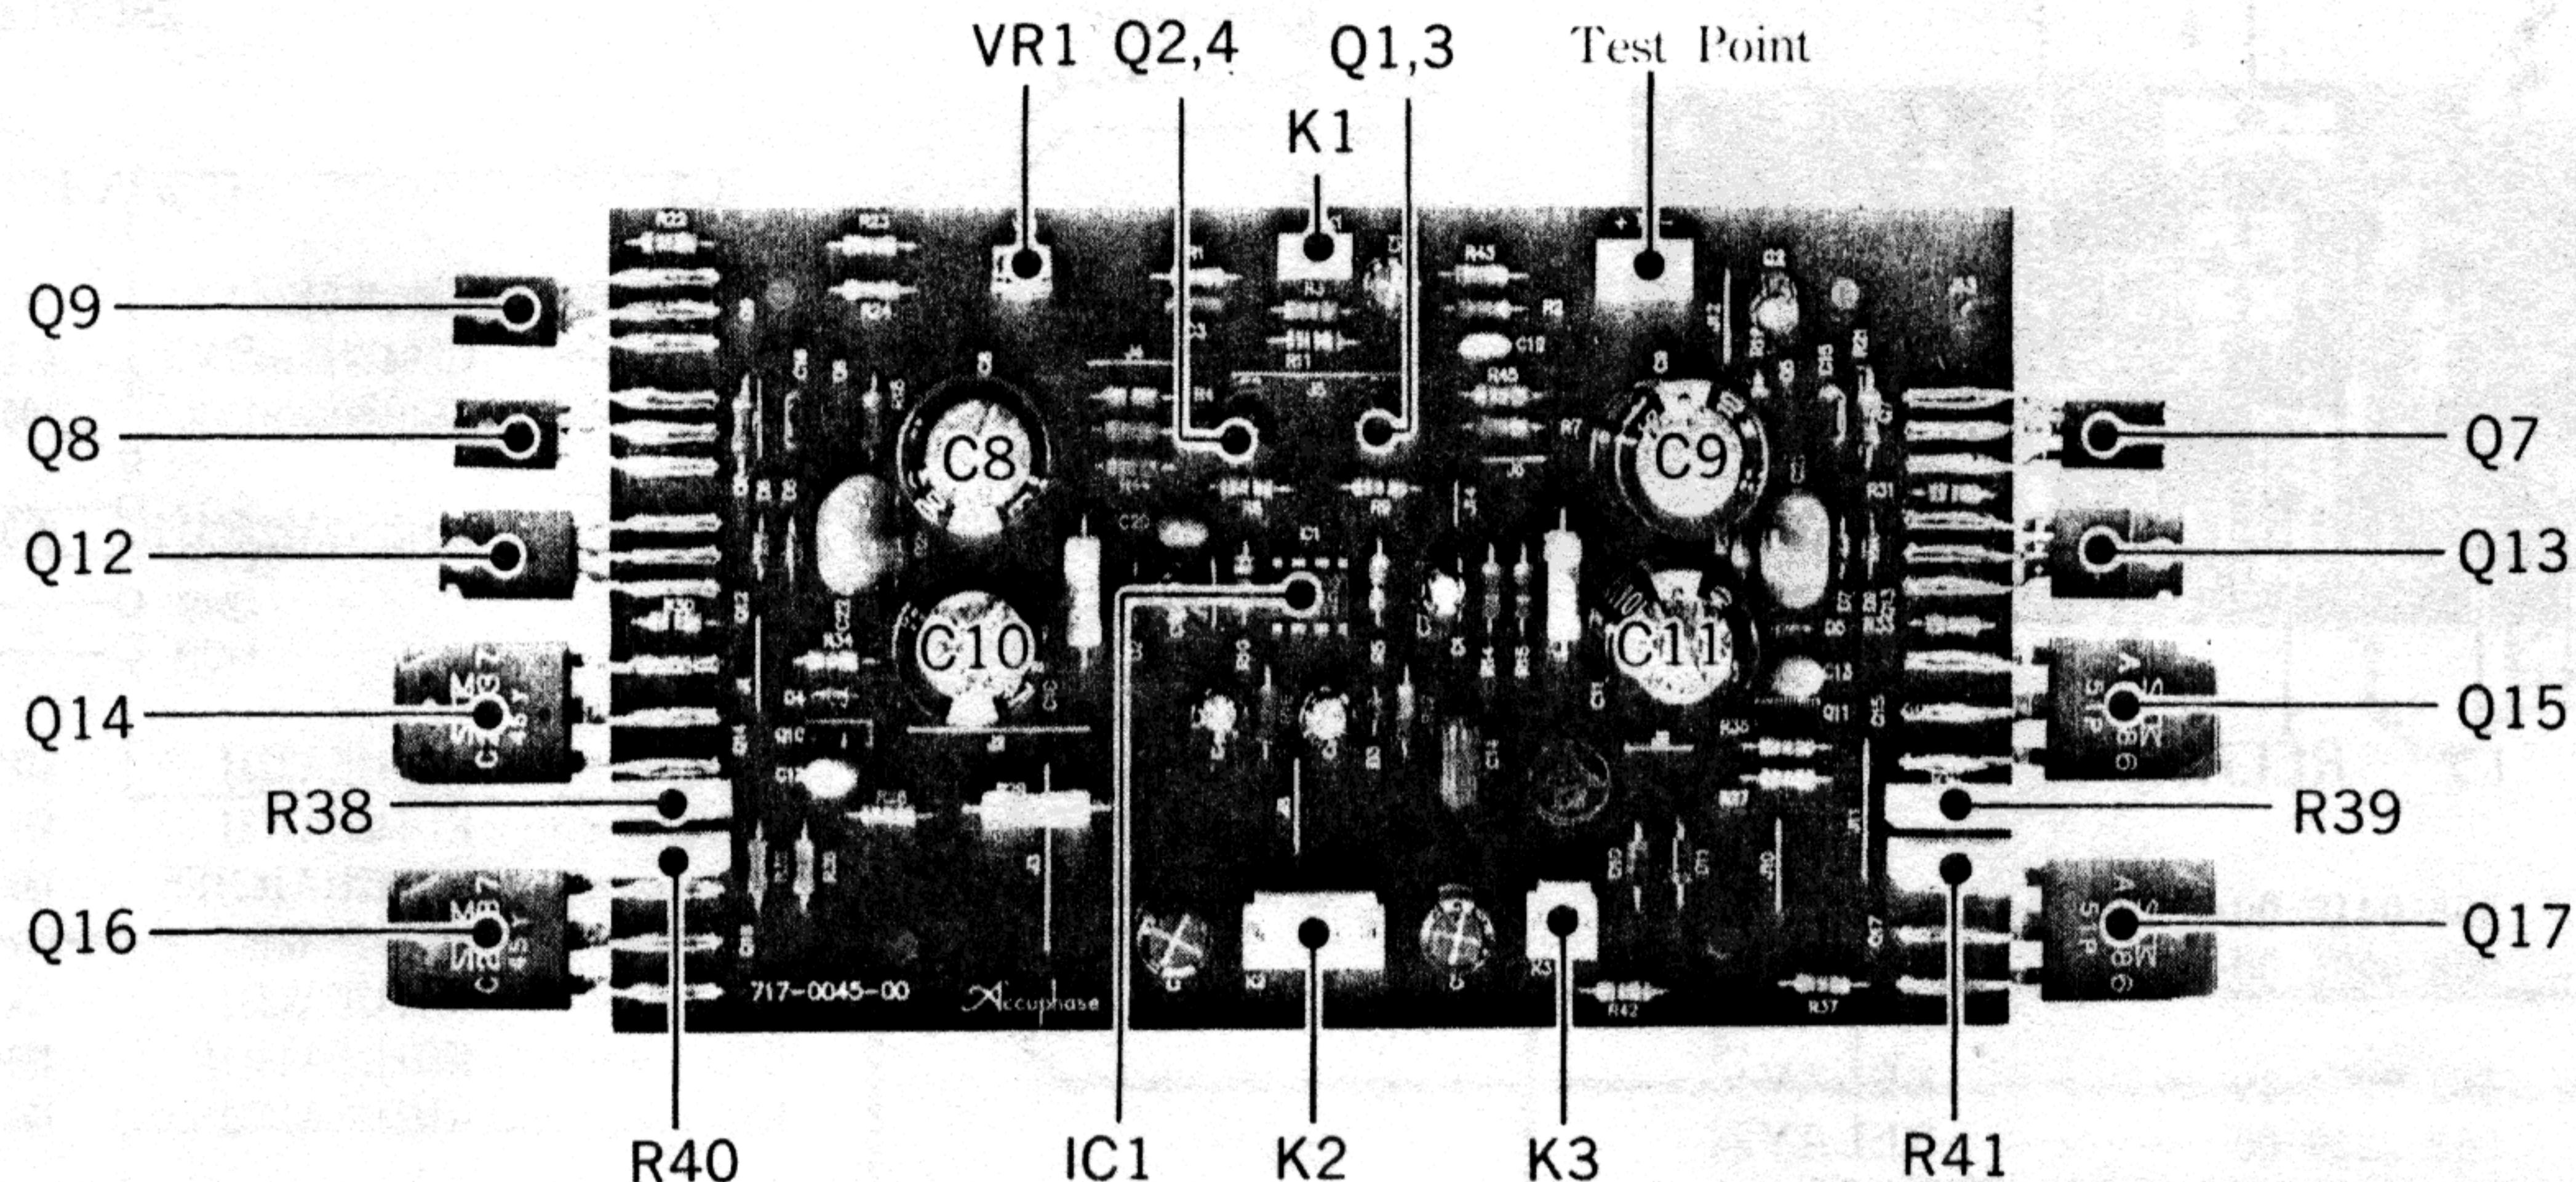

PC Board	115-0809-00					
PCボード						
Connector Plug	308-0306-00..... for K1		Electrolytic Capacitor アルミ電解コンデンサ	C1,4,5 CE04W1H100VP	10μF 50V	
コネクタプラグ	308 0411 00..... for K2			C2 CE04W1HR47VX	0.47μF/16V	
	308-0212-00..... for K3			C6,7 CE04W1C470VR	47μF 16V	
	308 0221 00..... for TP			C8,9 CE04W2A332FA	220μF 100V	
Terminal	314 0514 04		Polyester Film Capacitor ポリエステルフィルムコンデンサ	C10,11 CE04W2A471VR	470μF/100V	
端子				C17,18 CE04W2A100FA	10μF 100V	
Potentiometer	583-0524-00..... for VR1: 470Ω		Polypropylene Film Capacitor ポリプロピレンフィルムコンデンサ	C3 CQ922M1H102J B	1000pF/50V	
半固定抵抗器						
Diode	D1,2 HZ153L			C12,13 CQ922N2A682JAPS	6800pF/100V	
ダイオード	D4,5 1SS176			C14 CQ93PP2A103JM	0.01μF/100V	
	D6,7 HZ9A2L			C19,20 CQ922N2A102JAPS	1000pF/100V	
	D8,9 1SS81			C21,22 CQ922N2A104JAPS	0.1μF/100V	
	D10,11 S5277G					
Zener Diode	D3 RD8.2EW			R1 RD142EA474JF	470kΩ ± 5% 1/4W	
ツェナーダイオード				R2 RD142EA273JF	27kΩ ± 5% 1/4W	
				R3 RD142EA681JF	680Ω ± 5% 1/4W	
Transistor	Q1,4 2SC3478 K,U			R4,5 RD142EA303JF	30kΩ ± 5% 1/4W	
トランジスタ	Q2,3 2SA1376-K,U			R6,7 RD142EA332JF	3.3kΩ ± 5% 1/4W	
	Q5 2SC2705-Y			R8,9 RD142EA220JF	22Ω ± 5% 1/4W	
	Q6 2SA1145-Y			R14,15 RD142EA392GF	3.9kΩ ± 5% 1/4W	
	Q7,9 2SC3902-S,T			R16,17 RD142EA513JF	51kΩ ± 5% 1/4W	
	Q8 2SA1507-S,T			R18,19 RD142EA511JF	510Ω ± 5% 1/4W	
	Q10 2SC3668-Y			R22,44,45 RD142EA182JF	1.8kΩ ± 5% 1/4W	
	Q11 2SA1428-Y		Carbon Film Resistor 炭素被膜抵抗器	R23 RD142EA331JF	330Ω ± 5% 1/4W	
	Q14,16 2SC2837-O,P,Y			R24 RD142EA4R7JF	4.7Ω ± 5% 1/4W	
	Q15,17 2SA1186-O,P,Y			25,26 RD142HA221JFS	220Ω ± 5% 1/2W	
FET	Q12 2SK213			R27,28 RD142EA222JF	2.2kΩ ± 5% 1/4W	
	Q13 2SJ76			R30,31 RD142EA101JF	100Ω ± 5% 1/4W	
IC	IC1 NJM4580D-D			R32,33 RD142EA2R2JF	2.2Ω ± 5% 1/4W	
				R34~37 RD142EA822JF	8.2kΩ ± 5% 1/4W	
				R43 RD142EA183JF	18kΩ ± 5% 1/4W	
Ceramic Capacitor	C15,16 CC92CH2H331J	330pF/500V	Fuse Resistor フェューズ抵抗器	R20,21 RF142EA680G-P	68Ω ± 2% 1/4W	
磁器コンデンサ				R42 RF142EAR47J	0.47Ω ± 5% 1/4W	
			Metal Film Resistor 金属被膜抵抗器	R10 RN142EK6810F	681Ω ± 1% 1/4W	
				R11 RN142EK15R0F	150Ω ± 1% 4W	
			Oxide Metal Film Resistor 金属酸化物被皮膜抵抗器	R12,13 RS143DA332JS-P	3.3kΩ ± 5% 2W	
				R29 RN143DA470JS-P	47Ω ± 5% 2W	
			Metal Plate Resistor 金属板抵抗器	R38~40 RW993DJR22K-H	0.22Ω ± 5% 2W	