



# Technical Bulletin T743

**Product:** A/V Receiver

**Hardware Technical Bulletin:** T743-H2005-05R

**Date:** March 7/05

**Subject:** Static protection for muting transistors

**Note:** Implemented in production from serial number:R49T74310201

*Previous T.B.'s required: Revised from T743-H2005-05*

YES


NO

**DESCRIPTION:** You may have the complaint that the subwoofer or other channels are popping when switching inputs or when turning on and off.

**REASON:** The channel that is popping may have a muting transistor damaged due to an external source or subwoofer causing static damage to the transistor.

**SOLUTION:** Replace the transistor and install a 4700 pF capacitor between the base and collector on the pre amp pc board , as shown in the following two schematics. The use of a surface mount capacitor is recommended. Placing the capacitor on the bottom of the board between the base and collector of each muting transistor is preferred . See figure 2 on page 2.

**Note:** It is recommended to install this capacitor to each channel's muting transistor. The following are the designations of the muting transistors, Q608,Q609,Q610,Q611,Q615,Q617.

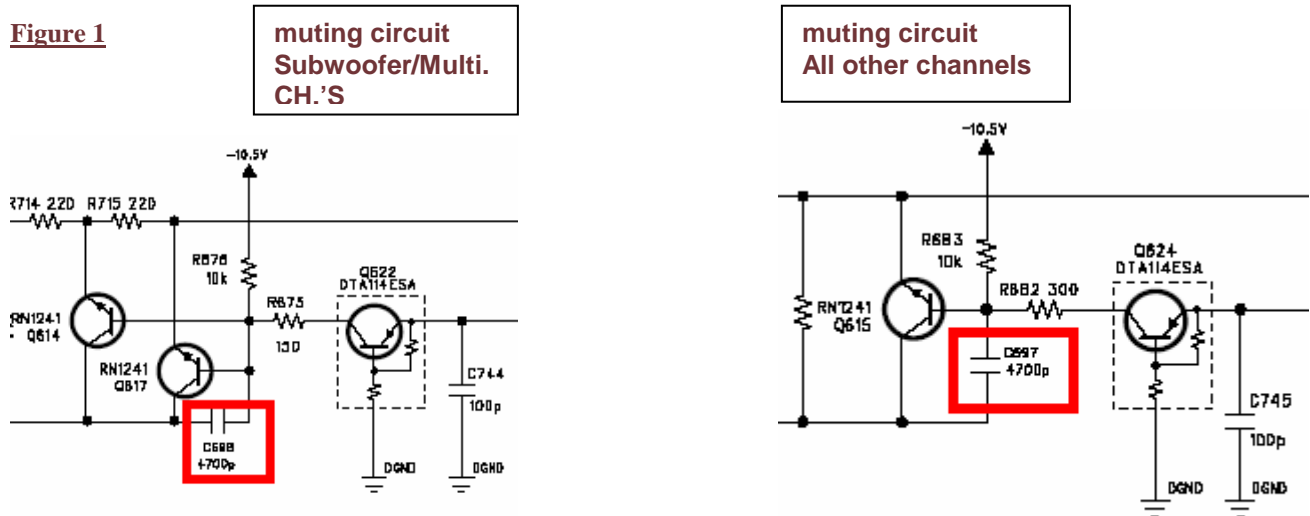


---

*Product: A/V Receiver*

*Hardware Technical Bulletin: T743-H2005-05R*

---

**Figure 2**

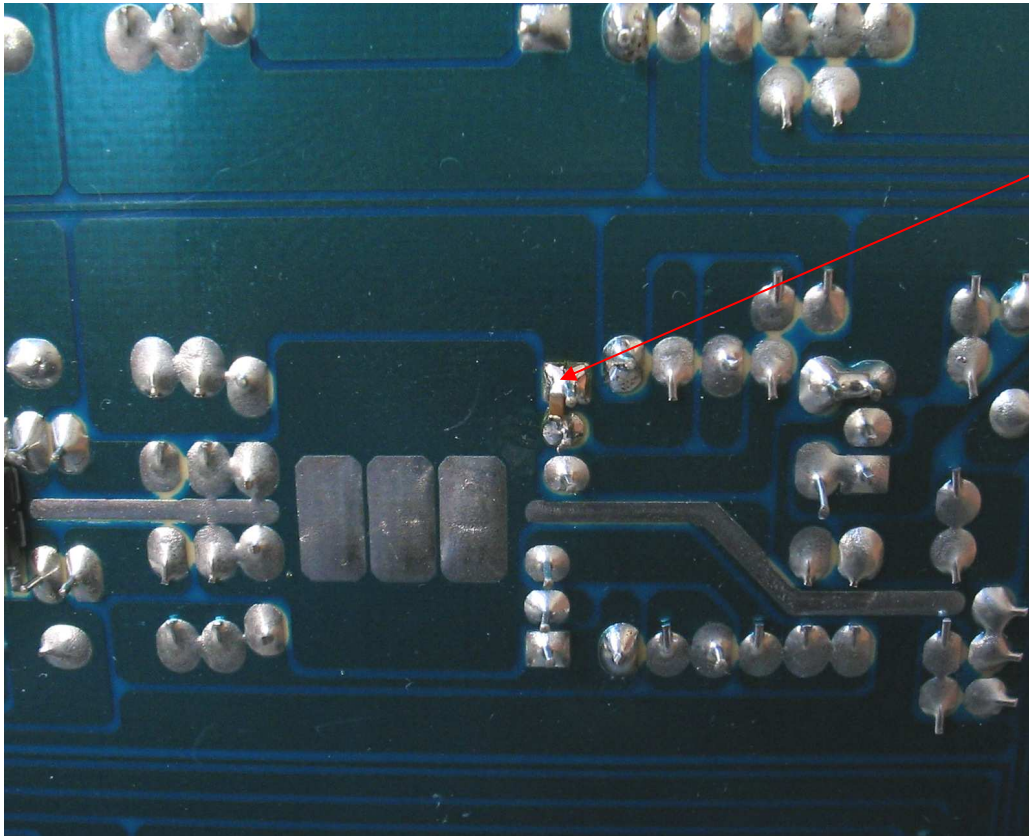

4700pF surface mount capacitor between base and collector pins of muting transistor on the pre amp pc board

*Contact:  
NAD Electronics International  
633 Granite Court  
Pickering, ON Canada L1K 3K1  
Voice: 905-831-0799 FAX 905-837-6357  
www.nadelectronics.com*